



## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

Report Reference No.: TRE1403007403 R/C: 95277

FCC ID: 2AB2LCYNUST7

Compiled by

( position+printed name+signature): File administrators Eric Wang

Eric Wang

Supervised by

( position+printed name+signature): Test Engineer Yuchao Wang

yuchao.wang

Approved by

( position+printed name+signature): Manager Wenliang Li

Wenliang Li

Date of issue: Mar 14, 2014

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name: Mobistel GmbH

Address: Rudolf-Diesel-Str.18.65760 Eschborn, Germany

#### Test specification:

Standard: FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: mobile phone

Trade Mark: mobistel

Model/Type reference: Cynus T7

Listed Models: /

Manufacturer: Mobistel GmbH

Modulation Type: CCK, OFDM

Operation Frequency: From 2412MHz to 2462MHz

Rating: DC 3.70V

Hardware version: Cynus T7\_V003

Software version: 3.4.5

Android version: 4.2.2

Result: PASS

**T E S T   R E P O R T**

|                                               |                               |
|-----------------------------------------------|-------------------------------|
| <b>Test Report No. :</b> <b>TRE1403007403</b> | Mar 14, 2014<br>Date of issue |
|-----------------------------------------------|-------------------------------|

Equipment under Test                      :              Mobile Phone

Model /Type                                        :              Cynus T7

Listed Models                                        :              /

**Applicant**                                                :              **Mobistel GmbH**

Address                                                :              Rudolf-Diesel-Str.18.65760 Eschborn , Germany

**Manufacturer**                                                :              **Mobistel GmbH**

Address                                                :              Rudolf-Diesel-Str.18.65760 Eschborn , Germany

|                    |             |
|--------------------|-------------|
| <b>Test Result</b> | <b>PASS</b> |
|--------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                  |                                                             |                  |
|------------------|-------------------------------------------------------------|------------------|
| <b><u>1.</u></b> | <b><u>TEST STANDARDS.....</u></b>                           | <b><u>4</u></b>  |
| <b><u>2.</u></b> | <b><u>SUMMARY .....</u></b>                                 | <b><u>5</u></b>  |
| 2.1.             | General Remarks                                             | 5                |
| 2.2.             | Product Description                                         | 5                |
| 2.3.             | Equipment Under Test                                        | 5                |
| 2.4.             | Description of the test mode                                | 5                |
| 2.5.             | Short description of the Equipment under Test (EUT)         | 6                |
| 2.6.             | EUT operation mode                                          | 6                |
| 2.7.             | EUT configuration                                           | 6                |
| 2.8.             | Internal Identification of AE used during the test          | 6                |
| 2.9.             | Related Submittal(s) / Grant (s)                            | 6                |
| 2.10.            | Modifications                                               | 6                |
| 2.11.            | NOTE                                                        | 7                |
| <b><u>3.</u></b> | <b><u>TEST ENVIRONMENT.....</u></b>                         | <b><u>8</u></b>  |
| 3.1.             | Address of the test laboratory                              | 8                |
| 3.2.             | Test Facility                                               | 8                |
| 3.3.             | Environmental conditions                                    | 9                |
| 3.4.             | Test Description                                            | 9                |
| 3.5.             | Statement of the measurement uncertainty                    | 9                |
| 3.6.             | Equipments Used during the Test                             | 10               |
| <b><u>4.</u></b> | <b><u>TEST CONDITIONS AND RESULTS.....</u></b>              | <b><u>11</u></b> |
| 4.1.             | AC Power Conducted Emission                                 | 11               |
| 4.2.             | Radiated Emission                                           | 14               |
| 4.3.             | Maximum Peak Output Power                                   | 23               |
| 4.4.             | Power Spectral Density                                      | 32               |
| 4.5.             | Band Edge Compliance of RF Emission                         | 41               |
| 4.6.             | Spurious RF Conducted Emission                              | 52               |
| 4.7.             | 6dB Bandwidth                                               | 83               |
| 4.8.             | Antenna Requirement                                         | 92               |
| <b><u>5.</u></b> | <b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b> | <b><u>93</u></b> |

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

## 2. SUMMARY

### 2.1. General Remarks

|                                |   |              |
|--------------------------------|---|--------------|
| Date of receipt of test sample | : | Nov 11, 2013 |
|                                |   |              |
| Testing commenced on           | : | Nov12, 2013  |
|                                |   |              |
| Testing concluded on           | : | Mar 14, 2014 |

### 2.2. Product Description

The **Mobistel GmbH's** Model: Cynus T7 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Name of EUT                       | Mobile Phone                          |
| Model Number                      | Cynus T7                              |
| FCC ID                            | 2AB2LCYNUST7                          |
| Modulation Type                   | QPSK for WCDMA,GMSK for GSM/GPRS/EDGE |
| Antenna Type                      | Internal                              |
| Hardware version                  | Cynus T7_V003                         |
| Software version                  | 3.4.5                                 |
| Android version                   | 4.2.2                                 |
| GSM/EDGE/GPRS                     | Supported GSM/GPRS/EDGE               |
| WCDMA Operation Frequency Band    | FDD Band II, FDD Band V               |
| HSDPA Release Version             | Release 8                             |
| HSUPA Release Version             | Release 6                             |
| WCDMA Release Version             | R99                                   |
| Extreme temp. Tolerance           | -30°C to +60°C                        |
| Extreme vol. Limits               | 3.40VDC to 4.20VDC (nominal: 3.70VDC) |
| GSM/GPRS Operation Frequency Band | GSM850/PCS1900                        |
| GSM Release Version               | R99                                   |
| GPRS operation mode               | Class B                               |
| GPRS Multislot Class              | 12                                    |
| EGPRS Multislot Class             | 12                                    |

### 2.3. Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V / 60 Hz                                | <input type="radio"/> 115V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 3.70V

### 2.4. Description of the test mode

IEEE 802.11b/g/n: The product support Third channels but only use Eleventh channels in USA.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1       | 2412           | 8       | 2447           |
| 2       | 2417           | 9       | 2452           |
| 3       | 2422           | 10      | 2457           |
| 4       | 2427           | 11      | 2462           |
| 5       | 2432           | 12      | 2467           |
| 6       | 2437           | 13      | 2472           |
| 7       | 2442           |         |                |

## 2.5. Short description of the Equipment under Test (EUT)

2.4GHz (Mobile Phone (M/N:Cynus T7))

For more details, refer to the user's manual of the EUT.

Series Number: 354718041824829

## 2.6. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides command to control the EUT for staying in continuous transmitting and receiving mode for testing.

## 2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

|   |             |                |   |
|---|-------------|----------------|---|
| ○ | Power Cable | Length (m) :   | / |
|   |             | Shield :       | / |
|   |             | Detachable :   | / |
| ○ | Multimeter  | Manufacturer : | / |
|   |             | Model No. :    | / |

## 2.8. Internal Identification of AE used during the test

| AE ID* | Description           |
|--------|-----------------------|
| AE1    | Battery               |
| AE2    | Charger and USB cable |

AE1

Model:Cynus T7  
 Manufacturer: Mobistel GmbH  
 Capacitance:2600mAh  
 Nominal Voltage:3.70V

AE2:

Model: Cynus T7  
 Manufacturer: Mobistel GmbH  
 Input: 100-240V~50/60Hz 0.15A  
 Output: OUTPUT: 5.0V DC 1.0A  
 Power Cable Length: 96cm  
 ○ Shielded      ● Unshielded

\*AE ID: is used to identify the test sample in the lab internally.

## 2.9. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AB2LCYNUST7** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.10. Modifications

No modifications were implemented to meet testing criteria.

**2.11. NOTE**

1. The EUT is a Mobile Phone WCDMA/HSUPA/HSDPA/GPRS/GSM,WLAN and Bluetooth function,The functions of the EUT listed as below:

|                   | Test Standards          | Reference Report |
|-------------------|-------------------------|------------------|
| GSM/GPRS/EGPRS    | FCC Part 22/FCC Part 24 | TRE1403007401    |
| WCDMA/HSUPA/HSDPA | FCC Part 22/FCC Part 24 | TRE1403007402    |
| WLAN              | FCC Part 15 C 15.247    | TRE1403007403    |
| Bluetooth v2.1    | FCC Part 15 C 15.247    | TRE1403007404    |
| Bluetooth 4.0     | FCC Part 15 C 15.247    | TRE1403007405    |
| USB Port          | FCC Part 15 B           | TRE1403007406    |
| SAR               | FCC Part 2 §2.1093      | TRE1403007407    |

2. The frequency bands used in this EUT are listed as follows:

| Frequency Band(MHz) | 2400-2483.5 | 5150-5350 | 5470-5725 | 5725-5850 |
|---------------------|-------------|-----------|-----------|-----------|
| 802.11b             | √           | —         | —         | —         |
| 802.11g             | √           | —         | —         | —         |
| 802.11n(20MHz)      | √           | —         | —         | —         |
| 802.11n(40MHz)      | √           | —         | —         | —         |

3. The EUT incorporates a SISO function,Physically,the EUT provides one completed transmitter and one completed receiver.

| Modulation Mode | TX Function |
|-----------------|-------------|
| 802.11b         | 1TX         |
| 802.11g         | 1TX         |
| 802.11n (20MHz) | 1TX         |
| 802.11n (40MHz) | 1TX         |

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen Huatongwei International Inspection Co., Ltd  
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China  
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

##### **A2LA-Lab Cert. No. 2243.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2015.

##### **FCC-Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun. 01, 2012, valid time is until Jun. 01, 2015.

##### **IC-Registration No.: 5377A**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **VCCI**

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

##### **DNV**

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

### 3.4. Test Description

| FCC PART 15 15.247              |                                |      |
|---------------------------------|--------------------------------|------|
| FCC Part 15.207                 | AC Power Conducted Emission    | PASS |
| FCC Part 15.247(a)(2)           | 6dB Bandwidth                  | PASS |
| FCC Part 15.247(d)              | Spurious RF Conducted Emission | PASS |
| FCC Part 15.247(b)              | Maximum Peak Output Power      | PASS |
| FCC Part 15.247(e)              | Power Spectral Density         | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions             | PASS |
| FCC Part 15.247(d)              | Band Edge                      | PASS |
| FCC Part 15.203/15.247 (b)      | Antenna Requirement            | PASS |

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                                                                                                                                                                               | Mode            | Data Rate | Channel |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|---------|
| Maximum Peak Conducted Output Power<br>Power Spectral Density<br>6dB Bandwidth<br>Spurious RF conducted emission<br>Radiated Emission 9kHz~1GHz&<br>Radiated Emission 1GHz~10th Harmonic | 11b/DSSS        | 1 Mbps    | 1/6/11  |
|                                                                                                                                                                                          | 11g/OFDM        | 6 Mbps    | 1/6/11  |
|                                                                                                                                                                                          | 11n(20MHz)/OFDM | 6.5Mbps   | 1/6/11  |
|                                                                                                                                                                                          | 11n(40MHz)/OFDM | 13.5 Mbps | 3/6/9   |
| Band Edge                                                                                                                                                                                | 11b/DSSS        | 1 Mbps    | 1/11    |
|                                                                                                                                                                                          | 11g/OFDM        | 6 Mbps    | 1/11    |
|                                                                                                                                                                                          | 11n(20MHz)/OFDM | 6.5Mbps   | 1/11    |
|                                                                                                                                                                                          | 11n(40MHz)/OFDM | 13.5 Mbps | 3/9     |

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

| Test Items                                 | Measurement Uncertainty | Notes |
|--------------------------------------------|-------------------------|-------|
| Frequency stability                        | 25 Hz                   | (1)   |
| Transmitter power conducted                | 0.57 dB                 | (1)   |
| Transmitter power Radiated                 | 2.20 dB                 | (1)   |
| Conducted spurious emission 9KHz-12.75 GHz | 1.60 dB                 | (1)   |
| Radiated spurious emission 9KHz-12.75 GHz  | 2.20 dB                 | (1)   |
| Conducted Emission 9KHz-30MHz              | 3.39 dB                 | (1)   |
| Radiated Emission 30~1000MHz               | 4.24 dB                 | (1)   |

|                                |         |     |
|--------------------------------|---------|-----|
| Radiated Emissio 1~18GHz       | 5.16 dB | (1) |
| Radiated Emissio 18-40GHz      | 5.54 dB | (1) |
| Occupied Bandwidth             | -----   | (1) |
| Emission Mask                  | -----   | (1) |
| Modulation Characteristic      | -----   | (1) |
| Transmitter Frequency Behavior | -----   | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

### 3.6. Equipments Used during the Test

| AC Power Conducted Emission |                   |               |             |            |            |
|-----------------------------|-------------------|---------------|-------------|------------|------------|
| Item                        | Test Equipment    | Manufacturer  | Model No.   | Serial No. | Last Cal.  |
| 1                           | Artificial Mains  | Rohde&Schwarz | ESH2-Z5     | 100028     | 2013/10/26 |
| 2                           | EMI Test Receiver | Rohde&Schwarz | ESCI        | 100106     | 2013/10/26 |
| 3                           | Pulse Limiter     | Rohde&Schwarz | ESHSZ2      | 100044     | 2013/10/26 |
| 4                           | EMI Test Software | Rohde&Schwarz | ES-K1 V1.71 | N/A        | N/A        |

| Radiated Emission |                         |                              |                    |            |            |
|-------------------|-------------------------|------------------------------|--------------------|------------|------------|
| Item              | Test Equipment          | Manufacturer                 | Model No.          | Serial No. | Last Cal.  |
| 1                 | Ultra-Broadband Antenna | ShwarzBeck                   | VULB9163           | 538        | 2013/10/26 |
| 2                 | EMI TEST RECEIVER       | Rohde&Schwarz                | ESI 26             | 100009     | 2013/10/26 |
| 3                 | EMI TEST Software       | Audix                        | E3                 | N/A        | 2013/10/26 |
| 4                 | TURNTABLE               | ETS                          | 2088               | 2149       | N/A        |
| 5                 | ANTENNA MAST            | ETS                          | 2075               | 2346       | N/A        |
| 6                 | EMI TEST Software       | Rohde&Schwarz                | ESK1               | N/A        | N/A        |
| 7                 | HORN ANTENNA            | ShwarzBeck                   | 9120D              | 1011       | 2013/10/26 |
| 8                 | Amplifer                | Sonoma                       | 310N               | E009-13    | 2013/10/26 |
| 9                 | JS amplifer             | Rohde&Schwarz                | JS4-00101800-28-5A | F201504    | 2013/10/26 |
| 10                | High pass filter        | Compliance Direction systems | BSU-6              | 34202      | 2013/10/26 |
| 11                | HORN ANTENNA            | ShwarzBeck                   | 9120D              | 1012       | 2013/10/26 |
| 12                | Amplifer                | Compliance Direction systems | PAP1-4060          | 120        | 2013/10/26 |
| 13                | Loop Antenna            | Rohde&Schwarz                | HFH2-Z2            | 100020     | 2013/10/26 |
| 14                | TURNTABLE               | MATURO                       | TT2.0              | ----       | N/A        |
| 15                | ANTENNA MAST            | MATURO                       | TAM-4.0-P          | ----       | N/A        |
| 16                | Horn Antenna            | SCHWARZBECK                  | BBHA9170           | 25841      | 2013/10/26 |
| 17                | HORN ANTENNA            | Rohde&Schwarz                | HF906              | 100039     | 2013/10/26 |
| 18                | ULTRA-BROADBAND ANTENNA | Rohde&Schwarz                | HL562              | 100015     | 2013/10/26 |


| Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission |                   |               |           |              |            |
|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|-----------|--------------|------------|
| Item                                                                                                                                      | Test Equipment    | Manufacturer  | Model No. | Serial No.   | Last Cal.  |
| 1                                                                                                                                         | Spectrum Analyzer | Rohde&Schwarz | FSP       | 1164.4391.40 | 2013/10/26 |

The Cal.Interval was one year

## 4. TEST CONDITIONS AND RESULTS

### 4.1. AC Power Conducted Emission

#### TEST CONFIGURATION

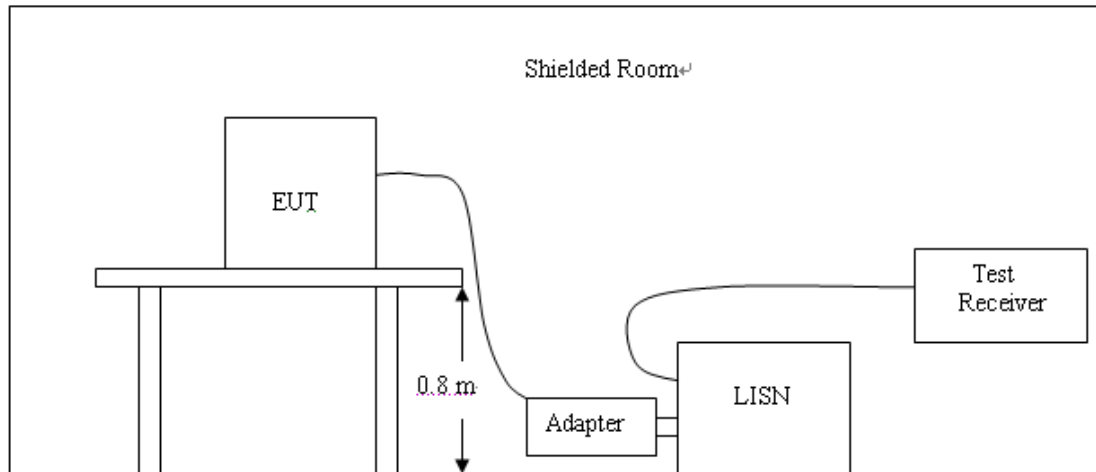

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency<br>(MHz) | Maximum RF Line Voltage (dBμV) |      |         |        |
|--------------------|--------------------------------|------|---------|--------|
|                    | CLASS A                        |      | CLASS B |        |
|                    | Q.P.                           | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50        | 79                             | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00        | 73                             | 60   | 56      | 46     |
| 5.00 - 30.0        | 73                             | 60   | 60      | 50     |


\* Decreasing linearly with the logarithm of the frequency

#### TEST RESULTS

The AC Power Conducted Emission measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode,the middle channel) is the worst case for all the test modes and channels.

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

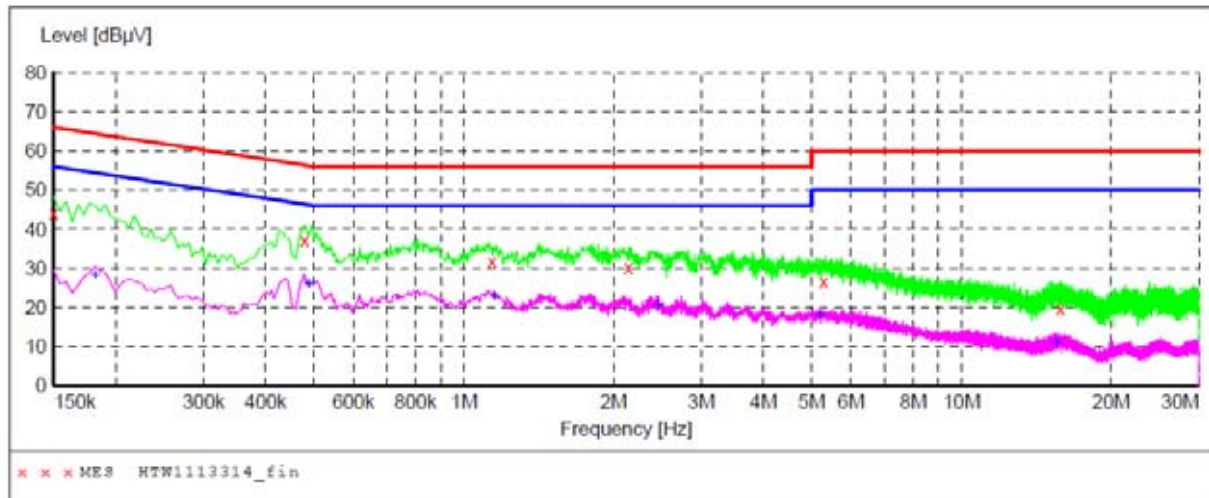**MEASUREMENT RESULT: "HTW1113314\_fin"**

11/13/2013 2:33PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.150000         | 44.10         | 10.1         | 66            | 21.9         | QP       | L1   | GND |
| 0.478500         | 37.10         | 10.1         | 56            | 19.3         | QP       | L1   | GND |
| 1.140000         | 31.70         | 10.3         | 56            | 24.3         | QP       | L1   | GND |
| 2.143500         | 30.30         | 10.3         | 56            | 25.7         | QP       | L1   | GND |
| 5.284500         | 26.50         | 10.3         | 60            | 33.5         | QP       | L1   | GND |
| 15.828000        | 19.80         | 10.7         | 60            | 40.2         | QP       | L1   | GND |


**MEASUREMENT RESULT: "HTW1113314\_fin2"**

11/13/2013 2:33PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.181500         | 28.00         | 10.1         | 54            | 26.4         | AV       | L1   | GND |
| 0.487500         | 26.10         | 10.1         | 46            | 20.1         | AV       | L1   | GND |
| 1.153500         | 22.70         | 10.3         | 46            | 23.3         | AV       | L1   | GND |
| 2.458500         | 20.50         | 10.3         | 46            | 25.5         | AV       | L1   | GND |
| 5.190000         | 17.80         | 10.3         | 50            | 32.2         | AV       | L1   | GND |
| 15.508500        | 11.10         | 10.7         | 50            | 38.9         | AV       | L1   | GND |

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

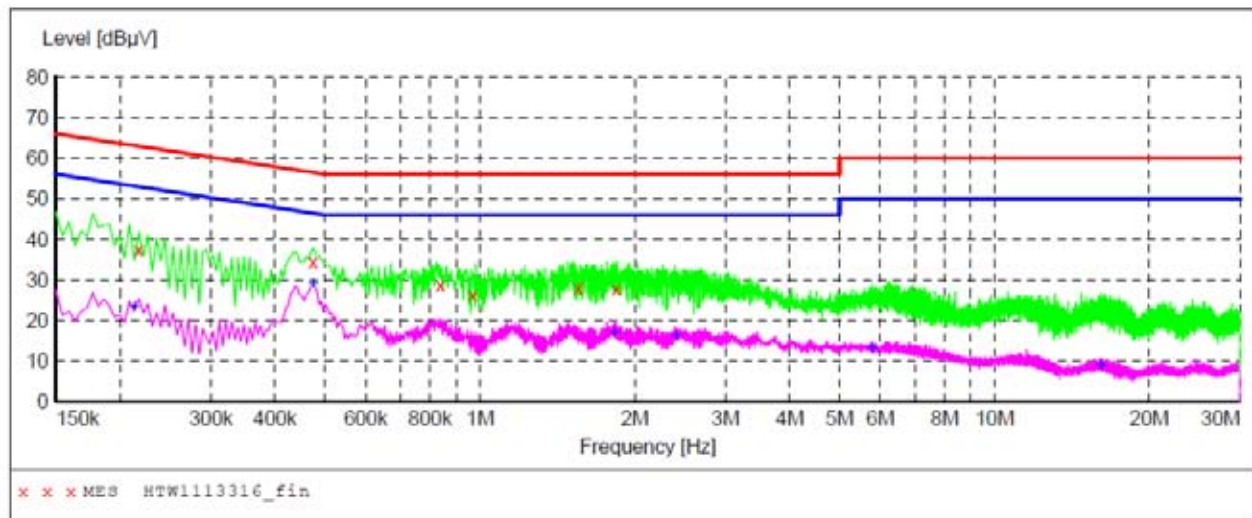**MEASUREMENT RESULT: "HTW1113316\_fin"**

11/13/2013 2:38PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.217500         | 37.50         | 10.1         | 63            | 25.4         | QP       | N    | GND |
| 0.474000         | 34.50         | 10.1         | 56            | 21.9         | QP       | N    | GND |
| 0.838500         | 28.60         | 10.2         | 56            | 27.4         | QP       | N    | GND |
| 0.969000         | 26.20         | 10.2         | 56            | 29.8         | QP       | N    | GND |
| 1.554000         | 28.10         | 10.3         | 56            | 27.9         | QP       | N    | GND |
| 1.842000         | 27.80         | 10.3         | 56            | 28.2         | QP       | N    | GND |

**MEASUREMENT RESULT: "HTW1113316\_fin2"**


11/13/2013 2:38PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.213000         | 23.40         | 10.1         | 53            | 29.7         | AV       | N    | GND |
| 0.474000         | 29.00         | 10.1         | 46            | 17.4         | AV       | N    | GND |
| 1.824000         | 17.10         | 10.3         | 46            | 28.9         | AV       | N    | GND |
| 2.404500         | 16.10         | 10.3         | 46            | 29.9         | AV       | N    | GND |
| 5.779500         | 13.20         | 10.3         | 50            | 36.8         | AV       | N    | GND |
| 16.089000        | 8.70          | 10.7         | 50            | 41.3         | AV       | N    | GND |


## 4.2. Radiated Emission

### TEST CONFIGURATION


Frequency range 9KHz – 30MHz

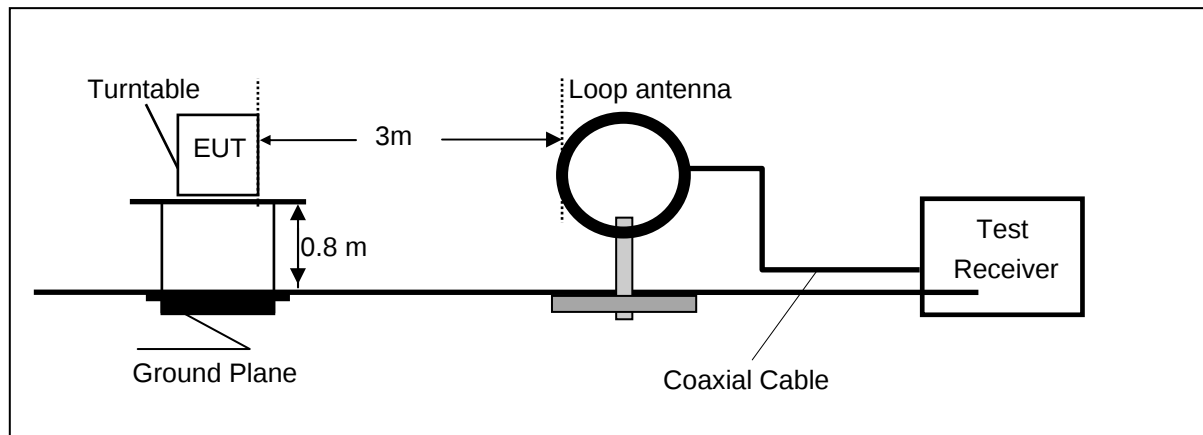

Frequency range 30MHz – 1000MHz

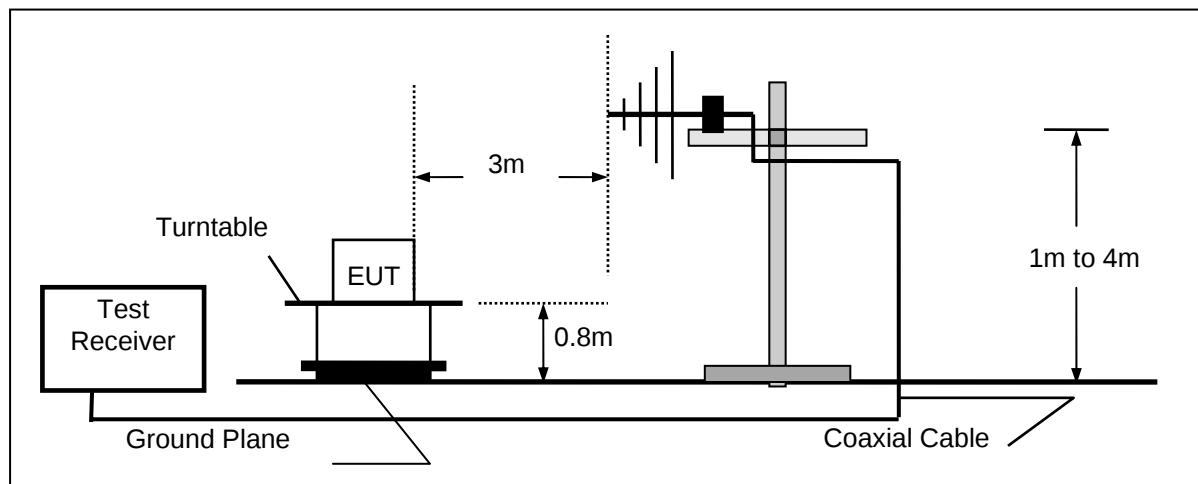

Frequency range above 1GHz-25GHz

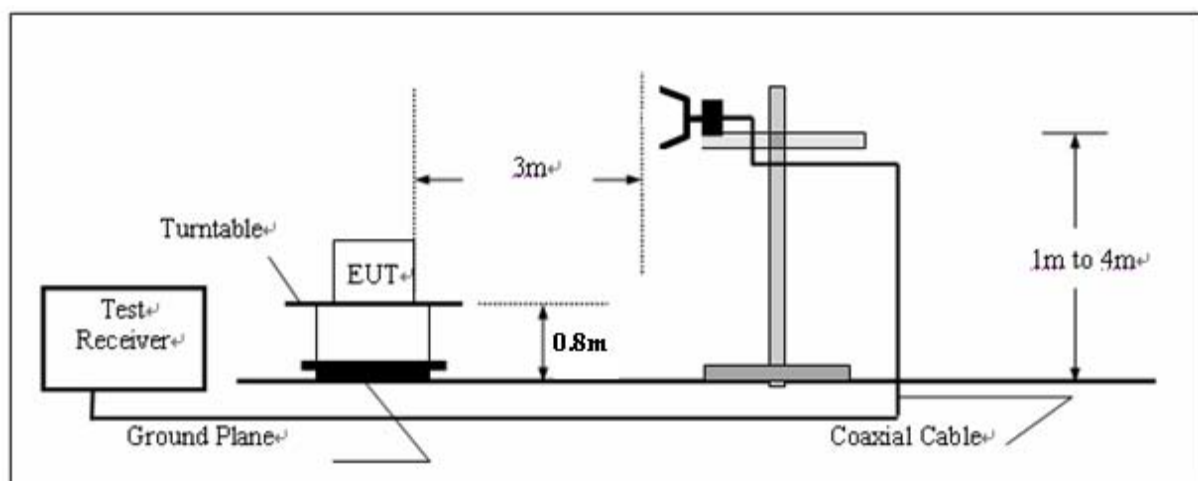

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT

3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2462MHz.so radiated emission test frequency band from 9KHz to 25GHz.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

### RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values.

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)         | Radiated (μV/m) |
|-----------------|-------------------|---------------------------|-----------------|
| 0.009-0.49      | 300               | $20\log(2400/F(KHz))+80$  | $2400/F(KHz)$   |
| 0.49-1.705      | 30                | $20\log(24000/F(KHz))+40$ | $24000/F(KHz)$  |
| 1.705-30        | 30                | $20\log(30)+40$           | 30              |
| 30-88           | 3                 | 40.0                      | 100             |
| 88-216          | 3                 | 43.5                      | 150             |
| 216-960         | 3                 | 46.0                      | 200             |
| Above 960       | 3                 | 54.0                      | 500             |

### TEST RESULTS

Remark:

1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode,the middle channel) is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientations,recored woest case at powered by adapter charging mode.


### **For 9KHz to 30MHz**

| Frequency (MHz) | Corrected Reading (dBμV/m)@3m | FCC Limit (dBμV/m) @3m | Margin (dB) | Detector | Result |
|-----------------|-------------------------------|------------------------|-------------|----------|--------|
| 12.00           | 41.87                         | 69.54                  | 27.67       | QP       | PASS   |
| 24.00           | 39.43                         | 69.54                  | 30.11       | QP       | PASS   |

For 30MHz to 1000MHz

**SWEEP TABLE: "test (30M-1G)"**

Short Description: Field Strength

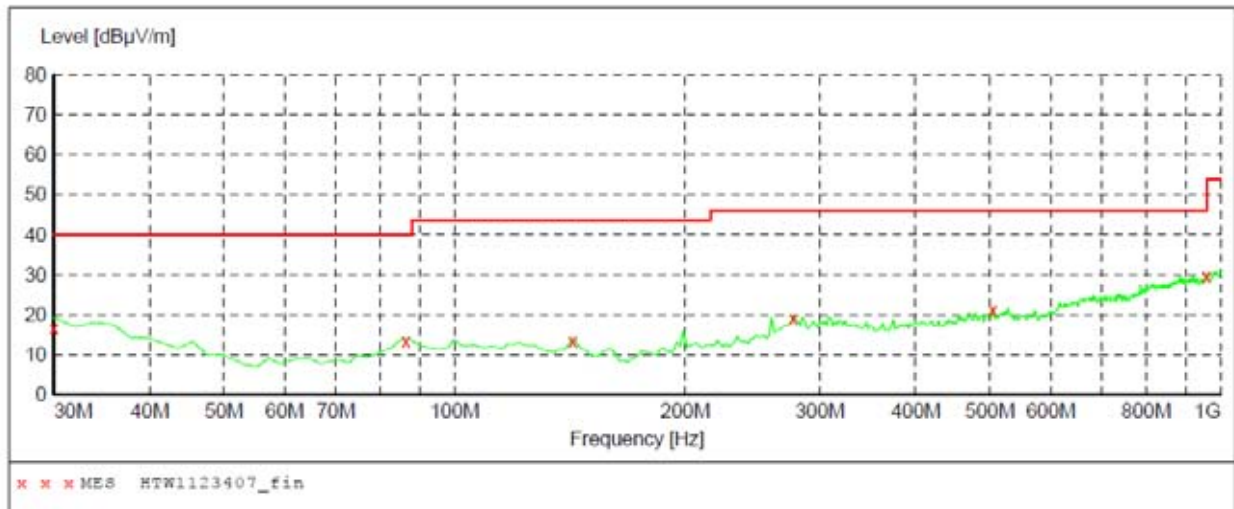
**MEASUREMENT RESULT: "HTW1123407\_fin"**

11/23/2013 11:23AM

| Frequency<br>MHz | Level<br>dBμV/m | Transd<br>dB | Limit<br>dBμV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 30.000000        | 17.20           | -10.0        | 40.0            | 22.0         | Q p  | 100.0        | 229.00         | HORIZONTAL   |
| 86.372745        | 14.10           | -19.4        | 40.0            | 25.9         | Q p  | 100.0        | 341.00         | HORIZONTAL   |
| 142.745491       | 14.00           | -20.4        | 43.5            | 29.5         | Q p  | 100.0        | 116.00         | HORIZONTAL   |
| 276.873747       | 19.80           | -16.3        | 46.0            | 26.2         | Q p  | 100.0        | 101.00         | HORIZONTAL   |
| 504.308617       | 21.80           | -11.5        | 46.0            | 24.2         | Q p  | 100.0        | 95.00          | HORIZONTAL   |
| 959.178357       | 30.20           | -4.2         | 46.0            | 15.8         | Q p  | 100.0        | 152.00         | HORIZONTAL   |

***SWEEP TABLE: "test (30M-1G)"***

Short Description: Field Strength

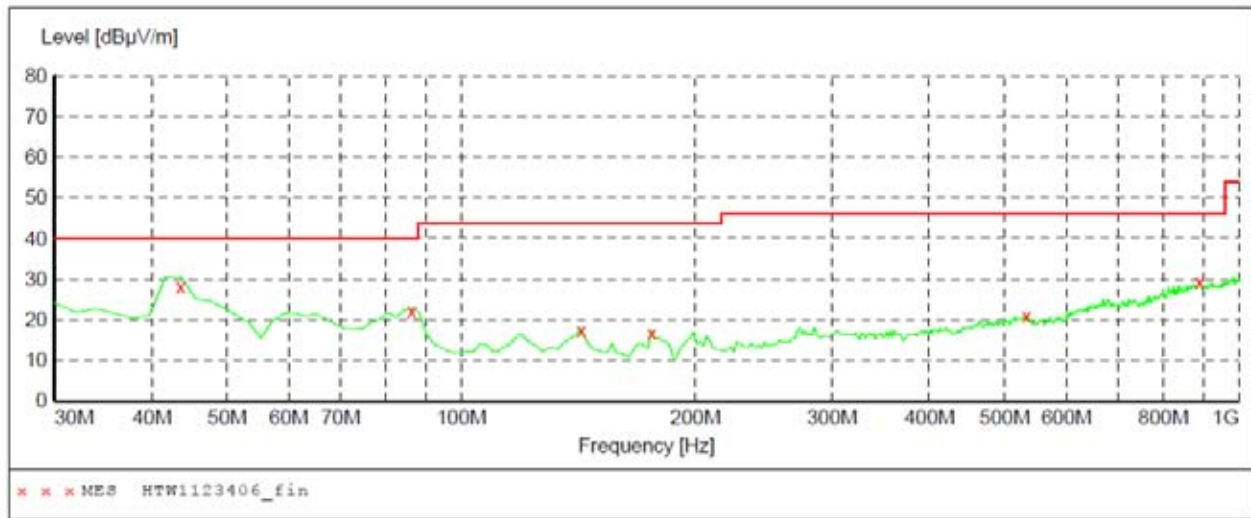***MEASUREMENT RESULT: "HTW1123406\_fin"***

11/23/2013 11:20AM

| Frequency<br>MHz | Level<br>dBuV/m | Transd<br>dB | Limit<br>dBuV/m | Margin<br>dB | Det. | Height<br>cm | Azimuth<br>deg | Polarization |
|------------------|-----------------|--------------|-----------------|--------------|------|--------------|----------------|--------------|
| 43.607214        | 28.70           | -17.2        | 40.0            | 11.3         | Q p  | 100.0        | 178.00         | VERTICAL     |
| 86.372745        | 21.80           | -19.4        | 40.0            | 18.2         | Q p  | 100.0        | 90.00          | VERTICAL     |
| 142.745491       | 18.00           | -20.4        | 43.5            | 25.5         | Q p  | 100.0        | 296.00         | VERTICAL     |
| 175.791583       | 17.30           | -21.0        | 43.5            | 26.2         | Q p  | 100.0        | 353.00         | VERTICAL     |
| 533.466934       | 20.90           | -11.2        | 46.0            | 25.1         | Q p  | 100.0        | 0.00           | VERTICAL     |
| 891.142285       | 29.20           | -4.1         | 46.0            | 16.8         | Q p  | 100.0        | 54.00          | VERTICAL     |

For 1GHz to 25GHz

## 802.11b Mode(above 1GHz)

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2412MHz) |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4824.00         | 55.04                  | PK | 74.00          | 18.96       | 1.00 H             | 30                   | 52.94            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 1                                                                      | 4824.00         | 46.45                  | AV | 54.00          | 7.55        | 1.00 H             | 30                   | 44.35            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 2                                                                      | 7236.00         | 58.60                  | PK | 74.00          | 15.40       | 1.00 H             | 136                  | 47.67            | 37.33                 | 8.90              | 35.3          | 10.93                    |
| 2                                                                      | 7236.00         | 42.38                  | AV | 54.00          | 11.62       | 1.00 H             | 136                  | 31.45            | 37.33                 | 8.90              | 35.3          | 10.93                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2412MHz) |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|----------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                  | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                    | 4824.00         | 63.04                  | PK | 74.00          | 10.96       | 1.00 H             | 309                  | 60.94            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 1                                                                    | 4824.00         | 50.85                  | AV | 54.00          | 3.15        | 1.00 H             | 309                  | 48.75            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 2                                                                    | 7236.00         | 60.76                  | PK | 74.00          | 13.24       | 1.00 H             | 158                  | 49.83            | 37.33                 | 8.90              | 35.3          | 10.93                    |
| 2                                                                    | 7236.00         | 50.78                  | AV | 54.00          | 3.22        | 1.00 H             | 158                  | 39.85            | 37.33                 | 8.90              | 35.3          | 10.93                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2437MHz) |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4874.00         | 59.39                  | PK | 74.00          | 14.61       | 1.00 H             | 215                  | 57.27            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                      | 4874.00         | 48.29                  | AV | 54.00          | 5.71        | 1.00 H             | 215                  | 46.17            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                      | 7311.00         | 62.26                  | PK | 74.00          | 11.74       | 1.00 H             | 207                  | 51.18            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                      | 7311.00         | 49.35                  | AV | 54.00          | 4.65        | 1.00 H             | 207                  | 38.27            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2437MHz) |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|----------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                  | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                    | 4874.00         | 59.39                  | PK | 74.00          | 14.61       | 1.00 H             | 139                  | 57.27            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                    | 4874.00         | 48.30                  | AV | 54.00          | 5.70        | 1.00 H             | 139                  | 46.18            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                    | 7311.00         | 58.35                  | PK | 74.00          | 15.65       | 1.00 H             | 31                   | 47.27            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                    | 7311.00         | 48.26                  | AV | 54.00          | 5.74        | 1.00 H             | 31                   | 37.18            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2462MHz) |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4924.00         | 59.74                  | PK | 74.00          | 14.26       | 1.00 H             | 312                  | 57.36            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 1                                                                      | 4924.00         | 49.83                  | AV | 54.00          | 4.17        | 1.00 H             | 312                  | 47.45            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 2                                                                      | 7386.00         | 62.08                  | PK | 74.00          | 11.92       | 1.00 H             | 127                  | 50.37            | 38.51                 | 8.50              | 35.3          | 11.71                    |
| 2                                                                      | 7386.00         | 49.08                  | AV | 54.00          | 4.92        | 1.00 H             | 127                  | 37.37            | 38.51                 | 8.50              | 35.3          | 11.71                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2462MHz) |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|----------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                  | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                    | 4924.00         | 62.93                  | PK | 74.00          | 11.07       | 1.00 H             | 330                  | 60.55            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 1                                                                    | 4924.00         | 49.36                  | AV | 54.00          | 4.64        | 1.00 H             | 330                  | 46.98            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 2                                                                    | 7386.00         | 64.13                  | PK | 74.00          | 9.87        | 1.00 H             | 207                  | 52.42            | 38.51                 | 8.50              | 35.3          | 11.71                    |
| 2                                                                    | 7386.00         | 49.07                  | AV | 54.00          | 4.93        | 1.00 H             | 207                  | 37.36            | 38.51                 | 8.50              | 35.3          | 11.71                    |

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value(dBuV)+Correction Factor(dB/m)
  2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
  3. The other emission levels were very low against the limit.
  4. Margin value = Limit value- Emission level.
  5. For Wireless 802.11b mode at 1Mbps.

**802.11g Mode(above 1GHz)**

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2412MHz)</b> |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|-----------------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                               | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                                 | 4824.00         | 57.47                  | PK | 74.00          | 16.53       | 1.00 H             | 36                   | 55.37            | 31.6                  | 7.00              | 36.5          | 2.10                     |
| 1                                                                                 | 4824.00         | 49.57                  | AV | 54.00          | 4.43        | 1.00 H             | 36                   | 47.47            | 31.6                  | 7.00              | 36.5          | 2.10                     |
| 2                                                                                 | 7236.00         | 62.04                  | PK | 74.00          | 11.96       | 1.00 H             | 241                  | 51.11            | 37.33                 | 8.90              | 35.3          | 10.93                    |
| 2                                                                                 | 7236.00         | 49.26                  | AV | 54.00          | 4.74        | 1.00 H             | 241                  | 38.33            | 37.33                 | 8.90              | 35.3          | 10.93                    |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M (802.11g--2412MHz)</b> |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|---------------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                             | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                               | 4824.00         | 63.46                  | PK | 74.00          | 10.54       | 1.00 H             | 50                   | 61.36            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 1                                                                               | 4824.00         | 49.57                  | AV | 54.00          | 4.43        | 1.00 H             | 50                   | 47.47            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 2                                                                               | 7236.00         | 61.22                  | PK | 74.00          | 12.78       | 1.00 H             | 291                  | 50.29            | 37.33                 | 8.90              | 35.3          | 10.93                    |
| 2                                                                               | 7236.00         | 48.48                  | AV | 54.00          | 5.52        | 1.00 H             | 291                  | 37.55            | 37.33                 | 8.90              | 35.3          | 10.93                    |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2437MHz)</b> |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|-----------------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                               | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                                 | 4874.00         | 62.73                  | PK | 74.00          | 11.27       | 1.00 H             | 114                  | 60.61            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                                 | 4874.00         | 49.40                  | AV | 54.00          | 4.60        | 1.00 H             | 114                  | 47.28            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                                 | 7311.00         | 60.47                  | PK | 74.00          | 13.53       | 1.00 H             | 58                   | 49.39            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                                 | 7311.00         | 48.34                  | AV | 54.00          | 5.66        | 1.00 H             | 58                   | 37.26            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M (802.11g--2437MHz)</b> |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|---------------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                             | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                               | 4874.00         | 63.80                  | PK | 74.00          | 10.20       | 1.00 H             | 130                  | 61.68            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                               | 4874.00         | 49.77                  | AV | 54.00          | 4.23        | 1.00 H             | 130                  | 47.65            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                               | 7311.00         | 62.49                  | PK | 74.00          | 11.51       | 1.00 H             | 270                  | 51.41            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                               | 7311.00         | 47.75                  | AV | 54.00          | 6.25        | 1.00 H             | 270                  | 36.67            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| <b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2462MHz)</b> |                 |                        |    |                |             |                    |                      |                  |                       |                   |               |                          |
|-----------------------------------------------------------------------------------|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                               | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                                 | 4924.00         | 59.98                  | PK | 74.00          | 14.02       | 1.00 H             | 325                  | 57.60            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 1                                                                                 | 4924.00         | 47.84                  | AV | 54.00          | 6.16        | 1.00 H             | 325                  | 45.46            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 2                                                                                 | 7311.00         | 62.47                  | PK | 74.00          | 11.53       | 1.00 H             | 217                  | 50.76            | 38.51                 | 8.50              | 35.3          | 11.71                    |
| 2                                                                                 | 7311.00         | 49.18                  | AV | 54.00          | 4.82        | 1.00 H             | 217                  | 37.47            | 38.51                 | 8.50              | 35.3          | 11.71                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2462MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|----------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                  | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                    | 4924.00         | 61.71                   | PK | 74.00          | 12.29       | 1.00 H             | 151                  | 59.33            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 1                                                                    | 4924.00         | 48.75                   | AV | 54.00          | 5.25        | 1.00 H             | 151                  | 46.37            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 2                                                                    | 7386.00         | 64.07                   | PK | 74.00          | 9.93        | 1.00 H             | 28                   | 52.36            | 38.51                 | 8.50              | 35.3          | 11.71                    |
| 2                                                                    | 7386.00         | 49.08                   | AV | 54.00          | 4.92        | 1.00 H             | 28                   | 37.37            | 38.51                 | 8.50              | 35.3          | 11.71                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
  3. The other emission levels were very low against the limit.
  4. Margin value = Limit value - Emission level.
  5. For Wireless 802.11g mode at 6Mbps.

### 802.11n(20MHz) Mode(above 1GHz)

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2412MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|--------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                      | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                        | 4824.00         | 63.93                   | PK | 74.00          | 10.07       | 1.00 H             | 79                   | 61.83            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 1                                                                        | 4824.00         | 48.57                   | AV | 54.00          | 5.43        | 1.00 H             | 79                   | 46.47            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 2                                                                        | 7236.00         | 62.29                   | PK | 74.00          | 11.71       | 1.00 H             | 189                  | 51.36            | 37.33                 | 8.90              | 35.3          | 10.93                    |
| 2                                                                        | 7236.00         | 48.60                   | AV | 54.00          | 5.40        | 1.00 H             | 189                  | 37.67            | 37.33                 | 8.90              | 35.3          | 10.93                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2412MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4824.00         | 63.79                   | PK | 74.00          | 10.21       | 1.00 H             | 47                   | 61.69            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 1                                                                      | 4824.00         | 49.36                   | AV | 54.00          | 4.64        | 1.00 H             | 47                   | 47.26            | 31.60                 | 7.00              | 36.5          | 2.10                     |
| 2                                                                      | 7236.00         | 63.40                   | PK | 74.00          | 10.60       | 1.00 H             | 180                  | 52.47            | 37.33                 | 8.90              | 35.3          | 10.93                    |
| 2                                                                      | 7236.00         | 49.74                   | AV | 54.00          | 4.26        | 1.00 H             | 180                  | 38.81            | 37.33                 | 8.90              | 35.3          | 10.93                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2437MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|--------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                      | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                        | 4874.00         | 59.87                   | PK | 74.00          | 14.13       | 1.00 H             | 217                  | 57.75            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                        | 4874.00         | 49.49                   | AV | 54.00          | 4.51        | 1.00 H             | 217                  | 47.37            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                        | 7311.00         | 62.56                   | PK | 74.00          | 11.44       | 1.00 H             | 180                  | 51.48            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                        | 7311.00         | 49.50                   | AV | 54.00          | 4.50        | 1.00 H             | 180                  | 38.42            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2437MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4874.00         | 60.49                   | PK | 74.00          | 13.51       | 1.00 H             | 243                  | 58.37            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                      | 4874.00         | 49.60                   | AV | 54.00          | 4.40        | 1.00 H             | 243                  | 47.48            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                      | 7311.00         | 61.83                   | PK | 74.00          | 12.17       | 1.00 H             | 210                  | 50.75            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                      | 7311.00         | 49.86                   | AV | 54.00          | 4.14        | 1.00 H             | 210                  | 38.78            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2462MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|--------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                      | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                        | 4924.00         | 58.94                   | PK | 74.00          | 15.06       | 1.00 H             | 140                  | 56.56            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 1                                                                        | 4924.00         | 46.05                   | AV | 54.00          | 7.95        | 1.00 H             | 140                  | 43.67            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 2                                                                        | 7386.00         | 61.08                   | PK | 74.00          | 12.92       | 1.00 H             | 227                  | 49.37            | 38.51                 | 8.50              | 35.3          | 11.71                    |
| 2                                                                        | 7386.00         | 49.20                   | AV | 54.00          | 4.80        | 1.00 H             | 227                  | 37.49            | 38.51                 | 8.50              | 35.3          | 11.71                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2462MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4924.00         | 59.88                   | PK | 74.00          | 14.12       | 1.00 H             | 190                  | 57.50            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 1                                                                      | 4924.00         | 48.75                   | AV | 54.00          | 5.25        | 1.00 H             | 190                  | 46.37            | 31.58                 | 7.00              | 36.2          | 2.38                     |
| 2                                                                      | 7386.00         | 62.10                   | PK | 74.00          | 11.90       | 1.00 H             | 279                  | 50.39            | 38.51                 | 8.50              | 35.3          | 11.71                    |
| 2                                                                      | 7386.00         | 49.16                   | AV | 54.00          | 4.84        | 1.00 H             | 279                  | 37.45            | 38.51                 | 8.50              | 35.3          | 11.71                    |

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)  
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor  
 3. The other emission levels were very low against the limit.  
 4. Margin value = Limit value - Emission level.  
 5. For Wireless 802.11n (20MHz) mode at 6.5Mbps.

**802.11n(40MHz) Mode(above 1GHz)**

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2422MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|--------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                      | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                        | 4844.00         | 62.07                   | PK | 74.00          | 11.93       | 1.00 H             | 69                   | 59.96            | 31.01                 | 7.30              | 36.2          | 2.11                     |
| 1                                                                        | 4844.00         | 46.46                   | AV | 54.00          | 7.54        | 1.00 H             | 69                   | 44.35            | 31.01                 | 7.30              | 36.2          | 2.11                     |
| 2                                                                        | 7266.00         | 61.99                   | PK | 74.00          | 12.01       | 1.00 H             | 190                  | 51.19            | 36.70                 | 8.90              | 34.8          | 10.80                    |
| 2                                                                        | 7266.00         | 47.32                   | AV | 54.00          | 6.68        | 1.00 H             | 190                  | 36.52            | 36.70                 | 8.90              | 34.8          | 10.80                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2422MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4844.00         | 60.42                   | PK | 74.00          | 13.58       | 1.00 H             | 351                  | 58.31            | 31.01                 | 7.30              | 36.2          | 2.11                     |
| 1                                                                      | 4844.00         | 47.80                   | AV | 54.00          | 6.20        | 1.00 H             | 351                  | 45.69            | 31.01                 | 7.30              | 36.2          | 2.11                     |
| 2                                                                      | 7266.00         | 62.73                   | PK | 74.00          | 11.27       | 1.00 H             | 177                  | 51.93            | 36.70                 | 8.90              | 34.8          | 10.80                    |
| 2                                                                      | 7266.00         | 47.72                   | AV | 54.00          | 6.28        | 1.00 H             | 177                  | 36.92            | 36.70                 | 8.90              | 34.8          | 10.80                    |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2437MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|--------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                      | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                        | 4874.00         | 61.48                   | PK | 74.00          | 12.52       | 1.00 H             | 247                  | 59.36            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                        | 4874.00         | 49.49                   | AV | 54.00          | 4.51        | 1.00 H             | 247                  | 47.37            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                        | 7311.00         | 64.78                   | PK | 74.00          | 9.22        | 1.00 H             | 103                  | 53.7             | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                        | 7311.00         | 49.44                   | AV | 54.00          | 4.56        | 1.00 H             | 103                  | 38.36            | 37.28                 | 8.60              | 34.8          | 11.08                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2437MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4874.00         | 59.17                   | PK | 74.00          | 14.83       | 1.00 H             | 302                  | 57.05            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 1                                                                      | 4874.00         | 50.01                   | AV | 54.00          | 3.99        | 1.00 H             | 302                  | 47.89            | 31.02                 | 7.60              | 36.5          | 2.12                     |
| 2                                                                      | 7311.00         | 64.14                   | PK | 74.00          | 9.86        | 1.00 H             | 177                  | 53.06            | 37.28                 | 8.60              | 34.8          | 11.08                    |
| 2                                                                      | 7311.00         | 49.41                   | AV | 54.00          | 4.59        | 1.00 H             | 177                  | 38.33            | 37.28                 | 8.60              | 34.8          | 11.08                    |


| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2452MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|--------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                      | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                        | 4904.00         | 58.63                   | PK | 74.00          | 15.37       | 1.00 H             | 59                   | 56.36            | 31.47                 | 7.00              | 36.2          | 2.27                     |
| 1                                                                        | 4904.00         | 45.63                   | AV | 54.00          | 8.37        | 1.00 H             | 59                   | 43.36            | 31.47                 | 7.00              | 36.2          | 2.27                     |
| 2                                                                        | 7356.00         | 61.75                   | PK | 74.00          | 12.25       | 1.00 H             | 194                  | 50.1             | 38.45                 | 8.50              | 35.3          | 11.65                    |
| 2                                                                        | 7356.00         | 48.01                   | AV | 54.00          | 5.99        | 1.00 H             | 194                  | 36.36            | 38.45                 | 8.50              | 35.3          | 11.65                    |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2452MHz) |                 |                         |    |                |             |                    |                      |                  |                       |                   |               |                          |
|------------------------------------------------------------------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|---------------|--------------------------|
| No.                                                                    | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier | Correction Factor (dB/m) |
| 1                                                                      | 4904.00         | 60.53                   | PK | 74.00          | 13.47       | 1.00 H             | 197                  | 58.26            | 31.47                 | 7.00              | 36.2          | 2.27                     |
| 1                                                                      | 4904.00         | 46.63                   | AV | 54.00          | 7.37        | 1.00 H             | 197                  | 44.36            | 31.47                 | 7.00              | 36.2          | 2.27                     |
| 2                                                                      | 7356.00         | 60.91                   | PK | 74.00          | 13.09       | 1.00 H             | 183                  | 49.26            | 38.45                 | 8.50              | 35.3          | 11.65                    |
| 2                                                                      | 7356.00         | 47.94                   | AV | 54.00          | 6.06        | 1.00 H             | 183                  | 36.29            | 38.45                 | 8.50              | 35.3          | 11.65                    |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
  3. The other emission levels were very low against the limit.
  4. Margin value = Limit value - Emission level.
  5. For Wireless 802.11n (40MHz) mode at 13.5Mbps.

### 4.3. Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Accoding to KDB558074 D01 V03 Integrated band power method for this procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

1. Set the RBW = 1 MHz.
2. Set the VBW  $\geq$  3 RBW
3. Set the span  $\geq$  1.5 x DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

#### LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

#### TEST RESULTS

Remark:We measured output power at difference data rate for each mode and recorded woest case for each mode.


##### 4.3.1 802.11b Test Mode

###### A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Refer to Plot | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|---------------|--------------|---------|
| 1       | 2412            | 16.38                            | Plot 4.3.1 A  | 30           | PASS    |
| 6       | 2437            | 15.70                            | Plot 4.3.1 B  | 30           | PASS    |
| 11      | 2462            | 14.81                            | Plot 4.3.1 C  | 30           | PASS    |


Note: 1. For 802.11b mode at finial test to get the worst-case emission at 1Mbps.  
2.The test results including the cable lose.

###### B. Test Plots

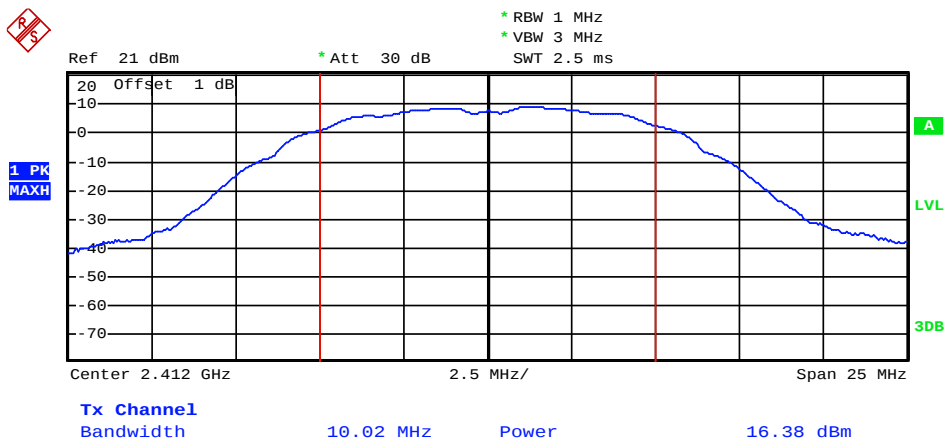


Date: 18.NOV.2013 14:08:51

(Plot 4.3.1 A: Channel 1: 2412MHz @ 802.11b)

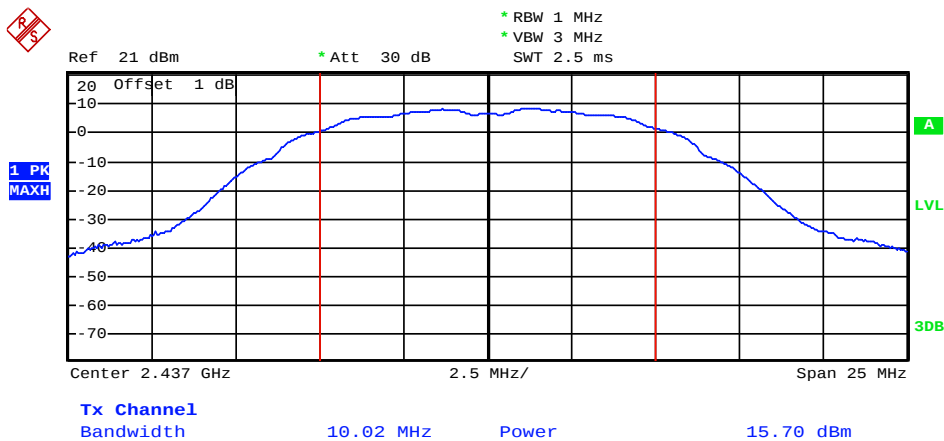

Date: 18.NOV.2013 14:09:14

(Plot 4.3.1 B: Channel 1: 2437MHz @ 802.11b)

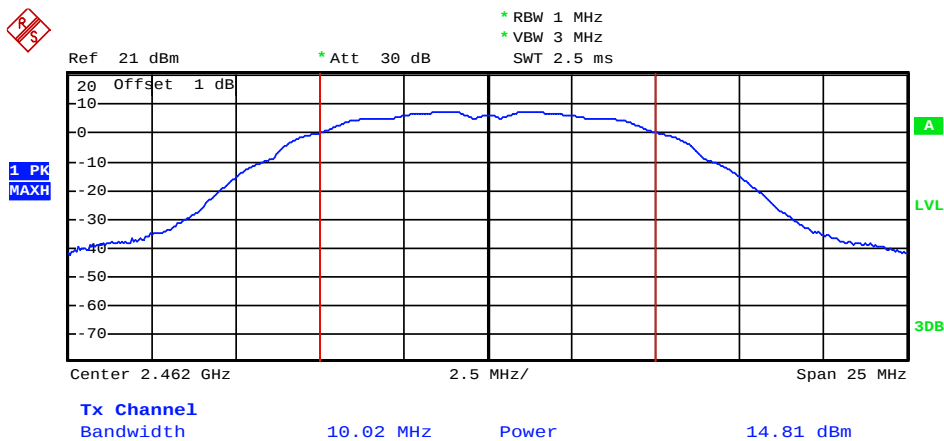

Date: 18.NOV.2013 14:09:54

(Plot 4.3.1 C: Channel 11: 2462MHz @ 802.11b)


4.3.2 802.11g Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Refer to Plot | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|---------------|--------------|---------|
| 1       | 2412            | 18.65                            | Plot 4.3.2 A  | 30           | PASS    |
| 6       | 2437            | 17.88                            | Plot 4.3.2 B  | 30           | PASS    |
| 11      | 2462            | 17.00                            | Plot 4.3.2 C  | 30           | PASS    |


Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.  
2.The test results including the cable lose.

B. Test Plots

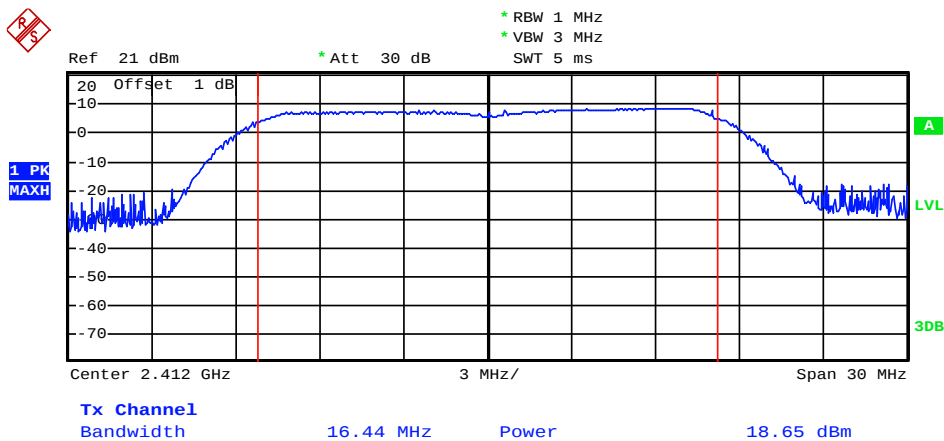


Date: 18.NOV.2013 14:11:22

(Plot 4.3.2 A: Channel 1: 2412MHz @ 802.11g)

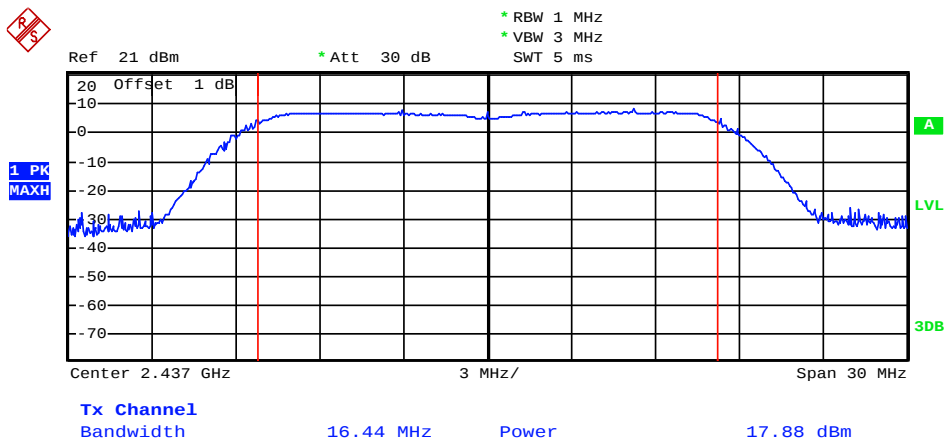

Date: 18.NOV.2013 14:11:57

(Plot 4.3.2 B: Channel 1: 2437MHz @ 802.11g)

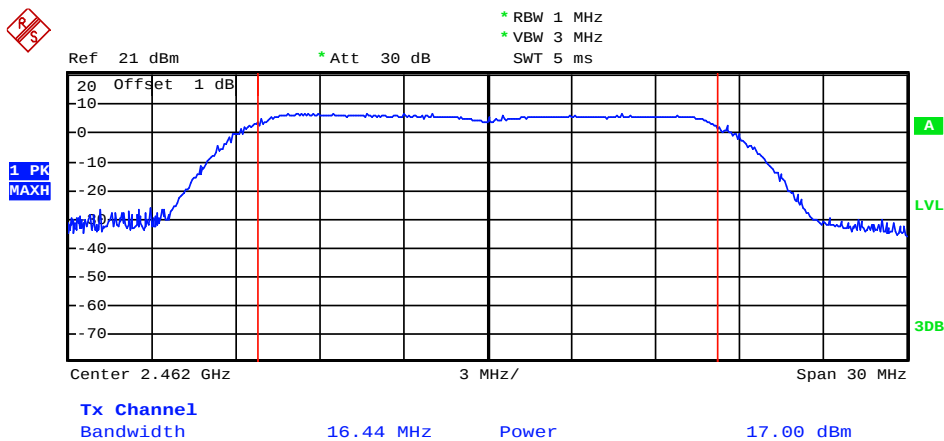

Date: 18.NOV.2013 14:12:27

(Plot 4.3.2 C: Channel 11: 2462MHz @ 802.11g)


4.3.3 802.11n(20MHz) Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Refer to Plot | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|---------------|--------------|---------|
| 1       | 2412            | 18.91                            | Plot 4.3.3 A  | 30           | PASS    |
| 6       | 2437            | 17.95                            | Plot 4.3.3 B  | 30           | PASS    |
| 11      | 2462            | 17.14                            | Plot 4.3.3 C  | 30           | PASS    |


Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.  
2.The test results including the cable loss.

B. Test Plots

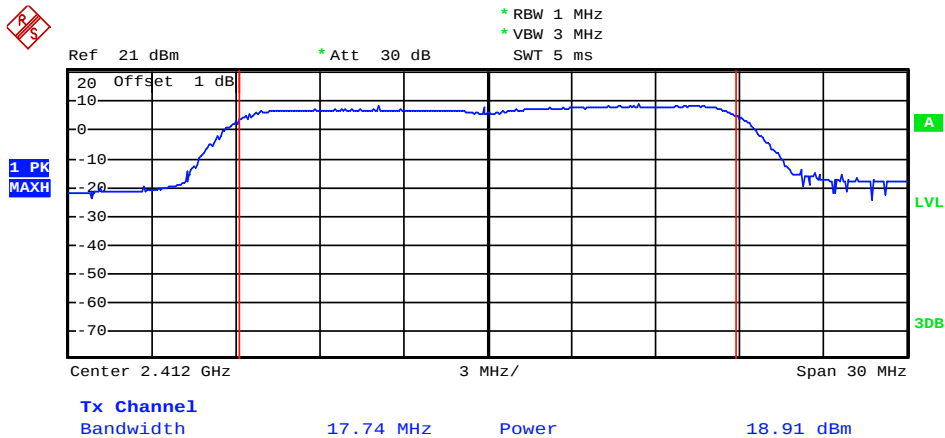


Date: 18.NOV.2013 14:14:19

(Plot 4.3.3 A: Channel 1: 2412MHz @ 802.11n(20MHz))

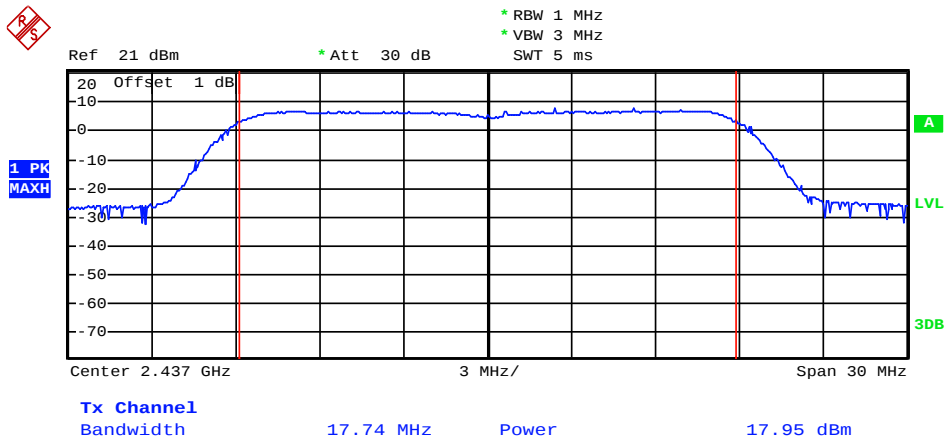

Date: 18.NOV.2013 14:14:53

(Plot 4.3.3 B: Channel 6: 2437MHz @ 802.11n(20MHz))

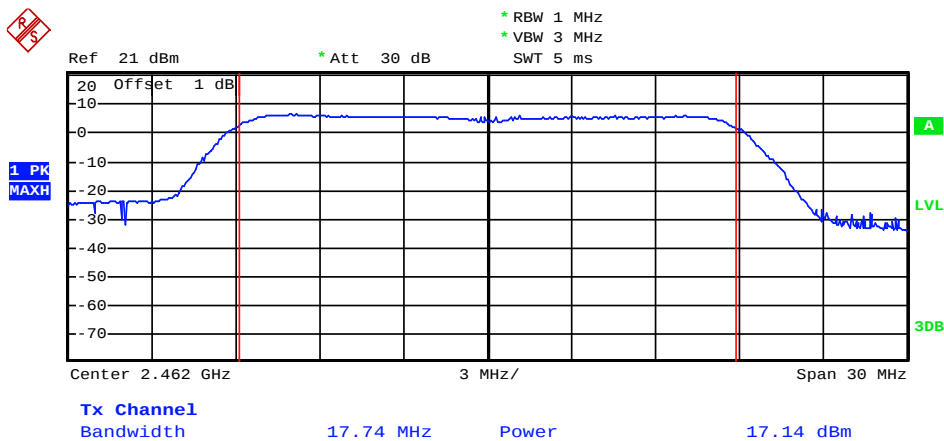

Date: 18.NOV.2013 14:15:33

(Plot 4.3.3 C: Channel 11: 2462MHz @ 802.11n(20MHz))


4.3.4 802.11n(40MHz) Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Refer to Plot | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|---------------|--------------|---------|
| 3       | 2422            | 16.40                            | Plot 4.3.4 A  | 30           | PASS    |
| 6       | 2437            | 15.99                            | Plot 4.3.4 B  | 30           | PASS    |
| 9       | 2452            | 15.48                            | Plot 4.3.4 C  | 30           | PASS    |


Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.  
2.The test results including the cable loss.

B. Test Plots

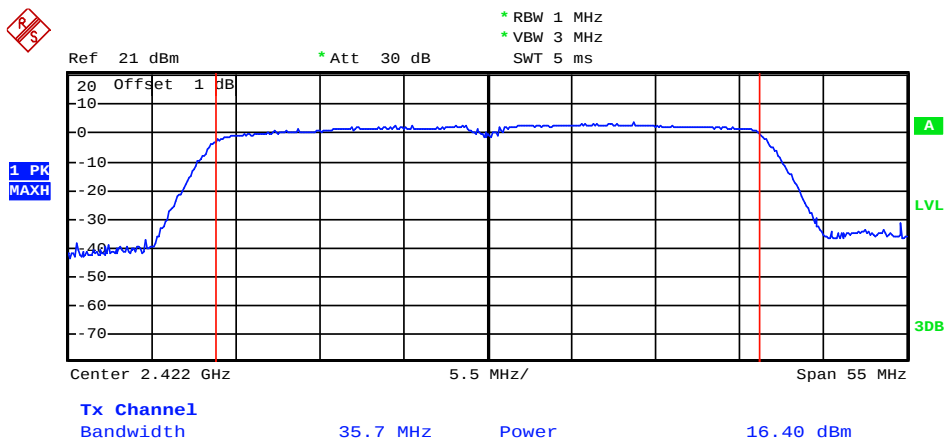


Date: 18.NOV.2013 14:17:13

(Plot 4.3.4 A: Channel 3: 2422MHz @ 802.11n(40MHz))

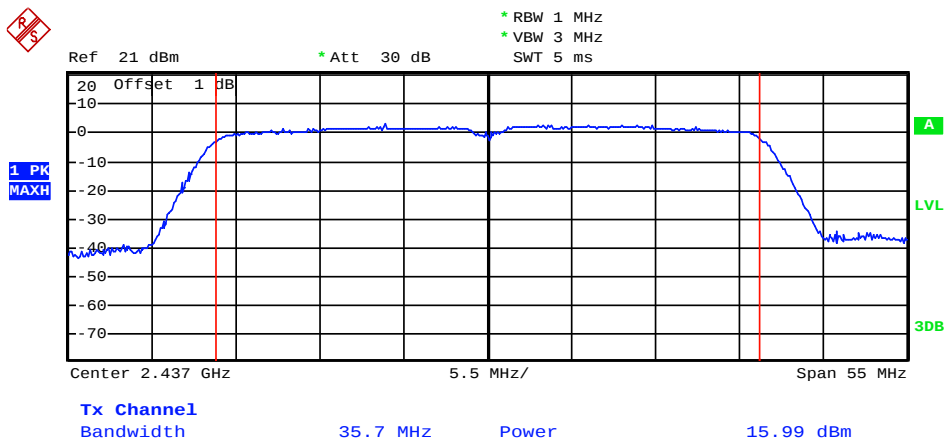

Date: 18.NOV.2013 14:17:46

(Plot 4.3.4 B: Channel 6: 2437MHz @ 802.11n(40MHz))

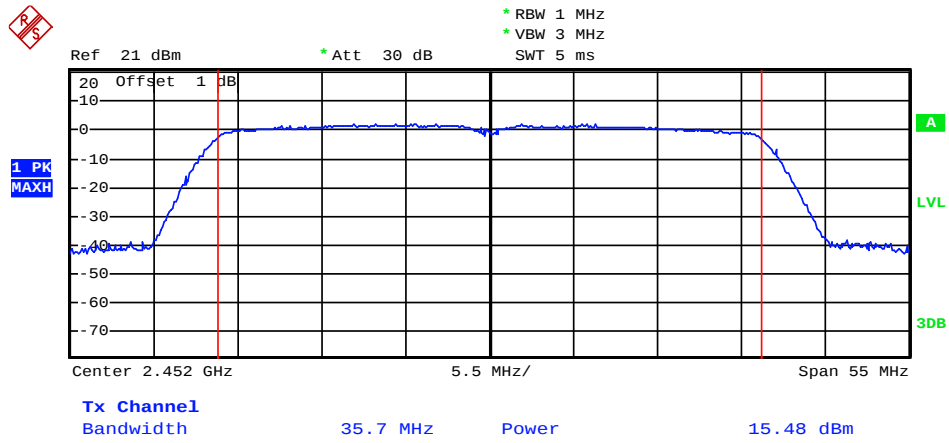


Date: 18.NOV.2013 14:18:43

(Plot 4.3.4 C: Channel 9: 2452MHz @ 802.11n(40MHz))

#### 4.4. Power Spectral Density

##### TEST CONFIGURATION



##### TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \text{ RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

##### TEST RESULTS


###### 4.4.1 802.11b Test Mode

###### A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/3kHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|-----------------------|---------------|-------------------|---------|
| 1       | 2412            | -9.26                 | Plot 4.4.1 A  | 8                 | PASS    |
| 6       | 2437            | -7.78                 | Plot 4.4.1 B  | 8                 | PASS    |
| 11      | 2462            | -12.60                | Plot 4.4.1 C  | 8                 | PASS    |


Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.  
2. The test results including the cable lose.

###### B. Test Plots

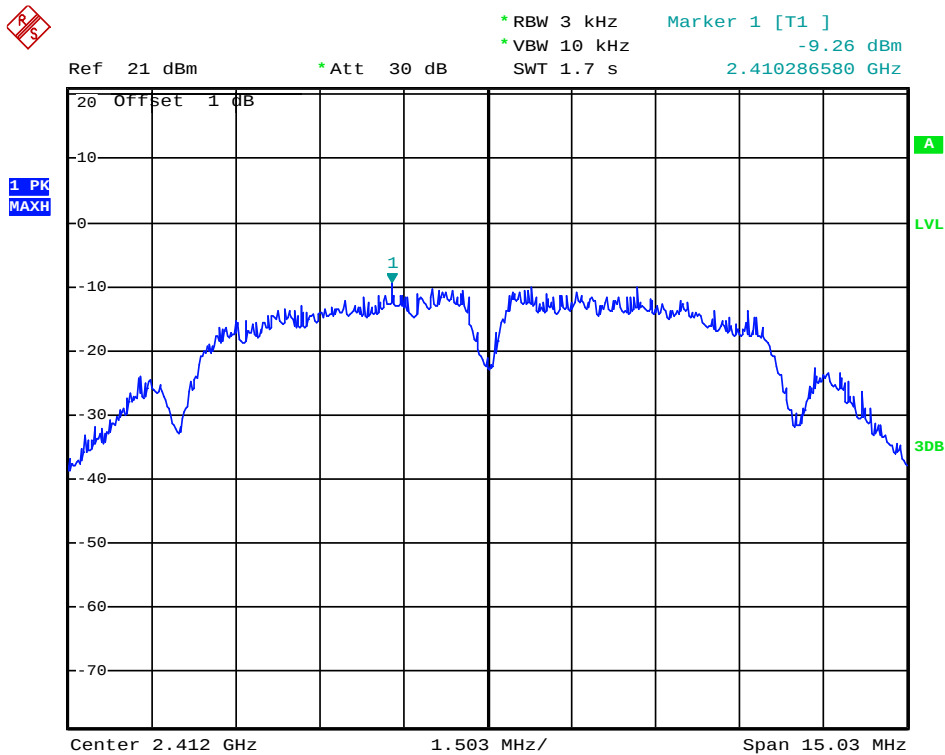


Date: 18.NOV.2013 14:20:33

(Plot 4.4.1 A: Channel 1: 2412MHz @ 802.11b)

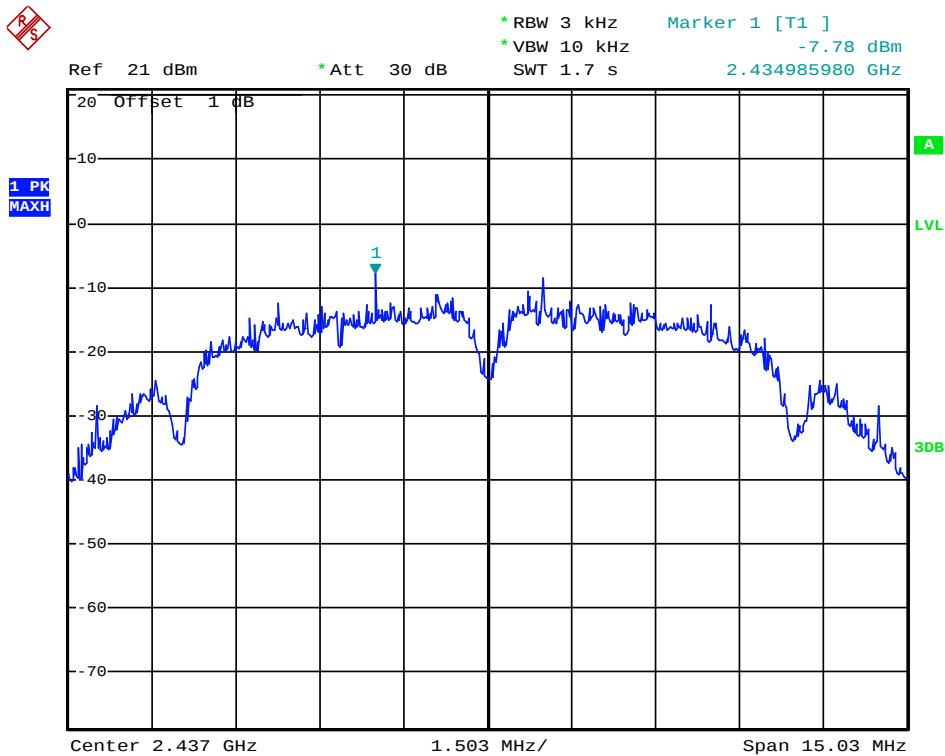

Date: 18.NOV.2013 14:20:57

(Plot 4.4.1 B: Channel 6: 2437MHz @ 802.11b)

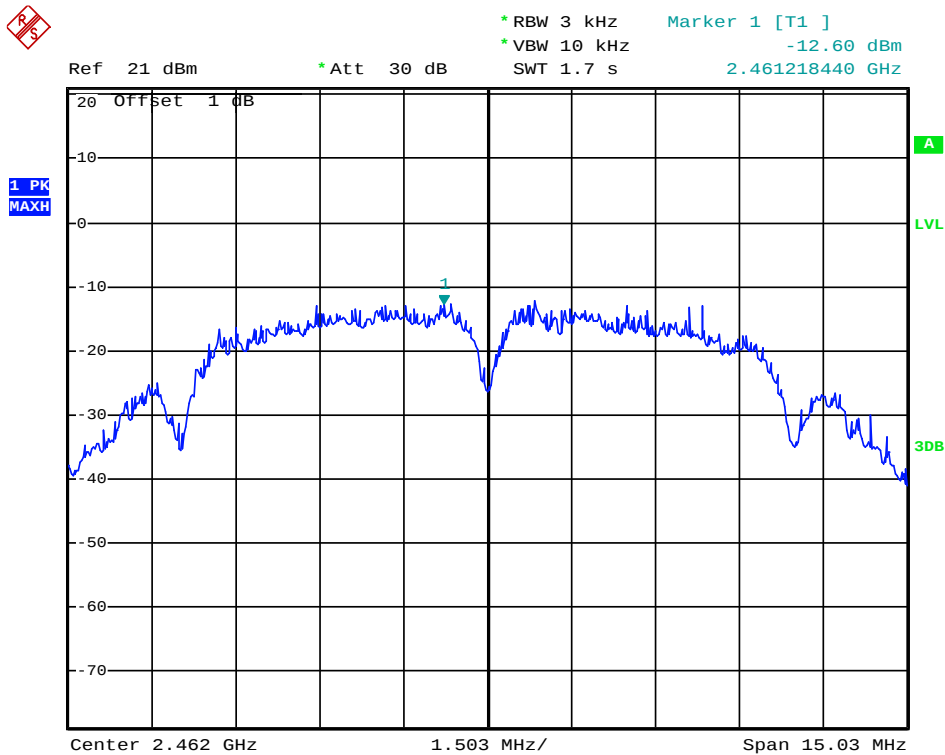

Date: 18.NOV.2013 14:21:23

(Plot 4.4.1 C: Channel 11: 2462MHz @ 802.11b)


4.4.2 802.11g Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/3kHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|-----------------------|---------------|-------------------|---------|
| 1       | 2412            | -14.69                | Plot 4.4.2 A  | 8                 | PASS    |
| 6       | 2437            | -15.63                | Plot 4.4.2 B  | 8                 | PASS    |
| 11      | 2462            | -17.80                | Plot 4.4.2 C  | 8                 | PASS    |


Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.  
2.The test results including the cable lose.

B. Test Plots

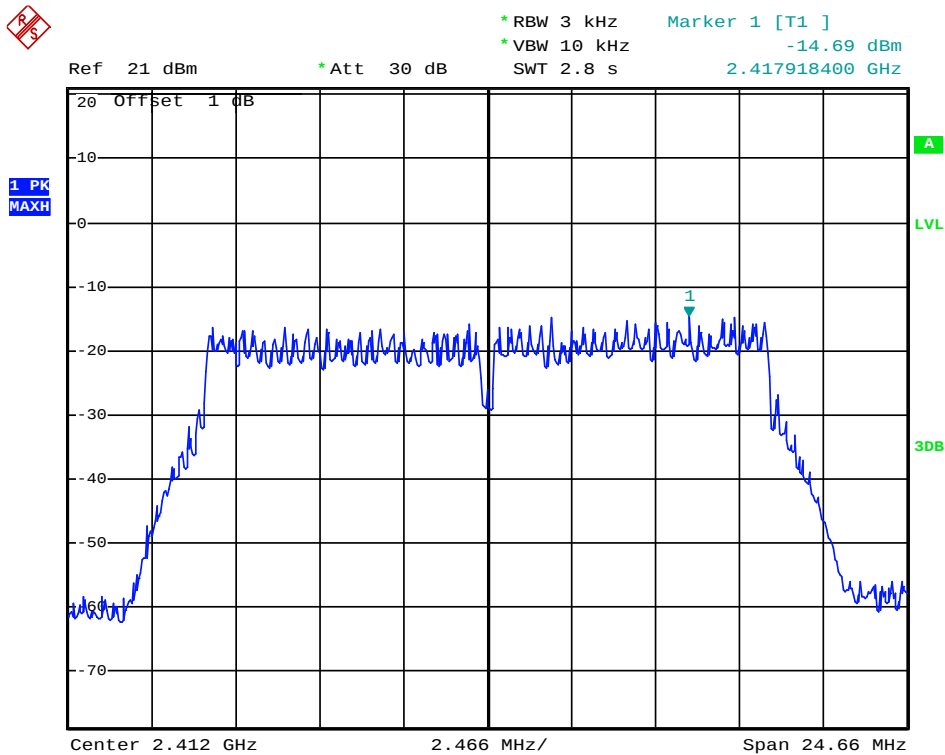


Date: 18.NOV.2013 14:22:36

(Plot 4.4.2 A: Channel 1: 2412MHz @ 802.11g)

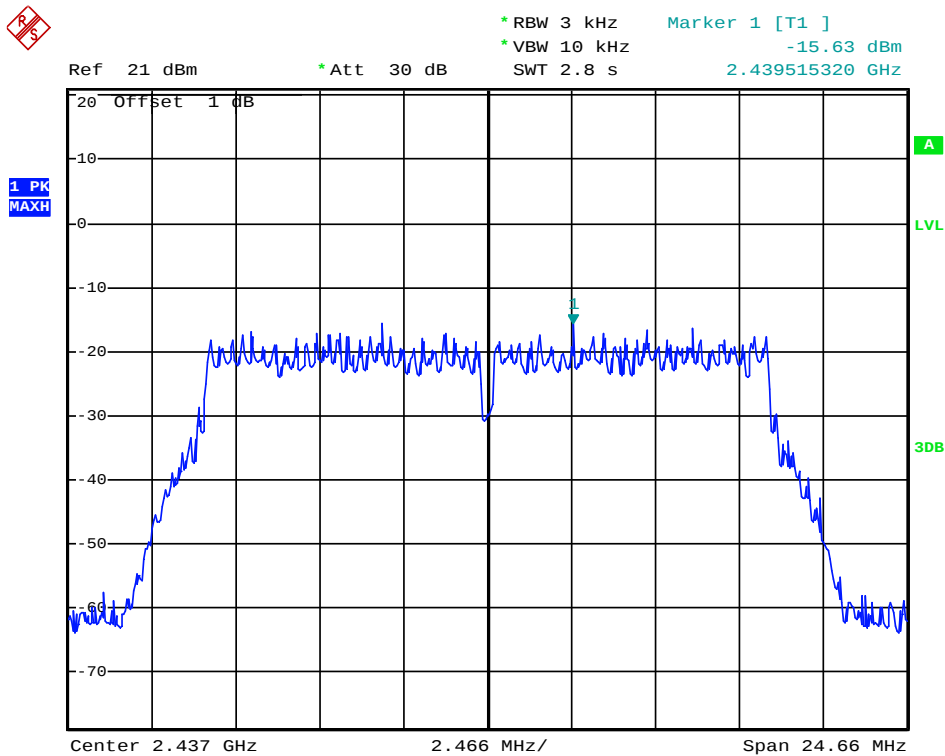

Date: 18.NOV.2013 14:23:00

(Plot 4.4.2 B: Channel 6: 2437MHz @ 802.11g)

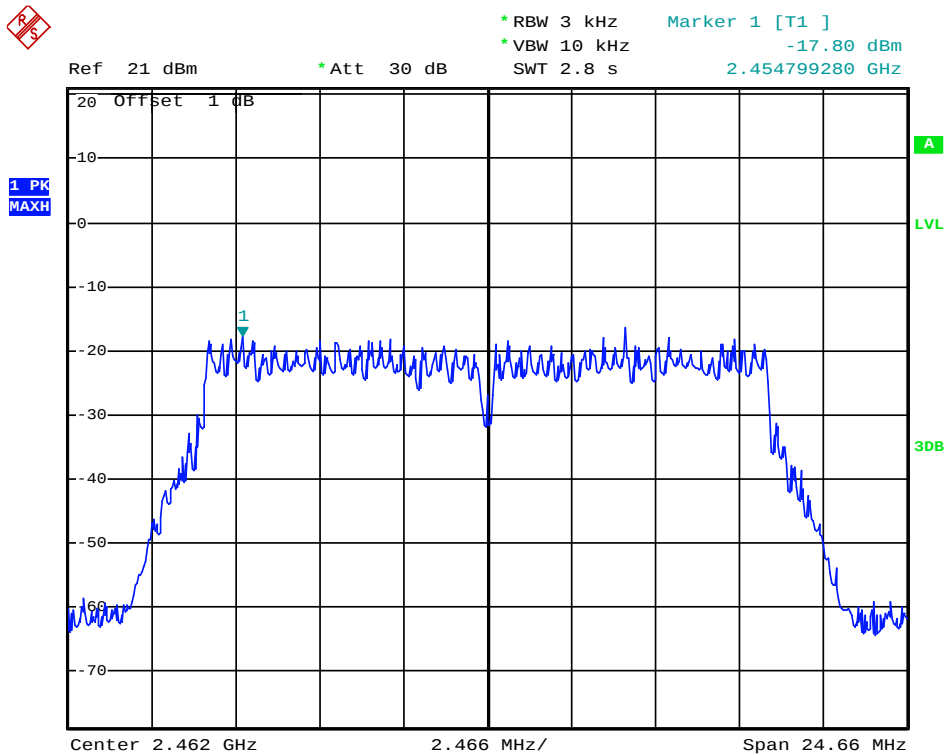

Date: 18.NOV.2013 14:23:31

(Plot 4.4.2 C: Channel 11: 2462MHz @ 802.11g)


4.4.3 802.11n(20MHz) Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/3kHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|-----------------------|---------------|-------------------|---------|
| 1       | 2412            | -15.80                | Plot 4.4.3 A  | 8                 | PASS    |
| 6       | 2437            | -16.87                | Plot 4.4.3 B  | 8                 | PASS    |
| 11      | 2462            | -17.40                | Plot 4.4.3 C  | 8                 | PASS    |


Note: 1. For 802.11n(20MHz) mode at finial test to get the worst-case emission at 6.5Mbps.  
2.The test results including the cable lose.

B. Test Plots

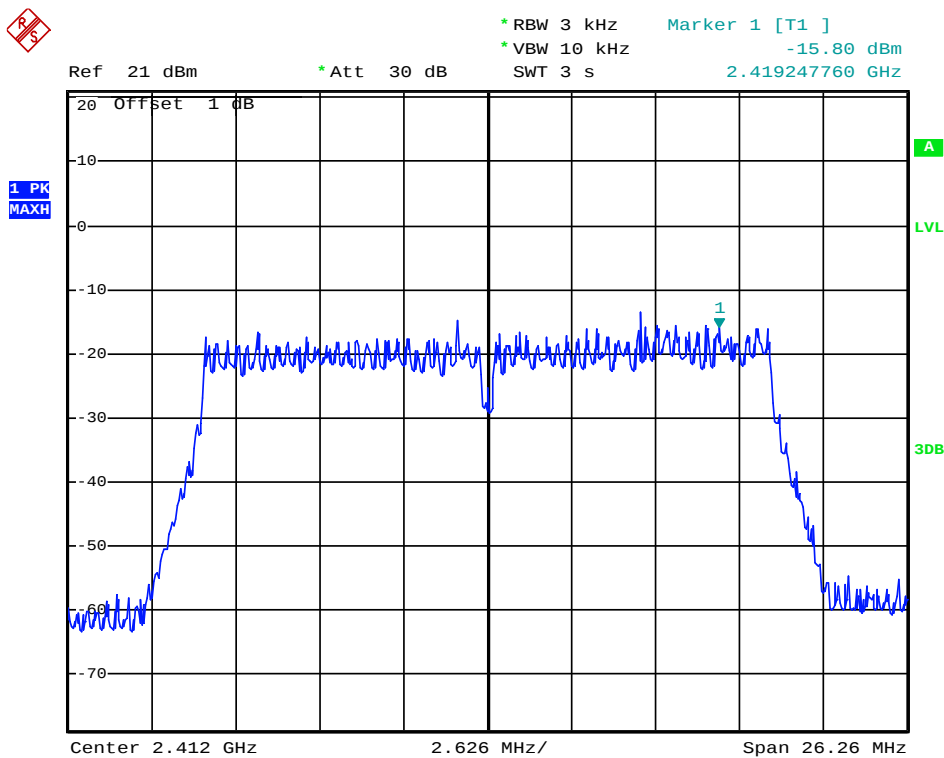


Date: 18.NOV.2013 14:24:50

(Plot 4.4.3 A: Channel 1: 2412MHz @ 802.11n(20MHz))

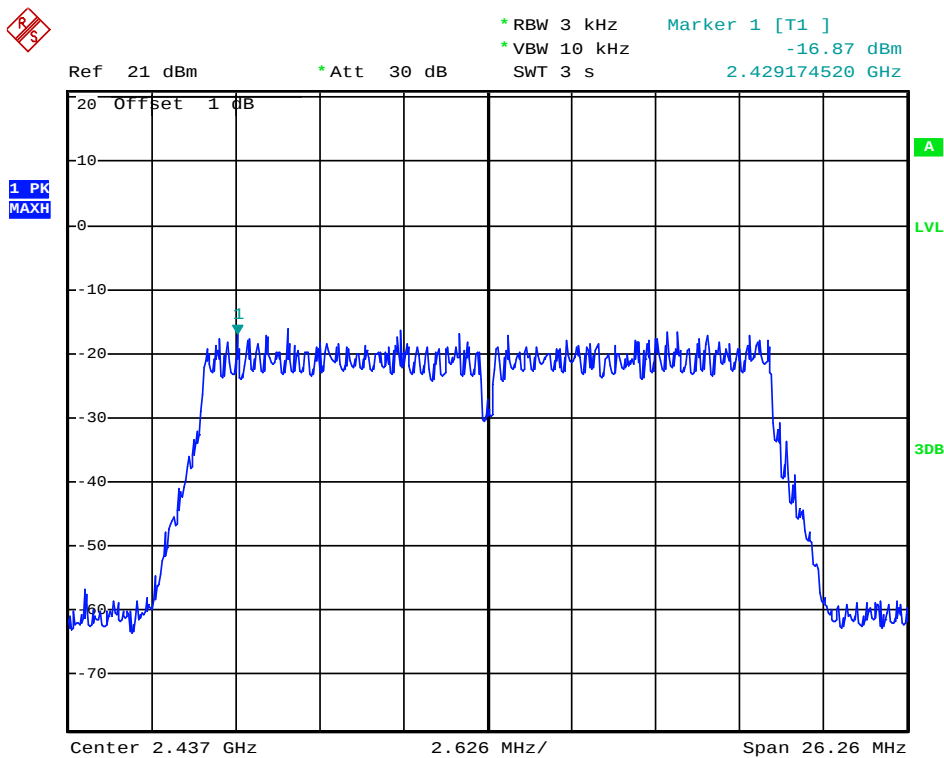

Date: 18.NOV.2013 14:25:20

(Plot 4.4.3 B: Channel 6: 2437MHz @ 802.11n(20MHz))

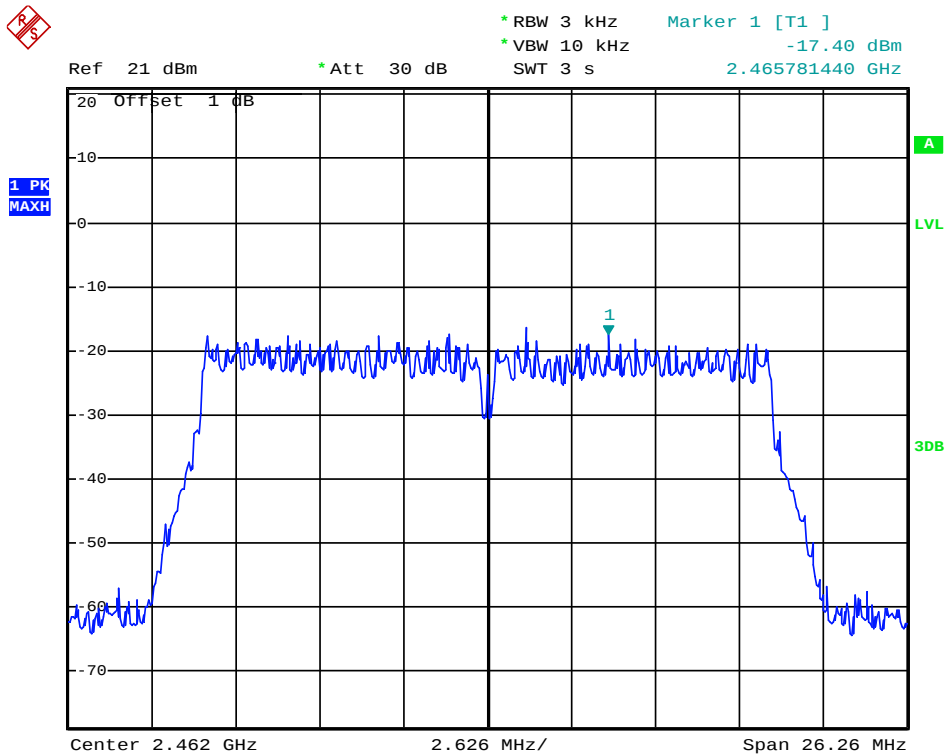

Date: 18.NOV.2013 14:25:43

(Plot 4.4.3 C: Channel 11: 2462MHz @ 802.11n(20MHz))


4.4.4 802.11n(40MHz) Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/3kHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|-----------------------|---------------|-------------------|---------|
| 3       | 2422            | -20.42                | Plot 4.4.4 A  | 8                 | PASS    |
| 6       | 2437            | -20.08                | Plot 4.4.4 B  | 8                 | PASS    |
| 9       | 2452            | -22.82                | Plot 4.4.4 C  | 8                 | PASS    |


Note: 1. For 802.11n(40MHz) mode at finial test to get the worst-case emission at 13.5Mbps.  
2.The test results including the cable lose.

B. Test Plots

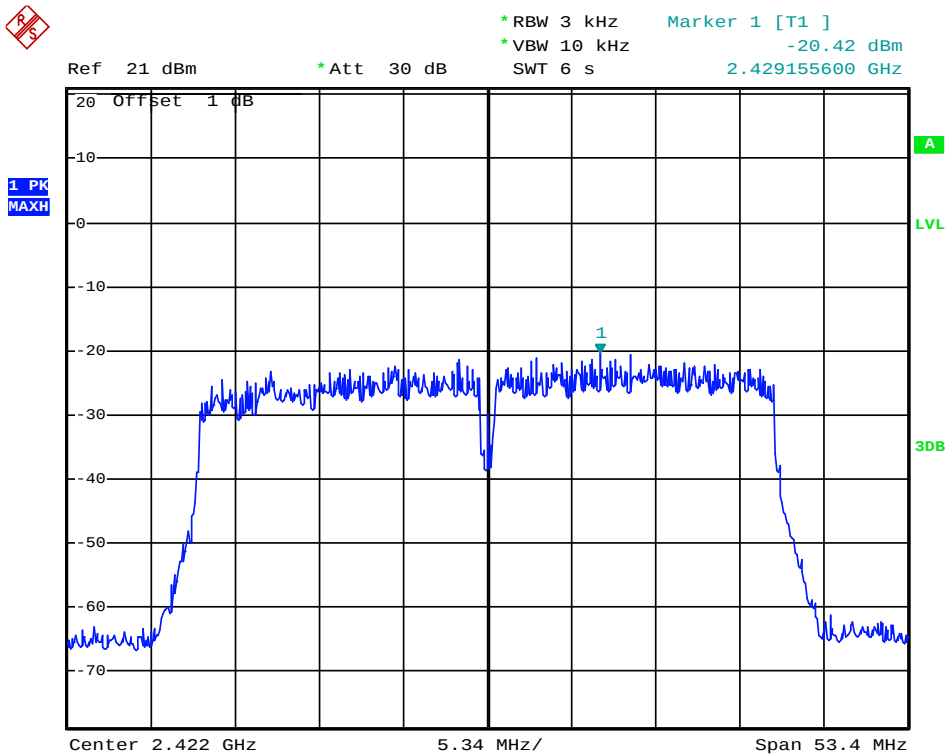


Date: 18.NOV.2013 14:26:45

(Plot 4.4.4 A: Channel 3: 2422MHz @ 802.11n(40MHz))

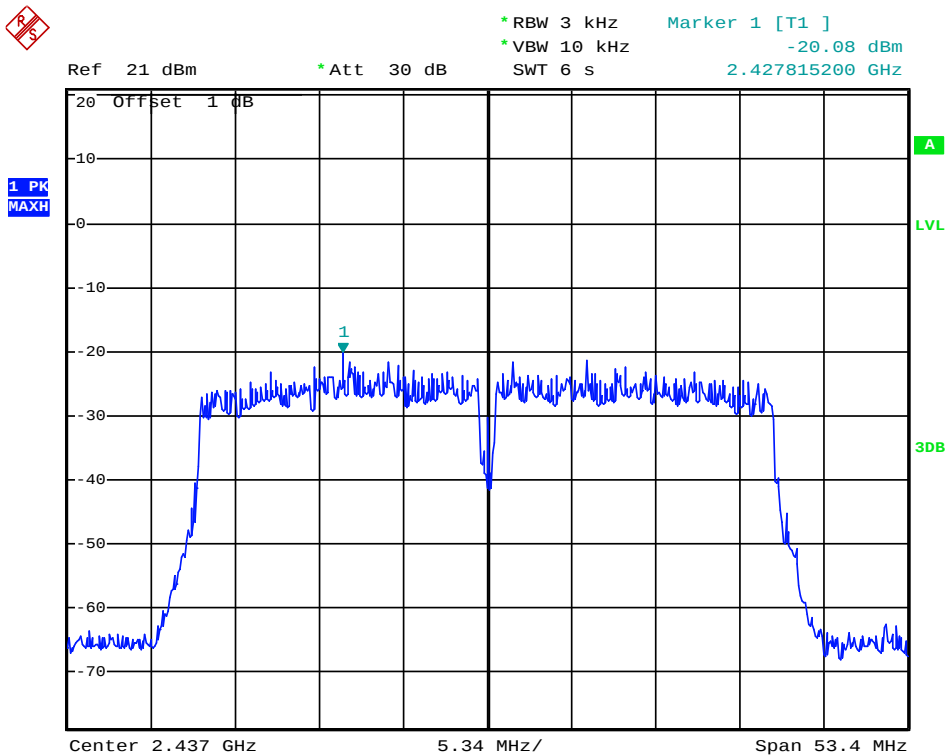

Date: 18.NOV.2013 14:27:10

(Plot 4.4.4 B: Channel 6: 2437MHz @ 802.11n(40MHz))

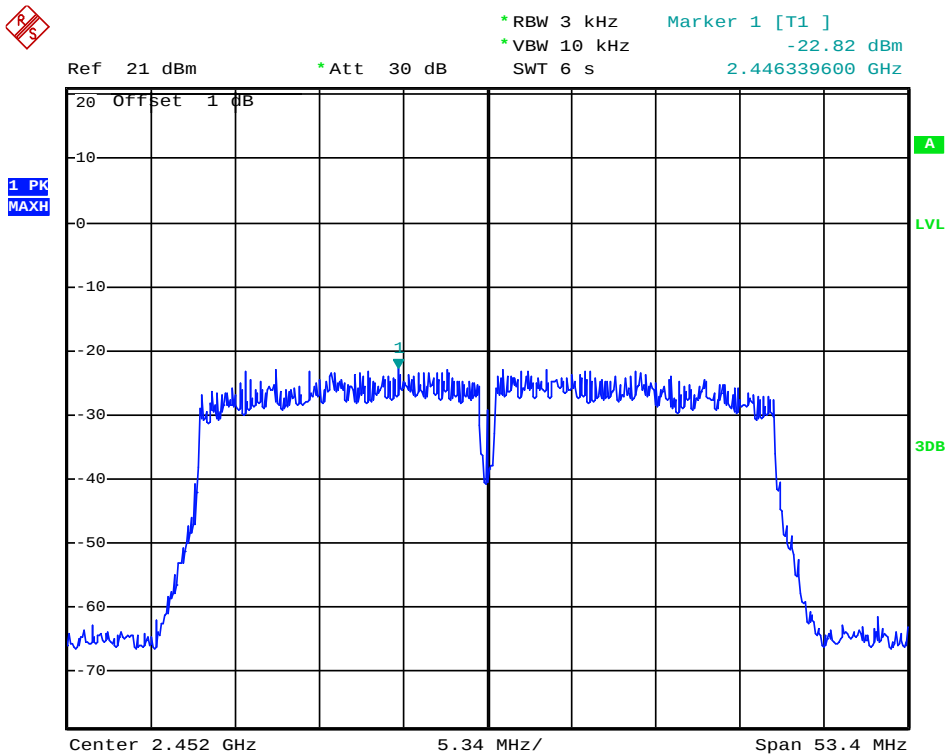

Date: 18.NOV.2013 14:27:46

(Plot 4.4.4 C: Channel 6: 2452MHz @ 802.11n(40MHz))

## 4.5. Band Edge Compliance of RF Emission

### TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:  
$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Compare the resultant electric field strength level to the applicable regulatory limit.

12. Perform radiated spurious emission test

### LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

### TEST RESULTS

Remark:The Bandedge was measured at difference data rate for each mode and recorded worst case for each mode.


## 4.5.1 802.11b Test Mode

## A. Test Verdict

| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Refer to Plot |
|-----------------|-----------------------|--------------------|-------------------------------|----------------------------------------|----------|----------------|---------------|
| 2390.00         | -45.87                | 2.00               | 0.00                          | 51.39                                  | Peak     | 74.00          | Plot 4.5.1 A1 |
| 2390.00         | -59.31                | 2.00               | 0.00                          | 37.95                                  | AV       | 54.00          | Plot 4.5.1 A2 |
| 2413.68         | 9.09                  | 2.00               | 0.00                          | 106.35                                 | Peak     | ---            | Plot 4.5.1 A1 |
| 2412.96         | 3.57                  | 2.00               | 0.00                          | 100.83                                 | AV       | ---            | Plot 4.5.1 A2 |
| 2460.00         | 7.54                  | 2.00               | 0.00                          | 104.8                                  | Peak     | ---            | Plot 4.5.1 A3 |
| 2461.30         | 2.31                  | 2.00               | 0.00                          | 99.57                                  | AV       | ---            | Plot 4.5.1 A4 |
| 2483.50         | -46.61                | 2.00               | 0.00                          | 50.65                                  | Peak     | 74.00          | Plot 4.5.1 A3 |
| 2483.50         | -58.14                | 2.00               | 0.00                          | 39.12                                  | AV       | 54.00          | Plot 4.5.1 A4 |


Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.  
 2. The test results including the cable loss.  
 3. "----" means that the fundamental frequency not for 15.209 limits requirement.

## B. Test Plots

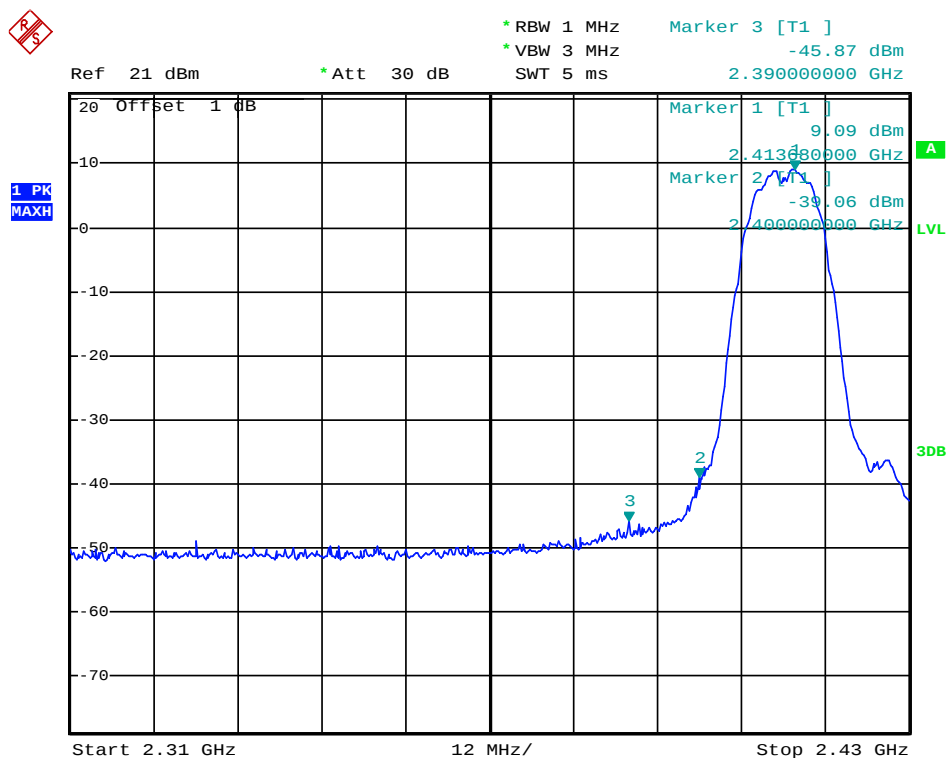


Date: 18.NOV.2013 14:37:39

(Plot 4.5.1 A1: Channel 1: 2412MHz @ 802.11b)

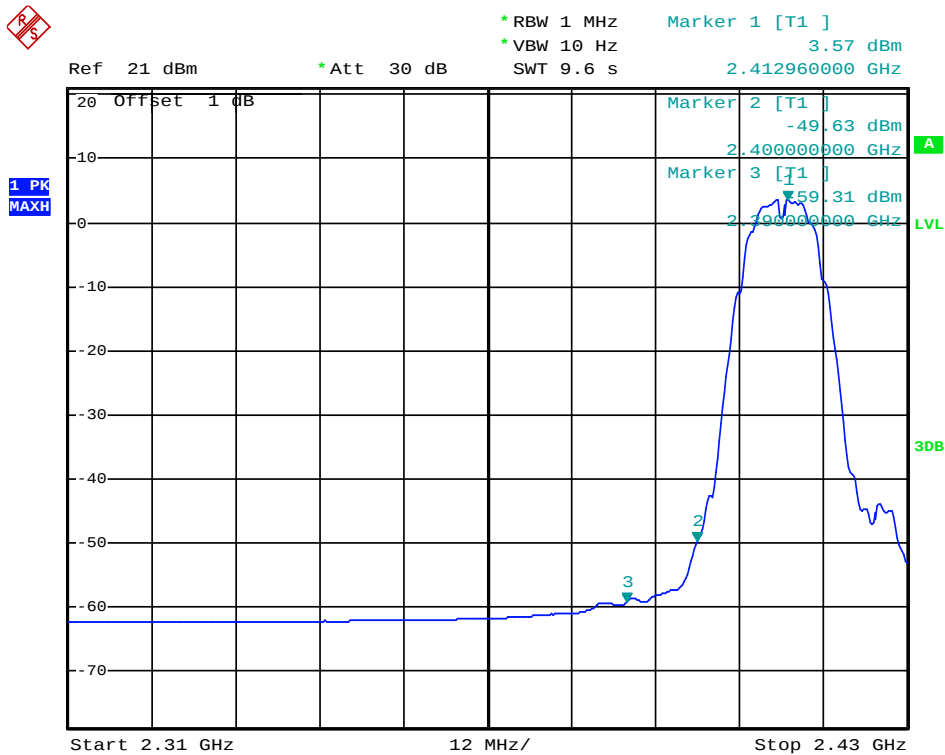


Date: 18.NOV.2013 14:38:06

(Plot 4.5.1 A2: Channel 1: 2412MHz @ 802.11b)

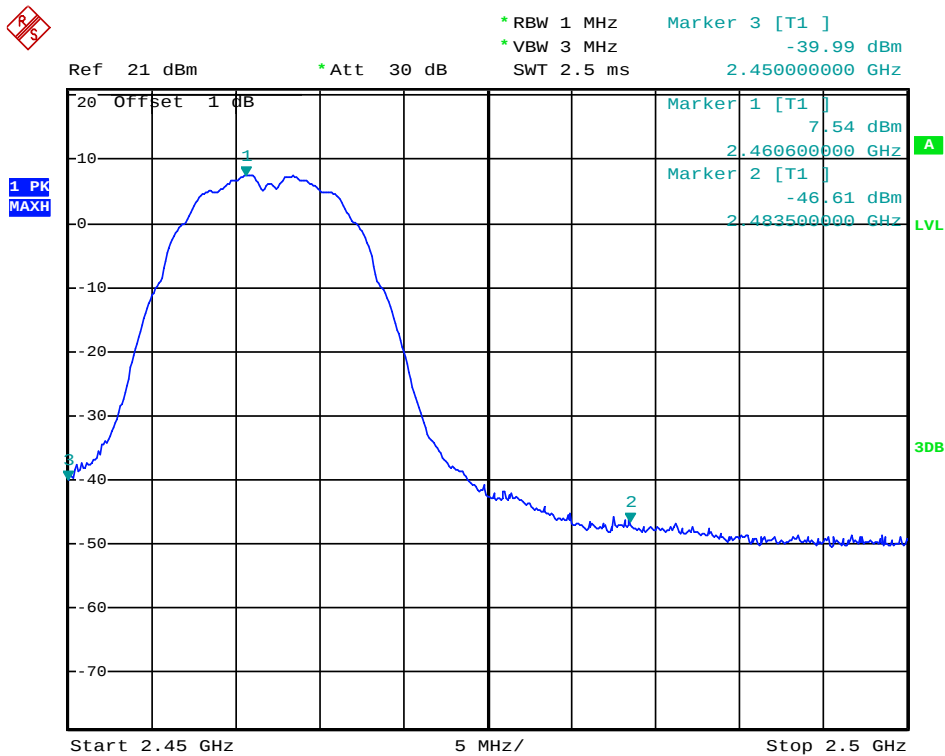

Date: 18.NOV.2013 14:44:44

(Plot 4.5.1 A3: Channel 11: 2462MHz @ 802.11b)

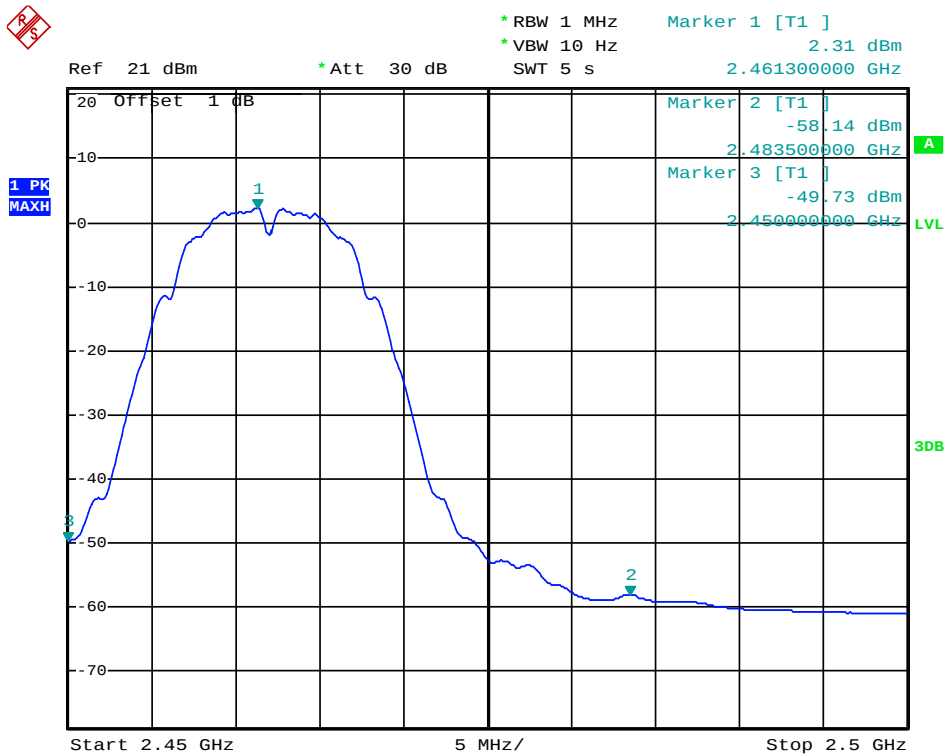

Date: 18.NOV.2013 14:45:02

(Plot 4.5.1 A4: Channel 11: 2462MHz @ 802.11b)


4.5.2 802.11g Test Mode

A. Test Verdict

| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Refer to Plot |
|-----------------|-----------------------|--------------------|-------------------------------|----------------------------------------|----------|----------------|---------------|
| 2390.00         | -31.28                | 2.00               | 0.00                          | 65.98                                  | Peak     | 74.00          | Plot 4.5.2 A1 |
| 2390.00         | -56.50                | 2.00               | 0.00                          | 40.76                                  | AV       | 54.00          | Plot 4.5.2 A2 |
| 2419.27         | 8.53                  | 2.00               | 0.00                          | 105.79                                 | Peak     | ---            | Plot 4.5.2 A1 |
| 2419.20         | -6.14                 | 2.00               | 0.00                          | 91.12                                  | AV       | ---            | Plot 4.5.2 A2 |
| 2455.00         | 6.50                  | 2.00               | 0.00                          | 103.76                                 | Peak     | ---            | Plot 4.5.2 A3 |
| 2455.20         | -8.06                 | 2.00               | 0.00                          | 89.20                                  | AV       | ---            | Plot 4.5.2 A4 |
| 2483.50         | -35.92                | 2.00               | 0.00                          | 61.34                                  | Peak     | 74.00          | Plot 4.5.2 A3 |
| 2483.50         | -55.36                | 2.00               | 0.00                          | 41.90                                  | AV       | 54.00          | Plot 4.5.2 A4 |


Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.  
2.The test results including the cable lose.  
3. “---” means that the fundamental frequency not for 15.209 limits requirement.

B. Test Plots

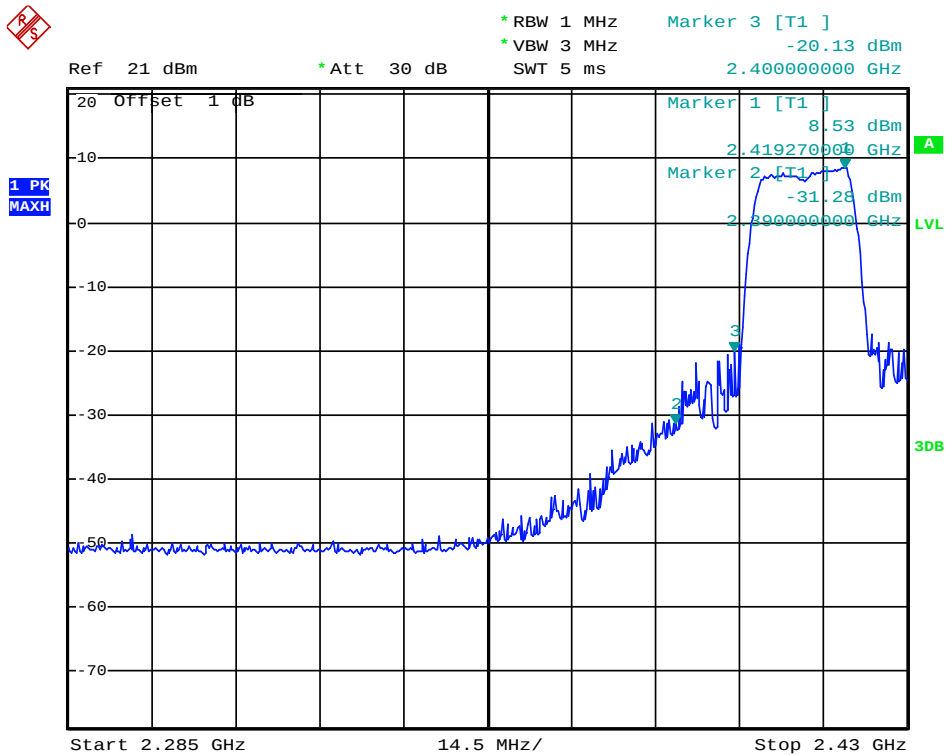


Date: 18.NOV.2013 14:49:35

(Plot 4.5.2 A1: Channel 1: 2412MHz @ 802.11g)

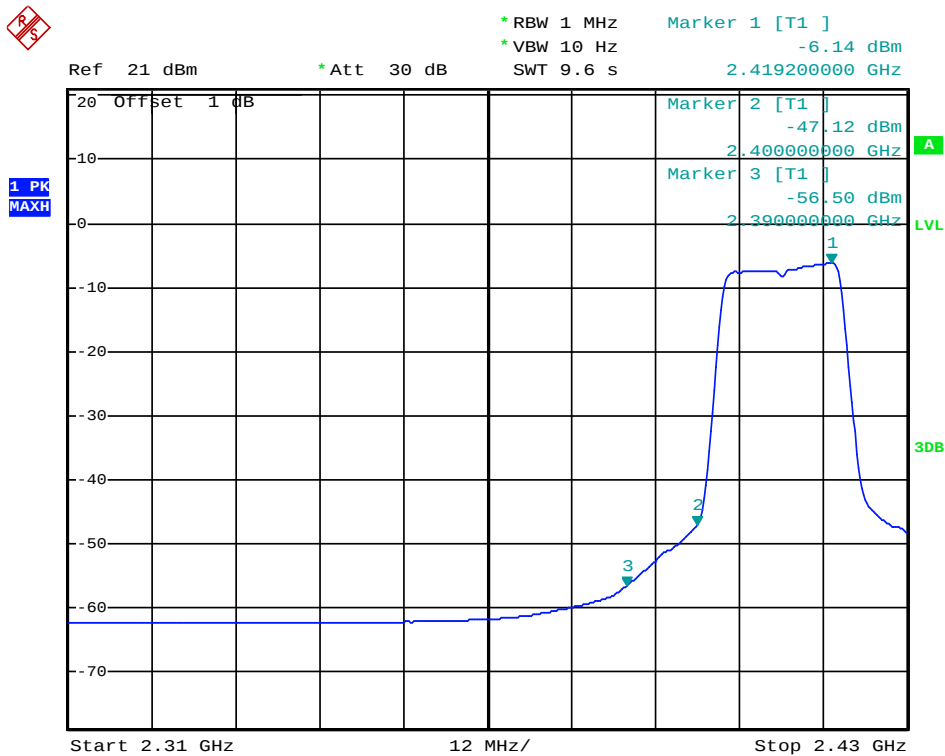


Date: 18.NOV.2013 14:38:42

(Plot 4.5.2 A2: Channel 1: 2412MHz @ 802.11g)

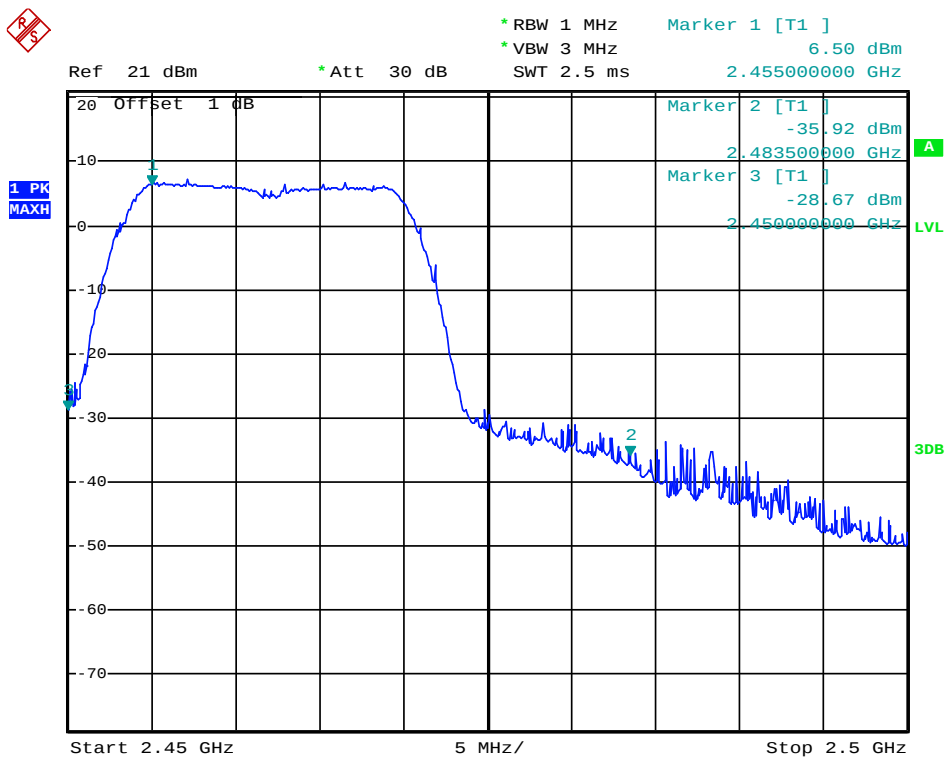

Date: 18.NOV.2013 14:46:33

(Plot 4.5.2 A3: Channel 11: 2462MHz @ 802.11g)

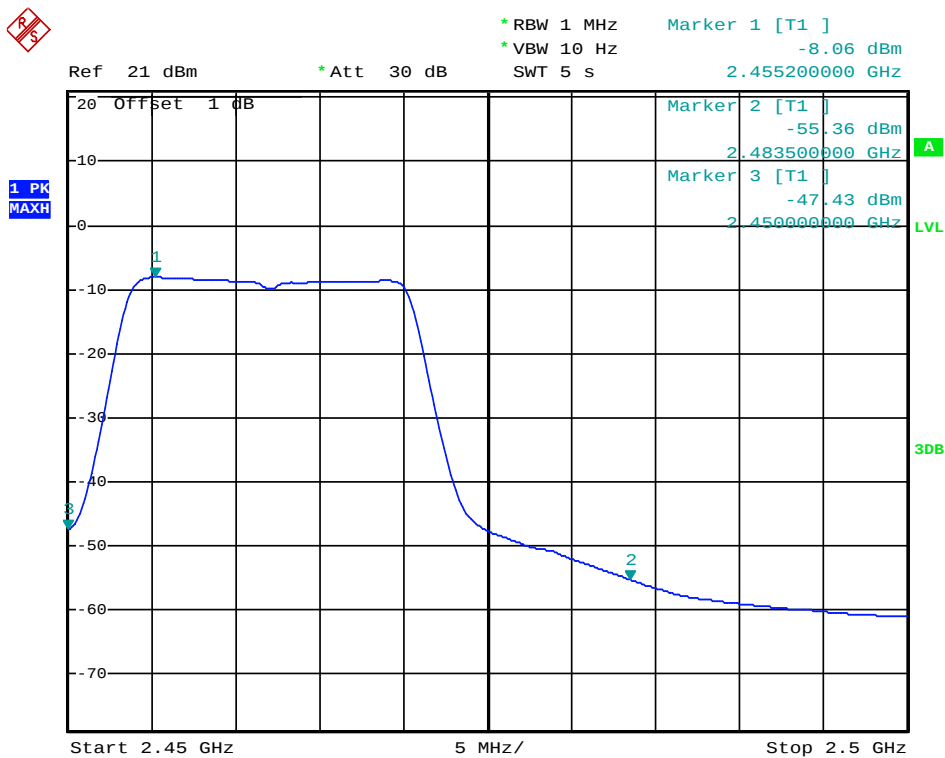

Date: 18.NOV.2013 14:46:00

(Plot 4.5.2 A4: Channel 11: 2462MHz @ 802.11g)


## 4.5.3 802.11n(20MHz) Test Mode

## A. Test Verdict

| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Refer to Plot |
|-----------------|-----------------------|--------------------|-------------------------------|----------------------------------------|----------|----------------|---------------|
| 2390.00         | -28.27                | 2.00               | 0.00                          | 68.99                                  | Peak     | 74.00          | Plot 4.5.3 A1 |
| 2390.00         | -55.52                | 2.00               | 0.00                          | 41.74                                  | AV       | 54.00          | Plot 4.5.3 A2 |
| 2419.44         | 8.30                  | 2.00               | 0.00                          | 105.56                                 | Peak     | ---            | Plot 4.5.3 A1 |
| 2419.44         | -6.55                 | 2.00               | 0.00                          | 90.71                                  | AV       | ---            | Plot 4.5.3 A2 |
| 2455.10         | 6.53                  | 2.00               | 0.00                          | 103.79                                 | Peak     | ---            | Plot 4.5.3 A3 |
| 2454.90         | -8.52                 | 2.00               | 0.00                          | 88.74                                  | AV       | ---            | Plot 4.5.3 A4 |
| 2483.50         | -36.61                | 2.00               | 0.00                          | 60.65                                  | Peak     | 74.00          | Plot 4.5.3 A3 |
| 2483.50         | -54.37                | 2.00               | 0.00                          | 42.89                                  | AV       | 54.00          | Plot 4.5.3 A4 |


Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.  
 2. The test results including the cable loss.  
 3. "----" means that the fundamental frequency not for 15.209 limits requirement.

## B. Test Plots

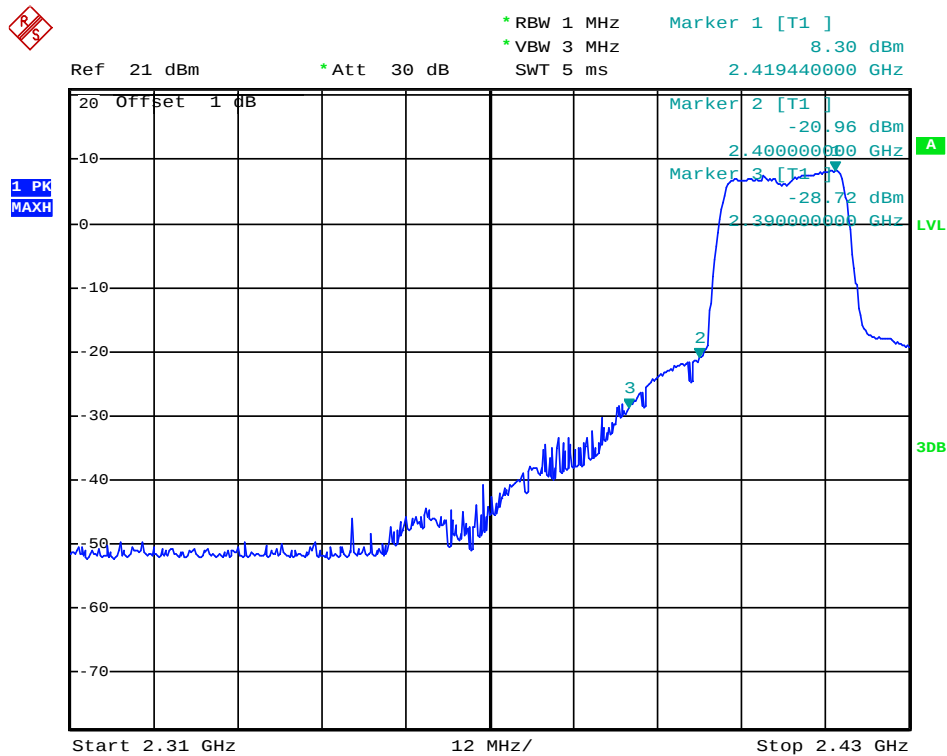


Date: 18.NOV.2013 14:43:04

(Plot 4.5.3 A1: Channel 1: 2412MHz @ 802.11n(20MHz))

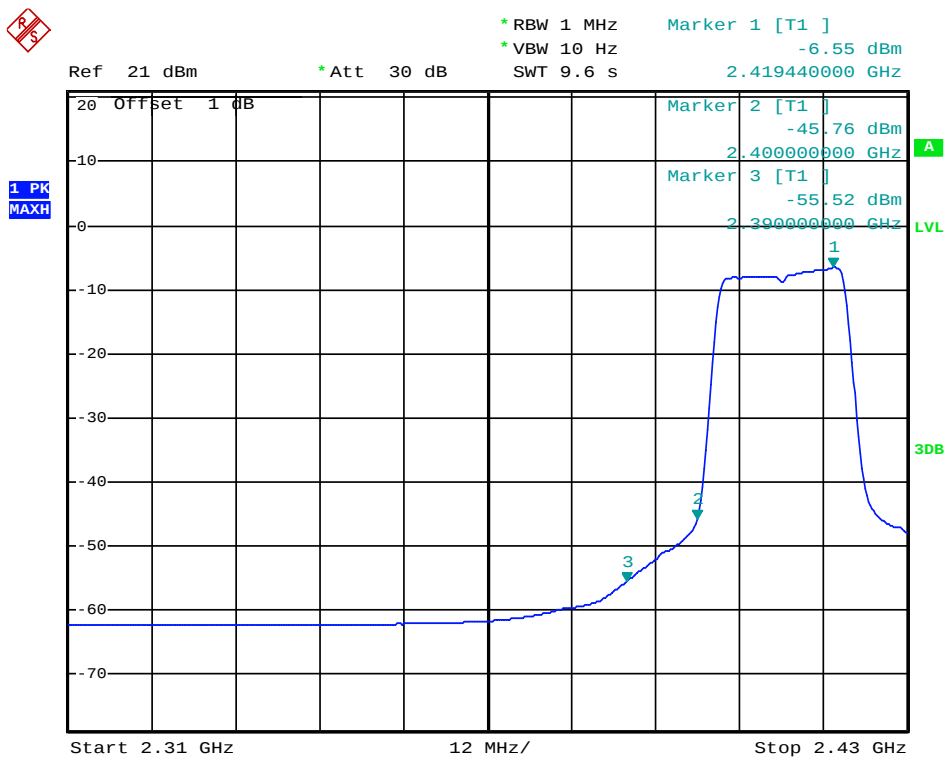


Date: 18.NOV.2013 14:42:37

(Plot 4.5.3 A2: Channel 1: 2412MHz @ 802.11n(20MHz))

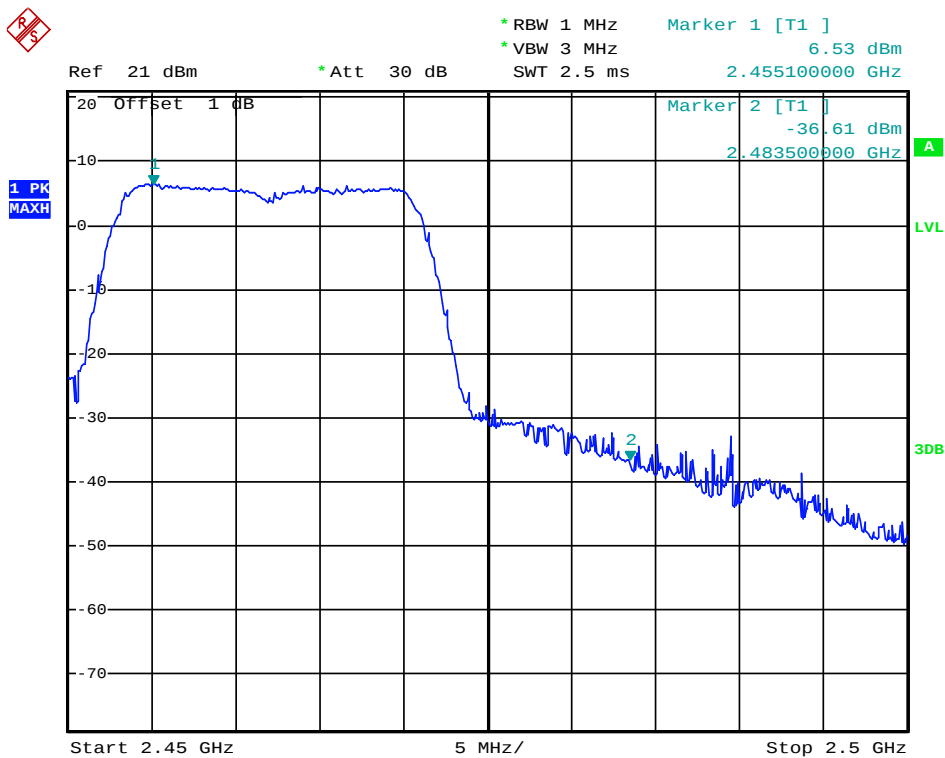

Date: 18.NOV.2013 14:47:38

(Plot 4.5.3 A3: Channel 11: 2462MHz @ 802.11n(20MHz))

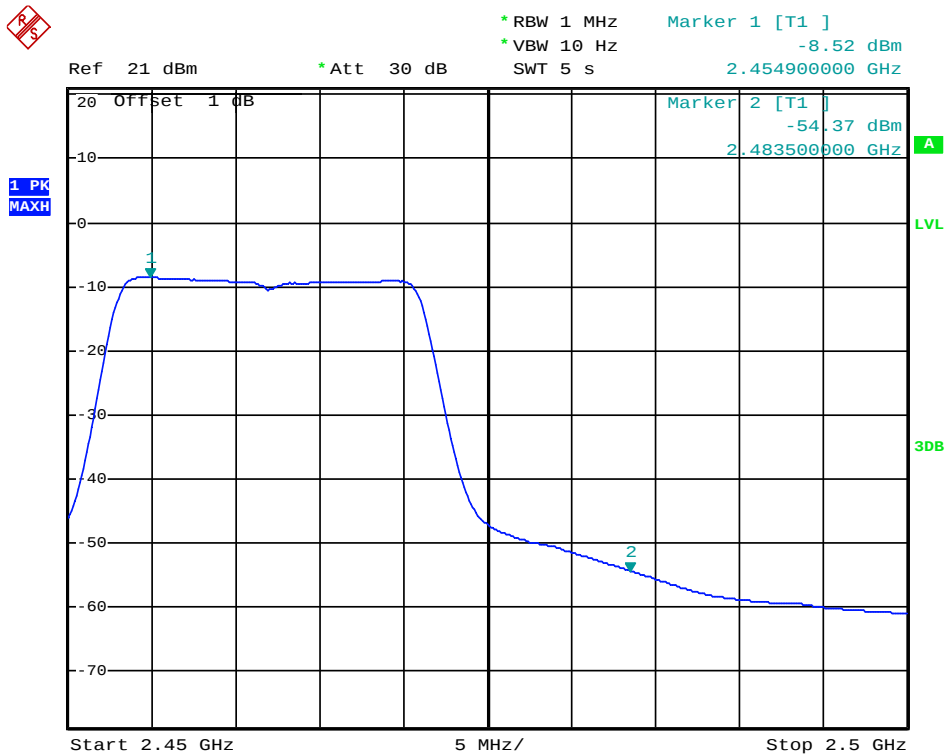

Date: 18.NOV.2013 14:48:00

(Plot 4.5.3 A4: Channel 11: 2462MHz @ 802.11n(20MHz))


4.5.4 802.11n(40MHz) Test Mode

A. Test Verdict

| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | Ground Reflection Factor (dB) | Covert Radiated E Level At 3m (dBuV/m) | Detector | Limit (dBuV/m) | Refer to Plot |
|-----------------|-----------------------|--------------------|-------------------------------|----------------------------------------|----------|----------------|---------------|
| 2390.00         | -43.50                | 2.00               | 0.00                          | 53.76                                  | Peak     | 74.00          | Plot 4.5.4 A1 |
| 2390.00         | -58.61                | 2.00               | 0.00                          | 38.65                                  | AV       | 54.00          | Plot 4.5.4 A2 |
| 2432.18         | 2.84                  | 2.00               | 0.00                          | 100.1                                  | Peak     | ---            | Plot 4.5.4 A1 |
| 2428.55         | -15.27                | 2.00               | 0.00                          | 81.99                                  | AV       | ---            | Plot 4.5.4 A2 |
| 2446.24         | 1.81                  | 2.00               | 0.00                          | 99.07                                  | Peak     | ---            | Plot 4.5.4 A3 |
| 2445.96         | -16.14                | 2.00               | 0.00                          | 81.12                                  | AV       | ---            | Plot 4.5.4 A4 |
| 2483.50         | -42.35                | 2.00               | 0.00                          | 54.91                                  | Peak     | 74.00          | Plot 4.5.4 A3 |
| 2483.50         | -56.90                | 2.00               | 0.00                          | 40.36                                  | AV       | 54.00          | Plot 4.5.4 A4 |


Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.  
2. The test results including the cable loss.  
3. “---” means that the fundamental frequency not for 15.209 limits requirement.

B. Test Plots

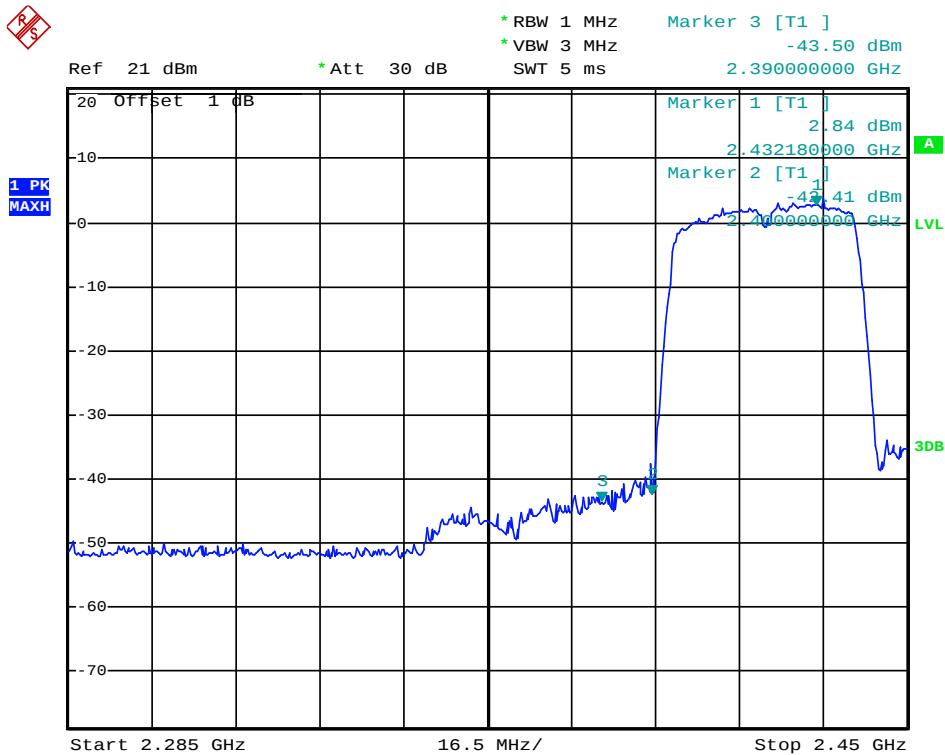


Date: 18.NOV.2013 14:50:41

(Plot 4.5.4 A1: Channel 3: 2422MHz @ 802.11n(40MHz))

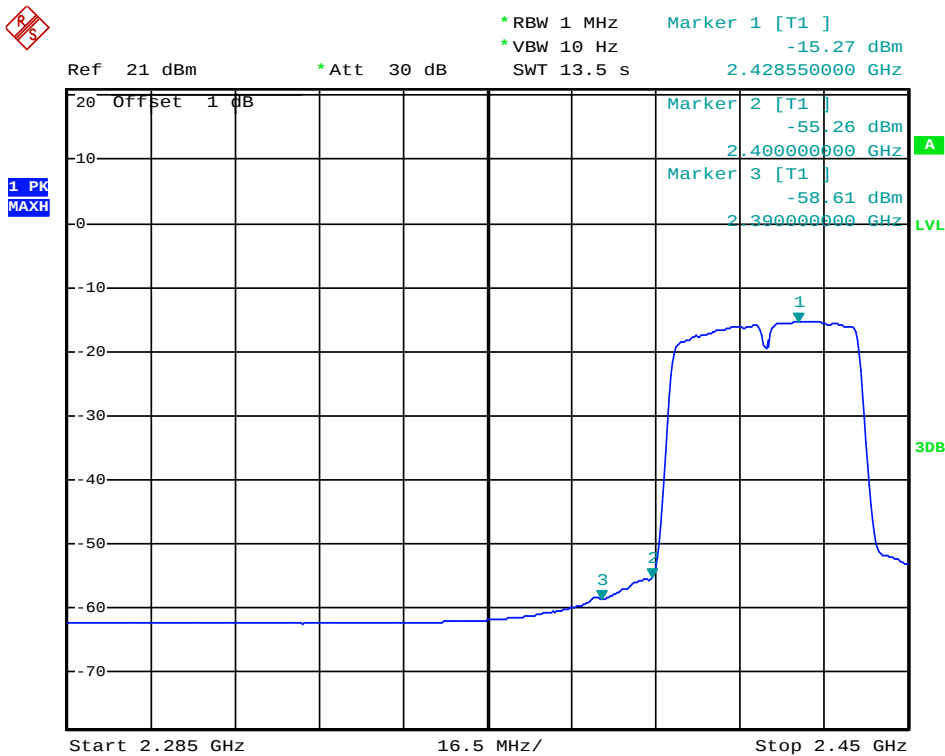


Date: 18.NOV.2013 14:51:25

(Plot 4.5.4 A2: Channel 3: 2422MHz @ 802.11n(40MHz))

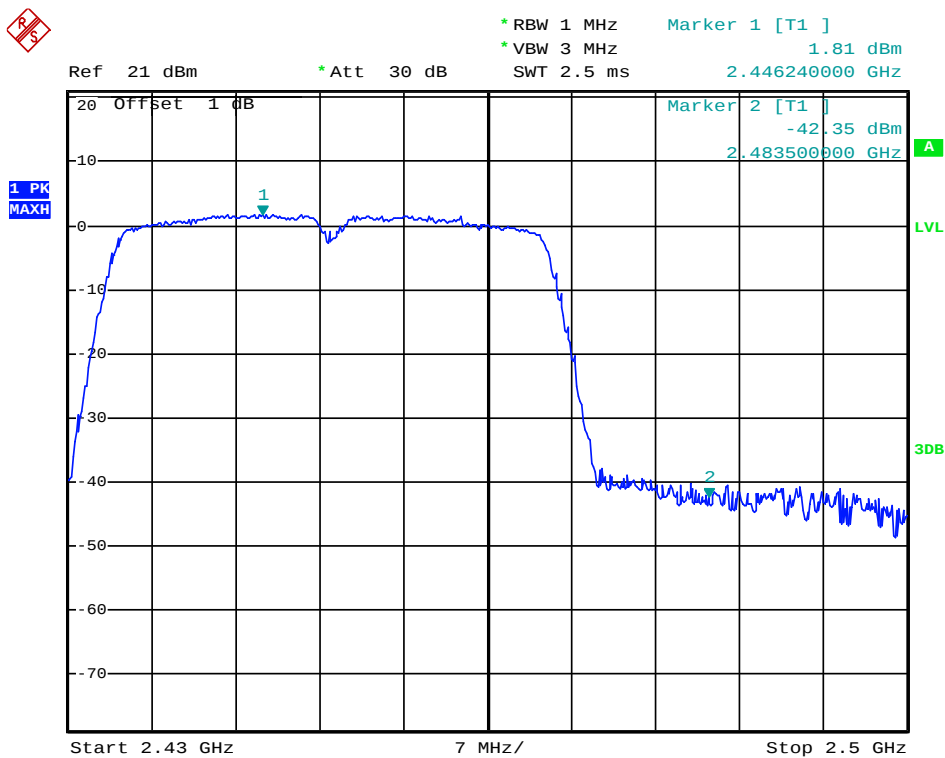

Date: 18.NOV.2013 14:52:27

(Plot 4.5.4 A3: Channel 9: 2452MHz @ 802.11n(40MHz))

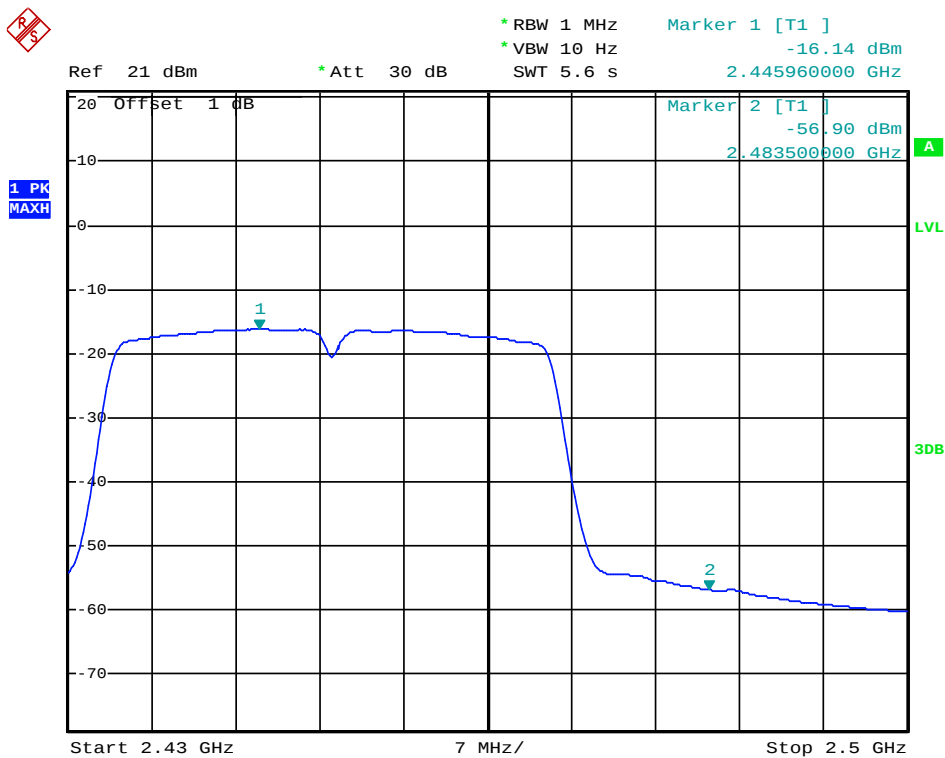


Date: 18.NOV.2013 14:52:10

(Plot 4.5.4 A4: Channel 9: 2452MHz @ 802.11n(40MHz))

## 4.6. Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

#### 4.6.1 802.11b Test Mode


##### A. Test Verdict

| Channel | Frequency (MHz) | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|---------------|-------------|---------|
| 1       | 2412            | Plot 4.6.1 A1 | -20         | PASS    |
|         |                 | Plot 4.6.1 A2 | -20         | PASS    |
|         |                 | Plot 4.6.1 A3 | -20         | PASS    |
|         |                 | Plot 4.6.1 A4 | -20         | PASS    |
| 6       | 2437            | Plot 4.6.1 B1 | -20         | PASS    |
|         |                 | Plot 4.6.1 B2 | -20         | PASS    |
|         |                 | Plot 4.6.1 B3 | -20         | PASS    |
|         |                 | Plot 4.6.1 B4 | -20         | PASS    |
| 11      | 2462            | Plot 4.6.1 C1 | -20         | PASS    |
|         |                 | Plot 4.6.1 C2 | -20         | PASS    |
|         |                 | Plot 4.6.1 C3 | -20         | PASS    |
|         |                 | Plot 4.6.1 C4 | -20         | PASS    |

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Detector | Limit (dBc) | Refer to Plot | Verdict |
|-----------------|-----------------------------------|----------|-------------|---------------|---------|
| 2400.00         | -49.54                            | Peak     | -20         | Plot 4.6.1 D  | PASS    |
| 2483.50         | -52.32                            | Peak     | -20         | Plot 4.6.1 E  | PASS    |


Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.  
2. The test results including the cable loss.

##### B. Test Plots

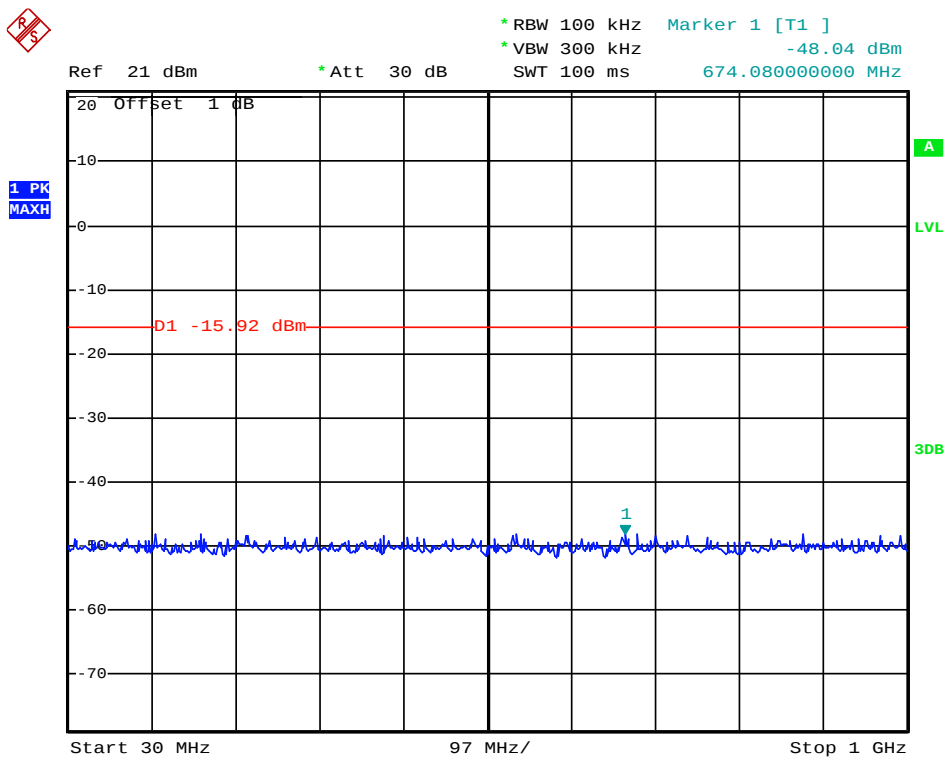


Date: 18.NOV.2013 14:54:46

(Plot 4.6.1 A1: Channel 1: 2412MHz @ 802.11b)

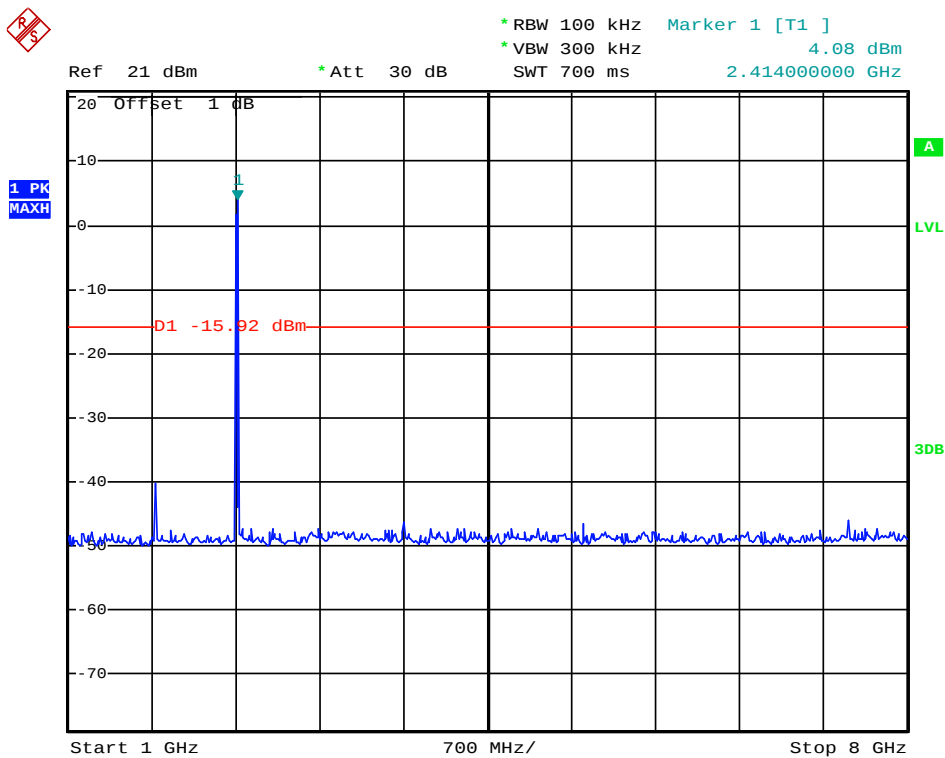


Date: 18.NOV.2013 14:54:27

(Plot 4.6.1 A2: Channel 1: 2412MHz @ 802.11b)

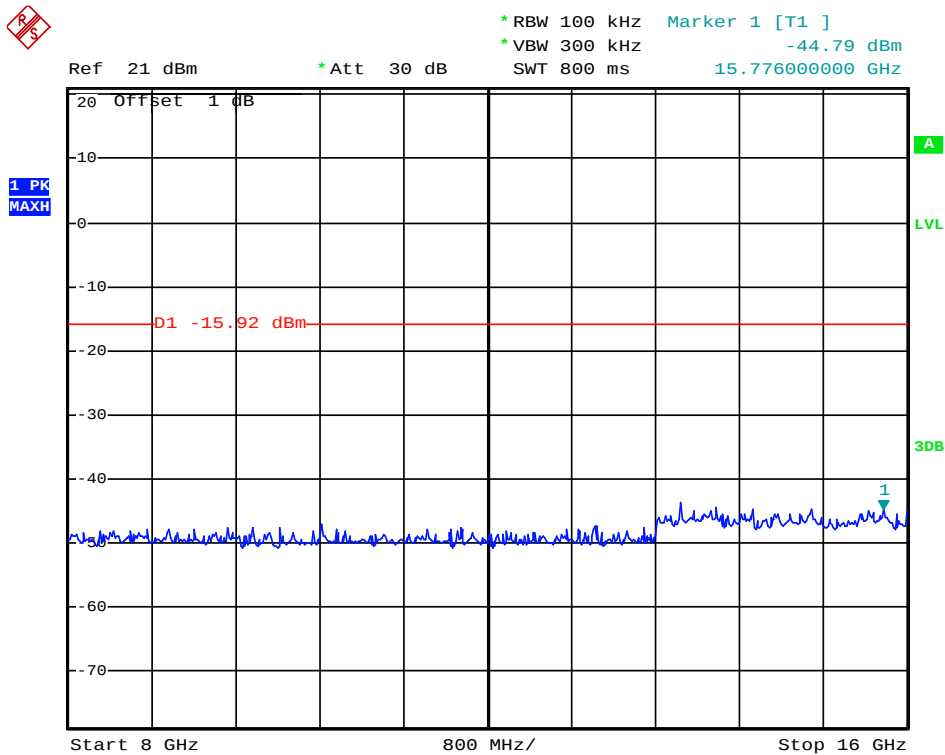


Date: 18.NOV.2013 14:55:04

(Plot 4.6.1 A3: Channel 1: 2412MHz @ 802.11b)

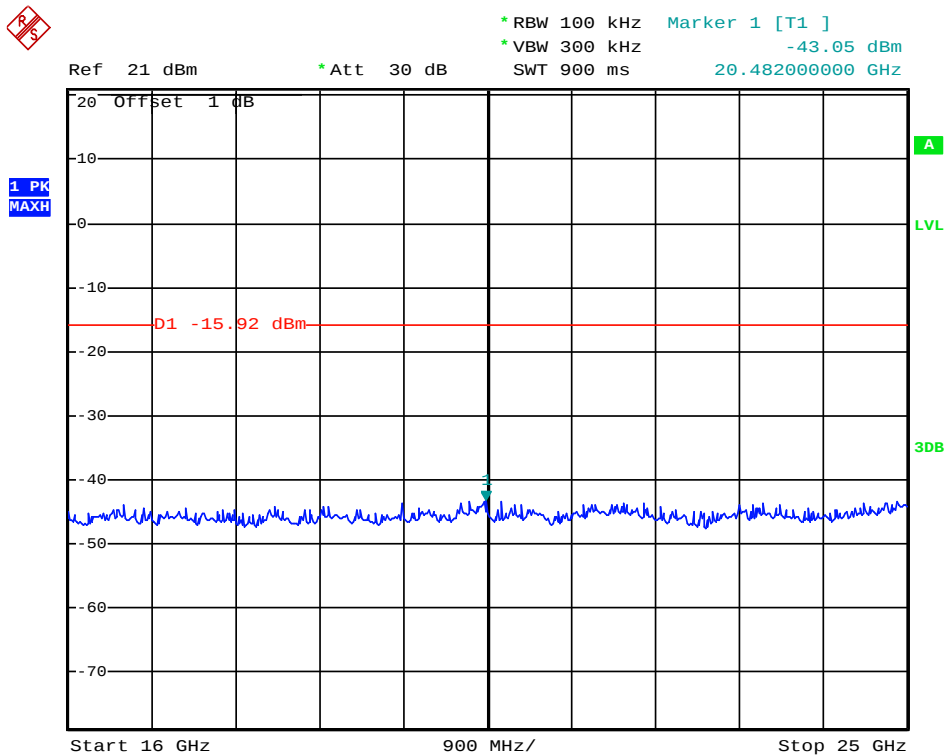


Date: 18.NOV.2013 14:55:20

(Plot 4.6.1 A4: Channel 1: 2412MHz @ 802.11b)

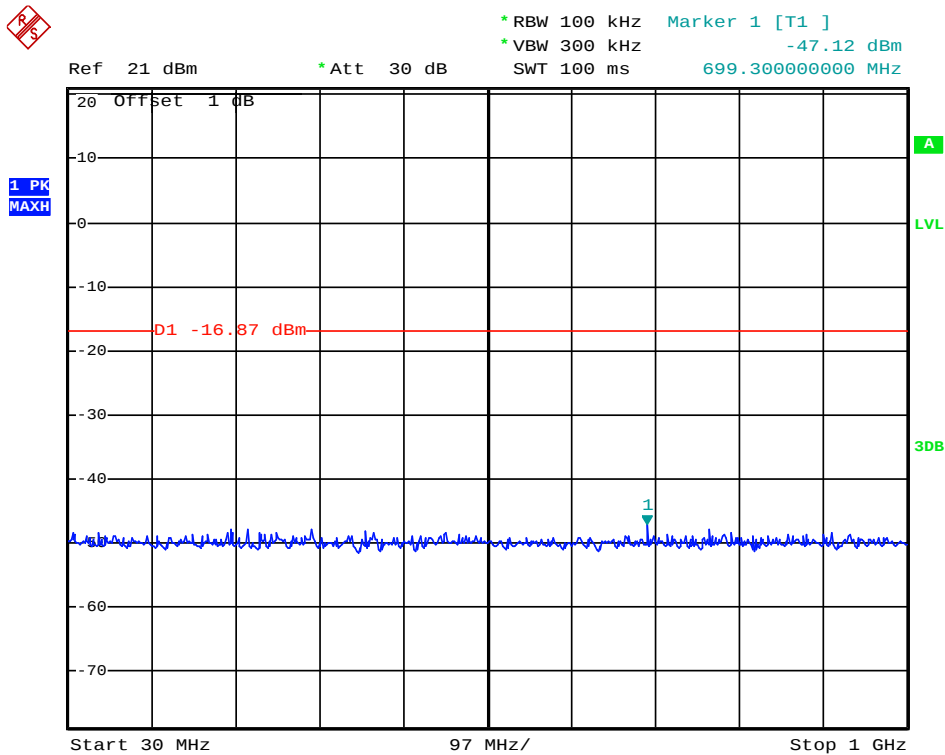


Date: 18.NOV.2013 14:56:55

(Plot 4.6.1 B1: Channel 6: 2437MHz @ 802.11b)

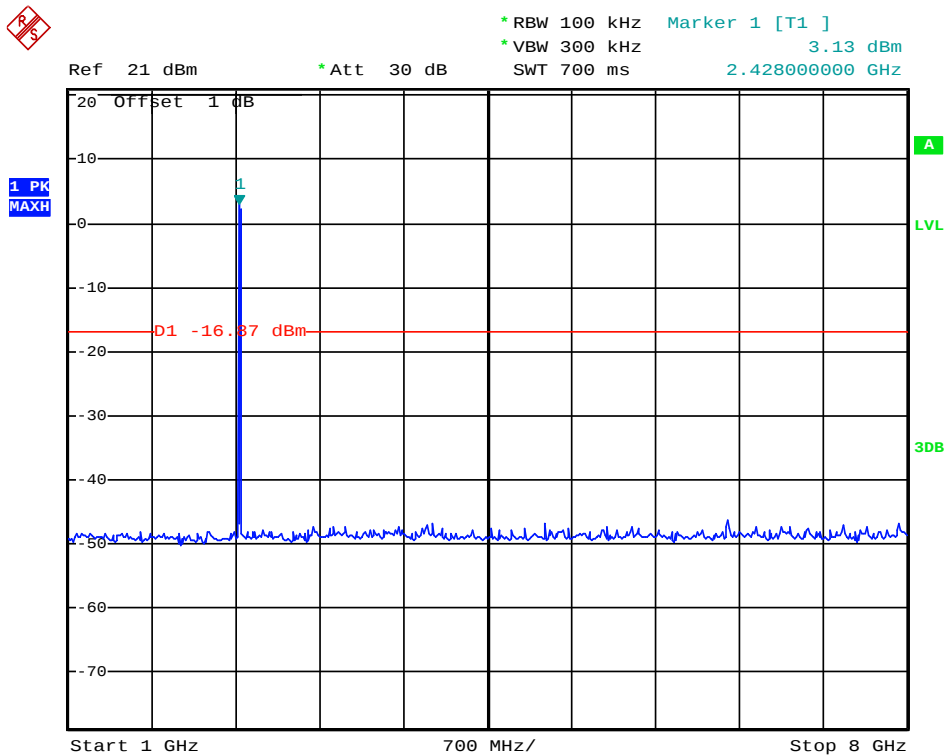


Date: 18.NOV.2013 14:56:31

(Plot 4.6.1 B2: Channel 6: 2437MHz @ 802.11b)

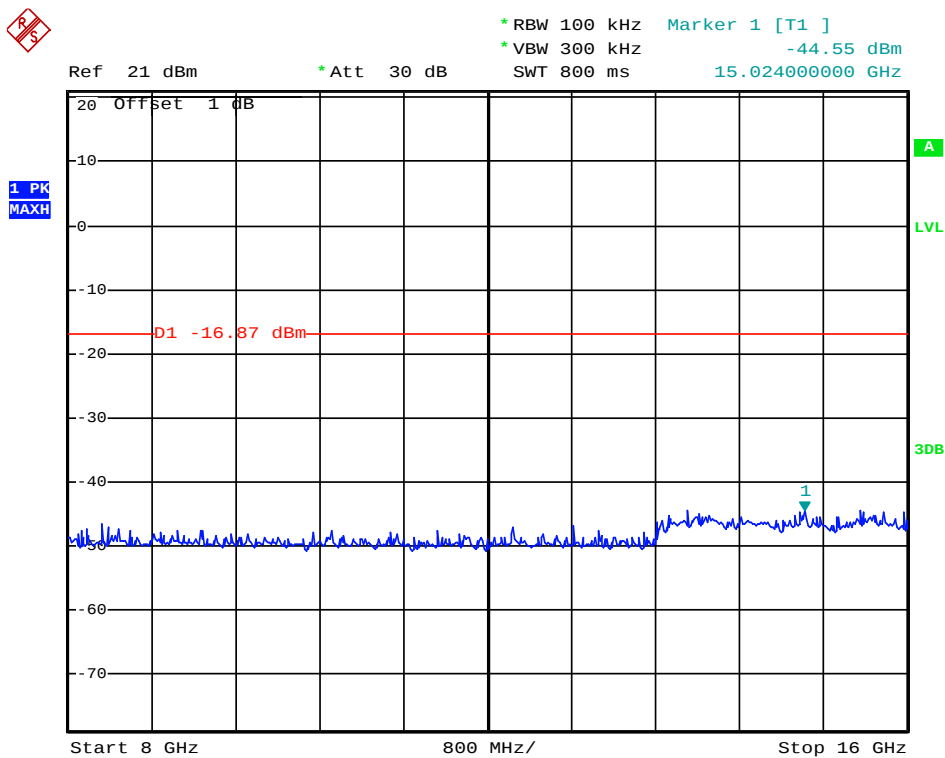


Date: 18.NOV.2013 14:57:10

(Plot 4.6.1 B3: Channel 6: 2437MHz @ 802.11b)

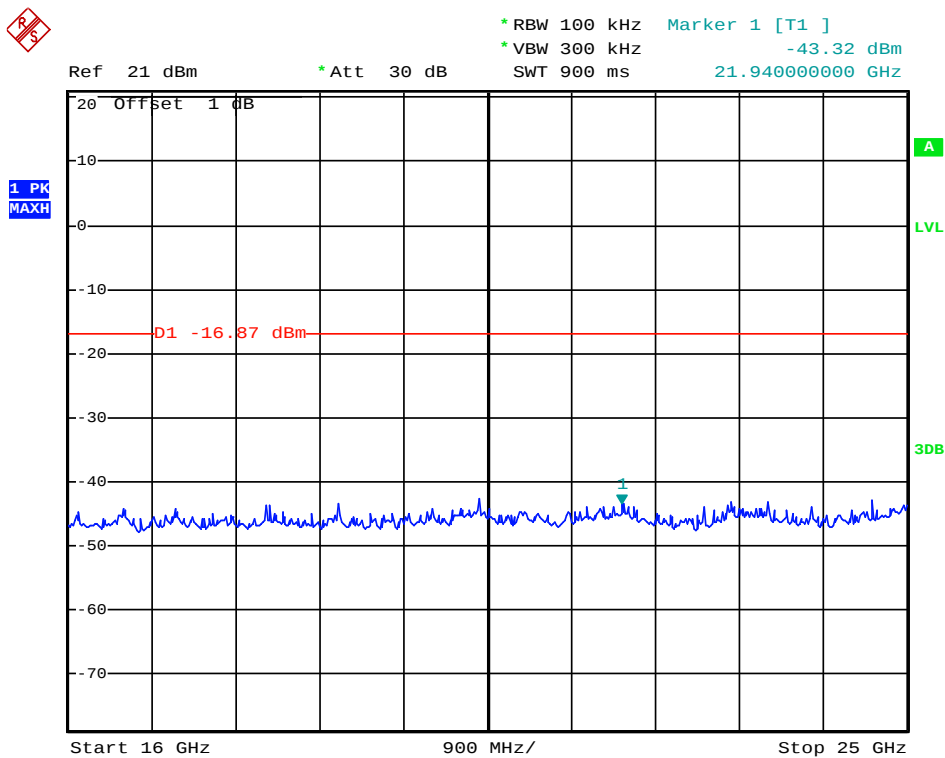


Date: 18.NOV.2013 14:57:24

(Plot 4.6.1 B4: Channel 6: 2437MHz @ 802.11b)

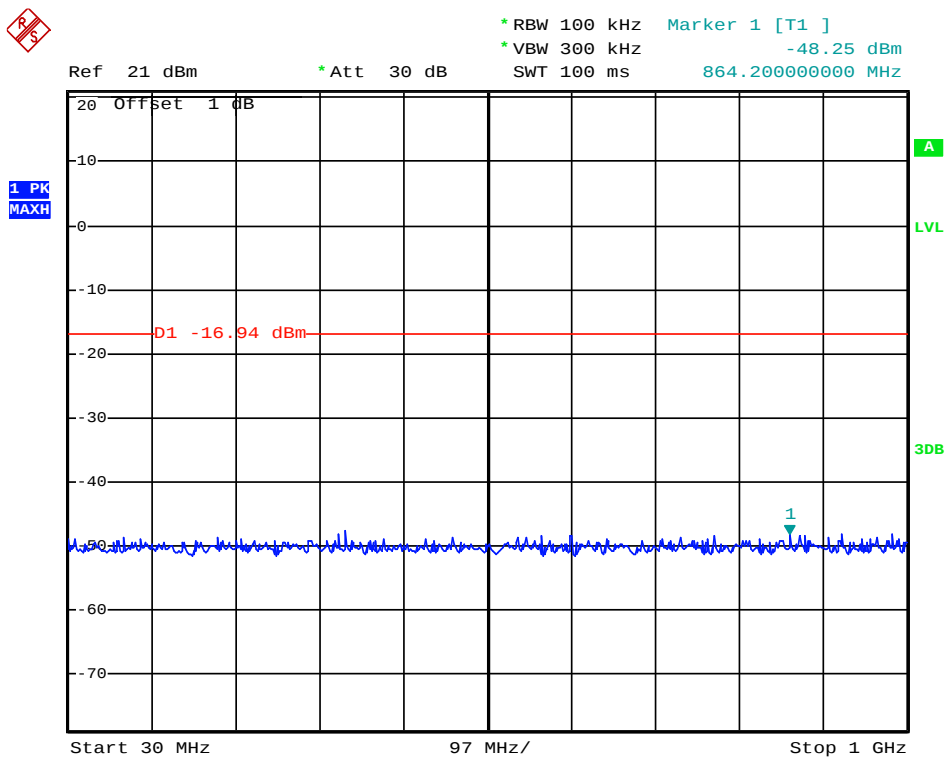


Date: 18.NOV.2013 14:58:25

(Plot 4.6.1 C1: Channel 11: 2462MHz @ 802.11b)

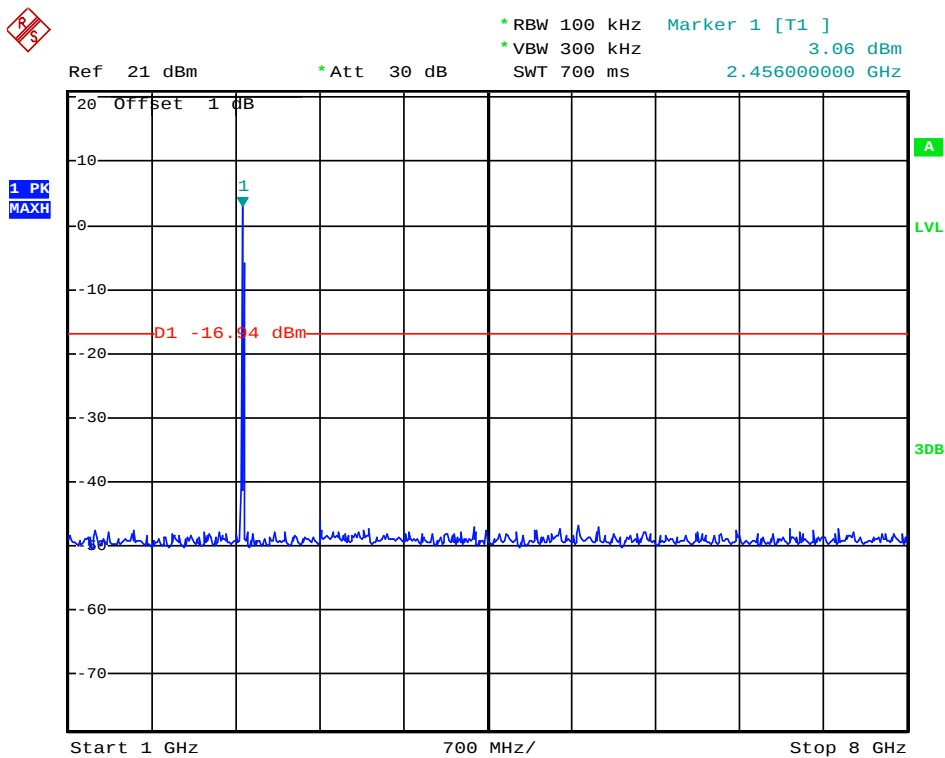


Date: 18.NOV.2013 14:58:12

(Plot 4.6.1 C2: Channel 11: 2462MHz @ 802.11b)

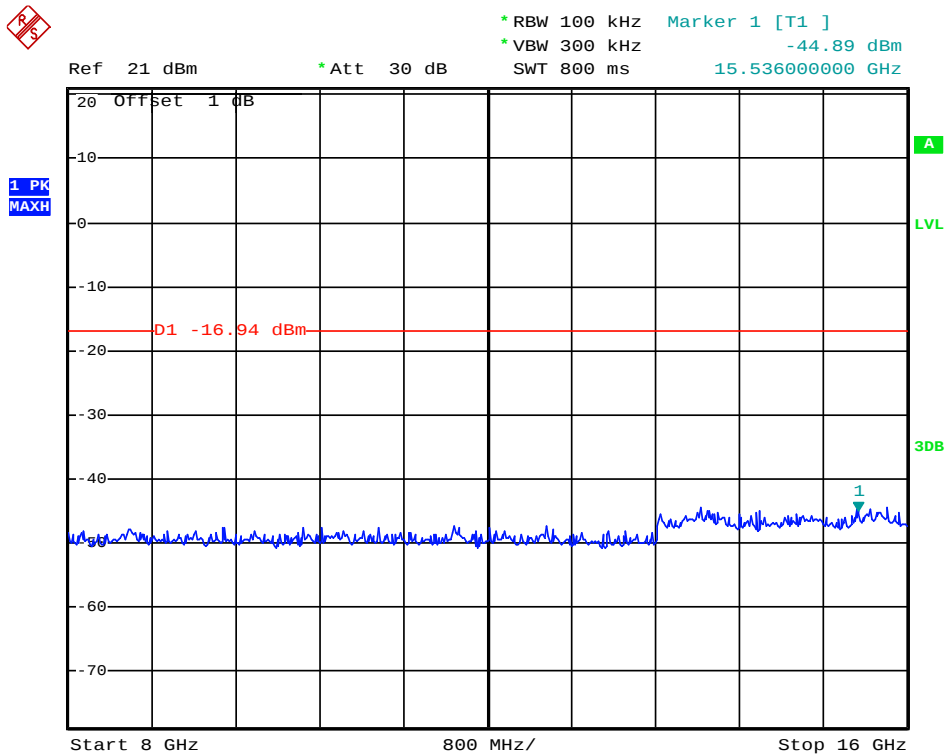


Date: 18.NOV.2013 14:58:37

(Plot 4.6.1 C3: Channel 11: 2462MHz @ 802.11b)

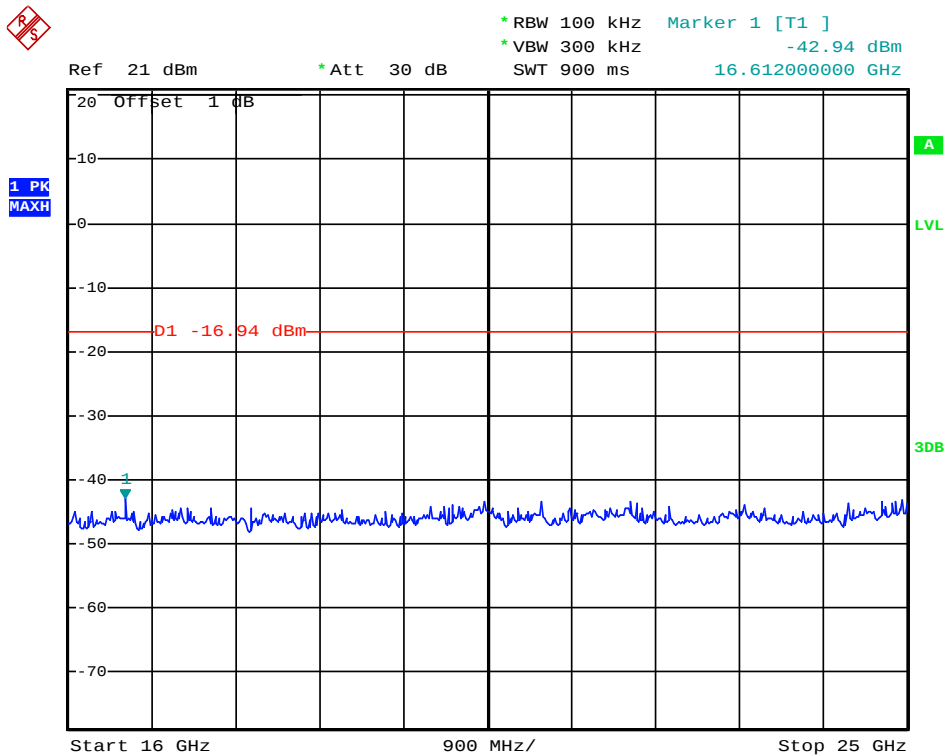


Date: 18.NOV.2013 14:58:52

(Plot 4.6.1 C4: Channel 11: 2462MHz @ 802.11b)

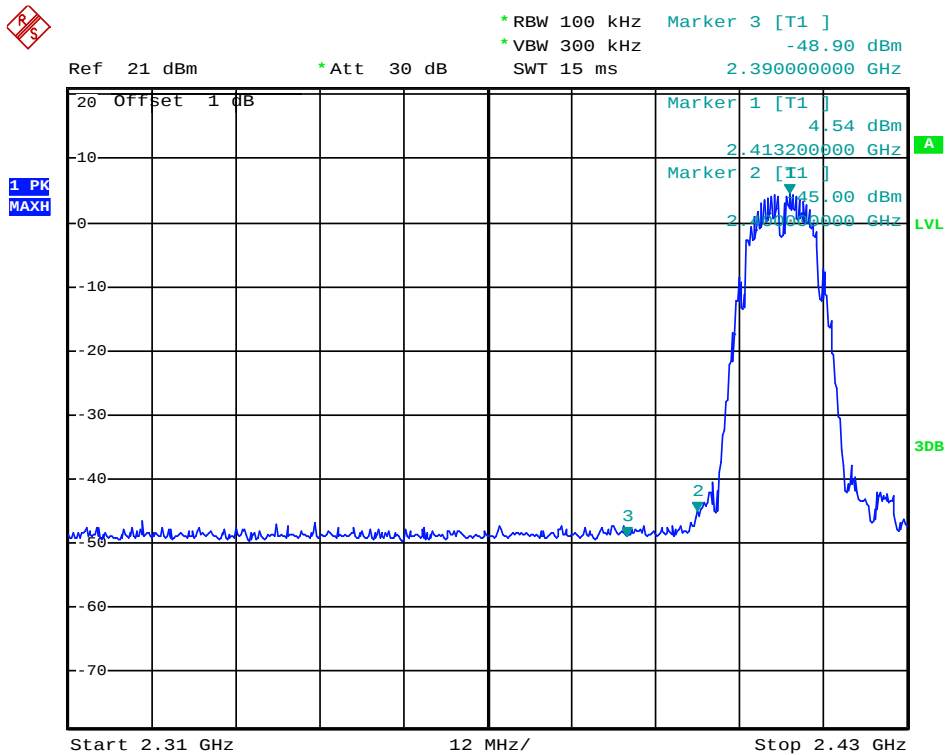

Date: 18.NOV.2013 14:31:02

(Plot 4.6.1 D: Channel 1: 2412MHz @ 802.11b)

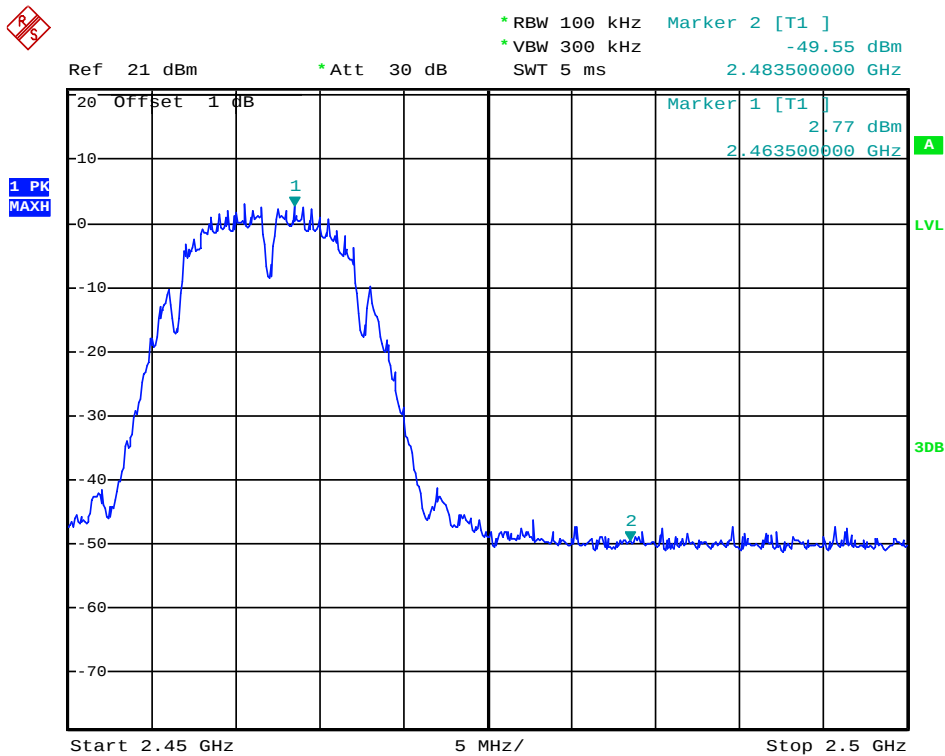

Date: 18.NOV.2013 14:33:17

(Plot 4.6.1 E: Channel 11: 2462MHz @ 802.11b)

## 4.6.2 802.11g Test Mode


## A. Test Verdict

| Channel | Frequency (MHz) | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|---------------|-------------|---------|
| 1       | 2412            | Plot 4.6.2 A1 | -20         | PASS    |
|         |                 | Plot 4.6.2 A2 | -20         | PASS    |
|         |                 | Plot 4.6.2 A3 | -20         | PASS    |
|         |                 | Plot 4.6.2 A4 | -20         | PASS    |
| 6       | 2437            | Plot 4.6.2 B1 | -20         | PASS    |
|         |                 | Plot 4.6.2 B2 | -20         | PASS    |
|         |                 | Plot 4.6.2 B3 | -20         | PASS    |
|         |                 | Plot 4.6.2 B4 | -20         | PASS    |
| 11      | 2462            | Plot 4.6.2 C1 | -20         | PASS    |
|         |                 | Plot 4.6.2 C2 | -20         | PASS    |
|         |                 | Plot 4.6.2 C3 | -20         | PASS    |
|         |                 | Plot 4.6.2 C4 | -20         | PASS    |

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Detector | Limit (dBc) | Refer to Plot | Verdict |
|-----------------|-----------------------------------|----------|-------------|---------------|---------|
| 2400.00         | -44.17                            | Peak     | -20         | Plot 4.6.2 D  | PASS    |
| 2483.50         | -46.50                            | Peak     | -20         | Plot 4.6.2 E  | PASS    |


Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.  
 2. The test results including the cable loss.

## B. Test Plots

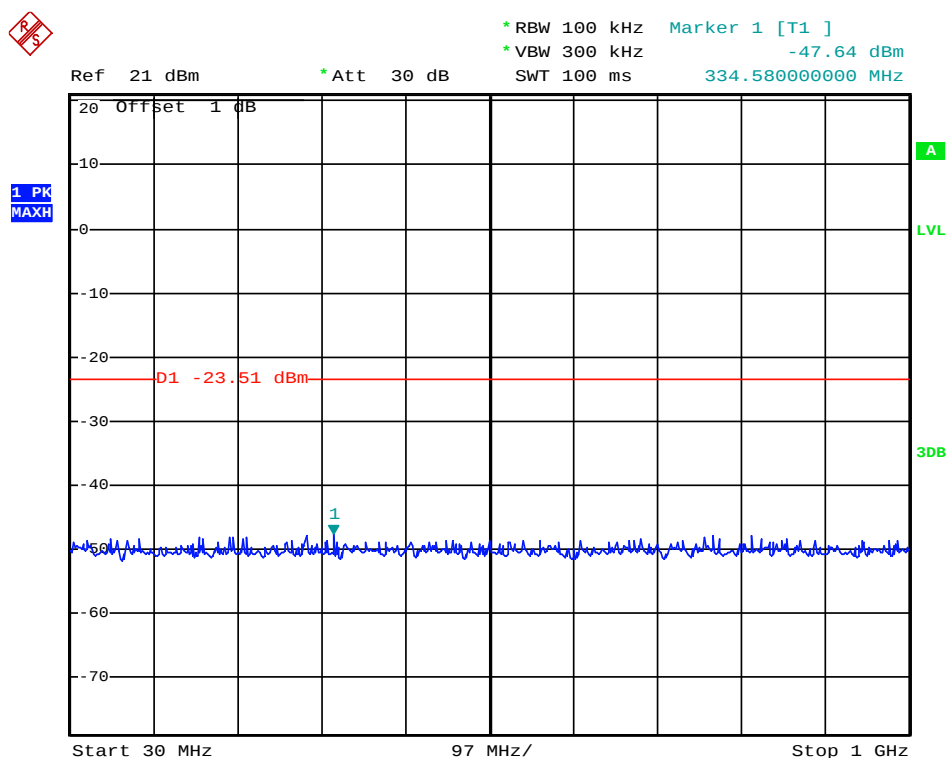


Date: 18.NOV.2013 14:59:51

(Plot 4.6.2 A1: Channel 1: 2412MHz @ 802.11g)

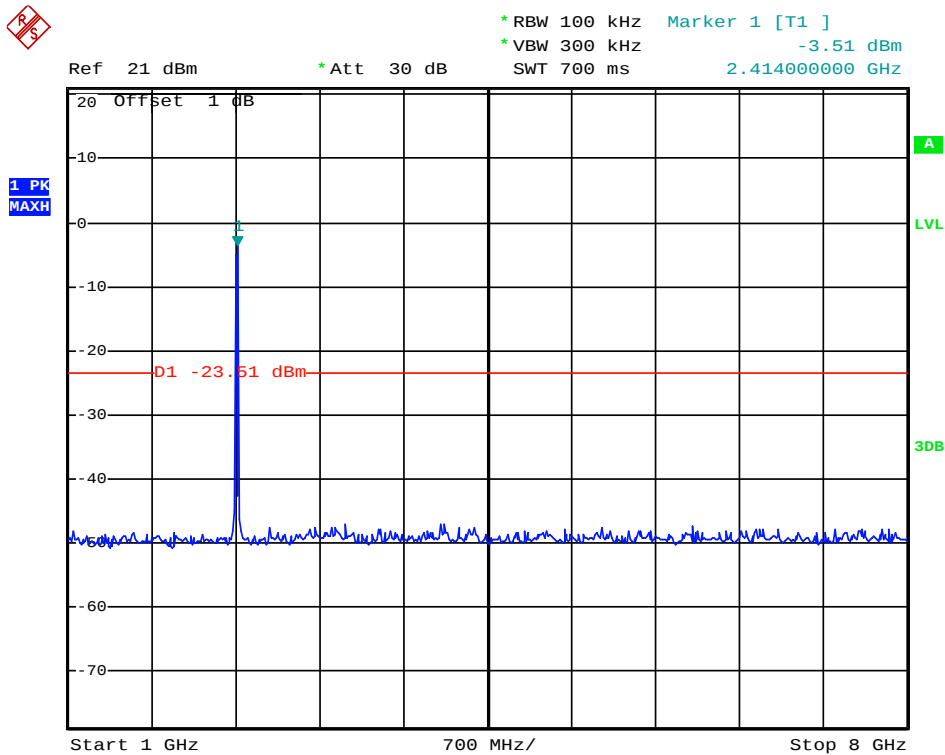


Date: 18.NOV.2013 14:59:35

(Plot 4.6.2 A2: Channel 1: 2412MHz @ 802.11g)

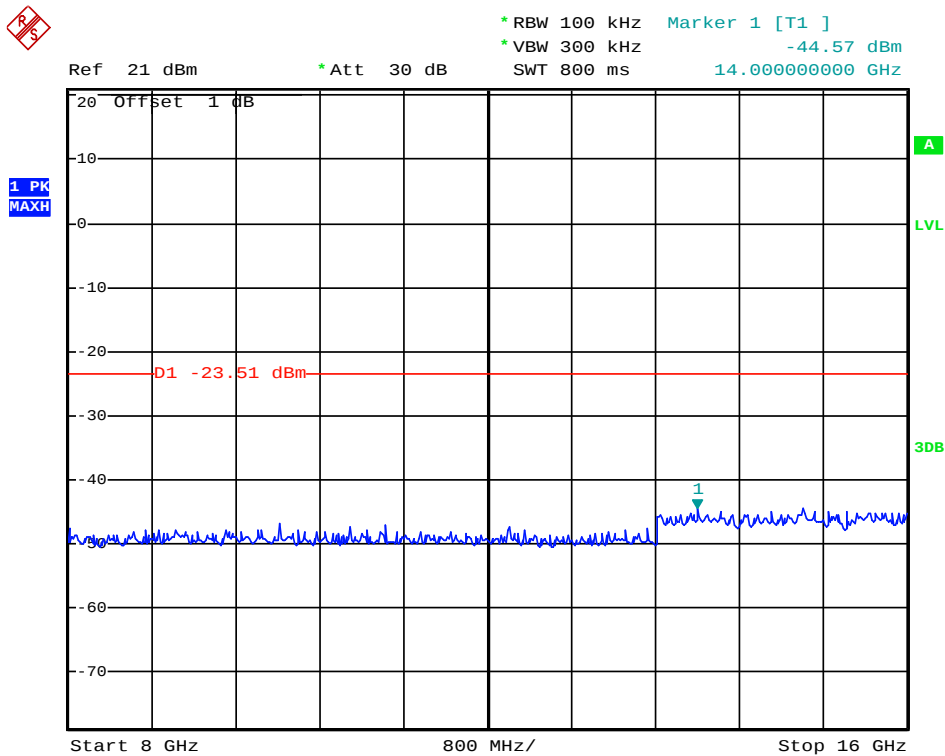


Date: 18.NOV.2013 15:00:06

(Plot 4.6.2 A3: Channel 1: 2412MHz @ 802.11g)

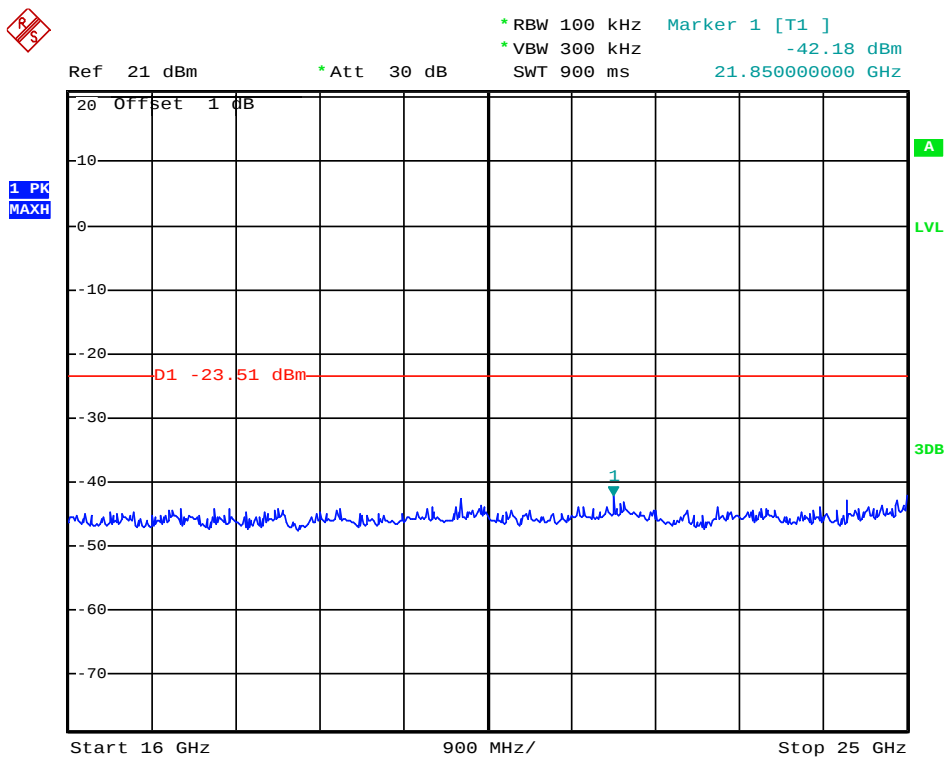


Date: 18.NOV.2013 15:00:30

(Plot 4.6.2 A4: Channel 1: 2412MHz @ 802.11g)

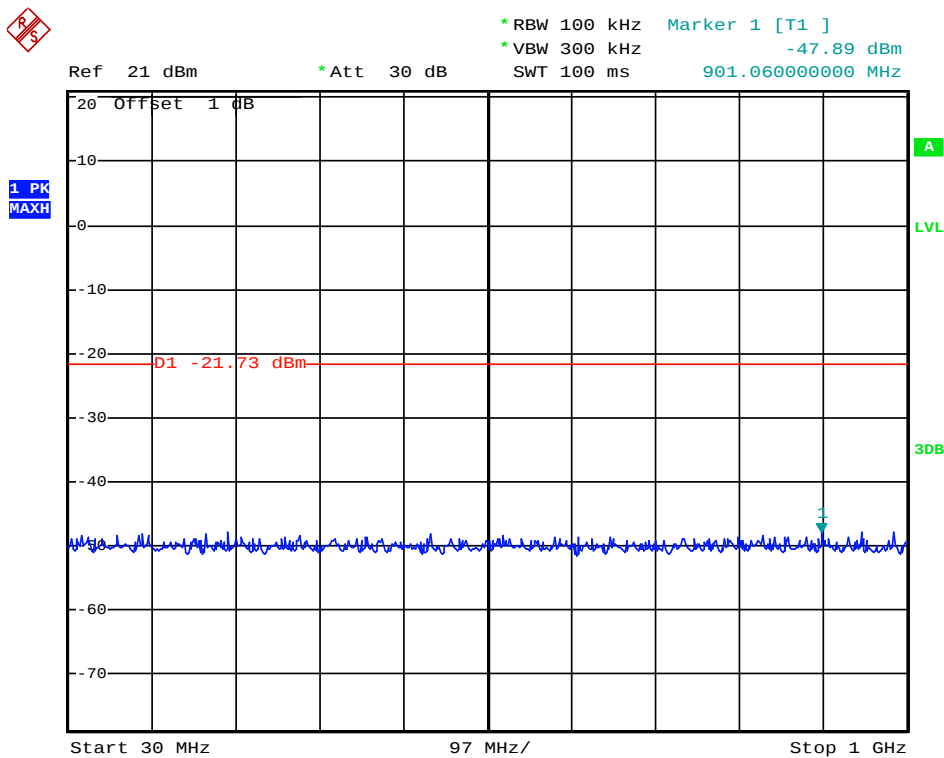


Date: 18.NOV.2013 15:01:31

(Plot 4.6.2 B1: Channel 6: 2437MHz @ 802.11g)

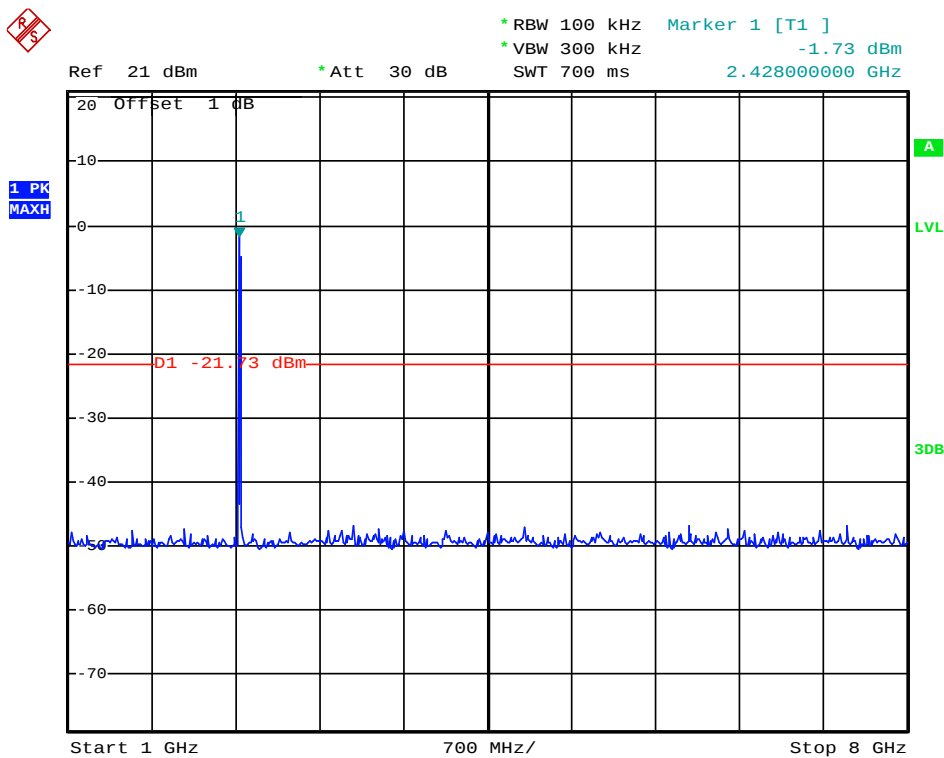


Date: 18.NOV.2013 15:01:15

(Plot 4.6.2 B2: Channel 6: 2437MHz @ 802.11g)

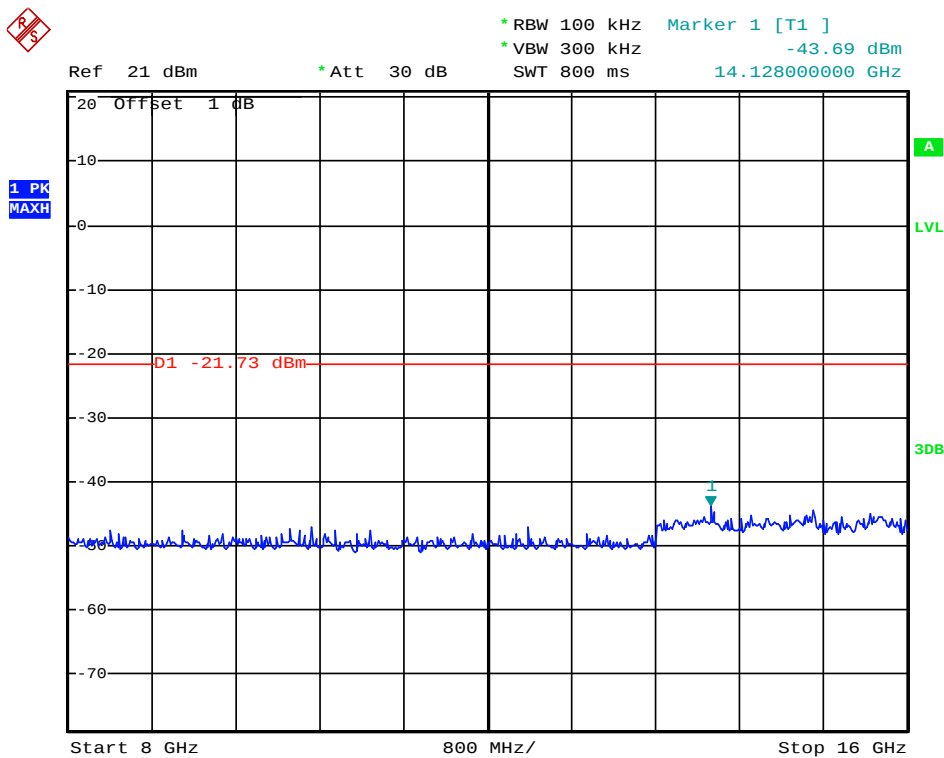


Date: 18.NOV.2013 15:01:43

(Plot 4.6.2 B3: Channel 6: 2437MHz @ 802.11g)

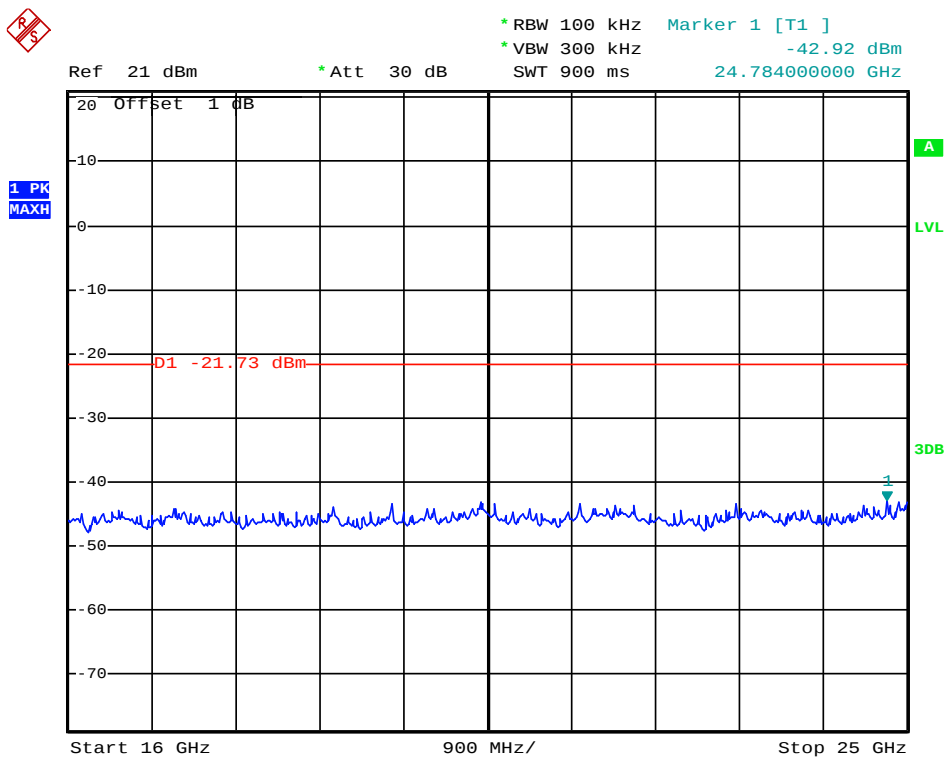


Date: 18.NOV.2013 15:02:01

(Plot 4.6.2 B4: Channel 6: 2437MHz @ 802.11g)

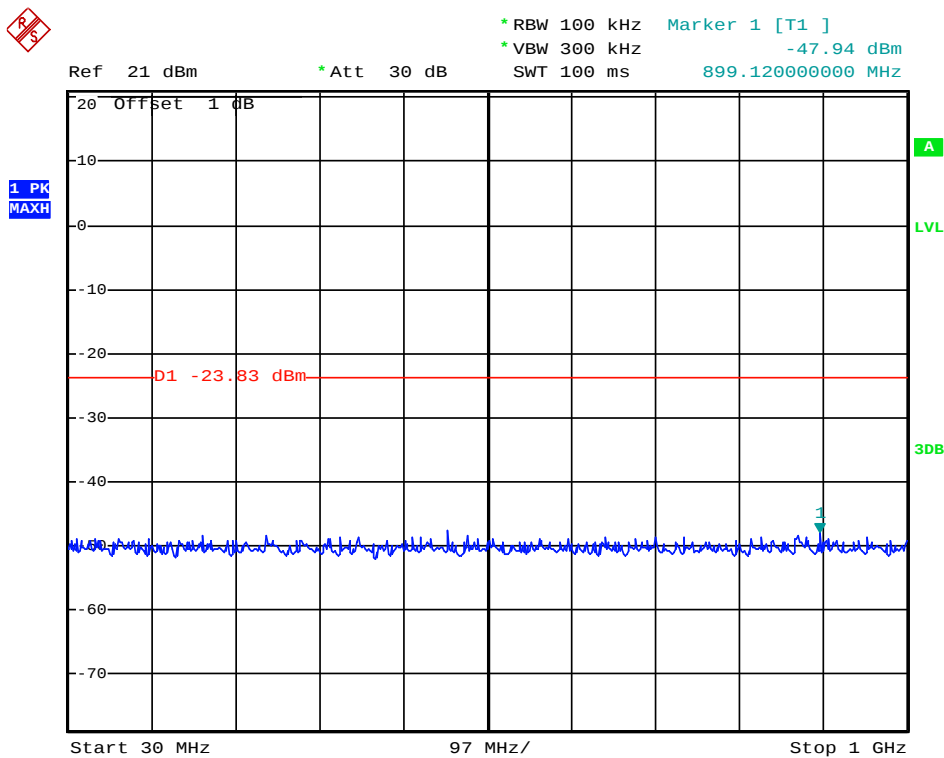


Date: 18.NOV.2013 15:03:03

(Plot 4.6.2 C1: Channel 11: 2462MHz @ 802.11g)

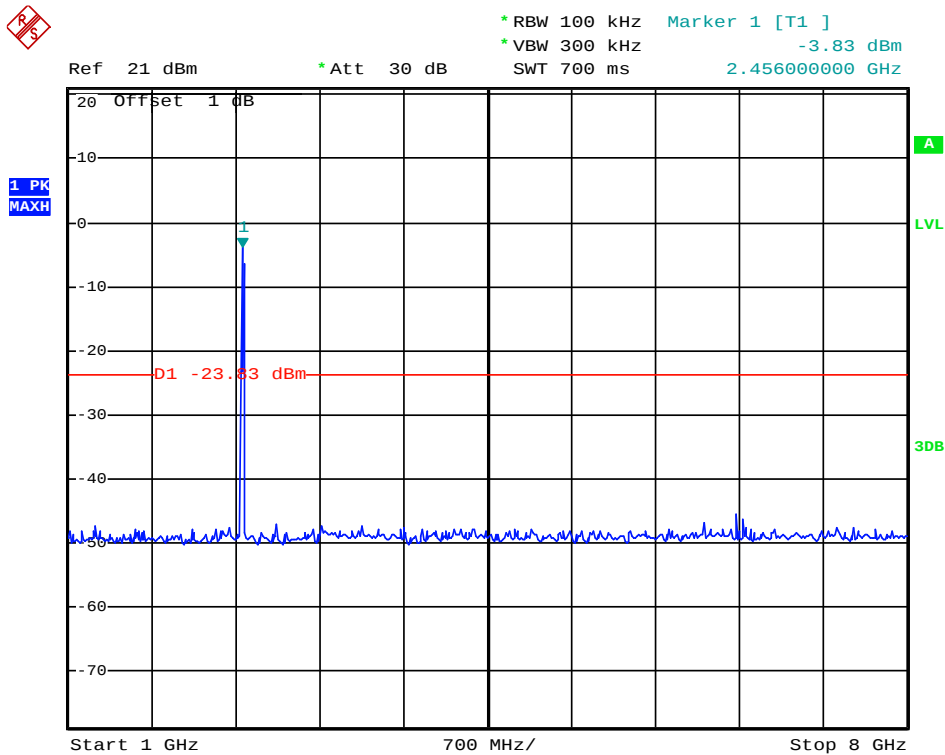


Date: 18.NOV.2013 15:02:51

(Plot 4.6.2 C2: Channel 11: 2462MHz @ 802.11g)

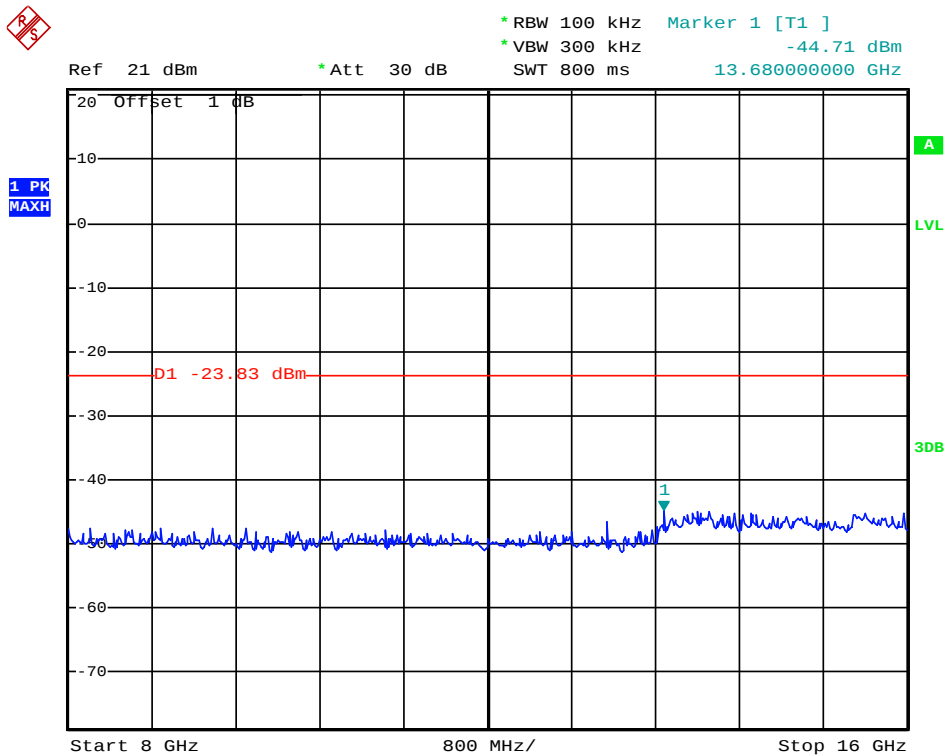


Date: 18.NOV.2013 15:03:14

(Plot 4.6.2 C3: Channel 11: 2462MHz @ 802.11g)

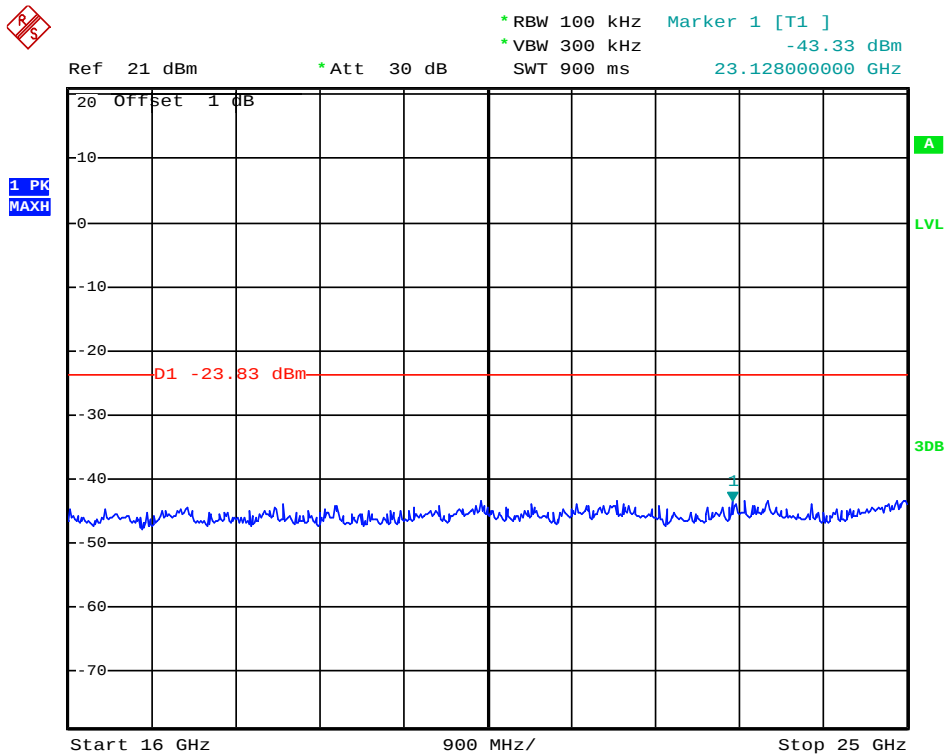


Date: 18.NOV.2013 15:03:30

(Plot 4.6.2 C4: Channel 11: 2462MHz @ 802.11g)

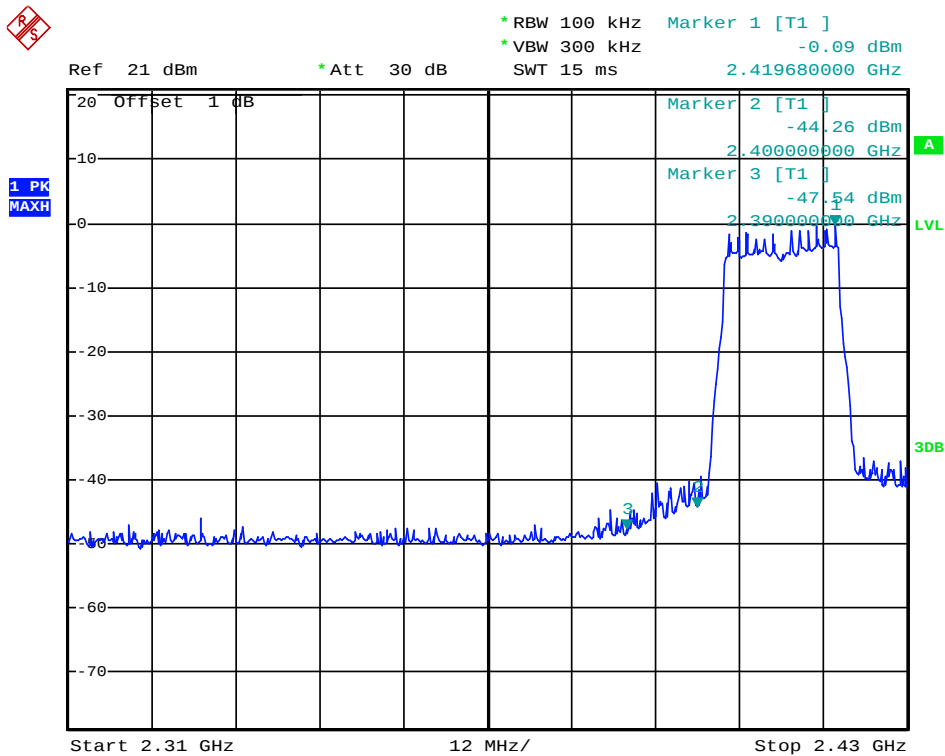

Date: 18.NOV.2013 14:31:47

(Plot 4.6.2 D: Channel 1: 2412MHz @ 802.11g)

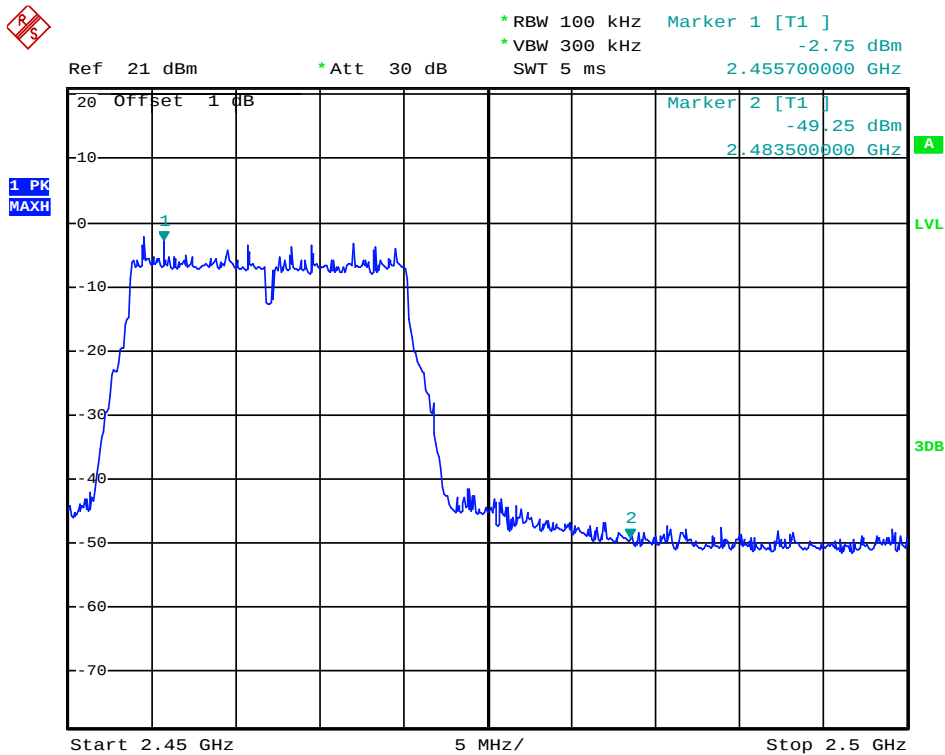

Date: 18.NOV.2013 14:33:54

(Plot 4.6.2 E: Channel 11: 2462MHz @ 802.11g)

4.6.3 802.11n(20MHz) Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|---------------|-------------|---------|
| 1       | 2412            | Plot 4.6.3 A1 | -20         | PASS    |
|         |                 | Plot 4.6.3 A2 | -20         | PASS    |
|         |                 | Plot 4.6.3 A3 | -20         | PASS    |
|         |                 | Plot 4.6.3 A4 | -20         | PASS    |
| 6       | 2437            | Plot 4.6.3 B1 | -20         | PASS    |
|         |                 | Plot 4.6.3 B2 | -20         | PASS    |
|         |                 | Plot 4.6.3 B3 | -20         | PASS    |
|         |                 | Plot 4.6.3 B4 | -20         | PASS    |
| 11      | 2462            | Plot 4.6.3 C1 | -20         | PASS    |
|         |                 | Plot 4.6.3 C2 | -20         | PASS    |
|         |                 | Plot 4.6.3 C3 | -20         | PASS    |
|         |                 | Plot 4.6.3 C4 | -20         | PASS    |

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Detector | Limit (dBc) | Refer to Plot | Verdict |
|-----------------|-----------------------------------|----------|-------------|---------------|---------|
| 2400.00         | -38.71                            | Peak     | -20         | Plot 4.6.3 D  | PASS    |
| 2483.50         | -45.90                            | Peak     | -20         | Plot 4.6.3 E  | PASS    |


Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.  
2.The test results including the cable lose.

B. Test Plots

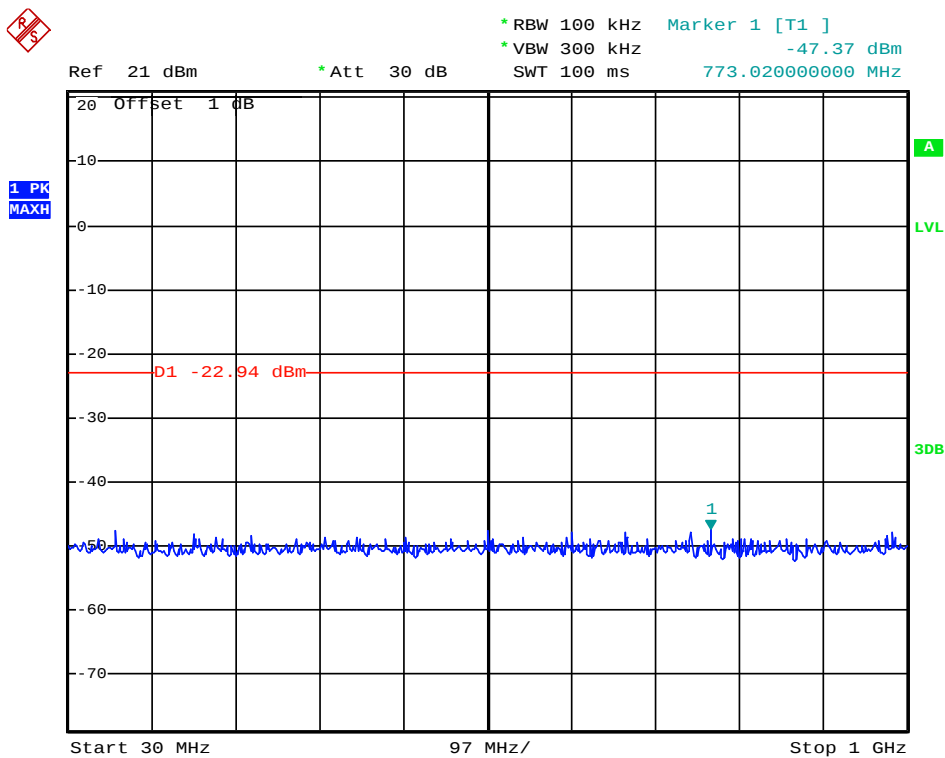


Date: 18.NOV.2013 15:04:35

(Plot 4.6.3 A1: Channel 1: 2412MHz @ 802.11n(20MHz))

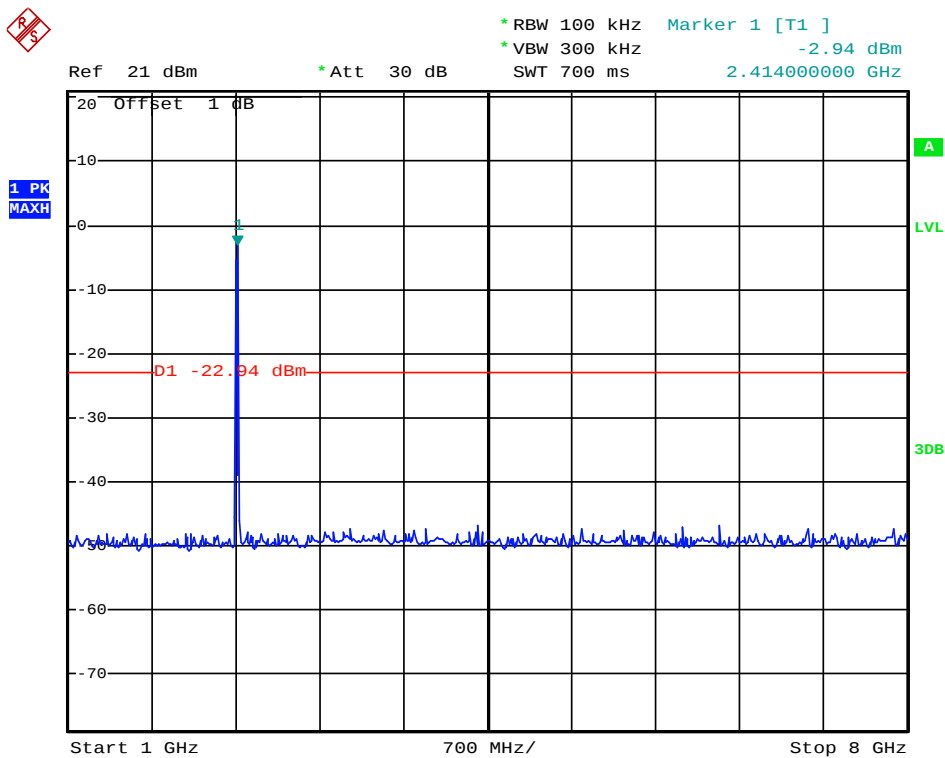


Date: 18.NOV.2013 15:04:20

(Plot 4.6.3 A2: Channel 1: 2412MHz @ 802.11n(20MHz))

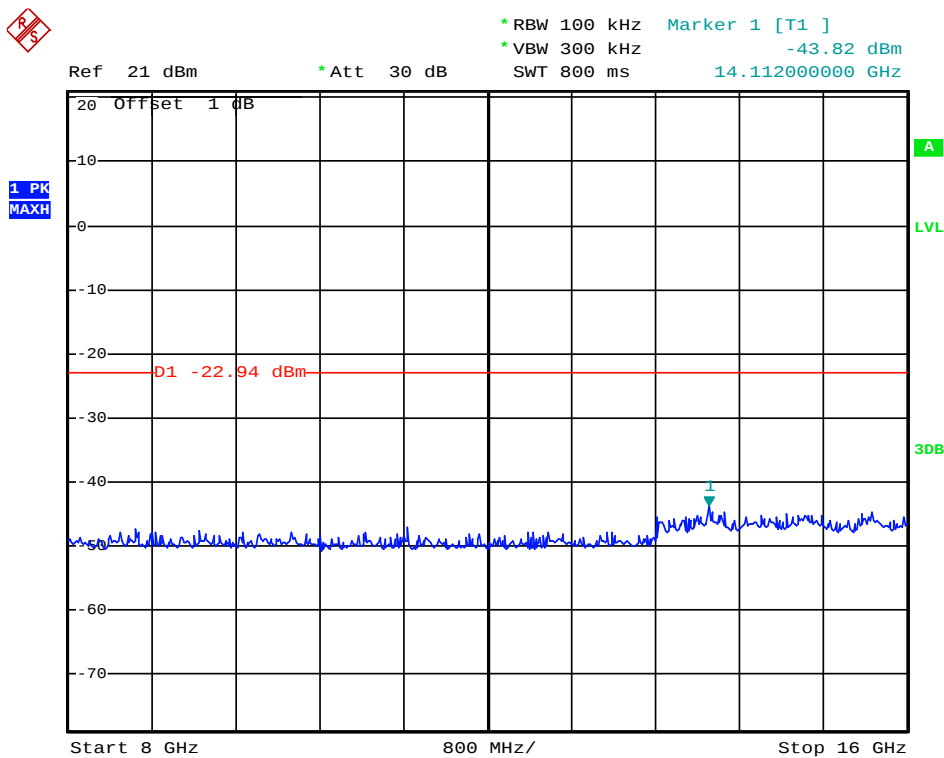


Date: 18.NOV.2013 15:04:48

(Plot 4.6.3 A3: Channel 1: 2412MHz @ 802.11n(20MHz))

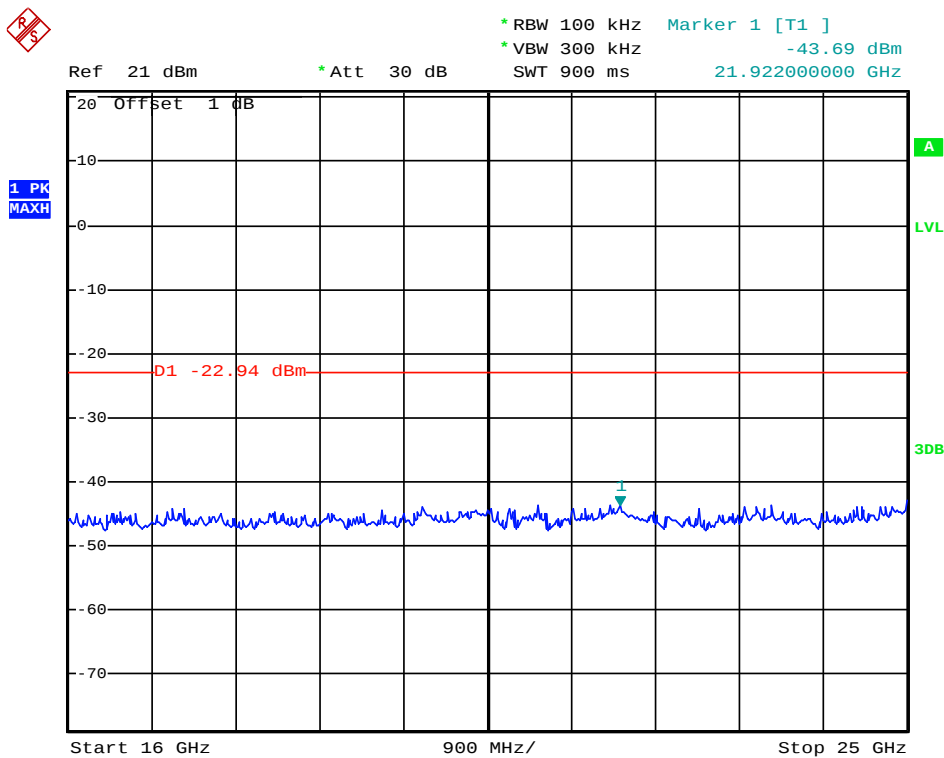


Date: 18.NOV.2013 15:05:01

(Plot 4.6.3 A4: Channel 1: 2412MHz @ 802.11n(20MHz))

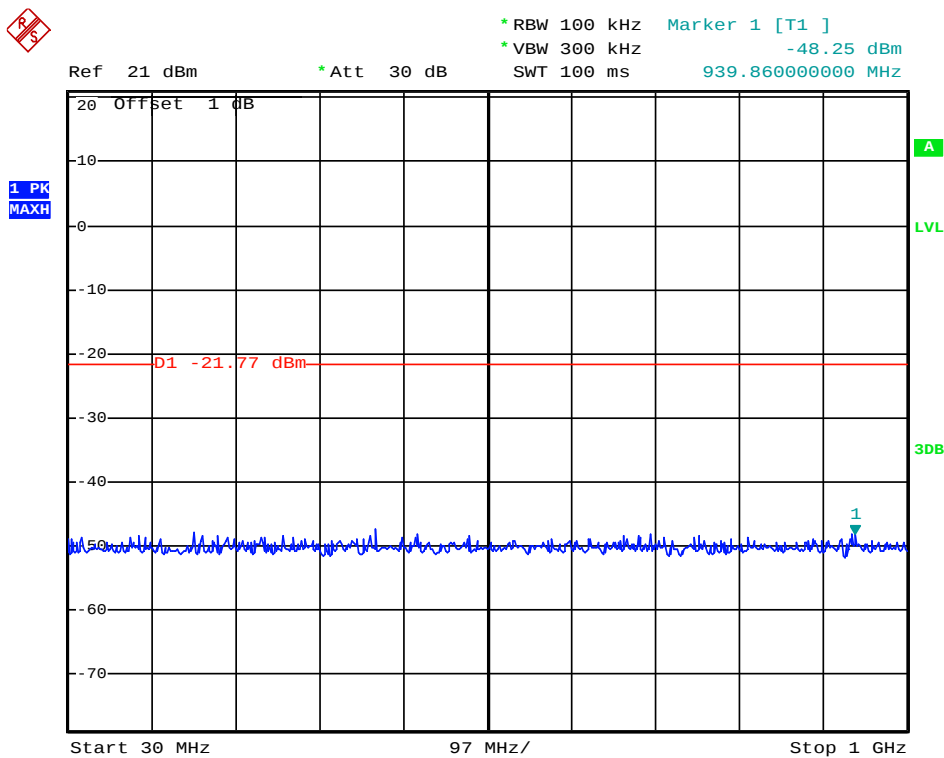


Date: 18.NOV.2013 15:10:39

(Plot 4.6.3 B1: Channel 6: 2437MHz @ 802.11n(20MHz))

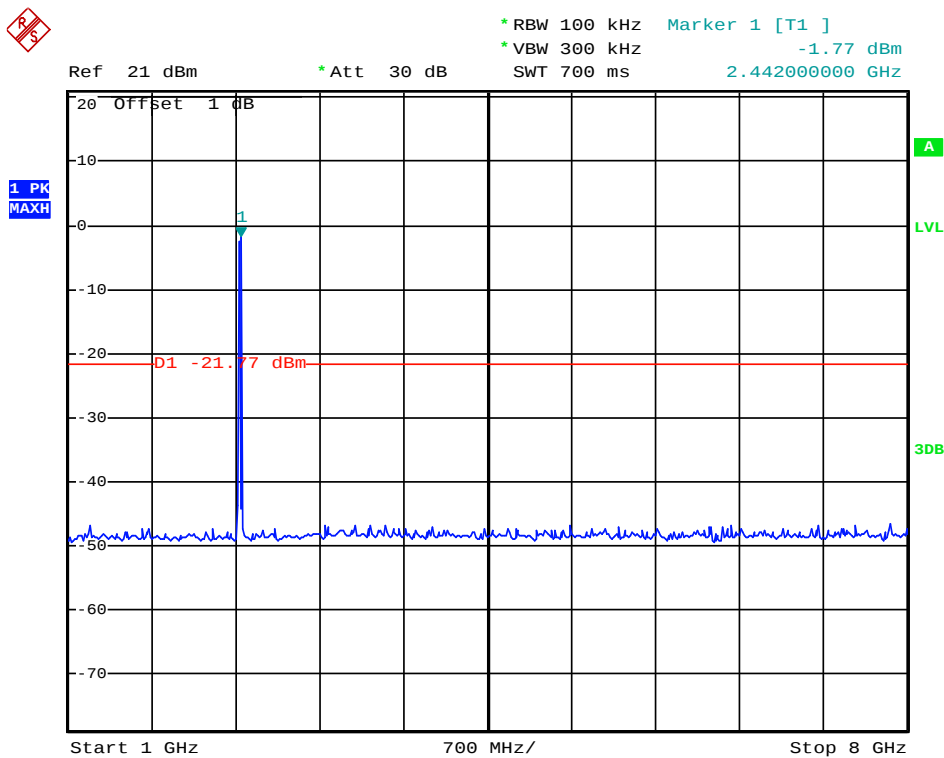


Date: 18.NOV.2013 15:07:04

(Plot 4.6.3 B2: Channel 6: 2437MHz @ 802.11n(20MHz))

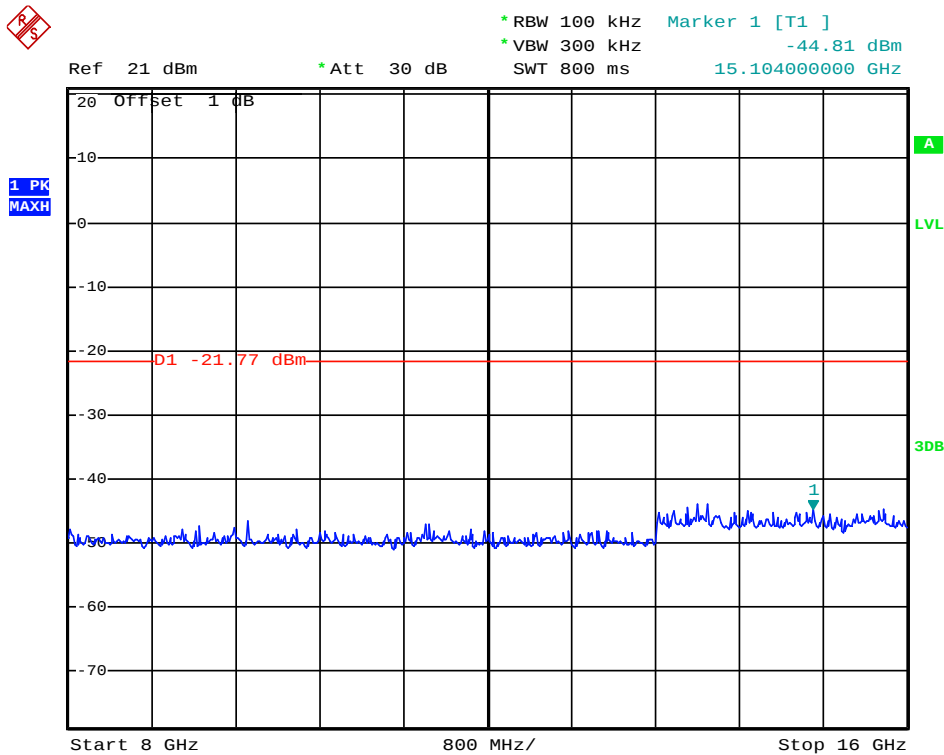


Date: 18.NOV.2013 15:10:51

(Plot 4.6.3 B3: Channel 6: 2437MHz @ 802.11n(20MHz))

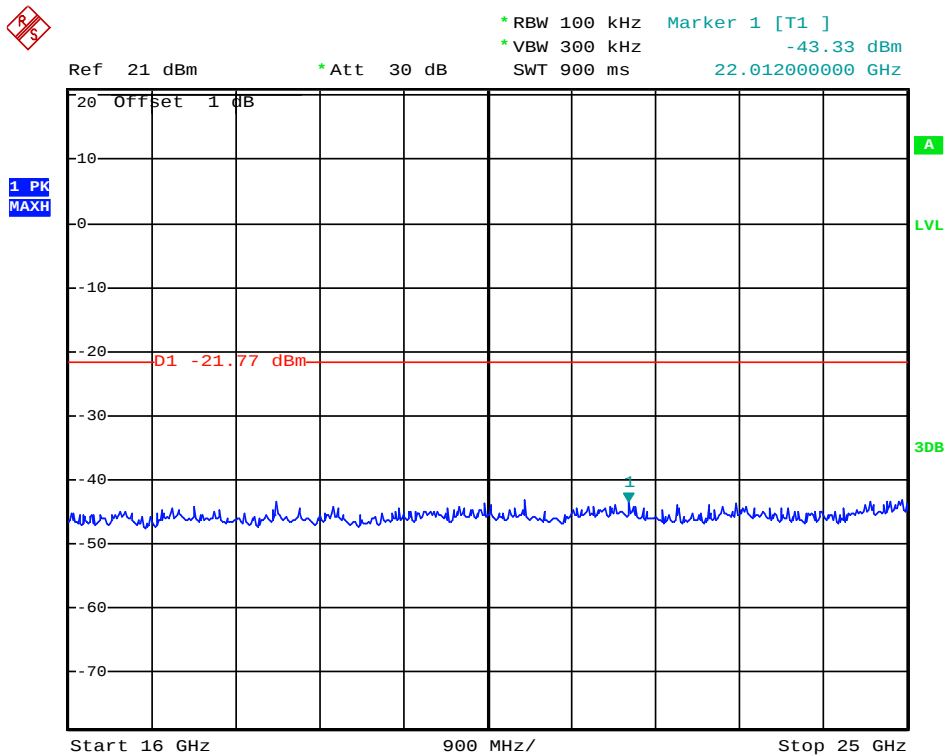


Date: 18.NOV.2013 15:11:08

(Plot 4.6.3 B4: Channel 6: 2437MHz @ 802.11n(20MHz))

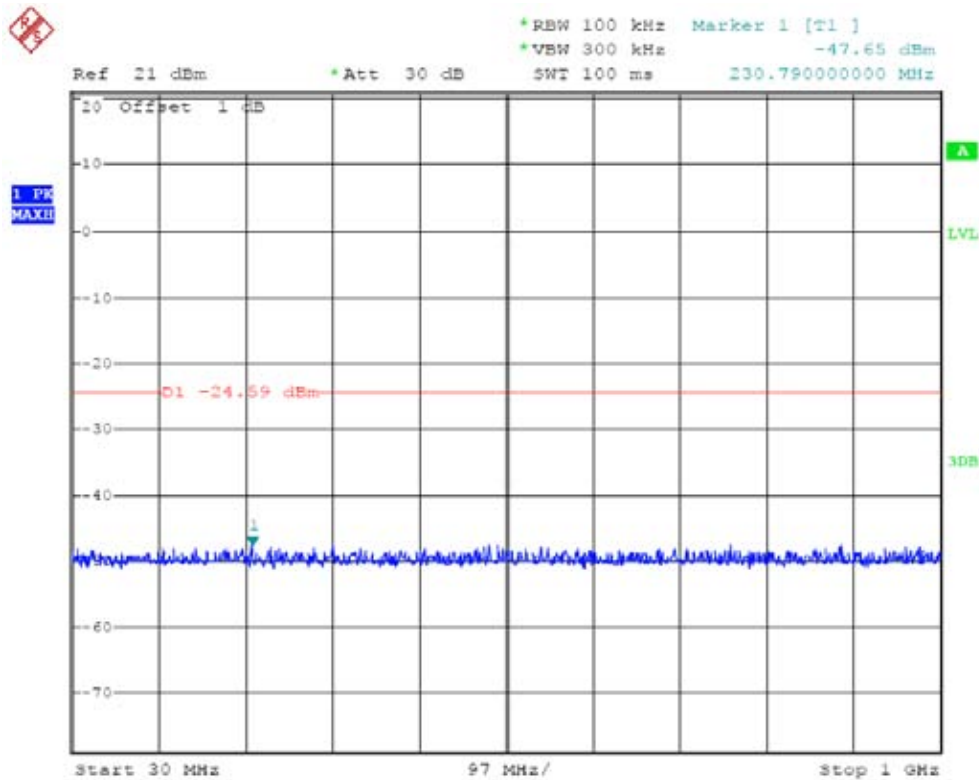


Date: 18.NOV.2013 15:44:16

(Plot 4.6.3 C1: Channel 11: 2462MHz @ 802.11n(20MHz))

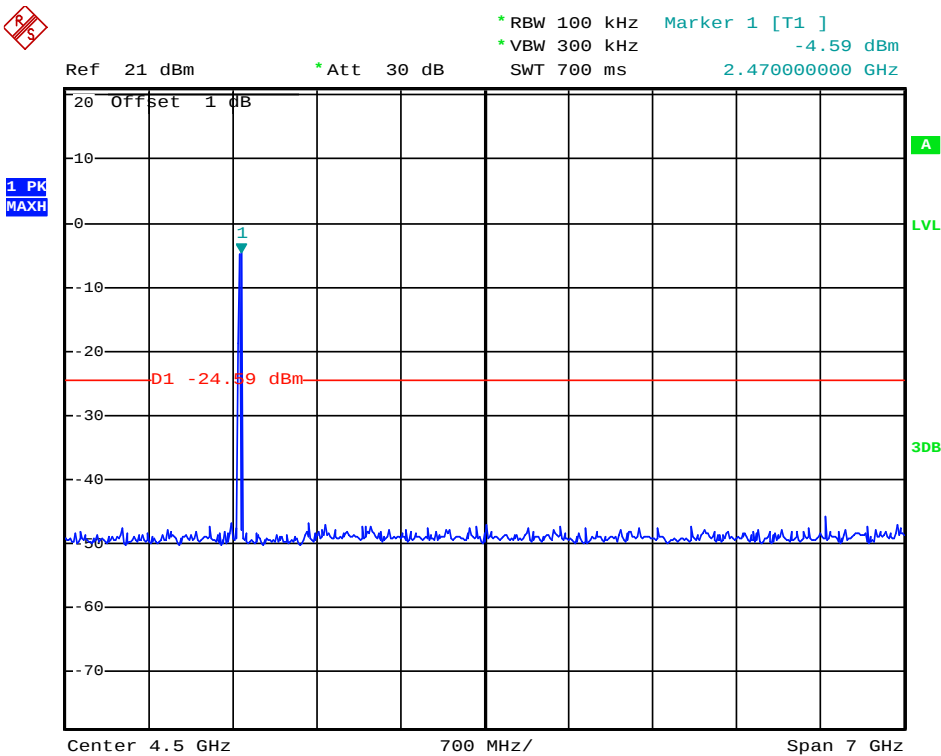


Date: 18.NOV.2013 15:43:53

(Plot 4.6.3 C2: Channel 11: 2462MHz @ 802.11n(20MHz))

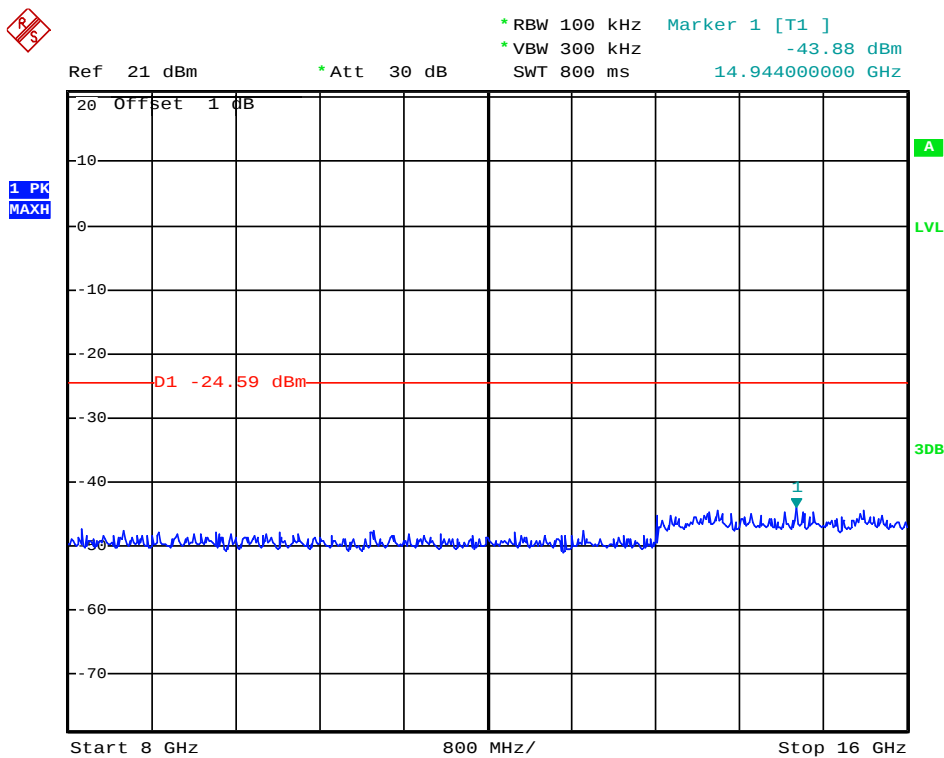


Date: 18.NOV.2013 15:44:29

(Plot 4.6.3 C3: Channel 11: 2462MHz @ 802.11n(20MHz))

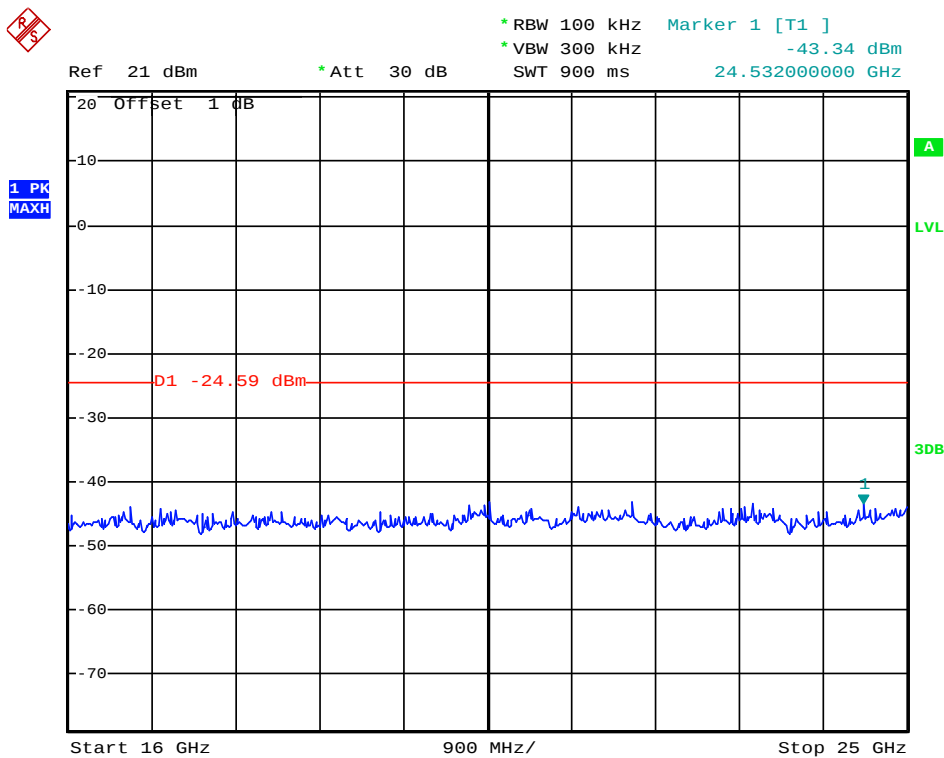


Date: 18.NOV.2013 15:44:40

(Plot 4.6.3 C4: Channel 11: 2462MHz @ 802.11n(20MHz))

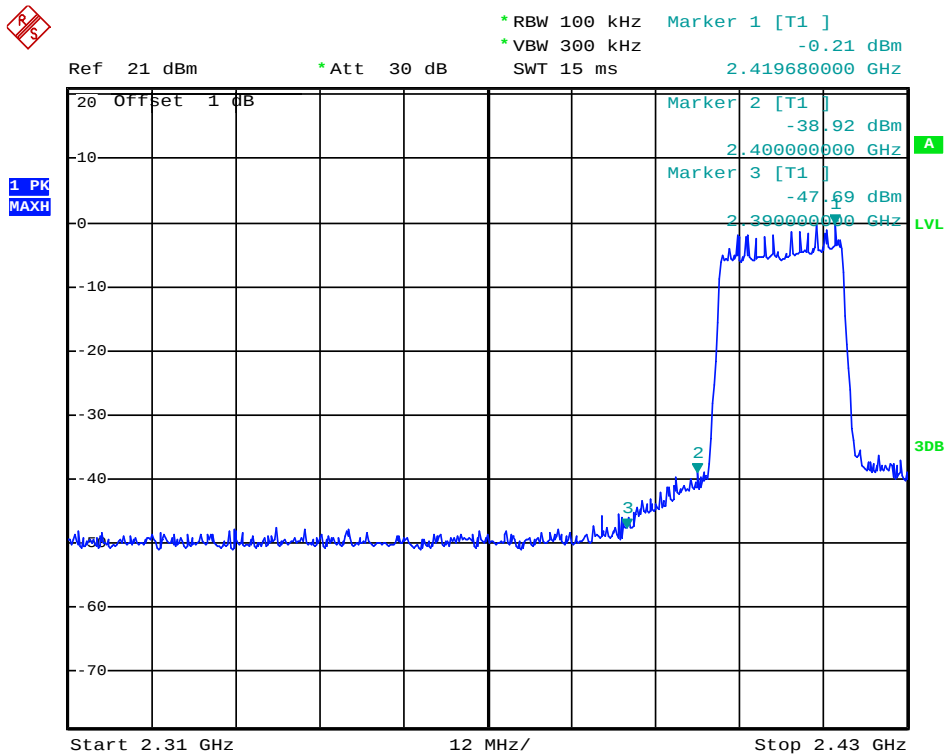

Date: 18.NOV.2013 14:32:21

(Plot 4.6.3 D: Channel 1: 2412MHz @ 802.11n(20MHz))

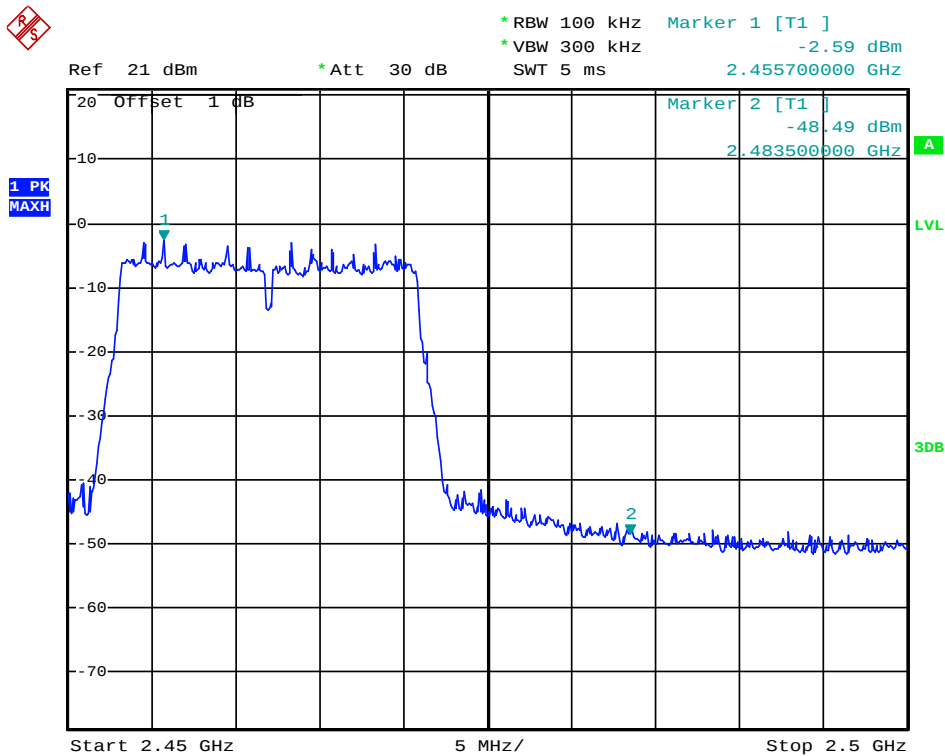

Date: 18.NOV.2013 14:34:29

(Plot 4.6.3 E: Channel 11: 2462MHz @ 802.11n(20MHz))

## 4.6.4 802.11n(40MHz) Test Mode


## A. Test Verdict

| Channel | Frequency (MHz) | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|---------------|-------------|---------|
| 3       | 2422            | Plot 4.6.4 A1 | -20         | PASS    |
|         |                 | Plot 4.6.4 A2 | -20         | PASS    |
|         |                 | Plot 4.6.4 A3 | -20         | PASS    |
|         |                 | Plot 4.6.4 A4 | -20         | PASS    |
| 6       | 2437            | Plot 4.6.4 B1 | -20         | PASS    |
|         |                 | Plot 4.6.4 B2 | -20         | PASS    |
|         |                 | Plot 4.6.4 B3 | -20         | PASS    |
|         |                 | Plot 4.6.4 B4 | -20         | PASS    |
| 9       | 2452            | Plot 4.6.4 C1 | -20         | PASS    |
|         |                 | Plot 4.6.4 C2 | -20         | PASS    |
|         |                 | Plot 4.6.4 C3 | -20         | PASS    |
|         |                 | Plot 4.6.4 C4 | -20         | PASS    |

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Detector | Limit (dBc) | Refer to Plot | Verdict |
|-----------------|-----------------------------------|----------|-------------|---------------|---------|
| 2400.00         | -41.40                            | Peak     | -20         | Plot 4.6.3 D  | PASS    |
| 2483.50         | -41.45                            | Peak     | -20         | Plot 4.6.3 E  | PASS    |


Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.  
2. The test results including the cable loss.

## B. Test Plots

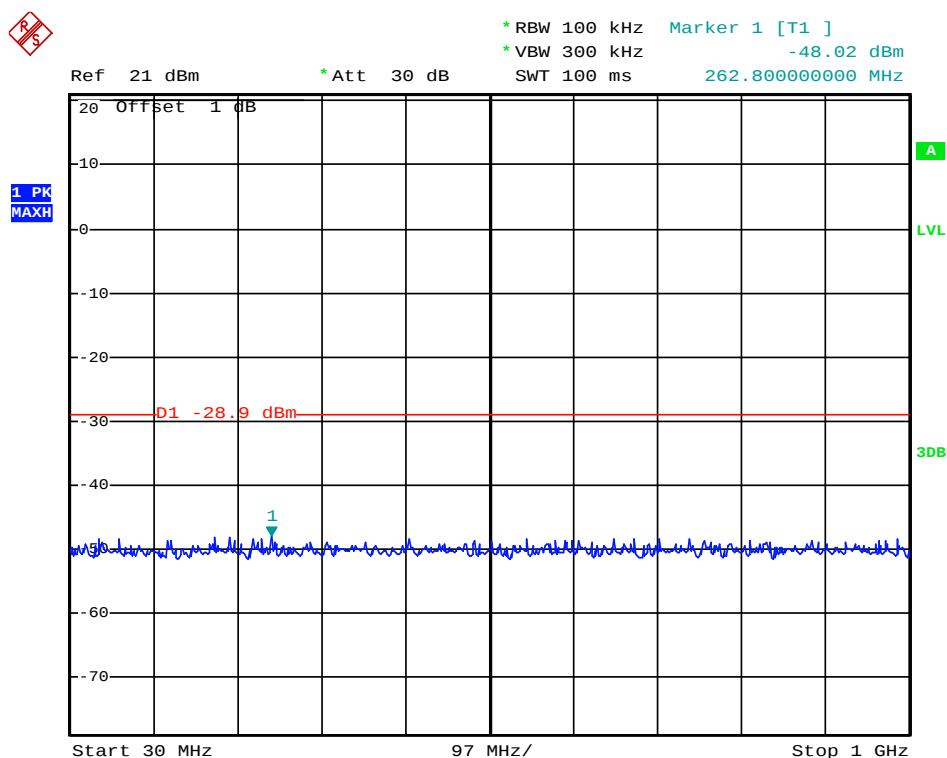


Date: 18.NOV.2013 15:45:43

(Plot 4.6.4 A1: Channel 3: 2422MHz @ 802.11n(40MHz))

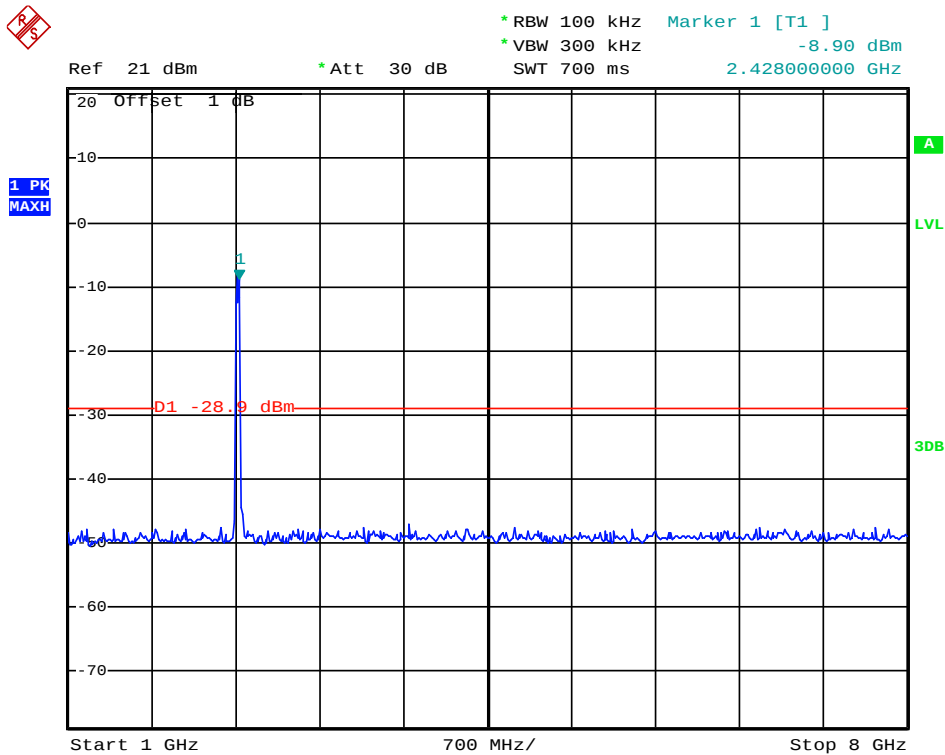


Date: 18.NOV.2013 15:45:28

(Plot 4.6.4 A2: Channel 3: 2422MHz @ 802.11n(40MHz))

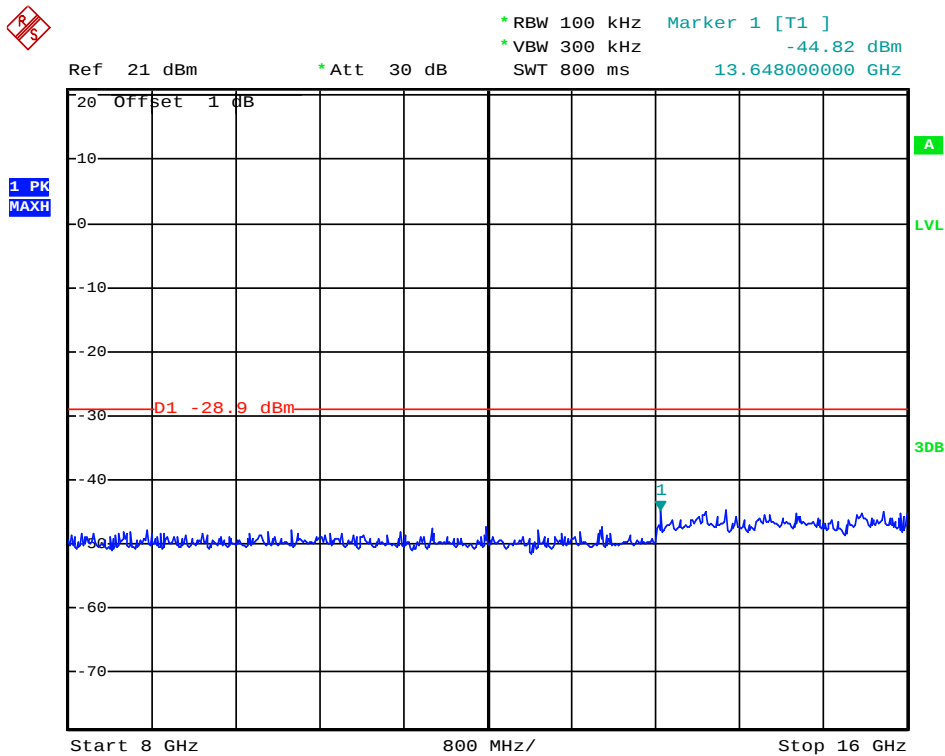


Date: 18.NOV.2013 15:45:54

(Plot 4.6.4 A3: Channel 3: 2422MHz @ 802.11n(40MHz))

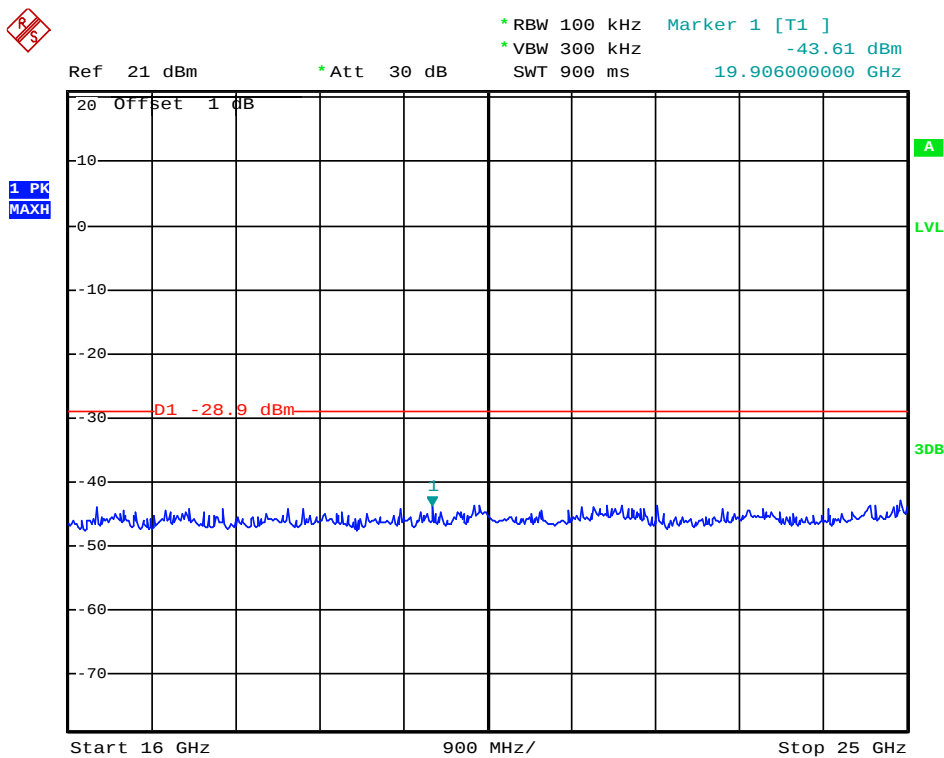


Date: 18.NOV.2013 15:46:06

(Plot 4.6.4 A4: Channel 3: 2422MHz @ 802.11n(40MHz))

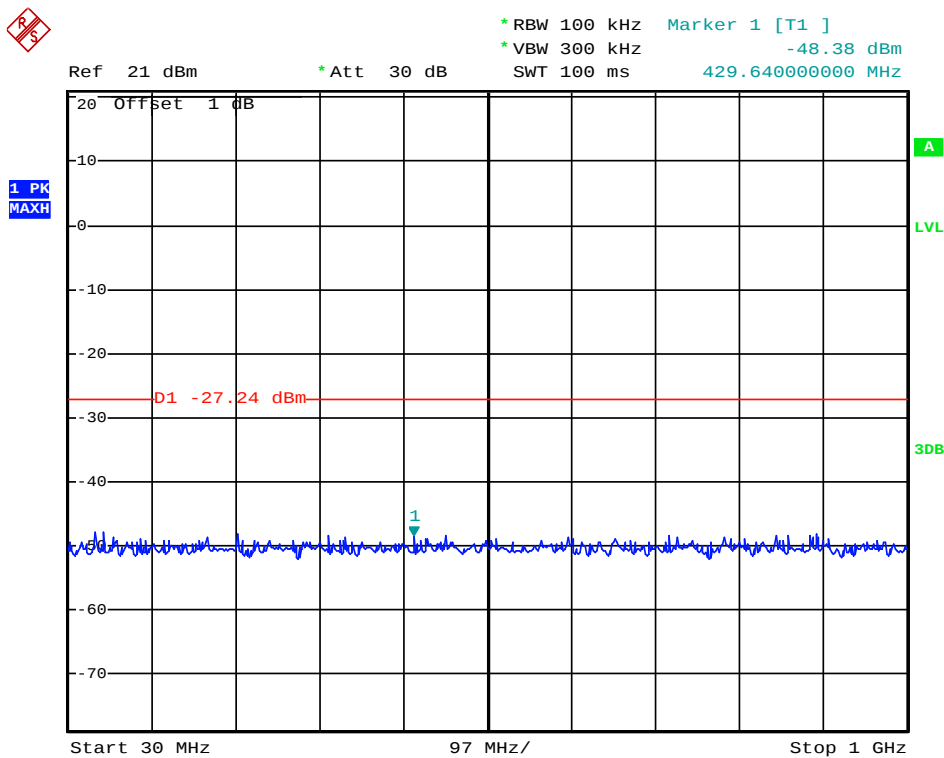


Date: 18.NOV.2013 15:47:00

(Plot 4.6.4 B1: Channel 6: 2437MHz @ 802.11n(40MHz))

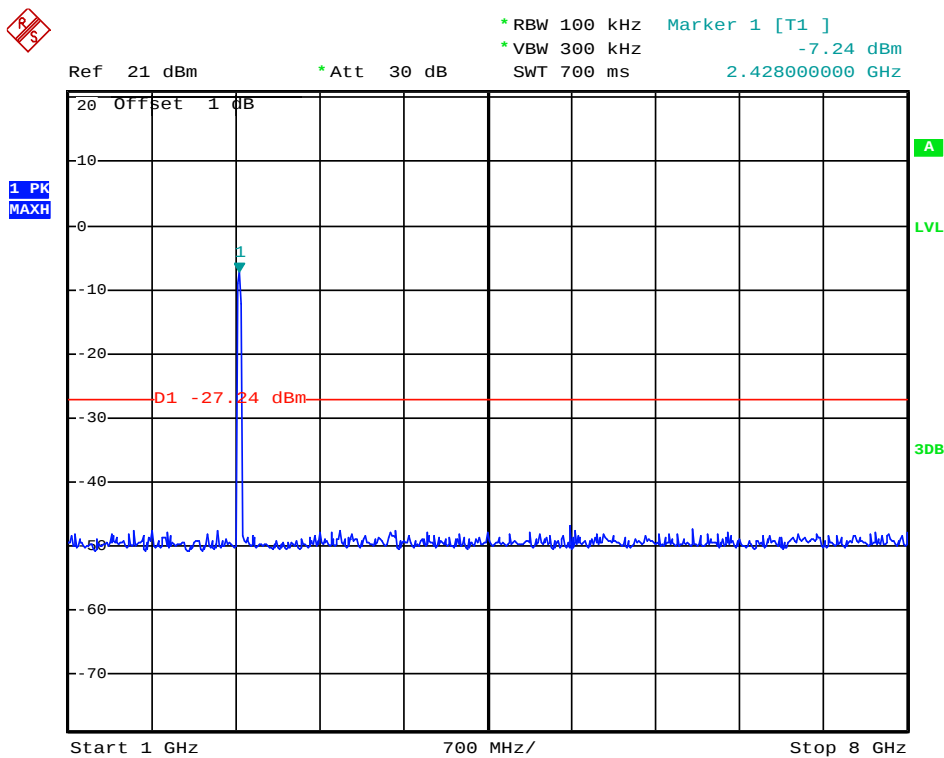


Date: 18.NOV.2013 15:46:46

(Plot 4.6.4 B2: Channel 6: 2437MHz @ 802.11n(40MHz))

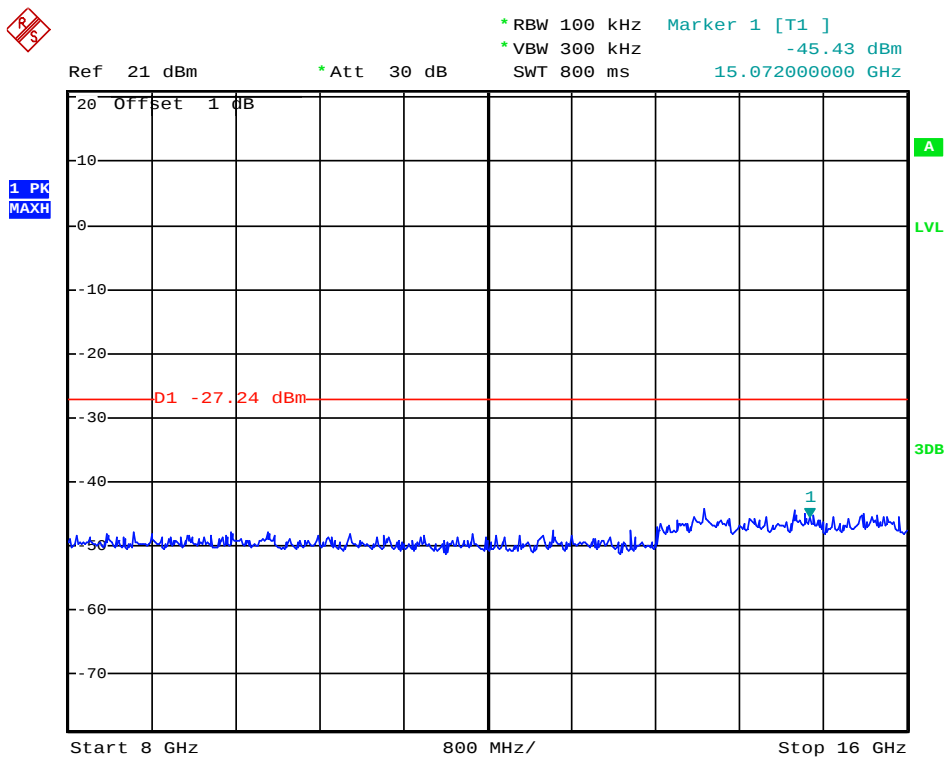


Date: 18.NOV.2013 15:47:11

(Plot 4.6.4 B3: Channel 6: 2437MHz @ 802.11n(40MHz))

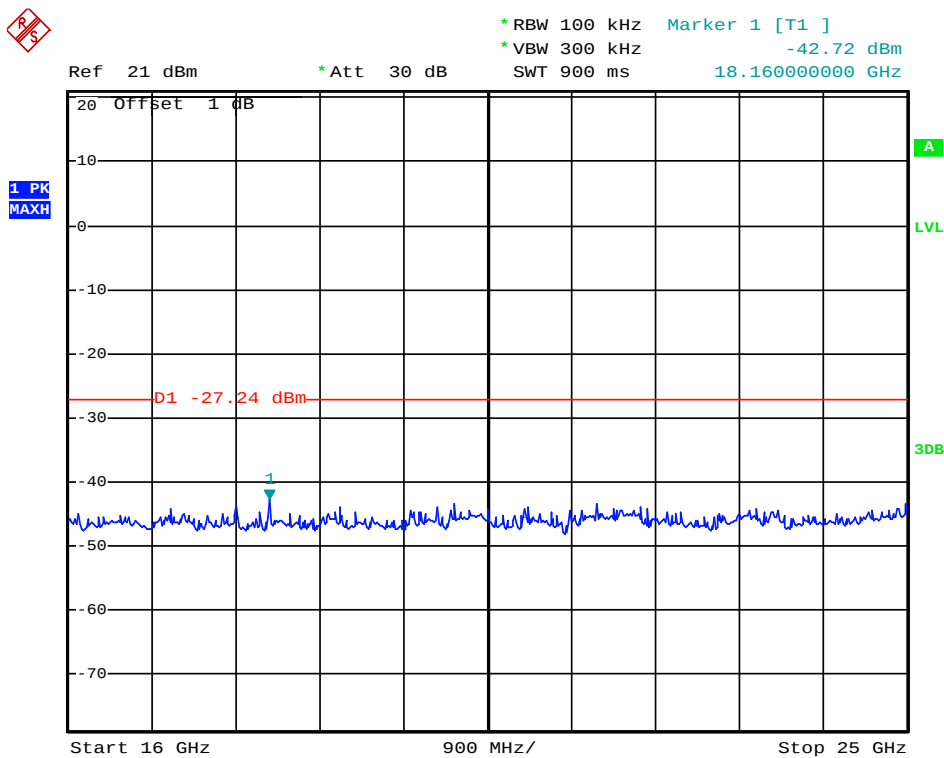


Date: 18.NOV.2013 15:47:23

(Plot 4.6.4 B4: Channel 6: 2437MHz @ 802.11n(40MHz))

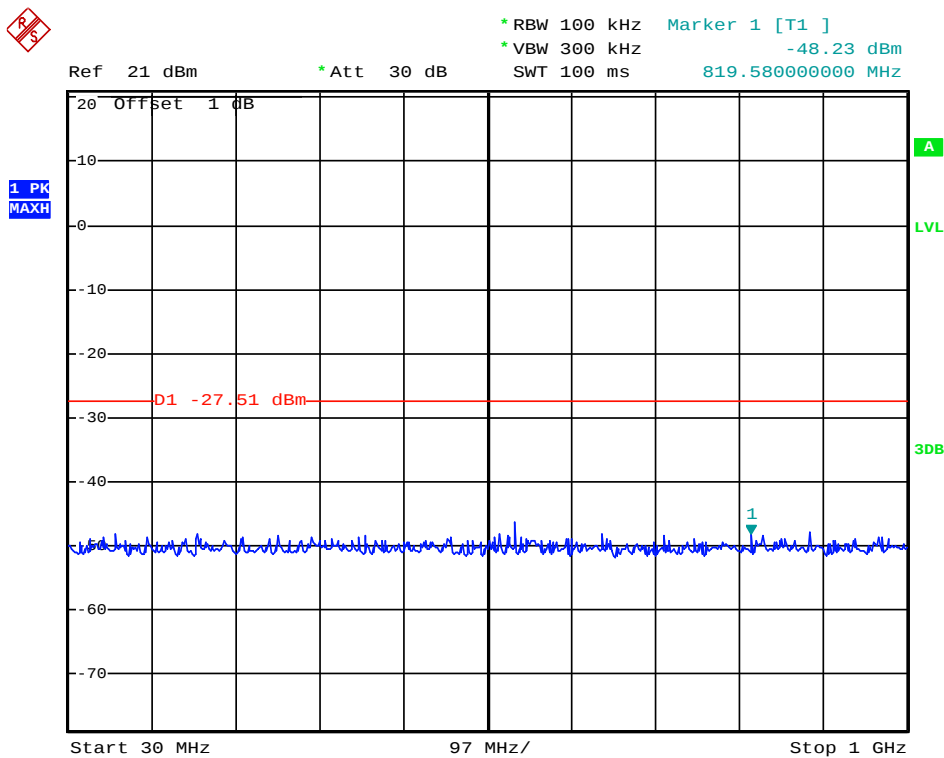


Date: 18.NOV.2013 15:48:27

(Plot 4.6.4 C1: Channel 9: 2452MHz @ 802.11n(40MHz))

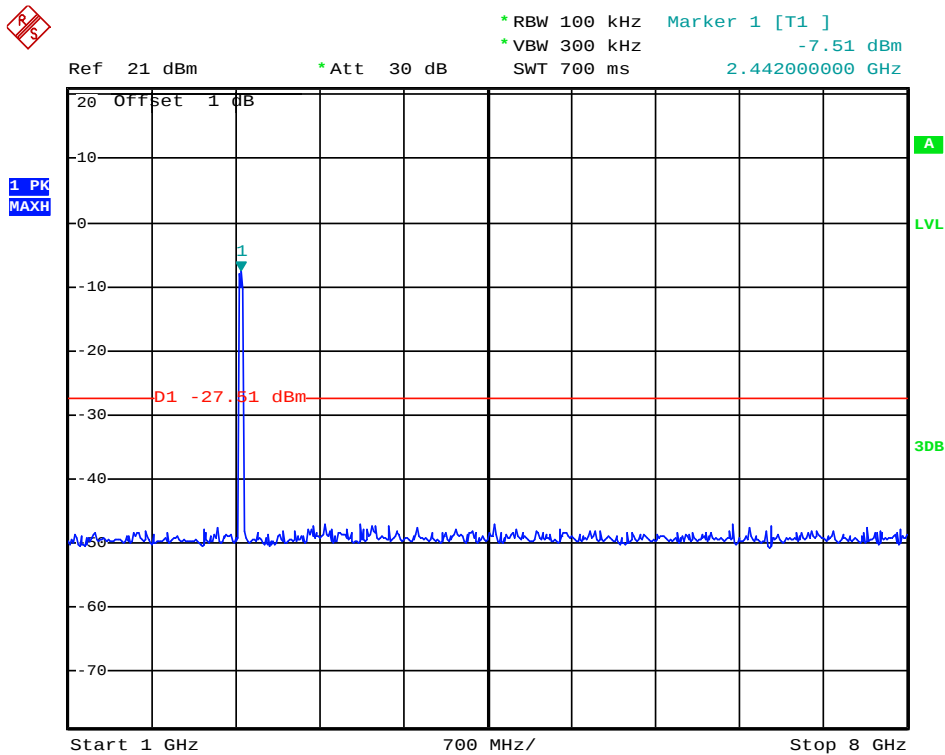


Date: 18.NOV.2013 15:48:15

(Plot 4.6.4 C2: Channel 9: 2452MHz @ 802.11n(40MHz))

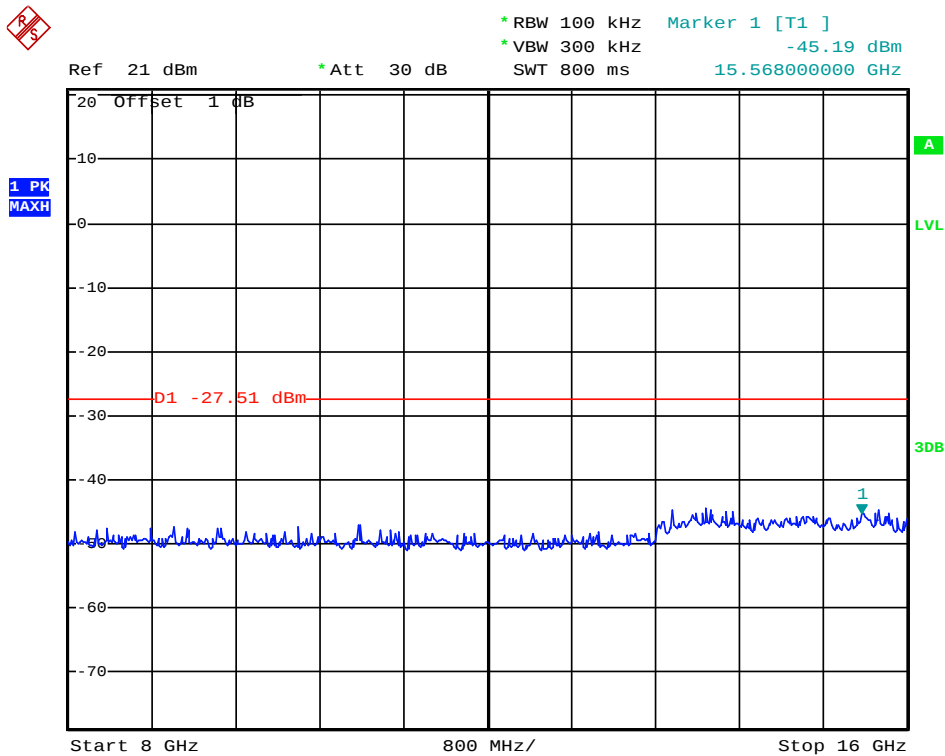


Date: 18.NOV.2013 15:49:00

(Plot 4.6.4 C3: Channel 9: 2452MHz @ 802.11n(40MHz))

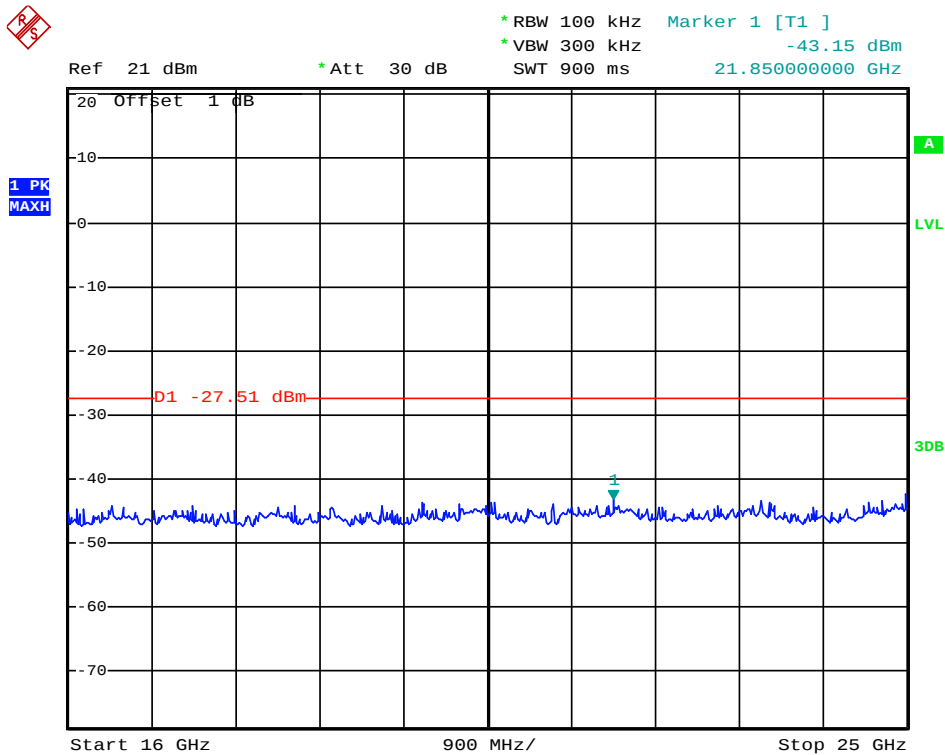


Date: 18.NOV.2013 15:49:12

(Plot 4.6.4 C4: Channel 9: 2452MHz @ 802.11n(40MHz))

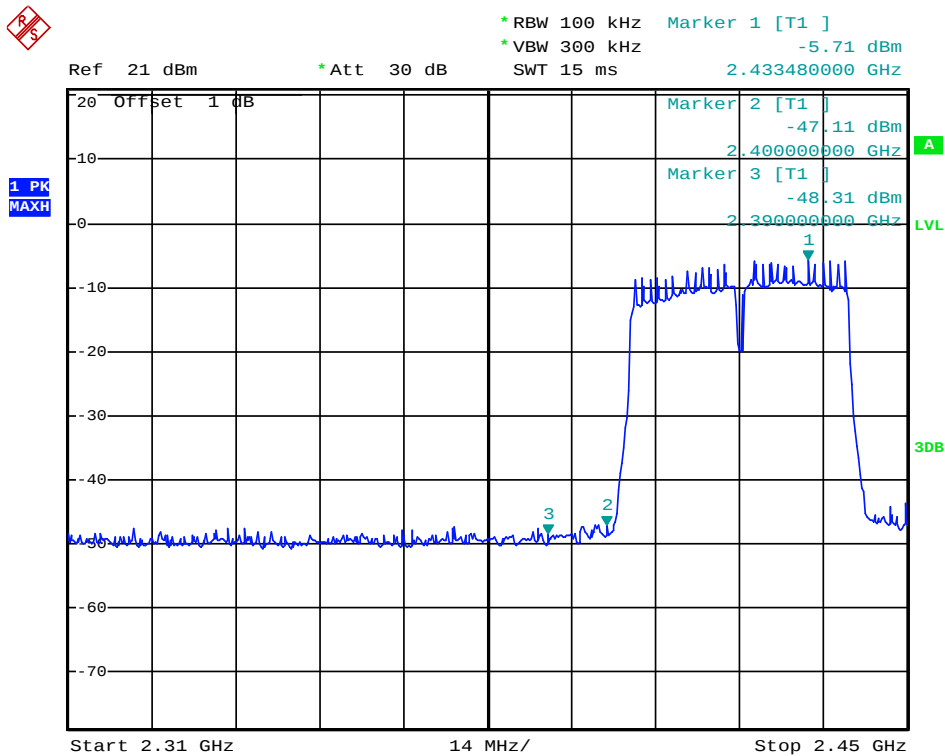

Date: 18.NOV.2013 14:35:23

(Plot 4.6.4 D: Channel 3: 2422MHz @ 802.11n(40MHz))

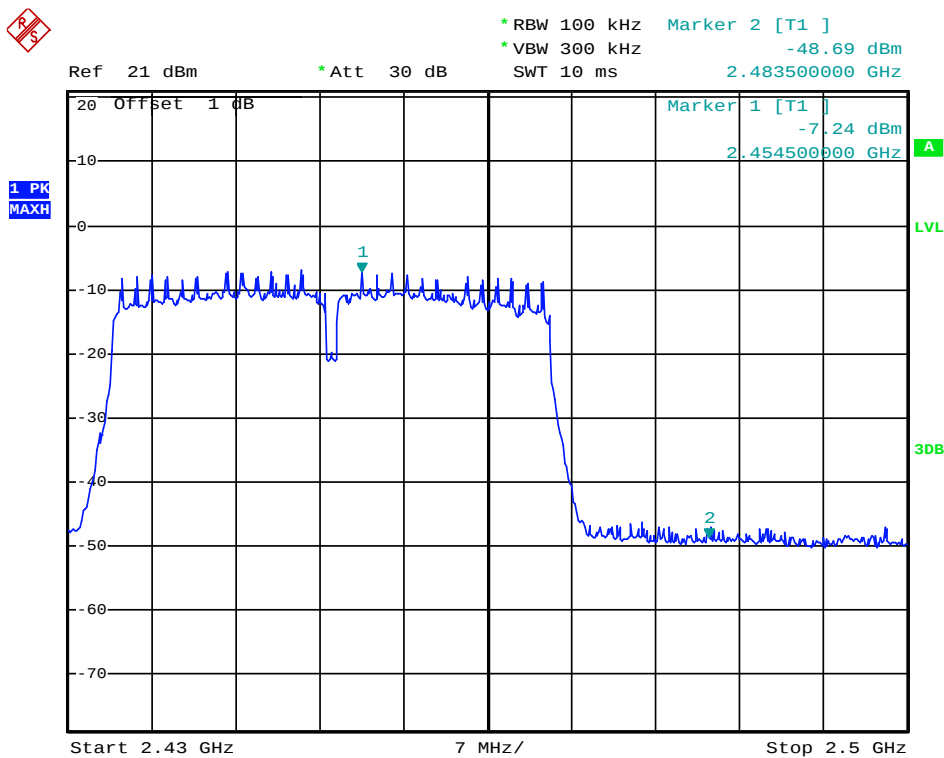


Date: 18.NOV.2013 14:36:04

(Plot 4.6.4 E: Channel 9: 2452MHz @ 802.11n(40MHz))

## 4.7. 6dB Bandwidth

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### TEST RESULTS


#### 4.7.1 801.11b Test Mode

##### A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 1       | 2412            | 10.02                | Plot 4.7.1 A  | $\geq 500$   | PASS    |
| 6       | 2437            | 10.02                | Plot 4.7.1 B  | $\geq 500$   | PASS    |
| 11      | 2462            | 10.02                | Plot 4.7.1 C  | $\geq 500$   | PASS    |


Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.  
2. The test results including the cable loss.

##### B. Test Plots

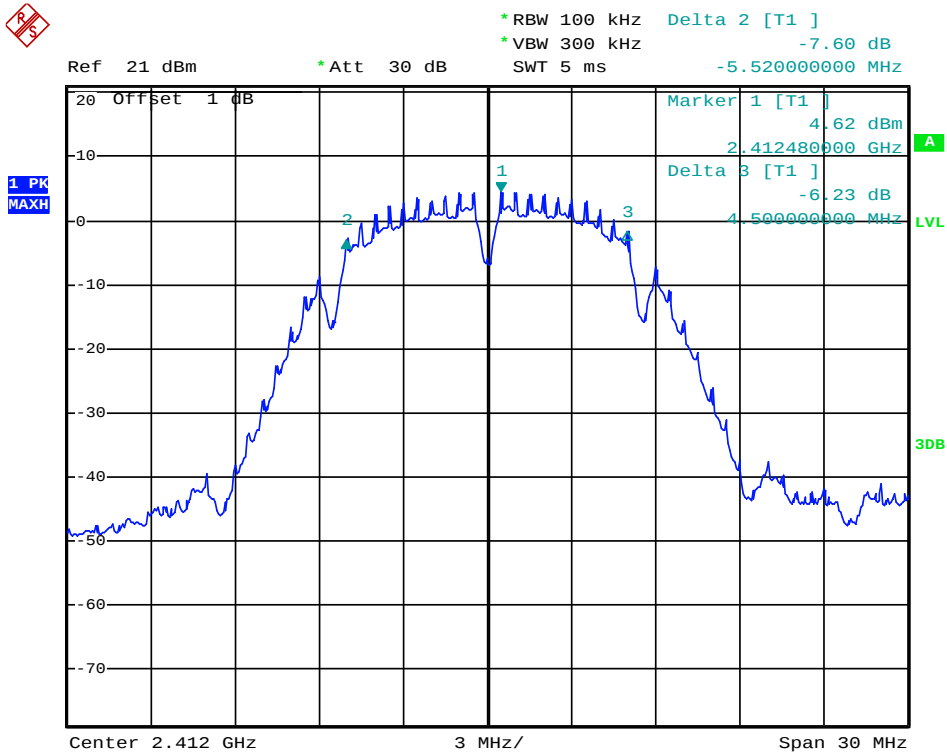


Date: 18.NOV.2013 13:51:08

(Plot 4.7.1 A: Channel 1: 2412MHz @ 802.11b)

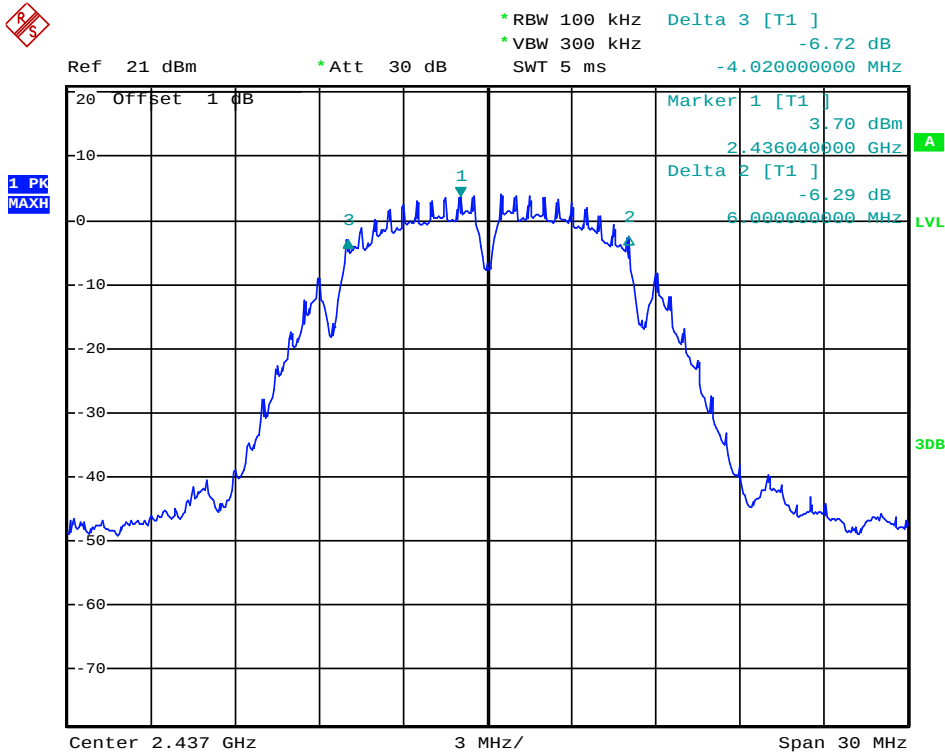

Date: 18.NOV.2013 13:52:41

(Plot 4.7.1 B: Channel 6: 2437MHz @ 802.11b)

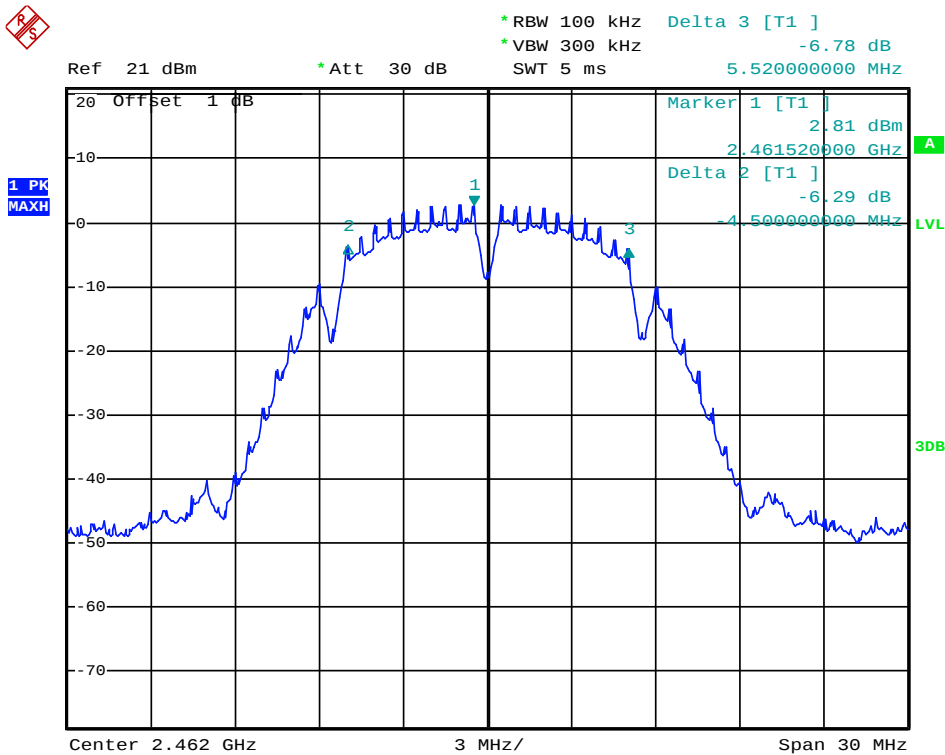

Date: 18.NOV.2013 13:54:29

(Plot 4.7.1 C: Channel 11: 2462MHz @ 802.11b)


4.7.2 801.11g Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 1       | 2412            | 16.44                | Plot 4.7.2 A  | ≥500         | PASS    |
| 6       | 2437            | 16.44                | Plot 4.7.2 B  | ≥500         | PASS    |
| 11      | 2462            | 16.50                | Plot 4.7.2 C  | ≥500         | PASS    |


Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.  
2.The test results including the cable lose.

B. Test Plots

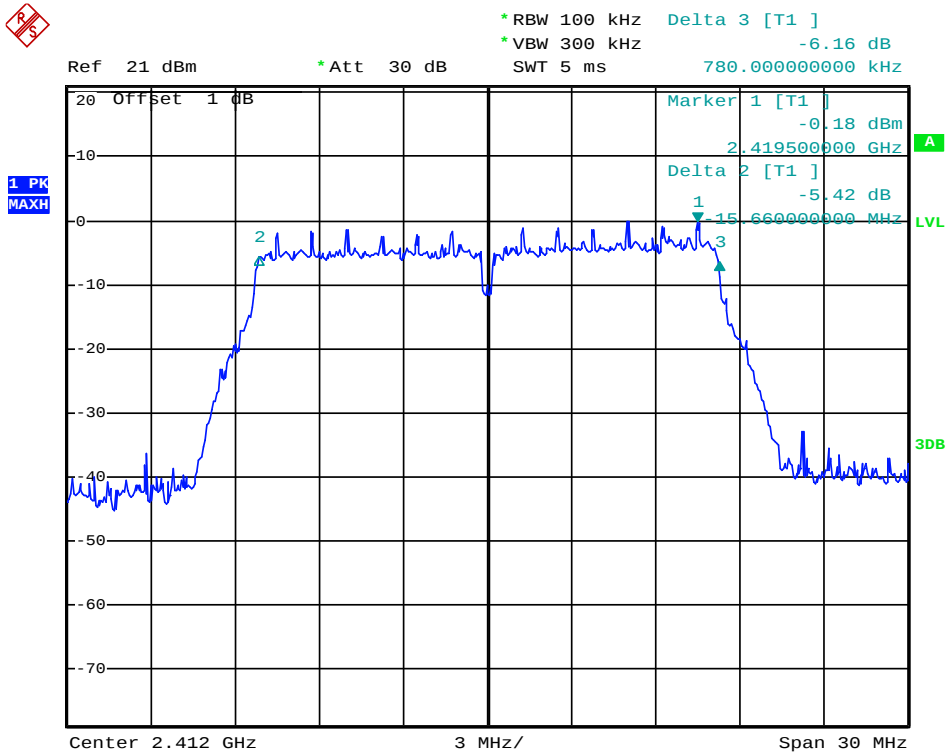


Date: 18.NOV.2013 13:56:01

(Plot 4.7.2 A: Channel 1: 2412MHz @ 802.11g)

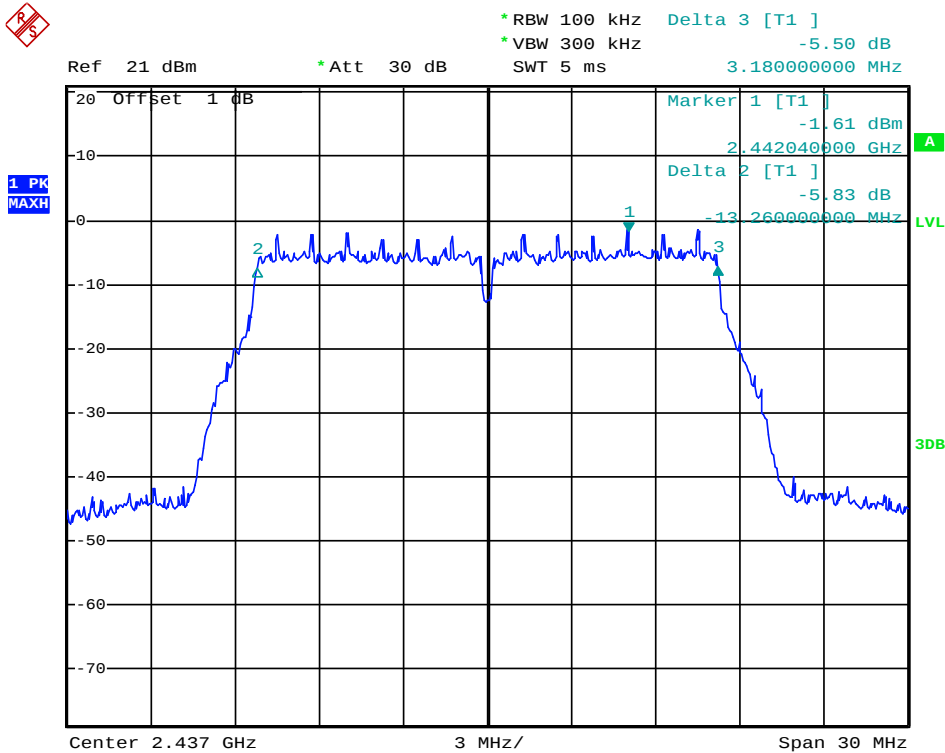

Date: 18.NOV.2013 14:01:02

(Plot 4.7.2 B: Channel 6: 2437MHz @ 802.11g)

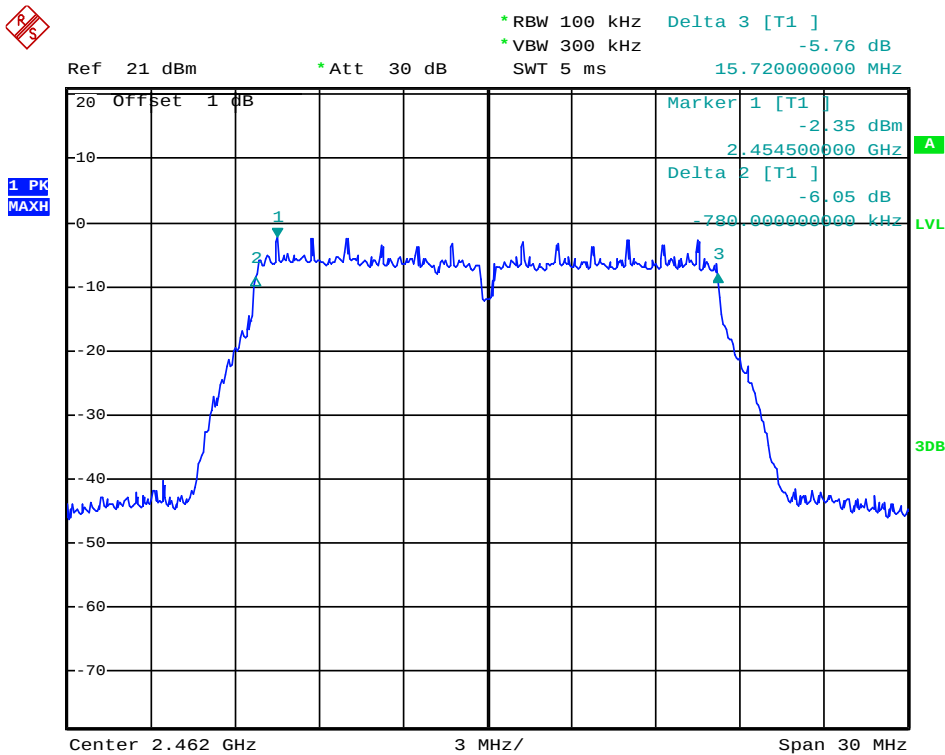

Date: 18.NOV.2013 13:59:48

(Plot 4.7.2 C: Channel 11: 2462MHz @ 802.11g)


4.7.3 801.11n(20MHz) Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 1       | 2412            | 17.64                | Plot 4.7.3 A  | ≥500         | PASS    |
| 6       | 2437            | 17.64                | Plot 4.7.3 B  | ≥500         | PASS    |
| 11      | 2462            | 17.70                | Plot 4.7.3 C  | ≥500         | PASS    |


Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.  
2.The test results including the cable lose.

B. Test Plots

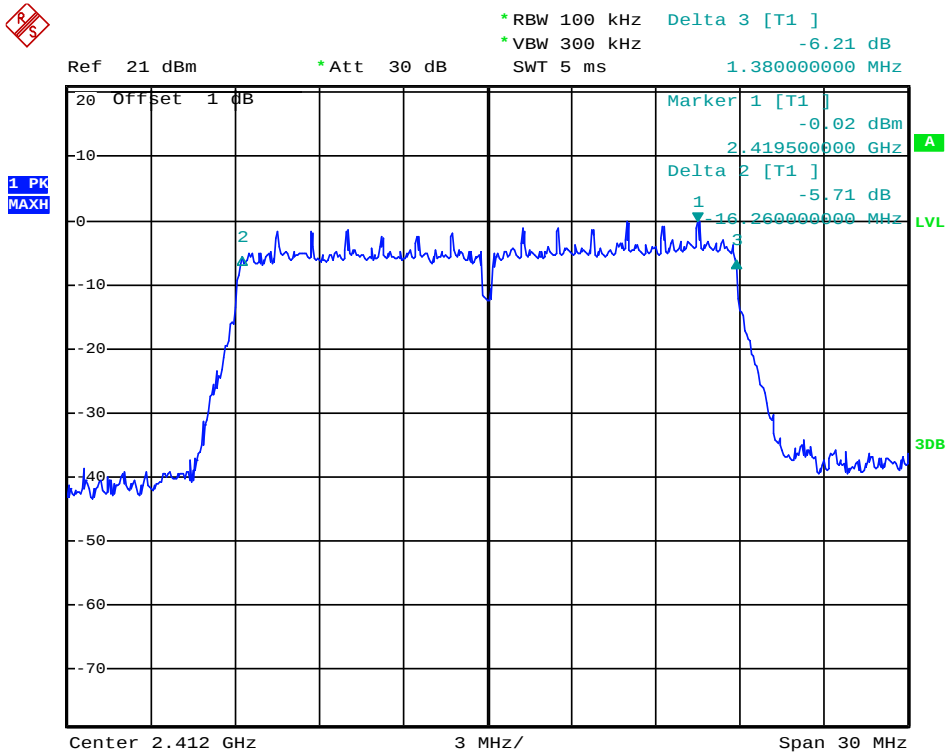


Date: 18.NOV.2013 14:02:14

(Plot 4.7.3 A: Channel 1: 2412MHz @ 802.11n(20MHz))

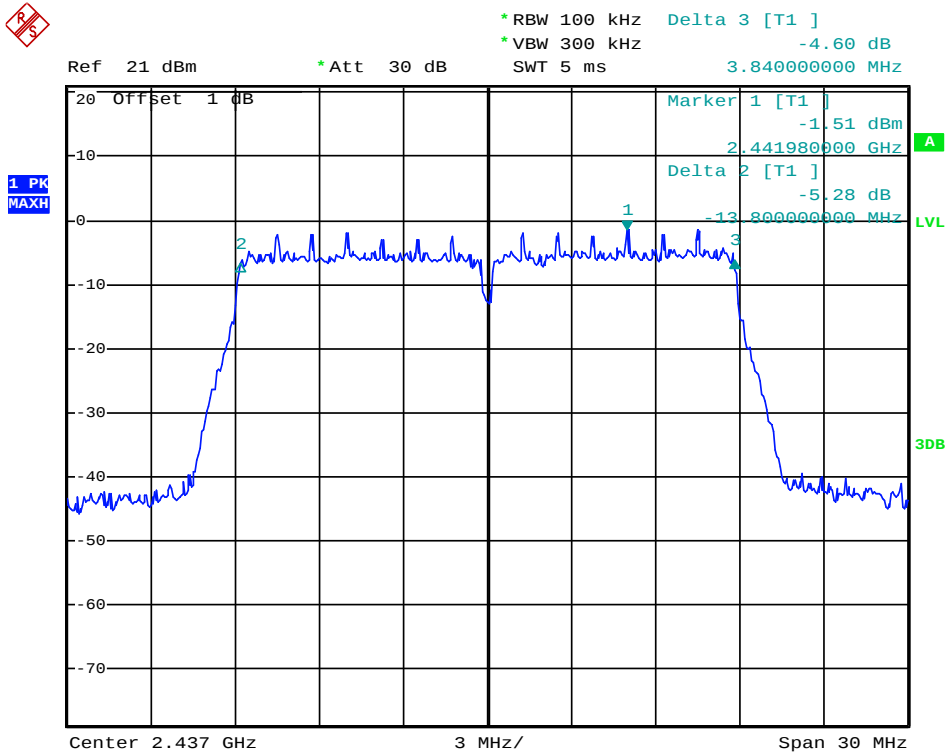

Date: 18.NOV.2013 14:03:51

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n(20MHz))

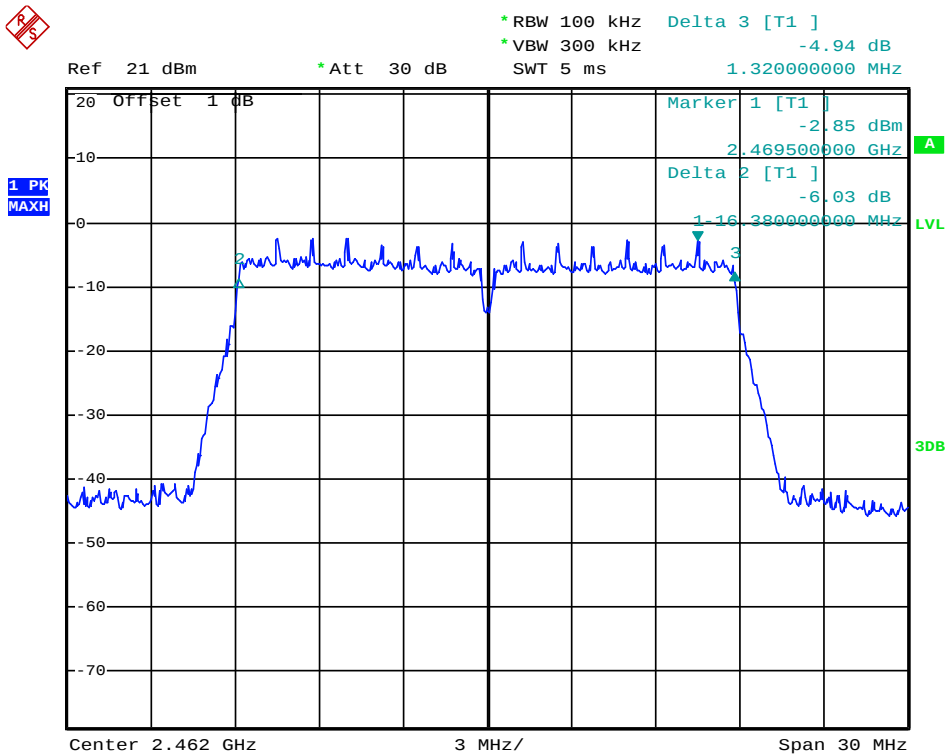

Date: 18.NOV.2013 14:04:37

(Plot 4.7.3 C: Channel 11: 2462MHz @ 802.11n(20MHz))


4.7.4 801.11n(40MHz) Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 3       | 2422            | 35.60                | Plot 4.7.4 A  | ≥500         | PASS    |
| 6       | 2437            | 35.70                | Plot 4.7.4 B  | ≥500         | PASS    |
| 9       | 2452            | 35.60                | Plot 4.7.4 C  | ≥500         | PASS    |


Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.  
2.The test results including the cable lose.

B. Test Plots

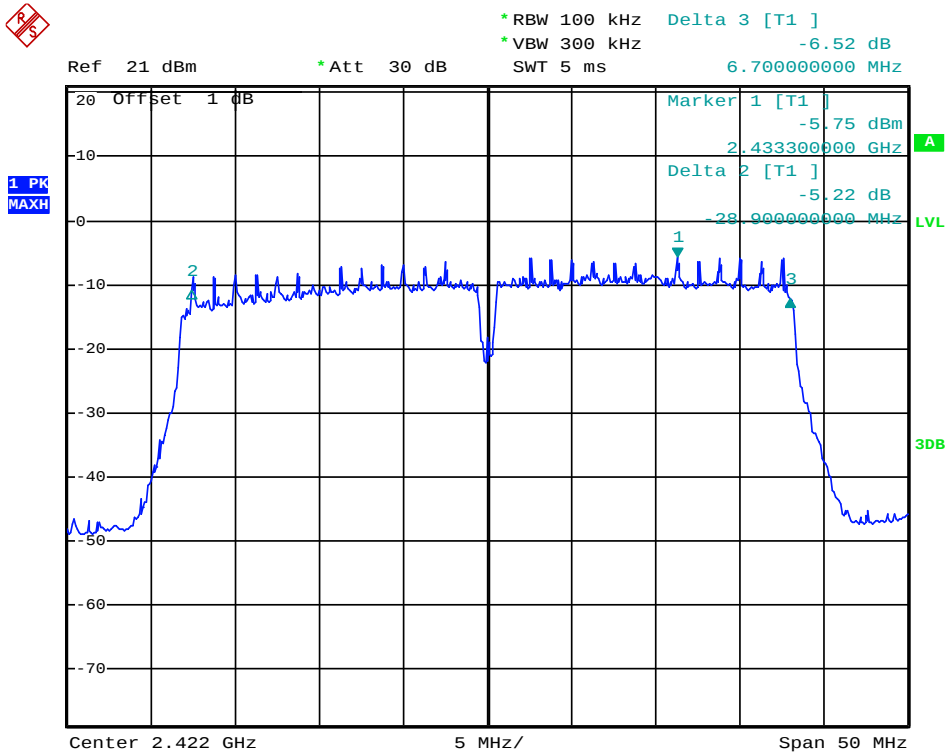


Date: 18.NOV.2013 14:05:50

(Plot 4.7.4 A: Channel 3: 2422MHz @ 802.11n(40MHz))

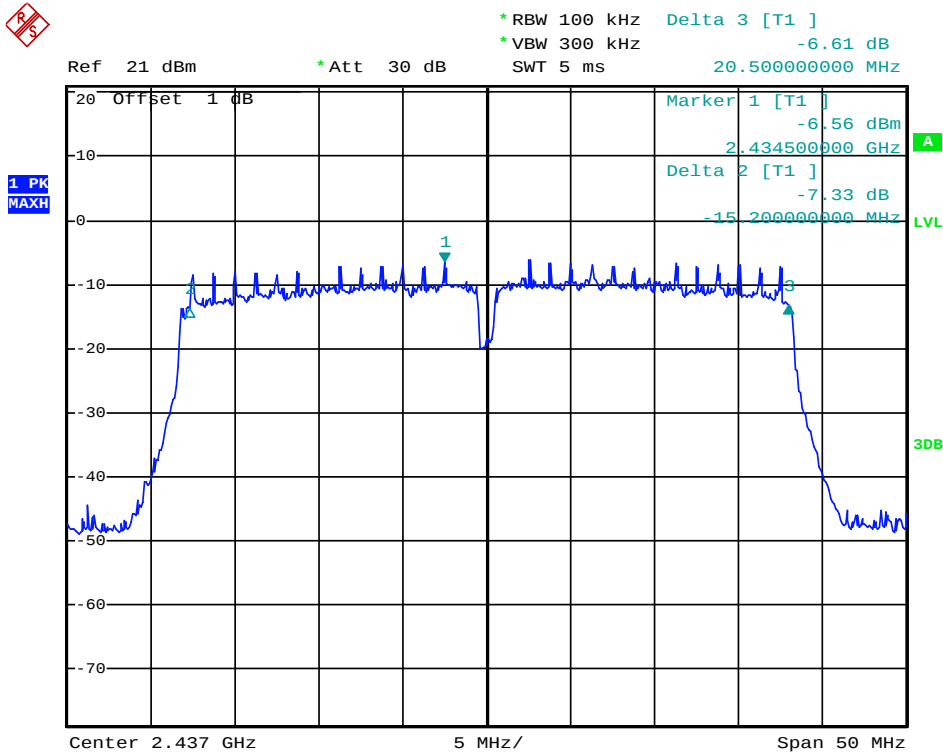

Date: 18.NOV.2013 14:06:43

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n(40MHz))

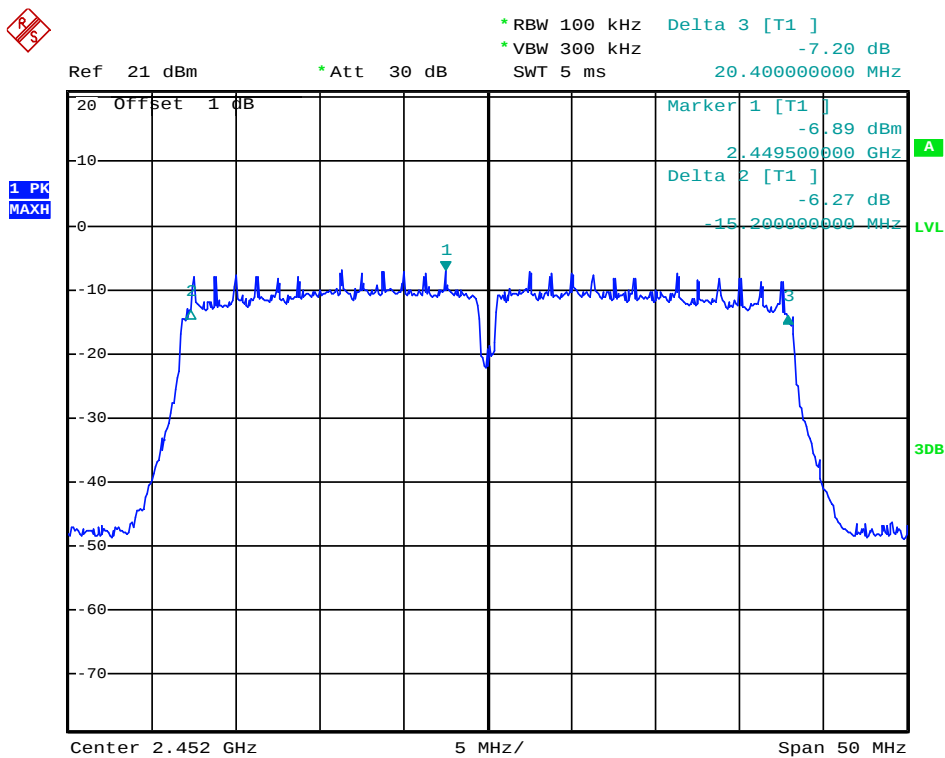

Date: 18.NOV.2013 14:07:47

(Plot 4.7.4 C: Channel 9: 2452MHz @ 802.11n(40MHz))

## 4.8. Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The WLAN and Bluetooth sharing same antenna and the maximum antenna gain of WLAN used was 0.00 dBi.



## **5. External and Internal Photos of the EUT**


### **External photos of the EUT**










Internal photos of the EUT

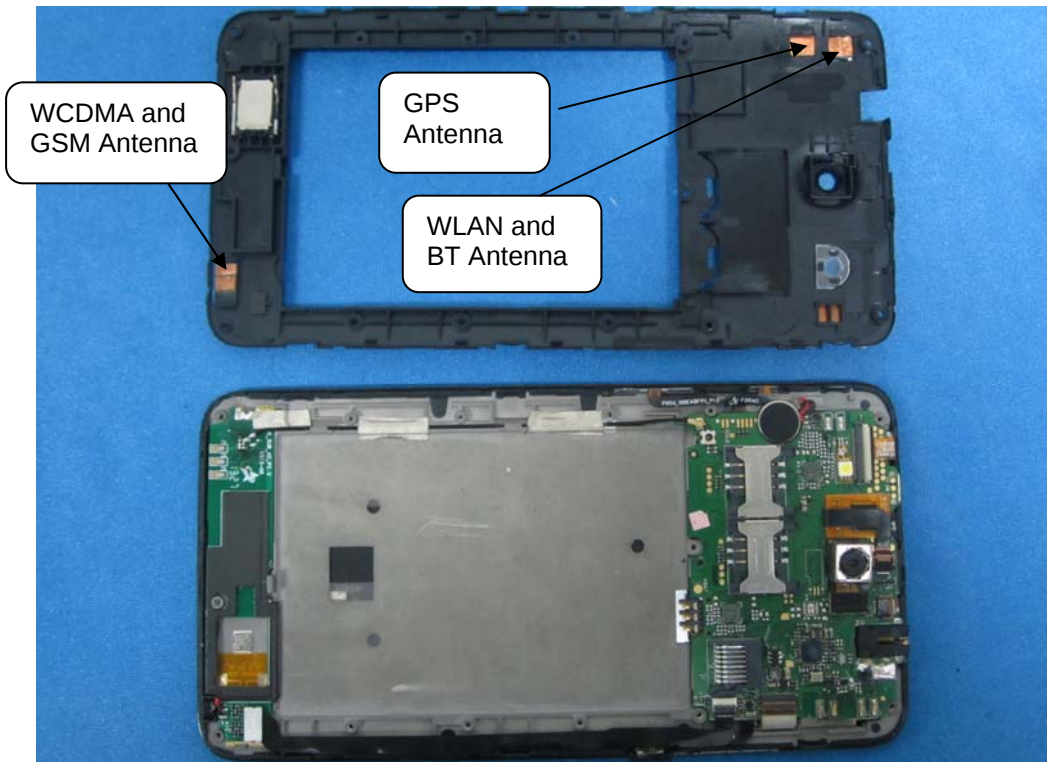

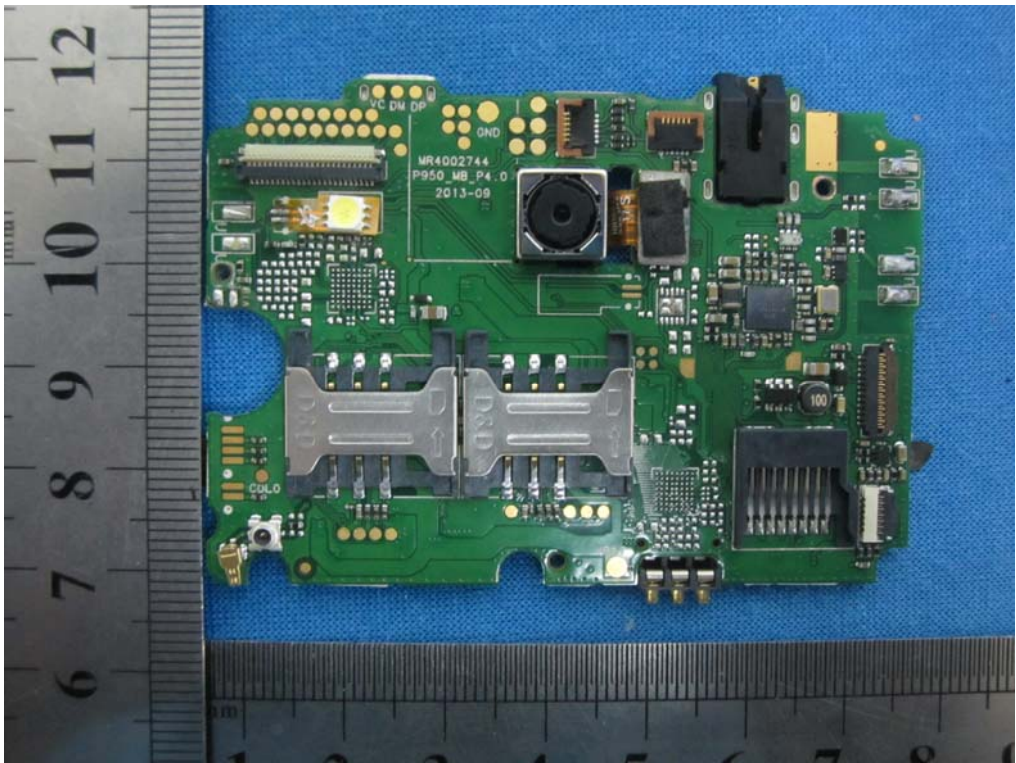



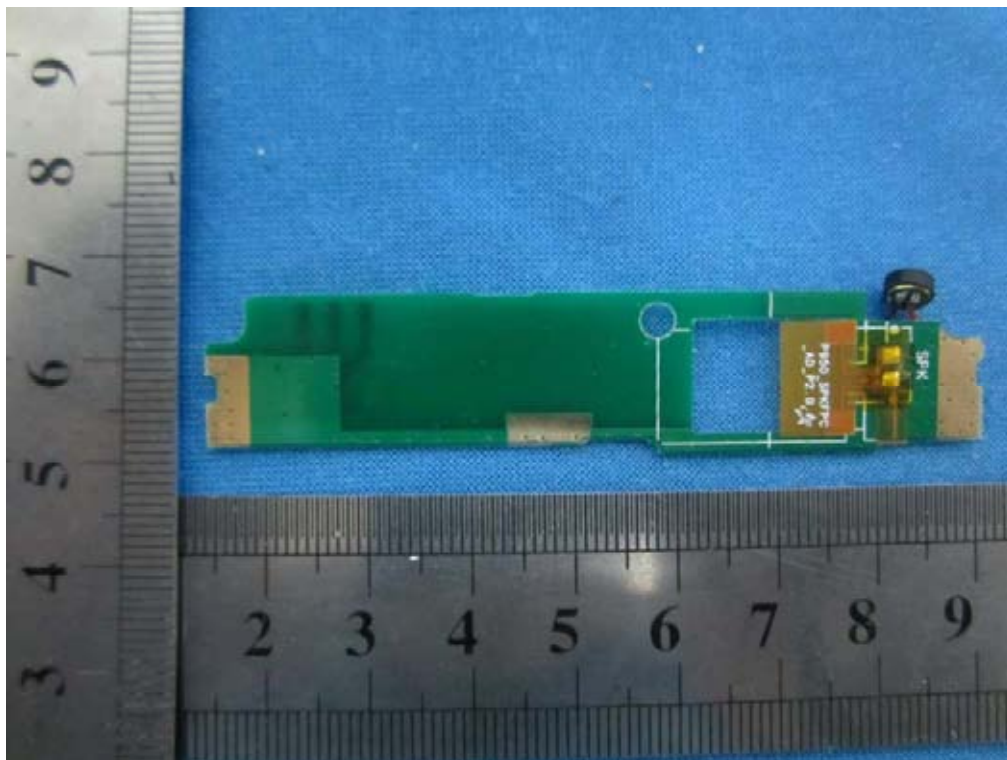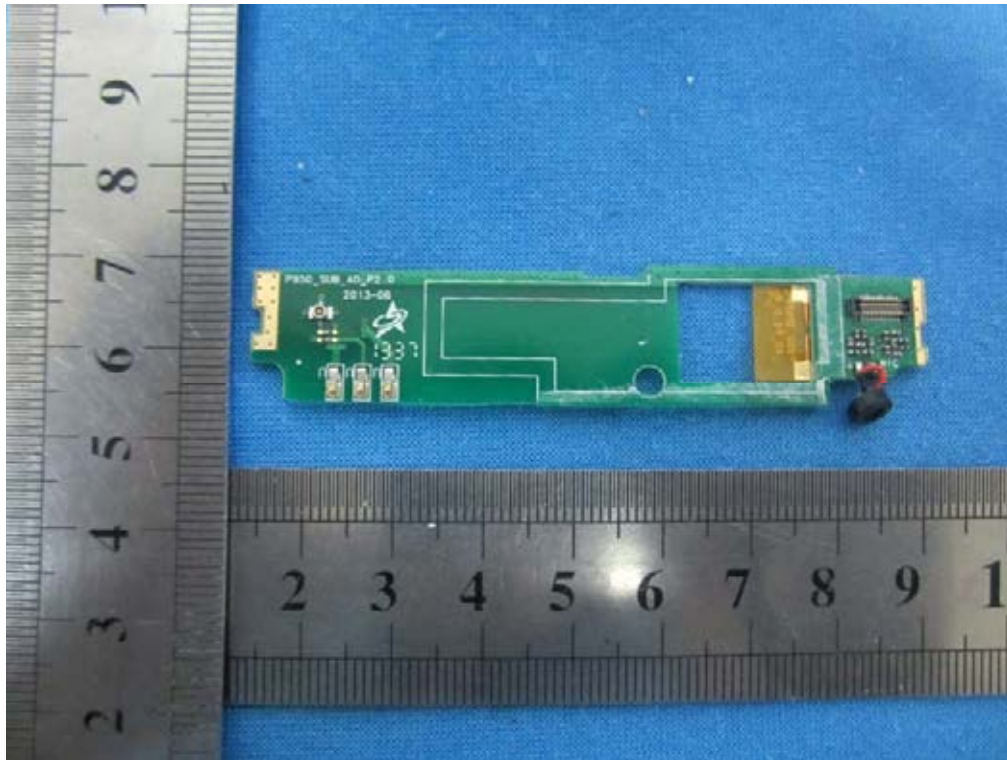

.....End of Report.....