

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 4**

CERTIFICATION TEST REPORT

For

Andon Beacon

MODEL NUMBER: AB21-1LBN

FCC ID : 2AB2Q-AB211LBN

IC : 10256A-AB211LBN

REPORT NUMBER: 4792319846-1-RF-2

ISSUE DATE: September 3, 2026

Prepared for

LEEDARSON LIGHTING CO., LTD.

**Xingtai Industrial Park, Economic Development Zone of Changtai County.
ZHANGZHOU CITY Fujian 363900**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd., Song Shan Lake Branch

**Room 101, Building 2, Zhihui City Phase I, No.4, Information Road, Songshan
Lake, Dongguan, Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	September 3, 2026	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a)(1) (i) RSS-247 Clause 6.2.3.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (2) RSS-247 Clause 6.2.3.2	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a)	Pass
4	Number of Hopping Frequency	15.247 (a) (i) RSS-247 Clause 6.2.3.1 (b)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (i) RSS-247 Clause 6.2.3.1 (b)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 6.6	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 6.6 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

Note:

1. This report is also performed according to ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 standards.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART C, ISED RSS-247 Issue 4 and ISED RSS-GEN Issue 5> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM PEAK OUTPUT POWER.....</i>	<i>9</i>
5.3. <i>CHANNEL LIST.....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>10</i>
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>11</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED	12
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>15</i>
7.2. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i>	<i>16</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>18</i>
7.4. <i>CARRIER FREQUENCY SEPARATION.....</i>	<i>19</i>
7.5. <i>NUMBER OF HOPPING FREQUENCIES</i>	<i>21</i>
7.6. <i>TIME OF OCCUPANCY (DWELL TIME).....</i>	<i>23</i>
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....</i>	<i>25</i>
8. RADIATED TEST RESULTS.....	27
8.1. <i>SPURIOUS EMISSIONS (1 GHz ~ 3 GHz).....</i>	<i>34</i>
8.2. <i>SPURIOUS EMISSIONS (3 GHz ~ 10 GHz).....</i>	<i>40</i>
8.3. <i>SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....</i>	<i>46</i>
8.4. <i>SPURIOUS EMISSIONS BELOW 30 MHz</i>	<i>52</i>
9. AC POWER LINE CONDUCTED EMISSIONS.....	55
10. ANTENNA REQUIREMENTS.....	58
11. TEST DATA	59

11.1.	<i>Appendix A: 20dB Emission Bandwidth</i>	59
11.1.1.	Test Result	59
11.1.2.	Test Graphs	60
11.2.	<i>Appendix B: Occupied Channel Bandwidth</i>	61
11.2.1.	Test Result	61
11.2.2.	Test Graphs	62
11.3.	<i>Appendix C: Maximum conducted output power</i>	63
11.3.1.	Test Result	63
11.4.	<i>Appendix D: Carrier frequency separation</i>	64
11.4.1.	Test Result	64
11.4.2.	Test Graphs	65
11.5.	<i>Appendix E: Time of occupancy</i>	66
11.5.1.	Test Result	66
11.5.2.	Test Graphs	67
11.6.	<i>Appendix F: Number of hopping channels</i>	68
11.6.1.	Test Result	68
11.6.2.	Test Graphs	69
11.7.	<i>Appendix G: Band edge measurements</i>	70
11.7.1.	Test Result	70
11.7.2.	Test Graphs	71
11.8.	<i>Appendix H: Conducted Spurious Emission</i>	73
11.8.1.	Test Result	73
11.8.2.	Test Graphs	74
11.9.	<i>Appendix I: Duty Cycle</i>	77
11.9.1.	Test Result	77
11.9.2.	Test Graphs	78

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: Xingtai Industrial Park, Economic Development Zone of
Changtai County. ZHANGZHOU CITY Fujian 363900

Manufacturer Information

Company Name: LEEDARSON LIGHTING CO., LTD.
Address: Xingtai Industrial Park, Economic Development Zone of
Changtai County. ZHANGZHOU CITY Fujian 363900

EUT Information

EUT Name: Andon Beacon
Model: AB21-1LBN
Sample Received Date: July 8, 2026
Sample Status: Normal
Sample ID: 9935580
Date of Tested: July 8, 2026~ September 3, 2026

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 4	PASS
ISED RSS-GEN Issue 5	PASS


Prepared By:



Mick Zhang

Engineer Project Associate

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024, ISED RSS-247 Issue 4 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
20dB Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Maximum Conducted Output Power	±0.743 dB
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Andon Beacon
Model	AB21-1LBN
Frequency Range:	902.3 MHz to 914.9 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	Lora-FHSS
Data Rates:	125 kbps
Normal Test Voltage:	DC 7.3V

Note: The EUT only supports 125kHz channel bandwidths mode.

5.2. MAXIMUM PEAK OUTPUT POWER

Test Mode	Bit Rate	Operation Frequency	Maximum Conducted PEAK Output Power (dBm)
Lora	125 kbps	902.3 MHz to 914.9 MHz	20.86

5.3. CHANNEL LIST

Channel List									
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	14	904.9	27	907.5	40	910.1	53	912.7
2	902.5	15	905.1	28	907.7	41	910.3	54	912.9
3	902.7	16	905.3	29	907.9	42	910.5	55	913.1
4	902.9	17	905.5	30	908.1	43	910.7	56	913.3
5	903.1	18	905.7	31	908.3	44	910.9	57	913.5
6	903.3	19	905.9	32	908.5	45	911.1	58	913.7
7	903.5	20	906.1	33	908.7	46	911.3	59	913.9
8	903.7	21	906.3	34	908.9	47	911.5	60	914.1
9	903.9	22	906.5	35	909.1	48	911.7	61	914.3
10	904.1	23	906.7	36	909.3	49	911.9	62	914.5
11	904.3	24	906.9	37	909.5	50	912.1	63	914.7
12	904.5	25	907.1	38	909.7	51	912.3	64	914.9
13	904.7	26	907.3	39	909.9	52	912.5		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
Lora	CH 1(Low Channel), CH 33(MID Channel), CH64(High Channel)	902.3 MHz, 908.7 MHz, 914.9 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 902 ~ 928MHz Band				
Test Software		SmartRF Studio 7		
Modulation Mode	Transmit Antenna Number	Test Channel		
		LCH	MCH	HCH
Lora-FHSS	1	default	default	default

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency Band (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	902-920	Metal antenna	0.36

Note: The value of the antenna gain was declared by customer.

Modulation	Transmit and Receive Mode	Description
Lora-FHSS	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note:

1.BT&Lora can't transmit simultaneously. (declared by client)

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	AC Adaptor	Lenovo	ADLX65YCC3D	Input: AC 100-240V, 1.8A, 50-60Hz Output: DC 20V, 3.25A, 65.0W Max

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

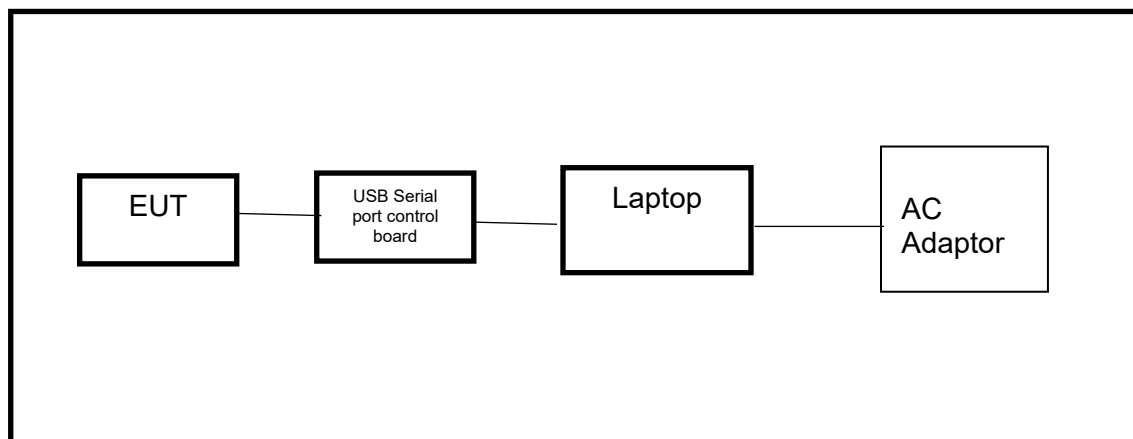

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test.

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name	Version	
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.12, 2025	Sep.11, 2026
Horn Antenna	ETS-Lindgren	3117	00213191	Jan.29,2026	Jan.28,2029
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV8-2350-2400-	4	Sep.12, 2025	Sep.11, 2026

		2483.5- 2533.5-40SS			
Software					
Description	Manufacturer	Name		Version	
Test Software for Radiated Emission	Tonscend	JS32-RE		5.0.0	
Test Software for Radiated Emissions	Farad	EZ-EMC		Ver. UL-3A1	

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026


7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

PROCEDURE

Refer to ANSI C63.10-2020 Zero – Span Spectrum Analyzer method.

RESULTS

Please refer to appendix I.

7.2. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (a) (1) RSS-247 Clause 6.2.3.1 (a)	20 dB Bandwidth	500 kHz	902 - 928
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	902 - 928


TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: $\geq 3 \times \text{RBW}$
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

RESULTS

Please refer to appendix A&B.

7.3. CONDUCTED OUTPUT POWER

LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (b) (1) ISED RSS-247 Clause 6.2.3.2	Peak Conducted Output Power	1 watt for systems employing at least 50 hopping channels	902 - 928

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

RESULTS

Please refer to appendix C.

7.4. CARRIER FREQUENCY SEPARATION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247 (a) (1) ISED RSS-247 Clause 6.2.3.1 (a)	Carrier Frequency Separation	Minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	902 - 928

TEST PROCEDURE


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

RESULTS

Please refer to Appendix D.

7.5. NUMBER OF HOPPING FREQUENCIES

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR 15.247 (a) (1) III ISED RSS-247 Clause 6.2.3.1 (b)	Number of Hopping Frequency	1. if the 20 dB bandwidth of the hopping channel is less than 250 kHz, at least 50 hopping channels 2. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, at least 25 hopping channels


TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

RESULTS

Please refer to appendix F.

7.6. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
CFR 47 15.247 (a) (i) ISED RSS-247 Clause 6.2.3.1 (b)	Time of Occupancy (Dwell Time)	1.If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. 2. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
VBW	$\geq$ RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Measure the maximum time duration of one single pulse.
A Period Time = (channel number)*0.4

TEST SETUP

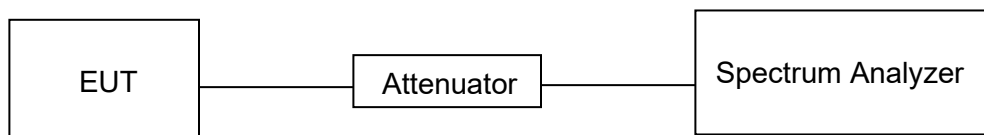

TEST ENVIRONMENT

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

RESULTS

Please refer to appendix E.

7.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 6.6	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.

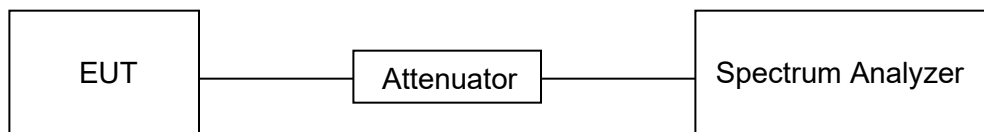TEST SETUP**TEST ENVIRONMENT**

Temperature	24.2 °C	Relative Humidity	61.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V

TEST DATE / ENGINEER

Test Date	July 30, 2026	Test By	Niki Zhu
-----------	---------------	---------	----------

RESULTS

Please refer to appendix G&H.

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5400	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

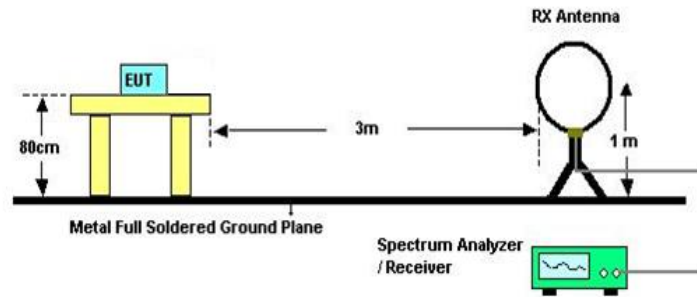


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

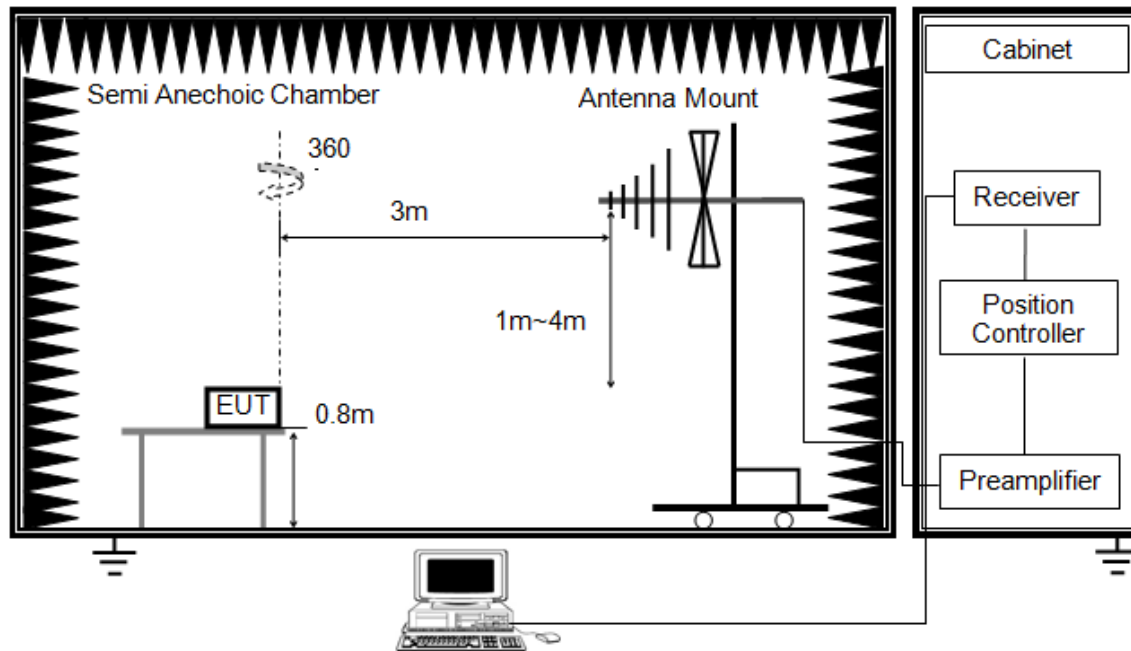


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

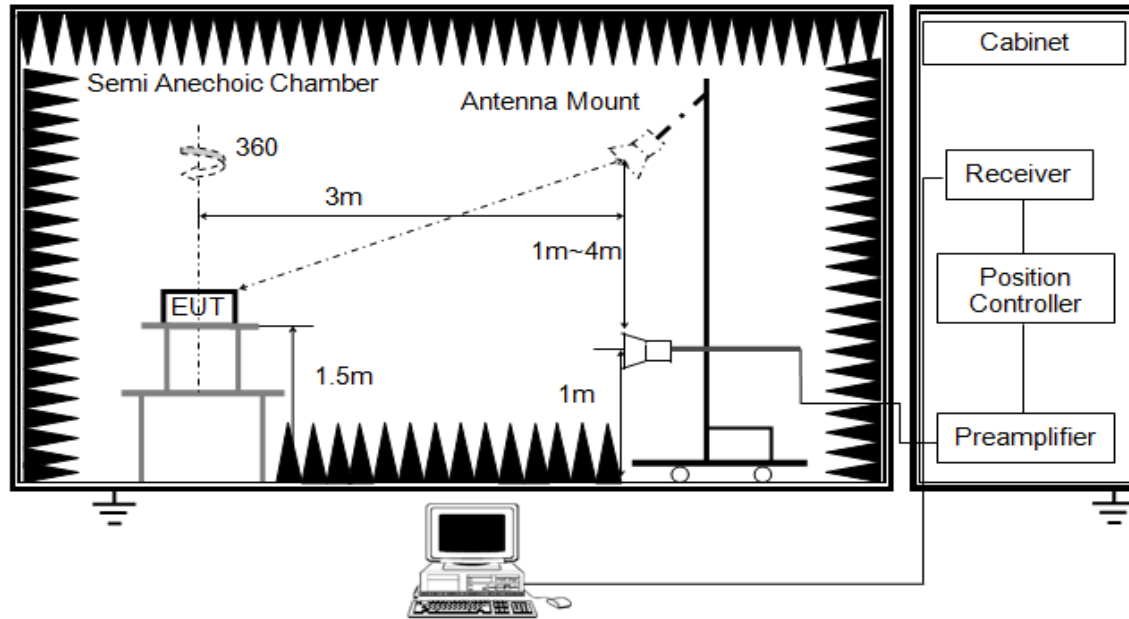


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

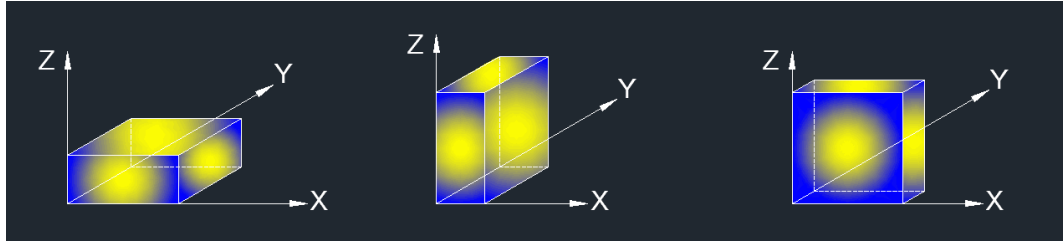

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 10 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $\text{VBW} = 1/\text{Ton}$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	61 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.3V


TEST DATE / ENGINEER

Test Date	August 4, 2026	Test By	Zhenlang Li
-----------	----------------	---------	-------------

RESULTS

8.1. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)


TX Radiated Test Result

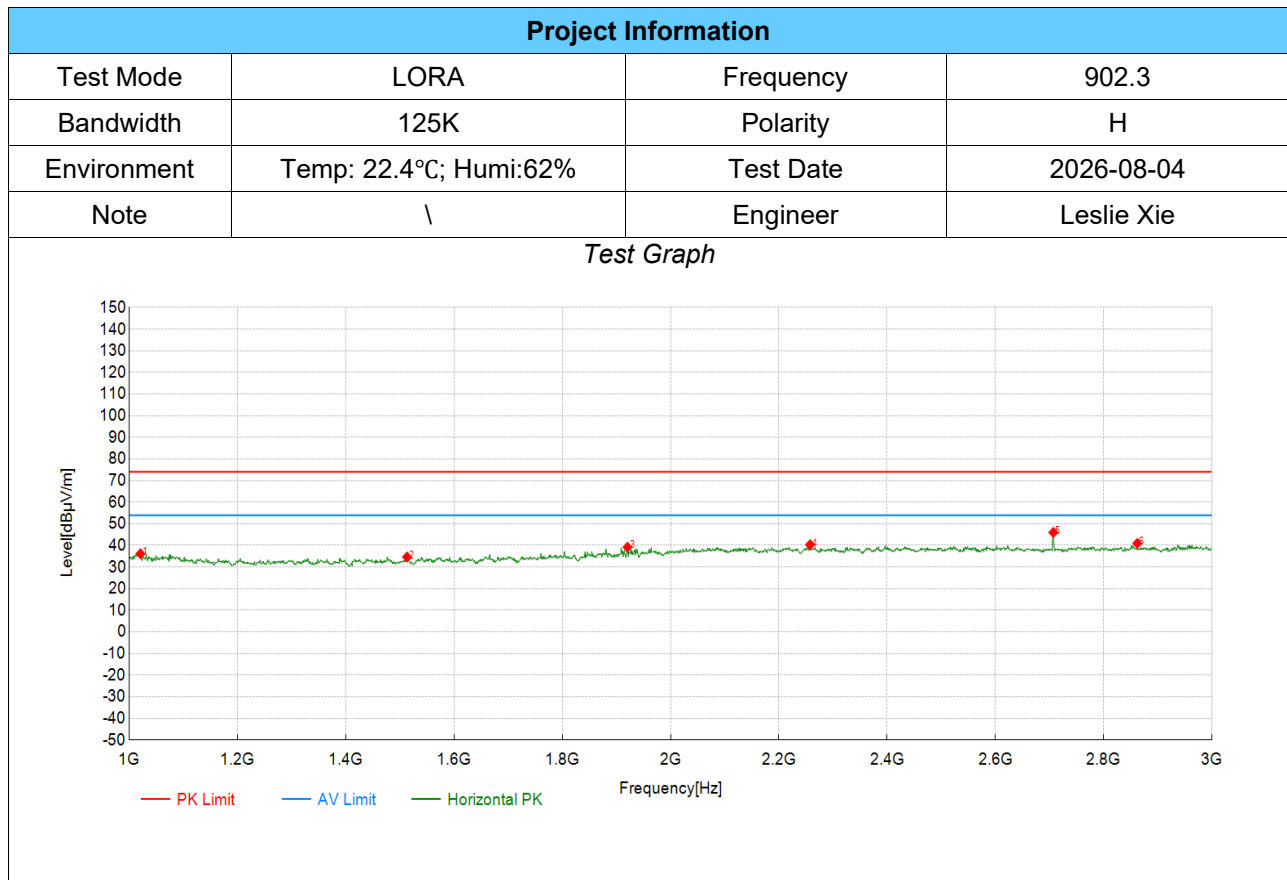

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1021.01	61.08	36.14	-24.94	74.00	37.86	PK	Horizontal	PASS
2	1513.26	59.13	34.64	-24.49	74.00	39.36	PK	Horizontal	PASS
3	1920.46	60.17	39.20	-20.97	74.00	34.80	PK	Horizontal	PASS
4	2257.63	60.04	40.35	-19.69	74.00	33.65	PK	Horizontal	PASS
5	2706.85	65.30	46.01	-19.29	74.00	27.99	PK	Horizontal	PASS
6	2861.93	60.03	40.95	-19.08	74.00	33.05	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

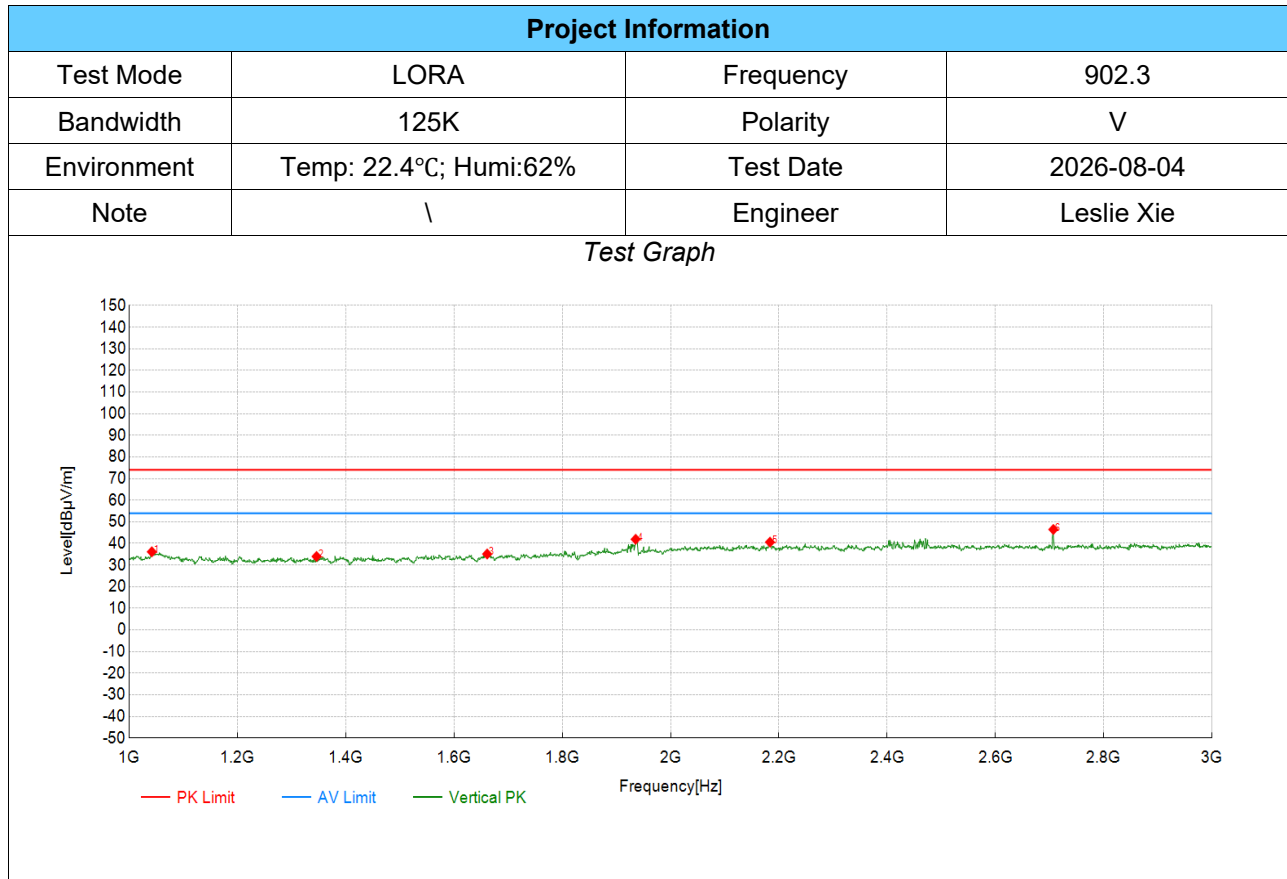

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1042.02	61.01	36.12	-24.89	74.00	37.88	PK	Vertical	PASS
2	1346.17	58.60	33.98	-24.62	74.00	40.02	PK	Vertical	PASS
3	1661.33	58.46	35.12	-23.34	74.00	38.88	PK	Vertical	PASS
4	1935.47	62.73	41.92	-20.81	74.00	32.08	PK	Vertical	PASS
5	2183.59	60.35	40.60	-19.75	74.00	33.40	PK	Vertical	PASS
6	2706.85	65.74	46.45	-19.29	74.00	27.55	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

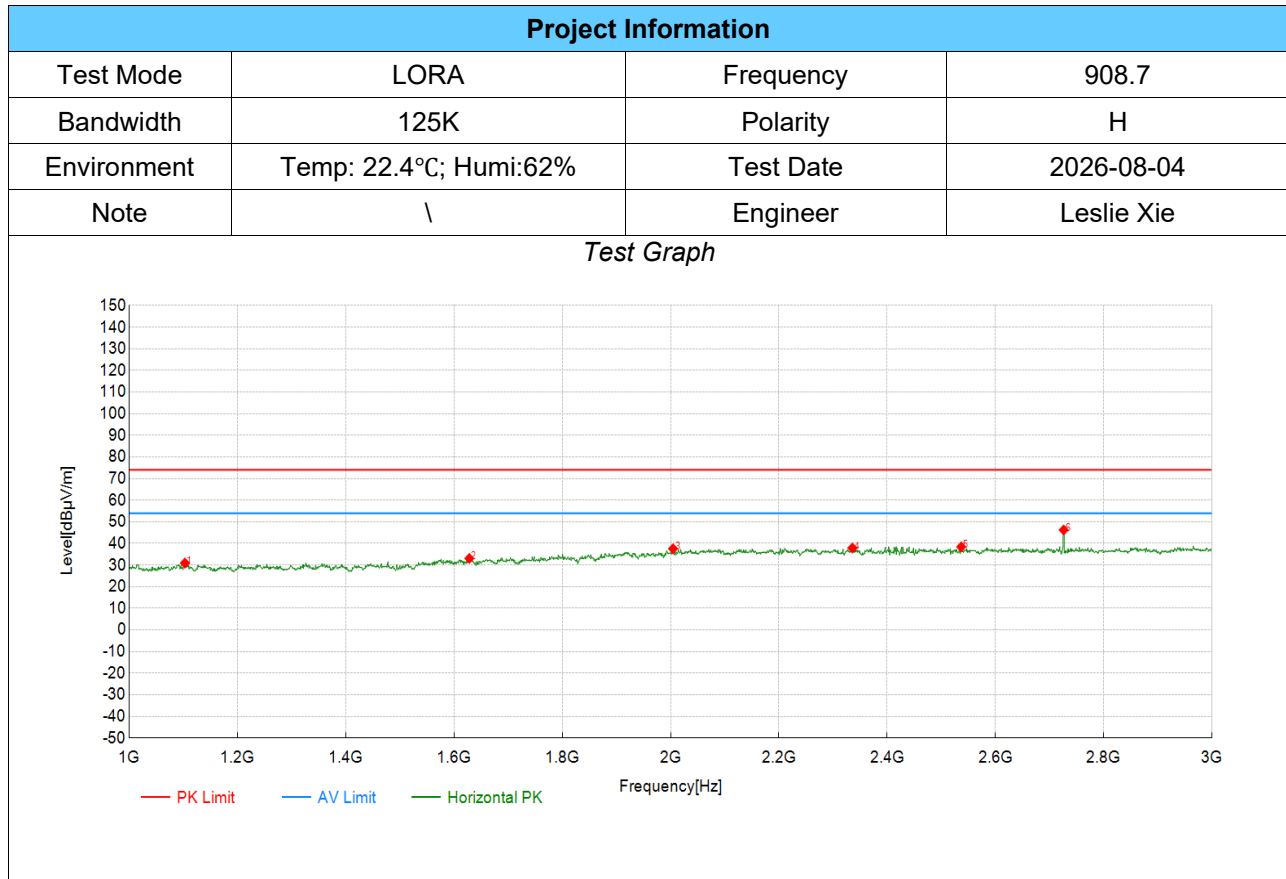


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1103.05	55.71	30.93	-24.78	74.00	43.07	PK	Horizontal	PASS
2	1628.31	56.68	33.08	-23.60	74.00	40.92	PK	Horizontal	PASS
3	2004.50	57.65	37.55	-20.10	74.00	36.45	PK	Horizontal	PASS
4	2335.67	57.54	37.88	-19.66	74.00	36.12	PK	Horizontal	PASS
5	2536.77	57.99	38.42	-19.57	74.00	35.58	PK	Horizontal	PASS
6	2725.86	65.48	46.22	-19.26	74.00	27.78	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


TX Radiated Test Result

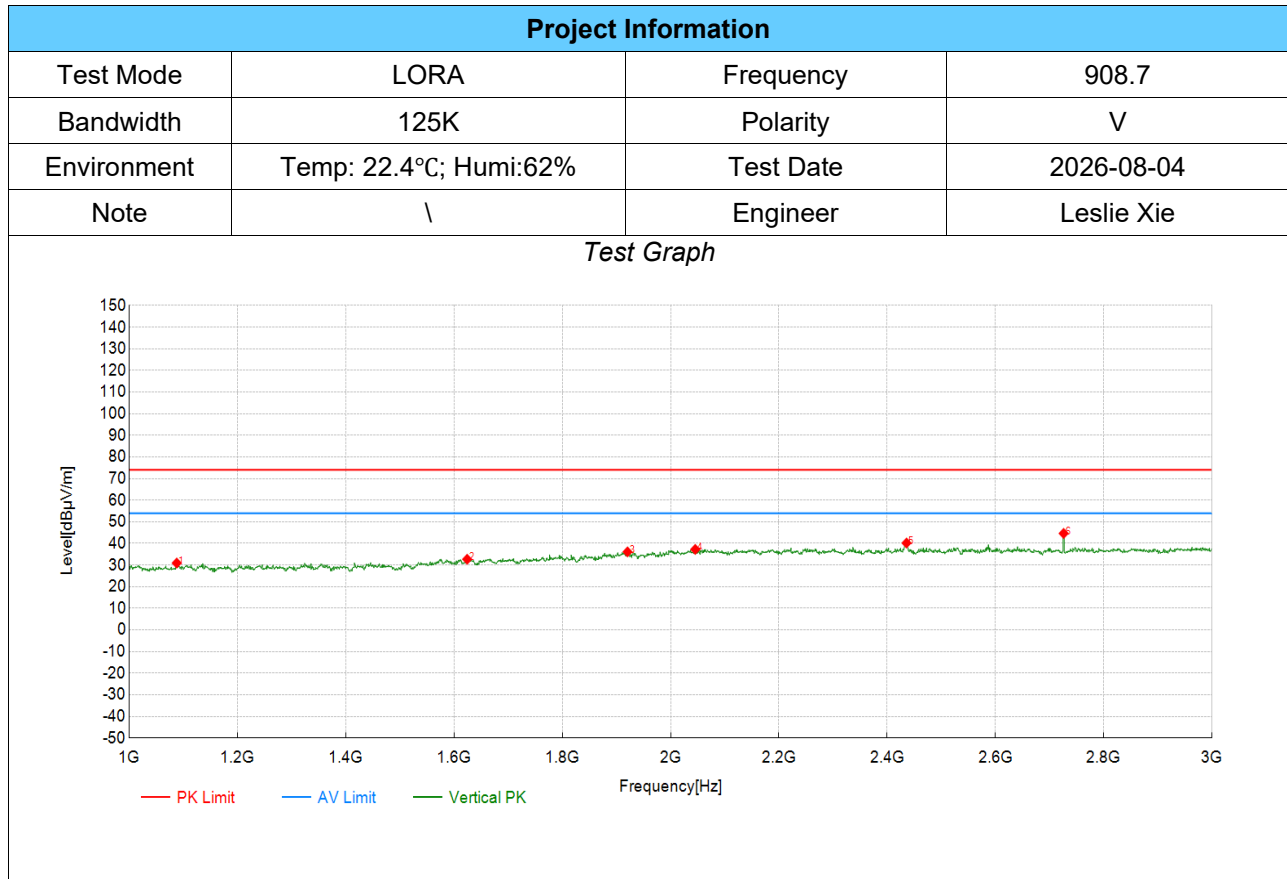

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1088.04	55.73	30.92	-24.81	74.00	43.08	PK	Vertical	PASS
2	1624.31	56.31	32.69	-23.62	74.00	41.31	PK	Vertical	PASS
3	1920.46	57.08	36.11	-20.97	74.00	37.89	PK	Vertical	PASS
4	2045.52	57.27	37.25	-20.02	74.00	36.75	PK	Vertical	PASS
5	2435.72	59.83	40.20	-19.63	74.00	33.80	PK	Vertical	PASS
6	2725.86	63.90	44.64	-19.26	74.00	29.36	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

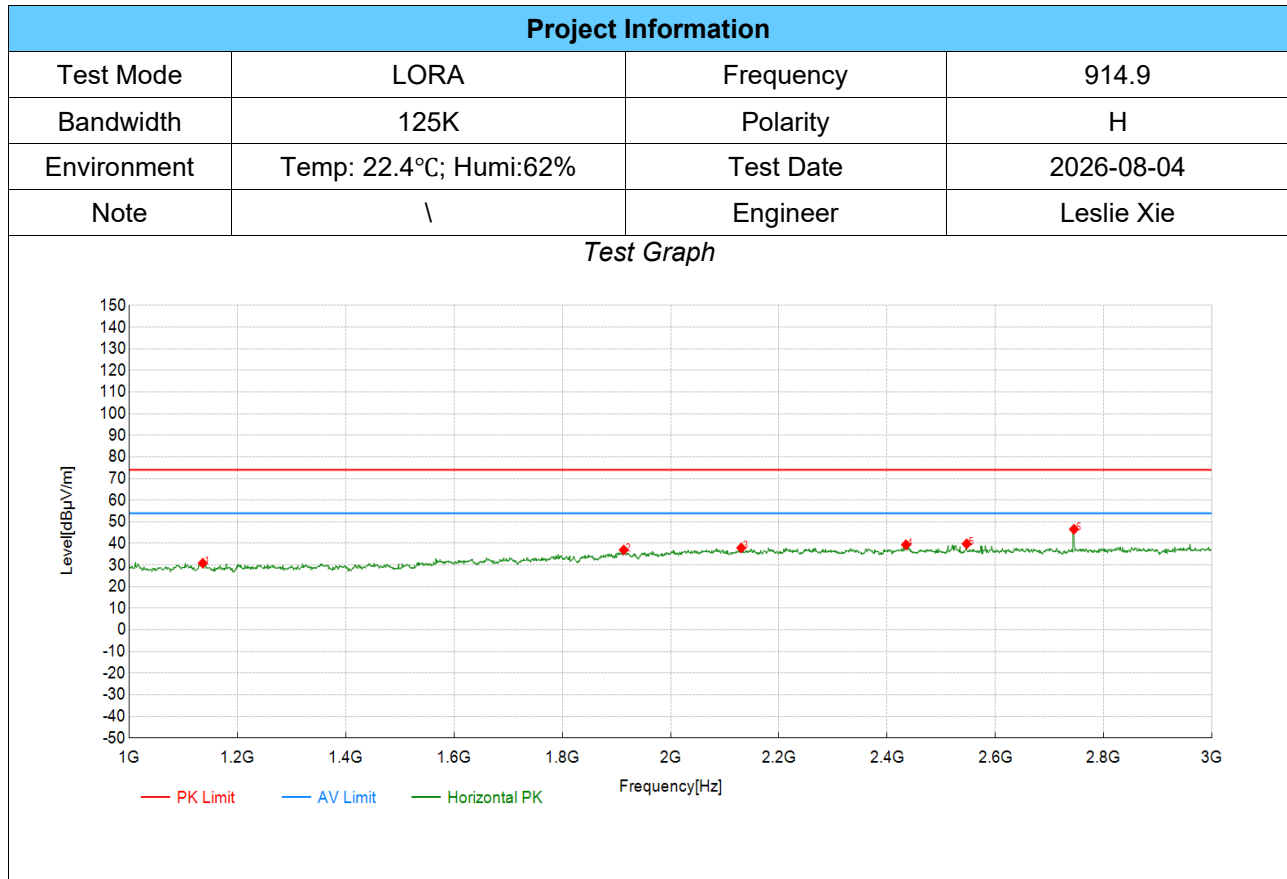


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1136.07	55.60	30.88	-24.72	74.00	43.12	PK	Horizontal	PASS
2	1913.46	58.00	36.96	-21.04	74.00	37.04	PK	Horizontal	PASS
3	2130.57	57.80	37.94	-19.86	74.00	36.06	PK	Horizontal	PASS
4	2434.72	59.03	39.41	-19.62	74.00	34.59	PK	Horizontal	PASS
5	2546.77	59.36	39.80	-19.56	74.00	34.20	PK	Horizontal	PASS
6	2744.87	65.76	46.54	-19.22	74.00	27.46	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

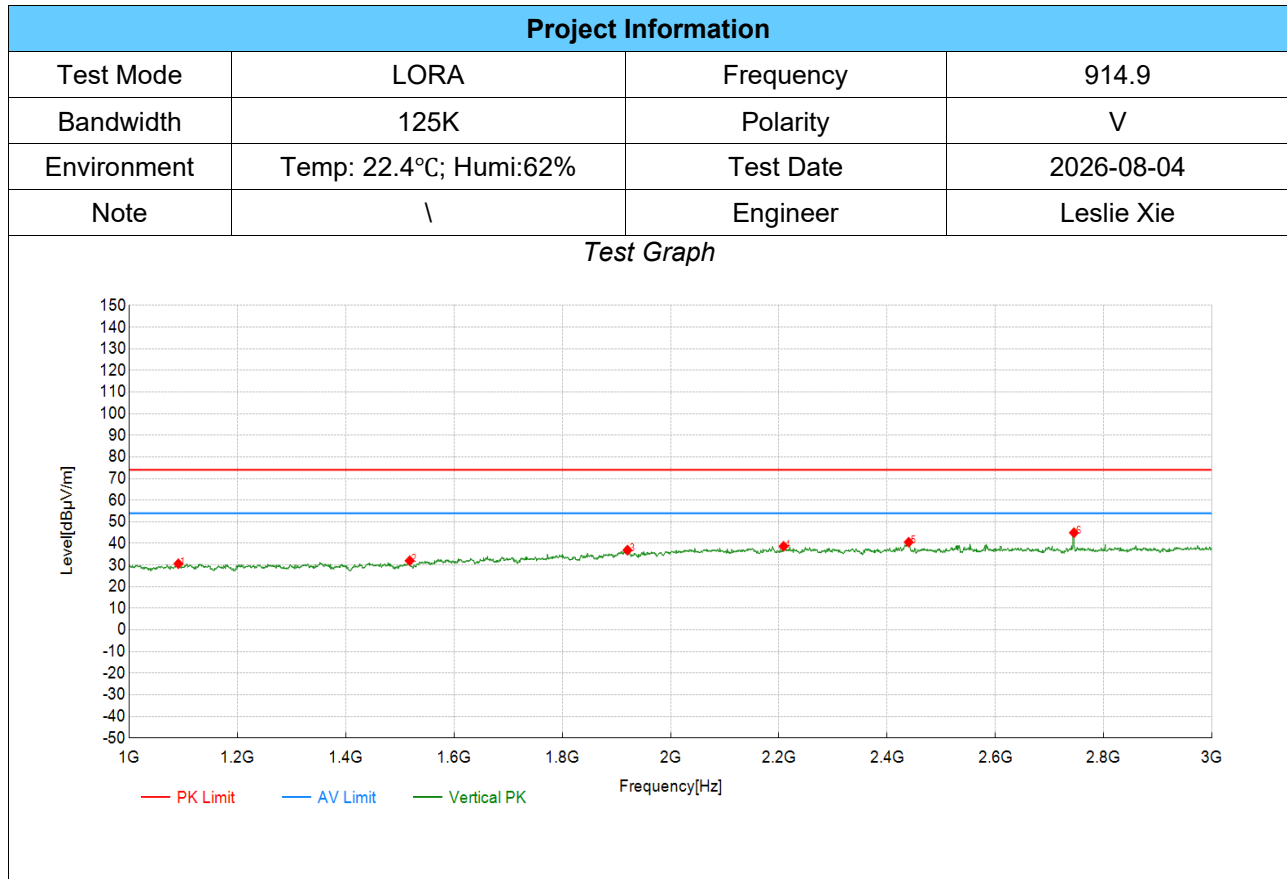


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1091.05	55.42	30.61	-24.81	74.00	43.39	PK	Vertical	PASS
2	1518.26	56.47	32.01	-24.46	74.00	41.99	PK	Vertical	PASS
3	1920.46	57.86	36.89	-20.97	74.00	37.11	PK	Vertical	PASS
4	2208.60	58.36	38.65	-19.71	74.00	35.35	PK	Vertical	PASS
5	2439.72	60.19	40.56	-19.63	74.00	33.44	PK	Vertical	PASS
6	2744.87	64.16	44.94	-19.22	74.00	29.06	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

8.2. SPURIOUS EMISSIONS (3 GHz ~ 10 GHz)


TX Radiated Test Result

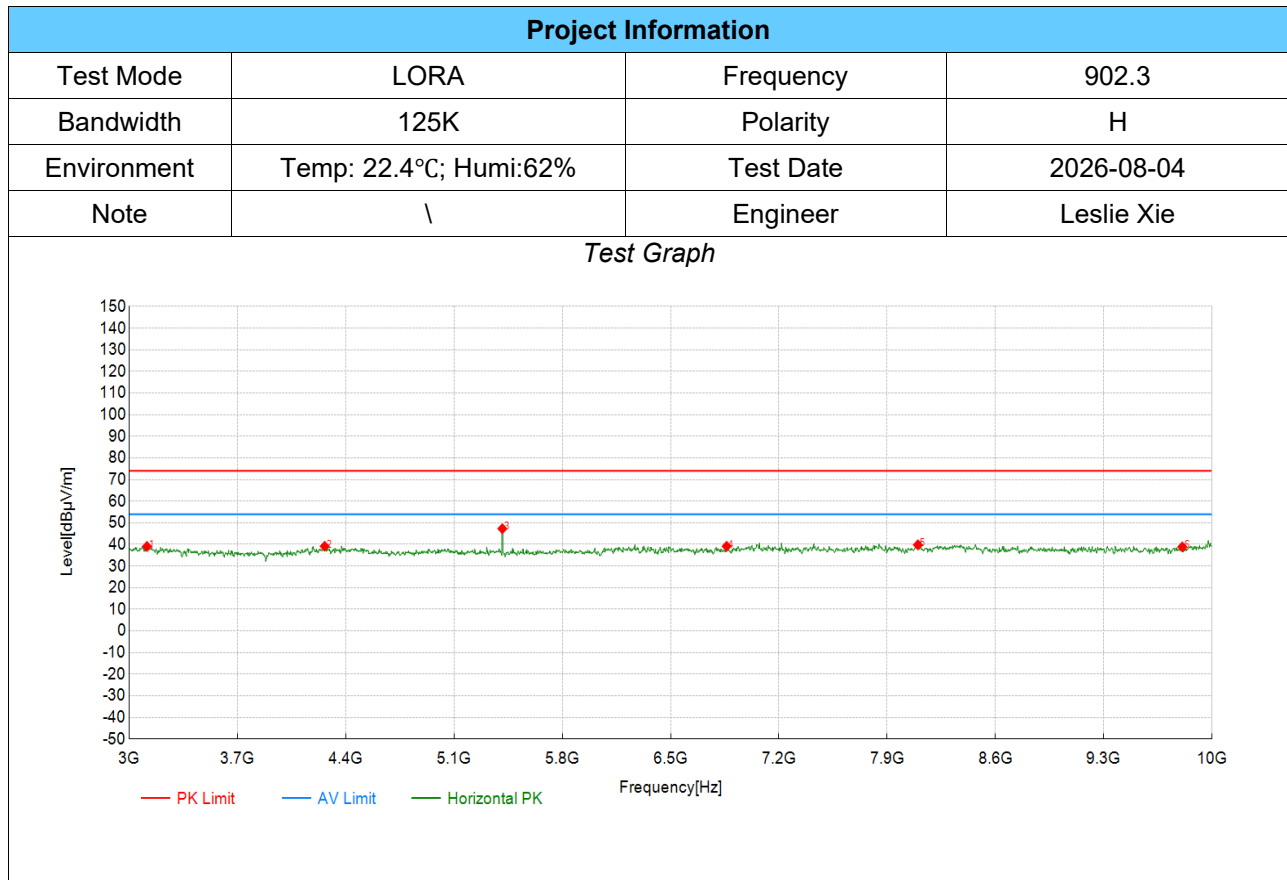

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3115.56	56.96	39.06	-17.90	74.00	34.94	PK	Horizontal	PASS
2	4264.13	56.80	39.15	-17.65	74.00	34.85	PK	Horizontal	PASS
3	5412.71	64.52	47.29	-17.23	74.00	26.71	PK	Horizontal	PASS
4	6862.43	54.58	39.15	-15.43	74.00	34.85	PK	Horizontal	PASS
5	8098.55	54.48	39.81	-14.67	74.00	34.19	PK	Horizontal	PASS
6	9807.40	50.81	38.85	-11.96	74.00	35.15	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

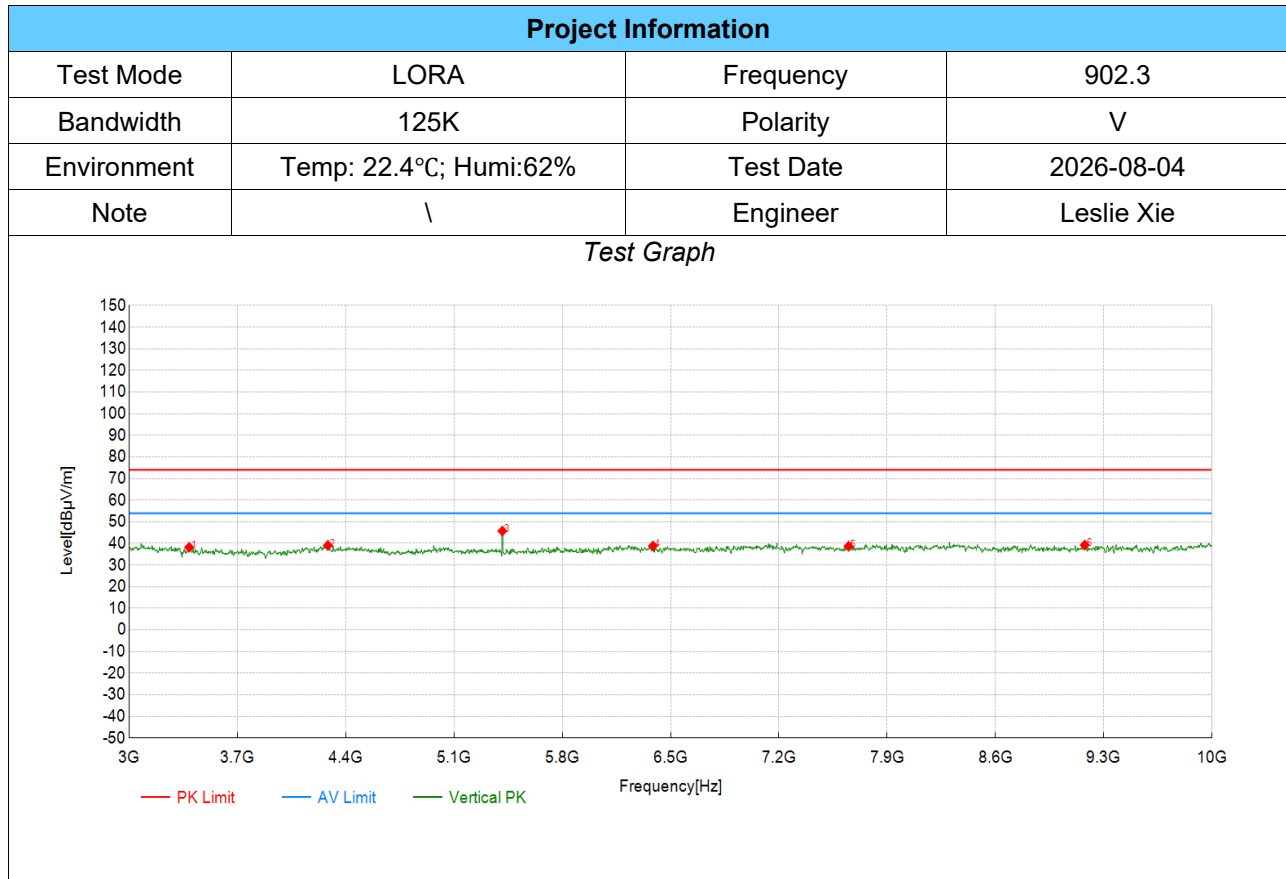


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3388.69	56.98	38.21	-18.77	74.00	35.79	PK	Vertical	PASS
2	4285.14	56.77	39.07	-17.70	74.00	34.93	PK	Vertical	PASS
3	5412.71	62.98	45.75	-17.23	74.00	28.25	PK	Vertical	PASS
4	6386.19	55.17	38.85	-16.32	74.00	35.15	PK	Vertical	PASS
5	7650.33	54.14	38.70	-15.44	74.00	35.30	PK	Vertical	PASS
6	9177.09	51.23	39.25	-11.98	74.00	34.75	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


TX Radiated Test Result

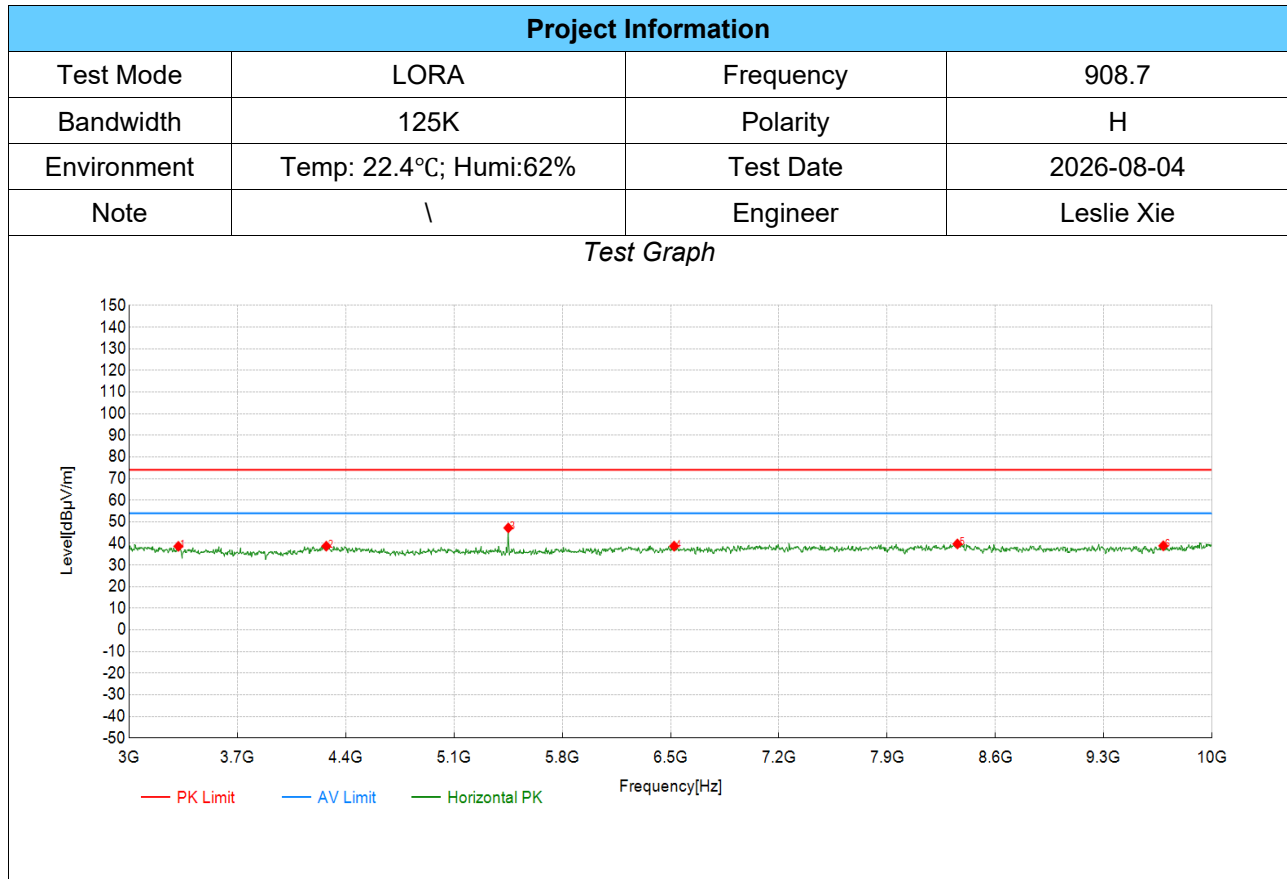

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3318.66	57.28	38.66	-18.62	74.00	35.34	PK	Horizontal	PASS
2	4274.64	56.42	38.75	-17.67	74.00	35.25	PK	Horizontal	PASS
3	5451.23	64.50	47.20	-17.30	74.00	26.80	PK	Horizontal	PASS
4	6522.76	54.92	38.74	-16.18	74.00	35.26	PK	Horizontal	PASS
5	8354.18	52.65	39.77	-12.88	74.00	34.23	PK	Horizontal	PASS
6	9684.84	51.08	38.90	-12.18	74.00	35.10	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

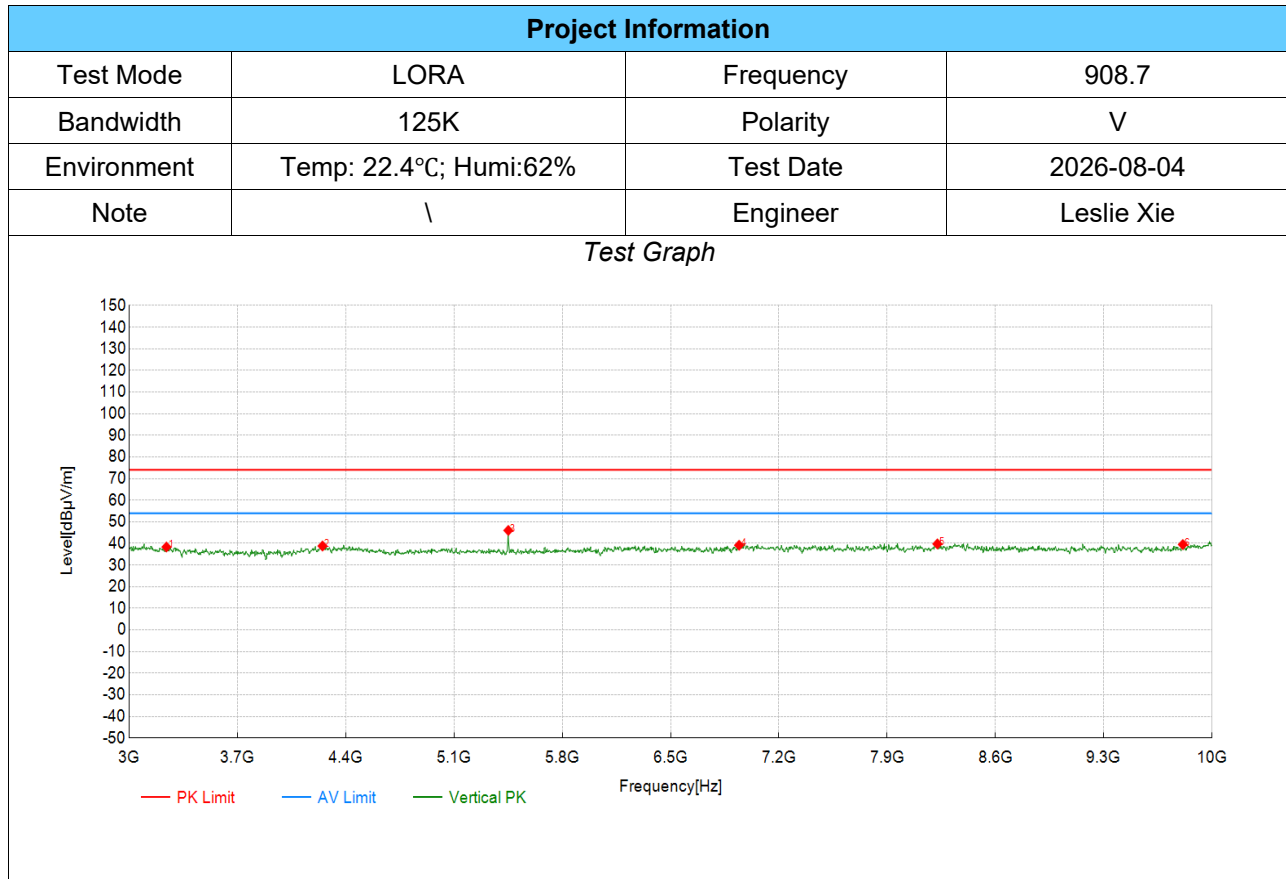


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3241.62	56.83	38.36	-18.47	74.00	35.64	PK	Vertical	PASS
2	4250.13	56.44	38.82	-17.62	74.00	35.18	PK	Vertical	PASS
3	5451.23	63.32	46.02	-17.30	74.00	27.98	PK	Vertical	PASS
4	6942.97	54.22	39.16	-15.06	74.00	34.84	PK	Vertical	PASS
5	8224.61	53.87	39.79	-14.08	74.00	34.21	PK	Vertical	PASS
6	9810.91	51.46	39.51	-11.95	74.00	34.49	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

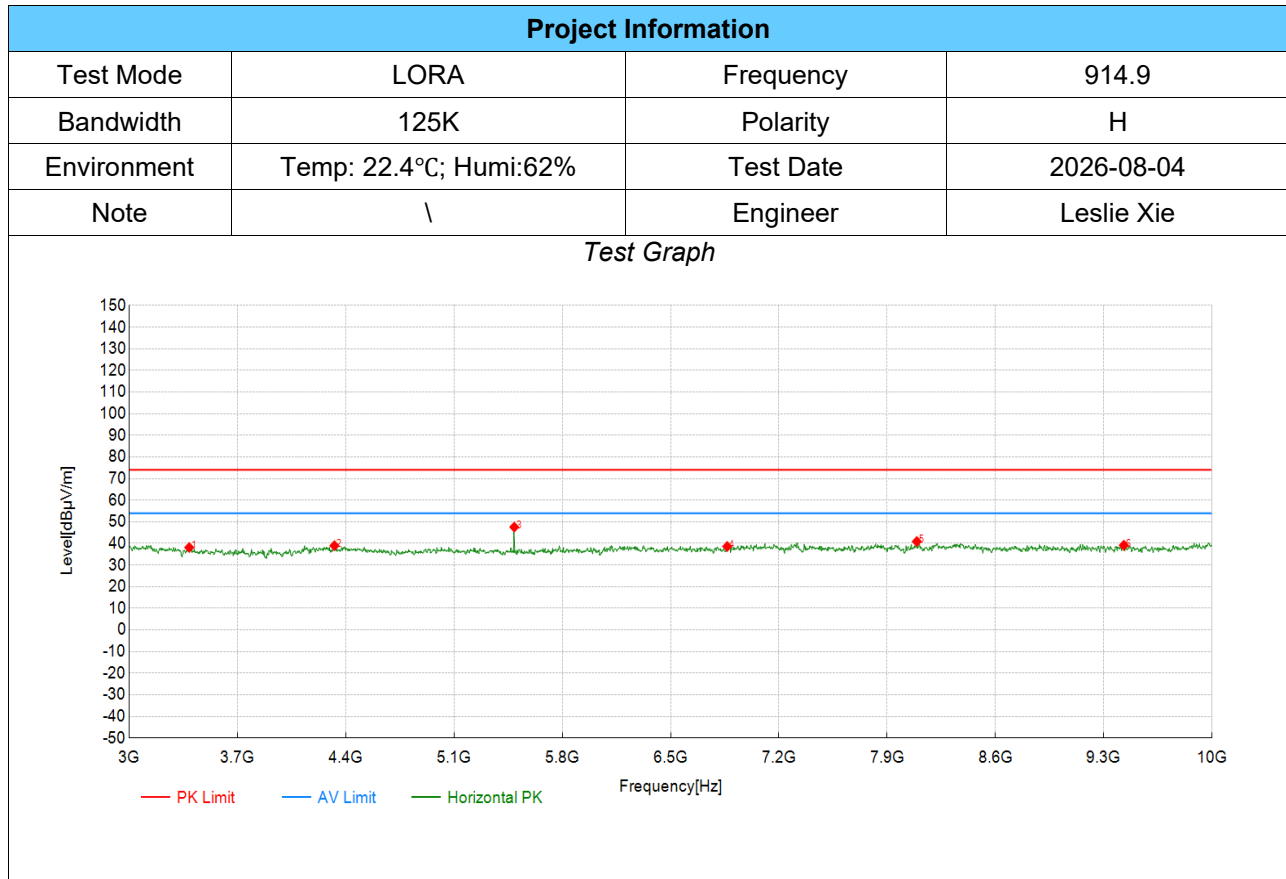


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3388.69	56.91	38.14	-18.77	74.00	35.86	PK	Horizontal	PASS
2	4327.16	56.76	38.97	-17.79	74.00	35.03	PK	Horizontal	PASS
3	5489.74	64.94	47.57	-17.37	74.00	26.43	PK	Horizontal	PASS
4	6865.93	54.00	38.60	-15.40	74.00	35.40	PK	Horizontal	PASS
5	8091.55	55.59	40.89	-14.70	74.00	33.11	PK	Horizontal	PASS
6	9429.21	50.63	39.15	-11.48	74.00	34.85	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

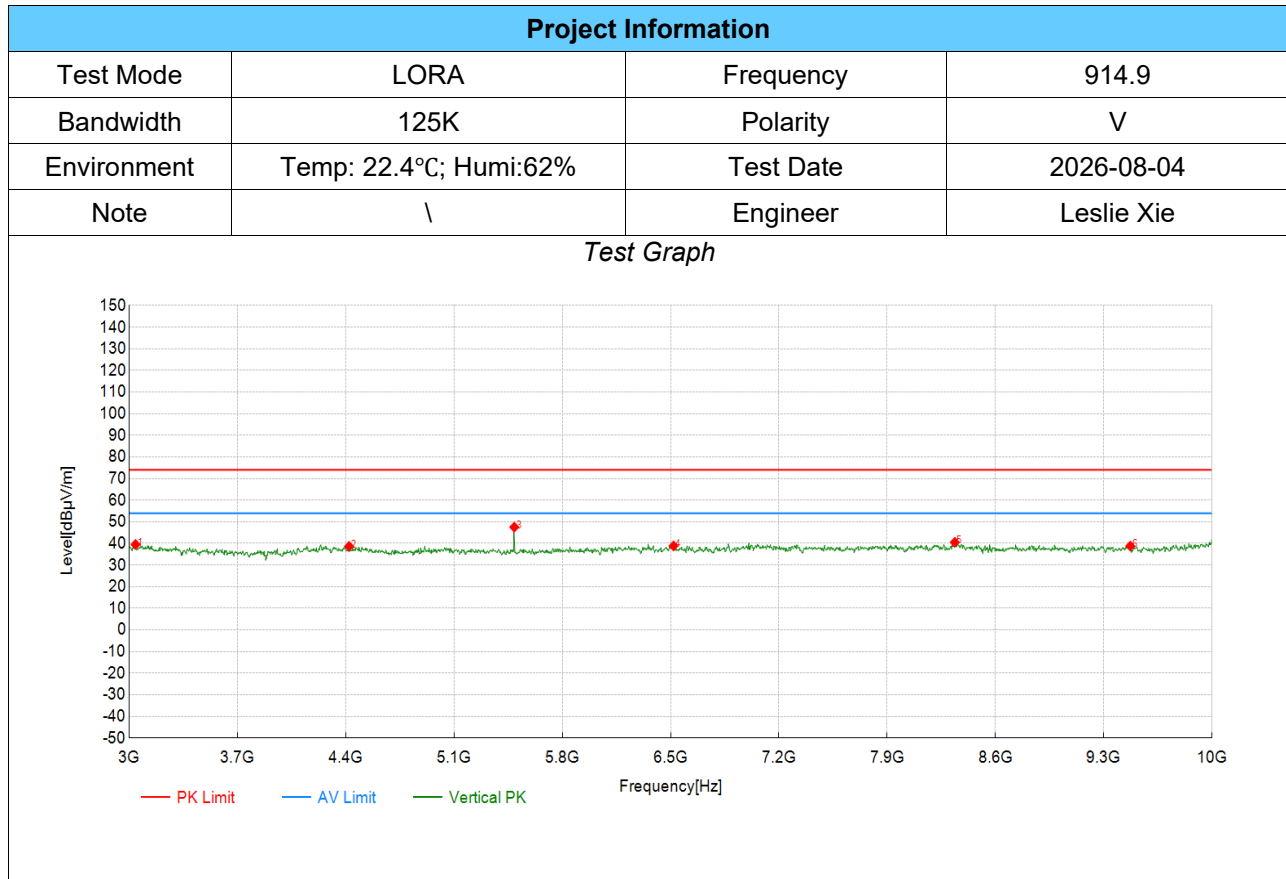


PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3042.02	56.99	39.53	-17.46	74.00	34.47	PK	Vertical	PASS
2	4421.71	56.61	38.63	-17.98	74.00	35.37	PK	Vertical	PASS
3	5489.74	64.92	47.55	-17.37	74.00	26.45	PK	Vertical	PASS
4	6519.26	55.04	38.86	-16.18	74.00	35.14	PK	Vertical	PASS
5	8336.67	53.57	40.53	-13.04	74.00	33.47	PK	Vertical	PASS
6	9471.24	50.49	38.80	-11.69	74.00	35.20	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


8.3. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

Test Mode:	Lora	Frequency(MHz):	902.3
Polarity:	Horizontal	Test Voltage:	DC 7.3V

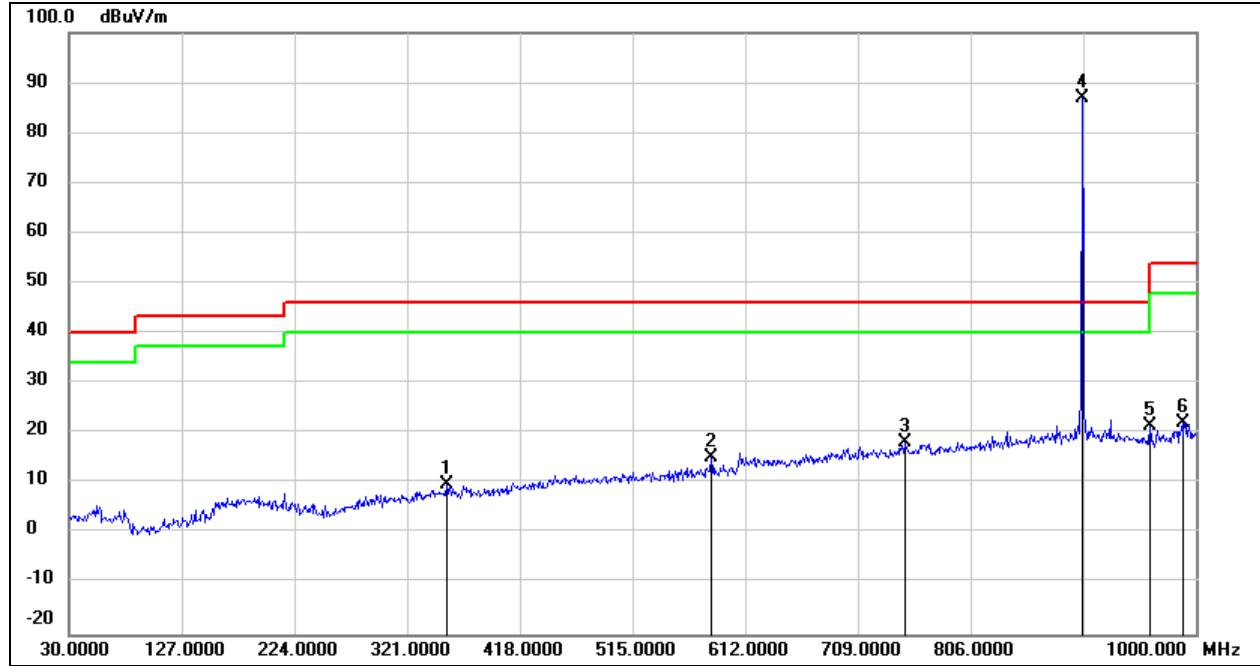


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	354.9500	19.12	-9.41	9.71	46.00	-36.29	peak
2	582.9000	21.11	-5.93	15.18	46.00	-30.82	peak
3	749.7400	21.61	-3.40	18.21	46.00	-27.79	peak
4	902.3000	87.35	-0.54	86.81	/	/	fundamental
5	960.0000	22.05	-0.45	21.60	46.00	-24.40	peak
6	988.3600	22.01	0.09	22.10	54.00	-31.90	peak

Test Mode:	Lora	Frequency(MHz):	902.3
Polarity:	Vertical	Test Voltage:	DC 7.3V

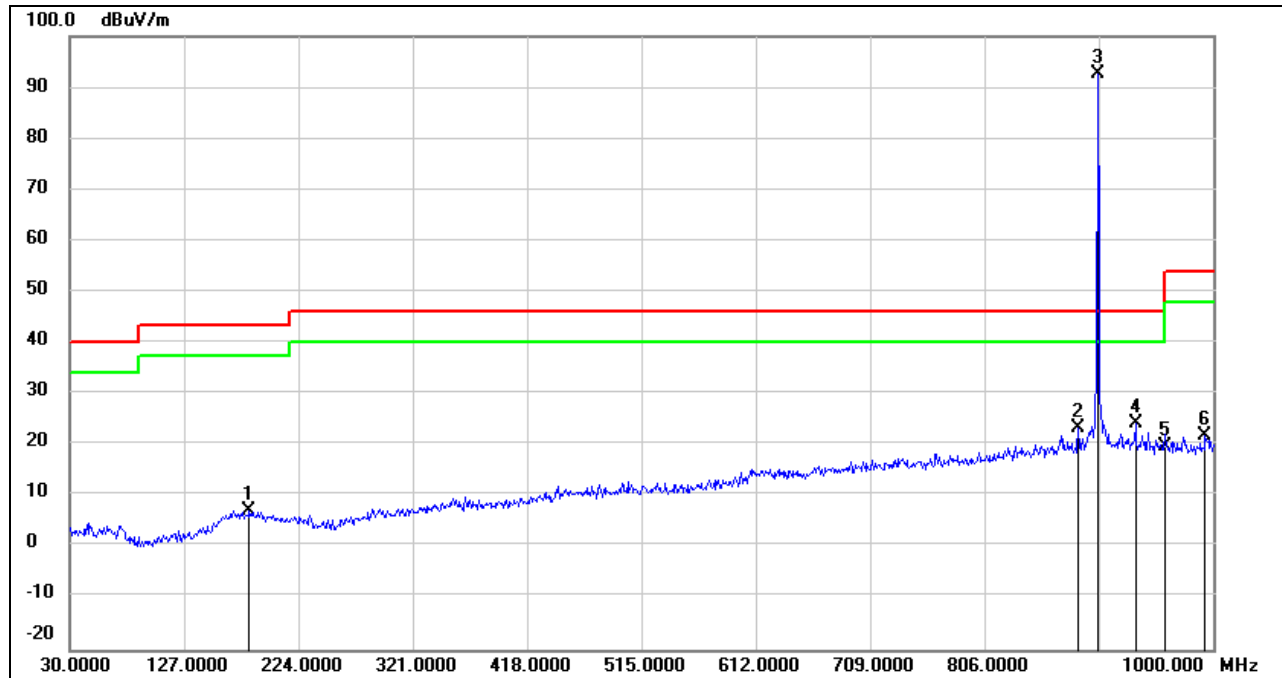


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	182.2899	19.21	-11.98	7.23	43.50	-36.27	peak
2	885.5400	23.99	-0.73	23.26	46.00	-22.74	peak
3	902.3000	93.25	-0.54	92.71	/	/	fundamental
4	934.0400	24.93	-0.56	24.37	46.00	-21.63	peak
5	960.0000	20.19	-0.45	19.74	46.00	-26.26	peak
6	993.2100	21.57	0.19	21.76	54.00	-32.24	peak

Test Mode:	Lora	Frequency(MHz):	908.7
Polarity:	Horizontal	Test Voltage:	DC 7.3V

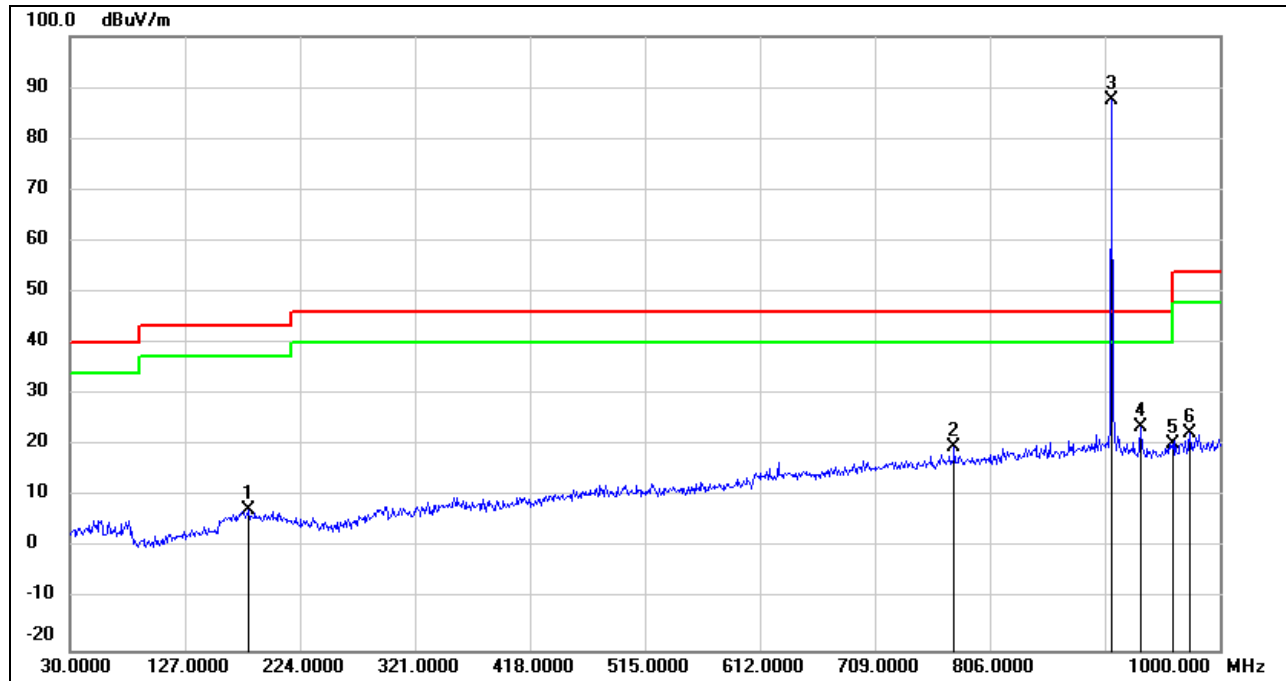


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	180.3500	19.38	-11.92	7.46	43.50	-36.04	peak
2	775.9300	22.61	-2.99	19.62	46.00	-26.38	peak
3	908.7000	87.98	-0.52	87.46	/	/	fundamental
4	933.0700	24.22	-0.56	23.66	46.00	-22.34	peak
5	960.0000	20.68	-0.45	20.23	46.00	-25.77	peak
6	974.7800	22.63	-0.17	22.46	54.00	-31.54	peak

Test Mode:	Lora	Frequency(MHz):	908.7
Polarity:	Vertical	Test Voltage:	DC 7.3V

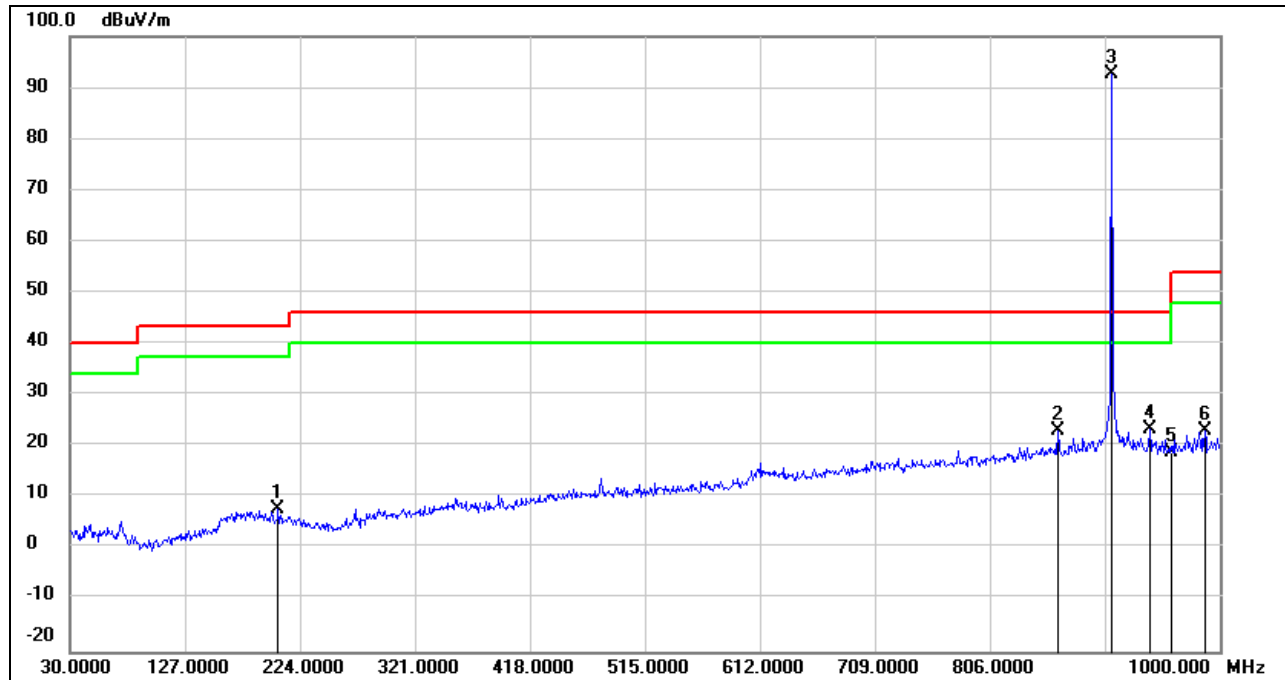


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	205.5700	20.52	-12.74	7.78	43.50	-35.72	peak
2	863.2300	24.25	-1.12	23.13	46.00	-22.87	peak
3	908.7000	93.18	-0.52	92.66	/	/	fundamental
4	940.8300	23.88	-0.60	23.28	46.00	-22.72	peak
5	960.0000	19.33	-0.45	18.88	46.00	-27.12	peak
6	987.3900	23.08	0.07	23.15	54.00	-30.85	peak

Test Mode:	Lora	Frequency(MHz):	914.9
Polarity:	Horizontal	Test Voltage:	DC 7.3V

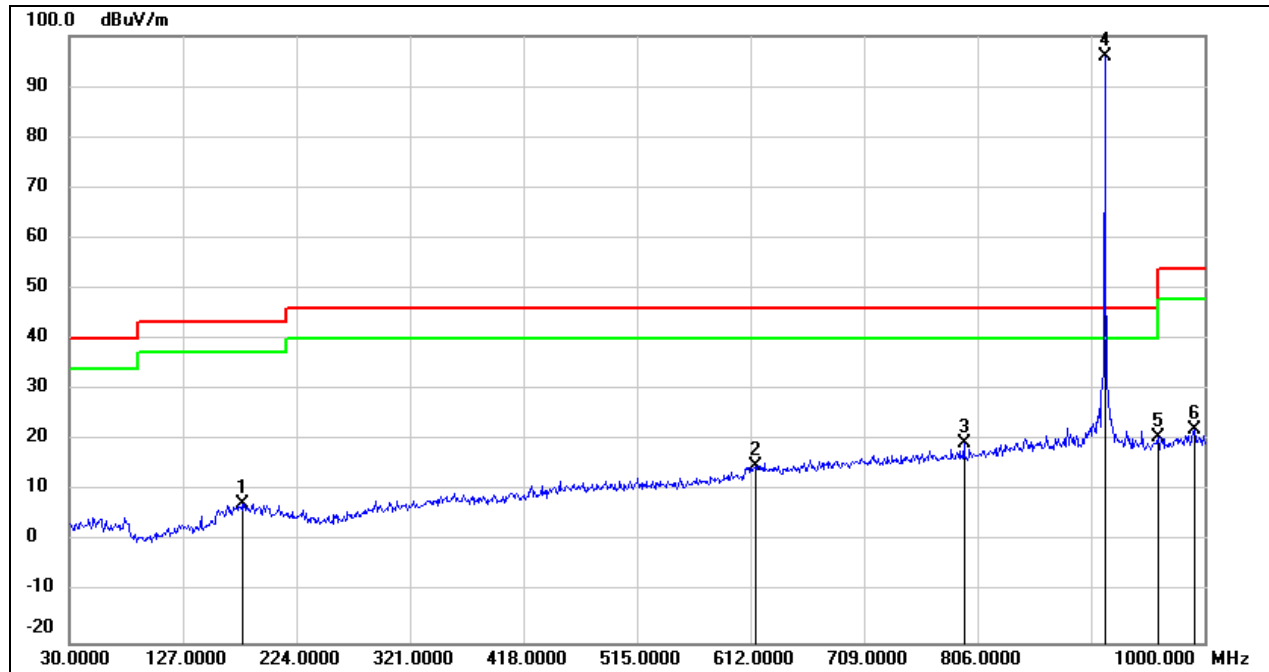

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.4400	19.42	-11.98	7.44	43.50	-36.06	peak
2	615.8800	20.53	-5.47	15.06	46.00	-30.94	peak
3	794.3600	22.02	-2.68	19.34	46.00	-26.66	peak
4	914.9000	96.60	-0.51	96.09	/	/	fundamental
5	960.0000	21.18	-0.45	20.73	46.00	-25.27	peak
6	991.2700	21.87	0.15	22.02	54.00	-31.98	peak


Test Mode:	Lora	Frequency(MHz):	914.9
Polarity:	Vertical	Test Voltage:	DC 7.3V

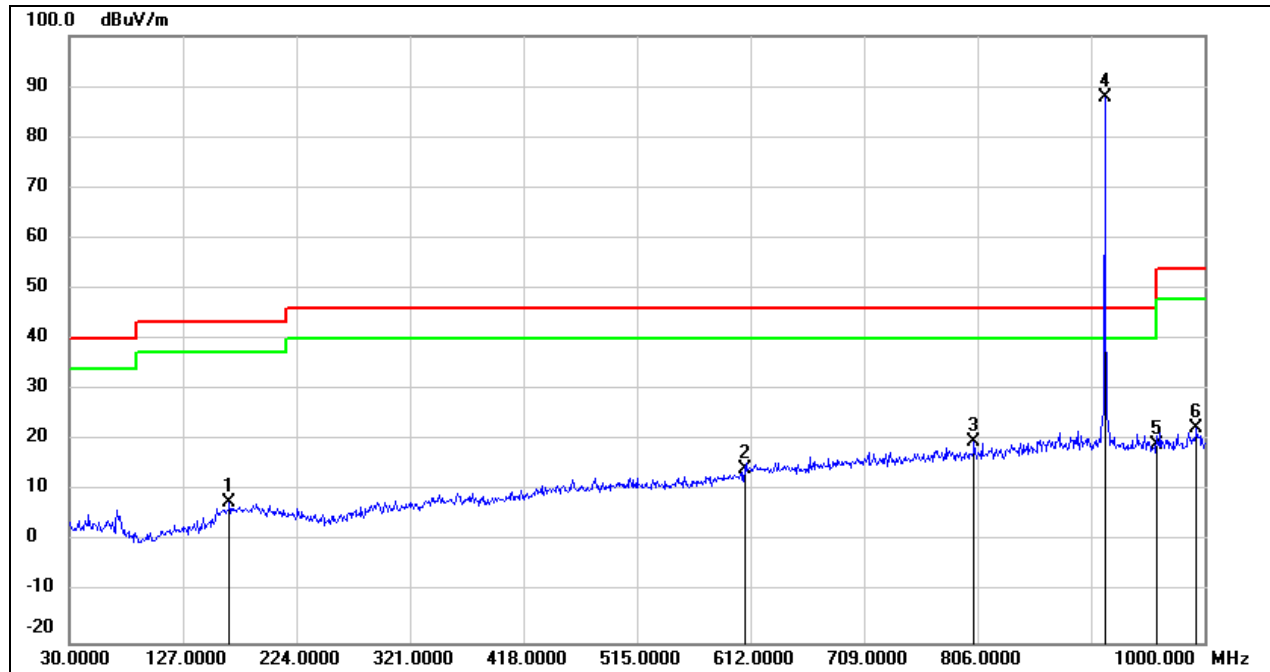

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	166.7700	20.31	-12.42	7.89	43.50	-35.61	peak
2	607.1500	19.72	-5.46	14.26	46.00	-31.74	peak
3	803.0900	22.27	-2.51	19.76	46.00	-26.24	peak
4	914.9000	88.42	-0.51	87.91	/	/	fundamental
5	960.0000	19.49	-0.45	19.04	46.00	-26.96	peak
6	993.2100	22.12	0.19	22.31	54.00	-31.69	peak


8.4. SPURIOUS EMISSIONS BELOW 30 MHz

Test Mode:	Lora	Frequency(MHz):	902.3
Polarity:	Horizontal	Test Voltage:	DC 7.3V

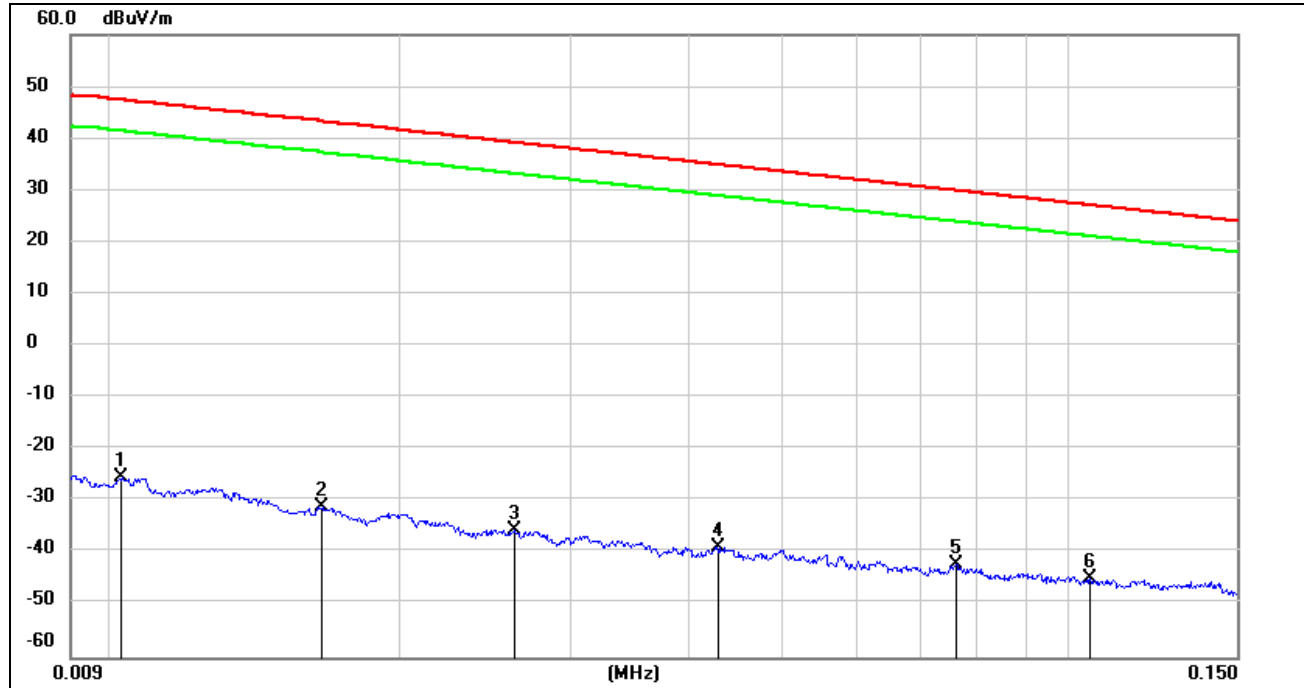


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0102	76.05	-101.40	-25.35	47.43	-72.78	peak
2	0.0165	70.34	-101.37	-31.03	43.25	-74.28	peak
3	0.0262	65.94	-101.37	-35.43	39.24	-74.67	peak
4	0.0429	62.72	-101.45	-38.73	34.95	-73.68	peak
5	0.0763	59.34	-101.60	-42.26	29.95	-72.21	peak
6	0.1053	56.81	-101.78	-44.97	27.16	-72.13	peak

Test Mode:	Lora	Frequency(MHz):	902.3
Polarity:	Horizontal	Test Voltage:	DC 7.3V

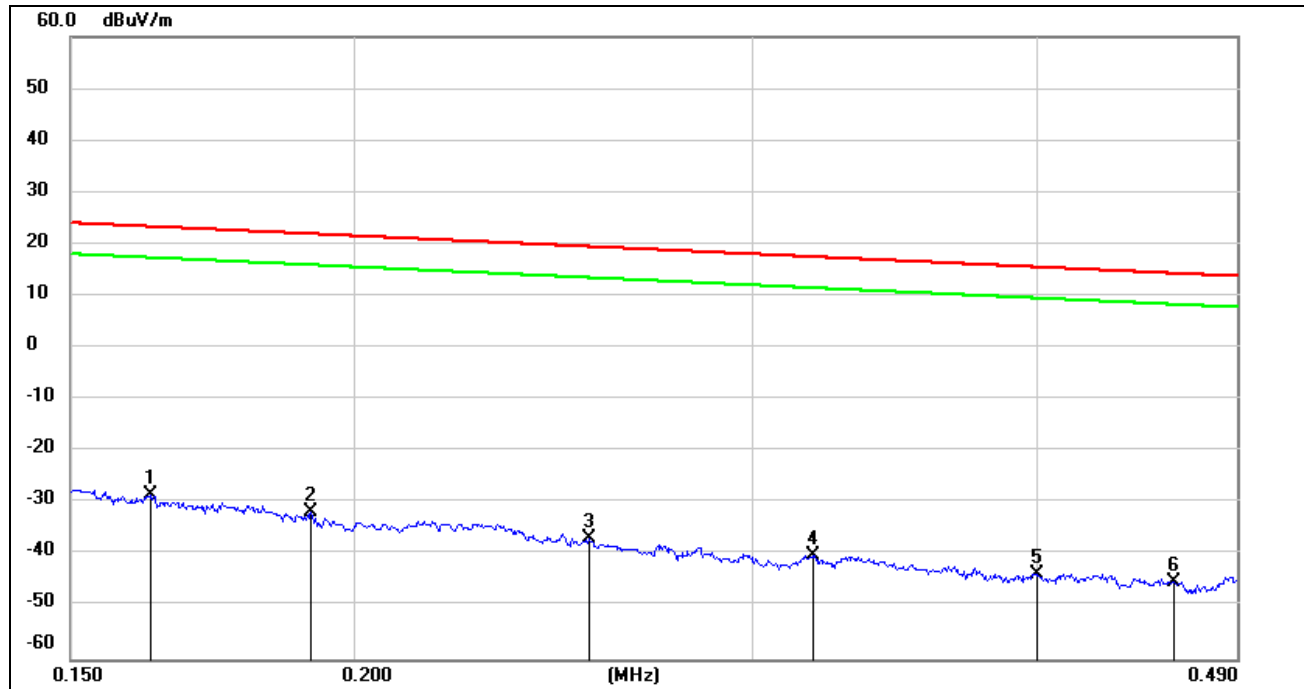

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1625	73.39	-101.65	-28.26	23.39	-51.65	peak
2	0.1915	70.02	-101.70	-31.68	21.96	-53.64	peak
3	0.2540	65.10	-101.80	-36.70	19.50	-56.20	peak
4	0.3190	61.89	-101.88	-39.99	17.53	-57.52	peak
5	0.4001	58.45	-101.96	-43.51	15.56	-59.07	peak
6	0.4596	56.99	-102.02	-45.03	14.36	-59.39	peak

Test Mode:	Lora	Frequency(MHz):	902.3
Polarity:	Horizontal	Test Voltage:	DC 7.3V

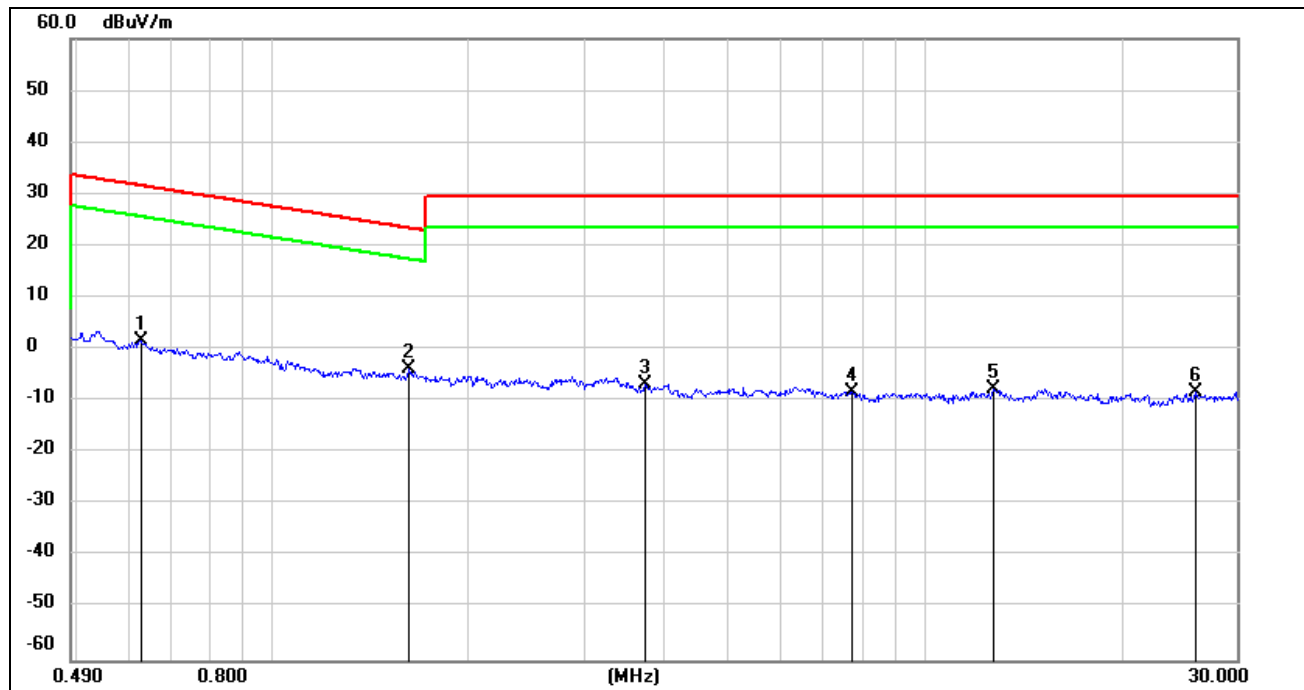

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.6298	63.67	-62.09	1.58	31.62	-30.04	peak
2	1.6149	58.12	-62.00	-3.88	23.44	-27.32	peak
3	3.7100	54.70	-61.41	-6.71	29.54	-36.25	peak
4	7.7200	52.98	-61.12	-8.14	29.54	-37.68	peak
5	12.7367	53.29	-60.92	-7.63	29.54	-37.17	peak
6	25.8978	52.26	-60.36	-8.10	29.54	-37.64	peak

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2020 clause 6.2.

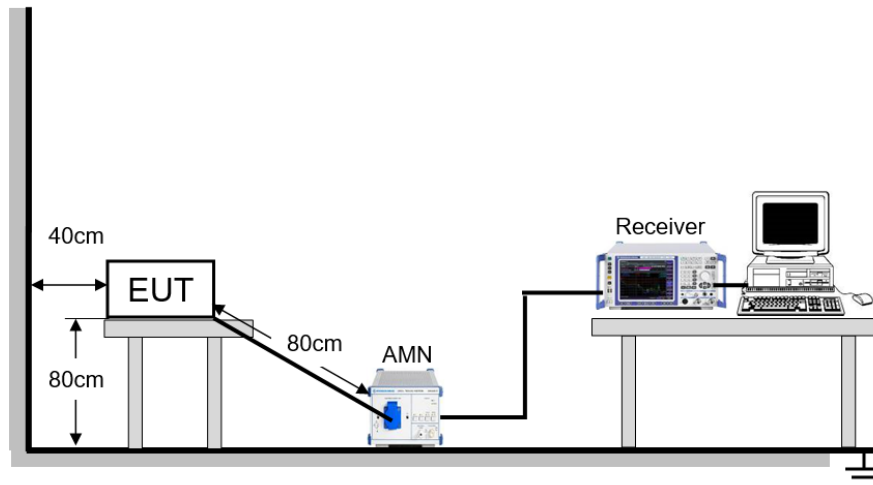

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT


Temperature	22.3 °C	Relative Humidity	54 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V/60 Hz

TEST DATE / ENGINEER

Test Date	August 12, 2026	Test By	Kevin Zhang
-----------	-----------------	---------	-------------

RESULTS

Test Mode:	Lora	Frequency(MHz):	902.3
Line:	Line		

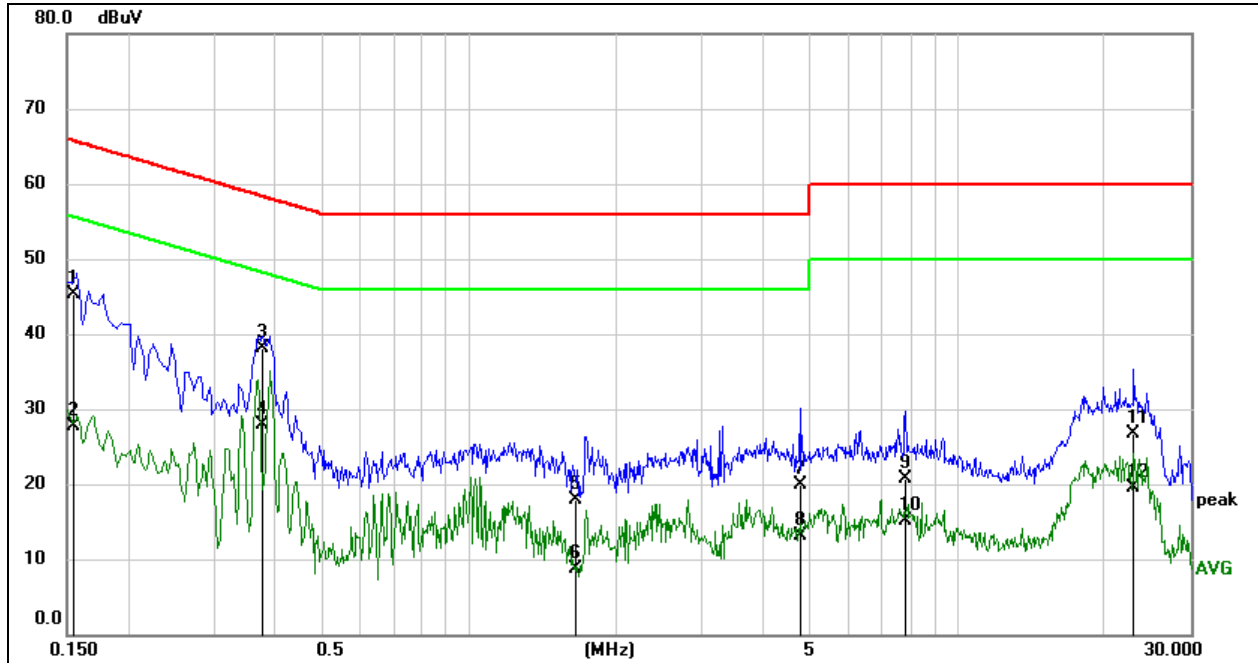


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1542	35.57	9.82	45.39	65.77	-20.38	QP
2	0.1542	17.88	9.82	27.70	55.77	-28.07	AVG
3	0.3769	28.45	9.70	38.15	58.35	-20.20	QP
4	0.3769	18.22	9.70	27.92	48.35	-20.43	AVG
5	1.6561	8.20	9.74	17.94	56.00	-38.06	QP
6	1.6561	-1.06	9.74	8.68	46.00	-37.32	AVG
7	4.7458	10.07	9.83	19.90	56.00	-36.10	QP
8	4.7458	3.29	9.83	13.12	46.00	-32.88	AVG
9	7.8025	10.95	9.78	20.73	60.00	-39.27	QP
10	7.8025	5.29	9.78	15.07	50.00	-34.93	AVG
11	22.9529	16.92	9.79	26.71	60.00	-33.29	QP
12	22.9529	9.77	9.79	19.56	50.00	-30.44	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	Lora	Frequency(MHz):	902.3
Line:	Neutral		

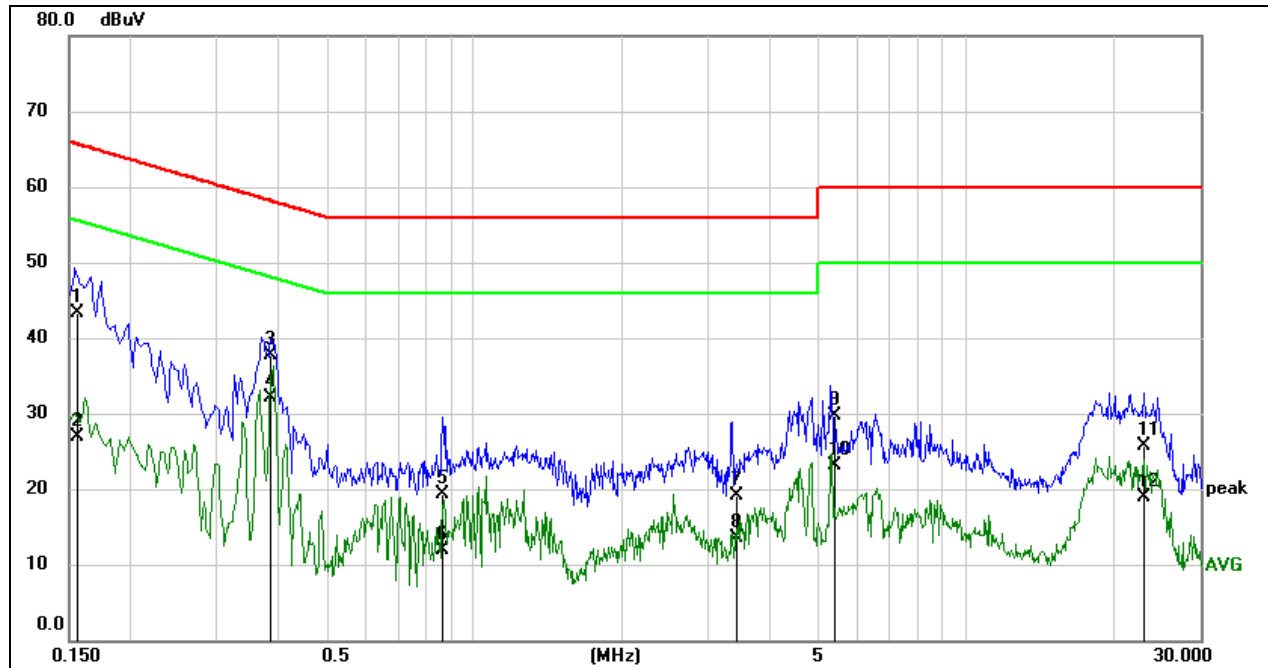

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1563	33.72	9.54	43.26	65.66	-22.40	QP
2	0.1563	17.46	9.54	27.00	55.66	-28.66	AVG
3	0.3856	28.19	9.60	37.79	58.16	-20.37	QP
4	0.3856	22.53	9.60	32.13	48.16	-16.03	AVG
5	0.8597	9.70	9.58	19.28	56.00	-36.72	QP
6	0.8597	2.39	9.58	11.97	46.00	-34.03	AVG
7	3.4416	9.45	9.67	19.12	56.00	-36.88	QP
8	3.4416	3.92	9.67	13.59	46.00	-32.41	AVG
9	5.4132	20.11	9.68	29.79	60.00	-30.21	QP
10	5.4132	13.34	9.68	23.02	50.00	-26.98	AVG
11	23.1155	15.97	9.76	25.73	60.00	-34.27	QP
12	23.1155	9.16	9.76	18.92	50.00	-31.08	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies


11. TEST DATA

11.1. Appendix A: 20dB Emission Bandwidth

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
Lora	Ant1	902.3	0.143	902.2334	902.2631	PASS
Lora	Ant1	908.7	0.143	908.6334	908.6627	PASS
Lora	Ant1	914.9	0.143	914.8339	914.8631	PASS

11.1.2. Test Graphs

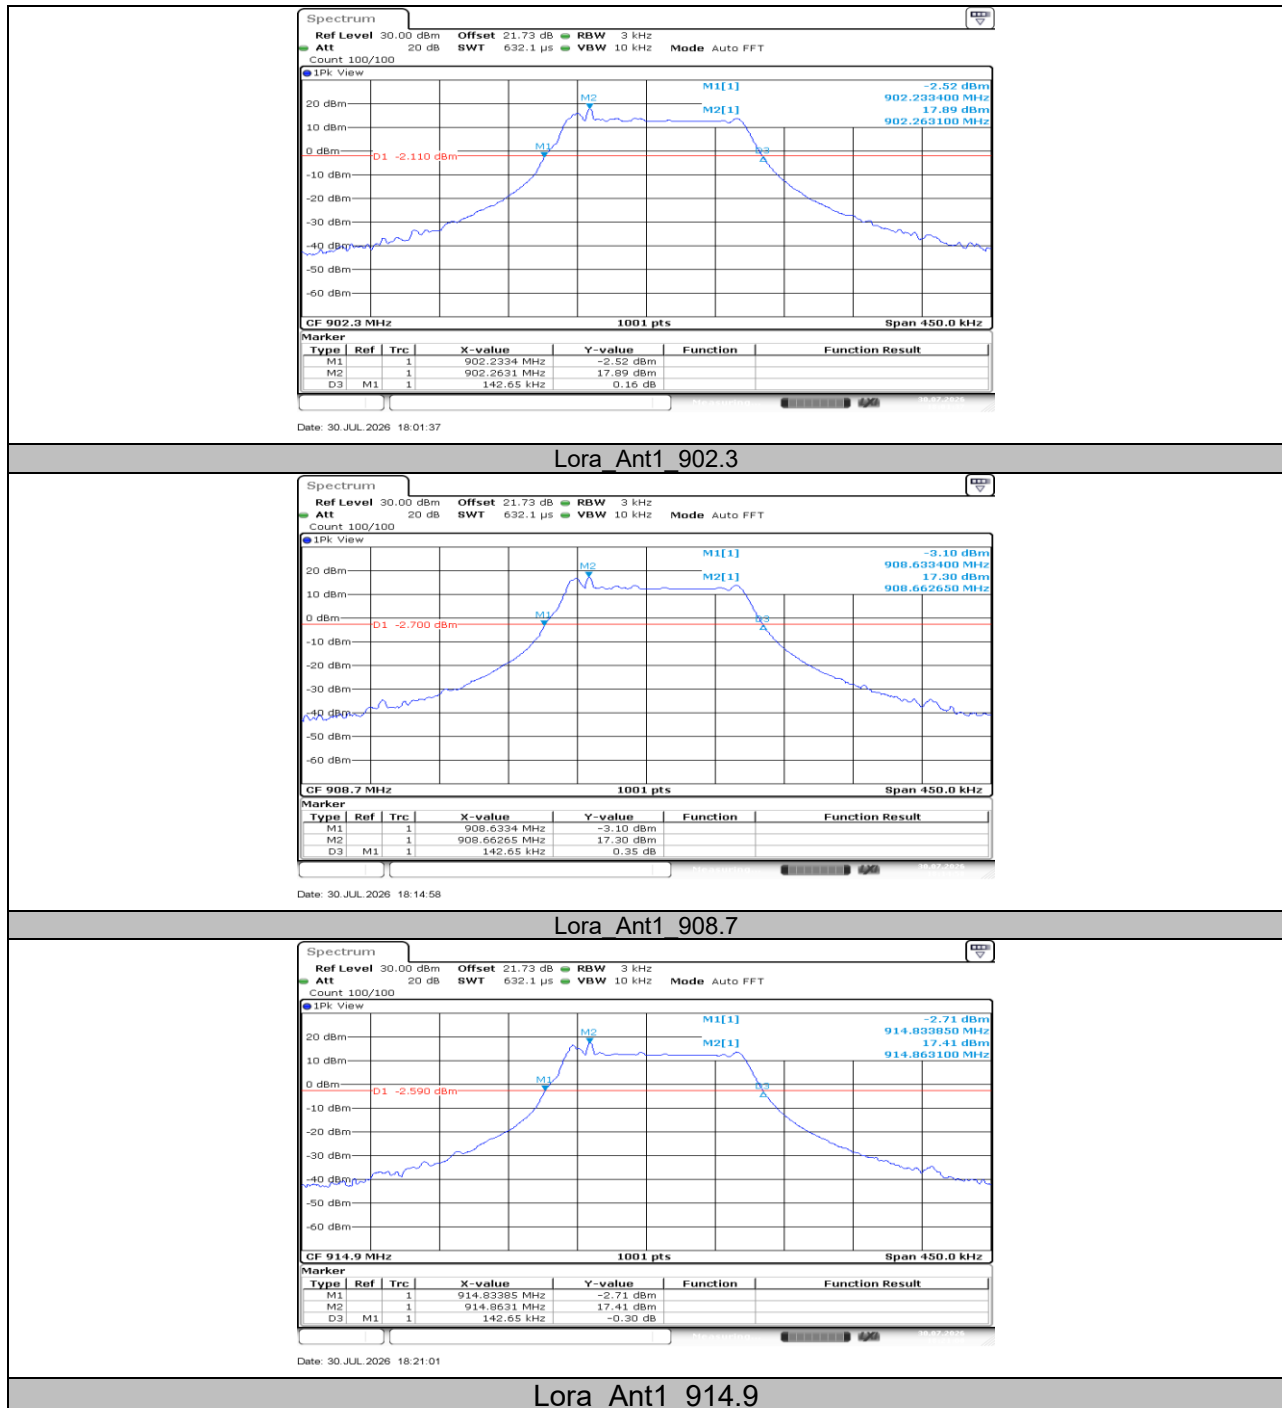


11.2. Appendix B: Occupied Channel Bandwidth

11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
Lora	Ant1	902.3	0.128	902.2416	902.3692	PASS
Lora	Ant1	908.7	0.126	908.6429	908.7692	PASS
Lora	Ant1	914.9	0.127	914.8420	914.9692	PASS

11.2.2. Test Graphs

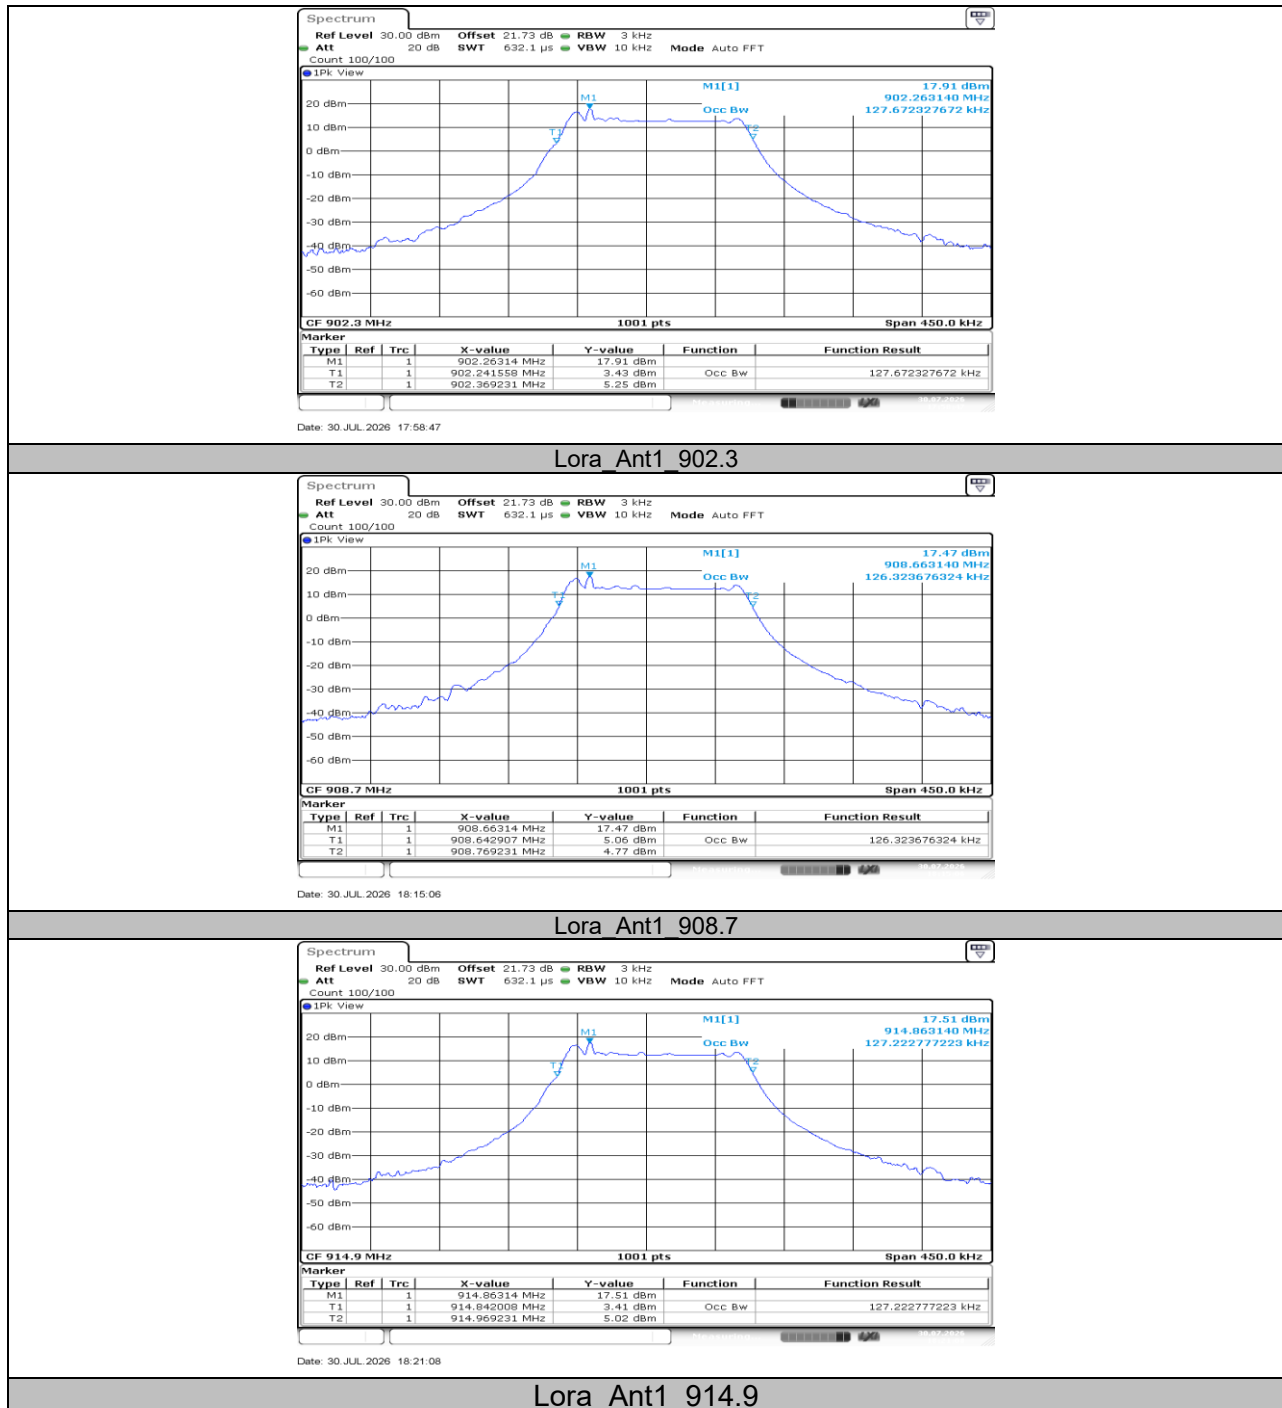


11.3. Appendix C: Maximum conducted output power**11.3.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
Lora	Ant1	902.3	20.70	30	PASS
Lora	Ant1	908.7	20.86	30	PASS
Lora	Ant1	914.9	20.78	30	PASS

11.4. Appendix D: Carrier frequency separation**11.4.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
Lora	Ant1	Hop	0.184	≥ 0.095	PASS

11.4.2. Test Graphs

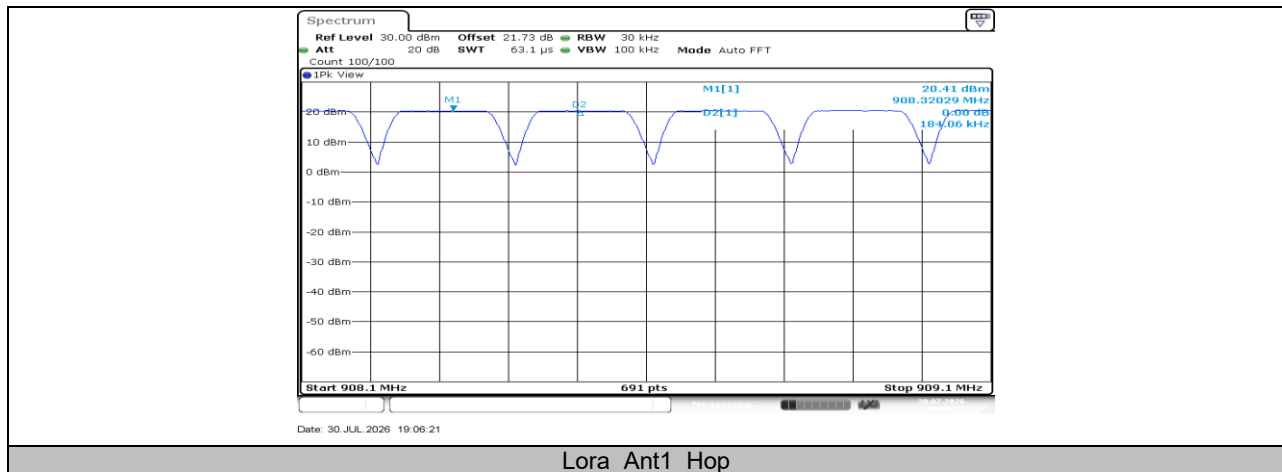


11.5. Appendix E: Time of occupancy

11.5.1. Test Result

Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
Lora	Ant1	Hop	128.341	3	0.385	≤0.4	PASS


11.5.2. Test Graphs

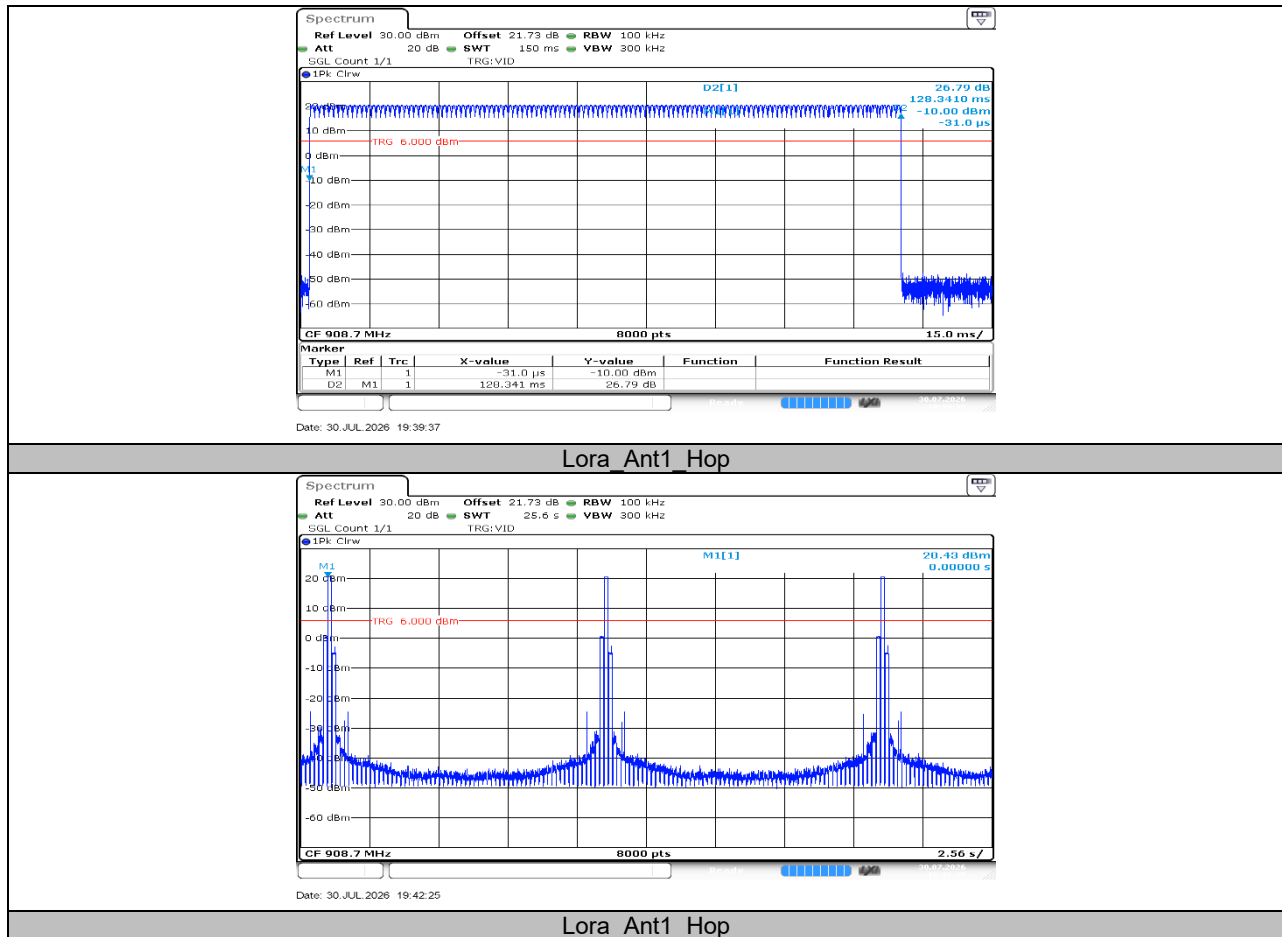

11.6. Appendix F: Number of hopping channels**11.6.1. Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
Lora	Ant1	Hop	64	≥50	pass


11.6.2. Test Graphs

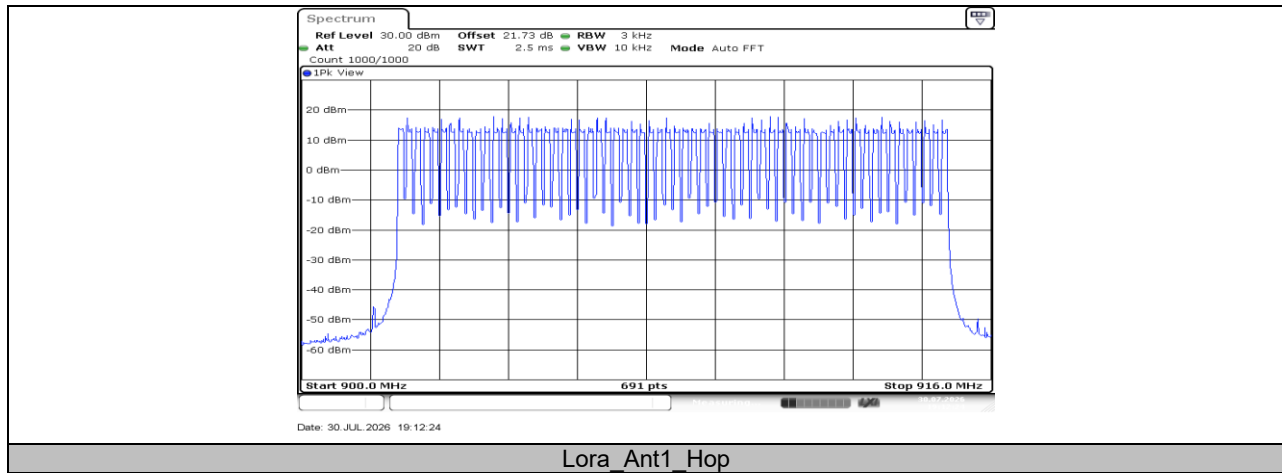


11.7. Appendix G: Band edge measurements**11.7.1. Test Result**

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
Lora	Ant1	Low	902.3	20.52	-31.05	≤0.52	PASS
		High	914.9	20.23	-45.96	≤0.23	PASS
		Low	Hop_902.3	20.46	-33.17	≤0.46	PASS
		High	Hop_914.9	20.28	-45.84	≤0.28	PASS


11.7.2. Test Graphs

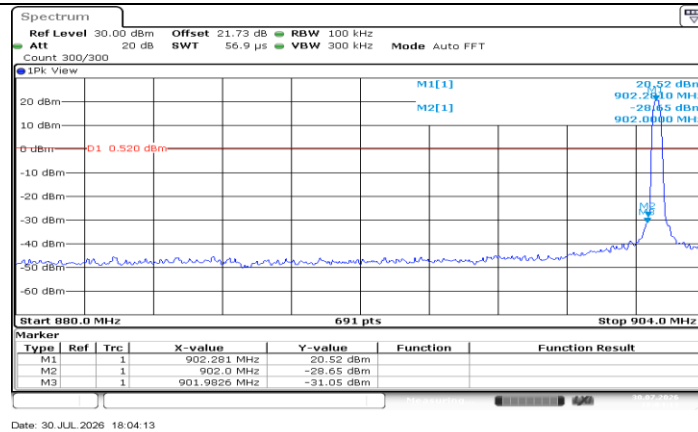


DH5 Ant1 Low 2402

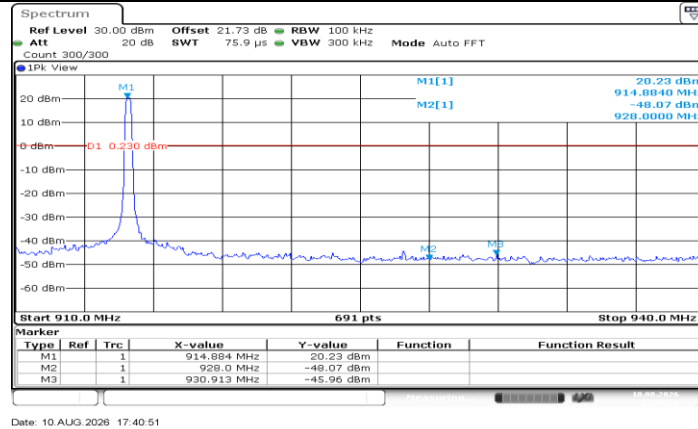

DH5 Ant1 High 2480

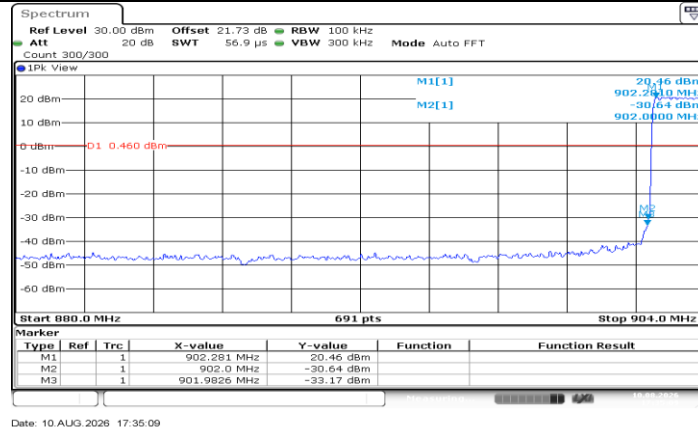

DH5 Ant1 Low Hop 2402

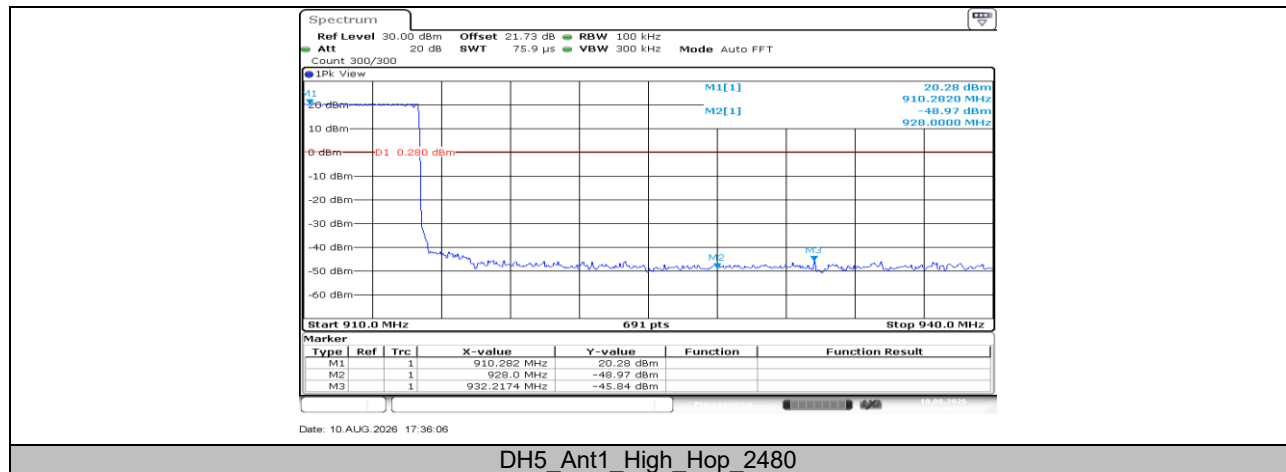



11.8. Appendix H: Conducted Spurious Emission


11.8.1. Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
Lora	Ant1	902.3	Reference	20.67	---	PASS
			30~1000	-45.43	≤ 0.67	PASS
			1000~26500	-39.71	≤ 0.67	PASS
		908.7	Reference	20.63	---	PASS
			30~1000	-45.68	≤ 0.63	PASS
			1000~26500	-39.92	≤ 0.35	PASS
		914.9	Reference	20.64	---	PASS
			30~1000	-45.32	≤ 0.64	PASS
			1000~26500	-39.88	≤ 0.64	PASS

11.8.2. Test Graphs

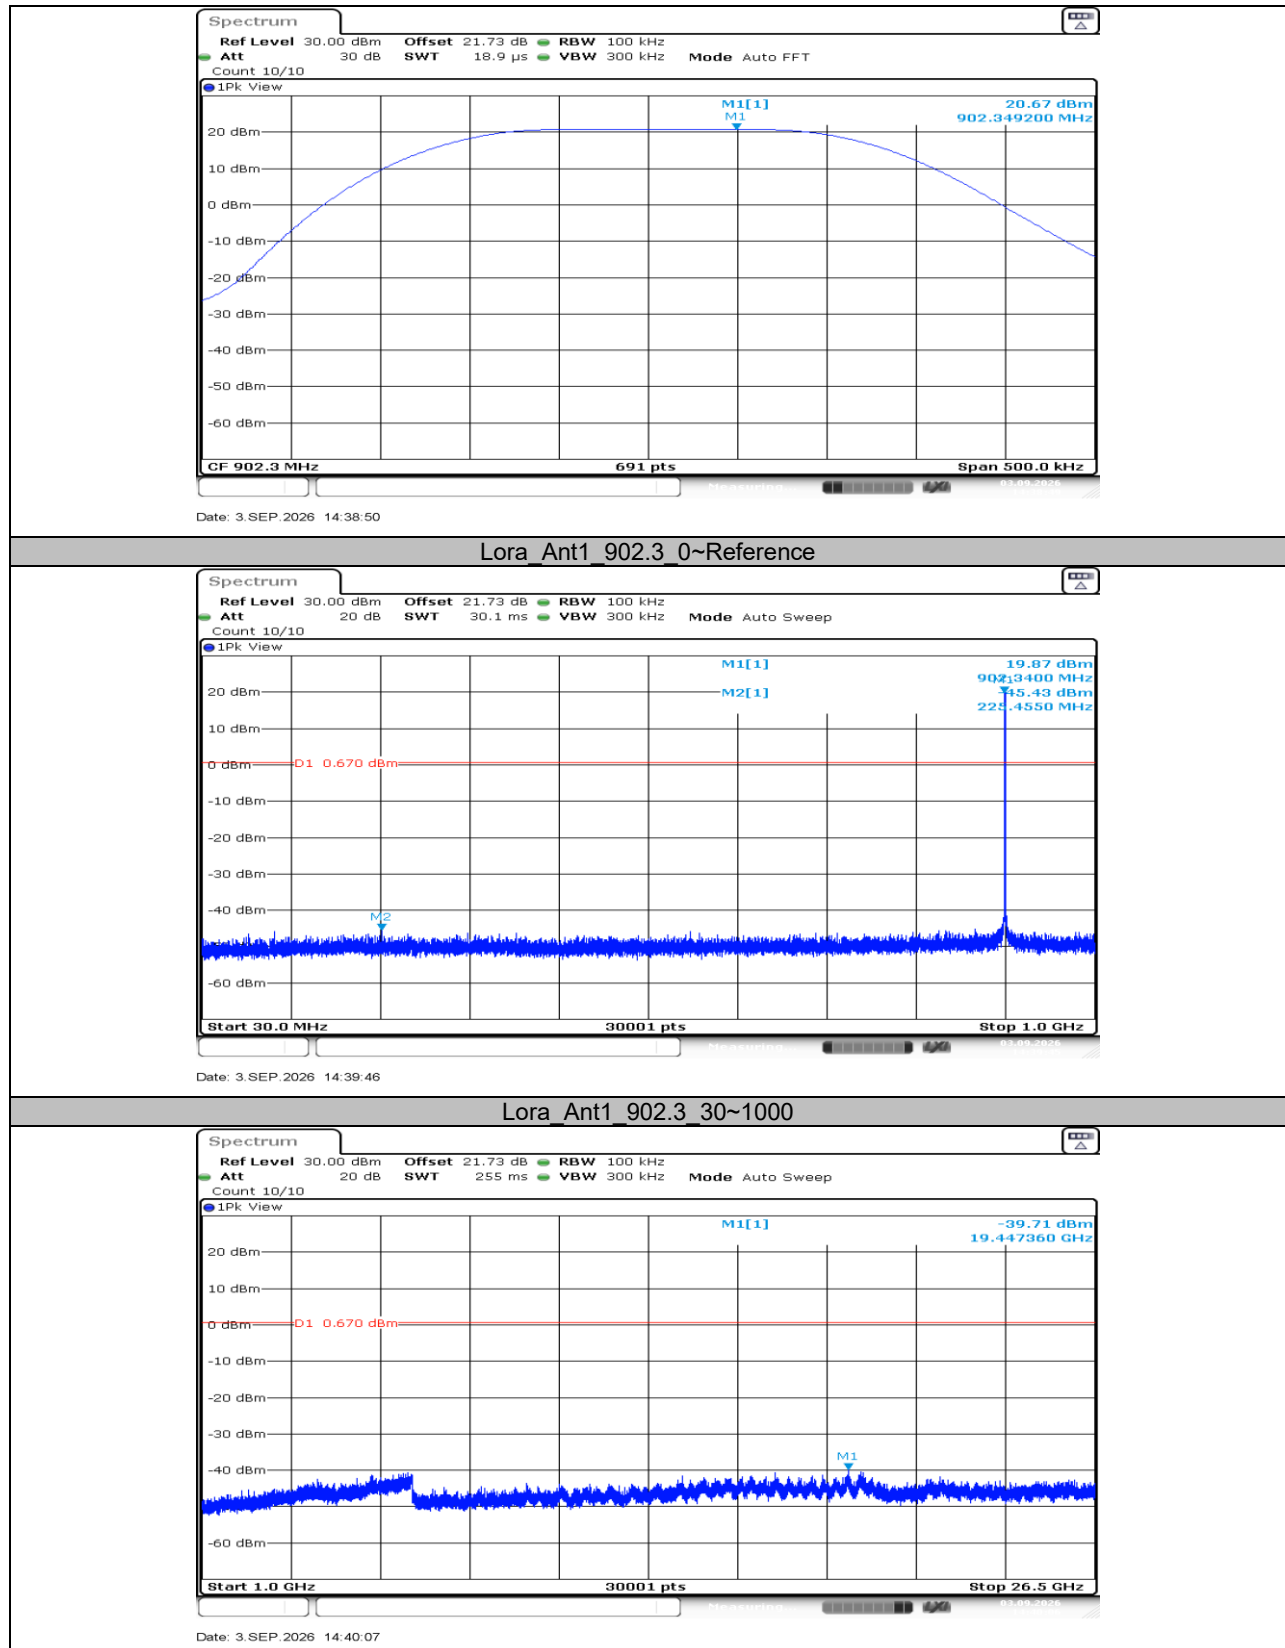


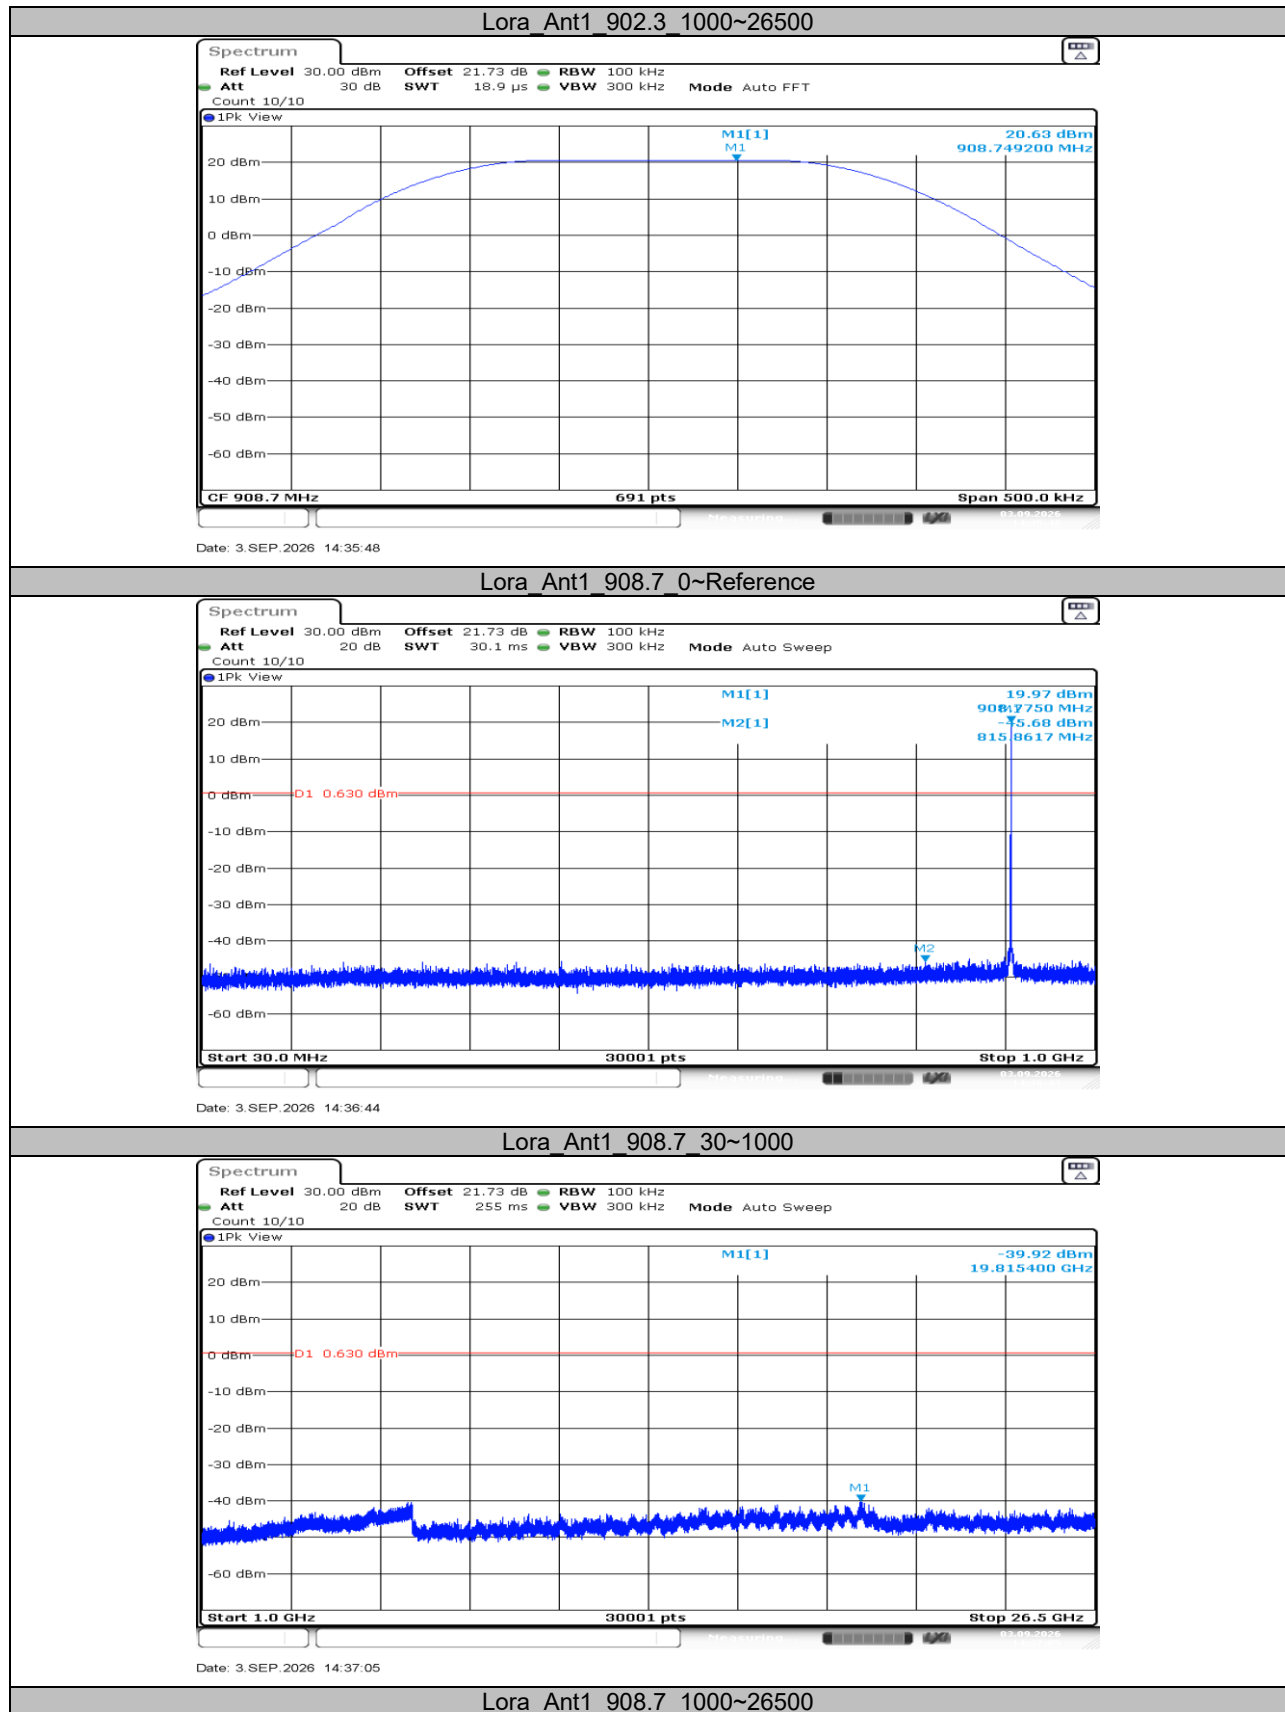

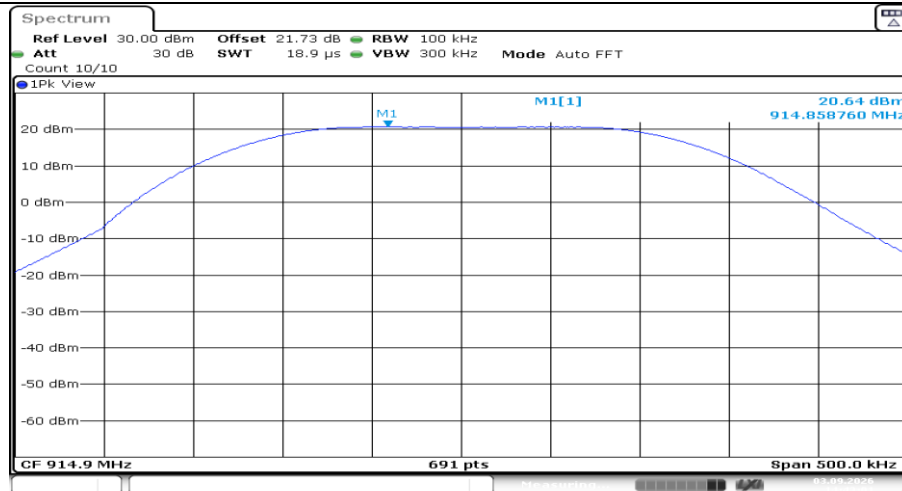


Date: 3.SEP.2026 14:43:01

Lora Ant1 914.9 0~Reference

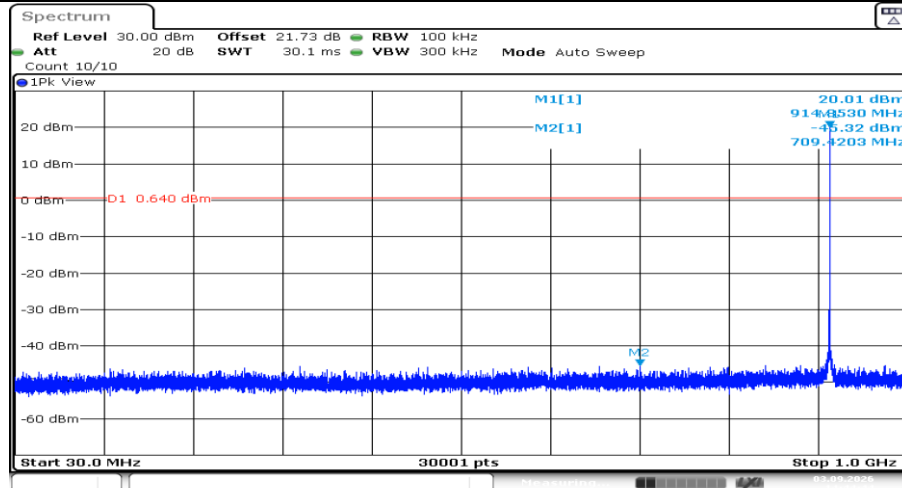

Date: 3.SEP.2026 14:44:44

Lora Ant1 914.9 30~1000

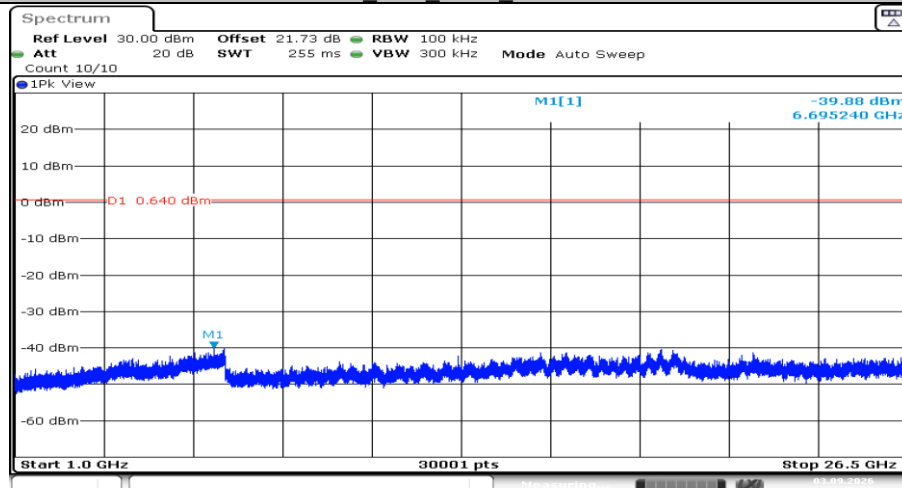

Date: 3.SEP.2026 14:45:06

Lora Ant1 914.9 1000~26500

11.9. Appendix I: Duty Cycle**11.9.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
Lora	128.39	140.02	0.9169	91.69	0.38	0.01	1

Note:


Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.9.2. Test Graphs

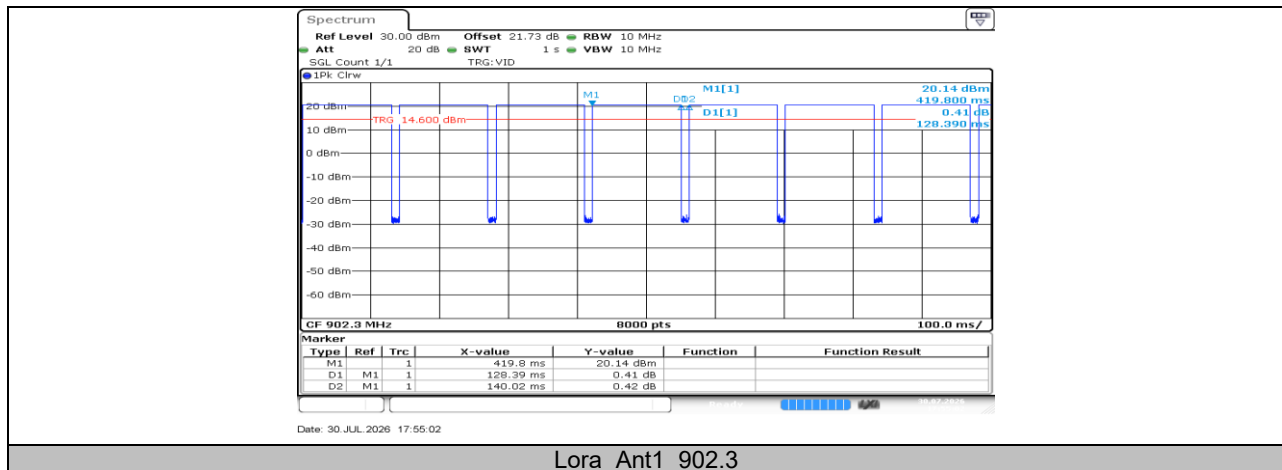

END OF REPORT