



FCC RF Test Report

APPLICANT : i.am.plus electronics inc
EQUIPMENT : SmartWatch
BRAND NAME : iamplus
MODEL NAME : IAM1110
MARKETING NAME : DIAL
FCC ID : 2AB2S-IAM1110
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 17, 2015 and testing was completed on Aug. 04, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Pre-Scanned RF Power	9
2.3 Test Mode	10
2.4 Connection Diagram of Test System	11
2.5 Support Unit used in test configuration and system	12
2.6 EUT Operation Test Setup	12
2.7 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement	15
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	29
3.6 AC Conducted Emission Measurement	33
3.7 Antenna Requirements	41
4 LIST OF MEASURING EQUIPMENT	42
5 UNCERTAINTY OF EVALUATION	43
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR571759C	Rev. 01	Initial issue of report	Apr. 07, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 A5.4(4)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.58 dB at 2483.520 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 10.50 dB at 2.566 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

i.am.plus electronics inc

10960 Wilshire Blvd., 5th Floor Los Angeles, CA 90024

1.2 Manufacturer

FIH Mobile Limited

No. 4, Mingsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	SmartWatch
Brand Name	iamplus
Model Name	IAM1110
Marketing Name	dial
FCC ID	2AB2S-IAM1110
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA WLAN 11b/g/n HT20 Bluetooth v4.0 EDR/LE
HW Version	PR4
SW Version	IP2_1C0C_1_240
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 17.80 dBm (0.0603 W) 802.11g : 20.66 dBm (0.1164 W) 802.11n HT20 : 19.33 dBm (0.0857 W)
99% Occupied Bandwidth	802.11b : 12.35MHz 802.11g : 18.25MHz 802.11n HT20 : 19.05MHz
Antenna Type	PIFA Antenna type with gain 0.25 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	17.80	16.76	16.74	16.62

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	20.66	19.61	20.33	19.55	20.30	19.69	19.29	19.22

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	19.33	19.30	18.96	19.21	19.15	18.94	19.13	19.21



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

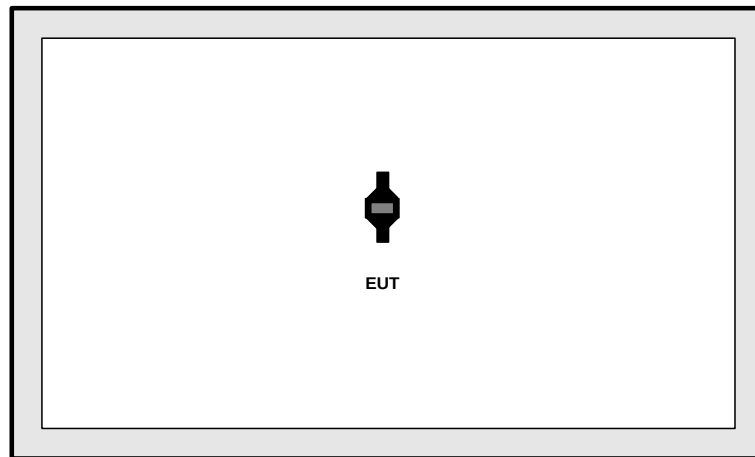

<AC Conducted Emission Mode>

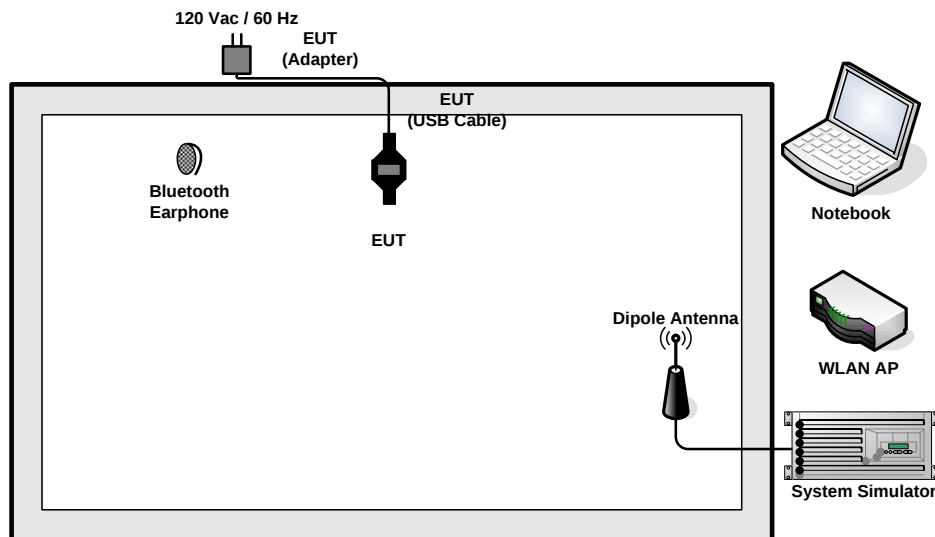

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

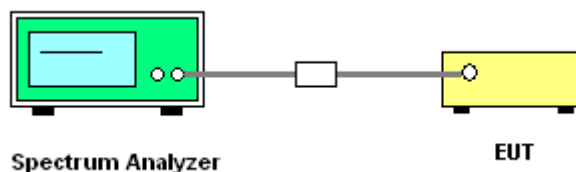

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

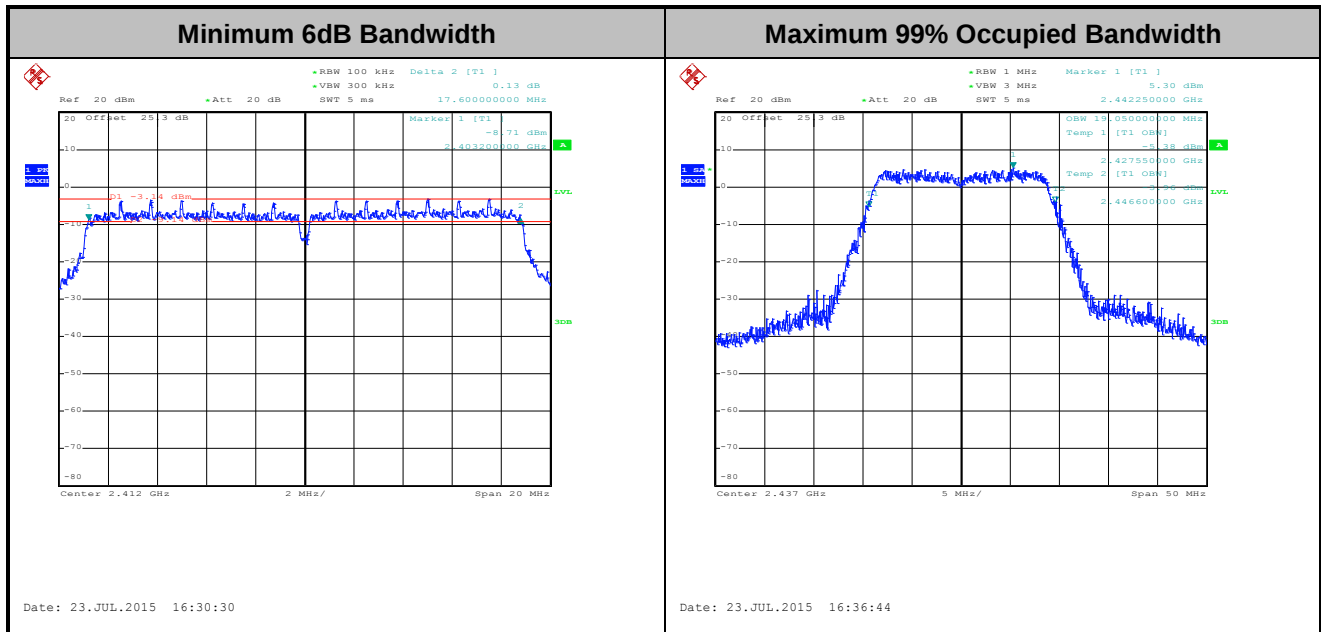

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup





3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

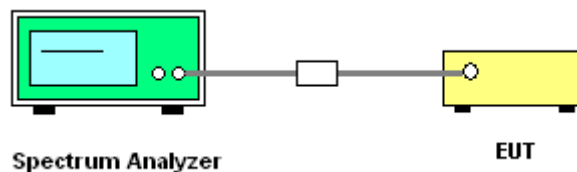



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

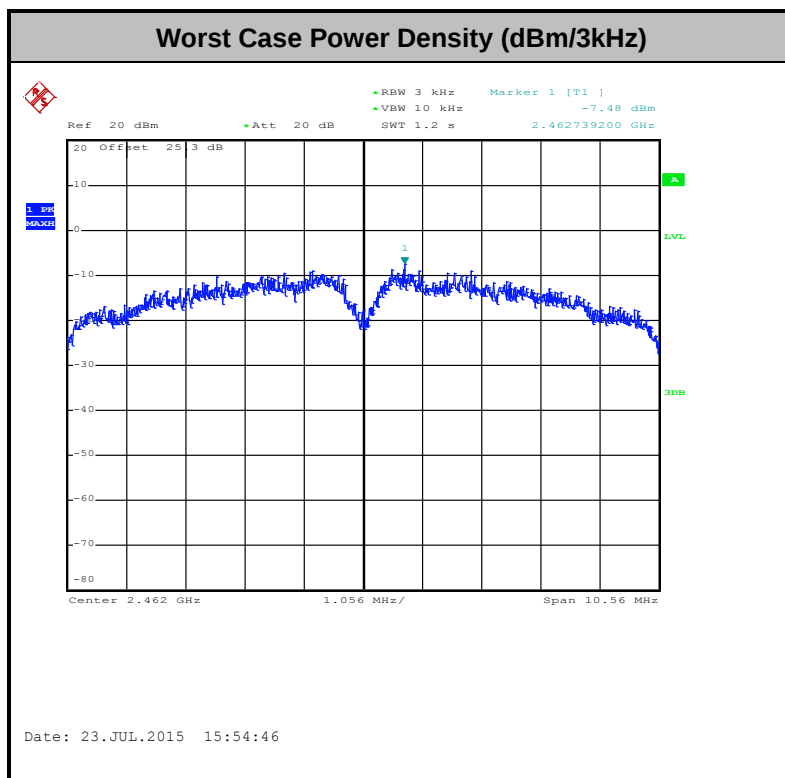

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

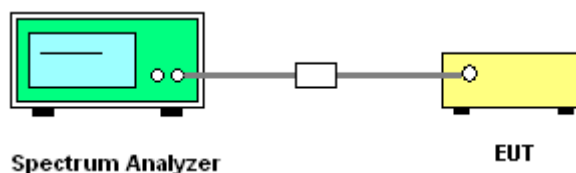



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~26℃
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	AC Chang

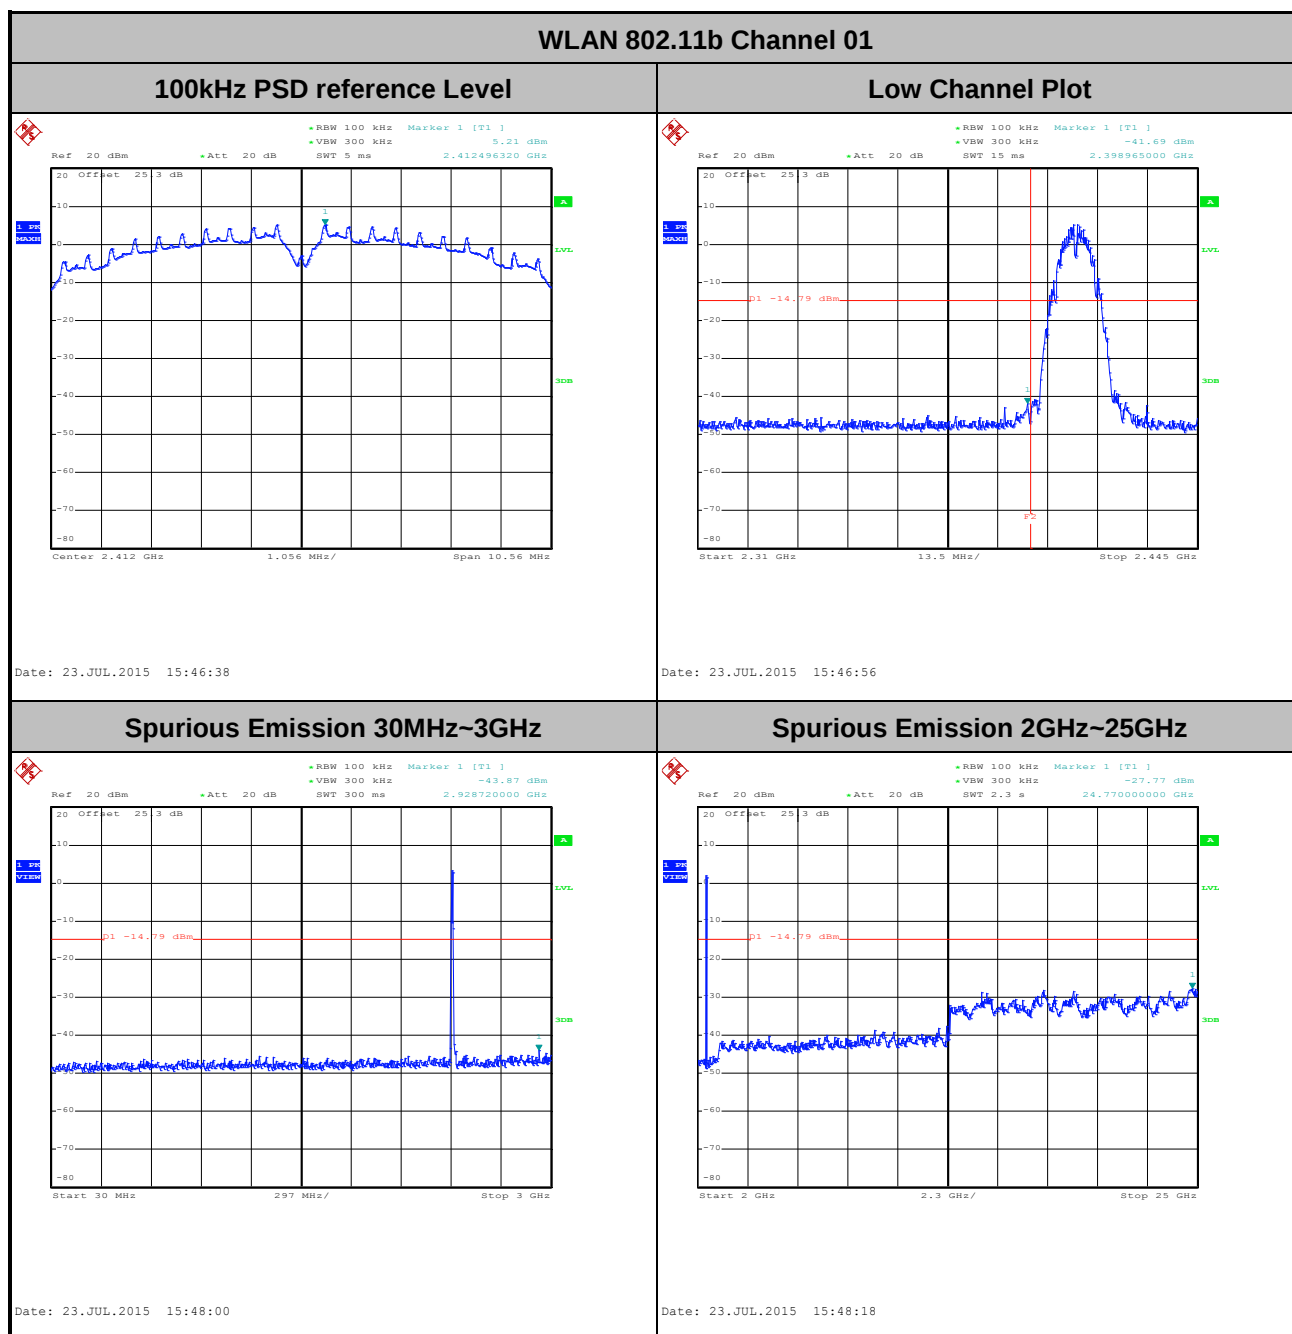




Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	AC Chang


WLAN 802.11b Channel 06

100kHz PSD reference Level

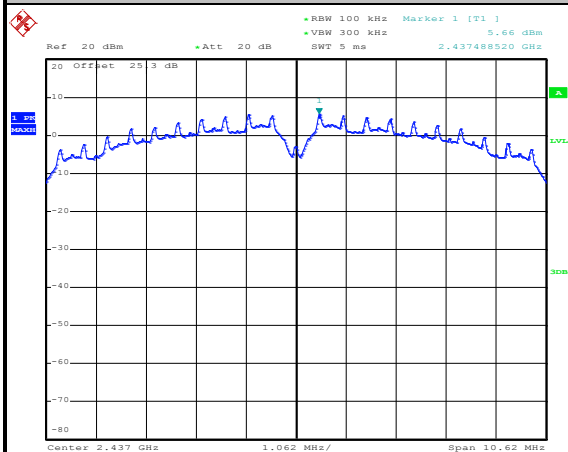


Date: 23.JUL.2015 15:52:16

Spurious Emission 30MHz~3GHz

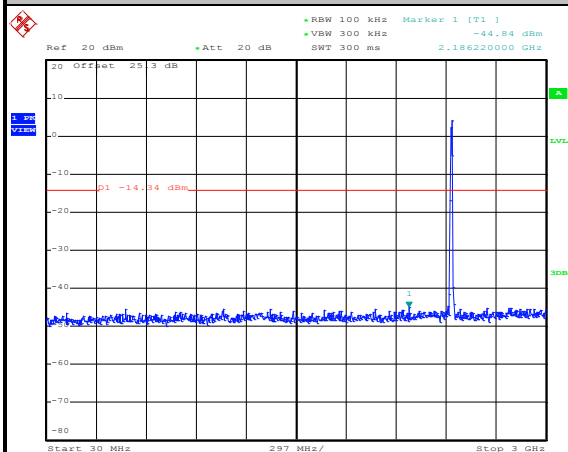

Date: 23.JUL.2015 15:52:45

Spurious Emission 2GHz~25GHz

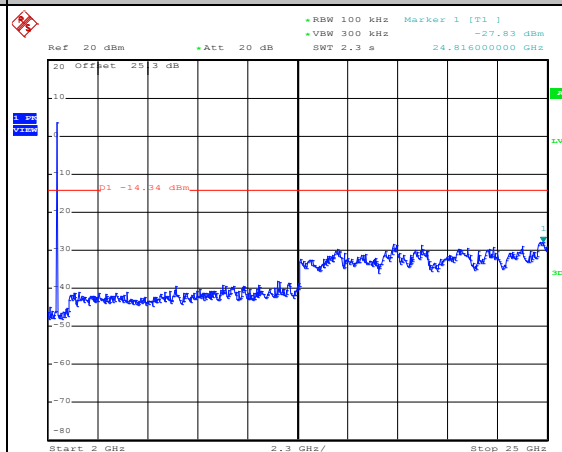


Date: 23.JUL.2015 15:53:02



Test Mode :	802.11b	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	AC Chang


WLAN 802.11b Channel 11

100kHz PSD reference Level

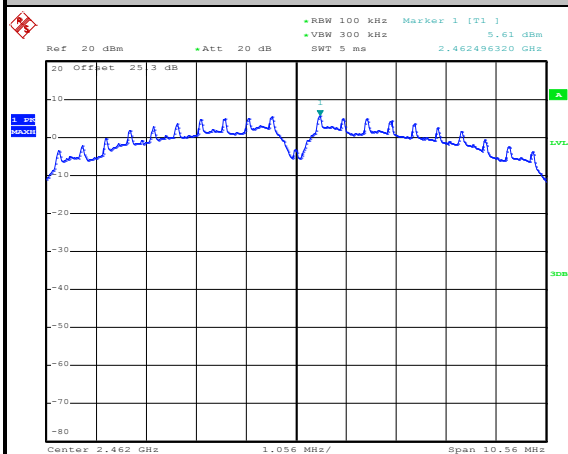


Date: 23.JUL.2015 15:55:59

High Channel Plot

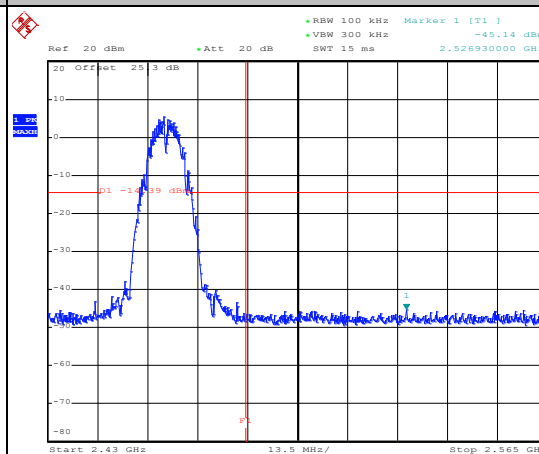


Date: 23.JUL.2015 15:56:22

Spurious Emission 30MHz~3GHz

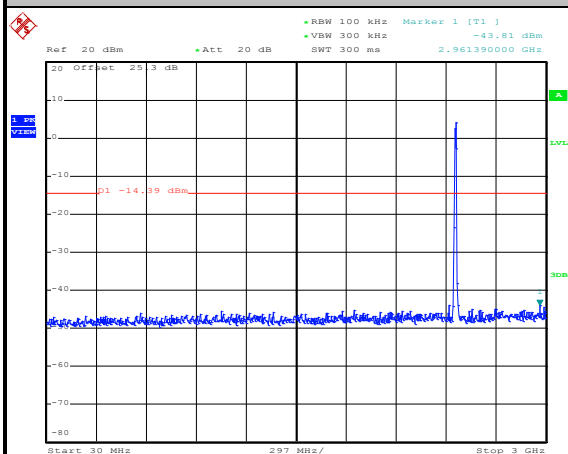

Date: 23.JUL.2015 15:56:45

Spurious Emission 2GHz~25GHz

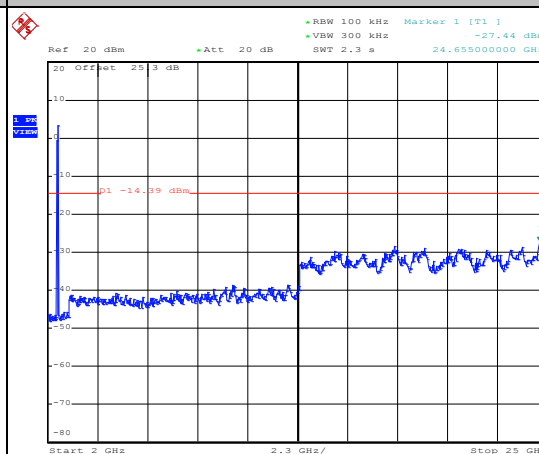


Date: 23.JUL.2015 15:57:03



Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	AC Chang


WLAN 802.11g Channel 01

100kHz PSD reference Level

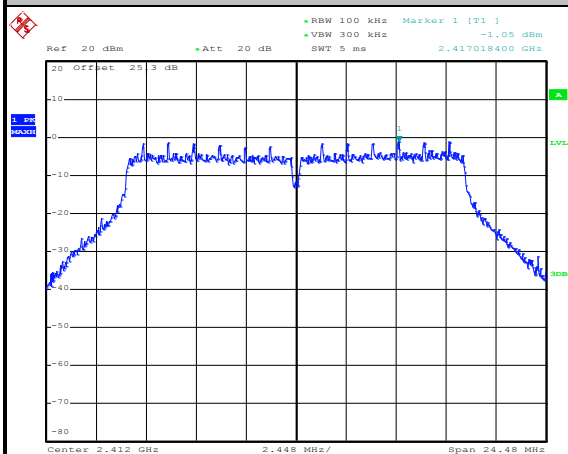


Date: 23.JUL.2015 16:09:58

Low Channel Plot

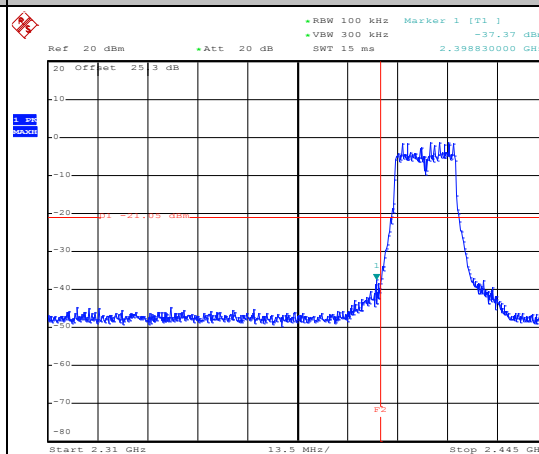


Date: 23.JUL.2015 16:11:27

Spurious Emission 30MHz~3GHz

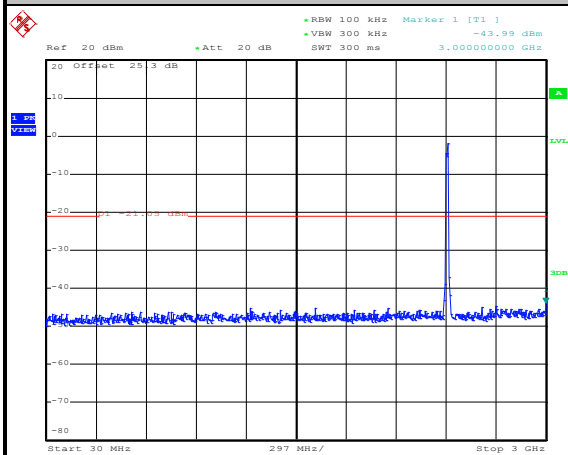

Date: 23.JUL.2015 16:11:58

Spurious Emission 2GHz~25GHz

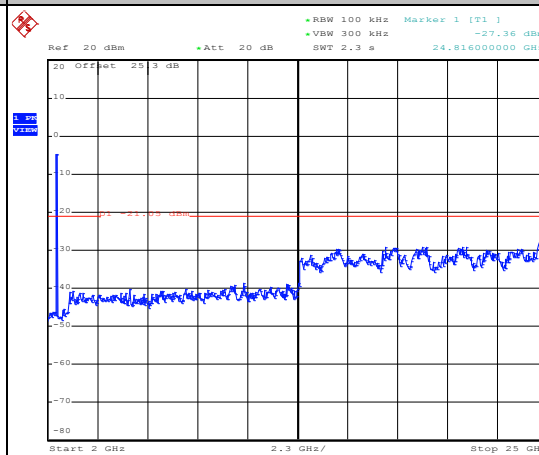


Date: 23.JUL.2015 16:12:15



Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	AC Chang


WLAN 802.11g Channel 06

100kHz PSD reference Level

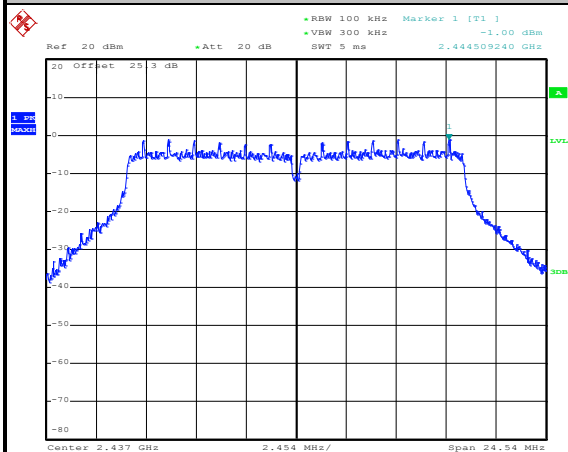


Date: 23.JUL.2015 16:27:45

Spurious Emission 30MHz~3GHz

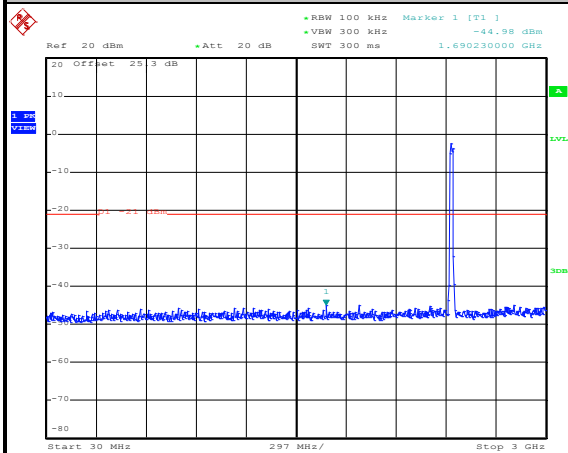

Date: 23.JUL.2015 16:28:35

Spurious Emission 2GHz~25GHz

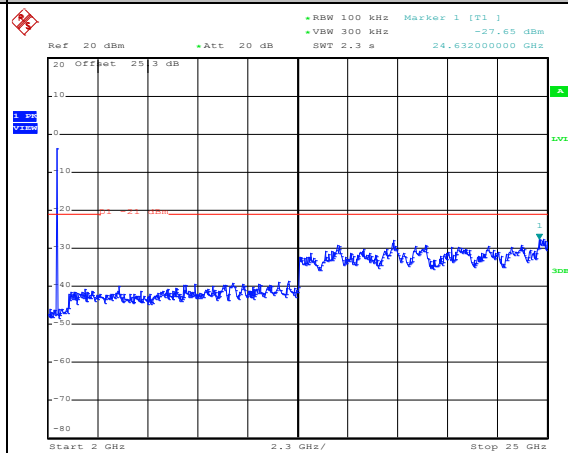


Date: 23.JUL.2015 16:28:52



Test Mode :	802.11g	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	AC Chang


WLAN 802.11g Channel 11

100kHz PSD reference Level

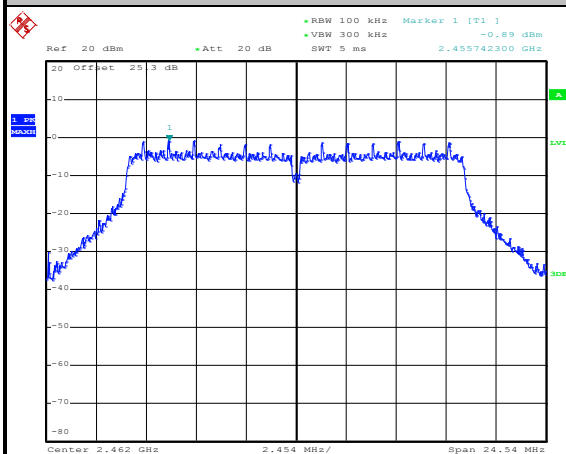


Date: 23.JUL.2015 16:24:24

High Channel Plot

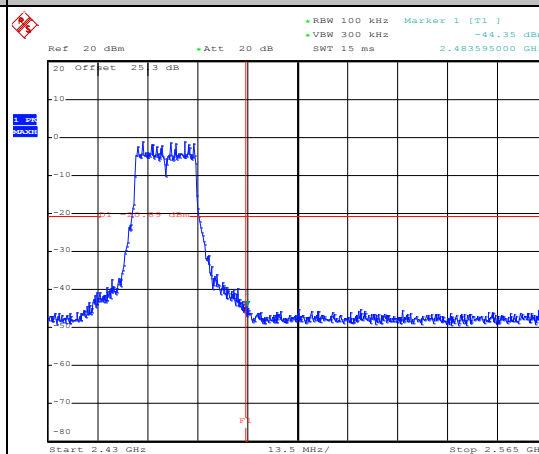


Date: 23.JUL.2015 16:24:40

Spurious Emission 30MHz~3GHz

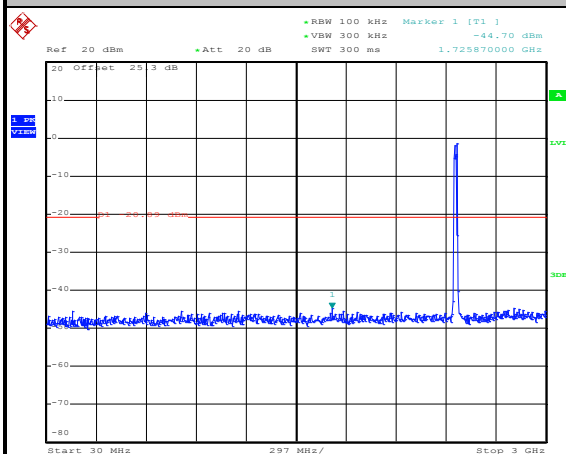

Date: 23.JUL.2015 16:25:12

Spurious Emission 2GHz~25GHz

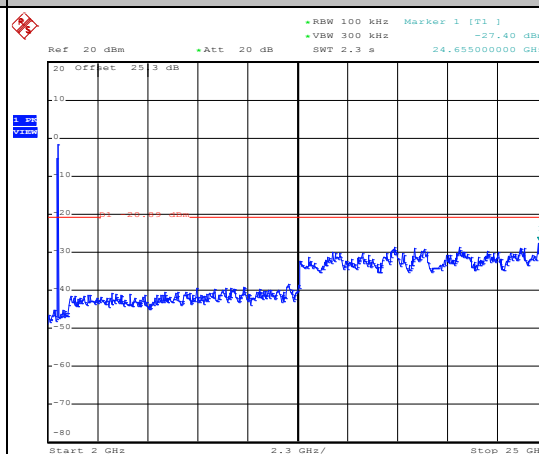


Date: 23.JUL.2015 16:25:30



Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~54%
Test Channel :	01	Test Engineer :	AC Chang


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

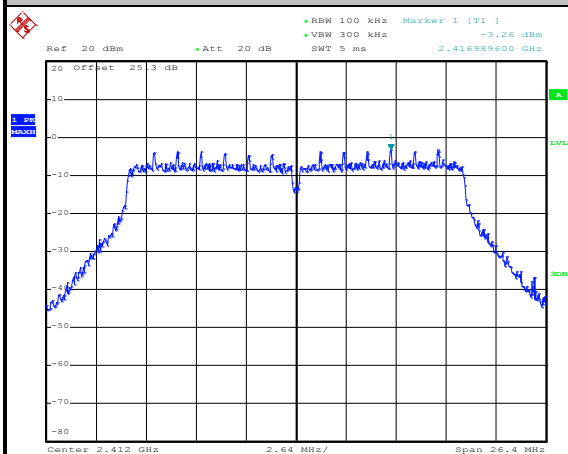


Date: 23.JUL.2015 16:32:34

Low Channel Plot

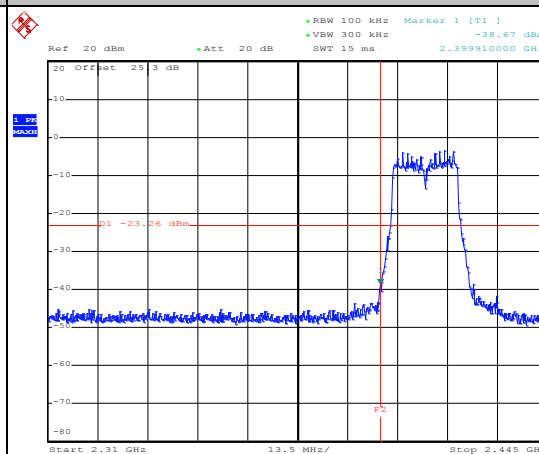


Date: 23.JUL.2015 16:33:19

Spurious Emission 30MHz~3GHz

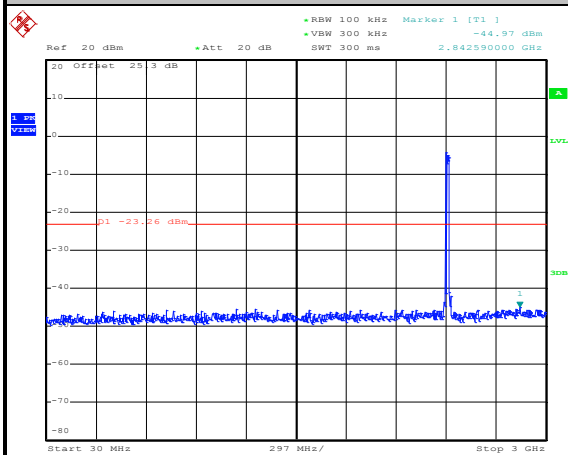

Date: 23.JUL.2015 16:33:43

Spurious Emission 2GHz~25GHz

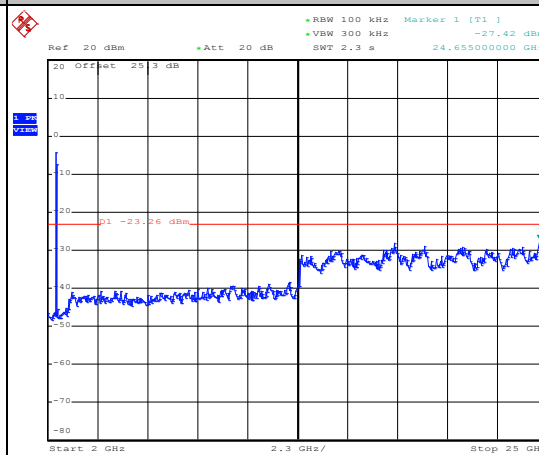


Date: 23.JUL.2015 16:34:01



Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz Mid	Relative Humidity :	45~54%
Test Channel :	06	Test Engineer :	AC Chang


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

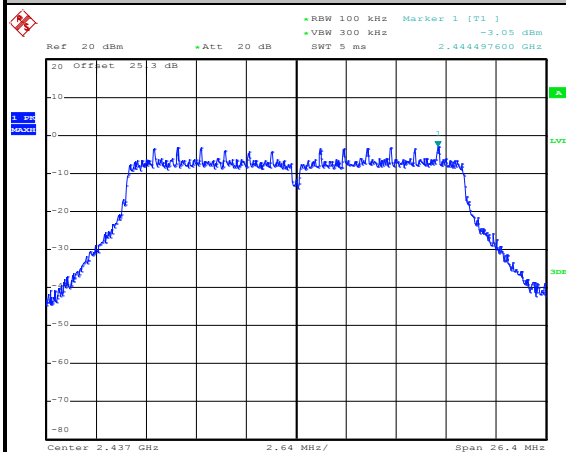


Date: 23.JUL.2015 16:38:33

Spurious Emission 30MHz~3GHz

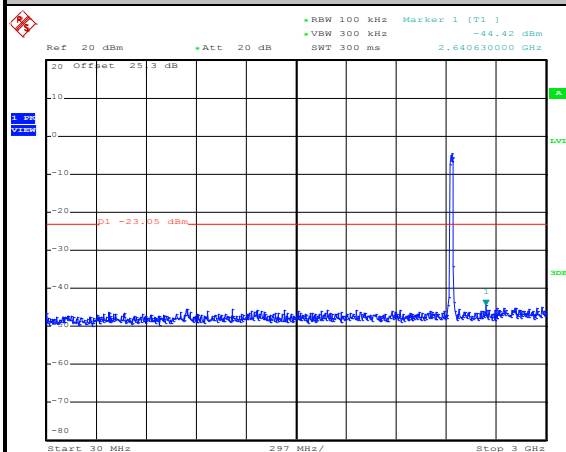

Date: 23.JUL.2015 16:39:26

Spurious Emission 2GHz~25GHz

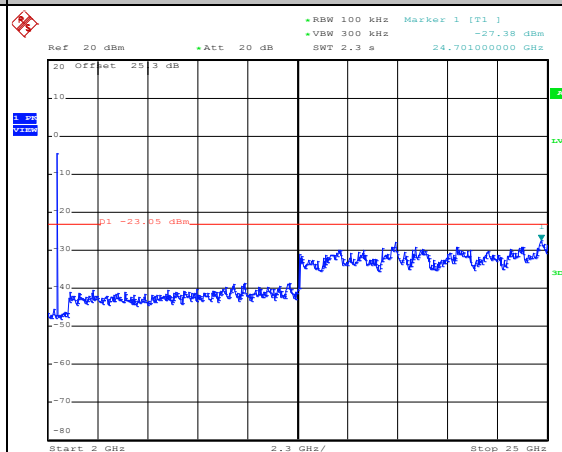


Date: 23.JUL.2015 16:39:43



Test Mode :	802.11n HT20	Temperature :	21~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~54%
Test Channel :	11	Test Engineer :	AC Chang


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

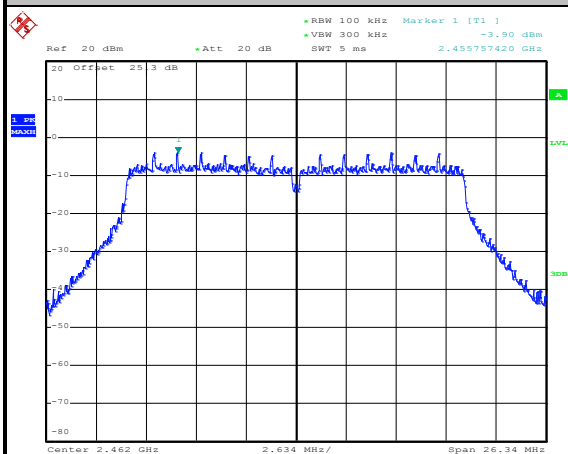


Date: 23.JUL.2015 16:44:03

High Channel Plot

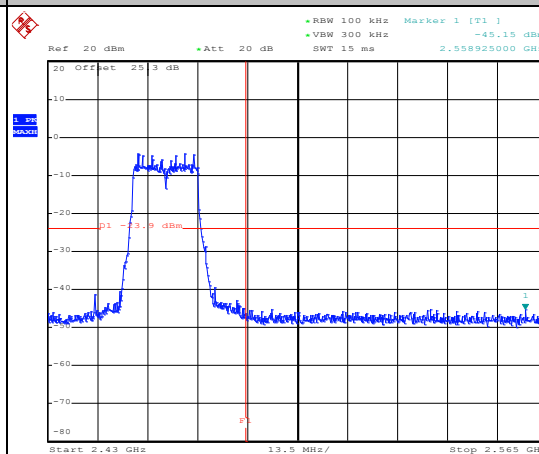


Date: 23.JUL.2015 16:44:26

Spurious Emission 30MHz~3GHz

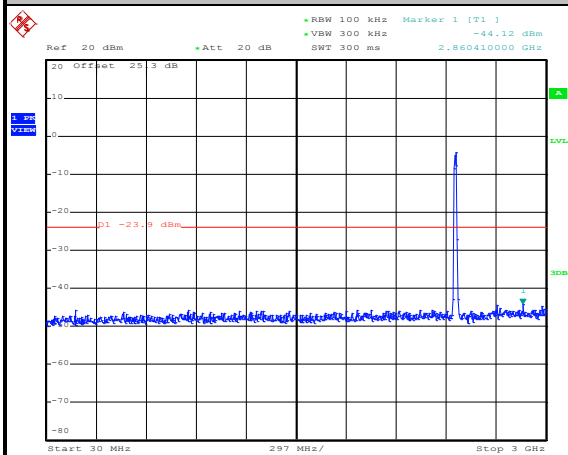

Date: 23.JUL.2015 16:45:38

Spurious Emission 2GHz~25GHz

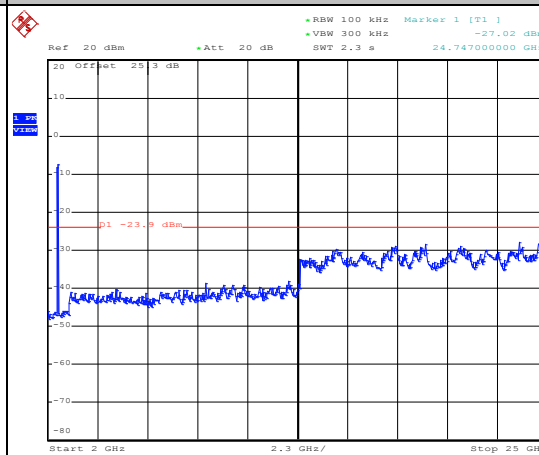

Date: 23.JUL.2015 16:45:56

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
802.11b	97.63	8240	0.121359223	300Hz
802.11g	87.34	1380	0.724637681	1kHz
2.4GHz 802.11n HT20	86.49	1280	0.78125	1kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

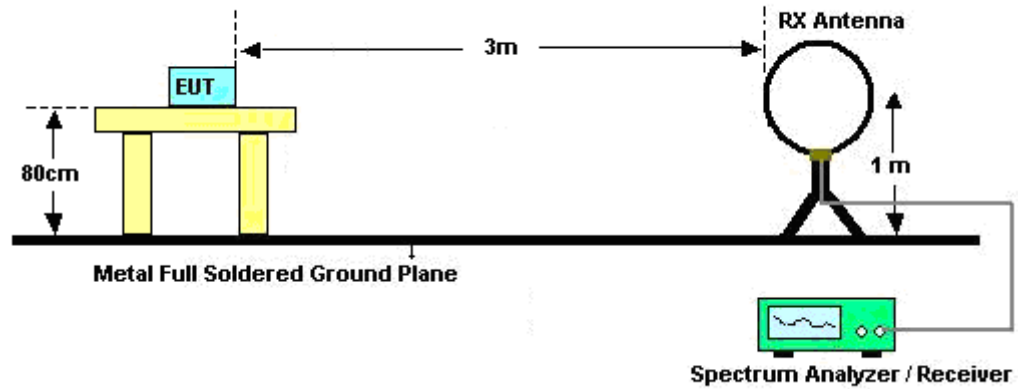

For radiated emissions from 30MHz to 1GHz

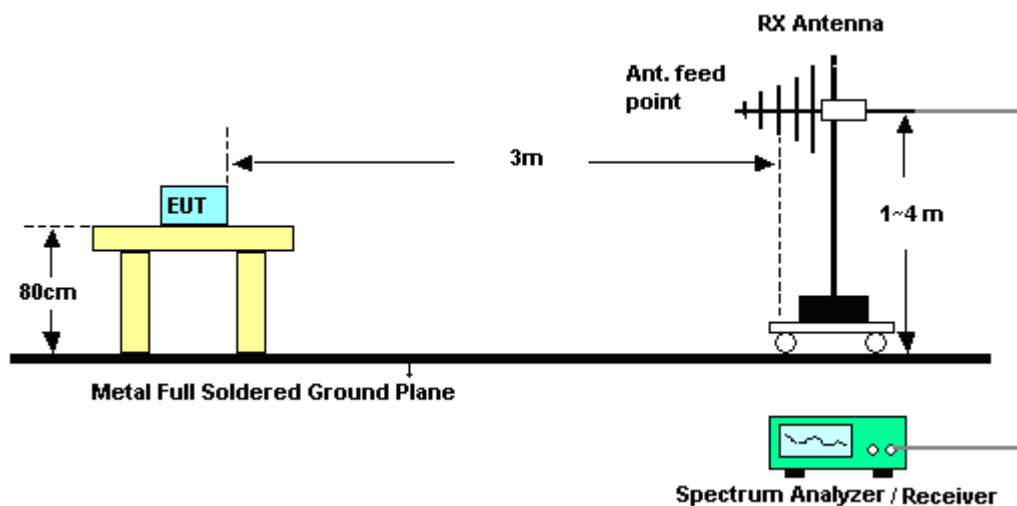

For radiated emissions above 1GHz

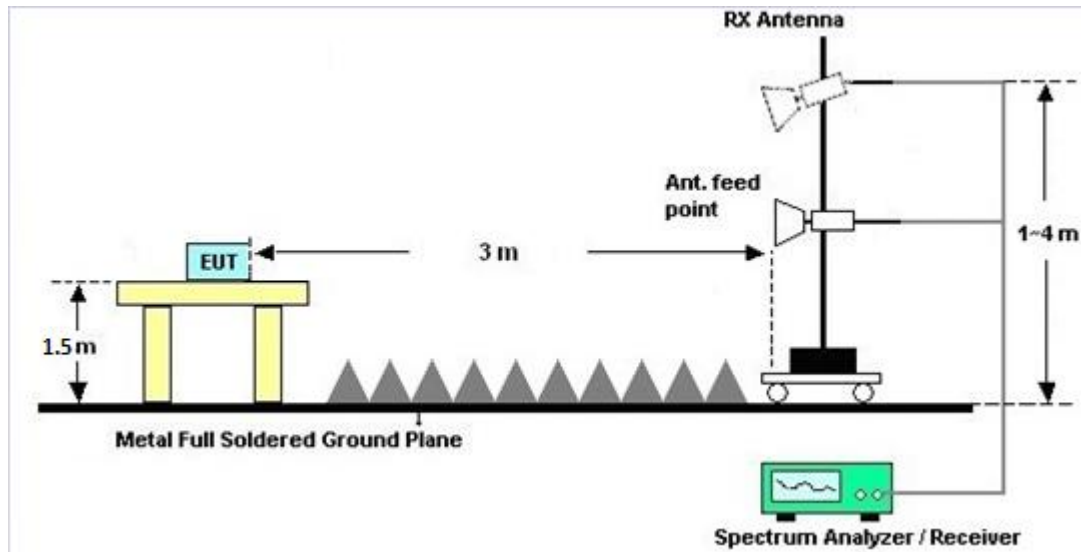

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

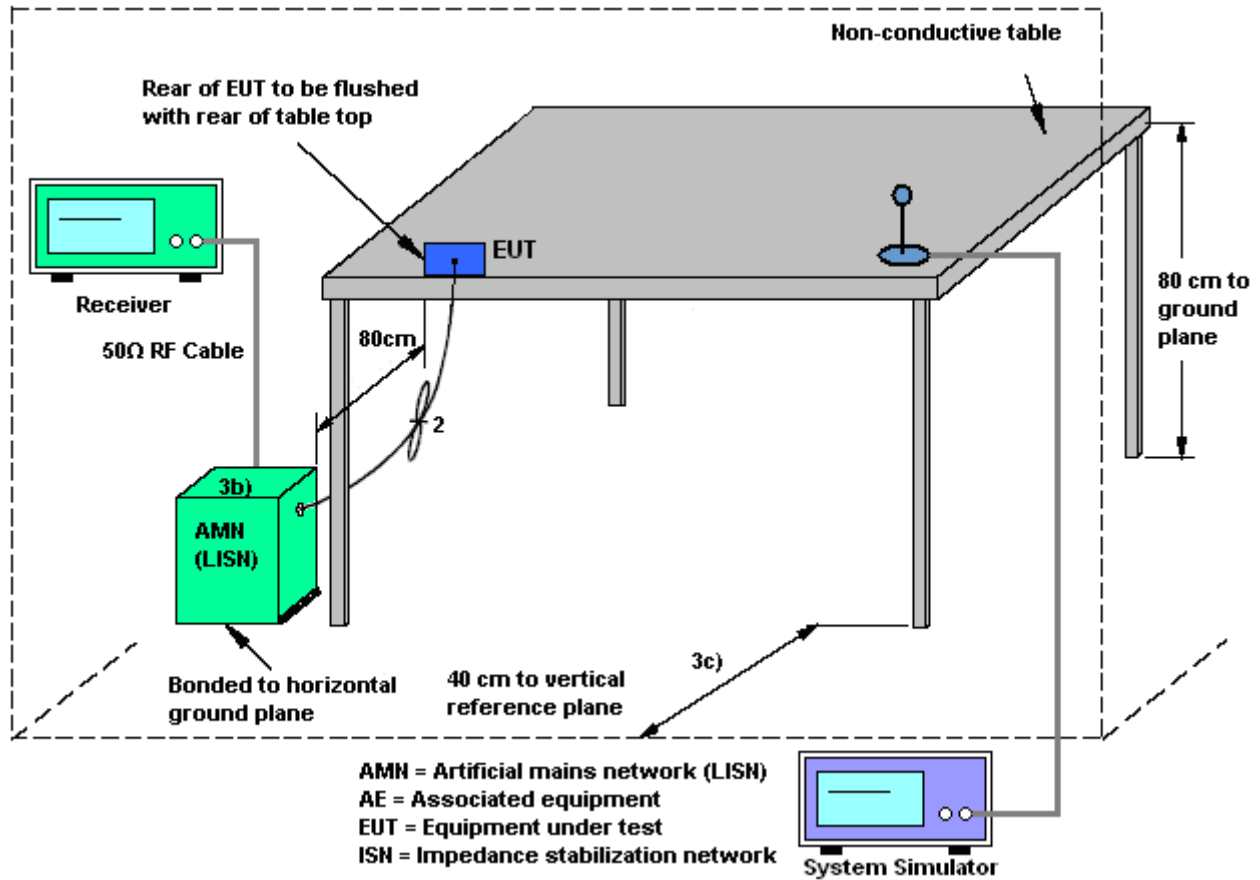

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	60~61%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)		

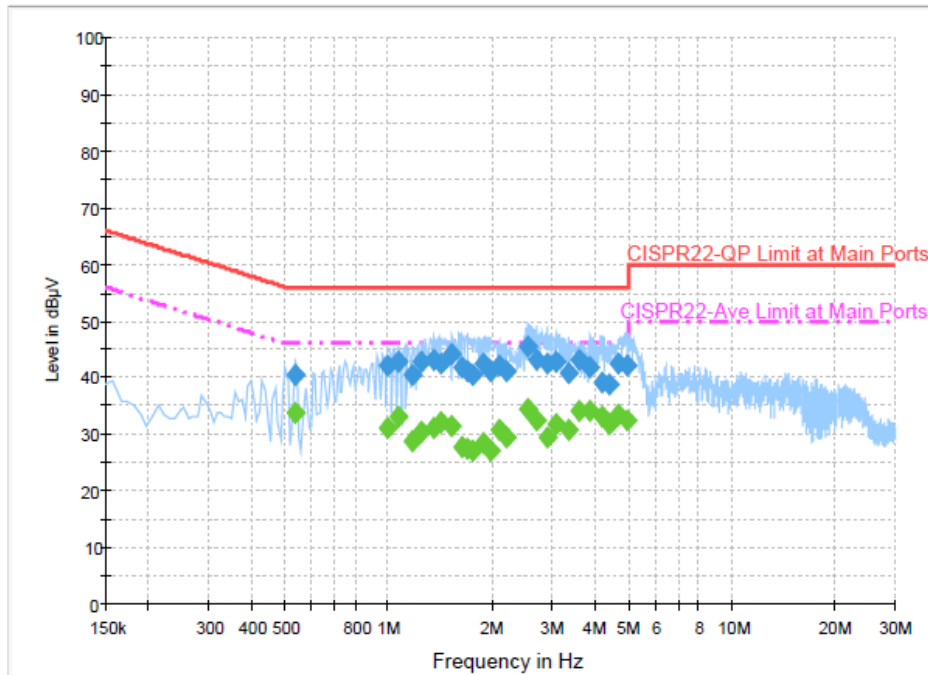

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.534000	40.5	Off	L1	19.4	15.5	56.0
0.998000	42.2	Off	L1	19.5	13.8	56.0
1.070000	42.9	Off	L1	19.6	13.1	56.0
1.182000	40.4	Off	L1	19.6	15.6	56.0
1.246000	43.0	Off	L1	19.6	13.0	56.0
1.358000	43.2	Off	L1	19.6	12.8	56.0
1.430000	42.6	Off	L1	19.5	13.4	56.0
1.534000	44.1	Off	L1	19.5	11.9	56.0
1.646000	41.8	Off	L1	19.6	14.2	56.0
1.694000	41.0	Off	L1	19.6	15.0	56.0
1.766000	40.5	Off	L1	19.6	15.5	56.0
1.894000	42.5	Off	L1	19.6	13.5	56.0
1.982000	41.2	Off	L1	19.7	14.8	56.0

Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	60~61%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)		

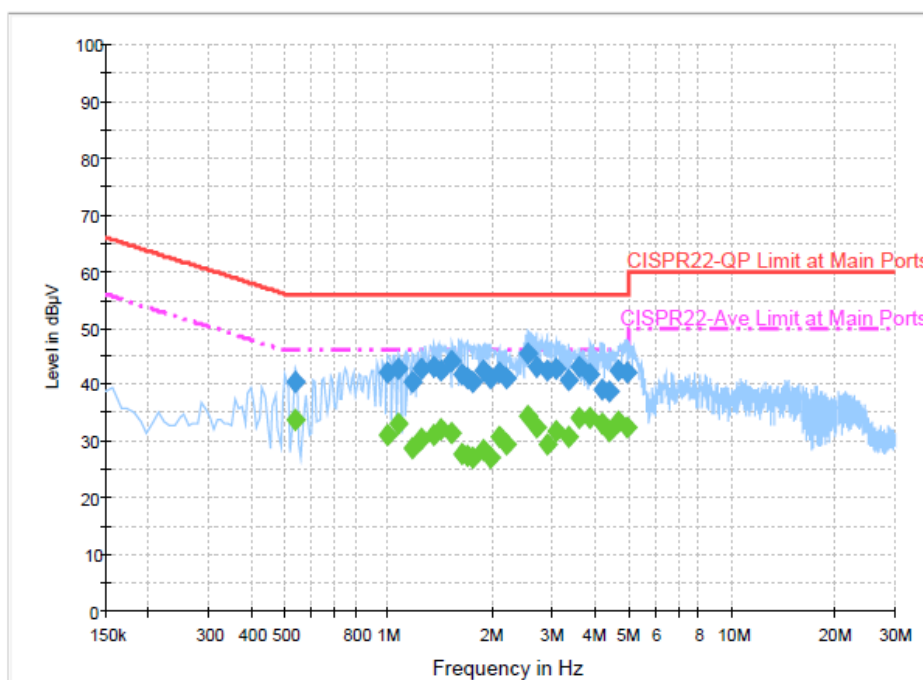
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.102000	42.2	Off	L1	19.7	13.8	56.0
2.214000	41.3	Off	L1	19.7	14.7	56.0
2.566000	45.5	Off	L1	19.7	10.5	56.0
2.702000	43.1	Off	L1	19.7	12.9	56.0
2.894000	42.3	Off	L1	19.7	13.7	56.0
3.070000	42.7	Off	L1	19.7	13.3	56.0
3.358000	40.9	Off	L1	19.7	15.1	56.0
3.598000	43.2	Off	L1	19.7	12.8	56.0
3.886000	41.6	Off	L1	19.7	14.4	56.0
4.214000	39.2	Off	L1	19.7	16.8	56.0
4.430000	39.0	Off	L1	19.7	17.0	56.0
4.678000	42.6	Off	L1	19.7	13.4	56.0
4.942000	42.3	Off	L1	19.8	13.7	56.0

Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	60~61%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)		

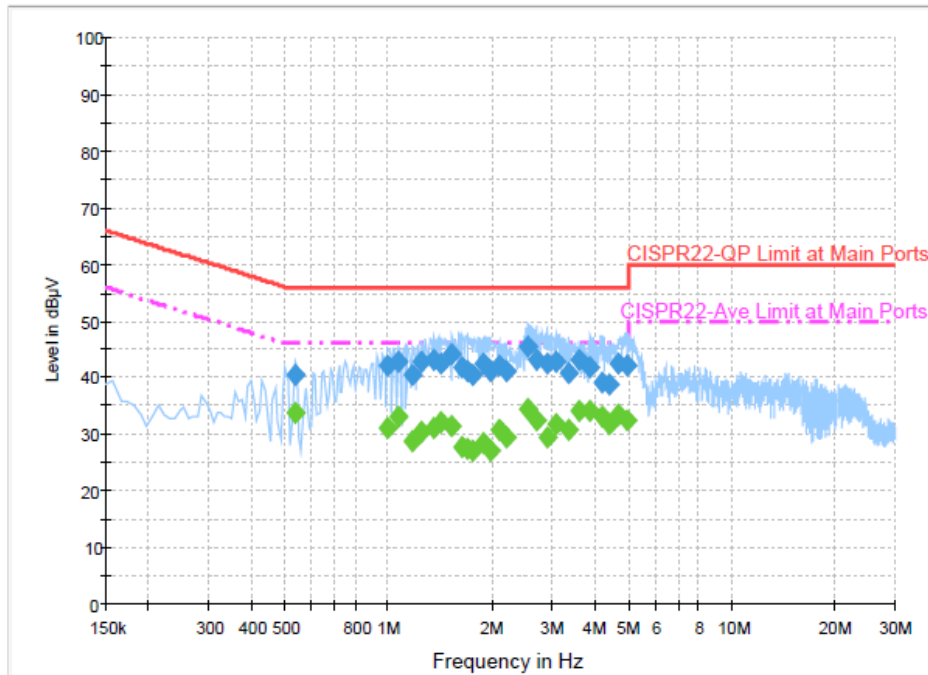
Final Result : Average


Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.534000	33.9	Off	L1	19.4	12.1	46.0
0.998000	31.2	Off	L1	19.5	14.8	46.0
1.070000	33.2	Off	L1	19.6	12.8	46.0
1.182000	28.8	Off	L1	19.6	17.2	46.0
1.246000	30.3	Off	L1	19.6	15.7	46.0
1.358000	31.3	Off	L1	19.6	14.7	46.0
1.430000	32.1	Off	L1	19.5	13.9	46.0
1.534000	31.6	Off	L1	19.5	14.4	46.0
1.646000	27.7	Off	L1	19.6	18.3	46.0
1.694000	27.4	Off	L1	19.6	18.6	46.0
1.766000	27.0	Off	L1	19.6	19.0	46.0
1.894000	28.4	Off	L1	19.6	17.6	46.0
1.982000	27.1	Off	L1	19.7	18.9	46.0

Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	60~61%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)		

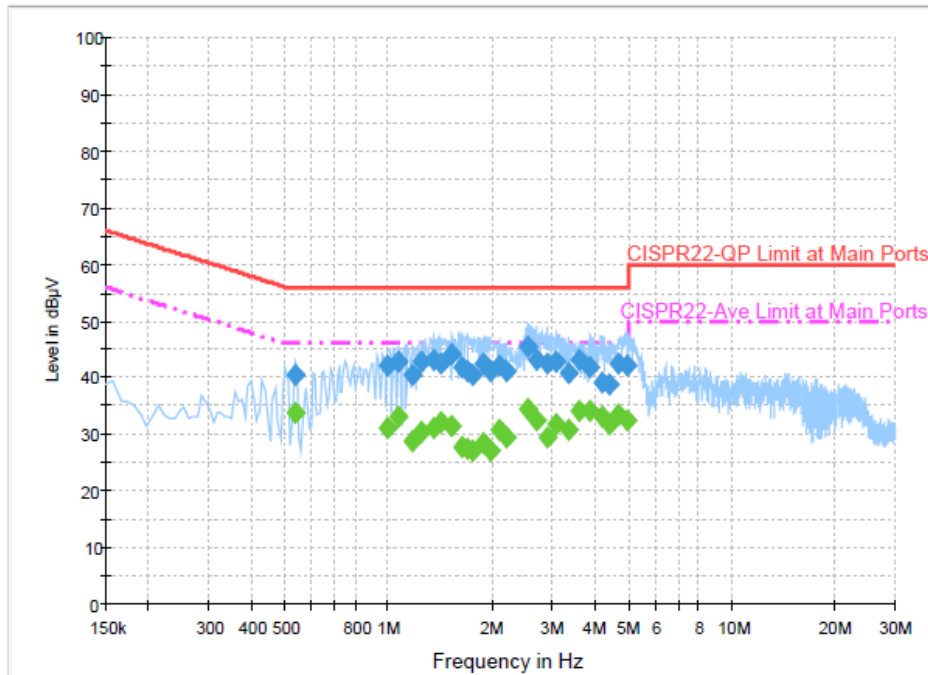
Final Result : Average


Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.102000	30.7	Off	L1	19.7	15.3	46.0
2.214000	29.3	Off	L1	19.7	16.7	46.0
2.566000	34.3	Off	L1	19.7	11.7	46.0
2.702000	32.4	Off	L1	19.7	13.6	46.0
2.894000	29.6	Off	L1	19.7	16.4	46.0
3.070000	31.9	Off	L1	19.7	14.1	46.0
3.358000	30.7	Off	L1	19.7	15.3	46.0
3.598000	34.1	Off	L1	19.7	11.9	46.0
3.886000	34.0	Off	L1	19.7	12.0	46.0
4.214000	33.2	Off	L1	19.7	12.8	46.0
4.430000	31.7	Off	L1	19.7	14.3	46.0
4.678000	33.5	Off	L1	19.7	12.5	46.0
4.942000	32.4	Off	L1	19.8	13.6	46.0

Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	60~61%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)		

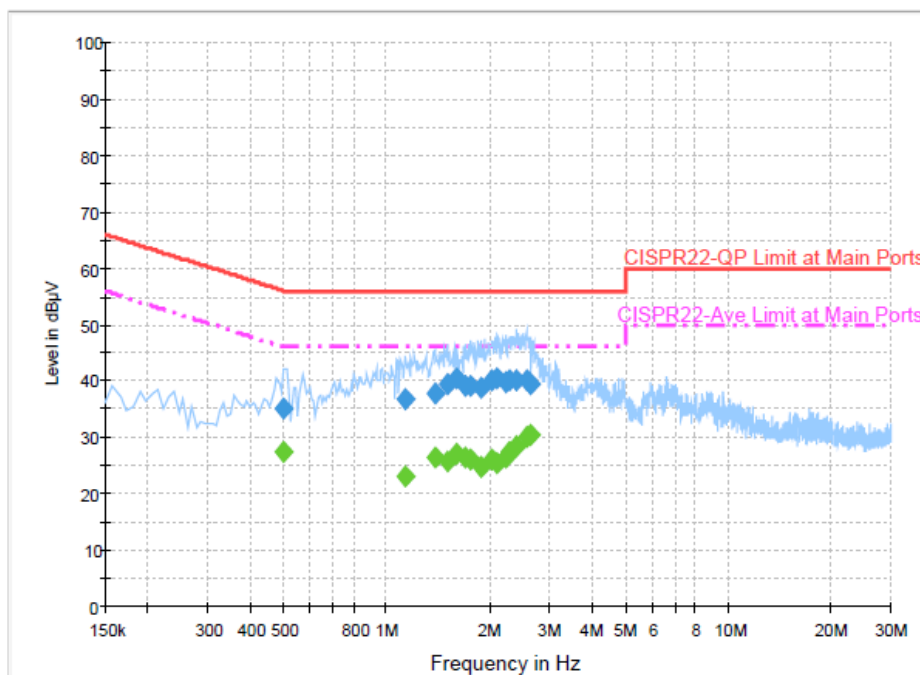
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.502000	35.0	Off	N	19.4	21.0	56.0
1.142000	36.7	Off	N	19.5	19.3	56.0
1.382000	37.9	Off	N	19.6	18.1	56.0
1.502000	39.4	Off	N	19.5	16.6	56.0
1.606000	40.5	Off	N	19.6	15.5	56.0
1.702000	39.1	Off	N	19.6	16.9	56.0
1.774000	39.1	Off	N	19.5	16.9	56.0
1.886000	38.8	Off	N	19.5	17.2	56.0
2.038000	40.0	Off	N	19.7	16.0	56.0
2.118000	40.6	Off	N	19.7	15.4	56.0
2.238000	39.8	Off	N	19.7	16.2	56.0
2.302000	40.2	Off	N	19.7	15.8	56.0
2.406000	40.0	Off	N	19.7	16.0	56.0
2.574000	40.2	Off	N	19.7	15.8	56.0
2.646000	39.5	Off	N	19.7	16.5	56.0

Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	60~61%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + MPEG4 + USB Cable (Charging from Adapter)		

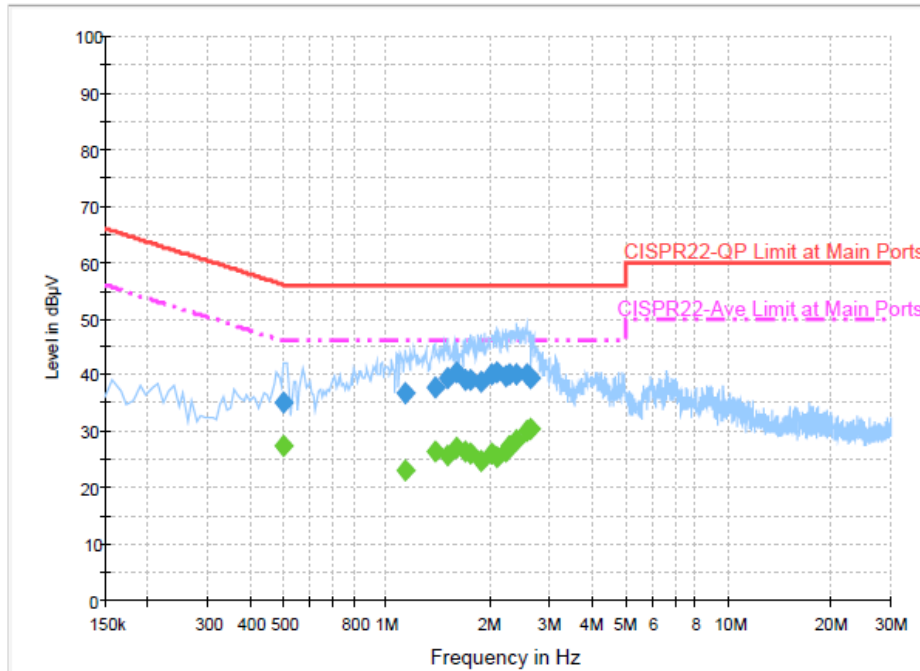
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.502000	27.3	Off	N	19.4	18.7	46.0
1.142000	22.9	Off	N	19.5	23.1	46.0
1.382000	26.4	Off	N	19.6	19.6	46.0
1.502000	25.6	Off	N	19.5	20.4	46.0
1.606000	27.1	Off	N	19.6	18.9	46.0
1.702000	26.6	Off	N	19.6	19.4	46.0
1.774000	26.0	Off	N	19.5	20.0	46.0
1.886000	24.8	Off	N	19.5	21.2	46.0
2.038000	26.2	Off	N	19.7	19.8	46.0
2.118000	25.5	Off	N	19.7	20.5	46.0
2.238000	26.5	Off	N	19.7	19.5	46.0
2.302000	27.6	Off	N	19.7	18.4	46.0
2.406000	28.3	Off	N	19.7	17.7	46.0
2.574000	30.2	Off	N	19.7	15.8	46.0
2.646000	30.6	Off	N	19.7	15.4	46.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1218006	300MHz~40GHz	Oct. 18, 2014	Jul. 23, 2015~ Aug. 04, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Oct. 18, 2014	Jul. 23, 2015~ Aug. 04, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jun. 18, 2015	Jul. 23, 2015~ Aug. 04, 2015	Jun. 17, 2016	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890089	1V~20V 0.5A~5A	Jan. 14, 2015	Jul. 23, 2015~ Aug. 04, 2015	Jan. 13, 2016	Conducted (TH05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Dec. 01, 2014	Jul. 29, 2015	Nov. 30, 2015	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	Jul. 29, 2015	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 29, 2015	N/A	Conduction (CO05-HY)
Loop Antenna	TESEQ	HLA6120	31244	9 kHz~30 MHz	Feb. 02, 2015	Jul. 30, 2015 ~ Jul. 31, 2015	Feb. 01, 2016	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Jul. 30, 2015 ~ Jul. 31, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2014	Jul. 30, 2015 ~ Jul. 31, 2015	Aug. 18, 2015	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	Jul. 30, 2015 ~ Jul. 31, 2015	Nov. 02, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 12, 2015	Jul. 30, 2015 ~ Jul. 31, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Jul. 30, 2015 ~ Jul. 31, 2015	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 21, 2014	Jul. 30, 2015 ~ Jul. 31, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Jul. 30, 2015 ~ Jul. 31, 2015	Jun. 01, 2016	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2014	Jul. 30, 2015 ~ Jul. 31, 2015	Aug. 29, 2015	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Mar. 10, 2015	Jul. 30, 2015 ~ Jul. 31, 2015	Mar. 09, 2016	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Sep. 17, 2014	Jul. 30, 2015 ~ Jul. 31, 2015	Sep. 16, 2015	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Jul. 30, 2015 ~ Jul. 31, 2015	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Jul. 30, 2015 ~ Jul. 31, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jul. 30, 2015 ~ Jul. 31, 2015	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Jul. 30, 2015 ~ Jul. 31, 2015	N/A	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	AC Chang	Temperature:	21~26	°C
Test Date:	2015/07/23 ~ 2015/08/04	Relative Humidity:	45~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.30	7.04	0.50	Pass
11b	1Mbps	1	6	2437	12.35	7.08	0.50	Pass
11b	1Mbps	1	11	2462	12.25	7.04	0.50	Pass
11g	6Mbps	1	1	2412	18.25	16.32	0.50	Pass
11g	6Mbps	1	6	2437	18.25	16.36	0.50	Pass
11g	6Mbps	1	11	2462	18.15	16.36	0.50	Pass
HT20	MCS0	1	1	2412	18.85	17.60	0.50	Pass
HT20	MCS0	1	6	2437	19.05	17.60	0.50	Pass
HT20	MCS0	1	11	2462	19.05	17.56	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.52	30.00	0.25	17.77	36.00	Pass
11b	1Mbps	1	6	2437	17.24	30.00	0.25	17.49	36.00	Pass
11b	1Mbps	1	11	2462	17.80	30.00	0.25	18.05	36.00	Pass
11g	6Mbps	1	1	2412	20.57	30.00	0.25	20.82	36.00	Pass
11g	6Mbps	1	6	2437	20.23	30.00	0.25	20.48	36.00	Pass
11g	6Mbps	1	11	2462	20.66	30.00	0.25	20.91	36.00	Pass
HT20	MCS0	1	1	2412	19.33	30.00	0.25	19.58	36.00	Pass
HT20	MCS0	1	6	2437	18.70	30.00	0.25	18.95	36.00	Pass
HT20	MCS0	1	11	2462	18.30	30.00	0.25	18.55	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	14.57
11b	1Mbps	1	6	2437	0.10	14.26
11b	1Mbps	1	11	2462	0.10	14.86
11g	6Mbps	1	1	2412	0.59	11.75
11g	6Mbps	1	6	2437	0.59	11.54
11g	6Mbps	1	11	2462	0.59	11.99
HT20	MCS0	1	1	2412	0.63	9.82
HT20	MCS0	1	6	2437	0.63	9.67
HT20	MCS0	1	11	2462	0.63	9.23

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-8.66	0.25	8.00	Pass
11b	1Mbps	1	6	2437	-9.12	0.25	8.00	Pass
11b	1Mbps	1	11	2462	-7.48	0.25	8.00	Pass
11g	6Mbps	1	1	2412	-14.91	0.25	8.00	Pass
11g	6Mbps	1	6	2437	-14.77	0.25	8.00	Pass
11g	6Mbps	1	11	2462	-13.41	0.25	8.00	Pass
HT20	MCS0	1	1	2412	-17.42	0.25	8.00	Pass
HT20	MCS0	1	6	2437	-16.86	0.25	8.00	Pass
HT20	MCS0	1	11	2462	-16.83	0.25	8.00	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Wei Chen, Ken Wu, and James Chiu	Temperature :	21~23°C
		Relative Humidity :	60~63%

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2332.5	58.92	-15.08	74	53.45	32.09	7.6	34.22	141	37	P	H
		2372.64	44.82	-9.18	54	39.25	32.16	7.68	34.27	141	37	A	H
	*	2412.024	105.64	-	-	99.99	32.2	7.75	34.3	141	37	P	H
	*	2412.692	102.08	-	-	96.43	32.2	7.75	34.3	141	37	A	H
													H
													H
		2352.66	58.92	-15.08	74	53.36	32.13	7.68	34.25	381	0	P	V
		2387.04	44.83	-9.17	54	39.17	32.18	7.75	34.27	381	0	A	V
	*	2413.193	102.68	-	-	97.03	32.2	7.75	34.3	381	0	P	V
	*	2412.692	99.09	-	-	93.44	32.2	7.75	34.3	381	0	A	V
													V
													V
802.11b CH 06 2437MHz		2335.47	58.58	-15.42	74	53.09	32.11	7.6	34.22	135	38	P	H
		2332.41	44.9	-9.1	54	39.43	32.09	7.6	34.22	135	38	A	H
	*	2435.822	105.35	-	-	99.65	32.22	7.83	34.35	135	38	P	H
	*	2436.239	101.75	-	-	96.05	32.22	7.83	34.35	135	38	A	H
		2495.24	59.07	-14.93	74	53.34	32.3	7.91	34.48	135	38	P	H
		2493.76	45.31	-8.69	54	39.58	32.3	7.91	34.48	135	38	A	H
		2322.24	58.48	-15.52	74	53.01	32.09	7.6	34.22	321	0	P	V
		2315.85	44.84	-9.16	54	39.39	32.07	7.6	34.22	321	0	A	V
	*	2436.99	102.1	-	-	96.38	32.24	7.83	34.35	321	0	P	V
	*	2436.239	98.47	-	-	92.77	32.22	7.83	34.35	321	0	A	V
		2492.88	58.82	-15.18	74	53.09	32.3	7.91	34.48	321	0	P	V
		2489.36	45.01	-8.99	54	39.23	32.3	7.91	34.43	321	0	A	V



802.11b CH 11 2462MHz	*	2462.041	105.06	-	-	99.28	32.26	7.91	34.39	180	39	P	H
	*	2462.792	101.33	-	-	95.55	32.26	7.91	34.39	180	39	A	H
		2484.48	59.75	-14.25	74	53.99	32.28	7.91	34.43	180	39	P	H
		2499.68	46.39	-7.61	54	40.66	32.3	7.91	34.48	180	39	A	H
													H
													H
	*	2462.124	101	-	-	95.22	32.26	7.91	34.39	283	0	P	V
	*	2462.792	97.38	-	-	91.6	32.26	7.91	34.39	283	0	A	V
		2483.6	59.54	-14.46	74	53.78	32.28	7.91	34.43	283	0	P	V
		2498.96	45.43	-8.57	54	39.7	32.3	7.91	34.48	283	0	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	41.99	-32.01	74	56.21	34.26	11.16	59.64	100	0	P	H
													H
													H
													H
		4824	41.7	-32.3	74	55.92	34.26	11.16	59.64	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4872	39.94	-34.06	74	54	34.3	11.21	59.57	100	0	P	H
		7311	45.56	-28.44	74	53.35	35.6	15.08	58.47	100	0	P	H
													H
													H
		4872	40.88	-33.12	74	54.94	34.3	11.21	59.57	100	0	P	V
		7308	46.68	-27.32	74	54.47	35.6	15.08	58.47	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4926	46.33	-27.67	74	60.22	34.34	11.27	59.5	100	0	P	H
		7386	44.48	-29.52	74	52.32	35.6	15.14	58.58	100	0	P	H
													H
													H
		4926	46.68	-27.32	74	60.57	34.34	11.27	59.5	100	0	P	V
		7386	44.14	-29.86	74	51.98	35.6	15.14	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.92	61.96	-12.04	74	56.33	32.18	7.75	34.3	132	11	P	H
		2389.65	45.74	-8.26	54	40.08	32.18	7.75	34.27	132	11	A	H
	*	2412	103.72	-	-	98.07	32.2	7.75	34.3	132	11	P	H
	*	2412	92.41	-	-	86.76	32.2	7.75	34.3	132	11	A	H
													H
													H
		2322.87	58.42	-15.58	74	52.95	32.09	7.6	34.22	259	360	P	V
		2345.82	45.25	-8.75	54	39.71	32.11	7.68	34.25	259	360	A	V
	*	2412	100.1	-	-	94.45	32.2	7.75	34.3	259	360	P	V
	*	2412	89.81	-	-	84.16	32.2	7.75	34.3	259	360	A	V
													V
													V
802.11g CH 06 2437MHz		2347.35	58.96	-15.04	74	53.42	32.11	7.68	34.25	133	23	P	H
		2383.71	45.27	-8.73	54	39.63	32.16	7.75	34.27	133	23	A	H
	*	2437	102.49	-	-	96.77	32.24	7.83	34.35	133	23	P	H
	*	2437	91.81	-	-	86.09	32.24	7.83	34.35	133	23	A	H
		2491.48	59.32	-14.68	74	53.54	32.3	7.91	34.43	133	23	P	H
		2489.6	46.32	-7.68	54	40.54	32.3	7.91	34.43	133	23	A	H
		2329.26	58.99	-15.01	74	53.52	32.09	7.6	34.22	322	0	P	V
		2346	45.28	-8.72	54	39.74	32.11	7.68	34.25	322	0	A	V
	*	2437	100.55	-	-	94.83	32.24	7.83	34.35	322	0	P	V
	*	2437	89.77	-	-	84.05	32.24	7.83	34.35	322	0	A	V
		2494.92	58.61	-15.39	74	52.88	32.3	7.91	34.48	322	0	P	V
		2489.12	45.59	-8.41	54	39.81	32.3	7.91	34.43	322	0	A	V



802.11g CH 11 2462MHz	*	2462	102.89	-	-	97.11	32.26	7.91	34.39	114	40	P	H
	*	2462	92.17	-	-	86.39	32.26	7.91	34.39	114	40	A	H
		2483.76	61.95	-12.05	74	56.19	32.28	7.91	34.43	114	40	P	H
		2483.52	46.42	-7.58	54	40.66	32.28	7.91	34.43	114	40	A	H
													H
													H
	*	2462	100.07	-	-	94.29	32.26	7.91	34.39	282	360	P	V
	*	2462	89.5	-	-	83.72	32.26	7.91	34.39	282	360	A	V
		2483.88	61.52	-12.48	74	55.76	32.28	7.91	34.43	282	360	P	V
		2483.68	46.1	-7.9	54	40.34	32.28	7.91	34.43	282	360	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	42.55	-31.45	74	56.77	34.26	11.16	59.64	100	0	P	H
													H
													H
													H
		4824	41.31	-32.69	74	55.53	34.26	11.16	59.64	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4872	41.06	-32.94	74	55.12	34.3	11.21	59.57	100	0	P	H
		7311	43.59	-30.41	74	51.38	35.6	15.08	58.47	100	0	P	H
													H
													H
		4874	41.44	-32.56	74	55.5	34.3	11.21	59.57	100	0	P	V
		7311	43.76	-30.24	74	51.55	35.6	15.08	58.47	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4926	41.57	-32.43	74	55.46	34.34	11.27	59.5	100	0	P	H
		7386	43.34	-30.66	74	51.18	35.6	15.14	58.58	100	0	P	H
													H
													H
		4924	41.02	-32.98	74	54.91	34.34	11.27	59.5	100	0	P	V
		7386	43.24	-30.76	74	51.08	35.6	15.14	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2336.73	58.57	-15.43	74	53.08	32.11	7.6	34.22	158	34	P	H
		2355.27	45.34	-8.66	54	39.78	32.13	7.68	34.25	158	34	A	H
	*	2412	102.91	-	-	97.26	32.2	7.75	34.3	158	34	P	H
	*	2412	91.99	-	-	86.34	32.2	7.75	34.3	158	34	A	H
													H
													H
		2355.99	58.49	-15.51	74	52.93	32.13	7.68	34.25	380	354	P	V
		2390	45.51	-8.49	54	39.88	32.18	7.75	34.3	380	354	A	V
	*	2412	99.91	-	-	94.26	32.2	7.75	34.3	380	354	P	V
	*	2412	89.23	-	-	83.58	32.2	7.75	34.3	380	354	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2369.04	58.65	-15.35	74	53.08	32.16	7.68	34.27	135	35	P	H
		2375.43	45.22	-8.78	54	39.65	32.16	7.68	34.27	135	35	A	H
	*	2437	103.27	-	-	97.55	32.24	7.83	34.35	135	35	P	H
	*	2437	91.83	-	-	86.11	32.24	7.83	34.35	135	35	A	H
		2487.24	59.07	-14.93	74	53.31	32.28	7.91	34.43	135	35	P	H
		2488.64	46.53	-7.47	54	40.75	32.3	7.91	34.43	135	35	A	H
		2373.63	58.5	-15.5	74	52.93	32.16	7.68	34.27	324	0	P	V
		2323.77	45.35	-8.65	54	39.88	32.09	7.6	34.22	324	0	A	V
	*	2437	98.77	-	-	93.05	32.24	7.83	34.35	324	0	P	V
	*	2437	88.33	-	-	82.61	32.24	7.83	34.35	324	0	A	V
		2491.52	59.44	-14.56	74	53.66	32.3	7.91	34.43	324	0	P	V
		2492.88	45.53	-8.47	54	39.8	32.3	7.91	34.48	324	0	A	V



802.11n HT20 CH 11 2462MHz	*	2462	102.36	-	-	96.58	32.26	7.91	34.39	115	38	P	H
	*	2462	90.48	-	-	84.7	32.26	7.91	34.39	115	38	A	H
		2494.4	60.09	-13.91	74	54.36	32.3	7.91	34.48	115	38	P	H
		2483.8	46.38	-7.62	54	40.62	32.28	7.91	34.43	115	38	A	H
													H
													H
	*	2462	98.48	-	-	92.7	32.26	7.91	34.39	283	0	P	V
	*	2462	87.24	-	-	81.46	32.26	7.91	34.39	283	0	A	V
		2499.96	59.17	-14.83	74	53.44	32.3	7.91	34.48	283	0	P	V
		2483.8	46	-8	54	40.24	32.28	7.91	34.43	283	0	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	41.43	-32.57	74	55.65	34.26	11.16	59.64	100	0	P	H
													H
													H
													H
		4824	40.78	-33.22	74	55	34.26	11.16	59.64	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	42.91	-31.09	74	56.97	34.3	11.21	59.57	100	0	P	H
		7311	43.48	-30.52	74	51.27	35.6	15.08	58.47	100	0	P	H
													H
													H
		4874	42.95	-31.05	74	57.01	34.3	11.21	59.57	100	0	P	V
		7311	42.86	-31.14	74	50.65	35.6	15.08	58.47	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4926	40.98	-33.02	74	54.87	34.34	11.27	59.5	100	0	P	H
		7386	43.4	-30.6	74	51.24	35.6	15.14	58.58	100	0	P	H
													H
													H
		4924	41.55	-32.45	74	55.44	34.34	11.27	59.5	100	0	P	V
		7386	44.03	-29.97	74	51.87	35.6	15.14	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		74.28	20.76	-19.24	40	43.1	6.8	2.06	31.2			P	H
		152.31	25.54	-17.96	43.5	43.3	10.76	2.61	31.13			P	H
		211.98	29.45	-14.05	43.5	48.62	9.22	2.69	31.08	100	0	P	H
		500.9	21.5	-24.5	46	30.21	18	3.89	30.6			P	H
		748.7	26.81	-19.19	46	30.62	22.11	4.48	30.4			P	H
		908.3	27.63	-18.37	46	29.71	23.44	4.8	30.32			P	H
													H
													H
													H
													H
													H
													H
		72.12	31.74	-8.26	40	54.38	6.56	2.06	31.26	100	0	P	V
		125.58	20.79	-22.71	43.5	37.83	11.68	2.38	31.1			P	V
		189.84	18.81	-24.69	43.5	38.42	8.8	2.69	31.1			P	V
		694.1	24.75	-21.25	46	30.26	20.55	4.35	30.41			P	V
		783	26.81	-19.19	46	30.56	21.97	4.62	30.34			P	V
		850.2	27.73	-18.27	46	30.14	23.29	4.7	30.4			P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.