

FCC PART 95
MEASUREMENT AND TEST REPORT

For

Atomic Monkey Products Ltd.

Room 811, 8/F., Corporation Park, No.11 On Lai Street, Shatin, N.T., HongKong

FCC ID: 2AB4XAMP10520

Report Type: Original Report	Product Type: Long Range Wrist Talkies
Test Engineer: Rocky Kang <i>Rocky Kang</i>	
Report Number: RSZ140416833-00	
Report Date: 2014-04-30	
Reviewed By: Jimmy Xiao <i>Jimmy Xiao</i> RF Engineer	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
DESCRIPTION OF TEST CONFIGURATION	4
EQUIPMENT MODIFICATIONS	4
BLOCK DIAGRAM OF TEST SETUP	4
SUMMARY OF TEST RESULTS	5
FCC §2.1093 - RF EXPOSURE INFORMATION	6
APPLICABLE STANDARD	6
FCC §2.1046, §95.639(a) & §95.639(d) - RF OUTPUT POWER	7
APPLICABLE STANDARD	7
TEST PROCEDURE	7
TEST EQUIPMENT LIST AND DETAILS.....	7
TEST DATA	7
FCC §2.1047 & §95.637(a) - MODULATION CHARACTERISTIC	9
APPLICABLE STANDARD	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
TEST DATA	9
FCC §2.1049 & §95.633(a) (c) - AUTHOURIZED BANDWIDTH AND EMISSION MASK.....	14
APPLICABLE STANDARD	14
TEST PROCEDURE	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA	14
FCC §2.1053 & §95.635(b) (7) - RADIATED SPURIOUS EMISSION	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	19
FCC§2.1055 (d), §95.626(b) & §95.621 - FREQUENCY STABILITY	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	21

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Atomic Monkey Products Ltd.* 's product, model number: 10520 (FCC ID: 2AB4XAMP10520) or the "EUT" in this report was a *Long Range Wrist Talkies* , which was measured approximately: 24 cm (L) x 5.0 cm (W) x 3.5 cm (H), rated input voltage: DC 4.5 V (1.5V AAA*3) battery.

** All measurement and test data in this report was gathered from production sample serial number: 14041603 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-04-16.*

Objective

This report is prepared on behalf of *Atomic Monkey Products Ltd.* in accordance with Part 2 and Part 95, Subpart A & Subpart B & Subpart E of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with Part 95 Subpart A, B and Subpart E of the Federal Communication Commissions rules with TIA-603-D, Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION


Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications

No modification was made to the EUT tested.

Block Diagram of Test Setup

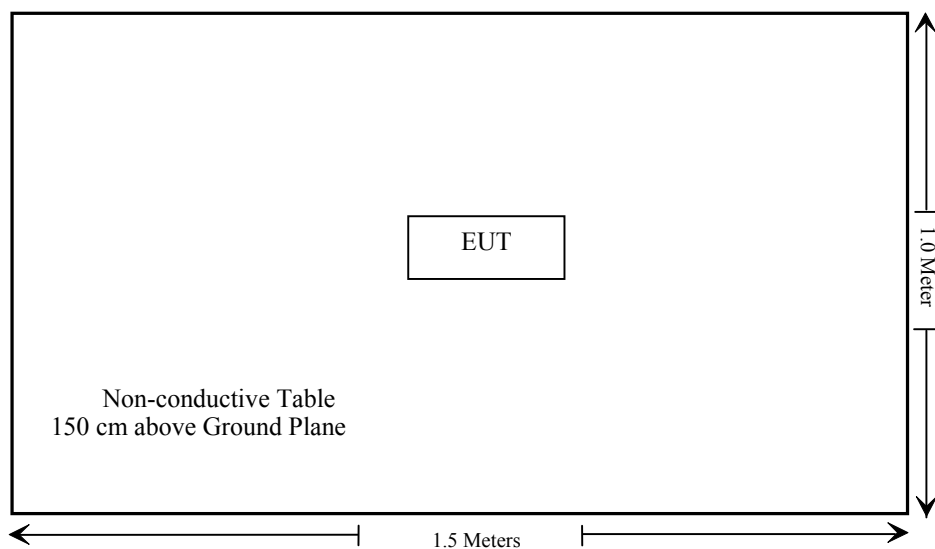

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1093	RF Exposure	Compliance
§2.1046, §95.639(a), §95.639(d)	RF Output Power	Compliance
§2.1047, §95.637(a)	Modulation Characteristic	Compliance
§2.1049, §95.633(a) (c)	Authorized Bandwidth & Emission Mask	Compliance
§2.1053, §95.635(b) (7)	Spurious Radiated Emissions	Compliance
§2.1055(d), §95.626(b), §95.621	Frequency Stability	Compliance

FCC §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

The Max Output Power: $22.3\text{dBm}(169.82\text{mW}) \cdot 50\% = 84.91\text{mW}$
 $(84.91/10) \cdot \sqrt{0.462} = 5.77 < 7.5$

Result: No need SAR test

The distance between the antenna and the hand surface is 10mm. Please see the plot.



FCC §2.1046, §95.639(a) & §95.639(d) - RF OUTPUT POWER**Applicable Standard**

Per FCC §2.1046, §95.639(a) and §95.639(d), No FRS Unit, under any condition of modulation, shall exceed a 0.5 W effective radiated power (ERP).

Per FCC §95.639 (a) (1), No GMRS transmitter, under any condition of modulation, shall exceed 50 W Carrier power when transmitting emission type A1D, F1D, G1D, A3E, F3E or G3E.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

Test Equipment List and Details

Manufacturer	Description	Model NO.	Serial NO.	Calibration Date	Calibration Due Date
HP	Signal Generator	8648C	3426A01345	2013-05-09	2014-05-09
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Com Power	Dipole Antenna	AD-100	041000	NCR	NCR

*** Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Rocky Kang on 2014-04-26.

Test Mode: Transmitting

Indicated		Table Angle Degree	Test Ant.		Substituted			Absolute Level (dBm)	FCC Part 95	
Frequency (MHz)	S.A. Reading (dBμV)		Height (m)	Polar (H/V)	S.G. Level (dBm)	Ant. Gain (dBd)	Cable Loss (dB)		ERP (Watt)	Limit (Watt)
Channel 11 FRS Channel (467.6375MHz)										
467.6375	118.77	184	1.4	H	22.3	0	0.6	21.7	0.15	0.5
467.6375	119.23	353	1.5	V	22.7	0	0.6	22.1	0.16	0.5
Channel 22 GMRS Channel (462.7250MHz)										
462.725	117.97	172	1.8	H	21.5	0	0.6	20.9	0.12	50
462.725	119.37	195	2.1	V	22.9	0	0.6	22.3	0.17	50

Test Result: Compliance.

FCC §2.1047 & §95.637(a) - MODULATION CHARACTERISTIC**Applicable Standard**

Per FCC §2.1047 and §95.637(a): A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz.

Each GMRS transmitter, except a mobile station transmitter with a power output of 2.5 W or less, must automatically prevent a greater than normal audio level from causing over-modulation. The transmitter also must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of § 95.631 (without filtering.) The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least $60 \log_{10} (f/3)$ dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communication Test Set	HP8920A	3438A05201	2013-06-14	2014-06-13

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Test Method: TIA/EIA-603-D

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Rocky Kang on 2014-04-26.

Please refer to the following tables and plots.

*Test Mode: Transmitting***Audio Frequency Response**

FRS – Channel 11 (467.6375 MHz)


Modulation Frequency (Hz)	MAXIMUM DEVIATION (kHz)	FCC Limit (kHz)
100.0	0.394	3.125
200.0	0.104	3.125
300.0	0.924	3.125
400.0	1.218	3.125
500.0	1.508	3.125
600.0	1.736	3.125
700.0	1.964	3.125
800.0	2.042	3.125
900.0	2.068	3.125
1000.0	2.134	3.125
1500.0	2.298	3.125
2000.0	2.363	3.125
2500.0	2.348	3.125
3000.0	0.085	3.125

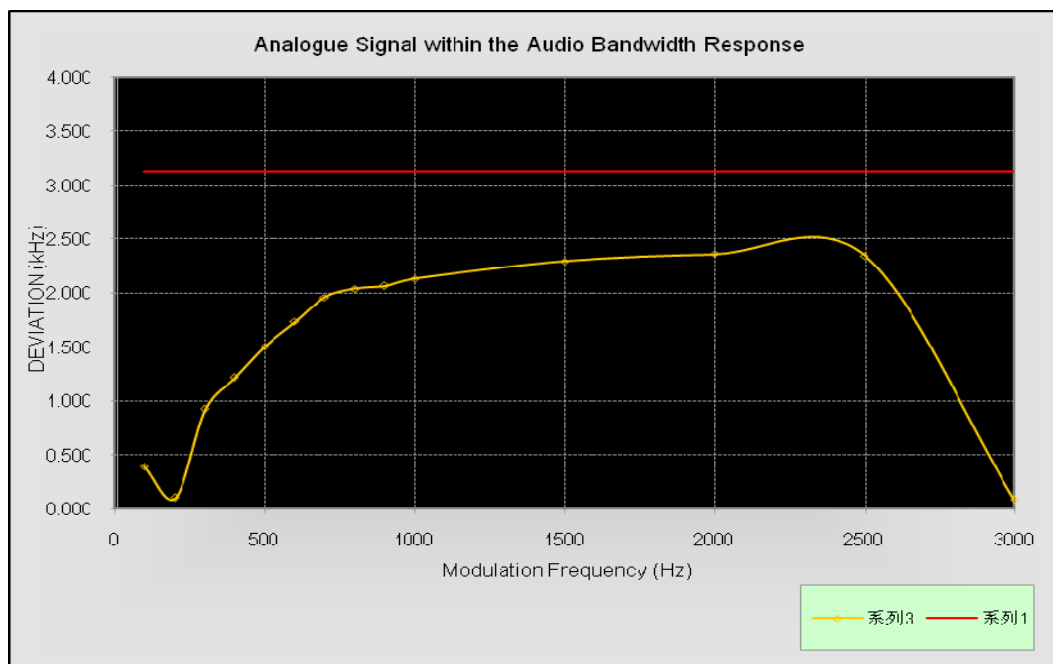

MODULATION LIMITING

FRS – Channel 11 (467.6375 MHz)


Audio Input Level (dB)	Frequency Deviation (kHz)			FCC Limit (kHz)
	(@ 300 Hz)	(@ 1000 Hz)	(@ 3000 Hz)	
20.0	0.908	2.146	0.085	2.5
15.0	0.902	2.134	0.084	2.5
10.0	0.912	2.122	0.074	2.5
5.0	0.818	2.104	0.064	2.5
0.0	0.485	1.500	0.061	2.5
-5.0	0.289	0.885	0.052	2.5
-10.0	0.184	0.502	0.047	2.5
-15.0	0.128	0.302	0.048	2.5
-20.0	0.096	0.182	0.052	2.5

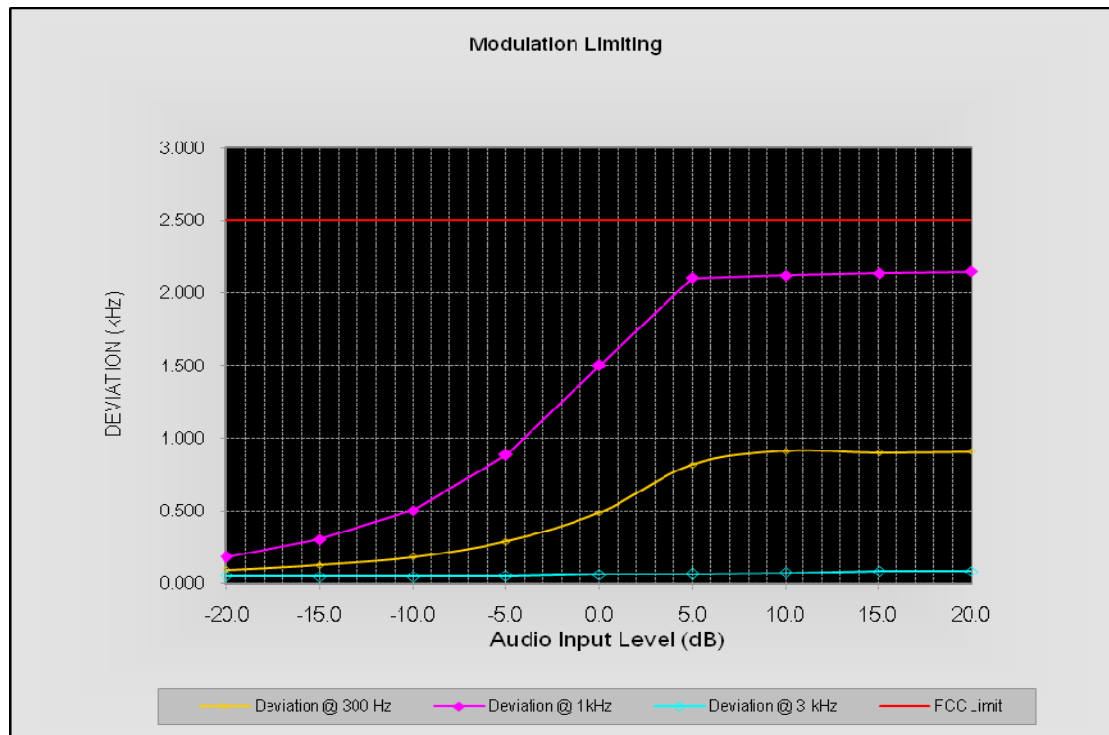

MODULATION LIMITING

GMRS – Channel 22 (462.7250MHz)


Audio Input Level (dB)	Frequency Deviation (kHz)			FCC Limit (kHz)
	(@ 300 Hz)	(@ 1000 Hz)	(@ 3000 Hz)	
20.0	0.892	2.173	0.093	5.0
15.0	0.881	2.166	0.095	5.0
10.0	0.885	2.115	0.085	5.0
5.0	0.806	2.108	0.073	5.0
0.0	0.585	1.500	0.061	5.0
-5.0	0.315	0.856	0.057	5.0
-10.0	0.197	0.563	0.051	5.0
-15.0	0.151	0.332	0.056	5.0
-20.0	0.086	0.191	0.052	5.0

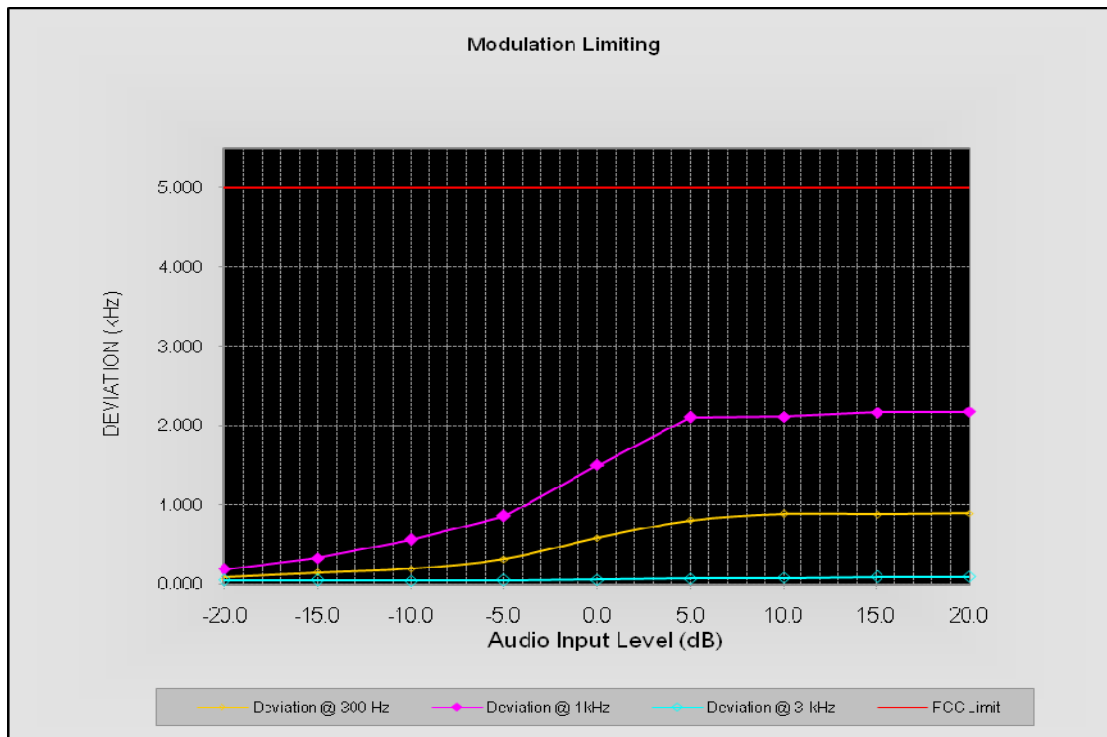

Audio frequency Low Pass Filter Response

GMRS – Channel 22 (462.7250 MHz)

Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
2.5	-4.11	0.0
3.0	-4.68	0.0
3.5	-8.21	-4.0
4.0	-10.34	-7.5
5.0	-15.36	-13.3
7.0	-26.15	-22.1
10.0	-34.21	-31.4
15.0	-47.62	-42.0
20.0	-51.21	-50.0
30.0	-51.36	-50.0
50.0	-52.34	-50.0
70.0	-54.21	-50.0

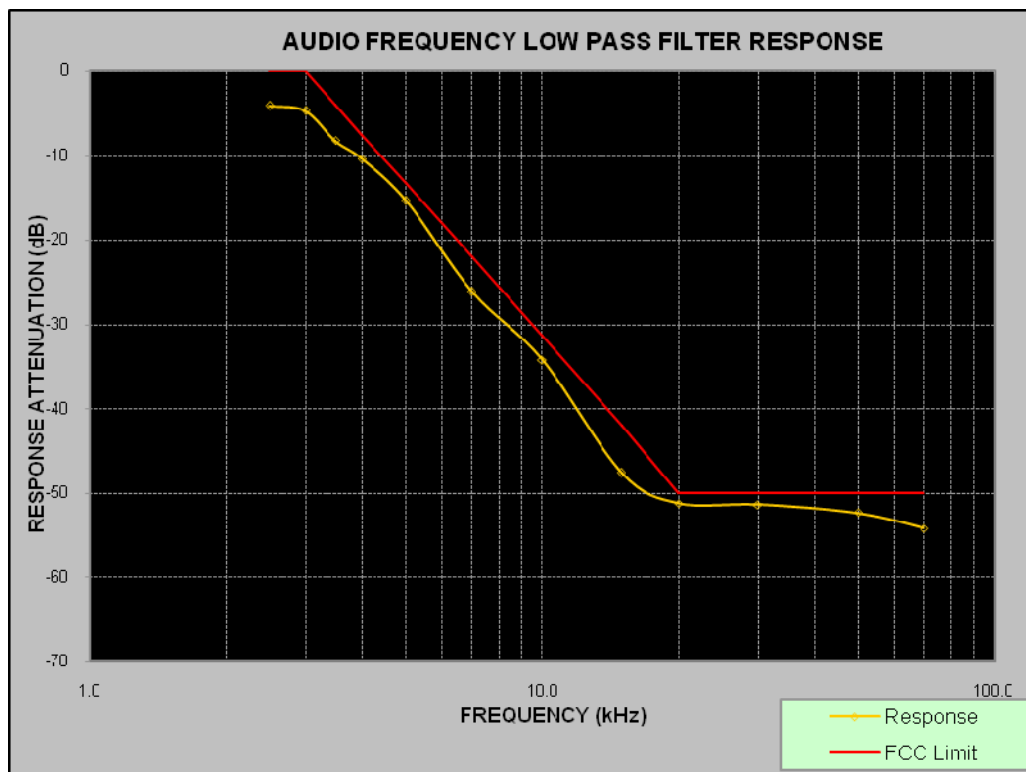

FCC §2.1049 & §95.633(a) (c) - AUTHORIZED BANDWIDTH AND EMISSION MASK

Applicable Standard

According to §95.633(c), the authorized bandwidth for emission type F3E or F2D transmitted by a FRS unit is 12.5 kHz. The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20kHz.

The power of each unwanted emission shall be less than TP as specified in the applicable paragraphs listed in the following :

- 1) At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 3) At least $43 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

Test Procedure

TIA-603-D, section 2.2.11

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	RF Communication Test Set	HP8920A	3438A05201	2013-06-14	2014-06-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2014-04-28.


Test Mode: Transmitting

Channel	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
11	467.6375	10.42	12.5	Pass
22	462.7250	10.34	20.0	Pass

GMRS – Channel 22 (462.7250 MHz)

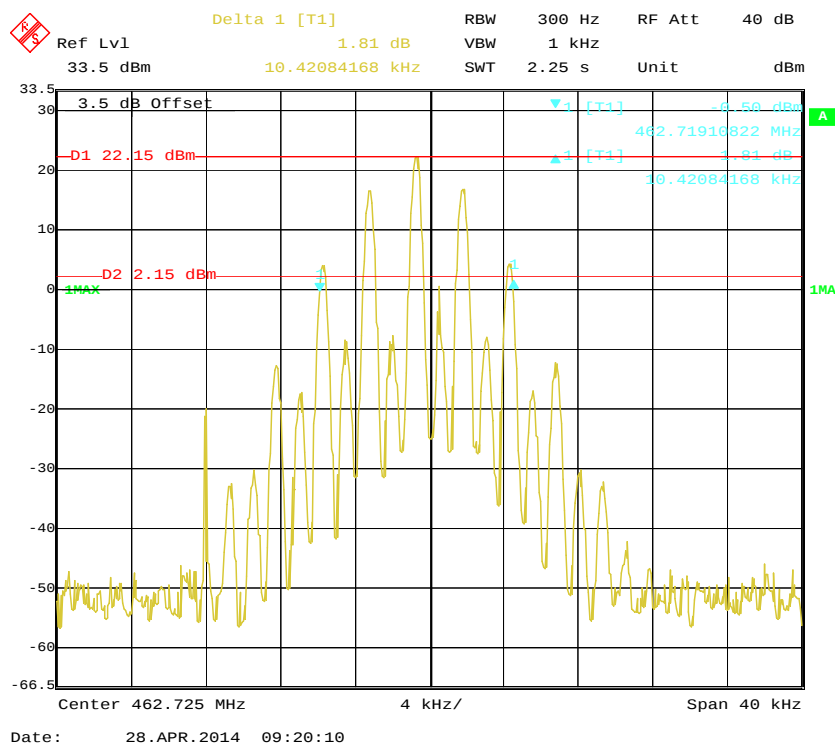


FRS – Channel 11 (467.6375 MHz)

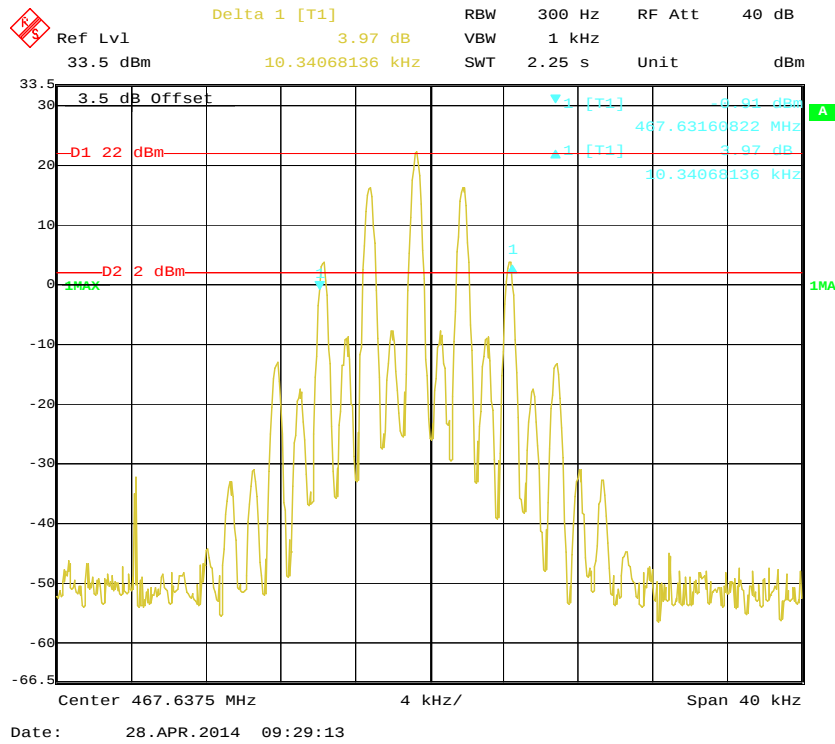


Emission Mask

GMRS – Channel 22 (462.7250 MHz)

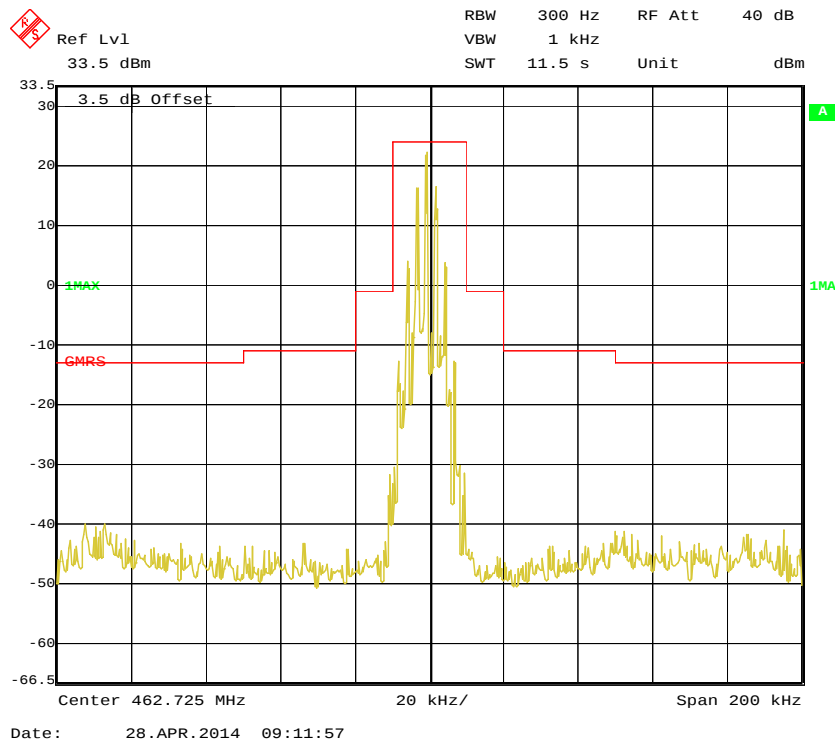

FRS – Channel 11 (467.6375 MHz)

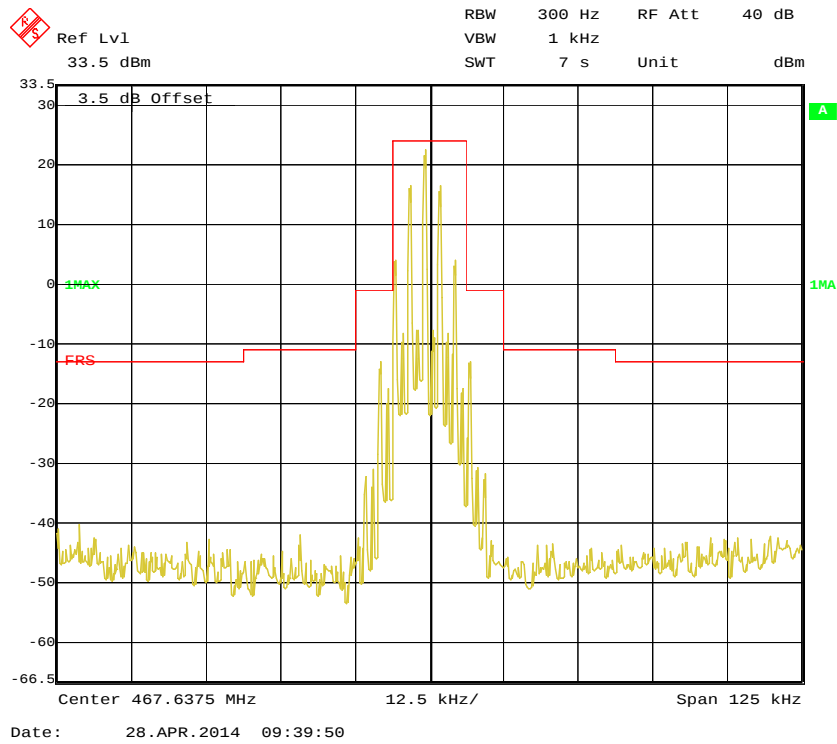

FCC §2.1053 & §95.635(b) (7) - RADIATED SPURIOUS EMISSION**Applicable Standard**

FCC §2.1053 and §95.635

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level
Spurious attenuation limit in dB = 43+10 Log₁₀ (power out in Watts)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Amplifier	ZVA-183-S+	5969001149	2014-04-03	2015-04-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2014-04-28.

Test Mode: Transmitting

GMRS: Channel 22 (462.7250 MHz)

Indicated		Table Angle Degree	Test Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Receiver Reading (dBuV)		Height (m)	Polar (H/V)	Level (dBm)	Antenna Gain Correction	Cable Loss (dB)			
925.45	78.74	27	1.0	V	-17.8	0	0.71	-18.47	-13	5.47
925.45	78.29	246	1.3	H	-18.2	0	0.71	-18.92	-13	5.92
1388.1	56.39	233	1.4	H	-44.2	9.00	0.88	-36.11	-13	23.11
1388.1	63.46	56	1.4	V	-38.0	9.00	0.88	-29.89	-13	16.89
1850.9	48.36	112	1.7	H	-55.2	9.40	1.00	-46.82	-13	33.82
1850.9	46.03	133	1.5	V	-53.8	9.40	1.00	-45.44	-13	32.44

FRS: Channel 11 (467.6375 MHz)

Indicated		Table Angle Degree	Test Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Receiver Reading (dBuV)		Height (m)	Polar (H/V)	Level (dBm)	Antenna Gain Correction	Cable Loss (dB)			
935.275	80.05	300	1.5	V	-16.5	0	0.72	-17.17	-13	4.17
935.275	81.98	233	2.1	H	-14.5	0	0.72	-15.24	-13	2.24
1402.9	55.33	121	1.5	H	-45.3	9.00	0.88	-37.17	-13	24.17
1402.9	62.15	124	1.6	V	-39.3	9.00	0.88	-31.20	-13	18.20
1868.0	45.76	178	1.7	H	-57.8	9.40	1.00	-49.42	-13	36.42
1868.0	47.27	188	1.6	V	-52.6	9.40	1.00	-44.20	-13	31.20

FCC§2.1055 (d), §95.626(b) & §95.621 - FREQUENCY STABILITY**Applicable Standard**

According to FCC §2.1055(a) (1), the frequency stability shall be measured with variation of ambient temperature from –30 °C to +50 °C, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.626(b), Each FRS Unit must be maintained within a frequency tolerance of 0.00025 %(2.5 ppm).

According to FCC §95.621, Each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005 %(5 ppm).

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage:

1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

Test Equipment List and Details

Manufacturer	Description	Model NO.	Serial NO.	Calibration Date	Calibration Due Date
Hewlett-Packard	Frequency Counter	5343A	2232A00827	2013-05-09	2016-05-08
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	26°C
Relative Humidity:	52%
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2014-04-28.

Test Mode: Transmitting

GMRS

Reference Frequency: 462.7250 MHz, Limit: ± 5 ppm			
Environment Temperature (°C)	Power Supplied (V _{DC})	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability Ver. Temperature			
50	4.5	462.724465	-1.156
40	4.5	462.724497	-1.087
30	4.5	462.724423	-1.247
20	4.5	462.724499	-1.083
10	4.5	462.724484	-1.115
0	4.5	462.724476	-1.132
-10	4.5	462.724405	-1.286
-20	4.5	462.724442	-1.206
-30	4.5	462.724461	-1.165
Frequency Stability Ver. Input Voltage			
20	3.6	462.724488	-1.106

FRS

Reference Frequency: 467.6375 MHz, Limit: ± 2.5 ppm			
Environment Temperature (°C)	Power Supplied (V _{DC})	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability Ver. Temperature			
50	4.5	467.636983	-1.106
40	4.5	467.636976	-1.121
30	4.5	467.636981	-1.110
20	4.5	467.636999	-1.071
10	4.5	467.636979	-1.114
0	4.5	467.636972	-1.129
-10	4.5	467.636925	-1.230
-20	4.5	467.636991	-1.088
-30	4.5	467.636975	-1.123
Frequency Stability Ver. Input Voltage			
20	3.6	467.636993	-1.084

***** END OF REPORT *****