

TEST REPORT

FCC ID: 2AB5E-MB300V3

Product: Mini wireless router

Model No.: MB300V3

Additional Model No.: MiniBoxV3.0, MR300R, MR300RU

Trade Mark: N/A

Report No.: TCT150907E012

Issued Date: Oct. 08, 2015

Issued for:

Gainstrong Industry Co.,Ltd

**3rd Floor, 1st Building, Block E, Minzhu West Industrial Zone, Bao'an Dist.,
Shenzhen**

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinu Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information.....	7
4.1. Test environment and mode.....	7
4.2. Description of Support Units.....	8
5. Facilities and Accreditations	9
5.1. Facilities	9
5.2. Location	9
5.3. Measurement Uncertainty.....	9
6. Test Results and Measurement Data	10
6.1. Antenna requirement	10
6.2. Conducted Emission.....	11
6.3. Emission Bandwidth	25
6.4. Power Spectral Density.....	35
6.5. Test Specification.....	35
6.6. Conducted Band Edge and Spurious Emission Measurement	46
6.7. Radiated Spurious Emission Measurement.....	64

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. Test Certification

Product:	Mini wireless router
Model No.:	MB300V3
Additional Model No.:	MiniBoxV3.0, MR300R, MR300RU
Applicant:	Gainstrong Industry Co.,Ltd
Address:	3rd Floor, 1 st Building, Block E, Minzhu West Industrial Zone, Bao'an Dist., Shenzhen
Manufacturer:	Gainstrong Industry Co.,Ltd
Address:	3rd Floor, 1 st Building, Block E, Minzhu West Industrial Zone, Bao'an Dist., Shenzhen
Date of Test:	Sep. 07 – Sep. 29, 2015
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 KDB 558074 D01 DTS Meas Guidance v03r02 KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: _____

SKY

Date: Sep. 29, 2015

Reviewed By: _____

Joe Zhou

Date: Oct. 08, 2015

Approved By: _____

Tomsin

Date: Oct. 08, 2015

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3)	PASS
6dB Emission Bandwidth	§15.247 (a)(2)	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	Mini wireless router
Model :	MB300V3
Additional Model:	MiniBoxV3.0, MR300R, MR300RU
Trade Mark:	N/A
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel Separation:	5MHz
Number of Channel:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Modulation Technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation Technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	omnidirectional antenna
Antenna Gain:	Both of two antennas are 2dBi
Power Supply:	DC 5V from USB port

Operation Frequency each of channel For 802.11b/g/n(HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n (HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
--	--	4	2427MHz	7	2442MHz	--	--
--	--	5	2432MHz	8	2447MHz	--	--
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

4. Genera Information

4.1. Test environment and mode

Operating Environment:

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Test Mode:

Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations (The value of duty cycle is 98.46%)
-------------------	---

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Laptop	ZL6	/	/	ACER

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142


5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$


6. Test Results and Measurement Data

6.1. Antenna requirement

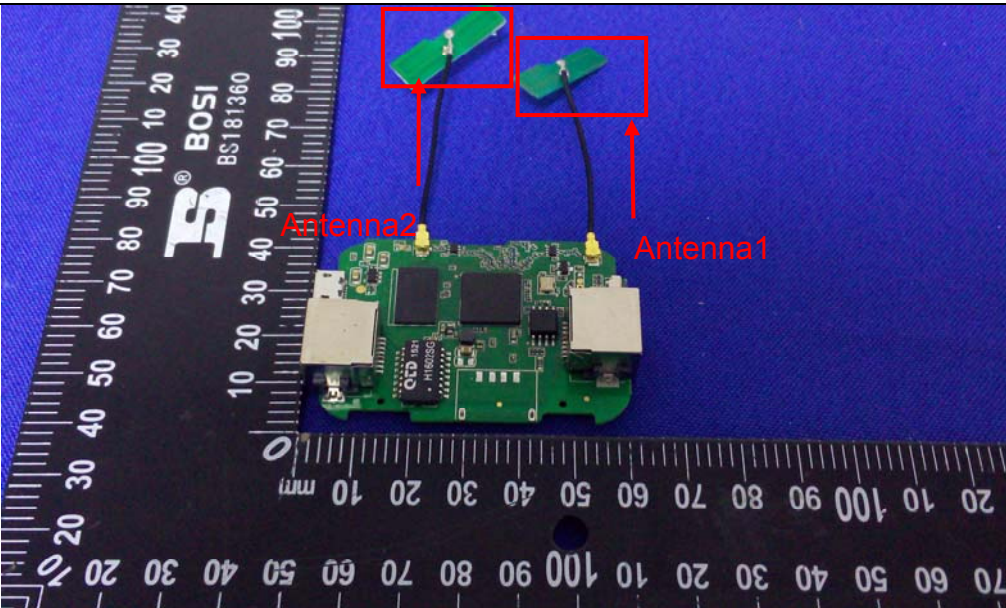Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The EUT has two PCB antennas which permanently attached, and the best case gain of the both antennas are 2dBi.	
	

6.2. Conducted Emission

6.2.1. Test Specification

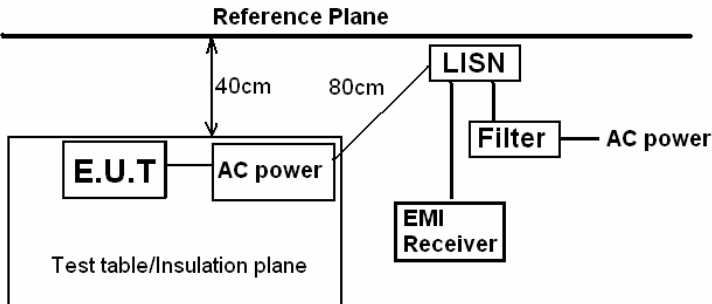Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4:2014														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.														
Test Result:	PASS														

6.2.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Nov. 16, 2015
LISN	Schwarzbeck	NSLK 8126	8126453	Nov. 29, 2015
Coax cable	TCT	CE-05	N/A	Nov. 15, 2015
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

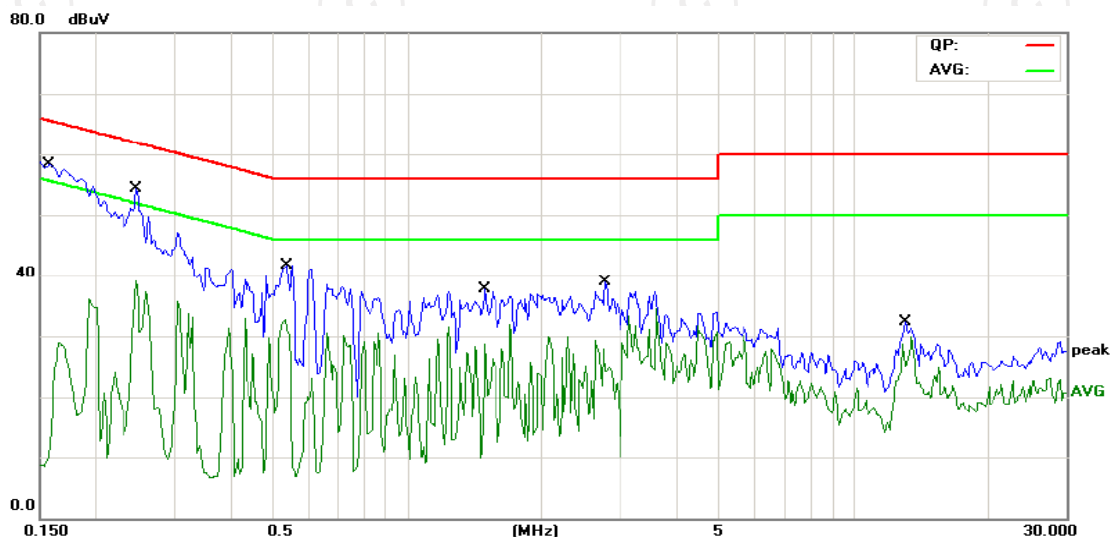

Site: Chamber #2 Phase: L1 Temperature: 25 (C)
Limit: FCC Part 15B Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 56 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1578	39.08	11.49	50.57	65.57	-15.00	QP	
2		0.1578	8.08	11.49	19.57	55.57	-36.00	AVG	
3		0.2477	35.23	11.44	46.67	61.83	-15.16	QP	
4		0.2477	17.69	11.44	29.13	51.83	-22.70	AVG	
5		0.5367	27.95	11.29	39.24	56.00	-16.76	QP	
6		0.5367	11.26	11.29	22.55	46.00	-23.45	AVG	
7		1.4898	22.16	11.42	33.58	56.00	-22.42	QP	
8		1.4898	10.94	11.42	22.36	46.00	-23.64	AVG	
9		2.7750	20.68	11.41	32.09	56.00	-23.91	QP	
10		2.7750	10.71	11.41	22.12	46.00	-23.88	AVG	
11		13.0897	18.71	11.43	30.14	60.00	-29.86	QP	
12		13.0897	9.64	11.43	21.07	50.00	-28.93	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

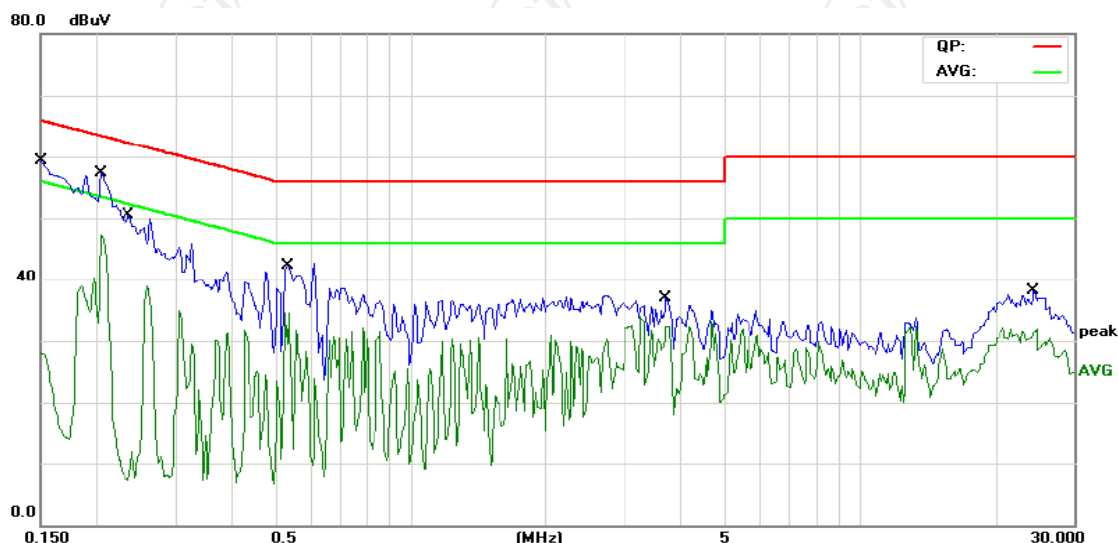

Site Chamber #2 Phase: **N** Temperature: 25 (C)
 Limit: FCC Part 15B Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 56 %

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1		0.1500	37.70	11.52	49.22	65.99	-16.77	QP	
2		0.1500	8.10	11.52	19.62	55.99	-36.37	AVG	
3	*	0.2047	39.70	11.48	51.18	63.41	-12.23	QP	
4		0.2047	11.12	11.48	22.60	53.41	-30.81	AVG	
5		0.2359	28.22	11.46	39.68	62.24	-22.56	QP	
6		0.2359	6.29	11.46	17.75	52.24	-34.49	AVG	
7		0.5328	23.13	11.29	34.42	56.00	-21.58	QP	
8		0.5328	4.84	11.29	16.13	46.00	-29.87	AVG	
9		3.7109	22.34	11.08	33.42	56.00	-22.58	QP	
10		3.7109	11.98	11.08	23.06	46.00	-22.94	AVG	
11		24.4648	21.24	10.75	31.99	60.00	-28.01	QP	
12		24.4648	13.57	10.75	24.32	50.00	-25.68	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)


Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.2.4. Maximum Conducted (Average) Output Power

6.2.5. Test Specification

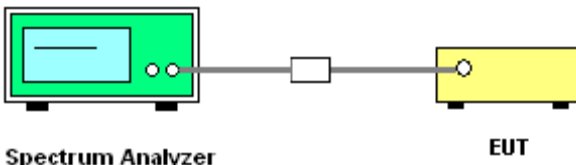Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074, KDB662911
Limit:	30dBm
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report. 5. The calculation method follows FCC KDB662911 D01 Multiple Transmitter Output v02r01
Test Result:	PASS

6.2.6. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Dec. 21, 2015
RF cable	TCT	RE-06	N/A	Nov. 15, 2015
Antenna Connector	TCT	RFC-01	N/A	Nov. 15, 2015

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.7. Test Data

Configuration IEEE 802.11b/ Antenna 1+Antenna 2					
Test channel	Maximum Conducted (Average) Output Power (dBm)			Limit (dBm)	Result
	Antenna 1	Antenna 2	Total		
Lowest	17.49	17.11	20.31	30.00	PASS
Middle	16.20	16.57	19.40	30.00	PASS
Highest	17.73	16.61	20.22	30.00	PASS

Configuration IEEE 802.11g/ Antenna 1+Antenna 2					
Test channel	Maximum Conducted (Average) Output Power (dBm)			Limit (dBm)	Result
	Antenna 1	Antenna 2	Total		
Lowest	19.57	19.23	22.41	30.00	PASS
Middle	18.65	18.43	21.55	30.00	PASS
Highest	19.48	18.78	22.15	30.00	PASS


Configuration IEEE 802.11n(H20)/ Antenna 1+Antenna 2					
Test channel	Maximum Conducted (Average) Output Power (dBm)			Limit (dBm)	Result
	Antenna 1	Antenna 2	Total		
Lowest	19.49	18.96	22.24	30.00	PASS
Middle	18.15	18.19	21.18	30.00	PASS
Highest	19.50	18.62	22.09	30.00	PASS

Configuration IEEE 802.11n(H40)/ Antenna 1+Antenna 2					
Test channel	Maximum Conducted (Average) Output Power (dBm)			Limit (dBm)	Result
	Antenna 1	Antenna 2	Total		
Lowest	12.55	12.02	15.30	30.00	PASS
Middle	12.59	12.57	15.59	30.00	PASS
Highest	12.69	12.51	15.61	30.00	PASS


Test plots as follows:

Antenna 1:
802.11b Modulation


Lowest channel

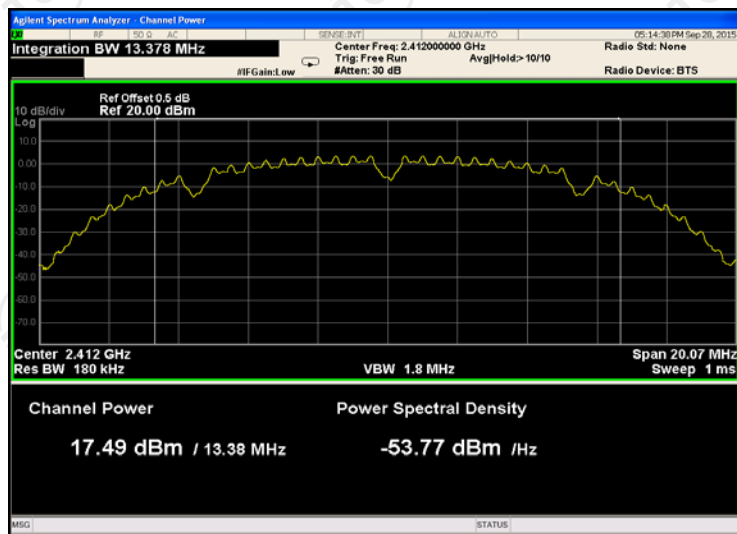

Middle channel

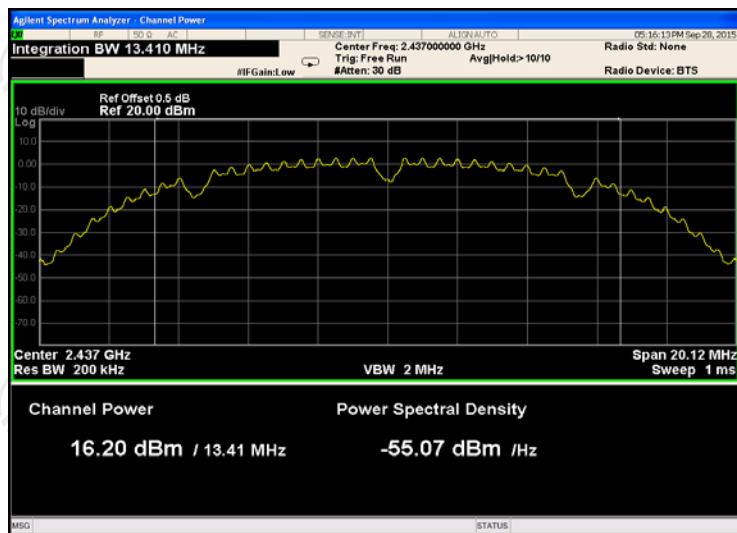


Highest channel

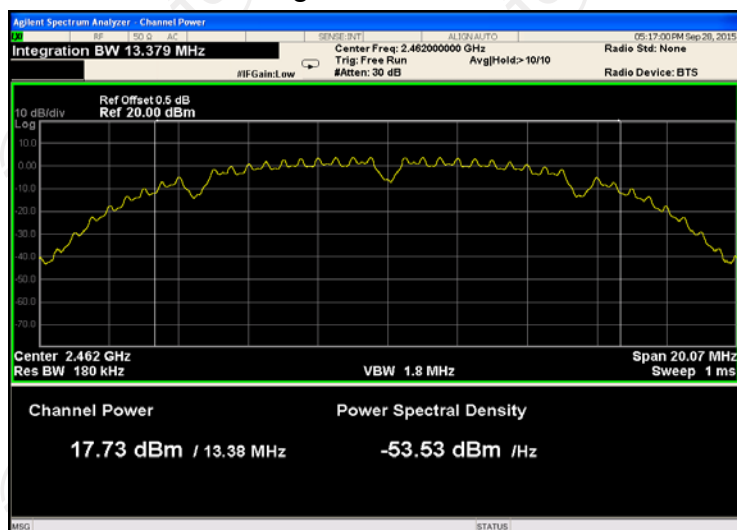


802.11g Modulation


Lowest channel

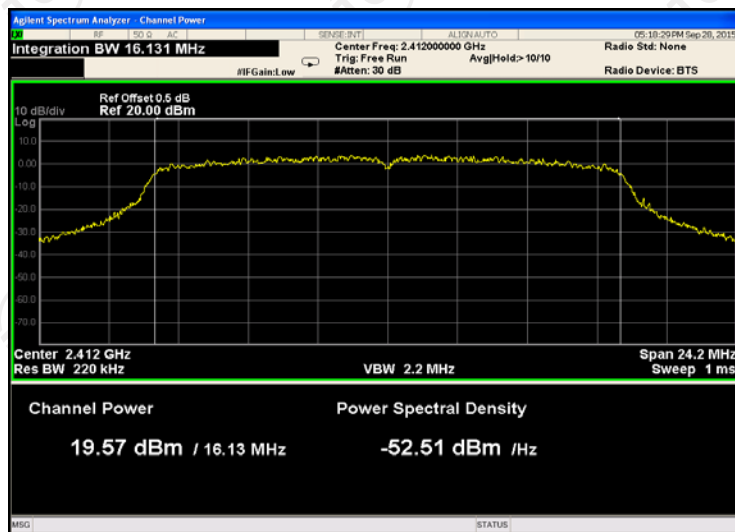

Middle channel

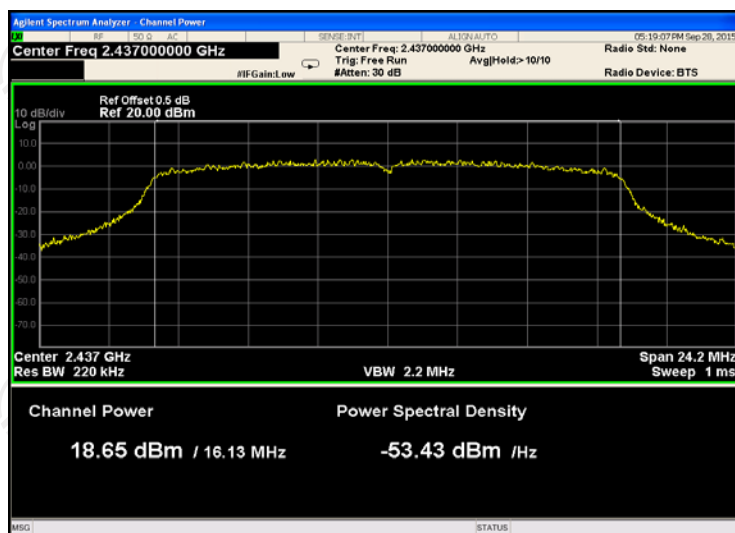


Highest channel

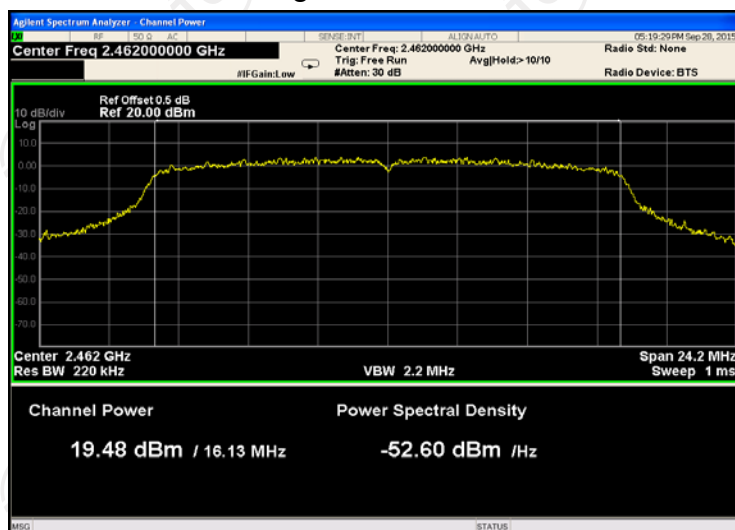


802.11n (HT20) Modulation


Lowest channel

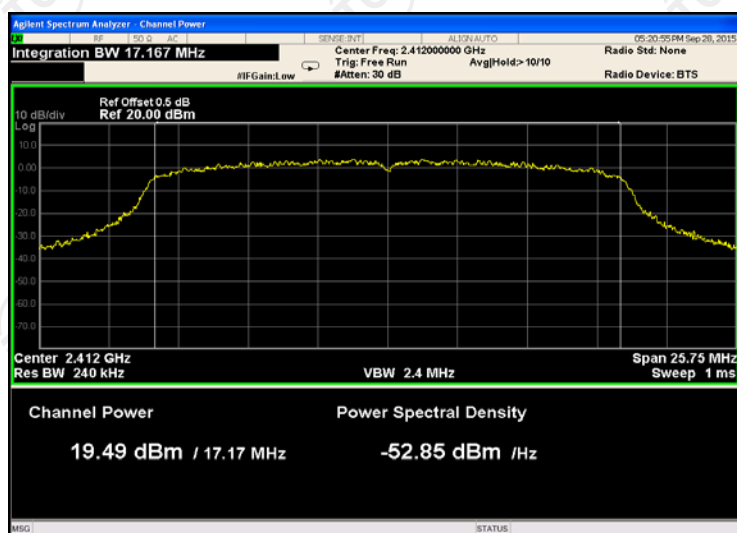

Middle channel

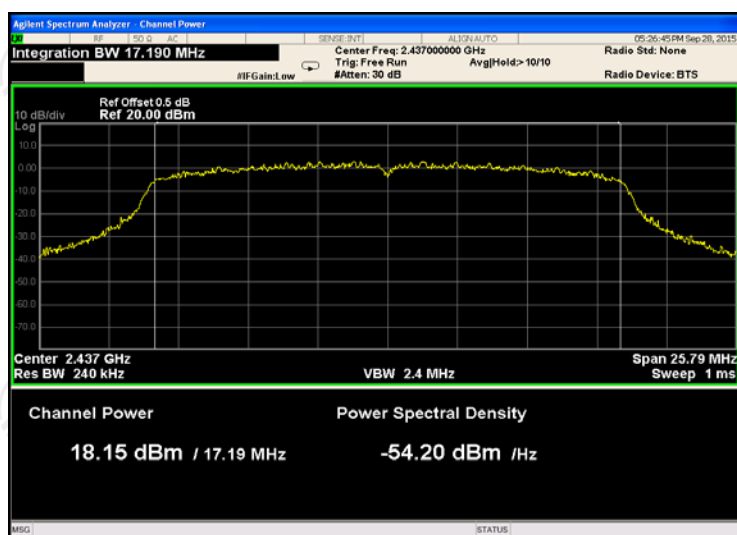


Highest channel

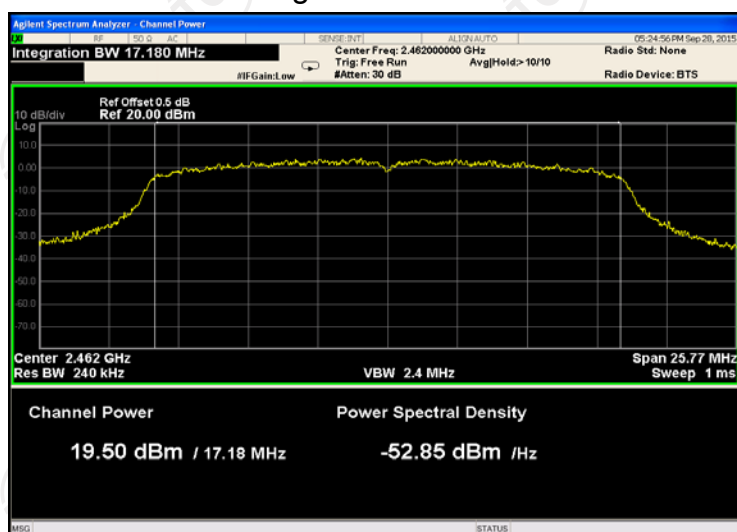


802.11n (HT40) Modulation


Lowest channel

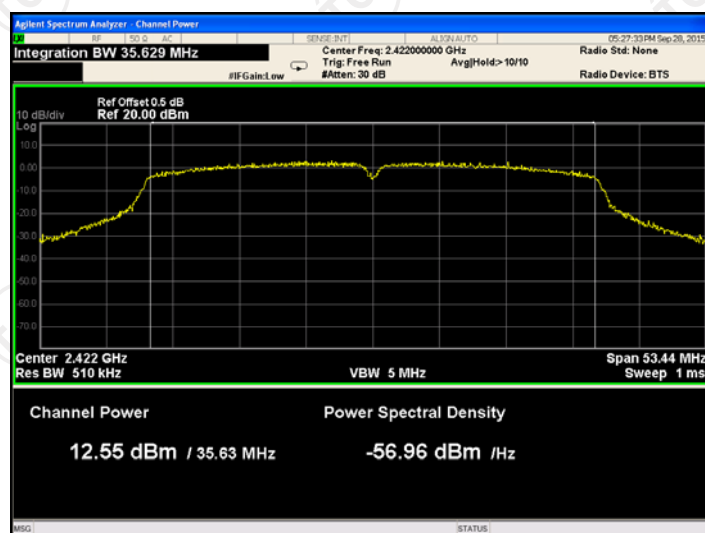

Middle channel

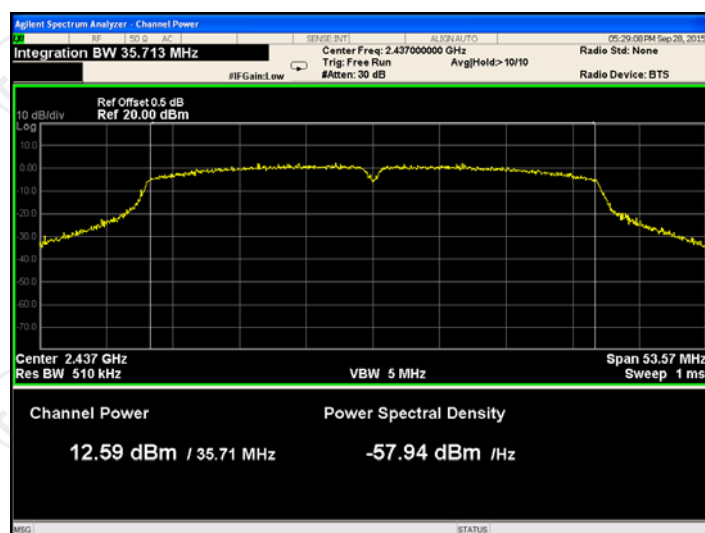


Highest channel

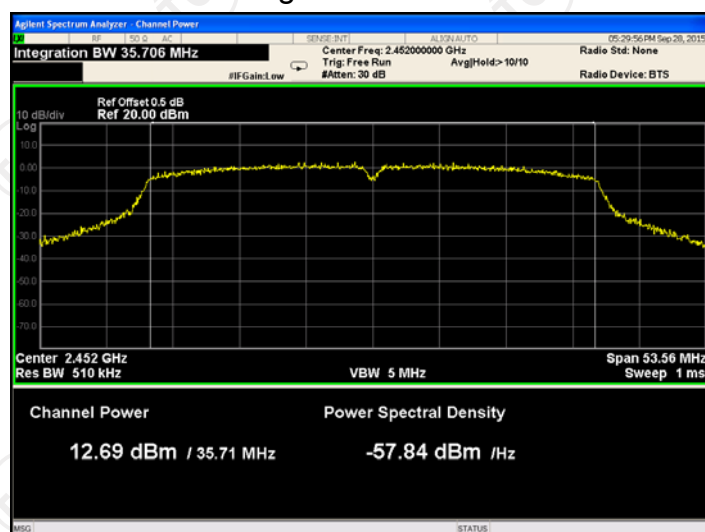


Antenna 2: 802.11b Modulation


Lowest channel

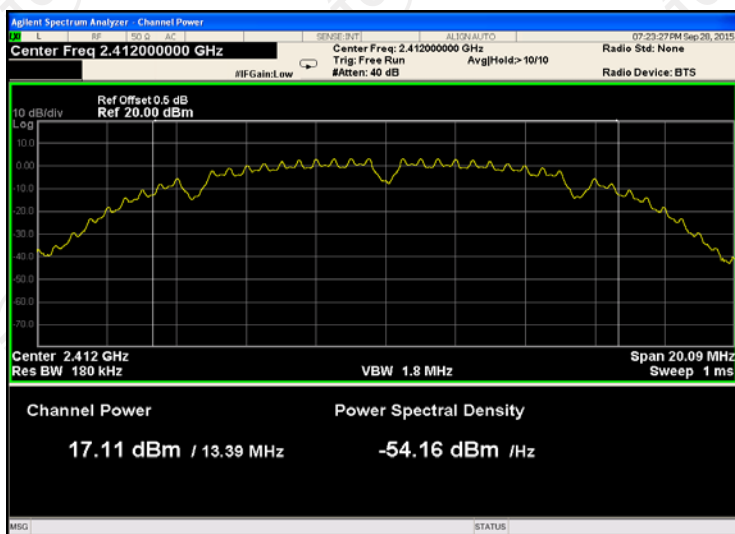

Middle channel

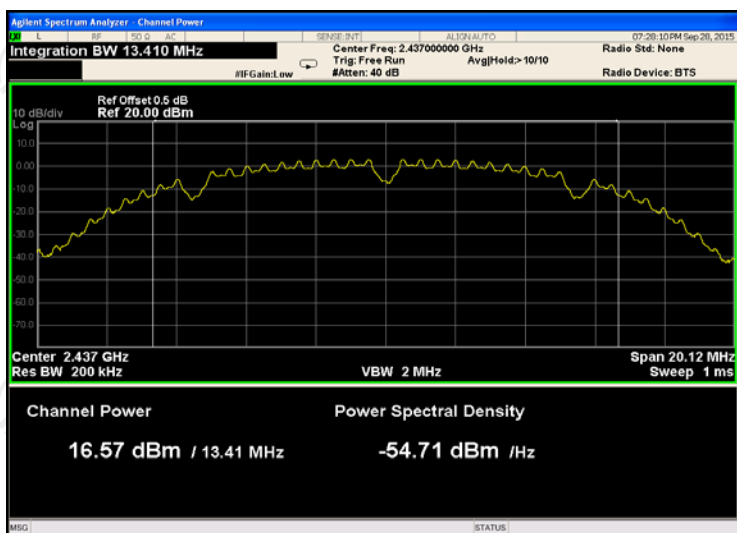


Highest channel

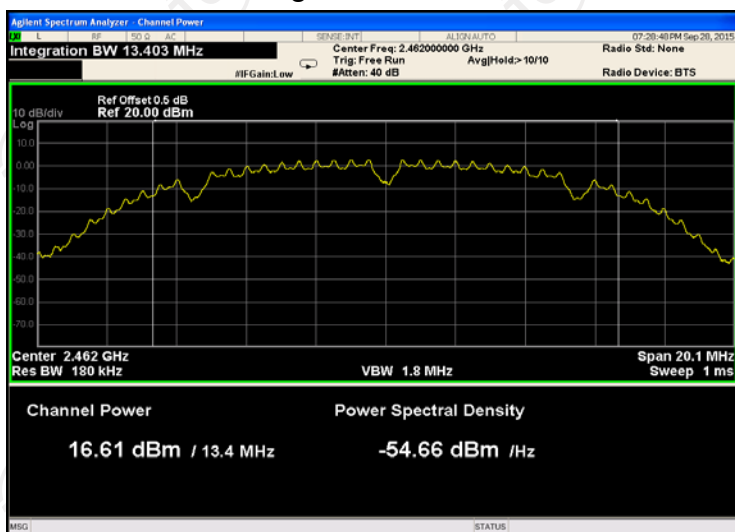


802.11g Modulation


Lowest channel

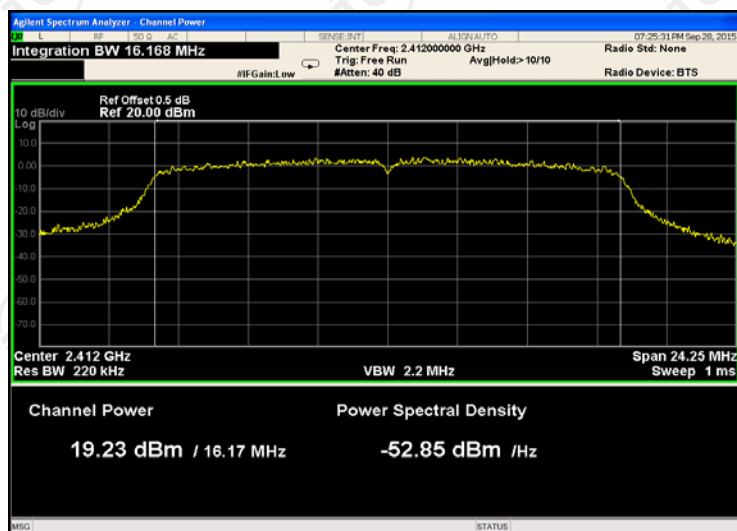

Middle channel

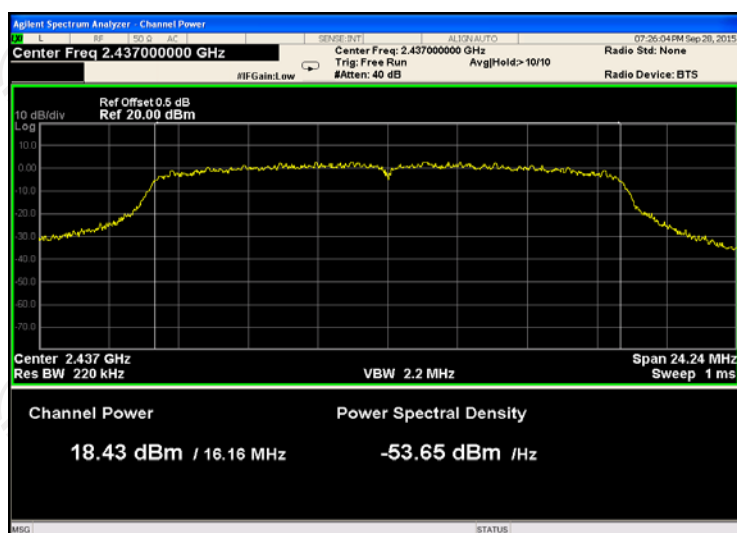


Highest channel

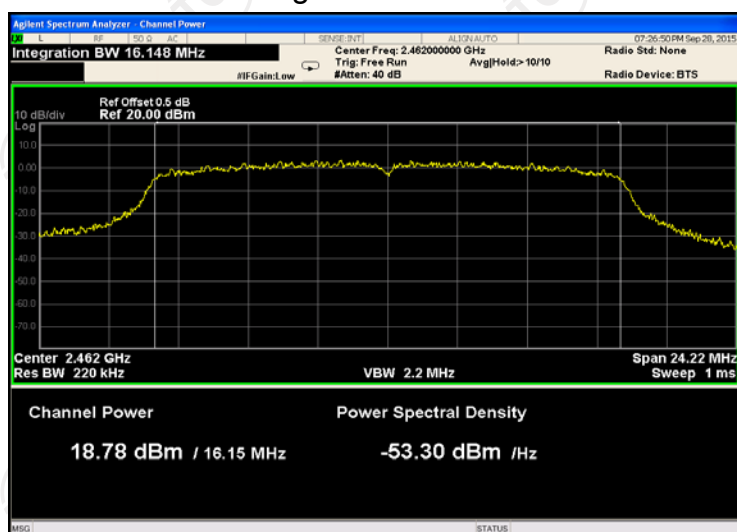


802.11n (HT20) Modulation


Lowest channel

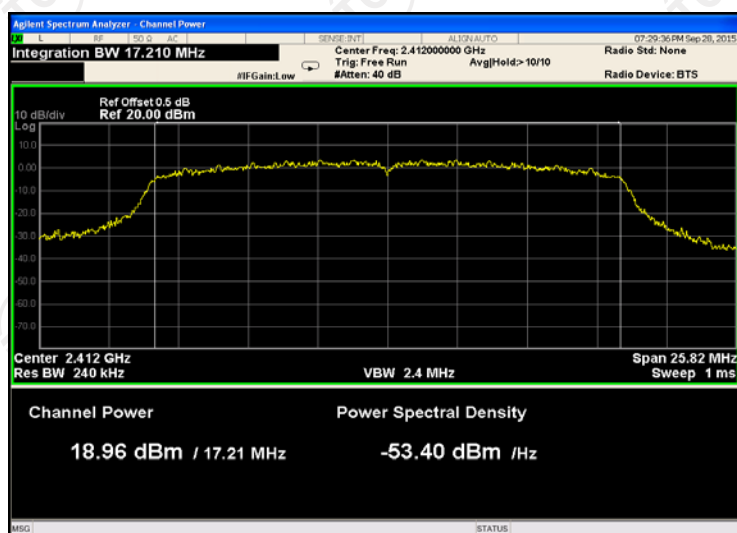

Middle channel

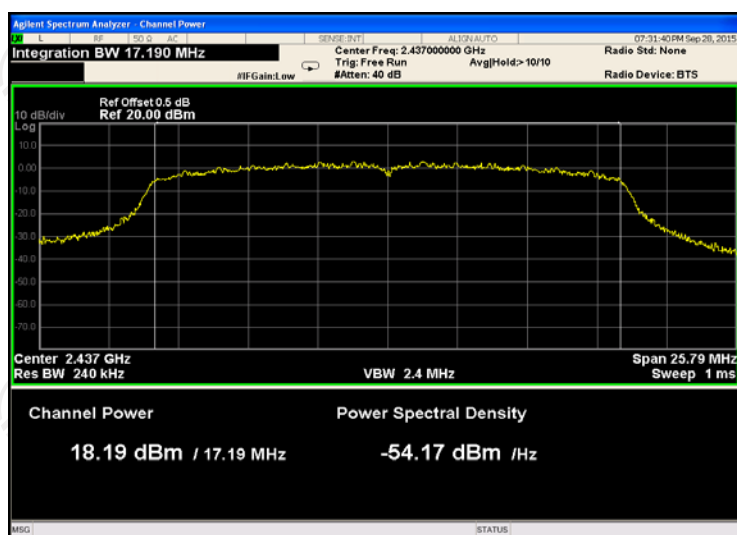


Highest channel

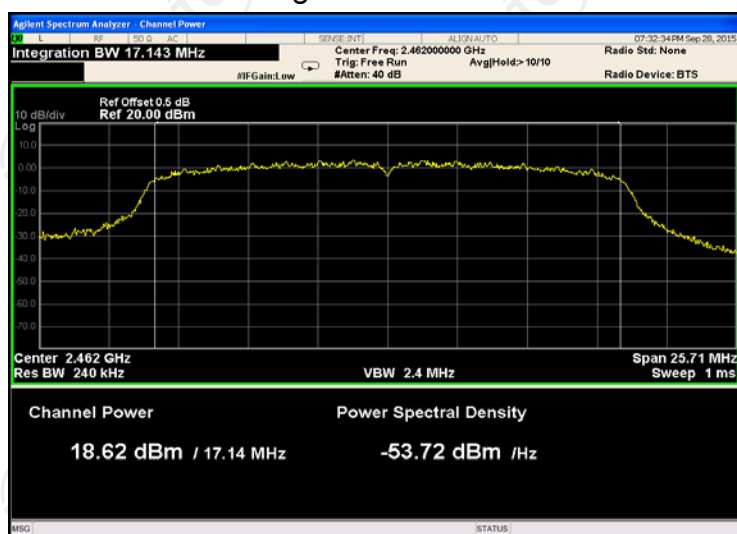


802.11n (HT40) Modulation

Lowest channel

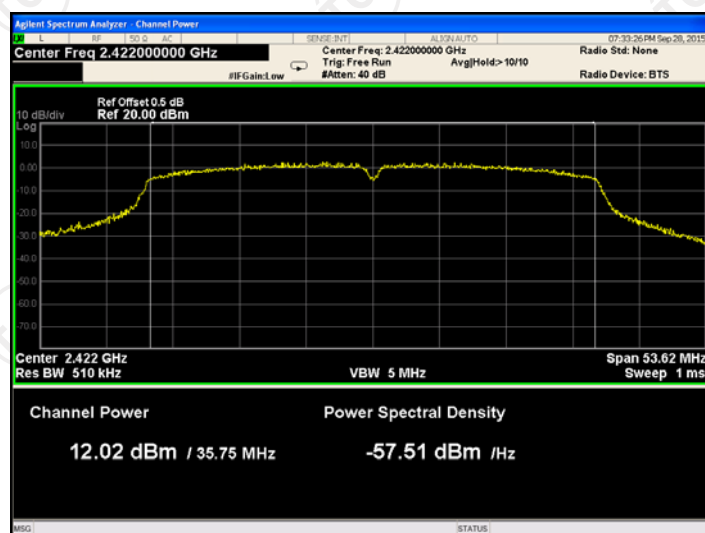

Middle channel

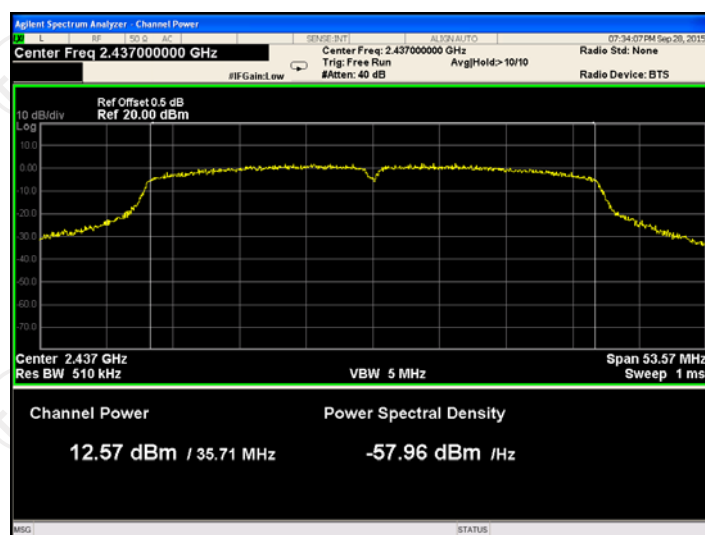

Highest channel

