



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	AIPTEK International Inc.
Applicant Address	2F, No.58, Park Avenue 2nd Rd., Science-Based Industrial Park, Hsinchu 30844, Taiwan, R.O.C.
FCC ID	2AB5H-RA7001
Manufacturer's company	AIPTEK International Inc.
Manufacturer Address	2F, No.58, Park Avenue 2nd Rd., Science-Based Industrial Park, Hsinchu 30844, Taiwan, R.O.C.

Product Name	POCKETCINEMA A100W
Brand Name	AIPTEK
Model No.	RA7
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 18, 2014
Final Test Date	Nov. 17, 2014
Submission Type	Original Equipment

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	8
3.9. EUT Operation during Test	8
3.10. Duty Cycle	8
3.11. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement	18
4.4. 6dB Spectrum Bandwidth Measurement	24
4.5. Radiated Emissions Measurement	29
4.6. Emissions Measurement	48
4.7. Antenna Requirements	66
5. LIST OF MEASURING EQUIPMENTS	67
6. MEASUREMENT UNCERTAINTY.....	69
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4O1803	Rev. 01	Initial issue of report	Apr. 08, 2015

1. VERIFICATION OF COMPLIANCE

Product Name : POCKETCINEMA A100W
Brand Name : AIPTEK
Model No. : RA7
Applicant : AIPTEK International Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 18, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	5.41 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	7.22 dB
4.3	15.247(e)	Power Spectral Density	Complies	15.65 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.11 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.13 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or Battery
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (HT20): 17.92 MHz ; MCS0 (HT40): 36.16 MHz
Maximum Conducted Output Power	MCS0 (HT20): 19.87 dBm ; MCS0 (HT40): 18.73 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or Battery
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.36 MHz ; 11g: 16.96 MHz
Maximum Conducted Output Power	11b: 22.78 dBm ; 11g: 19.83 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☐ With beamforming	☒ Without beamforming

Antenna and Band width

Antenna	Single (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7
802.11n (HT40)	1	MCS 0-7
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n		

3.2. Accessories

Power	Brand	Model	Rating
Adapter	Sunny	SYS1357-2412	INPUT: 100-240V, 1.0A MAX, 50-60Hz OUTPUT: 12V, 2.0A
Power	Brand Holder	Model	Rating
Lithium Ion Polymer(LIP) battery	POWER SOURCE ENERGY CO.,LTD.	H604070H-2S	Typical Capacity: 2000mAh Minimum Capacity: 1900mAh Nominal Voltage: 7.4V Discharging Current (Std.): 400mA Discharging Current (Max.): 2000mA
Others			
Plug*1			


3.3. Table for Filed Antenna

Ant.	Brand Holder	P/N	Antenna Type	Connector	Gain (dBi)
1	VSO ELECTRONICS CO.,LTD.	N-821-304-99990200	PIFA Antenna	N/A	1.8

Note:

For IEEE 802.11b/g/n mode:

Only Ant. 1 can be used as transmitting antenna and receiving antenna.

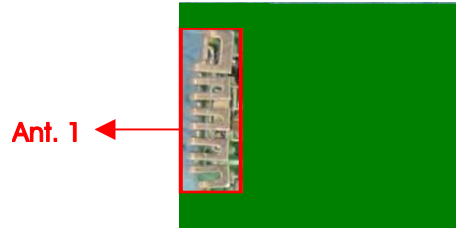

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1 ~Channel 11.

For 40MHz bandwidth systems, use Channel 3 ~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	802.11n HT20	MCS0	1/6/11	1
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Power Spectral Density	802.11n HT20	MCS0	1/6/11	1
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
6dB Spectrum Bandwidth	802.11n HT20	MCS0	1/6/11	1
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	802.11n HT20	MCS0	1/6/11	1
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	802.11n HT20	MCS0	1/6/11	1
	802.11n HT40	MCS0	3/6/9	1
	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1.CTX

For Radiated Emission test:

Mode 1. CTX

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

For Radiated Emission below 1GHz test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Earphone	E-BOOKI	E-EPC040	N/A

For Radiated Emission above 1GHz test:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Earphone	e-Power	S90W	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	E2KWM3945ABG

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n

Test Software Version	REAL TEK		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 HT20	62	63	51
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 HT40	60	60	53

Power Parameters of IEEE 802.11b/g

Test Software Version	REAL TEK		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	61	60	49
IEEE 802.11g	63	63	52

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11n MCS0 HT20	1.000	1.000	100	0.00	0.01
802.11n MCS0 HT40	1.000	1.000	100	0.00	0.01
802.11b	1.000	1.000	100	0.00	0.01
802.11g	1.000	1.000	100	0.00	0.01


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

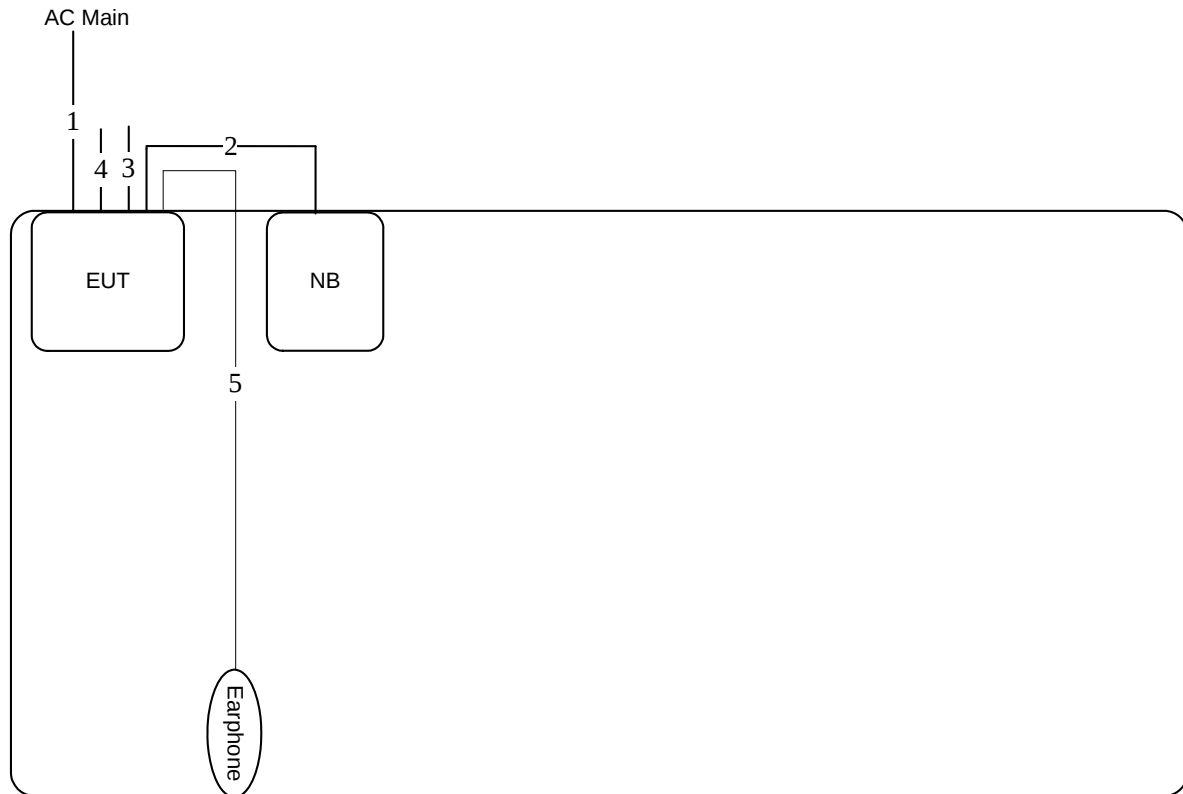

Item	Connection	Shielded	Length
1	Power Cable	No	1.4m
2	USB Cable	Yes	0.5m
3	HDMI Cable	Yes	1.2m
4	MHL Cable	Yes	0.9m
5	Audio Cable	No	1.4m

3.11.2. Radiation Emissions Test Configuration

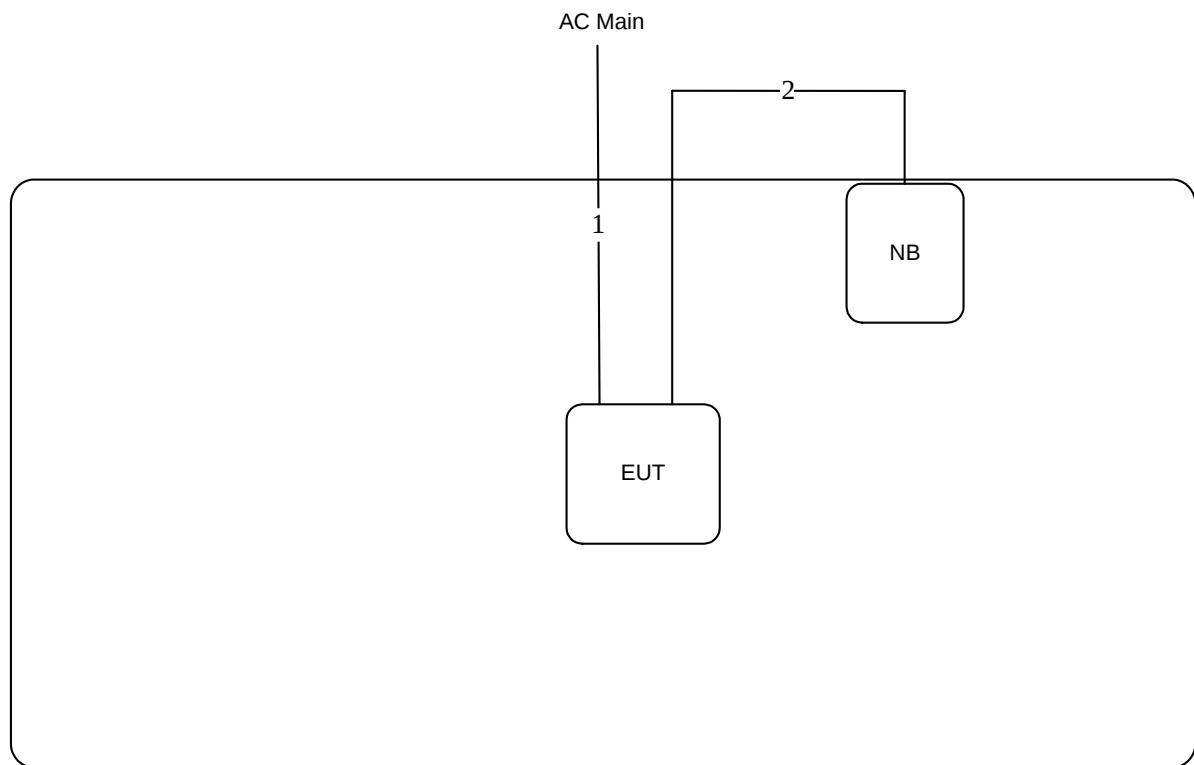

Item	Connection	Shielded	Length
1	Power Cable	No	1.4m
2	USB Cable	Yes	0.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

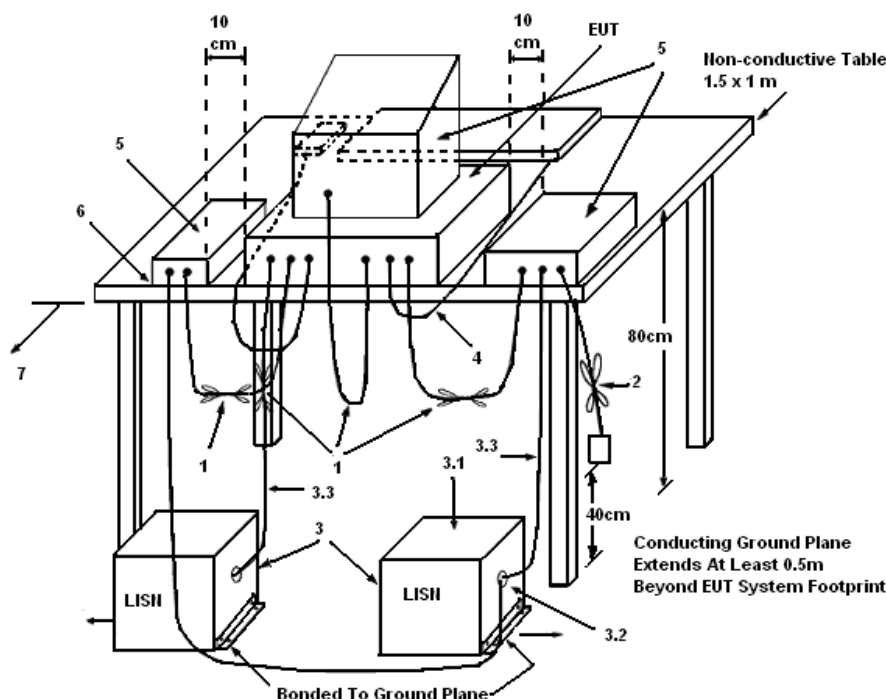

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX		

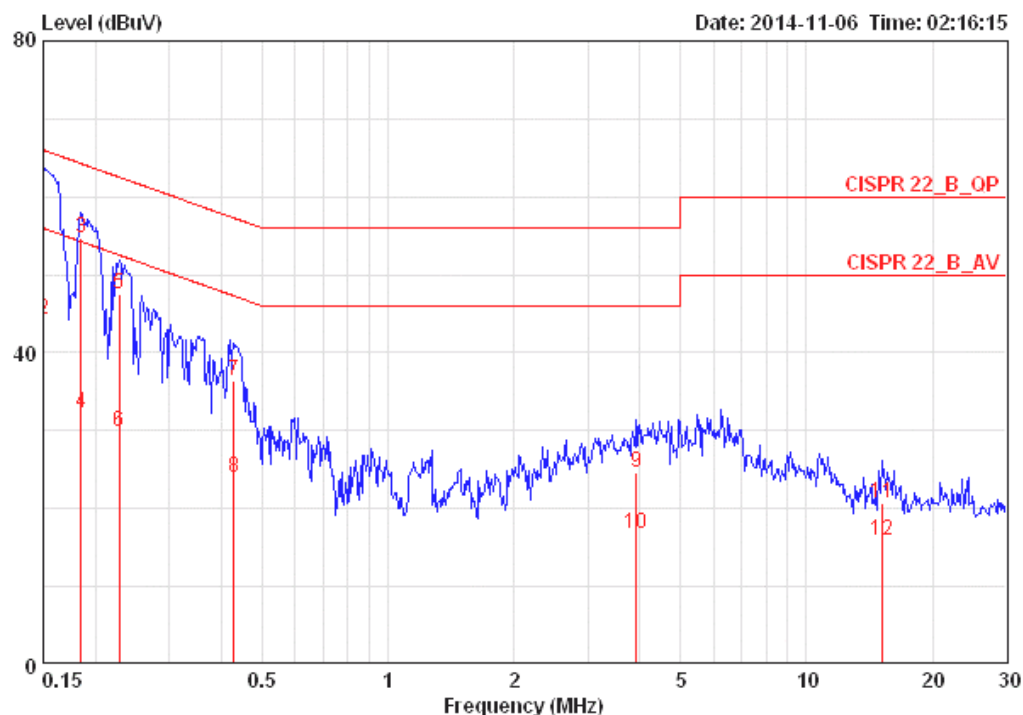

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	60.59	-5.41	66.00	50.47	9.96	0.16	QP	LINE
2	0.15000	44.24	-11.76	56.00	34.12	9.96	0.16	AVERAGE	LINE
3	0.18443	54.78	-9.50	64.28	44.66	9.96	0.16	QP	LINE
4	0.18443	32.34	-21.94	54.28	22.22	9.96	0.16	AVERAGE	LINE
5	0.22797	47.55	-14.98	62.52	37.42	9.96	0.17	QP	LINE
6	0.22797	29.81	-22.72	52.52	19.68	9.96	0.17	AVERAGE	LINE
7	0.42825	36.47	-20.82	57.29	26.33	9.95	0.18	QP	LINE
8	0.42825	23.89	-23.40	47.29	13.75	9.95	0.18	AVERAGE	LINE
9	3.922	24.62	-31.38	56.00	14.25	10.07	0.30	QP	LINE
10	3.922	16.86	-29.14	46.00	6.49	10.07	0.30	AVERAGE	LINE
11	15.226	20.65	-39.35	60.00	9.86	10.34	0.45	QP	LINE
12	15.226	15.90	-34.10	50.00	5.11	10.34	0.45	AVERAGE	LINE

Temperature	25°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX		

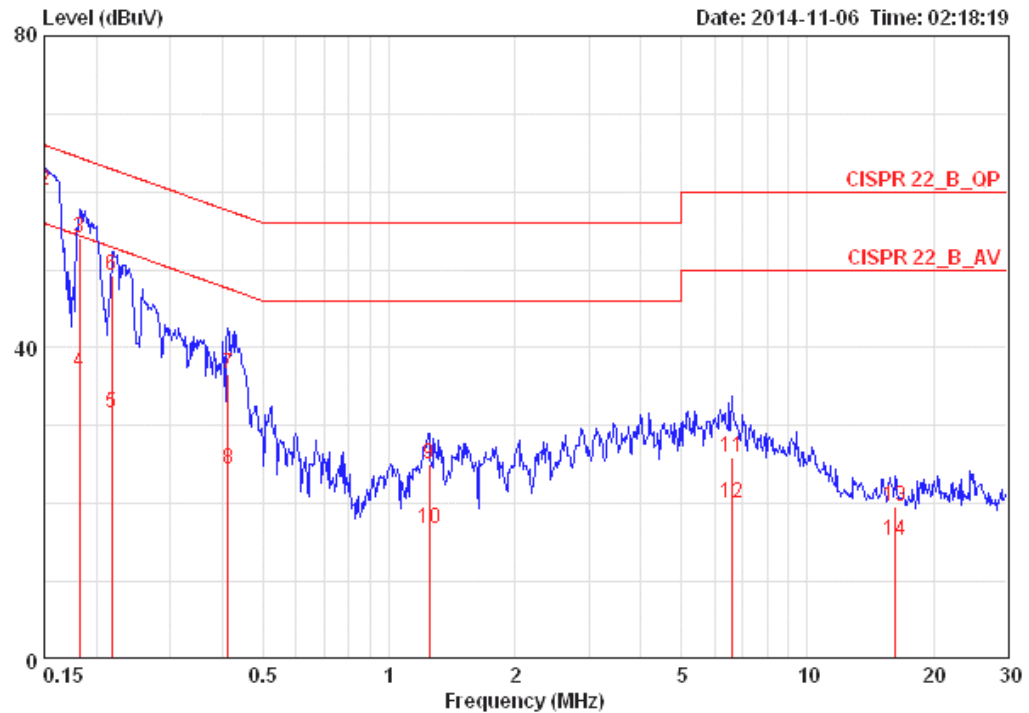

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	42.75	-13.25	56.00	32.64	9.95	0.16	AVERAGE	NEUTRAL
2	0.15000	60.07	-5.93	66.00	49.96	9.95	0.16	QP	NEUTRAL
3	0.18249	54.03	-10.34	64.37	43.92	9.95	0.16	QP	NEUTRAL
4	0.18249	36.77	-17.60	54.37	26.66	9.95	0.16	AVERAGE	NEUTRAL
5	0.21735	31.72	-21.20	52.92	21.60	9.95	0.17	AVERAGE	NEUTRAL
6	0.21735	49.20	-13.72	62.92	39.08	9.95	0.17	QP	NEUTRAL
7	0.41266	36.69	-20.90	57.59	26.57	9.94	0.18	QP	NEUTRAL
8	0.41266	24.41	-23.18	47.59	14.29	9.94	0.18	AVERAGE	NEUTRAL
9	1.249	25.01	-30.99	56.00	14.80	10.00	0.22	QP	NEUTRAL
10	1.249	16.70	-29.30	46.00	6.49	10.00	0.22	AVERAGE	NEUTRAL
11	6.592	25.96	-34.04	60.00	15.48	10.13	0.35	QP	NEUTRAL
12	6.592	20.03	-29.97	50.00	9.55	10.13	0.35	AVERAGE	NEUTRAL
13	16.226	19.67	-40.33	60.00	8.88	10.32	0.46	QP	NEUTRAL
14	16.226	15.36	-34.64	50.00	4.57	10.32	0.46	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

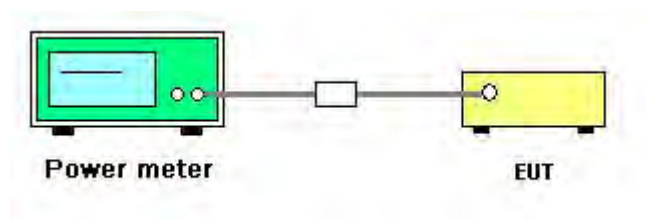

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	57%
Test Engineer	YC Chen	Configurations	IEEE 802.11n
Test Date	Nov. 17, 2014		

Configuration IEEE 802.11n MCS0 HT20 / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.17	30.00	Complies
6	2437 MHz	19.87	30.00	Complies
11	2462 MHz	15.38	30.00	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	18.32	30.00	Complies
6	2437 MHz	18.73	30.00	Complies
9	2452 MHz	15.83	30.00	Complies

Temperature	25°C	Humidity	57%
Test Engineer	YC Chen	Configurations	IEEE 802.11b/g
Test Date	Nov. 17, 2014		

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.78	30.00	Complies
6	2437 MHz	22.27	30.00	Complies
11	2462 MHz	19.45	30.00	Complies

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.55	30.00	Complies
6	2437 MHz	19.83	30.00	Complies
11	2462 MHz	15.69	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

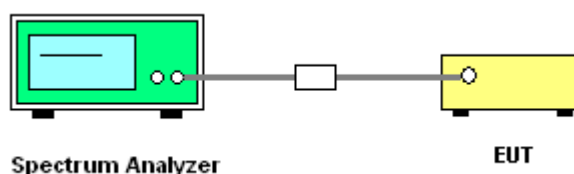

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	57%
Test Engineer	YC Chen	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20 / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-10.80	8.00	Complies
6	2437 MHz	-10.08	8.00	Complies
11	2462 MHz	-14.13	8.00	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
3	2422 MHz	-13.38	8.00	Complies
6	2437 MHz	-13.07	8.00	Complies
9	2452 MHz	-16.07	8.00	Complies

Temperature	25°C	Humidity	57%
Test Engineer	YC Chen	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-8.12	8.00	Complies
6	2437 MHz	-7.65	8.00	Complies
11	2462 MHz	-11.91	8.00	Complies


Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
1	2412 MHz	-11.19	8.00	Complies
6	2437 MHz	-10.48	8.00	Complies
11	2462 MHz	-10.69	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1

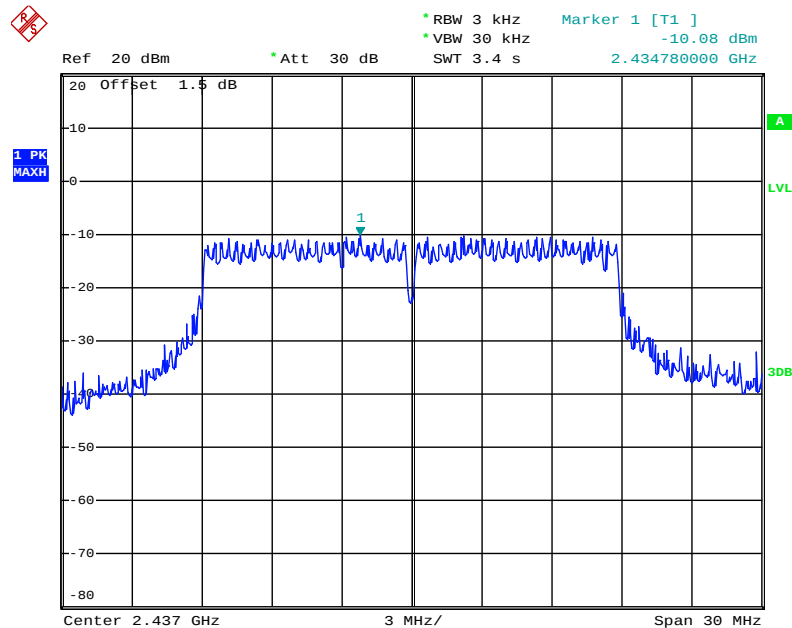


Date: 17.NOV.2014 11:44:07

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1

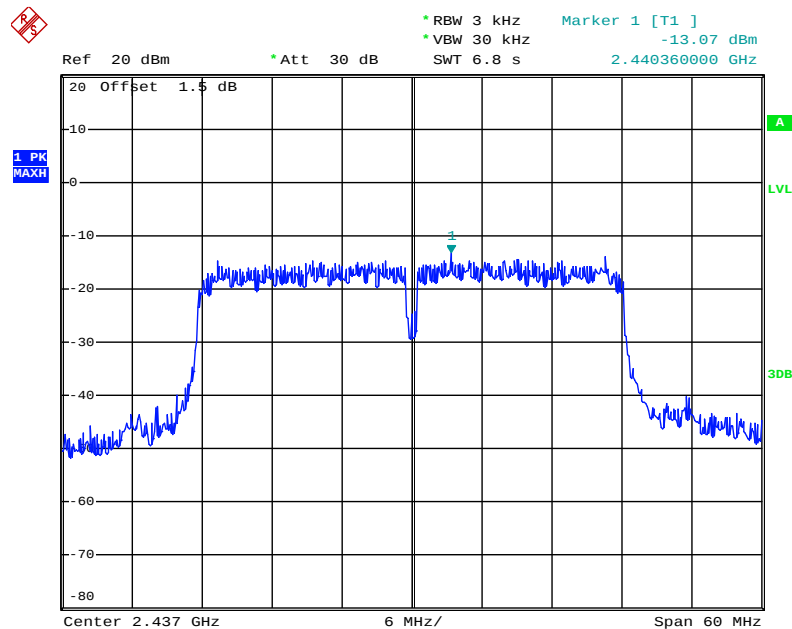


Date: 17.NOV.2014 11:45:58

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1

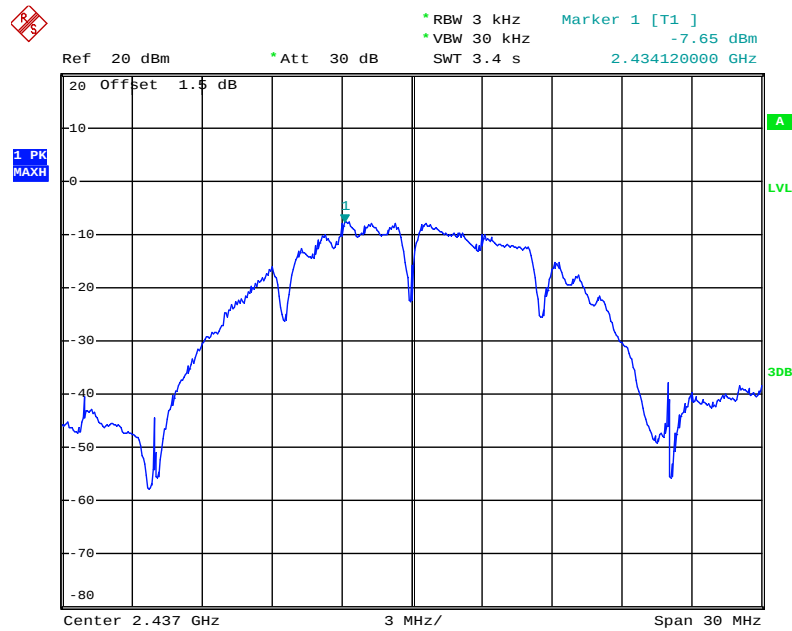

Date: 17.NOV.2014 11:03:30

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1

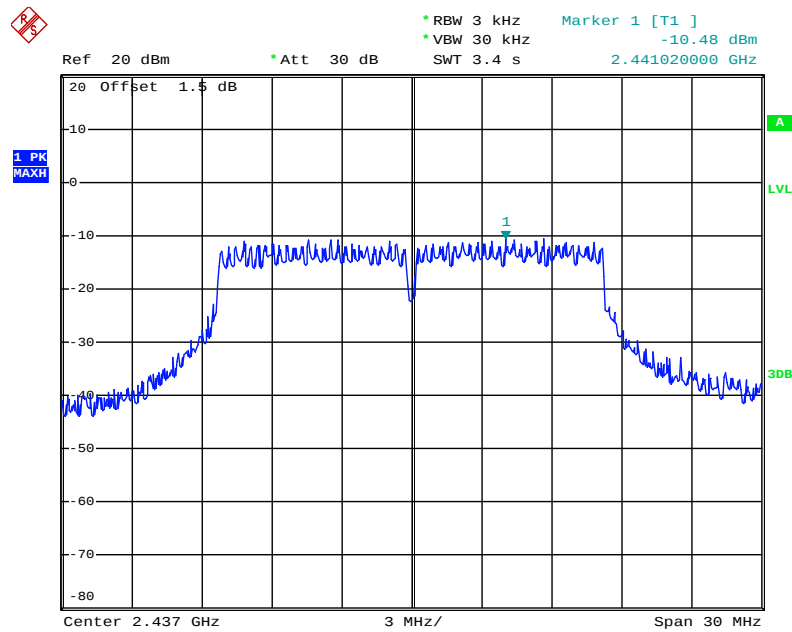

Date: 17.NOV.2014 11:15:04

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	57%
Test Engineer	YC Chen	Configurations	IEEE 802.11n

Configuration IEEE 802.11n MCS0 HT20 / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.84	17.84	500	Complies
6	2437 MHz	17.84	17.92	500	Complies
11	2462 MHz	17.84	17.76	500	Complies

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.48	36.16	500	Complies
6	2437 MHz	36.48	36.16	500	Complies
9	2452 MHz	36.48	36.16	500	Complies

Temperature	25°C	Humidity	57%
Test Engineer	YC Chen	Configurations	IEEE 802.11b/g

Configuration IEEE 802.11b / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.60	14.96	500	Complies
6	2437 MHz	9.60	15.36	500	Complies
11	2462 MHz	10.08	15.04	500	Complies


Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.56	16.64	500	Complies
6	2437 MHz	16.56	16.96	500	Complies
11	2462 MHz	16.56	16.64	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Ant. 1

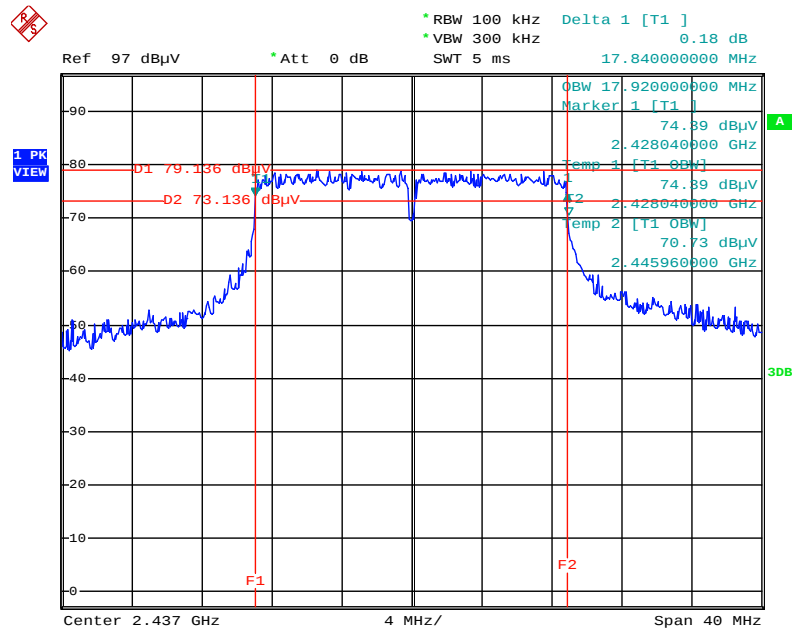


Date: 17.NOV.2014 11:33:36

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Ant. 1

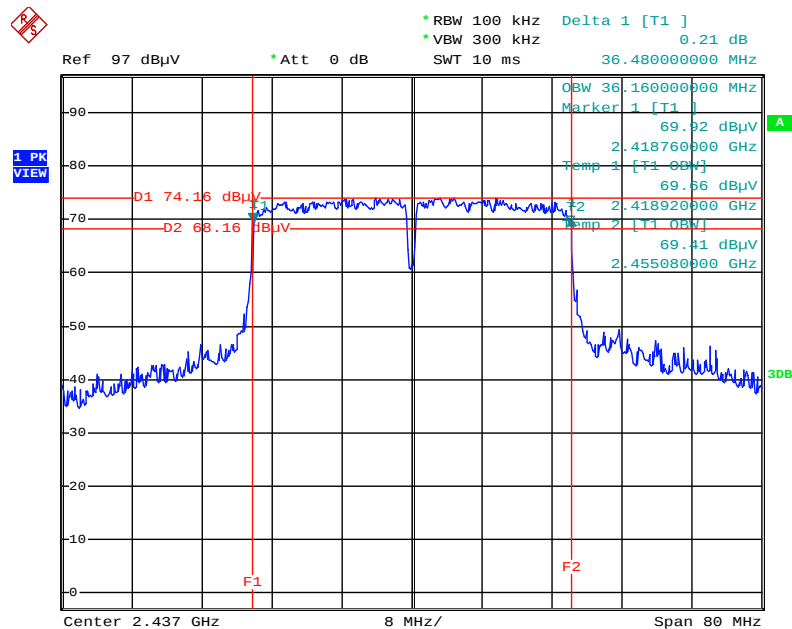


Date: 17.NOV.2014 11:36:23

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1

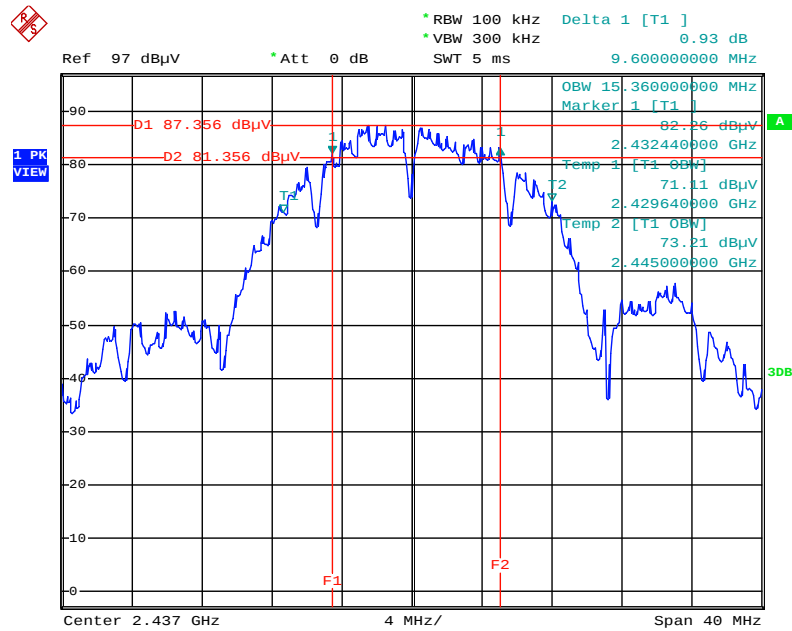

Date: 17.NOV.2014 11:39:42

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1

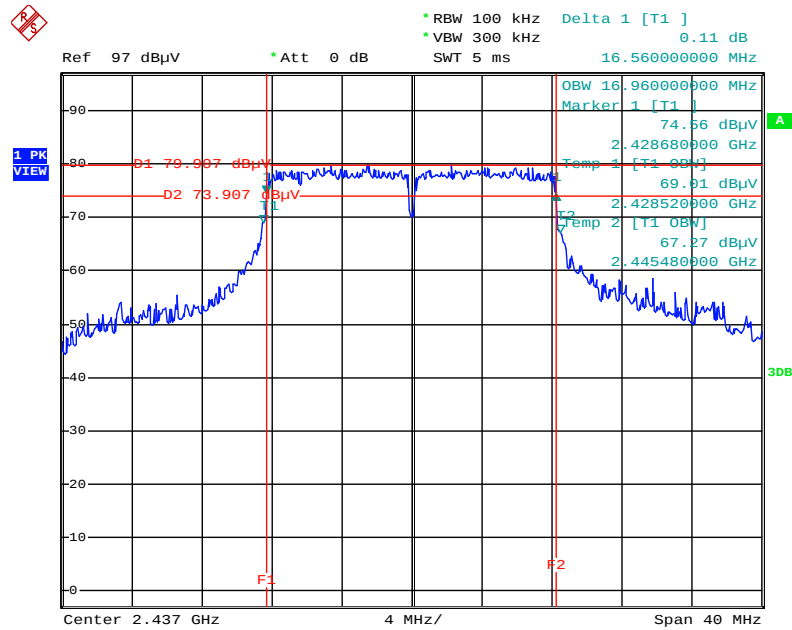

Date: 17.NOV.2014 11:26:59

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

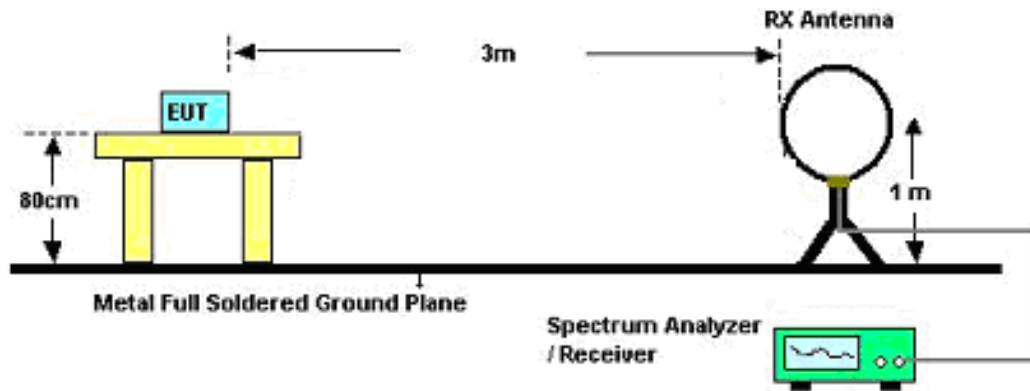

For Radiated Emissions: 30MHz~1GHz

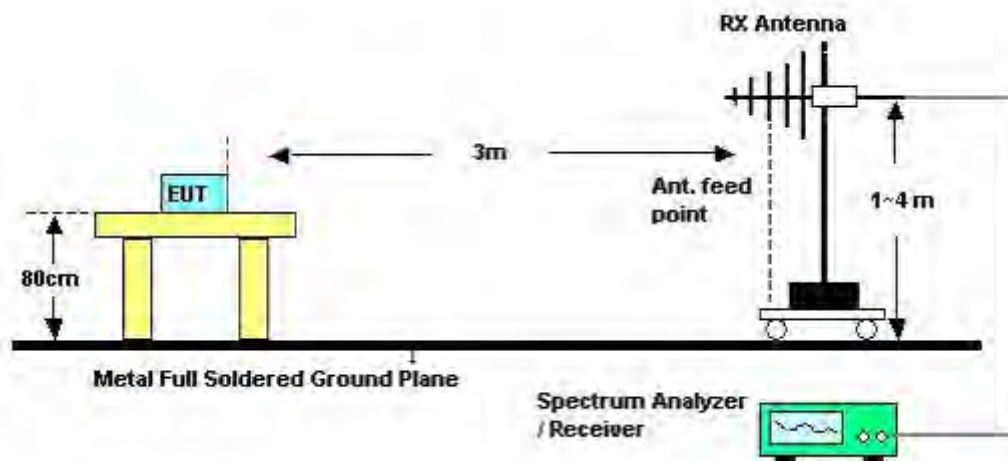

For Radiated Emissions: Above 1GHz

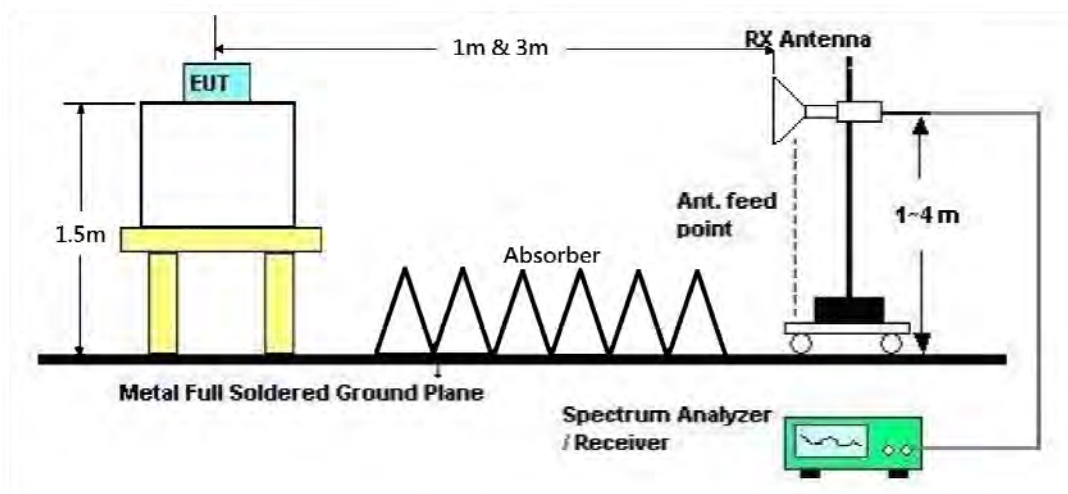

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	CTX
Test Date	Nov. 17, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	CTX

Horizontal

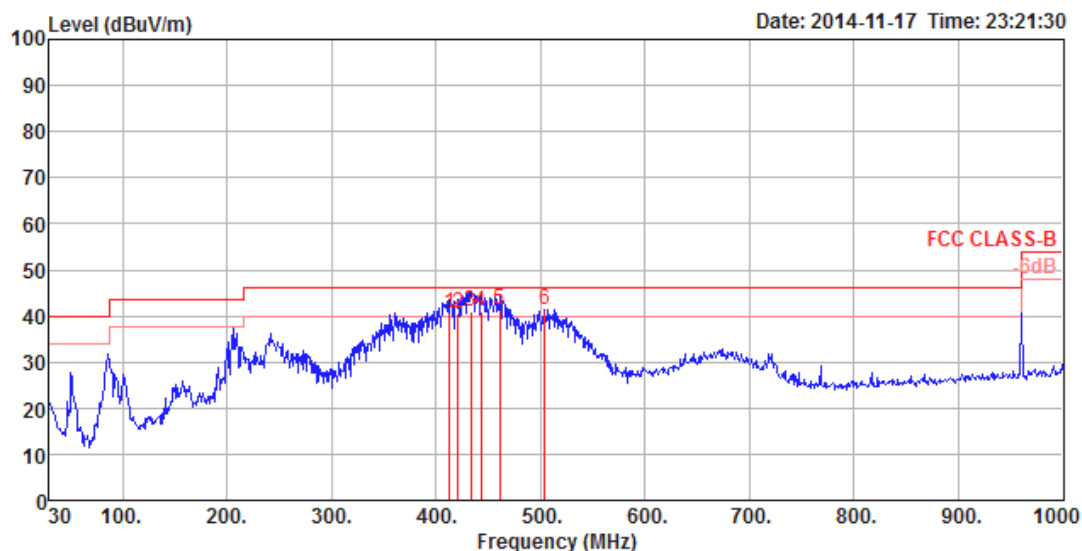

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	413.15	40.53	46.00	-5.47	54.24	1.78	16.66	32.15	100	110	HORIZONTAL QP
2	420.91	40.54	46.00	-5.46	54.21	1.79	16.75	32.21	100	68	HORIZONTAL QP
3	433.52	41.02	46.00	-4.98	54.43	1.82	16.90	32.13	100	73	HORIZONTAL QP
4	443.22	41.13	46.00	-4.87	54.36	1.84	17.02	32.09	100	79	HORIZONTAL QP
5	460.68	41.51	46.00	-4.49	54.40	1.88	17.25	32.02	100	85	HORIZONTAL QP
6	504.33	41.38	46.00	-4.62	53.70	1.97	17.87	32.16	200	31	HORIZONTAL Peak

Vertical

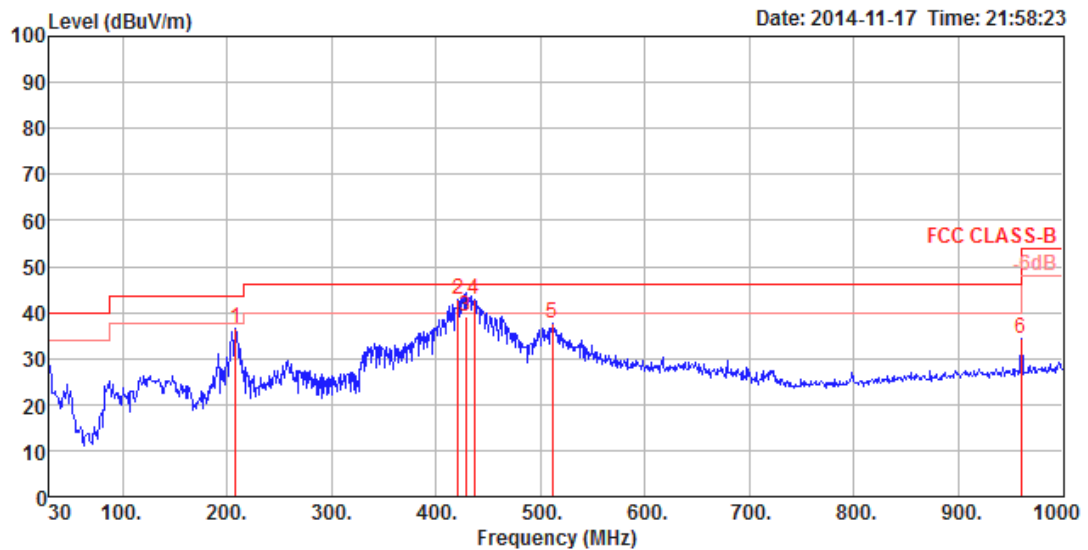

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	208.48	36.41	43.50	-7.09	56.45	1.26	10.74	32.04	100	268 VERTICAL	Peak
2	420.91	42.68	46.00	-3.32	56.34	1.79	16.76	32.21	150	296 VERTICAL	Peak
3	428.67	39.29	46.00	-6.71	52.81	1.81	16.85	32.18	150	285 VERTICAL	QP
4	436.43	42.72	46.00	-3.28	56.06	1.83	16.94	32.11	150	291 VERTICAL	Peak
5	511.12	37.75	46.00	-8.25	49.94	1.98	18.01	32.18	100	1 VERTICAL	Peak
6	960.23	34.26	54.00	-19.74	40.46	2.69	22.06	30.95	100	186 VERTICAL	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4822.18	46.00	74.00	-28.00	42.86	5.68	35.30	32.76	HORIZONTAL	199	119	Peak
2	4824.10	32.58	54.00	-21.42	29.43	5.69	35.30	32.76	HORIZONTAL	199	119	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4821.60	45.82	74.00	-28.18	42.68	5.68	35.30	32.76	VERTICAL	114	156	Peak
2	4824.23	32.43	54.00	-21.57	29.28	5.69	35.30	32.76	VERTICAL	114	156	Average

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4874.58	34.61	54.00	-19.39	31.37	5.75	35.31	32.80	HORIZONTAL	255	100	Average
2	4875.61	46.66	74.00	-27.34	43.43	5.75	35.32	32.80	HORIZONTAL	255	100	Peak
3	7309.55	51.43	74.00	-22.57	42.61	7.06	35.36	37.12	HORIZONTAL	228	100	Peak
4	7313.53	37.63	54.00	-16.37	28.81	7.06	35.36	37.12	HORIZONTAL	228	100	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4869.69	46.43	74.00	-27.57	43.20	5.74	35.31	32.80	VERTICAL	154	100	Peak
2	4876.82	33.26	54.00	-20.74	30.03	5.75	35.32	32.80	VERTICAL	154	100	Average
3	7306.73	51.61	74.00	-22.39	42.80	7.05	35.36	37.12	VERTICAL	202	100	Peak
4	7309.02	37.83	54.00	-16.17	29.01	7.06	35.36	37.12	VERTICAL	202	100	Average

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4919.36	46.78	74.00	-27.22	43.48	5.80	35.33	32.83	HORIZONTAL	173	100	Peak
2	4924.35	32.97	54.00	-21.03	29.65	5.81	35.33	32.84	HORIZONTAL	173	100	Average
3	7382.73	51.26	74.00	-22.74	42.34	7.08	35.32	37.16	HORIZONTAL	155	100	Peak
4	7386.22	37.96	54.00	-16.04	29.03	7.09	35.32	37.16	HORIZONTAL	155	100	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4922.51	32.81	54.00	-21.19	29.50	5.81	35.33	32.83	VERTICAL	242	100	Average
2	4927.58	46.02	74.00	-27.98	42.70	5.81	35.33	32.84	VERTICAL	242	100	Peak
3	7389.66	37.97	54.00	-16.03	29.03	7.09	35.31	37.16	VERTICAL	212	100	Average
4	7389.94	51.48	74.00	-22.52	42.54	7.09	35.31	37.16	VERTICAL	212	100	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4841.51	45.07	74.00	-28.93	41.88	5.71	35.30	32.78	HORIZONTAL	98	100	Peak
2	4843.94	31.90	54.00	-22.10	28.71	5.71	35.30	32.78	HORIZONTAL	98	100	Average
3	7267.26	38.09	54.00	-15.91	29.32	7.04	35.38	37.11	HORIZONTAL	71	100	Average
4	7270.99	51.04	74.00	-22.96	42.27	7.04	35.38	37.11	HORIZONTAL	71	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4839.34	32.07	54.00	-21.93	28.89	5.70	35.30	32.78	VERTICAL	143	100	Average
2	4839.83	44.94	74.00	-29.06	41.75	5.71	35.30	32.78	VERTICAL	143	100	Peak
3	7263.42	38.17	54.00	-15.83	29.41	7.04	35.39	37.11	VERTICAL	118	100	Average
4	7265.33	52.24	74.00	-21.76	43.48	7.04	35.39	37.11	VERTICAL	118	100	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4871.08	46.27	74.00	-27.73	43.04	5.74	35.31	32.80	HORIZONTAL	183	100	Peak
2	4873.93	33.38	54.00	-20.62	30.14	5.75	35.31	32.80	HORIZONTAL	183	100	Average
3	7306.14	38.04	54.00	-15.96	29.23	7.05	35.36	37.12	HORIZONTAL	158	100	Average
4	7306.47	50.92	74.00	-23.08	42.11	7.05	35.36	37.12	HORIZONTAL	158	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4873.93	33.29	54.00	-20.71	30.05	5.75	35.31	32.80	VERTICAL	245	100	Average
2	4874.23	45.95	74.00	-28.05	42.71	5.75	35.31	32.80	VERTICAL	245	100	Peak
3	7306.33	51.22	74.00	-22.78	42.41	7.05	35.36	37.12	VERTICAL	216	100	Peak
4	7309.97	37.99	54.00	-16.01	29.17	7.06	35.36	37.12	VERTICAL	216	100	Average

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4903.00	46.48	74.00	-27.52	43.21	5.78	35.33	32.82	HORIZONTAL	290	100	Peak
2	4903.99	33.40	54.00	-20.60	30.13	5.78	35.33	32.82	HORIZONTAL	290	100	Average
3	7351.53	38.54	54.00	-15.46	29.67	7.07	35.34	37.14	HORIZONTAL	262	100	Average
4	7352.98	51.78	74.00	-22.22	42.91	7.07	35.34	37.14	HORIZONTAL	262	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4900.87	47.03	74.00	-26.97	43.75	5.78	35.32	32.82	VERTICAL	334	100	Peak
2	4904.03	33.40	54.00	-20.60	30.13	5.78	35.33	32.82	VERTICAL	334	100	Average
3	7351.20	38.52	54.00	-15.48	29.65	7.07	35.34	37.14	VERTICAL	307	100	Average
4	7351.75	51.97	74.00	-22.03	43.10	7.07	35.34	37.14	VERTICAL	307	100	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4823.91	54.37	74.00	-19.63	51.22	5.69	35.30	32.76	HORIZONTAL	29	122	Peak
2	4824.11	50.01	54.00	-3.99	46.86	5.69	35.30	32.76	HORIZONTAL	29	122	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4824.03	51.01	74.00	-22.99	47.86	5.69	35.30	32.76	VERTICAL	300	100	Peak
2	4824.13	44.52	54.00	-9.48	41.37	5.69	35.30	32.76	VERTICAL	300	100	Average

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 6 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4874.09	53.26	54.00	-0.74	50.02	5.75	35.31	32.80	HORIZONTAL	40	100	Average
2	4874.15	56.05	74.00	-17.95	52.81	5.75	35.31	32.80	HORIZONTAL	40	100	Peak
3	7309.26	38.04	54.00	-15.96	29.22	7.06	35.36	37.12	HORIZONTAL	58	100	Average
4	7310.68	51.84	74.00	-22.16	43.02	7.06	35.36	37.12	HORIZONTAL	58	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4873.87	52.15	74.00	-21.85	48.91	5.75	35.31	32.80	VERTICAL	333	100	Peak
2	4874.13	46.75	54.00	-7.25	43.51	5.75	35.31	32.80	VERTICAL	333	100	Average
3	7307.28	37.31	54.00	-16.69	28.50	7.05	35.36	37.12	VERTICAL	279	100	Average
4	7309.29	50.26	74.00	-23.74	41.44	7.06	35.36	37.12	VERTICAL	279	100	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 11 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4923.90	56.64	74.00	-17.36	53.32	5.81	35.33	32.84	HORIZONTAL	42	100	Peak
2	4924.06	53.89	54.00	-0.11	50.57	5.81	35.33	32.84	HORIZONTAL	42	100	Average
3	7383.55	51.88	74.00	-22.12	42.96	7.08	35.32	37.16	HORIZONTAL	63	100	Peak
4	7384.38	41.97	54.00	-12.03	33.05	7.08	35.32	37.16	HORIZONTAL	63	100	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4924.04	56.18	74.00	-17.82	52.86	5.81	35.33	32.84	VERTICAL	74	234	Peak
2	4924.07	52.65	54.00	-1.35	49.33	5.81	35.33	32.84	VERTICAL	74	234	Average
3	7383.45	43.69	54.00	-10.31	34.77	7.08	35.32	37.16	VERTICAL	138	131	Average
4	7383.69	52.93	74.00	-21.07	44.01	7.08	35.32	37.16	VERTICAL	138	131	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4824.28	32.86	54.00	-21.14	29.71	5.69	35.30	32.76	HORIZONTAL	159	100	Average
2	4825.10	47.37	74.00	-26.63	44.21	5.69	35.30	32.77	HORIZONTAL	159	100	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4823.91	32.58	54.00	-21.42	29.43	5.69	35.30	32.76	VERTICAL	215	100	Average
2	4827.63	46.06	74.00	-27.94	42.90	5.69	35.30	32.77	VERTICAL	215	100	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 6 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4874.09	32.23	54.00	-21.77	28.99	5.75	35.31	32.80	HORIZONTAL	157	137	Average
2	4876.27	45.05	74.00	-28.95	41.82	5.75	35.32	32.80	HORIZONTAL	157	137	Peak
3	7306.67	37.57	54.00	-16.43	28.76	7.05	35.36	37.12	HORIZONTAL	127	100	Average
4	7312.01	50.64	74.00	-23.36	41.82	7.06	35.36	37.12	HORIZONTAL	127	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4874.65	32.17	54.00	-21.83	28.93	5.75	35.31	32.80	VERTICAL	147	109	Average
2	4878.47	45.57	74.00	-28.43	42.34	5.75	35.32	32.80	VERTICAL	147	109	Peak
3	7306.62	37.41	54.00	-16.59	28.60	7.05	35.36	37.12	VERTICAL	177	154	Average
4	7308.64	51.36	74.00	-22.64	42.54	7.06	35.36	37.12	VERTICAL	177	154	Peak

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 11 / Ant. 1
Test Date	Nov. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4924.00	32.85	54.00	-21.15	29.53	5.81	35.33	32.84	HORIZONTAL	191	122	Average
2	4924.94	46.01	74.00	-27.99	42.69	5.81	35.33	32.84	HORIZONTAL	191	122	Peak
3	7382.40	37.92	54.00	-16.08	29.00	7.08	35.32	37.16	HORIZONTAL	170	100	Average
4	7390.92	51.19	74.00	-22.81	42.25	7.09	35.31	37.16	HORIZONTAL	170	100	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4919.98	46.29	74.00	-27.71	42.99	5.80	35.33	32.83	VERTICAL	284	150	Peak
2	4924.17	33.33	54.00	-20.67	30.01	5.81	35.33	32.84	VERTICAL	284	150	Average
3	7384.78	51.23	74.00	-22.77	42.30	7.09	35.32	37.16	VERTICAL	243	137	Peak
4	7389.11	38.00	54.00	-16.00	29.06	7.09	35.31	37.16	VERTICAL	243	137	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Ant. 1
Test Date	Nov. 10, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	52.04	54.00	-1.96	20.46	3.68	0.00	27.90	HORIZONTAL	33	142	Average
2	2390.00	71.24	74.00	-2.76	39.66	3.68	0.00	27.90	HORIZONTAL	33	142	Peak
3	2409.11	106.13			74.54	3.69	0.00	27.90	HORIZONTAL	33	142	Peak
4	2420.25	96.15			64.55	3.70	0.00	27.90	HORIZONTAL	33	142	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2390.00	46.00	54.00	-8.00	14.42	3.68	0.00	27.90	HORIZONTAL	28	100	Average
2	2390.00	62.80	74.00	-11.20	31.22	3.68	0.00	27.90	HORIZONTAL	28	100	Peak
3	2434.11	107.10			75.50	3.70	0.00	27.90	HORIZONTAL	28	100	Peak
4	2442.50	97.22			65.61	3.71	0.00	27.90	HORIZONTAL	28	100	Average
5	2483.50	50.81	54.00	-3.19	19.18	3.73	0.00	27.90	HORIZONTAL	28	100	Average
6	2484.37	68.07	74.00	-5.93	36.44	3.73	0.00	27.90	HORIZONTAL	28	100	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2459.11	102.80			71.18	3.72	0.00	27.90	HORIZONTAL	28	100	Peak
2	2464.89	92.95			61.33	3.72	0.00	27.90	HORIZONTAL	28	100	Average
3	2483.50	51.83	54.00	-2.17	20.20	3.73	0.00	27.90	HORIZONTAL	28	100	Average
4	2483.79	72.75	74.00	-1.25	41.12	3.73	0.00	27.90	HORIZONTAL	28	100	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Ant. 1
Test Date	Nov. 10, 2014		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2383.92	68.85	74.00	-5.15	37.27	3.68	0.00	27.90	HORIZONTAL	35	108	Peak
2	2390.00	51.91	54.00	-2.09	20.33	3.68	0.00	27.90	HORIZONTAL	35	108	Average
3	2428.95	92.69			61.09	3.70	0.00	27.90	HORIZONTAL	35	108	Average
4	2428.95	102.75			71.15	3.70	0.00	27.90	HORIZONTAL	35	108	Peak

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.57	64.87	74.00	-9.13	33.29	3.68	0.00	27.90	HORIZONTAL	26	101	Peak
2	2390.00	47.68	54.00	-6.32	16.10	3.68	0.00	27.90	HORIZONTAL	26	101	Average
3	2443.95	102.45			70.84	3.71	0.00	27.90	HORIZONTAL	26	101	Peak
4	2446.55	92.80			61.19	3.71	0.00	27.90	HORIZONTAL	26	101	Average
5	2483.50	53.87	54.00	-0.13	22.24	3.73	0.00	27.90	HORIZONTAL	26	101	Average
6	2483.50	69.20	74.00	-4.80	37.57	3.73	0.00	27.90	HORIZONTAL	26	101	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2461.26	90.53			58.91	3.72	0.00	27.90	HORIZONTAL	30	106	Average
2	2462.42	100.87			69.25	3.72	0.00	27.90	HORIZONTAL	30	106	Peak
3	2483.50	53.52	54.00	-0.48	21.89	3.73	0.00	27.90	HORIZONTAL	30	106	Average
4	2485.82	72.95	74.00	-1.05	41.32	3.73	0.00	27.90	HORIZONTAL	30	106	Peak

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11b CH 1, 6, 11 / Ant. 1
Test Date	Nov. 10, 2014 ~ Nov. 11, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.71	53.66	54.00	-0.34	22.08	3.68	0.00	27.90	HORIZONTAL	45	125	Average
2	2390.00	62.19	74.00	-11.81	30.61	3.68	0.00	27.90	HORIZONTAL	45	125	Peak
3	2412.00	108.34			76.75	3.69	0.00	27.90	HORIZONTAL	45	125	Peak
4	2412.87	105.76			74.17	3.69	0.00	27.90	HORIZONTAL	45	125	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2342.64	58.69	74.00	-15.31	27.14	3.65	0.00	27.90	HORIZONTAL	28	100	Peak
2	2390.00	44.60	54.00	-9.40	13.02	3.68	0.00	27.90	HORIZONTAL	28	100	Average
3	2435.26	104.17			72.57	3.70	0.00	27.90	HORIZONTAL	28	100	Average
4	2435.26	106.77			75.17	3.70	0.00	27.90	HORIZONTAL	28	100	Peak
5	2484.08	50.94	54.00	-3.06	19.31	3.73	0.00	27.90	HORIZONTAL	28	100	Average
6	2488.71	62.38	74.00	-11.62	30.75	3.73	0.00	27.90	HORIZONTAL	28	100	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2462.00	104.14			72.52	3.72	0.00	27.90	HORIZONTAL	30	100	Peak
2	2462.87	101.76			70.14	3.72	0.00	27.90	HORIZONTAL	30	100	Average
3	2483.50	52.22	54.00	-1.78	20.59	3.73	0.00	27.90	HORIZONTAL	30	100	Average
4	2484.08	62.07	74.00	-11.93	30.44	3.73	0.00	27.90	HORIZONTAL	30	100	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	68%
Test Engineer	Lucas Huang	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1
Test Date	Nov. 10, 2014		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.13	73.50	74.00	-0.50	41.92	3.68	0.00	27.90	HORIZONTAL	28	104	Peak
2	2390.00	52.11	54.00	-1.89	20.53	3.68	0.00	27.90	HORIZONTAL	28	104	Average
3	2416.34	96.27			64.68	3.69	0.00	27.90	HORIZONTAL	28	104	Average
4	2418.95	106.56			74.96	3.70	0.00	27.90	HORIZONTAL	28	104	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2384.79	60.54	74.00	-13.46	28.96	3.68	0.00	27.90	HORIZONTAL	27	100	Peak
2	2390.00	45.98	54.00	-8.02	14.40	3.68	0.00	27.90	HORIZONTAL	27	100	Average
3	2439.89	107.63			76.02	3.71	0.00	27.90	HORIZONTAL	27	100	Peak
4	2442.50	97.65			66.04	3.71	0.00	27.90	HORIZONTAL	27	100	Average
5	2483.50	50.83	54.00	-3.17	19.20	3.73	0.00	27.90	HORIZONTAL	27	100	Average
6	2487.84	67.17	74.00	-6.83	35.54	3.73	0.00	27.90	HORIZONTAL	27	100	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2466.34	93.60			61.98	3.72	0.00	27.90	HORIZONTAL	33	100	Average
2	2468.80	103.05			71.43	3.72	0.00	27.90	HORIZONTAL	33	100	Peak
3	2483.50	53.22	54.00	-0.78	21.59	3.73	0.00	27.90	HORIZONTAL	33	100	Average
4	2483.50	71.37	74.00	-2.63	39.74	3.73	0.00	27.90	HORIZONTAL	33	100	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

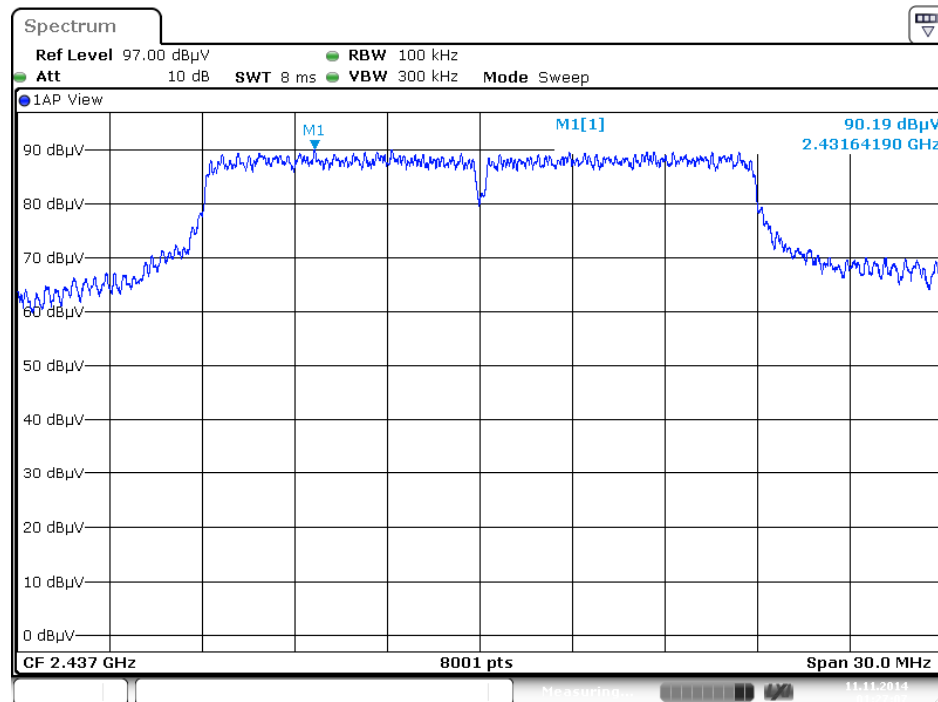

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

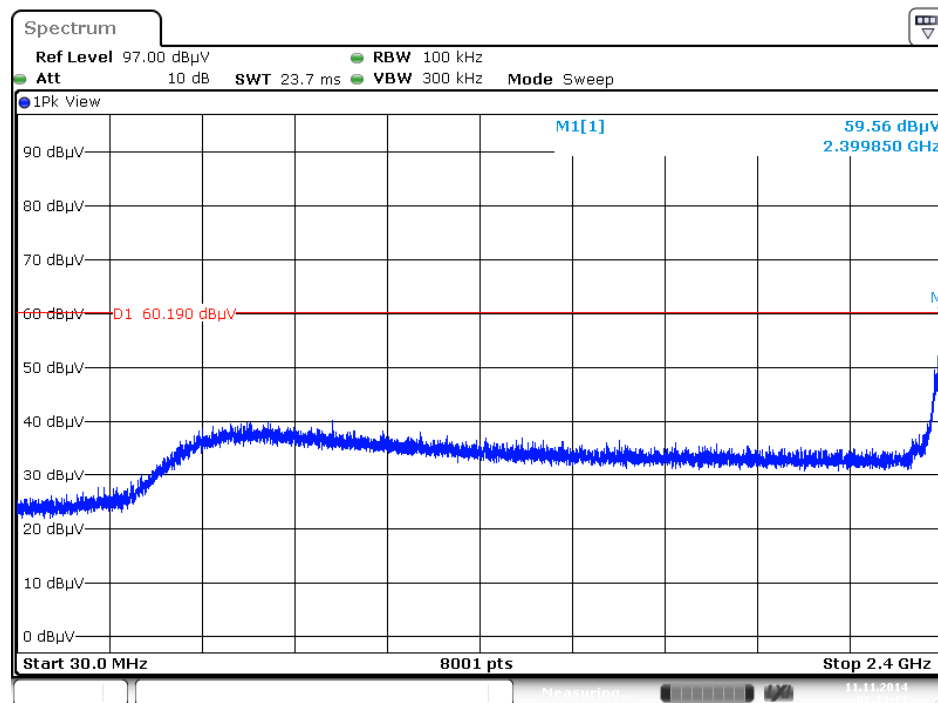


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

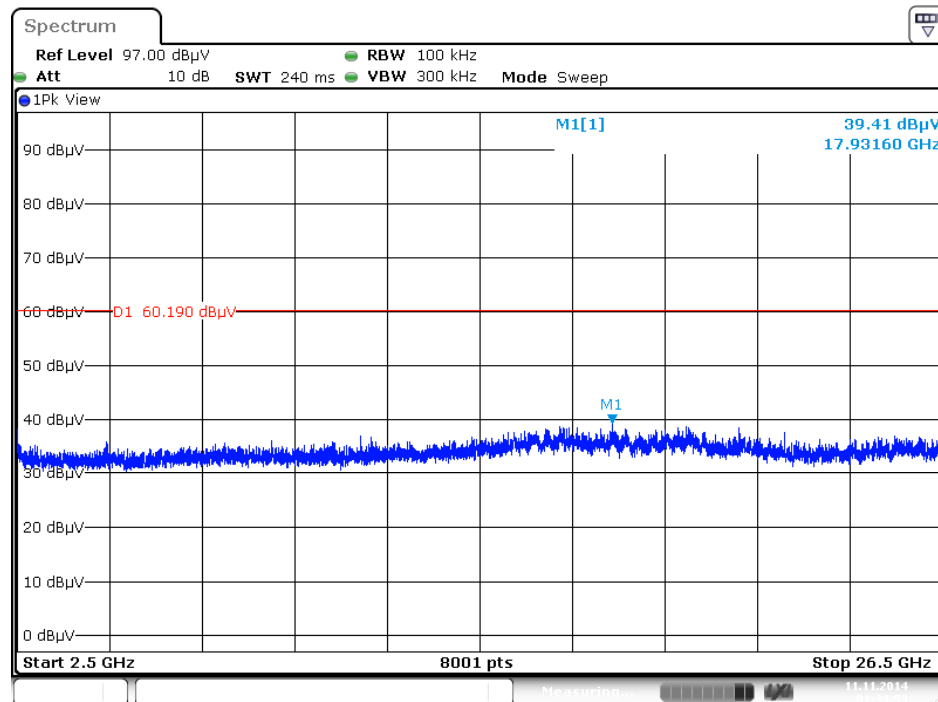


Date: 11.NOV.2014 01:33:54

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

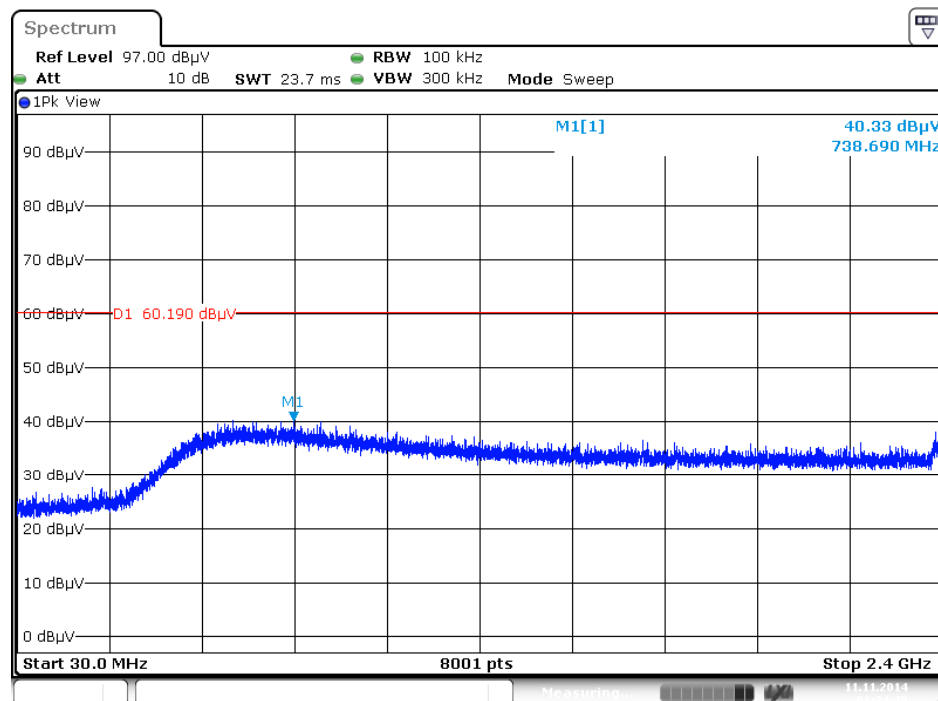


Date: 11.NOV.2014 01:34:40

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

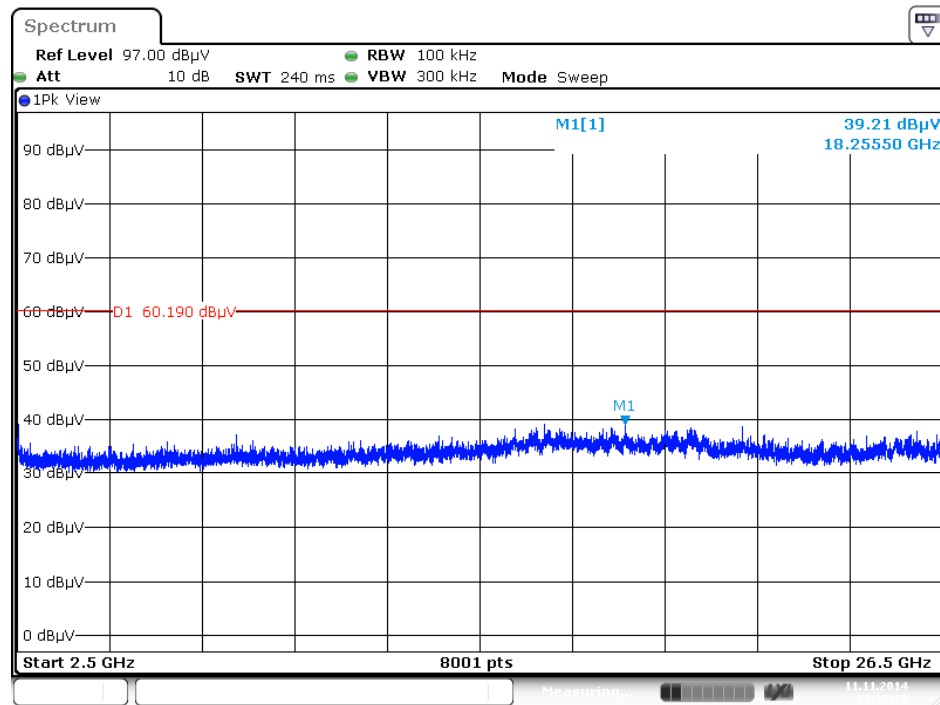


Date: 11.NOV.2014 01:35:18

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

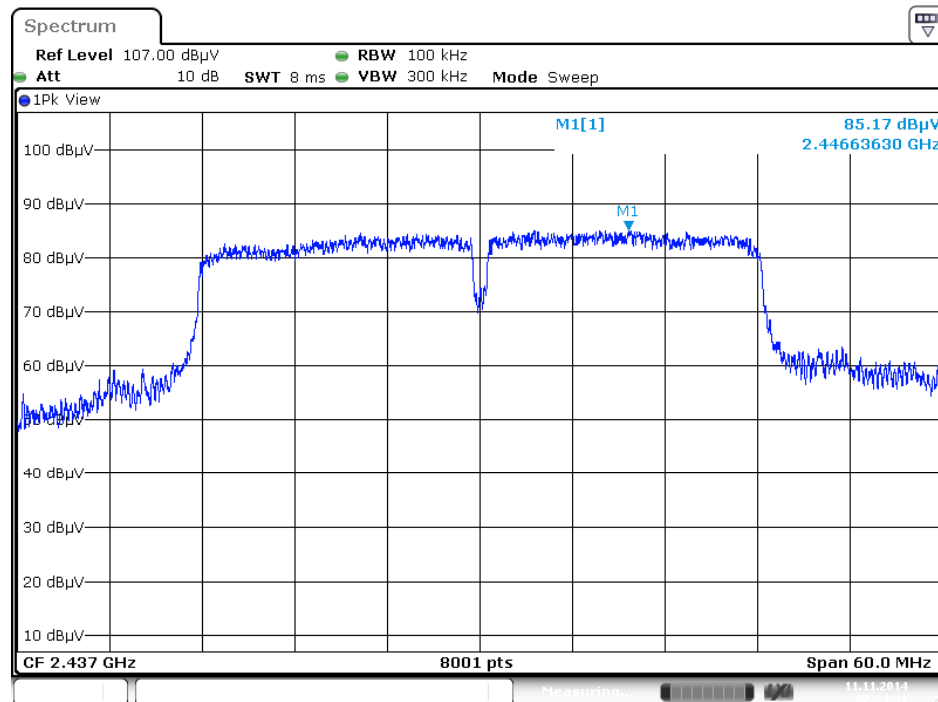


Date: 11.NOV.2014 02:24:42

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

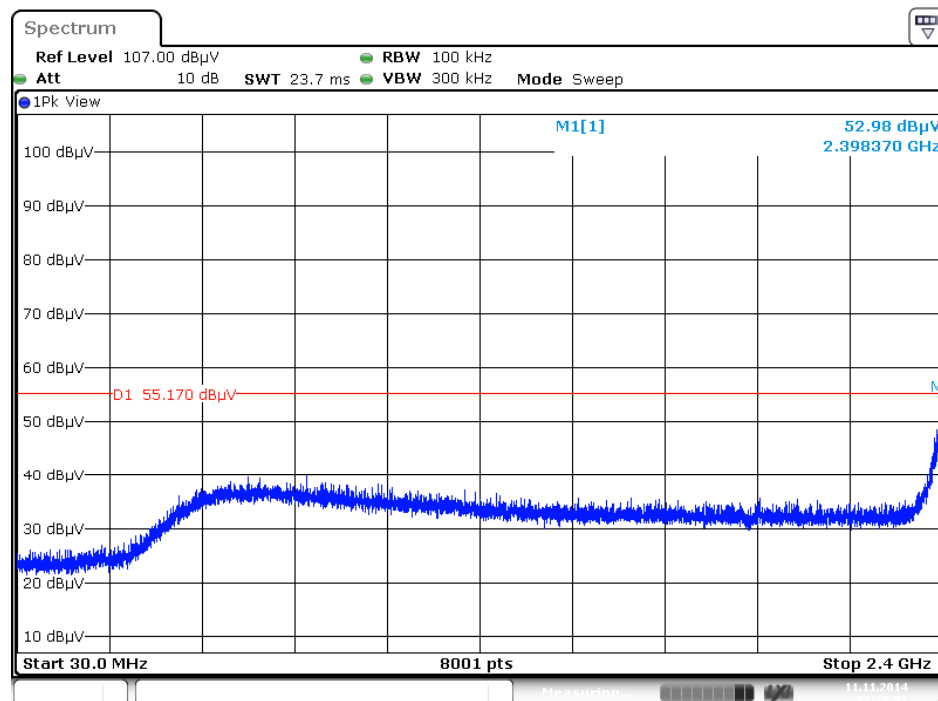


Date: 11.NOV.2014 02:25:51

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

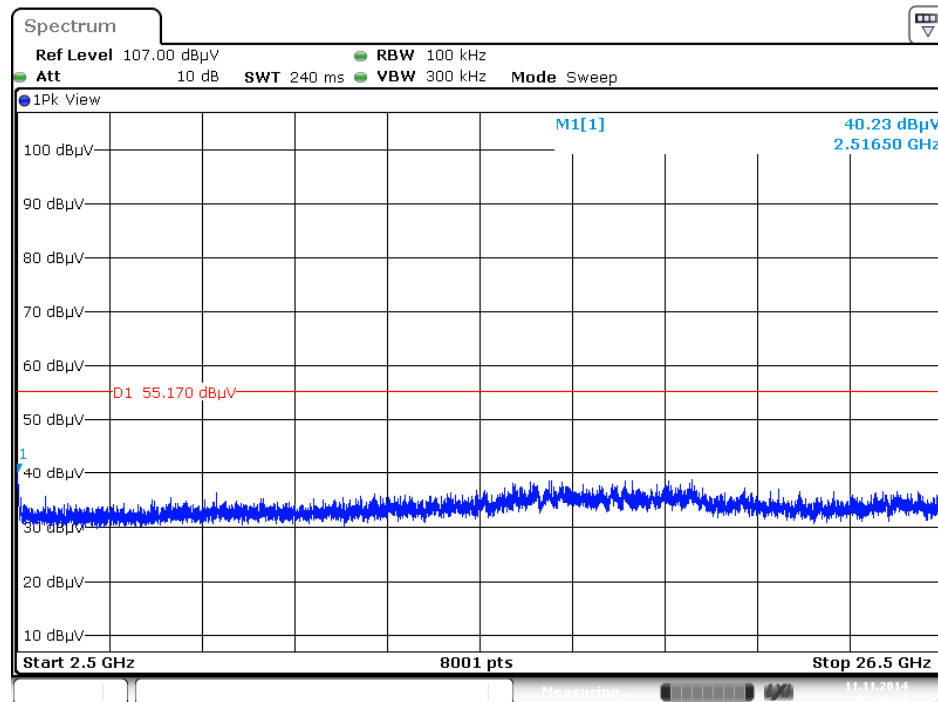


Date: 11.NOV.2014 02:26:32

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

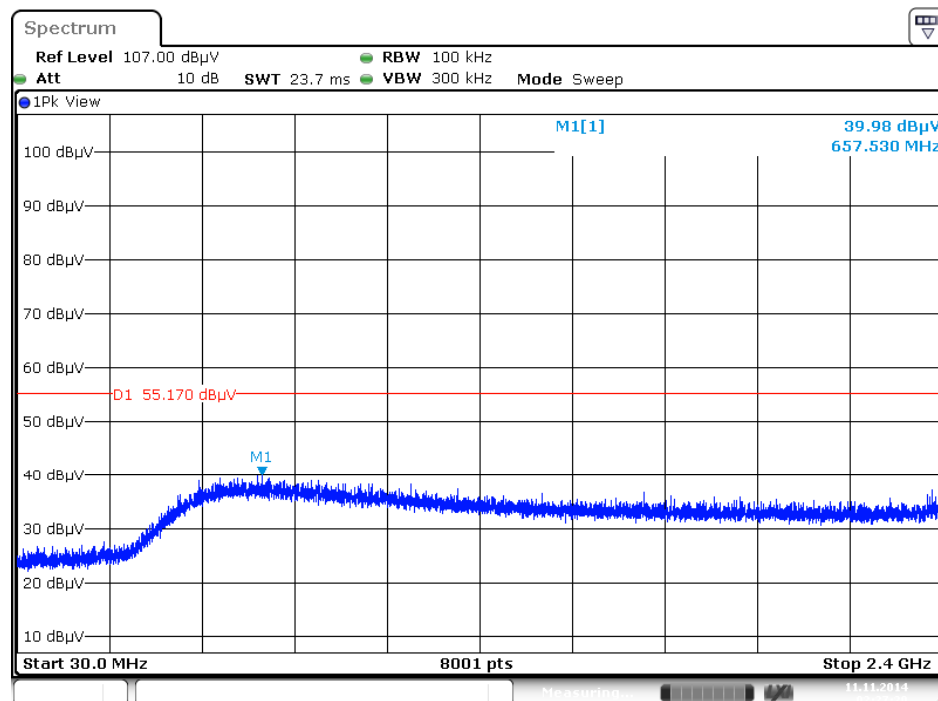


Date: 11.NOV.2014 02:27:21

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

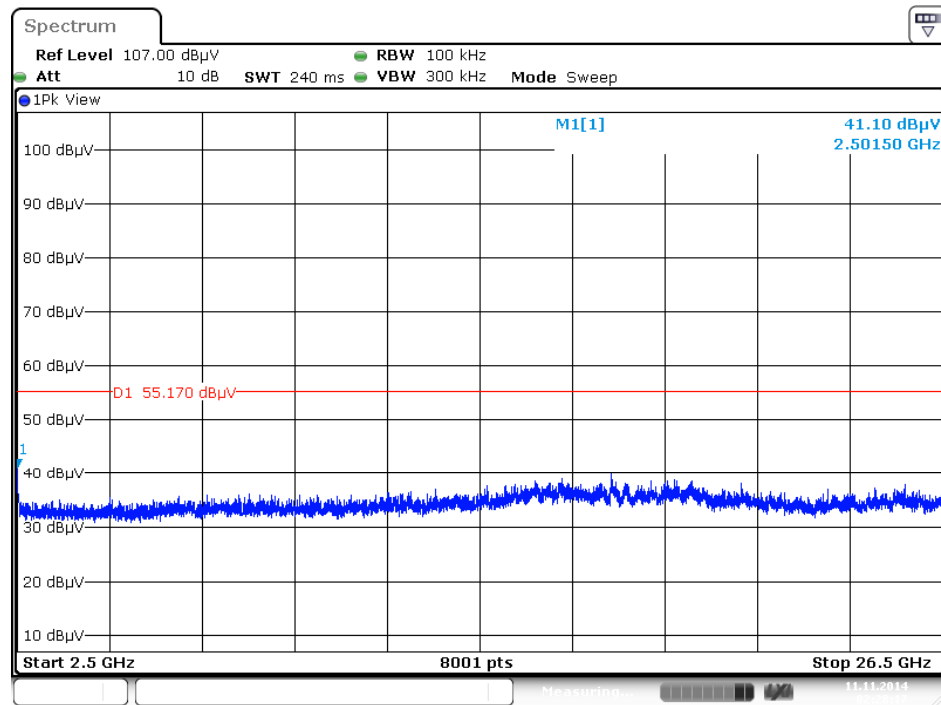


Date: 11.NOV.2014 02:28:18

Plot on Configuration IEEE 802.11b / Reference Level

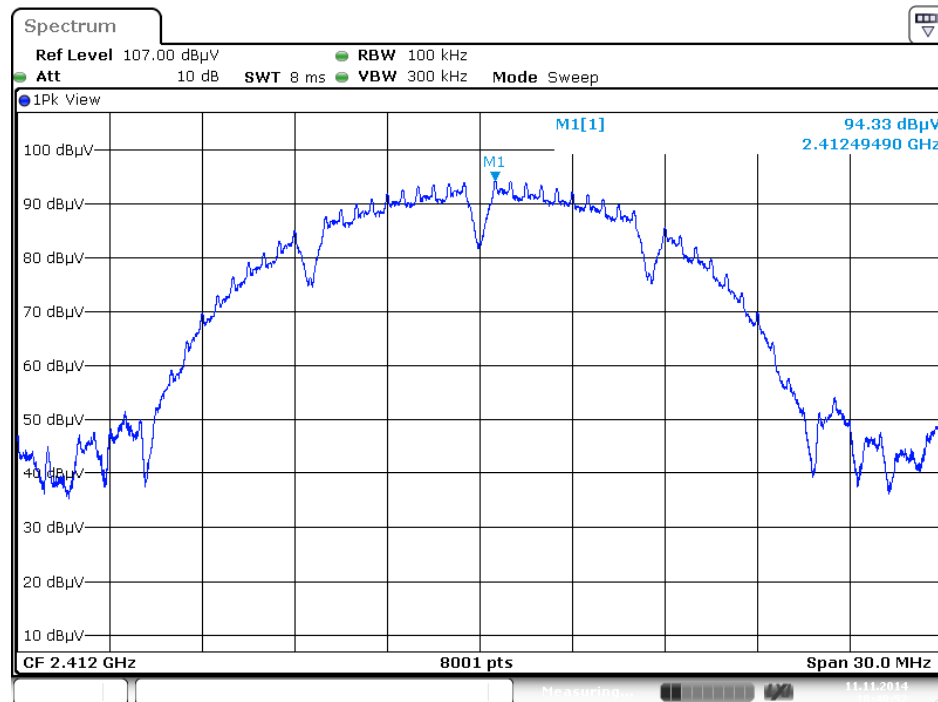


Date: 11.NOV.2014 18:40:53

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

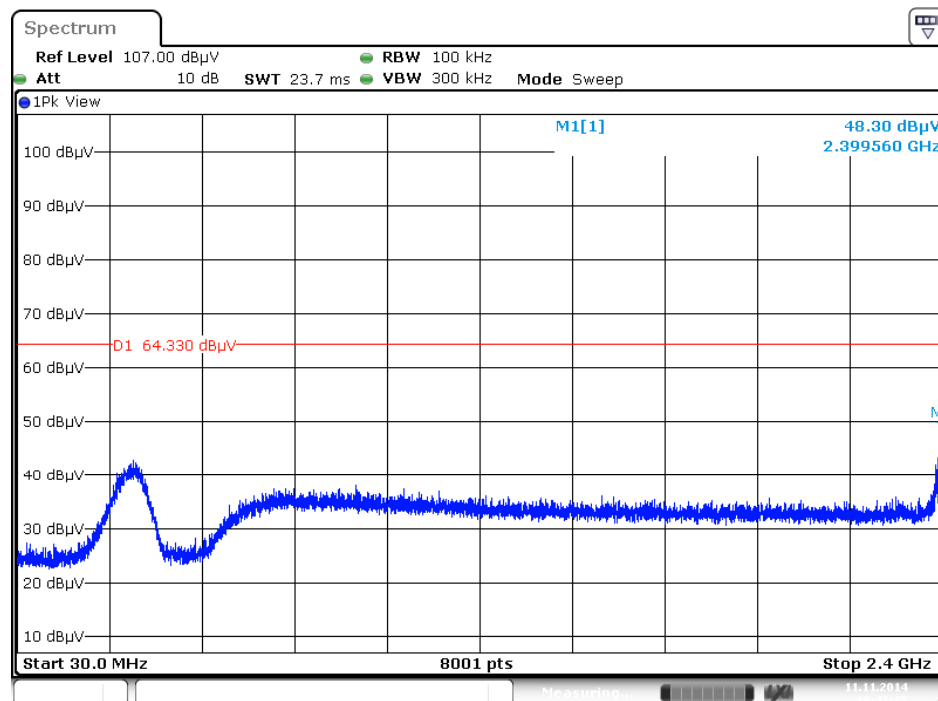


Date: 11.NOV.2014 18:41:35

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

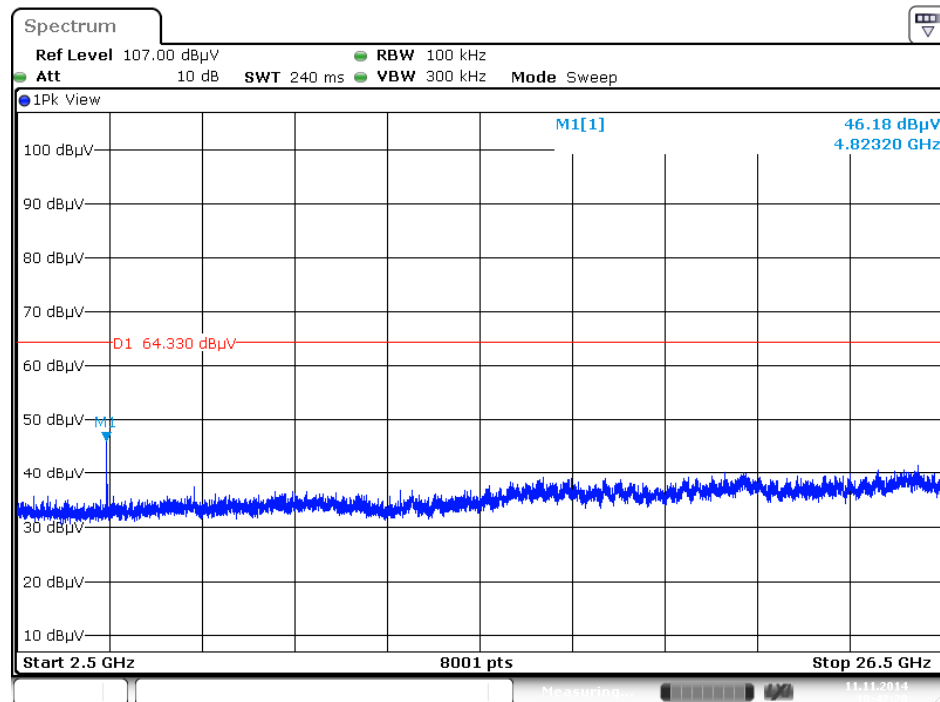


Date: 11.NOV.2014 18:42:20

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

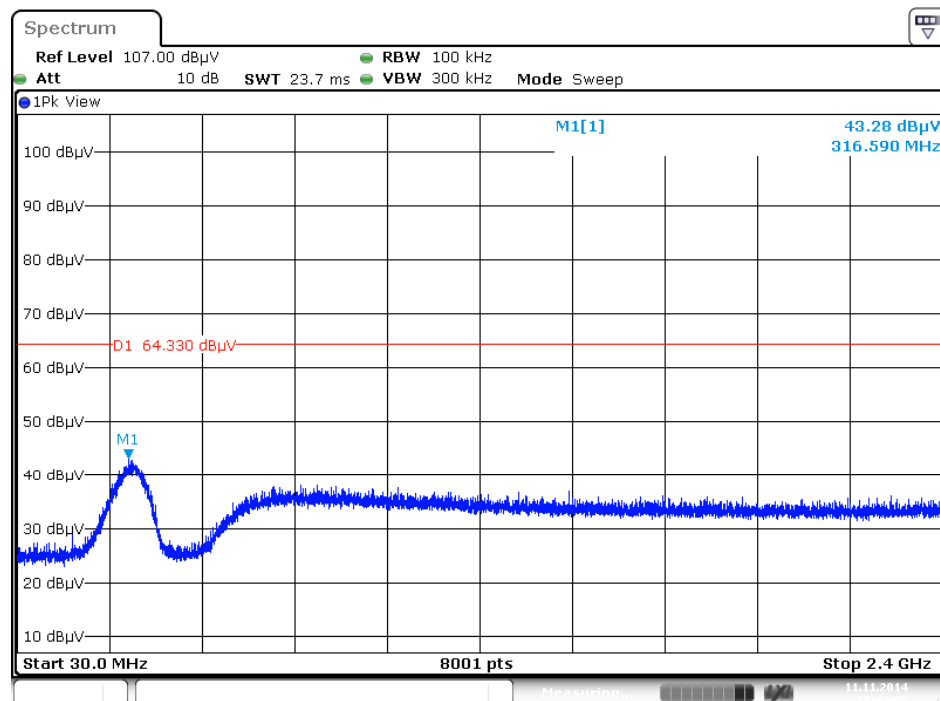


Date: 11.NOV.2014 18:44:06

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

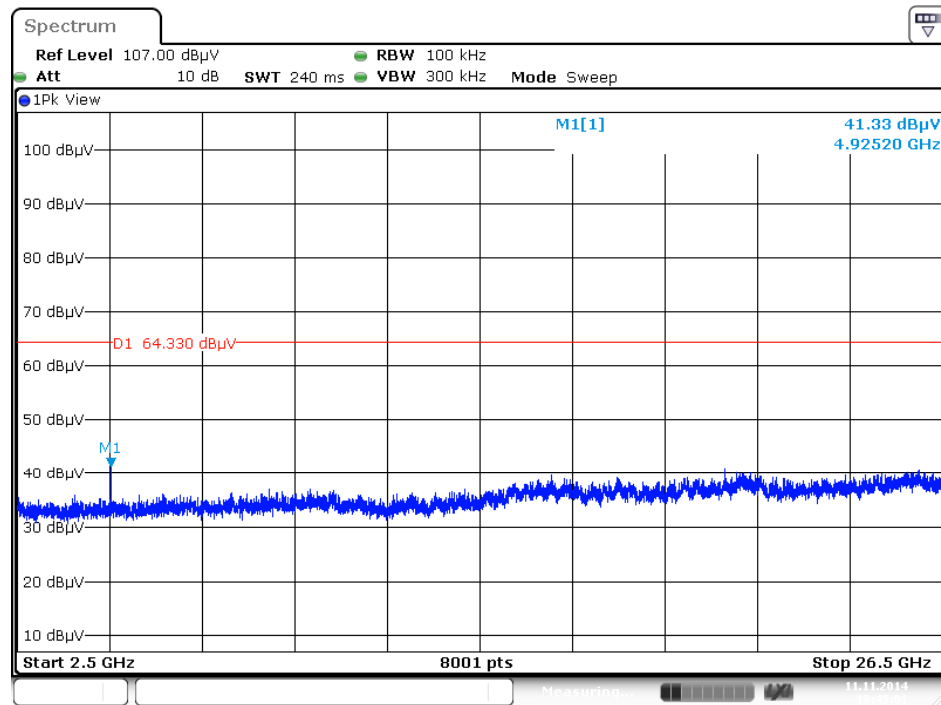


Date: 11.NOV.2014 18:45:01


Plot on Configuration IEEE 802.11g / Reference Level

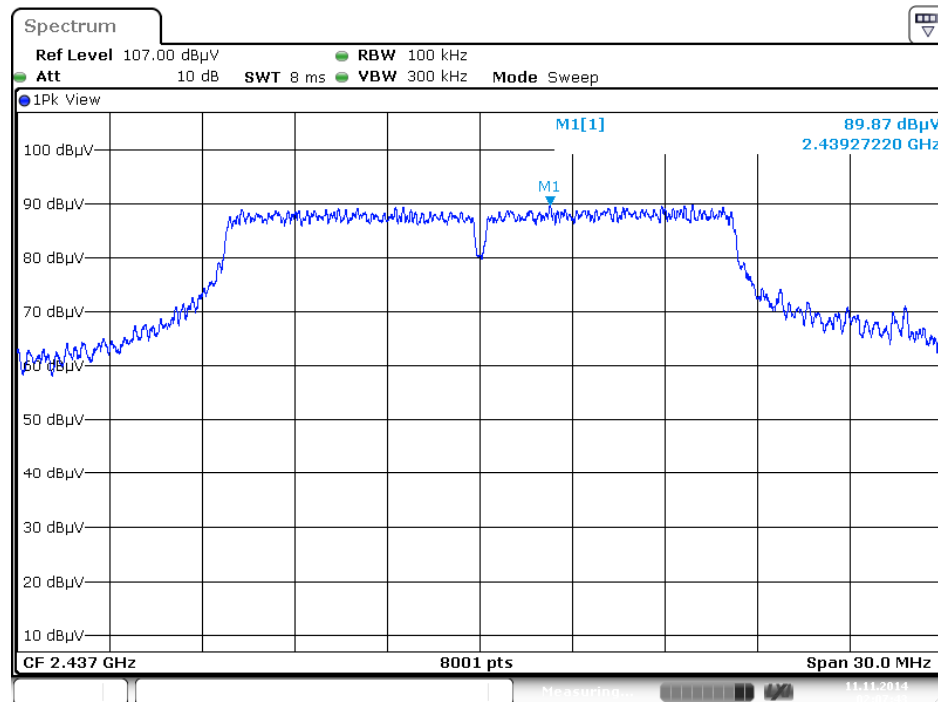

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

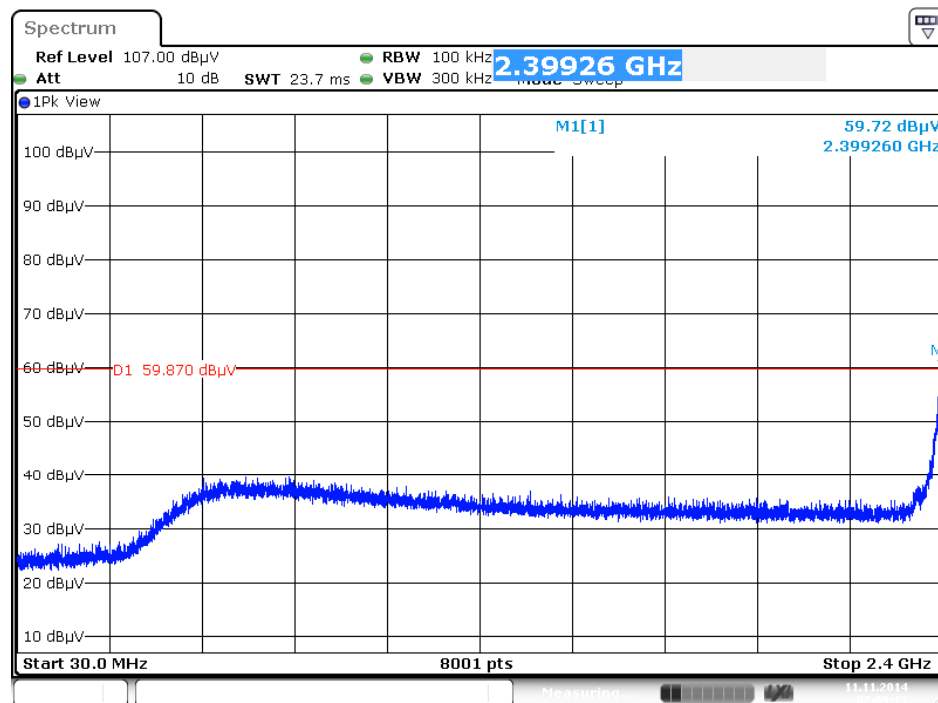


Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

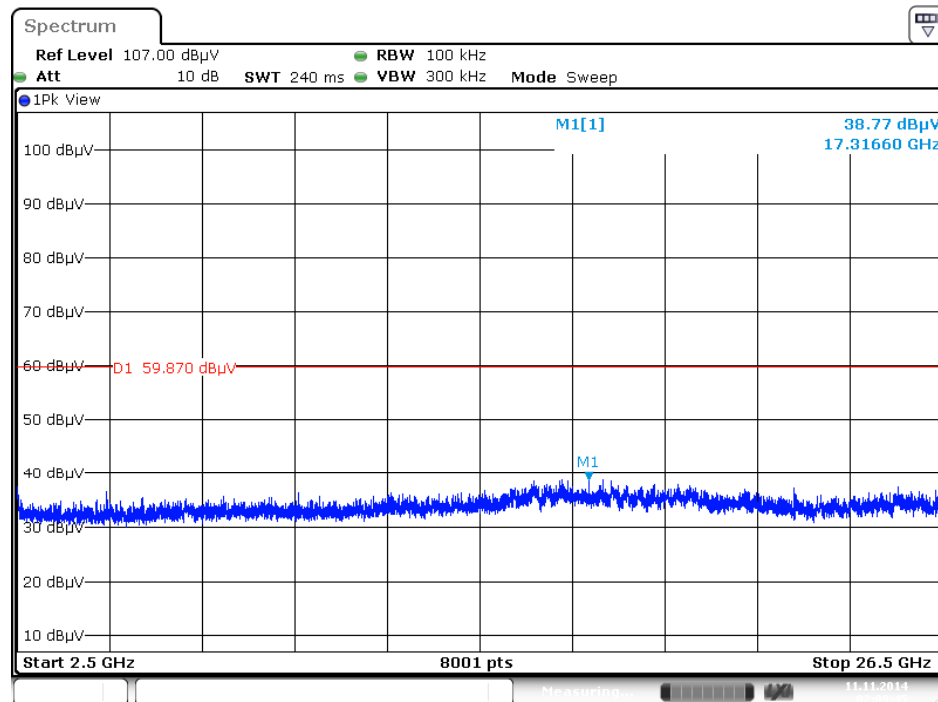


Date: 11.NOV.2014 02:09:45

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

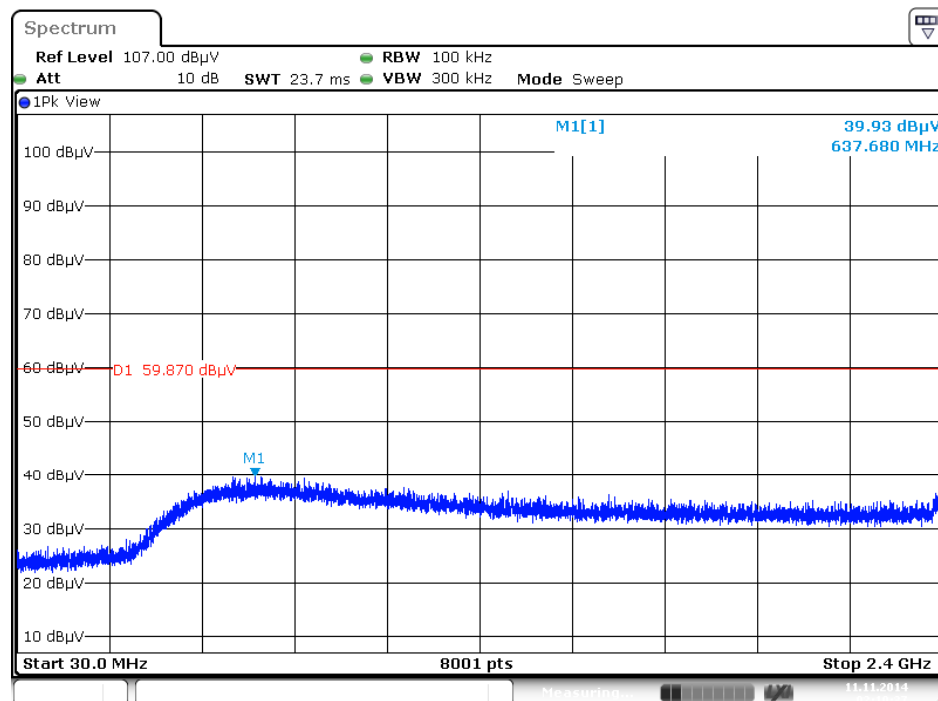

Date: 11.NOV.2014 02:10:37

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

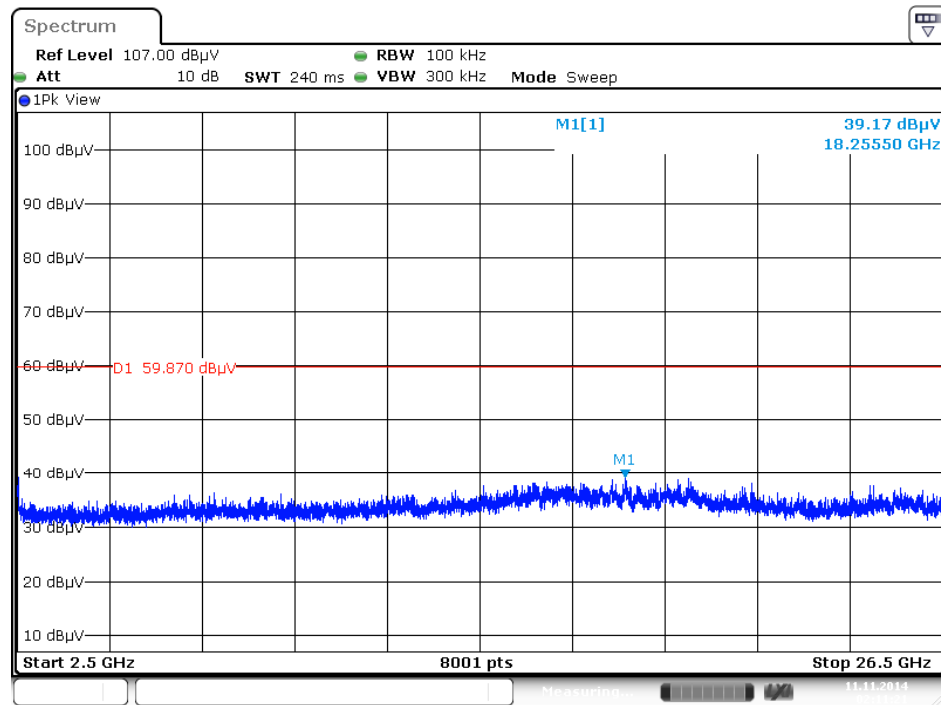

Date: 11.NOV.2014 02:11:21

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further,

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	--	26GHz ~ 40GHz	Feb. 17, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz - 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz - 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 06, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%