



Product Service

**Choose certainty.
Add value.**

Report On

FCC and Industry Canada Testing of the
Zeni Lite Buoy Co,Ltd.

Akari-3s (Type 3 AtoN With sensor)

In accordance with FCC CFR 47 Part 80 and
Industry Canada RSS-182

COMMERCIAL-IN-CONFIDENCE

FCC ID: 2AB5X-4180026

IC: Not supplied

Document 75927001 Report 04 Issue 2

July 2014



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC and Industry Canada Testing of the
Zeni Lite Buoy Co,Ltd.
Akari-3s (Type 3 AtoN With sensor)
In accordance with FCC CFR 47 Part 80 and Industry Canada RSS-182

Document 75927001 Report 04 Issue 2

July 2014

PREPARED FOR

SRT Marine Technology Ltd
Wireless House
Westfield Industrial Estate
Midsomer Norton
BATH
BA3 3BS

MANUFACTURER

Zeni Lite Buoy Co, Ltd
2-176-1
Toyoshima-Minami
Ikeda City
Osaka
563-0035
Japan

PREPARED BY

Natalie Bennett
Senior Administrator, Technical Solutions

APPROVED BY

Matthew Russell
Authorised Signatory

DATED

31 July 2014

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 80 and Industry Canada RSS-182. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

G Lawler

Document 75927001 Report 04 Issue 2



Page 1 of 17

COMMERCIAL-IN-CONFIDENCE



Product Service

CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 6
1.4	Product Information 8
1.5	Test Conditions 8
1.6	Deviations from the Standard 8
1.7	Modification Record 8
2	TEST DETAILS 9
2.1	Emission Limitations 10
3	TEST EQUIPMENT USED 13
3.1	Test Equipment Used 14
3.2	Measurement Uncertainty 15
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 16
4.1	Accreditation, Disclaimers and Copyright 17



Product Service

SECTION 1

REPORT SUMMARY

FCC and Industry Canada Testing of the
Zeni Lite Buoy Co,Ltd.
Akari-3s (Type 3 AtoN With sensor)
In accordance with FCC CFR 47 Part 80 and Industry Canada RSS-182



1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC and Industry Canada Testing of the Zeni Lite Buoy Co, Ltd. Akari-3s (Type 3 AtoN With sensor) to the requirements of FCC CFR 47 Part 80 and Industry Canada RSS-182.

Objective	To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Zeni Lite Buoy Co, Ltd.
Model Number(s)	Akari-3s (Type 3 AtoN With sensor)
Manufacturer Declared Variant(s)	Akari-1s (Type 1 AtoN With sensor) Akari-1 (Type 1 AtoN) Akari-3 (Type 3 AtoN)
Serial Number(s)	Test Sample: 002
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 80 (2013) Industry Canada RSS-182 (Issue 5, 2012)
Incoming Release Date	Application Form 10 June 2014
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	POR004675 02 June 2014
Start of Test	30 June 2014
Finish of Test	30 June 2014
Name of Engineer(s)	G Lawler

This report has been up issued to Issue 2 and should be read in place of Issue 1. This report has been up issued to change the model numbers of the products as requested by the customer.



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 80 and Industry Canada RSS-182 is shown below.

Section	Spec Clause		Test Description	Result	Comments/Base Standard
	FCC	IC			
Transmit					
2.1	80.211	7.9	Emission Limitations	Pass	



1.3 APPLICATION FORM

APPLICATION FORM FOR TESTING TO FCC/INDUSTRY CANADA REQUIREMENTS

APPLICANT'S DETAILS			
COMPANY NAME : Zeni Lite Buoy Co, Ltd. ADDRESS : 2-176-1, Toyoshima-Minami, Ikeda City, Osaka, 563-0035 Japan NAME FOR CONTACT PURPOSES : Shuzo Kawashita TELEPHONE NO: ...+81-72-761-1313 FAX NO: N/A E-MAIL: s-kawashita@zenilite.co.jp			

EQUIPMENT INFORMATION			
Model name/number	Akari-1s /Akari-1 /Akari-3s /Akari-3	Identification/Part number	AtoN: -080200.03.03.xx
Hardware Version	v1	Software Version:	
Sensor:- 80400.02.04.xx			
Manufacturer	Zenilite Buoy Co Ltd.	Country of Origin	Hungary
FCC ID	2AB5X-4180026	Industry Canada ID	N/A.
Technical description (a brief description of the intended use and operation)			
AIS AtoN, Maritime Navigation			
<u>Supply Voltage:</u>			
[]	AC mains	State AC voltage V	and AC frequency Hz
[x]	DC (external)	State DC voltage 12/24 V	and DC current 2.5 peak
[]	DC (internal)	State DC voltage V	and Battery type
<u>Frequency characteristics:</u>			
Transmitter Frequency range	156.025. MHz to 162.025. MHz	Channel spacing 25kHz	(if channelized)
Receiver Frequency range (if different)	 MHz to MHz	Channel spacing	(if channelized)
Designated test frequencies:			
Bottom: ...156.025 MHz	Middle:159.025... MHz	Top:162.025 MHz	
Intermediate Frequencies : 19.655 and 29.255 MHz			
Highest Internally Generated Frequency : 191.28 MHz			
<u>Power characteristics:</u>			
Maximum transmitter power	...12.5..... W	Minimum transmitter power (if variable)	 W
[]	Continuous transmission		
[]	Intermittent transmission	State duty cycle<1%	
If intermittent, can transmitter be set to continuous transmit test mode? Y/N (Low power only)			
<u>Antenna characteristics:</u>			
[X]	Antenna connector	State impedance50... ohm	
[]	Temporary antenna connector	State impedance ohm	
[]	Integral antenna Type	State gain dBi	
[X]	External Antenna Type Quarter wave vertical....	State gain3..... dBi	
<u>Modulation characteristics:</u>			
[]	Amplitude	[x]	Other
[]	Frequency	Details: ...GMSK.....	
[]	Phase	(GMSK, QSPK etc)	
Can the transmitter operate un-modulated?		Y/N (In test mode only)	
ITU Class of emission: 16K0GXW			
<u>Battery/Power Supply</u>			
Model name/number	N/A.....	Identification/Part number	
Manufacturer		Country of Origin	
<u>Ancillaries (if applicable)</u>			
Model name/number	N/A.....	Identification/Part number	
Manufacturer		Country of Origin	
<u>Extreme conditions:</u>			
Maximum temperature	+70°C	Minimum temperature	-25 °C
Maximum supply voltage	31.2 V	Minimum supply voltage	9.6V



Product Service

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

A handwritten signature in black ink, appearing to be 'Richard McMahon'.

Signature :

Name : Richard McMahon Engineer

Position held : Certification Engineer

Date : 31/07/14



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Zeni Lite Buoy Co,Ltd. Akari-3s (Type 3 AtoN With sensor) . A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 12 V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code
IC2932B-1 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC and Industry Canada Testing of the
Zeni Lite Buoy Co,Ltd.
Akari-3s (Type 3 AtoN With sensor)
In accordance with FCC CFR 47 Part 80 and Industry Canada RSS-182



Product Service

2.1 EMISSION LIMITATIONS

2.1.1 Specification Reference

FCC CFR 47 Part 80, Clause 80.211
Industry Canada RSS-182, Clause 7.9

2.1.2 Equipment Under Test and Modification State

Akari-3s S/N: Test Sample: 002 - Modification State 0

2.1.3 Date of Test

30 June 2014

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The EUT was set to transmit on maximum power with both channels operating simultaneously.

For any emissions found the EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

2.1.6 Environmental Conditions

Ambient Temperature	20.0°C
Relative Humidity	47.0%




Product Service

2.1.7 Test Results

12 V DC Supply

Radiated


30 MHz to 1 GHz

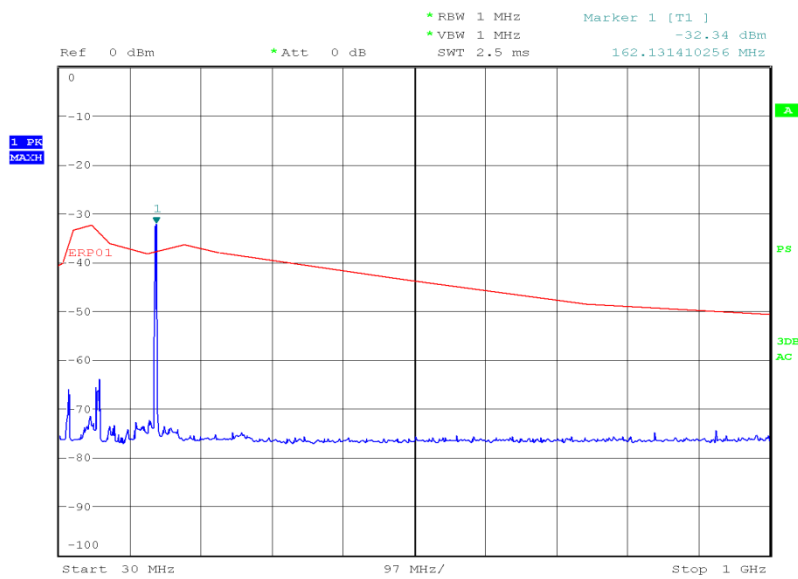

Date: 30.JUN.2014 18:55:42



Product Service

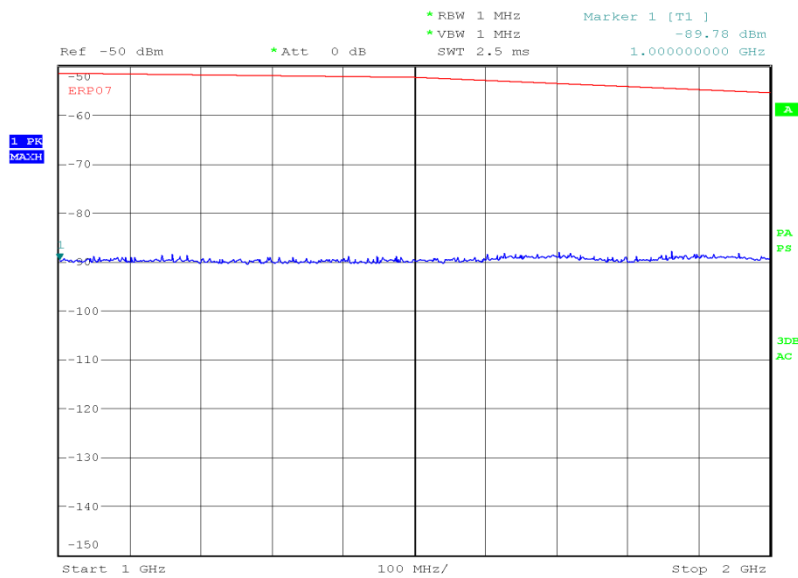1 GHz to 2 GHz

Date: 30.JUN.2014 19:29:39

Remarks

The EUT was set to transmit on 161.975 MHz and 162.025 MHz simultaneously at approximately 1 second intervals.

Limit Clause 80.211Outside the Emission Mask

>250 % of authorised bandwidth $43+10 \log P$ OR -13 dBm



Product Service

SECTION 3

TEST EQUIPMENT USED



Product Service

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1- Emission Limitations					
Termination 50ohm/50W	Bird	8085	389	12	20-Jun-2015
Screened Room (5)	Rainford	Rainford	1545	24	10-Jan-2015
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	10-Jun-2015
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Oct-2014
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU

TU – Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Emission Limitations	Radiated: ± 3.08 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2014 TÜV SÜD Product Service