

FCC RADIO TEST REPORT

FCC ID : 2AB6UCHR1
Equipment : Chime (Wire-Free, Radio)
Brand Name : August
Model Name : CH-R1
Applicant/ : August Home Inc
Manufacturer : 657 Bryant Street, San Francisco, CA 94107,USA
Standard : 47 CFR FCC Part 15.231

The product was received on Nov. 02, 2018, and testing was started from Nov. 07, 2018 and completed on Nov. 28, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	6
1.3	Testing Location Information	6
1.4	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT.....	8
2.1	The Worst Case Modulation Configuration	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration	9
2.4	Support Equipment.....	9
2.5	Test Setup Diagram	10
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	Emission Bandwidth	15
3.3	Fundamental Emissions	17
3.4	Transmitter Radiated Unwanted Emissions	19
3.5	Operation Restriction.....	29
4	TEST EQUIPMENT AND CALIBRATION DATA.....	31
 APPENDIX A. TEST PHOTOS		
 PHOTOGRAPHS OF EUT v01		

History of this test report

Report No.	Version	Description	Issued Date
FR8N0134AF	01	Initial issue of report	Dec. 11, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.231(c)	Emission Bandwidth	PASS	-
3.3	15.231(b)/(e)	Fundamental Emissions	PASS	-
3.4	15.231(b)/(e)	Transmitter Radiated Unwanted Emissions	PASS	-
3.5	15.231(a)/(e)	Operation Restriction	PASS	-

Declaration of Conformity:

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Comments and Explanations:

None.

Reviewed by: Jackson Tsai

Report Producer: Michelle Tsai

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)
433.92	FSK	433.92	1	78.05
Note 1: Field strength performed average level at 3m.				

1.1.2 Antenna Information

Antenna Category	
☒	Internal antenna (antenna permanently attached)
☐	External antenna (dedicated antennas) ; Unique antenna connector

Antenna General Information				
No.	Brand	Model	Ant. Type	Gain (dBi)
1	Wistron	Nix	Chip Antenna	-4.4

1.1.3 Type of EUT

Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.1.4 EUT Operational Condition

Supply Voltage	☒ AC mains	☐ DC	
Type of DC Source	☐ Internal DC supply	☒ External adapter	☐ Battery

1.1.5 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☒ Operated normally mode for worst duty cycle	
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] – (20 log x)
☒ 100%	0

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013

1.3 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
☐	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL : 886-3-656-9065	FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Andy	22.6°C / 62%	07/Nov/2018
RF Conducted	TH01-HY	Andy	25.3°C / 63%	28/Nov/2018
Radiated Emission	03CH02-HY	Patrick	23.8°C / 47%	27/Nov/2018

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
FSK	78.05

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
FSK	433.92

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Switching Power Supply Mode


The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	☒ EUT will be placed in fixed position.		
	☐ EUT will be placed in mobile position and operating multiple positions.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.		
Operating Mode	☒ 1. Switching Power Supply Mode		
Test Mode	FSK		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		


The Worst Case Mode for Following Conformance Tests	
Tests Item	Operation Restriction (silent time and operated time)
Test Condition	Conducted measurement
Test Mode	Operated normally mode for worst duty cycle condition.

2.4 Support Equipment

Support Equipment – RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	DC Power Supply	GW	GPS-3030DD	-
4	Fixture (Client Provide)	-	-	-

2.5 Test Setup Diagram

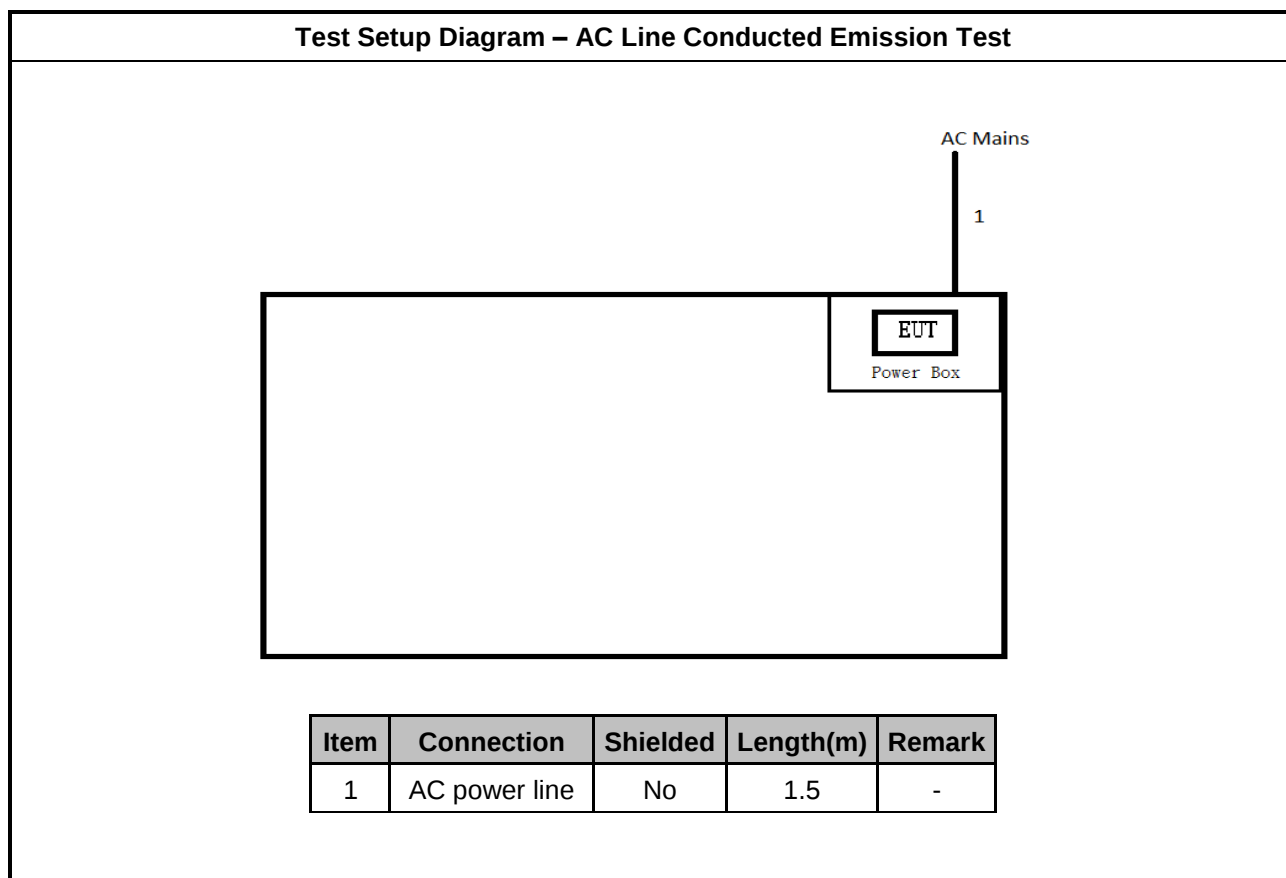

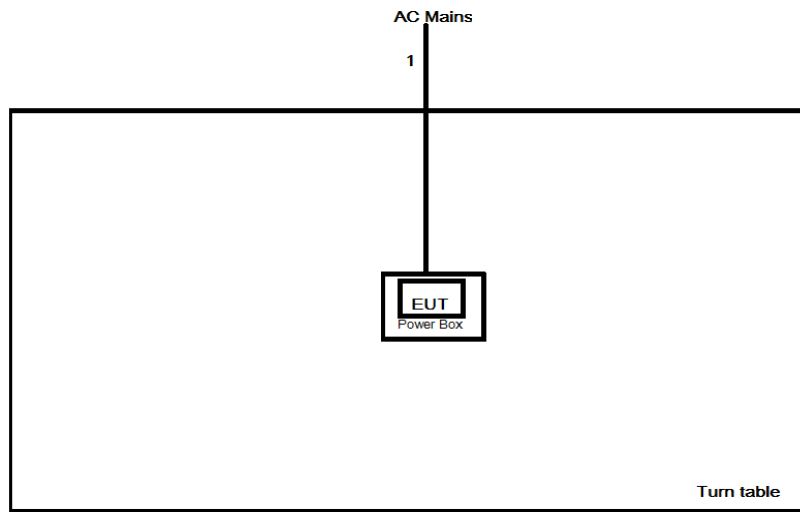Test Setup Diagram - Radiated Test


Item	Connection	Shielded	Length(m)	Remark
1	AC Power line	No	1.8m	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

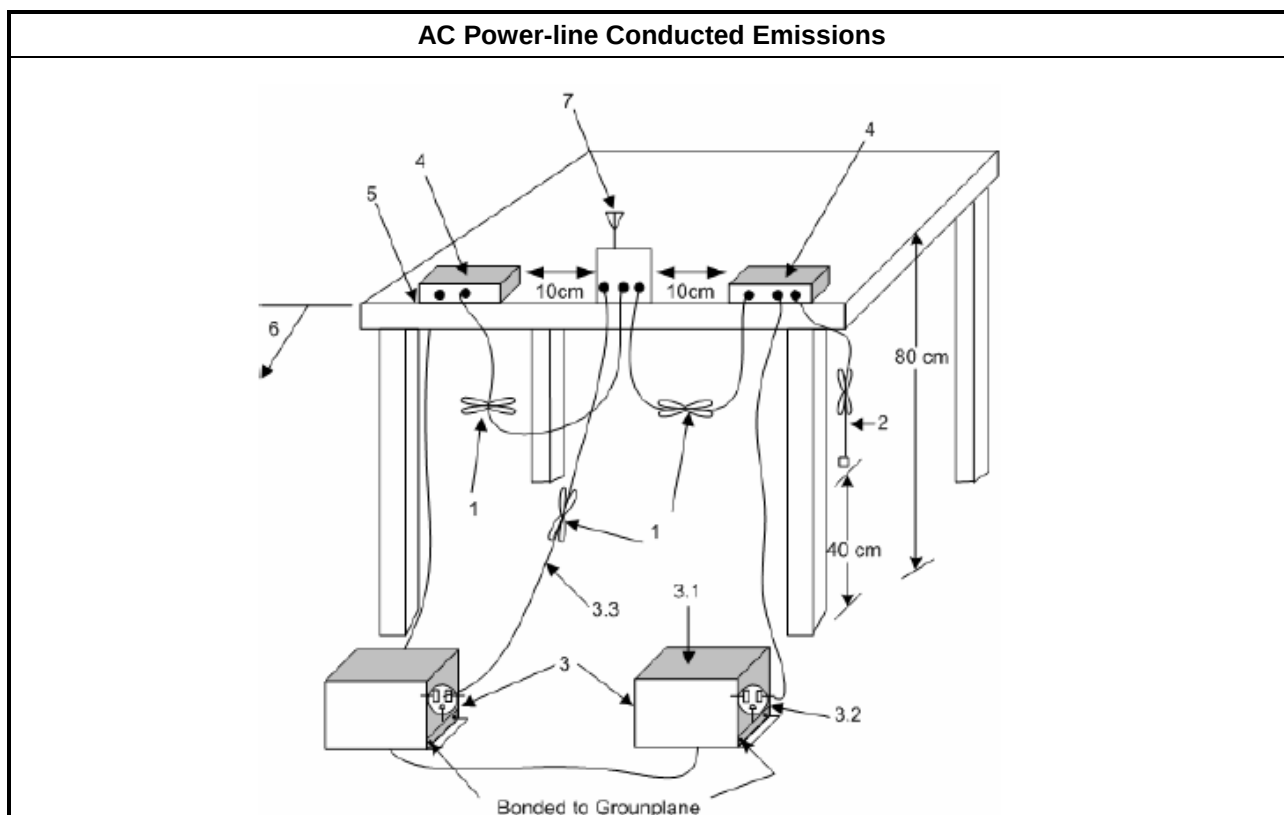

3.1.5 Test Result of AC Power-line Conducted Emissions

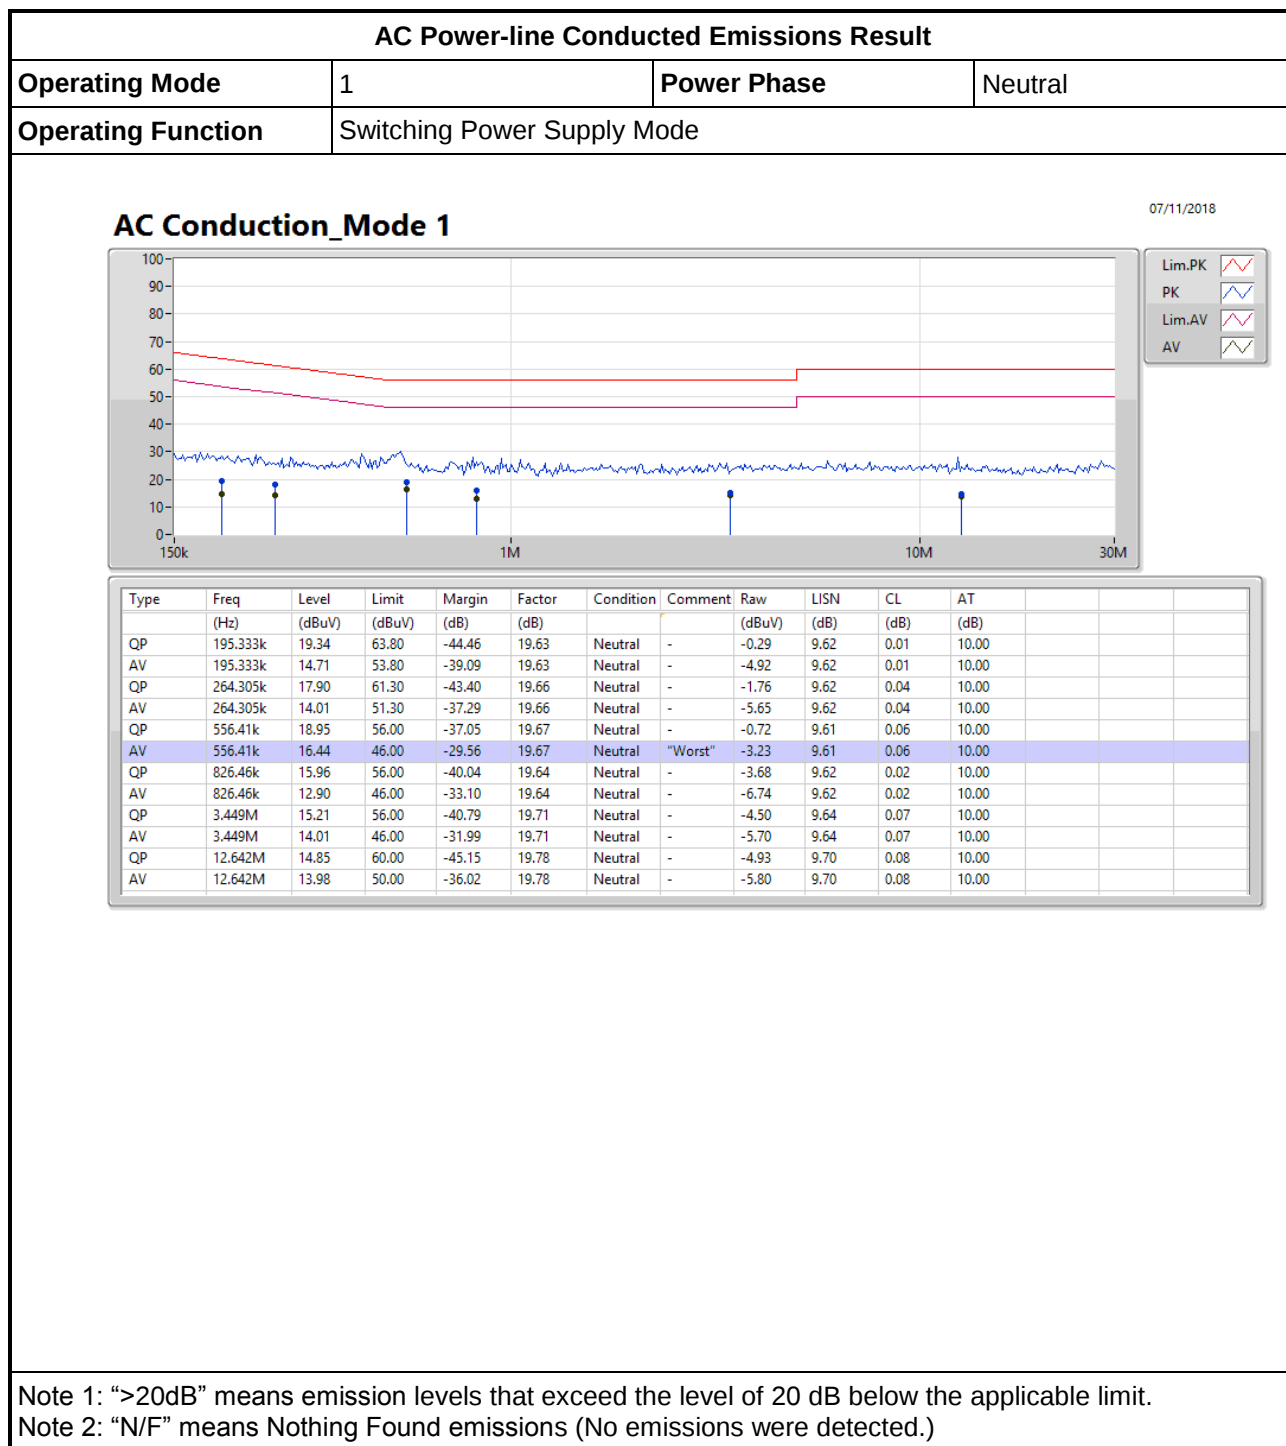


AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Switching Power Supply Mode		

AC Conduction_Mode 1

07/11/2018

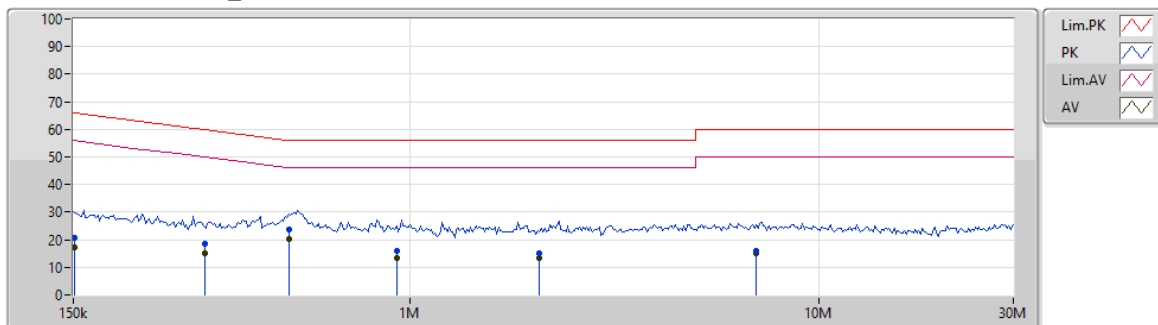

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150.904k	20.72	65.94	-45.22	19.66	Line	-	1.06	9.62	0.04	10.00			
AV	150.904k	17.17	55.94	-38.77	19.66	Line	-	-2.49	9.62	0.04	10.00			
QP	315.416k	18.42	59.82	-41.40	19.68	Line	-	-1.26	9.61	0.07	10.00			
AV	315.416k	14.94	49.82	-34.88	19.68	Line	-	-4.74	9.61	0.07	10.00			
QP	506.673k	23.69	56.00	-32.31	19.68	Line	-	4.01	9.61	0.07	10.00			
AV	506.673k	20.37	46.00	-25.63	19.68	Line	"Worst"	0.69	9.61	0.07	10.00			
QP	930.604k	15.74	56.00	-40.26	19.62	Line	-	-3.88	9.61	0.01	10.00			
AV	930.604k	13.56	46.00	-32.44	19.62	Line	-	-6.06	9.61	0.01	10.00			
QP	2.074M	15.29	56.00	-40.71	19.63	Line	-	-4.34	9.62	0.01	10.00			
AV	2.074M	13.51	46.00	-32.49	19.63	Line	-	-6.12	9.62	0.01	10.00			
QP	7.027M	16.14	60.00	-43.86	19.81	Line	-	-3.67	9.65	0.16	10.00			
AV	7.027M	14.90	50.00	-35.10	19.81	Line	-	-4.91	9.65	0.16	10.00			

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
☒	Emission bandwidth falls completely within authorized band.
☒	$F_c(70\sim 900\text{MHz}): BW \leq f_c \times 0.25\%$
☐	$F_c(>900\text{MHz}): BW \leq f_c \times 0.5\%$


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 6.9.3 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.

3.2.4 Test Setup

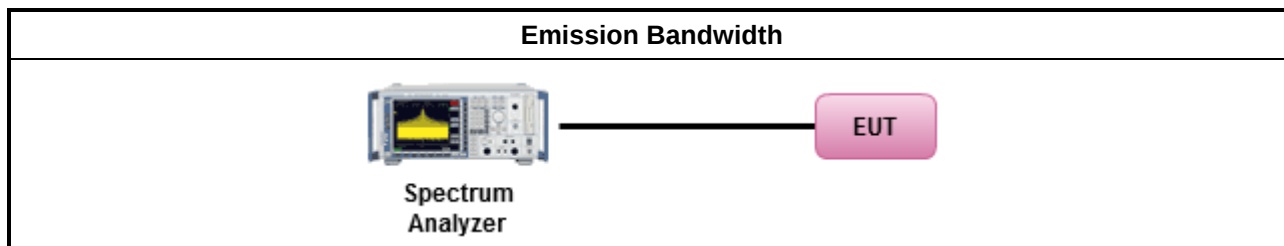

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result			
Modulation Mode	Frequency (MHz)	99% Bandwidth (kHz)	20dB BW (kHz)
FSK	433.92	182.34	176.60
Limit		N/A	1.08
Result		Complied	

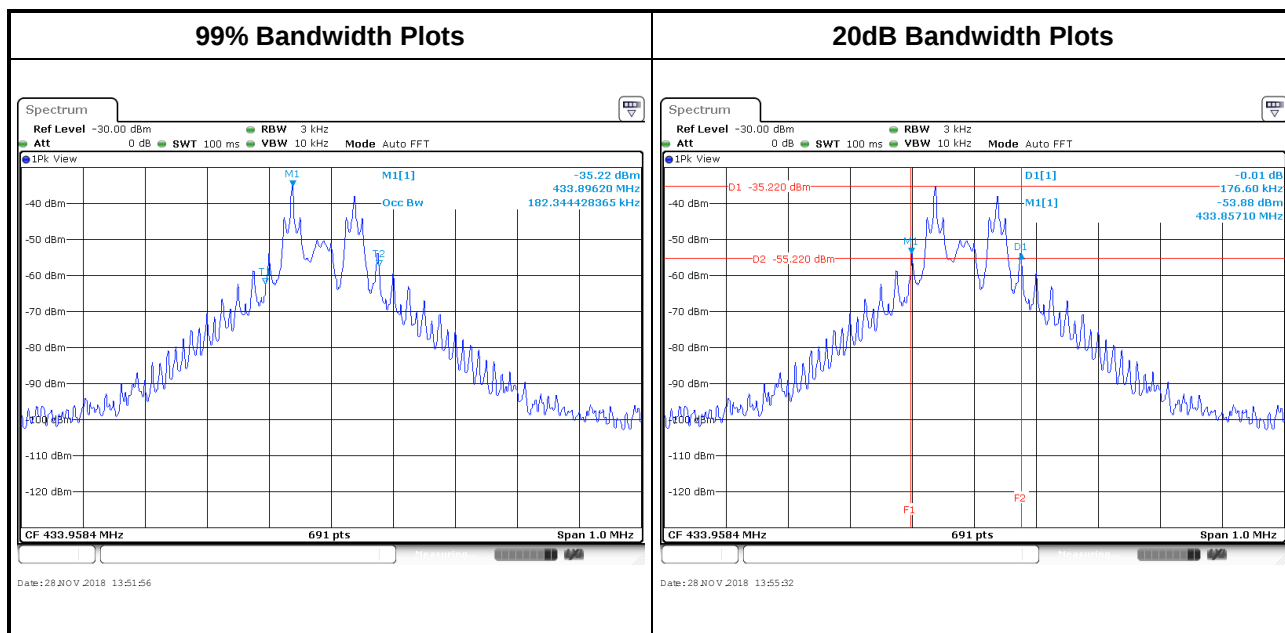

3.3 Fundamental Emissions

3.3.1 Fundamental Emissions Limit

For manually operated within 5 sec, activated automatically within 5 sec, periodic transmissions		
Frequency Band (MHz)	Fundamental Limit (uV/m) at 3m	Fundamental Limit (dBuV/m) at 3m
40.66-40.70	2250	67
70-130	1250	61.9
130-174	1250-3750(**)	61.9-71.5
174-260	3750	71.5
260-470	3750-12500(**)	71.5-81.9
Above 470	12500	81.9
**1. Linear interpolations. Based on the average value of the measured emissions.		

For periodic transmissions (lower field strength)		
Frequency Band (MHz)	Fundamental Limit (uV/m) at 3m	Fundamental Limit (dBuV/m) at 3m
40.66-40.70	1000	60
70-130	500	54
130-174	500-1500(**)	54-63.5
174-260	1500	63.5
260-470	1500-5000(**)	63.5-74
Above 470	5000	74
** 1. Linear interpolations. Based on the average value of the measured emissions.		


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

☒	For the transmitter emissions shall be measured using following options below:
☐	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
☒	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log$ (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions

3.3.4 Test Setup

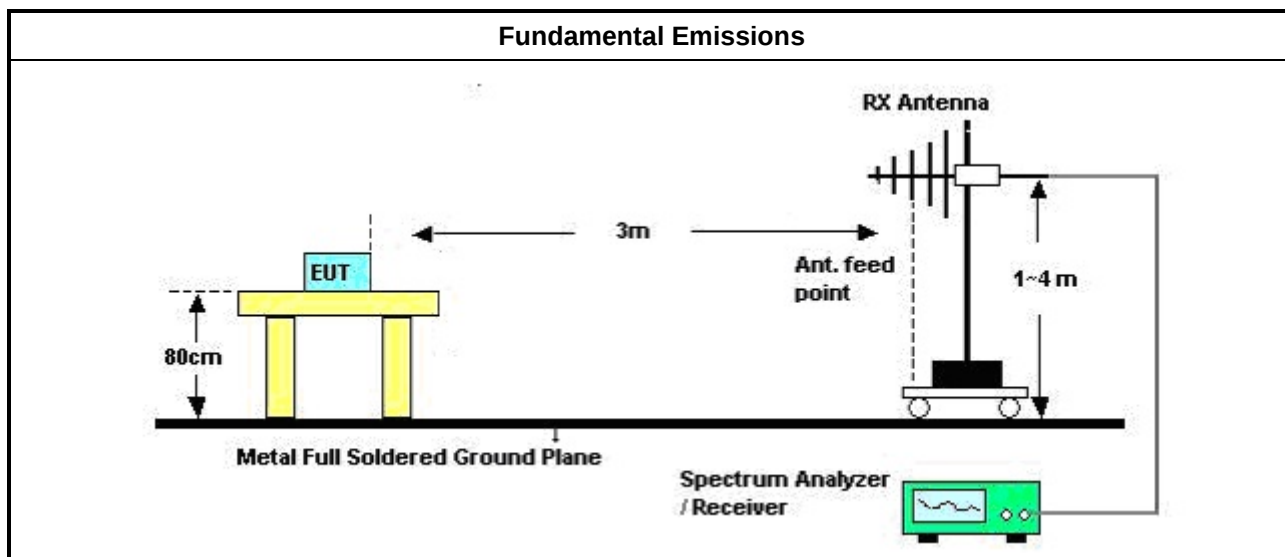

3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
FSK	433.99340	78.05	2.78	80.83	Average
FSK	433.99340	92.47	8.36	100.83	Peak
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: Horizontal Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).					

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

For manually operated within 5 sec, activated automatically within 5 sec, periodic transmissions		
Unwanted emissions limit follow this table or the general limits FCC 15.209, whichever limit permits higher field strength.		
Frequency Band (MHz)	Spurious Limit (uV/m) at 3m	Spurious Limit (dBuV/m) at 3m
40.66-40.70	225	47
70-130	125	41.9
130-174	125-375(**)	41.9-51.5
174-260	375	51.5
260-470	375-1250(**)	51.5-61.9
Above 470	1250	61.9
**1. Linear interpolations. Based on the average value of the measured emissions.		

For periodic transmissions (lower field strength)		
Unwanted emissions limit follow this table or the general limits FCC 15.209, whichever limit permits higher field strength.		
Frequency Band (MHz)	Spurious Limit (uV/m) at 3m	Spurious Limit (dBuV/m) at 3m
40.66-40.70	100	40
70-130	50	34
130-174	50-150(**)	34-43.5
174-260	150	43.5
260-470	150-500(**)	43.5-54
Above 470	500	54
** 1. Linear interpolations Based on the average value of the measured emissions.		

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method – General Information	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☐	Refer as ANSI C63.10, clause 6.10.3 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☐	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
☒	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log$ (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.4.4 Test Setup

Transmitter Spurious and Out of Band Emissions (9 kHz - 30 MHz)

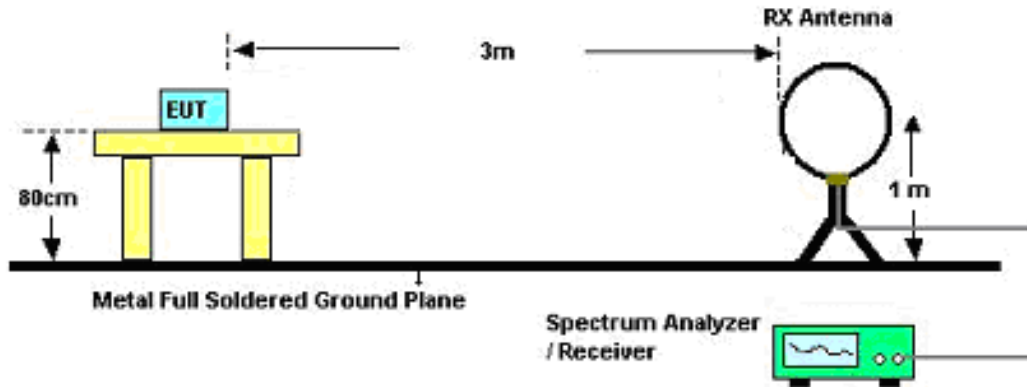


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna.

Transmitter Radiated Unwanted Emissions (below 1GHz)

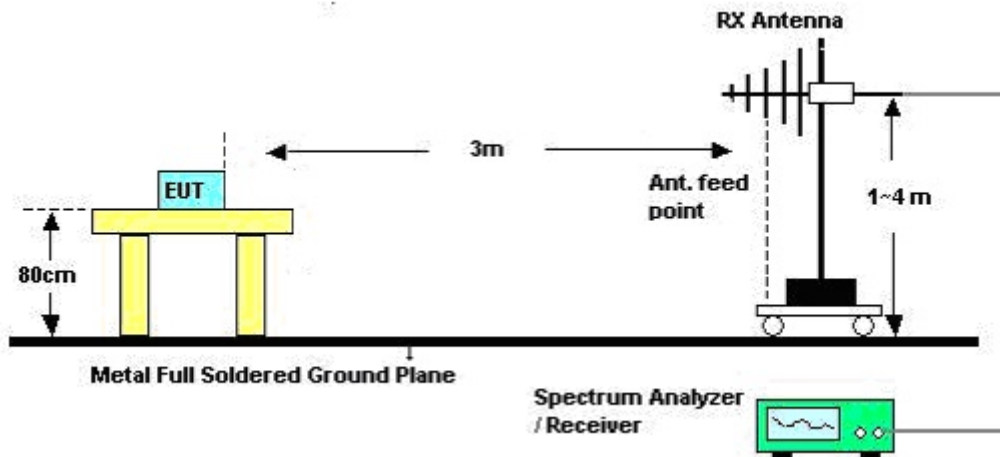


Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

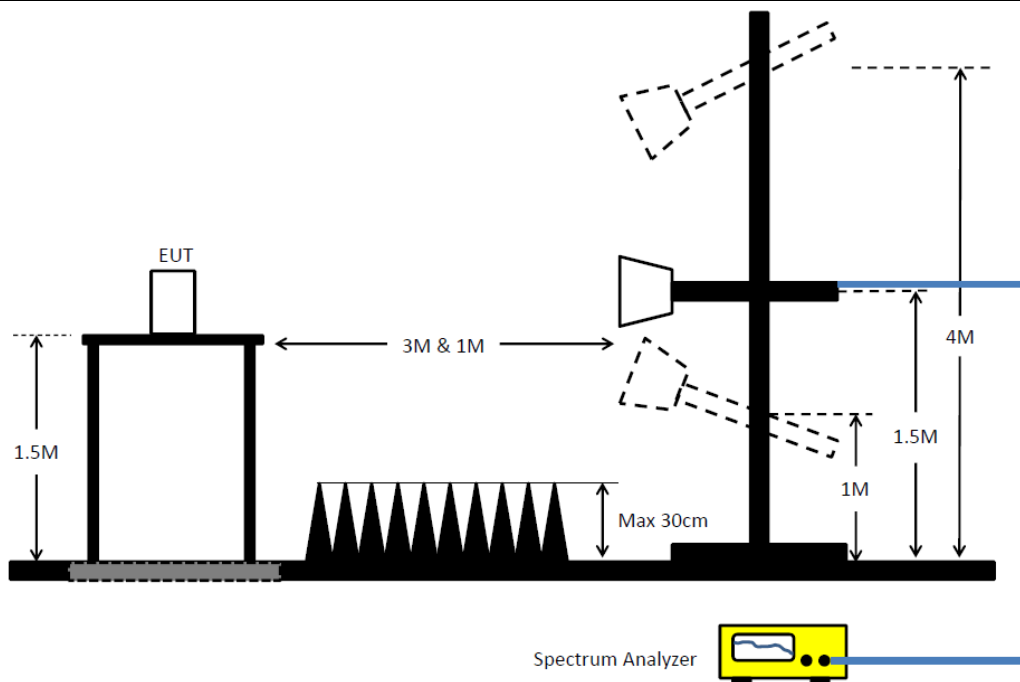Transmitter Radiated Unwanted Emissions (Above 1GHz)


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

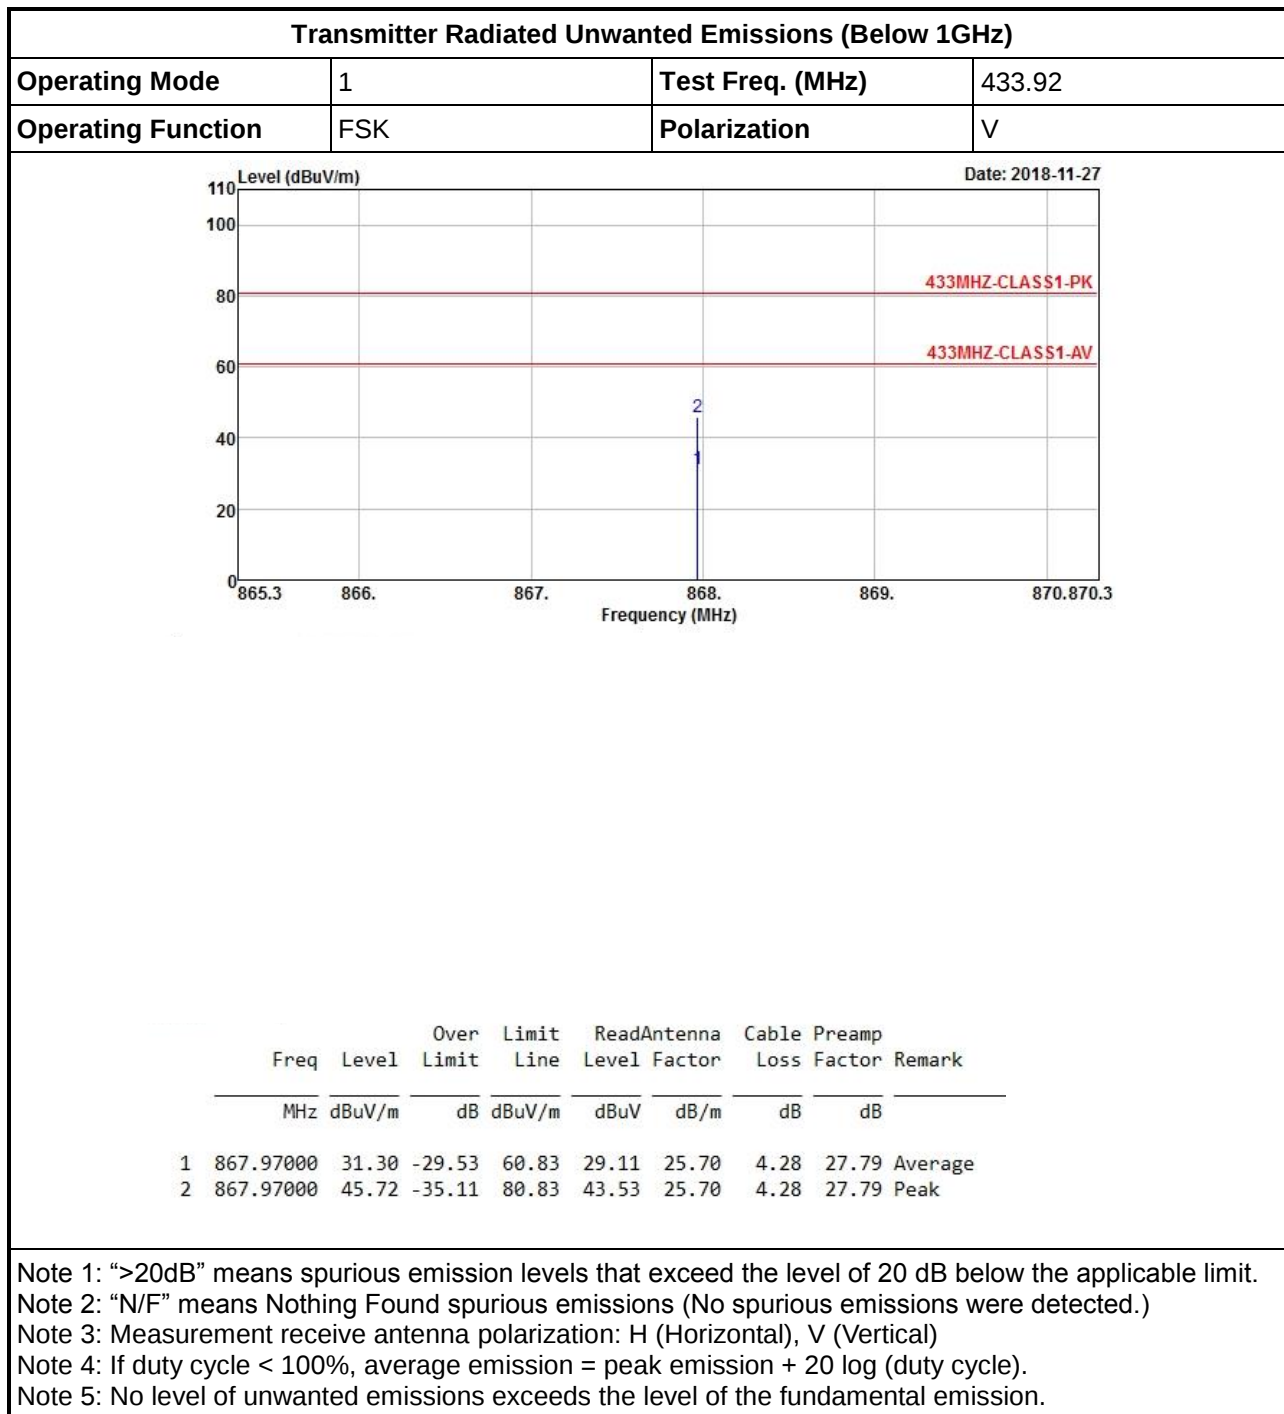3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Test Freq. (MHz)	433.92
Operating Function	FSK	Polarization	H

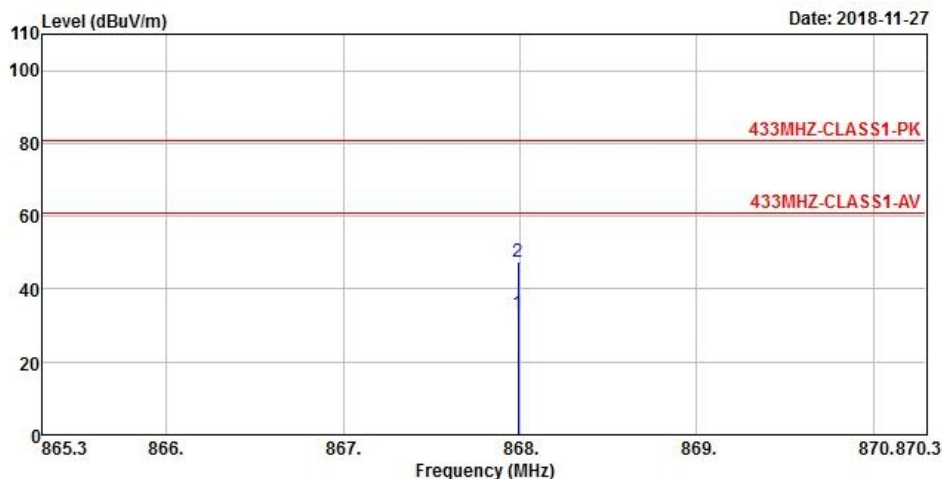

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	867.99000	33.16	-27.67	60.83	30.97	25.70	4.28	27.79	Average
2	867.99000	47.58	-33.25	80.83	45.39	25.70	4.28	27.79	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Test Freq. (MHz)	433.92
Operating Function	FSK	Polarization	V

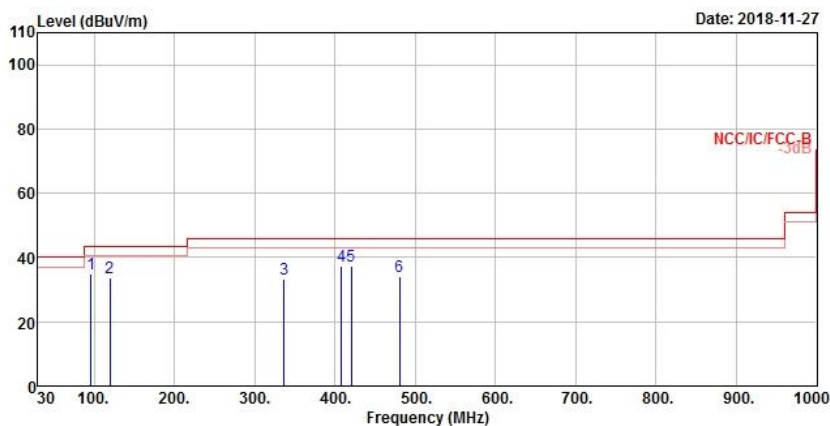

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	95.960000	34.73	-8.77	43.50	45.76	15.32	1.44	27.79	Peak	100	360
2	119.240000	33.63	-9.87	43.50	42.40	17.32	1.65	27.74	Peak	100	360
3	336.520000	33.37	-12.63	46.00	38.71	19.07	3.07	27.48	Peak	100	360
4	408.300000	37.28	-8.72	46.00	40.53	21.55	3.20	28.00	Peak	100	360
5	419.940000	37.19	-8.81	46.00	40.04	22.01	3.21	28.07	Peak	100	360
6	480.080000	34.24	-11.76	46.00	36.55	22.79	3.28	28.38	Peak	100	360

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Test Freq. (MHz)	433.92
Operating Function	FSK	Polarization	H

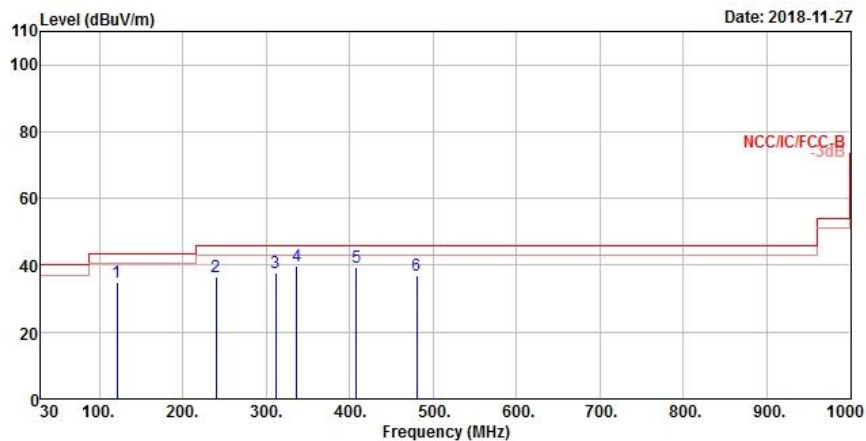

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		A/Pos	T/Pos
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm
1	121.18000	34.75	-8.75	43.50	43.50	17.32	1.66	27.73	Peak	100
2	239.52000	36.42	-9.58	46.00	44.56	16.53	2.68	27.35	Peak	100
3	311.30000	37.85	-8.15	46.00	43.34	18.78	3.02	27.29	Peak	100
4	336.52000	39.90	-6.10	46.00	45.24	19.07	3.07	27.48	Peak	100
5	408.30000	39.53	-6.47	46.00	42.78	21.55	3.20	28.00	Peak	100
6	480.08000	37.09	-8.91	46.00	39.40	22.79	3.28	28.38	Peak	100


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

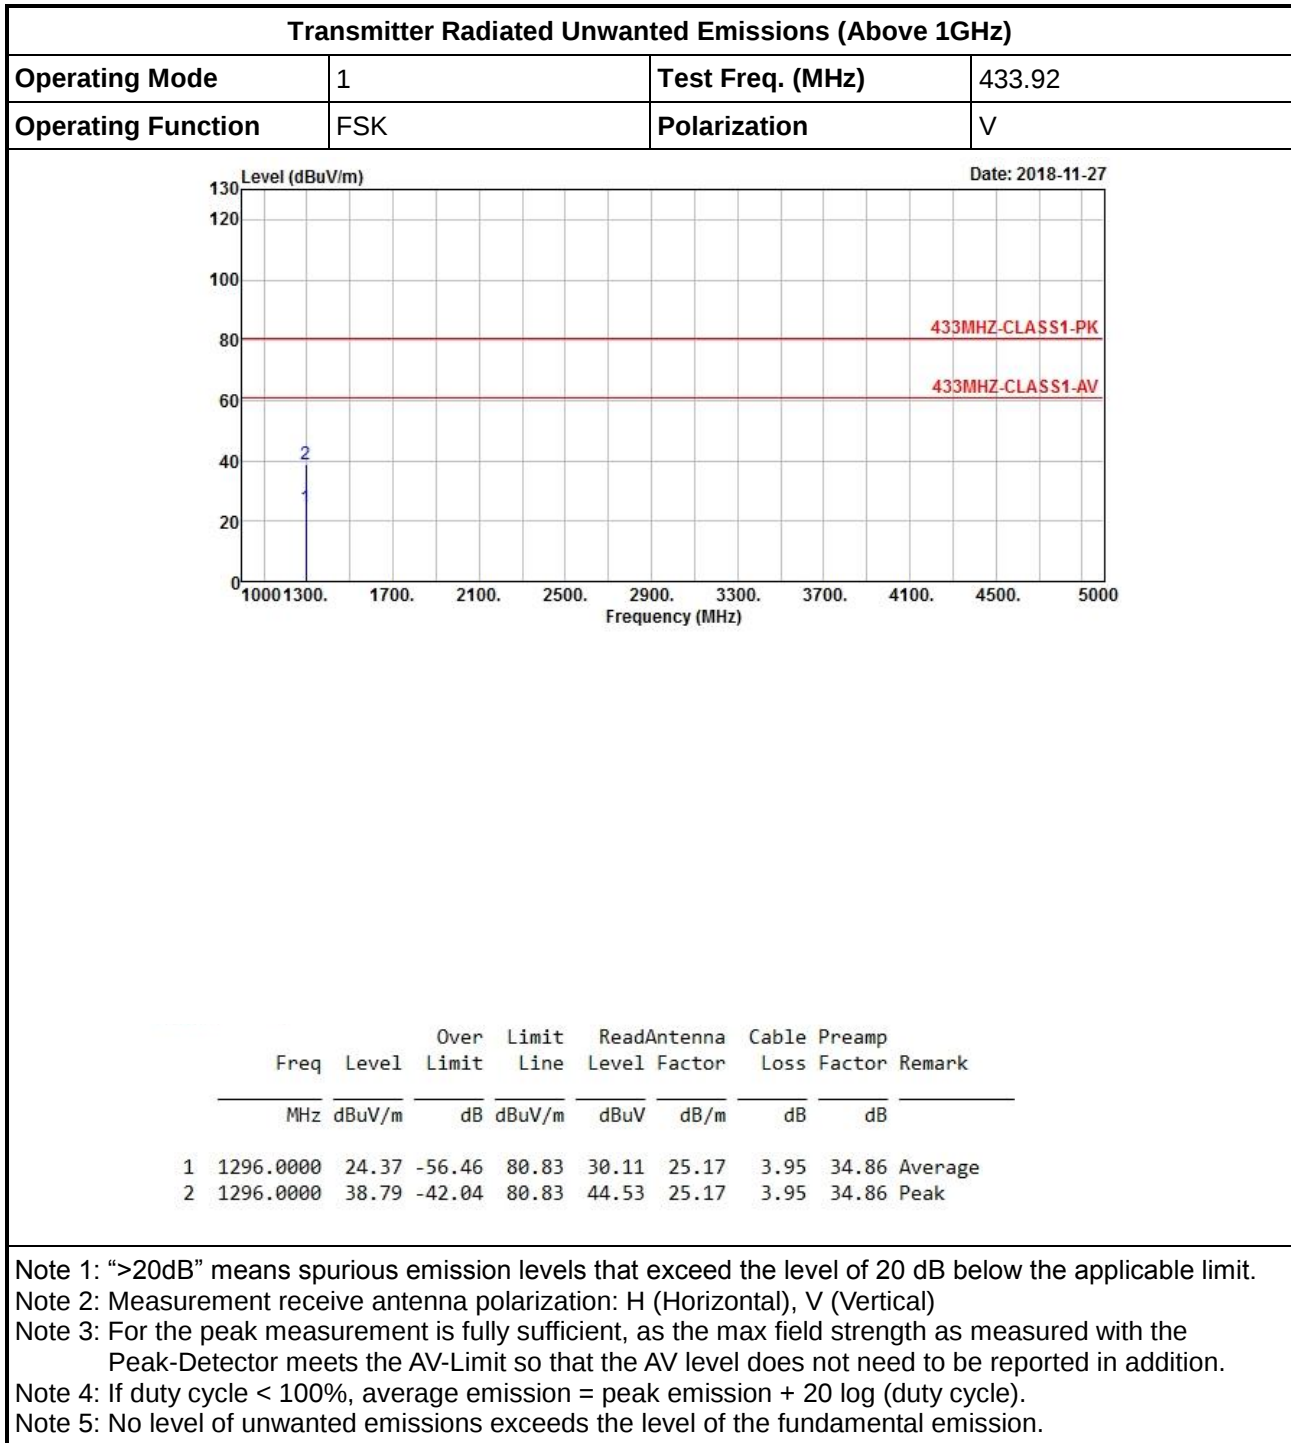3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Operating Mode	1	Test Freq. (MHz)	433.92
Operating Function	FSK	Polarization	H

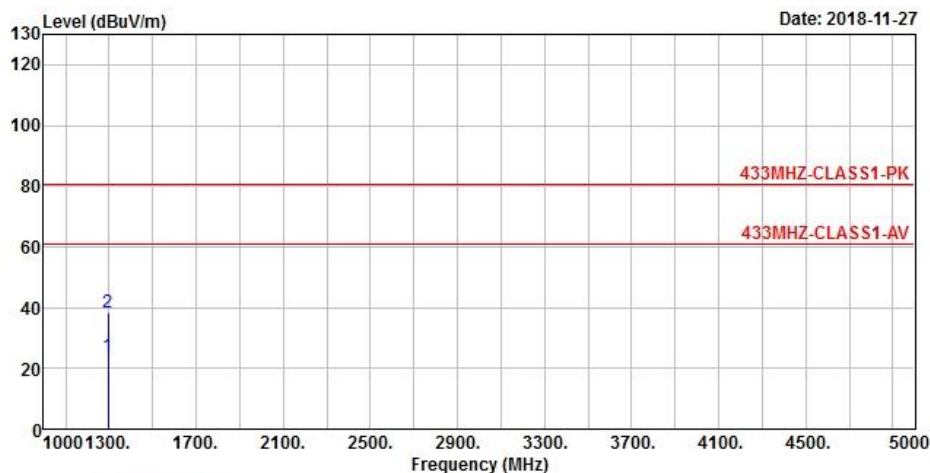

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	1296.0000	24.02	-56.81	80.83	29.76	25.17	3.95	34.86	Average
2	1296.0000	38.44	-42.39	80.83	44.18	25.17	3.95	34.86	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

Note 5: No level of unwanted emissions exceeds the level of the fundamental emission.

3.5 Operation Restriction

3.5.1 Operation Restriction Limit

Operation Restriction Limit	
☒	Manually operated: manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 sec of being released.
☐	Activated automatically: transmitter activated automatically shall cease transmission within 5 sec after activation.
☐	Periodic transmissions: permitted with total transmission time of 2 sec per hour or less.
☐	Periodic transmissions (lower field strength): each transmission is not greater than 1 sec and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 sec.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.
Periodic transmissions (lower field strength)

3.5.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 7.4 for periodic operation measurement.

3.5.4 Test Setup

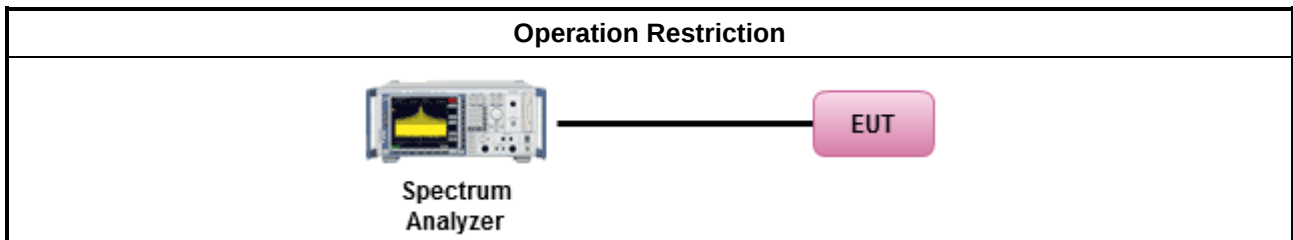

3.5.5 Test Result of Operation Restriction

Operation Condition	Pulse Duration (s)	Limits (s)
Transmission time (TX-on)	0.019	5.00

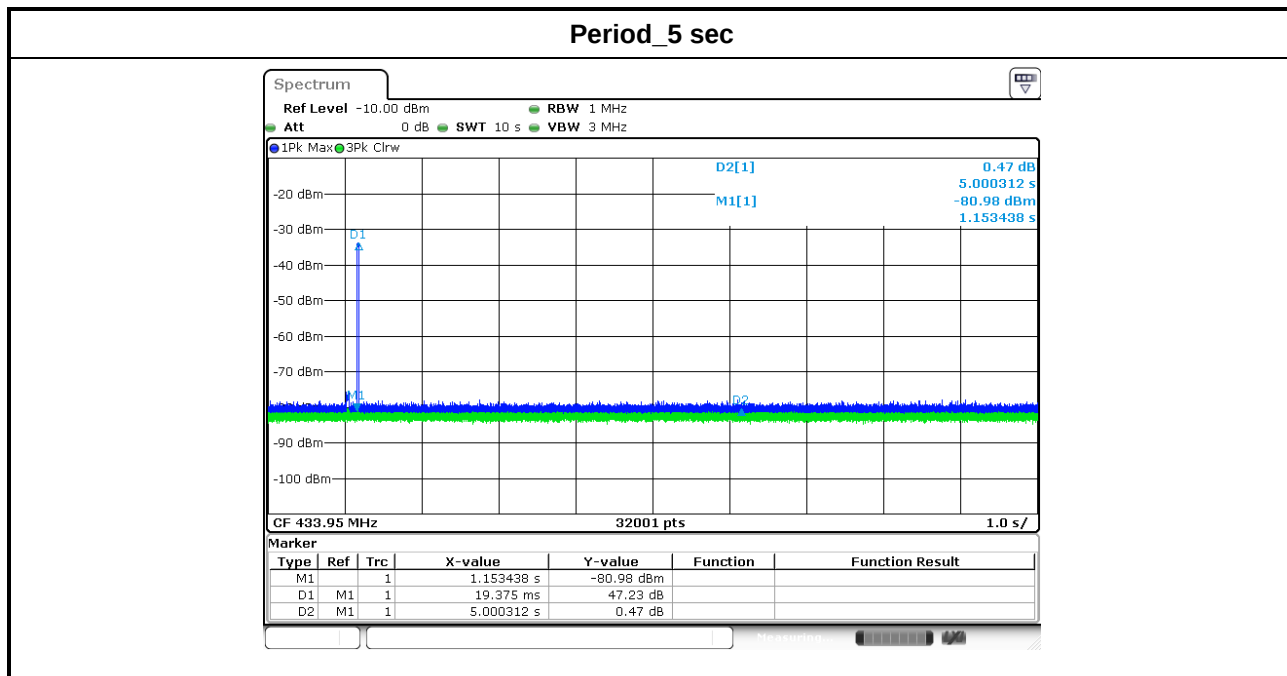

4 Test Equipment and Calibration Data

< Instrument for AC Conduction >

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	17/Sep/2018	16/Sep/2019
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2018	11/Oct/2019

NCR : Non-Calibration Require

< Radiated Test >

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	17/Oct/2018	16/Oct/2019
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz ~ 18GHz 3m	17/Oct/2018	16/Oct/2019
Amplifier	Agilent	8447D	2944A11149	100kHz ~ 1.3GHz	27Jul/2018	02/Jul/2019
Microwave Preamplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	23/Oct/2018	22/Oct/2019
Spectrum Analyzer	Rohde & Schwarz	FSP40	100593	9KHz - 40GHz	12/Dec/2017	11/Dec/2018
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100354	9kHz ~ 2.75GHz	08/Dec/2017	07/Dec/2018
RF Cable-R03m	Jye Bao	RG142	CB017	9kHz ~ 1GHz	19/Jan/2018	18/Jan/2019
RF Cable-high	SUHNER	SUCOFLEX104	MY34918/4	1GHz ~ 40GHz	19/Jan/2018	18/Jan/2019
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	13/Oct/2018	12/Oct/2019
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	06/Feb/2018	05/Feb/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1531	1GHz ~ 18GHz	18/Apr/ 2018	17/Apr/2019
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	24/Aug/2018	23/Aug/2019
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	29/Mar/2018	28/Mar/2019

< Conducted Test >

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	29/Dec/2017	28/Dec/2018