



FCC PART 15.247

TEST REPORT

For

HUNG WAI PRODUCTS LIMITED

Unit 11, 12/F., New Commerce Centre, 19 On Sum Street, Shatin, Hong Kong

FCC ID: 2AB6Z-BZT-T102

Report Type: Original Report	Product Name: Buzztime 7 inch Tablet - T102
Test Engineer: <u>Kevin Hu</u>	<i>Kevin Hu</i>
Report Number: <u>RDG170503801B</u>	
Report Date: <u>2017-06-08</u>	
Reviewed By: <u>Henry Ding</u> EMC Leader	<i>Henry Ding</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65525123, Fax: 028-65525125 www.baclcorp.com

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL CABLE	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD.....	8
FCC §15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD.....	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP	10
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS	11
TEST DATA	12
FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD.....	21
TEST EQUIPMENT LIST AND DETAILS	21
TEST PROCEDURE	21
TEST DATA	22
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	28
APPLICABLE STANDARD.....	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS	28
TEST DATA	29
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	39

APPLICABLE STANDARD.....	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS	39
TEST DATA	40
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	43
APPLICABLE STANDARD.....	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS	43
TEST DATA	43
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	59
APPLICABLE STANDARD.....	59
TEST PROCEDURE	59
TEST EQUIPMENT LIST AND DETAILS	59
TEST DATA	59
FCC §15.247(d) - BAND EDGES TESTING	65
APPLICABLE STANDARD.....	65
TEST PROCEDURE	65
TEST EQUIPMENT LIST AND DETAILS	66
TEST DATA	66

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **HUNG WAI PRODUCTS LIMITED**'s product, model number: **BZT-T102 (FCC ID: 2AB6Z-BZT-T102)** (the "EUT") in this report was a **Buzztime 7 inch Tablet - T102**, which was measured approximately: 18.8 cm (L) x 11.1 cm (W) x 1 cm (H), rated input voltage: DC5V from USB port or DC3.7V from battery.

**All measurement and test data in this report was gathered from final production sample, serial number: 170503801 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-05-05, and EUT conformed to test requirement.*

Objective

This report is prepared on behalf of **HUNG WAI PRODUCTS LIMITED** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.247 rules

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AB6Z-BZT-T102.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All of the measurements detailed in this Test Report were performed by Bay Area Compliance Laboratories Corp. (Chengdu).

The Bay Area Compliance Laboratories Corp. Chengdu's measurement Uncertainties (calculated for a k=2 Coverage Factor corresponding to approximately 95% Coverage) were as follows:

- For all of the AC Line Conducted Emissions Tests reported herein: ± 3.17 dB.
- For of all of the Direct Antenna Conducted Emissions Tests reported herein: ± 0.56 dB.

- For of all of the direct Radiated Emissions Tests reported herein are:
 - 30 MHz to 200 MHz: ± 4.7 dB;
 - 200 MHz to 1 GHz: ± 6.0 dB;
 - 1 GHz to 6 GHz: ± 5.13 dB; and,
 - 6 GHz to 40 GHz: ± 5.47 dB.

And the uncertainty will not be taken into consideration for all test data recorded in the report.

Test Facility

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The engineering mode configured the maximum power as default setting.


Equipment Modifications

No modification was made to the EUT.

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	no	no	1.0	Adapter	EUT
Earphone	no	no	1.2	EUT	Earphone

Block Diagram of Test Setup

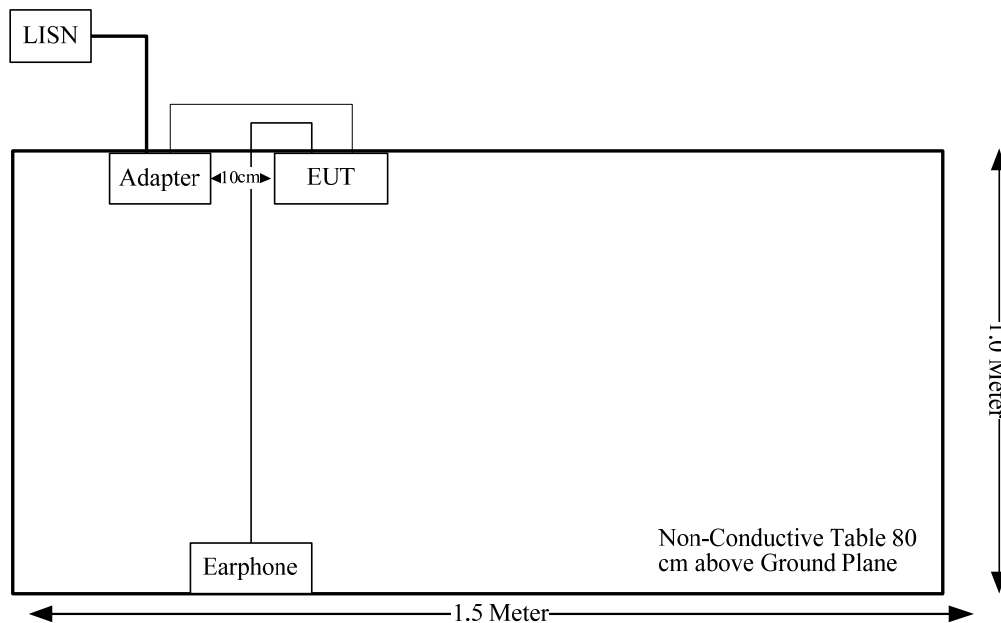

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
FCC§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
FCC§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
FCC§15.247 (a)(1)	20dB Bandwidth	Compliance
FCC§15.247(a)(1)	Channel Separation Test	Compliance
FCC§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
FCC§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
FCC§15.247(b)(1)	Peak Output Power Measurement	Compliance
FCC§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max tune-up conducted power is 8.5 dBm (7.08mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 7.08/5 \cdot (\sqrt{2.48}) = 2.2 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT have an internal FPC antenna permanently attached to the unit. The Maximum gain is 0 dBi, compliance the requirements, Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

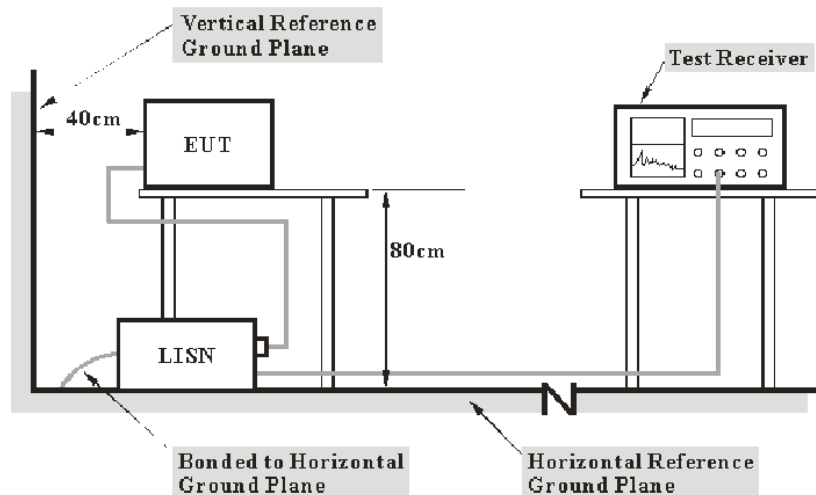

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	100018	2016-12-02	2017-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	DE14781	2016-10-31	2017-10-30
Unknown	Conducted Cable	Unknown	NO.5	2016-11-10	2017-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data


Environmental Conditions

Temperature:	27.1 °C
Relative Humidity:	40 %
ATM Pressure:	100.1 kPa

The testing was performed by Kevin Hu on 2017-06-01.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

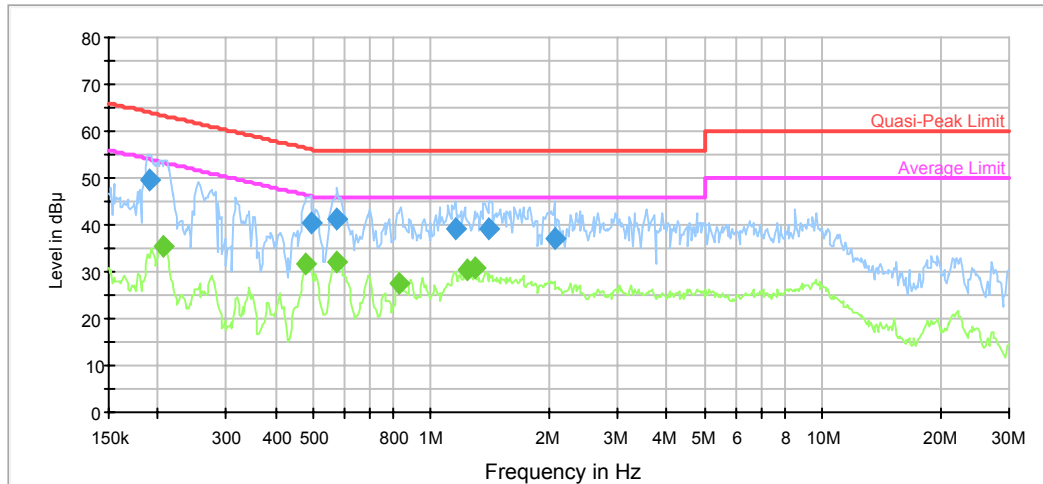

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.190505	49.7	9.000	L1	19.7	14.3	64.0	Compliance
0.491712	40.6	9.000	L1	19.7	15.5	56.1	Compliance
0.576662	41.2	9.000	L1	19.8	14.8	56.0	Compliance
1.153421	39.3	9.000	L1	19.7	16.7	56.0	Compliance
1.407671	39.1	9.000	L1	19.7	16.9	56.0	Compliance
2.063510	37.1	9.000	L1	19.8	18.9	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.207957	35.5	9.000	L1	19.7	17.8	53.3	Compliance
0.480097	31.8	9.000	L1	19.7	14.5	46.3	Compliance
0.572086	32.1	9.000	L1	19.7	13.9	46.0	Compliance
0.825364	27.6	9.000	L1	19.7	18.4	46.0	Compliance
1.239175	30.5	9.000	L1	19.7	15.5	46.0	Compliance
1.289541	30.7	9.000	L1	19.7	15.3	46.0	Compliance

AC120 V, 60 Hz, Neutral:

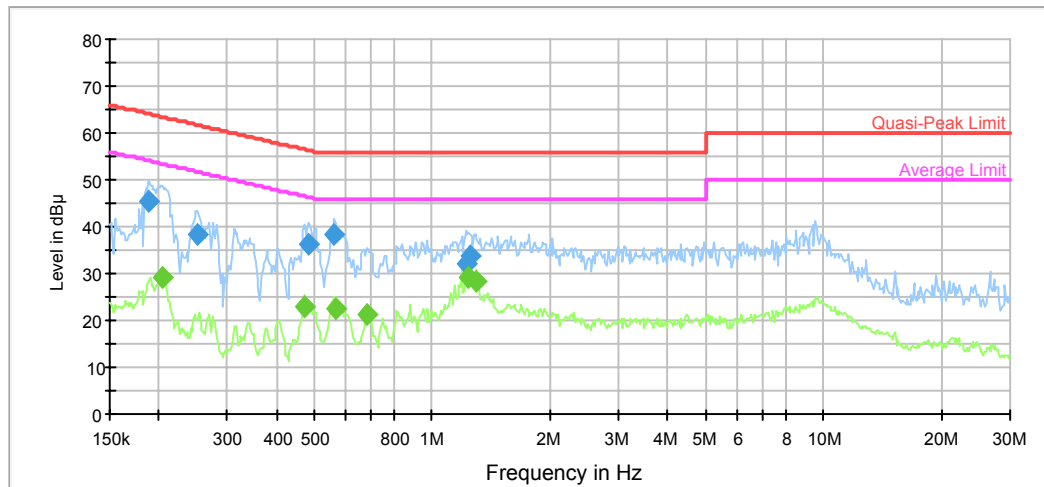

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.188994	45.3	9.000	N	19.6	18.8	64.1	Compliance
0.251783	38.5	9.000	N	19.6	23.2	61.7	Compliance
0.483938	36.4	9.000	N	19.6	19.9	56.3	Compliance
0.563041	38.2	9.000	N	19.6	17.8	56.0	Compliance
1.219583	31.9	9.000	N	19.6	24.1	56.0	Compliance
1.249088	33.8	9.000	N	19.6	22.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.204669	29.3	9.000	N	19.6	24.1	53.4	Compliance
0.472507	23.1	9.000	N	19.6	23.4	46.5	Compliance
0.567545	22.5	9.000	N	19.6	23.5	46.0	Compliance
0.681699	21.1	9.000	N	19.6	24.9	46.0	Compliance
1.239175	29.0	9.000	N	19.6	17.0	46.0	Compliance
1.289541	28.3	9.000	N	19.6	17.7	46.0	Compliance


FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205

EUT Setup

Below 1GHz:

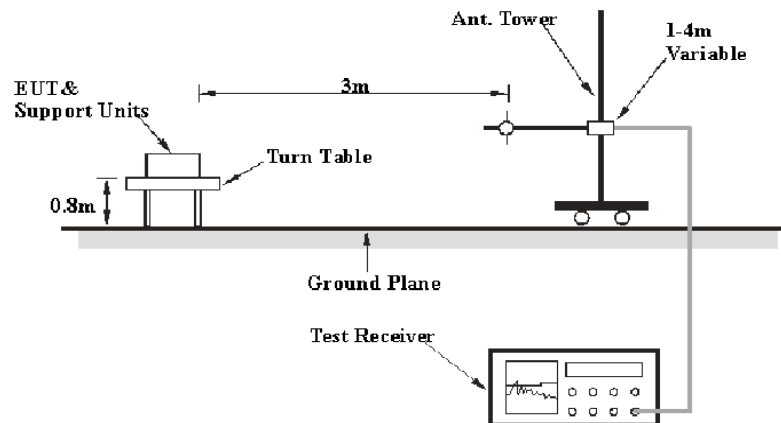

Above 1GHz:

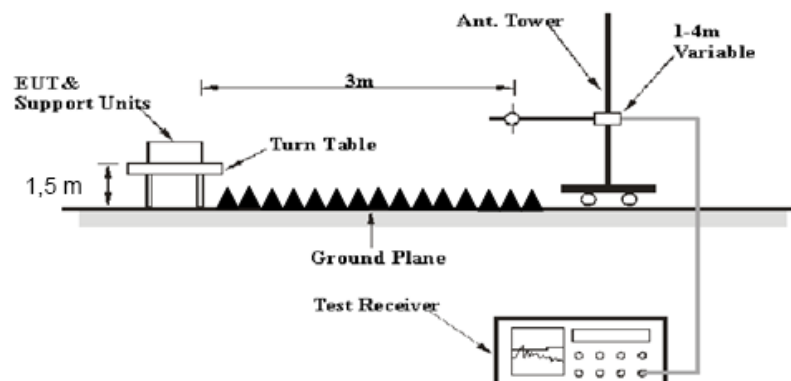

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A121808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2017-05-20	2018-05-19
HP	Amplifier	8449B	3008A00277	2016-12-02	2017-12-01
EMCT	Semi-Anechoic Chamber	966	966-1	2015-04-24	2018-04-23
Unknown	RF Cable (below 1GHz)	Unknown	NO.1	2016-11-10	2017-11-09
Unknown	RF Cable (below 1GHz)	Unknown	NO.4	2016-11-10	2017-11-09
Unknown	RF Cable (above 1GHz)	Unknown	NO.2	2016-11-10	2017-11-09

*** Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	27.5°C
Relative Humidity:	42 %
ATM Pressure:	100.1 kPa

** The testing was performed by Kevin Hu on 2017-06-01.*

Test Mode: Transmitting

30 MHz-25GHz:

BDR Mode (GFSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	71.97	PK	H	23.53	3.00	0.00	98.50	N/A	N/A
2402	61.02	AV	H	23.53	3.00	0.00	87.55	N/A	N/A
2402	71.59	PK	V	23.53	3.00	0.00	98.12	N/A	N/A
2402	61.54	AV	V	23.53	3.00	0.00	88.07	N/A	N/A
2390	26.29	PK	H	23.57	3.00	0.00	52.86	74.00	21.14
2390	14.36	AV	H	23.57	3.00	0.00	40.93	54.00	13.07
4804	42.52	PK	H	30.77	5.12	26.87	51.54	74.00	22.46
4804	37.51	AV	H	30.77	5.12	26.87	46.53	54.00	7.47
7206	34.84	PK	H	34.71	6.16	26.35	49.36	74.00	24.64
7206	20.45	AV	H	34.71	6.16	26.35	34.97	54.00	19.03
9608	32.71	PK	H	37.06	7.82	26.18	51.41	74.00	22.59
9608	18.12	AV	H	37.06	7.82	26.18	36.82	54.00	17.18
3131	40.94	PK	H	24.93	3.63	26.46	43.04	74.00	30.96
3131	26.41	AV	H	24.93	3.63	26.46	28.51	54.00	25.49
82.38	38.8	QP	H	8.31	0.50	28.37	19.24	40.00	20.76
62.98	38.4	QP	H	7.47	0.54	28.41	18.00	40.00	22.00
Middle Channel: 2441 MHz									
2441	72.69	PK	H	23.40	3.00	0.00	99.09	N/A	N/A
2441	62.28	AV	H	23.40	3.00	0.00	88.68	N/A	N/A
2441	71.53	PK	V	23.40	3.00	0.00	97.93	N/A	N/A
2441	60.08	AV	V	23.40	3.00	0.00	86.48	N/A	N/A
4882	16.48	PK	H	31.02	5.09	26.87	25.72	74.00	48.28
4882	3.51	AV	H	31.02	5.09	26.87	12.75	54.00	41.25
7323	41.14	PK	H	34.95	6.22	26.40	55.91	74.00	18.09
7323	31.65	AV	H	34.95	6.22	26.40	46.42	54.00	7.58
9764	33.88	PK	H	37.16	7.71	26.27	52.48	74.00	21.52
9764	18.9	AV	H	37.16	7.71	26.27	37.50	54.00	16.50
3131	38.77	PK	H	24.93	3.63	26.46	40.87	74.00	33.13
3131	24.25	AV	H	24.93	3.63	26.46	26.35	54.00	27.65
3190	39.69	PK	H	25.26	3.72	26.48	42.19	74.00	31.81
3190	25.94	AV	H	25.26	3.72	26.48	28.44	54.00	25.56
82.38	39.2	QP	H	8.31	0.50	28.37	19.64	40.00	20.36
62.98	38.2	QP	H	7.47	0.54	28.41	17.80	40.00	22.20
High Channel: 2480 MHz									
2480	72.48	PK	H	23.27	2.99	0.00	98.74	N/A	N/A
2480	61.83	AV	H	23.27	2.99	0.00	88.09	N/A	N/A
2480	70.86	PK	V	23.27	2.99	0.00	97.12	N/A	N/A
2480	60.23	AV	V	23.27	2.99	0.00	86.49	N/A	N/A
2483.5	28.33	PK	H	23.26	2.99	0.00	54.58	74.00	19.42
2483.5	15.24	AV	H	23.26	2.99	0.00	41.49	54.00	12.51
4960	42.09	PK	H	31.27	5.05	26.88	51.53	74.00	22.47
4960	32.99	AV	H	31.27	5.05	26.88	42.43	54.00	11.57
7440	34.86	PK	H	35.18	6.27	26.45	49.86	74.00	24.14
7440	20.11	AV	H	35.18	6.27	26.45	35.11	54.00	18.89
9920	32.83	PK	H	37.25	7.60	26.37	51.31	74.00	22.69
9920	18.7	AV	H	37.25	7.60	26.37	37.18	54.00	16.82
3131	39.91	PK	H	24.93	3.63	26.46	42.01	74.00	31.99
3131	26.29	AV	H	24.93	3.63	26.46	28.39	54.00	25.61
82.38	38.7	QP	H	8.31	0.50	28.37	19.14	40.00	20.86
62.98	38.5	QP	H	7.47	0.54	28.41	18.10	40.00	21.90

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	71.48	PK	H	23.53	3.00	0.00	98.01	N/A	N/A
2402	58.41	AV	H	23.53	3.00	0.00	84.94	N/A	N/A
2402	71.4	PK	V	23.53	3.00	0.00	97.93	N/A	N/A
2402	58.18	AV	V	23.53	3.00	0.00	84.71	N/A	N/A
2390	28.28	PK	H	23.57	3.00	0.00	54.85	74.00	19.15
2390	14.09	AV	H	23.57	3.00	0.00	40.66	54.00	13.34
4804	42.4	PK	H	30.77	5.12	26.87	51.42	74.00	22.58
4804	34.41	AV	H	30.77	5.12	26.87	43.43	54.00	10.57
7206	35.22	PK	H	34.71	6.16	26.35	49.74	74.00	24.26
7206	20.8	AV	H	34.71	6.16	26.35	35.32	54.00	18.68
9608	32.26	PK	H	37.06	7.82	26.18	50.96	74.00	23.04
9608	18.15	AV	H	37.06	7.82	26.18	36.85	54.00	17.15
2950	38.07	PK	H	24.10	3.39	26.46	39.10	74.00	34.90
2950	25.43	AV	H	24.10	3.39	26.46	26.46	54.00	27.54
82.38	39.1	QP	H	8.31	0.50	28.37	19.54	40.00	20.46
62.98	38.4	QP	H	7.47	0.54	28.41	18.00	40.00	22.00
Middle Channel: 2441 MHz									
2441	71.62	PK	H	23.40	3.00	0.00	98.02	N/A	N/A
2441	58.19	AV	H	23.40	3.00	0.00	84.59	N/A	N/A
2441	71.31	PK	V	23.40	3.00	0.00	97.71	N/A	N/A
2441	57.36	AV	V	23.40	3.00	0.00	83.76	N/A	N/A
4882	17.12	PK	H	31.02	5.09	26.87	26.36	74.00	47.64
4882	2.69	AV	H	31.02	5.09	26.87	11.93	54.00	42.07
7323	41.18	PK	H	34.95	6.22	26.40	55.95	74.00	18.05
7323	32.6	AV	H	34.95	6.22	26.40	47.37	54.00	6.63
9764	34.35	PK	H	37.16	7.71	26.27	52.95	74.00	21.05
9764	20.03	AV	H	37.16	7.71	26.27	38.63	54.00	15.37
2950	38.12	PK	H	24.10	3.39	26.46	39.15	74.00	34.85
2950	23.91	AV	H	24.10	3.39	26.46	24.94	54.00	29.06
3610	36.6	PK	H	27.44	4.34	26.58	41.80	74.00	32.20
3610	23.51	AV	H	27.44	4.34	26.58	28.71	54.00	25.29
82.38	39.2	QP	H	8.31	0.50	28.37	19.64	40.00	20.36
62.98	38.3	QP	H	7.47	0.54	28.41	17.90	40.00	22.10
High Channel: 2480 MHz									
2480	71.71	PK	H	23.27	2.99	0.00	97.97	N/A	N/A
2480	58.16	AV	H	23.27	2.99	0.00	84.42	N/A	N/A
2480	69.44	PK	V	23.27	2.99	0.00	95.70	N/A	N/A
2480	56.81	AV	V	23.27	2.99	0.00	83.07	N/A	N/A
2483.5	29.4	PK	H	23.26	2.99	0.00	55.65	74.00	18.35
2483.5	15.26	AV	H	23.26	2.99	0.00	41.51	54.00	12.49
4960	40.7	PK	H	31.27	5.05	26.88	50.14	74.00	23.86
4960	33.2	AV	H	31.27	5.05	26.88	42.64	54.00	11.36
7440	35.05	PK	H	35.18	6.27	26.45	50.05	74.00	23.95
7440	20.5	AV	H	35.18	6.27	26.45	35.50	54.00	18.50
9920	31.42	PK	H	37.25	7.60	26.37	49.90	74.00	24.10
9920	18.94	AV	H	37.25	7.60	26.37	37.42	54.00	16.58
2950	38.87	PK	H	24.10	3.39	26.46	39.90	74.00	34.10
2950	25.36	AV	H	24.10	3.39	26.46	26.39	54.00	27.61
82.38	38.9	QP	H	8.31	0.50	28.37	19.34	40.00	20.66
62.98	38.4	QP	H	7.47	0.54	28.41	18.00	40.00	22.00

EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)					
Low Channel: 2402 MHz									
2402	72.82	PK	H	23.53	3.00	0.00	99.35	N/A	N/A
2402	58.26	AV	H	23.53	3.00	0.00	84.79	N/A	N/A
2402	71.58	PK	V	23.53	3.00	0.00	98.11	N/A	N/A
2402	57.34	AV	V	23.53	3.00	0.00	83.87	N/A	N/A
2390	27.55	PK	H	23.57	3.00	0.00	54.12	74.00	19.88
2390	14.15	AV	H	23.57	3.00	0.00	40.72	54.00	13.28
4804	40.75	PK	H	30.77	5.12	26.87	49.77	74.00	24.23
4804	32	AV	H	30.77	5.12	26.87	41.02	54.00	12.98
7206	34.39	PK	H	34.71	6.16	26.35	48.91	74.00	25.09
7206	21	AV	H	34.71	6.16	26.35	35.52	54.00	18.48
9608	32.15	PK	H	37.06	7.82	26.18	50.85	74.00	23.15
9608	18.31	AV	H	37.06	7.82	26.18	37.01	54.00	16.99
2950	38.34	PK	H	24.10	3.39	26.46	39.37	74.00	34.63
2950	25.5	AV	H	24.10	3.39	26.46	26.53	54.00	27.47
82.38	38.7	QP	H	8.31	0.50	28.37	19.14	40.00	20.86
62.98	38.1	QP	H	7.47	0.54	28.41	17.70	40.00	22.30
Middle Channel: 2441 MHz									
2441	71.92	PK	H	23.40	3.00	0.00	98.32	N/A	N/A
2441	58.66	AV	H	23.40	3.00	0.00	85.06	N/A	N/A
2441	69.96	PK	V	23.40	3.00	0.00	96.36	N/A	N/A
2441	56.72	AV	V	23.40	3.00	0.00	83.12	N/A	N/A
4882	15.88	PK	H	31.02	5.09	26.87	25.12	74.00	48.88
4882	3.02	AV	H	31.02	5.09	26.87	12.26	54.00	41.74
7323	43.05	PK	H	34.95	6.22	26.40	57.82	74.00	16.18
7323	31.42	AV	H	34.95	6.22	26.40	46.19	54.00	7.81
9764	35.27	PK	H	37.16	7.71	26.27	53.87	74.00	20.13
9764	19.25	AV	H	37.16	7.71	26.27	37.85	54.00	16.15
2950	38.66	PK	H	24.10	3.39	26.46	39.69	74.00	34.31
2950	25.09	AV	H	24.10	3.39	26.46	26.12	54.00	27.88
3610	38	PK	H	27.44	4.34	26.58	43.20	74.00	30.80
3610	24.24	AV	H	27.44	4.34	26.58	29.44	54.00	24.56
82.38	38.7	QP	H	8.31	0.50	28.37	19.14	40.00	20.86
62.98	38.2	QP	H	7.47	0.54	28.41	17.80	40.00	22.20
High Channel: 2480 MHz									
2480	71.85	PK	H	23.27	2.99	0.00	98.11	N/A	N/A
2480	58.46	AV	H	23.27	2.99	0.00	84.72	N/A	N/A
2480	70.35	PK	V	23.27	2.99	0.00	96.61	N/A	N/A
2480	57.28	AV	V	23.27	2.99	0.00	83.54	N/A	N/A
2483.5	28.32	PK	H	23.26	2.99	0.00	54.57	74.00	19.43
2483.5	15.29	AV	H	23.26	2.99	0.00	41.54	54.00	12.46
4960	43.98	PK	H	31.27	5.05	26.88	53.42	74.00	20.58
4960	32.62	AV	H	31.27	5.05	26.88	42.06	54.00	11.94
7440	36.53	PK	H	35.18	6.27	26.45	51.53	74.00	22.47
7440	20.88	AV	H	35.18	6.27	26.45	35.88	54.00	18.12
9920	33.14	PK	H	37.25	7.60	26.37	51.62	74.00	22.38
9920	19.18	AV	H	37.25	7.60	26.37	37.66	54.00	16.34
2950	39.47	PK	H	24.10	3.39	26.46	40.50	74.00	33.50
2950	25.65	AV	H	24.10	3.39	26.46	26.68	54.00	27.32
82.38	39.2	QP	H	8.31	0.50	28.37	19.64	40.00	20.36
62.98	38.2	QP	H	7.47	0.54	28.41	17.80	40.00	22.20

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Unknown	RF Cable	Unknown	NO.3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	29.6°C
Relative Humidity:	71 %
ATM Pressure:	100.3 kPa

* The testing was performed by Kevin Hu on 2017-06-06.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.004	0.63
	Middle	2441	1.000	0.63
	High	2480	1.004	0.62
EDR ($\pi/4$ -DQPSK)	Low	2402	1.000	0.84
	Middle	2441	1.000	0.84
	High	2480	1.004	0.84
EDR (8DPSK)	Low	2402	1.004	0.85
	Middle	2441	1.000	0.85
	High	2480	1.000	0.85

Note: Limit= (2/3) × 20dB bandwidth


BDR Mode (GFSK):

Low Channel

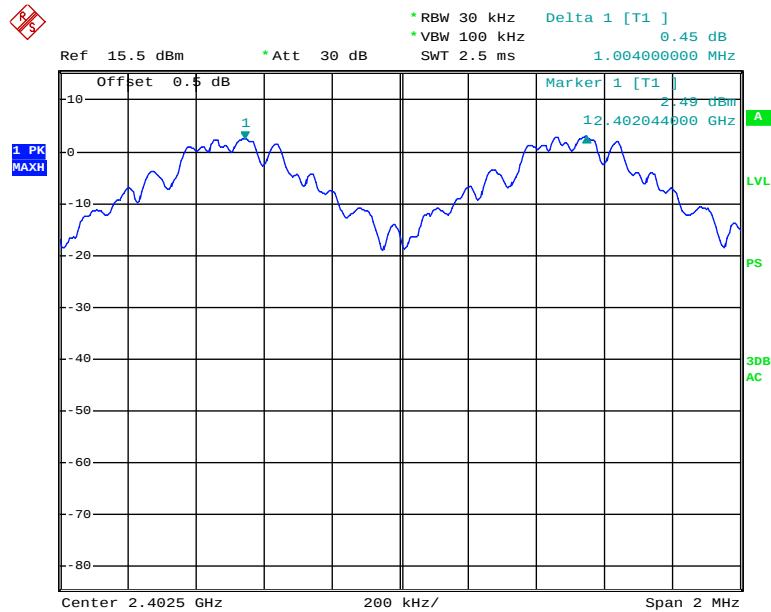


Date: 6.JUN.2017 19:35:09

Middle Channel

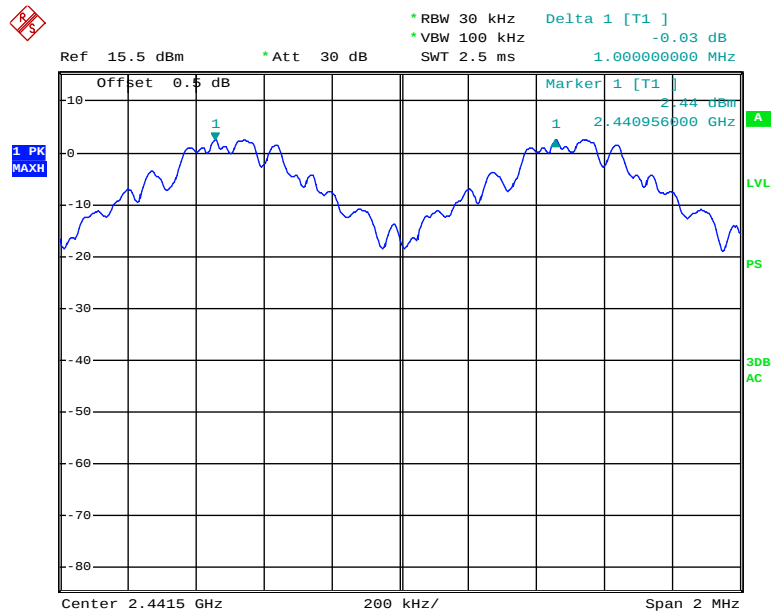

Date: 6.JUN.2017 19:38:42


High Channel

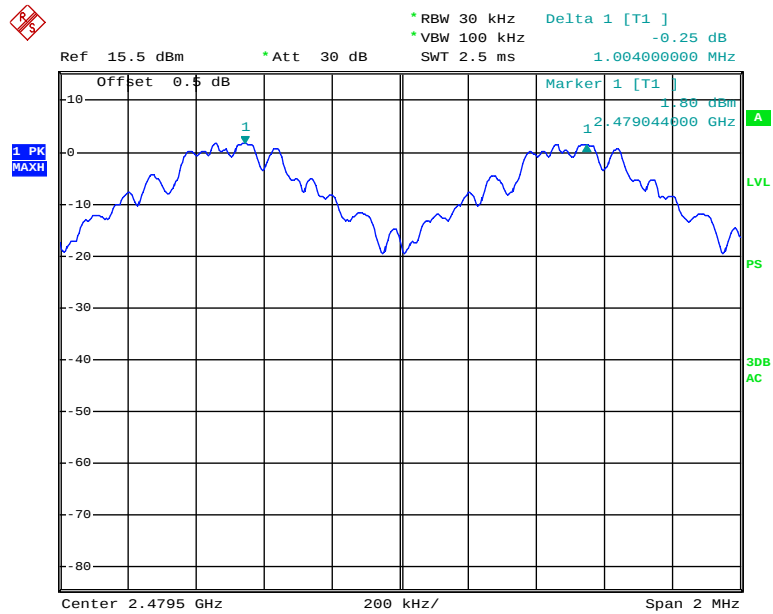

Date: 6.JUN.2017 19:41:56


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

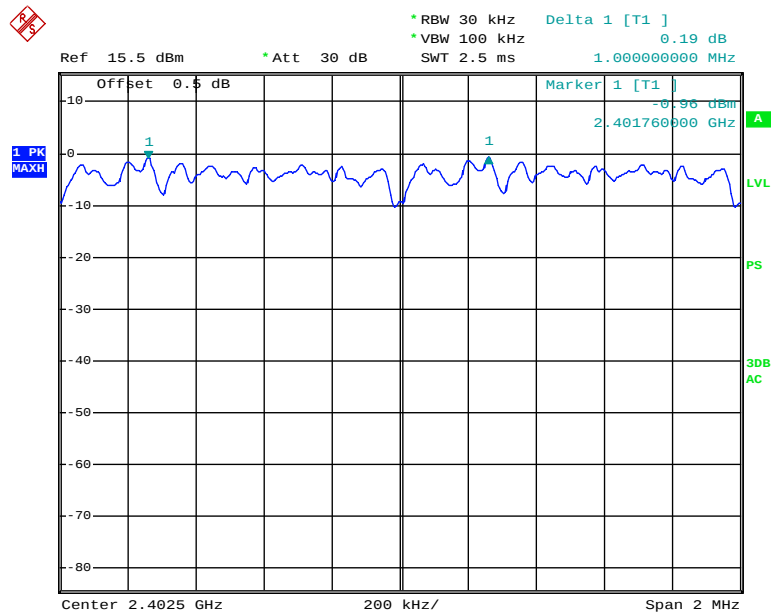


Date: 6.JUN.2017 19:49:19

Middle Channel

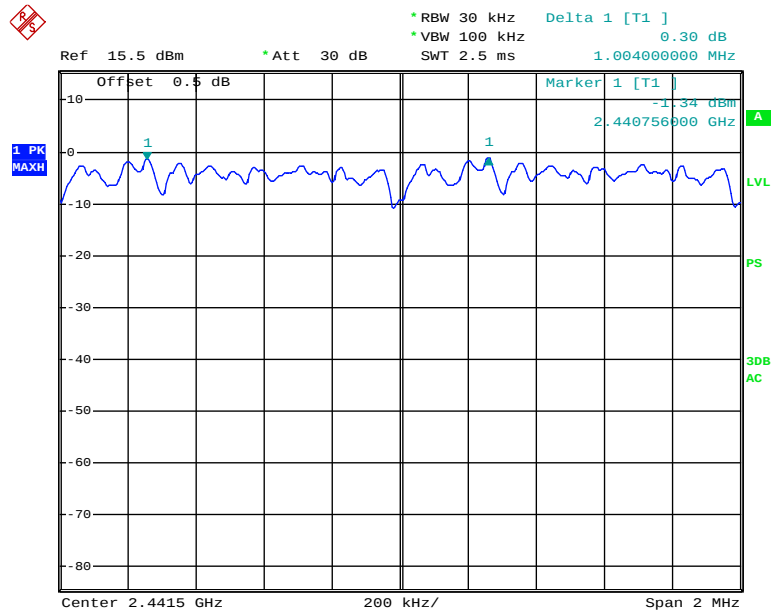

Date: 6.JUN.2017 19:46:59


High Channel

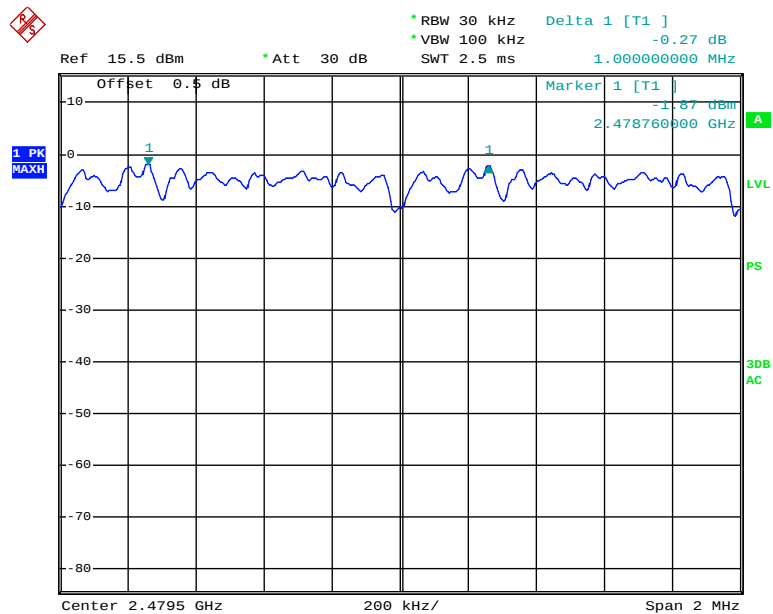

Date: 6.JUN.2017 19:44:10


EDR Mode (8-DPSK):

Low Channel

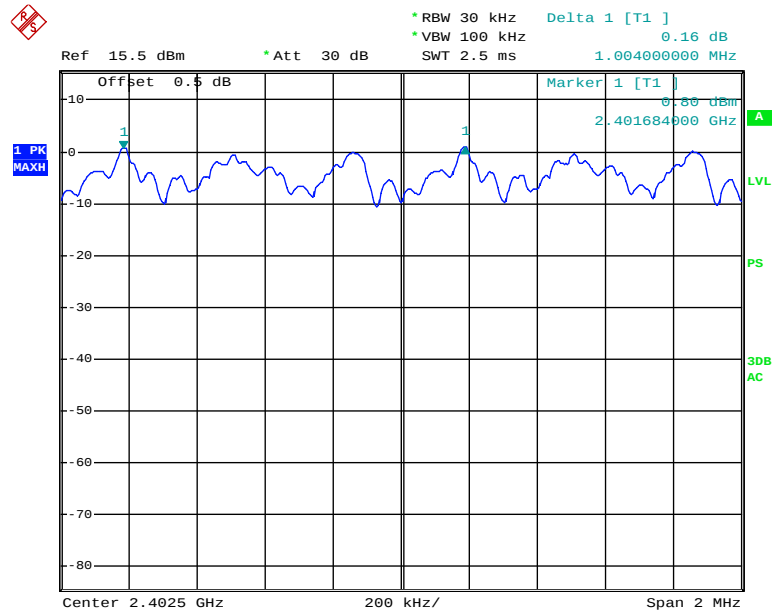


Date: 6.JUN.2017 19:51:47

Middle Channel

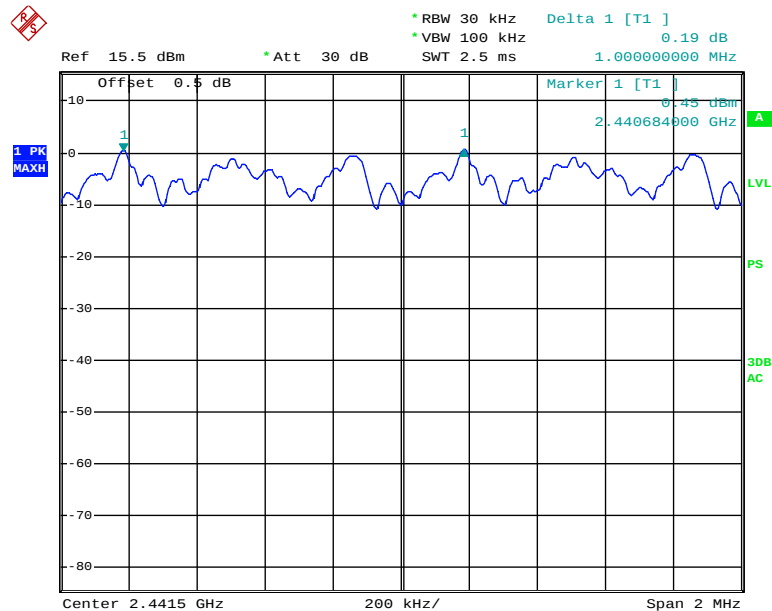

Date: 6.JUN.2017 19:54:27

High Channel

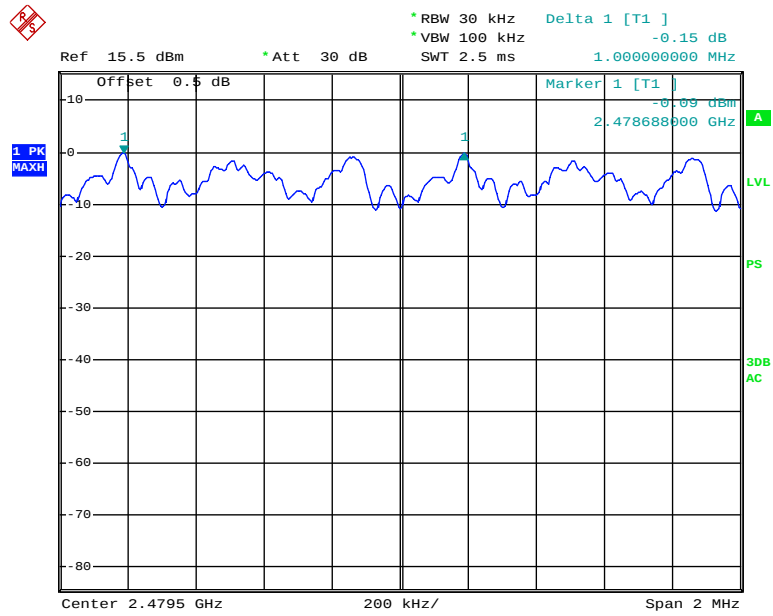

Date: 6.JUN.2017 19:56:30

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

According to FCC §15.247(a) (1)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Unknown	RF Cable	Unknown	NO.3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data

Environmental Conditions

Temperature:	29.6°C
Relative Humidity:	71 %
ATM Pressure:	100.3 kPa


* The testing was performed by Kevin Hu on 2017-06-06.

Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% occupied Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	1.04	0.92
	Middle	2441	1.04	0.92
	High	2480	1.04	0.93
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.36	1.21
	Middle	2441	1.36	1.21
	High	2480	1.36	1.21
EDR Mode (8DPSK)	Low	2402	1.37	1.25
	Middle	2441	1.37	1.25
	High	2480	1.37	1.25

20dB bandwidth, BDR Mode (GFSK):

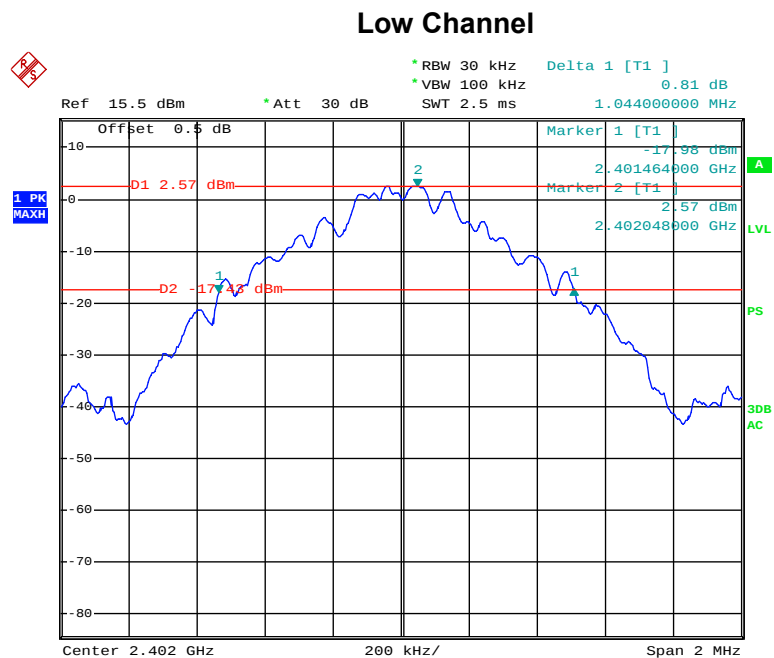


Date: 6.JUN.2017 19:30:51

Middle Channel

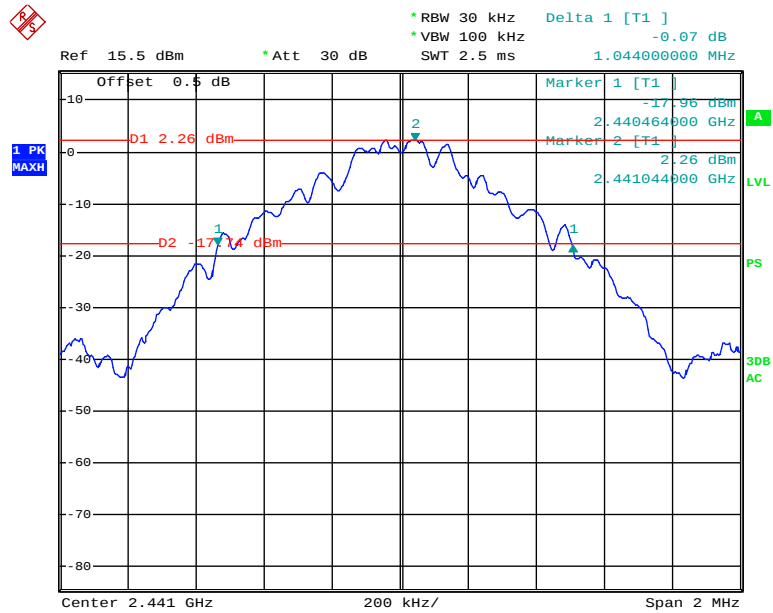

Date: 6.JUN.2017 19:02:45


High Channel

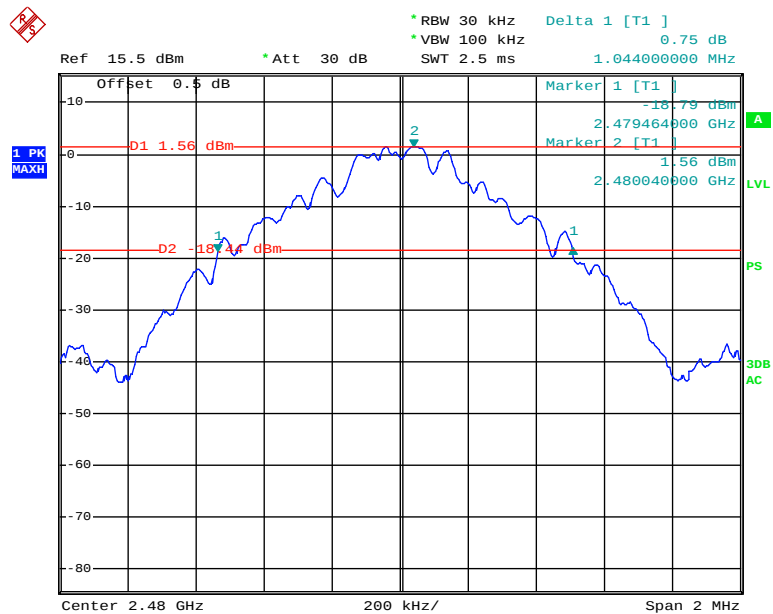

Date: 6.JUN.2017 19:04:20


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

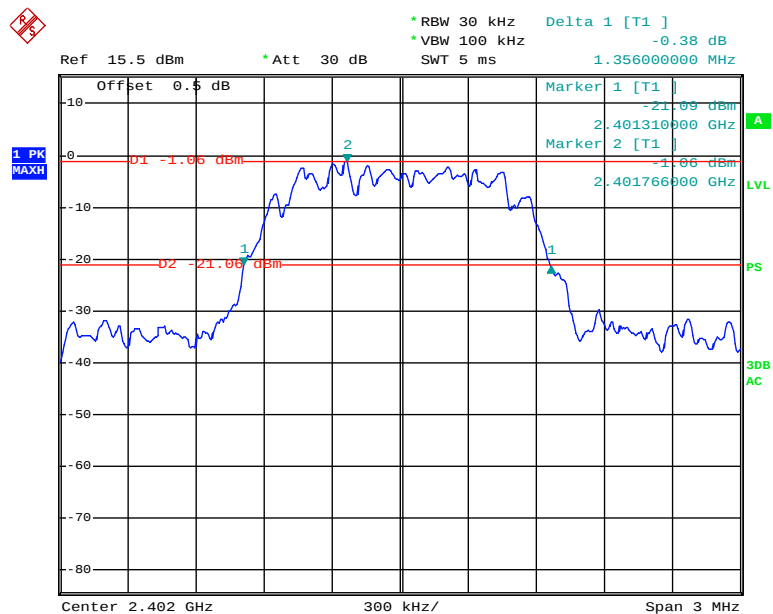


Date: 6.JUN.2017 19:10:34

Middle Channel

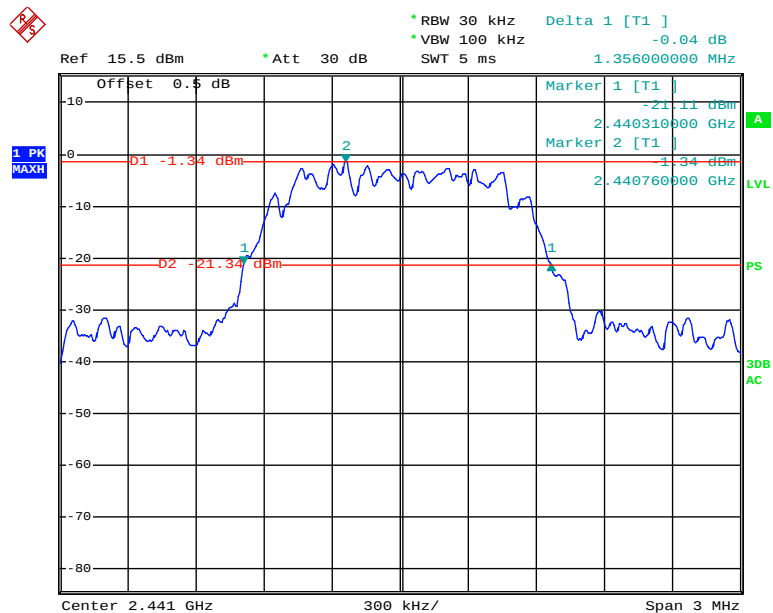

Date: 6.JUN.2017 19:09:03


High Channel

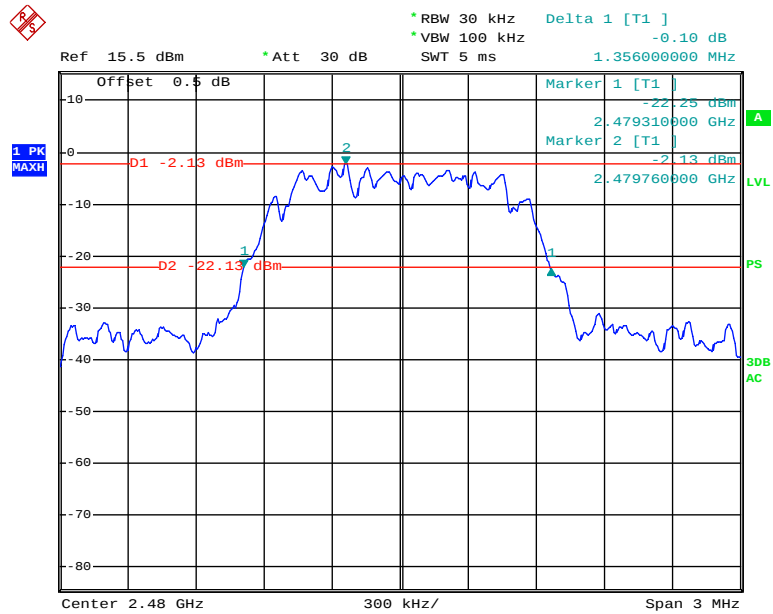

Date: 6.JUN.2017 19:07:09


EDR Mode (8-DPSK):

Low Channel

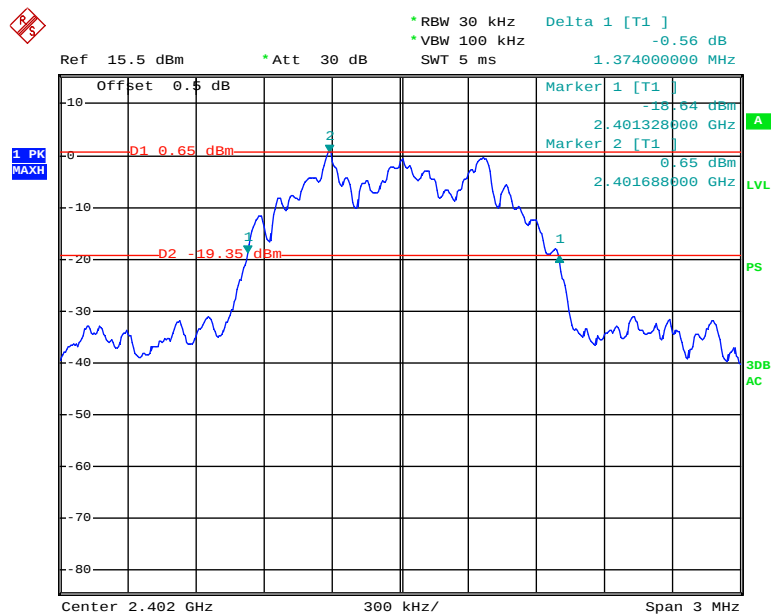


Date: 6.JUN.2017 19:12:49

Middle Channel

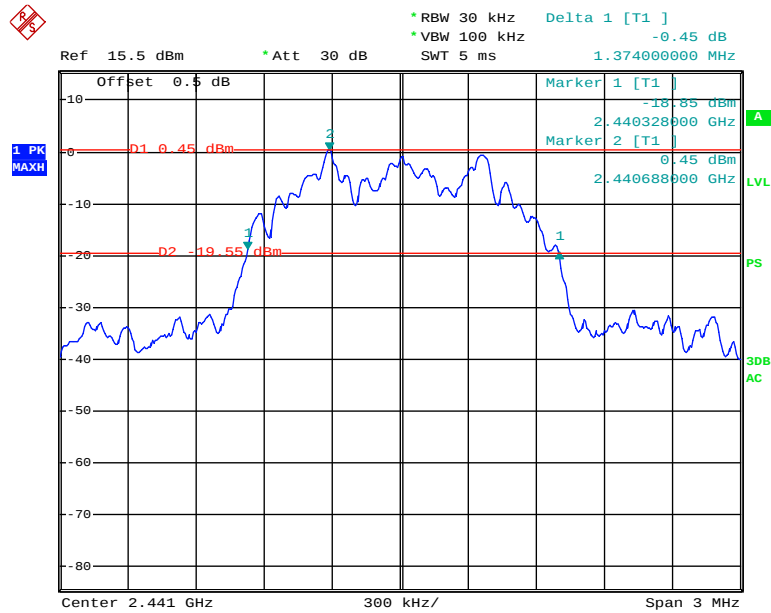

Date: 6.JUN.2017 19:14:40


High Channel

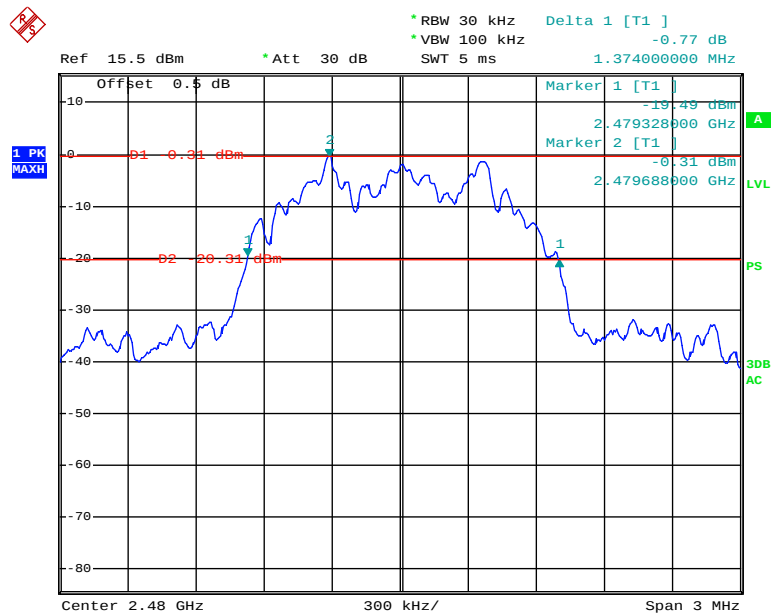

Date: 6.JUN.2017 19:16:32


99% Occupied Bandwidth, BDR(GFSK)

Low Channel

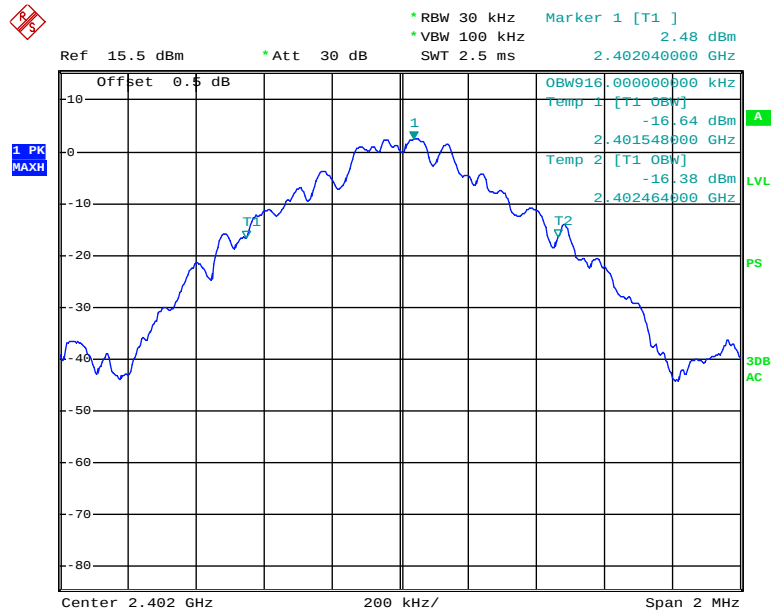


Date: 6.JUN.2017 19:31:01

Middle Channel

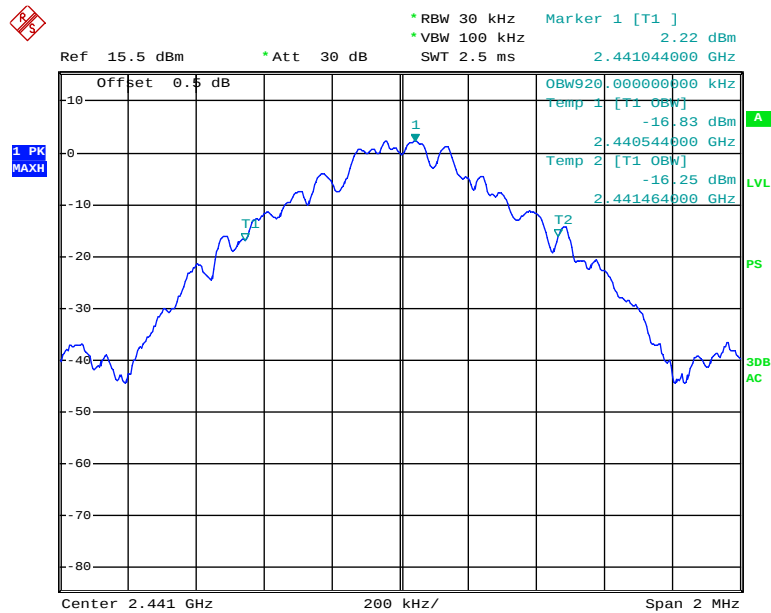

Date: 6.JUN.2017 19:02:55


High Channel

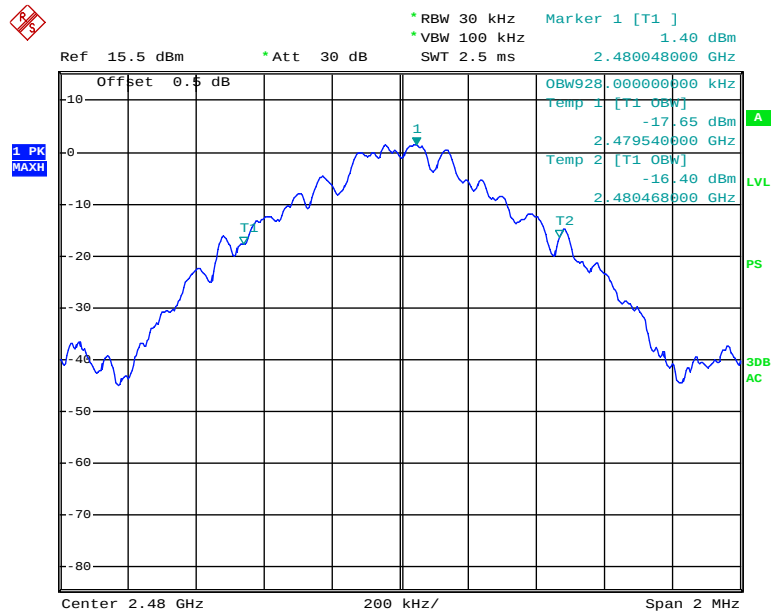

Date: 6.JUN.2017 19:04:30


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

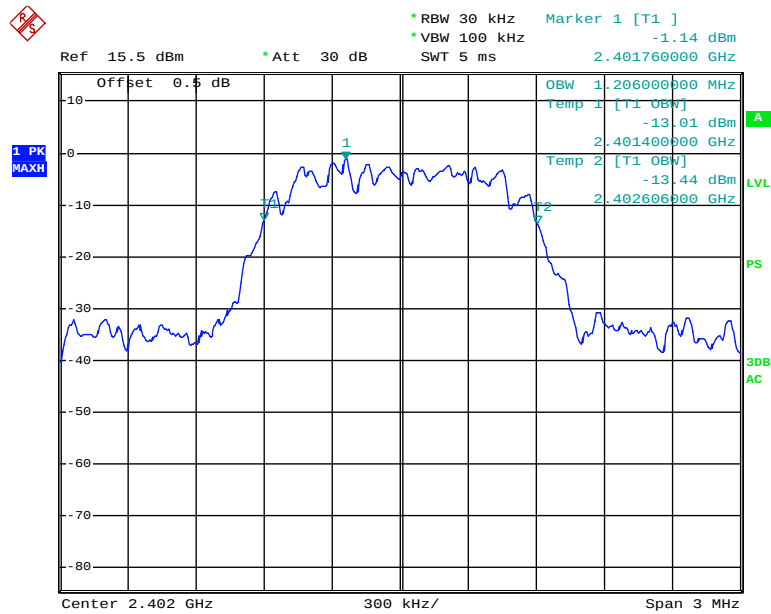


Date: 6.JUN.2017 19:10:46

Middle Channel

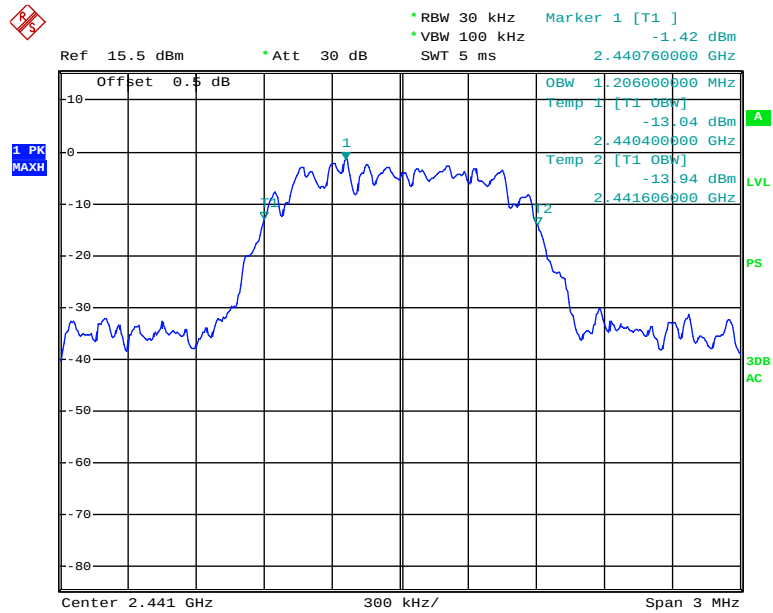

Date: 6.JUN.2017 19:09:13


High Channel

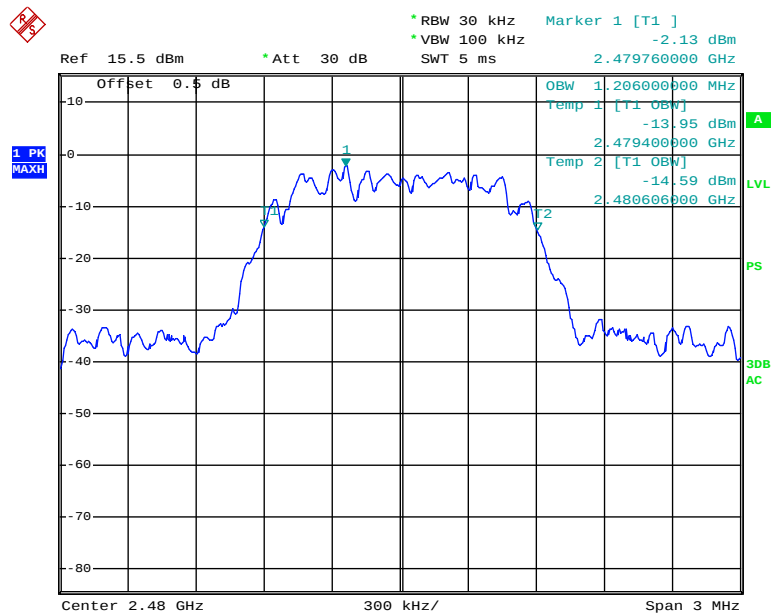

Date: 6.JUN.2017 19:07:18


EDR Mode (8-DPSK):

Low Channel

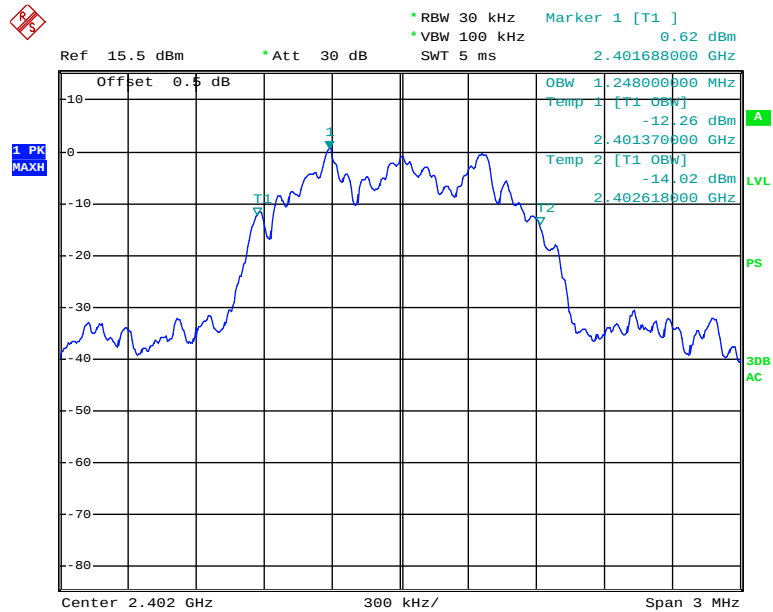


Date: 6.JUN.2017 19:13:01

Middle Channel

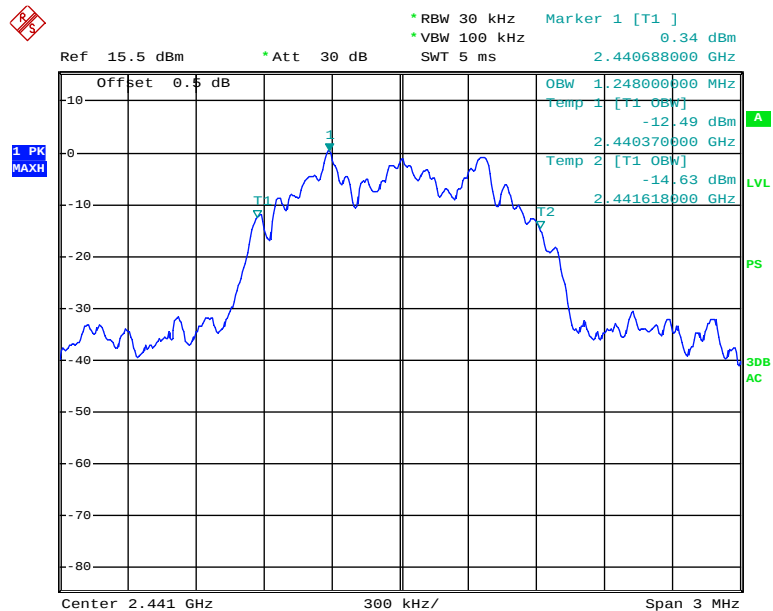

Date: 6.JUN.2017 19:14:50

High Channel

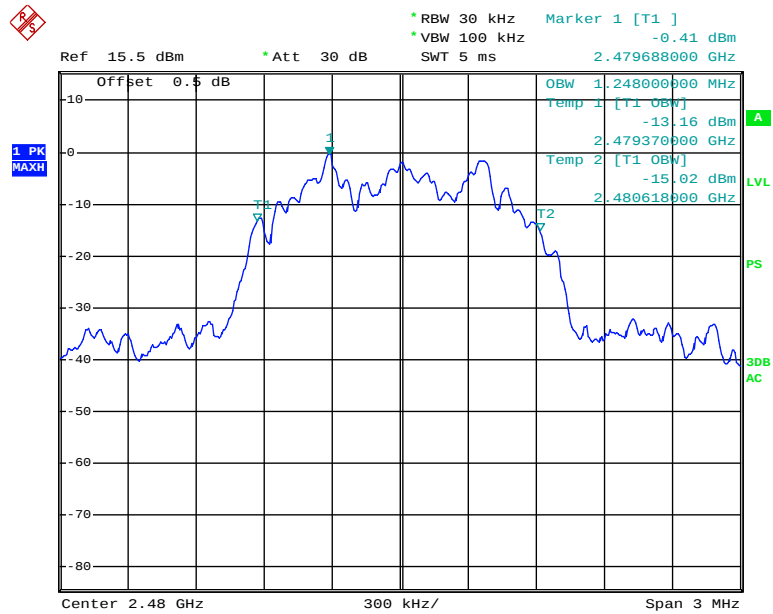

Date: 6.JUN.2017 19:16:44

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to 15.247 §(a) (1) (iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Unknown	RF Cable	Unknown	NO.3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B “Implementation of traceability policy in accredited laboratories”.

Test Data

Environmental Conditions

Temperature:	29.6°C
Relative Humidity:	71 %
ATM Pressure:	100.3 kPa

* The testing was performed by Kevin Hu on 2017-06-06.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

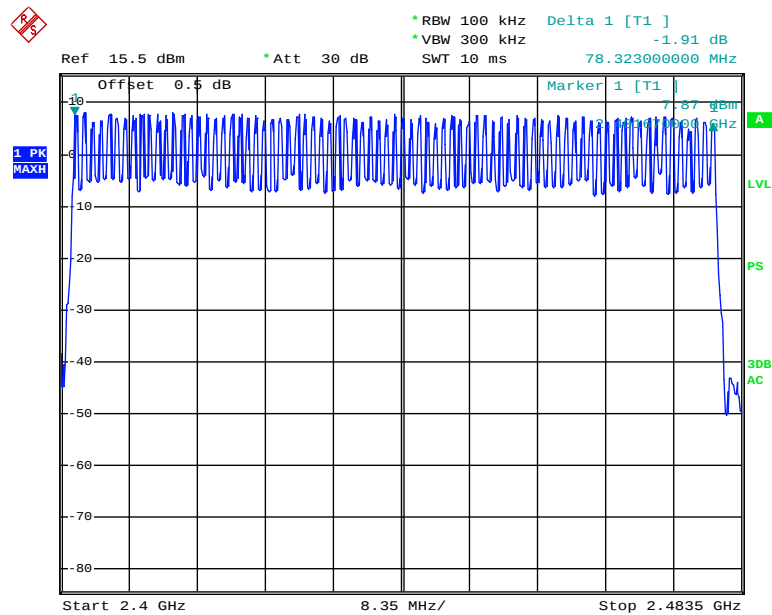


Date: 6.JUN.2017 20:01:36

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

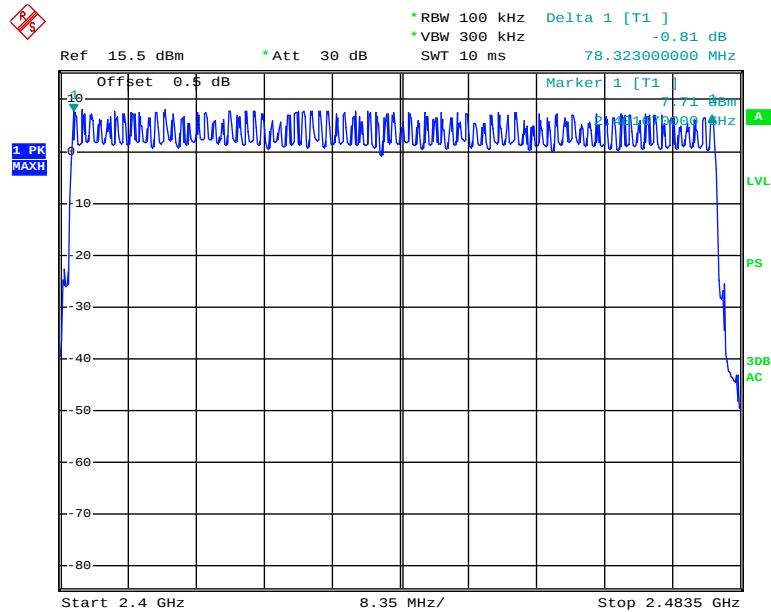


Date: 6.JUN.2017 20:06:43

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

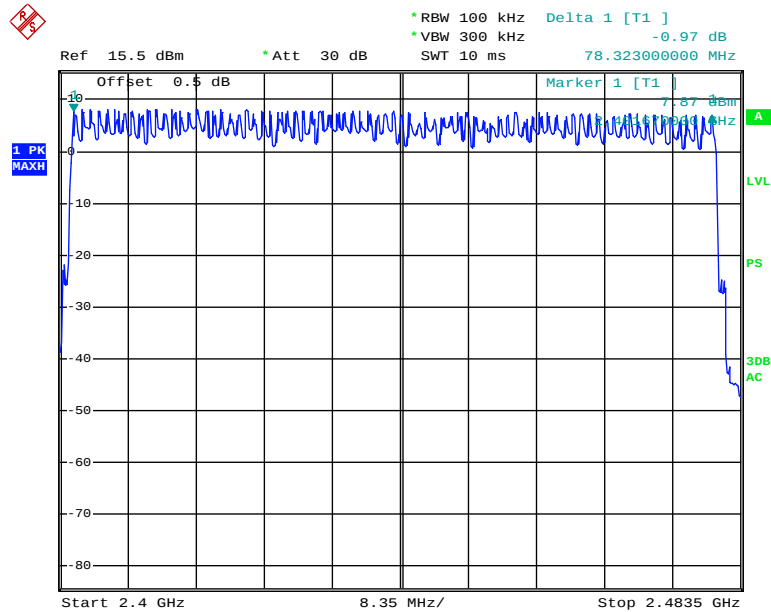

Date: 6.JUN.2017 20:11:54

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to 15.247 §(a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. The time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Unknown	RF Cable	Unknown	NO.3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions

Temperature:	29.6°C
Relative Humidity:	71 %
ATM Pressure:	100.3 kPa

* The testing was performed by Kevin Hu on 2017-06-06.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.414	0.132	0.4	Compliance
	Middle	0.416	0.133	0.4	Compliance
	High	0.416	0.133	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.686	0.270	0.4	Compliance
	Middle	1.686	0.270	0.4	Compliance
	High	1.686	0.270	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.940	0.314	0.4	Compliance
	Middle	2.940	0.314	0.4	Compliance
	High	2.940	0.314	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

DH1: Low Channel

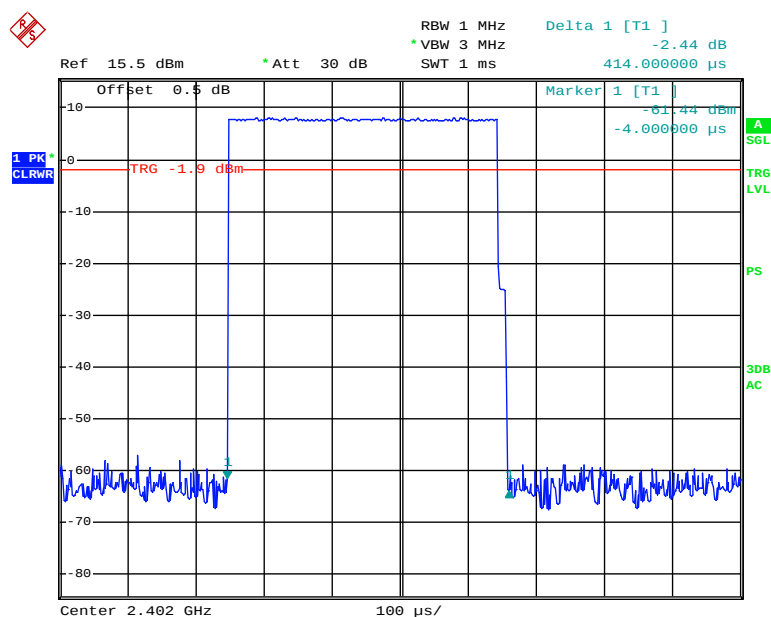


Date: 6.JUN.2017 20:14:21

DH1: Middle Channel

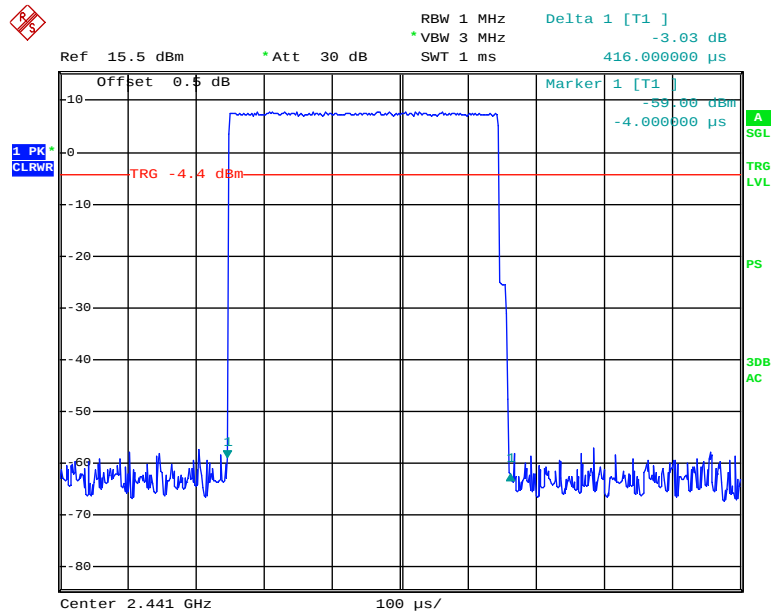


Date: 6.JUN.2017 20:14:27

DH1: High Channel

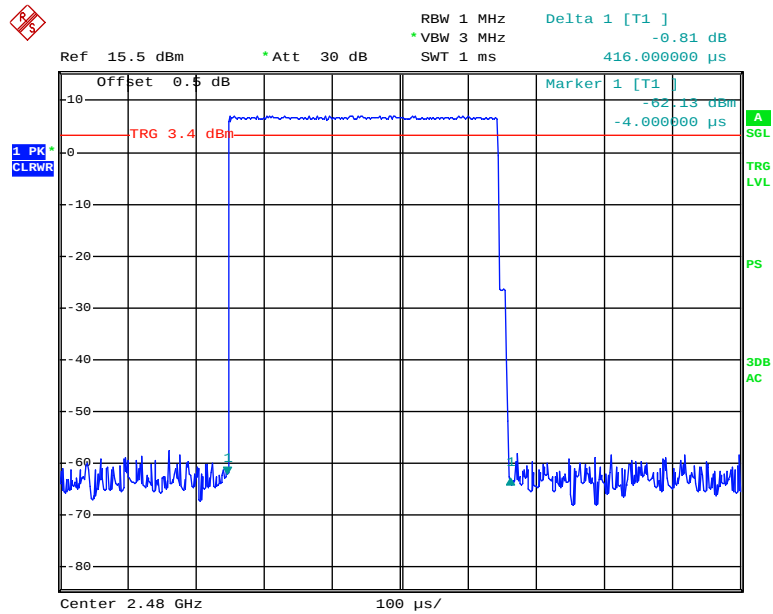


Date: 6.JUN.2017 20:14:59

DH3: Low Channel

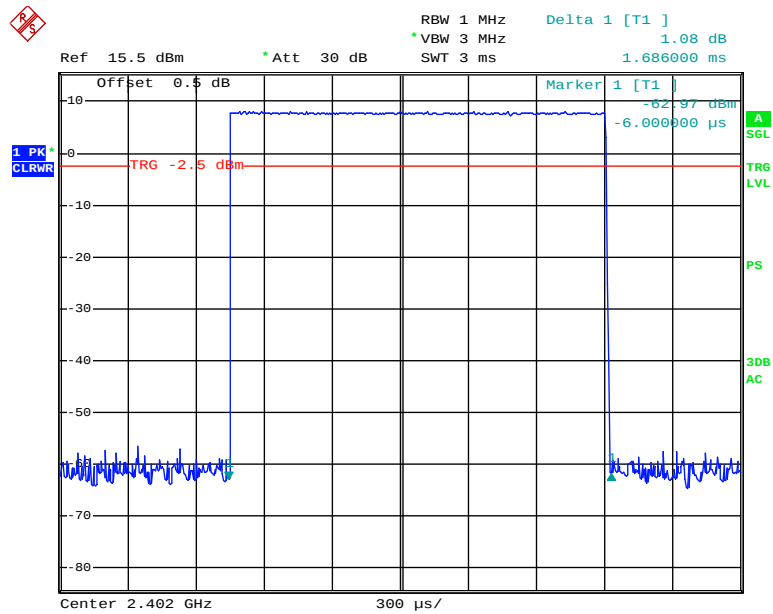


Date: 6.JUN.2017 20:15:53

DH3: Middle Channel

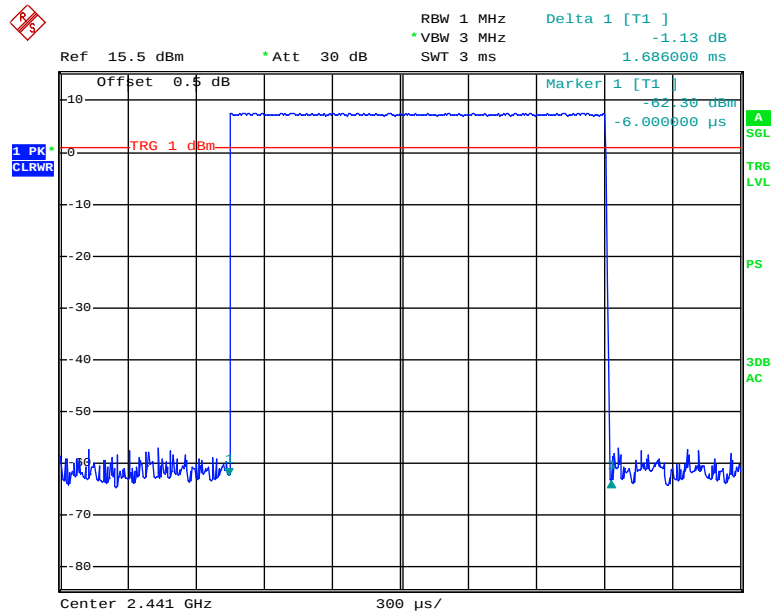


Date: 6.JUN.2017 20:16:12

DH3: High Channel

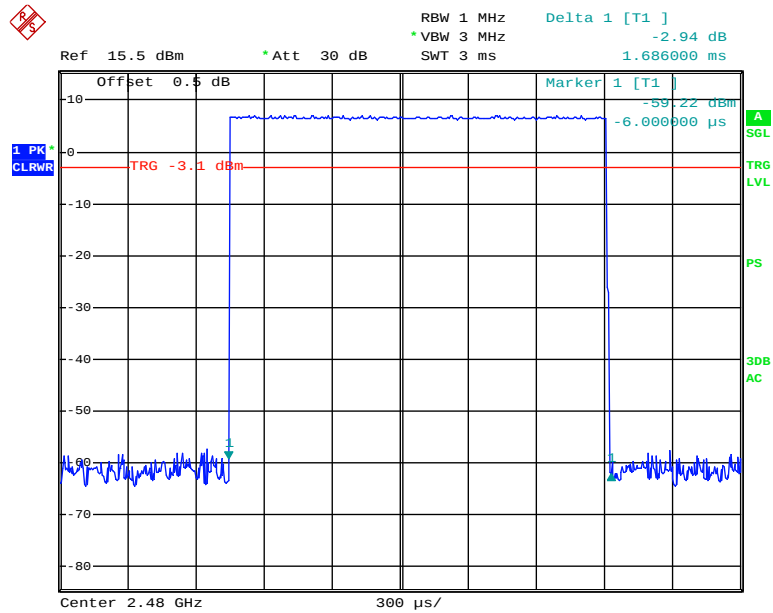


Date: 6.JUN.2017 20:16:23

DH5: Low Channel

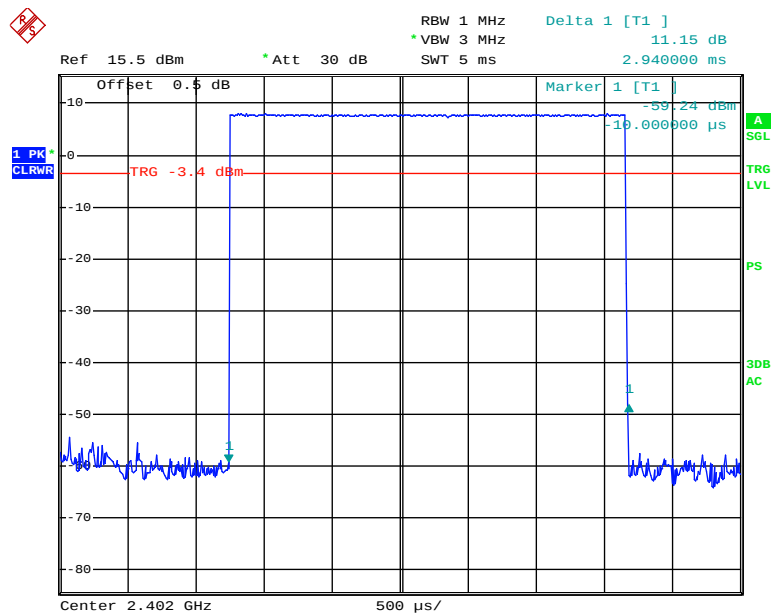


Date: 6.JUN.2017 20:17:17

DH5: Middle Channel

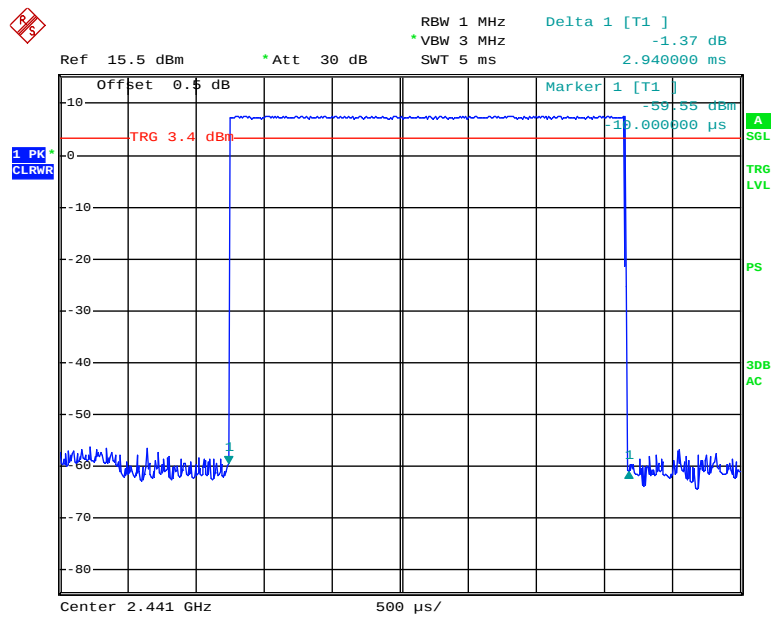

Date: 6.JUN.2017 20:17:37

DH5: High Channel

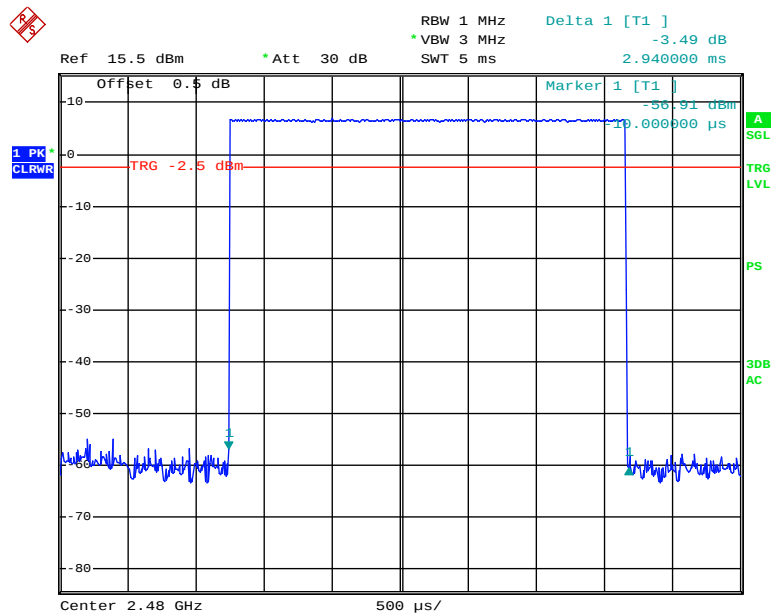


Date: 6.JUN.2017 20:17:49

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.424	0.136	0.4	Compliance
	Middle	0.426	0.136	0.4	Compliance
	High	0.424	0.136	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.692	0.271	0.4	Compliance
	Middle	1.692	0.271	0.4	Compliance
	High	1.692	0.271	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.940	0.314	0.4	Compliance
	Middle	2.950	0.315	0.4	Compliance
	High	2.940	0.314	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

2DH1: Low Channel

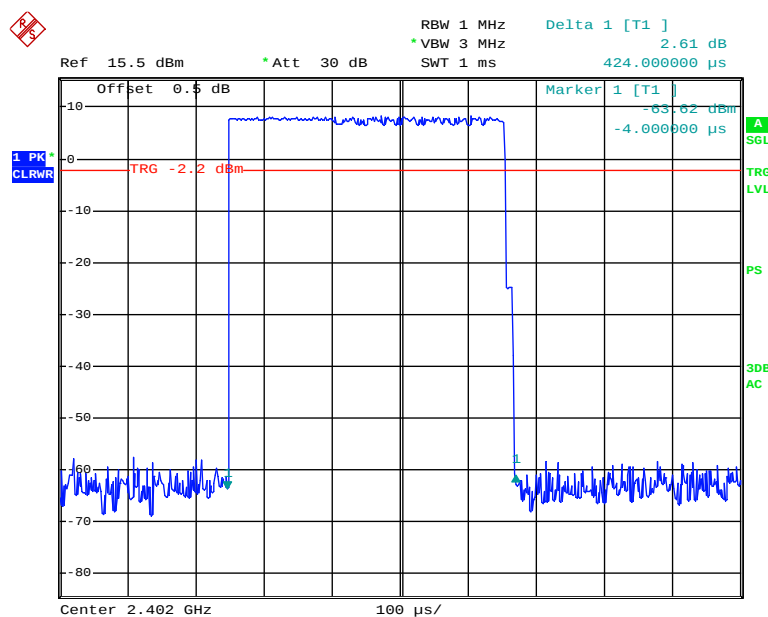


Date: 6.JUN.2017 20:22:07

2DH1: Middle Channel

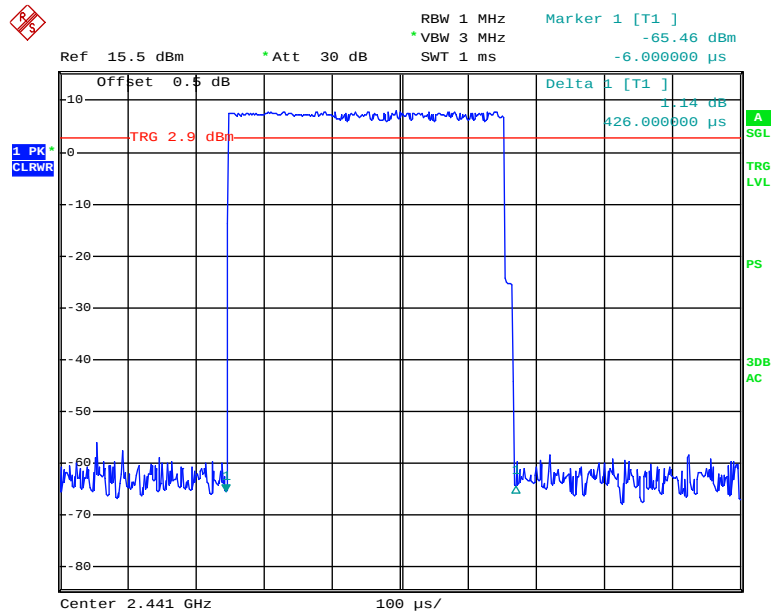


Date: 6.JUN.2017 20:22:33

2DH1: High Channel

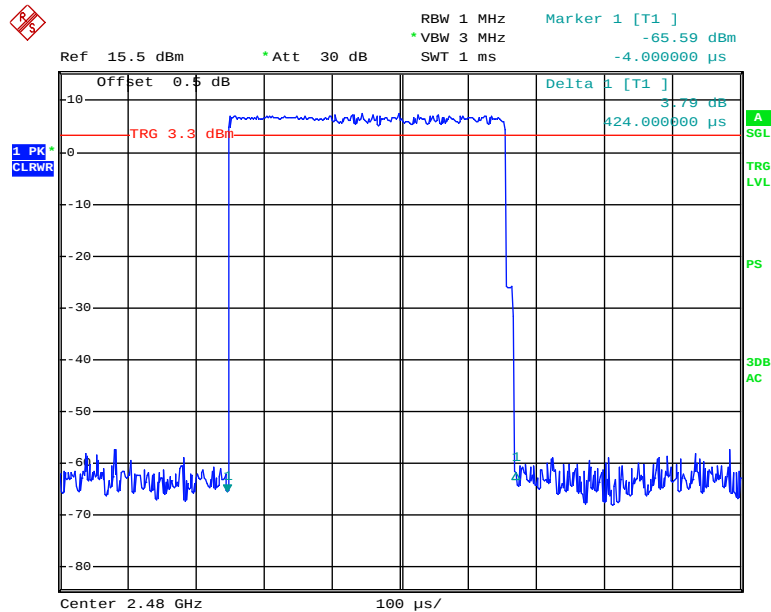


Date: 6.JUN.2017 20:23:01

2DH3: Low Channel

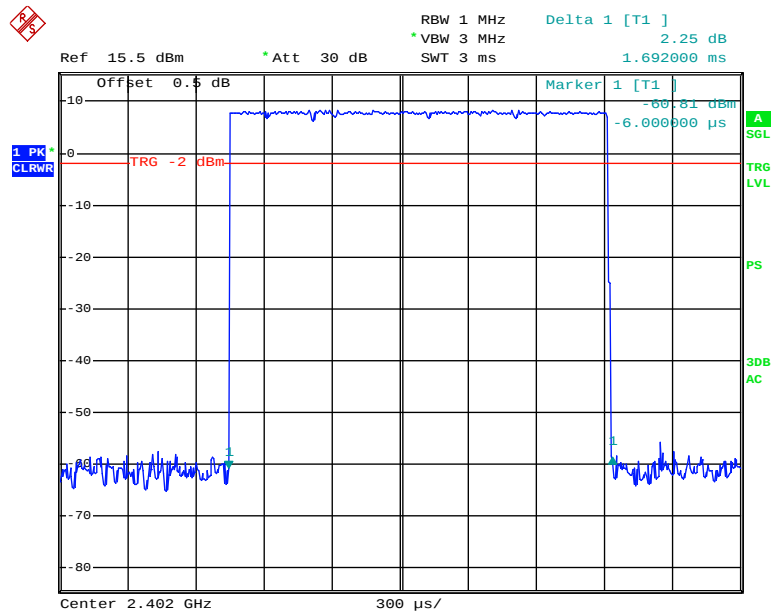


Date: 6.JUN.2017 20:24:01

2DH3: Middle Channel

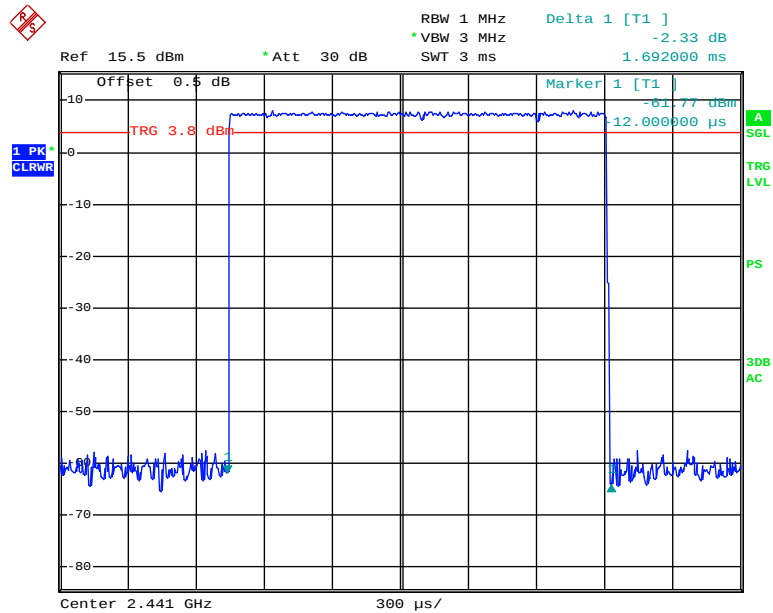


Date: 6.JUN.2017 20:25:04

2DH3: High Channel

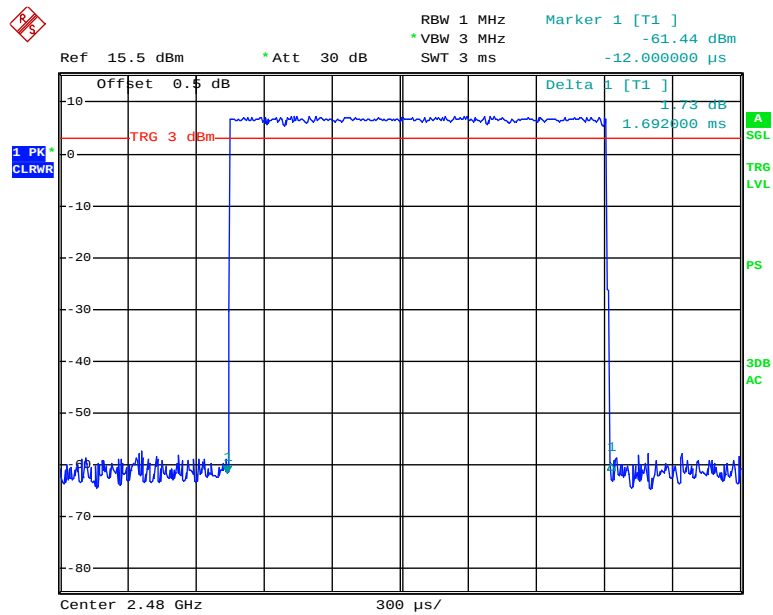


Date: 6.JUN.2017 20:25:39

2DH5: Low Channel

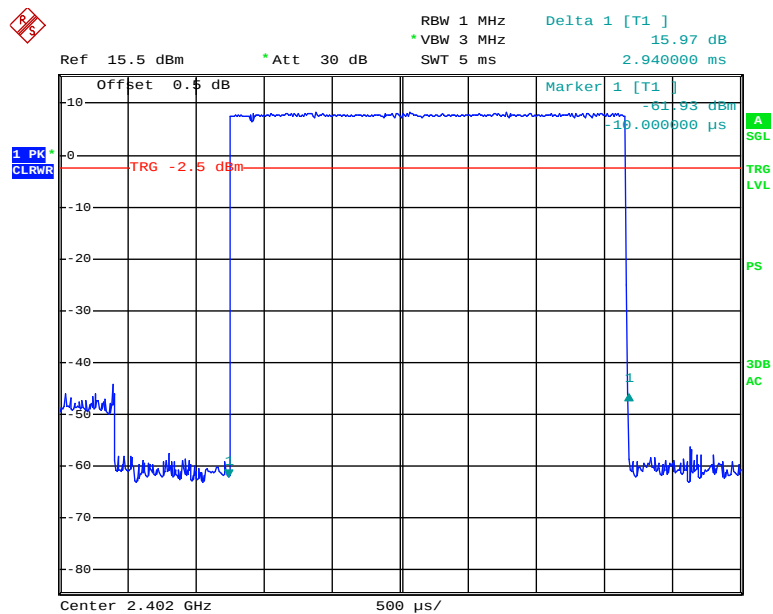


Date: 6.JUN.2017 20:27:35

2DH5: Middle Channel

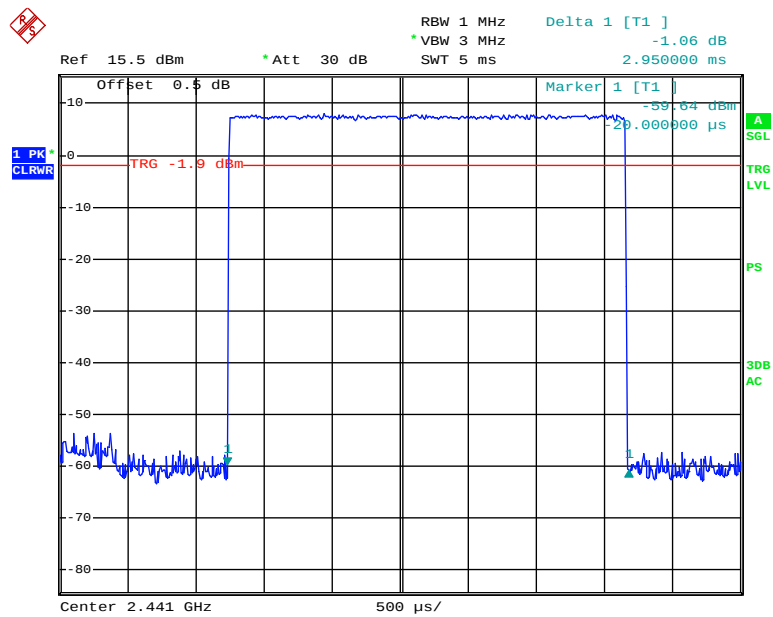

Date: 6.JUN.2017 20:27:41

2DH5: High Channel

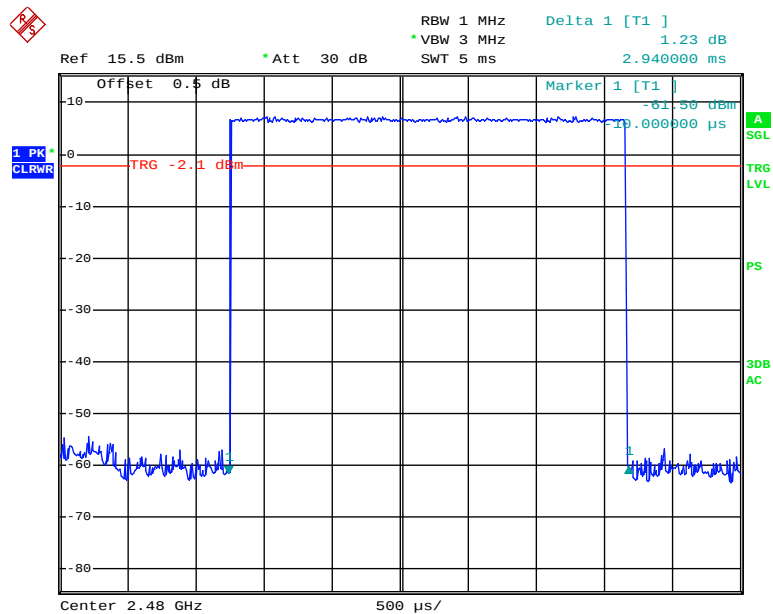


Date: 6.JUN.2017 20:27:48

EDR Mode (8-DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.426	0.136	0.4	Compliance
	Middle	0.424	0.136	0.4	Compliance
	High	0.424	0.136	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
3DH3	Low	1.692	0.271	0.4	Compliance
	Middle	1.692	0.271	0.4	Compliance
	High	1.692	0.271	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
3DH5	Low	2.950	0.315	0.4	Compliance
	Middle	2.950	0.315	0.4	Compliance
	High	2.950	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				

3DH1: Low Channel

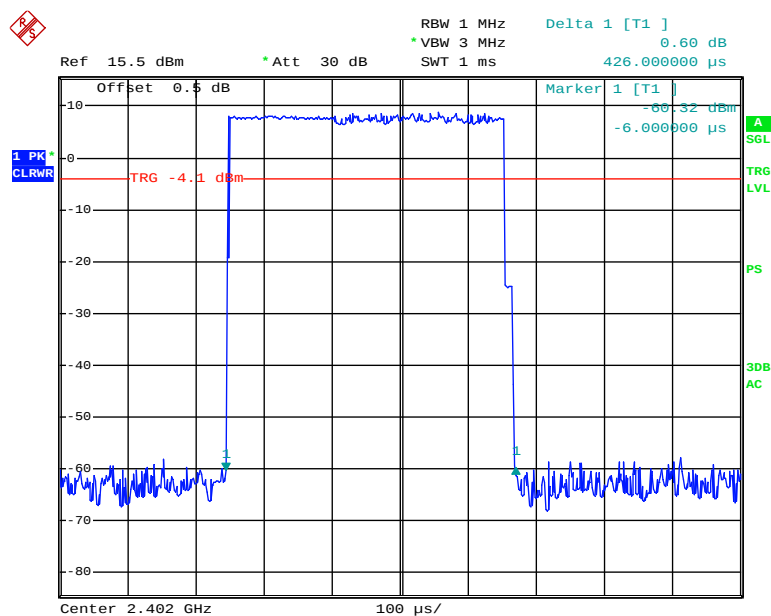


Date: 6.JUN.2017 20:35:15

3DH1: Middle Channel

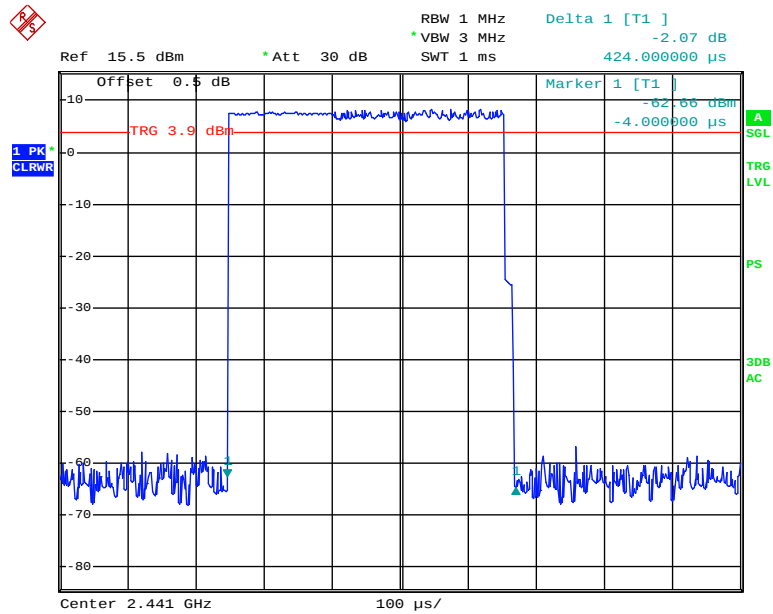


Date: 6.JUN.2017 20:35:32

3DH1: High Channel

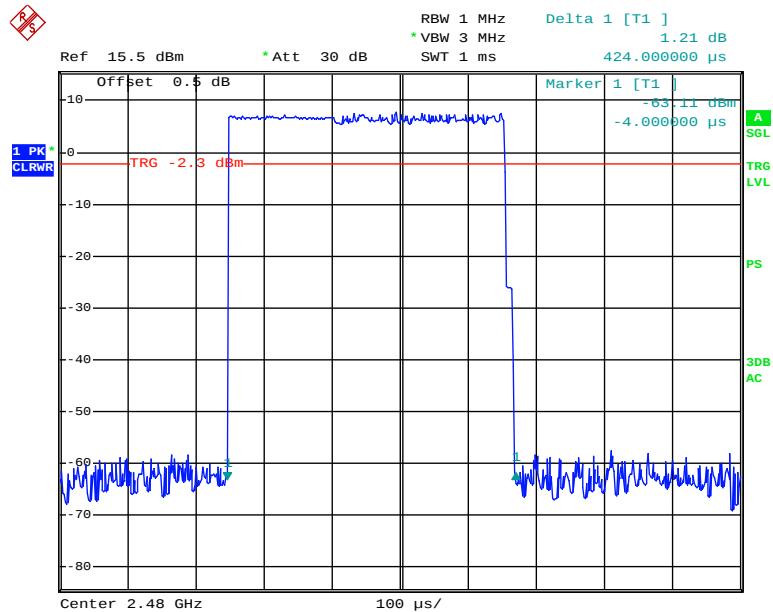


Date: 6.JUN.2017 20:35:39

3DH3: Low Channel

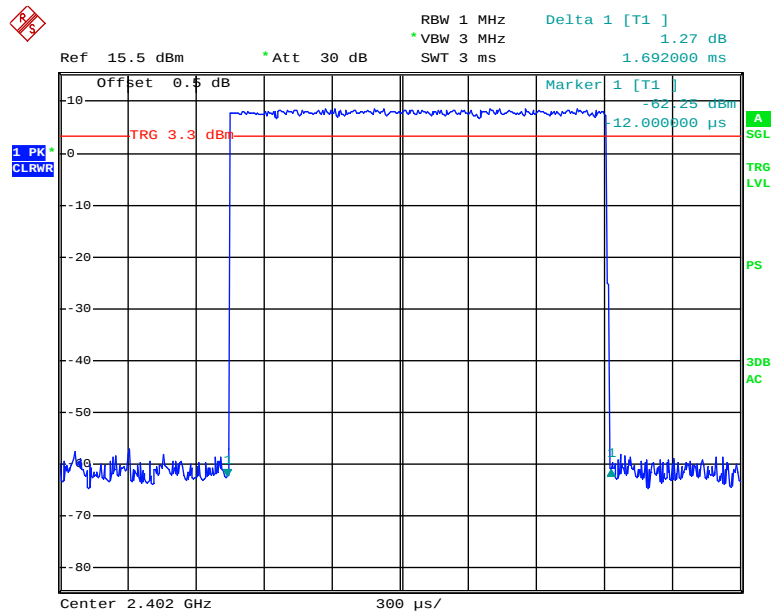


Date: 6.JUN.2017 20:33:23

3DH3: Middle Channel

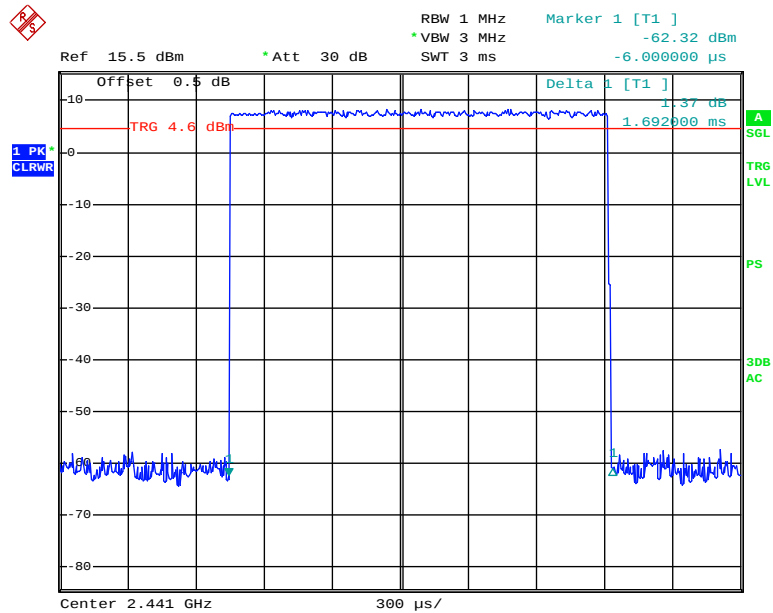


Date: 6.JUN.2017 20:33:57

3DH3: High Channel

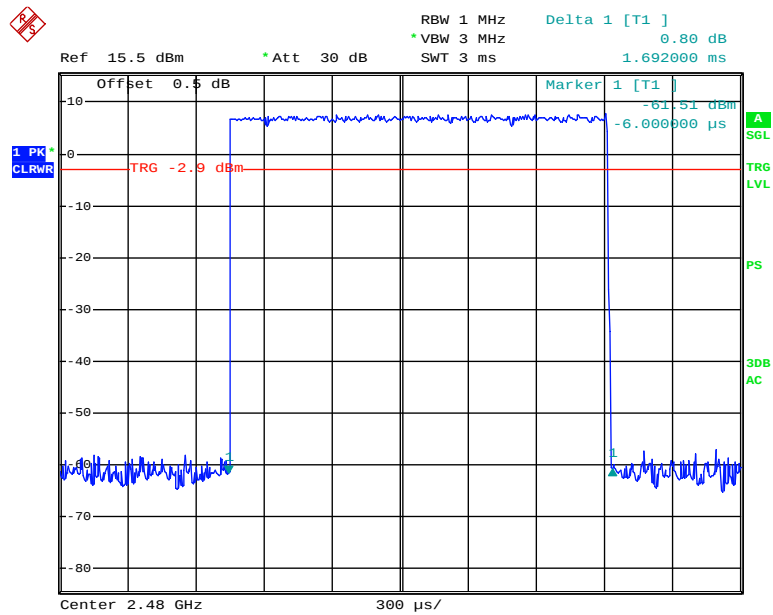



Date: 6.JUN.2017 20:34:04

3DH5: Low Channel

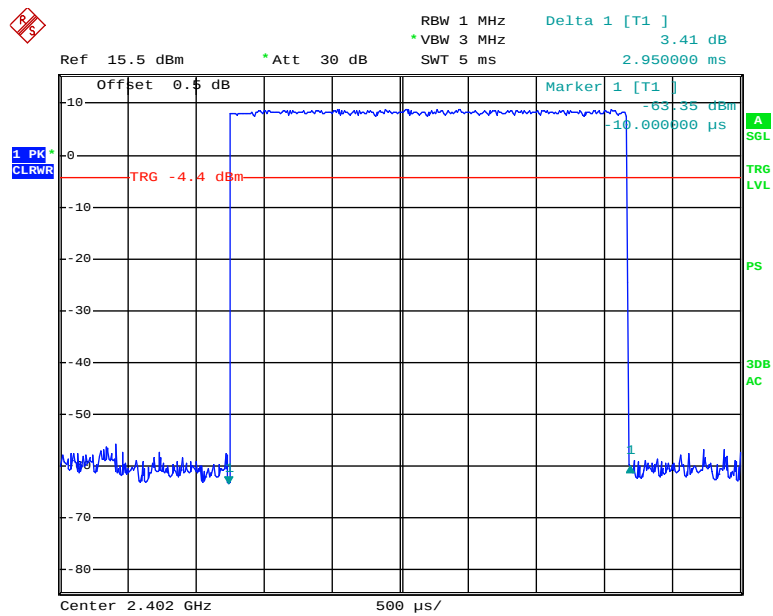

Date: 6.JUN.2017 20:31:58

Page 58 of 69



FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Unknown	RF Cable	Unknown	NO.3	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions

Temperature:	29.6°C
Relative Humidity:	71 %
ATM Pressure:	100.3 kPa

* The testing was performed by Kevin Hu on 2017-06-06.


Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	7.23	30
	2441	6.99	30
	2480	6.26	30
EDR Mode ($\pi/4$ -DQPSK)	2402	8.27	30
	2441	8.06	30
	2480	7.35	30
EDR Mode (8-DPSK)	2402	8.42	30
	2441	8.21	30
	2480	7.57	30


Note: The data above was tested in conducted mode.

BDR Mode (GFSK):

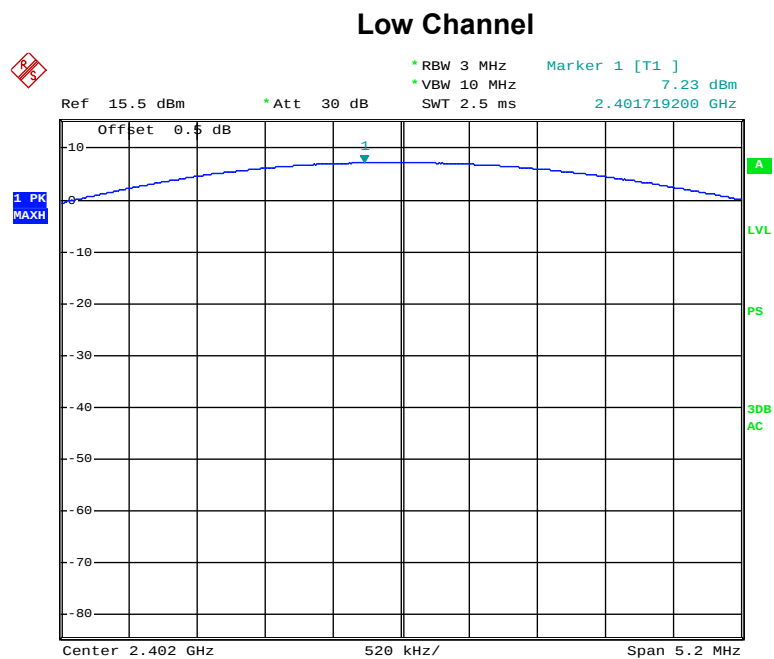


Date: 6.JUN.2017 19:31:12

Middle Channel

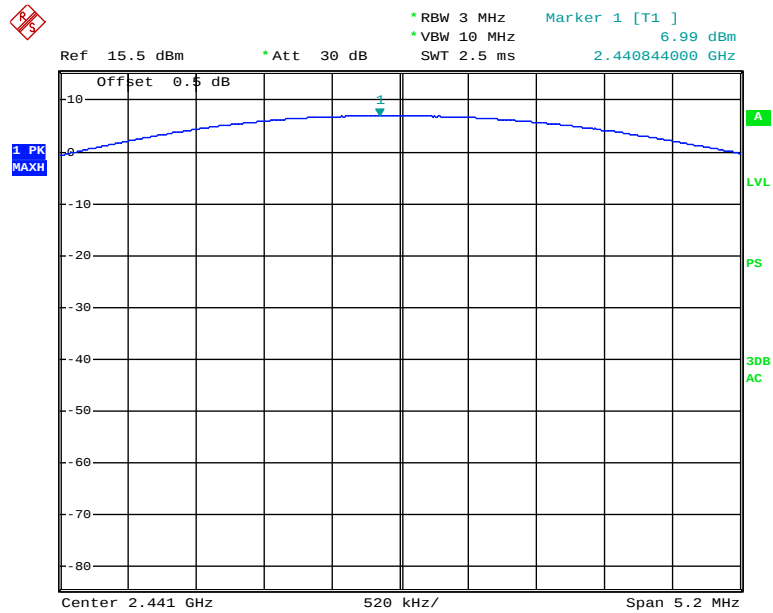

Date: 6.JUN.2017 19:03:07


High Channel

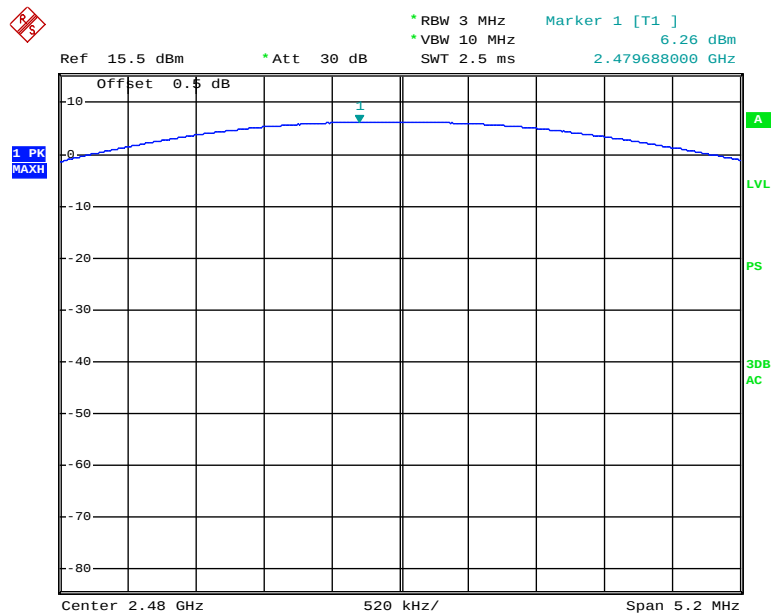

Date: 6.JUN.2017 19:04:41


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

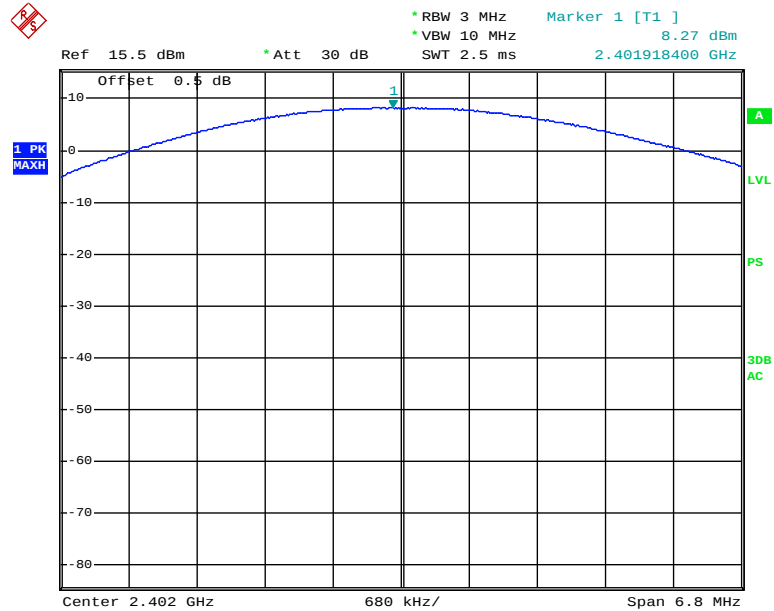


Date: 6.JUN.2017 19:10:57

Middle Channel

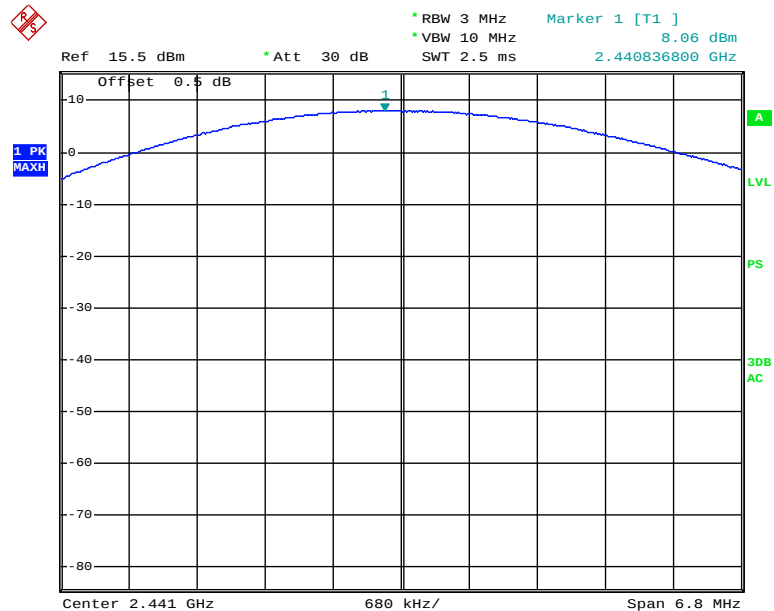

Date: 6.JUN.2017 19:09:25


High Channel

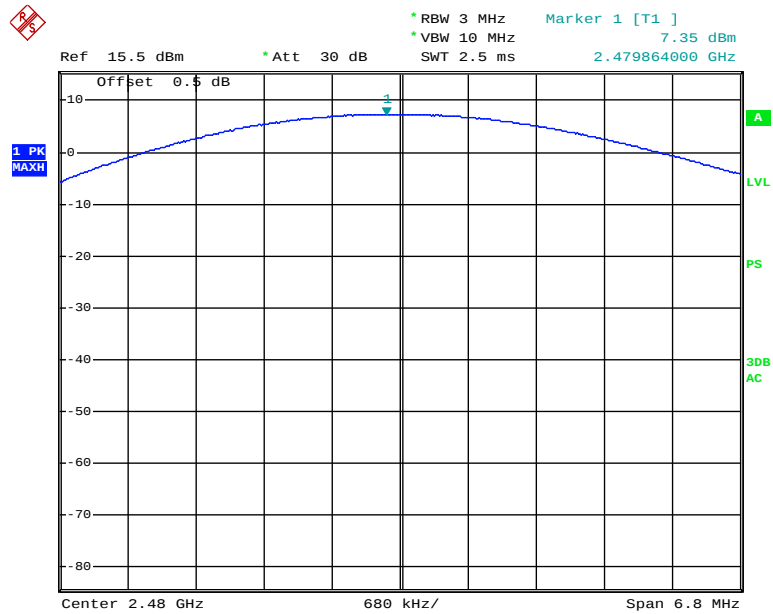

Date: 6.JUN.2017 19:07:29


EDR Mode (8-DPSK):

Low Channel

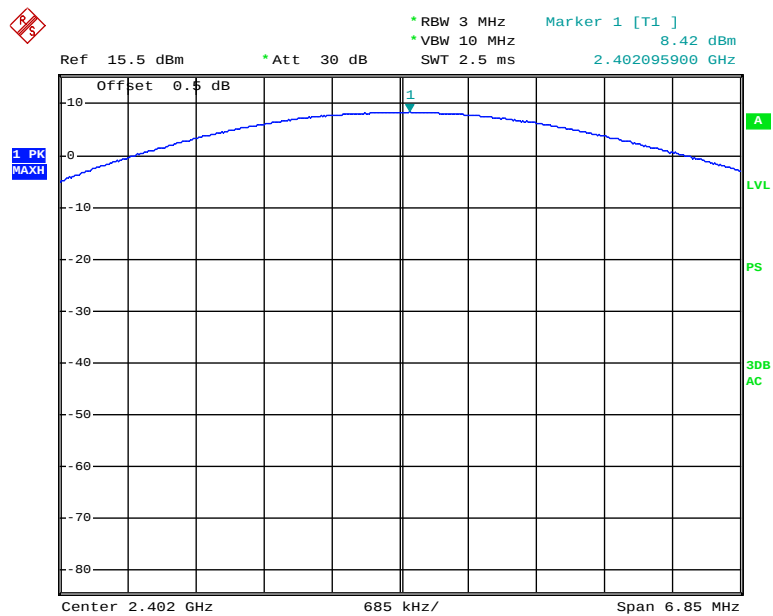


Date: 6.JUN.2017 19:13:12

Middle Channel

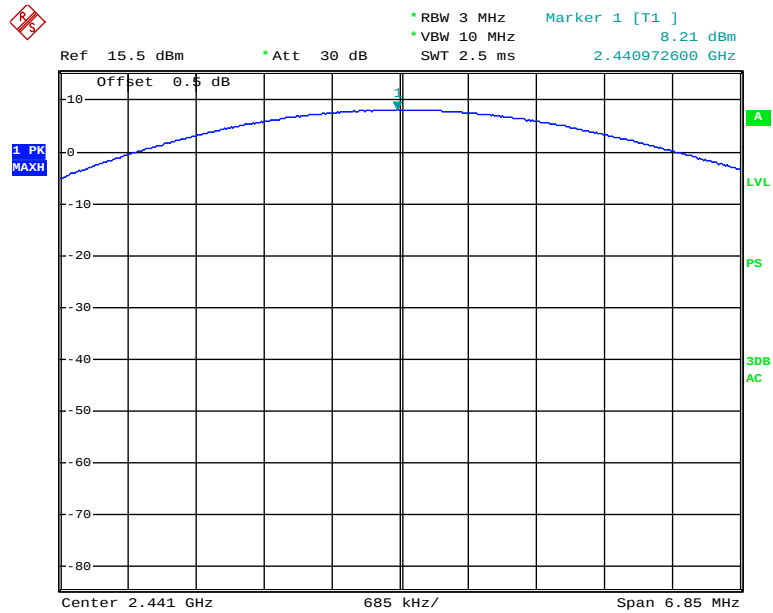

Date: 6.JUN.2017 19:15:02

High Channel

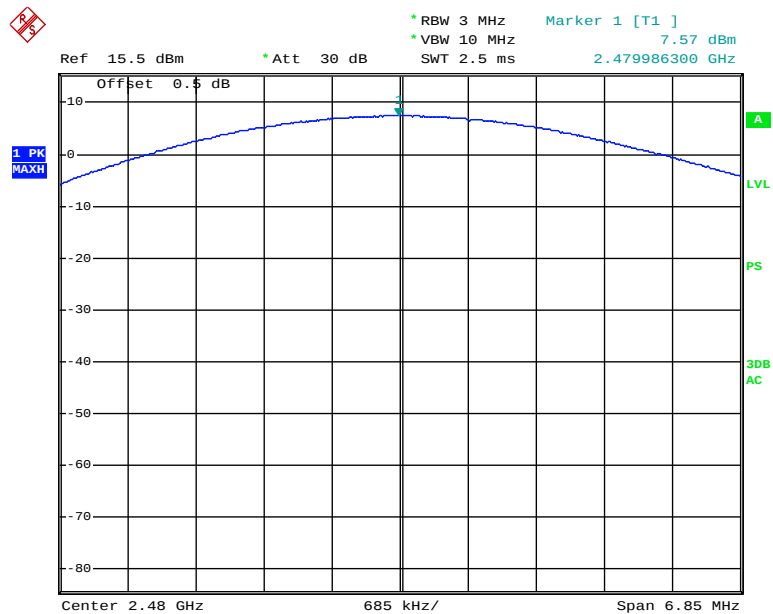

Date: 6.JUN.2017 19:16:55

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

According to 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW/ VBW of spectrum analyzer to 100 kHz/300kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Unknown	RF Cable	Unknown	NO.3	Each Time	/

*** Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data


Environmental Conditions

Temperature:	29.6°C
Relative Humidity:	71 %
ATM Pressure:	100.3 kPa

* The testing was performed by Kevin Hu on 2017-06-06.


Test Result: Compliance

BDR Mode (GFSK):

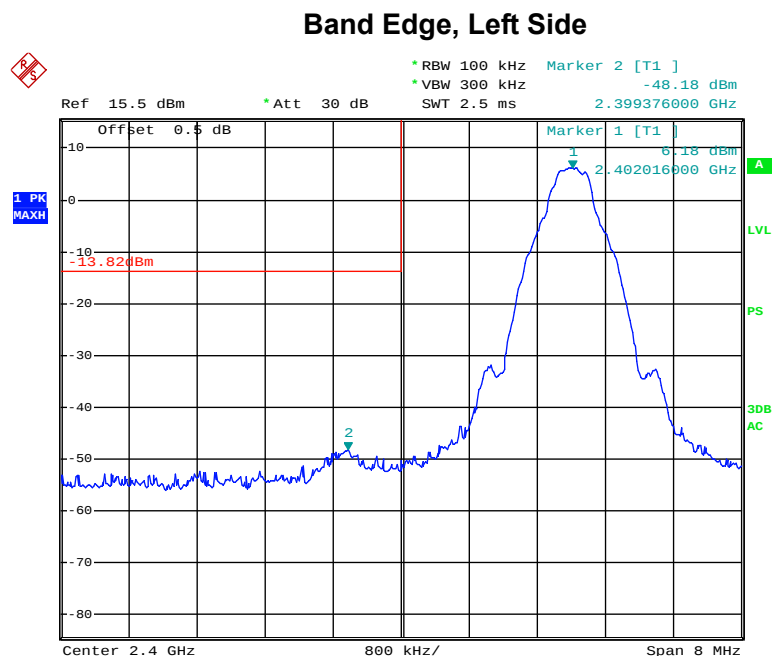

Date: 6.JUN.2017 19:31:27


Band Edge, Right Side

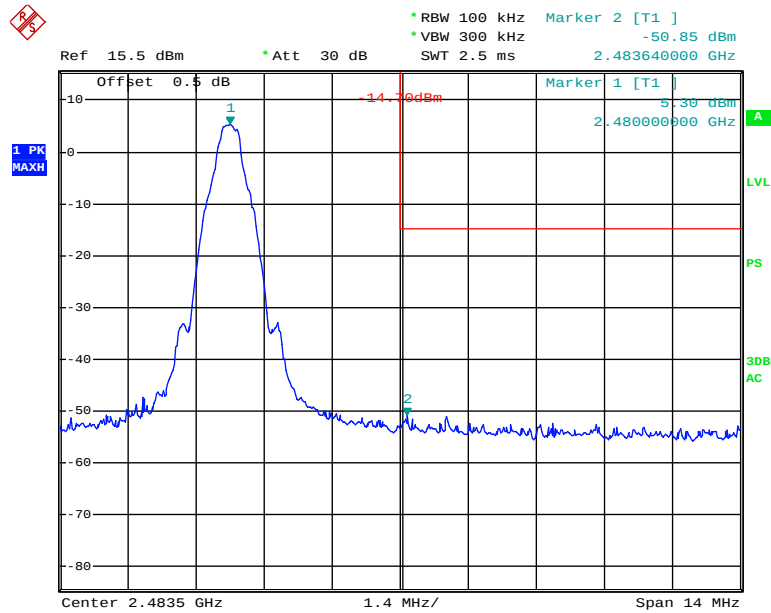

Date: 6.JUN.2017 19:05:10


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

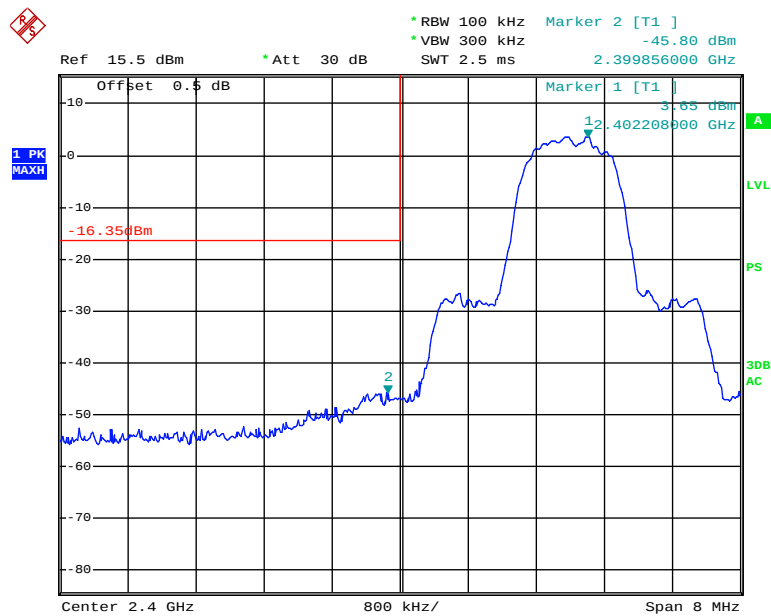

Date: 6.JUN.2017 19:11:18


Band Edge, Right Side

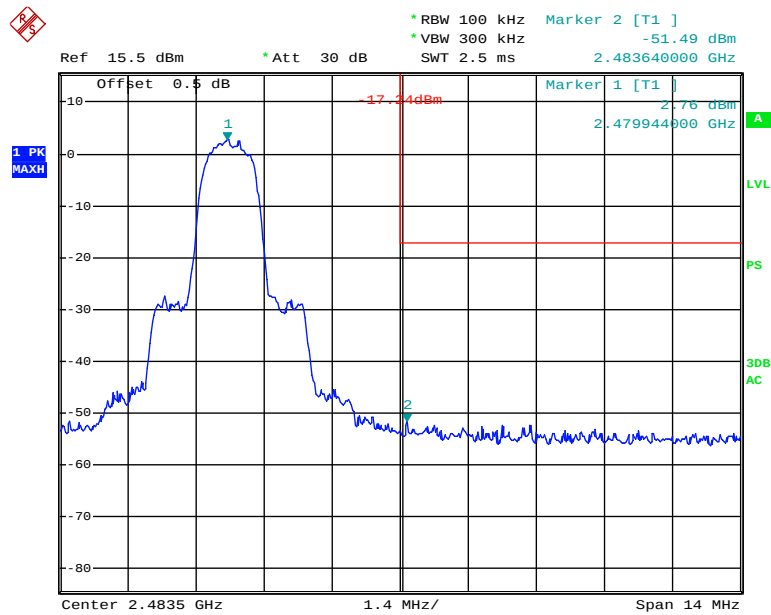

Date: 6.JUN.2017 19:07:51


EDR Mode (8-DPSK):

Band Edge, Left Side

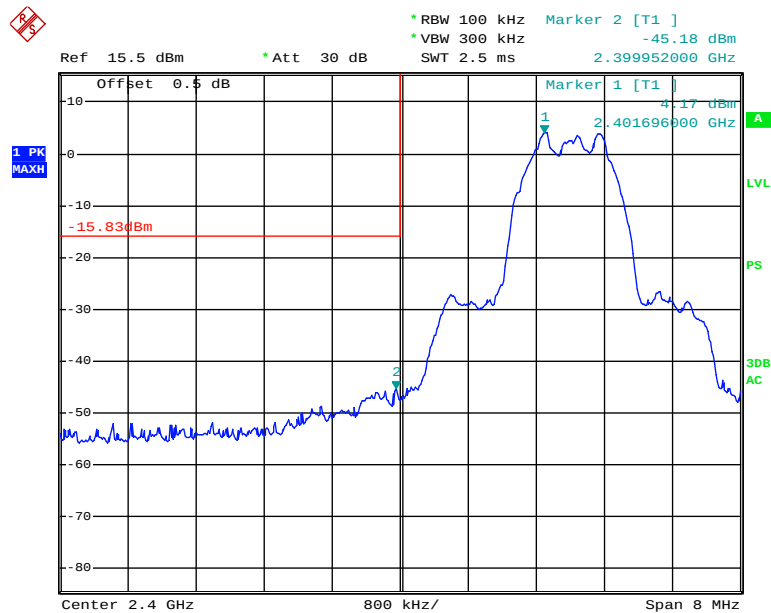

Date: 6.JUN.2017 19:13:34

Band Edge, Right Side

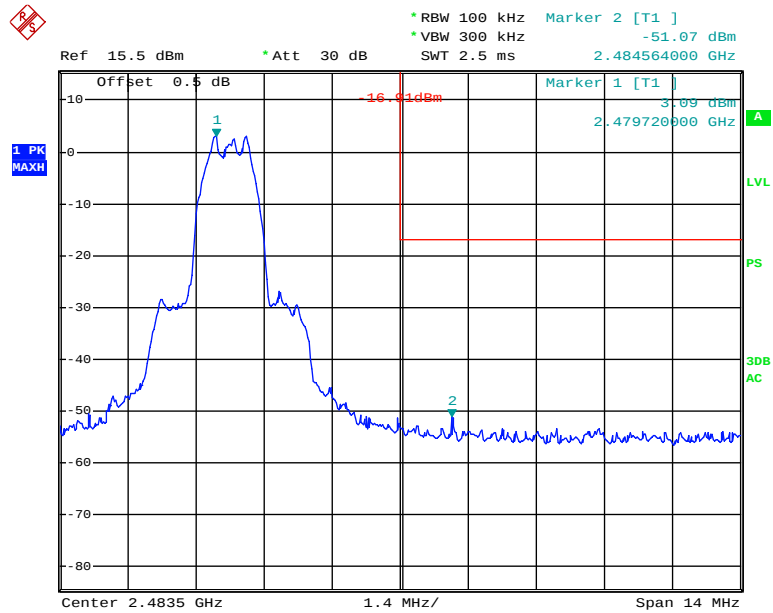

Date: 6.JUN.2017 19:17:11

***** END OF REPORT *****