

FCC REPORT

Applicant: HUNG WAI PRODUCTS LIMITED

Address of Applicant: Unit 11, 12/F., New Commerce Centre, 19 On Sum Street,
Shatin, Hong Kong

Equipment Under Test (EUT)

Product Name: 13.3" Android touch LCD Media Player

Model No.: DT133-AC4-720, 502-1339ATATM

FCC ID: 2AB6Z-DT133-AC4

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: 30 Jul., 2015

Date of Test: 30 Jul., to 06 Sep., 2015

Date of report issued: 06 Sep., 2015

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	06 Sep., 2015	Android player Main board with wireless module (FCC ID: 2AB6Z-1859ATMB) and same antenna were used by the device, only conducted emission and Radiated emission were re-tested.

Prepared by:

Luna Gao

Date:

06 Sep., 2015

Report Clerk

Reviewed by:

Carey Chen

Date:

06 Sep., 2015

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 LABORATORY FACILITY.....	7
5.5 LABORATORY LOCATION	7
5.6 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT	9
6.2 CONDUCTED EMISSION	10
6.3 CONDUCTED OUTPUT POWER	13
6.4 OCCUPY BANDWIDTH	14
6.5 POWER SPECTRAL DENSITY	15
6.6 BAND EDGE	16
6.7 SPURIOUS EMISSION	21
6.7.1 Restricted Band.....	21
6.7.2 Unwanted Emissions in the Restricted Bands.....	27
6.8 FREQUENCY STABILITY	37
7 TEST SETUP PHOTO.....	38
8 EUT CONSTRUCTIONAL DETAILS.....	39

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.407 (g)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407 (a)	Pass*
26dB Occupied Bandwidth	15.407 (a)	Pass*
6dB Emission Bandwidth	15.407(e)	Pass*
Power Spectral Density	15.407 (a)	Pass*
Band Edge	15.407(b)	Pass
Spurious Emission	15.205/15.209	Pass
Frequency Stability	15.407(g)	Pass*

Pass: The EUT complies with the essential requirements in the standard.

Pass: The test data refer to FCC ID: 2AB6Z-1859ATMB.*

Remark : Test according to ANSI C63.4:2009

5 General Information

5.1 Client Information

Applicant:	HUNG WAI PRODUCTS LIMITED
Address of Applicant:	Unit 11, 12/F., New Commerce Centre, 19 On Sum Street, Shatin, Hong Kong
Manufacturer:	HUNG WAI ELECTRONICS (HUIZHOU) LTD.
Address of Manufacturer:	3 rd floor, NO. 3, Minfeng Road, Huinan High and New Technology Industry Park, Huiao Avenue, Huizhou City, Guangdong, China

5.2 General Description of E.U.T.

Product Name:	13.3" Android touch LCD Media Player
Model No.:	DT133-AC4-720, 502-1339ATATM
Operation Frequency:	Band 1: 5180MHz-5240MHz Band 4: 5745MHz-5825MHz
Operation mode:	Indoor used
Channel numbers:	Band 1: 802.11a/802.11n20: 4, 802.11n40: 2 Band 4: 802.11a/802.11n20: 5, 802.11n40: 2
Channel separation:	802.11a/802.11n20: 20MHz, 802.11n40: 40MHz
Modulation technology: (IEEE 802.11a)	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology: (IEEE 802.11n)	BPSK, QPSK, 16-QAM, 64-QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1:13Mbps, MCS2:19.5Mbps, MCS3:26Mbps, MCS4:39Mbps, MCS5:52Mbps, MCS6:58.5Mbps, MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps, MCS1:30Mbps, MCS2:45Mbps, MCS3:60Mbps, MCS4:90Mbps, MCS5:120Mbps, MCS6:135Mbps, MCS7:150Mbps
Antenna Type:	Omni-directional
Antenna gain:	2.5 dBi
AC Adapter:	MODEL: PS24A120K2000UD Input: AC 100-240V 50/60Hz 1.0A Output: DC 12V, 2000mA
Remark:	Model No.: DT133-AC4-720, 502-1339ATATM were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being different model number for customer and for HUNG WAI.

Operation Frequency each of channel

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
36	5180MHz	39	5190MHz
40	5200MHz	45	5230MHz
44	5220MHz		
48	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz
153	5765MHz	159	5795MHz
157	5785MHz		
161	5805MHz		
165	5825MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5180MHz	The lowest channel	5190MHz
The middle channel	5200MHz	The highest channel	5230MHz
The highest channel	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5745MHz	The lowest channel	5755MHz
The middle channel	5785MHz	The highest channel	5795MHz
The highest channel	5825MHz		

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup" 6 Mbps for 802.11a, 6.5 Mbps for 802.11n20 and 13 Mbps for 802.11n40. All test items for 802.11a and 802.11n were performed with duty cycle above 98%, meet the requirements of KDB789033.

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● FCC - Registration No.: 817957

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

● IC - Registration No.: 10106A-1

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● CNAS - Registration No.: CNAS L6048

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi - Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	03-28-2015	03-28-2016
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	03-28-2015	03-28-2016
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2015	03-31-2016
6	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	04-01-2015	03-31-2016
7	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2015	03-31-2016
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	04-01-2015	03-31-2016
9	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
10	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
11	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	03-28-2015	03-28-2016
12	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	03-28-2015	03-28-2016
13	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2015	03-31-2016
14	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	03-28-2015	03-28-2016
15	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-08-2015	04-08-2016

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	11-10-2012	11-09-2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-28-2015	03-28-2016
3	LISN	CHASE	MN2050D	CCIS0074	03-28-2015	03-28-2016
4	Coaxial Cable	CCIS	N/A	CCIS0086	04-01-2015	03-31-2016
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement

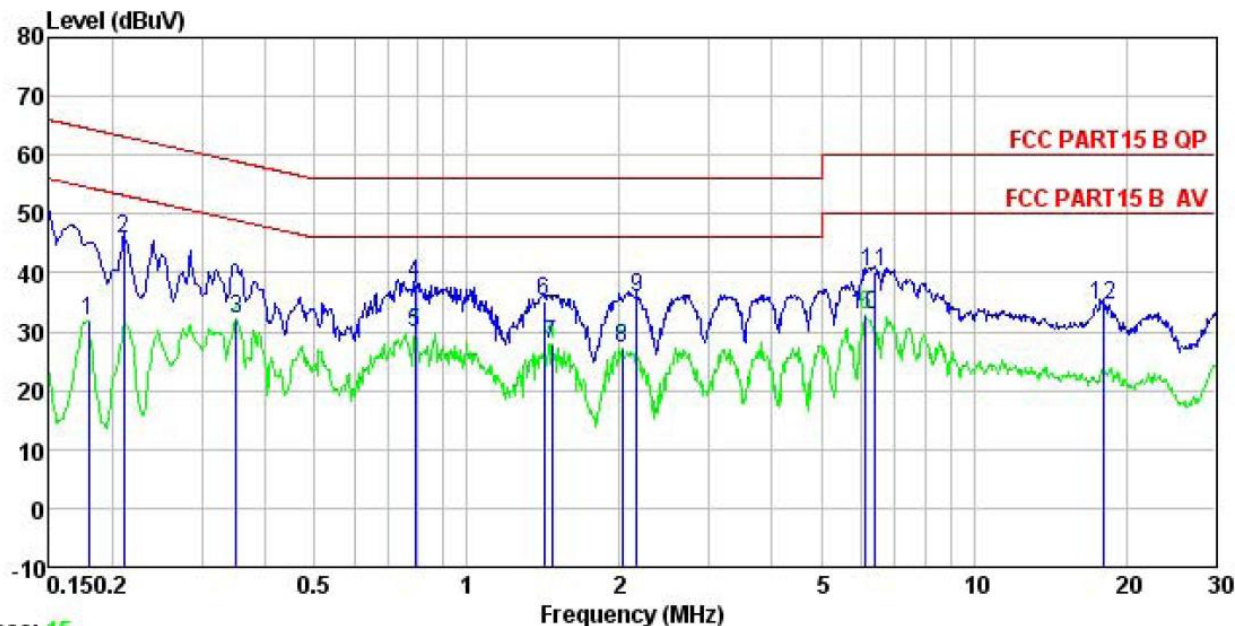
Standard requirement:	FCC Part15 E Section 15.203 /407(a)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> <i>This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</i>	
E.U.T Antenna:	
The antenna of EUT is a reverse-SMA connector, which cannot be replaced by end-user. And the antenna gain is 2.5 dBi. 	

6.2 Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.		
Test setup:	Reference Plane LISN AUX Equipment E.U.T 40cm 80cm Test table/Insulation plane LISN Filter EMI Receiver AC power Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.6 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Passed		

Measurement Data

Line:

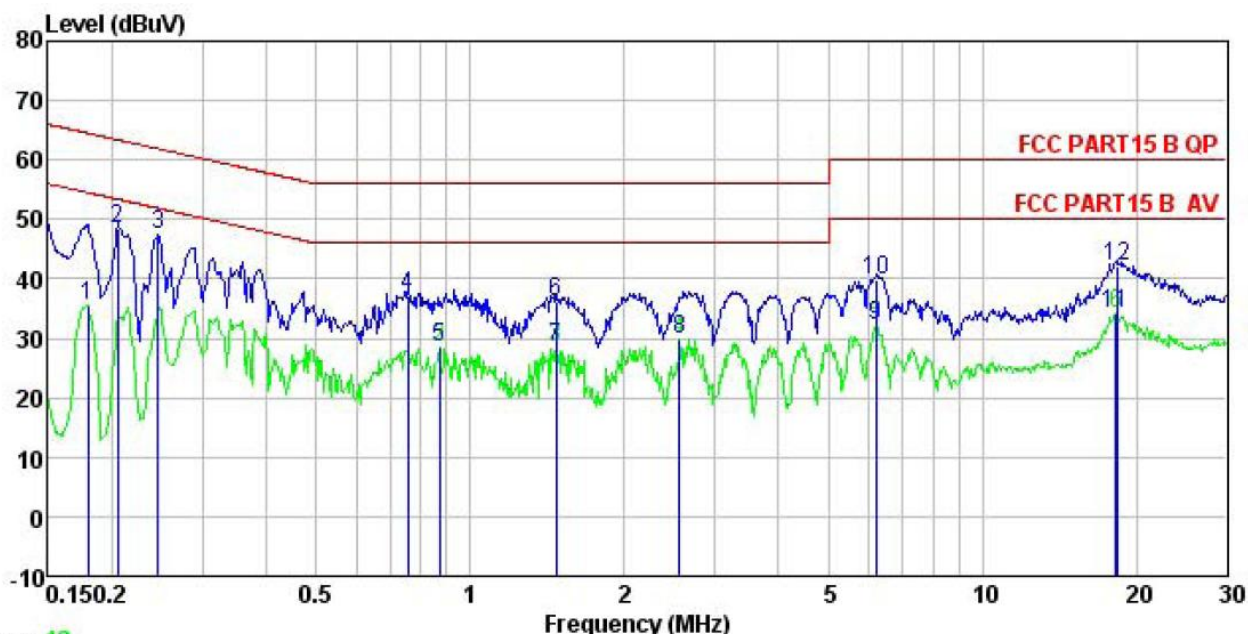


Trace: 15

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : 13.3" Android touch LCD Media Player
 Model : DT133- AC4-720
 Test Mode : 5G-WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Viki
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.180	20.83	0.28	10.77	31.88	54.50	-22.62	Average
2	0.211	34.69	0.28	10.76	45.73	63.18	-17.45	QP
3	0.350	21.06	0.27	10.73	32.06	48.96	-16.90	Average
4	0.792	27.09	0.23	10.81	38.13	56.00	-17.87	QP
5	0.792	18.77	0.23	10.81	29.81	46.00	-16.19	Average
6	1.418	24.04	0.26	10.92	35.22	56.00	-20.78	QP
7	1.472	16.64	0.26	10.92	27.82	46.00	-18.18	Average
8	2.023	16.07	0.26	10.96	27.29	46.00	-18.71	Average
9	2.167	24.66	0.26	10.95	35.87	56.00	-20.13	QP
10	6.121	21.59	0.31	10.82	32.72	50.00	-17.28	Average
11	6.386	28.98	0.31	10.81	40.10	60.00	-19.90	QP
12	17.944	23.24	0.33	10.90	34.47	60.00	-25.53	QP

Neutral:



Trace: 13

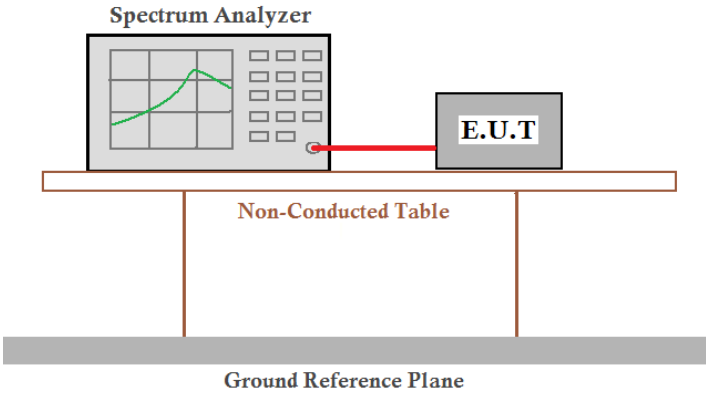
Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : 13.3" Android touch LCD Media Player
 Model : DT133- AC4-720
 Test Mode : 5G-WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Wiki
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.180	24.62	0.25	10.77	35.64	54.50	-18.86	Average
2	0.205	37.51	0.25	10.76	48.52	63.40	-14.88	QP
3	0.246	36.58	0.26	10.75	47.59	61.91	-14.32	QP
4	0.755	26.27	0.19	10.79	37.25	56.00	-18.75	QP
5	0.871	17.60	0.20	10.83	28.63	46.00	-17.37	Average
6	1.472	25.11	0.26	10.92	36.29	56.00	-19.71	QP
7	1.472	17.27	0.26	10.92	28.45	46.00	-17.55	Average
8	2.567	18.73	0.29	10.94	29.96	46.00	-16.04	Average
9	6.186	21.13	0.27	10.82	32.22	50.00	-17.78	Average
10	6.219	28.63	0.27	10.82	39.72	60.00	-20.28	QP
11	18.232	22.88	0.26	10.91	34.05	50.00	-15.95	Average
12	18.328	30.93	0.26	10.91	42.10	60.00	-17.90	QP

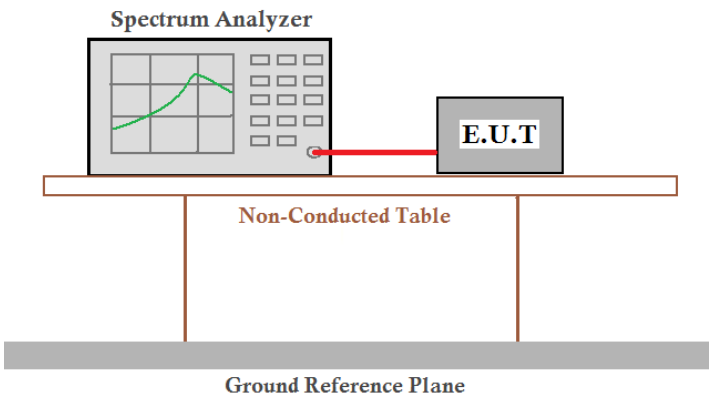
Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

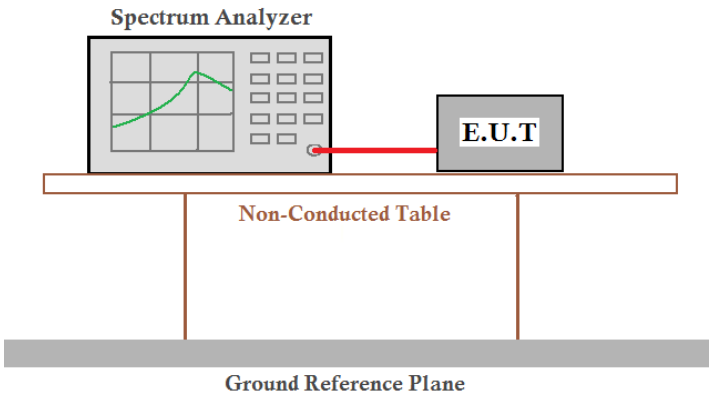
6.3 Conducted Output Power

Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (ii) & (a) (3)
Test Method:	ANSI C63.10: 2009 KDB 789033
Limit:	Band 1: 1 W (For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.); Band 4: 1W.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a thick grey horizontal bar labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB

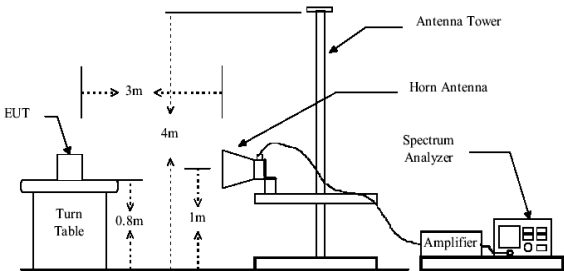
6.4 Occupy Bandwidth

Test Requirement:	FCC Part15 E Section 15.407 (a) (5) and Section 15.407 (e)
Test Method:	ANSI C63.10:2009 and KDB 789033
Limit:	Band 1: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz(6dB Bandwidth)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green trace, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a table labeled 'Non-Conducted Table'. Below this table is a thick grey bar representing the 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB

6.5 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (ii) & (a) (3)
Test Method:	ANSI C63.10:2009, KDB 789033
Limit:	Band 1: 17 dBm/MHz (The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.); Band 4: 30dBm/500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve on its screen, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table', which is depicted as a rectangular platform supported by two vertical legs. Below this table is a 'Ground Reference Plane', represented by a thick grey horizontal bar.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB

6.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 (b)																
Test Method:	ANSI C63.10:2009 , KDB 789033																
Receiver setup:	<table><tr><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>RMS</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>	Detector	RBW	VBW	Remark	Quasi-peak	120kHz	300kHz	Quasi-peak Value	Peak	1MHz	3MHz	Peak Value	RMS	1MHz	3MHz	Average Value
Detector	RBW	VBW	Remark														
Quasi-peak	120kHz	300kHz	Quasi-peak Value														
Peak	1MHz	3MHz	Peak Value														
RMS	1MHz	3MHz	Average Value														
Limit:	<table><tr><td></td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">Band 1</td><td>68.20</td><td>Peak Value</td></tr><tr><td>54.00</td><td>Average Value</td></tr><tr><td rowspan="2">Band 4</td><td>78.20</td><td>Peak Value</td></tr><tr><td>54.00</td><td>Average Value</td></tr></table> Remark: 1. Band 1 limit: E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBuV/m, for EIPR[dBm]= -27dBm. 2. Band 4 limit: E[dBμV/m] = EIRP[dBm] + 95.2=78.2 dBuV/m, for EIPR[dBm]= -17dBm.		Limit (dBuV/m @3m)	Remark	Band 1	68.20	Peak Value	54.00	Average Value	Band 4	78.20	Peak Value	54.00	Average Value			
	Limit (dBuV/m @3m)	Remark															
Band 1	68.20	Peak Value															
	54.00	Average Value															
Band 4	78.20	Peak Value															
	54.00	Average Value															
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																
Test setup:																	
Test Instruments:	Refer to section 5.6 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Passed																

Band 1:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	35.24	32.07	9.13	40.06	36.38	68.20	-31.82	Horizontal
5150.00	35.36	32.07	9.13	40.06	36.50	68.20	-31.70	Vertical
802.11a								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	25.48	32.07	9.13	40.06	26.62	54.00	-27.38	Horizontal
5150.00	24.36	32.07	9.13	40.06	25.50	54.00	-28.50	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.25	31.78	9.15	40.18	35.00	68.20	-33.20	Horizontal
5350.00	35.65	31.78	9.15	40.18	36.40	68.20	-31.80	Vertical
802.11a								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	25.36	31.78	9.15	40.18	26.11	54.00	-27.89	Horizontal
5350.00	25.46	31.78	9.15	40.18	26.21	54.00	-27.79	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.25	32.07	9.13	40.06	37.39	68.20	-30.81	Horizontal
5150.00	35.28	32.07	9.13	40.06	36.42	68.20	-31.78	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	25.89	32.07	9.13	40.06	27.03	54.00	-26.97	Horizontal
5150.00	25.33	32.07	9.13	40.06	26.47	54.00	-27.53	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	35.98	31.78	9.15	40.18	36.73	68.20	-31.47	Horizontal
5350.00	35.26	31.78	9.15	40.18	36.01	68.20	-32.19	Vertical
802.11n-HT20								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	24.05	31.78	9.15	40.18	24.80	54.00	-29.20	Horizontal
5350.00	24.81	31.78	9.15	40.18	25.56	54.00	-28.44	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	35.26	32.07	9.13	40.06	36.40	68.20	-31.80	Horizontal
5150.00	35.16	32.07	9.13	40.06	36.30	68.20	-31.90	Vertical
802.11n-HT40								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	25.45	32.07	9.13	40.06	26.59	54.00	-27.41	Horizontal
5150.00	25.03	32.07	9.13	40.06	26.17	54.00	-27.83	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.23	31.78	9.15	40.18	34.98	68.20	-33.22	Horizontal
5350.00	34.08	31.78	9.15	40.18	34.83	68.20	-33.37	Vertical
802.11n-HT40								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	25.88	31.78	9.15	40.18	26.63	54.00	-27.37	Horizontal
5350.00	25.36	31.78	9.15	40.18	26.11	54.00	-27.89	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	41.23	32.27	9.30	40.54	42.26	78.20	-35.94	Horizontal
5725.00	41.06	32.27	9.30	40.54	42.09	78.20	-36.11	Vertical
802.11a								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	29.58	32.27	9.30	40.54	30.61	54.00	-23.39	Horizontal
5725.00	29.36	32.27	9.30	40.54	30.39	54.00	-23.61	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	38.64	32.71	9.37	40.69	40.03	78.20	-38.17	Horizontal
5850.00	38.78	32.71	9.37	40.69	40.17	78.20	-38.03	Vertical
802.11a								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	30.25	32.71	9.37	40.69	31.64	54.00	-22.36	Horizontal
5850.00	30.63	32.71	9.37	40.69	32.02	54.00	-21.98	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	41.25	32.27	9.30	40.54	42.28	78.20	-35.92	Horizontal
5725.00	41.03	32.27	9.30	40.54	42.06	78.20	-36.14	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	30.63	32.27	9.30	40.54	31.66	54.00	-22.34	Horizontal
5725.00	30.78	32.27	9.30	40.54	31.81	54.00	-22.19	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	40.03	32.71	9.37	40.69	41.42	78.20	-36.78	Horizontal
5850.00	41.23	32.71	9.37	40.69	42.62	78.20	-35.58	Vertical
802.11n-HT20								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	31.25	32.71	9.37	40.69	32.64	54.00	-21.36	Horizontal
5850.00	30.36	32.71	9.37	40.69	31.75	54.00	-22.25	Vertical

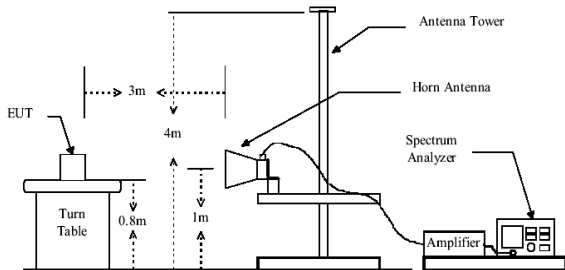
802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	38.56	32.27	9.30	40.54	39.59	78.20	-38.61	Horizontal
5725.00	38.23	32.27	9.30	40.54	39.26	78.20	-38.94	Vertical
802.11n-HT40								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	29.05	32.27	9.30	40.54	30.08	54.00	-23.92	Horizontal
5725.00	29.32	32.27	9.30	40.54	30.35	54.00	-23.65	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	41.75	32.71	9.37	40.69	43.14	78.20	-35.06	Horizontal
5850.00	41.98	32.71	9.37	40.69	43.37	78.20	-34.83	Vertical
802.11n-HT40								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	30.46	32.71	9.37	40.69	31.85	54.00	-22.15	Horizontal
5850.00	31.23	32.71	9.37	40.69	32.62	54.00	-21.38	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.7 Spurious Emission

6.7.1 Restricted Band

Test Requirement:	FCC Part15 E Section 15.407(b)																		
Test Method:	ANSI C63.10: 2009																		
Test Frequency Range:	Band 1: 4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz Band 4: 5.35 GHz to 5.46 GHz																		
Test site:	Measurement Distance: 3m																		
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>RMS</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	RMS	1MHz	3MHz	Average Value
Frequency	Detector	RBW	VBW	Remark															
Above 1GHz	Peak	1MHz	3MHz	Peak Value															
	RMS	1MHz	3MHz	Average Value															
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>74.00</td><td>Peak Value</td></tr><tr><td>54.00</td><td>Average Value</td></tr></table>					Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	74.00	Peak Value	54.00	Average Value						
Frequency	Limit (dBuV/m @3m)	Remark																	
Above 1GHz	74.00	Peak Value																	
	54.00	Average Value																	
Test Procedure:	7. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 8. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 9. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 10. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 11. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 12. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																		
Test setup:	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a turn table at a height of 0.8m. The turn table is rotated 360 degrees. The EUT is positioned 3m away from the antenna tower. The antenna tower is a variable-height tower with a horn antenna at the top. The antenna height is varied from 1m to 4m. The spectrum analyzer is connected to the antenna tower via an amplifier.																		
Test Instruments:	Refer to section 5.6 for details																		
Test mode:	Refer to section 5.3 for details																		
Test results:	Passed																		

Band 1:

802.11a

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	35.28	30.72	8.54	40.67	33.87	74.00	-40.13	Horizontal
4500.00	36.06	30.72	8.54	40.67	34.65	74.00	-39.35	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	25.36	30.72	8.54	40.67	23.95	54.00	-30.05	Horizontal
4500.00	24.92	30.72	8.54	40.67	23.51	54.00	-30.49	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	35.07	31.99	9.16	40.23	35.99	74.00	-38.01	Horizontal
5460.00	35.24	31.99	9.16	40.23	36.16	74.00	-37.84	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	26.32	31.99	9.16	40.23	27.24	54.00	-26.76	Horizontal
5460.00	26.54	31.99	9.16	40.23	27.46	54.00	-26.54	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT20

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	35.26	30.72	8.54	40.67	33.85	74.00	-40.15	Horizontal
4500.00	35.06	30.72	8.54	40.67	33.65	74.00	-40.35	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	35.23	30.72	8.54	40.67	33.82	54.00	-20.18	Horizontal
4500.00	25.01	30.72	8.54	40.67	23.60	54.00	-30.40	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	36.28	31.99	9.16	40.23	37.20	74.00	-36.80	Horizontal
5460.00	36.92	31.99	9.16	40.23	37.84	74.00	-36.16	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	26.36	31.99	9.16	40.23	27.28	54.00	-26.72	Horizontal
5460.00	26.54	31.99	9.16	40.23	27.46	54.00	-26.54	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	36.85	30.72	8.54	40.67	35.44	74.00	-38.56	Horizontal
4500.00	36.13	30.72	8.54	40.67	34.72	74.00	-39.28	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	26.58	30.72	8.54	40.67	25.17	54.00	-28.83	Horizontal
4500.00	26.34	30.72	8.54	40.67	24.93	54.00	-29.07	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	35.28	31.99	9.16	40.23	36.20	74.00	-37.80	Horizontal
5460.00	35.18	31.99	9.16	40.23	36.10	74.00	-37.90	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	27.32	31.99	9.16	40.23	28.24	54.00	-25.76	Horizontal
5460.00	27.56	31.99	9.16	40.23	28.48	54.00	-25.52	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:**802.11a**

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	44.25	31.78	9.15	40.18	45.00	74.00	-29.00	Horizontal
5460.00	44.03	31.99	9.16	40.23	44.95	74.00	-29.05	Horizontal
5350.00	43.68	31.78	9.15	40.18	44.43	74.00	-29.57	Vertical
5460.00	44.31	31.99	9.16	40.23	45.23	74.00	-28.77	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	32.55	31.78	9.15	40.18	33.30	54.00	-20.70	Horizontal
5460.00	33.68	31.99	9.16	40.23	34.60	54.00	-19.40	Horizontal
5350.00	33.09	31.78	9.15	40.18	33.84	54.00	-20.16	Vertical
5460.00	32.15	31.99	9.16	40.23	33.07	54.00	-20.93	Vertical

802.11n-HT20

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	44.12	31.78	9.15	40.18	44.87	74.00	-29.13	Horizontal
5460.00	44.36	31.99	9.16	40.23	45.28	74.00	-28.72	Horizontal
5350.00	43.05	31.78	9.15	40.18	43.80	74.00	-30.20	Vertical
5460.00	43.00	31.99	9.16	40.23	43.92	74.00	-30.08	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	34.78	31.78	9.15	40.18	35.53	54.00	-18.47	Horizontal
5460.00	34.23	31.99	9.16	40.23	35.15	54.00	-18.85	Horizontal
5350.00	34.06	31.78	9.15	40.18	34.81	54.00	-19.19	Vertical
5460.00	34.91	31.99	9.16	40.23	35.83	54.00	-18.17	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	44.26	31.78	9.15	40.18	45.01	74.00	-28.99	Horizontal
5460.00	44.36	31.99	9.16	40.23	45.28	74.00	-28.72	Horizontal
5350.00	43.98	31.78	9.15	40.18	44.73	74.00	-29.27	Vertical
5460.00	43.08	31.99	9.16	40.23	44.00	74.00	-30.00	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	32.68	31.78	9.15	40.18	33.43	54.00	-20.57	Horizontal
5460.00	32.52	31.99	9.16	40.23	33.44	54.00	-20.56	Horizontal
5350.00	32.93	31.78	9.15	40.18	33.68	54.00	-20.32	Vertical
5460.00	32.13	31.99	9.16	40.23	33.05	54.00	-20.95	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

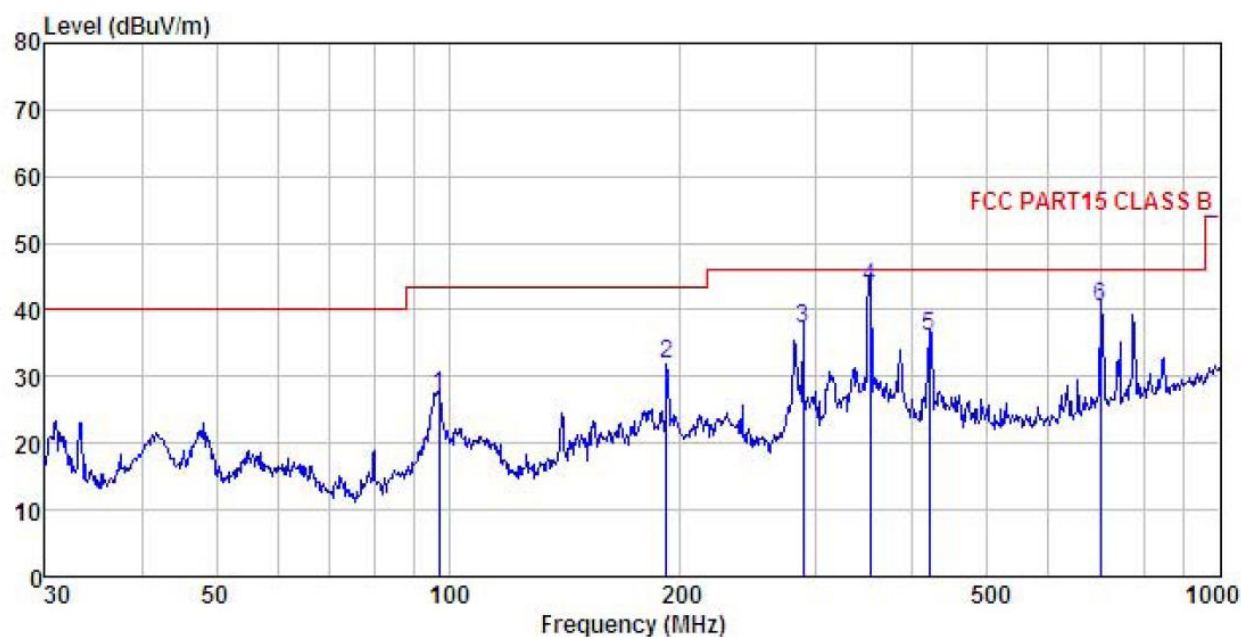
6.7.2 Unwanted Emissions in the Restricted Bands

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																											
Test Method:	ANSI C63.10:2009																											
Test Frequency Range:	30MHz to 40GHz																											
Test site:	Measurement Distance: 3m																											
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>RMS</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	RMS	1MHz	3MHz	Average Value				
Frequency	Detector	RBW	VBW	Remark																								
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value																								
Above 1GHz	Peak	1MHz	3MHz	Peak Value																								
	RMS	1MHz	3MHz	Average Value																								
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr></table> <table><tr><td>Frequency</td><td>Limit (dBm/MHz)</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>68.20</td><td>Peak Value</td></tr><tr><td>54.00</td><td>Average Value</td></tr></table> Remark: 1. Above 1GHz limit: $E[dB_{\mu}V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27dBm$.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Frequency	Limit (dBm/MHz)	Remark	Above 1GHz	68.20	Peak Value	54.00	Average Value
Frequency	Limit (dBuV/m @3m)	Remark																										
30MHz-88MHz	40.0	Quasi-peak Value																										
88MHz-216MHz	43.5	Quasi-peak Value																										
216MHz-960MHz	46.0	Quasi-peak Value																										
960MHz-1GHz	54.0	Quasi-peak Value																										
Frequency	Limit (dBm/MHz)	Remark																										
Above 1GHz	68.20	Peak Value																										
	54.00	Average Value																										
Test Procedure:	- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																											

Test setup:	Below 1GHz Above 1GHz
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Below 1GHz

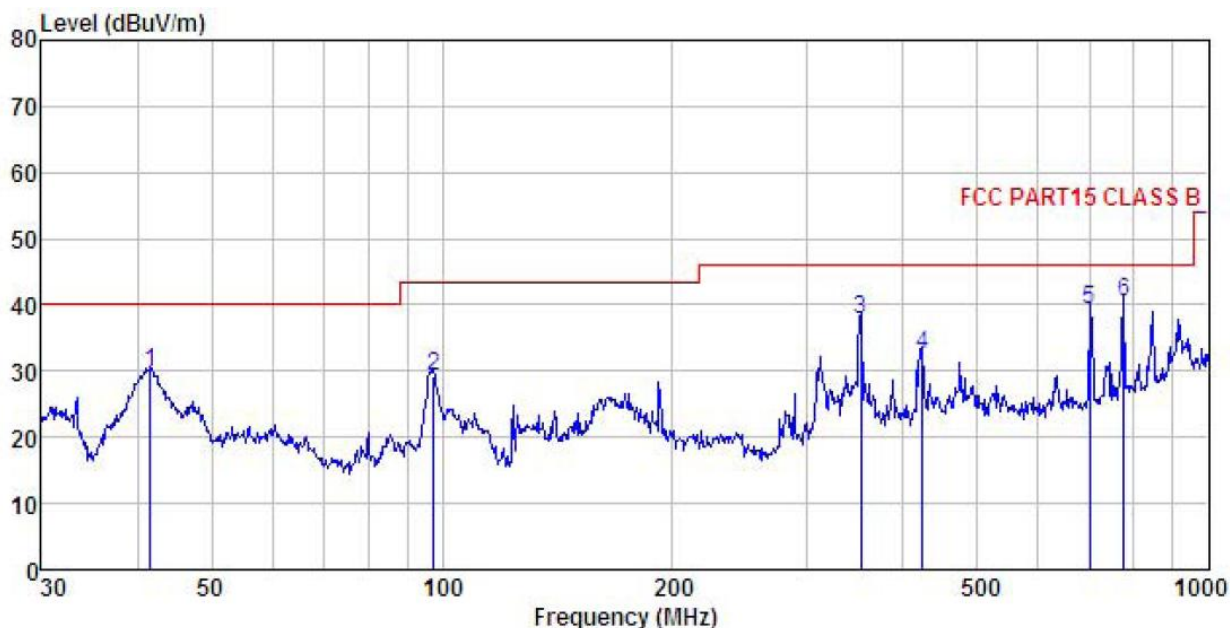
Horizontal:



Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 EUT : 13.3" Android touch LCD Media Player
 Model : DT13.3-AC4-720
 Test mode : 5G-WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55% 101KPa
 Test Engineer: Viki
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	97.115	42.69	12.97	0.94	29.54	27.06	43.50	-16.44	QP
2	191.745	48.86	10.56	1.37	28.89	31.90	43.50	-11.60	QP
3	287.990	51.11	12.84	1.74	28.47	37.22	46.00	-8.78	QP
4	351.708	55.72	14.30	1.94	28.57	43.39	46.00	-2.61	QP
5	420.580	47.33	15.47	2.18	28.82	36.16	46.00	-9.84	QP
6	699.305	47.30	18.80	2.91	28.67	40.34	46.00	-5.66	QP

Vertical:



Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 EUT : 13.3" Android touch LCD Media Player
 Model : DT13.3-AC4-720
 Test mode : 5G-WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55% 101KPa
 Test Engineer: Viki
 REMARK :

		ReadAntenna		Cable Preamp			Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	41.567	45.52	13.57	0.53	29.89	29.73	40.00	-10.27	QP
2	97.456	44.93	13.00	0.94	29.54	29.33	43.50	-14.17	QP
3	351.708	50.14	14.30	1.94	28.57	37.81	46.00	-8.19	QP
4	423.540	43.69	15.49	2.18	28.82	32.54	46.00	-13.46	QP
5	699.305	46.17	18.80	2.91	28.67	39.21	46.00	-6.79	QP
6	776.878	45.81	19.77	3.11	28.32	40.37	46.00	-5.63	QP

Above 1GHz:

Band 1:

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	44.25	39.23	13.84	41.34	55.98	68.20	-12.22	Vertical
10360.00	44.06	39.23	13.84	41.34	55.79	68.20	-12.41	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	33.52	39.23	13.84	41.34	45.25	54.00	-8.75	Vertical
10360.00	33.68	39.23	13.84	41.34	45.41	54.00	-8.59	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	42.36	39.36	13.85	41.27	54.30	68.20	-13.90	Vertical
10400.00	42.05	39.36	13.85	41.27	53.99	68.20	-14.21	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	33.58	39.36	13.85	41.27	45.52	54.00	-8.48	Vertical
10400.00	33.20	39.36	13.85	41.27	45.14	54.00	-8.86	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	44.26	39.56	13.90	41.06	56.66	68.20	-11.54	Vertical
10480.00	44.98	39.56	13.90	41.06	57.38	68.20	-10.82	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	32.11	39.56	13.90	41.06	44.51	54.00	-9.49	Vertical
10480.00	32.06	39.56	13.90	41.06	44.46	54.00	-9.54	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	44.23	39.23	13.84	41.34	55.96	68.20	-12.24	Vertical
10360.00	44.84	39.23	13.84	41.34	56.57	68.20	-11.63	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	32.12	39.23	13.84	41.34	43.85	54.00	-10.15	Vertical
10360.00	32.65	39.23	13.84	41.34	44.38	54.00	-9.62	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	44.15	39.36	13.85	41.27	56.09	68.20	-12.11	Vertical
10400.00	44.81	39.36	13.85	41.27	56.75	68.20	-11.45	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	34.26	39.36	13.85	41.27	46.20	54.00	-7.80	Vertical
10400.00	34.19	39.36	13.85	41.27	46.13	54.00	-7.87	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	44.23	39.56	13.90	41.06	56.63	68.20	-11.57	Vertical
10480.00	44.16	39.56	13.90	41.06	56.56	68.20	-11.64	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	33.26	39.56	13.90	41.06	45.66	54.00	-8.34	Vertical
10480.00	33.14	39.56	13.90	41.06	45.54	54.00	-8.46	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	44.21	39.29	13.84	41.31	56.03	68.20	-12.17	Vertical
10380.00	44.54	39.29	13.84	41.31	56.36	68.20	-11.84	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	30.28	39.29	13.84	41.31	42.10	54.00	-11.90	Vertical
10380.00	30.05	39.29	13.84	41.31	41.87	54.00	-12.13	Horizontal
802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	44.08	39.54	13.88	41.17	56.33	68.20	-11.87	Vertical
10460.00	44.02	39.54	13.88	41.17	56.27	68.20	-11.93	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	34.15	39.54	13.88	41.17	46.40	54.00	-7.60	10460.00
10460.00	34.06	39.54	13.88	41.17	46.31	54.00	-7.69	10460.00

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	44.25	40.25	13.82	40.75	57.57	68.20	-10.63	Vertical
11490.00	44.31	40.25	13.82	40.75	57.63	68.20	-10.57	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	32.02	40.25	13.82	40.75	45.34	54.00	-8.66	Vertical
11490.00	32.31	40.25	13.82	40.75	45.63	54.00	-8.37	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	44.23	40.17	13.78	40.91	57.27	68.20	-10.93	Vertical
11570.00	44.69	40.17	13.78	40.91	57.73	68.20	-10.47	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	32.54	40.17	13.78	40.91	45.58	54.00	-8.42	Vertical
11570.00	32.15	40.17	13.78	40.91	45.19	54.00	-8.81	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	42.25	39.89	13.74	41.06	54.82	68.20	-13.38	Vertical
11650.00	42.18	39.89	13.74	41.06	54.75	68.20	-13.45	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	34.56	39.89	13.74	41.06	47.13	54.00	-6.87	Vertical
11650.00	34.25	39.89	13.74	41.06	46.82	54.00	-7.18	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	44.29	40.25	13.82	40.75	57.61	68.20	-10.59	Vertical
11490.00	44.05	40.25	13.82	40.75	57.37	68.20	-10.83	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	31.26	40.25	13.82	40.75	44.58	54.00	-9.42	Vertical
11490.00	31.06	40.25	13.82	40.75	44.38	54.00	-9.62	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	44.17	40.17	13.78	40.91	57.21	68.20	-10.99	Vertical
11570.00	44.39	40.17	13.78	40.91	57.43	68.20	-10.77	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	31.29	40.17	13.78	40.91	44.33	54.00	-9.67	Vertical
11570.00	31.13	40.17	13.78	40.91	44.17	54.00	-9.83	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	44.19	39.89	13.74	41.06	56.76	68.20	-11.44	Vertical
11650.00	44.03	39.89	13.74	41.06	56.60	68.20	-11.60	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	33.28	39.89	13.74	41.06	45.85	54.00	-8.15	Vertical
11650.00	33.19	39.89	13.74	41.06	45.76	54.00	-8.24	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

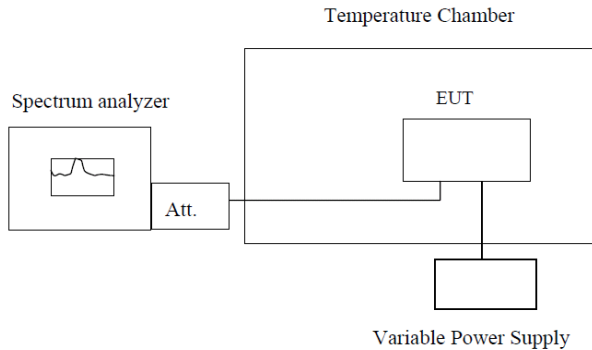
802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	40.15	40.26	13.83	40.77	53.47	68.20	-14.73	Vertical
11510.00	40.36	40.26	13.83	40.77	53.68	68.20	-14.52	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	28.54	40.26	13.83	40.77	41.86	54.00	-12.14	Vertical
11510.00	28.23	40.26	13.83	40.77	41.55	54.00	-12.45	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	43.25	40.08	13.77	40.95	56.15	68.20	-12.05	Vertical
11590.00	43.26	40.08	13.77	40.95	56.16	68.20	-12.04	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	28.54	40.08	13.77	40.95	41.44	54.00	-12.56	Vertical
11590.00	28.31	40.08	13.77	40.95	41.21	54.00	-12.79	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.8 Frequency stability

Test Requirement:	FCC Part15 E Section 15.407 (g)
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB