

FCC REPORT

Applicant: HUNG WAI PRODUCTS LIMITED

Address of Applicant: Unit 11, 12/F., New Commerce Centre, 19 On Sum Street,
Shatin, Hong Kong

Equipment Under Test (EUT)

Product Name: 18.5" Android touch LCD Media Player

Model No.: DT185-AC4-720, 502-1859ATATM

FCC ID: 2AB6Z-DT185-AC4

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: 22 Jul., 2015

Date of Test: 23 Jul., to 17 Aug., 2015

Date of report issued: 17 Aug., 2015

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	17 Aug., 2015	Android player Main board with wireless module (FCC ID: 2AB6Z-1859ATMB) and same antenna were used by the device, only conducted emission and Radiated emission were re-tested.

Prepared by:

Luna Gao

Date:

17 Aug., 2015

Report Clerk

Reviewed by:

Carey Chen

Date:

17 Aug., 2015

Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 LABORATORY FACILITY.....	7
5.5 LABORATORY LOCATION	7
5.6 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT	9
6.2 CONDUCTED EMISSION	10
6.3 CONDUCTED OUTPUT POWER	13
6.4 OCCUPY BANDWIDTH	14
6.5 POWER SPECTRAL DENSITY	15
6.6 BAND EDGE	16
6.7 SPURIOUS EMISSION	21
6.7.1 Restricted Band.....	21
6.7.2 Unwanted Emissions in the Restricted Bands	27
6.8 FREQUENCY STABILITY	37
7 TEST SETUP PHOTO.....	38
8 EUT CONSTRUCTIONAL DETAILS.....	39

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.407 (g)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407 (a)	Pass*
26dB Occupied Bandwidth	15.407 (a)	Pass*
6dB Emission Bandwidth	15.407(e)	Pass*
Power Spectral Density	15.407 (a)	Pass*
Band Edge	15.407(b)	Pass
Spurious Emission	15.205/15.209	Pass
Frequency Stability	15.407(g)	Pass*

Pass: The EUT complies with the essential requirements in the standard.

Pass: The test data refer to FCC ID: 2AB6Z-1859ATMB.*

Remark : Test according to ANSI C63.4:2009

5 General Information

5.1 Client Information

Applicant:	HUNG WAI PRODUCTS LIMITED
Address of Applicant:	Unit 11, 12/F., New Commerce Centre, 19 On Sum Street, Shatin, Hong Kong
Manufacturer:	HUNG WAI ELECTRONICS (HUIZHOU) LTD.
Address of Manufacturer:	3 rd floor, NO. 3, Minfeng Road, Huinan High and New Technology Industry Park, Huiao Avenue, Huizhou City, Guangdong, China

5.2 General Description of E.U.T.

Product Name:	18.5" Android touch LCD Media Player
Model No.:	DT185-AC4-720, 502-1859ATATM
Operation Frequency:	Band 1: 5180MHz-5240MHz Band 4: 5745MHz-5825MHz
Operation mode:	Indoor used
Channel numbers:	Band 1: 802.11a/802.11n20: 4, 802.11n40: 2 Band 4: 802.11a/802.11n20: 5, 802.11n40: 2
Channel separation:	802.11a/802.11n20: 20MHz, 802.11n40: 40MHz
Modulation technology: (IEEE 802.11a)	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology: (IEEE 802.11n)	BPSK, QPSK, 16-QAM, 64-QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1:13Mbps, MCS2:19.5Mbps, MCS3:26Mbps, MCS4:39Mbps, MCS5:52Mbps, MCS6:58.5Mbps, MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps, MCS1:30Mbps, MCS2:45Mbps, MCS3:60Mbps, MCS4:90Mbps, MCS5:120Mbps, MCS6:135Mbps, MCS7:150Mbps
Antenna Type:	Omni-directional
Antenna gain:	2.5 dBi
Power supply:	AC 120V/ 60Hz
AC Adapter:	MODEL: PS36IBCAY3000S Input: AC 100-240V 50/60Hz 1.0A Output: DC 12V, 3000mA
Remark:	Model No.: DT185-AC4-720, 502-1859ATATM were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being different model number for customer and for HUNG WAI.

Operation Frequency each of channel

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
36	5180MHz	39	5190MHz
40	5200MHz	45	5230MHz
44	5220MHz		
48	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz
153	5765MHz	159	5795MHz
157	5785MHz		
161	5805MHz		
165	5825MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5180MHz	The lowest channel	5190MHz
The middle channel	5200MHz	The highest channel	5230MHz
The highest channel	5240MHz		
Band 4			
802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5745MHz	The lowest channel	5755MHz
The middle channel	5785MHz	The highest channel	5795MHz
The highest channel	5825MHz		

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup" 6 Mbps for 802.11a, 6.5 Mbps for 802.11n20 and 13 Mbps for 802.11n40. All test items for 802.11a and 802.11n were performed with duty cycle above 98%, meet the requirements of KDB789033.

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi - Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	03-28-2015	03-28-2016
3	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	03-28-2015	03-28-2016
4	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
5	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2015	03-31-2016
6	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	04-01-2015	03-31-2016
7	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2015	03-31-2016
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	04-01-2015	03-31-2016
9	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
10	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
11	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	03-28-2015	03-28-2016
12	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	03-28-2015	03-28-2016
13	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2015	03-31-2016
14	Universal radio communication tester	Rhode & Schwarz	CMU200	CCIS0069	03-28-2015	03-28-2016
15	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	04-08-2015	04-08-2016

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	11-10-2012	11-09-2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-28-2015	03-28-2016
3	LISN	CHASE	MN2050D	CCIS0074	03-28-2015	03-28-2016
4	Coaxial Cable	CCIS	N/A	CCIS0086	04-01-2015	03-31-2016
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement

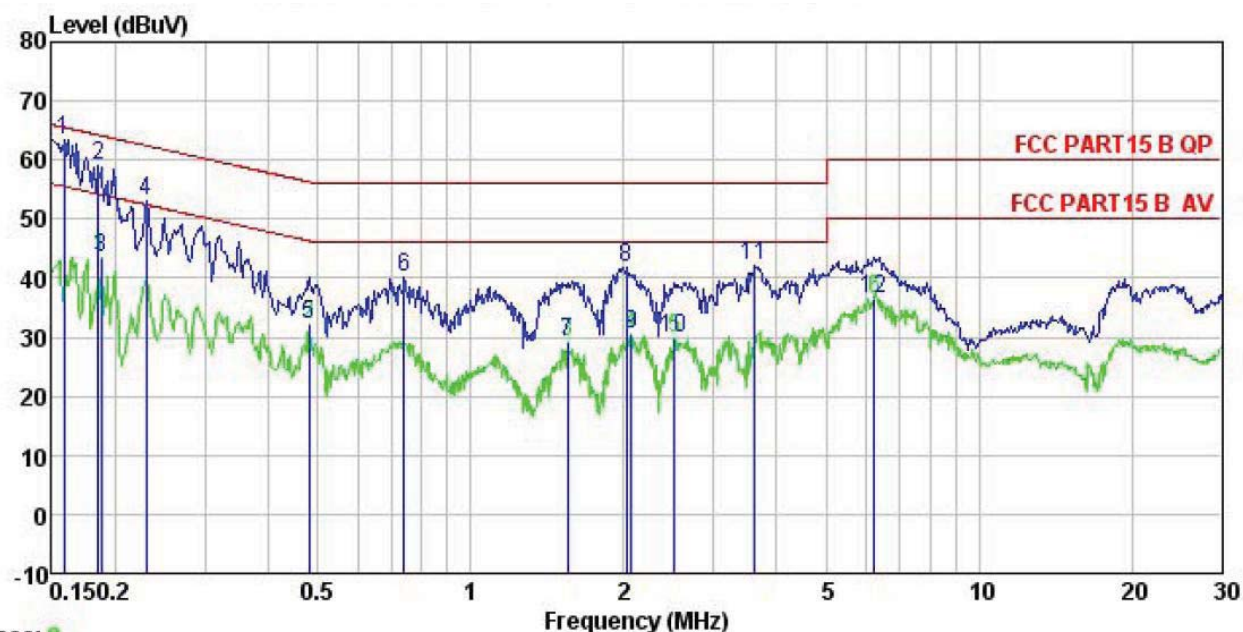
Standard requirement:	FCC Part15 E Section 15.203 /407(a)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> <i>This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</i>	
E.U.T Antenna:	
The antenna of EUT is a reverse-SMA connector, which cannot be replaced by end-user. And the antenna gain is 2.5 dBi. 	

6.2 Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test setup:	Reference Plane LISN AUX Equipment E.U.T 40cm 80cm LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.6 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Passed		

Measurement Data

Line:

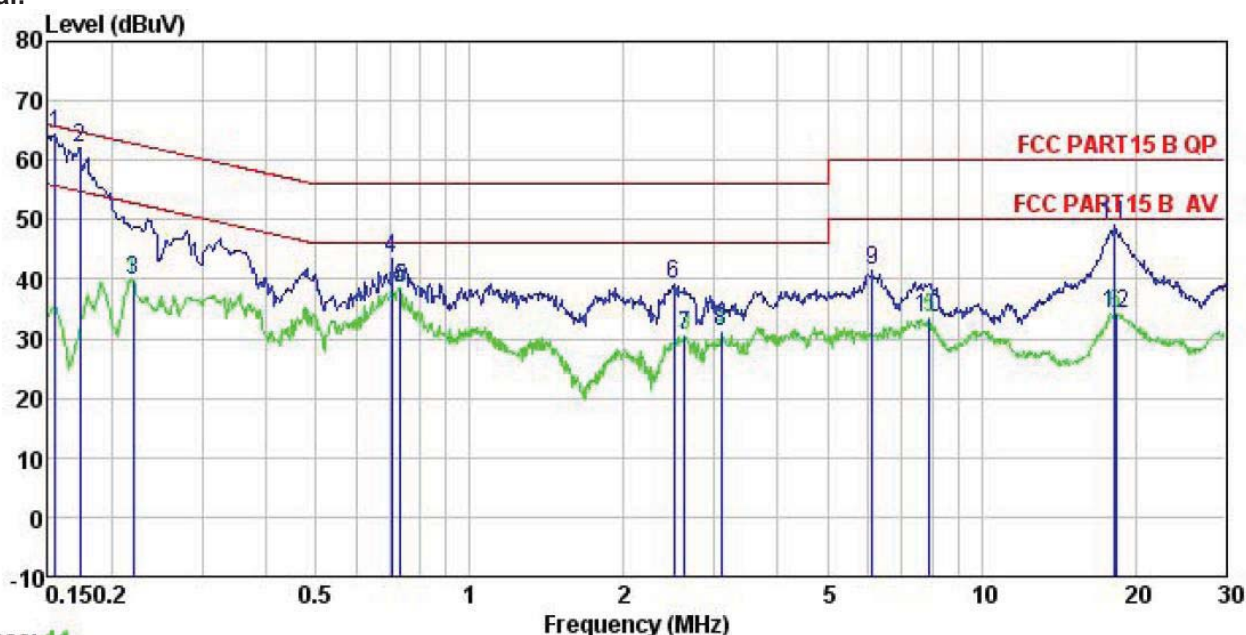


Trace: 9

Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : 18.5" Android touch LCD Media player
 Model : DT185-AC4-720
 Test Mode : 5G-WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Wiki
 Remark :

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit	Limit	Remark
		dBuV	dB	dB	dBuV	dBuV	dB	
1	0.158	52.34	0.27	10.78	63.39	65.56	-2.17	QP
2	0.185	48.10	0.28	10.77	59.15	64.24	-5.09	QP
3	0.187	32.34	0.28	10.76	43.38	54.15	-10.77	Average
4	0.230	41.94	0.27	10.75	52.96	62.44	-9.48	QP
5	0.481	21.08	0.29	10.75	32.12	46.32	-14.20	Average
6	0.739	29.22	0.22	10.79	40.23	56.00	-15.77	QP
7	1.552	17.83	0.26	10.93	29.02	46.00	-16.98	Average
8	2.023	30.61	0.26	10.96	41.83	56.00	-14.17	QP
9	2.066	19.30	0.26	10.96	30.52	46.00	-15.48	Average
10	2.513	18.63	0.27	10.94	29.84	46.00	-16.16	Average
11	3.623	30.97	0.28	10.90	42.15	56.00	-13.85	QP
12	6.219	25.46	0.31	10.82	36.59	50.00	-13.41	Average

Neutral:



Trace: 11

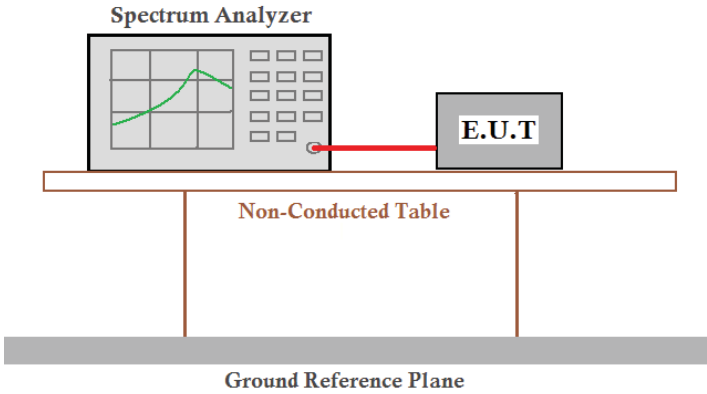
Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : 18.5" Android touch LCD Media player
 Model : DT185-AC4-720
 Test Mode : 5G-WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Viki
 Remark :

	Read	LISN	Cable		Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.155	53.43	0.25	10.78	64.46	65.74	-1.28 QP
2	0.173	51.10	0.25	10.77	62.12	64.81	-2.69 QP
3	0.220	28.95	0.25	10.76	39.96	52.83	-12.87 Average
4	0.705	32.62	0.18	10.77	43.57	56.00	-12.43 QP
5	0.731	27.62	0.18	10.78	38.58	46.00	-7.42 Average
6	2.500	27.79	0.29	10.94	39.02	56.00	-16.98 QP
7	2.636	19.30	0.29	10.93	30.52	46.00	-15.48 Average
8	3.107	19.99	0.29	10.92	31.20	46.00	-14.80 Average
9	6.121	30.23	0.27	10.82	41.32	60.00	-18.68 QP
10	7.893	22.34	0.26	10.84	33.44	50.00	-16.56 Average
11	18.232	37.97	0.26	10.91	49.14	60.00	-10.86 QP
12	18.328	23.16	0.26	10.91	34.33	50.00	-15.67 Average

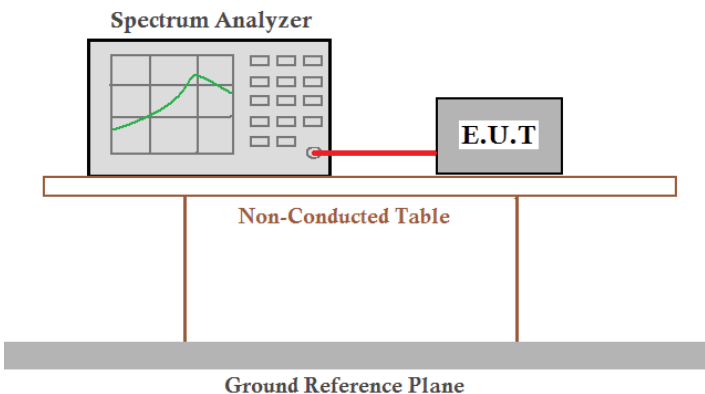
Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

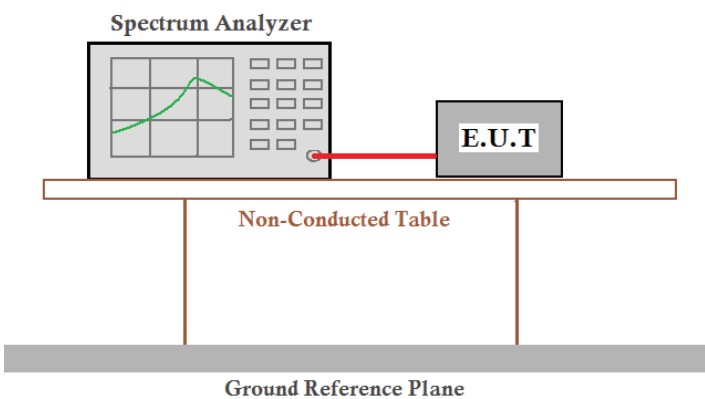
6.3 Conducted Output Power

Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (ii) & (a) (3)
Test Method:	ANSI C63.10: 2009, KDB 789033
Limit:	Band 1: 1 W (For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.); Band 4: 1W.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB

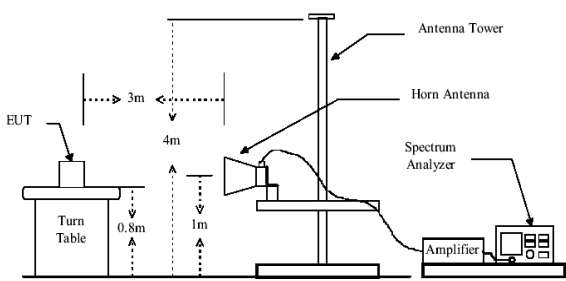
6.4 Occupy Bandwidth

Test Requirement:	FCC Part15 E Section 15.407 (a) (5) and Section 15.407 (e)
Test Method:	ANSI C63.10: 2009 and KDB 789033
Limit:	Band 1: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: N/A(26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz(6dB Bandwidth)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB

6.5 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (ii) & (a) (3)
Test Method:	ANSI C63.10: 2009, KDB 789033
Limit:	Band 1: 17 dBm/MHz (The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.); Band 4: 30dBm/500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB

6.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 (b)													
Test Method:	ANSI C63.10: 2009 , KDB 789033													
Receiver setup:	<table><tr><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td>RMS</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>	Detector	RBW	VBW	Remark	Quasi-peak	120kHz	300kHz	Quasi-peak Value	RMS	1MHz	3MHz	Average Value	
Detector	RBW	VBW	Remark											
Quasi-peak	120kHz	300kHz	Quasi-peak Value											
RMS	1MHz	3MHz	Average Value											
Limit:	<table><tr><td></td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">Band 1</td><td>68.20</td><td>Peak Value</td></tr><tr><td>54.00</td><td>Average Value</td></tr><tr><td rowspan="2">Band 4</td><td>78.20</td><td>Peak Value</td></tr><tr><td>54.00</td><td>Average Value</td></tr></table> Remark: 1. Band 1 limit: E[dBμV/m] = EIRP[dBm] + 95.2=68.2 dBuV/m, for EIPR[dBm]= -27dBm. 2. Band 4 limit: E[dBμV/m] = EIRP[dBm] + 95.2=78.2 dBuV/m, for EIPR[dBm]= -17dBm.		Limit (dBuV/m @3m)	Remark	Band 1	68.20	Peak Value	54.00	Average Value	Band 4	78.20	Peak Value	54.00	Average Value
	Limit (dBuV/m @3m)	Remark												
Band 1	68.20	Peak Value												
	54.00	Average Value												
Band 4	78.20	Peak Value												
	54.00	Average Value												
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.													
Test setup:														
Test Instruments:	Refer to section 5.6 for details													
Test mode:	Refer to section 5.3 for details													
Test results:	Passed													

Band 1:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.89	32.07	9.13	40.06	38.03	68.20	-30.17	Horizontal
5150.00	37.54	32.07	9.13	40.06	38.68	68.20	-29.52	Vertical
802.11a								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	28.64	32.07	9.13	40.06	29.78	54.00	-24.22	Horizontal
5150.00	28.97	32.07	9.13	40.06	30.11	54.00	-23.89	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	36.79	31.78	9.15	40.18	37.54	68.20	-30.66	Horizontal
5350.00	35.17	31.78	9.15	40.18	35.92	68.20	-32.28	Vertical
802.11a								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	28.47	31.78	9.15	40.18	29.22	54.00	-24.78	Horizontal
5350.00	28.39	31.78	9.15	40.18	29.14	54.00	-24.86	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.47	32.07	9.13	40.06	37.61	68.20	-30.59	Horizontal
5150.00	35.17	32.07	9.13	40.06	36.31	68.20	-31.89	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	28.97	32.07	9.13	40.06	30.11	54.00	-23.89	Horizontal
5150.00	27.36	32.07	9.13	40.06	28.50	54.00	-25.50	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	36.18	31.78	9.15	40.18	36.93	68.20	-31.27	Horizontal
5350.00	37.22	31.78	9.15	40.18	37.97	68.20	-30.23	Vertical
802.11n-HT20								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	26.47	31.78	9.15	40.18	27.22	54.00	-26.78	Horizontal
5350.00	25.81	31.78	9.15	40.18	26.56	54.00	-27.44	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.45	32.07	9.13	40.06	38.59	68.20	-29.61	Horizontal
5150.00	36.23	32.07	9.13	40.06	37.37	68.20	-30.83	Vertical
802.11n-HT40								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	27.48	32.07	9.13	40.06	28.62	54.00	-25.38	Horizontal
5150.00	26.31	32.07	9.13	40.06	27.45	54.00	-26.55	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	35.22	31.78	9.15	40.18	35.97	68.20	-32.23	Horizontal
5350.00	35.17	31.78	9.15	40.18	35.92	68.20	-32.28	Vertical
802.11n-HT40								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	26.44	31.78	9.15	40.18	27.19	54.00	-26.81	Horizontal
5350.00	25.31	31.78	9.15	40.18	26.06	54.00	-27.94	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:

802.11a								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	41.33	32.27	9.30	40.54	42.36	78.20	-35.84	Horizontal
5725.00	42.18	32.27	9.30	40.54	43.21	78.20	-34.99	Vertical
802.11a								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	33.67	32.27	9.30	40.54	34.70	54.00	-19.30	Horizontal
5725.00	32.18	32.27	9.30	40.54	33.21	54.00	-20.79	Vertical
802.11a								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	43.56	32.71	9.37	40.69	44.95	78.20	-33.25	Horizontal
5850.00	42.97	32.71	9.37	40.69	44.36	78.20	-33.84	Vertical
802.11a								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	28.36	32.71	9.37	40.69	29.75	54.00	-24.25	Horizontal
5850.00	29.17	32.71	9.37	40.69	30.56	54.00	-23.44	Vertical

802.11n-HT20								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	43.57	32.27	9.30	40.54	44.60	78.20	-33.60	Horizontal
5725.00	44.39	32.27	9.30	40.54	45.42	78.20	-32.78	Vertical
802.11n-HT20								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	33.64	32.27	9.30	40.54	34.67	54.00	-19.33	Horizontal
5725.00	32.91	32.27	9.30	40.54	33.94	54.00	-20.06	Vertical
802.11n-HT20								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	43.28	32.71	9.37	40.69	44.67	78.20	-33.53	Horizontal
5850.00	42.17	32.71	9.37	40.69	43.56	78.20	-34.64	Vertical
802.11n-HT20								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	33.13	32.71	9.37	40.69	34.52	54.00	-19.48	Horizontal
5850.00	32.26	32.71	9.37	40.69	33.65	54.00	-20.35	Vertical

802.11n-HT40								
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	38.46	32.27	9.30	40.54	39.49	78.20	-38.71	Horizontal
5725.00	37.17	32.27	9.30	40.54	38.20	78.20	-40.00	Vertical
802.11n-HT40								
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5725.00	32.34	32.27	9.30	40.54	33.37	54.00	-20.63	Horizontal
5725.00	31.28	32.27	9.30	40.54	32.31	54.00	-21.69	Vertical
802.11n-HT40								
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	41.21	32.71	9.37	40.69	42.60	78.20	-35.60	Horizontal
5850.00	42.39	32.71	9.37	40.69	43.78	78.20	-34.42	Vertical
802.11n-HT40								
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	33.17	32.71	9.37	40.69	34.56	54.00	-19.44	Horizontal
5850.00	32.64	32.71	9.37	40.69	34.03	54.00	-19.97	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.7 Spurious Emission

6.7.1 Restricted Band

Test Requirement:	FCC Part15 E Section 15.407(b)				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	Band 1: 4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz Band 4: 5.35 GHz to 5.46 GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	74.00		Peak Value	
		54.00		Average Value	
Test Procedure:	7. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 8. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 9. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 10. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 11. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 12. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	The diagram illustrates the test setup for spurious emission testing. It shows an Equipment Under Test (EUT) placed on a turn table at a height of 0.8m. The turn table is rotated 360 degrees to determine the position of the highest radiation. The EUT is positioned 3m away from the antenna tower. The antenna tower is a variable-height antenna with a horn antenna at the top. The antenna height is varied from 1m to 4m above the ground. The spectrum analyzer is connected to the antenna tower via an amplifier.				
Test Instruments:	Refer to section 5.6 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

Band 1:**802.11a**

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	32.33	30.72	8.54	40.67	30.92	74.00	-43.08	Horizontal
4500.00	33.52	30.72	8.54	40.67	32.11	74.00	-41.89	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	24.33	30.72	8.54	40.67	22.92	54.00	-31.08	Horizontal
4500.00	24.15	30.72	8.54	40.67	22.74	54.00	-31.26	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	35.23	31.99	9.16	40.23	36.15	74.00	-37.85	Horizontal
5460.00	35.98	31.99	9.16	40.23	36.90	74.00	-37.10	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	25.37	31.99	9.16	40.23	26.29	54.00	-27.71	Horizontal
5460.00	25.78	31.99	9.16	40.23	26.70	54.00	-27.30	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT20

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	35.45	30.72	8.54	40.67	34.04	74.00	-39.96	Horizontal
4500.00	35.12	30.72	8.54	40.67	33.71	74.00	-40.29	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	22.36	30.72	8.54	40.67	20.95	54.00	-33.05	Horizontal
4500.00	22.87	30.72	8.54	40.67	21.46	54.00	-32.54	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	34.98	31.99	9.16	40.23	35.90	74.00	-38.10	Horizontal
5460.00	34.78	31.99	9.16	40.23	35.70	74.00	-38.30	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	25.22	31.99	9.16	40.23	26.14	54.00	-27.86	Horizontal
5460.00	24.78	31.99	9.16	40.23	25.70	54.00	-28.30	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	35.23	30.72	8.54	40.67	33.82	74.00	-40.18	Horizontal
4500.00	34.22	30.72	8.54	40.67	32.81	74.00	-41.19	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4500.00	21.35	30.72	8.54	40.67	19.94	54.00	-34.06	Horizontal
4500.00	21.81	30.72	8.54	40.67	20.40	54.00	-33.60	Vertical
Test channel		Highest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	35.82	31.99	9.16	40.23	36.74	74.00	-37.26	Horizontal
5460.00	35.33	31.99	9.16	40.23	36.25	74.00	-37.75	Vertical
Test channel		Highest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5460.00	25.33	31.99	9.16	40.23	26.25	54.00	-27.75	Horizontal
5460.00	25.78	31.99	9.16	40.23	26.70	54.00	-27.30	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4:

802.11a

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	42.52	31.78	9.15	40.18	43.27	74.00	-30.73	Horizontal
5460.00	42.36	31.99	9.16	40.23	43.28	74.00	-30.72	Horizontal
5350.00	41.87	31.78	9.15	40.18	42.62	74.00	-31.38	Vertical
5460.00	41.32	31.99	9.16	40.23	42.24	74.00	-31.76	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.54	31.78	9.15	40.18	34.29	54.00	-19.71	Horizontal
5460.00	33.78	31.99	9.16	40.23	34.70	54.00	-19.30	Horizontal
5350.00	32.15	31.78	9.15	40.18	32.90	54.00	-21.10	Vertical
5460.00	32.46	31.99	9.16	40.23	33.38	54.00	-20.62	Vertical

802.11n-HT20

Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	42.36	31.78	9.15	40.18	43.11	74.00	-30.89	Horizontal
5460.00	42.15	31.99	9.16	40.23	43.07	74.00	-30.93	Horizontal
5350.00	42.98	31.78	9.15	40.18	43.73	74.00	-30.27	Vertical
5460.00	43.26	31.99	9.16	40.23	44.18	74.00	-29.82	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.14	31.78	9.15	40.18	33.89	54.00	-20.11	Horizontal
5460.00	33.98	31.99	9.16	40.23	34.90	54.00	-19.10	Horizontal
5350.00	34.23	31.78	9.15	40.18	34.98	54.00	-19.02	Vertical
5460.00	34.78	31.99	9.16	40.23	35.70	54.00	-18.30	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n-HT40

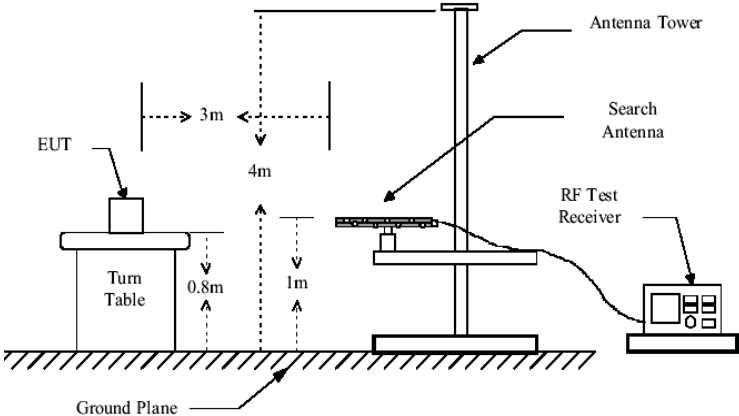
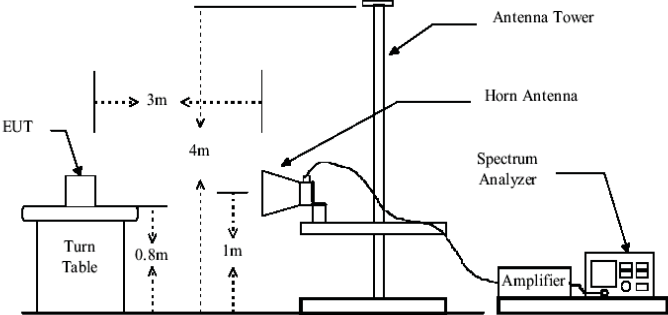
Test channel		Lowest			Level		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.25	31.78	9.15	40.18	41.00	74.00	-33.00	Horizontal
5460.00	40.33	31.99	9.16	40.23	41.25	74.00	-32.75	Horizontal
5350.00	41.81	31.78	9.15	40.18	42.56	74.00	-31.44	Vertical
5460.00	41.33	31.99	9.16	40.23	42.25	74.00	-31.75	Vertical
Test channel		Lowest			Level		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	33.25	31.78	9.15	40.18	34.00	54.00	-20.00	Horizontal
5460.00	33.98	31.99	9.16	40.23	34.90	54.00	-19.10	Horizontal
5350.00	34.25	31.78	9.15	40.18	35.00	54.00	-19.00	Vertical
5460.00	34.78	31.99	9.16	40.23	35.70	54.00	-18.30	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

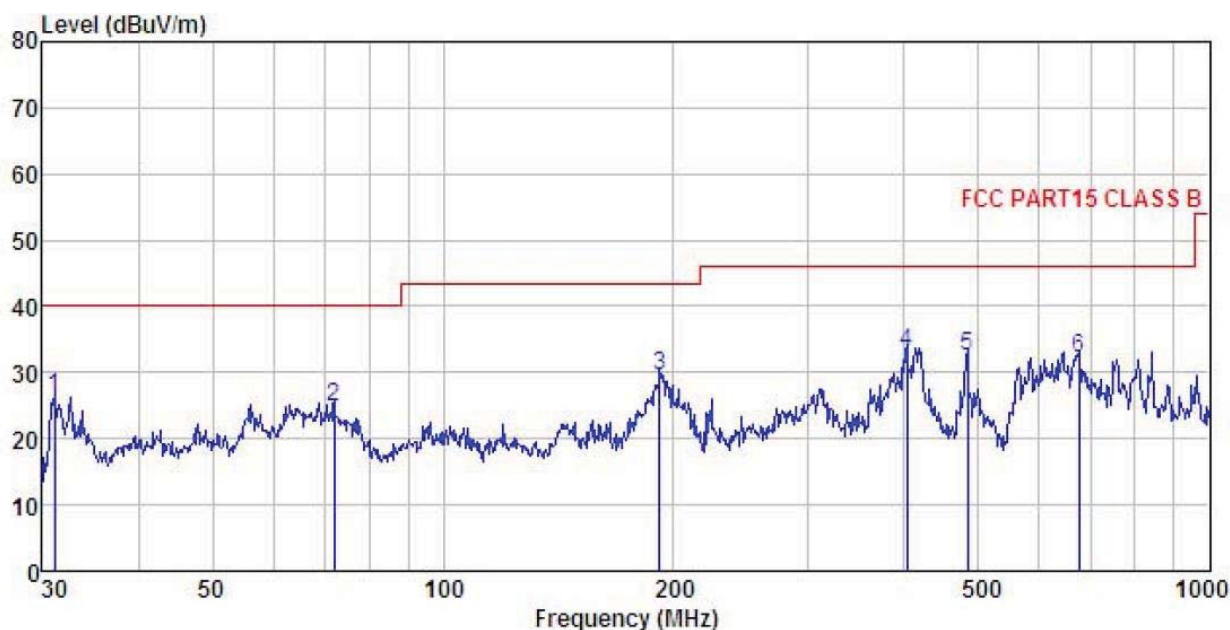
6.7.2 Unwanted Emissions in the Restricted Bands

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																													
Test Method:	ANSI C63.10: 2009																													
Test Frequency Range:	30MHz to 40GHz																													
Test site:	Measurement Distance: 3m																													
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td>Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value										
	Frequency	Detector	RBW	VBW	Remark																									
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value																									
Above 1GHz	Peak	1MHz	3MHz	Peak Value																										
Limit:	<table><tr><td>Frequency</td><td colspan="2">Limit (dBuV/m @3m)</td><td colspan="2">Remark</td></tr><tr><td>30MHz-88MHz</td><td colspan="2">40.0</td><td colspan="2">Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td colspan="2">43.5</td><td colspan="2">Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td colspan="2">46.0</td><td colspan="2">Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td colspan="2">54.0</td><td colspan="2">Quasi-peak Value</td></tr></table>					Frequency	Limit (dBuV/m @3m)		Remark		30MHz-88MHz	40.0		Quasi-peak Value		88MHz-216MHz	43.5		Quasi-peak Value		216MHz-960MHz	46.0		Quasi-peak Value		960MHz-1GHz	54.0		Quasi-peak Value	
	Frequency	Limit (dBuV/m @3m)		Remark																										
	30MHz-88MHz	40.0		Quasi-peak Value																										
	88MHz-216MHz	43.5		Quasi-peak Value																										
	216MHz-960MHz	46.0		Quasi-peak Value																										
	960MHz-1GHz	54.0		Quasi-peak Value																										
	<table><tr><td>Frequency</td><td colspan="2">Limit (dBm/MHz)</td><td colspan="2">Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td colspan="2">68.20</td><td colspan="2">Peak Value</td></tr><tr><td colspan="2">54.00</td><td colspan="2">Average Value</td></tr></table>					Frequency	Limit (dBm/MHz)		Remark		Above 1GHz	68.20		Peak Value		54.00		Average Value												
	Frequency	Limit (dBm/MHz)		Remark																										
	Above 1GHz	68.20		Peak Value																										
		54.00		Average Value																										
Remark:																														
1. Above 1GHz limit:																														
$E[dBuV/m] = EIRP[dBm] + 95.2=68.2 \text{ dBuV/m}$, for $EIPR[dBm]=-27dBm$.																														
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.																													
	2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.																													
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.																													
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.																													
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																													
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																													

Test setup:	Below 1GHz  Above 1GHz 
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Below 1GHz

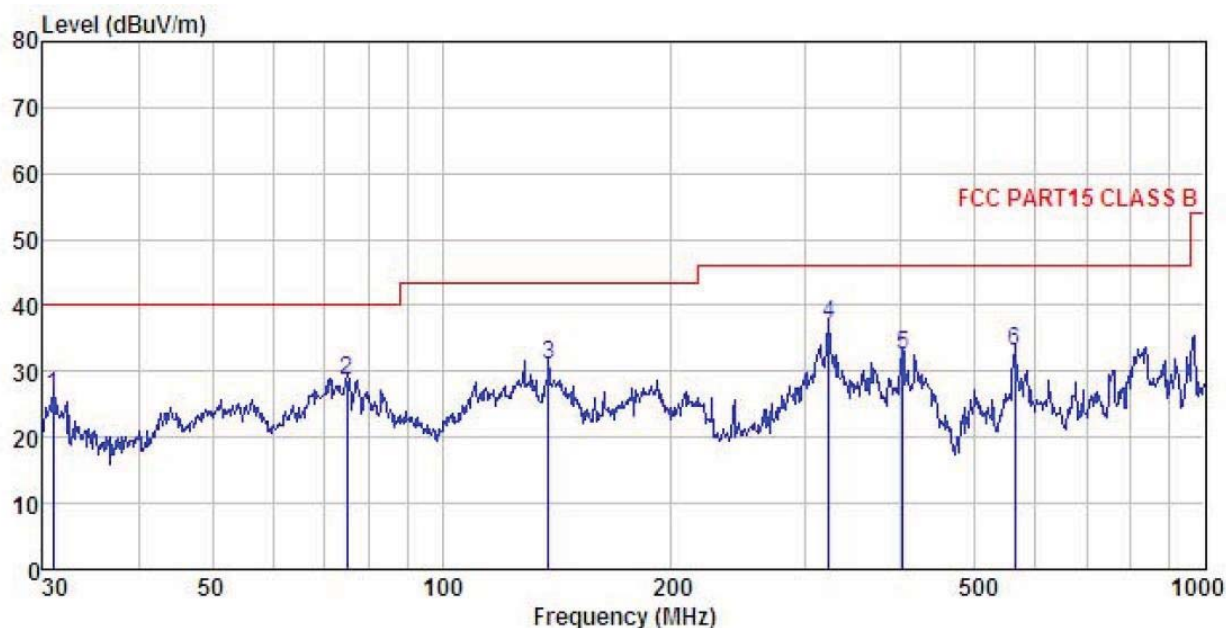
Horizontal:



Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 EUT : 18.5" Android touch LCD Media Player
 Model : DT185-AC4-720
 Test mode : 5G-WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55% 101KPa
 Test Engineer: Viki
 REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.071	43.44	12.32	0.44	29.97	26.23	40.00	-13.77	QP
2	72.084	45.33	8.26	0.80	29.70	24.69	40.00	-15.31	QP
3	191.745	46.50	10.56	1.37	28.89	29.54	43.50	-13.96	QP
4	403.250	44.66	15.14	2.13	28.79	33.14	46.00	-12.86	QP
5	483.910	42.71	16.20	2.36	28.93	32.34	46.00	-13.66	QP
6	675.208	39.26	18.72	2.85	28.72	32.11	46.00	-13.89	QP

Vertical:



Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 EUT : 18.5" Android touch LCD Media Player
 Model : DT185-AC4-720
 Test mode : 5G-WIFI mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55% 101KPa
 Test Engineer: Viki
 REMARK :

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	30.962	43.63	12.32	0.44	29.97	26.42	40.00	-13.58 QP
2	75.182	49.64	7.86	0.82	29.68	28.64	40.00	-11.36 QP
3	137.903	50.77	8.35	1.25	29.28	31.09	43.50	-12.41 QP
4	321.061	50.32	13.40	1.84	28.50	37.06	46.00	-8.94 QP
5	401.839	44.02	15.10	2.12	28.78	32.46	46.00	-13.54 QP
6	562.662	41.65	17.83	2.56	29.06	32.98	46.00	-13.02 QP

Above 1GHz:

Band 1:

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	45.55	39.23	13.84	41.34	57.28	68.20	-10.92	Vertical
10360.00	44.05	39.23	13.84	41.34	55.78	68.20	-12.42	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	32.42	39.23	13.84	41.34	44.15	54.00	-9.85	Vertical
10360.00	33.53	39.23	13.84	41.34	45.26	54.00	-8.74	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	44.59	39.36	13.85	41.27	56.53	68.20	-11.67	Vertical
10400.00	44.83	39.36	13.85	41.27	56.77	68.20	-11.43	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	34.44	39.36	13.85	41.27	46.38	54.00	-7.62	Vertical
10400.00	34.93	39.36	13.85	41.27	46.87	54.00	-7.13	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	43.58	39.56	13.90	41.06	55.98	68.20	-12.22	Vertical
10480.00	42.27	39.56	13.90	41.06	54.67	68.20	-13.53	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	33.08	39.56	13.90	41.06	45.48	54.00	-8.52	Vertical
10480.00	32.43	39.56	13.90	41.06	44.83	54.00	-9.17	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	45.26	39.23	13.84	41.34	56.99	68.20	-11.21	Vertical
10360.00	44.17	39.23	13.84	41.34	55.90	68.20	-12.30	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.00	35.53	39.23	13.84	41.34	47.26	54.00	-6.74	Vertical
10360.00	34.75	39.23	13.84	41.34	46.48	54.00	-7.52	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	45.52	39.36	13.85	41.27	57.46	68.20	-10.74	Vertical
10400.00	44.18	39.36	13.85	41.27	56.12	68.20	-12.08	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.00	35.53	39.36	13.85	41.27	47.47	54.00	-6.53	Vertical
10400.00	34.77	39.36	13.85	41.27	46.71	54.00	-7.29	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	43.26	39.56	13.90	41.06	55.66	68.20	-12.54	Vertical
10480.00	43.92	39.56	13.90	41.06	56.32	68.20	-11.88	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.00	32.08	39.56	13.90	41.06	44.48	54.00	-9.52	Vertical
10480.00	31.03	39.56	13.90	41.06	43.43	54.00	-10.57	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	43.15	39.29	13.84	41.31	54.97	68.20	-13.23	Vertical
10380.00	44.42	39.29	13.84	41.31	56.24	68.20	-11.96	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.00	31.33	39.29	13.84	41.31	43.15	54.00	-10.85	Vertical
10380.00	32.12	39.29	13.84	41.31	43.94	54.00	-10.06	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	43.15	39.54	13.88	41.17	55.40	68.20	-12.80	Vertical
10460.00	42.17	39.54	13.88	41.17	54.42	68.20	-13.78	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.00	33.12	39.54	13.88	41.17	45.37	54.00	-8.63	Vertical
10460.00	32.17	39.54	13.88	41.17	44.42	54.00	-9.58	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Band 4:

802.11a mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	43.52	40.25	13.82	40.75	56.84	68.20	-11.36	Vertical
11490.00	43.08	40.25	13.82	40.75	56.40	68.20	-11.80	Horizontal
802.11a mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	30.17	40.25	13.82	40.75	43.49	54.00	-10.51	Vertical
11490.00	30.02	40.25	13.82	40.75	43.34	54.00	-10.66	Horizontal

802.11a mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	43.13	40.17	13.78	40.91	56.17	68.20	-12.03	Vertical
11570.00	43.27	40.17	13.78	40.91	56.31	68.20	-11.89	Horizontal
802.11a mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	31.18	40.17	13.78	40.91	44.22	54.00	-9.78	Vertical
11570.00	30.12	40.17	13.78	40.91	43.16	54.00	-10.84	Horizontal

802.11a mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	44.16	39.89	13.74	41.06	56.73	68.20	-11.47	Vertical
11650.00	43.55	39.89	13.74	41.06	56.12	68.20	-12.08	Horizontal
802.11a mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	33.47	39.89	13.74	41.06	46.04	54.00	-7.96	Vertical
11650.00	31.15	39.89	13.74	41.06	43.72	54.00	-10.28	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	43.15	40.25	13.82	40.75	56.47	68.20	-11.73	Vertical
11490.00	42.03	40.25	13.82	40.75	55.35	68.20	-12.85	Horizontal
802.11n20 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.00	30.14	40.25	13.82	40.75	43.46	54.00	-10.54	Vertical
11490.00	29.63	40.25	13.82	40.75	42.95	54.00	-11.05	Horizontal

802.11n20 mode Middle channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	43.57	40.17	13.78	40.91	56.61	68.20	-11.59	Vertical
11570.00	43.10	40.17	13.78	40.91	56.14	68.20	-12.06	Horizontal
802.11n20 mode Middle channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.00	30.10	40.17	13.78	40.91	43.14	54.00	-10.86	Vertical
11570.00	30.34	40.17	13.78	40.91	43.38	54.00	-10.62	Horizontal

802.11n20 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	42.23	39.89	13.74	41.06	54.80	68.20	-13.40	Vertical
11650.00	42.61	39.89	13.74	41.06	55.18	68.20	-13.02	Horizontal
802.11n20 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.00	32.51	39.89	13.74	41.06	45.08	54.00	-8.92	Vertical
11650.00	30.33	39.89	13.74	41.06	42.90	54.00	-11.10	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

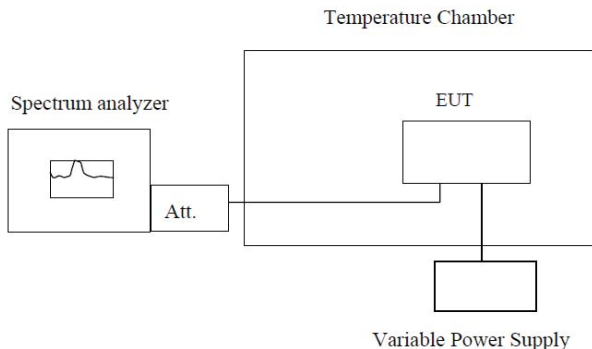
802.11n40 mode Lowest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	41.12	40.26	13.83	40.77	54.44	68.20	-13.76	Vertical
11510.00	42.75	40.26	13.83	40.77	56.07	68.20	-12.13	Horizontal
802.11n40 mode Lowest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11510.00	29.54	40.26	13.83	40.77	42.86	54.00	-11.14	Vertical
11510.00	29.32	40.26	13.83	40.77	42.64	54.00	-11.36	Horizontal

802.11n40 mode Highest channel (Peak Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	41.45	40.08	13.77	40.95	54.35	68.20	-13.85	Vertical
11590.00	42.22	40.08	13.77	40.95	55.12	68.20	-13.08	Horizontal
802.11n40 mode Highest channel (Average Value)								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11590.00	29.24	40.08	13.77	40.95	42.14	54.00	-11.86	Vertical
11590.00	29.63	40.08	13.77	40.95	42.53	54.00	-11.47	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

6.8 Frequency stability

Test Requirement:	FCC Part15 E Section 15.407 (g)
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details, and all channels have been tested, only shows the worst channel data in this report.
Test results:	Refer to FCC ID: 2AB6Z-1859ATMB