



# A Test Lab Techno Corp.

Changan Lab : No. 140-1, Changan Street, Bade District, Taoyuan City 33465, Taiwan (R.O.C).

Tel : 886-3-271-0188 / Fax : 886-3-271-0190

## SAR EVALUATION REPORT



|                     |                                                                                                                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Report No.     | : 1512FS19                                                                                                                                                                                  |
| Applicant           | : Iconnect                                                                                                                                                                                  |
| Applicant Address   | : No.9, Aly.58, Ln, 112, Ruiguang Rd., Neihu Dist, Taipei City, Taiwan                                                                                                                      |
| Manufacture         | : ALFA Network, Inc.                                                                                                                                                                        |
| Manufacture Address | : 4F-1, NO.106, RUEIGUANG RD., NEIHU DISTRICT, TAIPEI CITY 114, TAIWAN                                                                                                                      |
| Product Type        | : WiFi Pineapple                                                                                                                                                                            |
| Trade Name          | : Hak5                                                                                                                                                                                      |
| Model Number        | : NANO                                                                                                                                                                                      |
| Date of Received    | : Oct. 07, 2015                                                                                                                                                                             |
| Test Period         | : Dec. 28 ~ Dec. 30, 2015                                                                                                                                                                   |
| Date of Issued      | : Jan. 05, 2016                                                                                                                                                                             |
| Test Environment    | : Ambient Temperature : $22 \pm 2^{\circ} \text{C}$<br>Relative Humidity : 40 - 70 %                                                                                                        |
| Standard            | : ANSI/IEEE C95.1-1992 / IEEE Std. 1528-2013<br>47 CFR Part §2.1093<br>KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02<br>KDB 447498 D01 v06 / KDB 447498 D02 v02r01<br>KDB 248227 D01 v02r02 |
| Test Lab Location   | : Chang-an Lab                                                                                                                                                                              |



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. The test results in the report only apply to the tested sample.

Approved By :

(Bill Hu)

Tested By :

(Sky Chou)



# Contents

|                                                           |    |
|-----------------------------------------------------------|----|
| 1. Summary of Maximum Reported SAR Value.....             | 3  |
| 2. Description of Equipment under Test (EUT) .....        | 3  |
| 3. Introduction .....                                     | 4  |
| 3.1 SAR Definition .....                                  | 4  |
| 4. SAR Measurement Setup .....                            | 5  |
| 4.1 DASY E-Field Probe System.....                        | 6  |
| 4.1.1 E-Field Probe Specification .....                   | 7  |
| 4.1.2 E-Field Probe Calibration process.....              | 8  |
| 4.2 Data Acquisition Electronic (DAE) System .....        | 9  |
| 4.3 Robot.....                                            | 9  |
| 4.4 Measurement Server.....                               | 9  |
| 4.5 Device Holder .....                                   | 10 |
| 4.6 Oval Flat Phantom - ELI 4.0 .....                     | 10 |
| 4.7 Data Storage and Evaluation.....                      | 11 |
| 4.7.1 Data Storage .....                                  | 11 |
| 4.7.2 Data Evaluation .....                               | 12 |
| 5. Tissue Simulating Liquids .....                        | 14 |
| 5.1 Ingredients.....                                      | 15 |
| 5.2 Recipes .....                                         | 15 |
| 5.3 Liquid Depth .....                                    | 16 |
| 6. SAR Testing with RF Transmitters .....                 | 17 |
| 6.1 SAR Testing with 802.11 Transmitters .....            | 17 |
| 6.2 Conducted Power .....                                 | 18 |
| 6.3 Antenna location.....                                 | 19 |
| 6.4 Stand-alone SAR Evaluate .....                        | 20 |
| 6.5 Simultaneous Transmitting Evaluate .....              | 21 |
| 6.5.1 SAR to peak location separation ratio (SPLSR) ..... | 21 |
| 6.6 SAR test reduction according to KDB.....              | 21 |
| 7. System Verification and Validation .....               | 22 |
| 7.1 Symmetric Dipoles for System Verification.....        | 22 |
| 7.2 Liquid Parameters .....                               | 23 |
| 7.3 Verification Summary .....                            | 24 |
| 7.4 Validation Summary.....                               | 24 |
| 8. Test Equipment List .....                              | 25 |
| 9. Measurement Uncertainty.....                           | 26 |
| 10. Measurement Procedure .....                           | 28 |
| 10.1 Spatial Peak SAR Evaluation .....                    | 28 |
| 10.2 Area & Zoom Scan Procedures.....                     | 29 |
| 10.3 Volume Scan Procedures.....                          | 29 |
| 10.4 SAR Averaged Methods .....                           | 29 |
| 10.5 Power Drift Monitoring .....                         | 29 |
| 11. SAR Test Results Summary .....                        | 30 |
| 11.1 Head Measurement SAR .....                           | 30 |
| 11.2 Body Measurement SAR.....                            | 30 |
| 11.3 Hot-spot mode Measurement SAR.....                   | 30 |
| 11.4 Extremity Measurement SAR.....                       | 30 |
| 11.5 SAR Measurement Variability.....                     | 30 |
| 11.6 Std. C95.1-1999 RF Exposure Limit.....               | 31 |
| 12. References .....                                      | 32 |
| Appendix A -System Performance Check.....                 | 33 |
| Appendix B -SAR Measurement Data.....                     | 36 |
| Appendix C - Calibration.....                             | 40 |

## 1. Summary of Maximum Reported SAR Value

| Equipment Class | Mode                  | Highest Reported       |
|-----------------|-----------------------|------------------------|
|                 |                       | Body-Worn SAR1g (W/kg) |
| DTS             | WLAN 2.4GHz Antenna 1 | 0.11                   |

Note: The SAR limit ( Body: SAR1g 1.6 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999.

## 2. Description of Equipment under Test (EUT)

|                           |                                                                                            |                         |       |
|---------------------------|--------------------------------------------------------------------------------------------|-------------------------|-------|
| Applicant                 | Iconnect<br>No.9, Aly.58, Ln, 112, Ruiguang Rd., Neihu Dist, Taipei City, Taiwan           |                         |       |
| Manufacture               | ALFA Network, Inc.<br>4F-1, NO.106, RUEIGUANG RD., NEIHU DISTRICT, TAIPEI CITY 114, TAIWAN |                         |       |
| Product Type              | WiFi Pineapple                                                                             |                         |       |
| Trade Name                | Hak5                                                                                       |                         |       |
| Model Number              | NANO                                                                                       |                         |       |
| FCC ID                    | 2AB87-NANO                                                                                 |                         |       |
| RF Function               | IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz<br>IEEE 802.11n 2.4GHz 40MHz                 |                         |       |
| Tx Frequency              | Band                                                                                       | Operate Frequency (MHz) |       |
|                           | IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz                                              | 2412 - 2462             |       |
|                           | IEEE 802.11n 2.4GHz 40MHz                                                                  | 2422 - 2452             |       |
| RF Conducted Power (Avg.) | Band                                                                                       | Power                   |       |
|                           |                                                                                            | W                       | dBm   |
|                           | IEEE 802.11b                                                                               | 0.035                   | 15.45 |
|                           | IEEE 802.11g                                                                               | 0.036                   | 15.57 |
|                           | IEEE 802.11n 2.4GHz 20MHz                                                                  | 0.034                   | 15.28 |
|                           | IEEE 802.11n 2.4GHz 40MHz                                                                  | 0.013                   | 11.01 |
| Antenna Type              | Dipole antenna                                                                             |                         |       |
| Device Category           | Portable Device                                                                            |                         |       |
| Application Type          | Certification                                                                              |                         |       |

Note: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 3. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **Iconnect Trade Name : Hak5 Model(s) : NANO**. The test procedures, as described in American National Standards, Institute C95.1-1999 [ 1 ] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

#### 3.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$SAR = \frac{d}{dt} \left( \frac{dw}{dm} \right) = \frac{d}{dt} \left( \frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma E^2}{\rho}$$

Where :

$\sigma$  = conductivity of the tissue (S/m)


$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = RMS electric field strength (V/m)

\* Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [ 2 ]

## 4. SAR Measurement Setup

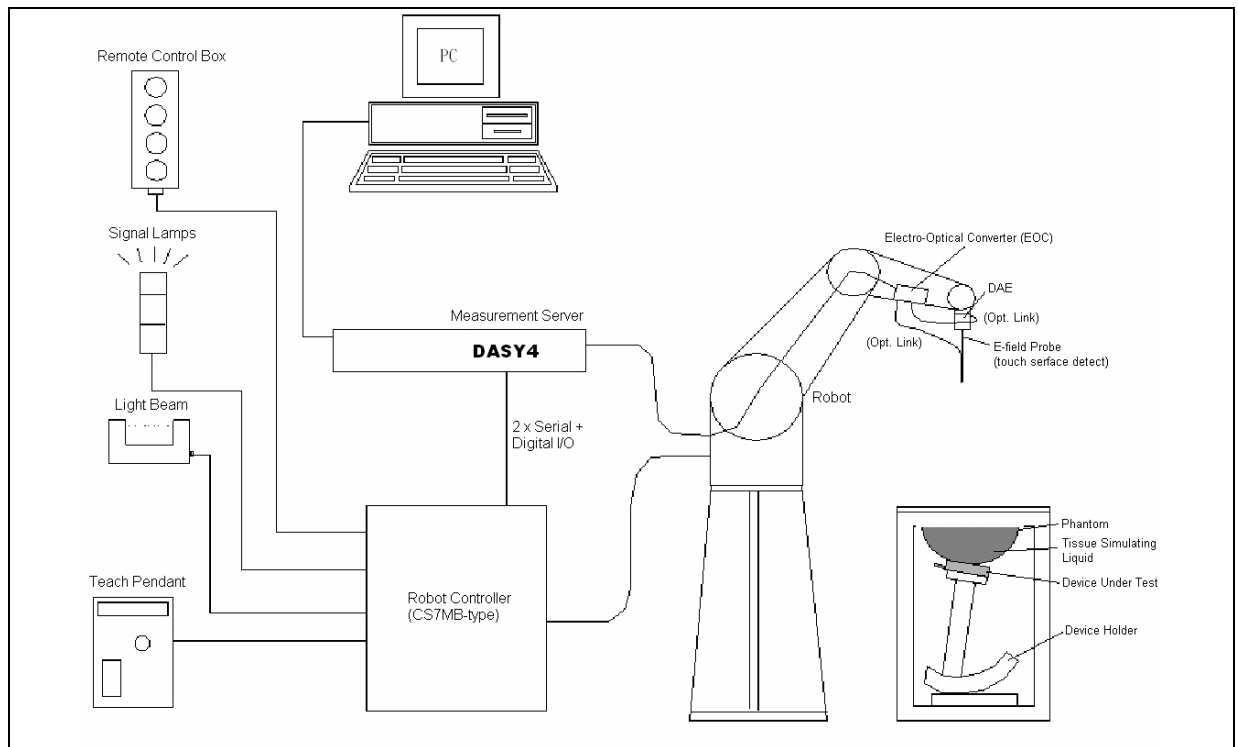

The DASY4 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer operating Windows 2000 or Windows XP.
7. DASY4 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The SAM twin phantom enabling testing left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. Validation dipole kits allowing validating the proper functioning of the system.



## 4.1 DASY E-Field Probe System

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration [ 3 ] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

#### 4.1.1 E-Field Probe Specification

|              |                                                                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration  | ISO/IEC 17025 calibration service available                                                                                                                 |
| Frequency    | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                              |
| Directivity  | $\pm 0.3$ dB in brain tissue (rotation around probe axis)<br>$\pm 0.5$ dB in brain tissue (rotation normal probe axis)                                      |
| Dimensions   | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |

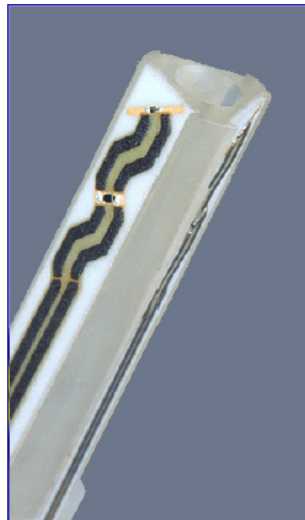


Figure 3. E-field Probe



Figure 4. Probe setup on robot



#### 4.1.2 E-Field Probe Calibration process

##### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter.

##### Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

##### Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where :

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

$\Delta T$  = Temperature increase due to RF exposure.

$$\text{Or } SAR = \frac{|E|^2 \sigma}{\rho}$$

Where :

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).



## 4.2 Data Acquisition Electronic (DAE) System

Model : DAE3, DAE4  
Construction : Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.  
Measurement Range : -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)  
Input Offset Voltage : < 5 $\mu$ V (with auto zero)  
Input Bias Current : < 50 fA  
Dimensions : 60 x 60 x 68 mm

## 4.3 Robot


Positioner : Stäubli Unimation Corp. Robot Model: RX90L  
Repeatability :  $\pm 0.025$  mm  
No. of Axis : 6

## 4.4 Measurement Server

Processor : PC/104 with a 166MHz low-power Pentium  
I/O-board : Link to DAE4 (or DAE3)  
16-bit A/D converter for surface detection system  
Digital I/O interface  
Serial link to robot  
Direct emergency stop output for robot

## 4.5 Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

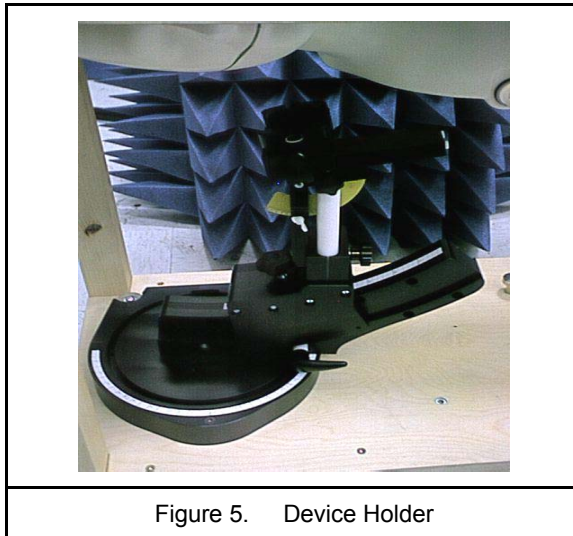

## 4.6 Oval Flat Phantom - ELI 4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

|                                   |                        |
|-----------------------------------|------------------------|
| Shell Thickness                   | $2 \pm 0.2$ mm         |
| Filling Volume                    | Approx. 30 liters      |
| Dimensions                        | 190×600×400 mm (H×L×W) |
| Table 1. Specification of ELI 4.0 |                        |

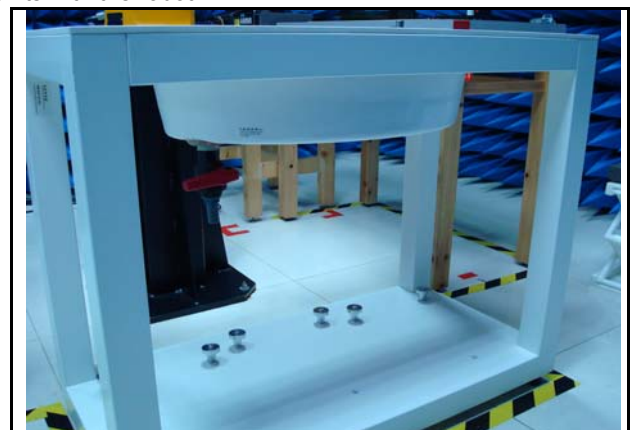


Figure 6. Oval Flat Phantom



## **4.7 Data Storage and Evaluation**

### **4.7.1 Data Storage**

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DA4 or DA5. The post processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

#### 4.7.2 Data Evaluation

The DASY post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

- Probe parameters :    - Sensitivity         $Norm_i, ai0, ai1, ai2$   
                               - Conversion factor     $ConvFi$   
                               - Diode compression point     $dcp_i$
- Device parameters :    - Frequency         $f$   
                               - Crest factor         $cf$
- Media parameters :    - Conductivity         $\sigma$   
                               - Density         $\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

- With      $V_i$      = compensated signal of channel i (i = x, y, z)  
             $U_i$      = input signal of channel i (i = x, y, z)  
             $cf$      = crest factor of exciting field (DASY parameter)  
             $dcp_i$    = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

$$E\text{-field probes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

*H-field probes :*

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
*Normi* = sensor sensitivity of channel i (i = x, y, z)  
 $\mu V/(V/m)^2$  for *E-field Probes*  
*ConvF* = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $SAR$  = local specific absorption rate in mW/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

\* Note : That the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m  
 $H_{tot}$  = total magnetic field strength in A/m

## 5. Tissue Simulating Liquids

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

### IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

| Target Frequency                                                                                      | Head         |                | Body         |                |
|-------------------------------------------------------------------------------------------------------|--------------|----------------|--------------|----------------|
| (MHz)                                                                                                 | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) |
| 150                                                                                                   | 52.3         | 0.76           | 61.9         | 0.80           |
| 300                                                                                                   | 45.3         | 0.87           | 58.2         | 0.92           |
| 450                                                                                                   | 43.5         | 0.87           | 56.7         | 0.94           |
| 835                                                                                                   | 41.5         | 0.90           | 55.2         | 0.97           |
| 900                                                                                                   | 41.5         | 0.97           | 55.0         | 1.05           |
| 915                                                                                                   | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450                                                                                                  | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610                                                                                                  | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800 - 2000                                                                                           | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450                                                                                                  | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000                                                                                                  | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800                                                                                                  | 35.3         | 5.27           | 48.2         | 6.00           |
| ( $\epsilon_r$ = relative permittivity, $\sigma$ = conductivity and $\rho$ = 1000 kg/m <sup>3</sup> ) |              |                |              |                |

Table 2. Tissue dielectric parameters for head and body phantoms



## 5.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H<sub>2</sub>O), resistivity  $\geq 16 \text{ M } \Omega$  -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)  
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

## 5.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of  $\pm 5\%$  for  $\epsilon$  and  $\pm 5\%$  for  $\sigma$ .

| Ingredients<br>(% by weight)     | Frequency (MHz) |       |       |       |       |       |       |       |       |       |       |       | Frequency<br>(GHz) |      |
|----------------------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------------------|------|
|                                  | 750             |       | 835   |       | 1750  |       | 1900  |       | 2450  |       | 2600  |       | 5GHz               |      |
| Tissue Type                      | Head            | Body  | Head  | Body  | Head  | Body  | Head  | Body  | Head  | Body  | Head  | Body  | Head               | Body |
| Water                            | 39.28           | 51.30 | 41.45 | 52.40 | 54.50 | 40.20 | 54.90 | 40.40 | 62.70 | 73.20 | 60.30 | 71.40 | 65.5               | 78.6 |
| Salt (NaCl)                      | 1.47            | 1.42  | 1.45  | 1.50  | 0.17  | 0.49  | 0.18  | 0.50  | 0.50  | 0.10  | 0.60  | 0.20  | 0.00               | 0.00 |
| Sugar                            | 58.15           | 46.18 | 56.00 | 45.00 | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00               | 0.00 |
| HEC                              | 1.00            | 1.00  | 1.00  | 1.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00               | 0.00 |
| Bactericide                      | 0.10            | 0.10  | 0.10  | 0.10  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00               | 0.00 |
| Triton X-100                     | 0.00            | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 17.2               | 10.7 |
| DGBE                             | 0.00            | 0.00  | 0.00  | 0.00  | 45.33 | 59.31 | 44.92 | 59.10 | 36.80 | 26.70 | 39.10 | 28.40 | 0.00               | 0.00 |
| Dielectric Constant              | 41.88           | 54.60 | 42.54 | 56.10 | 40.10 | 53.60 | 39.90 | 54.00 | 39.80 | 52.50 | 39.80 | 52.50 | 0.00               | 0.00 |
| Conductivity (S/m)               | 0.90            | 0.97  | 0.91  | 0.95  | 1.39  | 1.49  | 1.42  | 1.45  | 1.88  | 1.78  | 1.88  | 1.78  | 0.00               | 0.00 |
| Diethylene Glycol Mono-hexlether | 0.00            | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 17.3               | 10.7 |

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized,  $16 \text{ M } \Omega$  resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

### 5.3 Liquid Depth

According to KDB865664 ,the depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm with  $\leq \pm 0.5$  cm variation for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm with  $\leq \pm 0.5$  cm variation for measurements  $> 3$  GHz.

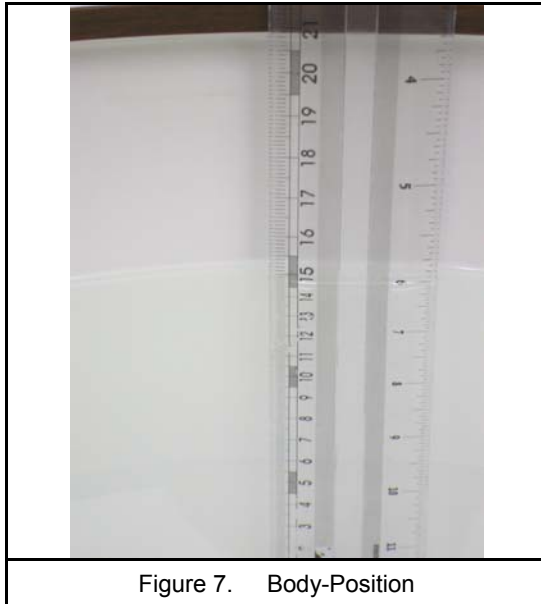


Figure 7. Body-Position



## 6. SAR Testing with RF Transmitters

### 6.1 SAR Testing with 802.11 Transmitters

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:



- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

## 6.2 Conducted Power

| Band                             | Data Rate | CH | Frequency (MHz) | Average Power (dBm) |       |
|----------------------------------|-----------|----|-----------------|---------------------|-------|
|                                  |           |    |                 | ANT-1               | ANT-2 |
| IEEE 802.11b                     | 1M        | 1  | 2412.0          | 15.45               | 8.55  |
|                                  |           | 6  | 2437.0          | 15.34               | 8.21  |
|                                  |           | 11 | 2462.0          | 15.31               | 8.33  |
|                                  | 2M        | 6  | 2437.0          | 15.33               | 8.20  |
|                                  | 5.5M      | 6  | 2437.0          | 15.31               | 8.12  |
|                                  | 11M       | 6  | 2437.0          | 15.29               | 8.14  |
| IEEE 802.11g                     | 6M        | 1  | 2412.0          | 15.57               | 12.85 |
|                                  |           | 6  | 2437.0          | 15.39               | 12.97 |
|                                  |           | 11 | 2462.0          | 14.93               | 12.82 |
|                                  | 9M        | 6  | 2437.0          | 15.35               | 12.10 |
|                                  | 12M       | 6  | 2437.0          | 15.33               | 12.19 |
|                                  | 18M       | 6  | 2437.0          | 15.32               | 12.00 |
|                                  | 24M       | 6  | 2437.0          | 15.30               | 12.80 |
|                                  | 36M       | 6  | 2437.0          | 15.29               | 12.15 |
|                                  | 48M       | 6  | 2437.0          | 15.26               | 12.92 |
| IEEE 802.11n<br>2.4 GHz<br>20MHz | 6.5M      | 1  | 2412.0          | 15.28               | 11.93 |
|                                  |           | 6  | 2437.0          | 15.17               | 12.51 |
|                                  |           | 11 | 2462.0          | 14.42               | 12.03 |
|                                  | 13M       | 6  | 2437.0          | 15.14               | 11.96 |
|                                  | 19.5M     | 6  | 2437.0          | 15.13               | 11.98 |
|                                  | 26M       | 6  | 2437.0          | 15.11               | 12.13 |
|                                  | 39M       | 6  | 2437.0          | 15.10               | 11.99 |
|                                  | 52M       | 6  | 2437.0          | 15.08               | 12.39 |
|                                  | 58.5M     | 6  | 2437.0          | 15.06               | 12.28 |
| IEEE 802.11n<br>2.4 GHz<br>40MHz | 13.5M     | 3  | 2422.0          | 11.01               | 11.75 |
|                                  |           | 6  | 2437.0          | 10.96               | 11.68 |
|                                  |           | 9  | 2452.0          | 10.87               | 11.66 |
|                                  | 27M       | 6  | 2437.0          | 10.93               | 11.17 |
|                                  | 40.5M     | 6  | 2437.0          | 10.86               | 11.03 |
|                                  | 54M       | 6  | 2437.0          | 10.82               | 11.07 |
|                                  | 81M       | 6  | 2437.0          | 10.77               | 11.00 |
|                                  | 108M      | 6  | 2437.0          | 10.71               | 10.90 |
|                                  | 121.5M    | 6  | 2437.0          | 10.66               | 11.32 |
|                                  | 135M      | 6  | 2437.0          | 10.62               | 11.60 |

### 6.3 Antenna location

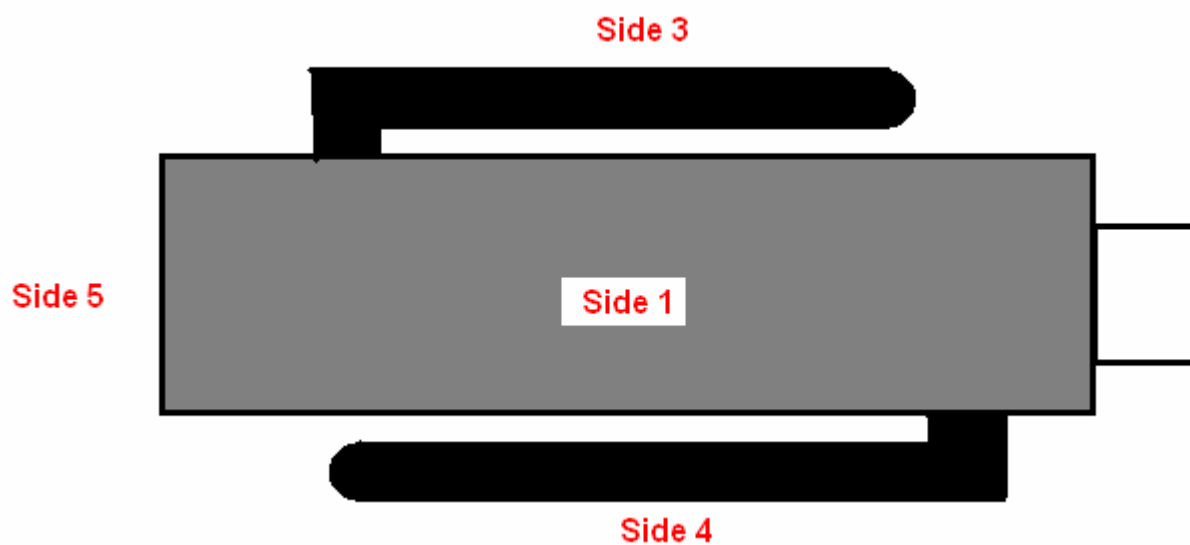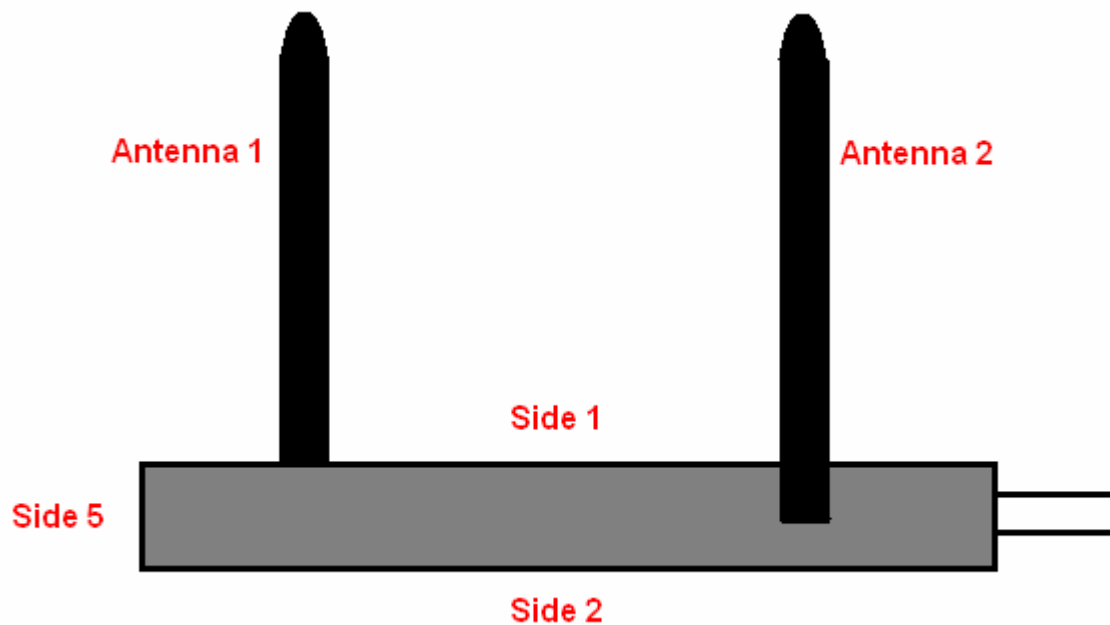

Note 1: The bottom is defined as Side 2.

Note 2: The opposite from the USB connector is defined as Side 5.



## 6.4 Stand-alone SAR Evaluate

Transmitter and antenna implementation as below:

| Band | WLAN Antenna 1 | WLAN Antenna 2 |
|------|----------------|----------------|
| WLAN | V              | V              |

Stand-alone transmission configurations as below:

| Band                      | Side 1 | Side 2 | Side 3 | Side 4 | Side 5 |
|---------------------------|--------|--------|--------|--------|--------|
| IEEE 802.11b              | ---    | V      | ---    | ---    | V      |
| IEEE 802.11g              | ---    | V      | ---    | ---    | V      |
| IEEE 802.11n 2.4GHz 20MHz | ---    | V      | ---    | ---    | V      |
| IEEE 802.11n 2.4GHz 40MHz | ---    | V      | ---    | ---    | V      |



## 6.5 Simultaneous Transmitting Evaluate

### Simultaneous transmission configurations as below:

The device has two individually modules and antenna, antenna transmits operating is diversity of 1TX. therefore, no have simultaneous transmission.

### 6.5.1 SAR to peak location separation ratio (SPLSR)

When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by  $(SAR1 + SAR2)^{1.5}/R_i$ , rounded to two decimal digits, and must be  $\leq 0.04$  for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

All of sum of SAR < 1.6 W/kg, therefore SPLSR is not required.

## 6.6 SAR test reduction according to KDB

### General:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to FCC, Supplement C [June 2001], IEEE1528-2013.
- All modes of operation were investigated, and worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plots.
- Batteries are fully charged for all readings.
- When the Channel's SAR 1g of maximum conducted power is > 0.8 mW/g, low, middle and high channel are supposed to be tested.

### KDB 447498:

- The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to IEEE1528-2013.

### KDB 865664:

- Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
- When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg.
- Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.


### KDB 248227:

- Refer 6.1 SAR Testing with 802.11 Transmitters.

## 7. System Verification and Validation

### 7.1 Symmetric Dipoles for System Verification

|                  |                                                                                                                                                                                                                                                                                                                                       |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction     | Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions. |
| Frequency        | 2450 MHz                                                                                                                                                                                                                                                                                                                              |
| Return Loss      | > 20 dB at specified verification position                                                                                                                                                                                                                                                                                            |
| Power Capability | > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )                                                                                                                                                                                                                                                                           |
| Options          | Dipoles for other frequencies or solutions and other calibration conditions are available upon request                                                                                                                                                                                                                                |
| Dimensions       | D2450V2: dipole length 51.5 mm; overall height 300 mm                                                                                                                                                                                                                                                                                 |

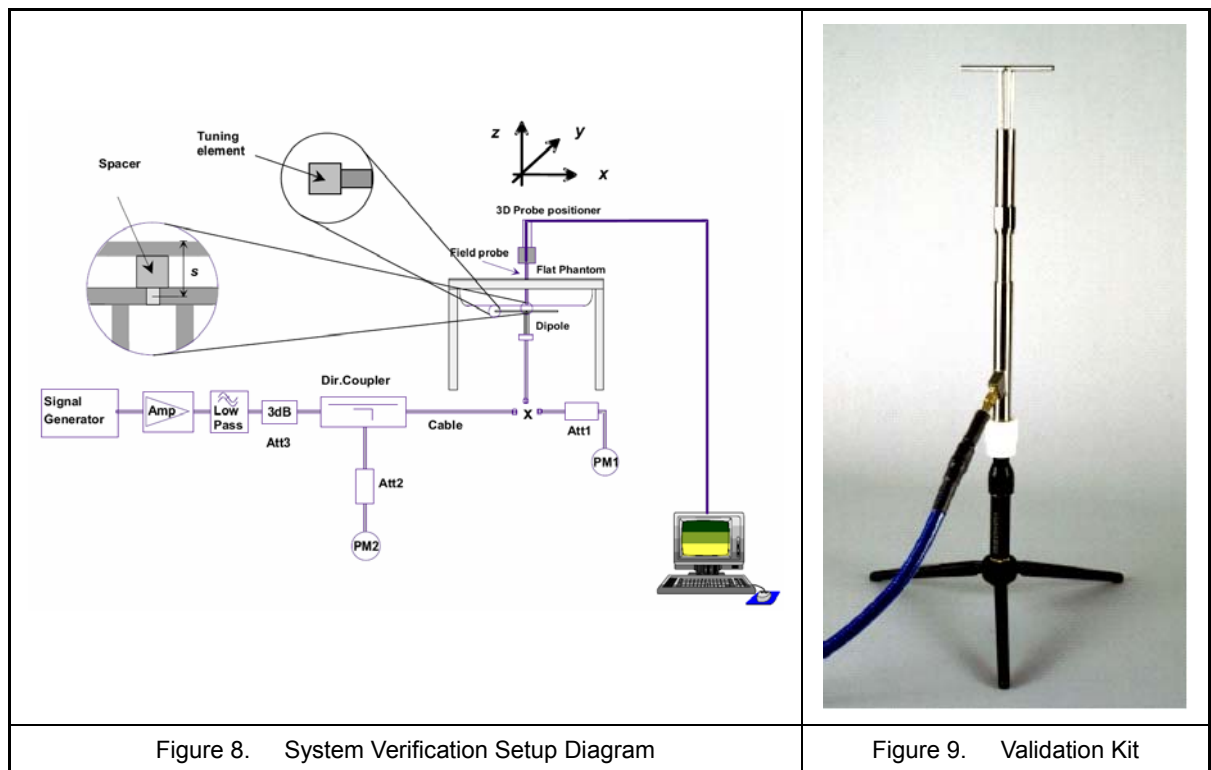

## 7.2 Liquid Parameters

| Liquid Verify                                                 |           |           |              |              |                |               |           |               |
|---------------------------------------------------------------|-----------|-----------|--------------|--------------|----------------|---------------|-----------|---------------|
| Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70% |           |           |              |              |                |               |           |               |
| Liquid Type                                                   | Frequency | Temp (°C) | Parameters   | Target Value | Measured Value | Deviation (%) | Limit (%) | Measured Date |
| 2450MHz (Body)                                                | 2400MHz   | 22.0      | $\epsilon_r$ | 52.77        | 50.88          | -3.58%        | ± 5       | 2015/12/28    |
|                                                               |           |           | $\sigma$     | 1.902        | 1.865          | -1.95%        | ± 5       |               |
|                                                               | 2450MHz   | 22.0      | $\epsilon_r$ | 52.70        | 50.72          | -3.76%        | ± 5       |               |
|                                                               |           |           | $\sigma$     | 1.950        | 1.923          | -1.39%        | ± 5       |               |
|                                                               | 2500MHz   | 22.0      | $\epsilon_r$ | 52.64        | 50.59          | -3.89%        | ± 5       |               |
|                                                               |           |           | $\sigma$     | 2.021        | 1.976          | -2.23%        | ± 5       |               |
| 2450MHz (Body)                                                | 2400MHz   | 22.0      | $\epsilon_r$ | 52.77        | 50.88          | -3.58%        | ± 5       | 2015/12/29    |
|                                                               |           |           | $\sigma$     | 1.902        | 1.865          | -1.95%        | ± 5       |               |
|                                                               | 2450MHz   | 22.0      | $\epsilon_r$ | 52.70        | 50.72          | -3.76%        | ± 5       |               |
|                                                               |           |           | $\sigma$     | 1.950        | 1.923          | -1.39%        | ± 5       |               |
|                                                               | 2500MHz   | 22.0      | $\epsilon_r$ | 52.64        | 50.59          | -3.89%        | ± 5       |               |
|                                                               |           |           | $\sigma$     | 2.021        | 1.976          | -2.23%        | ± 5       |               |
| 2450MHz (Body)                                                | 2400MHz   | 22.0      | $\epsilon_r$ | 52.77        | 50.88          | -3.58%        | ± 5       | 2015/12/30    |
|                                                               |           |           | $\sigma$     | 1.902        | 1.865          | -1.95%        | ± 5       |               |
|                                                               | 2450MHz   | 22.0      | $\epsilon_r$ | 52.70        | 50.72          | -3.76%        | ± 5       |               |
|                                                               |           |           | $\sigma$     | 1.950        | 1.923          | -1.39%        | ± 5       |               |
|                                                               | 2500MHz   | 22.0      | $\epsilon_r$ | 52.64        | 50.59          | -3.89%        | ± 5       |               |
|                                                               |           |           | $\sigma$     | 2.021        | 1.976          | -2.23%        | ± 5       |               |

Table 3. Measured Tissue dielectric parameters for body phantoms -3

### 7.3 Verification Summary

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 7\%$ . The verification was performed at 2450MHz.

| Mixture Type | Frequency (MHz) | Power               | SAR <sub>1g</sub> (W/Kg) | SAR <sub>10g</sub> (W/Kg) | Drift (dB) | Difference percentage |       | Probe Model / Serial No. | Dipole Model / Serial No. | 1W Target                |                           | Date          |
|--------------|-----------------|---------------------|--------------------------|---------------------------|------------|-----------------------|-------|--------------------------|---------------------------|--------------------------|---------------------------|---------------|
|              |                 |                     |                          |                           |            | 1g                    | 10g   |                          |                           | SAR <sub>1g</sub> (mW/g) | SAR <sub>10g</sub> (mW/g) |               |
| Body         | 2450            | 250 mW              | 13.3                     | 6.27                      | -0.005     | 0.60%                 | 2.80% | EX3DV4-SN3847            | D2450V2-SN712             | 52.90                    | 24.40                     | Dec. 28, 2015 |
|              |                 | Normalize to 1 Watt | 53.20                    | 25.08                     |            |                       |       |                          |                           |                          |                           |               |
| Body         | 2450            | 250 mW              | 13.1                     | 6.23                      | -0.007     | -0.90%                | 2.10% | EX3DV4-SN3847            | D2450V2-SN712             | 52.90                    | 24.40                     | Dec. 29, 2015 |
|              |                 | Normalize to 1 Watt | 52.40                    | 24.92                     |            |                       |       |                          |                           |                          |                           |               |
| Body         | 2450            | 250 mW              | 13.1                     | 6.23                      | -0.059     | -0.90%                | 2.10% | EX3DV4-SN3847            | D2450V2-SN712             | 52.90                    | 24.40                     | Dec. 30, 2015 |
|              |                 | Normalize to 1 Watt | 52.40                    | 24.92                     |            |                       |       |                          |                           |                          |                           |               |

### 7.4 Validation Summary

Per FCC KDB 865664 D02 v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters as below.

| Probe Type<br>Model /<br>Serial No. | Prob Cal.<br>Point<br>(MHz) | Head /<br>Body | Cond.        | Perm.    | CW Validation |           |          | Mod. Validation |                |      | Date          |
|-------------------------------------|-----------------------------|----------------|--------------|----------|---------------|-----------|----------|-----------------|----------------|------|---------------|
|                                     |                             |                | $\epsilon_r$ | $\sigma$ | Sensitivity   | Probe     | Probe    | Mod. Type       | Duty<br>Factor | PAR  |               |
|                                     |                             |                |              |          |               | Linearity | Isotropy |                 |                |      |               |
| EX3DV4-SN3847                       | 2450                        | Body           | 50.72        | 1.923    | Pass          | Pass      | Pass     | DSSS            | N/A            | Pass | Dec. 28, 2015 |
| EX3DV4-SN3847                       | 2450                        | Body           | 50.72        | 1.923    | Pass          | Pass      | Pass     | DSSS            | N/A            | Pass | Dec. 29, 2015 |
| EX3DV4-SN3847                       | 2450                        | Body           | 50.72        | 1.923    | Pass          | Pass      | Pass     | DSSS            | N/A            | Pass | Dec. 30, 2015 |



## 8. Test Equipment List

| Manufacturer  | Name of Equipment                  | Type/Model            | Serial Number     | Calibration   |               |
|---------------|------------------------------------|-----------------------|-------------------|---------------|---------------|
|               |                                    |                       |                   | Last Cal.     | Due Date      |
| SPEAG         | 2450MHz System Validation Kit      | D2450V2               | 712               | Mar. 12, 2015 | Mar. 12, 2016 |
| SPEAG         | Dosimetric E-Field Probe           | EX3DV4                | 3847              | Jan. 30, 2015 | Jan. 30, 2016 |
| SPEAG         | Data Acquisition Electronics       | DAE4                  | 541               | Feb. 03, 2015 | Feb. 03, 2016 |
| SPEAG         | Device Holder                      | N/A                   | N/A               | NCR           |               |
| SPEAG         | Measurement Server                 | SE UMS 001 BA         | 1021              | NCR           |               |
| SPEAG         | Phantom (ELI V4.0)                 | QDOVA001BB            | 1036              | NCR           |               |
| SPEAG         | Robot                              | Staubli RX90L         | F00/589B1/A/01    | NCR           |               |
| SPEAG         | Software                           | DASY4 V4.7 Build 80   | N/A               | NCR           |               |
| SPEAG         | Software                           | SEMCAD V1.8 Build 186 | N/A               | NCR           |               |
| Agilent       | Dielectric Probe Kit               | 85070C                | US99360094        | NCR           |               |
| Agilent       | ENA Series Network Analyzer        | E5071B                | MY42404655        | Apr. 10, 2015 | Apr. 10, 2016 |
| R&S           | Power Sensor                       | NRP-Z22               | 100179            | Jun. 01, 2015 | Jun. 01, 2016 |
| Agilent       | Power Sensor                       | 8481H                 | 3318A20779        | Jun. 15, 2015 | Jun. 15, 2016 |
| Agilent       | Power Meter                        | EDM Series E4418B     | GB40206143        | Jun. 15, 2015 | Jun. 15, 2016 |
| Anritsu       | Power Meter                        | ML2495A               | 1135009           | Aug. 24, 2015 | Aug. 24, 2016 |
| Agilent       | MXF-G-B RF Vector Signal Generator | N5182B                | MY53050382        | May 28, 2015  | May 28, 2016  |
| Agilent       | Dual Directional Coupler           | 778D                  | 50334             | NCR           |               |
| Mini-Circuits | Power Amplifier                    | ZHL-42W-SMA           | D111103#5         | NCR           |               |
| Mini-Circuits | Power Amplifier                    | ZVE-8G-SMA            | D042005 671800514 | NCR           |               |
| Aisi          | Attenuator                         | IEAT 3dB              | N/A               | NCR           |               |

Table 4. Test Equipment List



## **9. *Measurement Uncertainty***

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR<sub>1g</sub> to be less than  $\pm 21.76$  % for 300MHz ~3GHz.

According to Std. C95.3 [ 9 ] , the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of  $\pm 1$  to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least  $\pm 2$ dB can be expected.

Uncertainty of a Measure SAR of EUT with DASY System

| Item                                         | Uncertainty Component                                                           | Uncertainty Value | Prob. Dist  | Div.       | $c_i$ (1g) | $c_i$ (10g) | Std. Unc. (1-g) | Std. Unc. (10-g) | $v_i$ or $V_{eff}$ |
|----------------------------------------------|---------------------------------------------------------------------------------|-------------------|-------------|------------|------------|-------------|-----------------|------------------|--------------------|
| Measurement System                           |                                                                                 |                   |             |            |            |             |                 |                  |                    |
| u1                                           | Probe Calibration ( $k=1$ )                                                     | $\pm 6.0\%$       | Normal      | 1          | 1          | 1           | $\pm 6.0\%$     | $\pm 6.0\%$      | $\infty$           |
| u2                                           | Axial Isotropy                                                                  | $\pm 4.7\%$       | Rectangular | $\sqrt{3}$ | 0.7        | 0.7         | $\pm 1.9\%$     | $\pm 1.9\%$      | $\infty$           |
| u3                                           | Hemispherical Isotropy                                                          | $\pm 9.6\%$       | Rectangular | $\sqrt{3}$ | 0.7        | 0.7         | $\pm 3.9\%$     | $\pm 3.9\%$      |                    |
| u4                                           | Boundary Effect                                                                 | $\pm 1.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 0.6\%$     | $\pm 0.6\%$      | $\infty$           |
| u5                                           | Linearity                                                                       | $\pm 4.7\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 2.7\%$     | $\pm 2.7\%$      | $\infty$           |
| u6                                           | System Detection Limit                                                          | $\pm 1.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 0.6\%$     | $\pm 0.6\%$      | $\infty$           |
| u7                                           | Readout Electronics                                                             | $\pm 0.3\%$       | Normal      | 1          | 1          | 1           | $\pm 0.3\%$     | $\pm 0.3\%$      | $\infty$           |
| u8                                           | Response Time                                                                   | $\pm 0.8\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 0.5\%$     | $\pm 0.5\%$      | $\infty$           |
| u9                                           | Integration Time                                                                | $\pm 1.9\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 1.1\%$     | $\pm 1.1\%$      | $\infty$           |
| u10                                          | RF Ambient Conditions                                                           | $\pm 3.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 1.7\%$     | $\pm 1.7\%$      | $\infty$           |
| u11                                          | RF Ambient Reflections                                                          | $\pm 3.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 1.7\%$     | $\pm 1.7\%$      | $\infty$           |
| u12                                          | Probe Positioner Mechanical Tolerance                                           | $\pm 0.4\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 0.2\%$     | $\pm 0.2\%$      | $\infty$           |
| u13                                          | Probe Positioning with respect to Phantom Shell                                 | $\pm 2.9\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 1.7\%$     | $\pm 1.7\%$      | $\infty$           |
| u14                                          | Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | $\pm 1.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 0.6\%$     | $\pm 0.6\%$      | $\infty$           |
| Test sample Related                          |                                                                                 |                   |             |            |            |             |                 |                  |                    |
| u15                                          | Test sample Positioning                                                         | $\pm 3.6\%$       | Normal      | 1          | 1          | 1           | $\pm 3.6\%$     | $\pm 3.6\%$      | 89                 |
| u16                                          | Device Holder Uncertainty                                                       | $\pm 2.7\%$       | Normal      | 1          | 1          | 1           | $\pm 2.7\%$     | $\pm 2.7\%$      | 5                  |
| u17                                          | Output Power Variation - SAR drift measurement                                  | $\pm 5.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 2.9\%$     | $\pm 2.9\%$      | $\infty$           |
| Phantom and Tissue Parameters                |                                                                                 |                   |             |            |            |             |                 |                  |                    |
| u18                                          | Phantom Uncertainty ( shape and thickness tolerances)                           | $\pm 4.0\%$       | Rectangular | $\sqrt{3}$ | 1          | 1           | $\pm 2.3\%$     | $\pm 2.3\%$      | $\infty$           |
| u19                                          | Liquid Conductivity - deviation from target values                              | $\pm 5.0\%$       | Rectangular | $\sqrt{3}$ | 0.64       | 0.43        | $\pm 1.8\%$     | $\pm 1.2\%$      | $\infty$           |
| u20                                          | Liquid Conductivity - measurement uncertainty                                   | $\pm 2.5\%$       | Normal      | 1          | 0.64       | 0.43        | $\pm 1.6\%$     | $\pm 1.08\%$     | 69                 |
| u21                                          | Liquid Permittivity - deviation from target values                              | $\pm 5.0\%$       | Rectangular | $\sqrt{3}$ | 0.6        | 0.49        | $\pm 1.7\%$     | $\pm 1.4\%$      | $\infty$           |
| u22                                          | Liquid Permittivity - measurement uncertainty                                   | $\pm 2.5\%$       | Normal      | 1          | 0.6        | 0.49        | $\pm 1.5\%$     | $\pm 1.23\%$     | 69                 |
| Combined standard uncertainty                |                                                                                 |                   | RSS         |            |            |             | $\pm 10.88\%$   | $\pm 10.66\%$    | 313                |
| Expanded uncertainty (95% CONFIDENCE LEVEL ) |                                                                                 |                   | $k=2$       |            |            |             | $\pm 21.76\%$   | $\pm 21.31\%$    |                    |

Table 5. Uncertainty Budget for frequency range 300MHz to 3GHz

## 10. **Measurement Procedure**

The measurement procedures are as follows:

1. For WLAN function, engineering testing software installed on Notebook can provide continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

### 10.1 **Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values from the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1g and 10g



## 10.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

| Grid Type    | Frequency          |                    | Step size (mm) |          |          | X*Y*Z<br>(Point) | Cube size |    |    | Step size |   |   |
|--------------|--------------------|--------------------|----------------|----------|----------|------------------|-----------|----|----|-----------|---|---|
|              |                    |                    | X              | Y        | Z        |                  | X         | Y  | Z  | X         | Y | Z |
| uniform grid | $\leq 3\text{GHz}$ | $\leq 2\text{GHz}$ | $\leq 8$       | $\leq 8$ | $\leq 5$ | 5*5*7            | 32        | 32 | 30 | 8         | 8 | 5 |
|              |                    | 2G - 3G            | $\leq 5$       | $\leq 5$ | $\leq 5$ | 7*7*7            | 30        | 30 | 30 | 5         | 5 | 5 |
|              | 3 - 6GHz           | 3 - 4GHz           | $\leq 5$       | $\leq 5$ | $\leq 4$ | 7*7*8            | 30        | 30 | 28 | 5         | 5 | 4 |
|              |                    | 4 - 5GHz           | $\leq 4$       | $\leq 4$ | $\leq 3$ | 8*8*10           | 28        | 28 | 27 | 4         | 4 | 3 |
|              |                    | 5 - 6GHz           | $\leq 4$       | $\leq 4$ | $\leq 2$ | 8*8*12           | 28        | 28 | 22 | 4         | 4 | 2 |
|              |                    |                    |                |          |          |                  |           |    |    |           |   |   |

(Our measure settings are refer KDB Publication 865664 D01v01r04)

## 10.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 10.4 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## 10.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 11. SAR Test Results Summary

1. The bottom is defined as Side 2.
2. The opposite from the USB connector is defined as Side 5.
3. SAR for the initial test configuration is measured using the highest maximum output power channel.
4. When the reported SAR of the highest measured maximum output power channel is  $\leq 0.8$  W/kg, no further SAR testing is required for IEEE 802.11b DSSS.
5. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for 2.4GHz OFDM configuration.

### 11.1 Head Measurement SAR

Evaluated head SAR is not available.

### 11.2 Body Measurement SAR

| Index. | Position | Band         | Ch. | Data Rate | Test Position    | Spacing (mm) | SAR <sub>1g</sub> (W/kg) | Power Drift | Burst Avg Power | Max tune-up | Reported SAR <sub>1g</sub> (W/kg) |
|--------|----------|--------------|-----|-----------|------------------|--------------|--------------------------|-------------|-----------------|-------------|-----------------------------------|
| #3     | Flat     | IEEE 802.11b | 1   | 1M        | Antenna 1 Side 2 | 5            | 0.103                    | 0.112       | 15.45           | 15.70       | 0.11                              |
| #4     | Flat     | IEEE 802.11b | 1   | 1M        | Antenna 1 Side 5 | 0            | 0.031                    | 0.128       | 15.45           | 15.70       | 0.03                              |
| #1     | Flat     | IEEE 802.11b | 1   | 1M        | Antenna 2 Side 2 | 5            | 0.027                    | -0.194      | 8.55            | 8.80        | 0.03                              |
| #2     | Flat     | IEEE 802.11b | 1   | 1M        | Antenna 2 Side 5 | 0            | 0.024                    | -0.039      | 8.55            | 8.80        | 0.03                              |

### 11.3 Hot-spot mode Measurement SAR

Evaluated Hot-spot mode SAR is not available.

### 11.4 Extremity Measurement SAR

Evaluated extremity SAR is not available.

### 11.5 SAR Measurement Variability

Detailed evaluations please refer KDB 865664 on "SAR test reduction according to KDB" section.

SAR Measurement Variability is not available.

## 11.6 Std. C95.1-1999 RF Exposure Limit

| Human Exposure                                          | Population<br>Uncontrolled<br>Exposure<br>( W/kg ) or (mW/g) | Occupational<br>Controlled<br>Exposure<br>( W/kg ) or (mW/g) |
|---------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
| Spatial Peak SAR*<br>(head)                             | 1.60                                                         | 8.00                                                         |
| Spatial Peak SAR**<br>(Whole Body)                      | 0.08                                                         | 0.40                                                         |
| Spatial Peak SAR***<br>(Partial-Body)                   | 1.60                                                         | 8.00                                                         |
| Spatial Peak SAR****<br>(Hands / Feet / Ankle / Wrist ) | 4.00                                                         | 20.00                                                        |

Table 6. Safety Limits for Partial Body Exposure

### Notes :

- \* The Spatial Peak value of the SAR averaged over any 1 gram of tissue.  
( defined as a tissue volume in the shape of a cube ) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole – body.
- \*\*\* The Spatial Average value of the SAR averaged over the partial – body.
- \*\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue.  
( defined as a tissue volume in the shape of a cube ) and over the appropriate averaging time.

**Population / Uncontrolled Environments** : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational / Controlled Environments** : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

## 12. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Pokovi<sup>c</sup>, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Pokovi<sup>c</sup>, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz, Jan. 1995.
- [11] IEEE Std 1528™-2013 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head From Wireless Communications Devices: Measurement Techniques

## Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/28/2015 11:44:22 AM

### System Performance Check at 2450MHz\_20151228\_Body

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.92 \text{ mho/m}$ ;  $\epsilon_r = 50.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### System performance cheek at 2450MHz/Area Scan (61x61x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 22.2 W/Kg

### System performance cheek at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 107.5 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 26.0 W/kg

**SAR(1 g) = 13.3 W/Kg; SAR(10 g) = 6.27 W/Kg**

Maximum value of SAR (measured) = 19.8 W/Kg

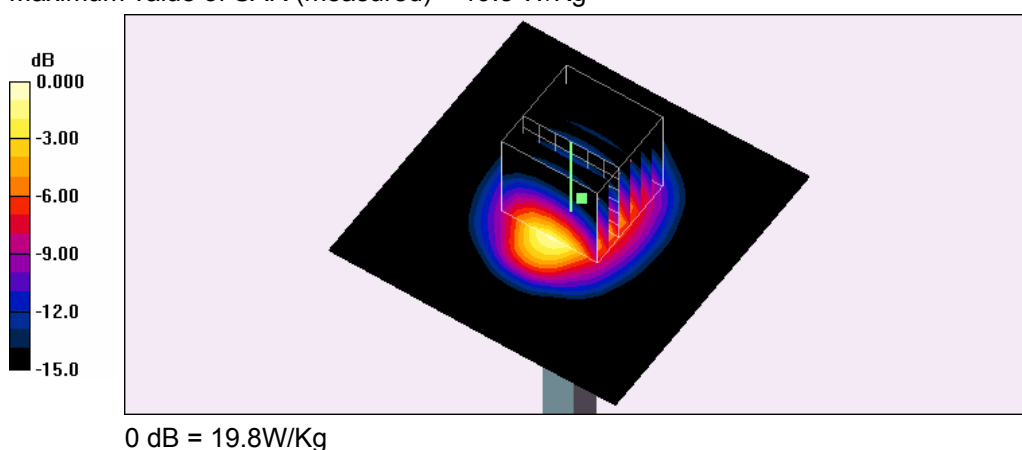

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/29/2015 09:15:36 AM

### System Performance Check at 2450MHz\_20151229\_Body

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.92 \text{ mho/m}$ ;  $\epsilon_r = 50.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### System performance check at 2450MHz/Area Scan (61x61x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 20.8 W/Kg

### System performance check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 107.0 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 25.2 W/kg

**SAR(1 g) = 13.1 W/Kg; SAR(10 g) = 6.23 W/Kg**

Maximum value of SAR (measured) = 19.4 W/Kg

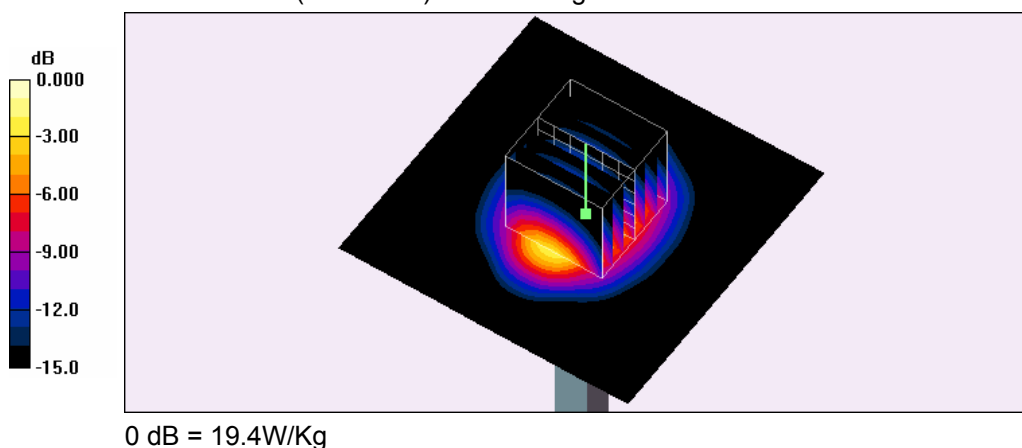

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/30/2015 09:11:49 AM

### System Performance Check at 2450MHz\_20151230\_Body

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.92 \text{ mho/m}$ ;  $\epsilon_r = 50.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### System performance check at 2450MHz/Area Scan (61x61x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 20.0 W/Kg

### System performance check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 104.4 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 25.2 W/kg

**SAR(1 g) = 13.1 W/Kg; SAR(10 g) = 6.23 W/Kg**

Maximum value of SAR (measured) = 19.5 W/Kg

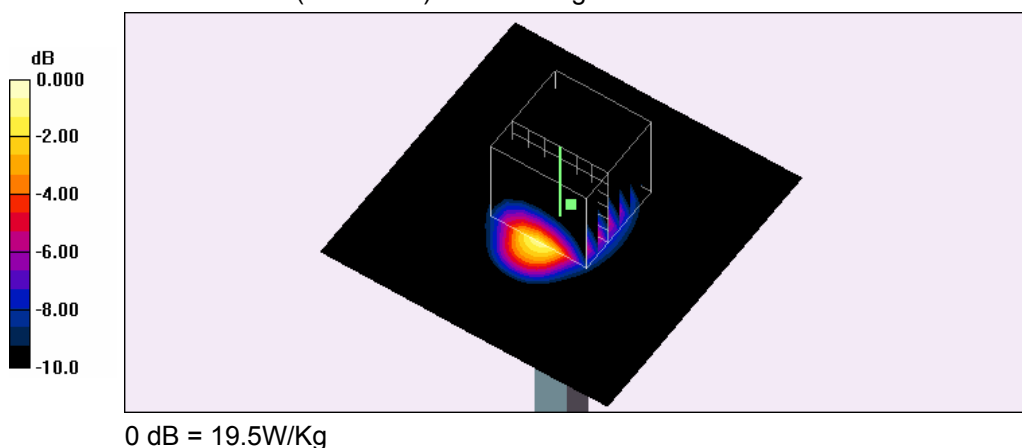

## Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/29/2015 01:42:29 PM

### 3\_802.11b Ch 1\_1M\_Side 2\_5mm\_Antenna 1

**DUT: NANO; Type: WiFi Pineapple**

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.88 \text{ mho/m}$ ;  $\epsilon_r = 50.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Flat/Area Scan (151x151x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.134 W/Kg


**Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.27 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.169 W/kg

**SAR(1 g) = 0.103 W/Kg; SAR(10 g) = 0.066 W/Kg**

Maximum value of SAR (measured) = 0.134 W/Kg

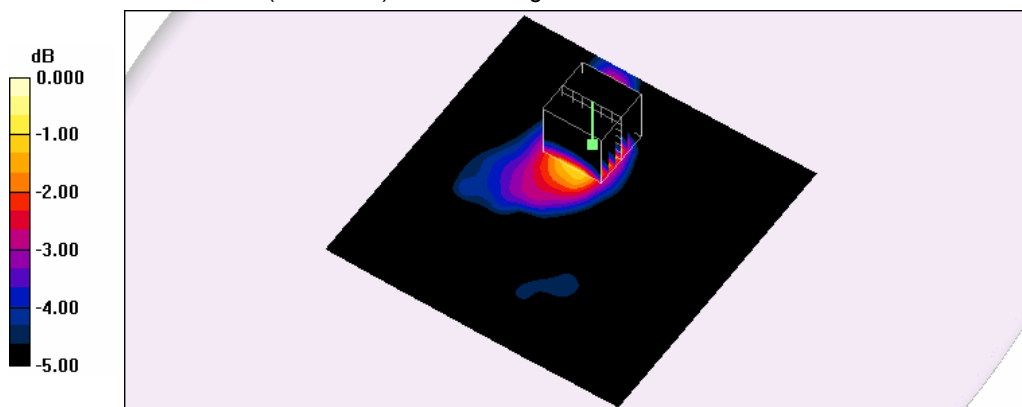

0 dB = 0.134W/Kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/30/2015 10:27:05 AM

#### 4\_802.11b Ch 1\_1M\_Side 5\_0mm\_Antenna 1

#### DUT: NANO; Type: WiFi Pineapple

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Flat/Area Scan (151x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.068 W/Kg


**Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.15 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.207 W/kg

**SAR(1 g) = 0.031 W/Kg; SAR(10 g) = 0.00551 W/Kg**

Maximum value of SAR (measured) = 0.070 W/Kg

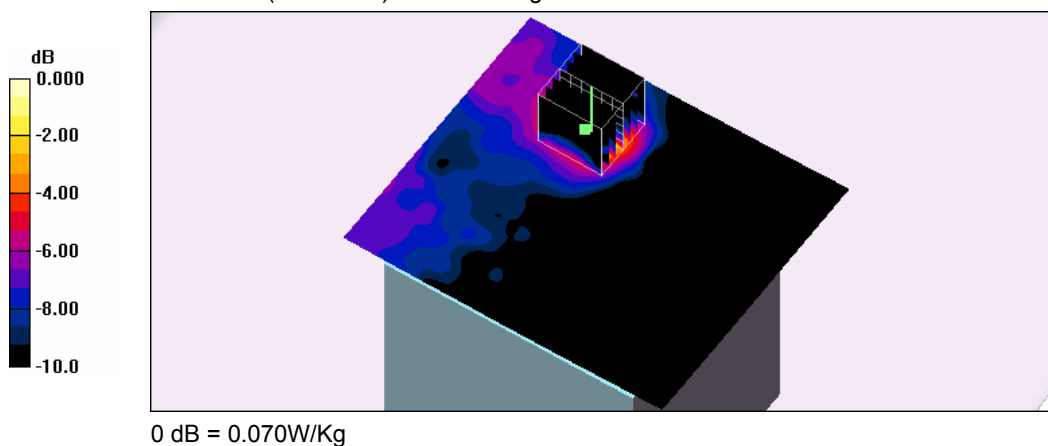

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/28/2015 05:44:22 PM

# **1\_802.11b Ch 1\_1M\_Side 2\_5mm\_Antenna 2**

## **DUT: NANO; Type: WiFi Pineapple**

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Flat/Area Scan (151x151x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.042 W/Kg


**Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.78 V/m; Power Drift = -0.194 dB

Peak SAR (extrapolated) = 0.054 W/kg

**SAR(1 g) = 0.027 W/Kg; SAR(10 g) = 0.015 W/Kg**

Maximum value of SAR (measured) = 0.041 W/Kg

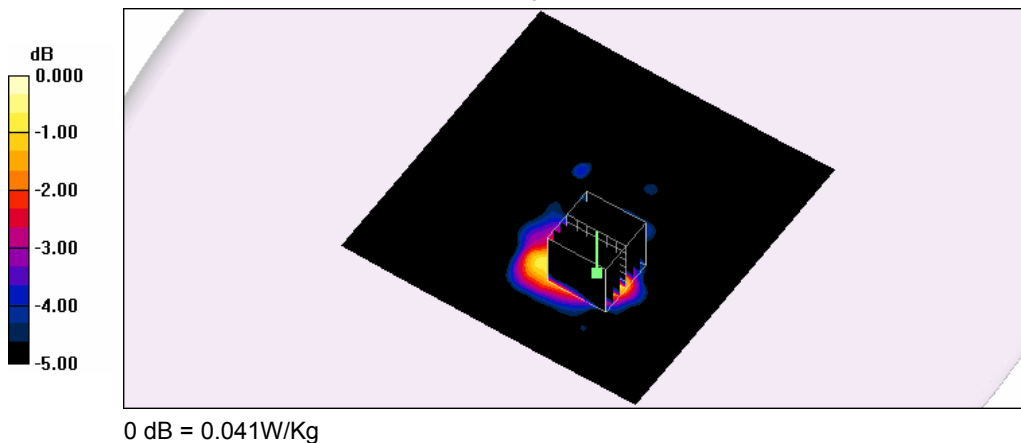

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/29/2015 10:36:31 AM

## 2\_802.11b Ch 1\_1M\_Side 5\_0mm\_Antenna 2

### DUT: NANO; Type: WiFi Pineapple

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3847; ConvF(7.29, 7.29, 7.29); Calibrated: 1/30/2015
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2/3/2015
- Phantom: ELI 4.0; Type: QDOVA001BB; Serial: 1036
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Flat/Area Scan (151x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.041 W/Kg


**Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.913 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.063 W/kg

**SAR(1 g) = 0.024 W/Kg; SAR(10 g) = 0.011 W/Kg**

Maximum value of SAR (measured) = 0.039 W/Kg

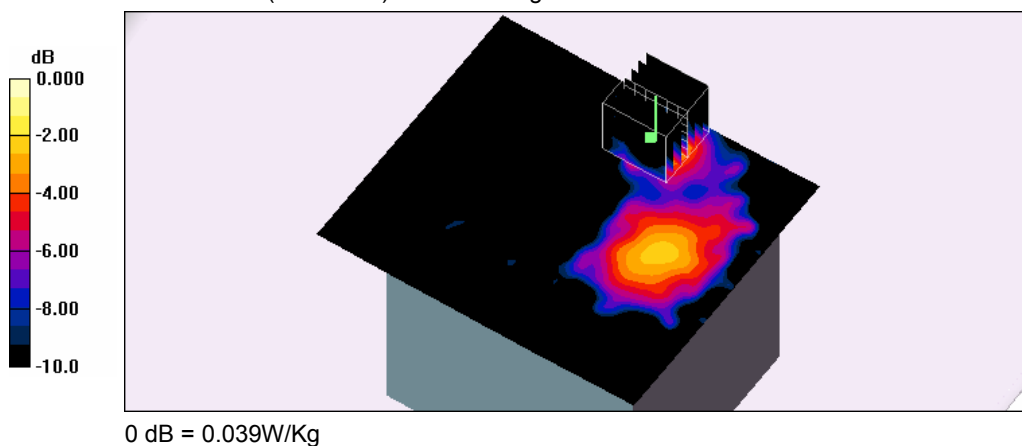



## ***Appendix C - Calibration***

All of the instruments Calibration information are listed below.

- Dipole \_ D2450V2 SN:712 Calibration No.Z15-97042
- Probe \_ EX3DV4 SN:3847 Calibration No.Z15-97003
- DAE \_ DAE4 SN:541 Calibration No.Z15-97004



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Client

ATL

Certificate No: Z15-97042

## CALIBRATION CERTIFICATE

Object D2450V2 - SN: 712

Calibration Procedure(s) FD-Z11-2-003-01  
Calibration Procedures for dipole validation kits

Calibration date: March 12, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRP2        | 101919     | 01-Jul-14 (CTTL, No.J14X02146)           | Jun-15                |
| Power sensor NRP-Z91    | 101547     | 01-Jul-14 (CTTL, No.J14X02146)           | Jun-15                |
| Reference Probe ES3DV3  | SN 3142    | 01-Sep-14(CTTL-SPEAG, No. Z14-97079)     | Aug-15                |
| DAE4                    | SN 1331    | 20-Jan-15(CTTL-SPEAG, No. Z15-97011)     | Jan-16                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 02-Feb-15 (CTTL, No.J15X00729)           | Feb-16                |
| Network Analyzer E5071C | MY46110673 | 03-Feb-15 (CTTL, No.J15X00728)           | Feb-16                |

|                | Name        | Function                          | Signature |
|----------------|-------------|-----------------------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer                 |           |
| Reviewed by:   | Qi Dianyuan | SAR Project Leader                |           |
| Approved by:   | Lu Bingsong | Deputy Director of the laboratory |           |

Issued: March 12, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97042

Page 1 of 8



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

#### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### Additional Documentation:

- DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                          |             |
|------------------------------|--------------------------|-------------|
| DASY Version                 | DASY52                   | 52.8.8.1222 |
| Extrapolation                | Advanced Extrapolation   |             |
| Phantom                      | Triple Flat Phantom 5.1C |             |
| Distance Dipole Center - TSL | 10 mm                    | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm        |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz     |             |

### Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.5 $\pm$ 6 % | 1.77 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | <1.0 °C             | ---            | ---                  |

### SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                                |
|---------------------------------------------------------|--------------------|--------------------------------|
| SAR measured                                            | 250 mW input power | 13.7 mW / g                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 55.3 mW / g $\pm$ 20.8 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                                |
| SAR measured                                            | 250 mW input power | 6.33 mW / g                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 25.5 mW / g $\pm$ 20.4 % (k=2) |

### Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 51.8 $\pm$ 6 % | 1.96 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | <1.0 °C             | ---            | ---                  |

### SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                                |
|---------------------------------------------------------|--------------------|--------------------------------|
| SAR measured                                            | 250 mW input power | 13.3 mW / g                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 52.9 mW / g $\pm$ 20.8 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                                |
| SAR measured                                            | 250 mW input power | 6.13 mW / g                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 24.4 mW / g $\pm$ 20.4 % (k=2) |

Certificate No: Z15-97042

Page 3 of 8



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## Appendix

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 52.7Ω+ 5.06jΩ |
| Return Loss                          | - 25.1dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 50.0Ω+ 6.01jΩ |
| Return Loss                          | - 24.4dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.037 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# **DASY5 Validation Report for Head TSL**

Date: 03.12.2015

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 712**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.774$  S/m;  $\epsilon_r = 39.52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(4.58, 4.58, 4.58); Calibrated: 2014-09-01;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-20
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:**


dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.87 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.9 W/kg

**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.33 W/kg**

Maximum value of SAR (measured) = 18.0 W/kg

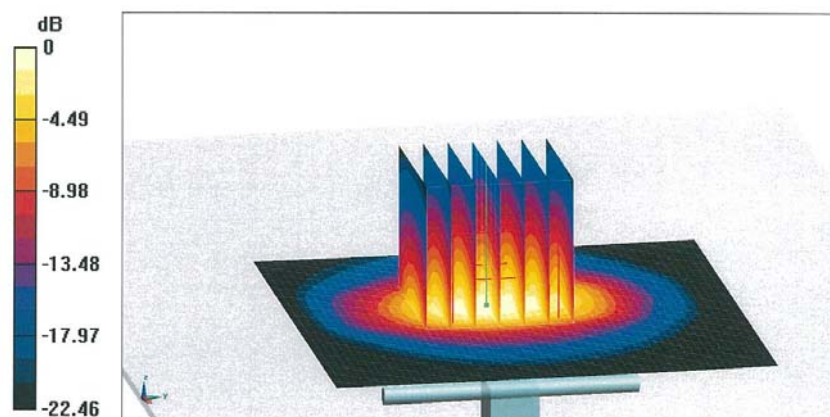


0 dB = 18.0 W/kg = 12.55 dBW/kg



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

### Impedance Measurement Plot for Head TSL

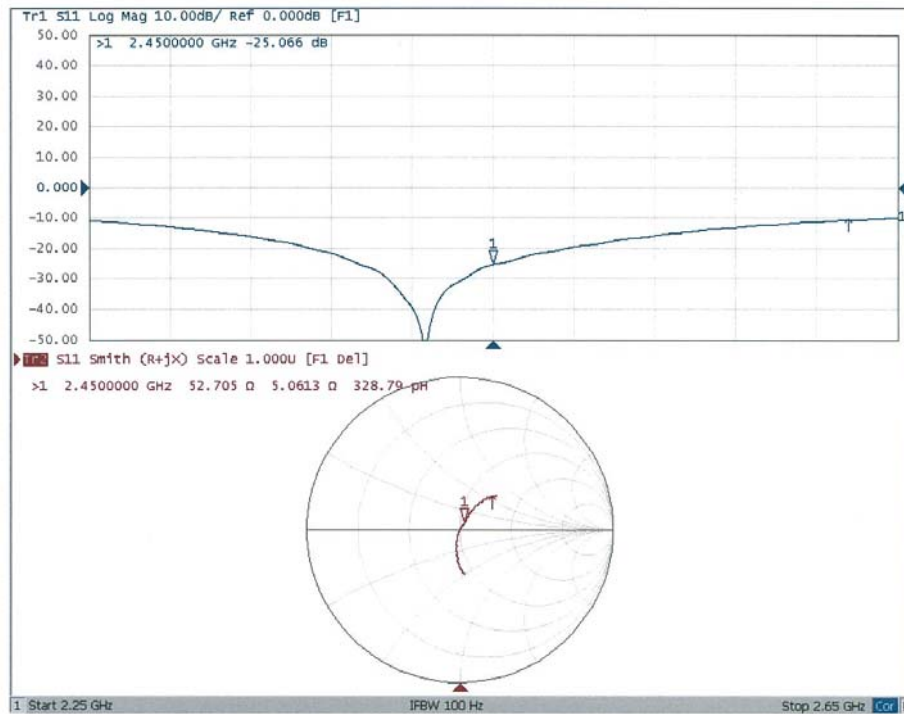



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# **DASY5 Validation Report for Body TSL**

Date: 03.12.2015

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 712**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.962 \text{ S/m}$ ;  $\epsilon_r = 51.82$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(4.29, 4.29, 4.29); Calibrated: 2014-09-01;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2015-01-20
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/1
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW,**

**dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (8x7x7)/Cube 0: Measurement grid:**


dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.63 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.6 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.13 W/kg**

Maximum value of SAR (measured) = 17.6 W/kg

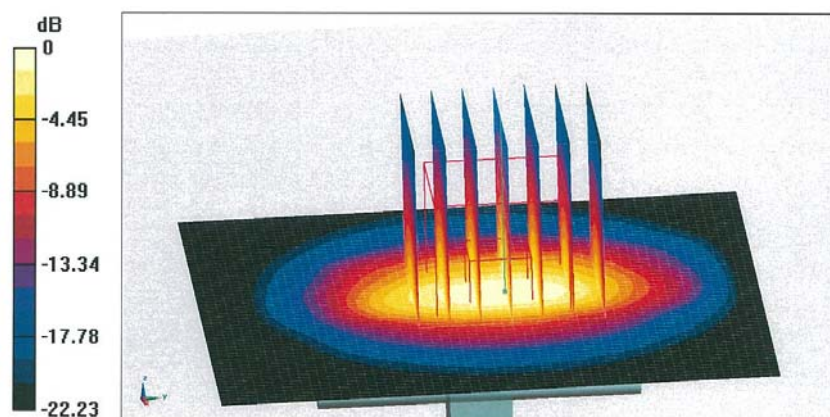

Certificate No: Z15-97042


Page 7 of 8



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

### Impedance Measurement Plot for Body TSL

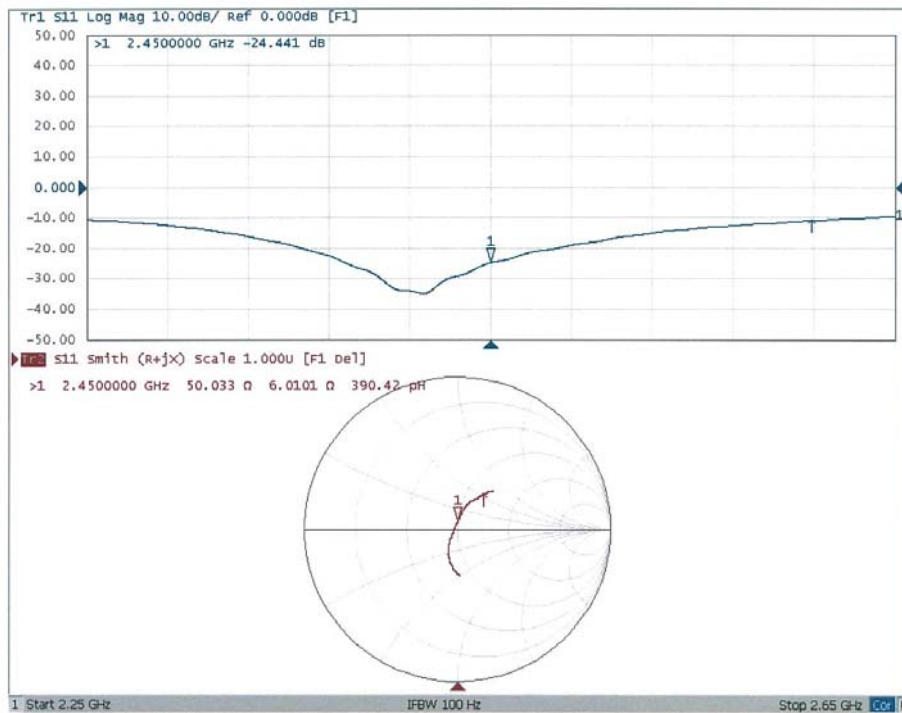

**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-CTTL Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAEs calibrated by CTTL (*China Telecommunication Technology Labs*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and CTTL, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following. The conditions in this KDB are valid until December 31, 2015.

- 1) The agreement established between SPEAG and CTTL is only applicable to calibration services performed by CTTL where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. CTTL shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-CTTL agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by CTTL, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics or probe sensor model based linearization methods that are not fully described in SAR standards are excluded and cannot be used for measurements to support FCC equipment certification.
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the CTTL QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by CTTL. Equivalent test equipment and measurement configurations may be considered only when agreed by both SPEAG and the FCC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 systems or higher version systems that satisfy the requirements of this KDB.
- 3) The SPEAG-CTTL agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by CTTL under this SPEAG-

- CTTL Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. CTTL shall apply the required protocols without modification and, upon request, provide copies of documentation to the FCC to substantiate program implementation.
- a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the CTTL QA protocol shall be performed between SPEAG and CTTL at least once every 12 months. The ILCE acceptance criteria defined in the CTTL QA protocol shall be satisfied for the CTTL, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by CTTL. Written confirmation from SPEAG is required for CTTL to issue calibration certificates under the SPEAG-CTTL Dual-Logo calibration program. Quarterly reports for all calibrations performed by CTTL under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by CTTL shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the CTTL QA protocol before each actual calibration can commence. CTTL shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit CTTL facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document shall be provided to CTTL clients that accept calibration services according to the SPEAG-CTTL Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
  - 5) CTTL shall address any questions raised by its clients or TCBs relating to the SPEAG-CTTL Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Client

ATL

Certificate No: Z15-97003

## CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3847

Calibration Procedure(s)

FD-Z11-2-004-01

Calibration Procedures for Dosimetric E-field Probes

Calibration date:

January 30, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|-------------|------------------------------------------|-----------------------|
| Power Meter NRP2        | 101919      | 01-Jul-14 (CTTL, No.J14X02146)           | Jun-15                |
| Power sensor NRP-Z91    | 101547      | 01-Jul-14 (CTTL, No.J14X02146)           | Jun-15                |
| Power sensor NRP-Z91    | 101548      | 01-Jul-14 (CTTL, No.J14X02146)           | Jun-15                |
| Reference10dBAttenuator | 18N50W-10dB | 13-Mar-14(TMC,No.JZ14-1103)              | Mar-16                |
| Reference20dBAttenuator | 18N50W-20dB | 13-Mar-14(TMC,No.JZ14-1104)              | Mar-16                |
| Reference Probe EX3DV4  | SN 3617     | 28-Aug-14(SPEAG,No.EX3-3617_Aug14)       | Aug-15                |
| DAE4                    | SN 777      | 17-Sep-14 (SPEAG, DAE4-777_Sep14)        | Sep -15               |
| Secondary Standards     | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGeneratorMG3700A  | 6201052605  | 01-Jul-14 (CTTL, No.J14X02145)           | Jun-15                |
| Network Analyzer E5071C | MY46110673  | 15-Feb-14 (TMC, No.JZ14-781)             | Feb-15                |

|                | Name        | Function                          | Signature |
|----------------|-------------|-----------------------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer                 |           |
| Reviewed by:   | Qi Dianyuan | SAR Project Leader                |           |
| Approved by:   | Lu Bingsong | Deputy Director of the laboratory |           |

Issued: January 31, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97003

Page 1 of 11

#### Glossary:

|                       |                                                                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                               |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                              |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                             |
| DCP                   | diode compression point                                                                                                                |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                           |
| A,B,C,D               | modulation dependent linearization parameters                                                                                          |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                      |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

# Probe EX3DV4

## SN: 3847

Calibrated: January 30, 2015

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3847

### Basic Calibration Parameters

|                                                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|----------------------------------------------------------|----------|----------|----------|-----------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.45     | 0.35     | 0.42     | ±10.8%    |
| DCP(mV) <sup>B</sup>                                     | 102.5    | 102.7    | 101.5    |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A dB | B dB $\sqrt{\mu\text{V}}$ | C   | D dB | VR mV | Unc <sup>E</sup> (k=2) |
|-----|---------------------------|---|------|---------------------------|-----|------|-------|------------------------|
| 0   | CW                        | X | 0.0  | 0.0                       | 1.0 | 0.00 | 176.8 | ±2.7%                  |
|     |                           | Y | 0.0  | 0.0                       | 1.0 |      | 158.5 |                        |
|     |                           | Z | 0.0  | 0.0                       | 1.0 |      | 170.2 |                        |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3847

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.71    | 9.71    | 9.71    | 0.13               | 1.25                    | ± 12%       |
| 835                  | 41.5                               | 0.90                            | 9.12    | 9.12    | 9.12    | 0.14               | 1.26                    | ± 12%       |
| 900                  | 41.5                               | 0.97                            | 8.99    | 8.99    | 8.99    | 0.13               | 1.34                    | ± 12%       |
| 1750                 | 40.1                               | 1.37                            | 7.92    | 7.92    | 7.92    | 0.16               | 1.40                    | ± 12%       |
| 1900                 | 40.0                               | 1.40                            | 7.79    | 7.79    | 7.79    | 0.17               | 1.35                    | ± 12%       |
| 2000                 | 40.0                               | 1.40                            | 7.72    | 7.72    | 7.72    | 0.13               | 1.71                    | ± 12%       |
| 2300                 | 39.5                               | 1.67                            | 7.48    | 7.48    | 7.48    | 0.28               | 0.91                    | ± 12%       |
| 2450                 | 39.2                               | 1.80                            | 7.06    | 7.06    | 7.06    | 0.50               | 0.77                    | ± 12%       |
| 2600                 | 39.0                               | 1.96                            | 6.91    | 6.91    | 6.91    | 0.66               | 0.67                    | ± 12%       |
| 5200                 | 36.0                               | 4.66                            | 5.32    | 5.32    | 5.32    | 0.45               | 1.16                    | ± 13%       |
| 5300                 | 35.9                               | 4.76                            | 5.04    | 5.04    | 5.04    | 0.43               | 1.18                    | ± 13%       |
| 5500                 | 35.6                               | 4.96                            | 4.83    | 4.83    | 4.83    | 0.46               | 1.26                    | ± 13%       |
| 5600                 | 35.5                               | 5.07                            | 4.77    | 4.77    | 4.77    | 0.52               | 1.10                    | ± 13%       |
| 5800                 | 35.3                               | 5.27                            | 4.66    | 4.66    | 4.66    | 0.55               | 1.11                    | ± 13%       |

<sup>C</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3847

### Calibration Parameter Determined in Body Tissue Simulating Media


| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.53    | 9.53    | 9.53    | 0.14               | 1.56                    | ± 12%       |
| 835                  | 55.2                               | 0.97                            | 9.42    | 9.42    | 9.42    | 0.18               | 1.36                    | ± 12%       |
| 900                  | 55.0                               | 1.05                            | 9.19    | 9.19    | 9.19    | 0.20               | 1.24                    | ± 12%       |
| 1750                 | 53.4                               | 1.49                            | 7.65    | 7.65    | 7.65    | 0.13               | 1.80                    | ± 12%       |
| 1900                 | 53.3                               | 1.52                            | 7.46    | 7.46    | 7.46    | 0.16               | 1.43                    | ± 12%       |
| 2000                 | 53.3                               | 1.52                            | 7.65    | 7.65    | 7.65    | 0.13               | 2.07                    | ± 12%       |
| 2300                 | 52.9                               | 1.81                            | 7.52    | 7.52    | 7.52    | 0.34               | 1.15                    | ± 12%       |
| 2450                 | 52.7                               | 1.95                            | 7.29    | 7.29    | 7.29    | 0.32               | 1.18                    | ± 12%       |
| 2600                 | 52.5                               | 2.16                            | 7.19    | 7.19    | 7.19    | 0.42               | 0.91                    | ± 12%       |
| 5200                 | 49.0                               | 5.30                            | 4.96    | 4.96    | 4.96    | 0.52               | 1.21                    | ± 13%       |
| 5300                 | 48.9                               | 5.42                            | 4.78    | 4.78    | 4.78    | 0.60               | 1.03                    | ± 13%       |
| 5500                 | 48.6                               | 5.65                            | 4.42    | 4.42    | 4.42    | 0.58               | 1.19                    | ± 13%       |
| 5600                 | 48.5                               | 5.77                            | 4.41    | 4.41    | 4.41    | 0.61               | 1.04                    | ± 13%       |
| 5800                 | 48.2                               | 6.00                            | 4.35    | 4.35    | 4.35    | 0.66               | 0.90                    | ± 13%       |

<sup>C</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

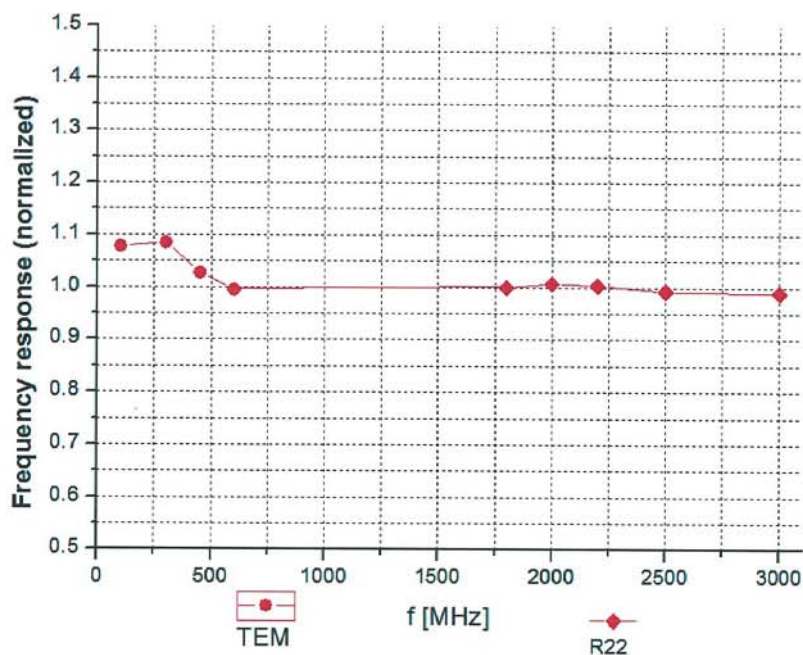



Uncertainty of Frequency Response of E-field:  $\pm 7.5\%$  ( $k=2$ )

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**


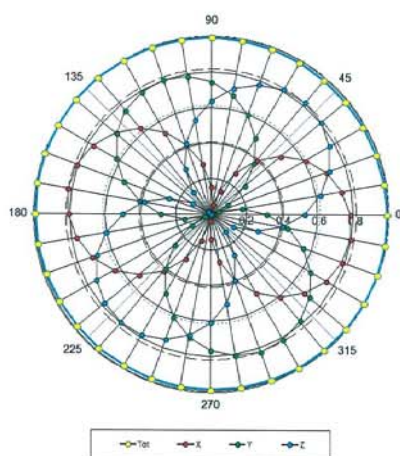


**f=1800 MHz, R22**

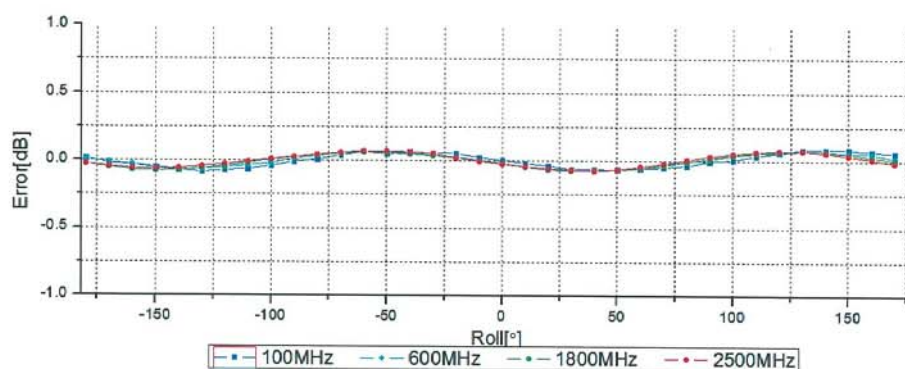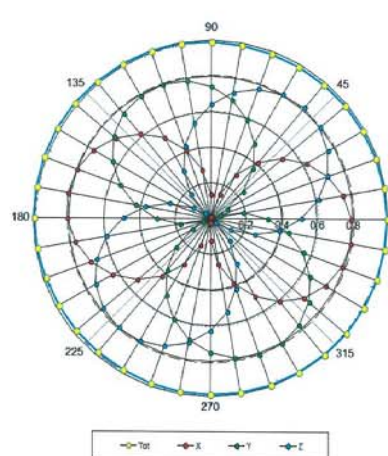

Uncertainty of Axial Isotropy Assessment:  $\pm 0.9\%$  ( $k=2$ )

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

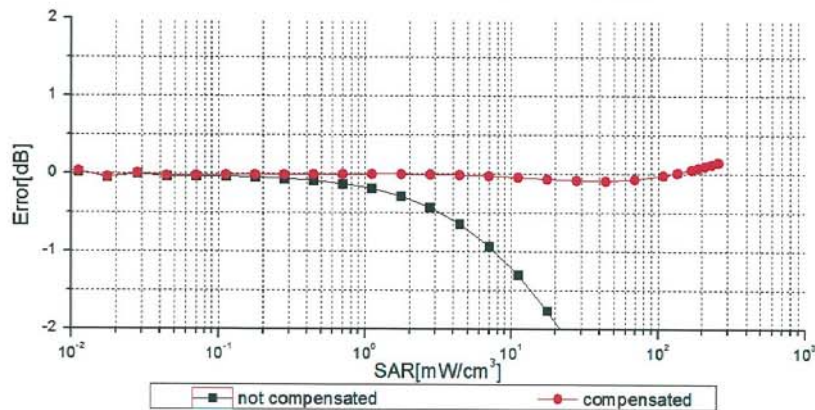
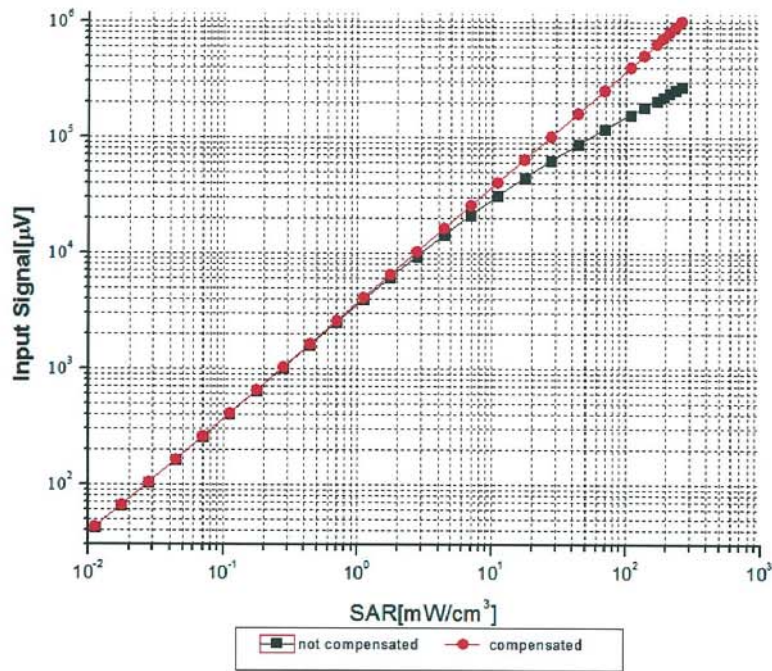


Uncertainty of Linearity Assessment: ±0.9% (k=2)


## Conversion Factor Assessment

f=900 MHz, WGLS R9(H\_convF)

f=1750 MHz, WGLS R22(H\_convF)

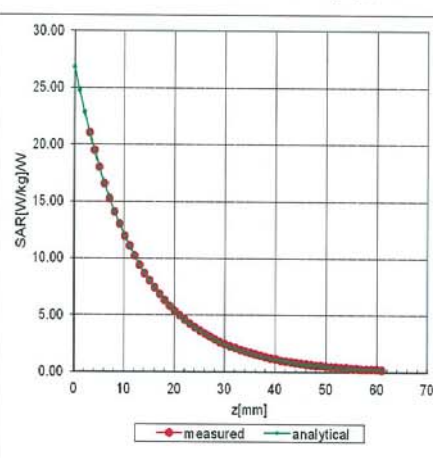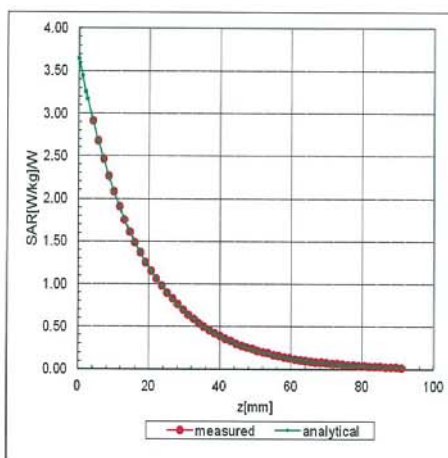

## Deviation from Isotropy in Liquid

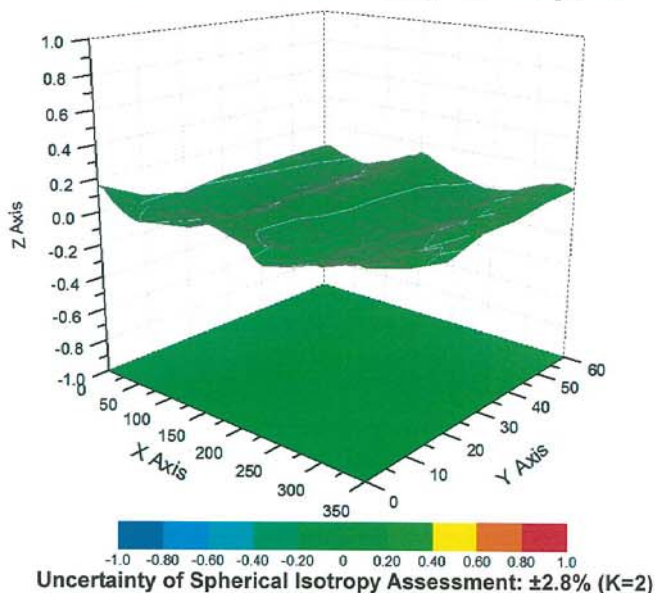



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3847

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 12.6       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disable    |
| Probe Overall Length                          | 337mm      |
| Probe Body Diameter                           | 10mm       |
| Tip Length                                    | 9mm        |
| Tip Diameter                                  | 2.5mm      |
| Probe Tip to Sensor X Calibration Point       | 1mm        |
| Probe Tip to Sensor Y Calibration Point       | 1mm        |
| Probe Tip to Sensor Z Calibration Point       | 1mm        |
| Recommended Measurement Distance from Surface | 1.4mm      |



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Client : ATL

Certificate No: Z15-97004

## CALIBRATION CERTIFICATE

Object DAE4 - SN: 541

Calibration Procedure(s) FD-Z11-2-002-01  
Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: February 03, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Process Calibrator 753 | 1971018 | 01-July-14 (CTTL, No:J14X02147)          | July-15               |

|                | Name        | Function                          | Signature |
|----------------|-------------|-----------------------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer                 |           |
| Reviewed by:   | Qi Dianyuan | SAR Project Leader                |           |
| Approved by:   | Lu Bingsong | Deputy Director of the laboratory |           |

Issued: February 04, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97004

Page 1 of 3



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

#### Glossary:

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

#### Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

#### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB =  $6.1\mu V$ , full range =  $-100...+300\text{ mV}$

Low Range: 1LSB =  $61\text{ nV}$ , full range =  $-1.....+3\text{ mV}$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                          | Y                          | Z                          |
|---------------------|----------------------------|----------------------------|----------------------------|
| High Range          | $404.549 \pm 0.15\% (k=2)$ | $404.414 \pm 0.15\% (k=2)$ | $404.175 \pm 0.15\% (k=2)$ |
| Low Range           | $3.96723 \pm 0.7\% (k=2)$  | $3.93603 \pm 0.7\% (k=2)$  | $3.97491 \pm 0.7\% (k=2)$  |

#### Connector Angle

|                                           |                           |
|-------------------------------------------|---------------------------|
| Connector Angle to be used in DASY system | $290.5^\circ \pm 1^\circ$ |
|-------------------------------------------|---------------------------|