





General Specifications


Frequency Range	2400 – 2500 MHz 5150 – 5850 MHz
V.S.W.R	≤ 2.0
Radiation	Toroidal
Polarization	Linear
Impedance	50 Ω
Connector	RP-SMA Female
Dimensions	108.5 x Ø13 mm 4.27 x Ø0.51 inches
Weight	g
Operating Temperature	-40 °C to 65 °C -40°F to 149°F

RF Specifications

Frequency (MHz)	Gain (dBi)
2400	1.10
2450	1.76
2500	-0.30
5150	1.02
5250	1.33
5350	1.47
5425	1.20
5550	1.15
5725	-0.56
5850	0.03

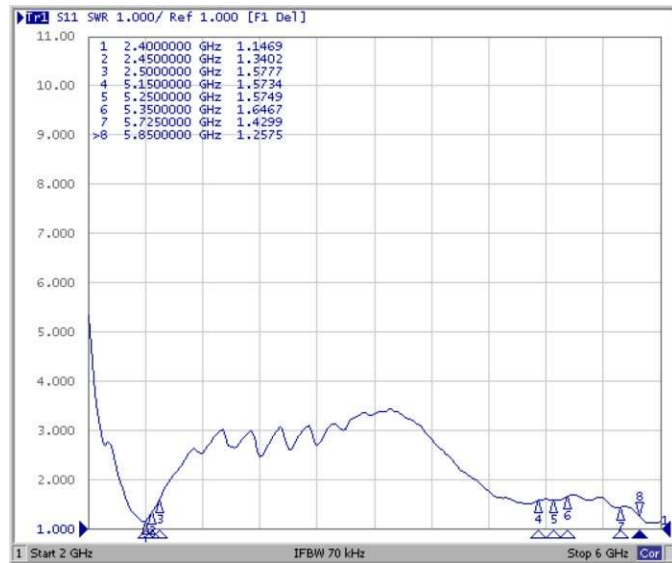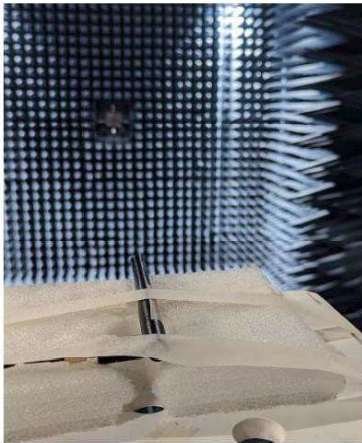

H-Plane

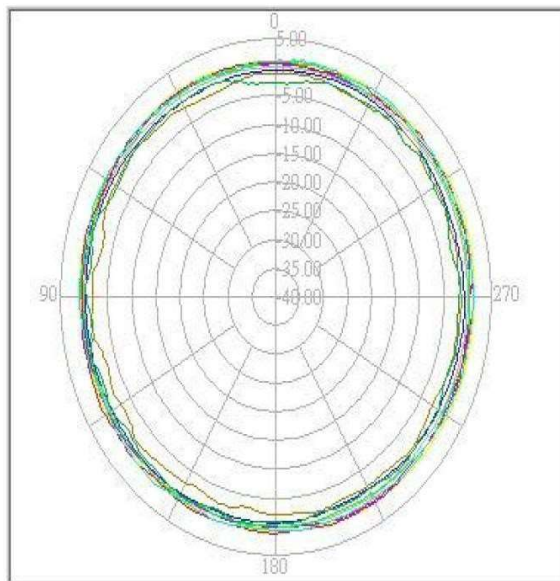

E-Plane

