



FCC PART 15 SUBPART C

TEST AND MEASUREMENT REPORT

For

PayPal

2211 North First Street,
San Jose, CA 95131, USA

FCC ID: 2AB8CDCBNEE01
IC: 11927A-DCBNEE01
Model: DCBNEE01

Report Type: Original Report		Product Type: 802.11 a/b/g/n USB sticker	
Prepared By	Chen Ge 		
Report Number	R1404102-247 BLE		
Report Date	2014-06-30		
Reviewed By	Suhaila Khushzad Engineering Manager 		
	Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (BAC-2)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Mechanical Description of EUT	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty	5
1.7 Test Facility	6
2 System Test Configuration.....	7
2.1 Justification	7
2.2 EUT Exercise Software.....	7
2.3 Special Equipment	7
2.4 Equipment Modifications.....	7
2.5 Local Support Equipment	7
2.6 EUT Internal Configuration Details.....	7
3 Summary of Test Results	8
4 FCC §15.247 (i) §2.1093 & IC RSS-102 - RF Exposure	9
4.1 Applicable Standards	9
4.2 Test result.....	9
5 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements	10
5.1 Applicable Standards	10
5.2 Antenna List.....	10
5.3 Result	10
6 FCC §15.207 & IC RSS-Gen §7.2.4 - AC Power Line Conducted Emissions.....	11
6.1 Applicable Standard.....	11
6.2 Test Setup	11
6.3 Test Equipment List and Details.....	11
6.4 Test Setup Block Diagram	12
6.5 Test Procedure	12
6.6 Test Environmental Conditions	12
6.7 Summary of Test Results	13
6.8 Conducted Emissions Test Plots and Data.....	14
7 FCC §2.1051, §15.247(d) & IC RSS-210 §A8.5 – Spurious Emissions at Antenna Terminals.....	16
7.1 Applicable Standards	16
7.2 Measurement Procedure.....	16
7.3 Test Equipment List and Details.....	16
7.4 Test Environmental Conditions	16
7.5 Test Results.....	16
8 FCC §15.205, §15.209 & §15.247(d) & IC RSS-210 §A8.5 – Spurious Radiated Emissions	20
8.1 Applicable Standards	20
8.2 Test Setup	21
8.3 Test Procedure	21
8.4 Corrected Amplitude & Margin Calculation.....	22
8.5 Test Equipment List and Details.....	22
8.6 Test Environmental Conditions	22
8.7 Summary of Test Results	23
8.8 Radiated Emissions Test Data and Plots.....	23
9 FCC§15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth	26
9.1 Applicable Standards	26
9.2 Measurement Procedure.....	26

9.3	Test Equipment List and Details	26
9.4	Test Environmental Conditions	26
9.5	Test Results	26
10	FCC §15.247(b) & IC RSS-210 §A8.4 – Peak Output Power Measurement	29
10.1	Applicable Standards	29
10.2	Measurement Procedure	29
10.3	Test Equipment List and Details	29
10.4	Test Environmental Conditions	29
10.5	Test Results	29
11	FCC §15.247(d) & IC RSS-210 §A8.5 – 100 kHz Bandwidth of Band Edges	32
11.1	Applicable Standards	32
11.2	Measurement Procedure	32
11.3	Test Equipment List and Details	32
11.4	Test Environmental Conditions	32
11.5	Test Results	32
12	FCC §15.247(e) & IC RSS-210 §A8.2 (b) – Power Spectral Density	34
12.1	Applicable Standards	34
12.2	Measurement Procedure	34
12.3	Test Equipment List and Details	34
12.4	Test Environmental Conditions	34
12.5	Test Results	34
13	Exhibit A – FCC & IC Equipment Labeling Requirements	37
13.1	FCC ID Label Requirements	37
13.2	IC Label Requirements	37
13.3	FCC ID & IC Label Contents and Location	38
14	Exhibit B – Test Setup Photographs	39
14.1	Conducted Emissions - AC Powered Front View	39
14.2	Conducted Emissions - AC Powered Side View	39
		39
14.3	Radiated Emission below 1 GHz Front View	40
14.4	Radiated Emission below 1 GHz Rear View	40
14.5	Radiated Emission above 1 GHz Front View	41
14.6	Radiated Emission above 1 GHz Rear View	41
15	Exhibit C – EUT Photographs	42
15.1	EUT Top View	42
15.2	EUT Bottom View	42
15.3	EUT Left Side View	43
15.4	EUT Right Side View	43
15.5	EUT Open Case Top View	44
15.6	EUT Open Case Bottom View	44
		44
15.7	EUT Top View without shielding	45
15.8	EUT Bottom View without shielding	45

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1404102-247 BLE	Original Report	2014-06-30

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *PayPal*. and their product FCC ID: 2AB8CDCBNEE01, IC: 11927A-DCBNEE01, model: DCBNEE01 which will henceforth be referred to as the EUT (Equipment Under Testing). The EUT is a USB sticker with 2.4 GHz & 5 GHz 802.11 a/b/g/n and Bluetooth.

1.2 Mechanical Description of EUT

The EUT measures approximately 9.8 cm (L) x 2.2 cm (W) x 1.0 cm (H) and weighs 18.5 g.

The test data gathered are from typical production sample, serial number: P6H2CK assigned by Client.

1.3 Objective

This report is prepared on behalf of *PayPal* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules and IC RSS-210 Issue 8, Dec 2010.

The objective is to determine compliance with FCC Part 15.247 and IC RSS-210 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, and power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emissions, Conducted and Radiated Spurious Emissions.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15.407, RSS-210 Annex 9 of NII with FCC ID: 2AB8CDCBNEE01, IC: 11927A-DCBNEE01.

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz and ANSI C63.10-2009, American National Standard for Testing Unlicensed Wireless Devices.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2: 2011, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.7 Test Facility

Bay area compliance Laboratories Corp. (BACL) is:

1- An independent Commercial Test Laboratory accredited to **ISO 17025: 2005** by **A2LA**, in the fields of: Electromagnetic Compatibility & Telecommunications covering Emissions, Immunity, Radio, RF Exposure, Safety and Telecom. This includes NEBS (Network Equipment Building System), Wireless RF, Telecommunications Terminal Equipment (TTE); Network Equipment; Information Technology Equipment (ITE); Medical Electrical Equipment; Industrial, Commercial, and Medical Test Equipment; Professional Audio and Video Equipment; Electronic (Digital) Products; Industrial and Scientific Instruments; Cabled Distribution Systems and Energy Efficiency Lighting.

2- An ENERGY STAR Recognized Laboratory, for the LM80 Testing, a wide variety of Luminaires and Computers.

3- A NIST Designated Phase-I and Phase-II CAB including: ACMA (Australian Communication and Media Authority), BSMI (Bureau of Standards, Metrology and Inspection of Taiwan), IDA (Infocomm Development Authority of Singapore), IC(Industry Canada), Korea (Ministry of Communications Radio Research Laboratory), NCC (Formerly DGT; Directorate General of Telecommunication of Chinese Taipei) OFTA (Office of the Telecommunications Authority of Hong Kong), Vietnam, VCCI - Voluntary Control Council for Interference of Japan and a designated EU CAB (Conformity Assessment Body) (Notified Body) for the EMC and R&TTE Directives.

4- A Product Certification Body accredited to **ISO Guide 65: 1996** by **A2LA** to certify:

1- Unlicensed, Licensed radio frequency devices and Telephone Terminal Equipment for the FCC. Scope A1, A2, A3, A4, B1, B2, B3, B4 & C.

2. Radio Standards Specifications (RSS) in the Category I Equipment Standards List and All Broadcasting Technical Standards (BETS) in Category I Equipment Standards List for Industry Canada.

3. Radio Communication Equipment for Singapore.

4. Radio Equipment Specifications, GMDSS Marine Radio Equipment Specifications, and Fixed Network Equipment Specifications for Hong Kong.

5. Japan MIC Telecommunication Business Law (A1, A2) and Radio Law (B1, B2 and B3).

6. Audio/Video, Battery Charging Systems, Computers, Displays, Enterprise Servers, Imaging Equipment, Set-Top Boxes, Telephony, Televisions, Ceiling Fans, CFLs (Including GU24s), Decorative Light Strings, Integral LED Lamps, Luminaires, Residential Ventilating Fans.

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2009, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.4-2009 and FCC KDB 558074 D01 DTS Meas Guidance v03r01.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test utility used was *Terminal* was provided by Whizz System Inc, and was verified by *Chen Ge* to comply with the standard requirements being tested against.

2.3 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
HP	Laptop	NX6110	CNU5130969

2.6 EUT Internal Configuration Details

N/A

3 Summary of Test Results

Results reported relate only to the product tested.

FCC Rules	Description of Test	Results
FCC §15.247(i), §2.1093 IC RSS-102	RF Exposure	Compliant
FCC §15.203 IC RSS-Gen §7.1.2	Antenna Requirement	Compliant
FCC §15.207(a) IC RSS-Gen §7.2.4	AC Line Conducted Emissions	Compliant
FCC §15.247 (d) IC RSS-210 §A8.5	Spurious Emissions at Antenna Port	Compliant
FCC §15.205 IC RSS-210 §2.2	Restricted Bands	Compliant
FCC §15.209, §15.247 (d) IC RSS-210 §A8.5	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) IC RSS-210 §A8.2	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3) IC RSS-210 §A8.4	Maximum Peak Output Power	Compliant
FCC §15.247(d) IC RSS-210 §A8.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) IC RSS-210 §A8.2(b)	Power Spectral Density	Compliant

4 FCC §15.247 (i) §2.1093 & IC RSS-102 - RF Exposure

4.1 Applicable Standards

FCC §15.247(i) and §1.1307(b)(1).

IC RSS-102.

4.2 Test result

Compliant, the output power of BTLE is less than the SAR test exclusion thresholds. Stand along SAR is not required for BTLE.

5 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements

5.1 Applicable Standards

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

As per IC RSS-Gen §7.1.2: Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

5.2 Antenna List

Antenna Type/Pattern	Antenna Gain (dBi) @ 2.4 GHz
Integrated	3.2

5.3 Result

The antenna consists of non-standard (UFL) connectors with less 6 dBi gain; therefore, it complies with the antenna requirement. Please refer to the internal photos.

6 FCC §15.207 & IC RSS-Gen §7.2.4 - AC Power Line Conducted Emissions

6.1 Applicable Standard

As per FCC §15.207 and IC RSS-Gen §7.2.4 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

**Decreases with the logarithm of the frequency.*

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC Part15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the unit was connected with LISN which provided 120 V / 60 Hz AC power.


6.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2014-03-28	1 year
Solar Electronics	LISN	9252-50-R-24-N	511205	2013-06-25	1 year
TTE	Filter, High Pass	H9962-150K-50-21378	K7133	2013-05-30	1 year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.4 Test Setup Block Diagram

Conducted Emissions

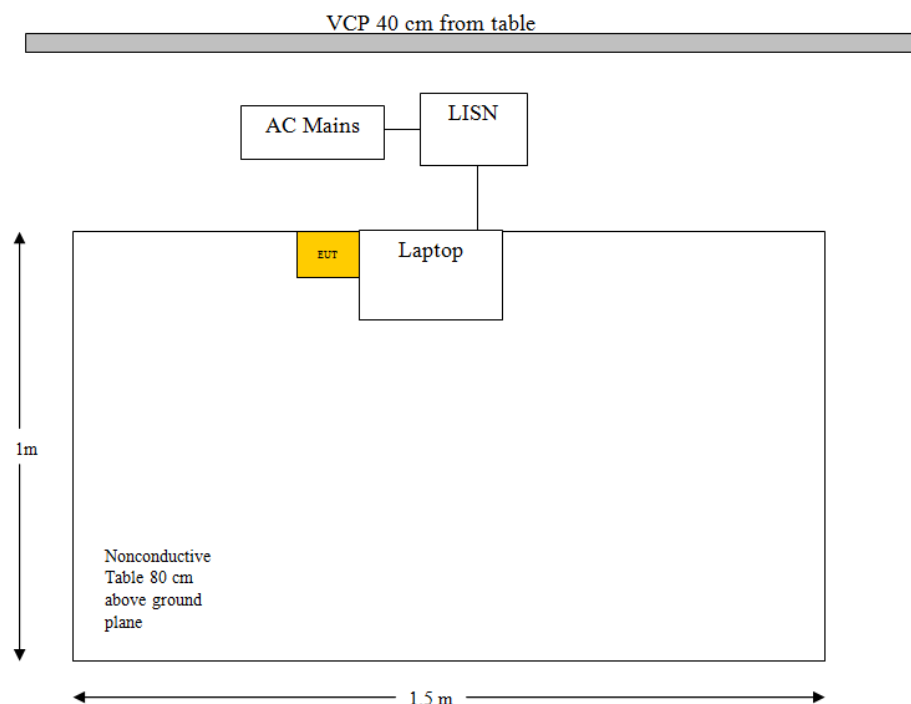

6.5 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a “QP”. Average readings are distinguished with an “Ave”.

6.6 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	52 %
ATM Pressure:	101.89 kPa

The testing was performed by Chen Ge on 2014-05-13 in 5 m chamber 3.


6.7 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Part 15.207 standard's conducted emissions limits, with the *worst* margin reading of:

Connection: AC/DC adapter of PC connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-14.31	0.212931	Neutral	0.15-30

6.8 Conducted Emissions Test Plots and Data


120 V, 60 Hz – Line

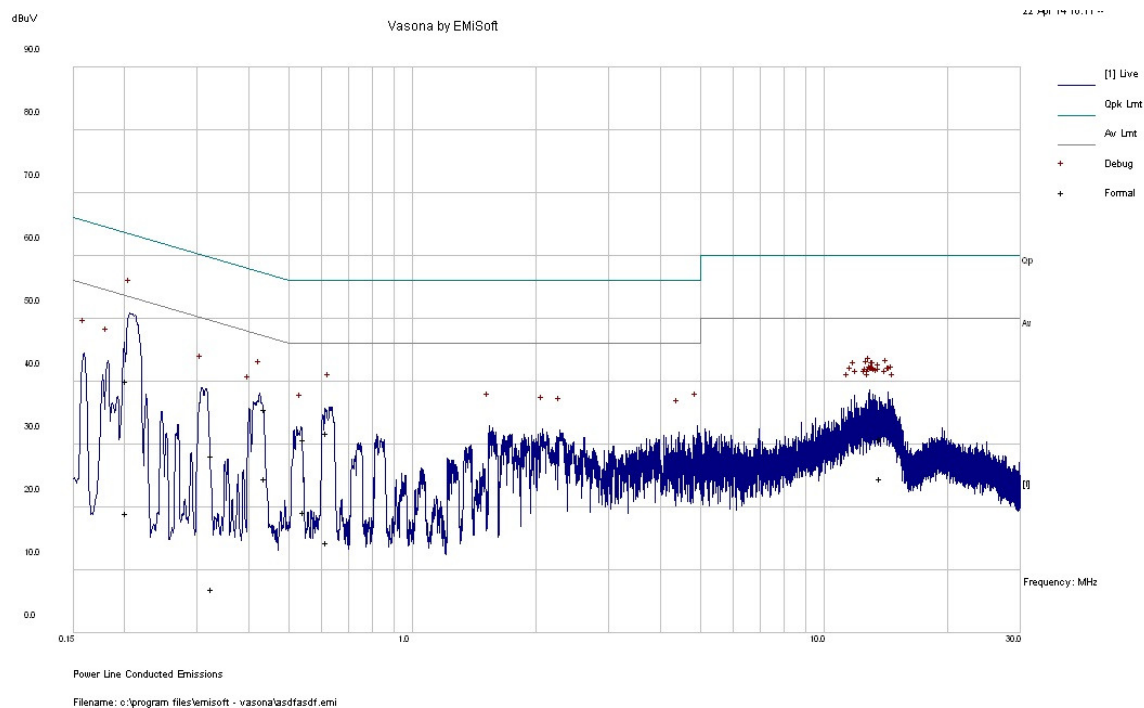

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)	Detector (QP/Ave.)
0.20913	36.13	Line	63.24	-16.44	QP
0.422823	25.69	Line	57.39	-21.84	QP
0.641067	23.49	Line	56	-22.66	QP
0.157692	27.94	Line	65.58	-25.44	QP
0.324381	25.35	Line	59.59	-24.12	QP
0.165936	26.43	Line	65.16	-27.45	QP

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)	Detector (QP/Ave.)
0.20913	31.96	Line	53.24	-21.29	Ave.
0.422823	28.08	Line	47.39	-19.31	Ave.
0.641067	25.78	Line	46	-20.22	Ave.
0.157692	10.90	Line	55.58	-44.68	Ave.
0.324381	14.15	Line	49.59	-35.44	Ave.
0.165936	9.69	Line	55.16	-45.47	Ave.

120 V, 60 Hz – Neutral

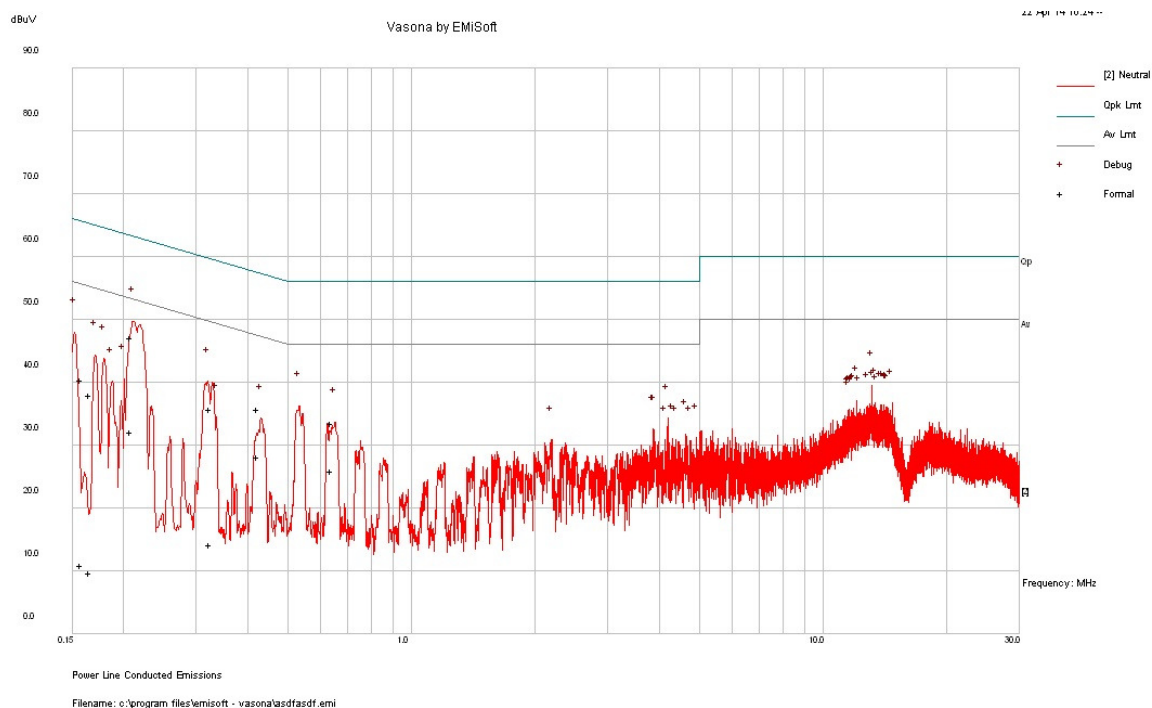

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)	Detector (QP/Ave.)
0.212931	48.78	Neutral	63.09	-14.31	QP
0.154044	42.21	Neutral	65.78	-23.57	QP
0.313218	37.83	Neutral	59.88	-22.05	QP
0.521637	32.95	Neutral	56	-23.05	QP
13.15831	31.38	Neutral	60	-28.62	QP
0.153354	41.52	Neutral	65.82	-24.30	QP

Frequency (MHz)	Corrected Amplitude (dBμV)	Conductor (Line/Neutral)	Limit (dBμV)	Margin (dB)	Detector (QP/Ave.)
0.212931	36.49	Neutral	53.09	-16.60	Ave.
0.154044	13.72	Neutral	55.78	-42.06	Ave.
0.313218	23.64	Neutral	49.88	-26.24	Ave.
0.521637	19.01	Neutral	46	-26.99	Ave.
13.15831	24.88	Neutral	50	-25.12	Ave.
0.153354	13.63	Neutral	55.82	-42.19	Ave.

7 FCC §2.1051, §15.247(d) & IC RSS-210 §A8.5 – Spurious Emissions at Antenna Terminals

7.1 Applicable Standards

For FCC §15.247(d) and IC RSS-210 §A8.5 in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Requirements: CFR 47, §2.1051.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1057.

7.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11: Emissions in non-restricted frequency bands and section 12: Emissions in restricted frequency bands.

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2014-02-28	1 year

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102 kPa


The testing was performed by Chen Ge on 2014-05-07 at RF site.

7.5 Test Results


Please refer to following plots of spurious emissions.

Low Channel, 2402 MHz

30 MHz – 3 GHz

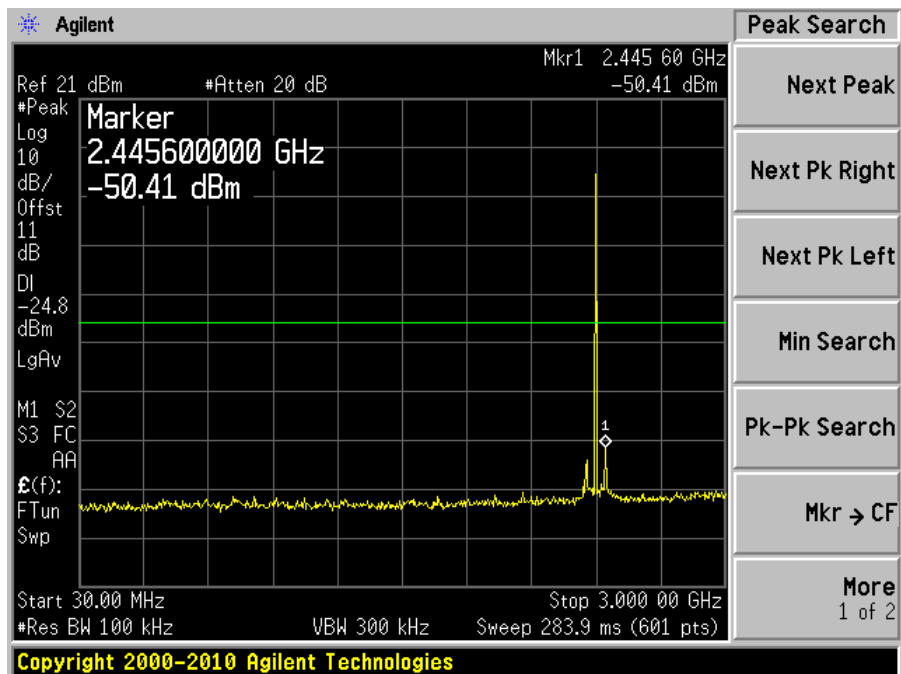


3 GHz – 26 GHz

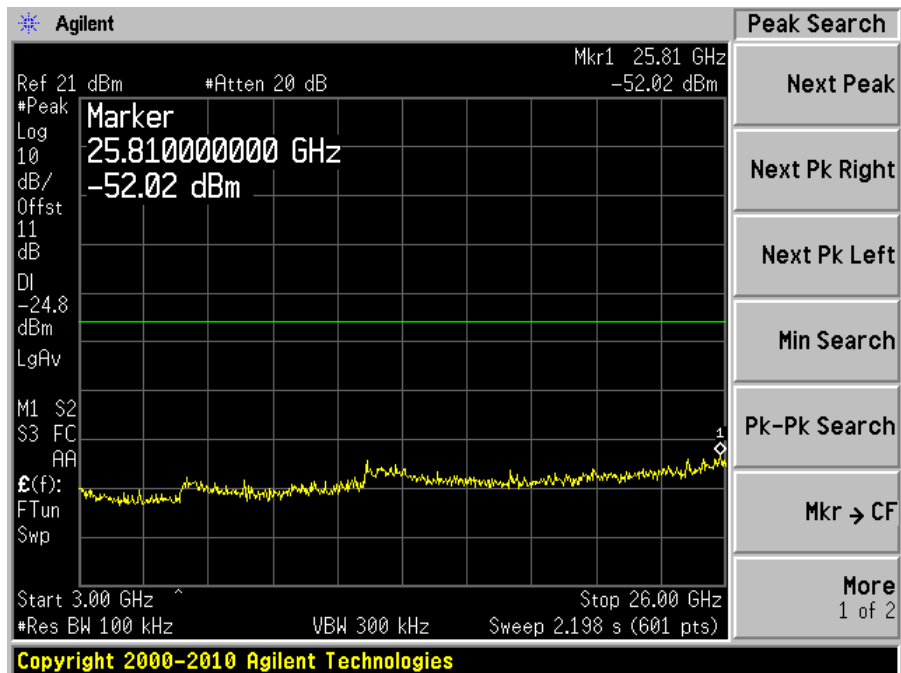


Middle Channel, 2440 MHz

30 MHz – 3 GHz

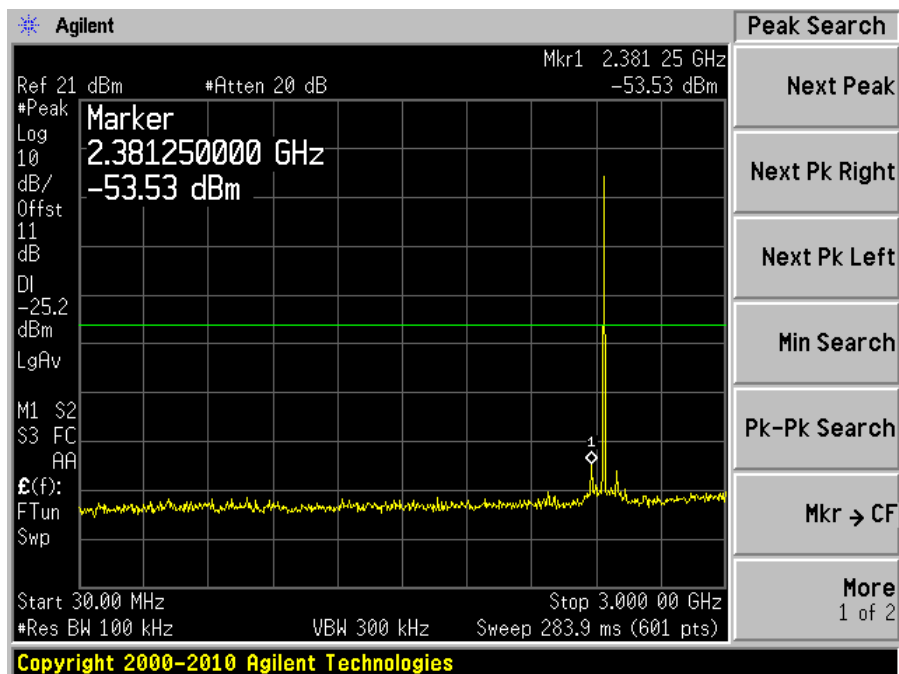


3 GHz – 26 GHz

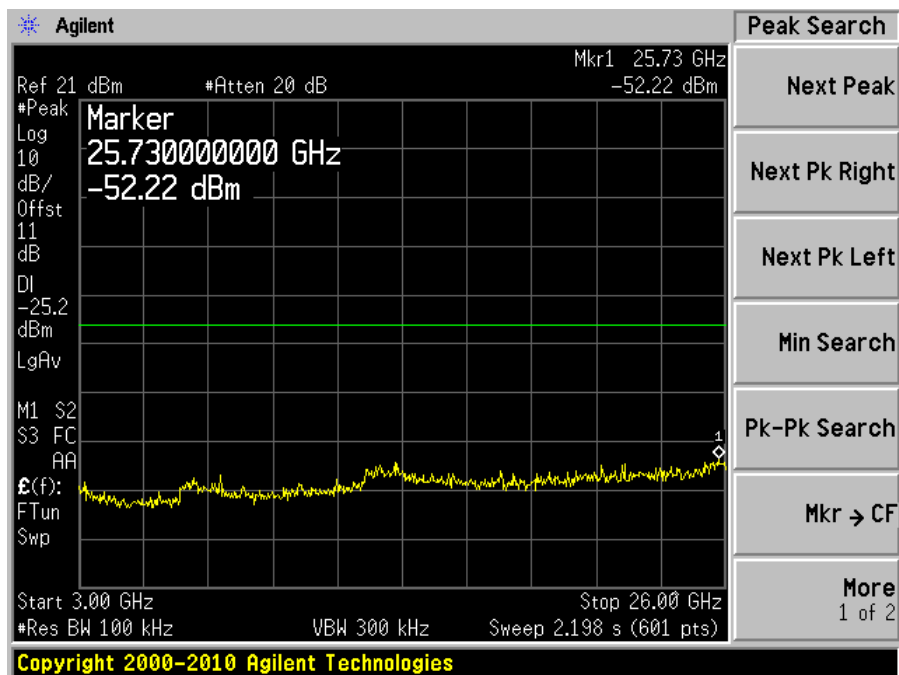


High Channel, 2480 MHz

30 MHz – 3 GHz

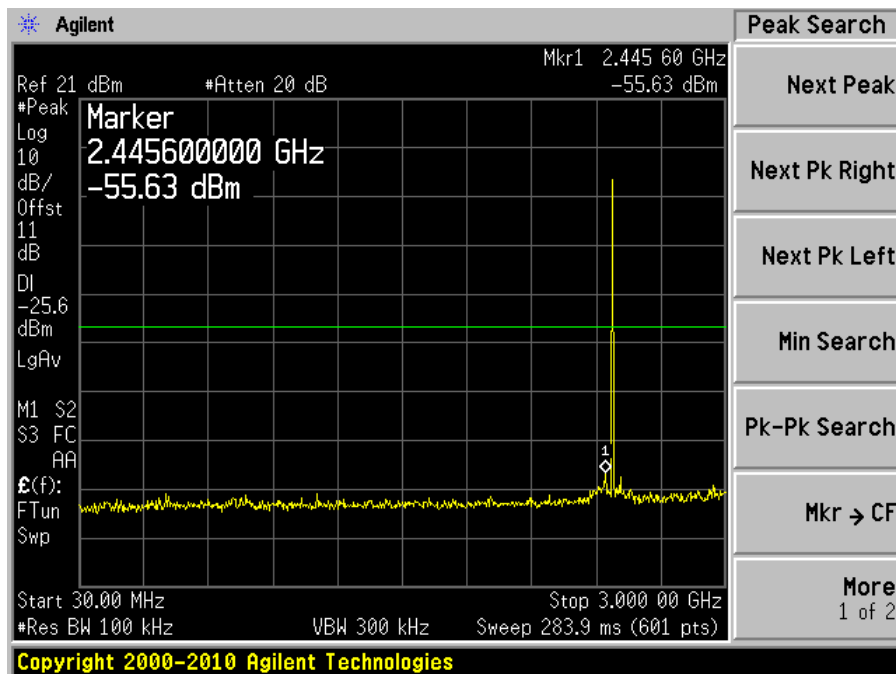

3 GHz – 26 GHz

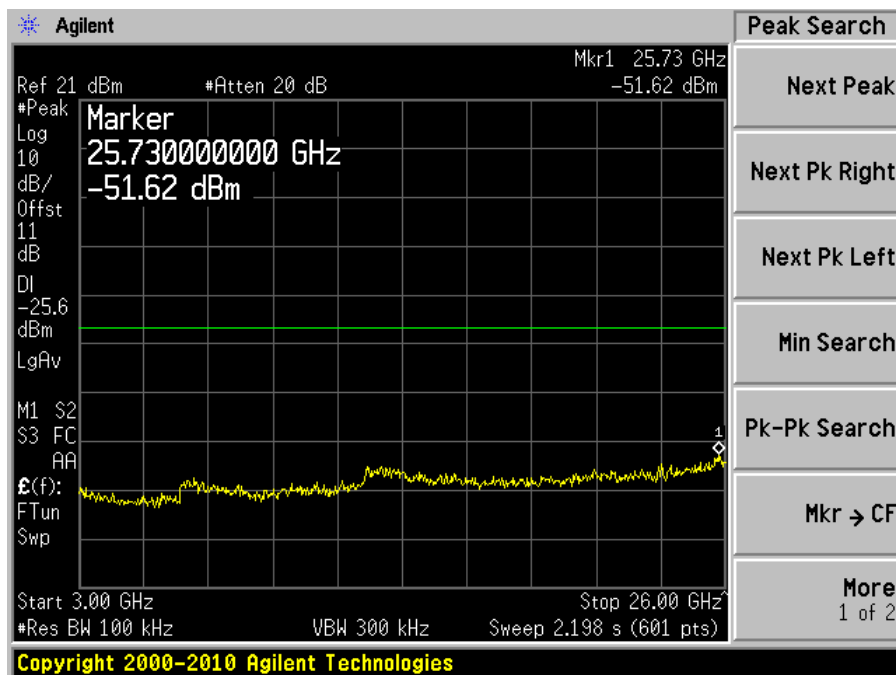

8 FCC §15.205, §15.209 & §15.247(d) & IC RSS-210 §A8.5 – Spurious Radiated Emissions

8.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-210: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per IC RSS-210 A8.5 Out-of-band Emissions, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C, IC RSS-210 limits.

8.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

8.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2013-08-15	1 year
Hewlett Packard	Pre-amplifier	8447D	2944A06639	2013-06-09	1 year
Agilent	Pre-amplifier	8449B	3008A01978	2014-02-04	1 year
WiseWave	Horn Antenna	ARH-4223-02	10555-01	2012-08-09	3 Years
Agilent	Spectrum Analyzer	E4440A	US42221851	2014-02-28	1 year
EMCO	Horn Antenna	3315	9511-4627	2013-10-17	1 year
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2014-03-22	1 year

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

8.6 Test Environmental Conditions

Temperature:	22-23 °C
Relative Humidity:	43 %
ATM Pressure:	102 kPa

The testing was performed by Chen Ge on 2014-05-08 at 5m chamber 3.

8.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15C/IC RSS-210 standard's radiated emissions limits, and had the worst margin of:

30-1000 MHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-1.37	566.52	Vertical	Low Channel

1-25 GHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-14.16	7440	Vertical	High Channel

Please refer to the following table for specific test result details

8.8 Radiated Emissions Test Data and Plots

1) 30-1000 MHz, measured at 3 meters distance, worst case.

Frequency (MHz)	Corrected Amplitude (dBuV)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV)	Margin (dB)
566.52	44.63	110	V	105	46	-1.37
456.02	39.21	102	V	145	46	-6.79
384.00	43.75	100	H	243	46	-2.25
687.26	40.15	100	V	105	46	-5.85
500.00	39.05	109	V	178	46	-6.95
911.97	37.15	100	H	73	46	-8.85

2) 1 – 25 GHz, measured at 3 meters distance

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2402 MHz, measured at 3 meters											
2402	71.55	65	100	V	28.956	3.12	0	103.626	-	-	Fun/Peak
2402	66.68	100	135	H	28.956	3.12	0	98.756	-	-	Fun/Peak
2402	49.95	62	100	V	28.956	3.12	0	82.026	-	-	Fun/Ave
2402	47.22	101	135	H	28.956	3.12	0	79.296	-	-	Fun/Ave
2390	49.452	0	100	V	28.192	3.12	34.29	46.474	74	-27.526	Peak
2390	49.211	0	100	H	28.192	3.12	34.29	46.233	74	-27.767	Peak
2390	35.077	0	100	V	28.192	3.12	34.29	32.099	54	-21.901	Ave
2390	35.096	0	100	H	28.192	3.12	34.29	32.118	54	-21.882	Ave
4804	46.356	0	100	V	33.097	4.56	34.29	49.723	74	-24.277	Peak
4804	46.268	0	100	H	33.097	4.56	34.29	49.635	74	-24.365	Peak
4804	31.739	0	100	V	33.097	4.56	34.29	35.106	54	-18.894	Ave
4804	31.737	0	100	H	33.097	4.56	34.29	35.104	54	-18.896	Ave
7206	46.343	0	100	V	35.928	5.49	34.39	53.371	83.626	-30.255	Peak
7206	46.422	0	100	H	35.928	5.49	34.39	53.45	78.756	-25.306	Peak
7206	31.907	0	100	V	35.928	5.49	34.39	38.935	62.026	-23.091	Ave
7206	31.92	0	100	H	35.928	5.49	34.39	38.948	59.296	-20.348	Ave
9608	47.152	0	100	V	37.954	6.54	34.9	56.746	83.626	-26.88	Peak
9608	47.731	0	100	H	37.954	6.54	34.9	57.325	78.756	-21.431	Peak
9608	32.493	0	100	V	37.954	6.54	34.9	42.087	62.026	-19.939	Ave
9608	32.523	0	100	H	37.954	6.54	34.9	42.117	59.296	-17.179	Ave
Middle Channel 2440 MHz, measured at 3 meters											
2440	70.55	215	100	V	28.956	3.12	0	102.626	-	-	Fun/Peak
2440	68.69	162	100	H	28.956	3.12	0	100.766	-	-	Fun/Peak
2440	48.18	215	100	V	28.956	3.12	0	80.256	-	-	Fun/Ave
2440	67.18	162	100	H	28.956	3.12	0	99.256	-	-	Fun/Ave
4880	46.378	0	100	V	33.327	4.54	34.29	49.955	74	-24.045	Peak
4880	47.075	0	100	H	33.327	4.54	34.29	50.652	74	-23.348	Peak
4880	31.568	0	100	V	33.327	4.54	34.29	35.145	54	-18.855	Ave
4880	31.571	0	100	H	33.327	4.54	34.29	35.148	54	-18.852	Ave
7320	46.491	0	100	V	36.369	5.57	34.39	54.04	74	-19.96	Peak
7320	46.357	0	100	H	36.369	5.57	34.39	53.906	74	-20.094	Peak
7320	31.59	0	100	V	36.369	5.57	34.39	39.139	54	-14.861	Ave
7320	31.625	0	100	H	36.369	5.57	34.39	39.174	54	-14.826	Ave
9760	48.17	0	100	V	38.287	6.62	34.9	58.177	82.626	-24.449	Peak
9760	47.328	0	100	H	38.287	6.62	34.9	57.335	80.766	-23.431	Peak
9760	32.378	0	100	V	38.287	6.62	34.9	42.385	60.256	-17.871	Ave
9760	32.43	0	100	H	38.287	6.62	34.9	42.437	79.256	-36.819	Ave

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2480 MHz, measured at 3 meters											
2480	69.88	165	100	V	29.155	3.25	0	102.285	-	-	Fun/Peak
2480	66.48	114	108	H	29.155	3.25	0	98.885	-	-	Fun/Peak
2480	66.5	165	100	V	29.155	3.25	0	98.905	-	-	Fun/Ave
2480	64.07	114	108	H	29.155	3.25	0	96.475	-	-	Fun/Ave
2483.5	46.418	0	100	V	29.155	3.25	34.29	44.533	74	-29.467	Peak
2483.5	47.282	0	100	H	29.155	3.25	34.29	45.397	74	-28.603	Peak
2483.5	32.837	0	100	V	29.155	3.25	34.29	30.952	54	-23.048	Ave
2483.5	32.853	0	100	H	29.155	3.25	34.29	30.968	54	-23.032	Ave
4960	46.812	0	100	V	33.327	4.52	34.29	50.369	74	-23.631	Peak
4960	46.351	0	100	H	33.327	4.52	34.29	49.908	74	-24.092	Peak
4960	31.935	0	100	V	33.327	4.52	34.29	35.492	54	-18.508	Ave
4960	31.977	0	100	H	33.327	4.52	34.29	35.534	54	-18.466	Ave
7440	45.845	0	100	V	36.565	5.62	34.39	53.64	74	-20.36	Peak
7440	46.29	0	100	H	36.565	5.62	34.39	54.085	74	-19.915	Peak
7440	32.045	0	100	V	36.565	5.62	34.39	39.84	54	-14.16	Ave
7440	32.018	0	100	H	36.565	5.62	34.39	39.813	54	-14.187	Ave
9920	45.563	0	100	V	38.287	6.55	34.9	55.5	82.285	-26.785	Peak
9920	46.868	0	100	H	38.287	6.55	34.9	56.805	78.885	-22.08	Peak
9920	32.278	0	100	V	38.287	6.55	34.9	42.215	78.905	-36.69	Ave
9920	32.286	0	100	H	38.287	6.55	34.9	42.223	76.475	-34.252	Ave

9 FCC§15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth

9.1 Applicable Standards

According to FCC §15.247(a)(2) and IC RSS-210 A8.2 (a), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2014-02-28	1 year

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102 kPa


The testing was performed by Chen Ge on 2014-05-07 at RF site.

9.5 Test Results


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (kHz)	FCC/IC Limit (MHz)	Results
Low	2402	1.0756	708.616	> 0.5	Compliant
Middle	2440	1.0692	696.605	> 0.5	Compliant
High	2480	1.0772	705.996	> 0.5	Compliant

Please refer to the following plots for detailed test results


Low channel: 2402 MHz

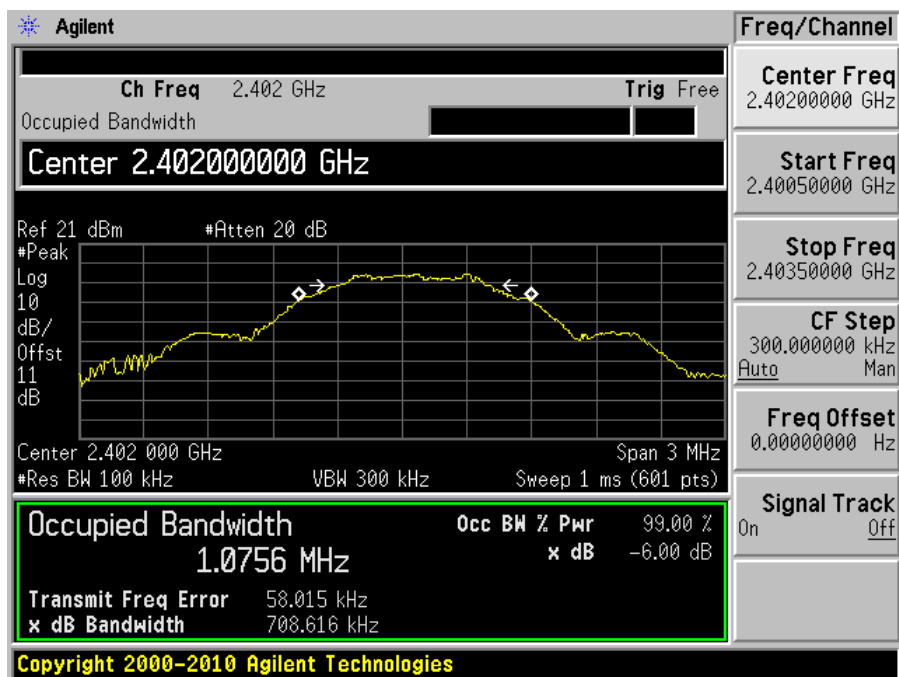

Middle channel: 2440 MHz

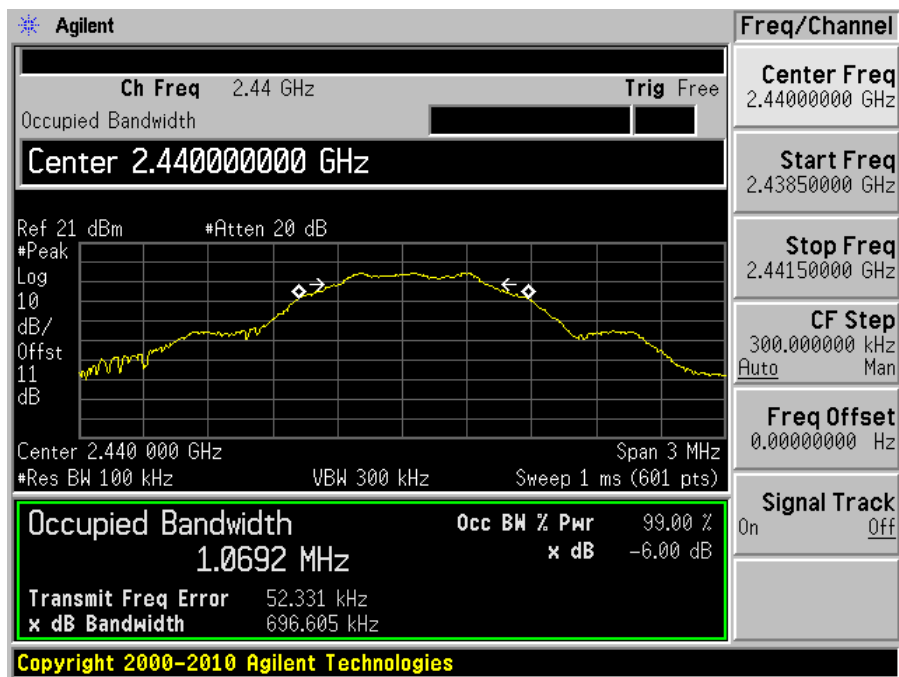

High channel: 2480 MHz

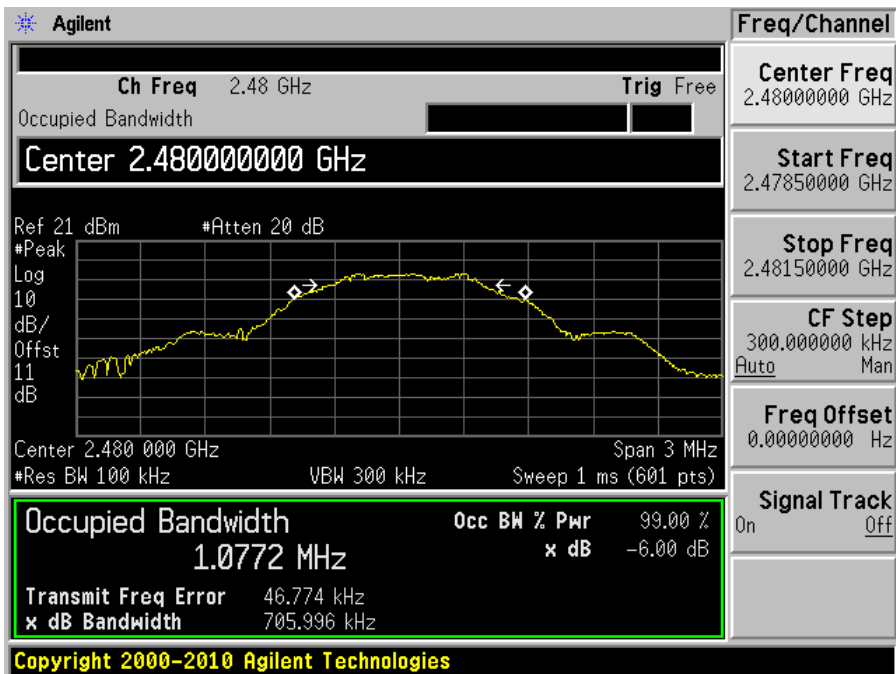

10 FCC §15.247(b) & IC RSS-210 §A8.4 – Peak Output Power Measurement

10.1 Applicable Standards

According to FCC §15.247(b) and IC RSS-210 §A8.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2014-02-28	1 year

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102 kPa


The testing was performed by Chen Ge on 2014-05-07 at RF site.

10.5 Test Results


Channel	Frequency (MHz)	Conducted Output Power (dBm)	FCC/IC Limit (dBm)	Margin (dB)
Low	2402	6.47	30	-23.53
Middle	2440	6.25	30	-23.75
High	2480	5.25	30	-24.75

Please refer to the following plots.


Low channel: 2402 MHz

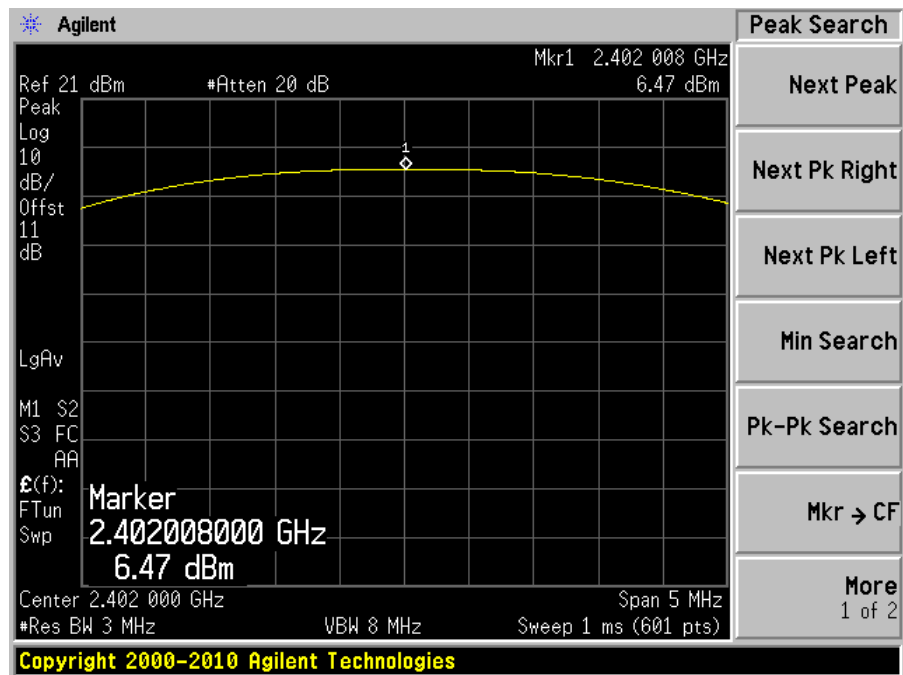

Middle channel: 2440 MHz

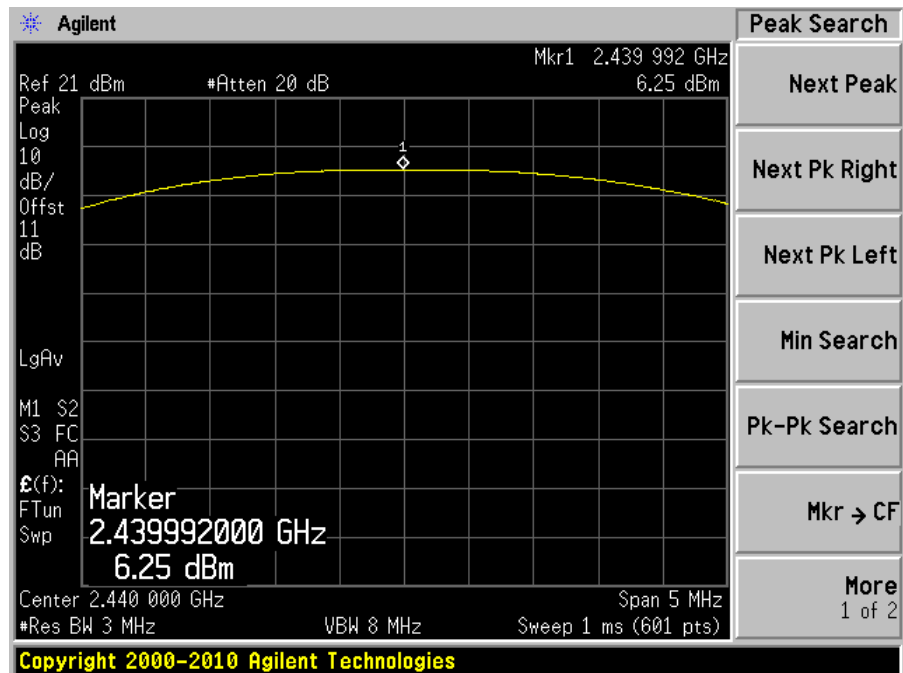

High channel: 2480 MHz

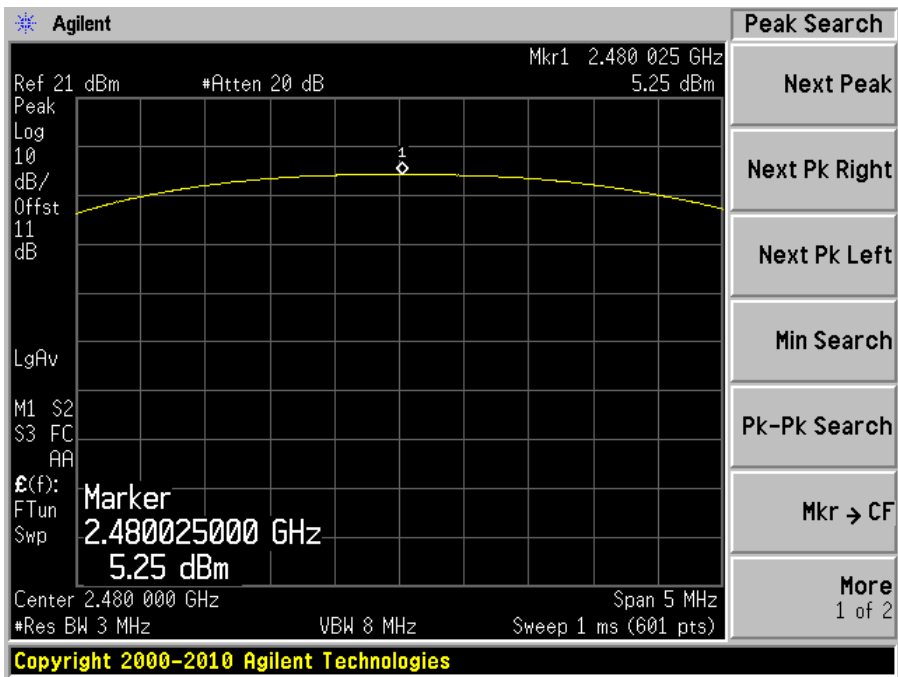

11 FCC §15.247(d) & IC RSS-210 §A8.5 – 100 kHz Bandwidth of Band Edges

11.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to IC Rss-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

11.2 Measurement Procedure

The measurements are base on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2014-02-28	1 year

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions


Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102 kPa

The testing was performed by Chen Ge on 2014-05-07 at RF site.


11.5 Test Results

Please refer to following pages for plots of band edge.

Low Band Edge

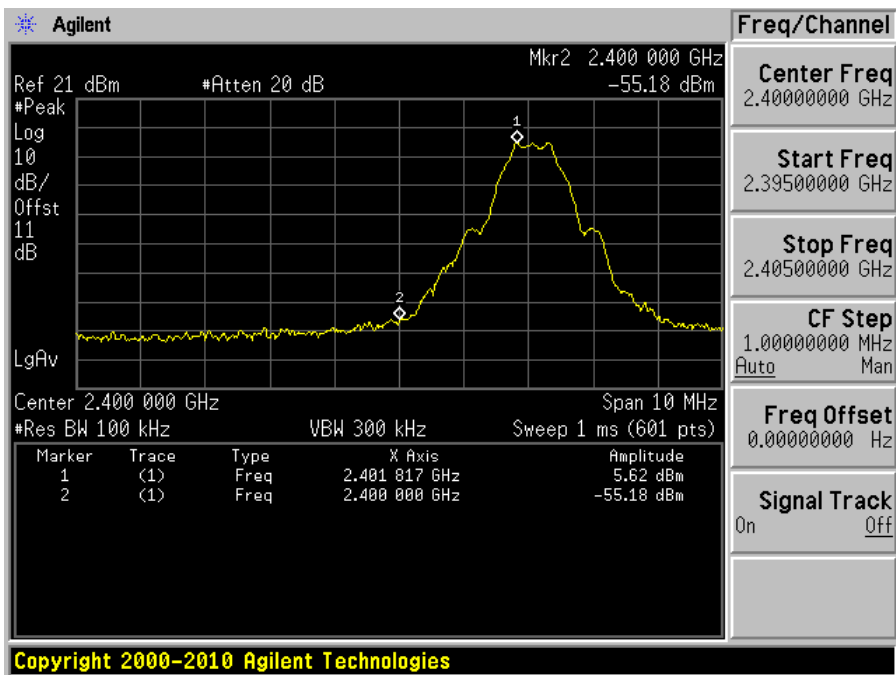

High Band Edge

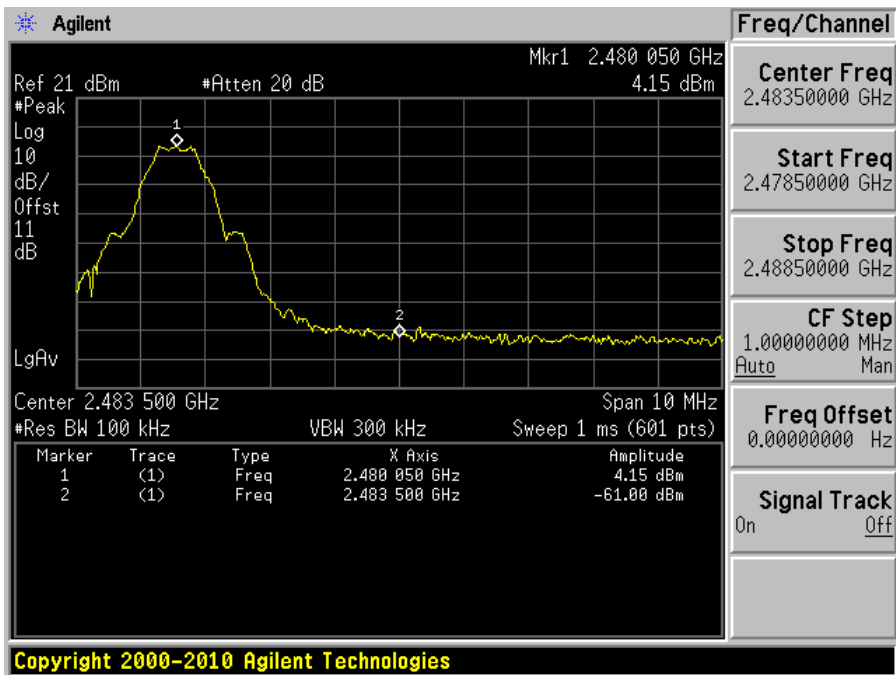

12 FCC §15.247(e) & IC RSS-210 §A8.2 (b) – Power Spectral Density

12.1 Applicable Standards

According to FCC §15.247(e) and RSS-210 §A8.2 (b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2014-02-28	1 year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

12.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102 kPa


The testing was performed by Chen Ge on 2014-05-07 at RF site.

12.5 Test Results


Channel	Frequency (MHz)	PSD (dBm)	FCC/IC Limit (dBm)	Margin (dB)
Low	2402	-7.91	8	-15.91
Middle	2440	-8.12	8	-16.12
High	2480	-9.35	8	-17.35

Please refer to the following plots for detailed test results:

Low channel: 2402 MHz

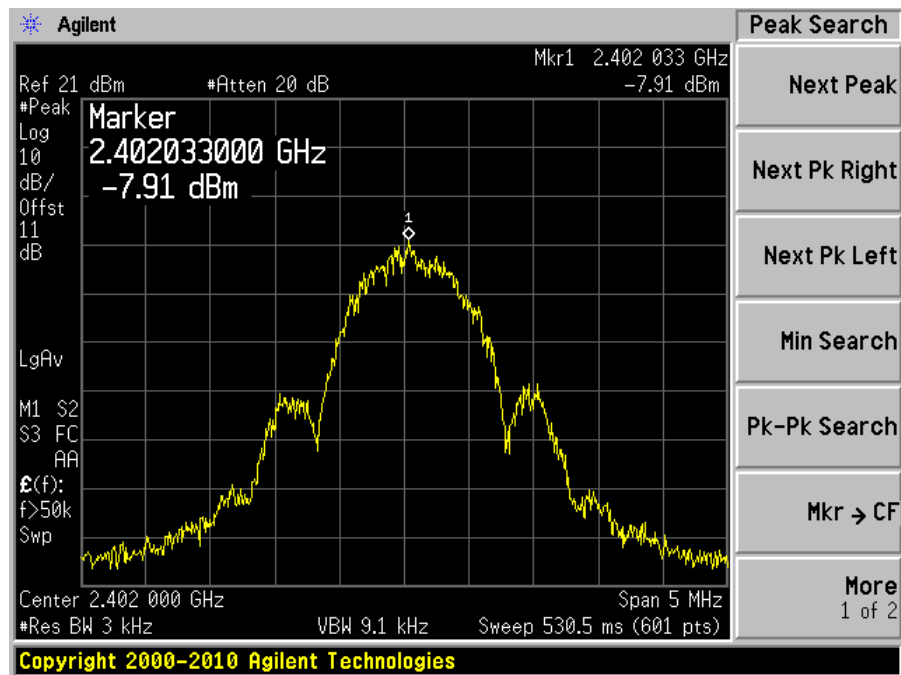

Middle channel: 2440 MHz

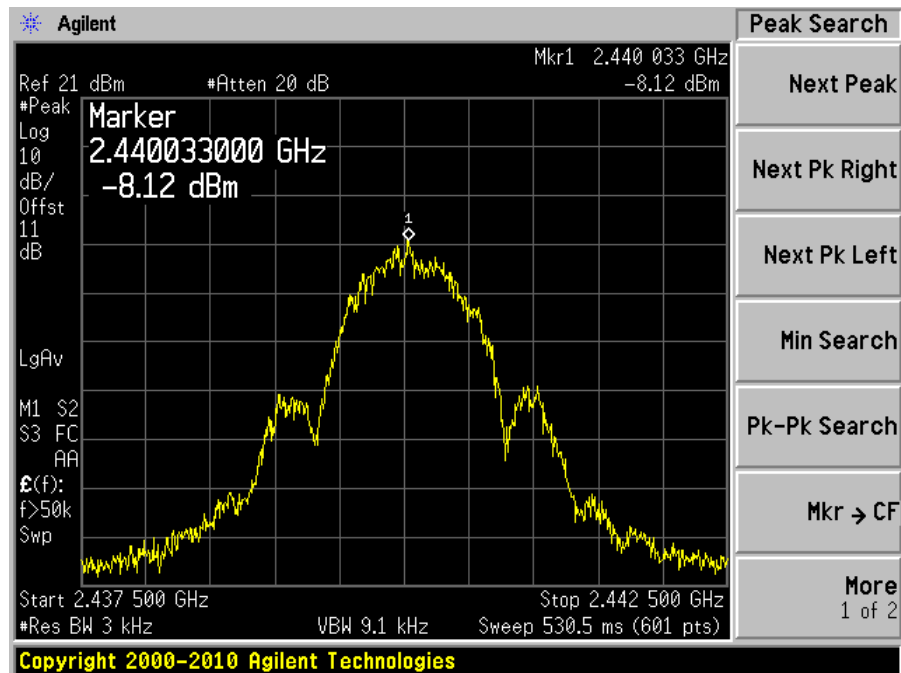

High channel: 2480 MHz

