

FCC TEST REPORT  
for  
ANGELFISH TECHNOLOGY CO., LIMITED

Tablet PC  
Model No.: Q8H, A720, G761, A88H, M712,  
M765, M788, R726, A7870, A802, A923

Prepared for : ANGELFISH TECHNOLOGY CO., LIMITED  
Address : RM 1005, 10/F HO KING COMM CTR 2-16 FA YUEN ST  
MONGKOK KLN HONG KONG

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited  
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,  
Nanshan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066544  
Fax: (86) 755-26014772

Report Number : 201404741F  
Date of Test : Apr. 09~ 14, 2014  
Date of Report : Apr. 15, 2014

## TABLE OF CONTENT

Description

Page

Test Report

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                                        | <b>4</b>  |
| 1.1. Description of Device (EUT).....                                      | 4         |
| 1.2. Auxiliary Equipment Used during Test .....                            | 5         |
| 1.3. Description of Test Facility .....                                    | 6         |
| 1.4. Measurement Uncertainty.....                                          | 6         |
| <b>2. TEST METHODOLOGY .....</b>                                           | <b>7</b>  |
| 2.1. Summary of Test Results.....                                          | 7         |
| 2.2. Description of Test Modes.....                                        | 7         |
| 2.3. List of channels:.....                                                | 8         |
| <b>3. CONDUCTED EMISSION TEST.....</b>                                     | <b>9</b>  |
| 3.1. Block Diagram of Test Setup .....                                     | 9         |
| 3.2. Power Line Conducted Emission Measurement Limits (15.207).....        | 9         |
| 3.3. Configuration of EUT on Measurement .....                             | 9         |
| 3.4. Operating Condition of EUT .....                                      | 9         |
| 3.5. Test Procedure .....                                                  | 10        |
| 3.6. Test equipment .....                                                  | 10        |
| 3.7. Power Line Conducted Emission Measurement Results .....               | 10        |
| <b>4. FCC PART 15.247 REQUIREMENTS FOR DSSS &amp; OFDM MODULATION.....</b> | <b>13</b> |
| 4.1 Test Setup .....                                                       | 13        |
| 4.2 6dB Bandwidth .....                                                    | 13        |
| 4.3. Maximum Peak output power test .....                                  | 21        |
| 4.4. Band Edges Measurement .....                                          | 29        |
| 4.5. Peak Power Spectral Density .....                                     | 66        |
| 4.6. Radiated Emissions.....                                               | 74        |
| <b>5. PHOTOGRAPH.....</b>                                                  | <b>85</b> |
| 5.1. Photo of Conducted Emission Measurement.....                          | 85        |
| 5.2. Photo of Radiation Emission Test .....                                | 86        |
| <b>APPENDIX I (EXTERNAL PHOTOS).....</b>                                   | <b>87</b> |
| <b>APPENDIX II (INTERNAL PHOTOS) .....</b>                                 | <b>90</b> |

APPENDIX I (External Photos) (3 Pages)

APPENDIX II (Internal Photos) (3 Pages)

## TEST REPORT

Applicant : ANGELFISH TECHNOLOGY CO., LIMITED  
Manufacturer : ANGELFISH TECHNOLOGY CO., LIMITED  
EUT : Tablet PC  
Model No. : Q8H, A720, G761, A88H, M712, M765,  
M788, R726, A7870, A802, A923  
Serial No. : N/A  
Trade Mark : N/A  
Rating : DC 5C, 2A Via Adapter (AC 100-240V, 50/60Hz, 0.60A)

Measurement Procedure Used:  
FCC Part15 Subpart C, Paragraph 15.247

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Apr. 09~ 14, 2014

Prepared by :

*Rock zeng*

(Tested Engineer / Rock Zeng)

Reviewer :

*Amy Ding*

(Project Manager / Amy Ding)

Approved & Authorized Signer :

*Tom Chen*

(Manager / Tom Chen)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                           |                                                                                                                                                                                       |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT                       | : Tablet PC                                                                                                                                                                           |
| Model Number              | : Q8H, A720, G761, A88H, M712, M765, M788, R726, A7870, A802, A923<br>(Note: All samples are the same except the model number and appearance, so we prepare "Q8H" for EMC test only.) |
| Test Power Supply         | : AC 120V/60Hz for adapter/<br>DC 5V(With DC 3.7V battery inside)                                                                                                                     |
| Adapter                   | : Model:THX-050200KE<br>Input: AC 100-240V, 50/60Hz, 0.60A<br>Output: DC 5V, 2000mA                                                                                                   |
| RF Transmission Frequency | : 2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20))<br>2422MHz~2452MHz ( 802.11n(HT40))                                                                                                 |
| Channels                  | : 11 For (802.11b/802.11g/802.11n(HT20))<br>7 For (802.11n(HT40))                                                                                                                     |
| Modulation                | 802.11b CCK<br>802.11g OFDM<br>802.11n MCS                                                                                                                                            |
| Antenna Gain:             | : 0dBi                                                                                                                                                                                |
| Applicant Address         | : ANGELFISH TECHNOLOGY CO., LIMITED<br>RM 1005, 10/F HO KING COMM CTR 2-16 FA YUEN ST<br>MONGKOK KLN HONG KONG                                                                        |
| Manufacturer Address      | : ANGELFISH TECHNOLOGY CO., LIMITED<br>RM 1005, 10/F HO KING COMM CTR 2-16 FA YUEN ST<br>MONGKOK KLN HONG KONG                                                                        |
| Factory Address           | : ANGELFISH TECHNOLOGY CO., LIMITED<br>RM 1005, 10/F HO KING COMM CTR 2-16 FA YUEN ST<br>MONGKOK KLN HONG KONG                                                                        |
| Date of receipt           | : Apr. 09, 2014                                                                                                                                                                       |
| Date of Test              | : Apr. 09~ 14, 2014                                                                                                                                                                   |

## 1.2. Auxiliary Equipment Used during Test

|                       |                                                                                                                 |
|-----------------------|-----------------------------------------------------------------------------------------------------------------|
| PC                    | : Manufacturer: DELL<br>M/N: OPTIPLEX 380<br>S/N: 1J63X2X<br>CE , FCC: DOC                                      |
| MONITOR               | : Manufacturer: DELL<br>M/N: E170Sc<br>S/N: CN-00V539-64180-055-0UPS<br>CE , FCC: DOC                           |
| KEYBOARD              | : Manufacturer: DELL<br>M/N: SK-8115<br>S/N: CN-0DJ313-71616-06C-02XN<br>CE , FCC: DOC<br>Cable: 1m, unshielded |
| MOUSE                 | : Manufacturer: DELL<br>M/N: M-UARDEL7<br>S/N: N/A<br>CE , FCC: DOC<br>Cable: 1m, unshielded                    |
| Printer               | : Manufacturer: Brother<br>M/N: MFC-3360C<br>S/N: N/A<br>CE, FCC: DOC                                           |
| Power Cord of Printer | : Non-shielded, Detachable, 0.8m, w/o core                                                                      |
| USB Cable for Printer | : Non-Shielded , 1.5m                                                                                           |
| Power Line            | Non-Shielded, 1.5m                                                                                              |
| VGA Cable             | : Non-Shielded, 1.5m                                                                                            |
| Network Cable         | : Non-Shielded, 1.5m                                                                                            |
| USB Cable for EUT     | : Non-Shielded, 1.2m                                                                                            |

### 1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS - LAB Code: L3503**

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

**FCC-Registration No.: 752021**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

**IC-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, February 22, 2013.

**Test Location**

All Emissions tests were performed at  
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

### 1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC Part 15, Paragraph 15.247.

### 2.1. Summary of Test Results

The EUT has been tested according to the following specifications:

| Standard                                 | Test Type                                | Result | Notes    |
|------------------------------------------|------------------------------------------|--------|----------|
| FCC Part 15, Paragraph 15.107, 15.207    | Conducted Emission Test                  | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(b)(1)      | Peak Output Power                        | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(a)(2)      | 6dB Bandwidth                            | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(c)         | 100kHz Bandwidth of Frequency Band Edges | PASS   | Complies |
| FCC Part 15, Paragraph 15.209(a)(f)      | Spurious Emission                        | PASS   | Complies |
| FCC Part 15, Paragraph 15.247(a)(1)      | Frequency Separation                     | -      | N/A      |
| FCC Part 15, Paragraph 15.247(a)(1)(iii) | Number of Hopping Frequency              | -      | N/A      |
| FCC Part 15, Paragraph 15.247(a)(1)(iii) | Time of Occupancy                        | -      | N/A      |
| FCC Part 15, Paragraph 15.247(c)         | Peak Power Density                       | PASS   | Complies |

### 2.2. Description of Test Modes

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1 Mbps lowest data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6 Mbps lowest data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20): Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with MCS 0 Mbps lowest data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40): Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with MCS 0 Mbps lowest data rate (the worst case) are chosen for the final testing.

## 2.3. List of channels:

√ - available


X - tested

| Number | Frequency(MHz) |   | 802.11<br>b/g/n<br>(HT20) | 802.11<br>b/g/n<br>(HT40) |
|--------|----------------|---|---------------------------|---------------------------|
| 1      | 2412           | √ | X                         |                           |
| 2      | 2417           | √ |                           |                           |
| 3      | 2422           | √ |                           | X                         |
| 4      | 2427           | √ |                           |                           |
| 5      | 2432           | √ |                           |                           |
| 6      | 2437           | √ | X                         | X                         |
| 7      | 2442           | √ |                           |                           |
| 8      | 2447           | √ |                           |                           |
| 9      | 2452           | √ |                           | X                         |
| 10     | 2457           | √ |                           |                           |
| 11     | 2462           | √ | X                         |                           |

### 3. Conducted Emission Test

#### 3.1. Block Diagram of Test Setup

##### 3.1.1. Block diagram of connection between the EUT and simulators

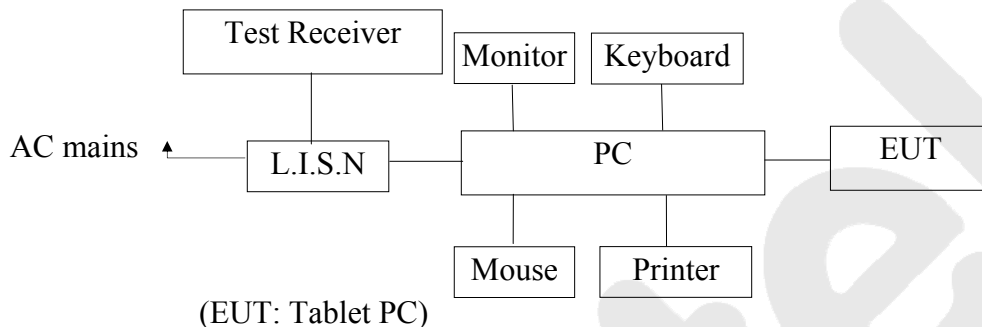

#### 3.2. Power Line Conducted Emission Measurement Limits (15.207)

| Frequency<br>MHz | Limits dB(μV)    |               |
|------------------|------------------|---------------|
|                  | Quasi-peak Level | Average Level |
| 0.15 ~ 0.50      | 66 ~ 56*         | 56 ~ 46*      |
| 0.50 ~ 5.00      | 56               | 46            |
| 5.00 ~ 30.00     | 60               | 50            |

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

#### 3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Tablet PC  
Model Number : Q8H  
Applicant : ANGELFISH TECHNOLOGY CO., LIMITED

#### 3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (Charging to adapter, Communication) and measure it.

### 3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

### 3.6. Test equipment

| Item | Equipment          | Manufacturer         | Model No. | Serial No. | Last Cal.     | Cal. Interval |
|------|--------------------|----------------------|-----------|------------|---------------|---------------|
| 1.   | Two-Line V-network | Rohde & Schwarz      | ENV216    | 100055     | Apr. 23, 2013 | 1 Year        |
| 2.   | EMI Test Receiver  | Rohde & Schwarz      | ESCI      | 100627     | Apr. 23, 2013 | 1 Year        |
| 3.   | RF Switching Unit  | Compliance Direction | RSU-M2    | 38303      | Apr. 23, 2013 | 1 Year        |

### 3.7. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150KHz to 30 MHz is investigated.


The EUT was tested on (Charging to adapter, Communication) modes, only the worst data of (Communication) are attached in the following pages.

## CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room  
Operating Condition: Communication  
Test Specification: DC 5V  
Comment: Live Line  
Tem:25°C Hum:50%

### SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

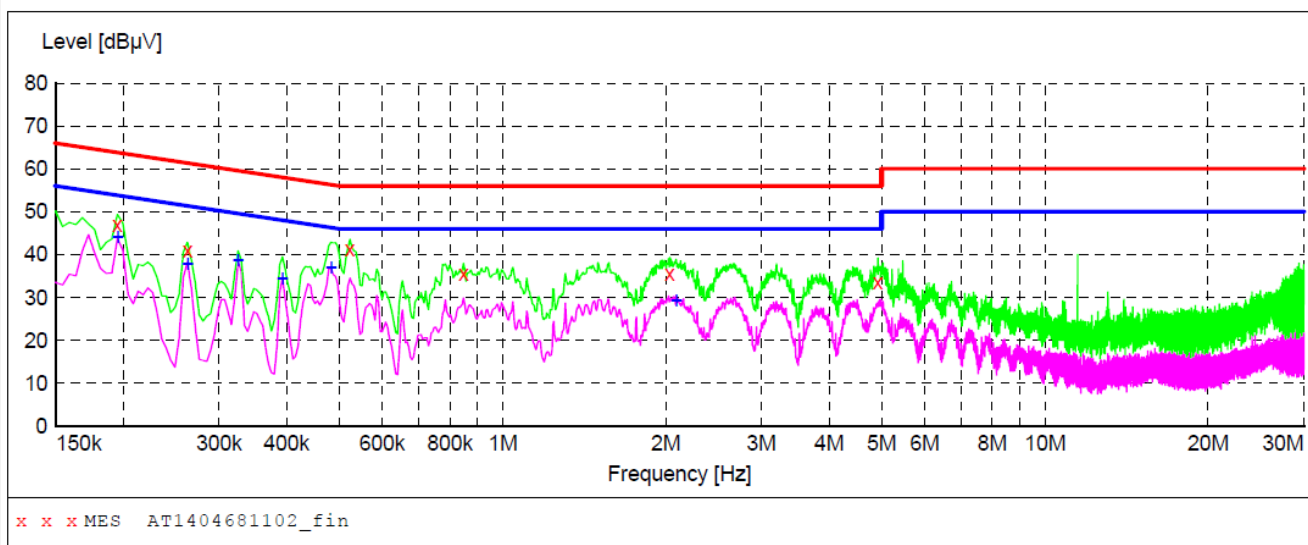

### MEASUREMENT RESULT: "AT1404681102\_fin"

4/9/2014 10:49AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.195000         | 47.00         | 20.1         | 64            | 16.8         | QP       | L1   | GND |
| 0.262500         | 41.10         | 20.1         | 61            | 20.3         | QP       | L1   | GND |
| 0.523500         | 41.20         | 20.1         | 56            | 14.8         | QP       | L1   | GND |
| 0.847500         | 35.60         | 20.1         | 56            | 20.4         | QP       | L1   | GND |
| 2.035000         | 35.50         | 20.3         | 56            | 20.5         | QP       | L1   | GND |
| 4.924000         | 33.60         | 20.5         | 56            | 22.4         | QP       | L1   | GND |

### MEASUREMENT RESULT: "AT1404681102\_fin2"

4/9/2014 10:49AM


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.195000         | 44.00         | 20.1         | 54            | 9.8          | AV       | L1   | GND |
| 0.262500         | 37.80         | 20.1         | 51            | 13.6         | AV       | L1   | GND |
| 0.325500         | 38.60         | 20.1         | 50            | 11.0         | AV       | L1   | GND |
| 0.393000         | 34.50         | 20.1         | 48            | 13.5         | AV       | L1   | GND |
| 0.483000         | 36.90         | 20.1         | 46            | 9.4          | AV       | L1   | GND |
| 2.089000         | 29.30         | 20.3         | 46            | 16.7         | AV       | L1   | GND |

## CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room  
Operating Condition: Communication  
Test Specification: DC 5V  
Comment: Neutral Line  
Tem:25°C Hum:50%

### SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

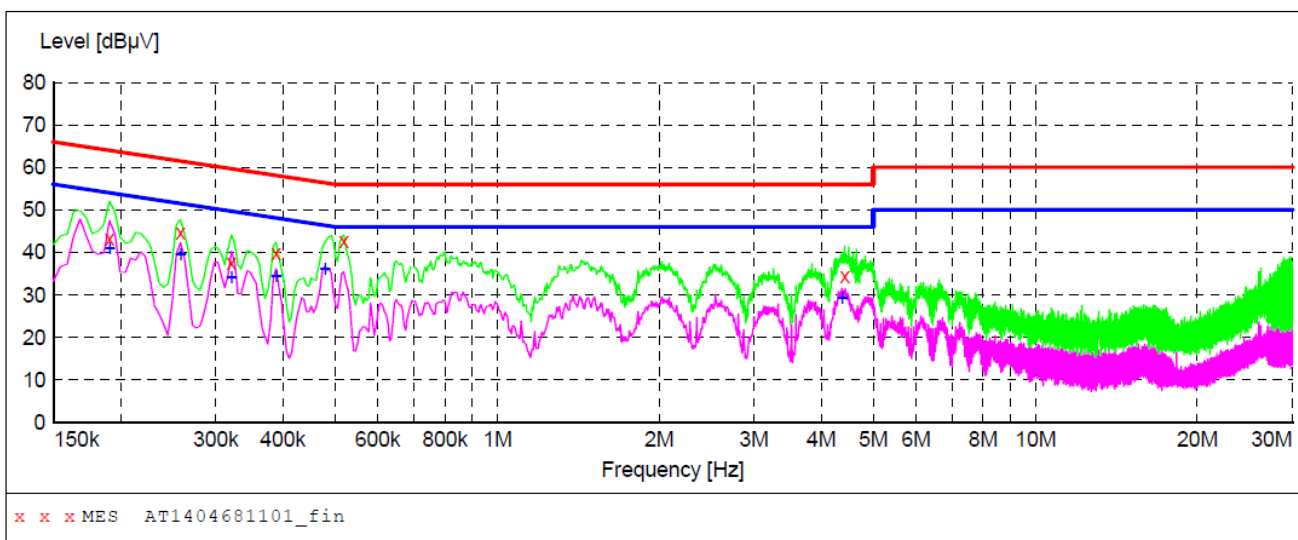

### MEASUREMENT RESULT: "AT1404681101\_fin"

4/9/2014 10:46AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.190500         | 43.20         | 20.1         | 64            | 20.8         | QP       | N    | GND |
| 0.258000         | 44.80         | 20.1         | 62            | 16.7         | QP       | N    | GND |
| 0.321000         | 37.70         | 20.1         | 60            | 22.0         | QP       | N    | GND |
| 0.388500         | 39.70         | 20.1         | 58            | 18.4         | QP       | N    | GND |
| 0.519000         | 42.60         | 20.1         | 56            | 13.4         | QP       | N    | GND |
| 4.424500         | 34.40         | 20.5         | 56            | 21.6         | QP       | N    | GND |


### MEASUREMENT RESULT: "AT1404681101\_fin2"

4/9/2014 10:46AM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.190500         | 40.80         | 20.1         | 54            | 13.2         | AV       | N    | GND |
| 0.258000         | 39.50         | 20.1         | 52            | 12.0         | AV       | N    | GND |
| 0.321000         | 34.20         | 20.1         | 50            | 15.5         | AV       | N    | GND |
| 0.388500         | 34.30         | 20.1         | 48            | 13.8         | AV       | N    | GND |
| 0.478500         | 36.20         | 20.1         | 46            | 10.2         | AV       | N    | GND |
| 4.370500         | 29.40         | 20.5         | 46            | 16.6         | AV       | N    | GND |

## 4. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

### 4.1 Test Setup



### 4.2 6dB Bandwidth

#### a. Limit

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### b. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
RBW = 100kHz, VBW  $\geq$  3\*RBW = 300kHz,  
Detector= Peak  
Trace mode= Max hold.  
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### c. Test Setup See 4.1

#### d. Test Equipment

| Item | Equipment                  | Manufacturer            | Model No. | Serial No. | Last Cal.     | Cal. Interval |
|------|----------------------------|-------------------------|-----------|------------|---------------|---------------|
| 1.   | Spectrum Analysis          | Agilent                 | E4407B    | US39390582 | Aug. 09, 2013 | 1 Year        |
| 2.   | Preamplifier               | Instruments corporation | EMC011830 | 980100     | Aug. 09, 2013 | 1 Year        |
| 3.   | EMI Test Receiver          | Rohde & Schwarz         | ESPI      | 101604     | Apr. 23, 2013 | 1 Year        |
| 4.   | Double Ridged Horn Antenna | Instruments corporation | GTH-0118  | 351600     | Aug. 09, 2013 | 3 Year        |
| 5.   | EMI Test Software EZ-EMC   | SHURPLE                 | N/A       | N/A        | N/A           | N/A           |

#### e. Test Results

Pass.

**f. Test Data**

Test mode: IEEE 802.11b

| Channel | Frequency<br>(MHz) | Bandwidth<br>(MHz) | Limit<br>(kHz) | Results |
|---------|--------------------|--------------------|----------------|---------|
| Low     | 2412               | 11.88              | >500           | Pass    |
| Mid     | 2437               | 11.88              |                | Pass    |
| High    | 2462               | 11.88              |                | Pass    |

Test mode: IEEE 802.11g

| Channel | Frequency<br>(MHz) | Bandwidth<br>(MHz) | Limit<br>(kHz) | Results |
|---------|--------------------|--------------------|----------------|---------|
| Low     | 2412               | 16.65              | >500           | Pass    |
| Mid     | 2437               | 16.65              |                | Pass    |
| High    | 2462               | 16.65              |                | Pass    |

Test mode: IEEE 802.11n (HT20)


| Channel | Frequency<br>(MHz) | Bandwidth<br>(MHz) | Limit<br>(kHz) | Results |
|---------|--------------------|--------------------|----------------|---------|
| Low     | 2412               | 17.73              | >500           | Pass    |
| Mid     | 2437               | 17.73              |                | Pass    |
| High    | 2462               | 17.73              |                | Pass    |

Test mode: IEEE 802.11n (HT40)


| Channel | Frequency<br>(MHz) | Bandwidth<br>(MHz) | Limit<br>(kHz) | Results |
|---------|--------------------|--------------------|----------------|---------|
| Low     | 2422               | 36.32              | >500           | Pass    |
| Mid     | 2437               | 36.32              |                | Pass    |
| High    | 2452               | 36.32              |                | Pass    |

Test Plots See the following page.

Test Mode: 802.11b---Low

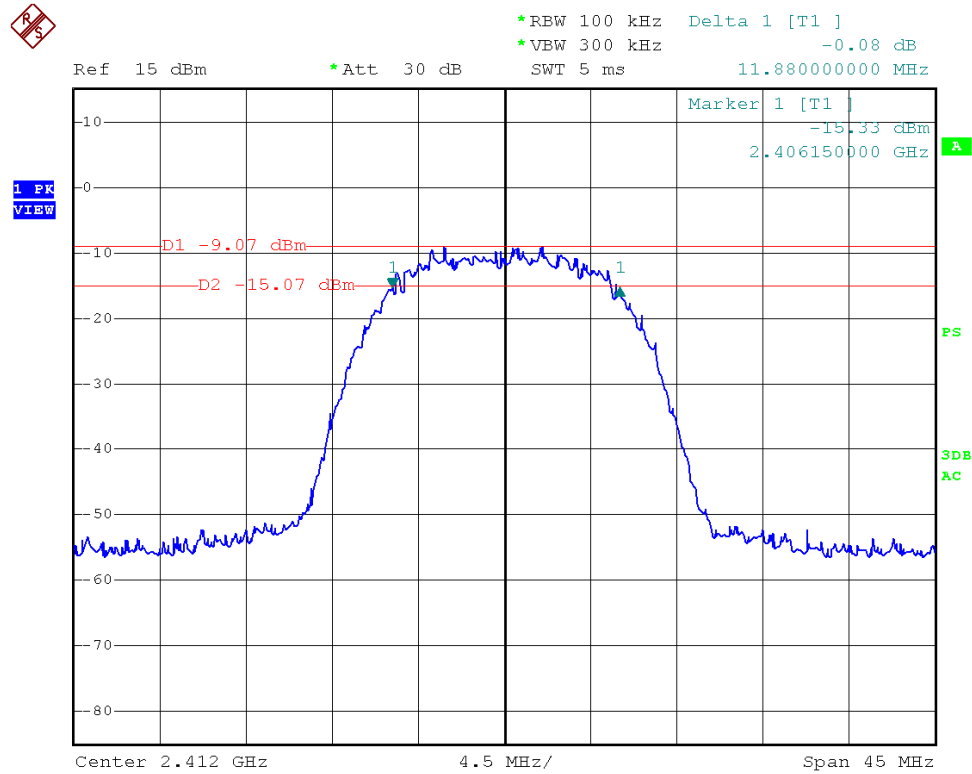


Test Mode: 802.11b---Mid

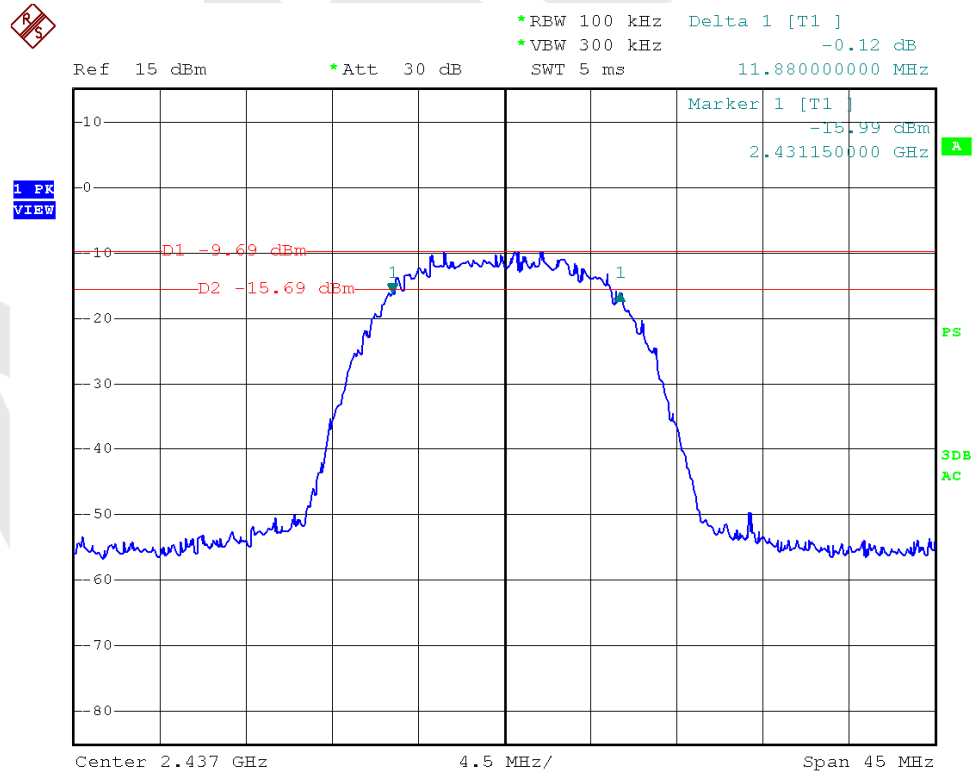

Test Mode: 802.11b---High




\*RBW 100 kHz Delta 1 [T1 ]  
\*VBW 300 kHz -0.26 dB  
SWT 5 ms 11.880000000 MHz

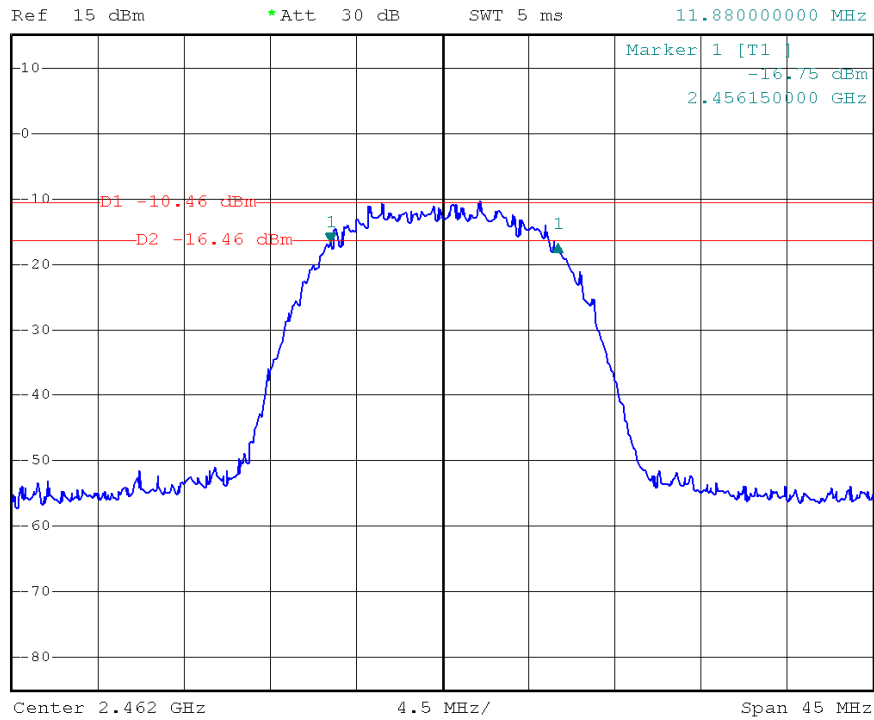


Test Mode: 802.11g---Low




\*RBW 100 kHz Delta 1 [T1 ]  
\*VBW 300 kHz -2.96 dB  
SWT 5 ms 16.650000000 MHz

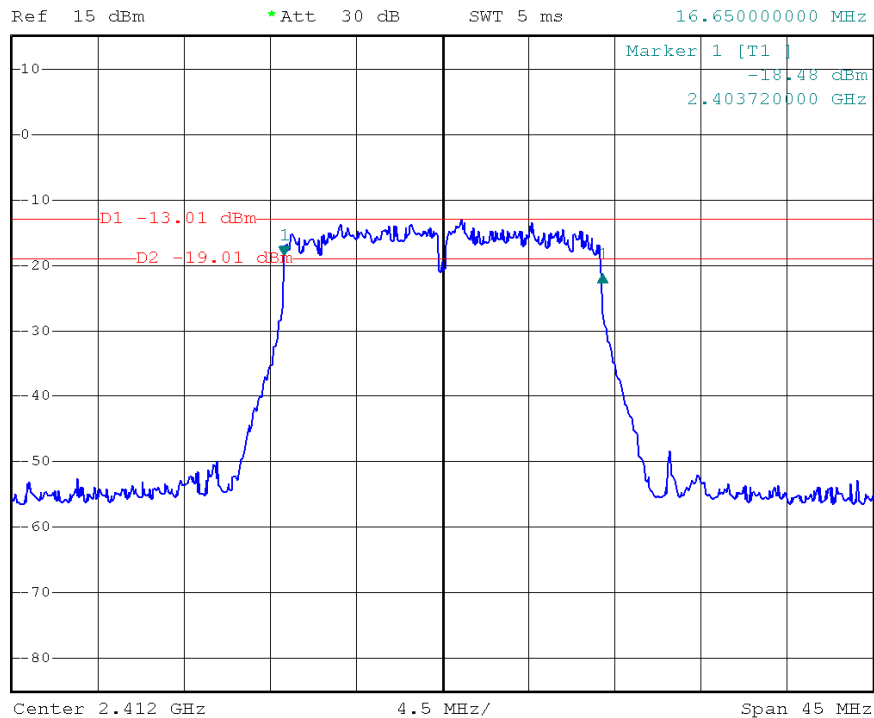


Test Mode: 802.11g---Mid

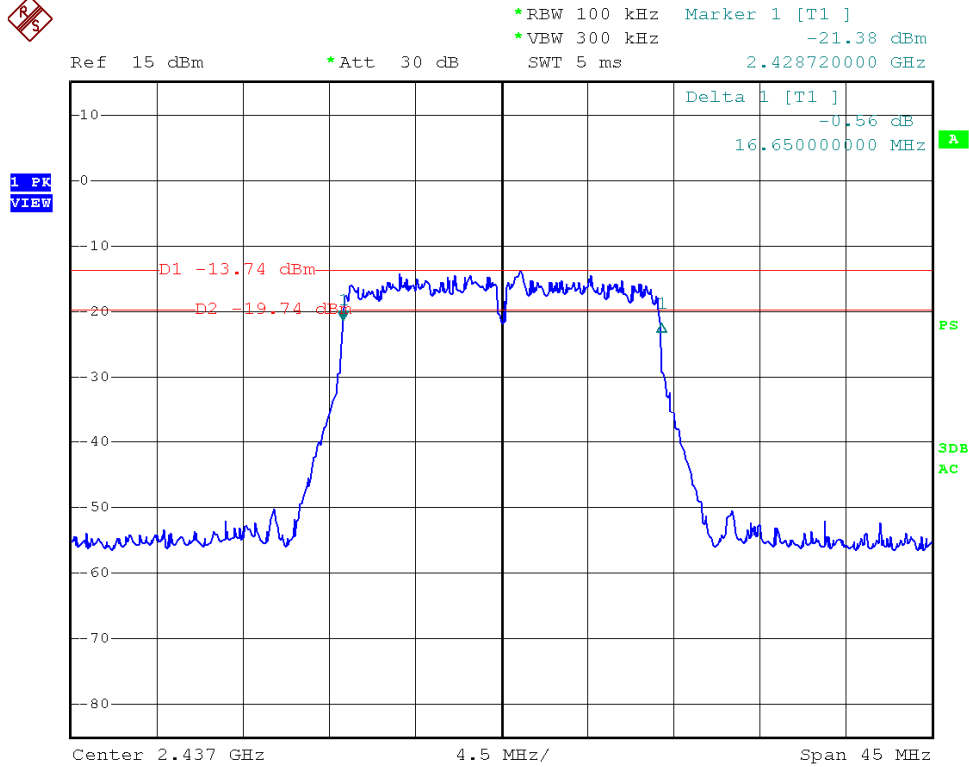


Test Mode: 802.11g---High

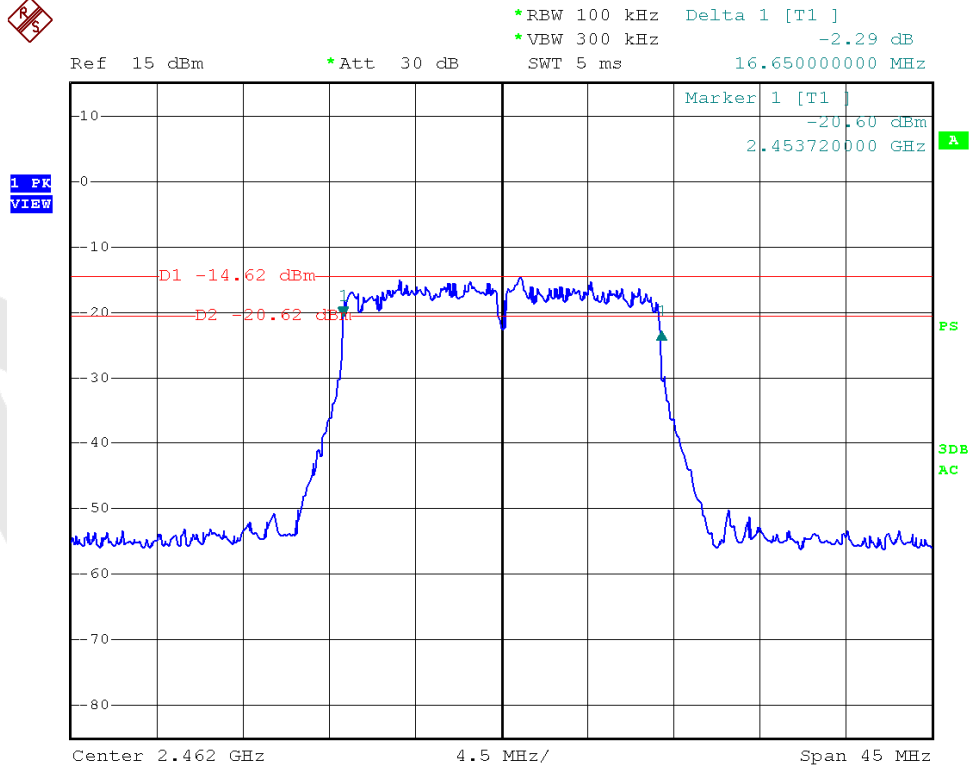


Test Mode: 802.11n (HT20)---Low

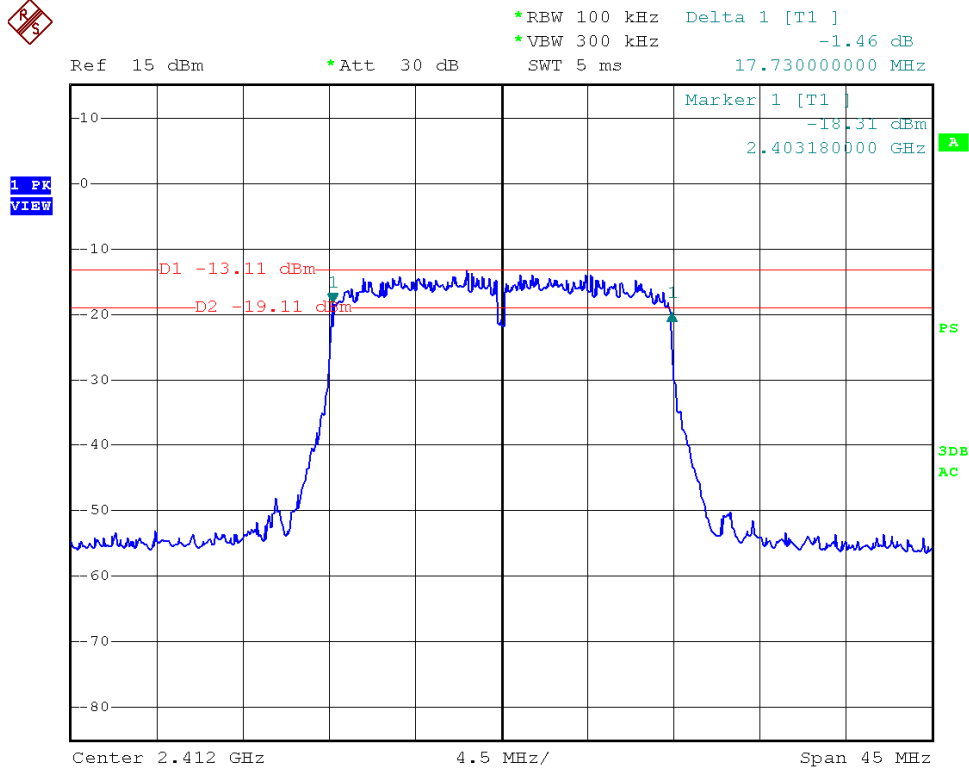


Test Mode: 802.11n (HT20)---Mid

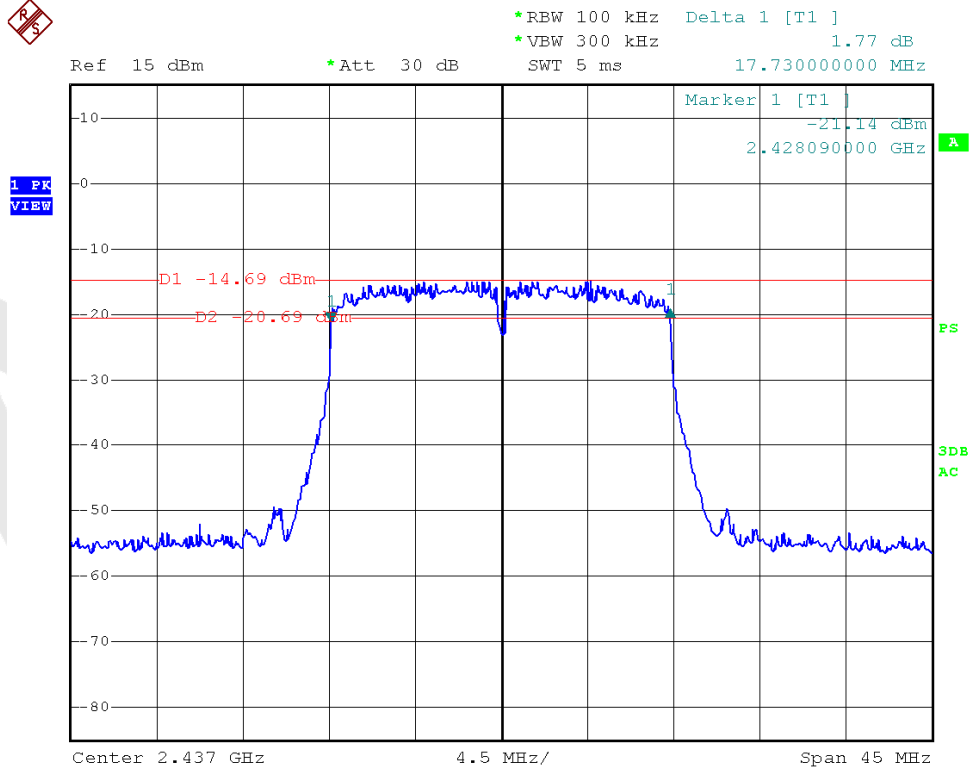


Test Mode: 802.11n (HT20)---High

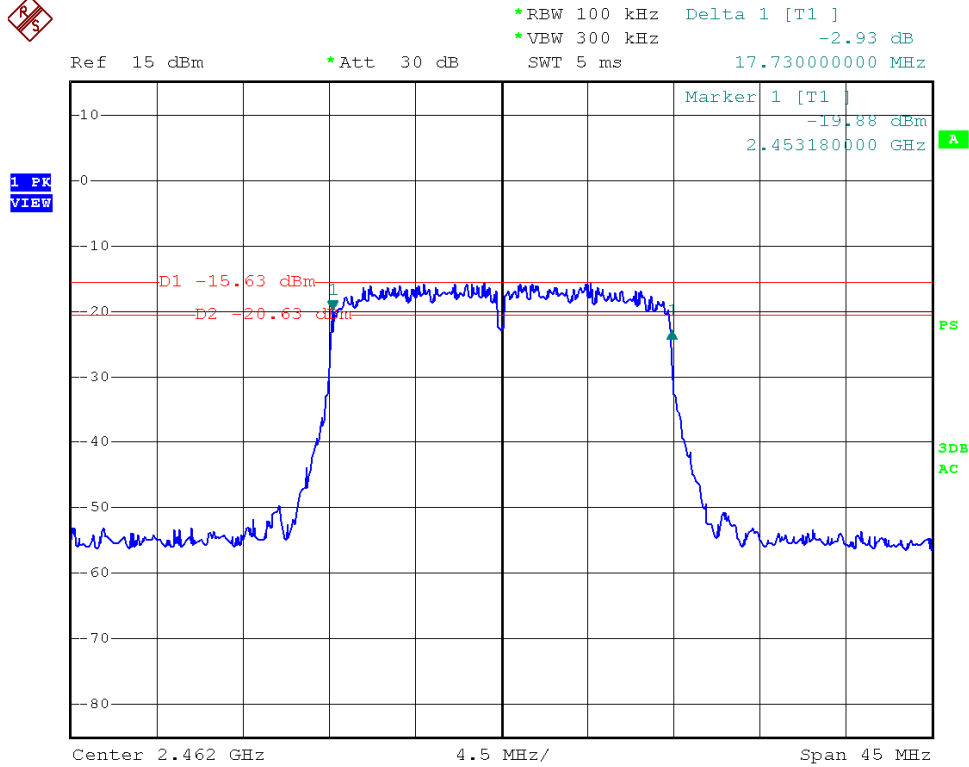


Test Mode: 802.11n (HT40)---Low

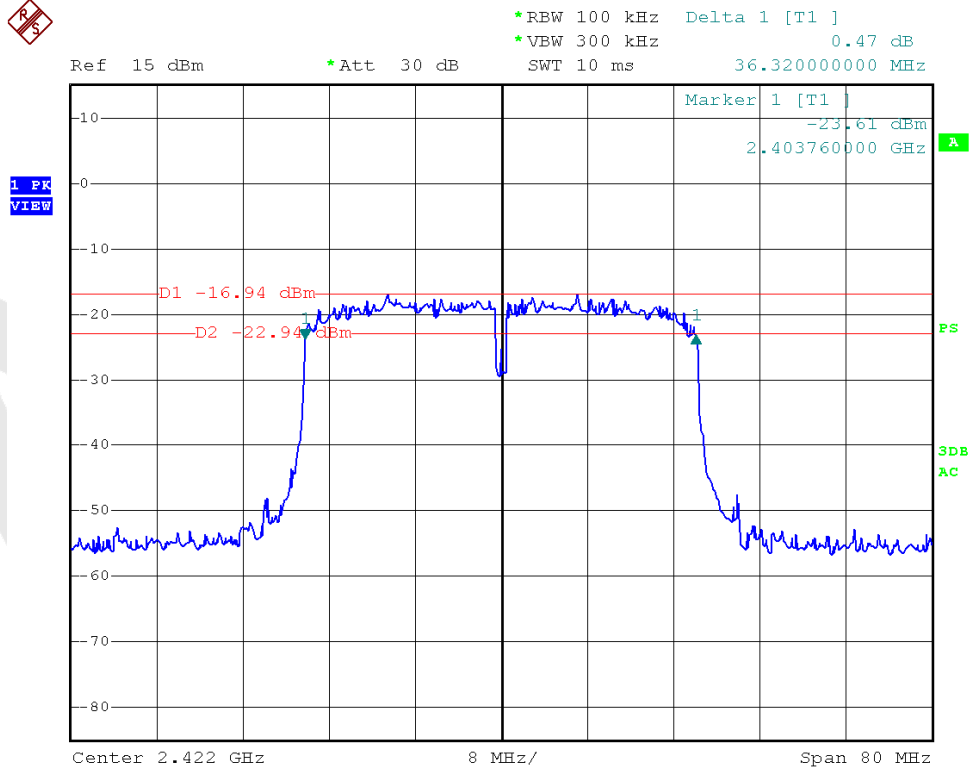

Test Mode: 802.11n (HT40)---Mid

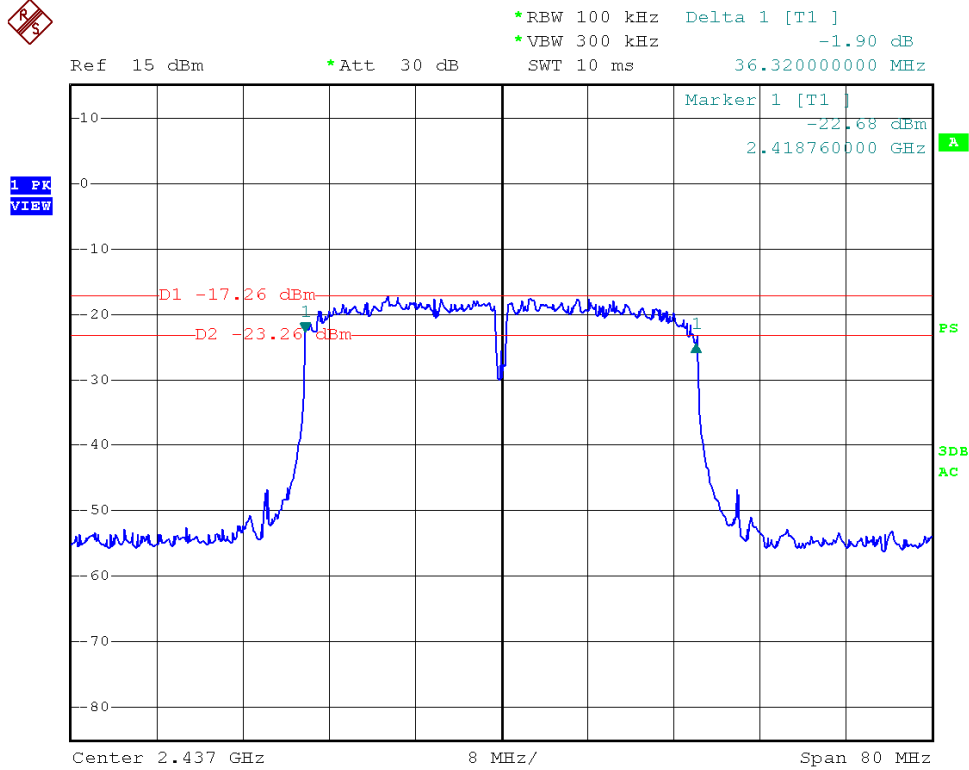

Test Mode: 802.11n (HT40)---High

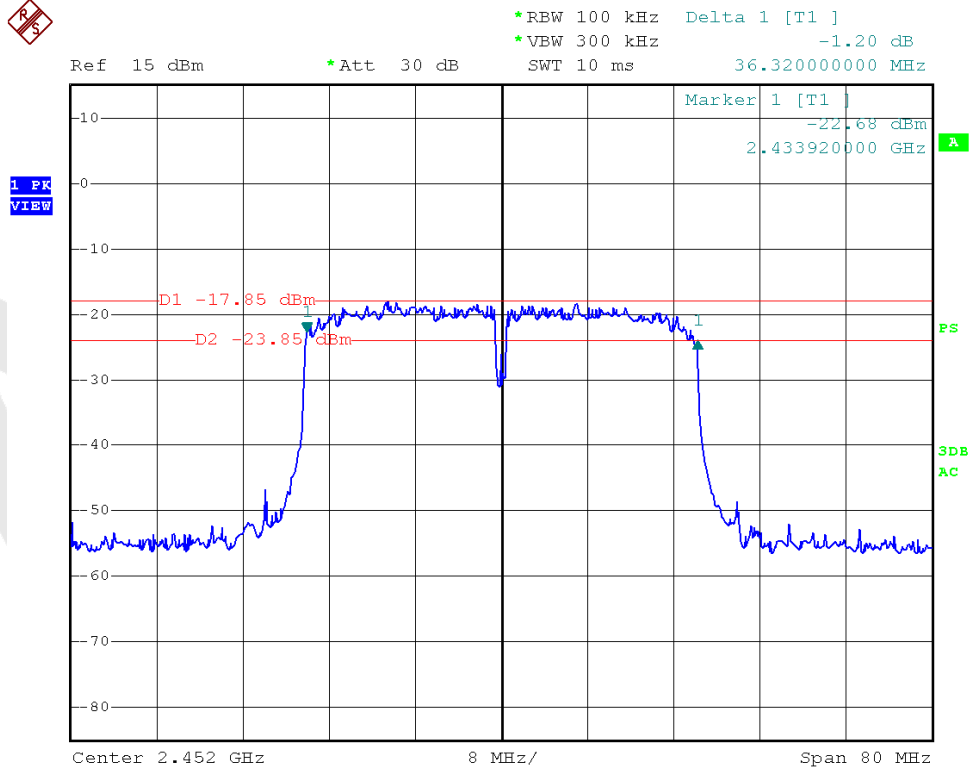


### 4.3. Maximum Peak output power test

#### a. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### b. Configuration of Measurement



#### c. Data Rates

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1 Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6 Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6.5Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 13.5Mbps data rate (the worst case) are chosen for the final testing.

#### d. Test Procedure

**This test was according the kDB 558074 9.1.2:**

1. This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.
2. Set the RBW = 1 MHz.
3. Set the VBW  $\geq 3 \times \text{RBW} = 3 \text{ MHz}$ .
4. Set the span  $\geq 1.5 \times \text{DTS bandwidth}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

#### e. Test Equipment

Same as the equipment listed in 4.2.

#### f. Test Results

Pass.

**g. Test Data**

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | Maximum transmit power | Limit |         | Result |
|---------|-----------------|------------------------|-------|---------|--------|
|         |                 | (dBm)                  | (dBm) | (watts) |        |
| Low     | 2412            | 8.43                   | 30    | 1       | Pass   |
| Mid     | 2437            | 7.51                   |       |         | Pass   |
| High    | 2462            | 6.59                   |       |         | Pass   |

Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | Maximum transmit power | Limit |         | Result |
|---------|-----------------|------------------------|-------|---------|--------|
|         |                 | (dBm)                  | (dBm) | (watts) |        |
| Low     | 2412            | 7.36                   | 30    | 1       | Pass   |
| Mid     | 2437            | 6.73                   |       |         | Pass   |
| High    | 2462            | 6.04                   |       |         | Pass   |

Test mode: IEEE 802.11n (HT20)

| Channel | Frequency (MHz) | Maximum transmit power | Limit |         | Result |
|---------|-----------------|------------------------|-------|---------|--------|
|         |                 | (dBm)                  | (dBm) | (watts) |        |
| Low     | 2412            | 7.30                   | 30    | 1       | Pass   |
| Mid     | 2437            | 6.73                   |       |         | Pass   |
| High    | 2462            | 5.93                   |       |         | Pass   |


Test mode: IEEE 802.11n (HT40)

| Channel | Frequency (MHz) | Maximum transmit power | Limit |         | Result |
|---------|-----------------|------------------------|-------|---------|--------|
|         |                 | (dBm)                  | (dBm) | (watts) |        |
| Low     | 2422            | 6.91                   | 30    | 1       | Pass   |
| Mid     | 2437            | 6.36                   |       |         | Pass   |
| High    | 2452            | 5.91                   |       |         | Pass   |

Test Mode: 802.11b---Low



1 PK  
MAXH

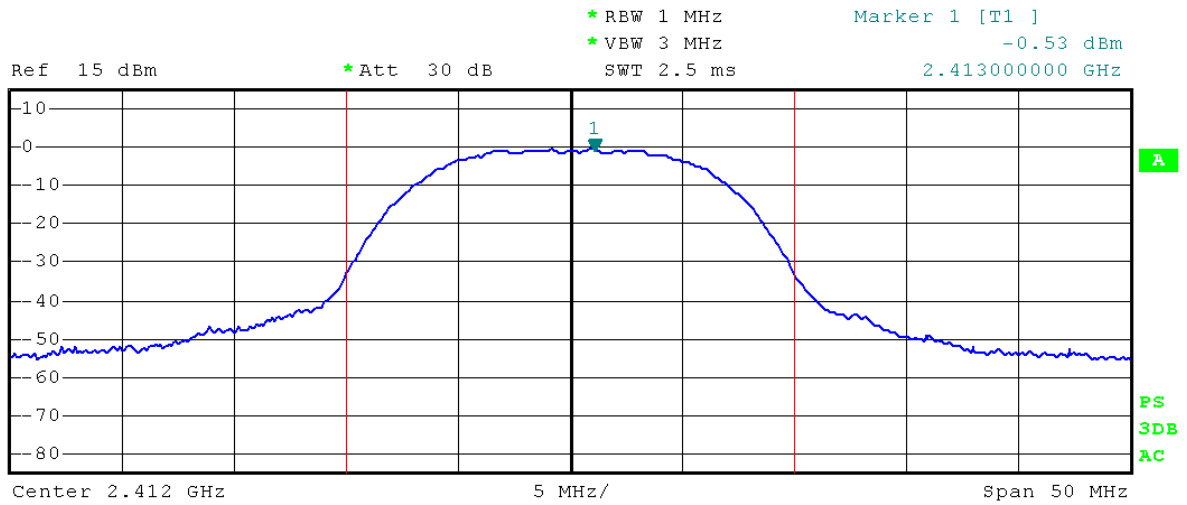


Tx Channel  
Bandwidth 20 MHz Power 8.43 dBm

Test Mode: 802.11b---Mid



1 PK  
MAXH

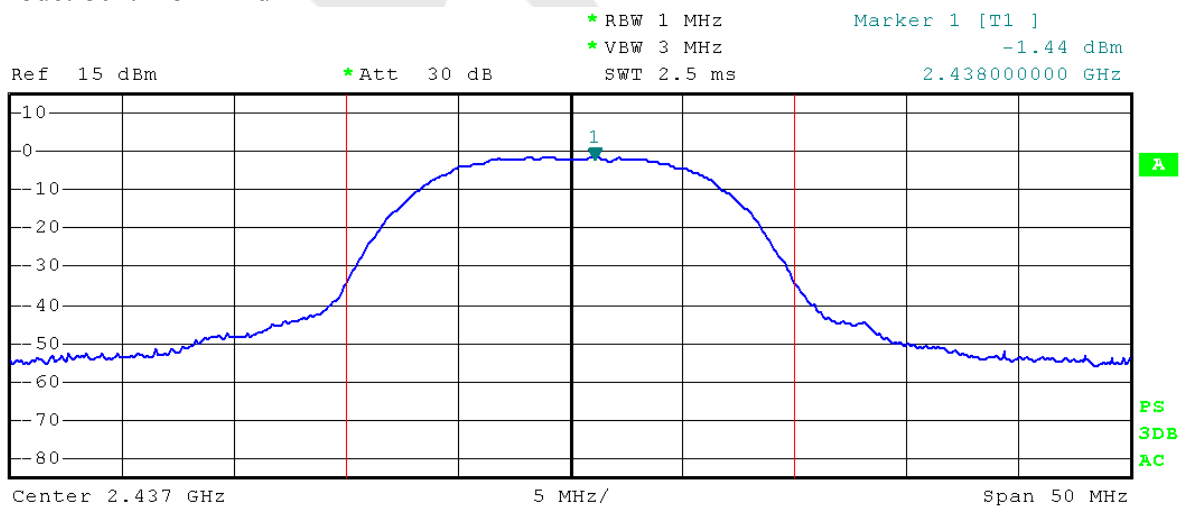


Tx Channel  
Bandwidth 20 MHz Power 7.51 dBm

Test Mode: 802.11b---High




1 PK  
MAXH

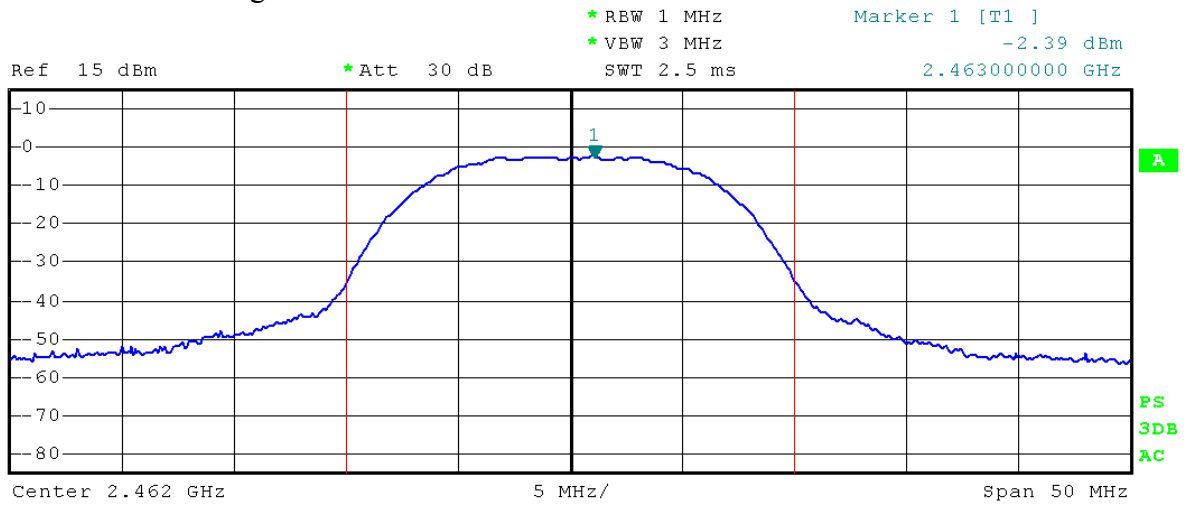

Test Mode: 802.11g---Low




1 PK  
MAXH

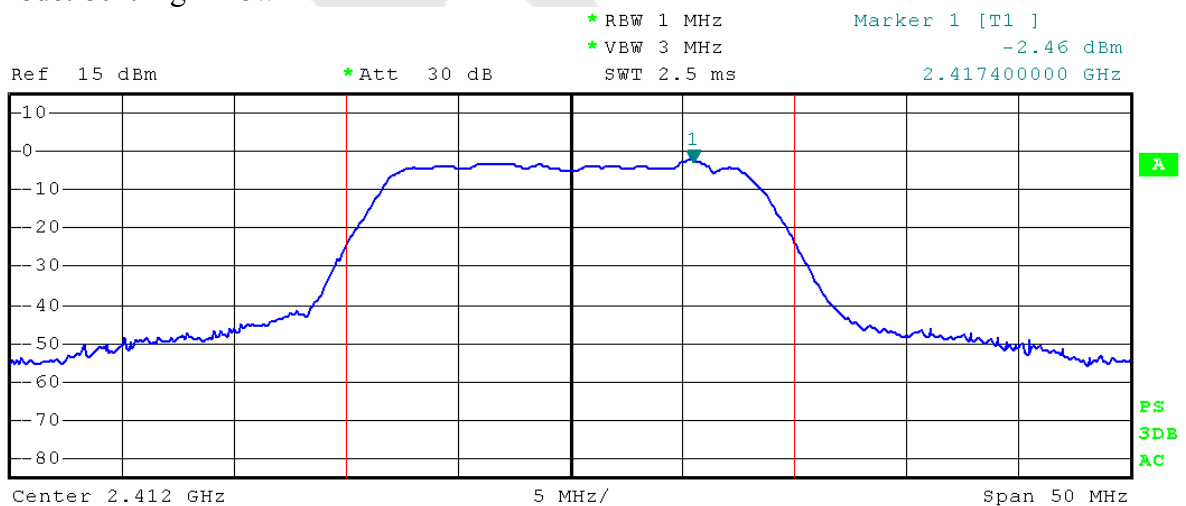

Test Mode: 802.11g---Mid



1 PK  
MAXH

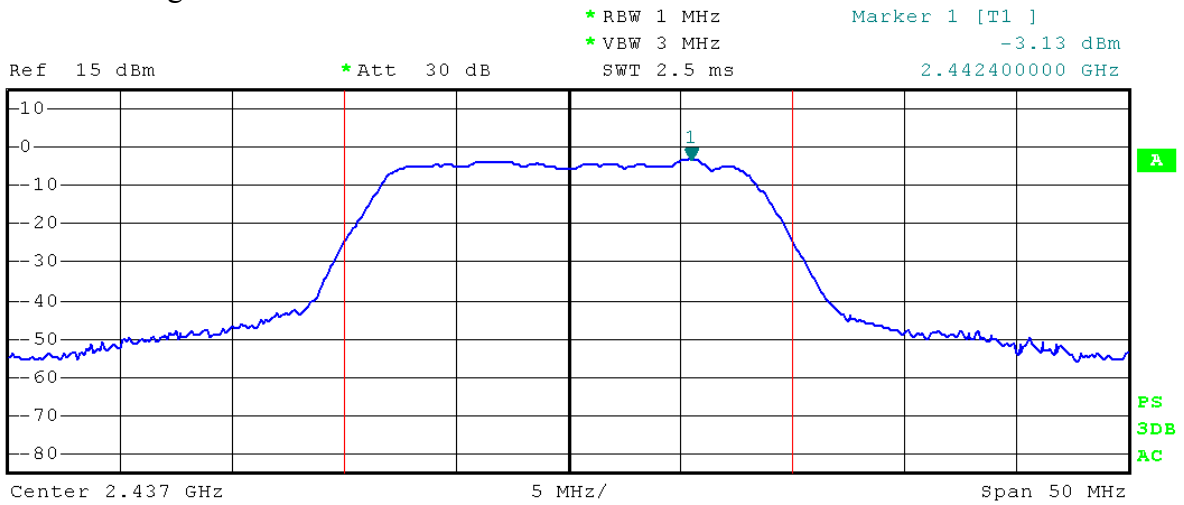


Tx Channel  
Bandwidth 20 MHz Power 6.73 dBm

Test Mode: 802.11g---High




1 PK  
MAXH

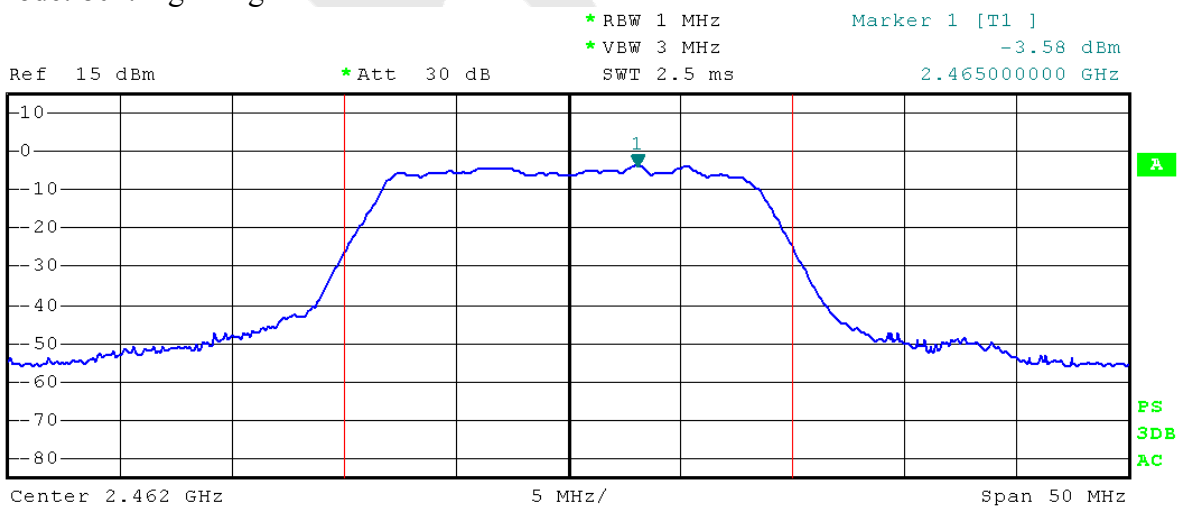


Tx Channel  
Bandwidth 20 MHz Power 6.04 dBm


Test Mode: 802.11n(HT20)---Low

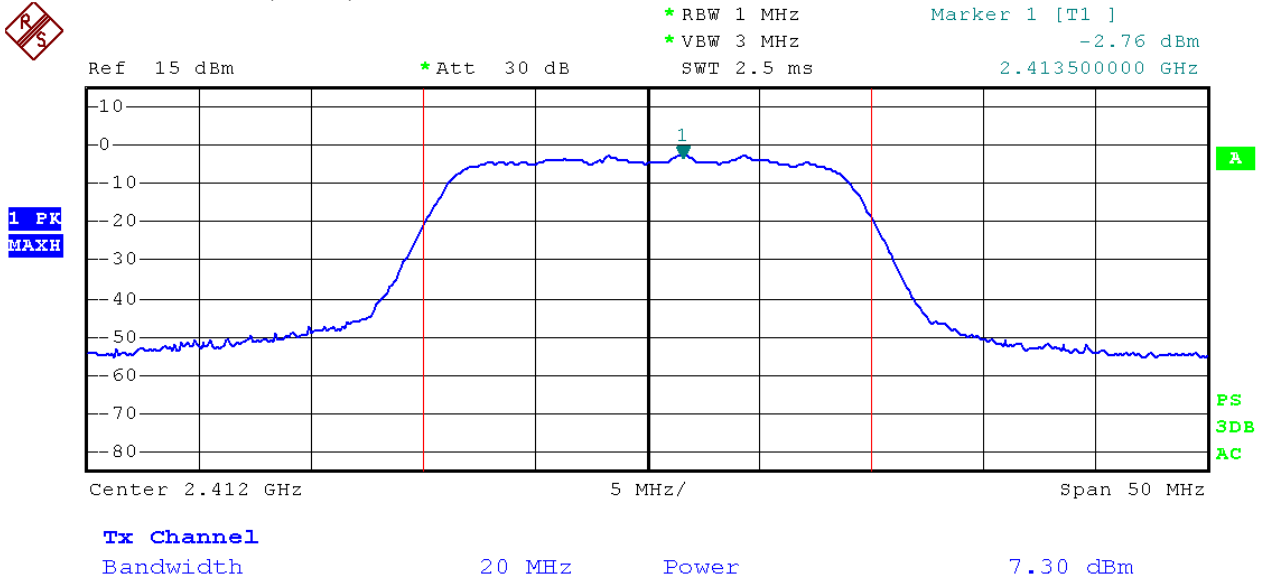


Test Mode: 802.11n(HT20)---Mid

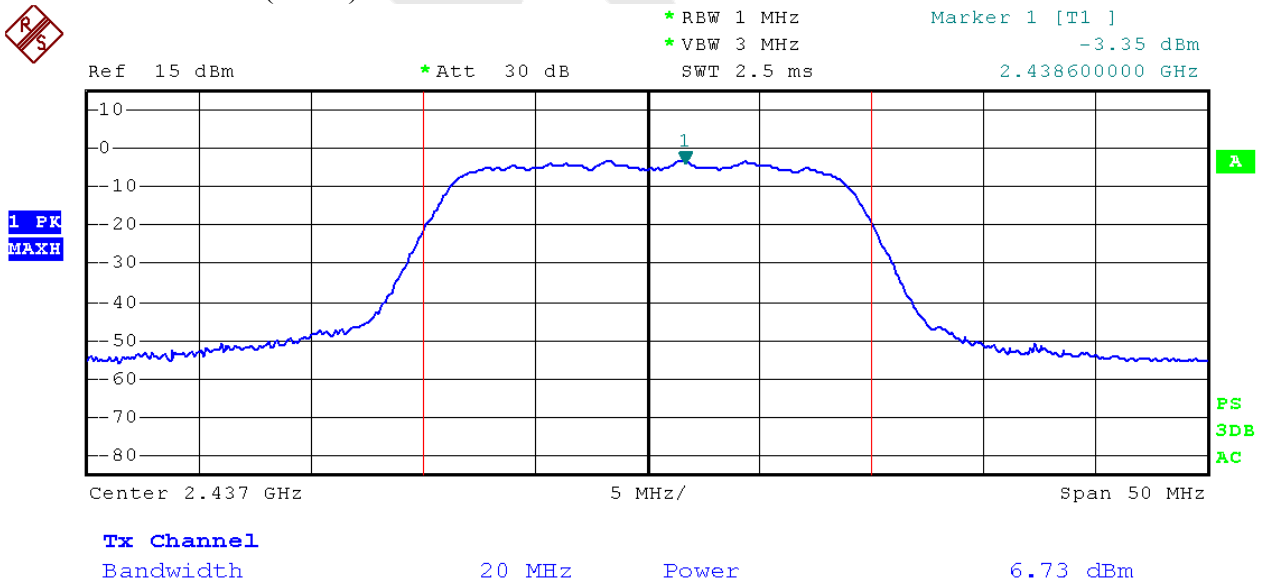


Test Mode: 802.11n(HT20)---High

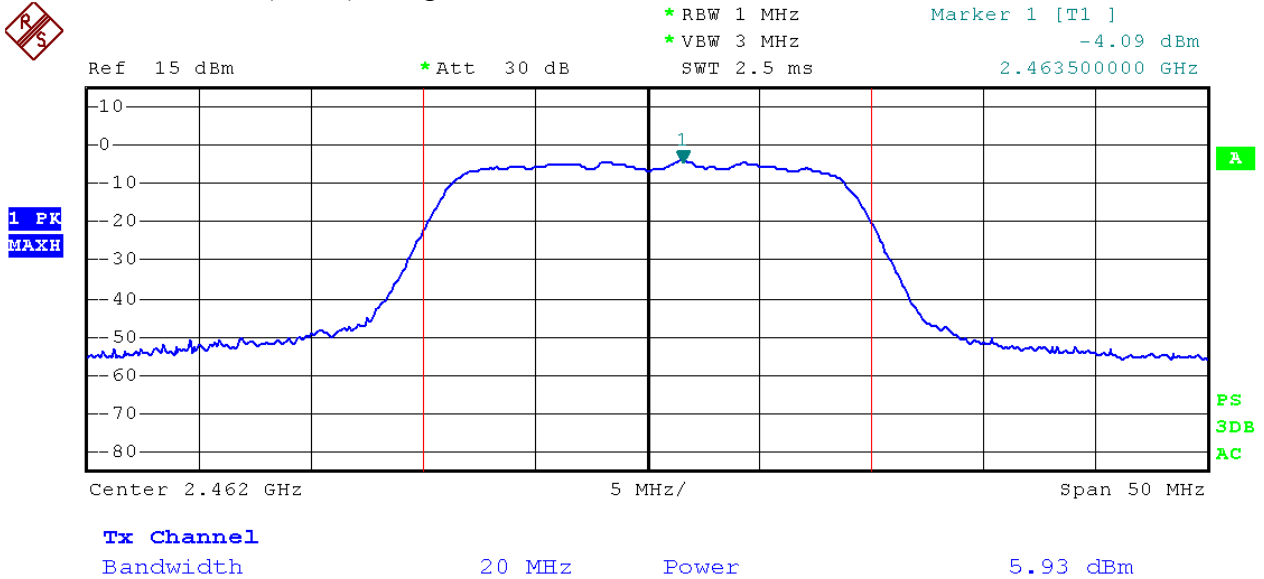


Test Mode: 802.11n(HT40)---Low

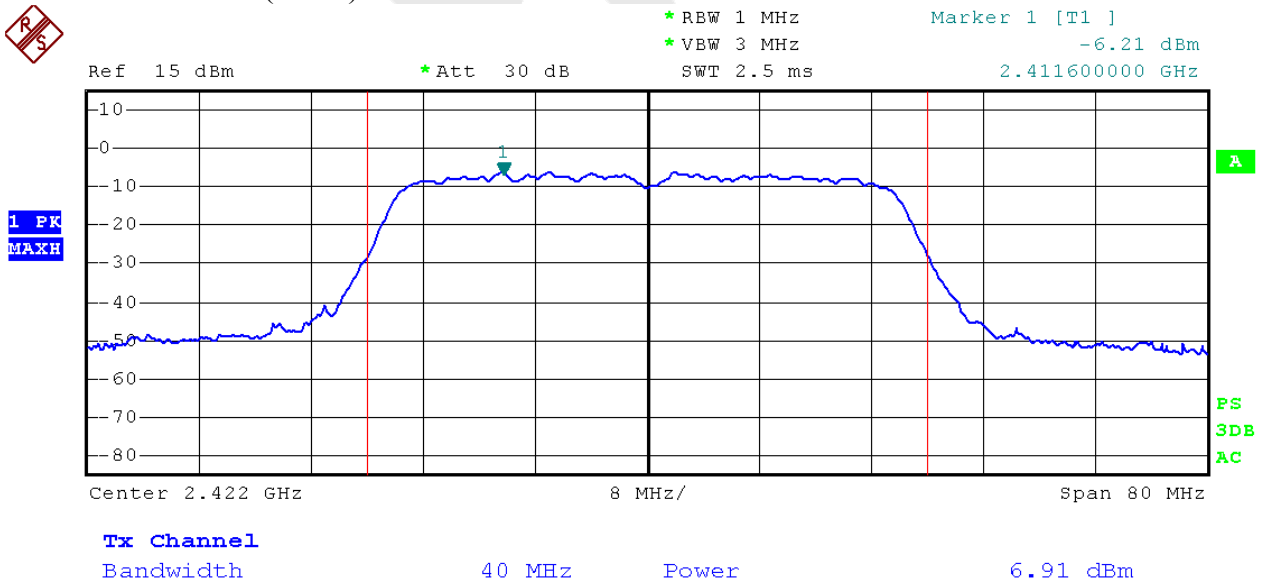

Test Mode: 802.11n(HT40)---Mid

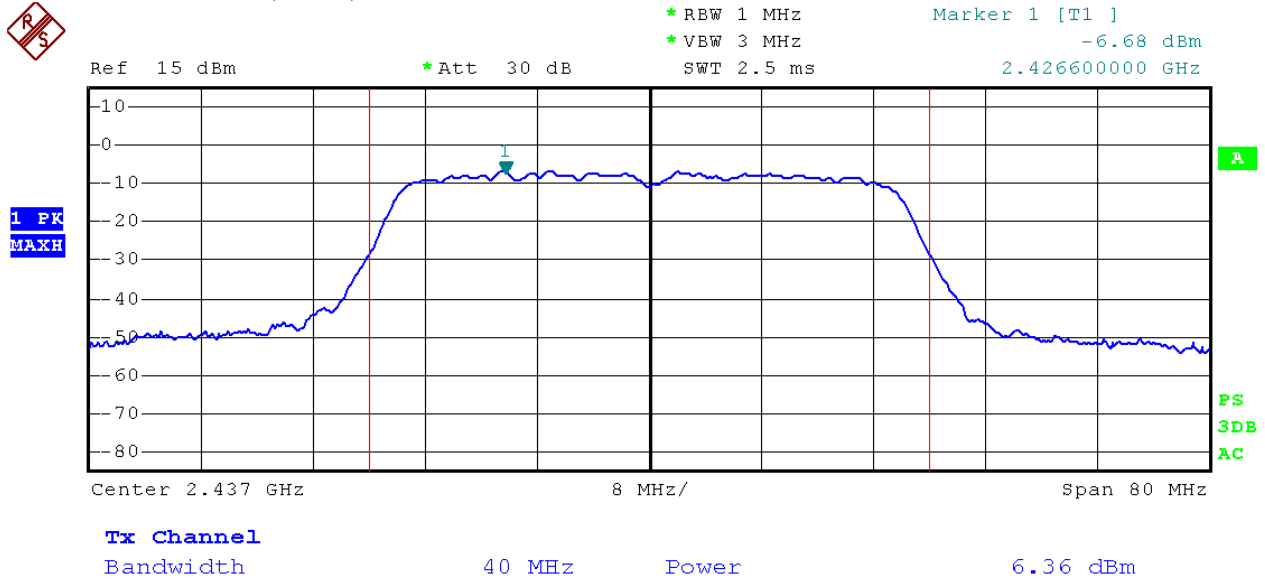

Test Mode: 802.11n(HT40)---High

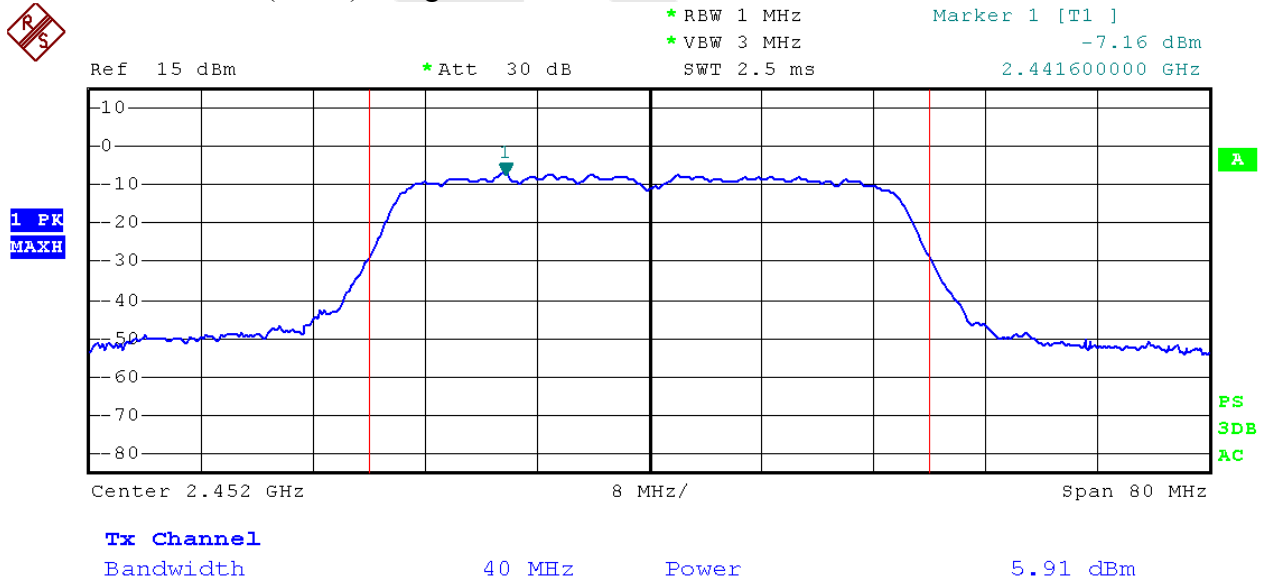

#### 4.4. Band Edges Measurement

##### a. Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


##### b. Test Procedure

###### 1. Conducted Method:

- 1) Set RBW=100KHz, VBW=300KHz
- 2) Detector=peak
- 3) Sweep time= auto
- 4) Trace mode=max hold.

###### 2. Radiated Method:

- 1) The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Peak detector: RBW=1MHz, VBW=3MHz, SWT=AUTO  
Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO  
The EUT is tested in 9\*6\*6 Chamber.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

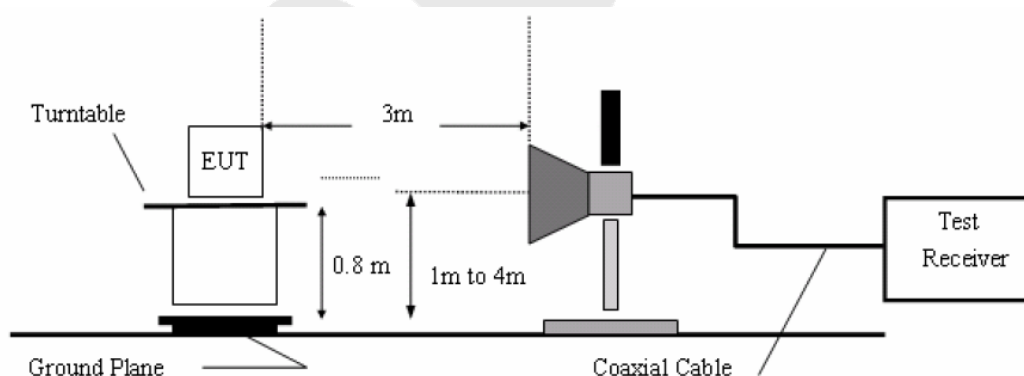

##### c. Test Equipment

Same as the equipment listed in 4.2.


##### d. Test Results

Pass.


##### e. Test Plots

See the following page.


Test Mode: 802.11b ---Low

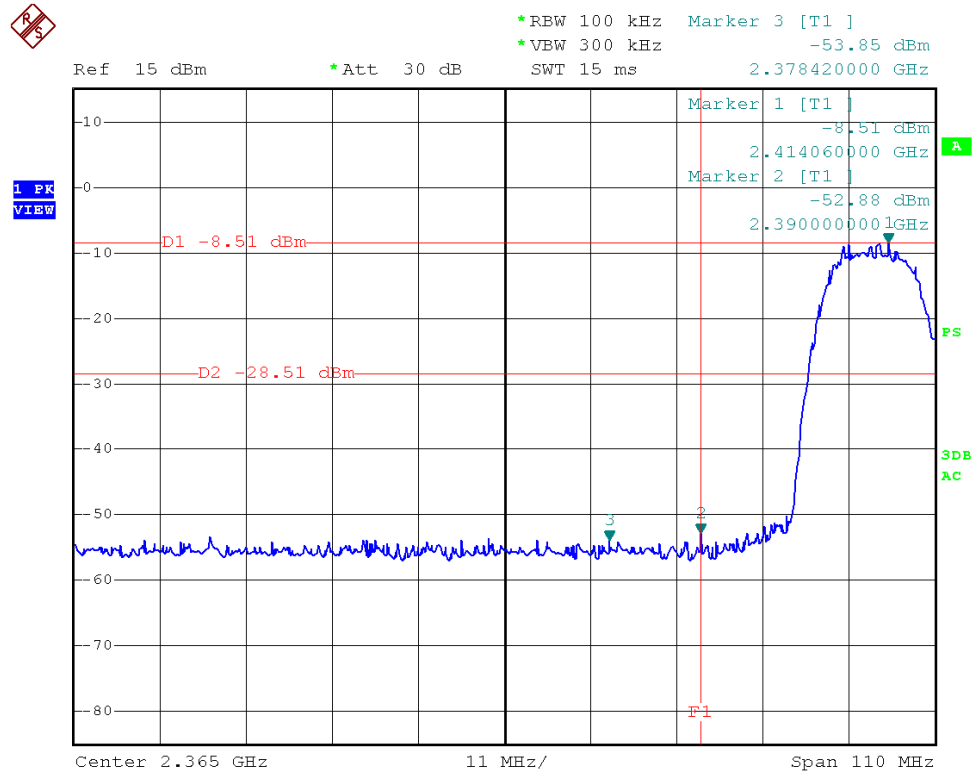


Test Mode: 802.11b ---High

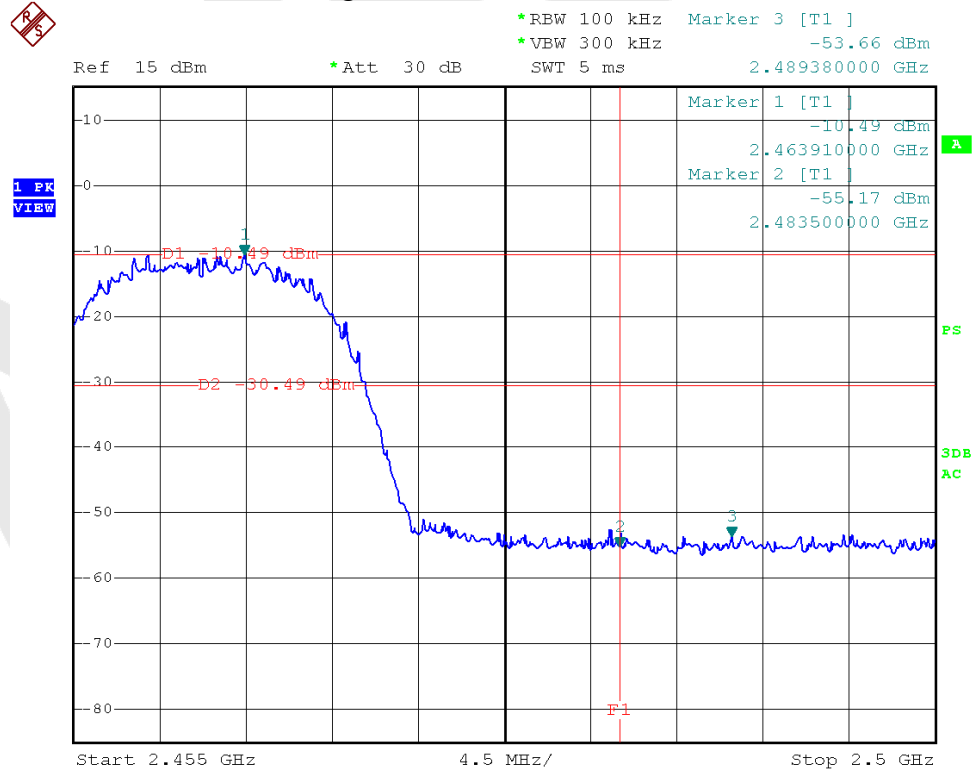


Test Mode: 802.11g ---Low

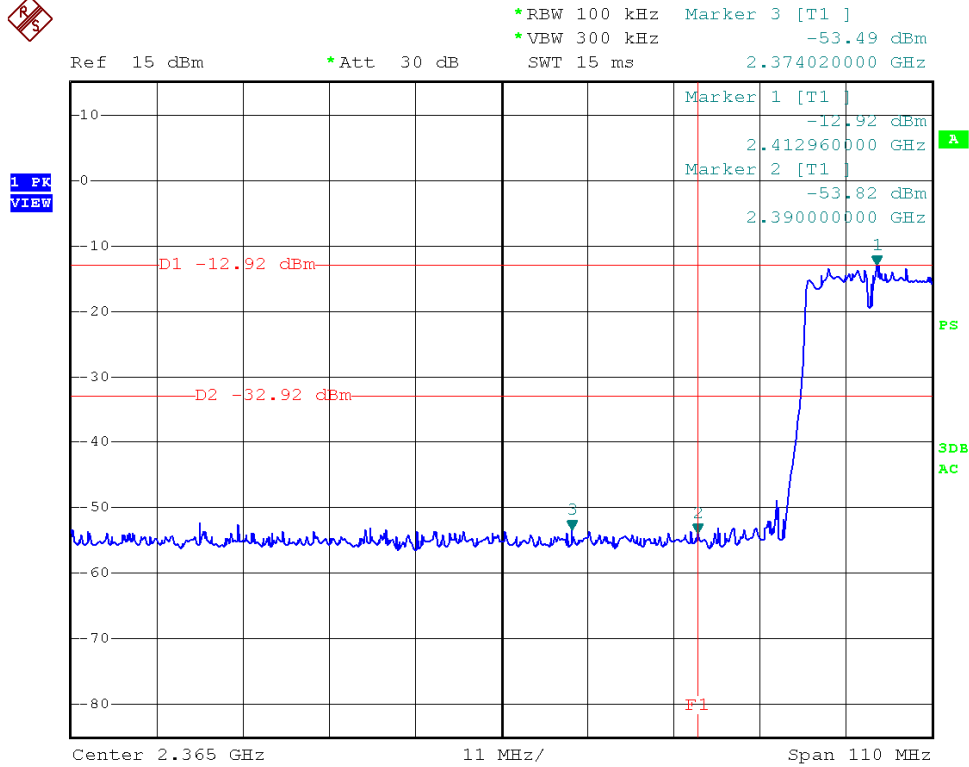


Test Mode: 802.11g ---High

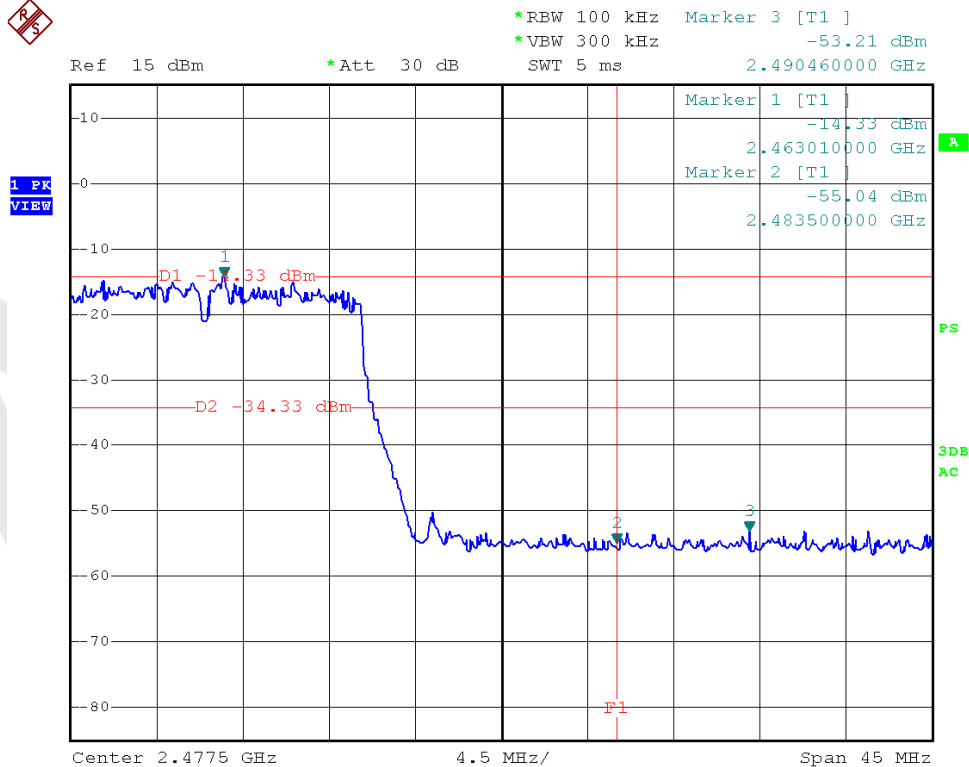


Test Mode: 802.11n (HT20) ---Low

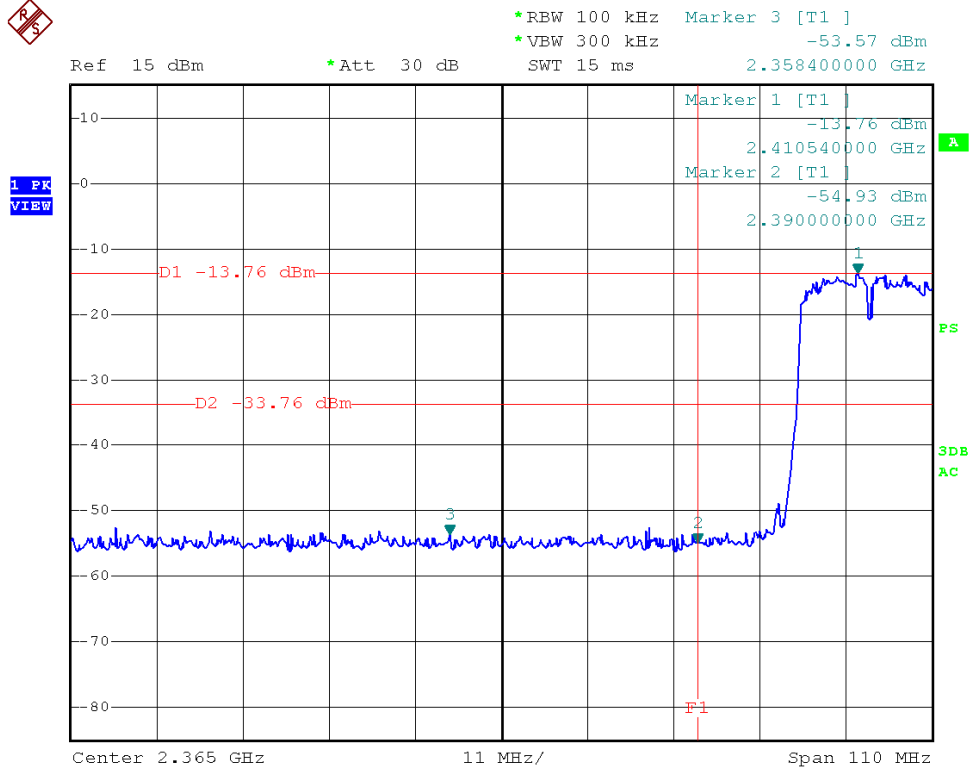


Test Mode: 802.11n (HT20)---High

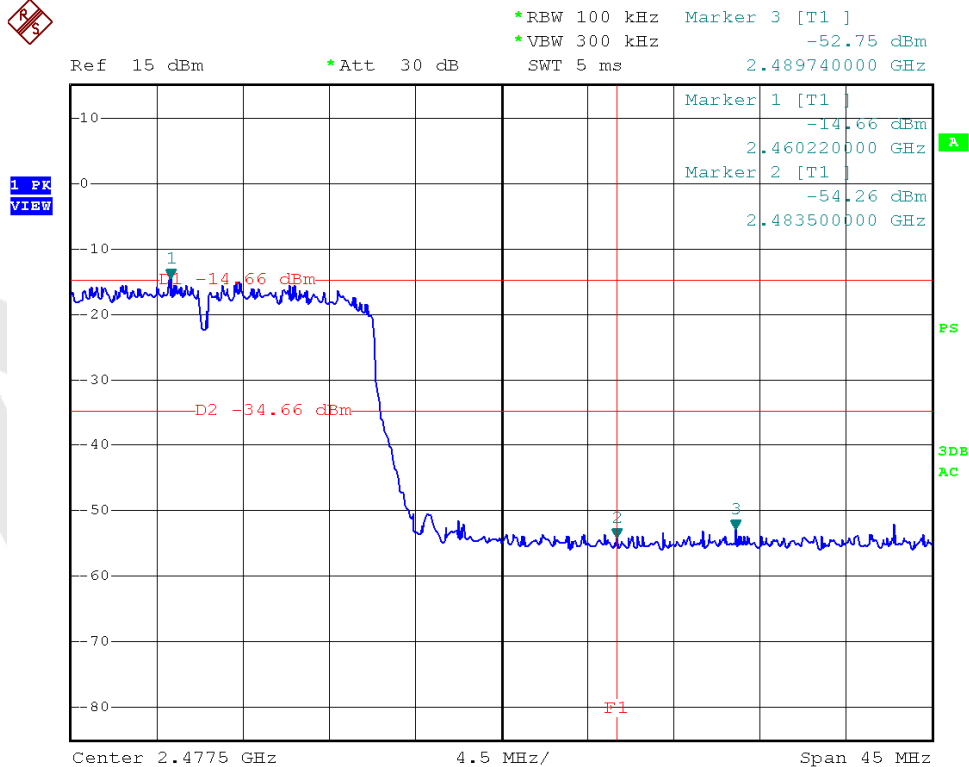


Test Mode: 802.11n (HT40) ---Low

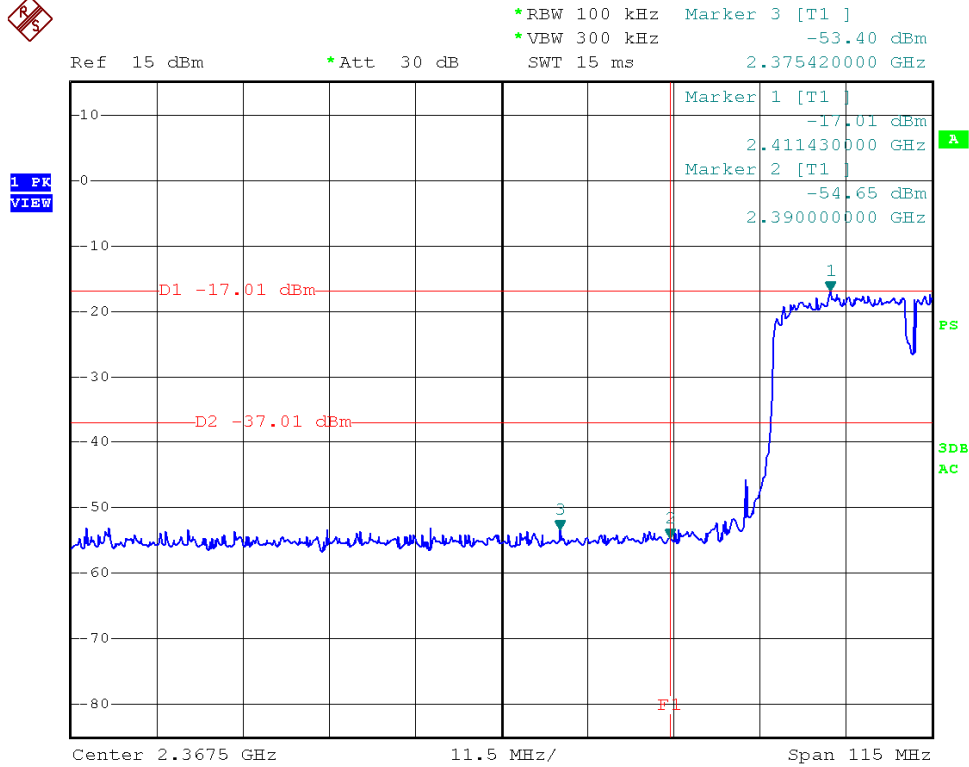

Test Mode: 802.11n (HT40) ---High

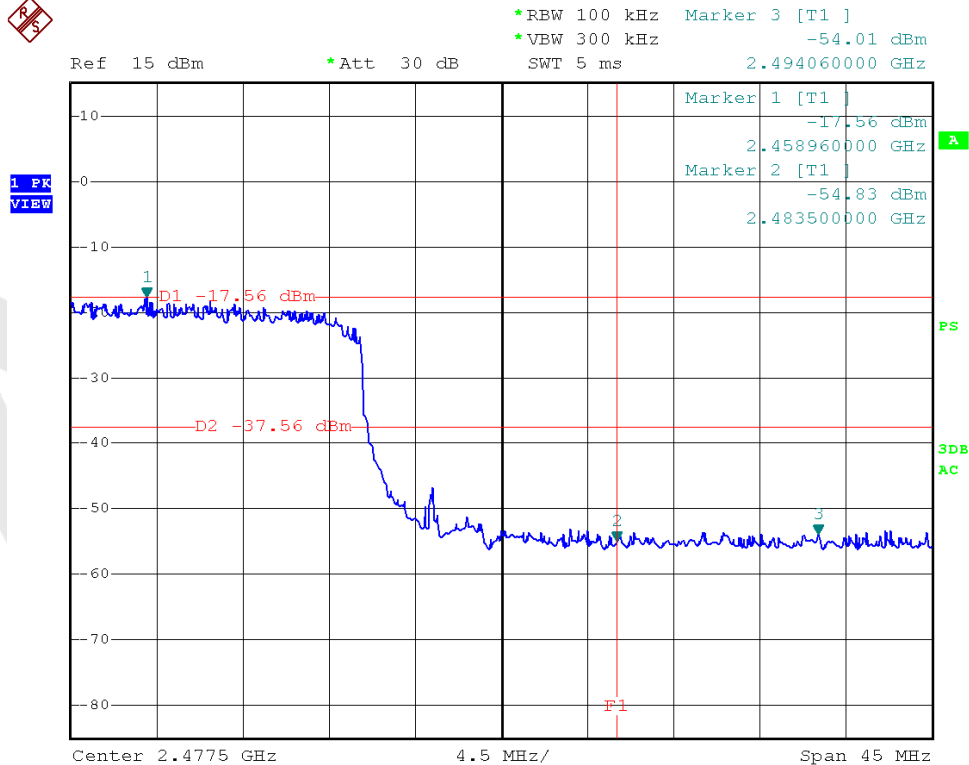


Test Mode: 802.11b  
2412MHz  
Horizontal-PEAK:

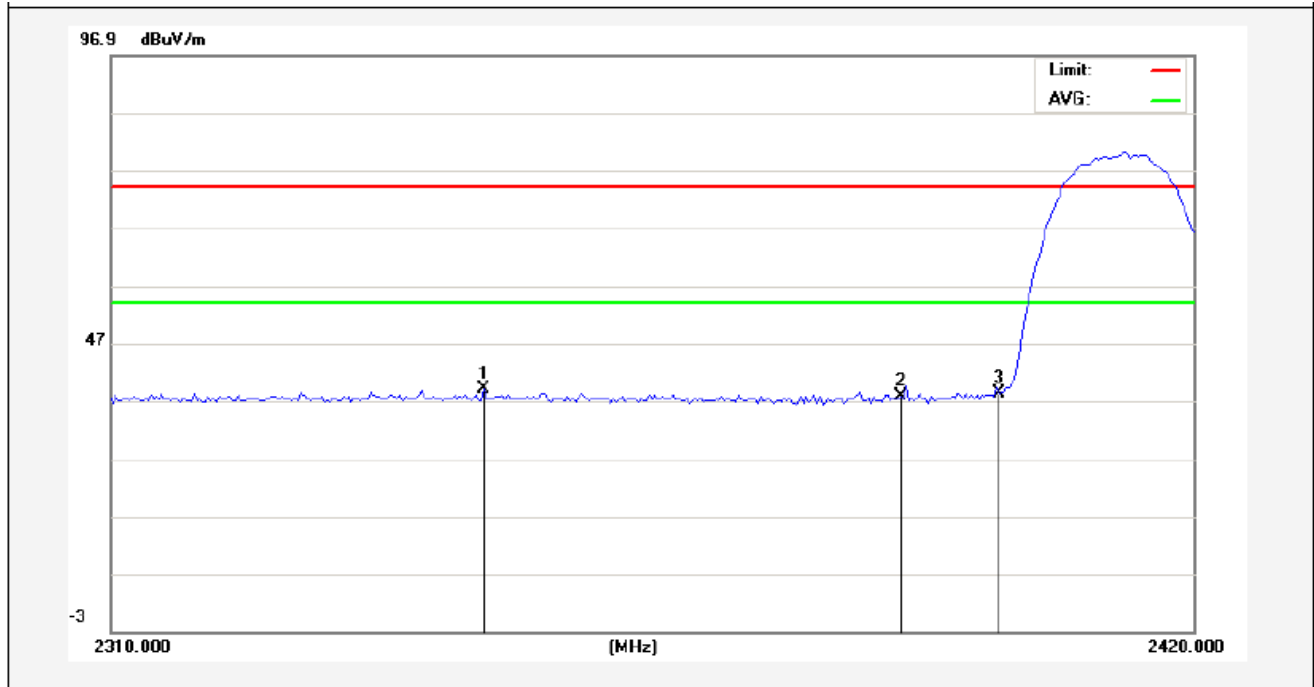


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2347.400    | 41.56            | -2.61         | 38.95           | 74.00         | -35.05          | peak     |             |              |        |
| 2   | 2390.000    | 40.33            | -2.51         | 37.82           | 74.00         | -36.18          | peak     |             |              |        |
| 3   | 2400.000    | 40.89            | -2.49         | 38.40           | 74.00         | -35.60          | peak     |             |              |        |

Horizontal-AV:

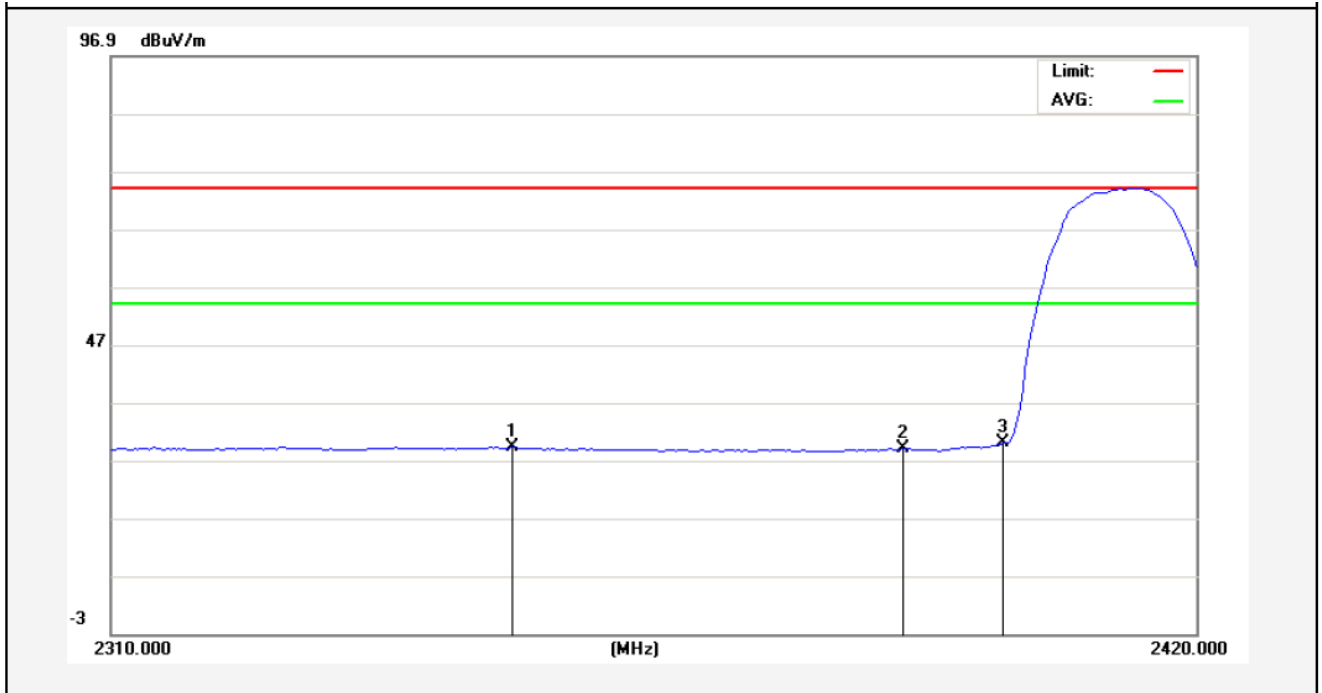


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2350.150    | 31.80            | -2.60         | 29.20           | 54.00         | -24.80          | AVG      |             |              |        |
| 2   | 2390.000    | 31.52            | -2.51         | 29.01           | 54.00         | -24.99          | AVG      |             |              |        |
| 3   | 2400.000    | 32.40            | -2.49         | 29.91           | 54.00         | -24.09          | AVG      |             |              |        |

Test Mode: 802.11b  
2412MHz  
Vertical-PEAK:

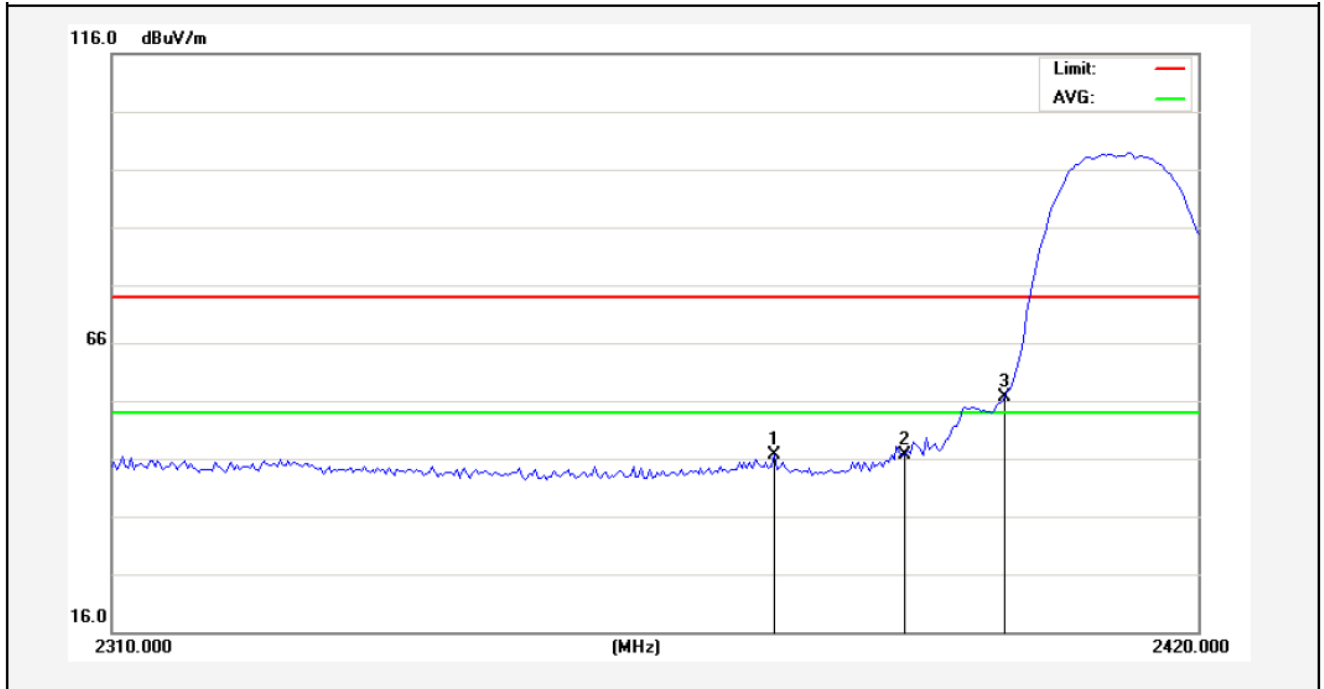


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2376.550    | 49.13            | -2.54         | 46.59           | 74.00          | -27.41          | peak     |             |              |        |
| 2   | 2390.000    | 49.09            | -2.51         | 46.58           | 74.00          | -27.42          | peak     |             |              |        |
| 3   | 2400.000    | 59.09            | -2.49         | 56.60           | 74.00          | -17.40          | peak     |             |              |        |

Vertical-AV:

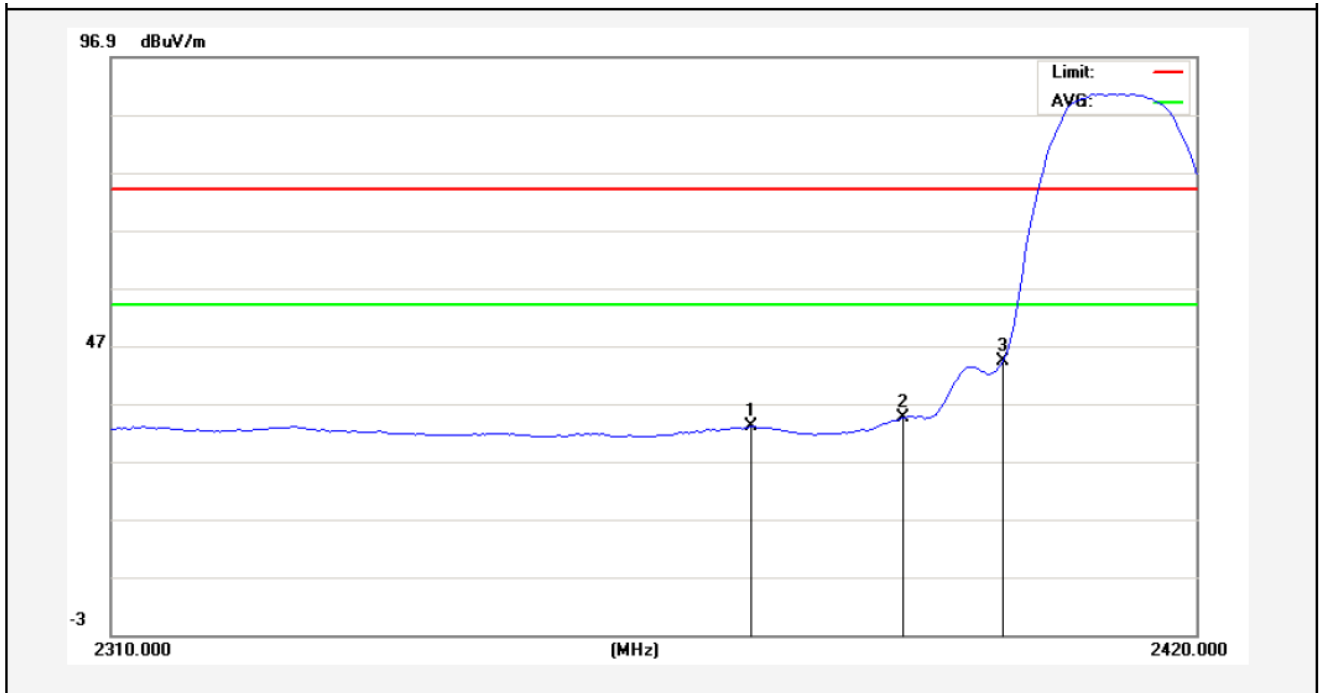


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2374.350    | 35.48            | -2.55         | 32.93           | 54.00         | -21.07          | AVG      |             |              |        |
| 2   | 2390.000    | 36.95            | -2.51         | 34.44           | 54.00         | -19.56          | AVG      |             |              |        |
| 3   | 2400.000    | 46.80            | -2.49         | 44.31           | 54.00         | -9.69           | AVG      |             |              |        |

Test Mode: 802.11b  
2462MHz  
Horizontal-PEAK:

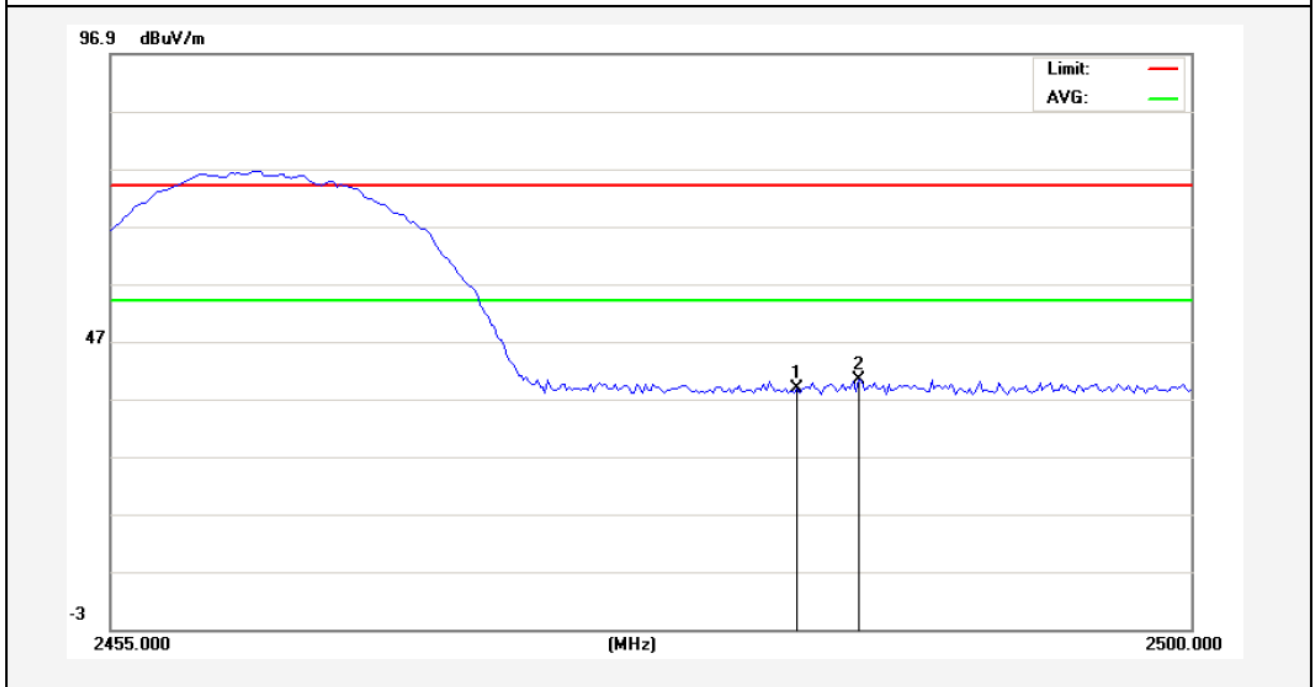


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 41.10            | -2.31         | 38.79           | 74.00         | -35.21          | peak     |             |              |        |
| 2   | 2486.162    | 42.69            | -2.30         | 40.39           | 74.00         | -33.61          | peak     |             |              |        |

Horizontal-AV:

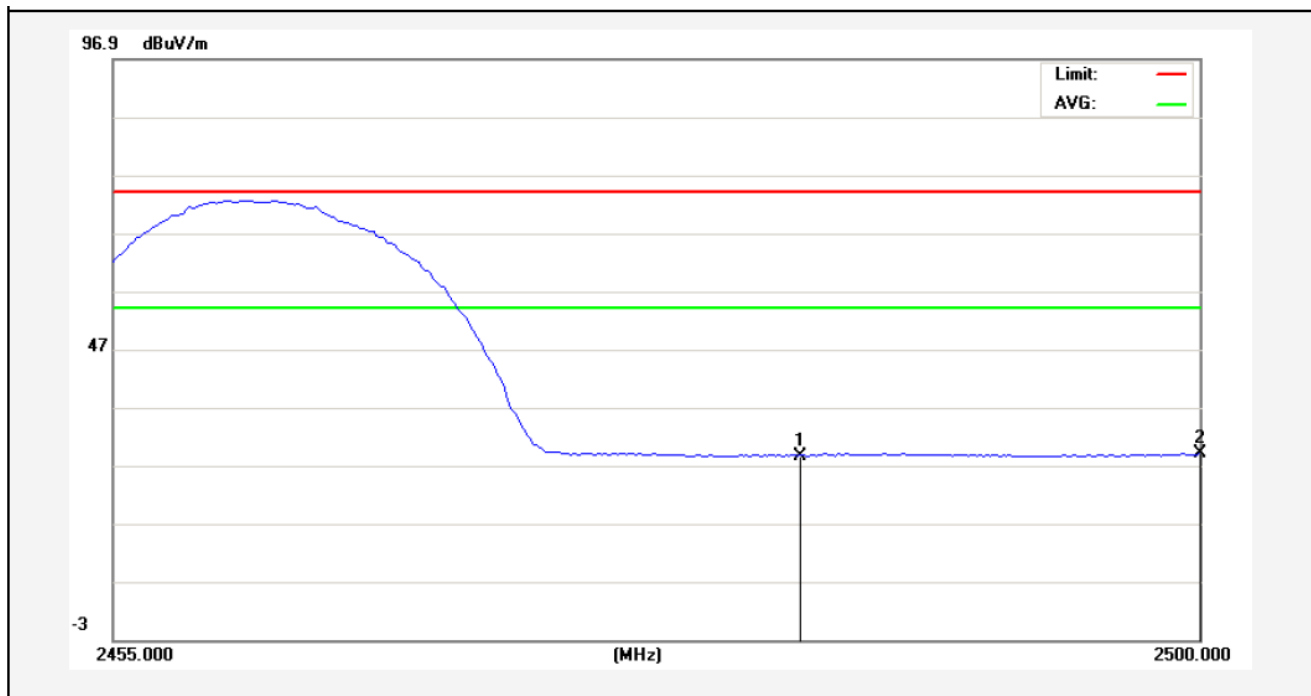


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 30.96            | -2.31         | 28.65           | 54.00         | -25.35          | AVG      |             |              |        |
| 2   | 2500.000    | 31.29            | -2.27         | 29.02           | 54.00         | -24.98          | AVG      |             |              |        |

Test Mode: 802.11b  
2462MHz  
Vertical-PEAK:

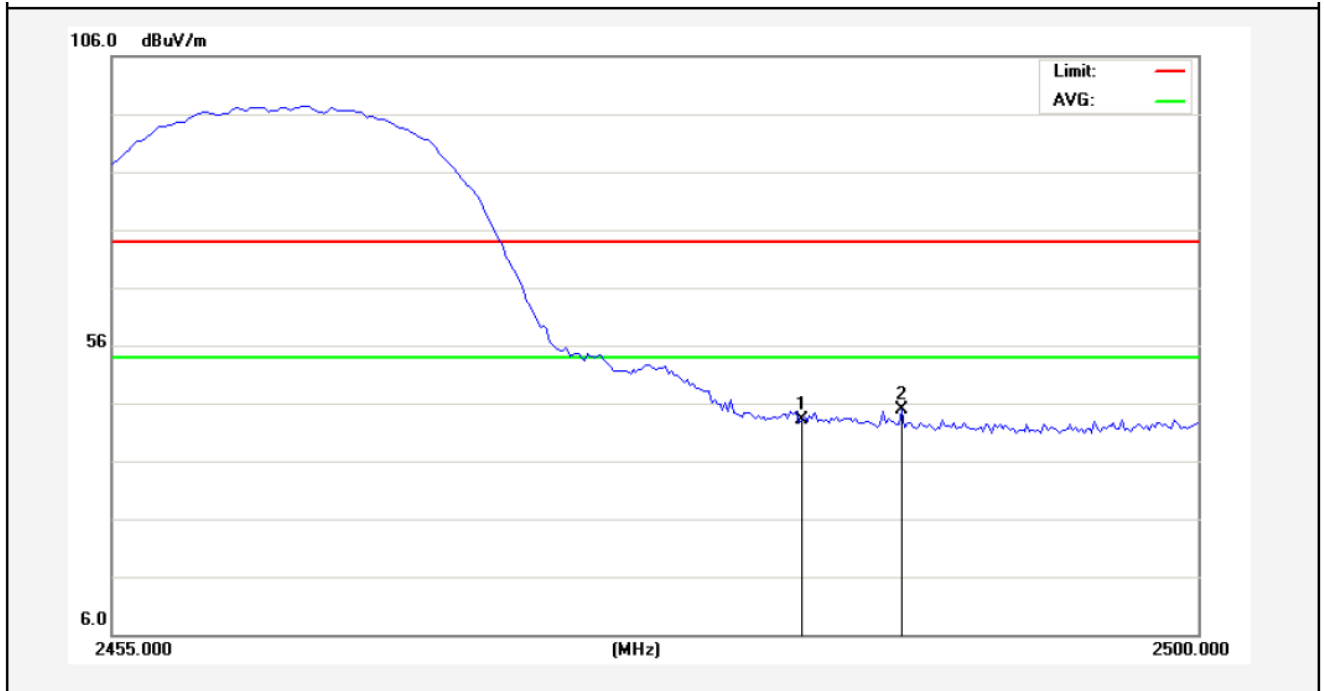


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 45.48            | -2.31         | 43.17           | 74.00         | -30.83          | peak     |             |              |        |
| 2   | 2487.738    | 47.08            | -2.30         | 44.78           | 74.00         | -29.22          | peak     |             |              |        |

Vertical-AV:

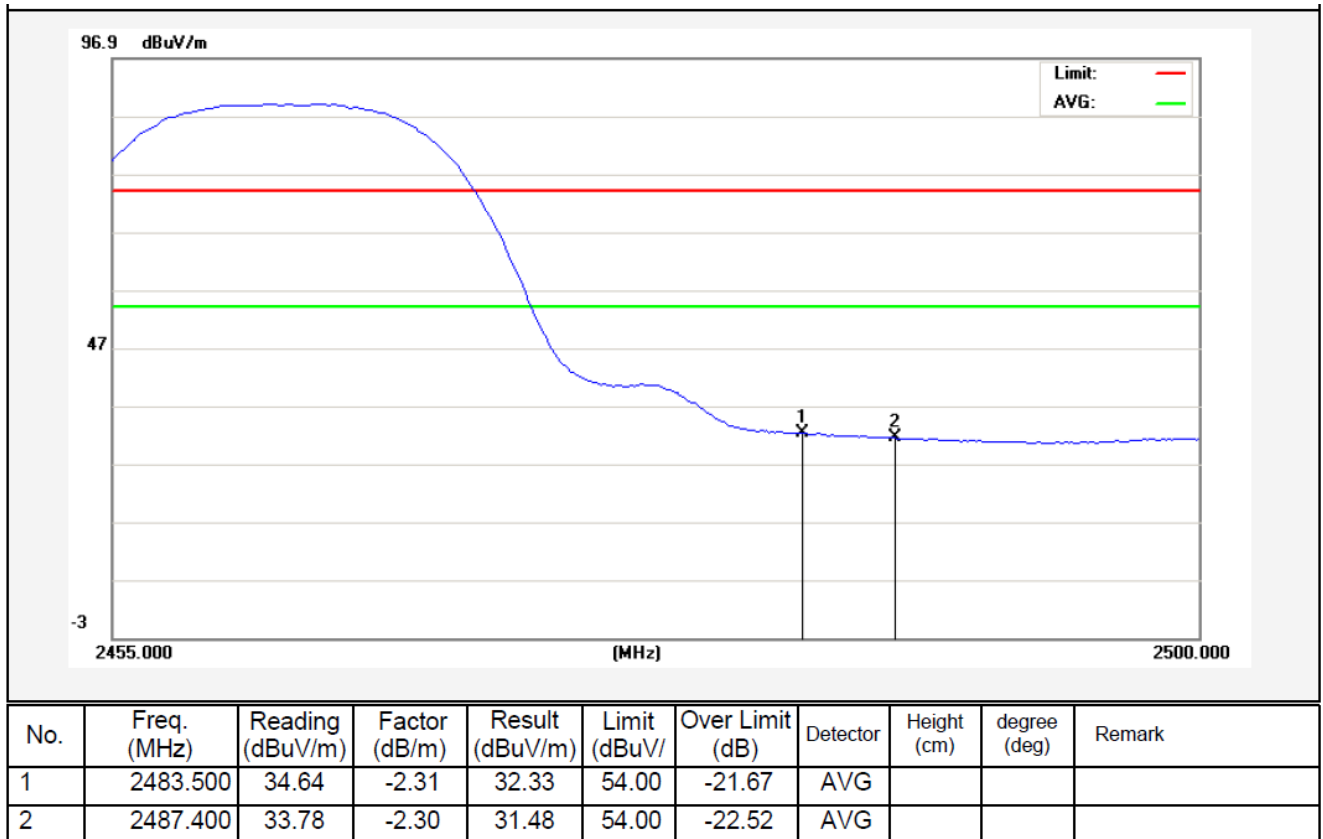


Test Mode: 802.11g  
2412MHz  
Horizontal-PEAK:

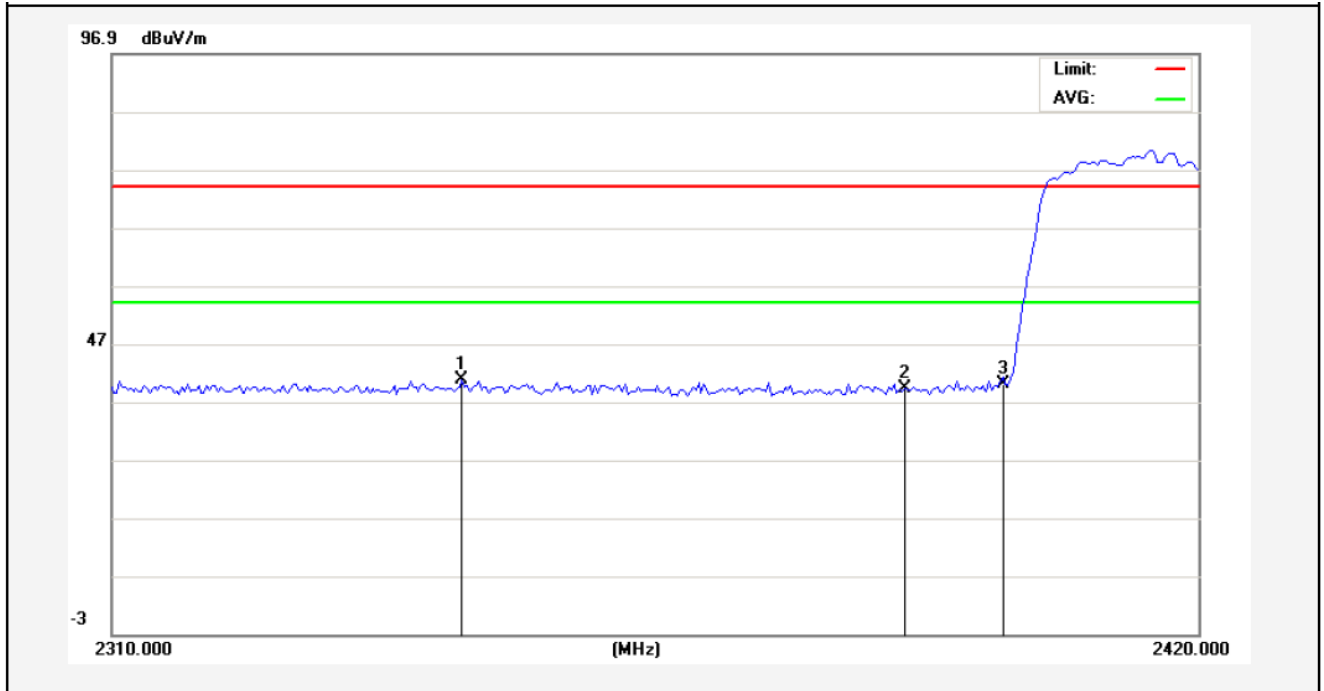


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2344.925    | 43.31            | -2.61         | 40.70           | 74.00         | -33.30          | peak     |             |              |        |
| 2   | 2390.000    | 41.76            | -2.51         | 39.25           | 74.00         | -34.75          | peak     |             |              |        |
| 3   | 2400.000    | 42.60            | -2.49         | 40.11           | 74.00         | -33.89          | peak     |             |              |        |

Horizontal-AV:

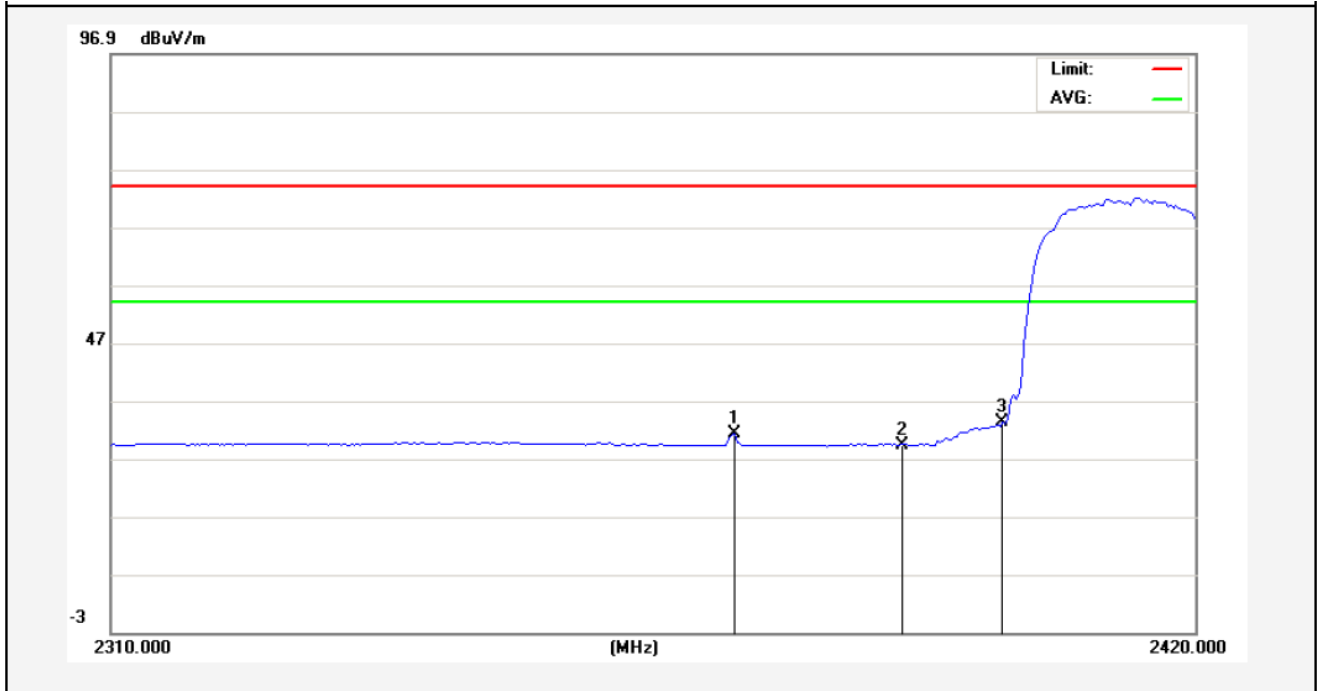


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2372.700    | 33.76            | -2.55         | 31.21           | 54.00         | -22.79          | AVG      |             |              |        |
| 2   | 2390.000    | 31.91            | -2.51         | 29.40           | 54.00         | -24.60          | AVG      |             |              |        |
| 3   | 2400.000    | 35.85            | -2.49         | 33.36           | 54.00         | -20.64          | AVG      |             |              |        |

Test Mode: 802.11g  
2412MHz  
Vertical-PEAK:

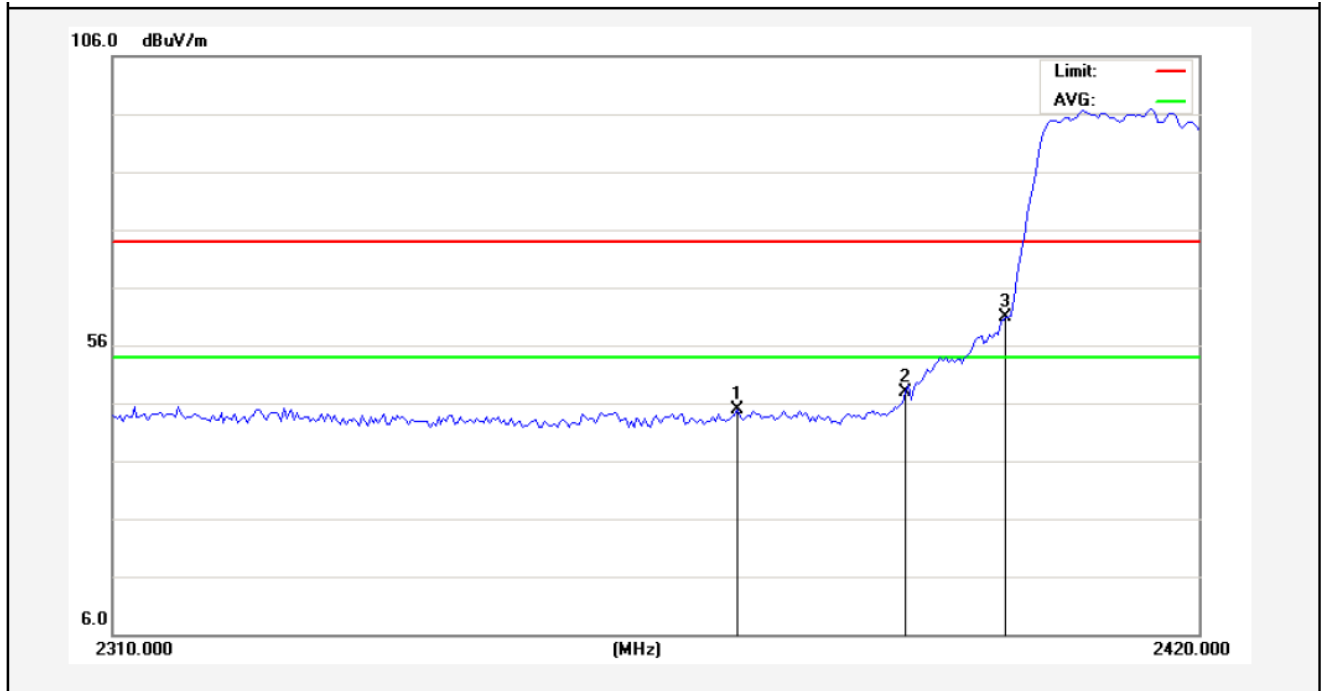


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2372.700    | 47.31            | -2.55         | 44.76           | 74.00         | -29.24          | peak     |             |              |        |
| 2   | 2390.000    | 50.40            | -2.51         | 47.89           | 74.00         | -26.11          | peak     |             |              |        |
| 3   | 2400.000    | 63.28            | -2.49         | 60.79           | 74.00         | -13.21          | peak     |             |              |        |

Vertical-AV:

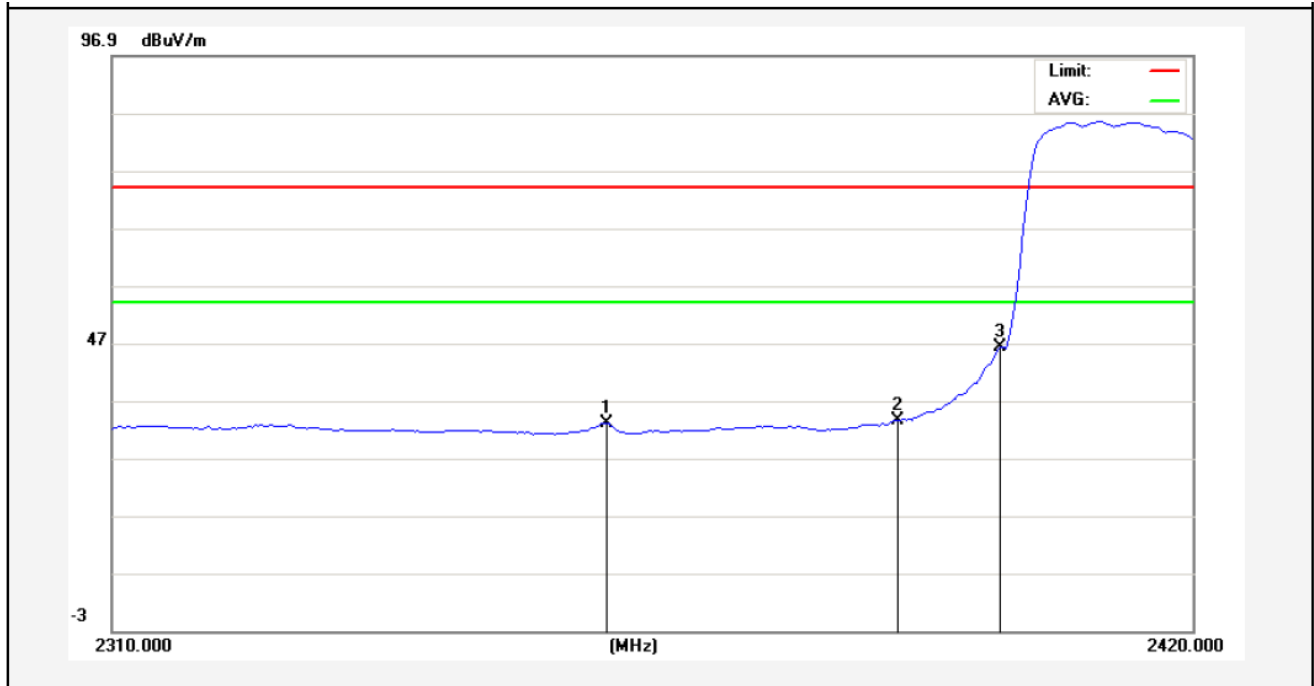


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2359.775    | 35.62            | -2.58         | 33.04           | 54.00         | -20.96          | AVG      |             |              |        |
| 2   | 2390.000    | 36.02            | -2.51         | 33.51           | 54.00         | -20.49          | AVG      |             |              |        |
| 3   | 2400.000    | 48.77            | -2.49         | 46.28           | 54.00         | -7.72           | AVG      |             |              |        |

Test Mode: 802.11g  
2462MHz  
Horizontal-PEAK:

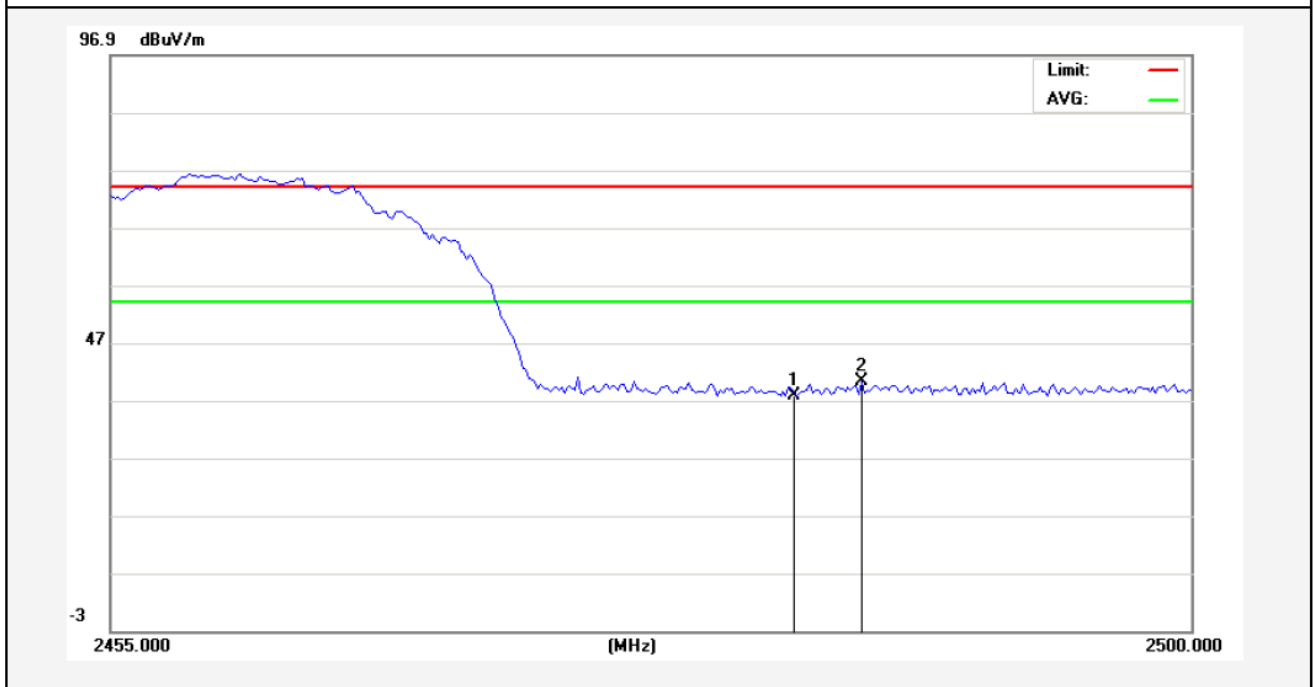


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 40.16            | -2.31         | 37.85           | 74.00         | -36.15          | peak     |             |              |        |
| 2   | 2486.275    | 42.64            | -2.30         | 40.34           | 74.00         | -33.66          | peak     |             |              |        |

Horizontal-AV:

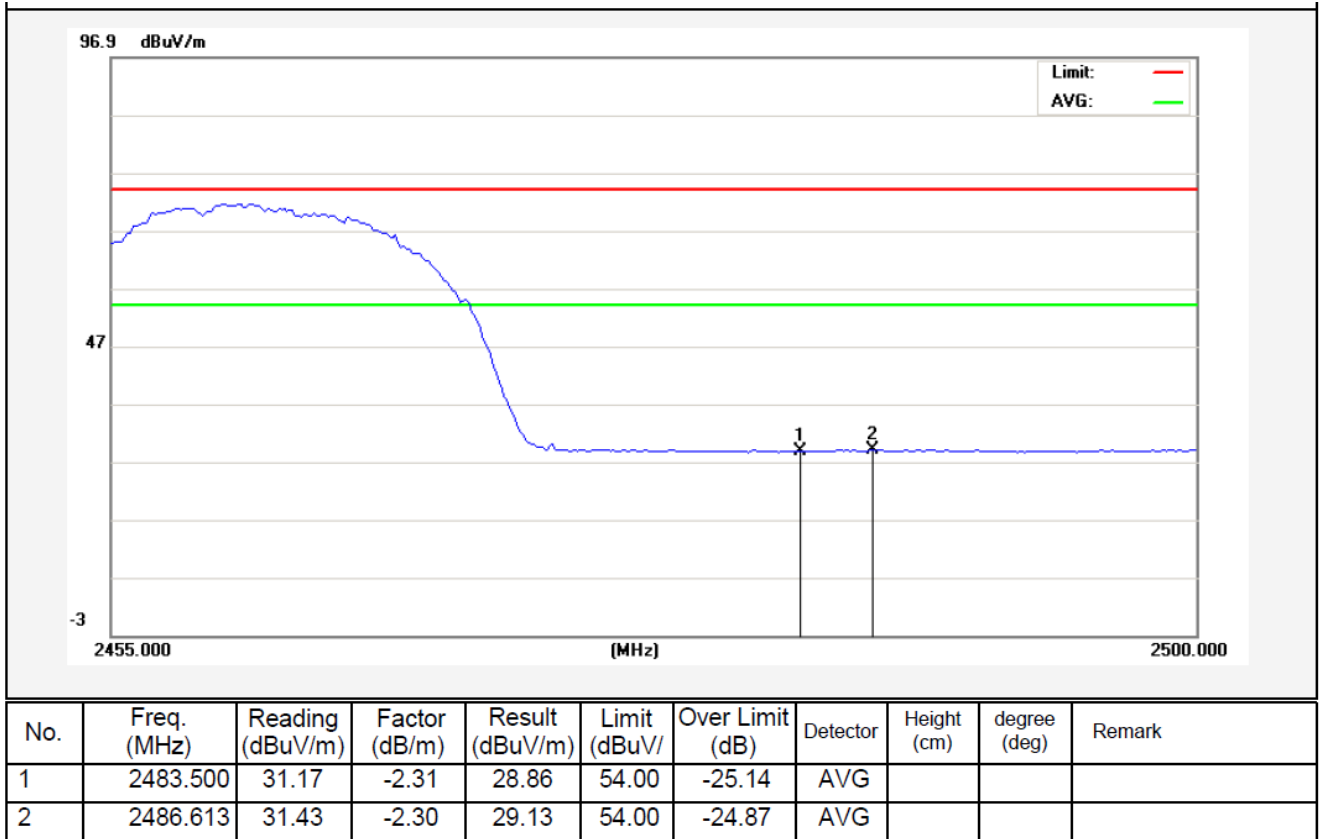


Test Mode: 802.11g  
2462MHz  
Vertical-PEAK:

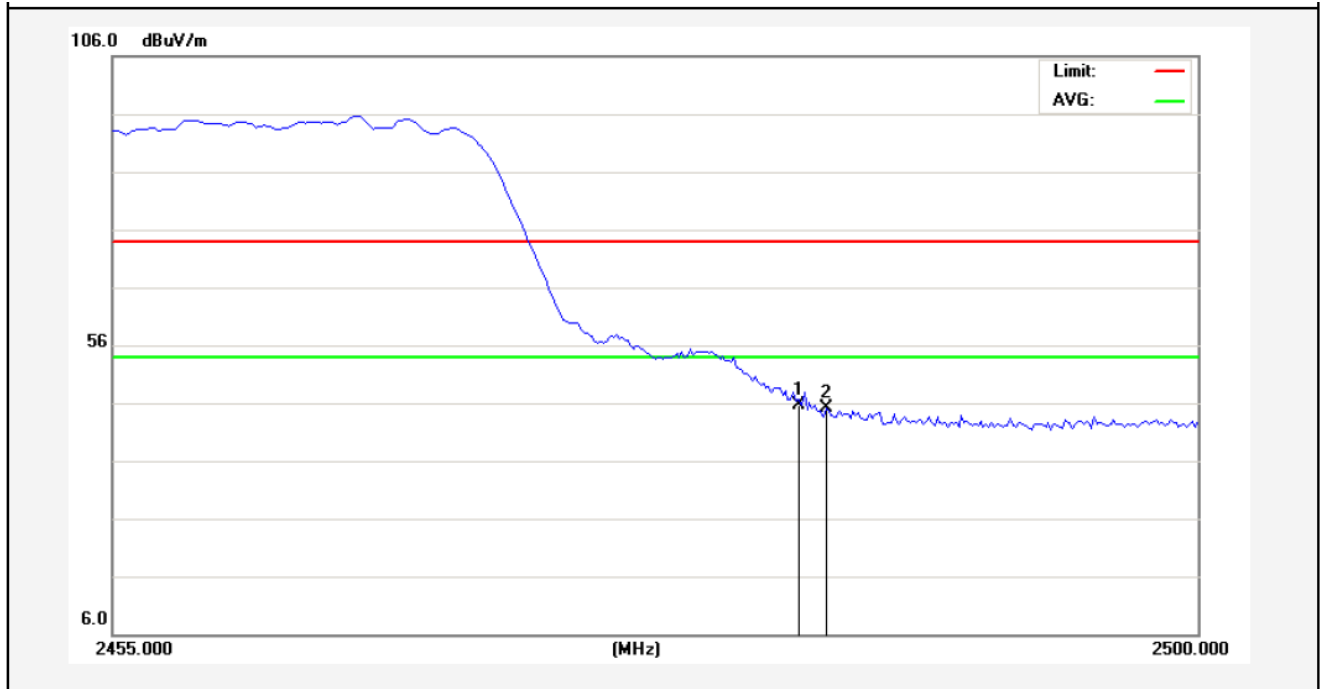

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 47.96            | -2.31         | 45.65           | 74.00         | -28.35          | peak     |             |              |        |
| 2   | 2484.588    | 47.44            | -2.30         | 45.14           | 74.00         | -28.86          | peak     |             |              |        |

Vertical-AV:

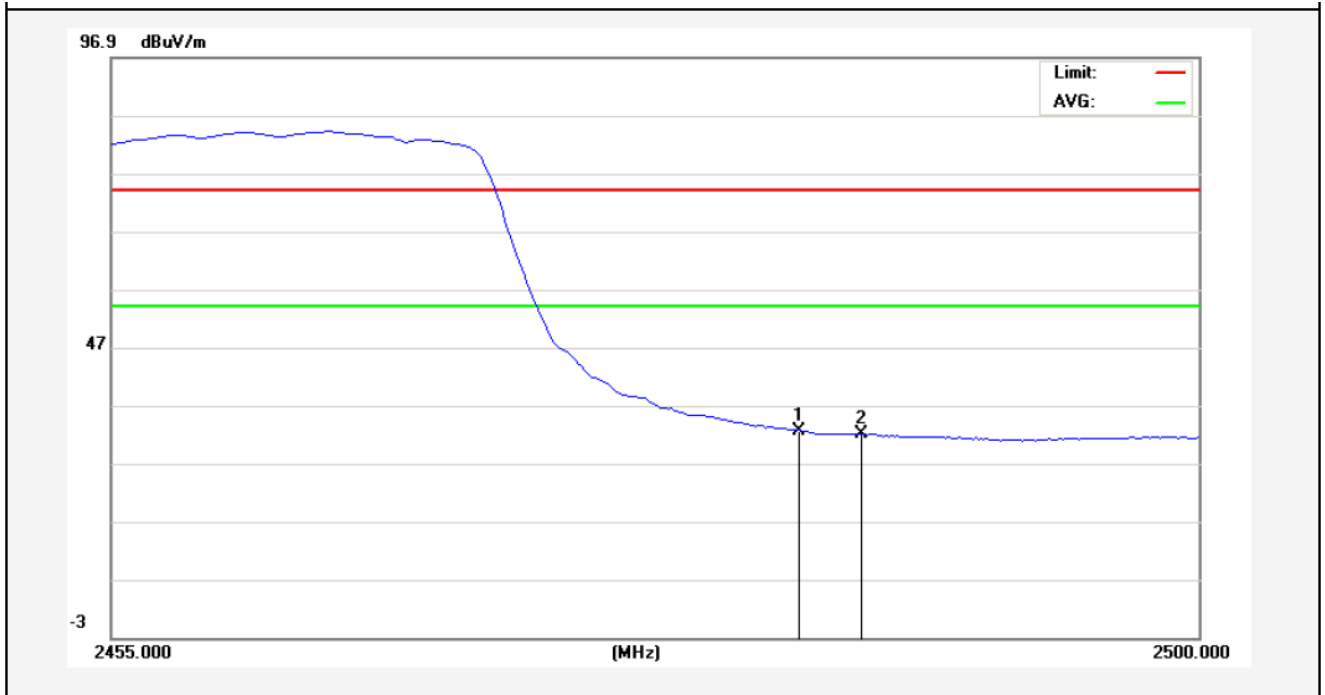


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 34.94            | -2.31         | 32.63           | 54.00         | -21.37          | AVG      |             |              |        |
| 2   | 2486.162    | 34.34            | -2.30         | 32.04           | 54.00         | -21.96          | AVG      |             |              |        |

Test Mode: 802.11n (HT20)


2412MHz

Horizontal-PEAK:

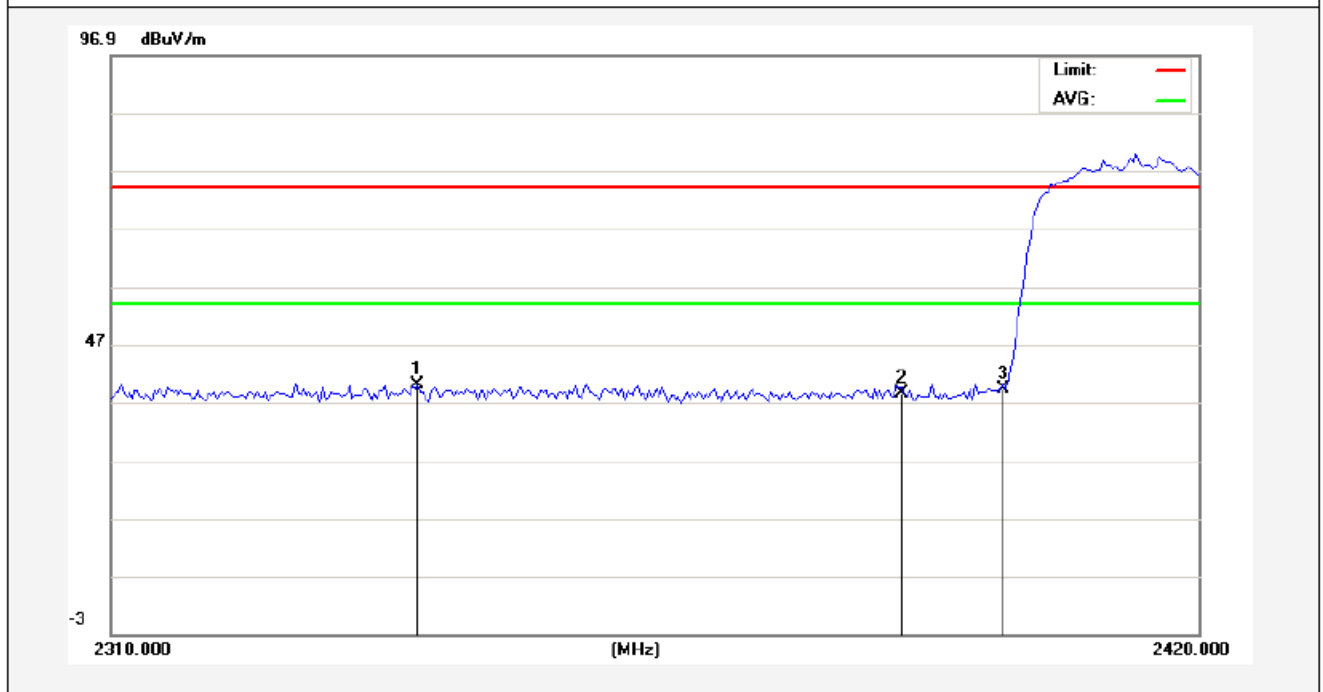


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2340.800    | 42.64            | -2.62         | 40.02           | 74.00         | -33.98          | peak     |             |              |        |
| 2   | 2390.000    | 41.15            | -2.51         | 38.64           | 74.00         | -35.36          | peak     |             |              |        |
| 3   | 2400.000    | 41.72            | -2.49         | 39.23           | 74.00         | -34.77          | peak     |             |              |        |

Horizontal-AV:

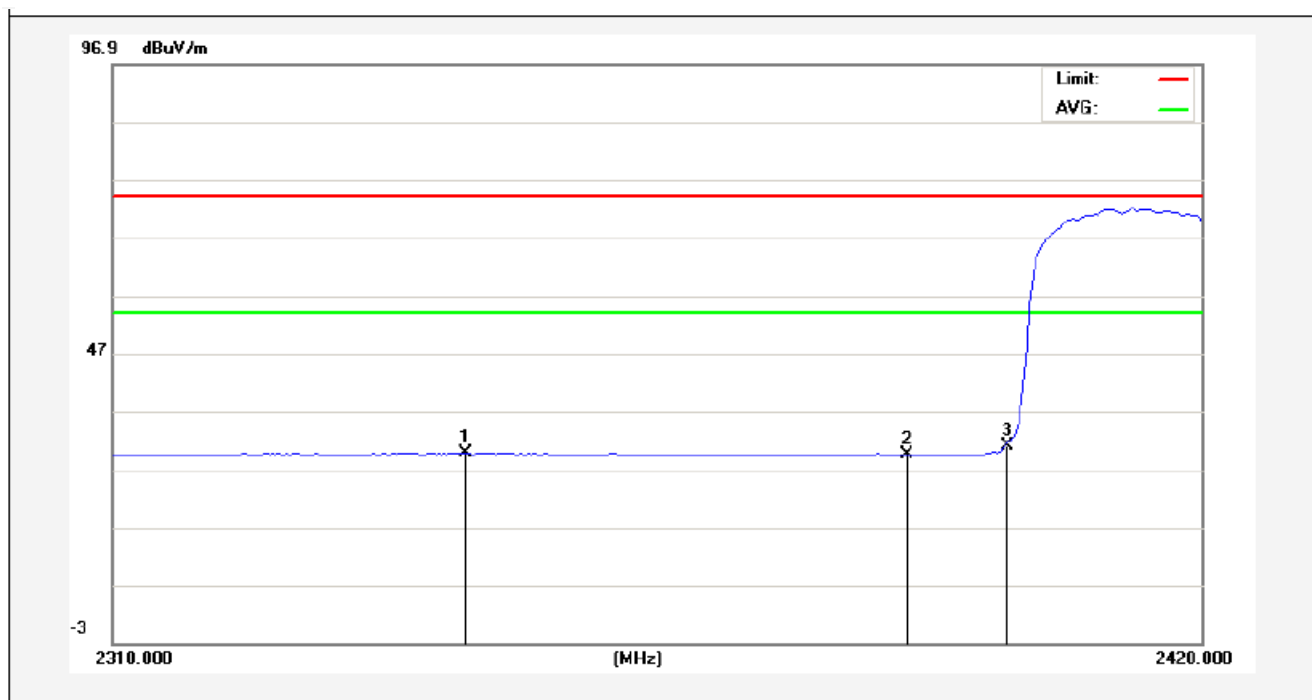


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2345.200    | 32.45            | -2.61         | 29.84           | 54.00         | -24.16          | AVG      |             |              |        |
| 2   | 2390.000    | 31.98            | -2.51         | 29.47           | 54.00         | -24.53          | AVG      |             |              |        |
| 3   | 2400.000    | 33.45            | -2.49         | 30.96           | 54.00         | -23.04          | AVG      |             |              |        |

Test Mode: 802.11n (HT20)  
2412MHz  
Vertical-PEAK:

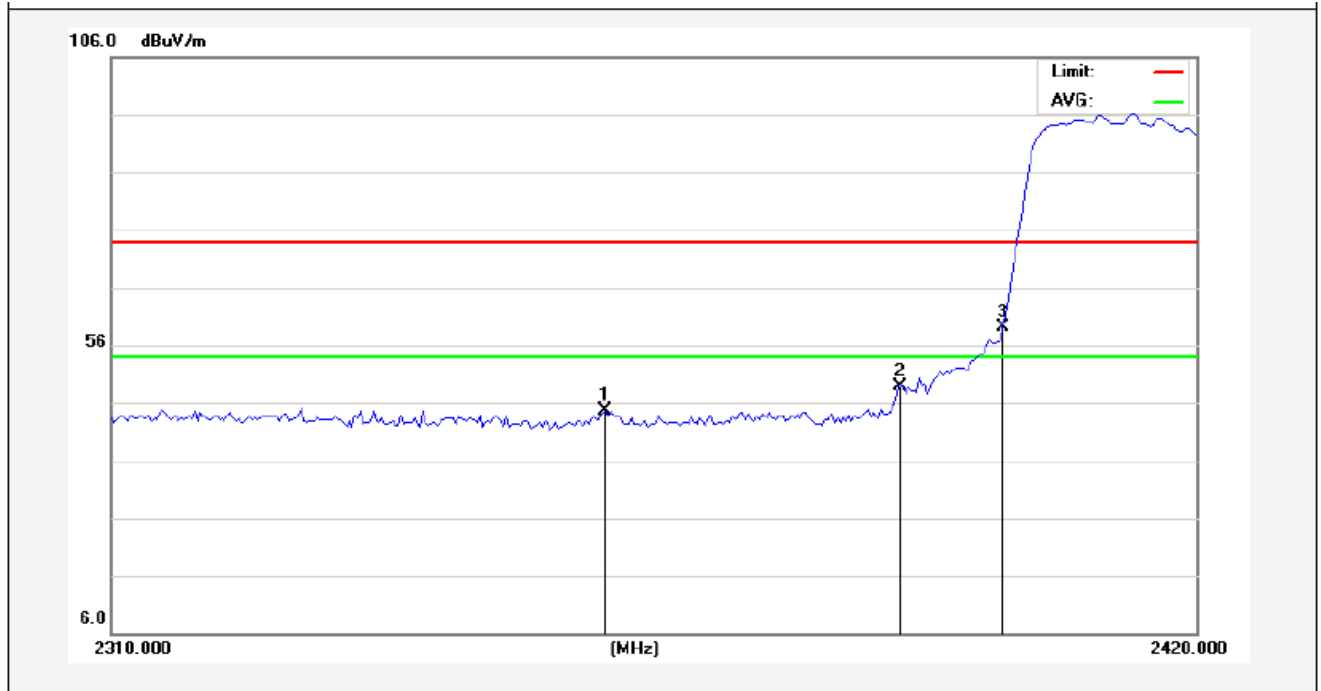


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2359.500    | 47.23            | -2.58         | 44.65           | 74.00         | -29.35          | peak     |             |              |        |
| 2   | 2390.000    | 51.37            | -2.51         | 48.86           | 74.00         | -25.14          | peak     |             |              |        |
| 3   | 2400.000    | 61.55            | -2.49         | 59.06           | 74.00         | -14.94          | peak     |             |              |        |

Vertical-AV:

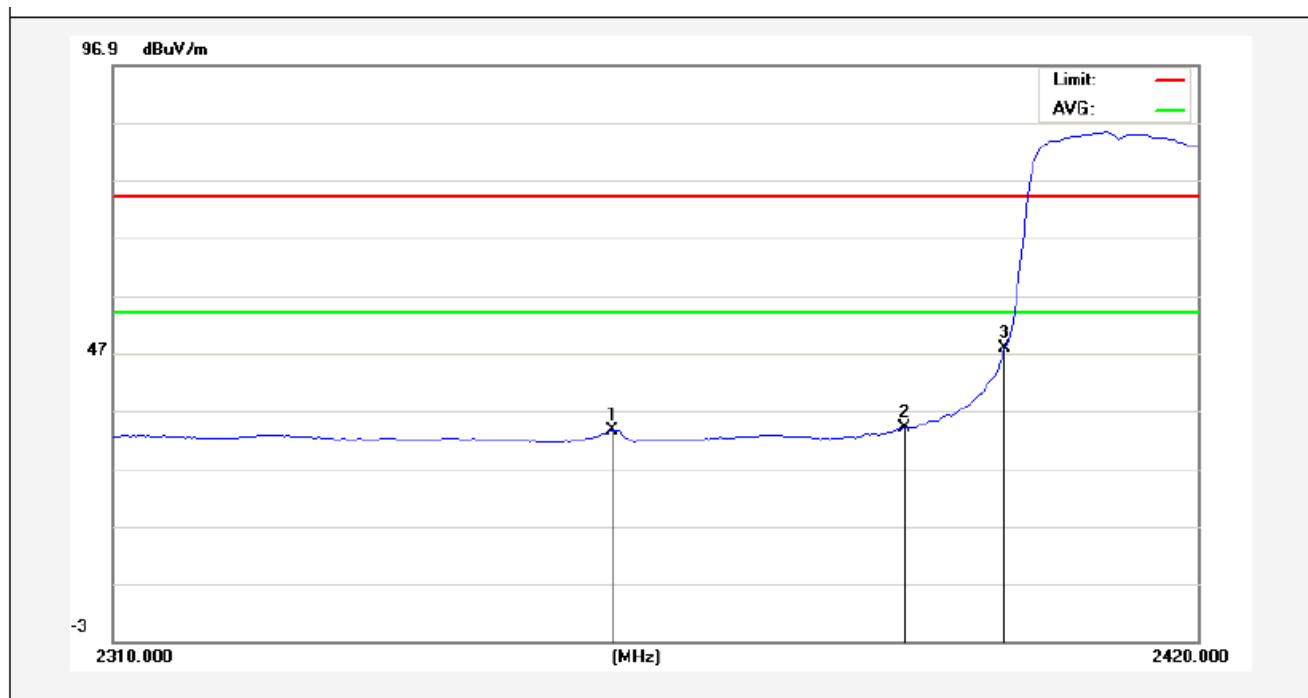


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2360.050    | 36.18            | -2.58         | 33.60           | 54.00         | -20.40          | AVG      |             |              |        |
| 2   | 2390.000    | 36.45            | -2.51         | 33.94           | 54.00         | -20.06          | AVG      |             |              |        |
| 3   | 2400.000    | 50.34            | -2.49         | 47.85           | 54.00         | -6.15           | AVG      |             |              |        |

Test Mode: 802.11n (HT20)  
2462MHz  
Horizontal-PEAK:

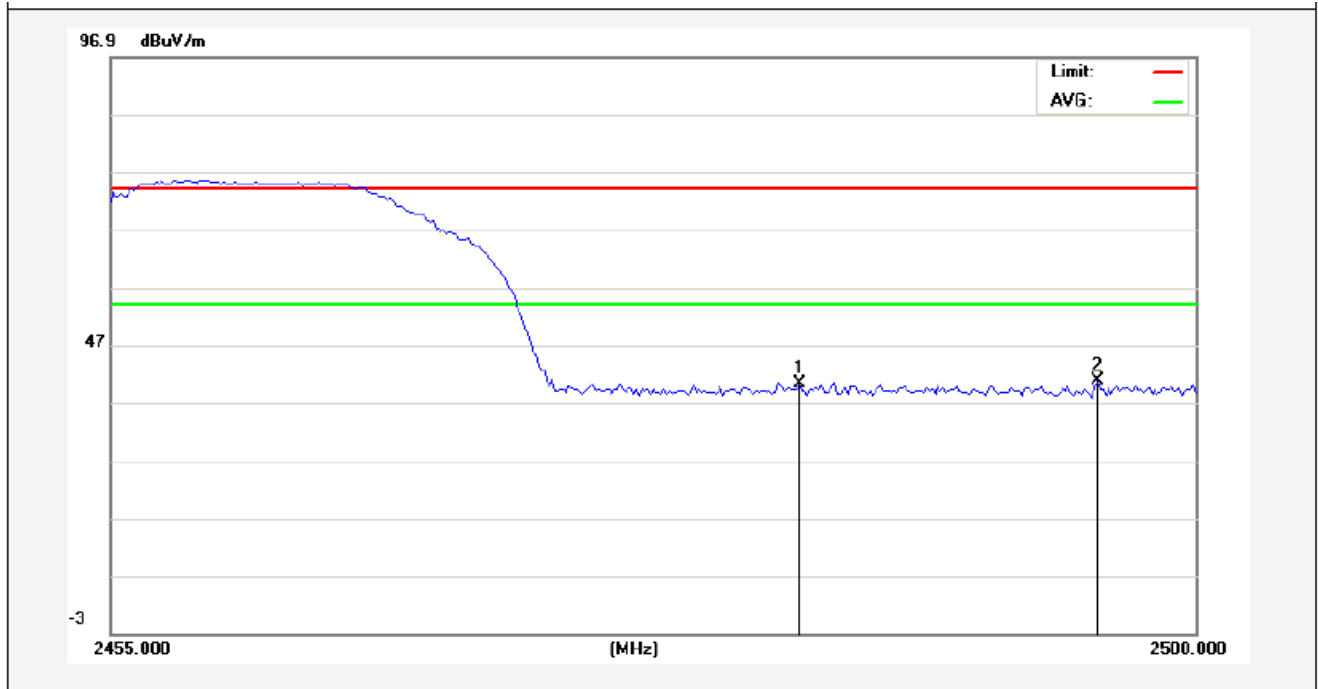


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 42.59            | -2.31         | 40.28           | 74.00         | -33.72          | peak     |             |              |        |
| 2   | 2495.950    | 43.18            | -2.28         | 40.90           | 74.00         | -33.10          | peak     |             |              |        |

Horizontal-AV:

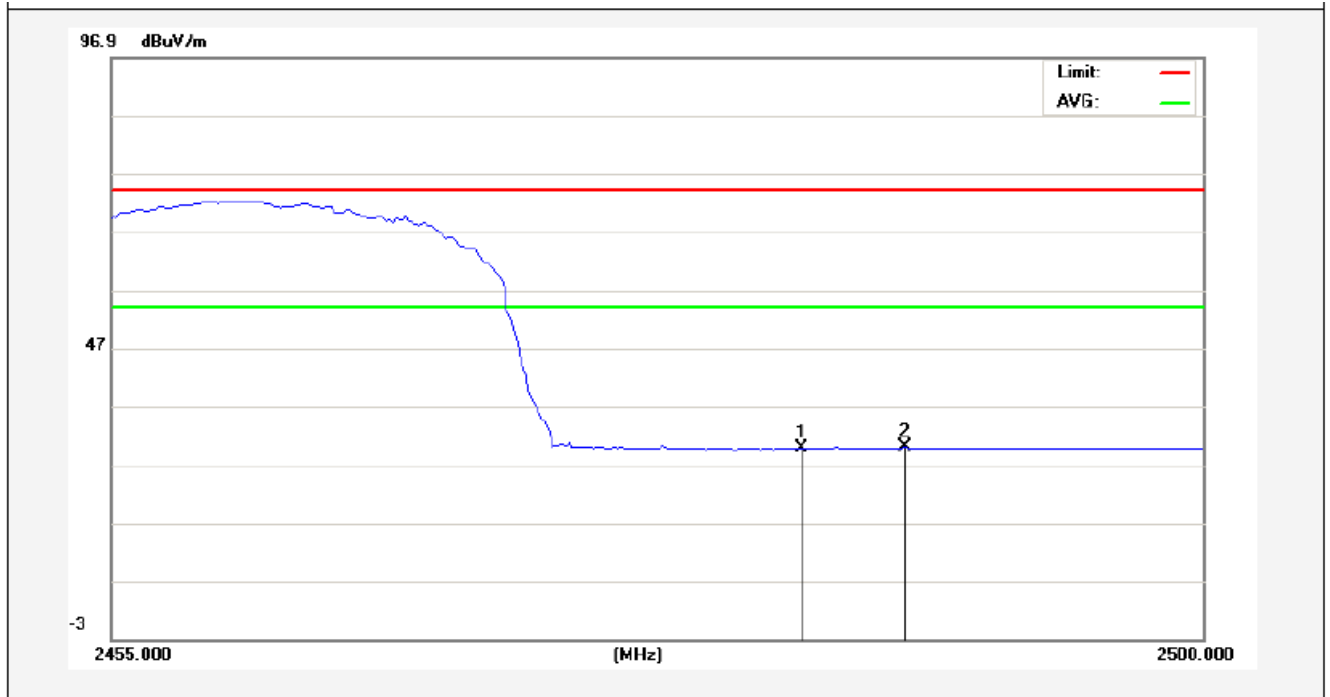


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 32.04            | -2.31         | 29.73           | 54.00         | -24.27          | AVG      |             |              |        |
| 2   | 2487.738    | 32.25            | -2.30         | 29.95           | 54.00         | -24.05          | AVG      |             |              |        |

Test Mode: 802.11n (HT20)  
2462MHz  
Vertical-PEAK:

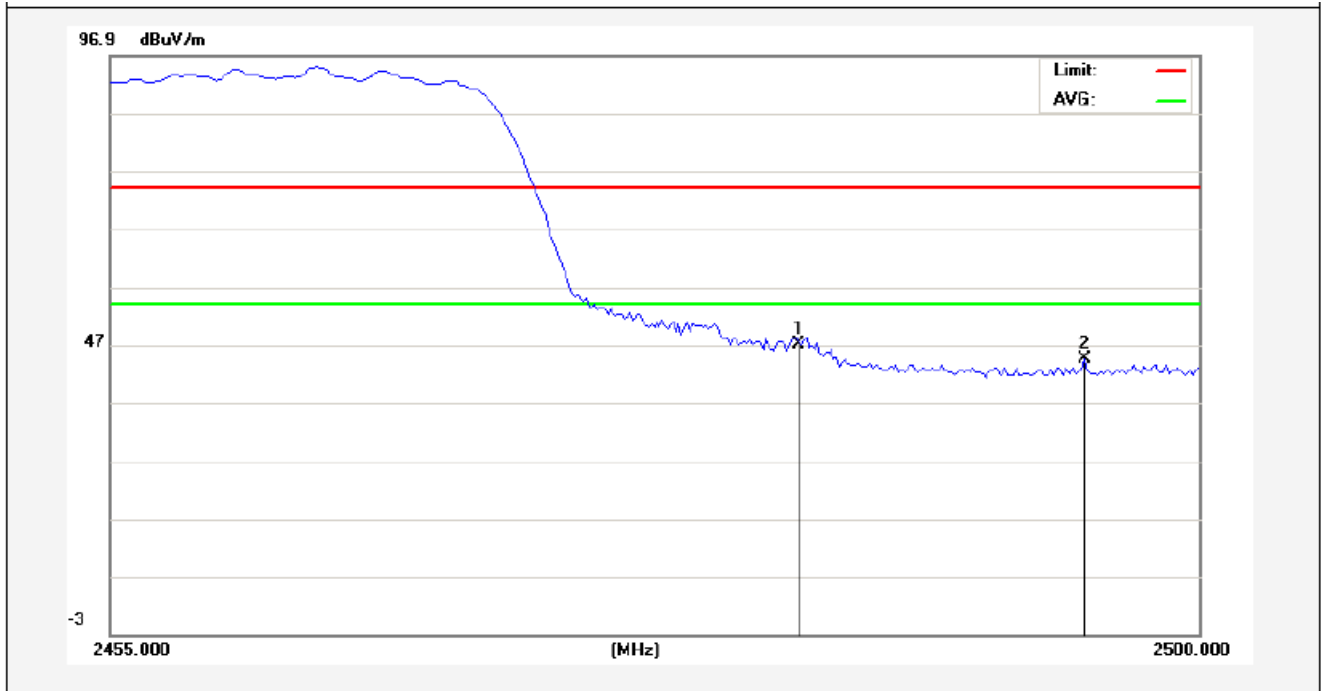


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 49.34            | -2.31         | 47.03           | 74.00         | -26.97          | peak     |             |              |        |
| 2   | 2495.275    | 46.70            | -2.28         | 44.42           | 74.00         | -29.58          | peak     |             |              |        |

Vertical-AV:

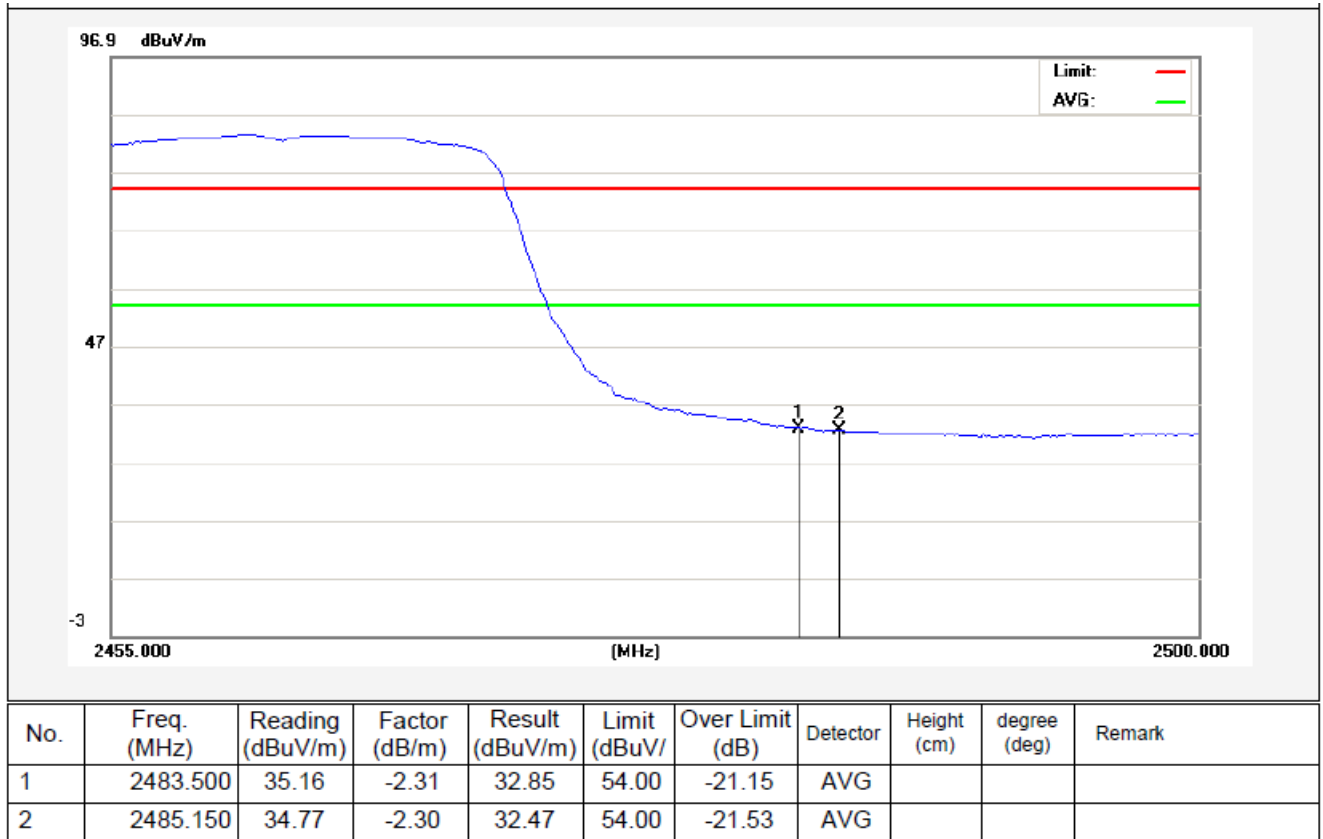


Test Mode: 802.11n (HT40)  
2412MHz  
Horizontal-PEAK:

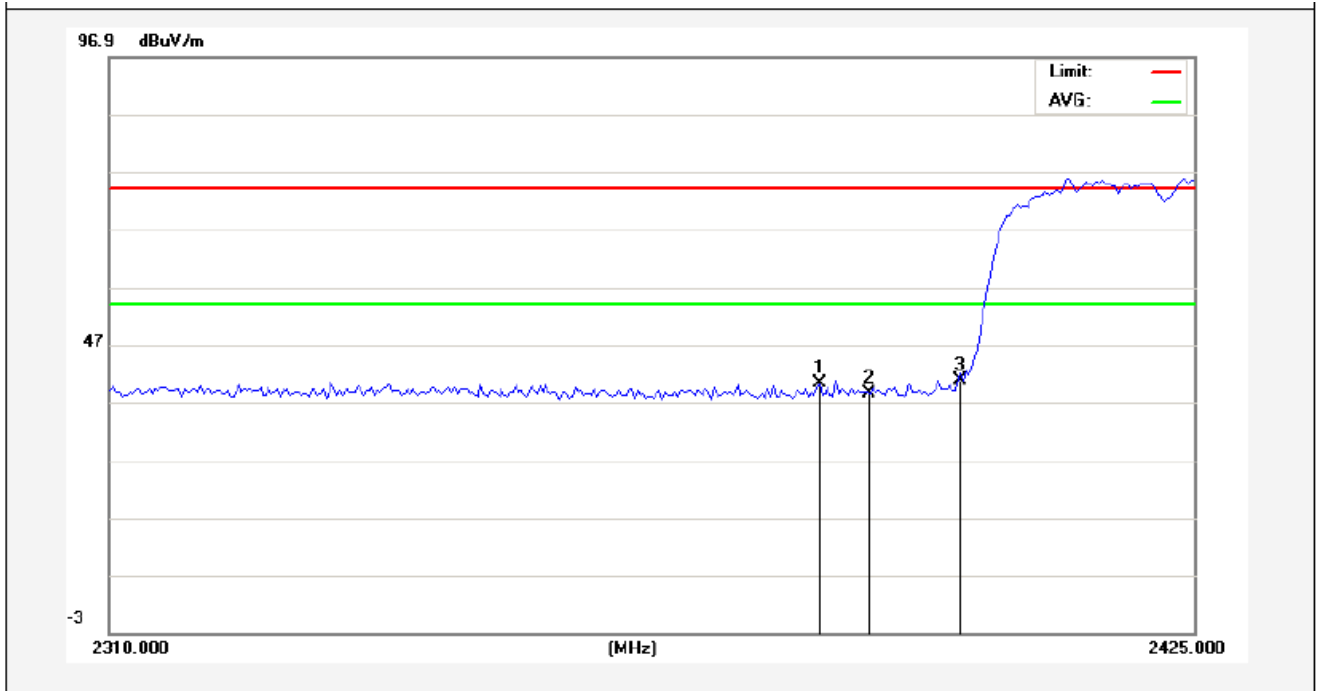

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2384.750    | 42.88            | -2.53         | 40.35           | 74.00         | -33.65          | peak     |             |              |        |
| 2   | 2390.000    | 41.06            | -2.51         | 38.55           | 74.00         | -35.45          | peak     |             |              |        |
| 3   | 2400.000    | 43.31            | -2.49         | 40.82           | 74.00         | -33.18          | peak     |             |              |        |

Horizontal-AV:

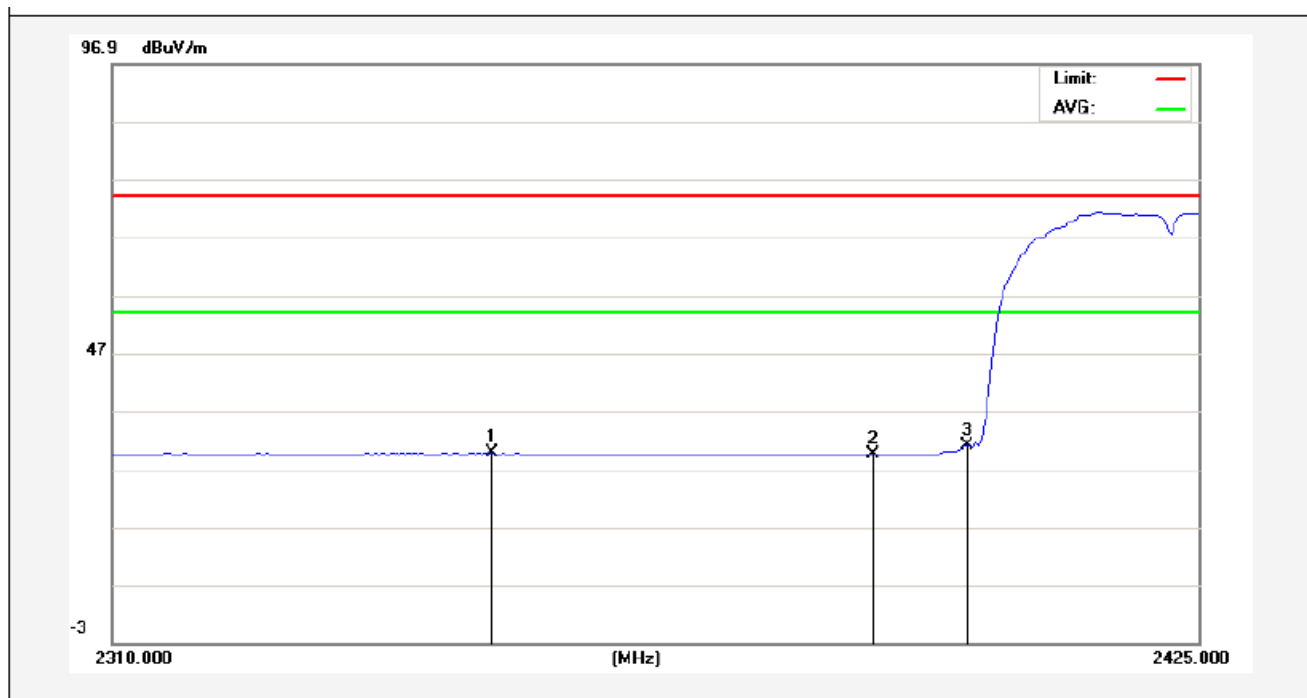


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2349.675    | 32.42            | -2.60         | 29.82           | 54.00         | -24.18          | AVG      |             |              |        |
| 2   | 2390.000    | 31.99            | -2.51         | 29.48           | 54.00         | -24.52          | AVG      |             |              |        |
| 3   | 2400.000    | 33.53            | -2.49         | 31.04           | 54.00         | -22.96          | AVG      |             |              |        |

Test Mode: 802.11n (HT40)


2412MHz

Vertical-PEAK:

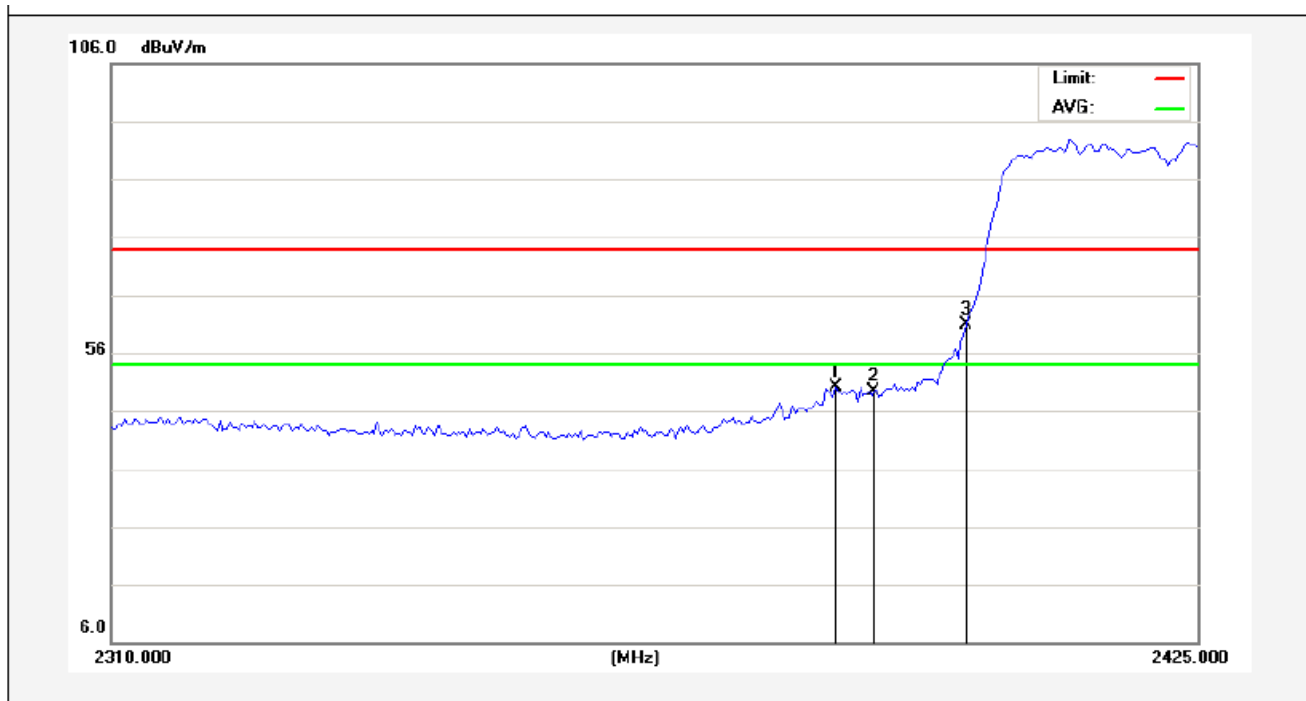


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2386.188    | 52.60            | -2.52         | 50.08           | 74.00         | -23.92          | peak     |             |              |        |
| 2   | 2390.000    | 51.88            | -2.51         | 49.37           | 74.00         | -24.63          | peak     |             |              |        |
| 3   | 2400.000    | 63.44            | -2.49         | 60.95           | 74.00         | -13.05          | peak     |             |              |        |

Vertical-AV:

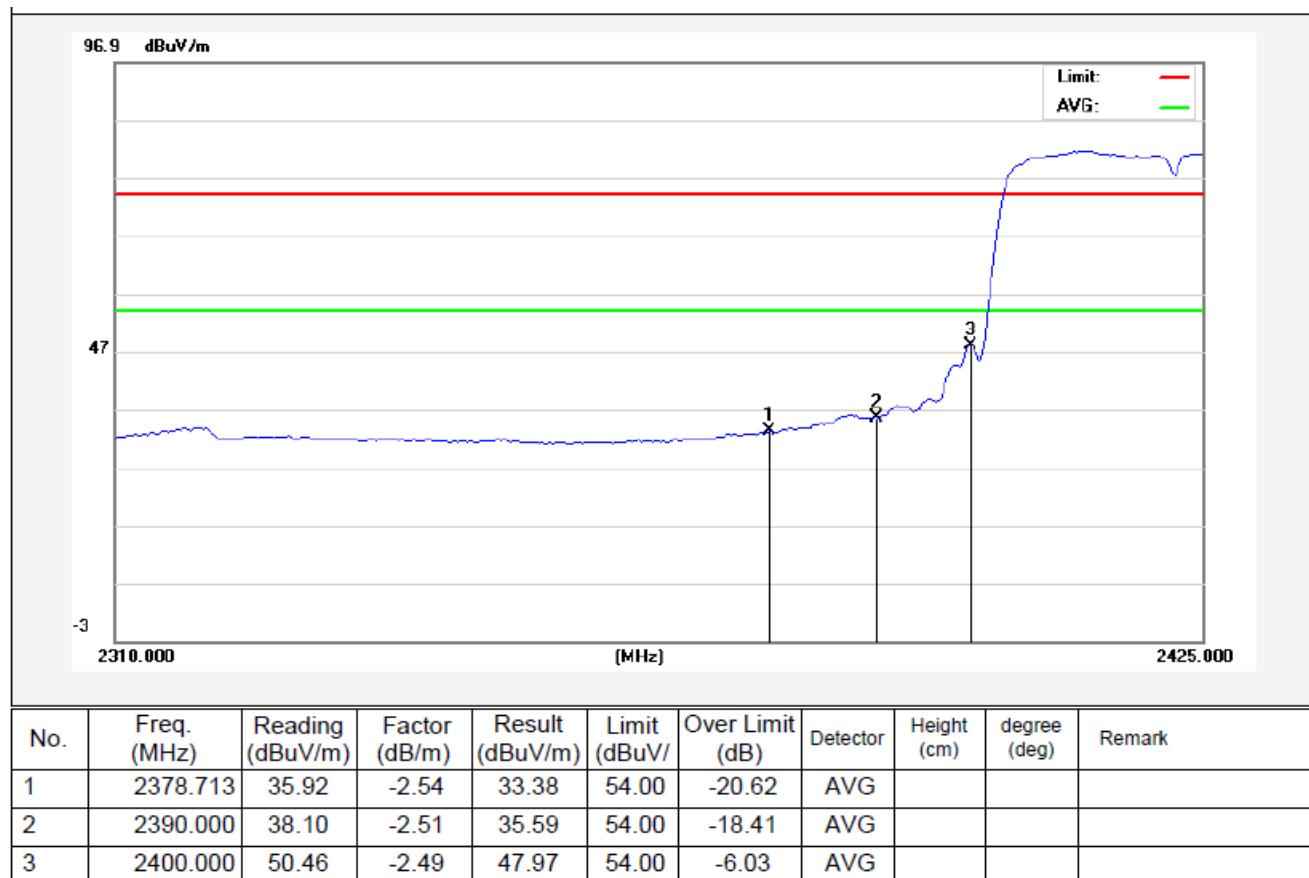


Test Mode: 802.11n (HT40)  
2462MHz  
Horizontal-PEAK:

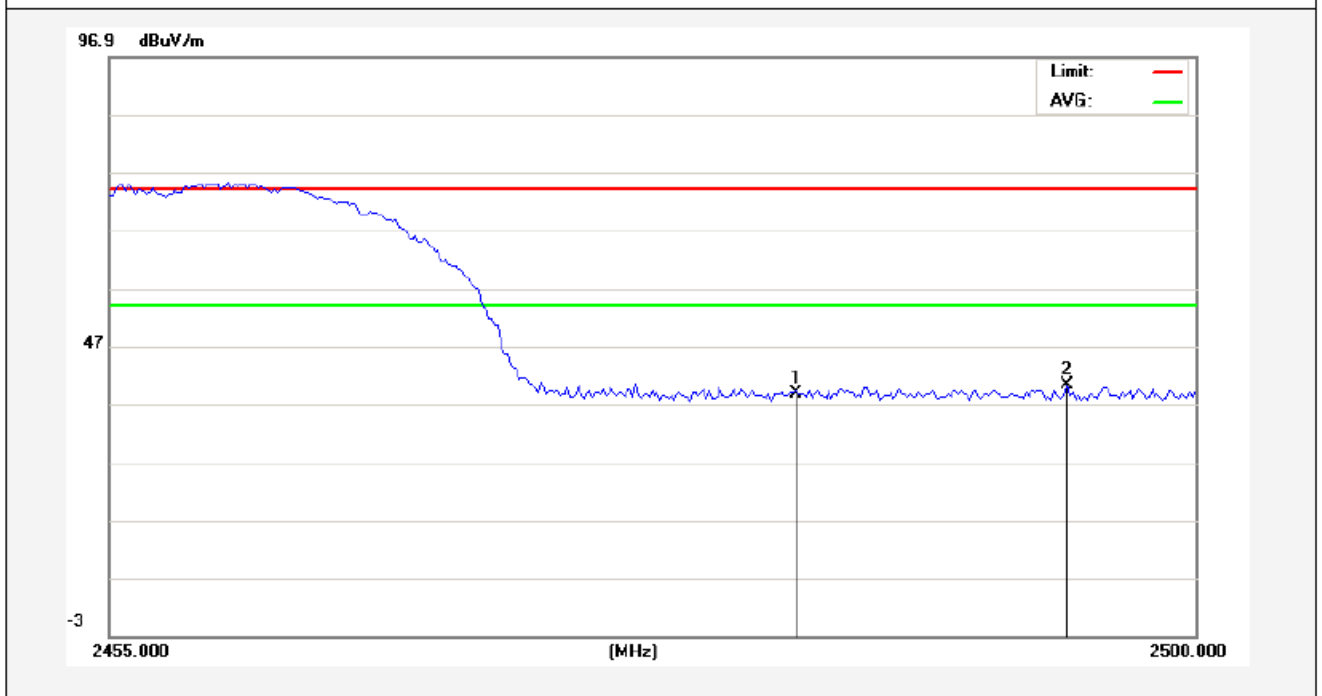


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 41.20            | -2.31         | 38.89           | 74.00         | -35.11          | peak     |             |              |        |
| 2   | 2494.713    | 42.63            | -2.28         | 40.35           | 74.00         | -33.65          | peak     |             |              |        |

Horizontal-AV:

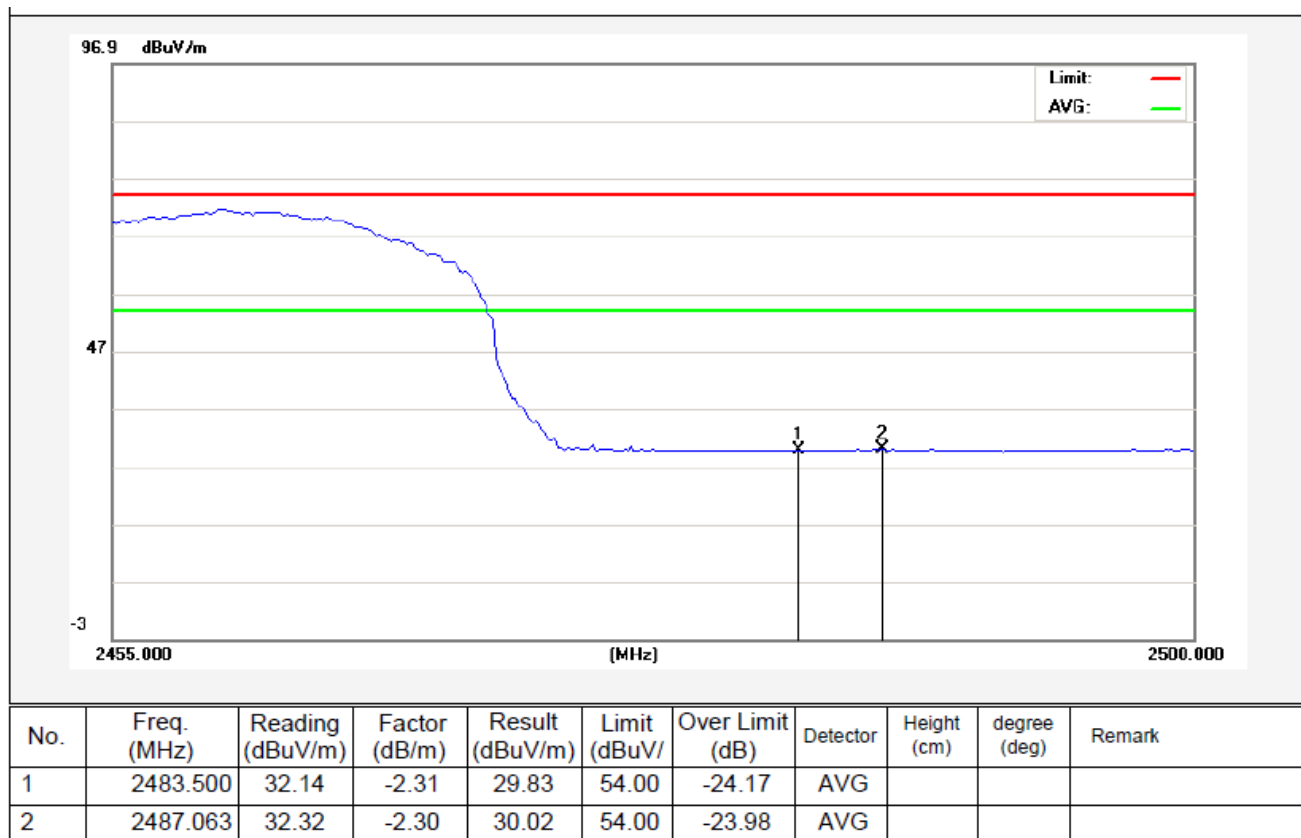


Test Mode: 802.11n (HT40)  
2462MHz  
Vertical-PEAK:

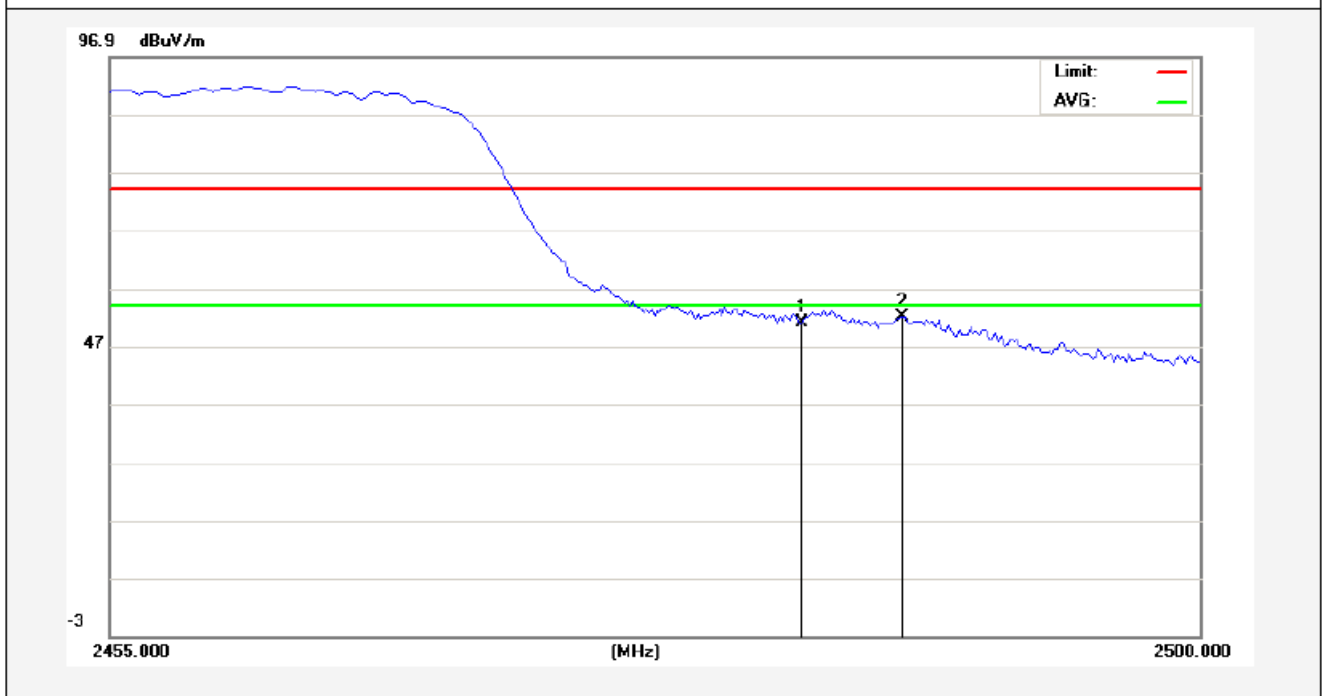

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 2483.500    | 53.37            | -2.31         | 51.06           | 74.00         | -22.94          | peak     |             |              |        |
| 2   | 2487.738    | 54.41            | -2.30         | 52.11           | 74.00         | -21.89          | peak     |             |              |        |

Vertical-AV:

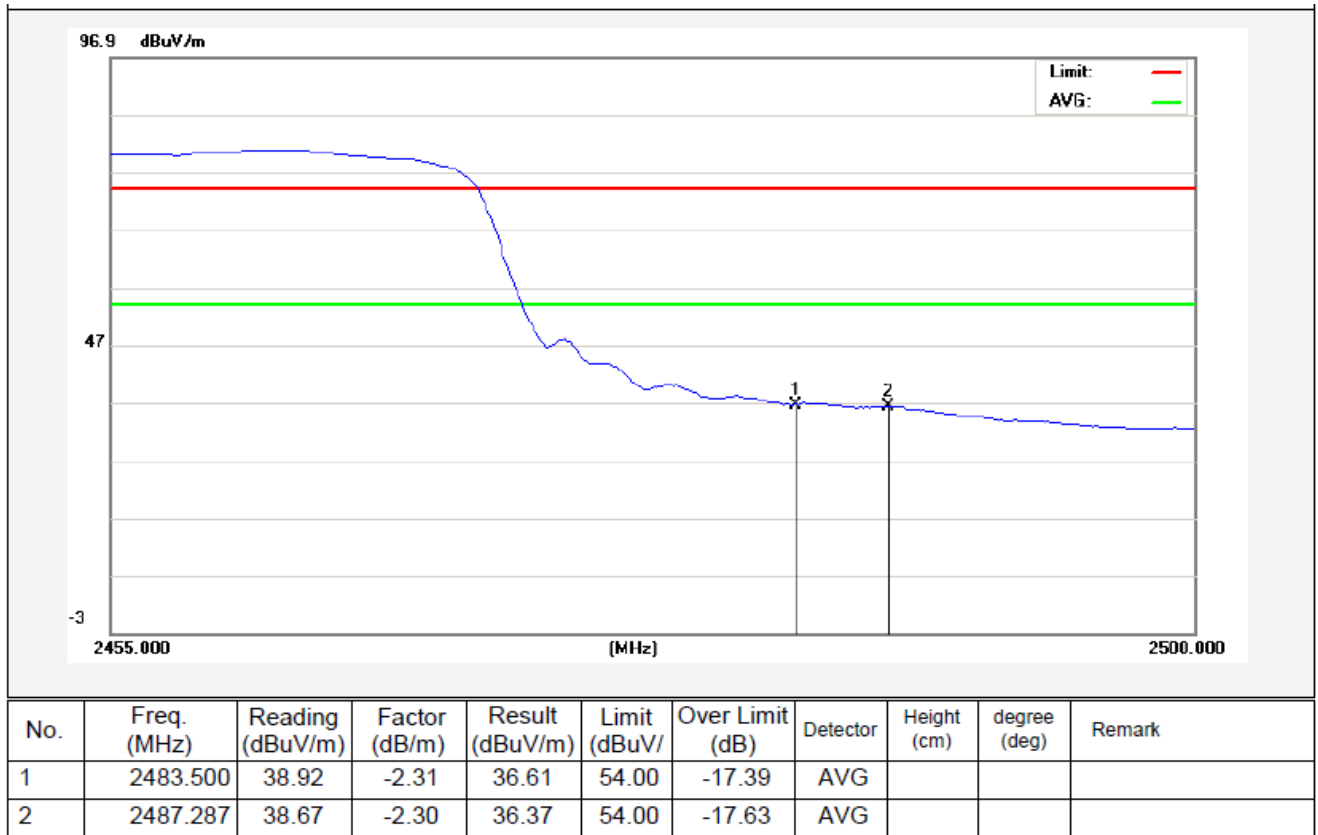

#### 4.5. Peak Power Spectral Density

##### **a. Limit**

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

##### **b. Test Procedure**

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5MHz, Sweep=500s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

##### **c. Test Equipment**

Same as the equipment listed in 4.2.

##### **d. Test Setup**

See 4.1

##### **e. Test Results**

Pass

##### **f. Test Data**

Please refer to the following data.

##### **g. Test Plot** See the following pages

Test mode: IEEE 802.11b

| Channel | Frequency<br>(MHz) | PPSD<br>(dBm/3KHz) | Σ PSD<br>(dBm/3KHz) | Limit<br>(dBm) | Result |
|---------|--------------------|--------------------|---------------------|----------------|--------|
| Low     | 2412               | -20.86             | -                   | 8.00           | Pass   |
| Mid     | 2437               | -22.01             | -                   |                | Pass   |
| High    | 2462               | -23.00             | -                   |                | Pass   |

Test mode: IEEE 802.11g

| Channel | Frequency<br>(MHz) | PPSD<br>(dBm) | Σ PSD<br>(dBm) | Limit<br>(dBm) | Result |
|---------|--------------------|---------------|----------------|----------------|--------|
| Low     | 2412               | -25.81        | -              | 8.00           | Pass   |
| Mid     | 2437               | -26.43        | -              |                | Pass   |
| High    | 2462               | -27.89        | -              |                | Pass   |


Test mode: IEEE 802.11n (HT20)

| Channel | Frequency<br>(MHz) | PPSD<br>(dBm/3KHz) | Σ PSD<br>(dBm/3KHz) | Limit<br>(dBm) | Result |
|---------|--------------------|--------------------|---------------------|----------------|--------|
| Low     | 2412               | -26.76             | -                   | 8.00           | Pass   |
| Mid     | 2437               | -27.32             | -                   |                | Pass   |
| High    | 2462               | -28.33             | -                   |                | Pass   |


Test mode: IEEE 802.11n (HT40)

| Channel | Frequency<br>(MHz) | PPSD<br>(dBm/3KHz) | Σ PSD<br>(dBm/3KHz) | Limit<br>(dBm) | Result |
|---------|--------------------|--------------------|---------------------|----------------|--------|
| Low     | 2422               | -28.32             | -                   | 8.00           | Pass   |
| Mid     | 2437               | -28.89             | -                   |                | Pass   |
| High    | 2452               | -29.47             | -                   |                | Pass   |


802.11 b CH--Low

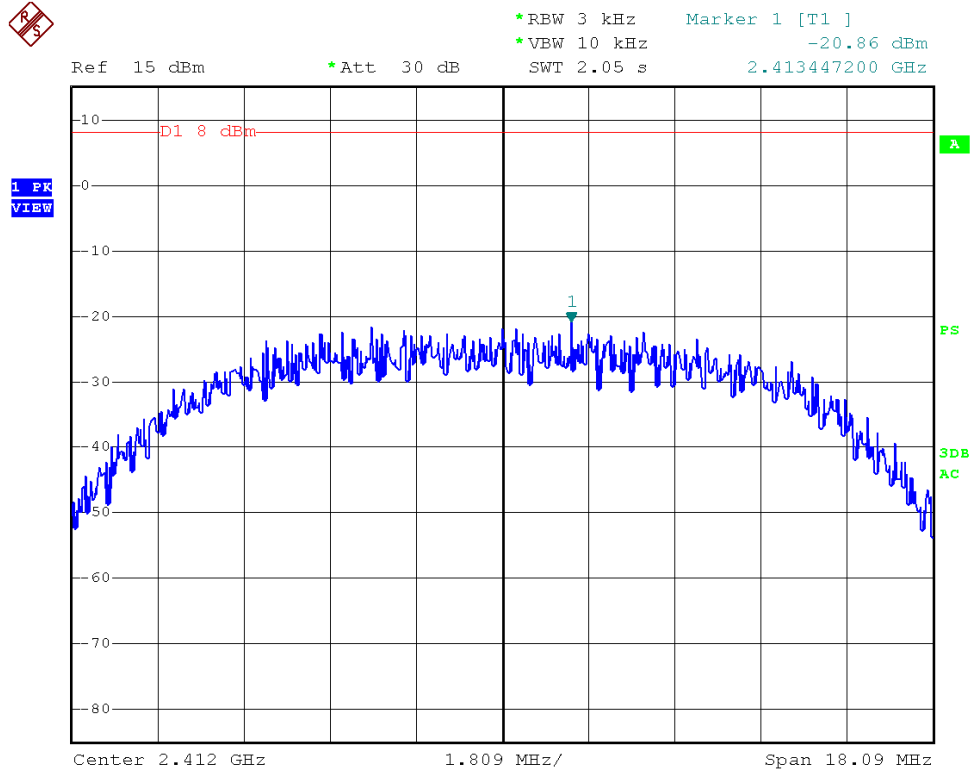


802.11 b CH--Mid

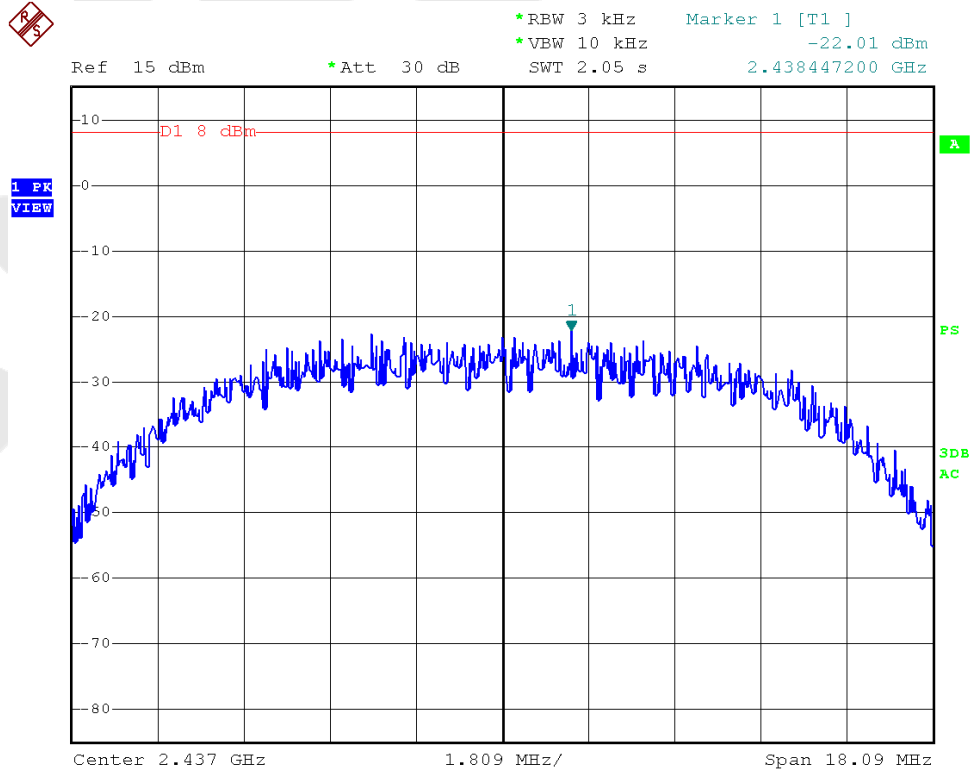

802.11 b CH--High

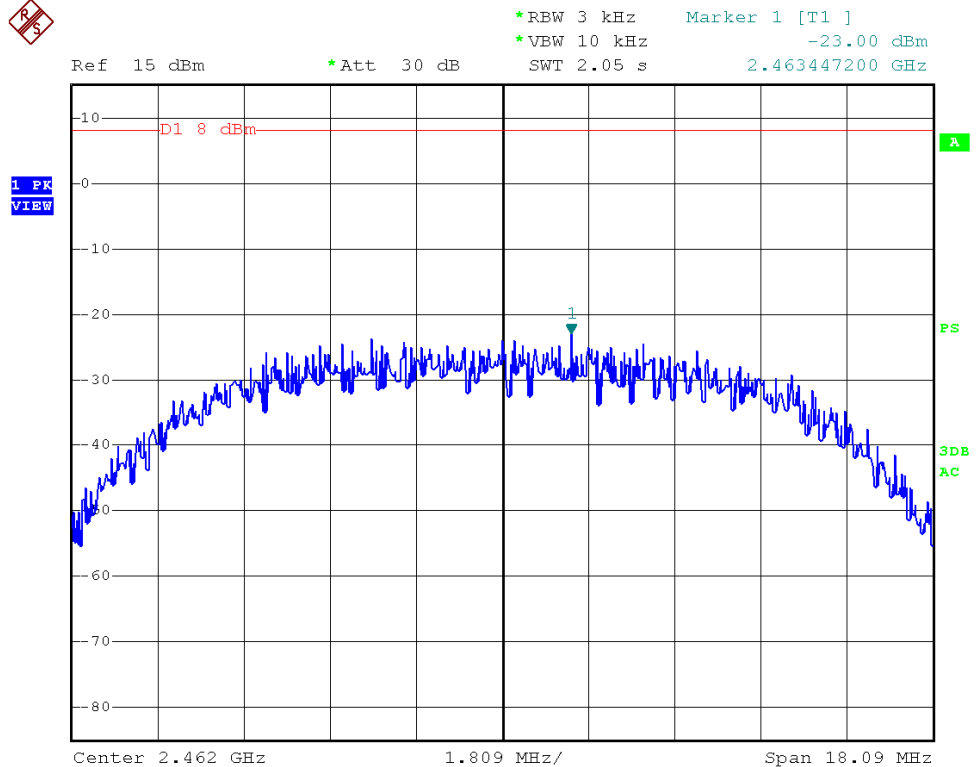


802.11g CH--Low

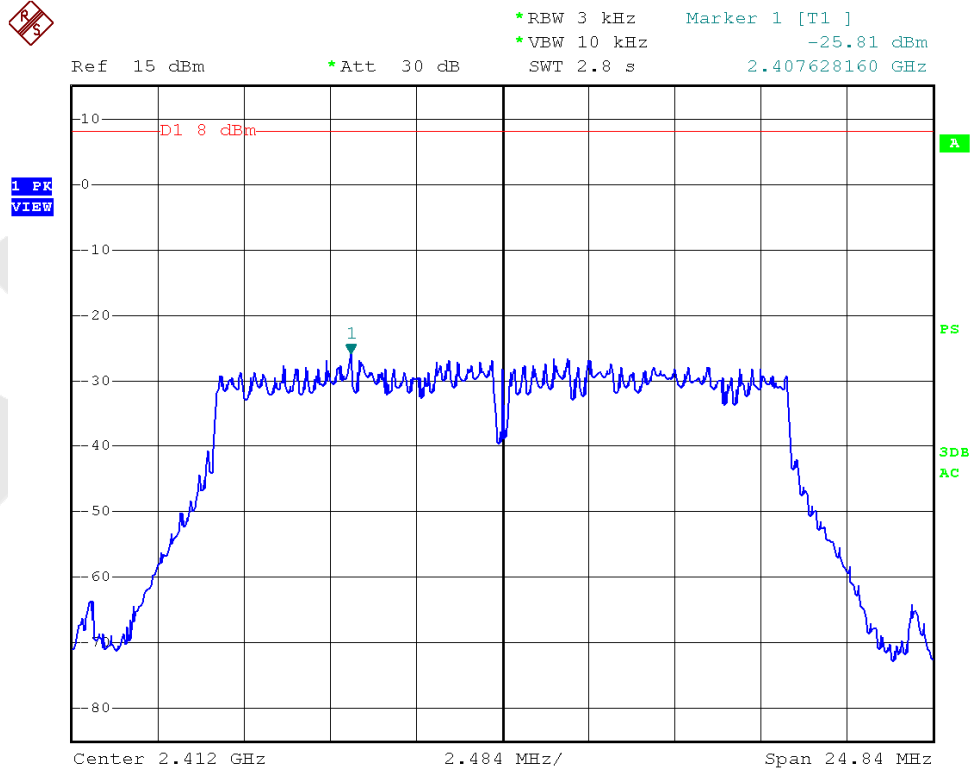


802.11g

CH--Mid

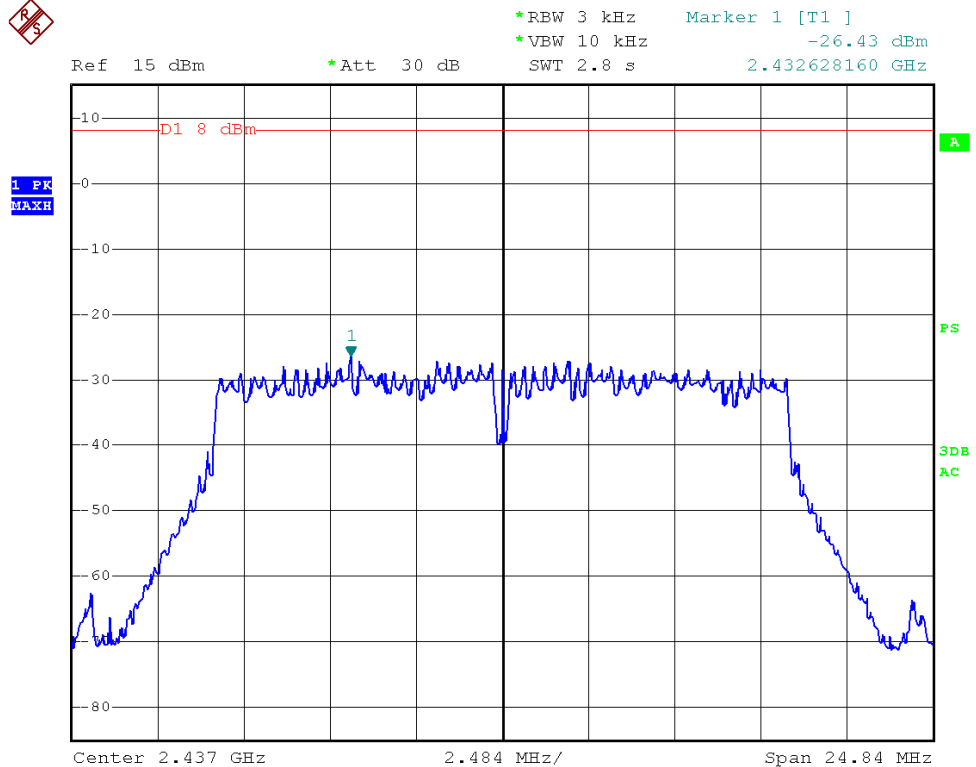


802.11g


CH--High

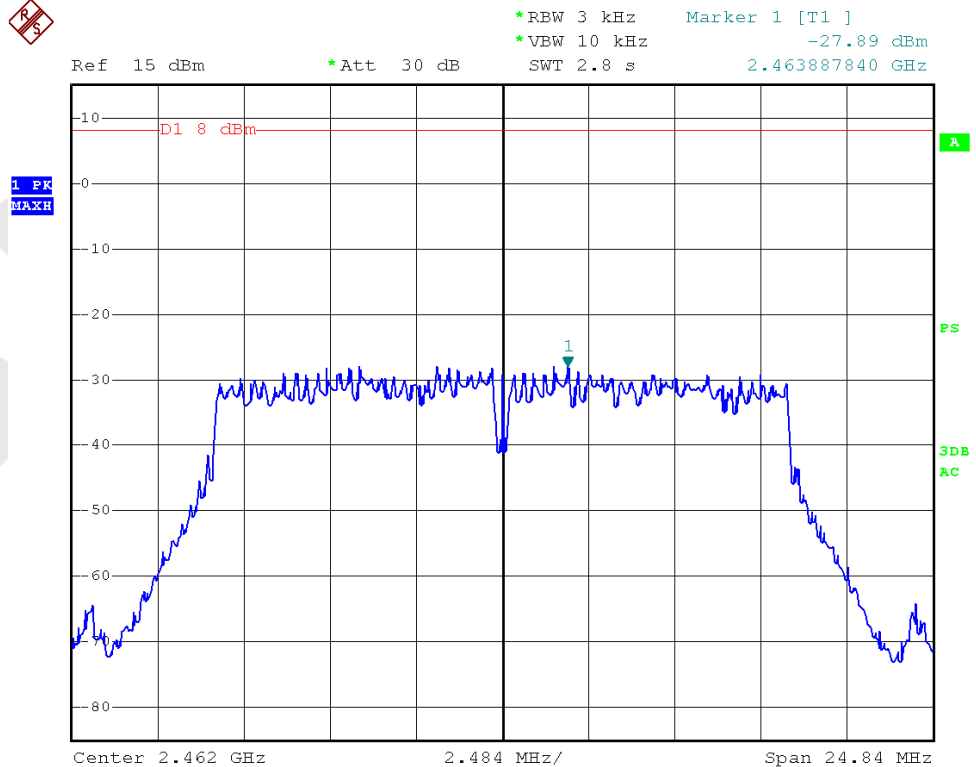


802.11n (HT20) CH—Low

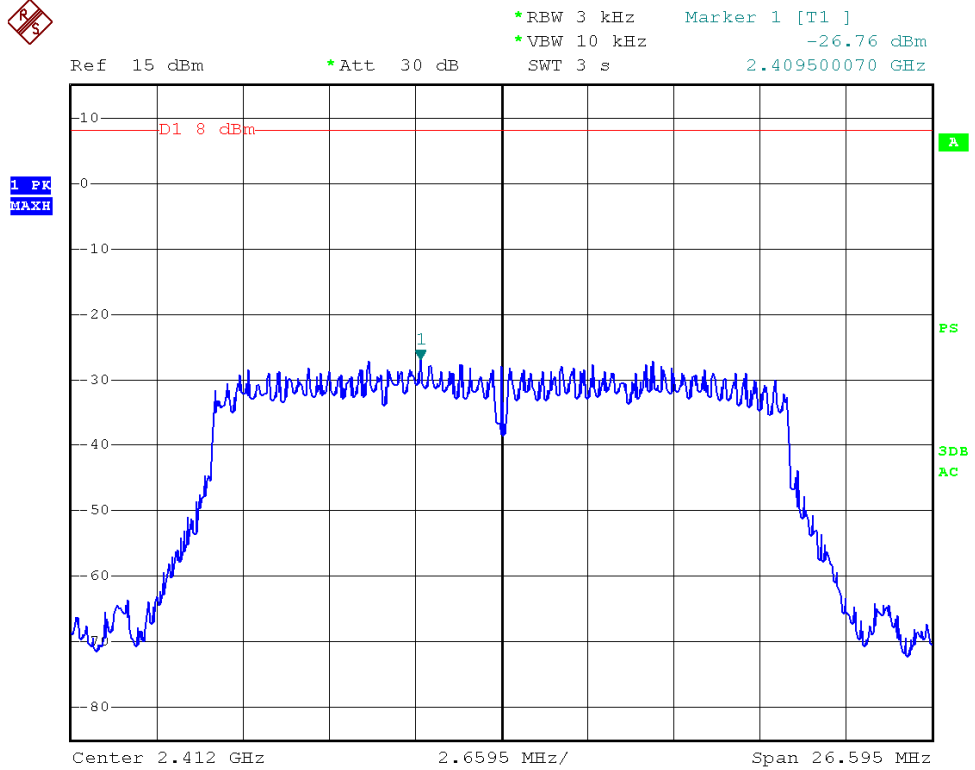


802.11n (HT20) CH—Mid

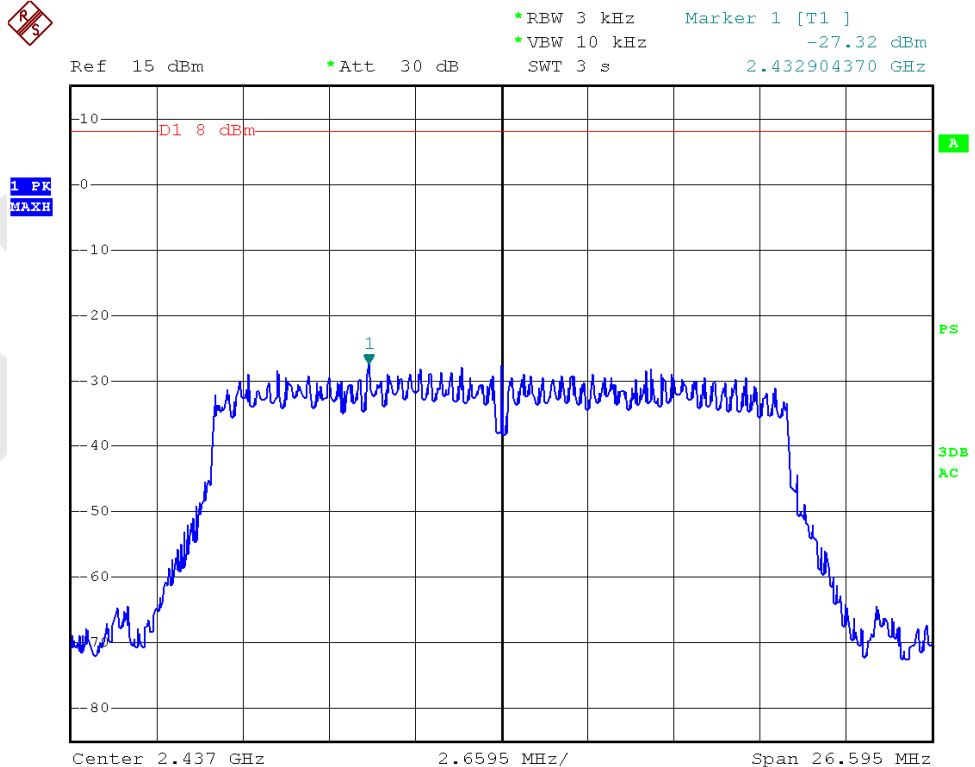


802.11n (HT20) CH—High

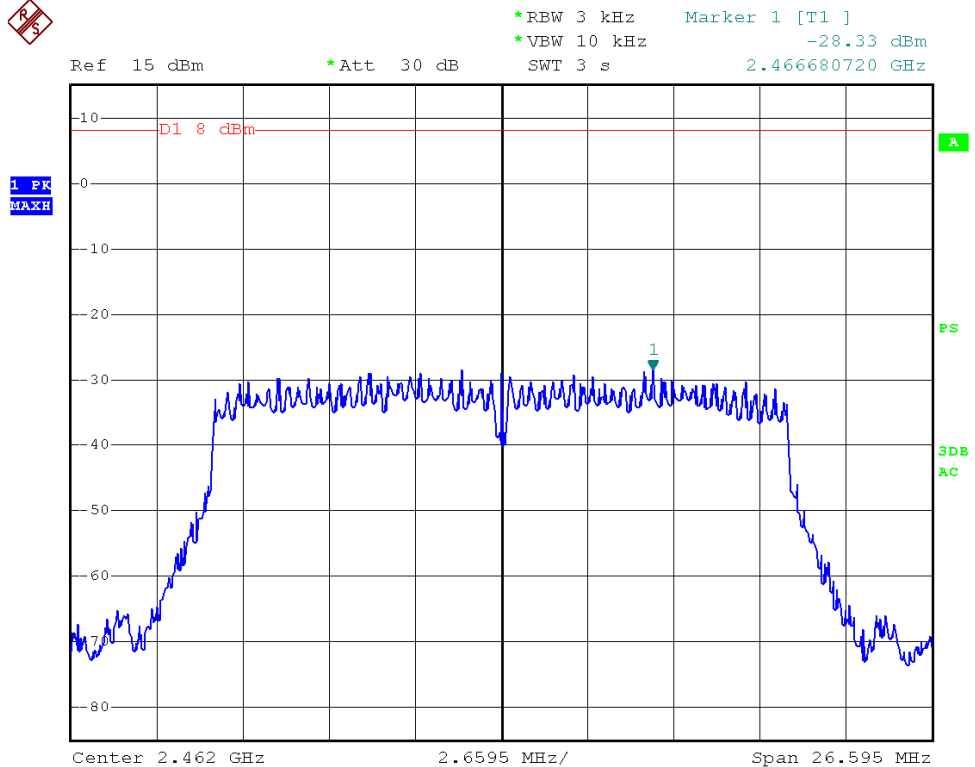


802.11n (HT40) CH—Low

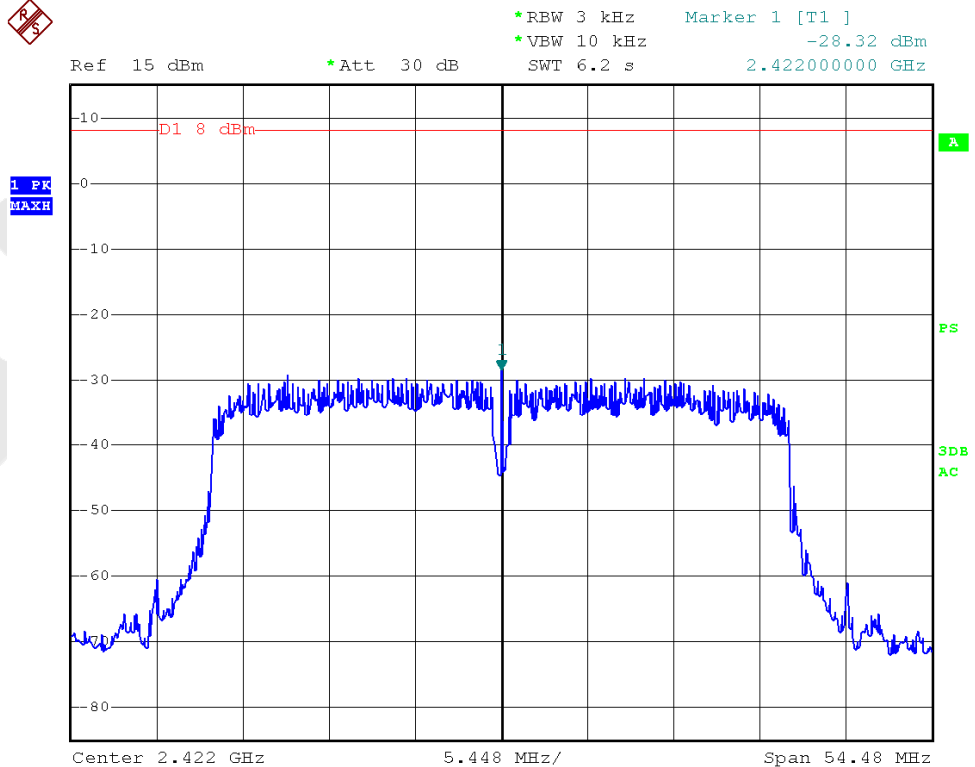

802.11n (HT40) CH—Mid

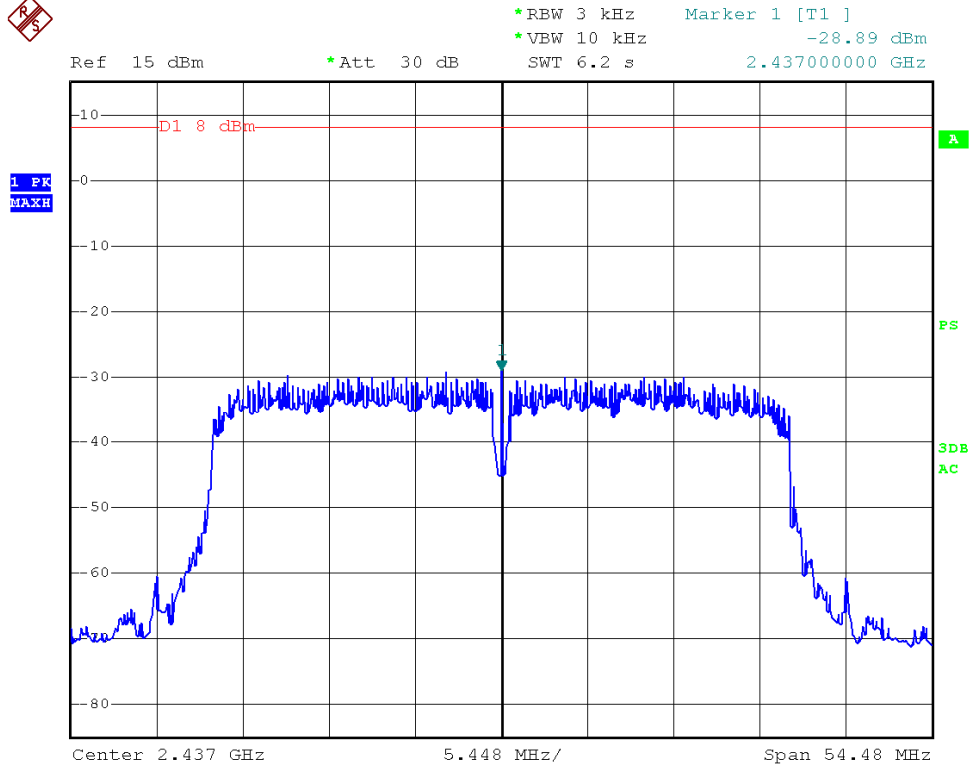

802.11n (HT40) CH—High

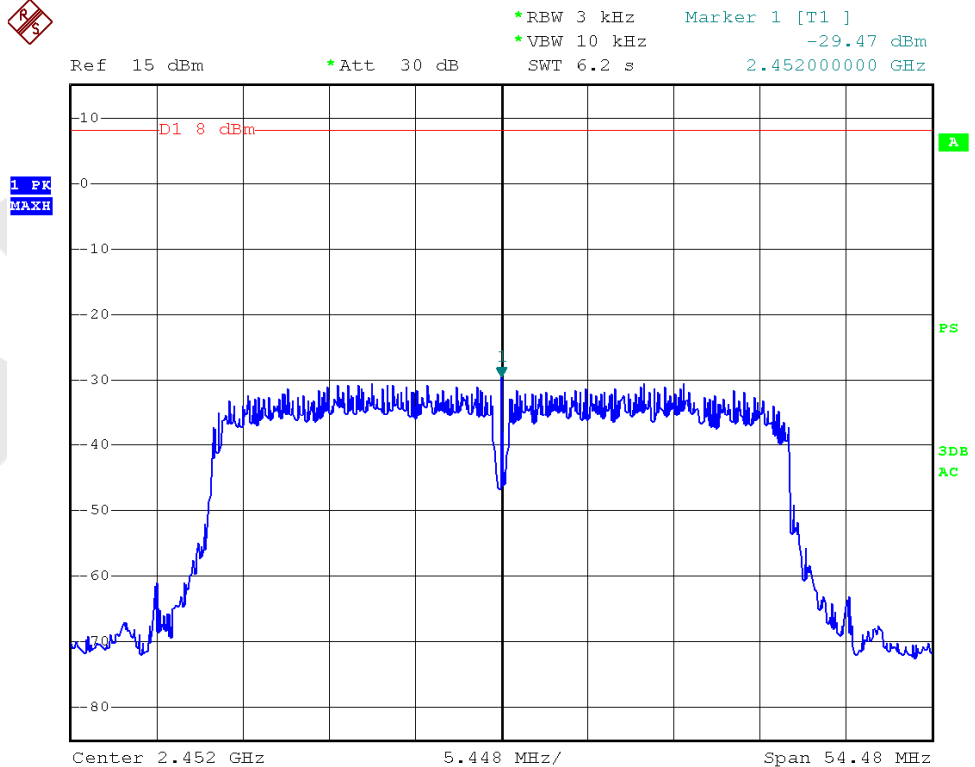

## 4.6. Radiated Emissions

### 4.6.1.1. Test Limits (< 30 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meter) |
|-----------------|-----------------------------------|------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                          |
| 0.490-1.705     | 24000/F(kHz)                      | 30                           |
| 1.705-30.0      | 30                                | 30                           |

### 4.6.1.2. Test Limits ( $\geq$ 30 MHz)

| FIELD STRENGTH of Fundamental:<br>@3M | FIELD STRENGTH of Harmonics | S15.209<br>30 - 88 MHz | 40 dBuV/m |
|---------------------------------------|-----------------------------|------------------------|-----------|
| 902-928 MHz                           |                             | 88 - 216 MHz           | 43.5      |
| 2.4-2.4835 GHz                        |                             | 216 - 960 MHz          | 46        |
| 94 dBuV/m @3m                         | 54 dBuV/m @3m               | ABOVE 960 MHz          | 54dBuV/m  |


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test Equipment


| Item | Equipment                  | Manufacturer            | Model No. | Serial No.    | Last Cal.     | Cal. Interval |
|------|----------------------------|-------------------------|-----------|---------------|---------------|---------------|
| 1.   | Preamplifier               | Instruments corporation | EMC011830 | 980100        | Aug. 09, 2013 | 1 Year        |
| 2.   | EMI Test Receiver          | Rohde & Schwarz         | ESPI      | 101604        | Apr. 23, 2013 | 1 Year        |
| 3.   | Double Ridged Horn Antenna | Instruments corporation | GTH-0118  | 351600        | Aug. 09, 2013 | 3 Year        |
| 4.   | Bilog Broadband Antenna    | Schwarzbeck             | VULB9163  | VULB 9163-289 | Apr. 23, 2013 | 3 Year        |
| 5.   | Pre-amplifier              | SONOMA                  | 310N      | 186860        | Apr. 23, 2013 | 1 Year        |
| 6.   | EMI Test Software EZ-EMC   | SHURPLE                 | N/A       | N/A           | N/A           | N/A           |

#### 4.6.2. Test Configuration:


##### 4.6.2.1. 9k to 30MHz emissions:

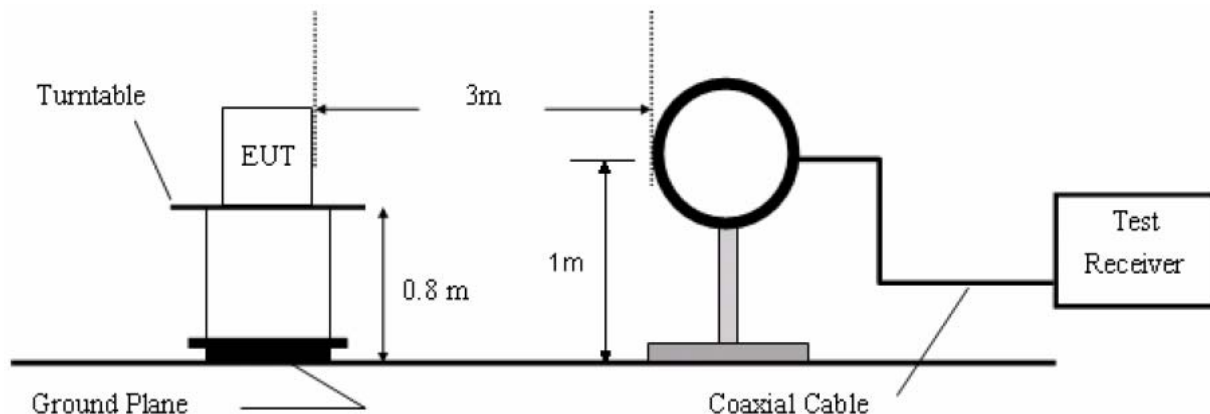

##### 4.6.2.2. 30M to 1G emissions:

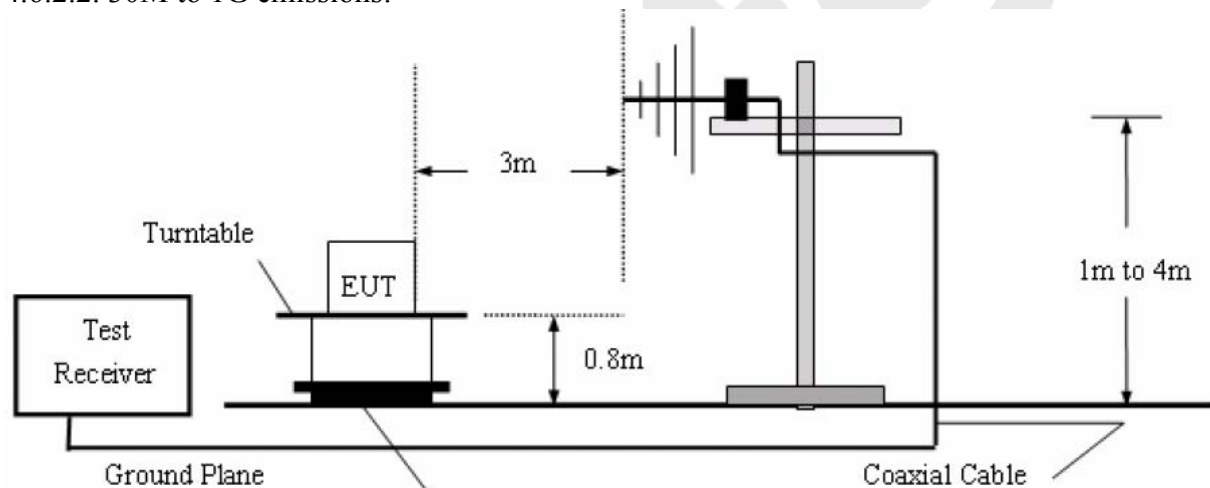

##### 4.6.2.3. 1G to 40G emissions:

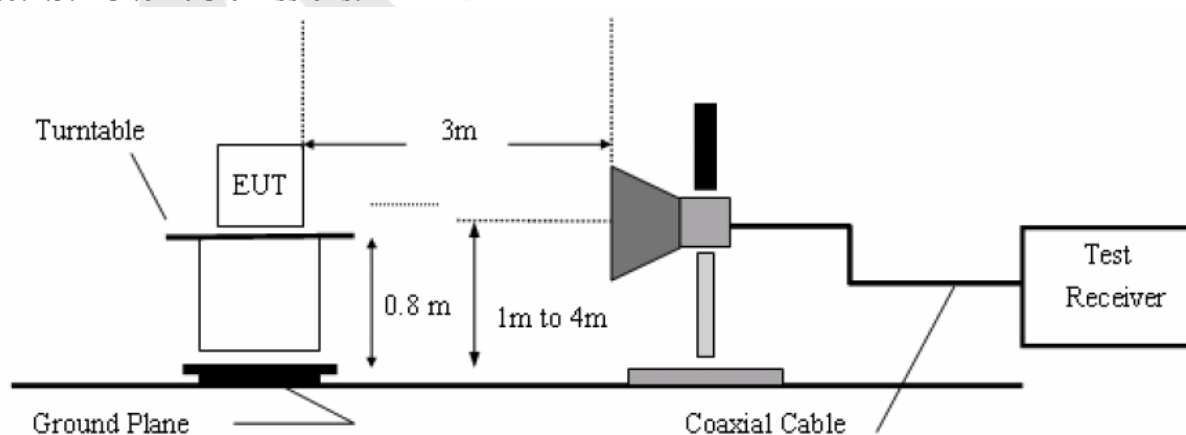

#### 4.6.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz.


The EUT is tested in 9\*6\*6 Chamber.

The test results are listed in Section 4.6.4.

#### 4.6.4. Test Results


The EUT was tested on (Charging to adapter, Communication, Camera Mode, WIFI Mode) modes, only the worst data of (WIFI Mode) are attached in the following pages.

|            |                      |                     |               |
|------------|----------------------|---------------------|---------------|
| Job No.:   | AT1404681F           | Polarization:       | Horizontal    |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | DC 5V         |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.3(C)/55%RH |
| Test Mode: | WIFI Mode            | Distance:           | 3m            |

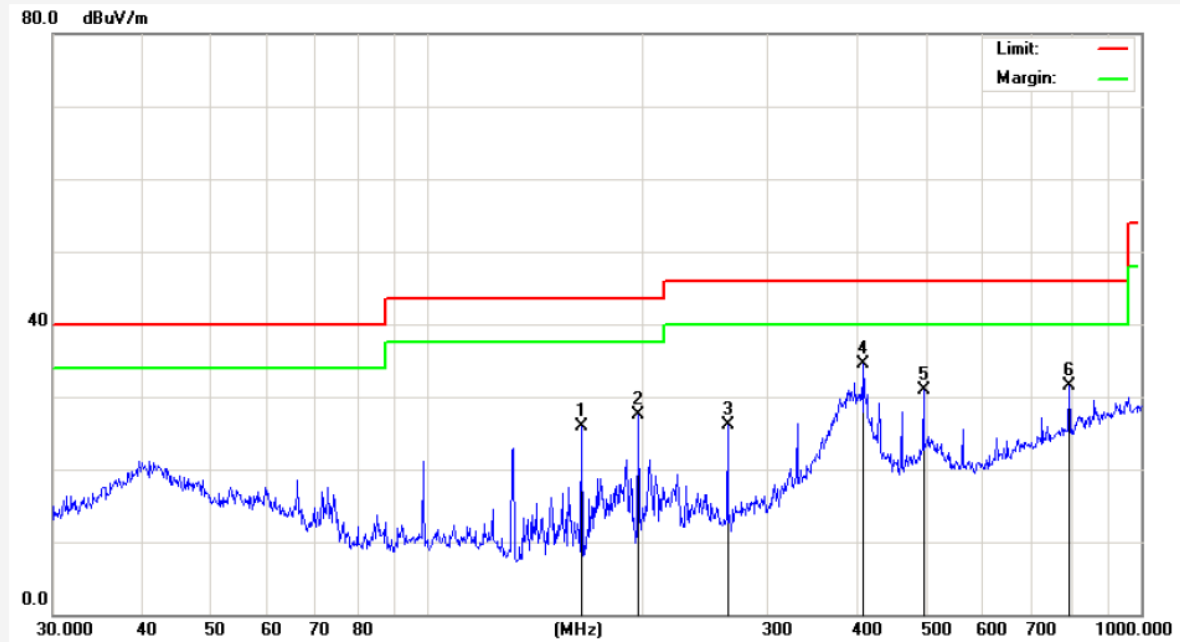


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 164.9075    | 48.60            | -22.71        | 25.89           | 43.50         | -17.61          | peak     |             |              |        |
| 2   | 197.8928    | 48.37            | -20.88        | 27.49           | 43.50         | -16.01          | peak     |             |              |        |
| 3   | 263.8190    | 44.85            | -18.84        | 26.01           | 46.00         | -19.99          | peak     |             |              |        |
| 4   | 408.9460    | 47.22            | -12.65        | 34.57           | 46.00         | -11.43          | peak     |             |              |        |
| 5   | 495.9344    | 41.94            | -11.06        | 30.88           | 46.00         | -15.12          | peak     |             |              |        |
| 6   | 793.3960    | 38.23            | -6.65         | 31.58           | 46.00         | -14.42          | peak     |             |              |        |

|                   |                             |                            |                      |
|-------------------|-----------------------------|----------------------------|----------------------|
| <b>Job No.:</b>   | <b>AT1404681F</b>           | <b>Polarization:</b>       | <b>Vertical</b>      |
| <b>Standard:</b>  | <b>(RE)FCC PART15 C _3m</b> | <b>Power Source:</b>       | <b>DC 5V</b>         |
| <b>Test item:</b> | <b>Radiation Test</b>       | <b>Temp.(C)/Hum.(%RH):</b> | <b>24.3(C)/55%RH</b> |
| <b>Test Mode:</b> | <b>WIFI Mode</b>            | <b>Distance:</b>           | <b>3m</b>            |

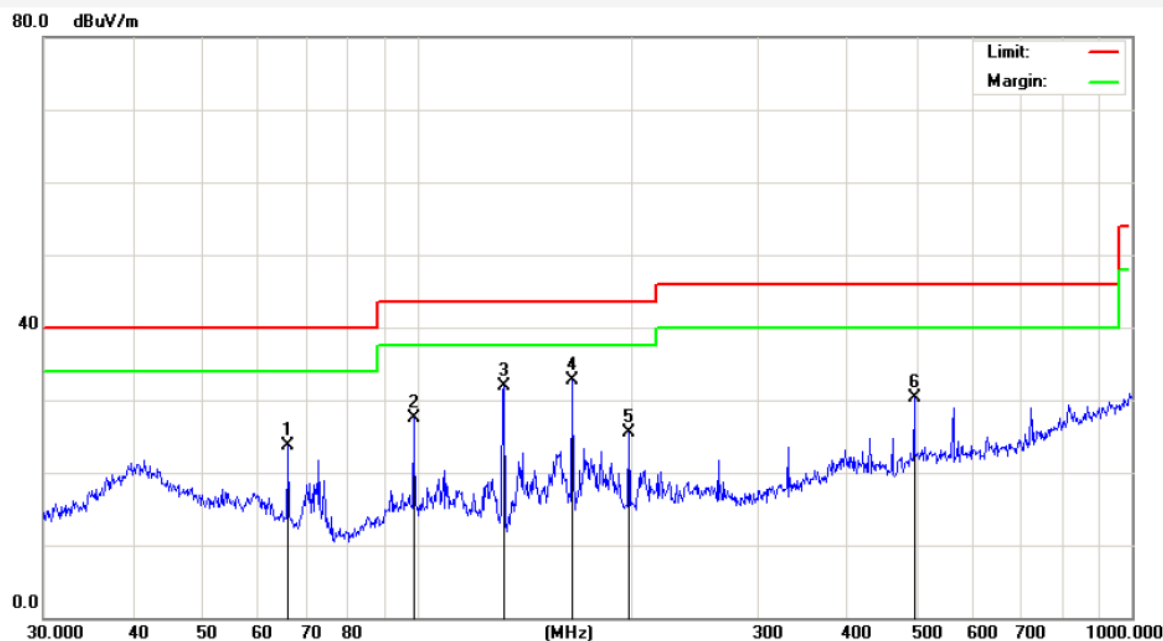


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 66.0341     | 41.61            | -17.92        | 23.69           | 40.00         | -16.31          | peak     |             |              |        |
| 2   | 98.8324     | 43.33            | -15.82        | 27.51           | 43.50         | -15.99          | peak     |             |              |        |
| 3   | 132.2205    | 49.77            | -17.96        | 31.81           | 43.50         | -11.69          | peak     |             |              |        |
| 4   | 164.9074    | 50.33            | -17.71        | 32.62           | 43.50         | -10.88          | peak     |             |              |        |
| 5   | 197.8926    | 41.45            | -15.88        | 25.57           | 43.50         | -17.93          | peak     |             |              |        |
| 6   | 495.9343    | 41.44            | -11.06        | 30.38           | 46.00         | -15.62          | peak     |             |              |        |

|                   |                             |                            |                      |
|-------------------|-----------------------------|----------------------------|----------------------|
| <b>Job No.:</b>   | <b>AT1404681F</b>           | <b>Polarization:</b>       | <b>Horizontal</b>    |
| <b>Standard:</b>  | <b>(RE)FCC PART15 C _3m</b> | <b>Power Source:</b>       | <b>DC 5V</b>         |
| <b>Test item:</b> | <b>Radiation Test</b>       | <b>Temp.(C)/Hum.(%RH):</b> | <b>24.3(C)/55%RH</b> |
| <b>Note:</b>      | <b>802.11b(2412MHz)</b>     | <b>Distance:</b>           | <b>3m</b>            |

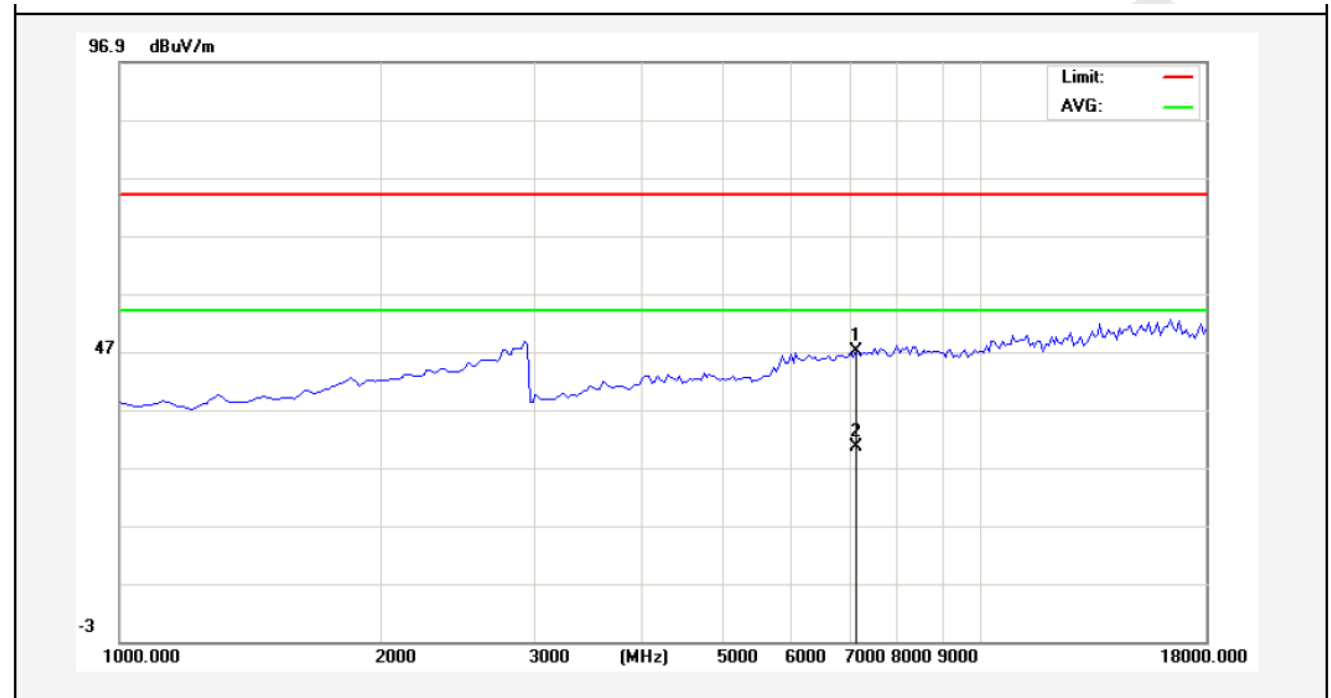


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 7120.000    | 38.76            | 8.33          | 47.09           | 74.00         | -26.91          | peak     |             |              |        |
| 2   | 7120.000    | 22.21            | 8.33          | 30.54           | 54.00         | -23.46          | AVG      |             |              |        |

|                   |                             |                            |                      |
|-------------------|-----------------------------|----------------------------|----------------------|
| <b>Job No.:</b>   | <b>AT1404681F</b>           | <b>Polarization:</b>       | <b>Vertical</b>      |
| <b>Standard:</b>  | <b>(RE)FCC PART15 C _3m</b> | <b>Power Source:</b>       | <b>DC 5V</b>         |
| <b>Test item:</b> | <b>Radiation Test</b>       | <b>Temp.(C)/Hum.(%RH):</b> | <b>24.3(C)/55%RH</b> |
| <b>Note:</b>      | <b>802.11b(2412MHz)</b>     | <b>Distance:</b>           | <b>3m</b>            |

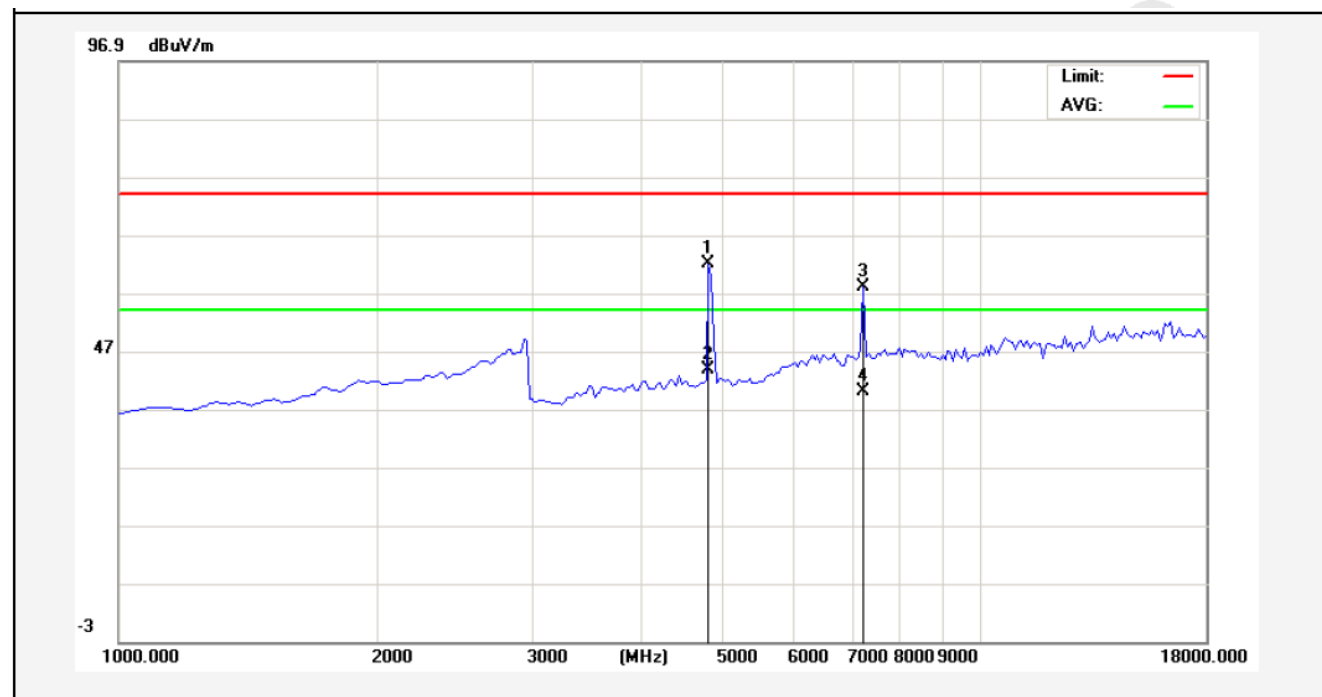


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 4825.000    | 58.77            | 3.34          | 62.11           | 74.00         | -11.89          | peak     |             |              |        |
| 2   | 4825.000    | 40.55            | 3.34          | 43.89           | 54.00         | -10.11          | AVG      |             |              |        |
| 3   | 7247.500    | 49.56            | 8.48          | 58.04           | 74.00         | -15.96          | peak     |             |              |        |
| 4   | 7247.500    | 31.47            | 8.48          | 39.95           | 54.00         | -14.05          | AVG      |             |              |        |

|                   |                             |                            |                      |
|-------------------|-----------------------------|----------------------------|----------------------|
| <b>Job No.:</b>   | <b>AT1404681F</b>           | <b>Polarization:</b>       | <b>Horizontal</b>    |
| <b>Standard:</b>  | <b>(RE)FCC PART15 C _3m</b> | <b>Power Source:</b>       | <b>DC 5V</b>         |
| <b>Test item:</b> | <b>Radiation Test</b>       | <b>Temp.(C)/Hum.(%RH):</b> | <b>24.3(C)/55%RH</b> |
| <b>Note:</b>      | <b>802.11b(2437MHz)</b>     | <b>Distance:</b>           | <b>3m</b>            |

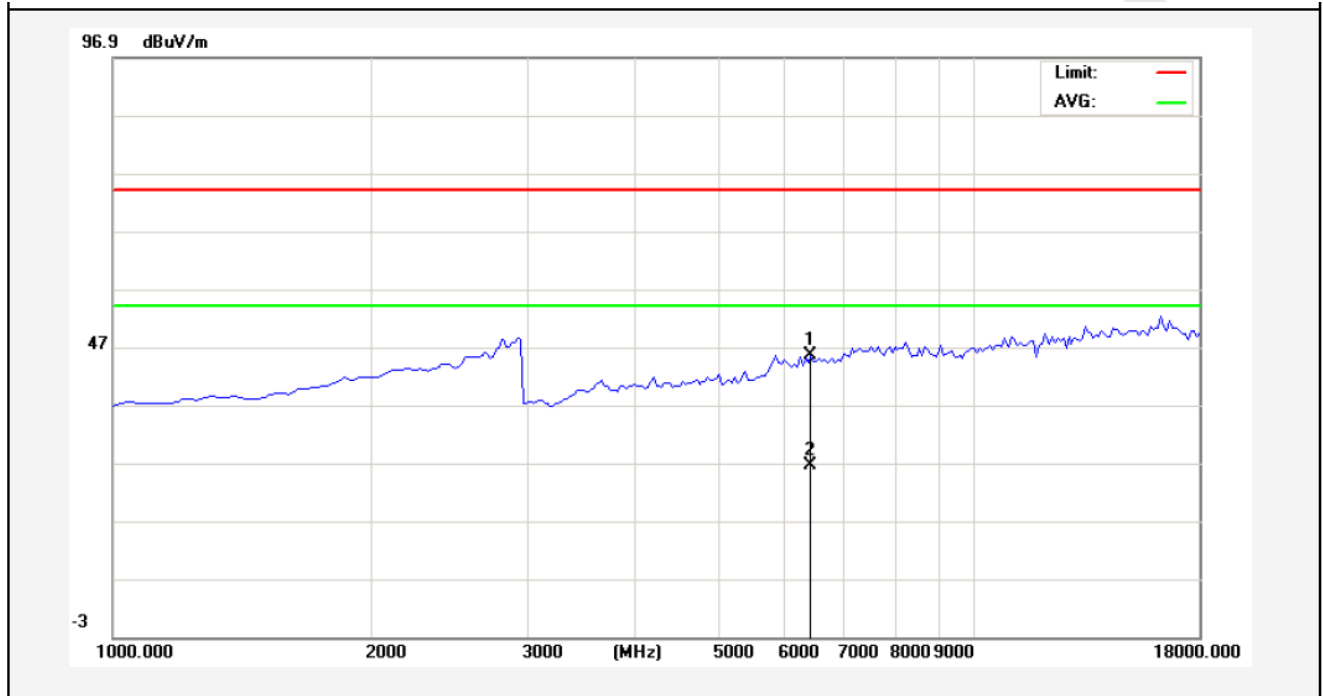


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 6440.000    | 38.04            | 7.54          | 45.58           | 74.00         | -28.42          | peak     |             |              |        |
| 2   | 6440.000    | 18.91            | 7.54          | 26.45           | 54.00         | -27.55          | AVG      |             |              |        |

|                   |                             |                            |                       |
|-------------------|-----------------------------|----------------------------|-----------------------|
| <b>Job No.:</b>   | <b>AT1404681F</b>           | <b>Polarization:</b>       | <b>Vertical</b>       |
| <b>Standard:</b>  | <b>(RE)FCC PART15 C _3m</b> | <b>Power Source:</b>       | <b>DC 5V</b>          |
| <b>Test item:</b> | <b>Radiation Test</b>       | <b>Temp.(C)/Hum.(%RH):</b> | <b>24.3(C)/55 %RH</b> |
| <b>Note:</b>      | <b>802.11b(2437MHz)</b>     | <b>Distance:</b>           | <b>3m</b>             |

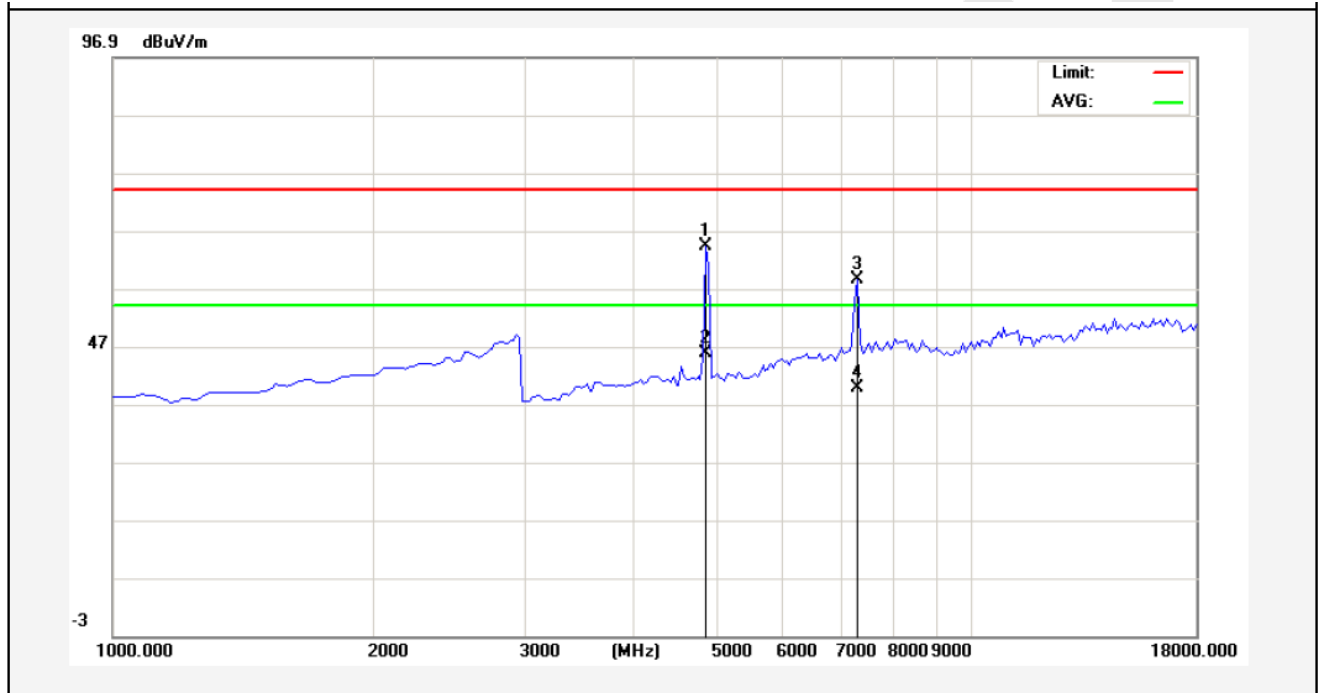


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 4867.500    | 60.96            | 3.41          | 64.37           | 74.00         | -9.63           | peak     |             |              |        |
| 2   | 4867.500    | 42.37            | 3.41          | 45.78           | 54.00         | -8.22           | AVG      |             |              |        |
| 3   | 7332.500    | 49.87            | 8.58          | 58.45           | 74.00         | -15.55          | peak     |             |              |        |
| 4   | 7332.500    | 31.31            | 8.58          | 39.89           | 54.00         | -14.11          | AVG      |             |              |        |

|            |                      |                     |               |
|------------|----------------------|---------------------|---------------|
| Job No.:   | AT1404681F           | Polarization:       | Horizontal    |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | DC 5V         |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.3(C)/55%RH |
| Note:      | 802.11b(2462MHz)     | Distance:           | 3m            |

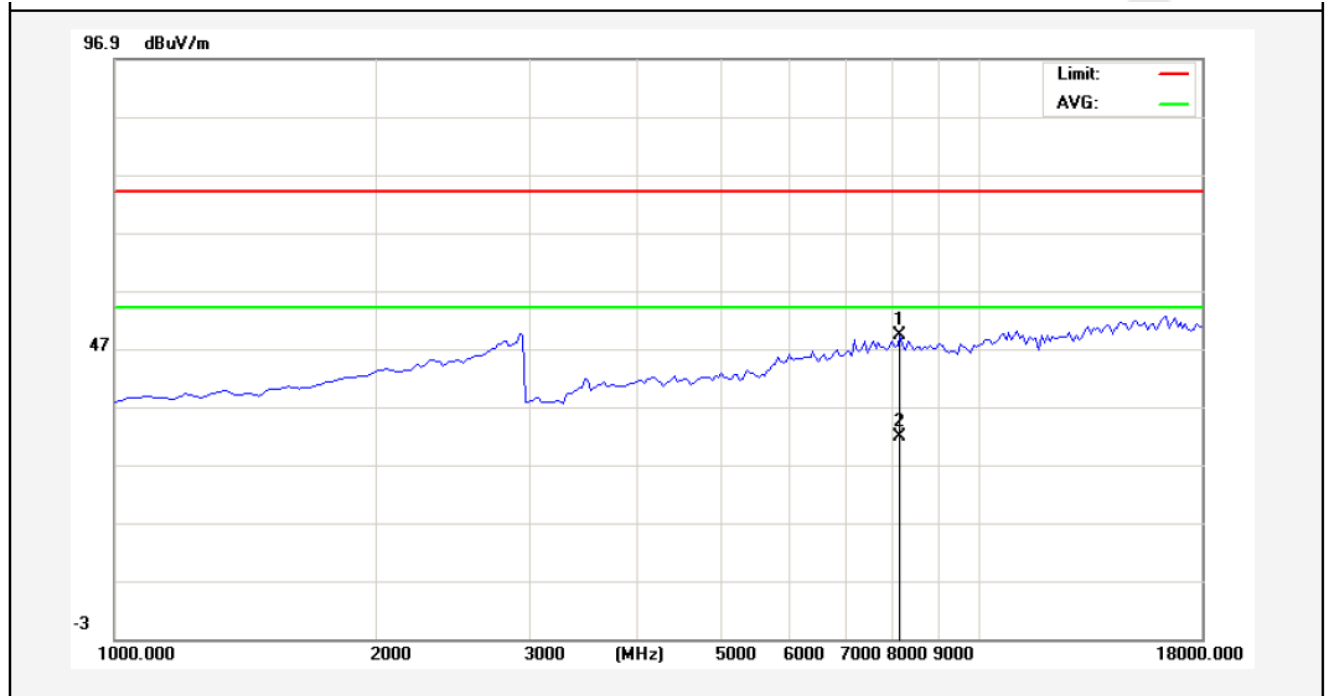

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 8097.500    | 39.53            | 9.66          | 49.19           | 74.00         | -24.81          | peak     |             |              |        |
| 2   | 8097.500    | 22.00            | 9.66          | 31.66           | 54.00         | -22.34          | AVG      |             |              |        |

|            |                      |                     |               |
|------------|----------------------|---------------------|---------------|
| Job No.:   | AT1404681F           | Polarization:       | Vertical      |
| Standard:  | (RE)FCC PART15 C _3m | Power Source:       | DC 5V         |
| Test item: | Radiation Test       | Temp.(C)/Hum.(%RH): | 24.3(C)/55%RH |
| Note:      | 802.11b(2462MHz)     | Distance:           | 3m            |

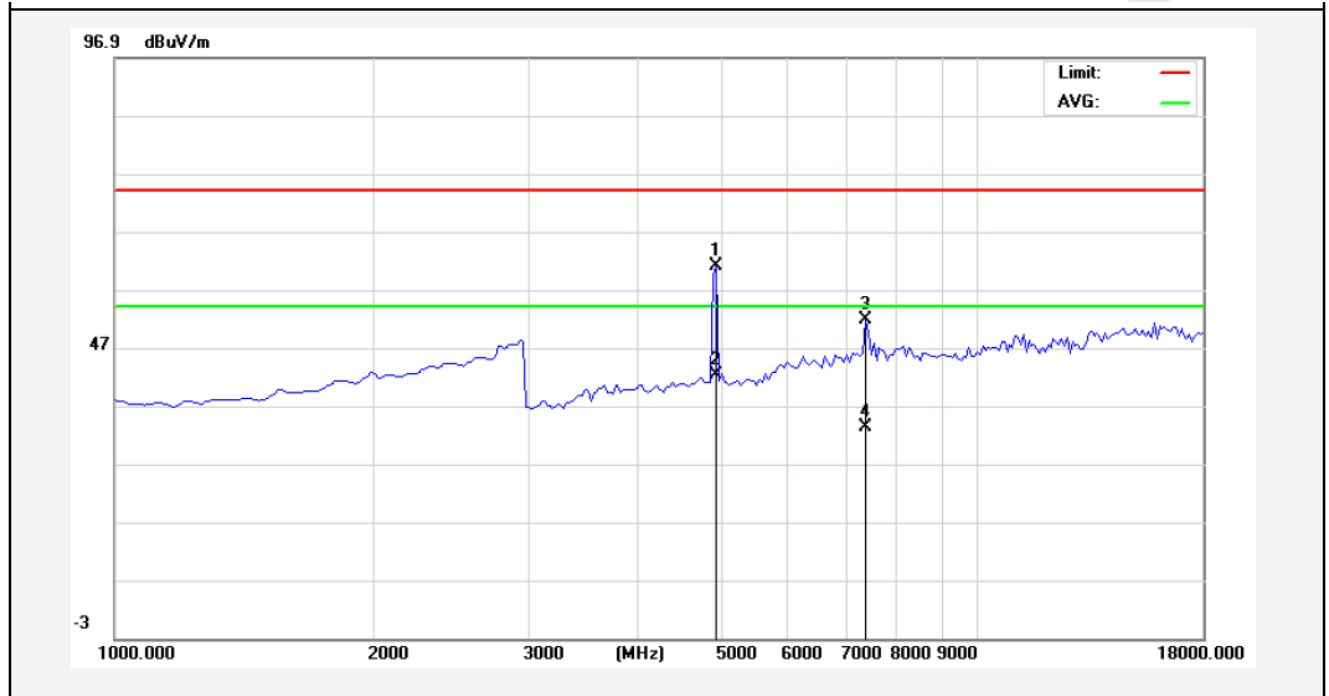


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1   | 4952.500    | 57.39            | 3.57          | 60.96           | 74.00         | -13.04          | peak     |             |              |        |
| 2   | 4952.500    | 38.78            | 3.57          | 42.35           | 54.00         | -11.65          | AVG      |             |              |        |
| 3   | 7375.000    | 43.24            | 8.63          | 51.87           | 74.00         | -22.13          | peak     |             |              |        |
| 4   | 7375.000    | 24.55            | 8.63          | 33.18           | 54.00         | -20.82          | AVG      |             |              |        |

## 5. PHOTOGRAPH

### 5.1. Photo of Conducted Emission Measurement



## 5.2. Photo of Radiation Emission Test

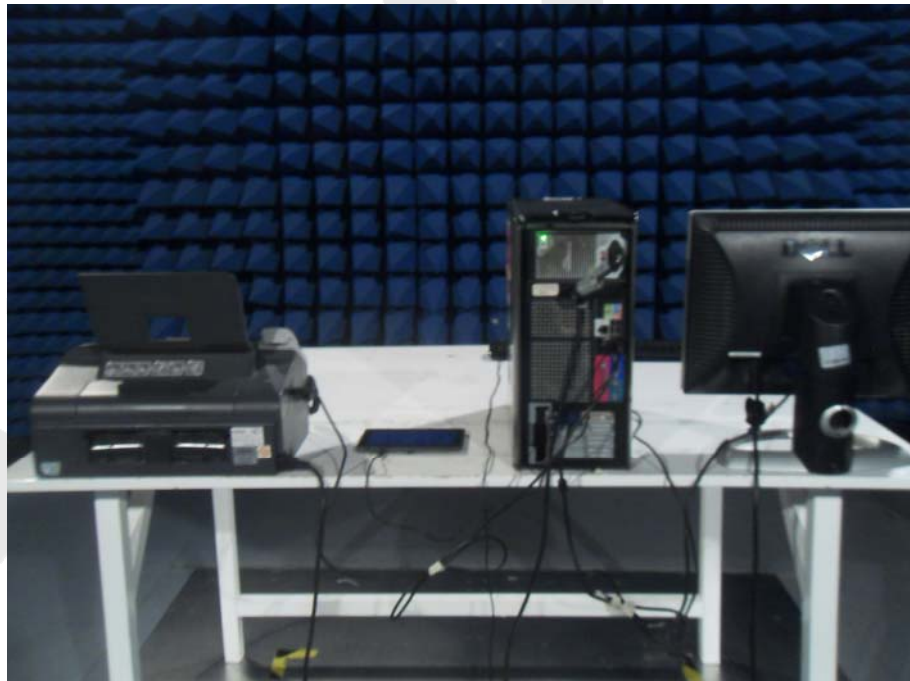

## APPENDIX I (EXTERNAL PHOTOS)

Figure 1  
The EUT-Overall View



Figure 2  
The EUT- Front View



Figure 3  
The EUT- Back View



Figure 4  
The EUT- Side View



Figure 5  
The EUT- Side View



## APPENDIX II (INTERNAL PHOTOS)

Figure 6  
The EUT-Inside View



Figure 7  
PCB of the EUT-Front View

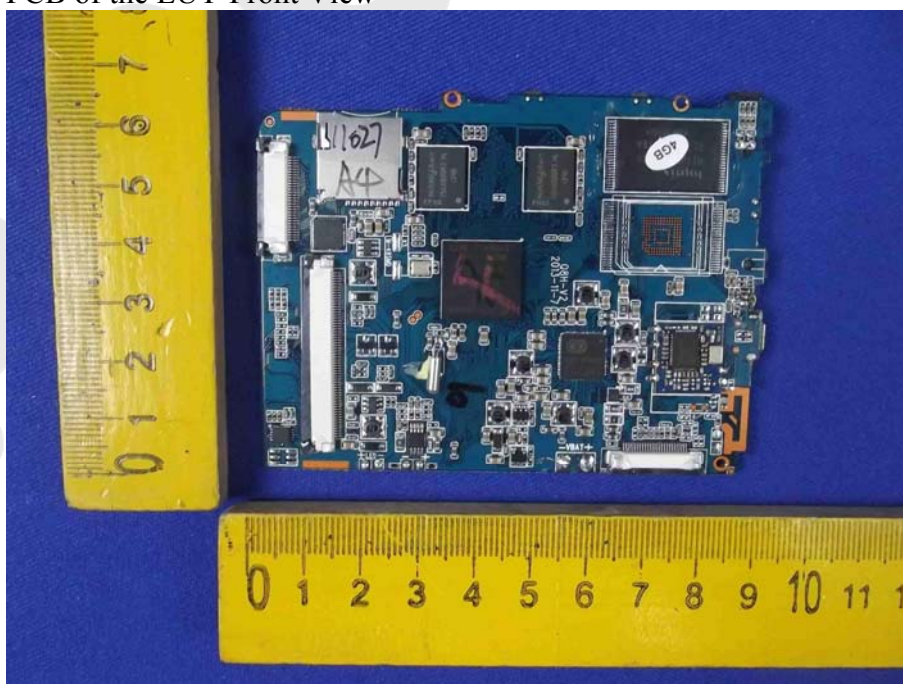


Figure 8  
PCB of the EUT-Back View

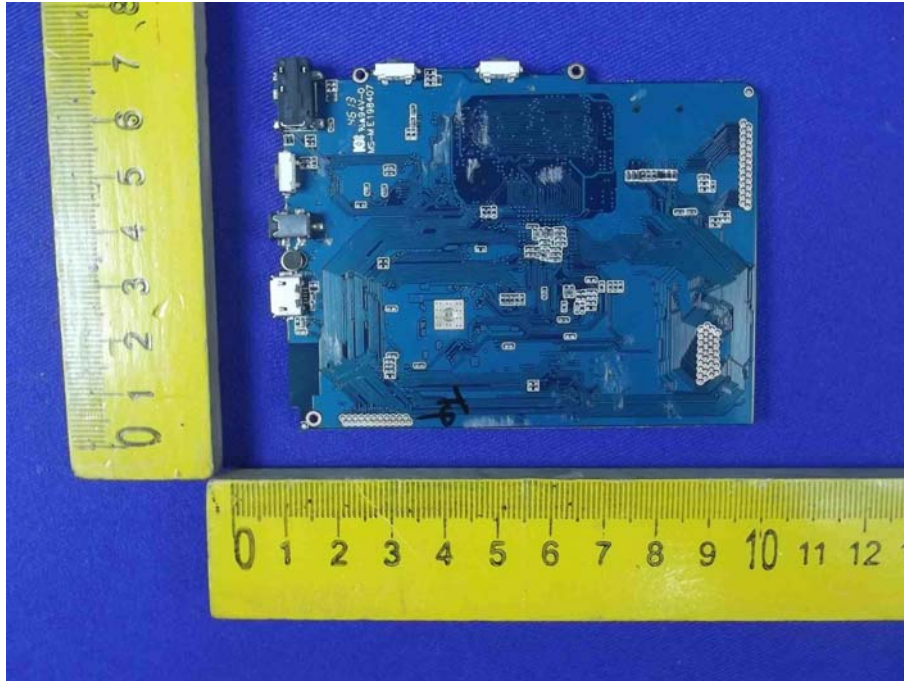


Figure 9  
PCB of the EUT-Front View

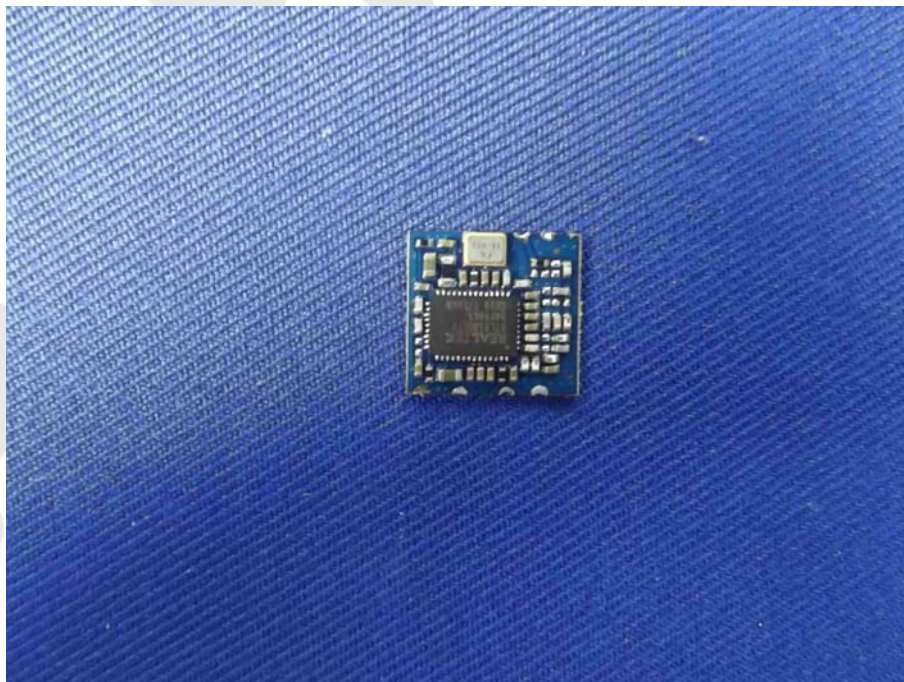


Figure 10  
PCB of the EUT-Back View

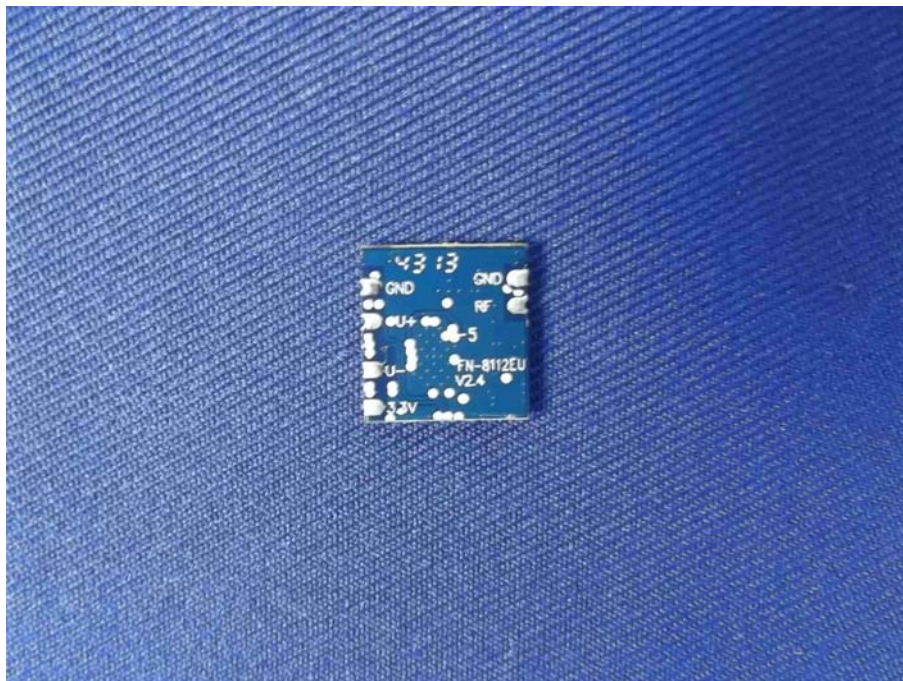


Figure 11  
Photo of Antenna Location

