

TEST REPORT

Reference No. : WTS16S0858734-2E
FCC ID..... : 2AB9WW01
Applicant..... : XYZprinting, Inc.
Address : 10F., No.99, Sec. 5, Nanjing E. Rd., Songshan Dist., Taipei City
10571, Taiwan (R.O.C.)
Manufacturer : Kinpo Electronics(China)Co,Ltd.
Address : Sha-Tou Control District, Changan Town, Dongguan City,
Guangdong,China
Product Name : Wheeled Robot
Model No. : W-01
Brand..... : XYZrobot
Standards..... : FCC CFR47 Part 15 C Section 15.247:2015
Date of Receipt sample..... : Aug. 19, 2016
Date of Test..... : Aug. 20 – Sep. 06, 2016
Date of Issue : Sep. 14, 2016
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:

Approved by:



Zero Zhou / Test Engineer



Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 CHANNEL LIST	4
4.4 WI-FI TEST MODE	5
4.5 TEST FACILITY	5
5 EQUIPMENT USED DURING TEST	6
5.1 EQUIPMENTS LIST	6
5.2 MEASUREMENT UNCERTAINTY	7
5.3 TEST EQUIPMENT CALIBRATION	7
6 TEST SUMMARY	8
7 RADIATED EMISSIONS.....	9
7.1 EUT OPERATION.....	9
7.2 TEST SETUP	10
7.3 SPECTRUM ANALYZER SETUP	11
7.4 TEST PROCEDURE	12
7.5 SUMMARY OF TEST RESULTS	13
8 BAND EDGE MEASUREMENT	22
8.1 TEST PRODUCE.....	22
8.2 TEST RESULT	23
9 BANDWIDTH MEASUREMENT.....	26
9.1 TEST PROCEDURE:	26
9.2 TEST RESULT:	26
10 MAXIMUM PEAK OUTPUT POWER	32
10.1 TEST PROCEDURE:.....	32
10.2 TEST RESULT:	32
11 POWER SPECTRAL DENSITY	38
11.1 TEST PROCEDURE:.....	38
11.2 TEST RESULT:	38
12 ANTENNA REQUIREMENT	44
13 RF EXPOSURE.....	45
14 PHOTOGRAPHS – MODEL W-01 TEST SETUP.....	46
14.1 RADIATED EMISSION	46
15 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	49
15.1 MODEL W-01 – EXTERNAL PHOTOS.....	49
15.2 MODEL W-01– INTERNAL PHOTOS.....	53

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS16S0858734-2E	Aug. 19, 2016	Aug. 20 – Sep. 06, 2016	Sep. 11, 2016	original	-	Replaced
WTS16S0858734-2E	Aug. 19, 2016	Aug. 20 – Sep. 06, 2016	Sep. 11, 2016	Revision1	added Multiple Transmitter Output testing	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name:	Wheeled Robot
Model No.:	W-01
Model Difference:	N/A
Operation Frequency:	2402MHz ~ 2480MHz, separated by 2MHz,40 channels in total for BT 2412MHz ~ 2462MHz for Wi-Fi
The Lowest Oscillator:	32.768KHz
Antenna Type:	chip antenna for BT monopole antenna for Wi-Fi
Antenna Gain:	1.3 dBi for BT 2.0 dBi for Wi-Fi
Type of modulation:	GFSK(BLE only) IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max.)

4.2 Details of E.U.T.

Technical Data:	DC 12V by 8*1.5V (UM-3 OR SIZE"AA" OR EQUIV) Batteries
-----------------	--

4.3 Channel List

BT mode

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

Wi-Fi mode

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Wi-Fi Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	/	/	/
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	/	/	/
Band Edge	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	/	/	/
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	/	/	/

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A-1, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Sep.15,2015	Sep.14,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Sep.15,2015	Sep.14,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.15,2015	Sep.14,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Sep.15,2015	Sep.14,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Sep.15,2015	Sep.14,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2015	Sep.14,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2015	Sep.14,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2015	Sep.14,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2015	Sep.14,2016
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2015	Sep.14,2016

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	C
Conducted Emissions	15.207(a)	N/A
Bandwidth	15.247(a)(2)	C
Maximum Peak Output Power	15.247(b)(3),(4)	C
Power Spectral Density	15.247(e)	C
Band Edge	15.247(d)	C
Antenna Requirement	15.203	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013;ANSI C63. 4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

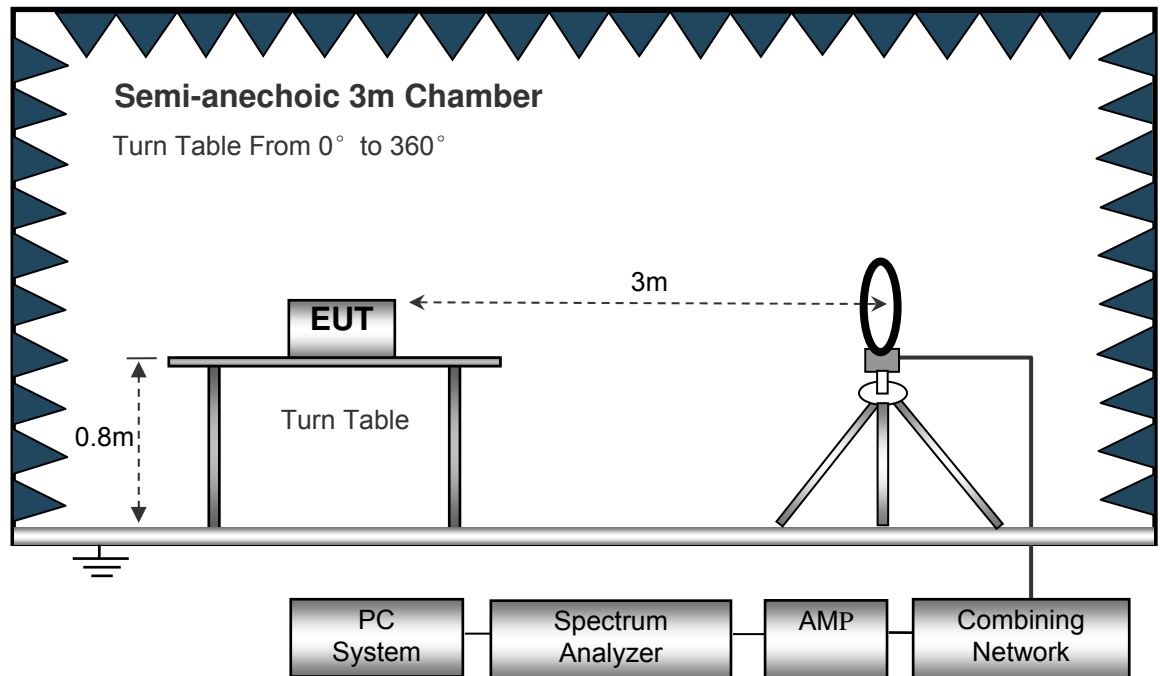

The test setup for emission measurement from 30 MHz to 1 GHz.

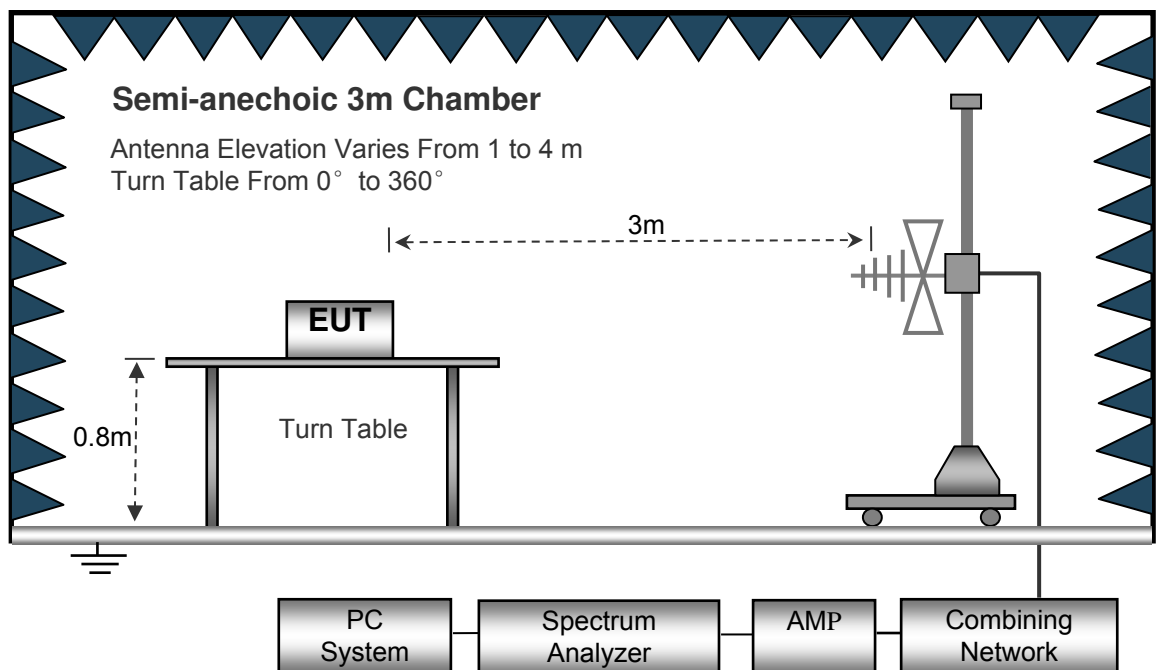

The test setup for emission measurement above 1 GHz.

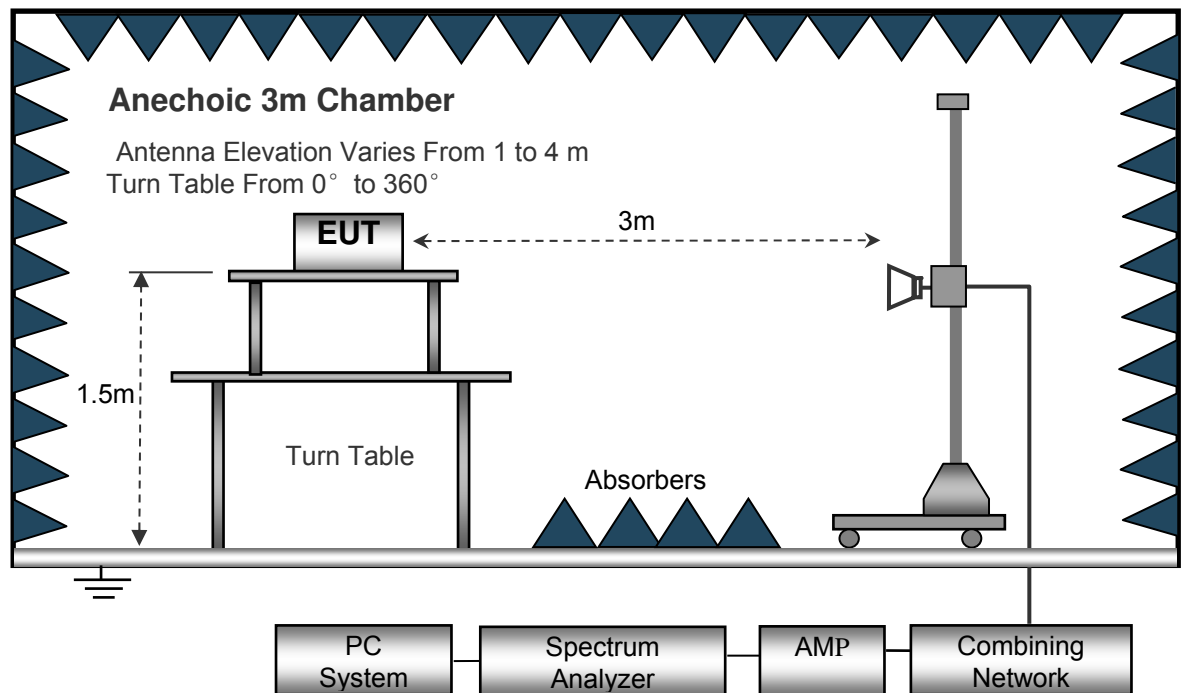

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 32.768KHz to 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
181.36	21.64	QP	323	1.8	H	10.52	32.16	43.53	-11.37
181.36	18.63	QP	266	1.7	V	10.52	29.15	43.53	-14.38
4824.00	53.72	PK	156	1.7	V	-1.06	52.66	74.00	-21.34
4824.00	40.97	Ave	156	1.7	V	-1.06	39.91	54.00	-14.09
7236.00	52.20	PK	7	1.2	H	1.43	53.63	74.00	-20.37
7236.00	43.40	Ave	7	1.2	H	1.43	44.83	54.00	-9.17
2328.63	46.08	PK	184	1.8	V	-13.31	32.77	74.00	-41.23
2328.63	37.04	Ave	184	1.8	V	-13.31	23.73	54.00	-30.27
2385.97	44.09	PK	1	1.5	H	-13.07	31.02	74.00	-42.98
2385.97	37.42	Ave	1	1.5	H	-13.07	24.35	54.00	-29.65
2490.37	43.64	PK	261	1.1	V	-13.05	30.59	74.00	-43.41
2490.37	37.49	Ave	261	1.1	V	-13.05	24.44	54.00	-29.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
181.36	20.91	QP	66	1.9	H	10.52	31.43	43.53	-12.10
181.36	20.62	QP	265	1.2	V	10.52	31.14	43.53	-12.39
4874.00	51.08	PK	312	1.7	V	-0.67	50.41	74.00	-23.59
4874.00	41.97	Ave	312	1.7	V	-0.67	41.30	54.00	-12.70
7311.00	51.46	PK	153	1.2	H	2.22	53.68	74.00	-20.32
7311.00	43.57	Ave	153	1.2	H	2.22	45.79	54.00	-8.21
2349.52	45.51	PK	299	1.3	V	-13.24	32.27	74.00	-41.73
2349.52	37.37	Ave	299	1.3	V	-13.24	24.13	54.00	-29.87
2354.90	43.69	PK	260	1.4	H	-13.37	30.32	74.00	-43.68
2354.90	36.76	Ave	260	1.4	H	-13.37	23.39	54.00	-30.61
2490.02	43.28	PK	175	1.8	V	-13.02	30.26	74.00	-43.74
2490.02	38.52	Ave	175	1.8	V	-13.02	25.50	54.00	-28.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
181.36	20.92	QP	45	1.7	H	10.52	31.44	43.53	-12.09
181.36	19.36	QP	278	1.3	V	10.52	29.88	43.53	-13.65
4924.00	51.83	PK	269	1.3	V	-0.27	51.56	74.00	-22.44
4924.00	44.36	Ave	269	1.3	V	-0.27	44.09	54.00	-9.91
7386.00	52.64	PK	285	1.5	H	2.86	55.50	74.00	-18.50
7386.00	40.35	Ave	285	1.5	H	2.86	43.21	54.00	-10.79
2335.58	46.90	PK	191	1.0	V	-13.22	33.68	74.00	-40.32
2335.58	39.11	Ave	191	1.0	V	-13.22	25.89	54.00	-28.11
2374.08	42.33	PK	319	1.3	H	-13.14	29.19	74.00	-44.81
2374.08	36.90	Ave	319	1.3	H	-13.14	23.76	54.00	-30.24
2490.13	43.95	PK	243	1.9	V	-13.07	30.88	74.00	-43.12
2490.13	36.11	Ave	243	1.9	V	-13.07	23.04	54.00	-30.96

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
181.36	21.30	QP	26	1.7	H	10.54	31.84	43.53	-11.69
181.36	20.83	QP	103	1.3	V	10.54	31.37	43.53	-12.16
4824.00	54.62	PK	216	1.7	V	-1.08	53.54	74.00	-20.46
4824.00	42.96	Ave	216	1.7	V	-1.08	41.88	54.00	-12.12
7236.00	52.94	PK	282	1.5	H	1.46	54.40	74.00	-19.60
7236.00	41.66	Ave	282	1.5	H	1.46	43.12	54.00	-10.88
2316.36	46.56	PK	283	1.3	V	-13.33	33.23	74.00	-40.77
2316.36	38.07	Ave	283	1.3	V	-13.33	24.74	54.00	-29.26
2379.68	42.08	PK	359	1.7	H	-13.04	29.04	74.00	-44.96
2379.68	37.90	Ave	359	1.7	H	-13.04	24.86	54.00	-29.14
2486.06	42.96	PK	33	1.8	V	-13.07	29.89	74.00	-44.11
2486.06	38.39	Ave	33	1.8	V	-13.07	25.32	54.00	-28.68

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
181.36	21.04	QP	140	1.5	H	10.54	31.58	43.53	-11.95
181.36	19.62	QP	49	1.1	V	10.54	30.16	43.53	-13.37
4874.00	52.96	PK	87	1.9	V	-0.66	52.30	74.00	-21.70
4874.00	41.90	Ave	87	1.9	V	-0.66	41.24	54.00	-12.76
7311.00	52.38	PK	8	1.1	H	2.23	54.61	74.00	-19.39
7311.00	41.04	Ave	8	1.1	H	2.23	43.27	54.00	-10.73
2343.74	45.51	PK	331	1.4	V	-13.27	32.24	74.00	-41.76
2343.74	38.17	Ave	331	1.4	V	-13.27	24.90	54.00	-29.10
2370.02	43.69	PK	54	1.1	H	-13.38	30.31	74.00	-43.69
2370.02	37.17	Ave	54	1.1	H	-13.38	23.79	54.00	-30.21
2485.99	42.16	PK	108	1.7	V	-13.05	29.11	74.00	-44.89
2485.99	37.74	Ave	108	1.7	V	-13.05	24.69	54.00	-29.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
181.36	21.49	QP	96	1.3	H	10.54	32.03	43.53	-11.50
181.36	18.45	QP	84	1.5	V	10.54	28.99	43.53	-14.54
4924.00	51.25	PK	98	1.2	V	-0.30	50.95	74.00	-23.05
4924.00	43.58	Ave	98	1.2	V	-0.30	43.28	54.00	-10.72
7386.00	52.91	PK	308	1.2	H	2.85	55.76	74.00	-18.24
7386.00	42.28	Ave	308	1.2	H	2.85	45.13	54.00	-8.87
2318.33	45.38	PK	242	1.6	V	-13.23	32.15	74.00	-41.85
2318.33	39.47	Ave	242	1.6	V	-13.23	26.24	54.00	-27.76
2361.25	42.64	PK	283	1.3	H	-13.16	29.48	74.00	-44.52
2361.25	38.60	Ave	283	1.3	H	-13.16	25.44	54.00	-28.56
2494.88	42.96	PK	110	1.8	V	-13.05	29.91	74.00	-44.09
2494.88	38.32	Ave	110	1.8	V	-13.05	25.27	54.00	-28.73

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
181.36	22.23	QP	116	1.7	H	10.56	32.79	43.53	-10.74
181.36	18.92	QP	15	1.6	V	10.56	29.48	43.53	-14.05
4824.00	51.89	PK	91	1.2	V	-1.07	50.82	74.00	-23.18
4824.00	44.52	Ave	91	1.2	V	-1.07	43.45	54.00	-10.55
7236.00	53.40	PK	0	1.4	H	1.50	54.90	74.00	-19.10
7236.00	40.15	Ave	0	1.4	H	1.50	41.65	54.00	-12.35
2332.26	45.05	PK	338	1.4	V	-13.02	32.03	74.00	-41.97
2332.26	39.15	Ave	338	1.4	V	-13.02	26.13	54.00	-27.87
2355.39	42.07	PK	335	2.0	H	-13.05	29.02	74.00	-44.98
2355.39	36.59	Ave	335	2.0	H	-13.05	23.54	54.00	-30.46
2499.57	44.75	PK	35	1.8	V	-13.03	31.72	74.00	-42.28
2499.57	38.14	Ave	35	1.8	V	-13.03	25.11	54.00	-28.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
181.36	21.30	QP	206	1.4	H	10.56	31.86	43.53	-11.67
181.36	19.96	QP	147	1.9	V	10.56	30.52	43.53	-13.01
4874.00	51.40	PK	148	1.4	V	-0.69	50.71	74.00	-23.29
4874.00	44.10	Ave	148	1.4	V	-0.69	43.41	54.00	-10.59
7311.00	51.76	PK	208	1.4	H	2.25	54.01	74.00	-19.99
7311.00	41.20	Ave	208	1.4	H	2.25	43.45	54.00	-10.55
2317.13	46.51	PK	30	1.6	V	-13.20	33.31	74.00	-40.69
2317.13	38.20	Ave	30	1.6	V	-13.20	25.00	54.00	-29.00
2364.04	44.18	PK	156	1.4	H	-13.33	30.85	74.00	-43.15
2364.04	36.14	Ave	156	1.4	H	-13.33	22.81	54.00	-31.19
2484.03	44.26	PK	280	1.1	V	-13.11	31.15	74.00	-42.85
2484.03	36.72	Ave	280	1.1	V	-13.11	23.61	54.00	-30.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
181.36	21.10	QP	146	1.0	H	10.56	31.66	43.53	-11.87
181.36	19.79	QP	32	1.2	V	10.56	30.35	43.53	-13.18
4924.00	53.27	PK	165	1.7	V	-0.29	52.98	74.00	-21.02
4924.00	44.45	Ave	165	1.7	V	-0.29	44.16	54.00	-9.84
7386.00	52.85	PK	235	1.0	H	2.83	55.68	74.00	-18.32
7386.00	42.74	Ave	235	1.0	H	2.83	45.57	54.00	-8.43
2316.65	45.71	PK	355	1.8	V	-13.19	32.52	74.00	-41.48
2316.65	39.15	Ave	355	1.8	V	-13.19	25.96	54.00	-28.04
2389.46	42.12	PK	147	1.4	H	-13.20	28.92	74.00	-45.08
2389.46	37.47	Ave	147	1.4	H	-13.20	24.27	54.00	-29.73
2491.61	44.53	PK	353	1.8	V	-13.08	31.45	74.00	-42.55
2491.61	37.01	Ave	353	1.8	V	-13.08	23.93	54.00	-30.07

Test Frequency: 18GHz to 25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance v03r05
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result


Test result plots shown as follows:

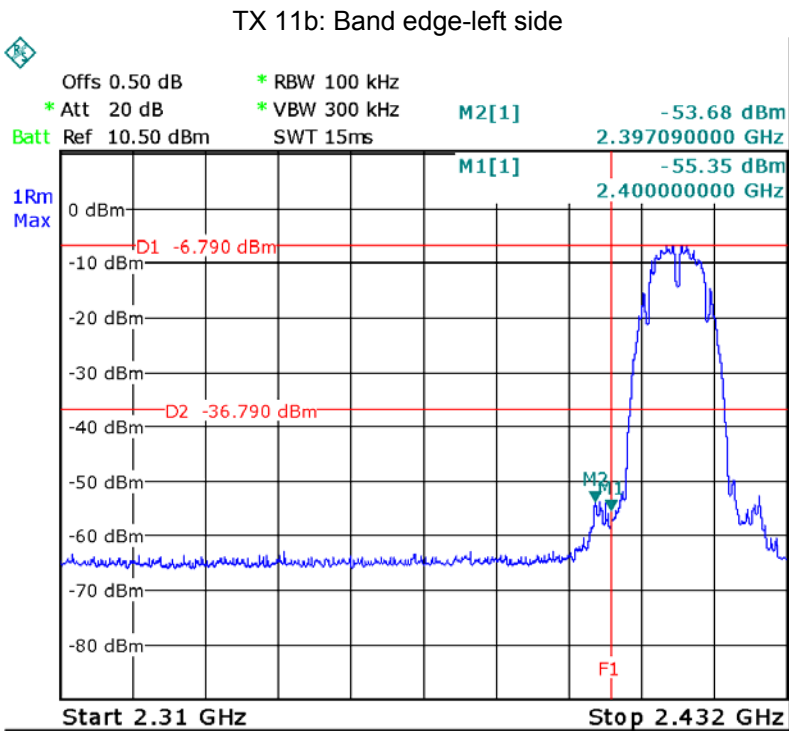


TX 11b: Band edge-right side


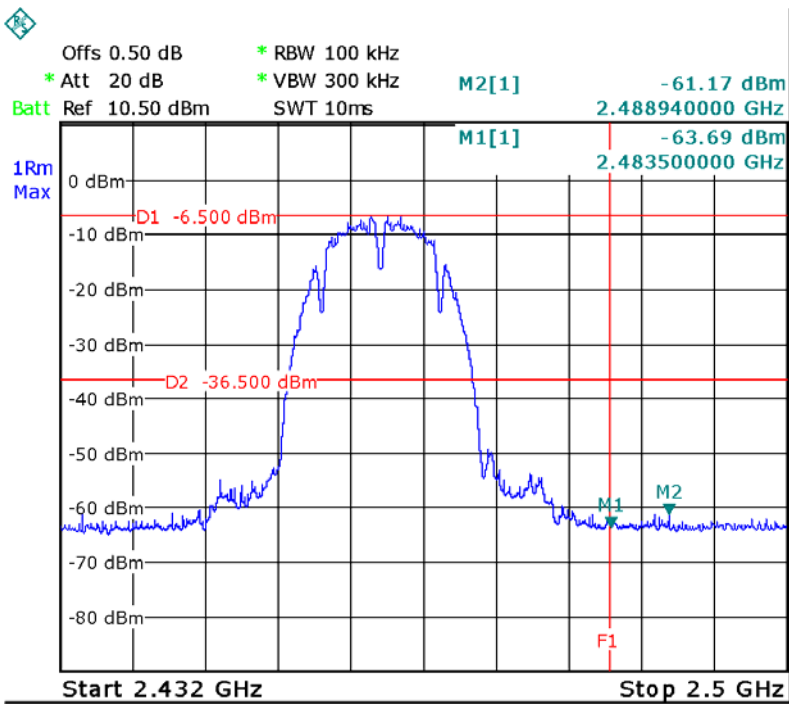


TX 11g: Band edge-left side

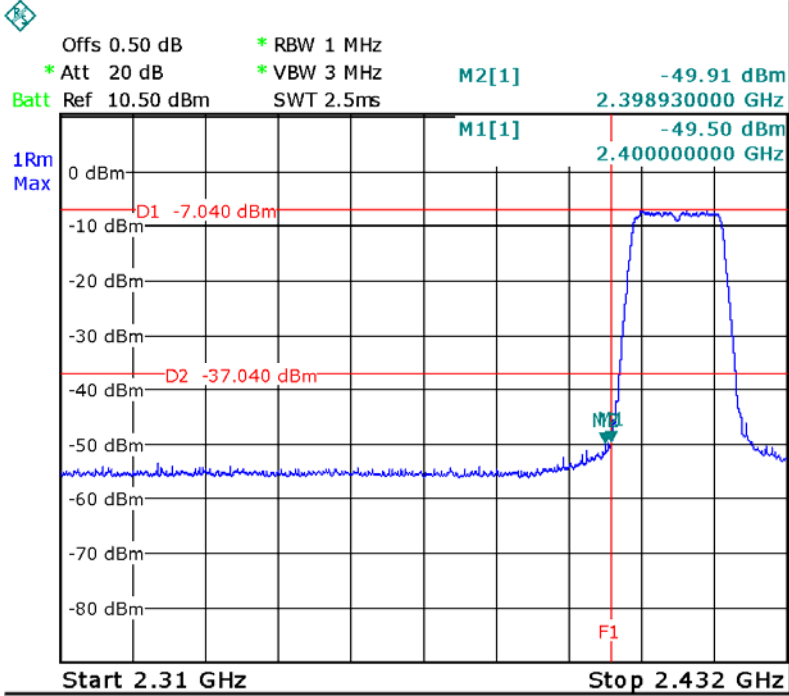

TX 11g: Band edge-right side

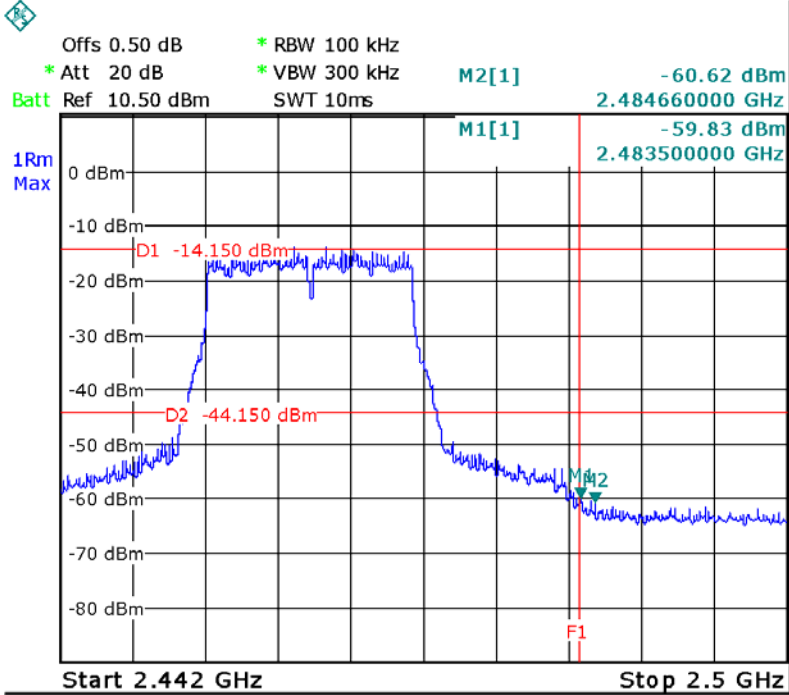

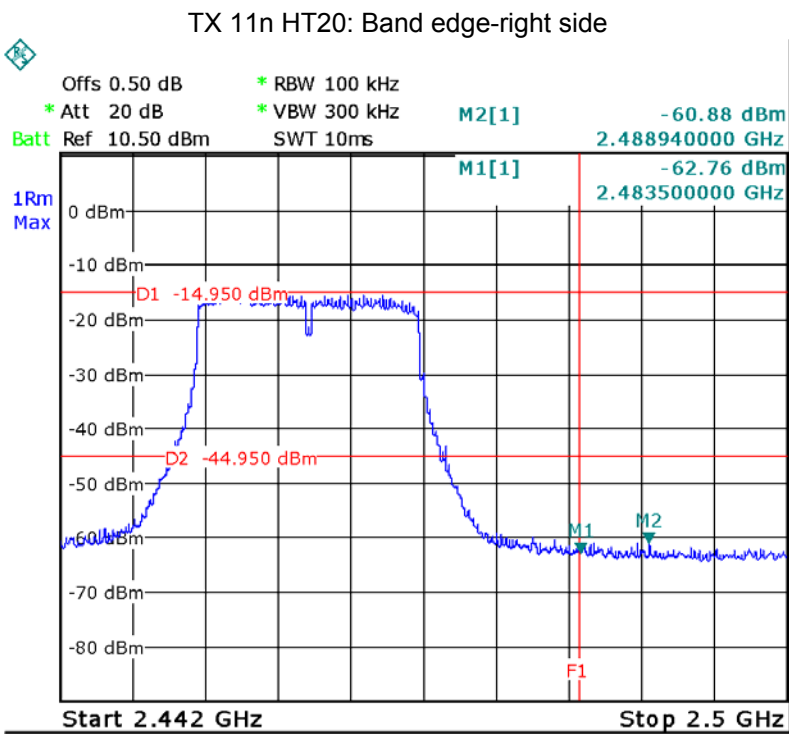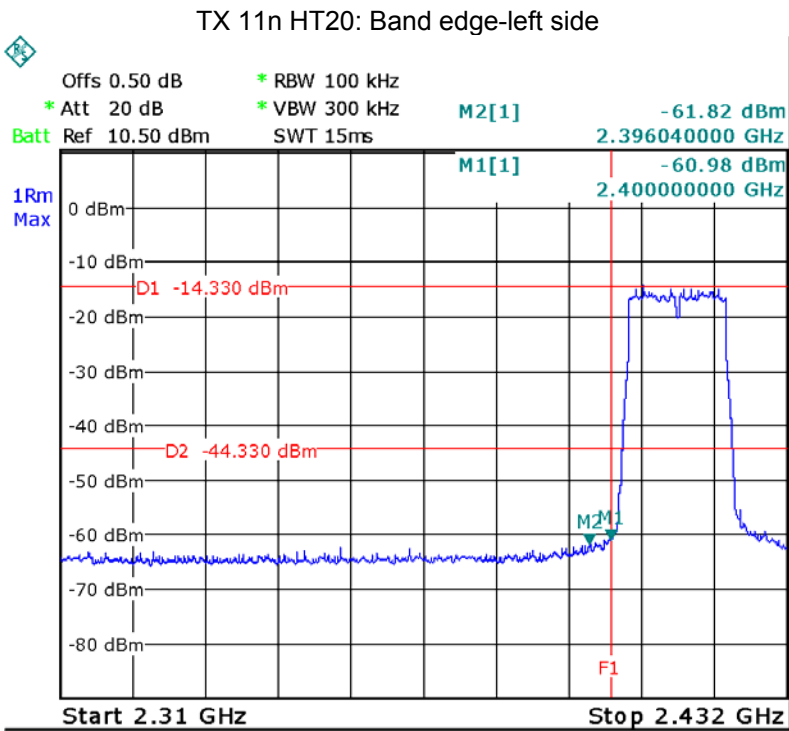

9 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance v03r05



9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



9.2 Test Result:



Operation mode	Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11
	10.124	10.124	10.124
TX 11g	Channel 1	Channel 6	Channel 11
	16.517	16.517	16.517
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.623	17.623	17.623


Test result plot as follows:

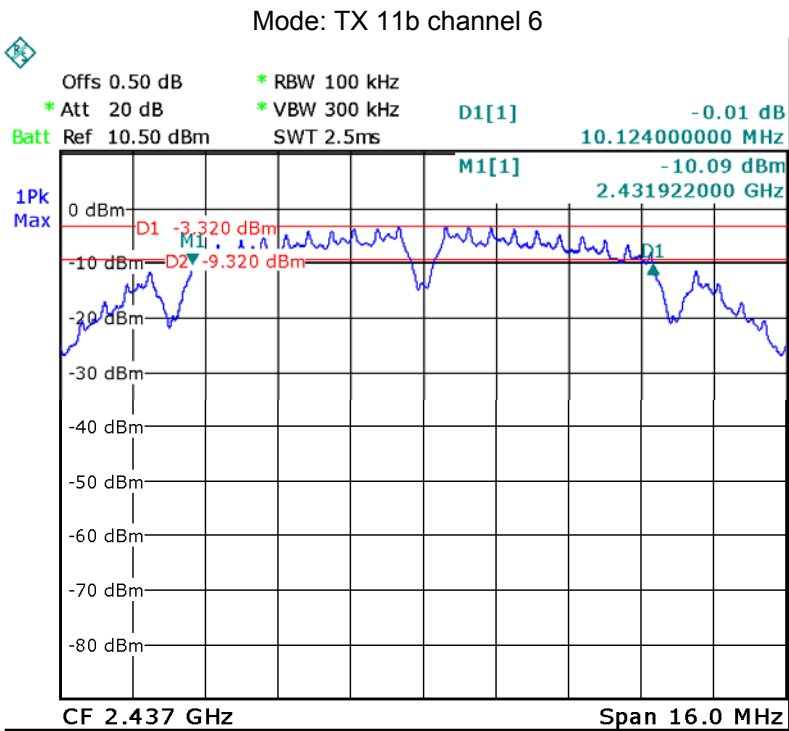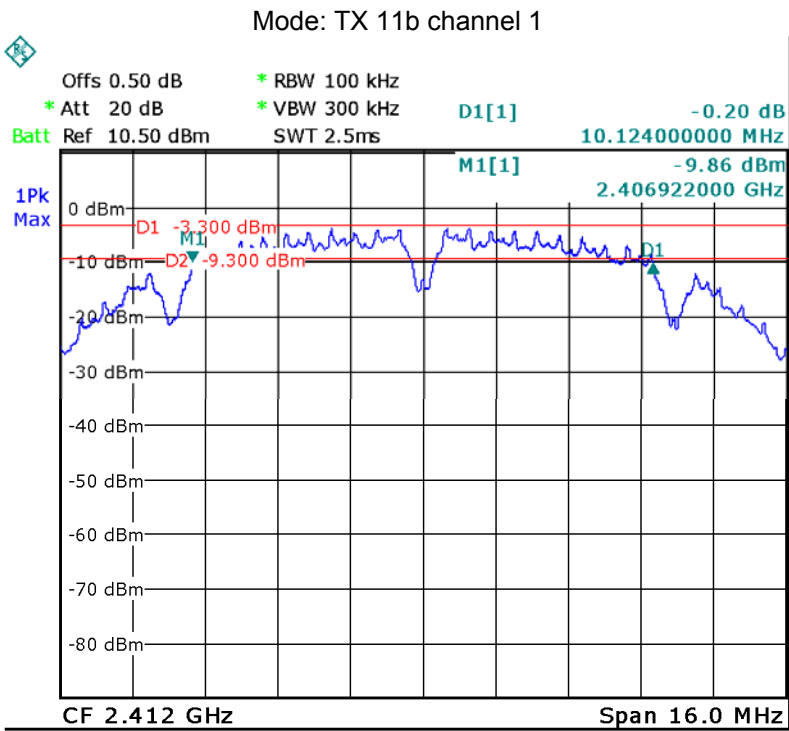

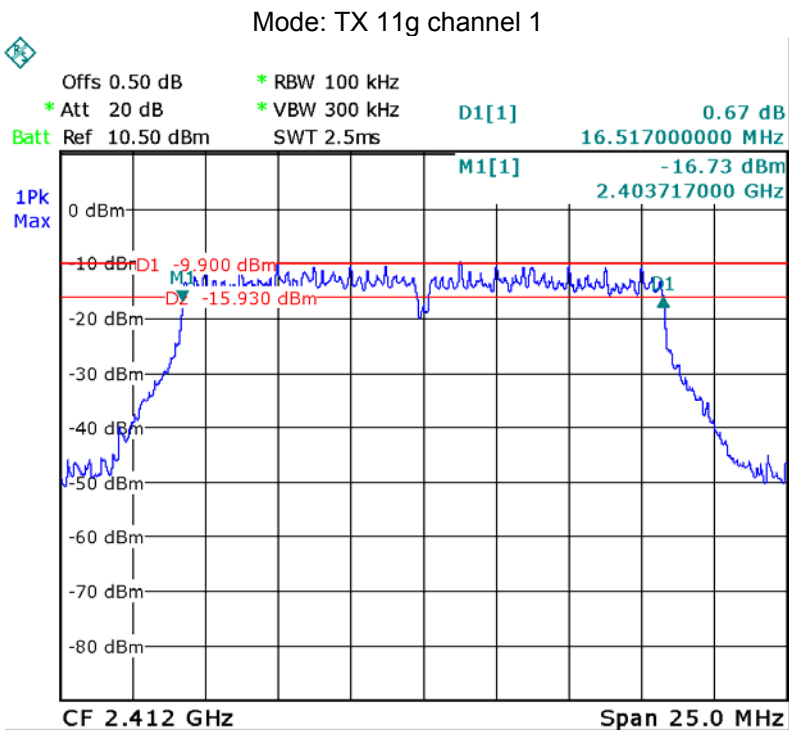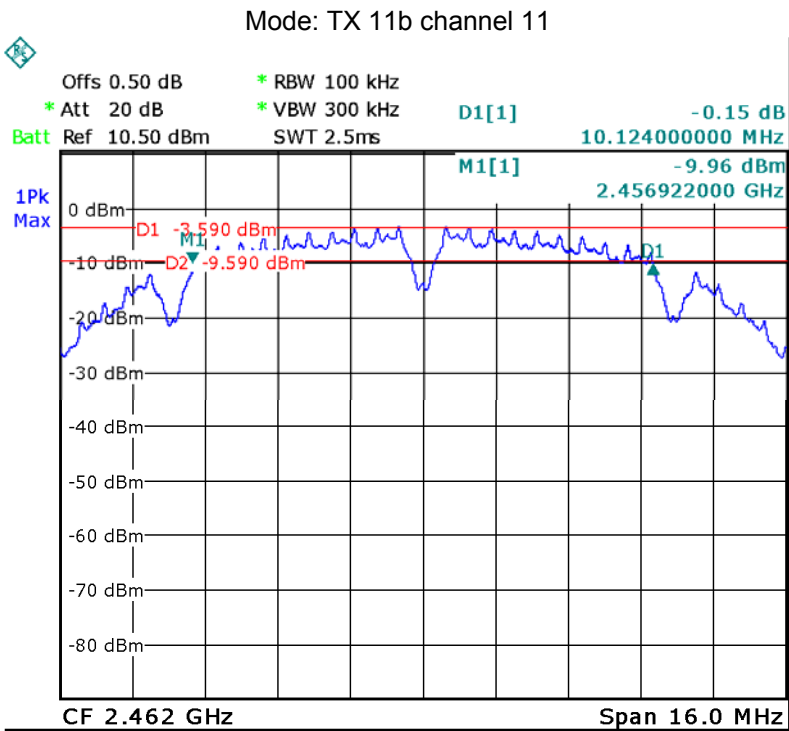

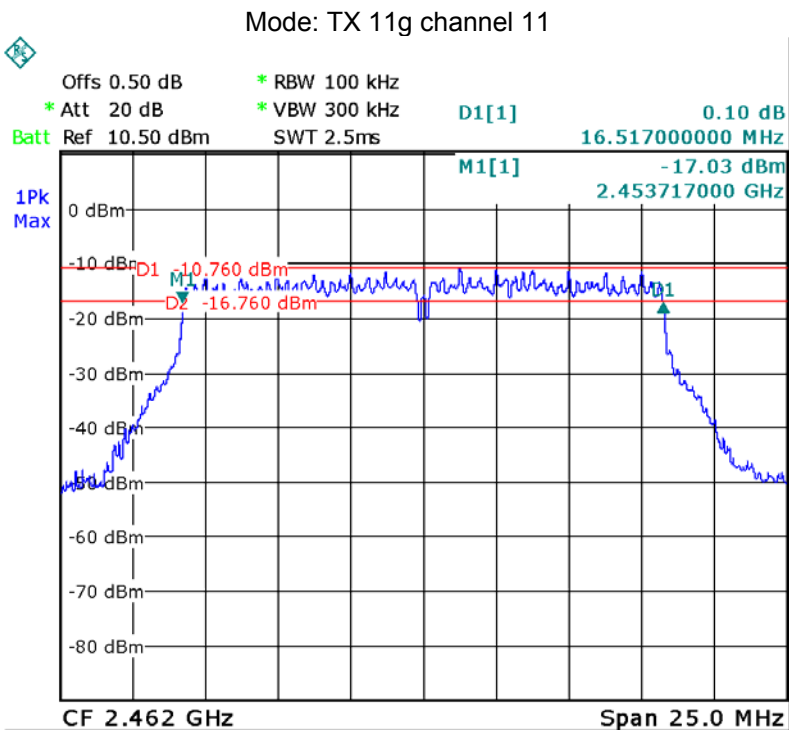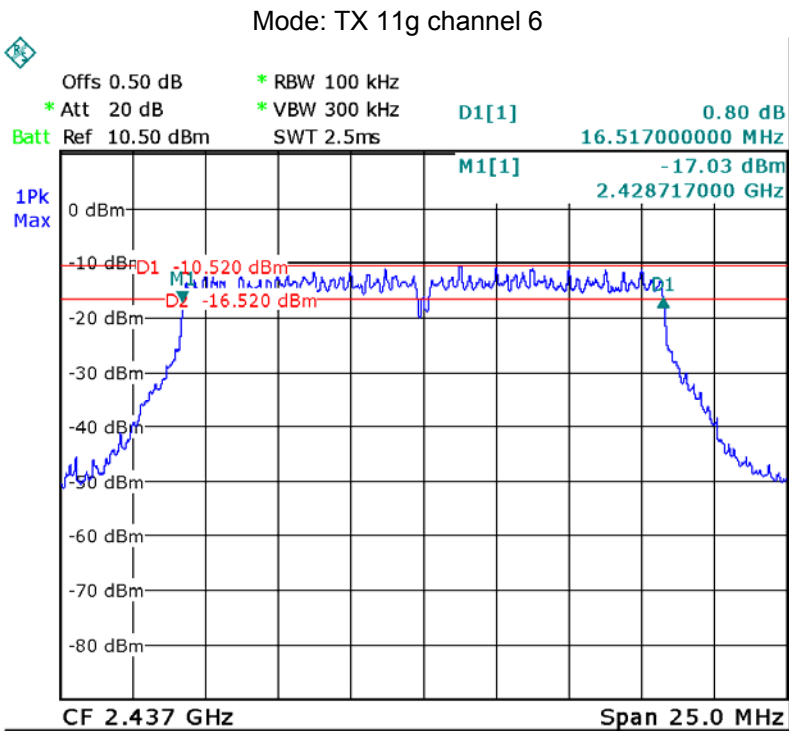

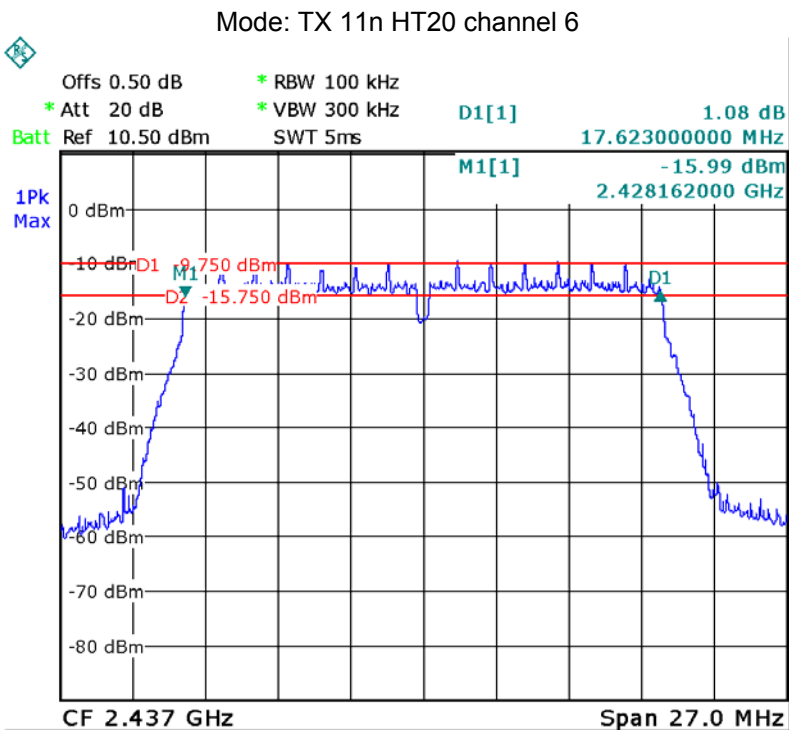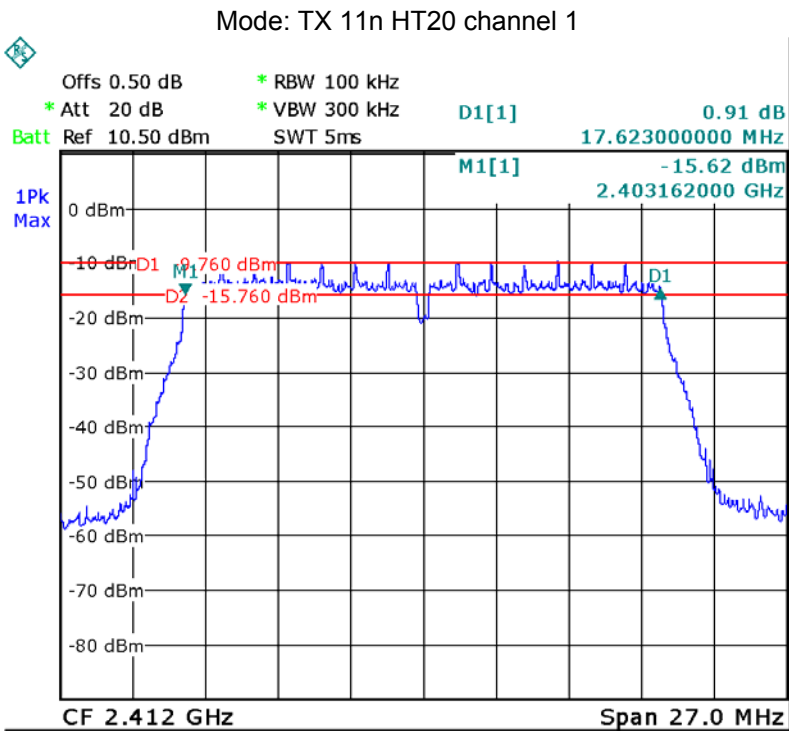

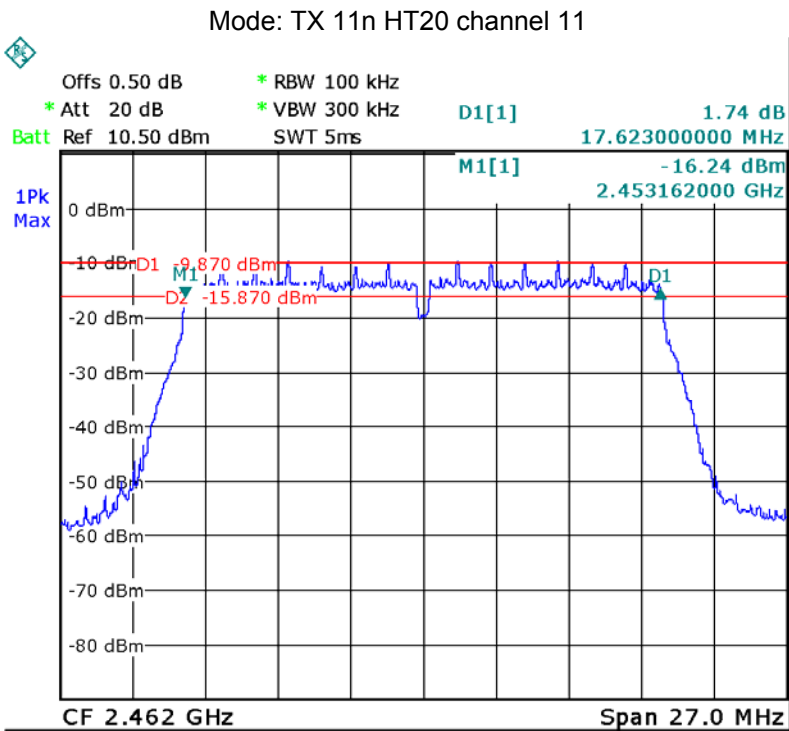

10 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance v03r05

10.1 Test Procedure:

KDB558074 D01 v03r05

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



10.2 Test Result:



Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.33	9.20	9.15
Limit: 1W/30dBm		



Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.45	9.19	9.03
Limit: 1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.32	9.46	9.38
Limit: 1W/30dBm		


**Remark: For Wi-Fi and BT transmitters operating simultaneously,
Please refer to WTS16S0858734-3E FCC RF Exposure Test Report**

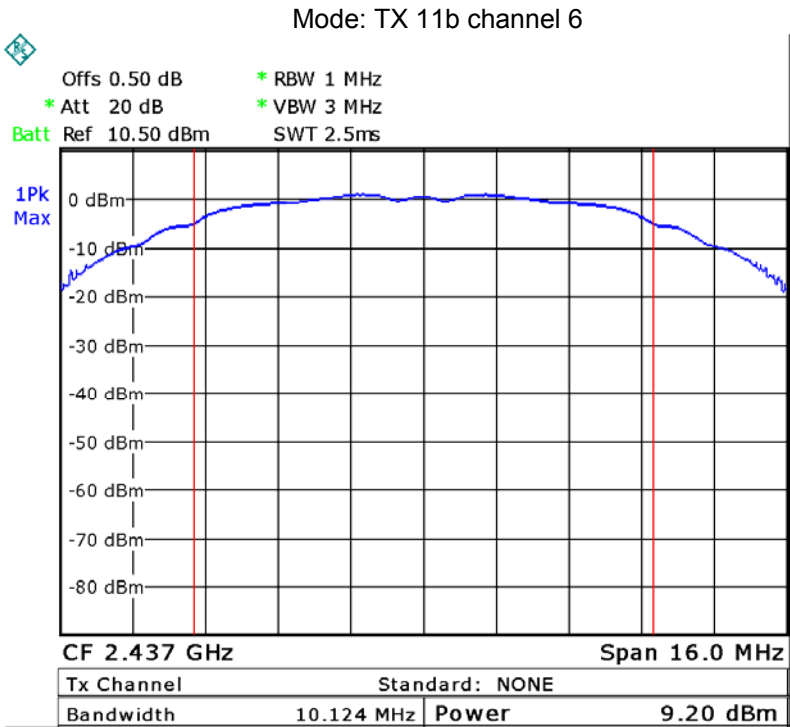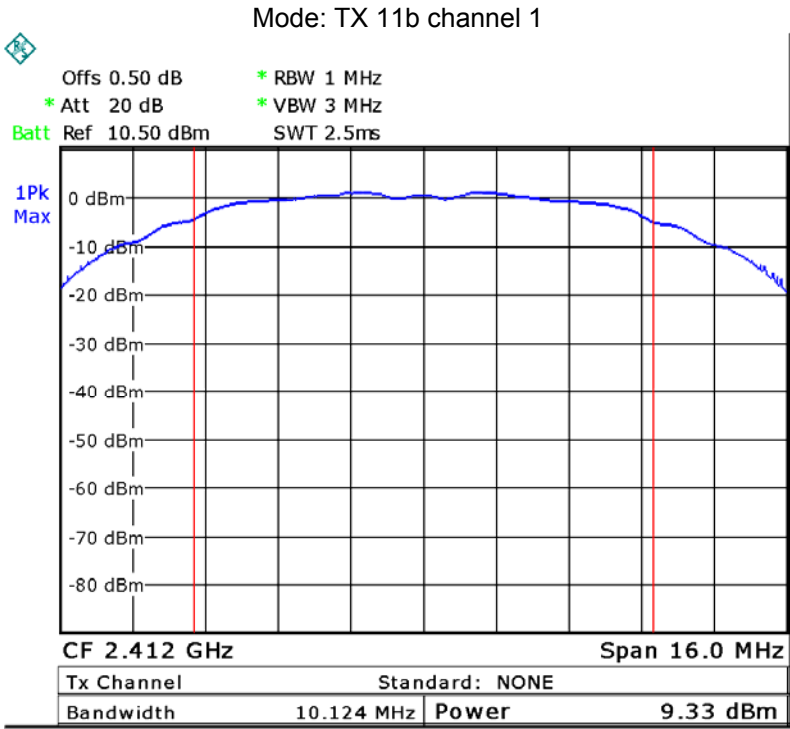

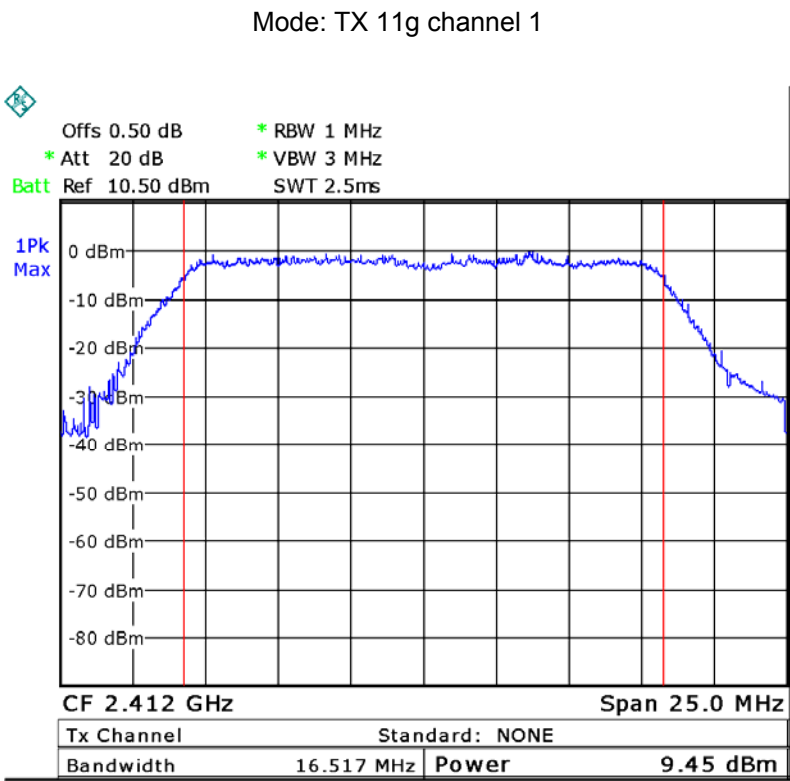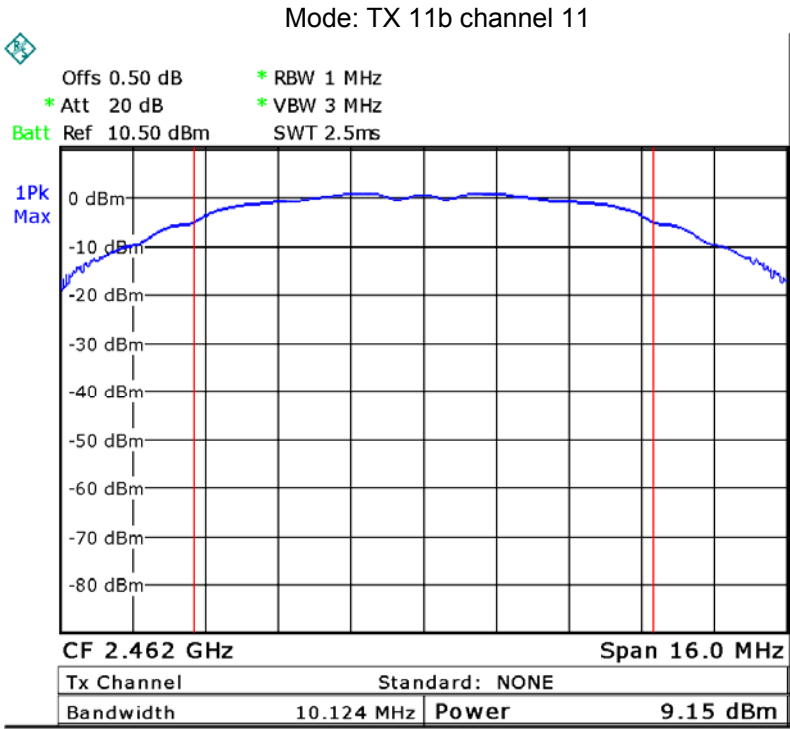


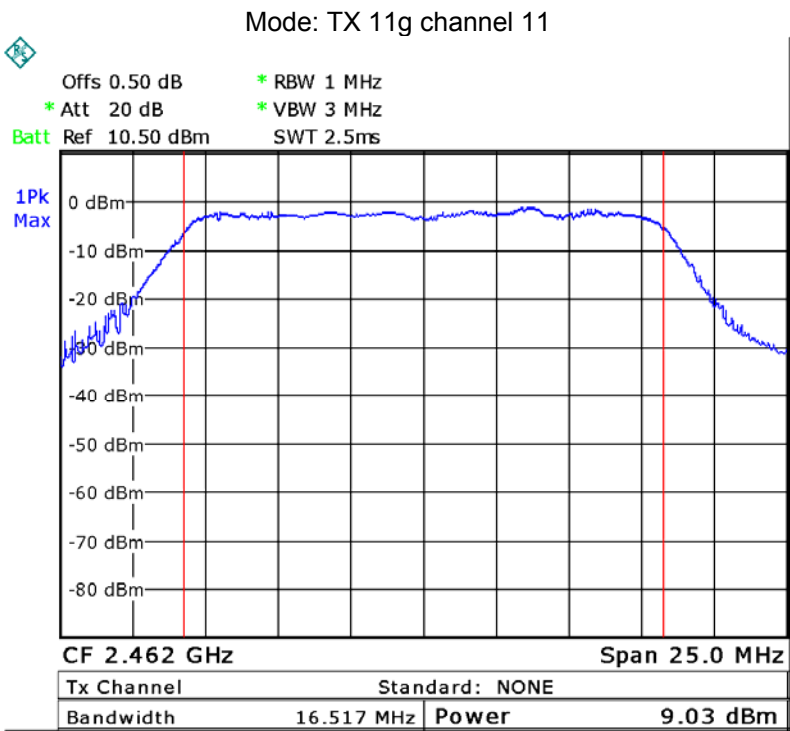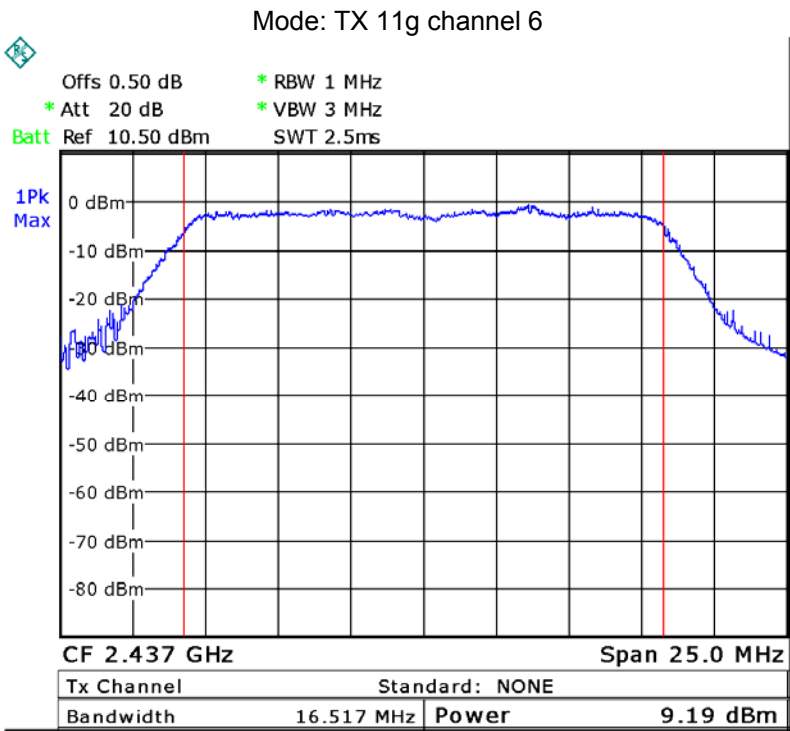


Mode: TX 11n HT20 channel 1

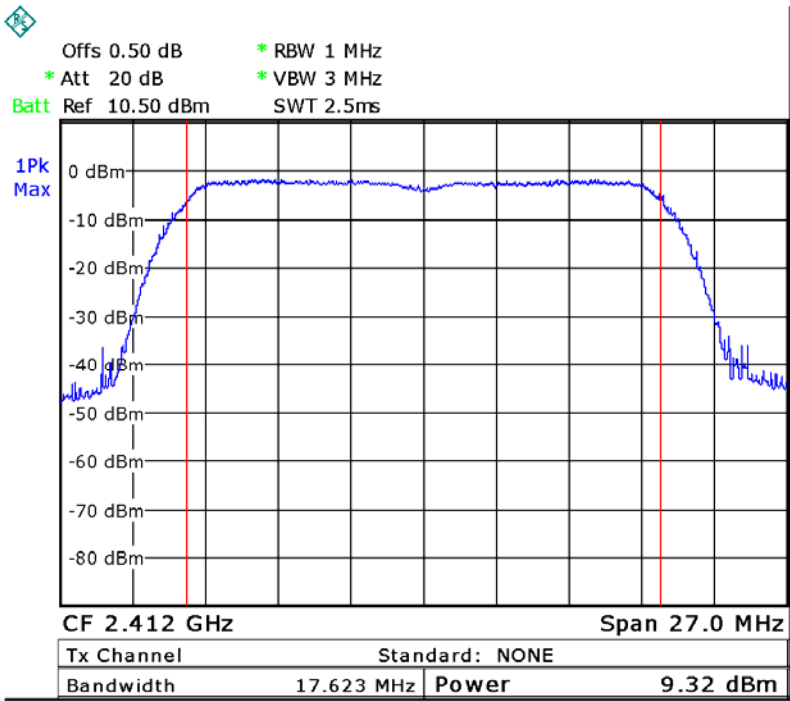

Mode: TX 11n HT20 channel 6

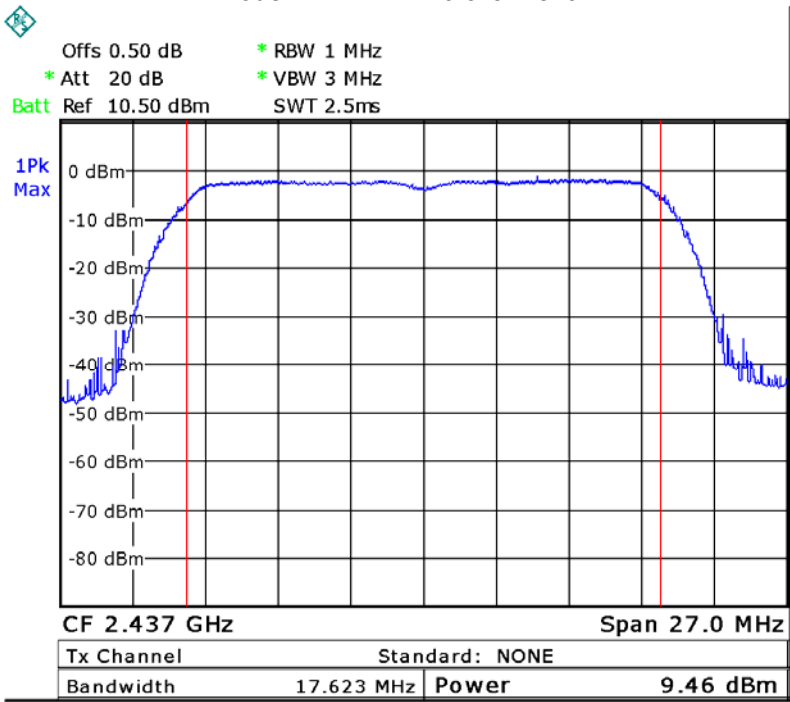

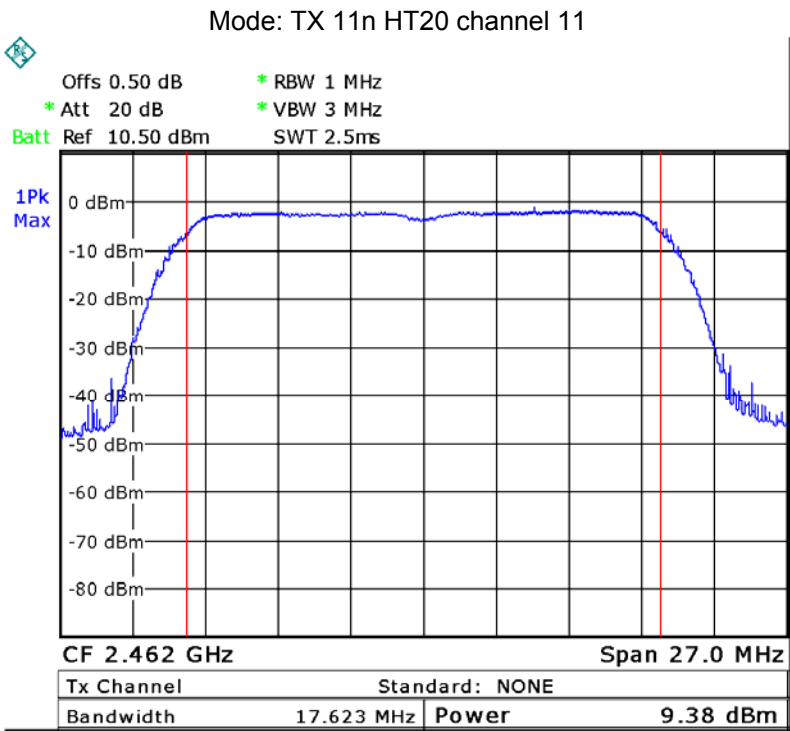

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r05

11.1 Test Procedure:

KDB558074 D01 v03r05

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



11.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-17.51	-18.26	-17.91
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-24.83	-25.95	-27.31
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-25.28	-24.32	-25.52
Limit: 8dBm per 3kHz		


**Remark: For Wi-Fi and BT transmitters operating simultaneously,
Please refer to WTS16S0858734-3E FCC RF Exposure Test Report**

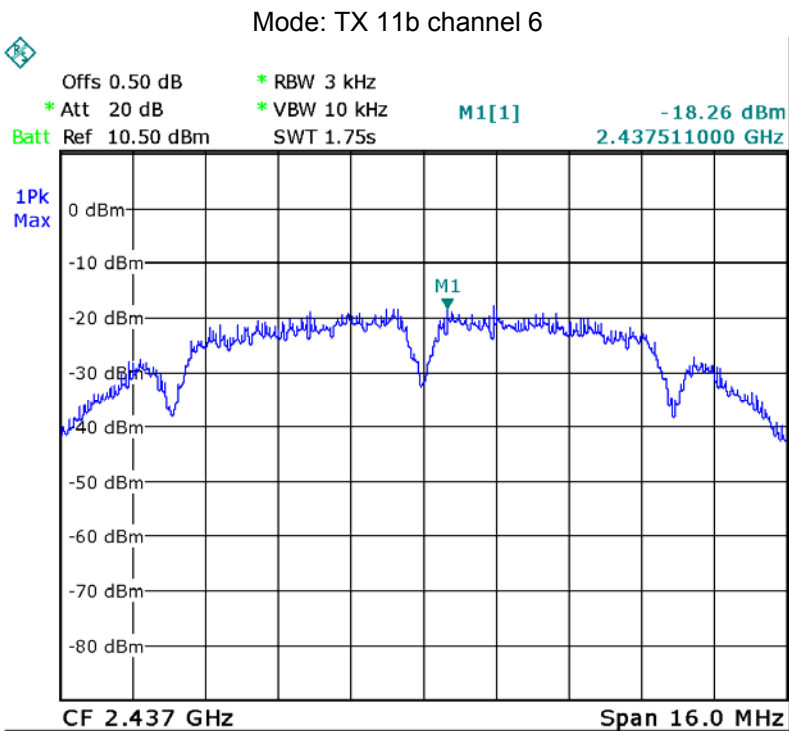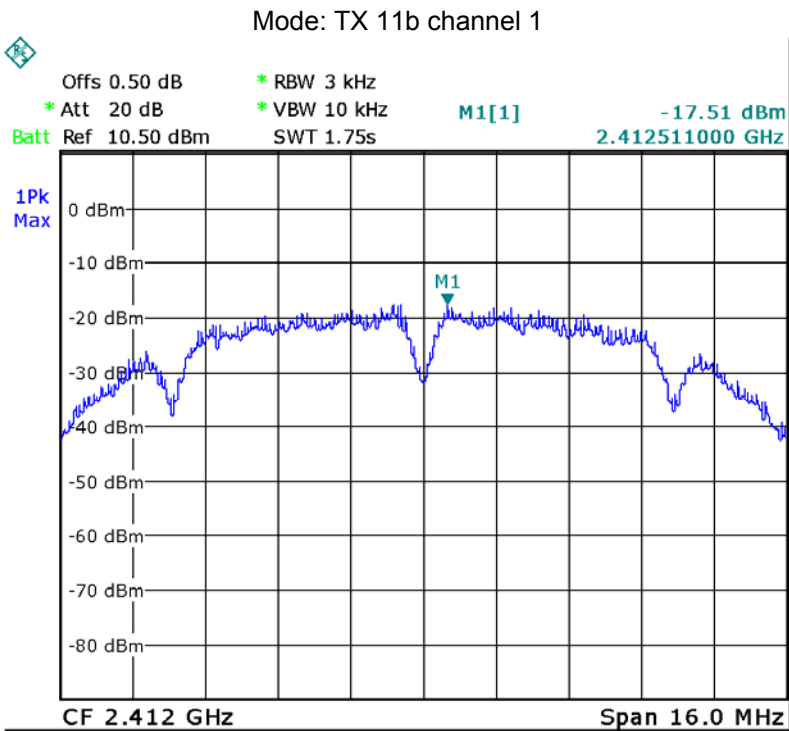

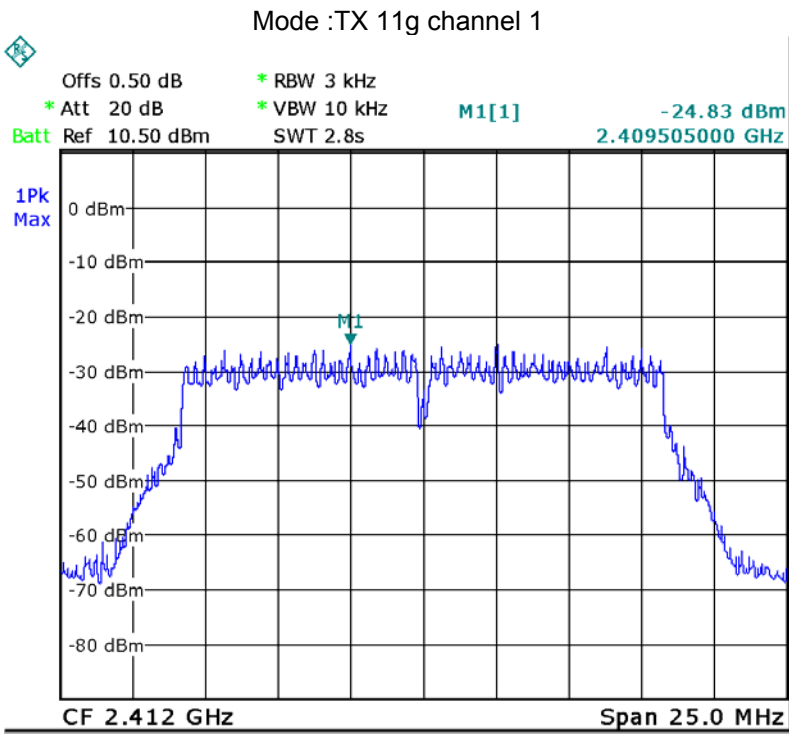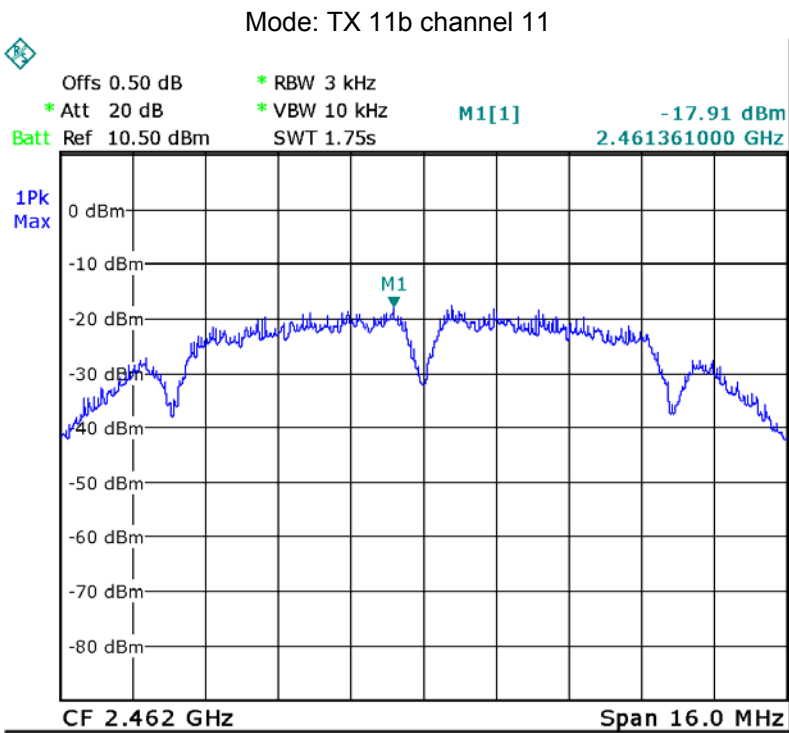

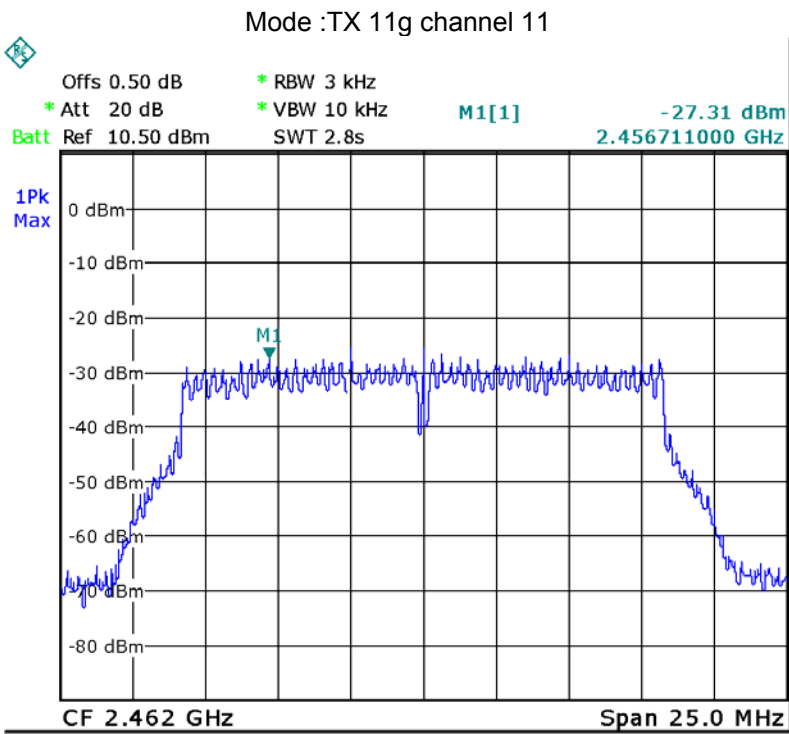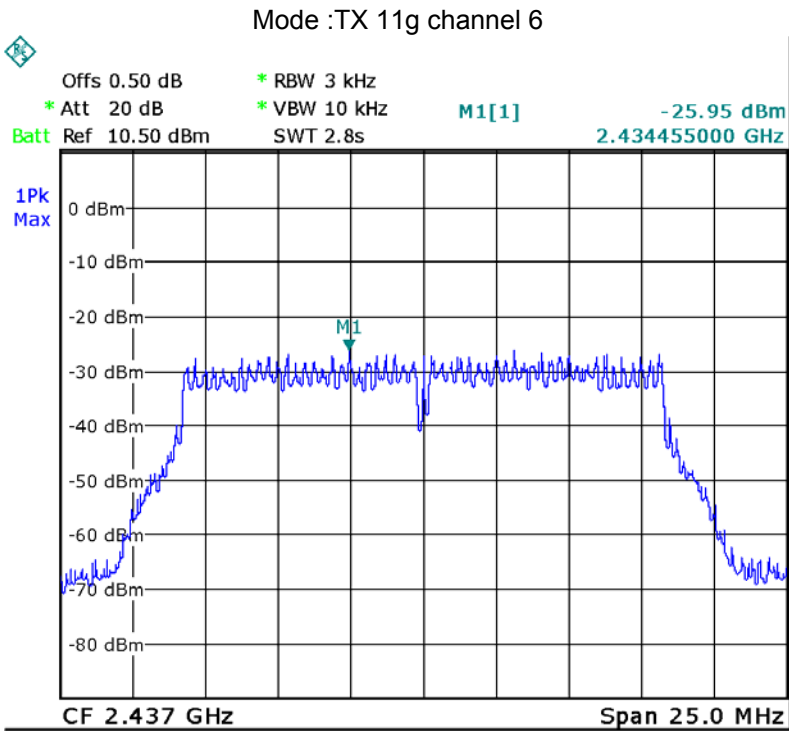

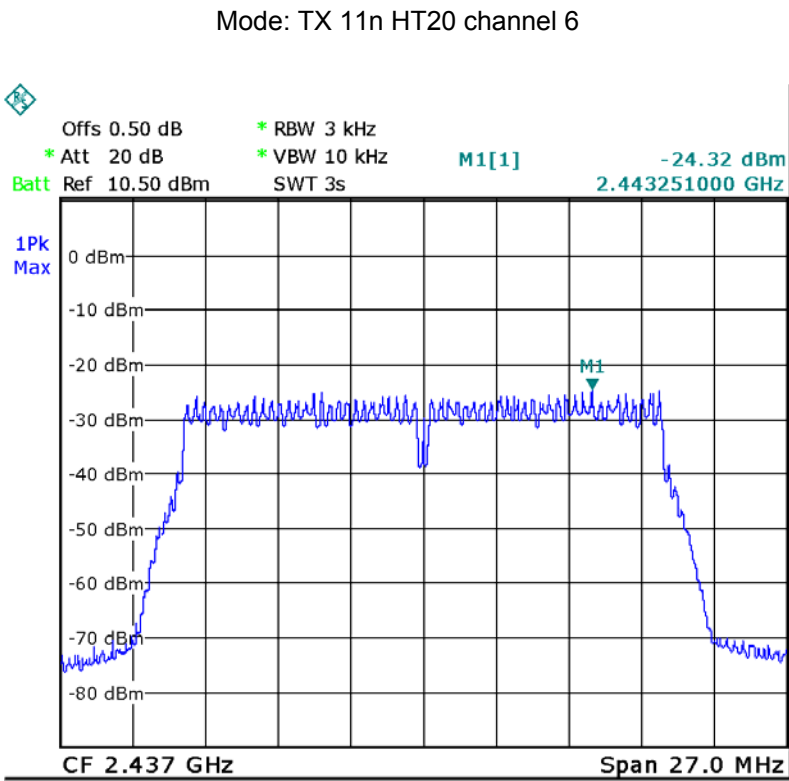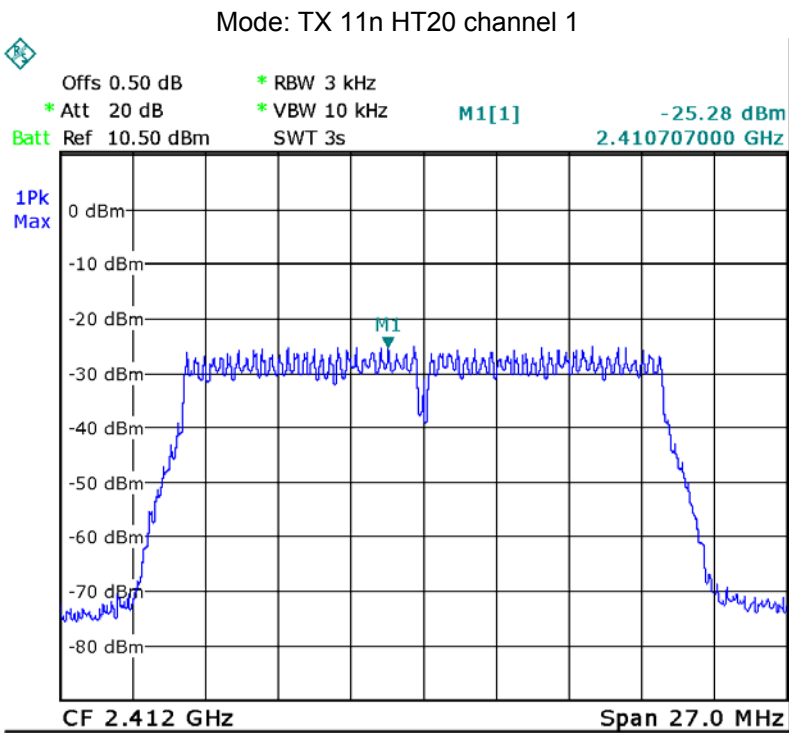

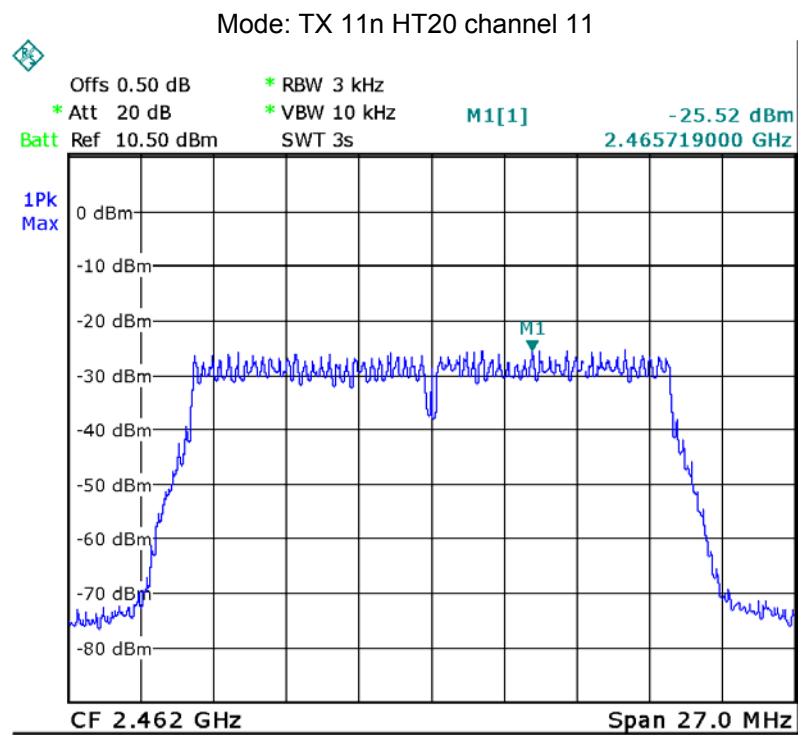


12 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one monopole antenna, the gain is 2.0 dBi. meets the requirements of FCC 15.203.

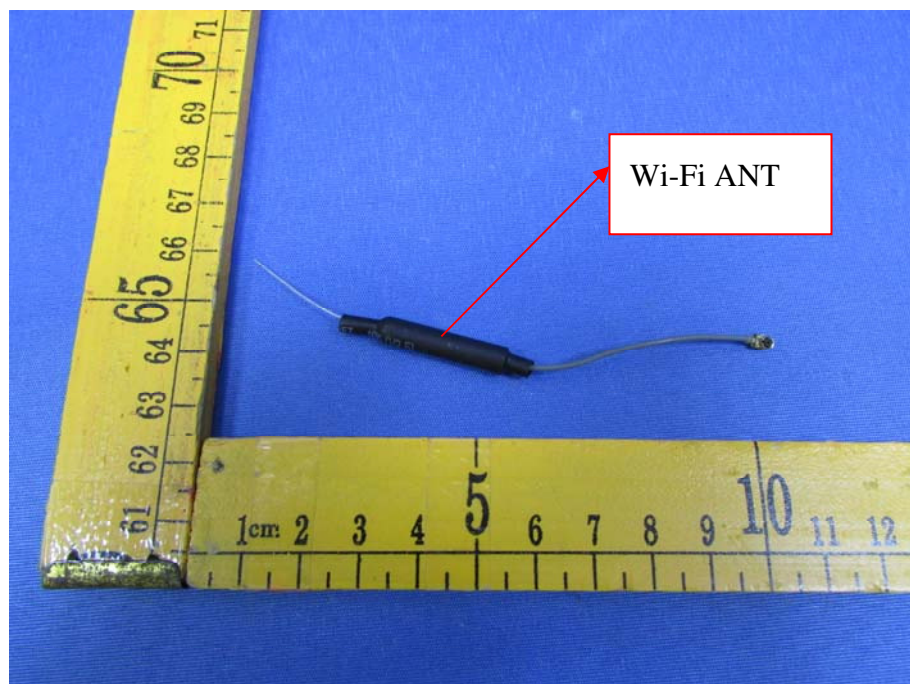


13 RF Exposure

Remark: Please refer to WTS16S0858734-3E FCC RF Exposure Test Report.


14 Photographs – Model W-01 Test Setup


14.1 Radiated Emission

Test frequency 32.768KHz to 30MHz at Test Site 2#

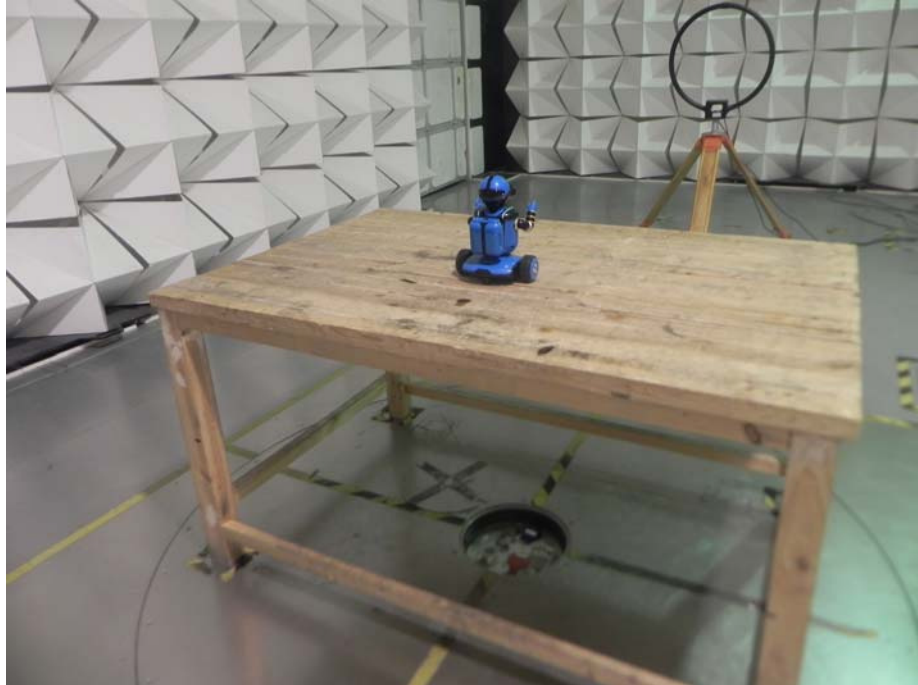



Test frequency from 30MHz to 1GHz at Test Site 2#

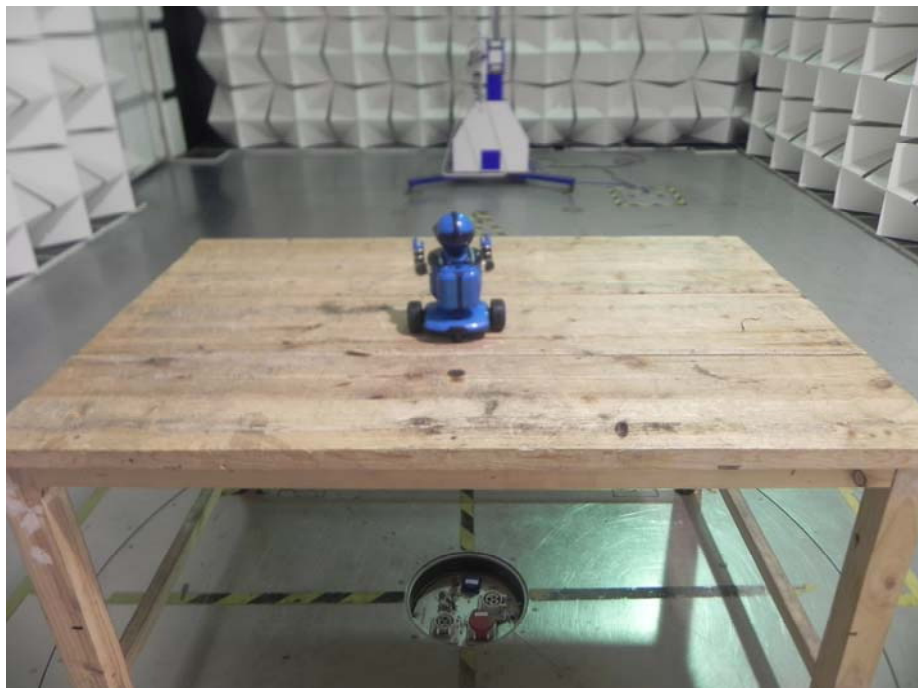

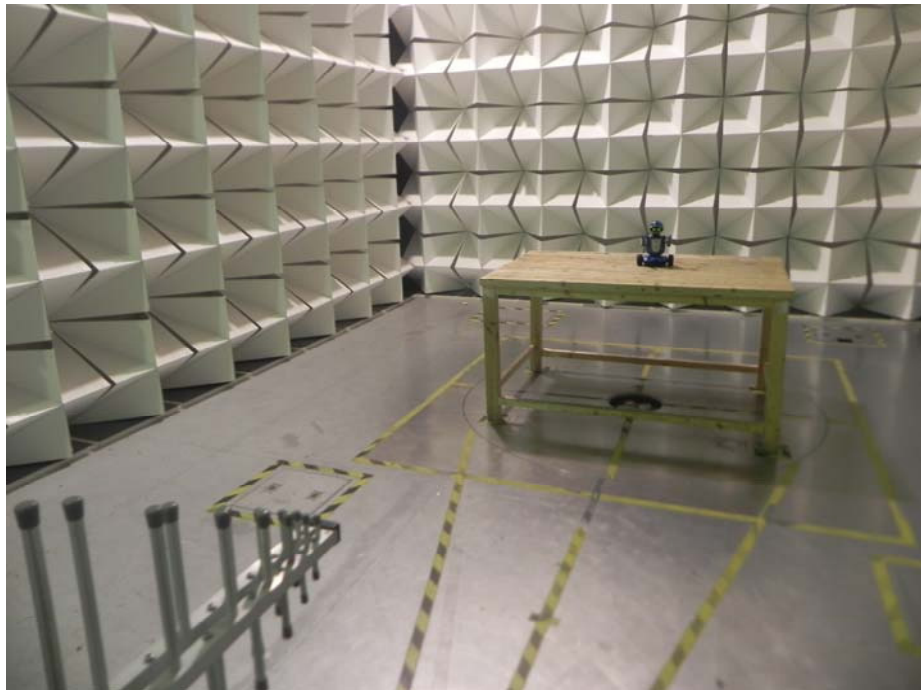

Test frequency 1GHz to 25GHz at Test Site 1#



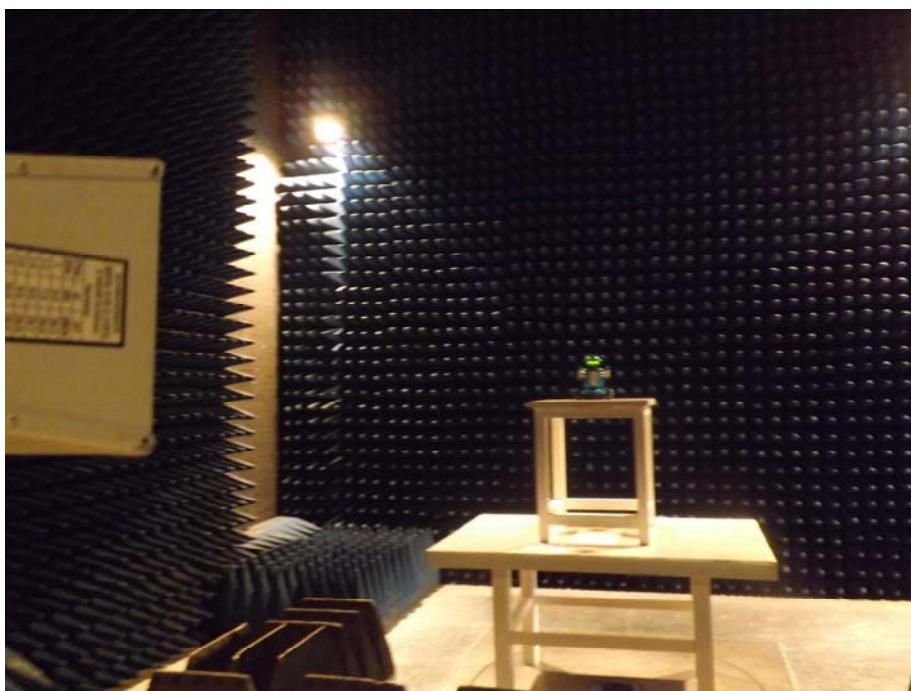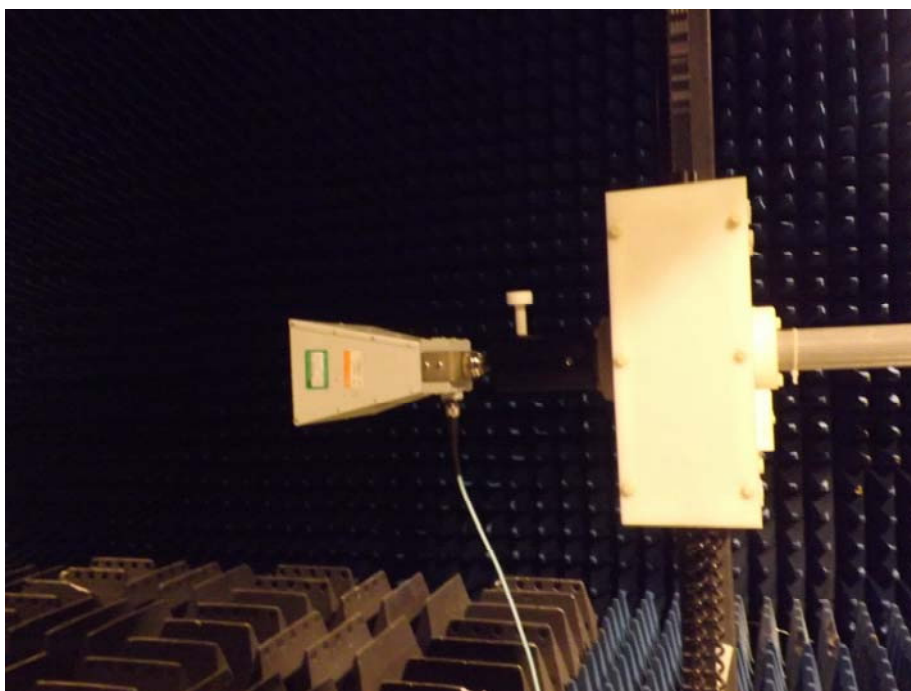

15 Photographs - Constructional Details

15.1 Model W-01 – External Photos
















15.2 Model W-01– Internal Photos


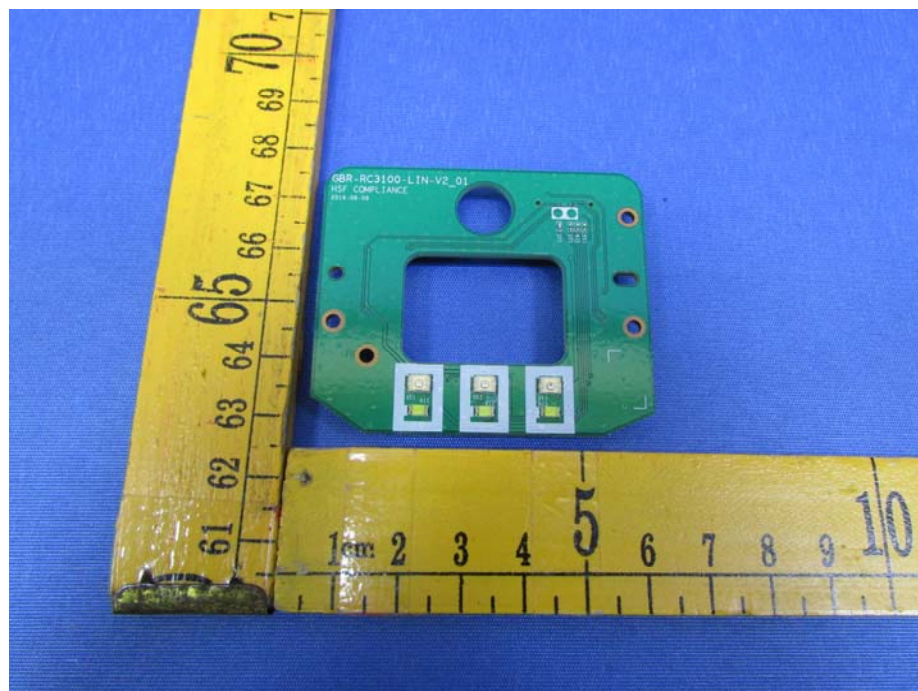


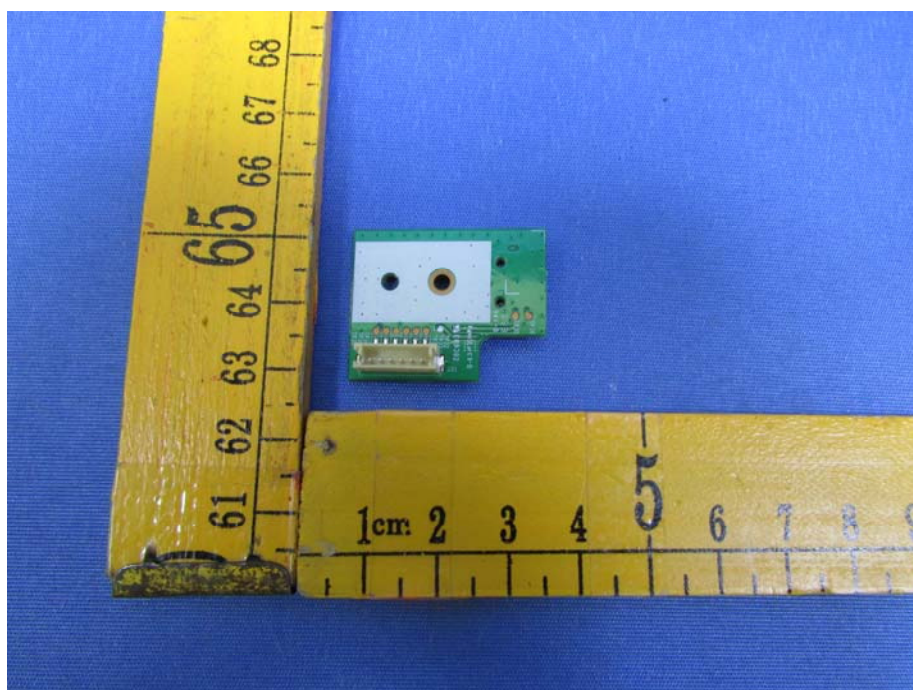
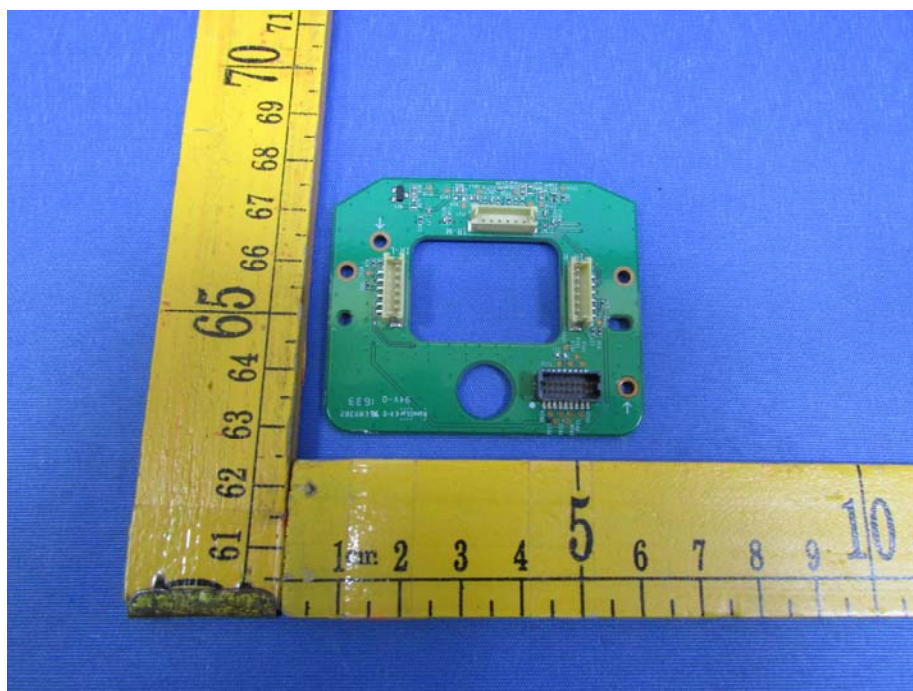



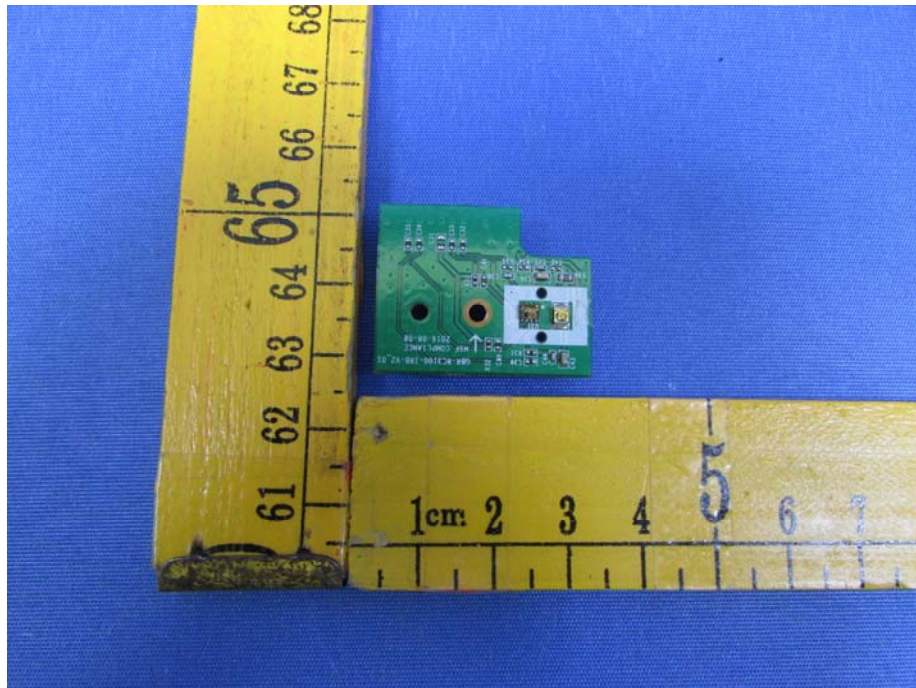


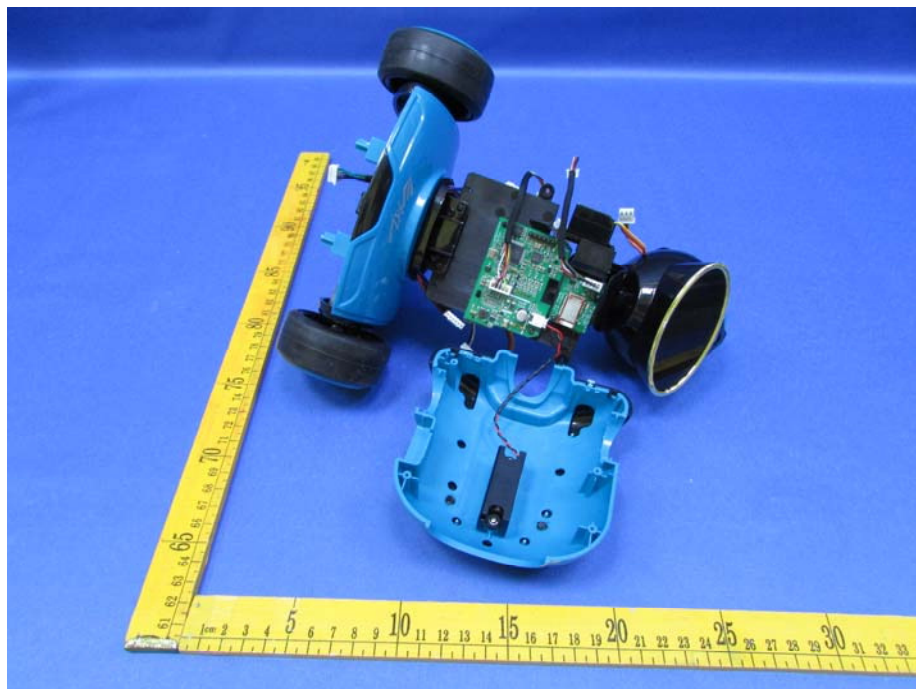


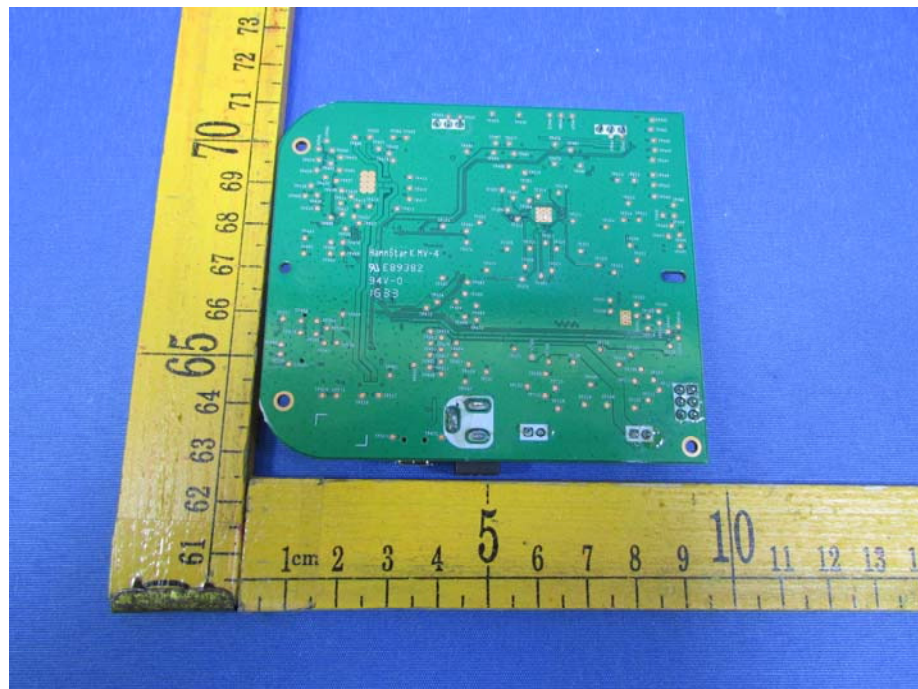
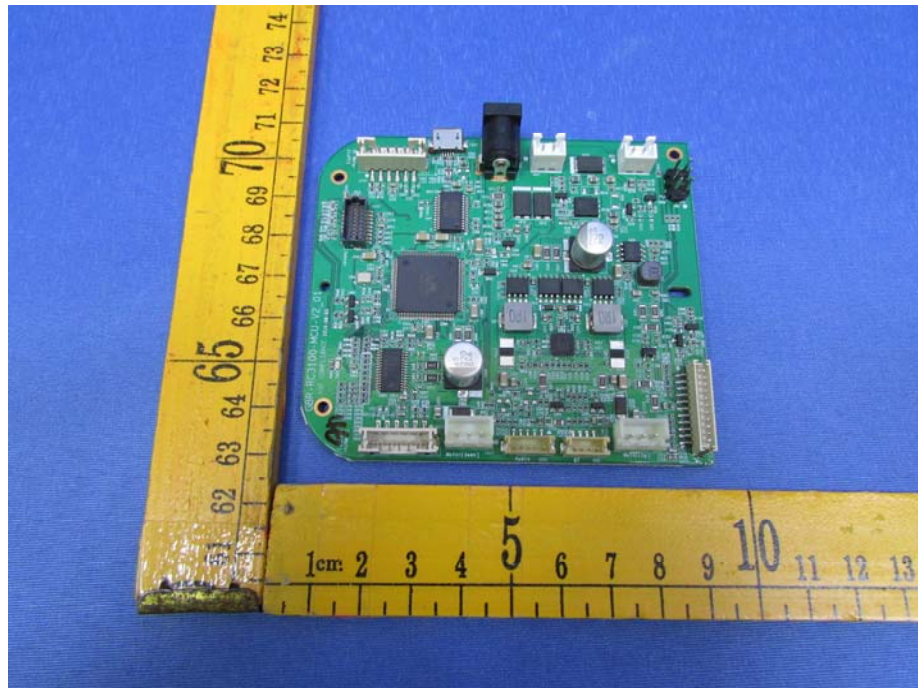


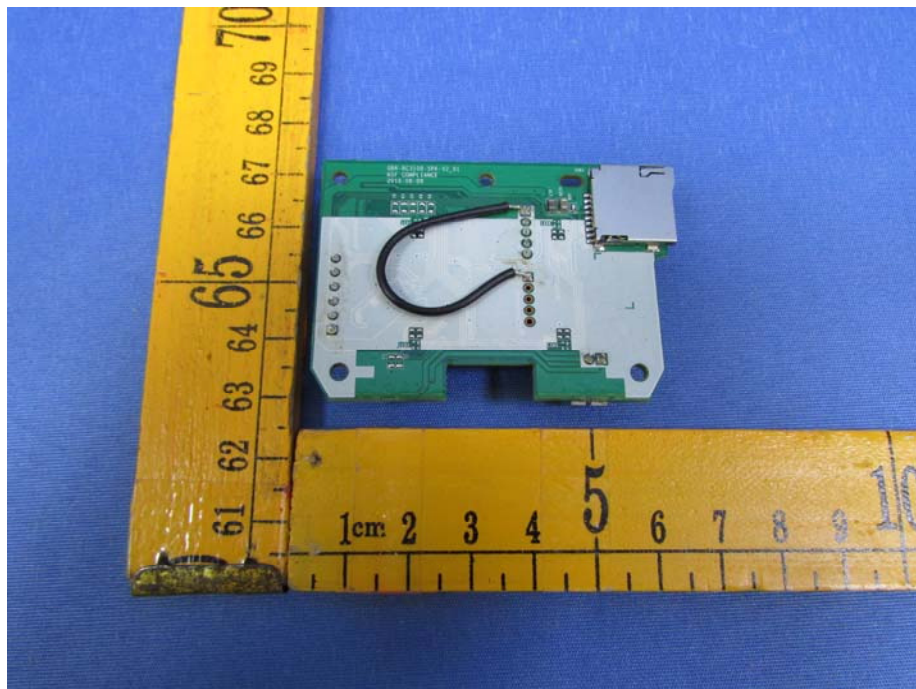
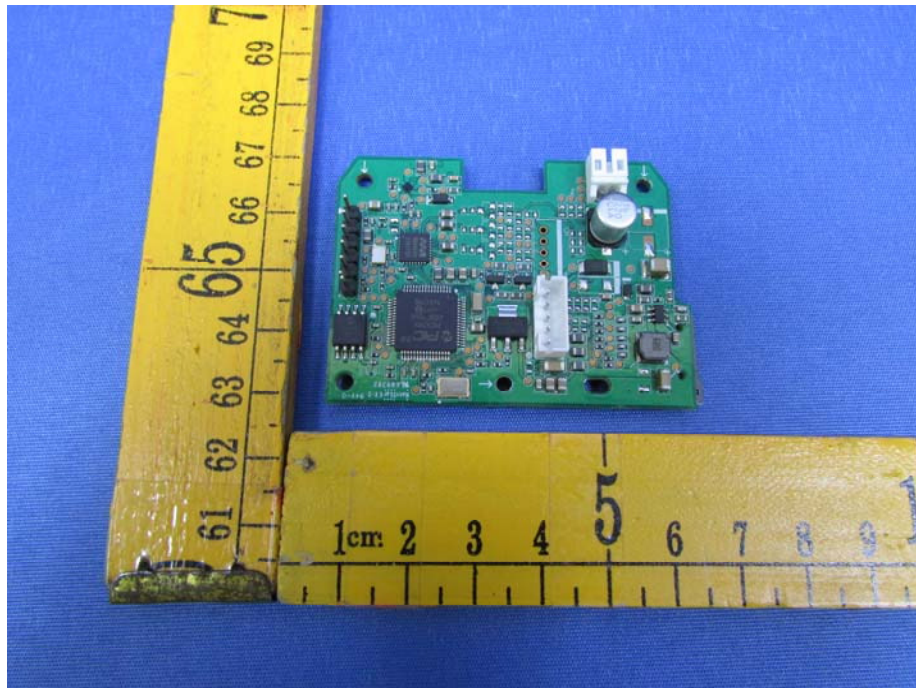


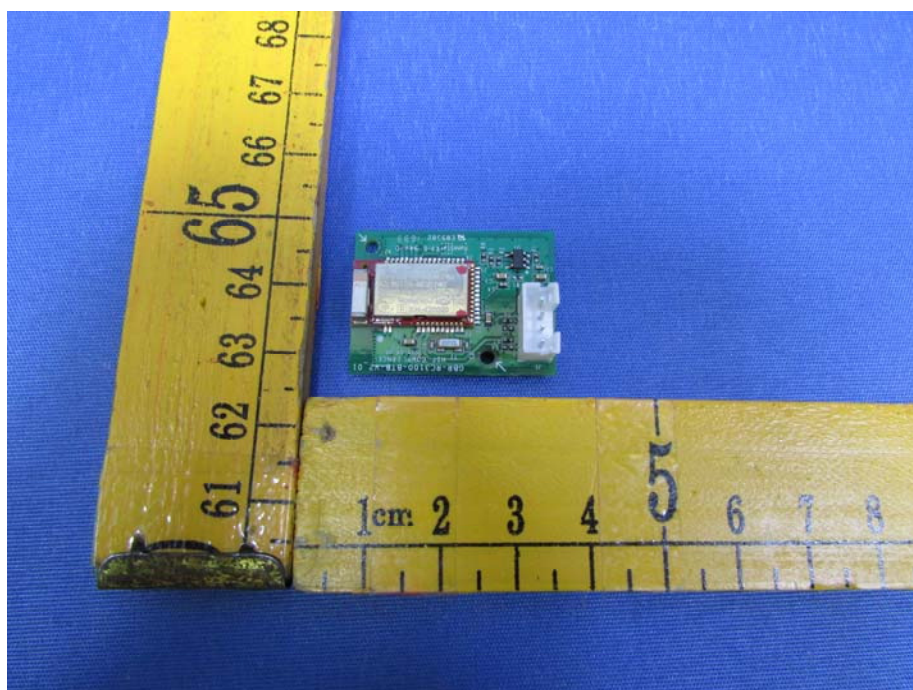
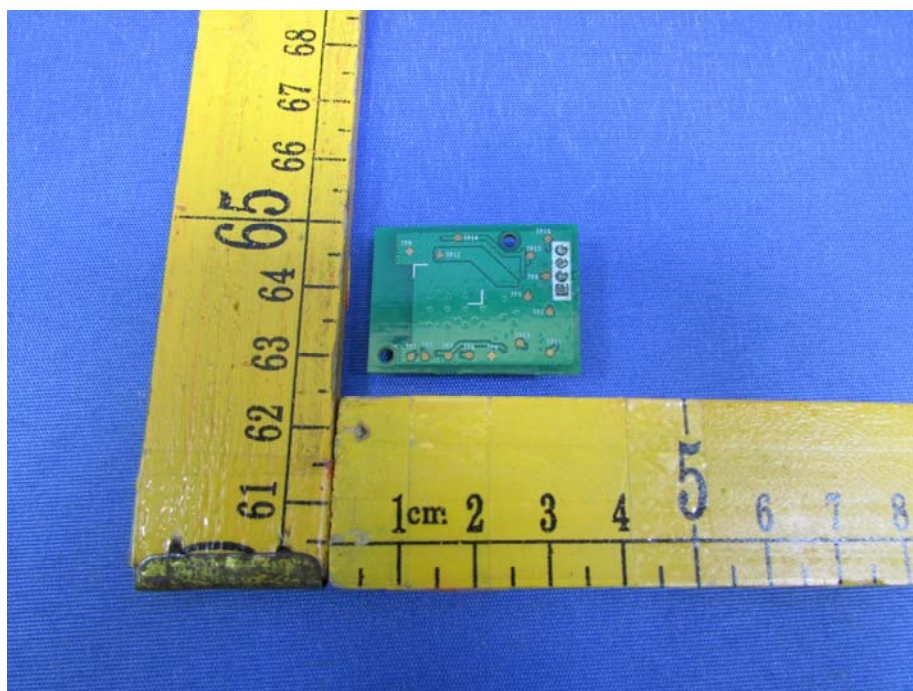


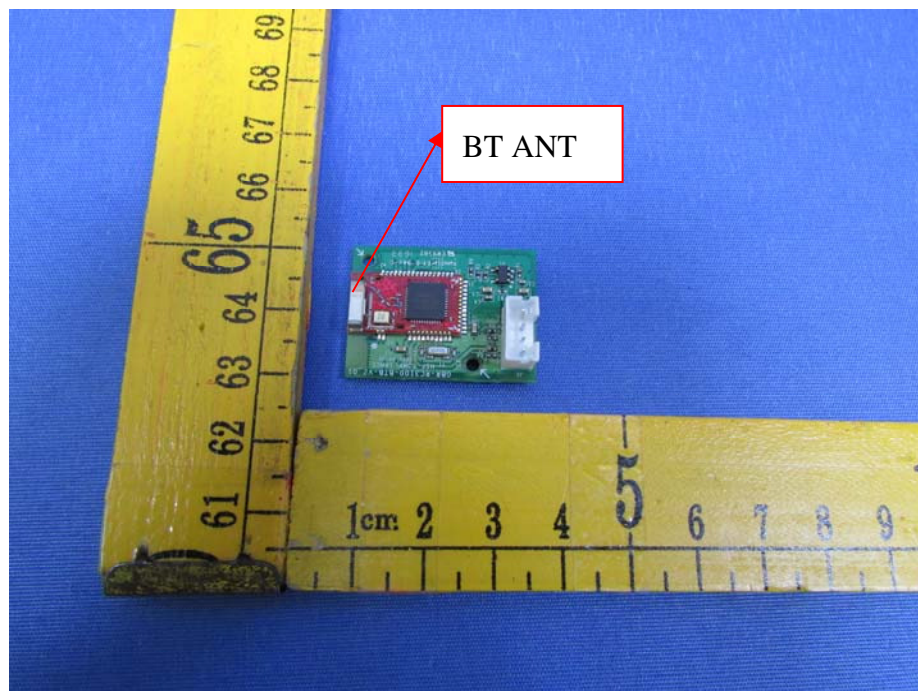
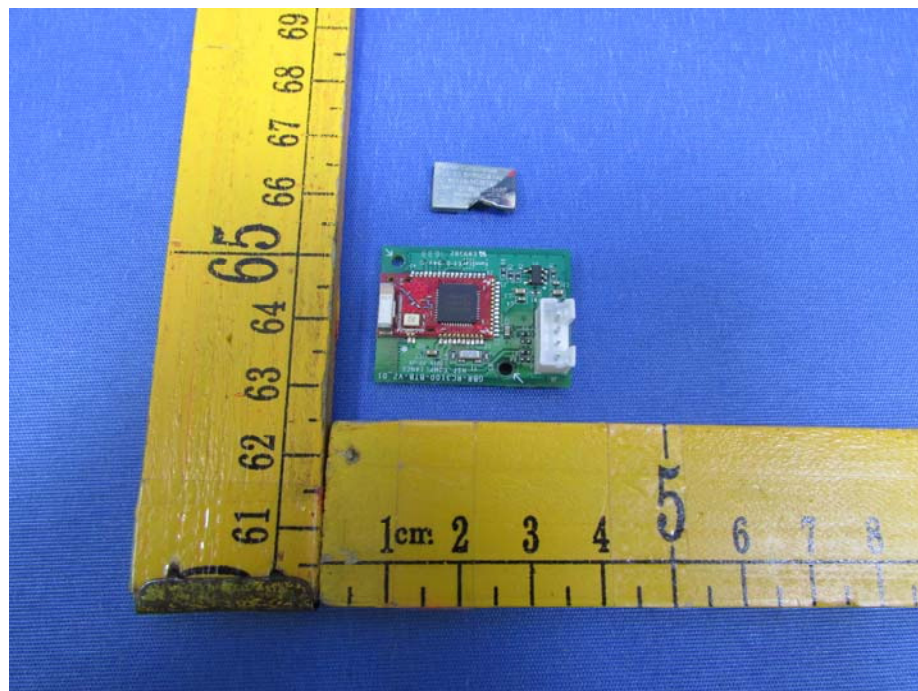



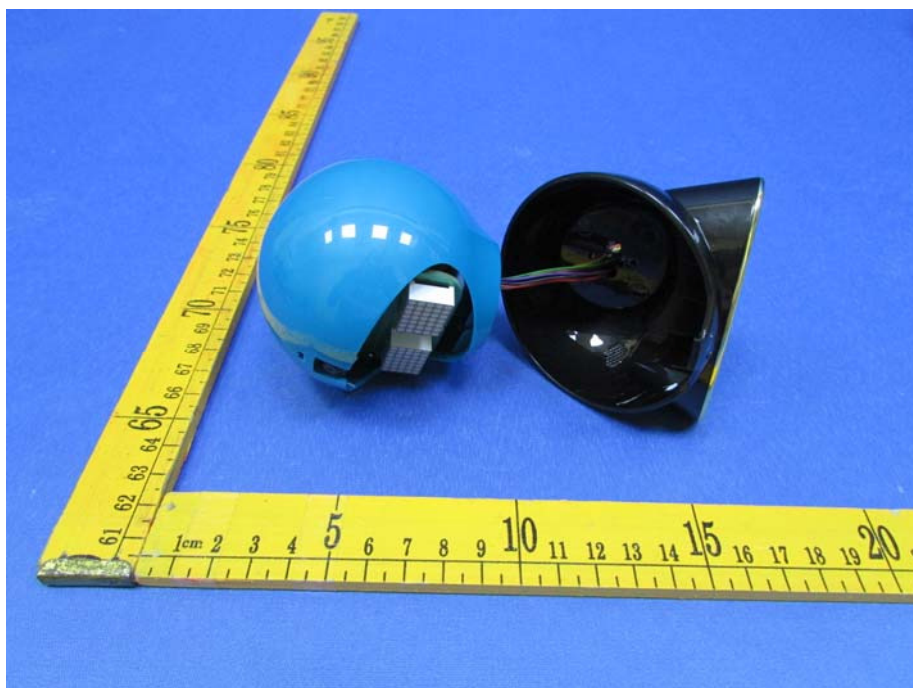


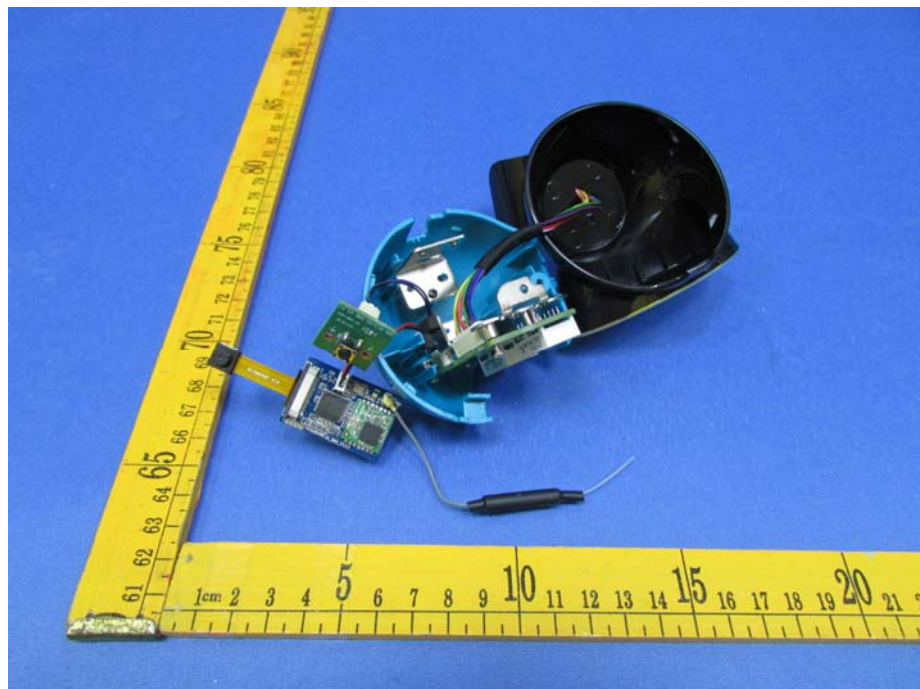
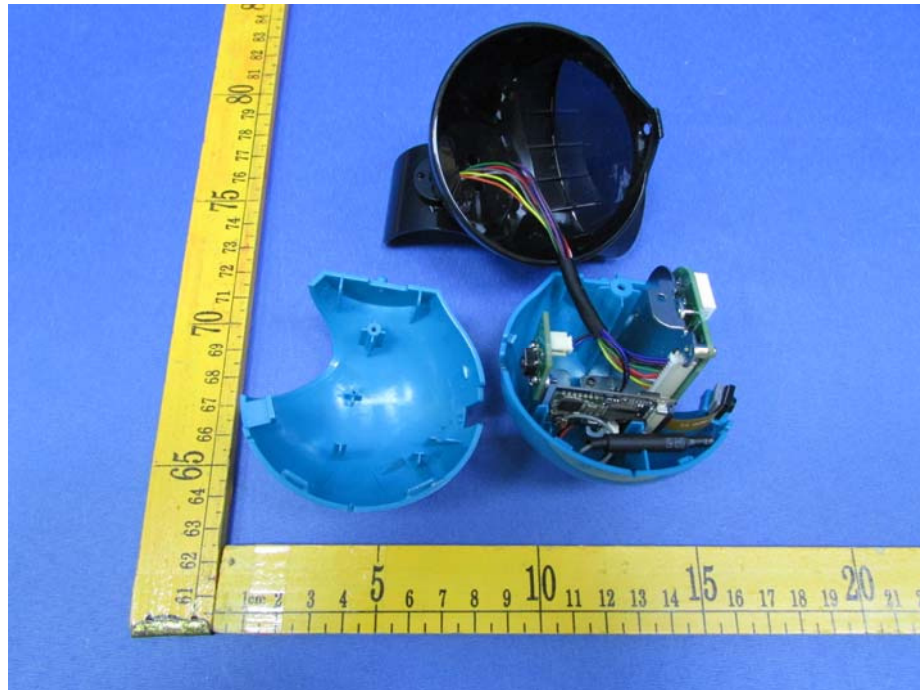


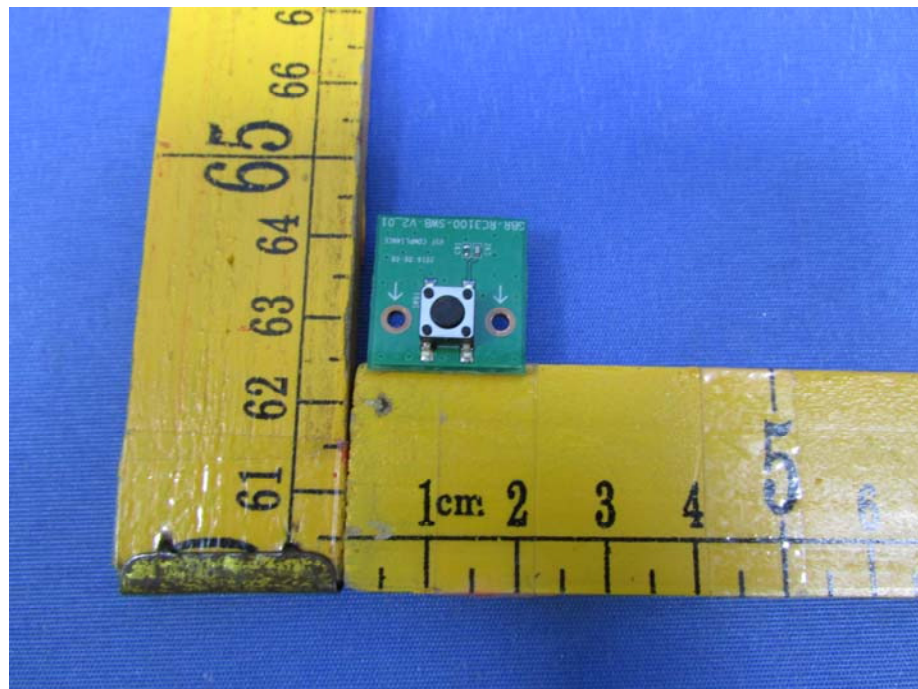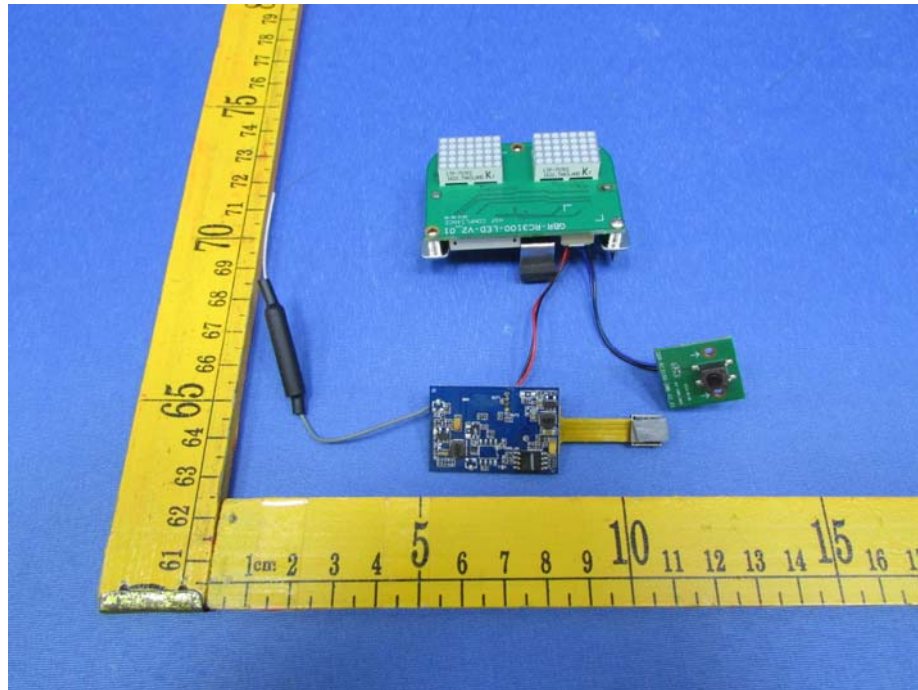

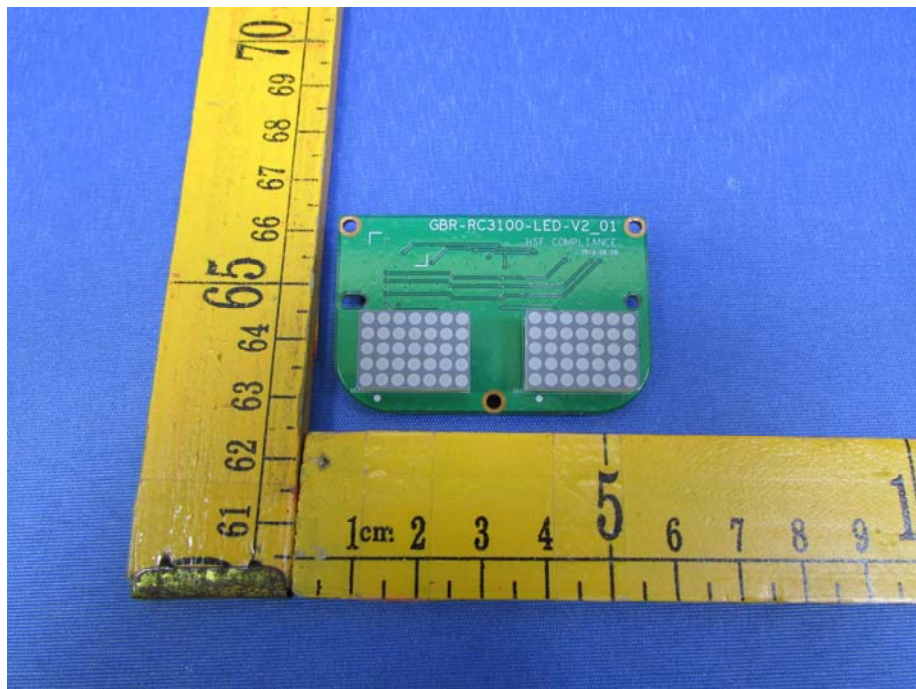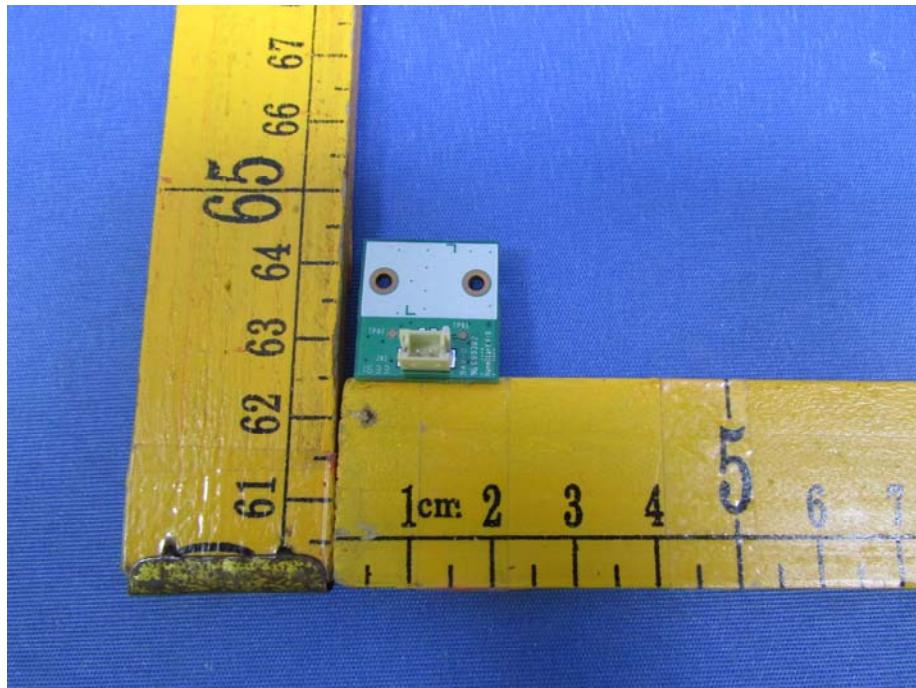

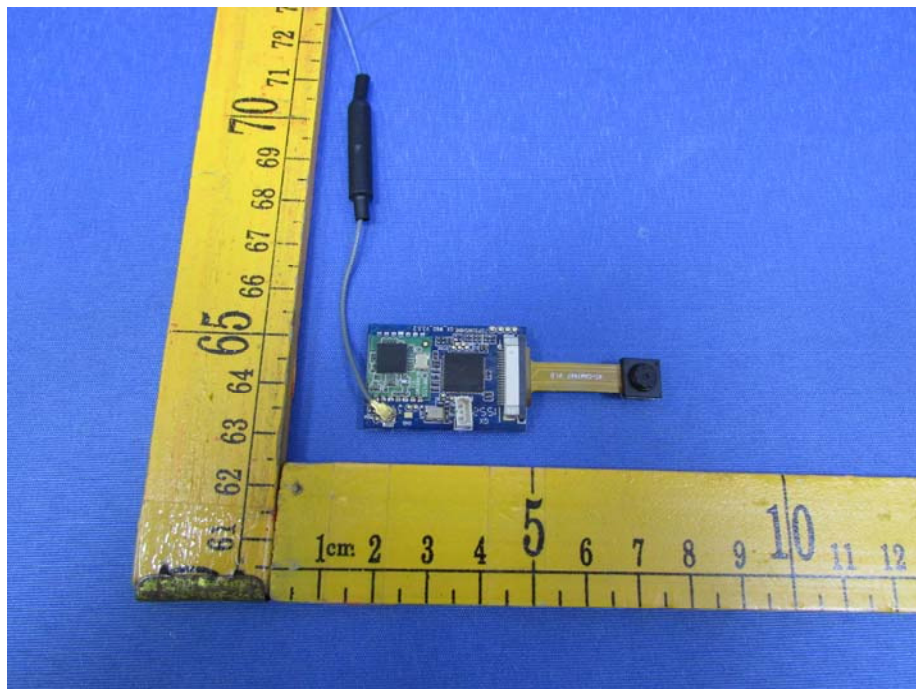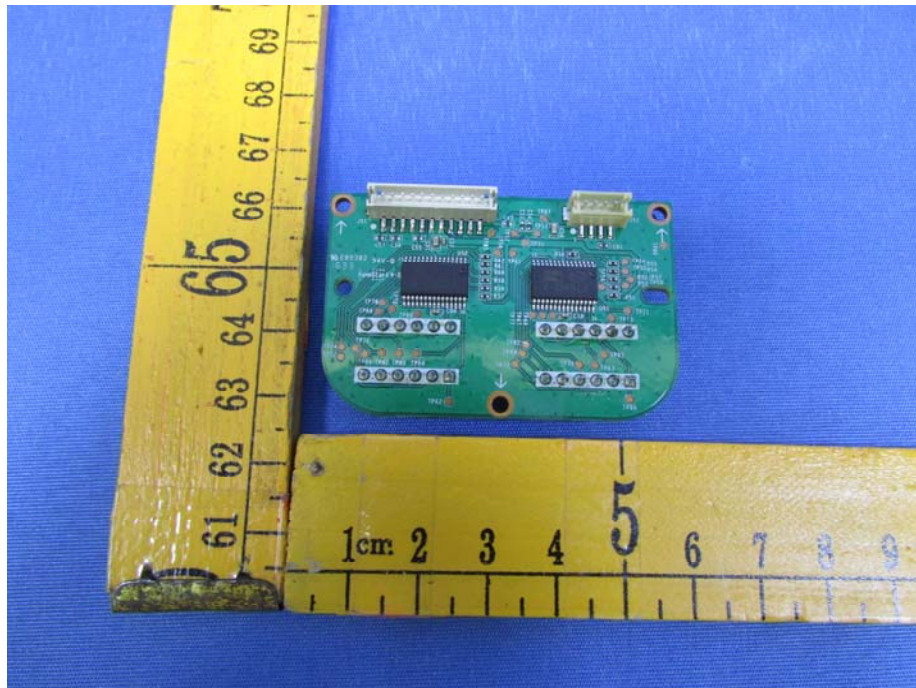

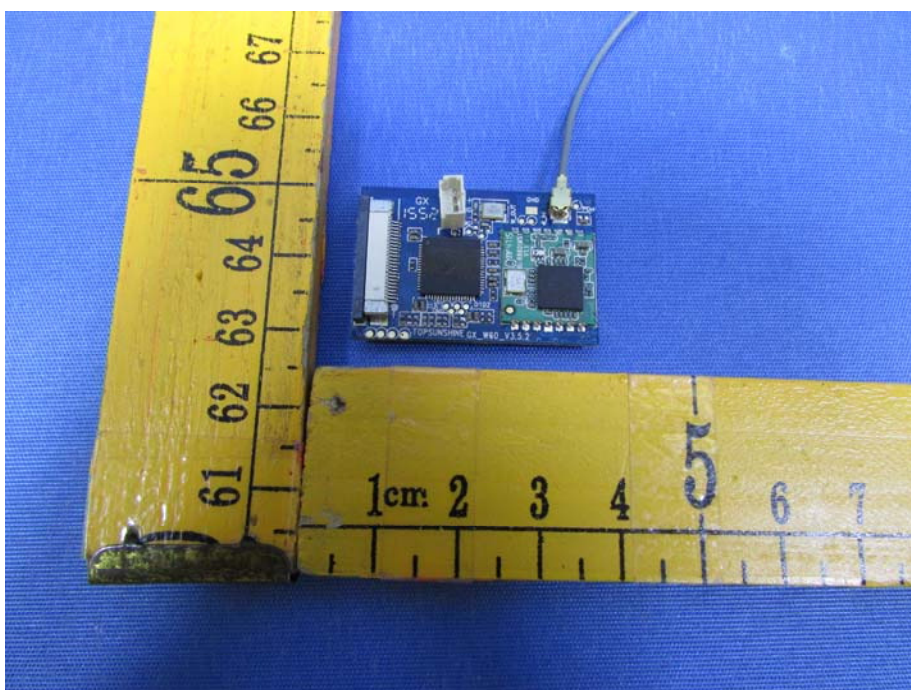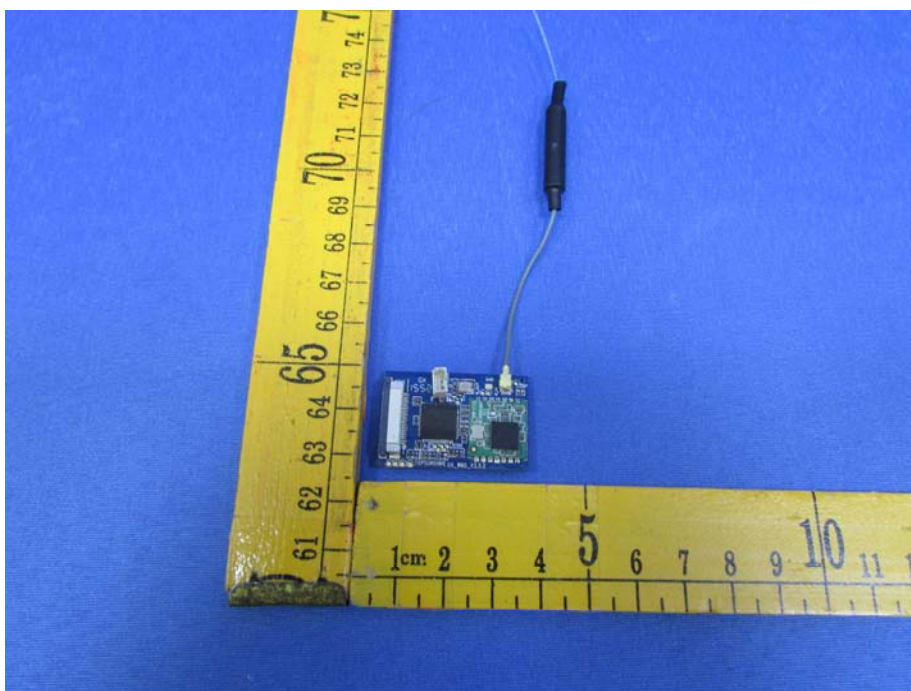

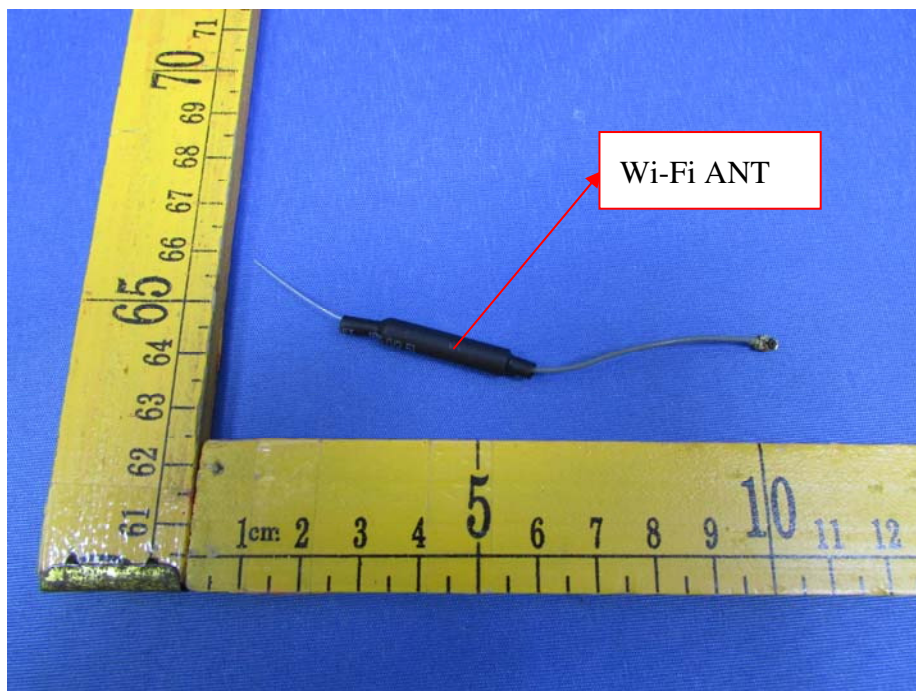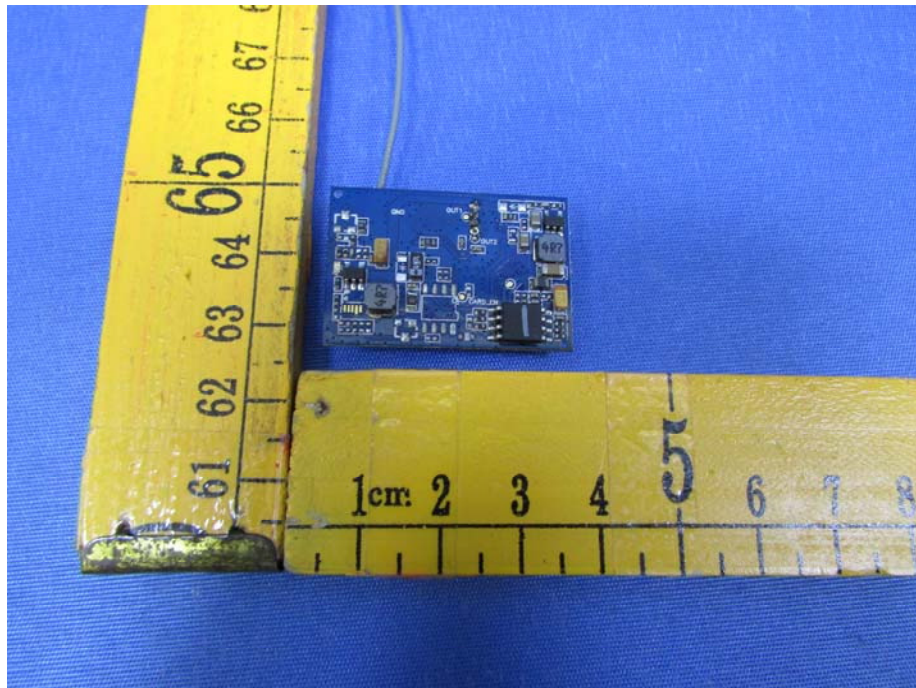

=====End of Report=====