

# FCC/ISED SIGFOX REPORT

## Certification

**Applicant Name:**  
WISOL CO., LTD

**Address:**  
531-7, Gajang-ro, Osan-si Gyeonggi-do, 18103, Korea

**Date of Issue:**

July 27, 2017

**Test Site/Location:**

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-R-1707-F019

**HCT FRN:** 0005866421

**ISED Registration Number:** 5944A-5

|                  |                          |
|------------------|--------------------------|
| <b>FCC ID</b>    | <b>: 2ABA2SFM11R2D</b>   |
| <b>IC</b>        | <b>: 11534A-SFM11R2D</b> |
| <b>APPLICANT</b> | <b>: WISOL CO., LTD</b>  |

**Model:** SFM11R2D

**EUT Type:** Sigfox Module

**Max. RF Output Power:** Low : 23.123 dBm (205.26 mW)

High : 22.734 dBm (187.67 Mw)

**Frequency Range:** Low : 902.1375 MHz – 904.6625 MHz

High : 920.1375 MHz – 922.6625 MHz

**Modulation type:** DBPSK

**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter

**FCC Rule Part(s):** Part 15 subpart C 15.247

**IC Rule Part(s):** RSS-247 Issue 2 (February 2017), RSS-Gen Issue 4(November 2014)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by : Jung Rae Cho**  
**Engineer of Telecommunication testing center**



**Approved by : Jong Seok Lee**  
**Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

| TEST REPORT NO. | DATE          | DESCRIPTION             |
|-----------------|---------------|-------------------------|
| HCT-R-1707-F019 | July 27, 2017 | - First Approval Report |
|                 |               |                         |
|                 |               |                         |
|                 |               |                         |
|                 |               |                         |

# Table of Contents

|       |                                                          |    |
|-------|----------------------------------------------------------|----|
| 1.    | GENERAL INFORMATION .....                                | 4  |
| 2.    | EUT DESCRIPTION .....                                    | 4  |
| 3.    | TEST METHODOLOGY .....                                   | 5  |
| 3.1   | EUT CONFIGURATION .....                                  | 5  |
| 3.2   | EUT EXERCISE .....                                       | 5  |
| 3.3   | GENERAL TEST PROCEDURES .....                            | 5  |
| 3.4   | DESCRIPTION OF TEST MODES .....                          | 6  |
| 4.    | INSTRUMENT CALIBRATION .....                             | 6  |
| 5.    | FACILITIES AND ACCREDITATIONS .....                      | 6  |
| 5.1   | FACILITIES .....                                         | 6  |
| 5.2   | EQUIPMENT .....                                          | 6  |
| 6.    | ANTENNA REQUIREMENTS .....                               | 6  |
| 7.    | MEASUREMENT UNCERTAINTY .....                            | 7  |
| 8.    | SUMMARY OF TEST RESULTS .....                            | 8  |
| 8.1   | FCC Part .....                                           | 8  |
| 8.2   | IC Part .....                                            | 9  |
| 9.    | TEST RESULT .....                                        | 10 |
| 9.1   | PEAK POWER .....                                         | 10 |
| 9.2   | BAND EDGES .....                                         | 16 |
| 9.3   | FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW) ..... | 22 |
| 9.4   | NUMBER OF HOPPING FREQUENCY .....                        | 33 |
| 9.5   | TIME OF OCCUPANCY (DWELL TIME) .....                     | 36 |
| 9.6   | SPURIOUS EMISSIONS .....                                 | 42 |
| 9.6.1 | CONDUCTED SPURIOUS EMISSIONS .....                       | 42 |
| 9.6.2 | RADIATED SPURIOUS EMISSIONS .....                        | 50 |
| 9.6.3 | RECEIVER SPURIOUS EMISSIONS .....                        | 66 |
| 9.7   | POWERLINE CONDUCTED EMISSIONS .....                      | 67 |
| 10.   | LIST OF TEST EQUIPMENT .....                             | 72 |
| 10.1  | LIST OF TEST EQUIPMENT(Conducted Test) .....             | 72 |
| 10.2  | LIST OF TEST EQUIPMENT(Radiated Test) .....              | 73 |

## 1. GENERAL INFORMATION

**Applicant:** WISOL CO., LTD  
**Address:** 531-7, Gajang-ro, Osan-si Gyeonggi-do, 18103, Korea  
**FCC ID:** 2ABA2SFM11R2D  
**IC:** 11534A-SFM11R2D  
**EUT Type:** Sigfox Module  
**Model:** SFM11R2D  
**Date(s) of Tests:** June 16, 2017 ~ July 24, 2017  
**Place of Tests:** HCT Co., Ltd.  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

## 2. EUT DESCRIPTION

|                              |                                                                                                                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                 | SFM11R2D                                                                                                            |
| <b>EUT Type</b>              | Sigfox Module                                                                                                       |
| <b>Power Supply</b>          | DC 3.3 V                                                                                                            |
| <b>Frequency Range</b>       | Low : 902.1375 MHz – 904.6625 MHz<br>High : 920.1375 MHz – 922.6625 MHz                                             |
| <b>Max. RF Output Power:</b> | Low : 23.123 dBm (205.26 mW)<br>High : 22.734 dBm (187.67 Mw)                                                       |
| <b>Modulation Type</b>       | DBPSK                                                                                                               |
| <b>Modulation Technique</b>  | FHSS                                                                                                                |
| <b>Number of Channels</b>    | Low : 54 Channels (9 Macro channels x 6 Micro channels)<br>High : 54 Channels (9 Macro channels x 6 Micro channels) |
| <b>Antenna Specification</b> | Manufacturer: INNO-LINK<br>Antenna type: External dipole antenna<br>Peak Gain : 2.1 dBi                             |

### ※ 15.247 Requirements for Sigfox transmitter

- This Sigfox Quad-mode module has been tested by a Sigfox Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.

- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.

- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### **3. TEST METHODOLOGY**

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / the RSS-Gen issue 4, RSS-247 issue 2.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW  $\geq 3 \times$  RBW).

##### **Conducted Antenna Terminal**

See Section from 7.8.2 to 7.8.8.(ANSI 63.10-2013)

### **3.4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## **6. ANTENNA REQUIREMENTS**

### **According to FCC 47 CFR §15.203:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* This module has SMA type antenna connector, not unique coupling. So it's subject to Limited single-modular transmitter.

\*The OEM manufacturer who will install this module into their device must not give an access to an antenna and connector by end-user in compliance with FCC Section 15.203.

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB) |
|------------------------------------------|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82                             |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 3.40                             |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 4.80                             |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.70                             |

## 8. SUMMARY OF TEST RESULTS

### 8.1 FCC Part

| Test Description                    | FCC Part Section(s)        | Test Limit                                                                                                    | Test Condition | Test Result |
|-------------------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------|----------------|-------------|
| 20 dB Bandwidth                     | §15.247(a)(1)(i)           | N/A                                                                                                           | CONDUCTED      | PASS        |
| Occupied Bandwidth                  | N/A                        | N/A                                                                                                           |                | N/A         |
| Conducted Maximum Peak Output Power | §15.247(b)(2)              | < 1 W if ≥ 50 non-overlapping hopping channels used<br>< 0.25 W if < 50 non-overlapping hopping channels used |                | PASS        |
| Carrier Frequency Separation        | §15.247(a)(1)              | >25 kHz or<br>> 20dB BW of hopping channel                                                                    |                | PASS        |
| Number of Hopping Frequencies       | §15.247(a)(1)(i)           | ≥ 50                                                                                                          |                | PASS        |
| Time of Occupancy                   | §15.247(a)(1)(i)           | <400 ms                                                                                                       |                | PASS        |
| Conducted Spurious Emissions        | §15.247(d)                 | > 20 dB for all out-of band emissions                                                                         |                | PASS        |
| Band Edge(Out of Band Emissions)    | §15.247(d)                 | > 20 dB for all out-of band emissions                                                                         |                | PASS        |
| AC Power line Conducted Emissions   | §15.207(a)                 | cf. Section 9.7                                                                                               |                | PASS        |
| Radiated Spurious Emissions         | §15.247(d), 15.205, 15.209 | cf. Section 9.6.2                                                                                             | RADIATED       | PASS        |
| Radiated Restricted Band Edge       | §15.247(d), 15.205, 15.209 | cf. Section 9.6.3                                                                                             |                | PASS        |

## 8.2 IC Part

| Test Description                    | IC Part Section(s)           | Test Limit                                                                                                        | Test Condition | Test Result |
|-------------------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------|-------------|
| 20 dB Bandwidth                     | RSS-247, 5.1.3               | N/A                                                                                                               | CONDUCTED      | PASS        |
| 99 % Bandwidth                      | RSS-Gen, 6.6                 | N/A                                                                                                               |                | PASS        |
| Conducted Maximum Peak Output Power | RSS-247, 5.4.1               | < 1 W if the hopset uses 50 or more hopping channels<br>< 0.25 W if the hopset uses less than 50 hopping channels |                | PASS        |
| Carrier Frequency Separation        | RSS-247, 5.1.2               | >25 kHz or<br>> 20dB BW of hopping channel                                                                        |                | PASS        |
| Number of Hopping Frequencies       | RSS-247, 5.1.3               | $\geq 50$                                                                                                         |                | PASS        |
| Time of Occupancy                   | RSS-247, 5.1.3               | < 0.4 s                                                                                                           |                | PASS        |
| Conducted Spurious Emissions        | RSS-247, 5.5                 | < 20 dB for all out-of band emissions                                                                             |                | PASS        |
| Band Edge(Out of Band Emissions)    | RSS-247, 5.5                 | < 20 dB for all out-of band emissions                                                                             |                | PASS        |
| AC Power line Conducted Emissions   | RSS-Gen, 8.8                 | RSS-Gen section 8.8 table 3                                                                                       |                | PASS        |
| Radiated Spurious Emissions         | RSS-Gen, 8.9                 | RSS-Gen section 8.9 table 4, 5                                                                                    | RADIATED       | PASS        |
| Radiated Restricted Band Edge       | RSS-Gen, 8.10                | RSS-Gen section 8.10 table 6                                                                                      |                | PASS        |
| Receiver Spurious Emissions         | RSS-Gen, 5<br>RSS-Gen, 7.1.2 | RSS-Gen section 7.1.2 table 2                                                                                     |                | PASS        |

## 9. TEST RESULT


### 9.1 PEAK POWER

#### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 902-928 MHz band: 1 watt (30 dBm) for systems employing at least 50 hopping channels; and, 0.25 watts (24 dBm) for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.
3. The e.i.r.p of this module not exceed 4 W because the antenna gain not exceed not 6 dBi.

#### Test Configuration



#### TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

#### SAMPLE CALCULATION

$$\begin{aligned}\text{Output Power} &= \text{Spectrum Reading Power} + \text{Attenuator loss} + \text{Cable loss(1 ea)} \\ &= 10 \text{ dBm} + 10 \text{ dB} + 0.1 \text{ dB} = 20.1 \text{ dBm}\end{aligned}$$

Note :

1. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 900 MHz range that was rounded off to the closest tenth dB. Actual value of loss for the Attenuator and cable combination is 10 dB at 900 MHz.

**TEST RESULTS**

No non-compliance noted

**Test Data****[Low Band]**


| Channel | Frequency<br>(MHz) | Output Power<br>(DBPSK) |        | Limit<br>(mW) | Result |
|---------|--------------------|-------------------------|--------|---------------|--------|
|         |                    | (dBm)                   | (mW)   |               |        |
| Low     | 902.1375           | 23.123                  | 205.26 | 1000          | PASS   |
| Mid     | 903.4125           | 22.968                  | 198.06 |               | PASS   |
| High    | 904.6625           | 23.009                  | 199.94 |               | PASS   |

**[High Band]**

| Channel | Frequency<br>(MHz) | Output Power<br>(DBPSK) |        | Limit<br>(mW) | Result |
|---------|--------------------|-------------------------|--------|---------------|--------|
|         |                    | (dBm)                   | (mW)   |               |        |
| Low     | 920.1375           | 22.734                  | 187.67 | 1000          | PASS   |
| Mid     | 921.3875           | 22.656                  | 184.33 |               | PASS   |
| High    | 922.6625           | 22.597                  | 181.84 |               | PASS   |


## Test Plots (DBPSK) – Low Band

### Peak Power (Low)

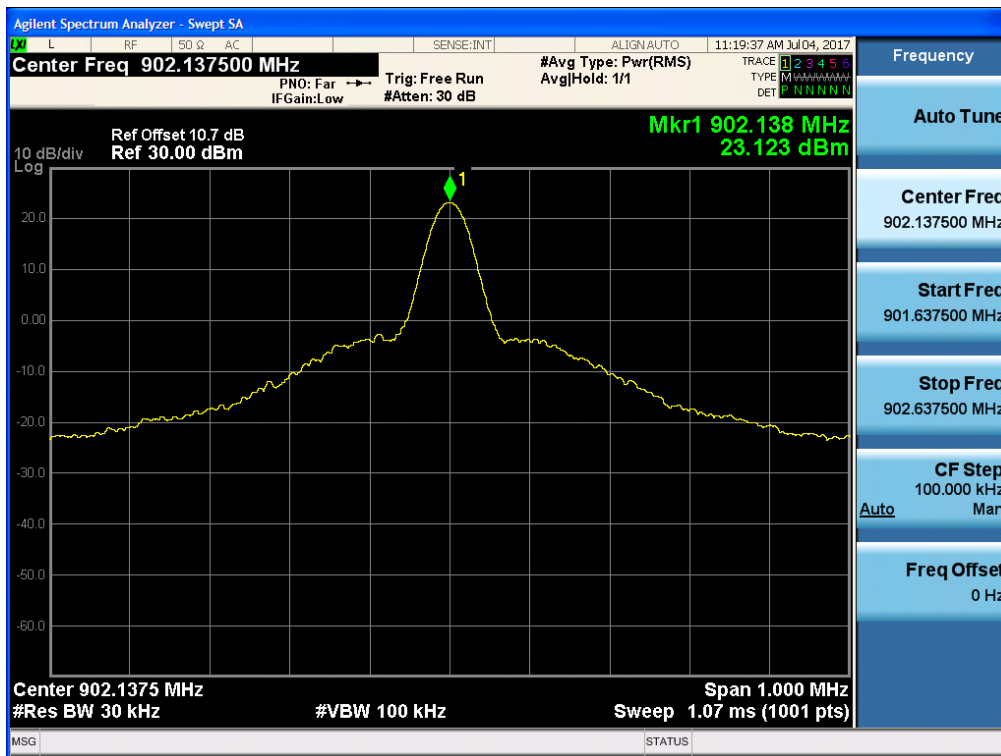


## Test Plots (DBPSK)

### Peak Power (Middle)

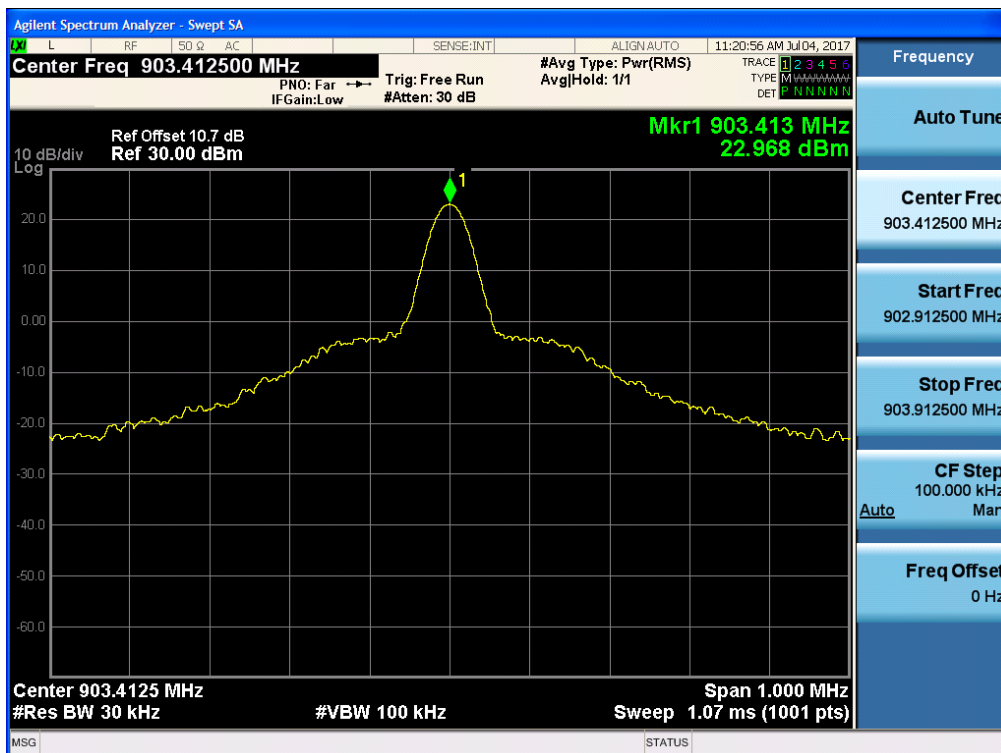

# Test Plots (DBPSK)

## Peak Power (High)

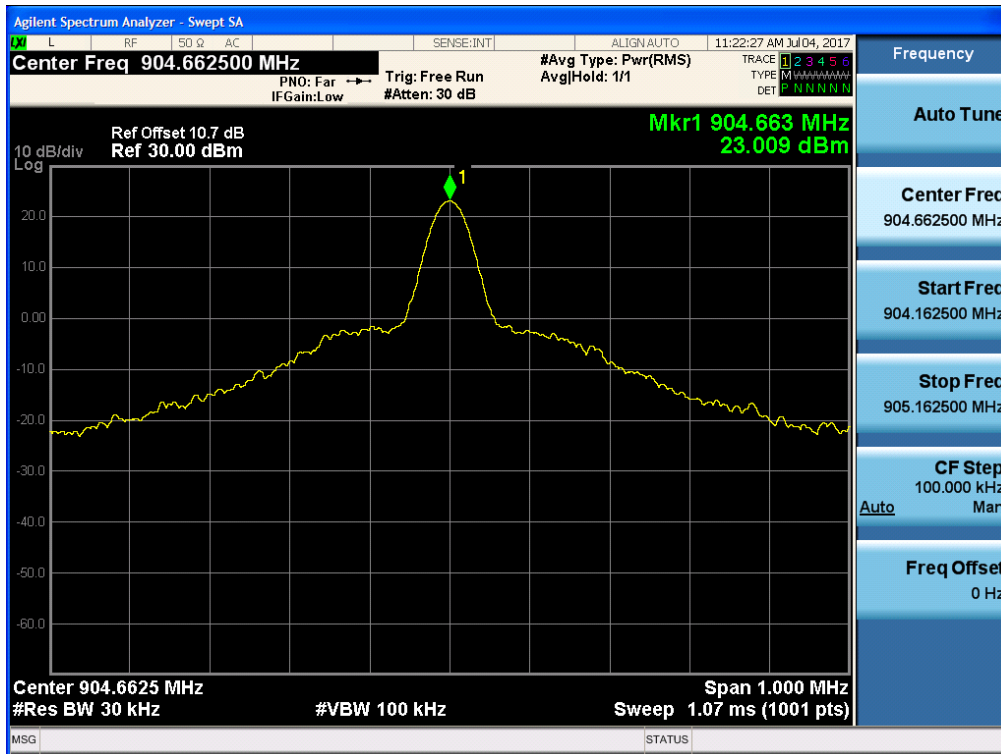

## Test Plots (DBPSK) – High Band Peak Power (Low)



## Test Plots (DBPSK) Peak Power (Middle)



# Test Plots (DBPSK)

## Peak Power (High)




## 9.2 BAND EDGES

### LIMIT

According to §15.247(d) / RSS-247 5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Test Configuration

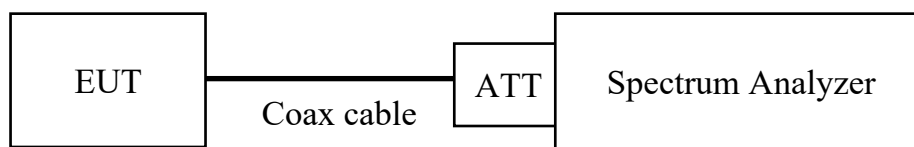

## TEST PROCEDURE

**This test is performed with hopping off and hopping on.**

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

## TEST RESULTS

See attached.

Note :

1. The results in plot is already including the actual values of loss for the Attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 900 MHz range that was rounded off to the closest tenth dB. Actual value of loss for the Attenuator and cable combination is 10 dB at 900 MHz.

## Test Data

### [Low Band]

- Without hopping

| Frequency<br>(MHz) | Channel | D-BPSK<br>(dB) | Limit<br>(dBc) | Margin<br>D-BPSK (dBc) | Result |
|--------------------|---------|----------------|----------------|------------------------|--------|
| 902.1375           | Low     | 72.425         | 20             | 52.43                  | Pass   |
| 904.6625           | Upper   | 72.202         |                | 52.20                  | Pass   |

- With hopping

| Frequency<br>(MHz) | Channel<br>No. | D-BPSK<br>(dB) | Limit<br>(dBc) | Margin<br>D-BPSK (dBc) | Result |
|--------------------|----------------|----------------|----------------|------------------------|--------|
| 902.1375           | Lower          | 72.249         | 20             | 52.25                  | Pass   |
| 904.6625           | Upper          | 71.942         |                | 51.94                  | Pass   |

### [High Band]


- Without hopping

| Frequency<br>(MHz) | Channel | D-BPSK<br>(dB) | Limit<br>(dBc) | Margin<br>D-BPSK (dBc) | Result |
|--------------------|---------|----------------|----------------|------------------------|--------|
| 920.1375           | Low     | 71.671         | 20             | 51.67                  | Pass   |
| 922.6625           | Upper   | 71.741         |                | 51.74                  | Pass   |


- With hopping

| Frequency<br>(MHz) | Channel<br>No. | D-BPSK<br>(dB) | Limit<br>(dBc) | Margin<br>D-BPSK (dBc) | Result |
|--------------------|----------------|----------------|----------------|------------------------|--------|
| 920.1375           | Lower          | 71.436         | 20             | 51.44                  | Pass   |
| 922.6625           | Upper          | 72.161         |                | 52.16                  | Pass   |


## Test Plots without hopping (DBPSK) – Low Band Band Edges (Low)

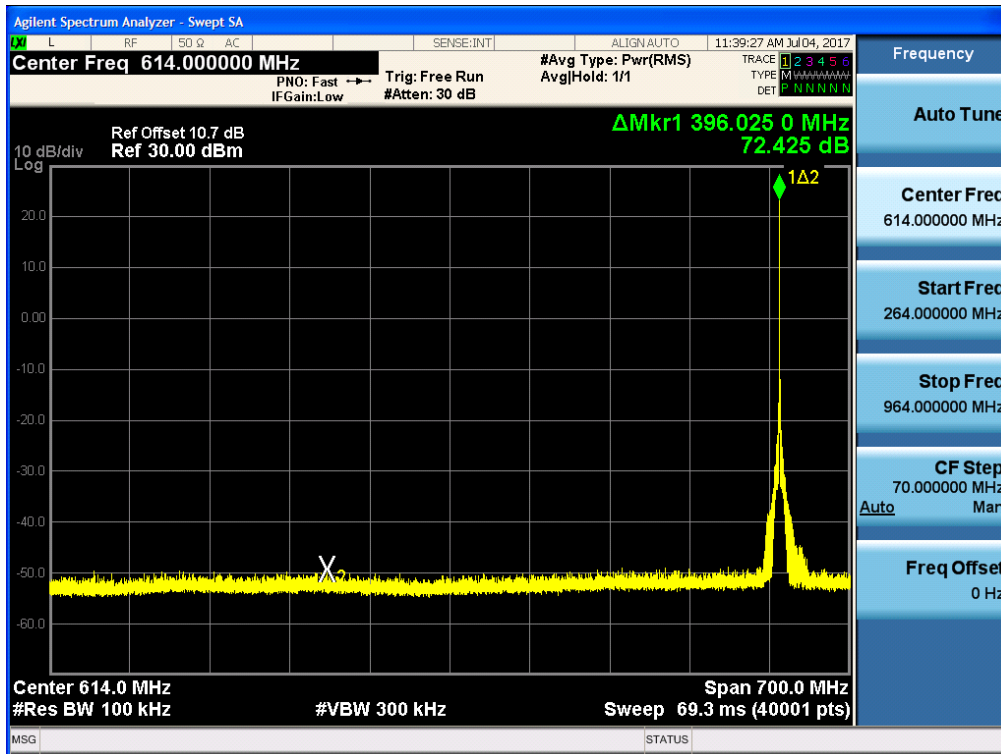


## Test Plots without hopping (DBPSK) Band Edges (High)

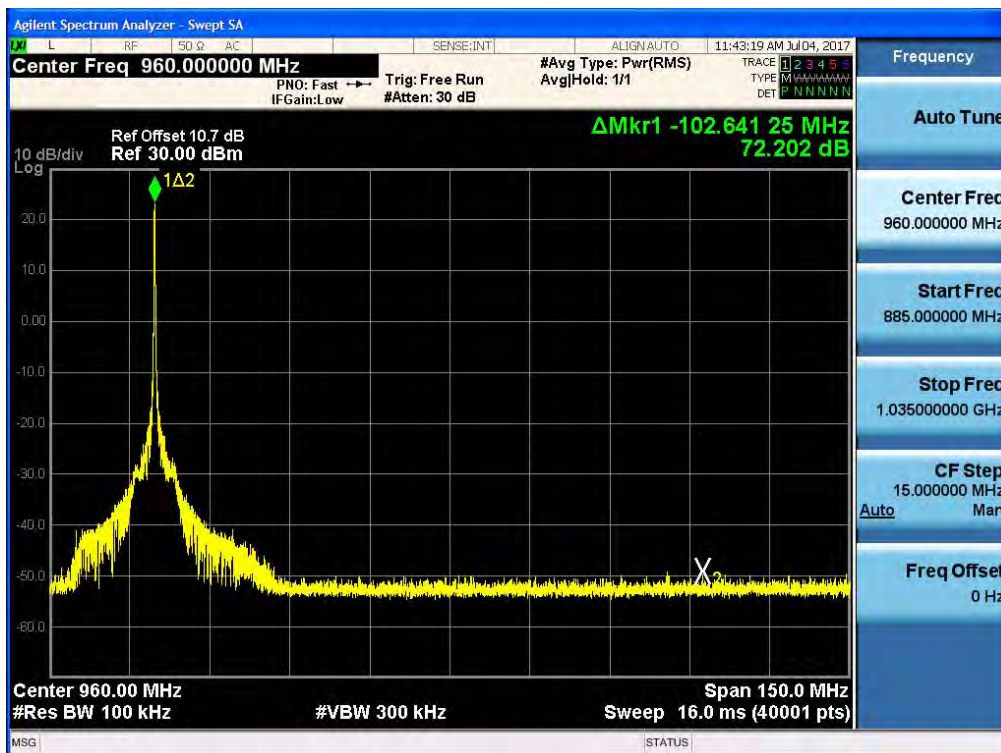


# Test Plots with hopping (DBPSK) Band Edges (Low)

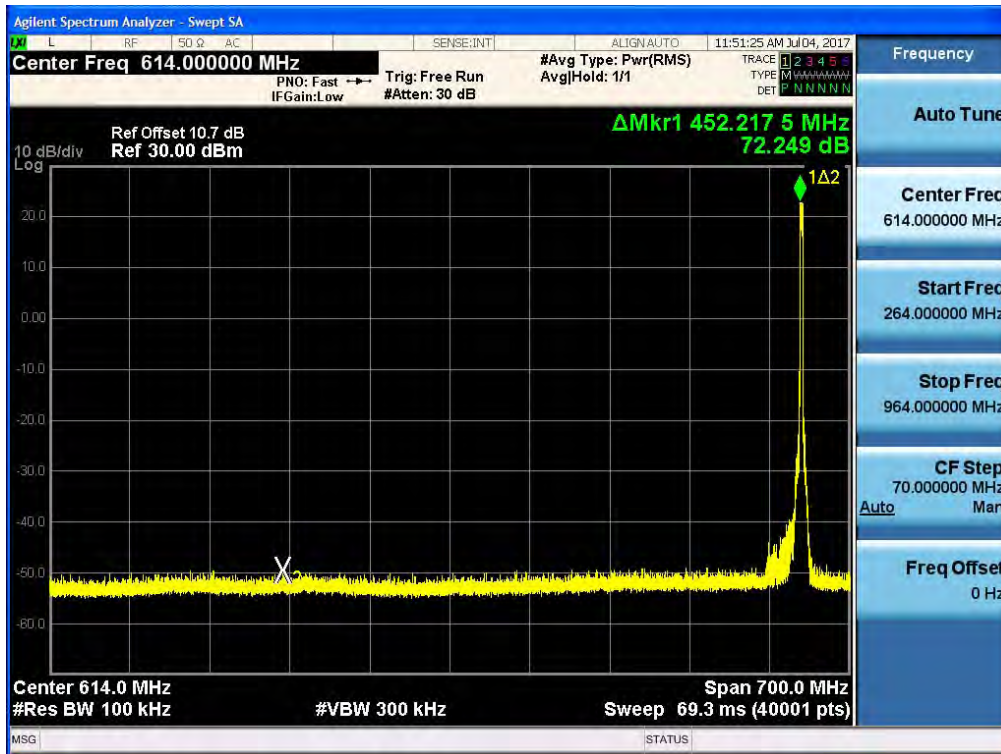


# Test Plots with hopping (DBPSK) Band Edges (High)

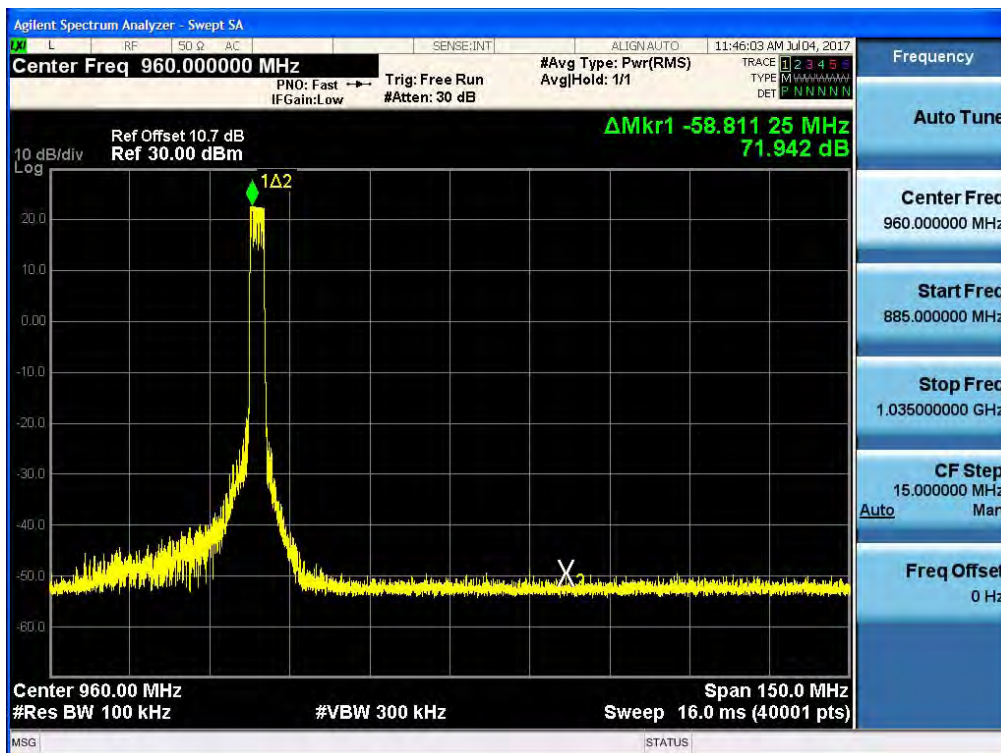


## Test Plots without hopping (DBPSK) – High Band Band Edges (Low)

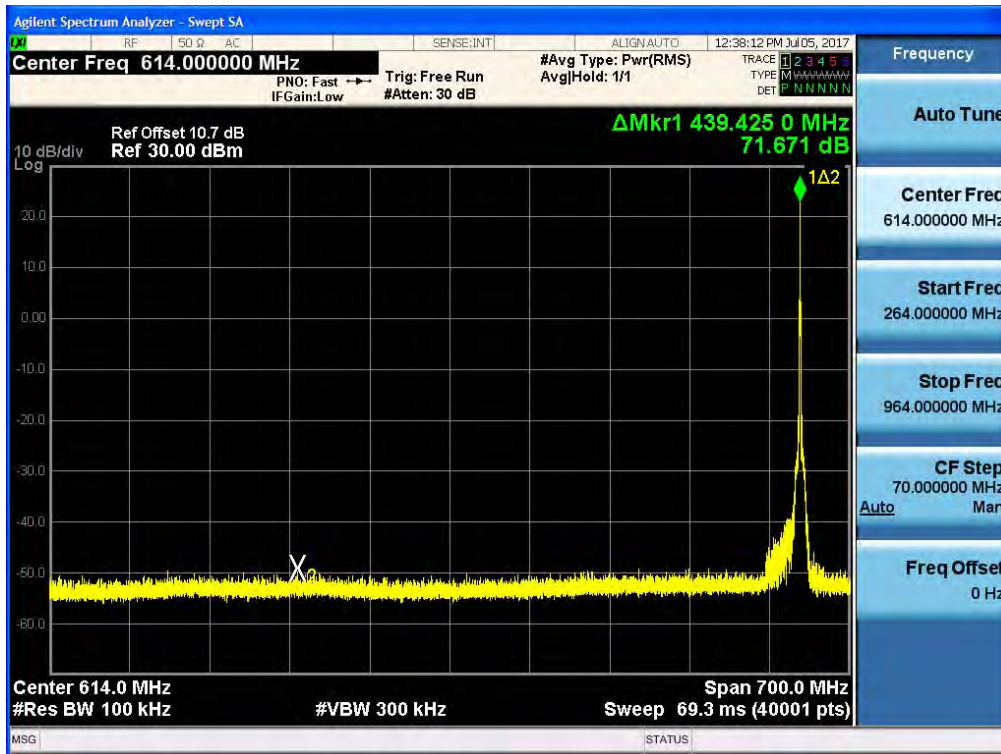


## Test Plots without hopping (DBPSK) Band Edges (High)

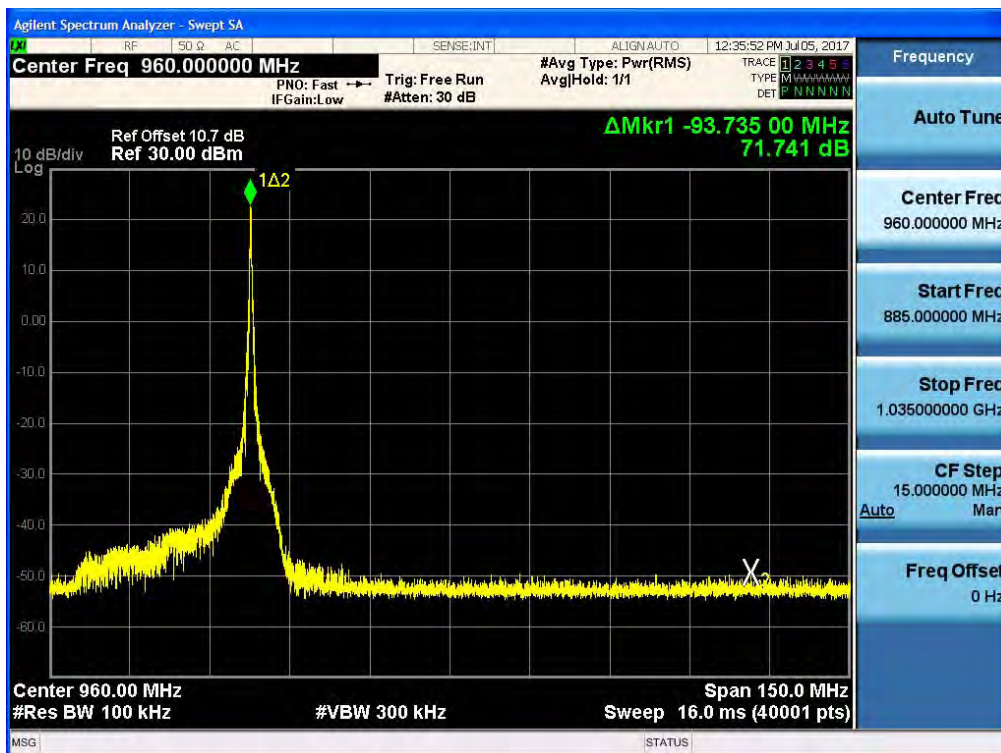

## Test Plots with hopping (DBPSK) Band Edges (Low)

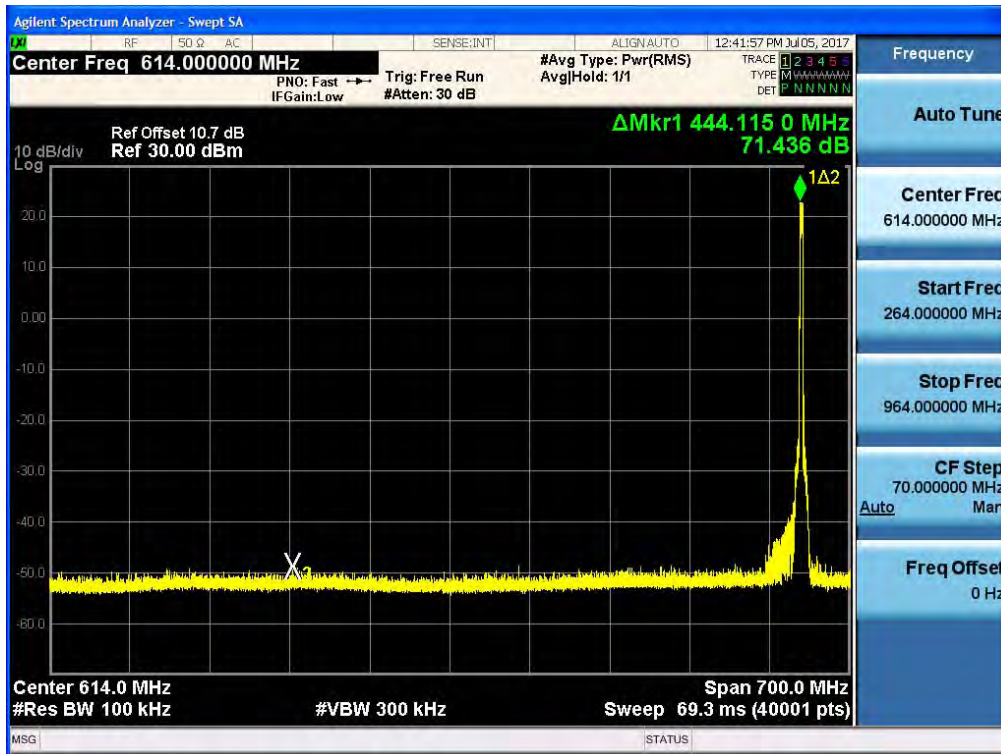

## Test Plots with hopping (DBPSK) Band Edges (High)

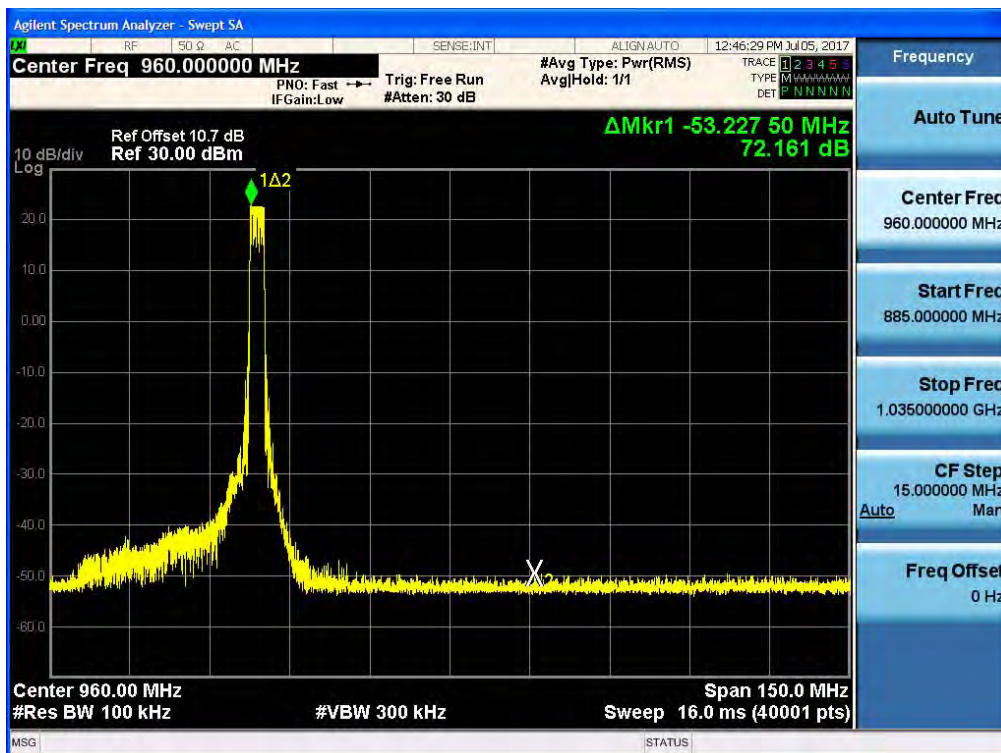


### 9.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

#### LIMIT

According to §15.247(a)(1) / RSS-247 5.1.2, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### Test Configuration



#### TEST PROCEDURE

The Channel Separation test is performed with hopping on. And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

#### TEST RESULTS

No non-compliance noted

**Test Data – Low Band**

| Channel Separation<br>(kHz) | 20dB Bandwidth (kHz) |        | Limit<br>(kHz)                           | Result |
|-----------------------------|----------------------|--------|------------------------------------------|--------|
| DBPSK                       | Channel              | DBPSK  |                                          |        |
| 25.050                      | Low                  | 23.650 | >25 or<br>>20dB BW of<br>hopping channel | Pass   |
|                             | Mid                  | 23.500 |                                          |        |
|                             | High                 | 23.575 |                                          |        |

**Occupied Bandwidth (99% BW )**

| 99% BW (kHz) |        |        |        |
|--------------|--------|--------|--------|
| Channel      | Low    | Mid    | High   |
|              | 25.561 | 25.427 | 25.532 |

**Test Data – High Band**


| Channel Separation<br>(kHz) | 20dB Bandwidth (kHz) |        | Limit<br>(kHz)                           | Result |
|-----------------------------|----------------------|--------|------------------------------------------|--------|
| DBPSK                       | Channel              | DBPSK  |                                          |        |
| 25.050                      | Low                  | 23.700 | >25 or<br>>20dB BW of<br>hopping channel | Pass   |
|                             | Mid                  | 23.700 |                                          |        |
|                             | High                 | 23.600 |                                          |        |

**Occupied Bandwidth (99% BW )**

| 99% BW (kHz) |        |        |        |
|--------------|--------|--------|--------|
| Channel      | Low    | Mid    | High   |
|              | 25.579 | 25.632 | 25.612 |

## Test Plots (DBPSK) – Low Band

### Channel Separation

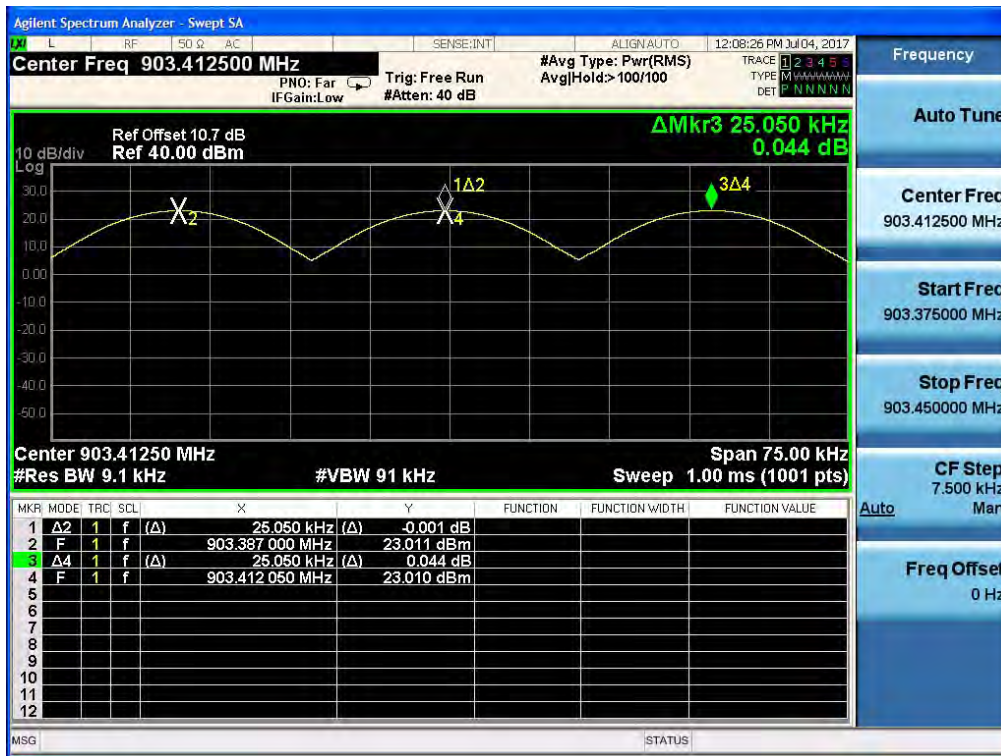


## Test Plots (DBPSK) – High Band

### Channel Separation




## Test Plots (DBPSK) – Low Band


### 20 dB Bandwidth (Low)

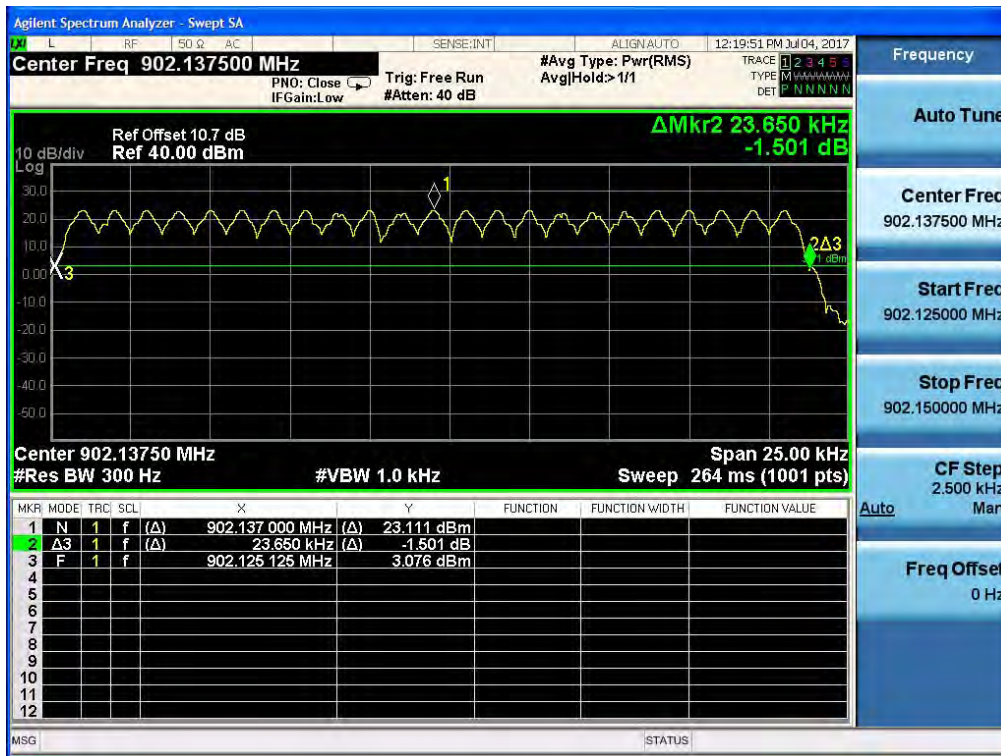


### 20 dB Bandwidth (Mid)

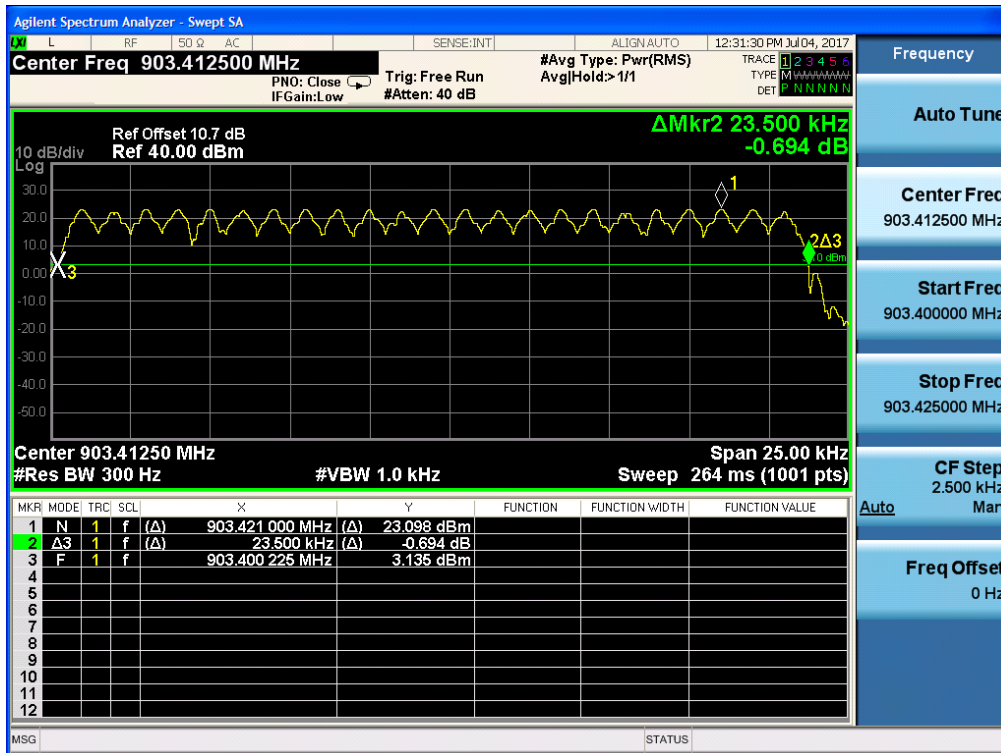


## 20 dB Bandwidth (High)

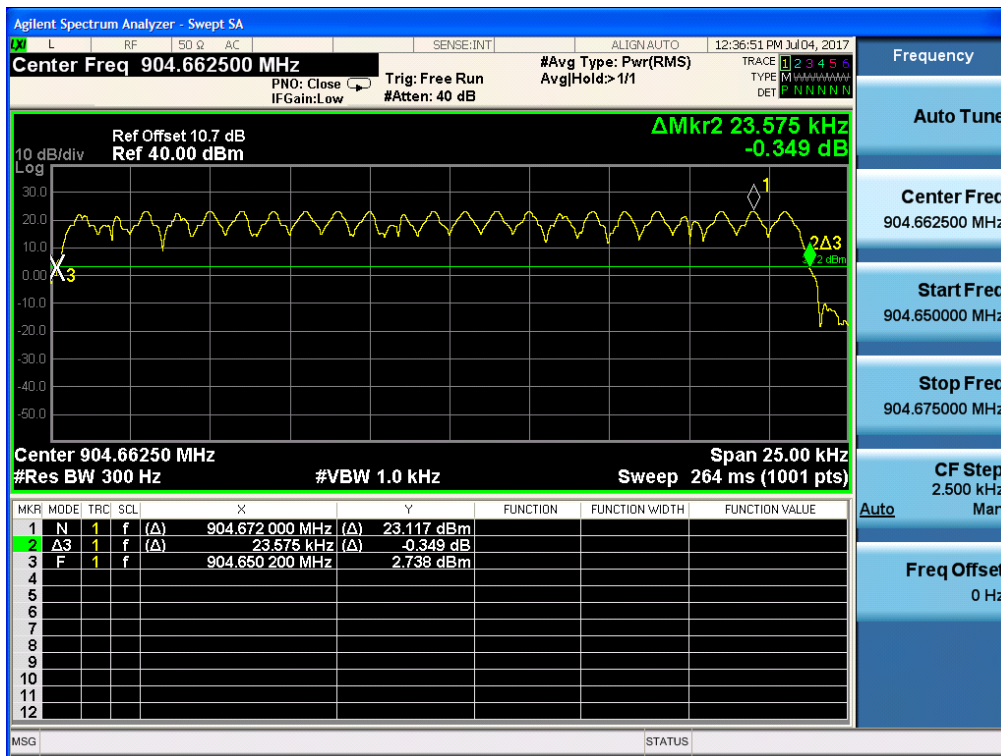


Test Plots (DBPSK) – High Band  
20 dB Bandwidth (Low)

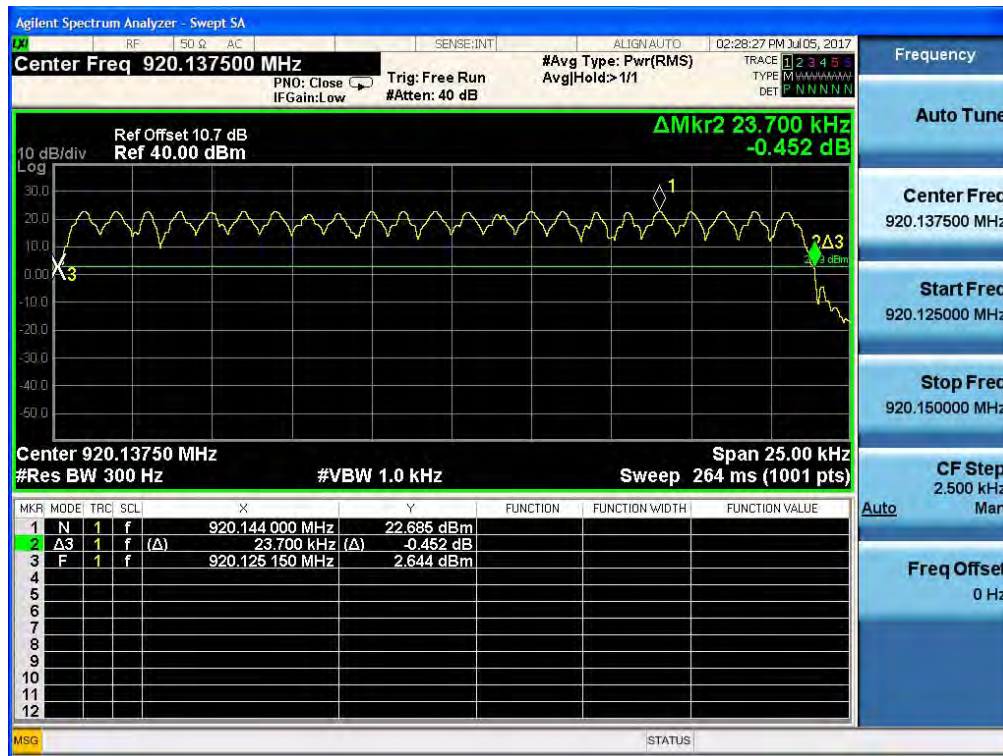

20 dB Bandwidth (Mid)

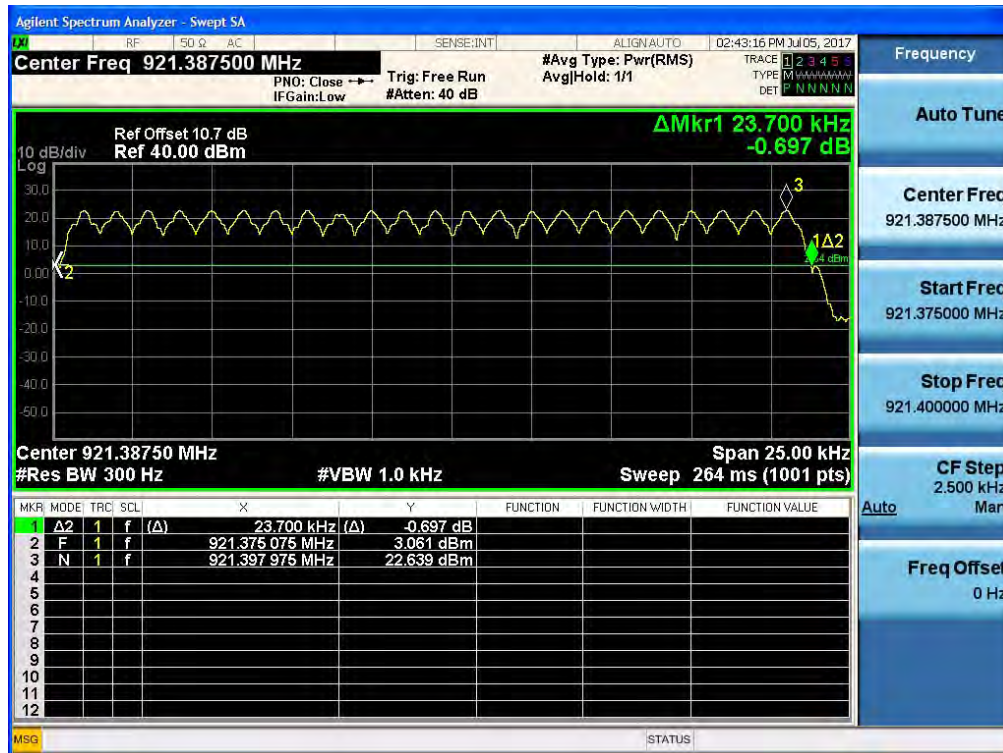

## 20 dB Bandwidth (High)

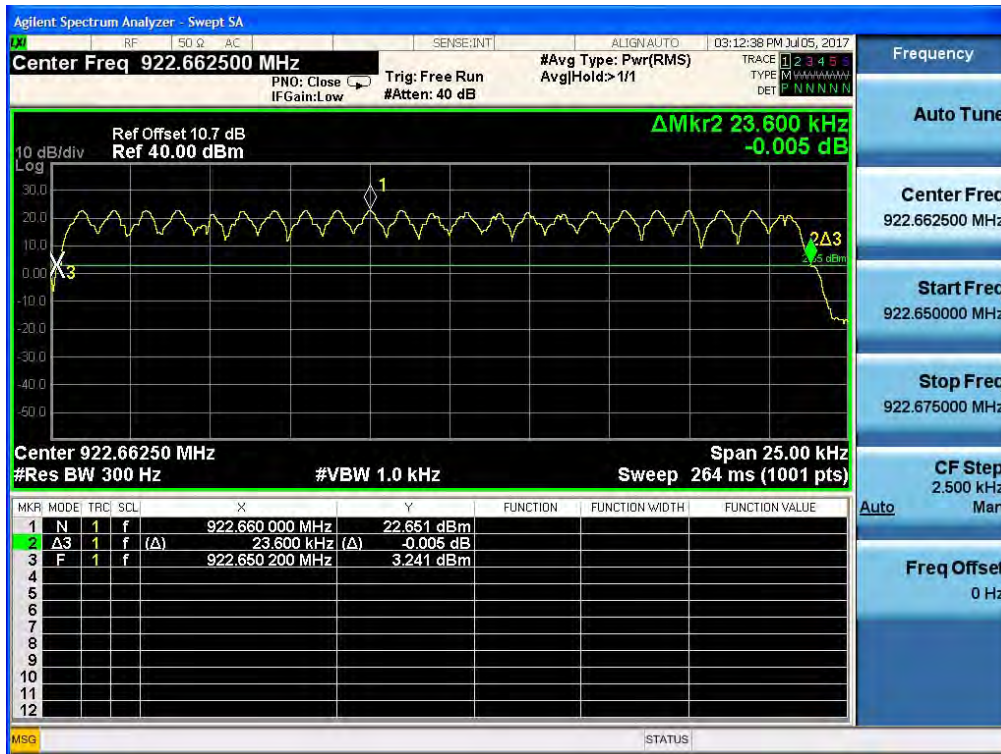


## Test Plots (DBPSK) – Low Band


### Occupied Bandwidth (Low)



### Occupied Bandwidth (Mid)

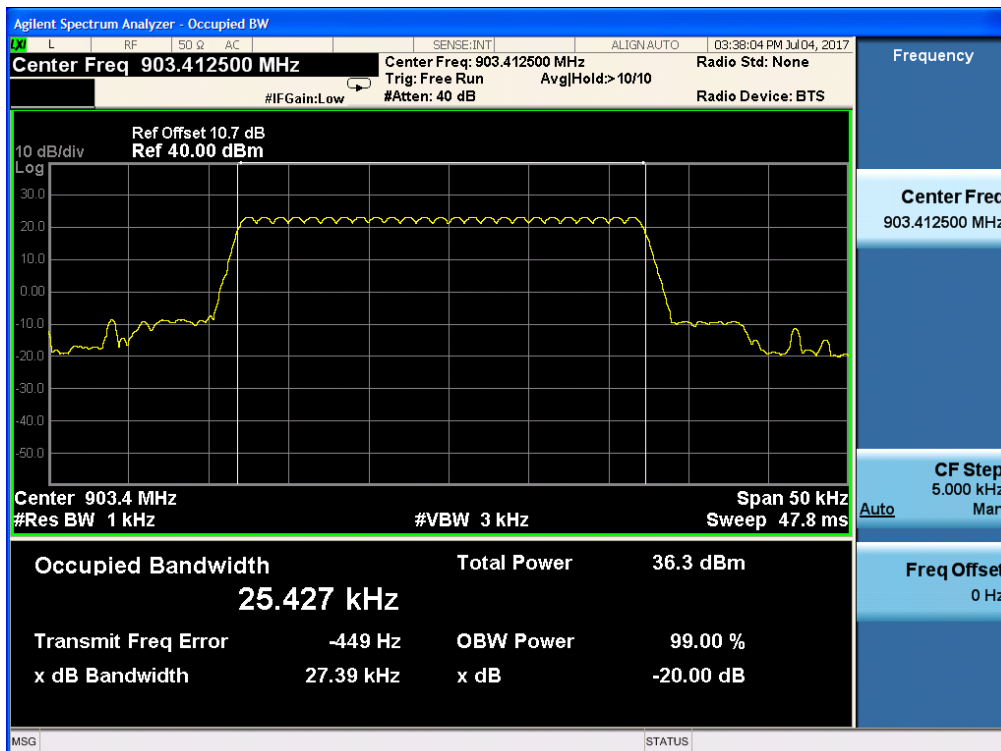

## Occupied Bandwidth (High)

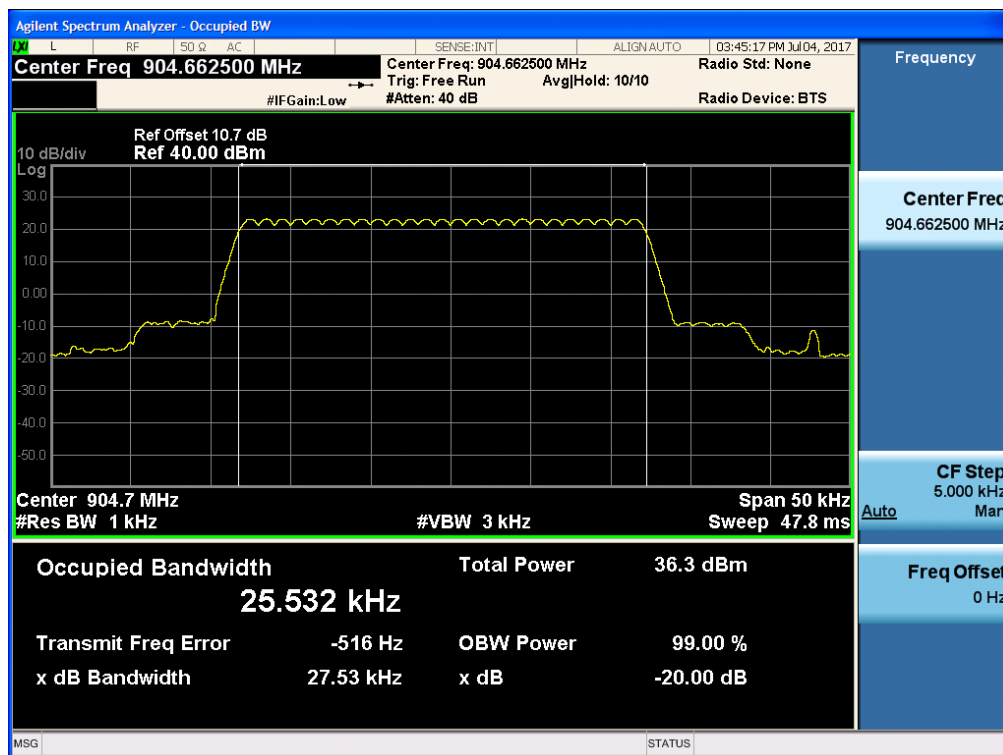

## Test Plots (DBPSK) – High Band Occupied Bandwidth (Low)



## Occupied Bandwidth (Mid)



## Occupied Bandwidth (High)




## 9.4 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(i) / RSS-247 5.1.3, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

### Test Configuration



### TEST PROCEDURE

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013)

- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

### TEST RESULTS


No non-compliance noted

#### Test Data (Number of Hopping Frequencies : $9 \times 6 = 54$ )

| (Number of Macro CH) | (Number of Micro CH) |
|----------------------|----------------------|
| D-BPSK               | D-BPSK               |
| 9                    | 6                    |


## Test Plots – Low Band

### Number of macro channels

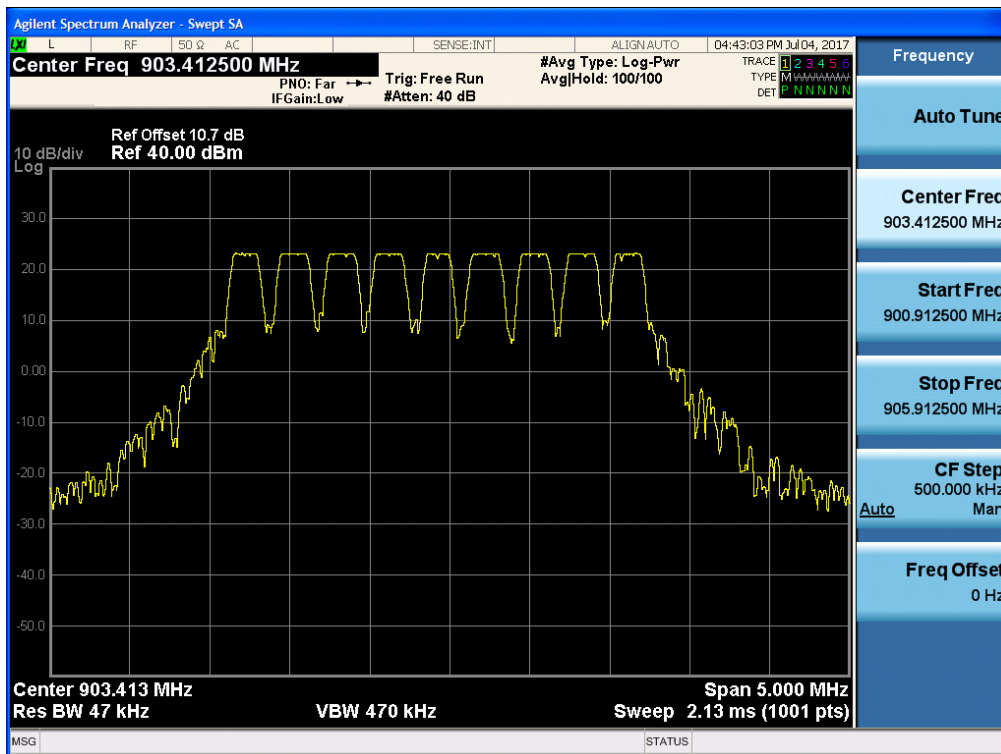


## Test Plots

### Number of micro channels in one single macro channel

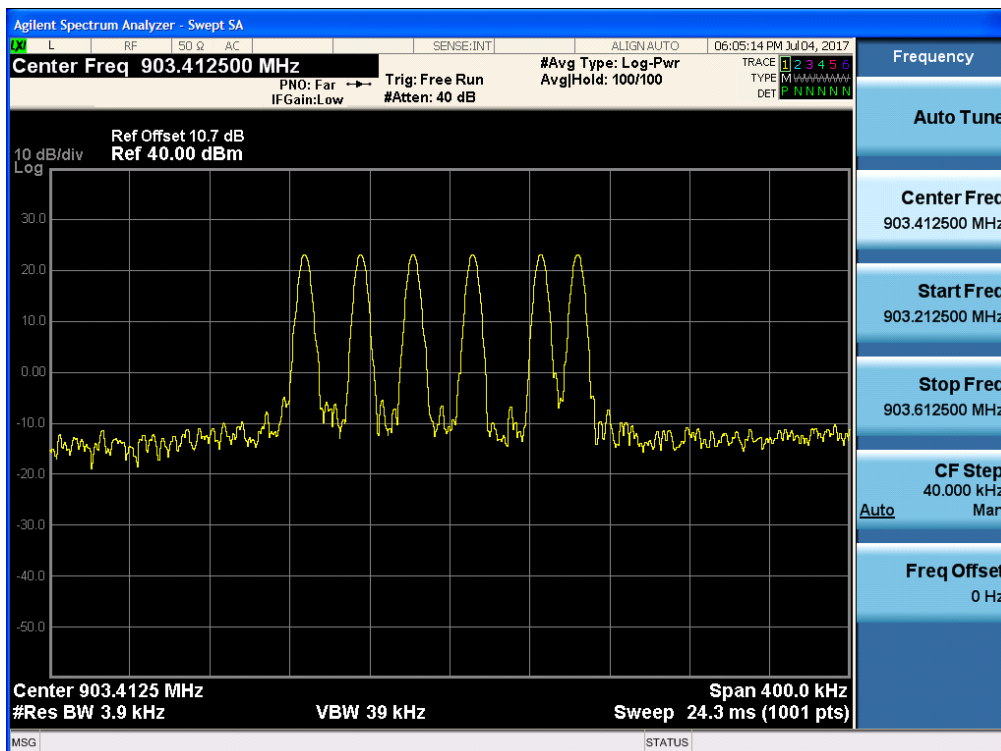


## Test Plots – High Band

### Number of macro channels

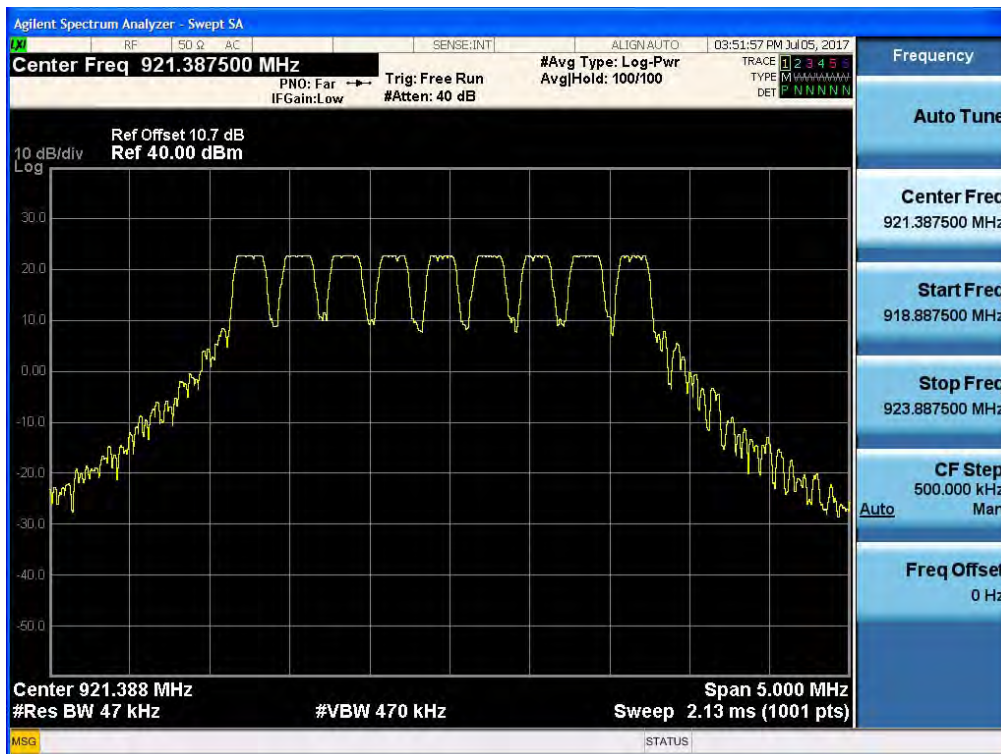

## Test Plots

### Number of micro channels in one single macro channel

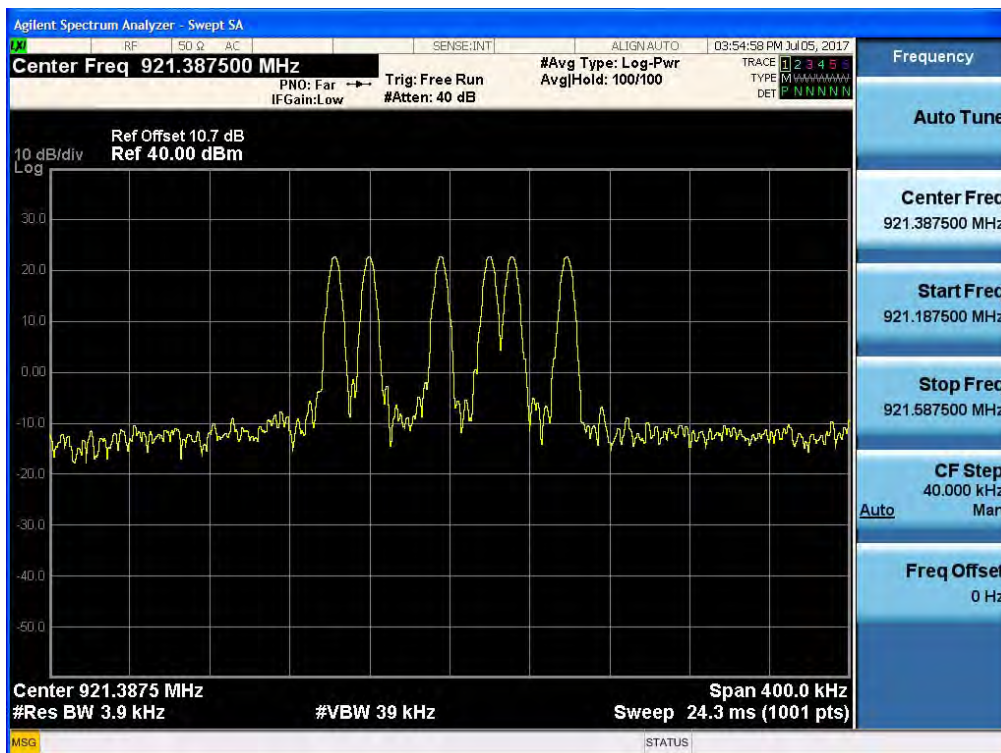


## 9.5 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(i) / RSS-247 5.1.3, Frequency hopping systems operating in the 902 MHz ~ 928MHz bands. if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### Test Configuration



### TEST PROCEDURE

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

**TEST RESULTS**

See the table.

**[Low Band]**

|                       | Channel | DBPSK    | Limit<br>(ms) | Result |
|-----------------------|---------|----------|---------------|--------|
| Pulse<br>Time<br>(ms) | Low     | 360.0 ms | 400           | PASS   |
|                       | Mid     | 359.3 ms |               | PASS   |
|                       | High    | 360.0 ms |               | PASS   |


**[High Band]**

|                       | Channel | DBPSK    | Limit<br>(ms) | Result |
|-----------------------|---------|----------|---------------|--------|
| Pulse<br>Time<br>(ms) | Low     | 360.0 ms | 400           | PASS   |
|                       | Mid     | 360.0 ms |               | PASS   |
|                       | High    | 359.2 ms |               | PASS   |

[Low Band]


Test Plots (Channel Low)

Time slot length = 360.0 ms

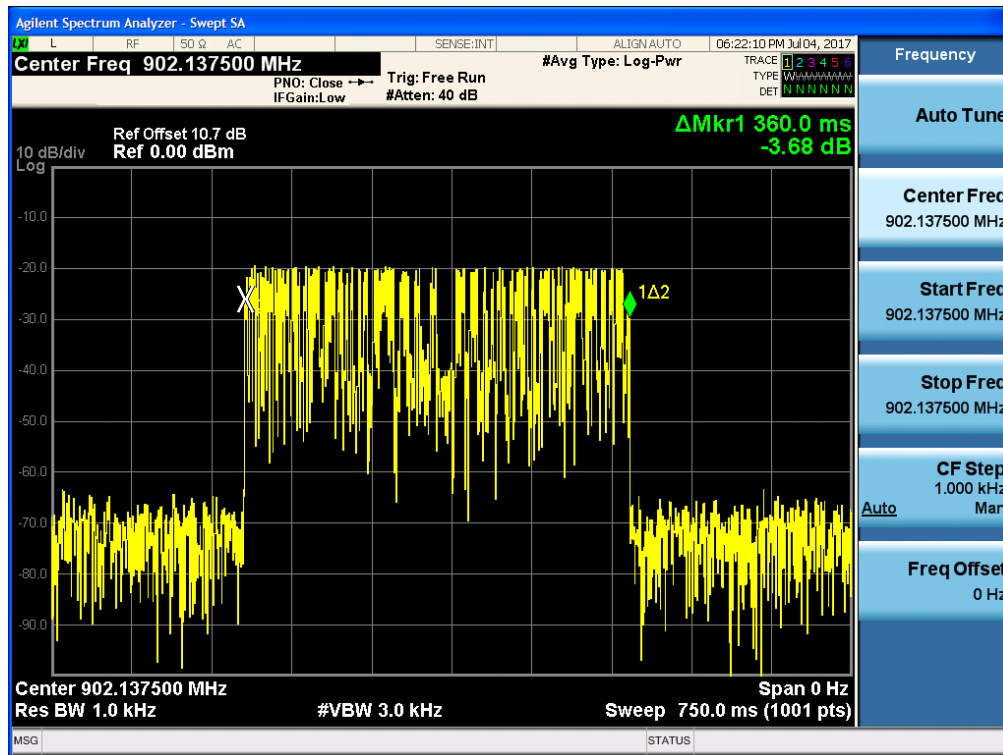


Test Plots (Channel Mid)

Time slot length = 359.3 ms

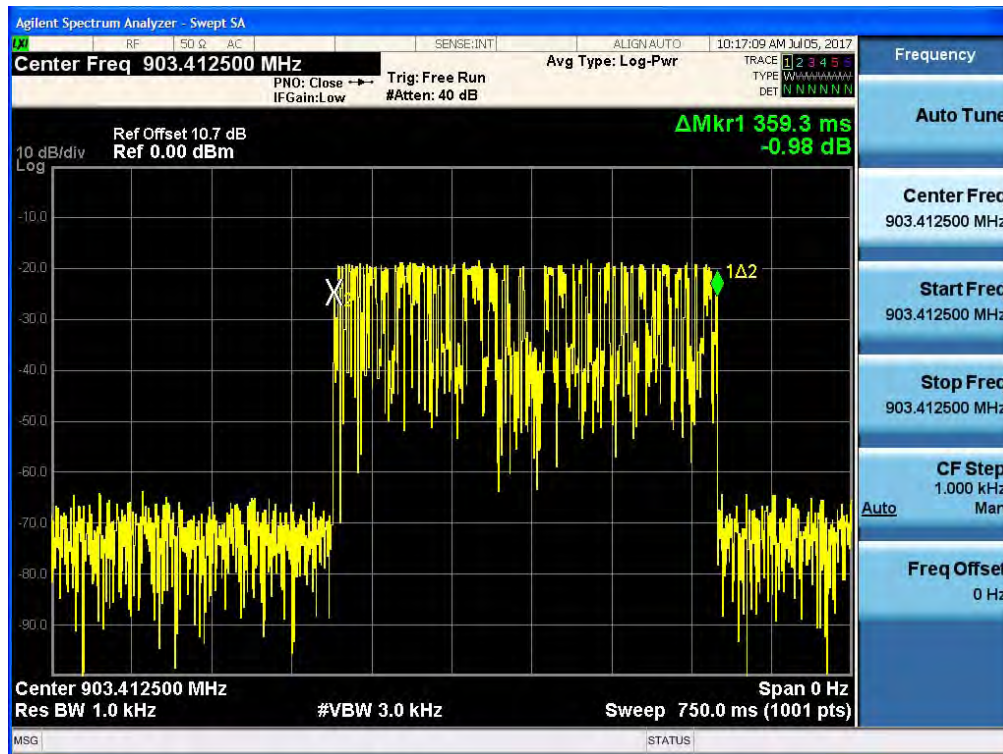


## Test Plots (Channel High)

Time slot length = 360.0 ms

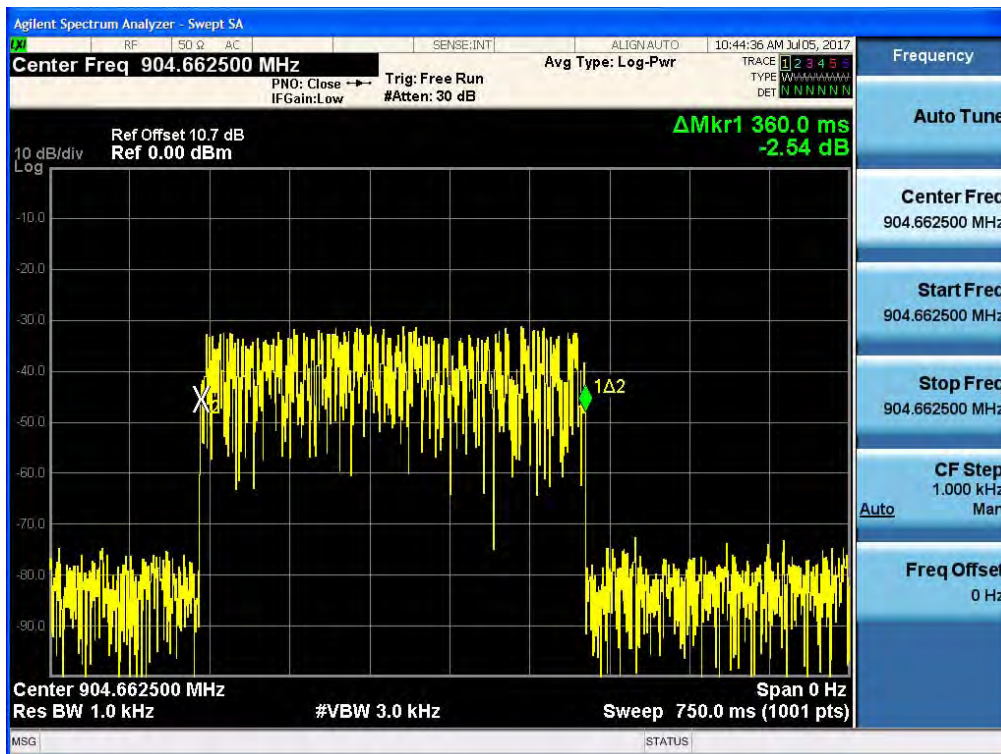

## Test Plots


Hops / channel @ 20s = 1 (The highest emission is only relevant)

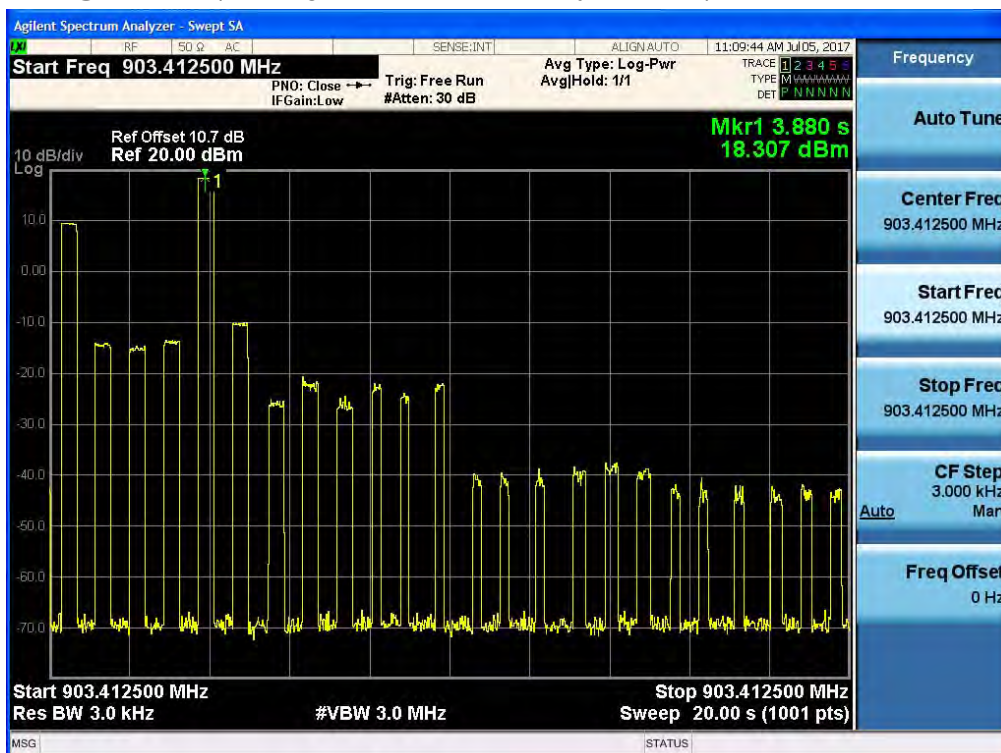

[High Band]


Test Plots (Channel Low)

Time slot length = 360.0 ms

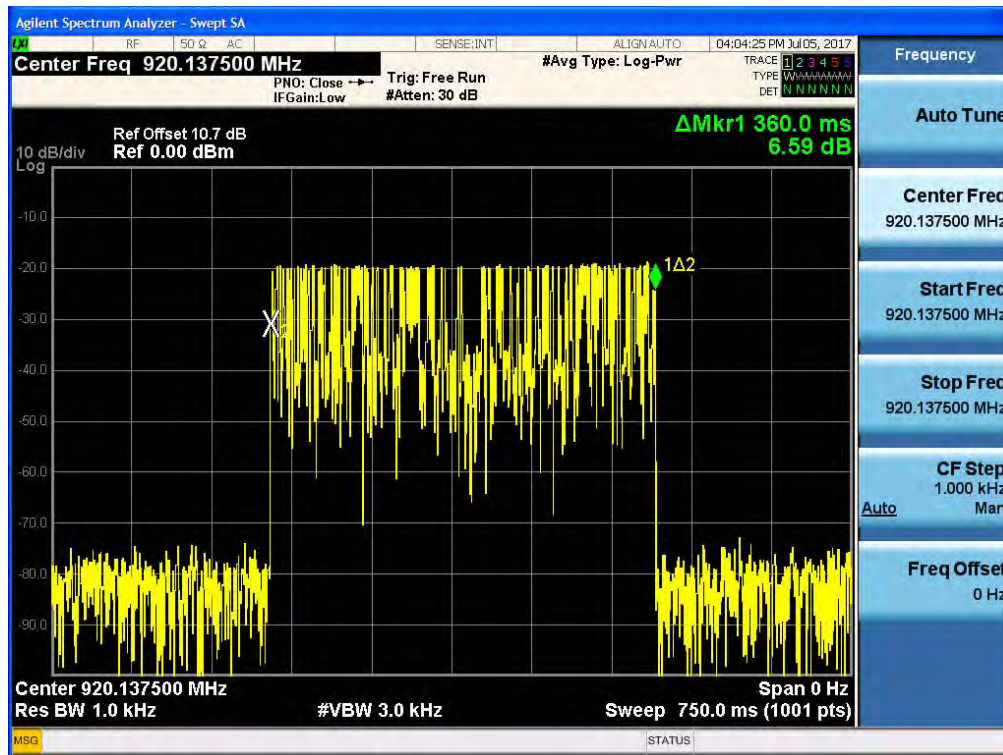


Test Plots (Channel Mid)

Time slot length = 360.0 ms

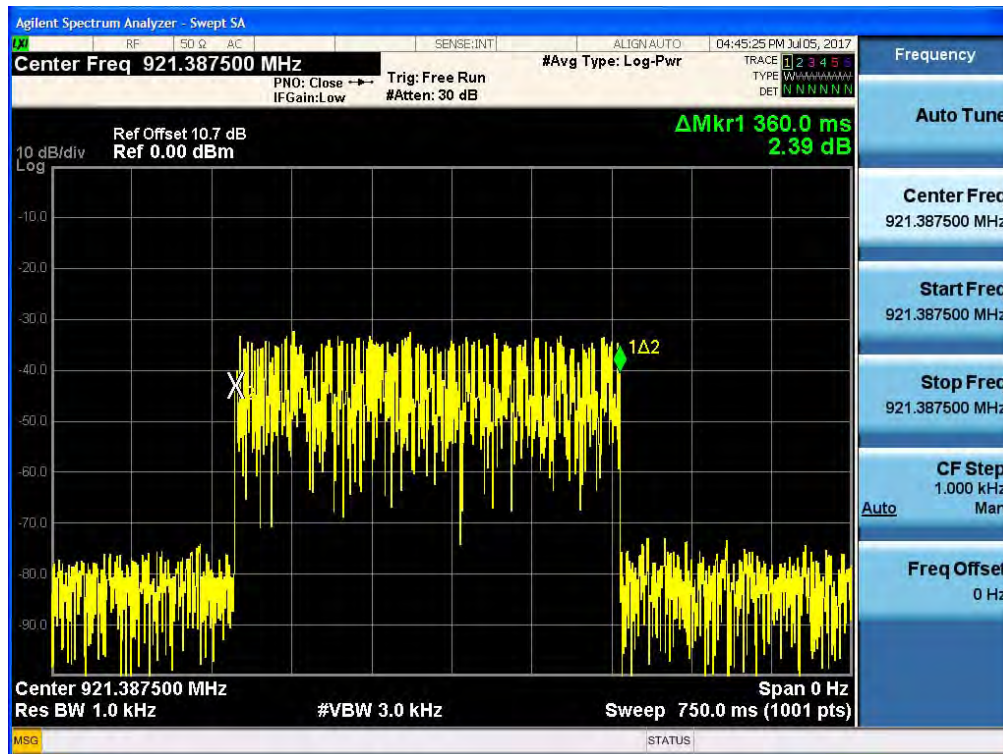


### Test Plots (Channel High)

Time slot length = 359.2 ms

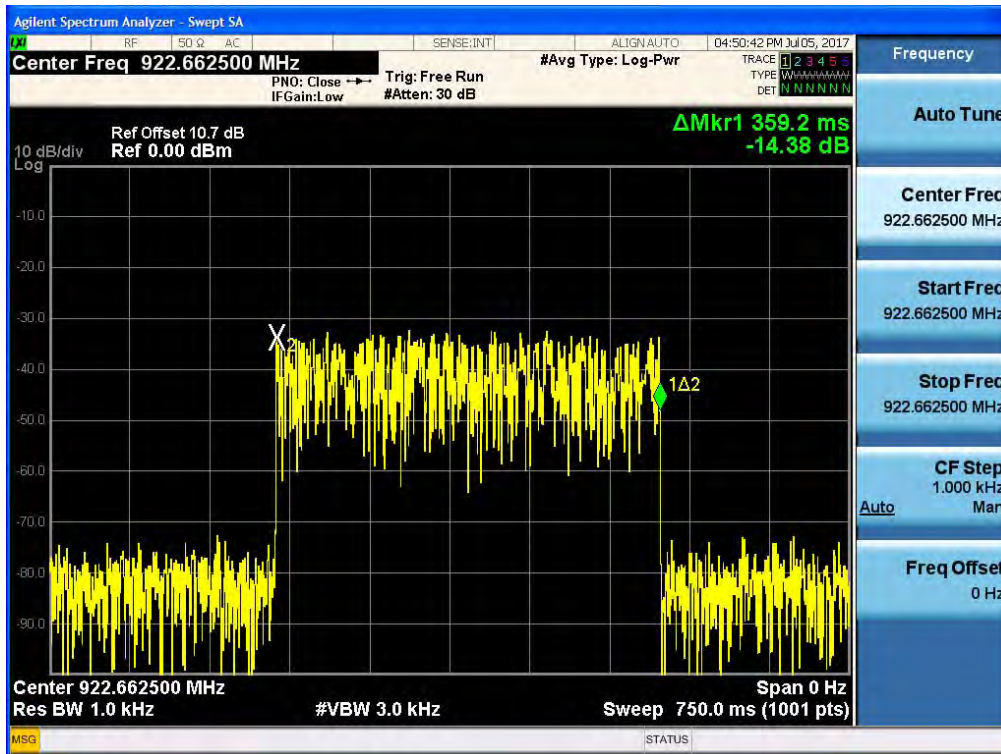

### Test Plots

Hops / channel @ 20s = 1 (The highest emission is only relevant)

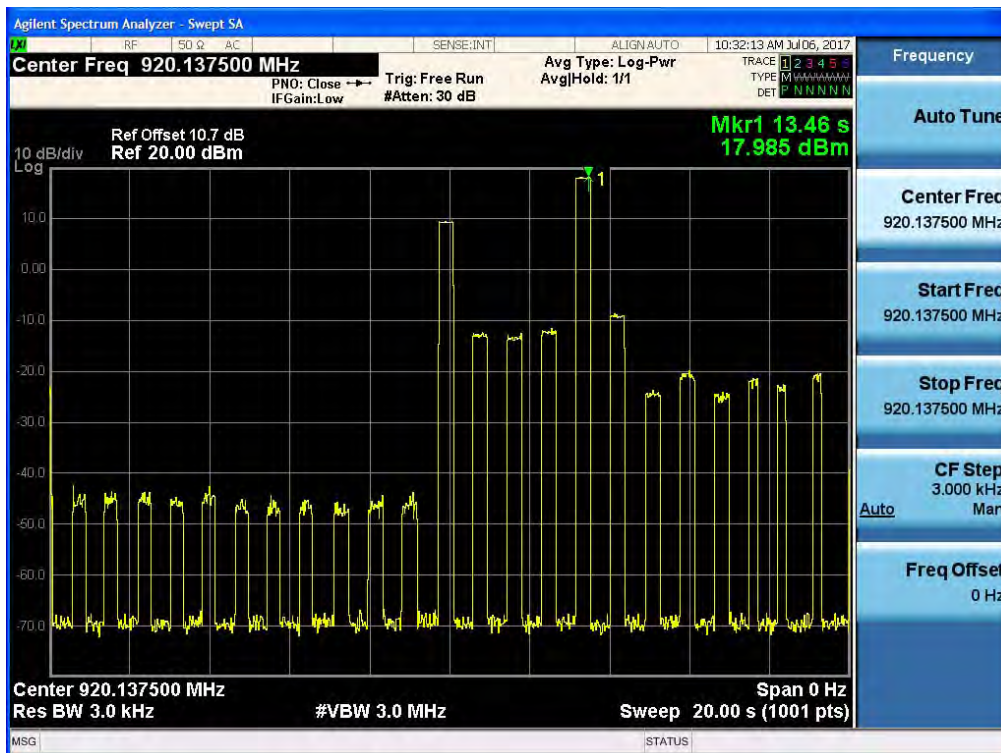

## 9.6 SPURIOUS EMISSIONS


### 9.6.1 CONDUCTED SPURIOUS EMISSIONS

#### Test Requirements and limit, §15.247(d) / RSS-247(Issue 2) Section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit : 20 dBc**

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 10 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

**TEST RESULTS**

No non-compliance noted.

Note : In order to simplify the report, attached plots were only the worst case channel and data rate.

**■ FACTORS FOR FREQUENCY**

| Freq(MHz) | Factor(dB) |
|-----------|------------|
| 30        | 10.95      |
| 100       | 9.51       |
| 200       | 9.823      |
| 300       | 9.848      |
| 400       | 9.909      |
| 500       | 9.941      |
| 600       | 9.986      |
| 700       | 10.00      |
| 800       | 10.02      |
| 900       | 10.00      |
| 1000      | 10.12      |
| 2000      | 10.32      |
| 3000      | 11.15      |
| 4000      | 10.74      |
| 5000      | 10.63      |
| 6000      | 10.66      |
| 7000      | 10.90      |
| 8000      | 10.82      |
| 9000      | 10.93      |
| 10000     | 11.00      |


Note : 1. “\*” is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss

## [Low Band]


Test Plots (DBPSK)- 30 MHz - 1 GHz

Spurious Emission

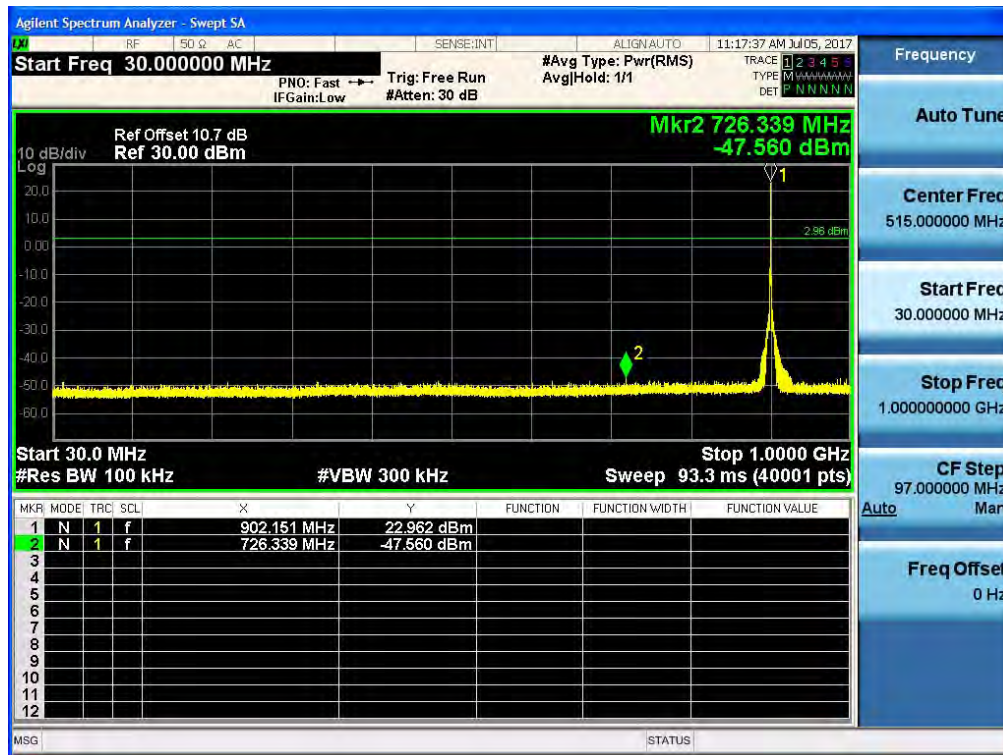


Test Plots (DBPSK)- 1 GHz – 3 GHz

Spurious Emission

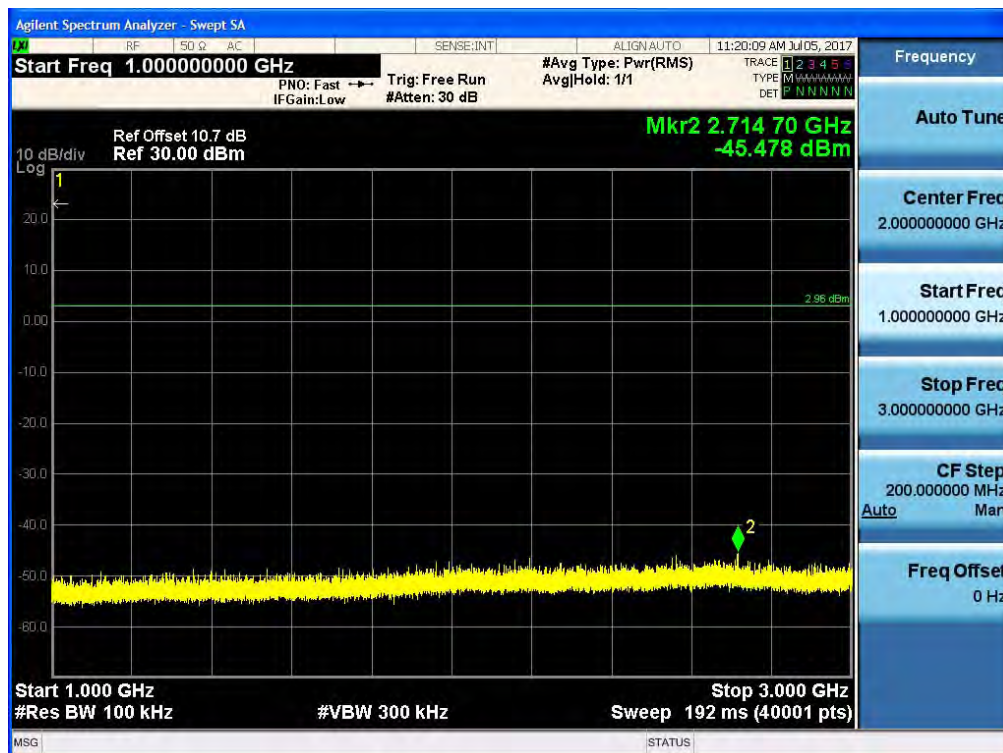

## Test Plots (DBPSK)- 3 GHz – 5 GHz

### Spurious Emission

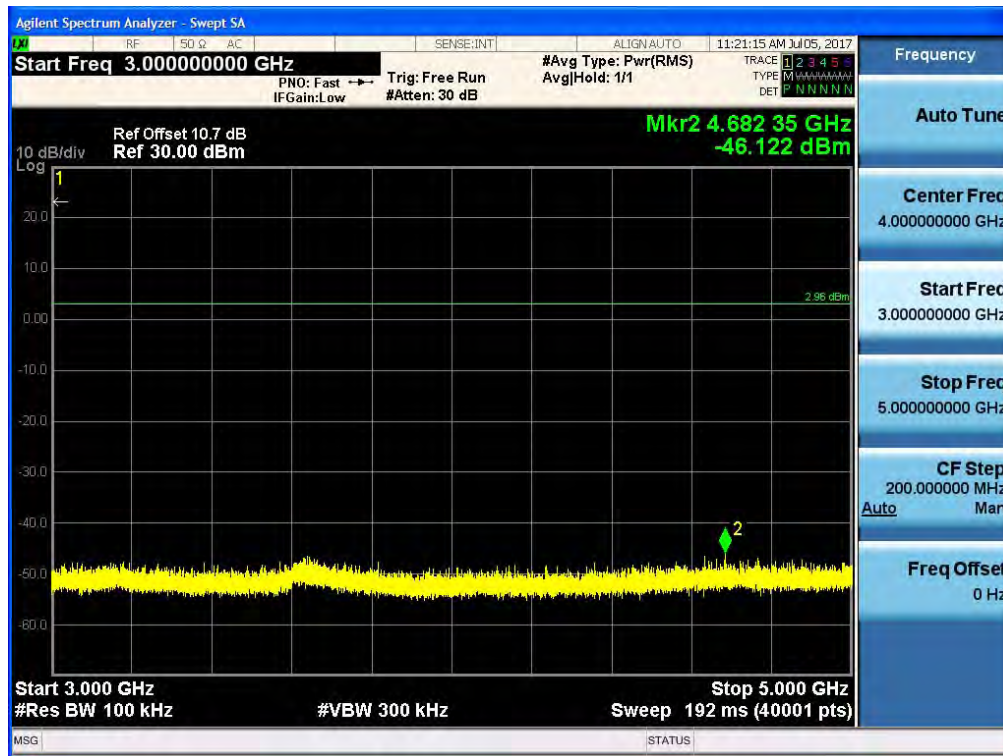


## Test Plots(DBPSK)- 5 GHz - 7 GHz


### Spurious Emission



## Test Plots (DBPSK)- 7 GHz - 9 GHz Spurious Emission

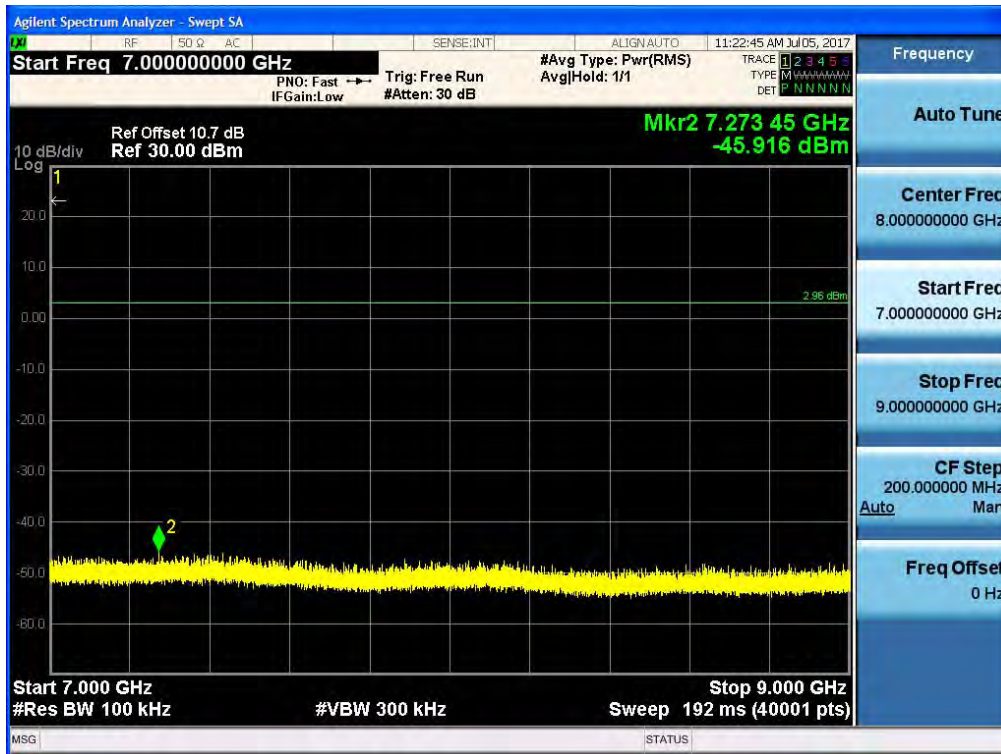


## Test Plots(DBPSK)- 9 GHz - 10 GHz Spurious Emission

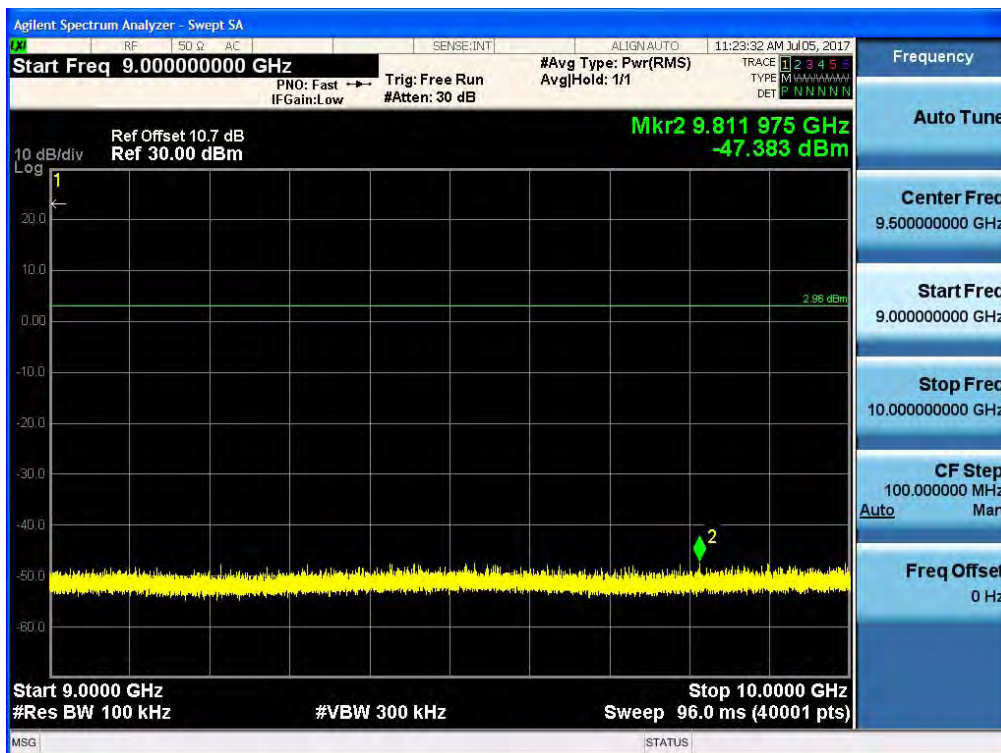

## [High Band]

Test Plots (DBPSK)- 30 MHz - 1 GHz

Spurious Emission

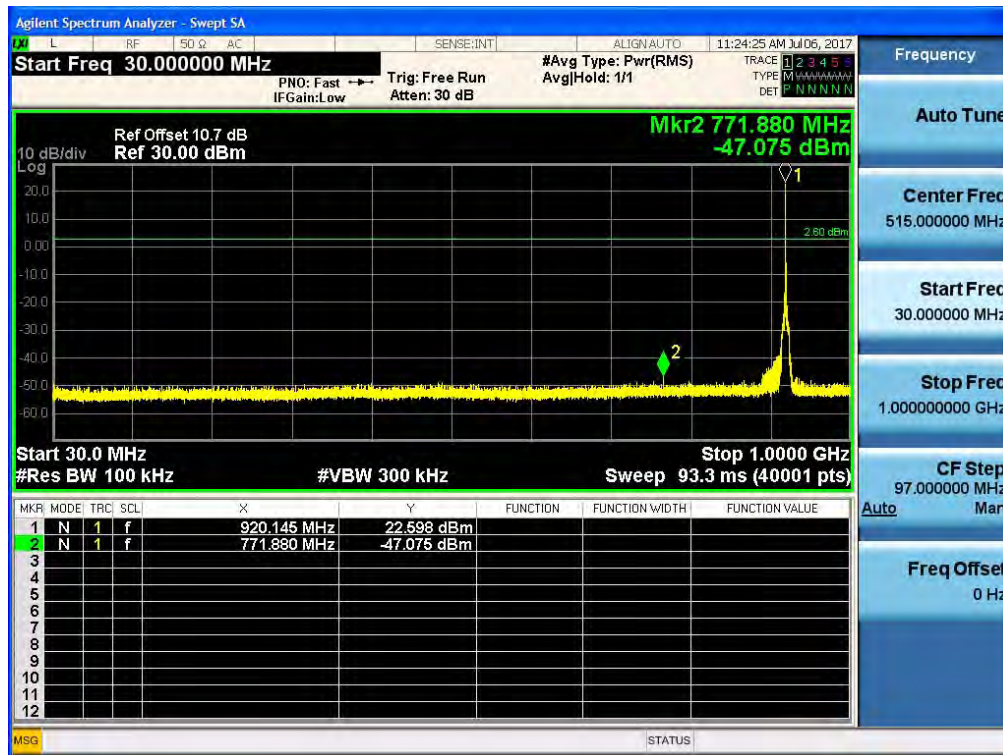


Test Plots (DBPSK)- 1 GHz – 3 GHz

Spurious Emission




## Test Plots (DBPSK)- 3 GHz – 5 GHz

## Spurious Emission

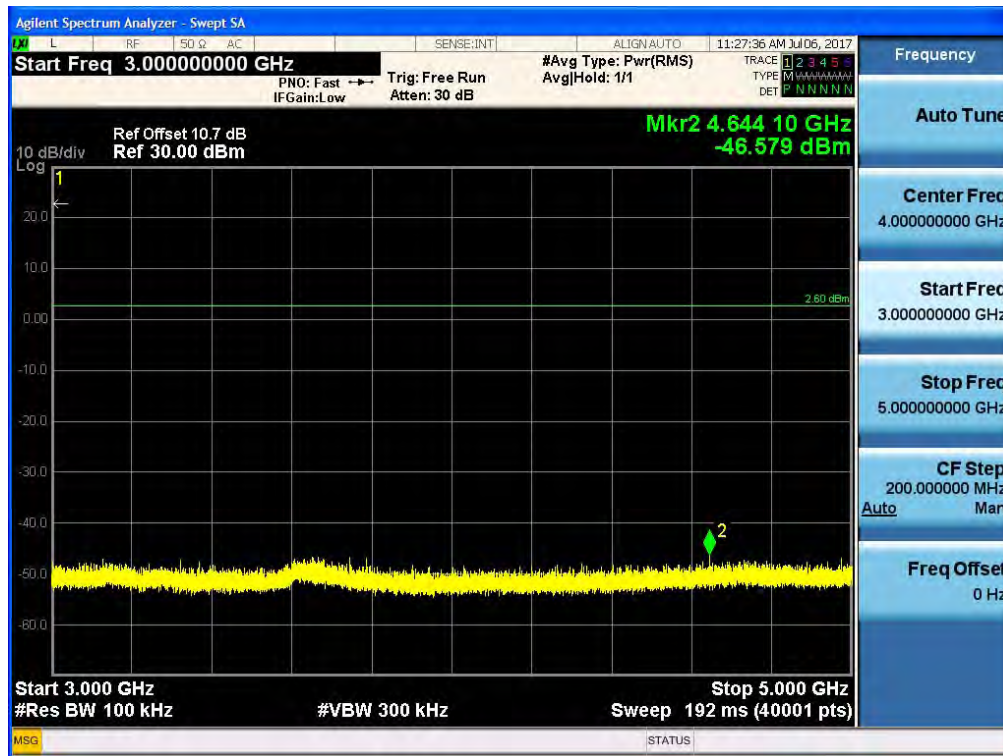


## Test Plots(DBPSK)- 5 GHz - 7 GHz


## Spurious Emission

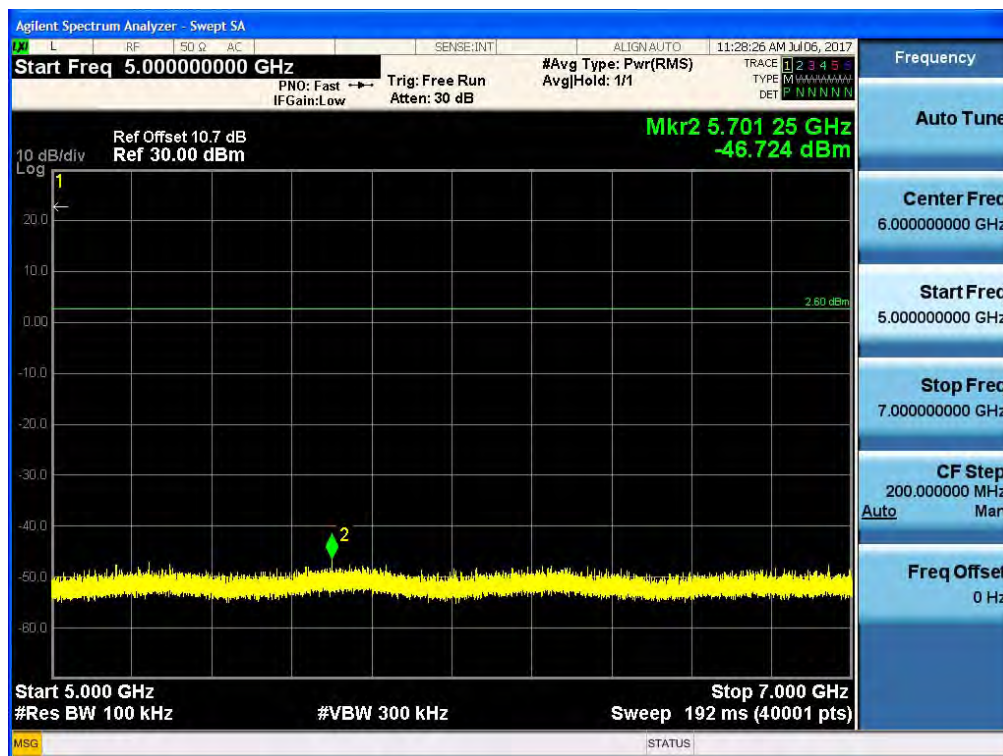

## Test Plots (DBPSK)- 7 GHz - 9 GHz Spurious Emission

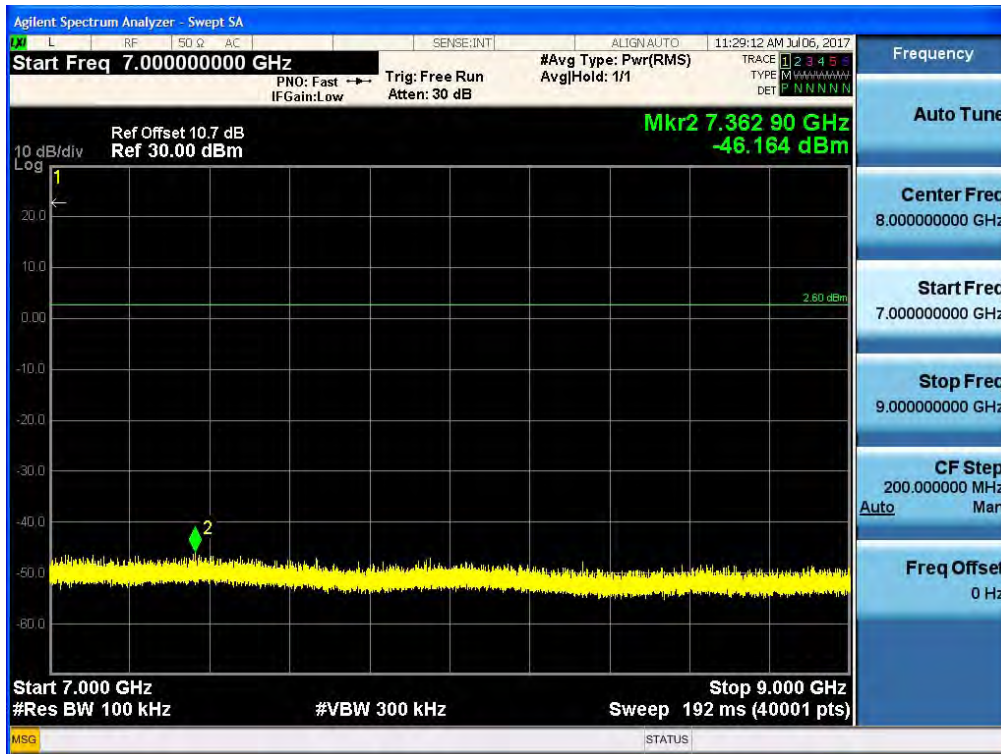

## Test Plots(DBPSK)- 9 GHz - 10 GHz Spurious Emission

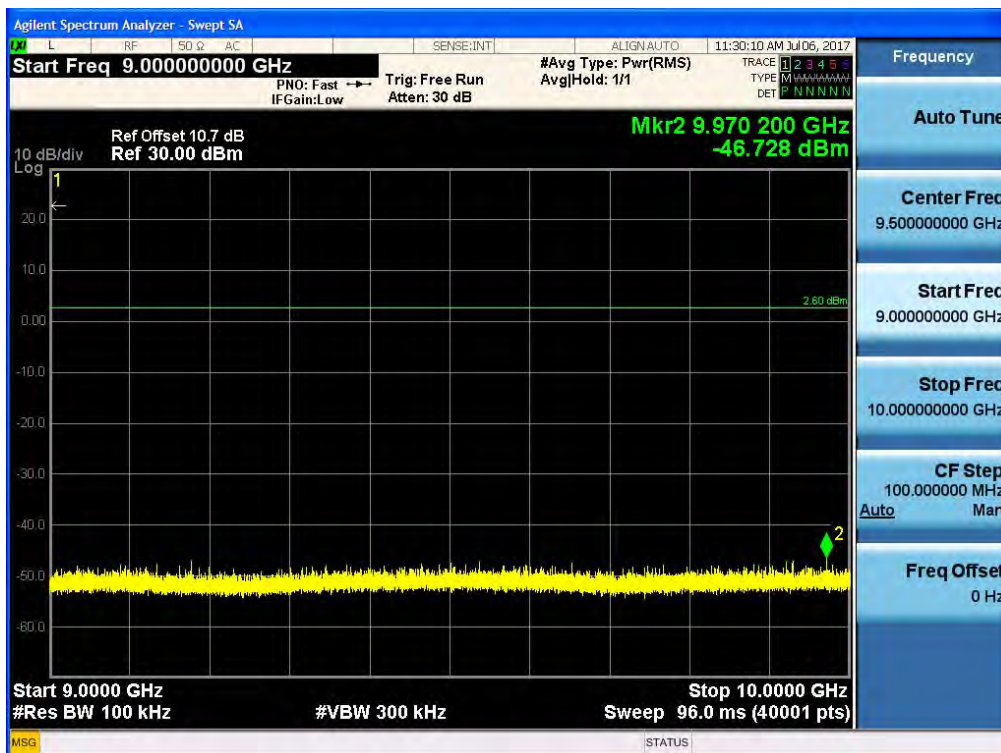

## 9.6.2 RADIATED SPURIOUS EMISSIONS

### LIMIT : §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 4) Section 8.9

20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)           | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)          | 30                       |
| 1.705 – 30      | 30                    | 30                       |
| 30-88           | 100                   | 3                        |
| 88-216          | 150                   | 3                        |
| 216-960         | 200                   | 3                        |
| Above 960       | 500                   | 3                        |


## Restricted band of operation : §15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:


| MHz                      | MHz                 | MHz           | GHz              |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.17725-4.17775          | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.20725-4.20775          | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41              |                     |               |                  |


## Test Configuration

### Below 30 MHz

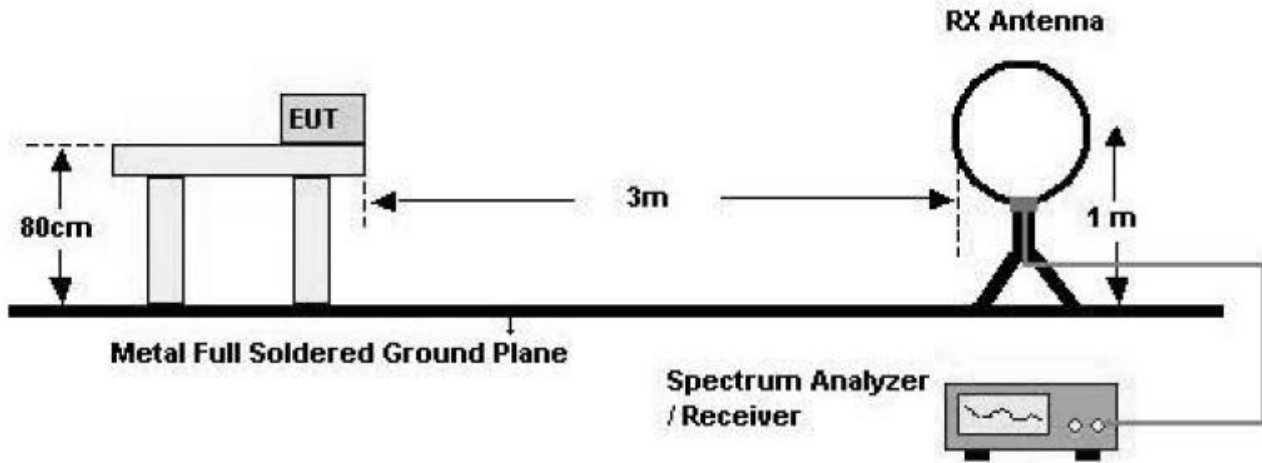

### 30 MHz - 1 GHz

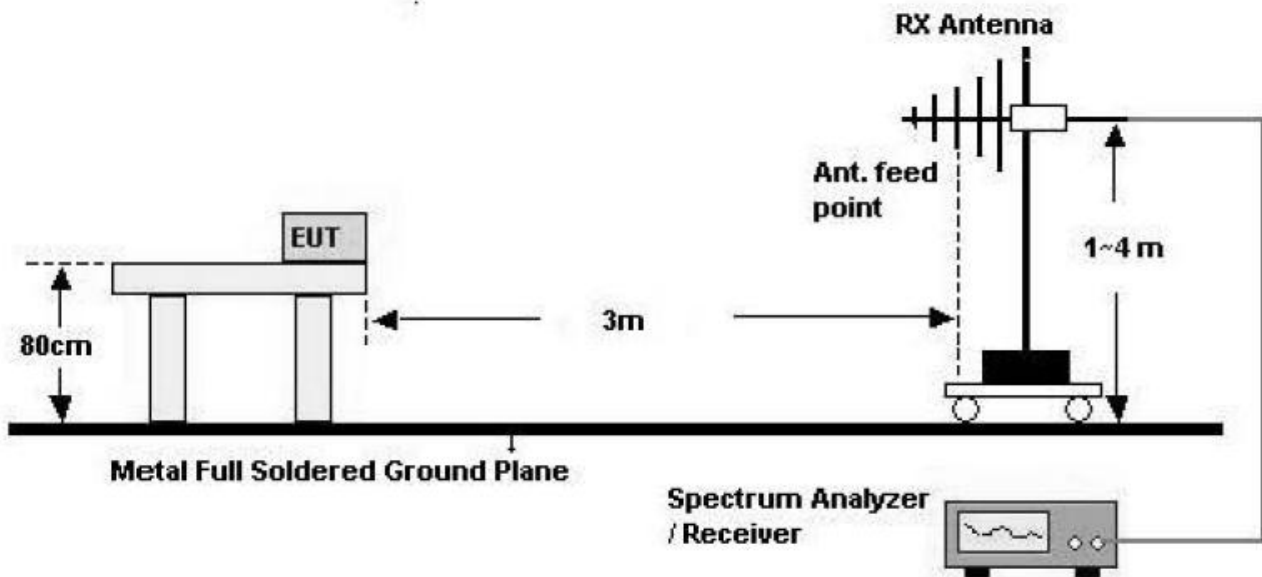

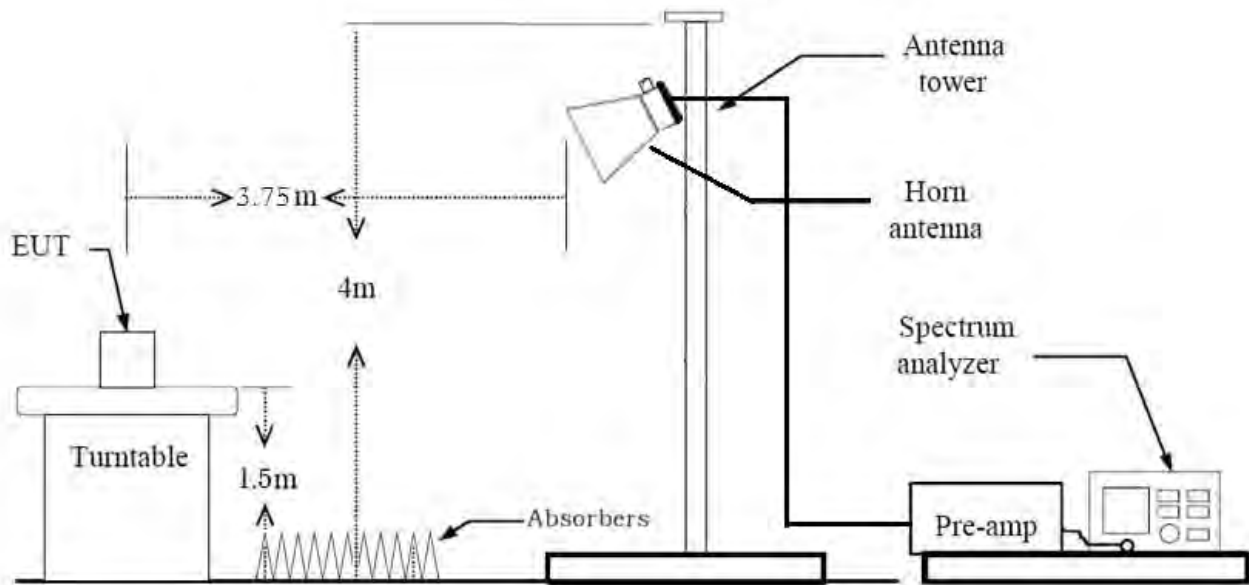**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak: 1 GHz – 10 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
  - b. Average (RMS): 1 GHz – 10 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW

**Note :**

1. We are performed the RSE and radiated band edge using standard radiated method.
2. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

**TEST RESULTS****9 kHz – 30MHz****Operation Mode:** Normal Mode

| Frequency               | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-------------------------|---------|-------------|------------|----------|--------|--------|--------|
| MHz                     | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |
| No Critical peaks found |         |             |            |          |        |        |        |

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. The test results for below 30 MHz is correlated to an open site.  
The result on OATS is about 2 dB higher than semi-anechoic chamber (10 m chamber)

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Mode

| Frequency               | Reading | Ant. factor | Cable loss | Ant. POL | Total  | Limit  | Margin |
|-------------------------|---------|-------------|------------|----------|--------|--------|--------|
| MHz                     | dBuV/m  | dBm/m       | dBm        | (H/V)    | dBuV/m | dBuV/m | dB     |
| No Critical peaks found |         |             |            |          |        |        |        |

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

# [Low Band]

Operation Mode: CH Low(DBPSK)

| Frequency<br>[MHz] | Reading<br>[dBuV] | ※A.F.+C.L.-<br>A.G.+D.F.+F.L.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|---------------------------------------|-------------------|-------------------|-------------------|----------------|---------------------|
| 2706.41            | 53.97             | -10.83                                | V                 | 43.14             | 73.98             | 30.84          | PK                  |
| 2706.41            | 44.18             | -10.83                                | V                 | 33.35             | 53.98             | 20.63          | AV                  |
| 3608.55            | 52.38             | -8.2                                  | V                 | 44.18             | 73.98             | 29.80          | PK                  |
| 3608.55            | 41.80             | -8.2                                  | V                 | 33.60             | 53.98             | 20.38          | AV                  |
| 4510.69            | 51.19             | -5.92                                 | V                 | 45.27             | 73.98             | 28.71          | PK                  |
| 4510.69            | 39.38             | -5.92                                 | V                 | 33.46             | 53.98             | 20.52          | AV                  |
| 5412.83            | 48.79             | -1.86                                 | V                 | 46.93             | 73.98             | 27.05          | PK                  |
| 5412.83            | 36.43             | -1.86                                 | V                 | 34.57             | 53.98             | 19.41          | AV                  |
| 8119.24            | 46.48             | 5.95                                  | V                 | 52.43             | 73.98             | 21.55          | PK                  |
| 8119.24            | 34.37             | 5.95                                  | V                 | 40.32             | 53.98             | 13.66          | AV                  |
| 9021.38            | 46.91             | 7.24                                  | V                 | 54.15             | 73.98             | 19.83          | PK                  |
| 9021.38            | 34.64             | 7.24                                  | V                 | 41.88             | 53.98             | 12.10          | AV                  |
| 2706.41            | 54.46             | -10.83                                | H                 | 43.63             | 73.98             | 30.35          | PK                  |
| 2706.41            | 45.39             | -10.83                                | H                 | 34.56             | 53.98             | 19.42          | AV                  |
| 3608.55            | 52.11             | -8.2                                  | H                 | 43.91             | 73.98             | 30.07          | PK                  |
| 3608.55            | 41.54             | -8.2                                  | H                 | 33.34             | 53.98             | 20.64          | AV                  |
| 4510.69            | 51.48             | -5.92                                 | H                 | 45.56             | 73.98             | 28.42          | PK                  |
| 4510.69            | 39.60             | -5.92                                 | H                 | 33.68             | 53.98             | 20.30          | AV                  |
| 5412.83            | 48.55             | -1.86                                 | H                 | 46.69             | 73.98             | 27.29          | PK                  |
| 5412.83            | 36.29             | -1.86                                 | H                 | 34.43             | 53.98             | 19.55          | AV                  |
| 8119.24            | 46.58             | 5.95                                  | H                 | 52.53             | 73.98             | 21.45          | PK                  |
| 8119.24            | 34.40             | 5.95                                  | H                 | 40.35             | 53.98             | 13.63          | AV                  |
| 9021.38            | 46.98             | 7.24                                  | H                 | 54.22             | 73.98             | 19.76          | PK                  |
| 9021.38            | 34.70             | 7.24                                  | H                 | 41.94             | 53.98             | 12.04          | AV                  |

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor / F.L. : Filter Loss

## Operation Mode: CH Mid(DBPSK)

| Frequency<br>[MHz] | Reading<br>[dBuV] | ※A.F.+C.L.-<br>A.G.+D.F.+F.L.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|---------------------------------------|-------------------|-------------------|-------------------|----------------|---------------------|
| 2710.24            | 53.76             | -10.83                                | V                 | 42.93             | 73.98             | 31.05          | PK                  |
| 2710.24            | 43.88             | -10.83                                | V                 | 33.05             | 53.98             | 20.93          | AV                  |
| 3613.65            | 52.72             | -8.17                                 | V                 | 44.55             | 73.98             | 29.43          | PK                  |
| 3613.65            | 41.40             | -8.17                                 | V                 | 33.23             | 53.98             | 20.75          | AV                  |
| 4517.06            | 51.17             | -5.79                                 | V                 | 45.38             | 73.98             | 28.60          | PK                  |
| 4517.06            | 40.12             | -5.79                                 | V                 | 34.33             | 53.98             | 19.65          | AV                  |
| 5420.48            | 49.19             | -1.93                                 | V                 | 47.26             | 73.98             | 26.72          | PK                  |
| 5420.48            | 36.80             | -1.93                                 | V                 | 34.87             | 53.98             | 19.11          | AV                  |
| 8130.71            | 47.01             | 5.97                                  | V                 | 52.98             | 73.98             | 21.00          | PK                  |
| 8130.71            | 34.68             | 5.97                                  | V                 | 40.65             | 53.98             | 13.33          | AV                  |
| 9034.13            | 46.73             | 6.50                                  | V                 | 53.23             | 73.98             | 20.75          | PK                  |
| 9034.13            | 35.03             | 6.50                                  | V                 | 41.53             | 53.98             | 12.45          | AV                  |
| 2710.24            | 54.10             | -10.83                                | H                 | 43.27             | 73.98             | 30.71          | PK                  |
| 2710.24            | 44.40             | -10.83                                | H                 | 33.57             | 53.98             | 20.41          | AV                  |
| 3613.65            | 52.54             | -8.17                                 | H                 | 44.37             | 73.98             | 29.61          | PK                  |
| 3613.65            | 41.05             | -8.17                                 | H                 | 32.88             | 53.98             | 21.10          | AV                  |
| 4517.06            | 51.34             | -5.79                                 | H                 | 45.55             | 73.98             | 28.43          | PK                  |
| 4517.06            | 40.40             | -5.79                                 | H                 | 34.61             | 53.98             | 19.37          | AV                  |
| 5420.48            | 49.05             | -1.93                                 | H                 | 47.12             | 73.98             | 26.86          | PK                  |
| 5420.48            | 36.73             | -1.93                                 | H                 | 34.80             | 53.98             | 19.18          | AV                  |
| 8130.71            | 47.04             | 5.97                                  | H                 | 53.01             | 73.98             | 20.97          | PK                  |
| 8130.71            | 34.75             | 5.97                                  | H                 | 40.72             | 53.98             | 13.26          | AV                  |
| 9034.13            | 46.76             | 6.50                                  | H                 | 53.26             | 73.98             | 20.72          | PK                  |
| 9034.13            | 35.10             | 6.50                                  | H                 | 41.60             | 53.98             | 12.38          | AV                  |

## Operation Mode: CH High(DBPSK)

| Frequency<br>[MHz] | Reading<br>[dBuV] | ※A.F.+C.L.-<br>A.G.+D.F.+F.L.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|---------------------------------------|-------------------|-------------------|-------------------|----------------|---------------------|
| 2713.99            | 52.67             | -10.83                                | V                 | 41.84             | 73.98             | 32.14          | PK                  |
| 2713.99            | 42.88             | -10.83                                | V                 | 32.05             | 53.98             | 21.93          | AV                  |
| 3618.65            | 51.82             | -8.11                                 | V                 | 43.71             | 73.98             | 30.27          | PK                  |
| 3618.65            | 40.75             | -8.11                                 | V                 | 32.64             | 53.98             | 21.34          | AV                  |
| 4523.31            | 51.79             | -5.79                                 | V                 | 46.00             | 73.98             | 27.98          | PK                  |
| 4523.31            | 41.02             | -5.79                                 | V                 | 35.23             | 53.98             | 18.75          | AV                  |
| 5427.98            | 49.16             | -1.76                                 | V                 | 47.40             | 73.98             | 26.58          | PK                  |
| 5427.98            | 36.60             | -1.76                                 | V                 | 34.84             | 53.98             | 19.14          | AV                  |
| 8141.96            | 47.28             | 5.99                                  | V                 | 53.27             | 73.98             | 20.71          | PK                  |
| 8141.96            | 35.04             | 5.99                                  | V                 | 41.03             | 53.98             | 12.95          | AV                  |
| 9046.63            | 47.13             | 7.00                                  | V                 | 54.13             | 73.98             | 19.85          | PK                  |
| 9046.63            | 34.94             | 7.00                                  | V                 | 41.94             | 53.98             | 12.04          | AV                  |
| 2713.99            | 52.83             | -10.83                                | H                 | 42.00             | 73.98             | 31.98          | PK                  |
| 2713.99            | 43.10             | -10.83                                | H                 | 32.27             | 53.98             | 21.71          | AV                  |
| 3618.65            | 51.49             | -8.11                                 | H                 | 43.38             | 73.98             | 30.60          | PK                  |
| 3618.65            | 40.48             | -8.11                                 | H                 | 32.37             | 53.98             | 21.61          | AV                  |
| 4523.31            | 52.08             | -5.79                                 | H                 | 46.29             | 73.98             | 27.69          | PK                  |
| 4523.31            | 41.20             | -5.79                                 | H                 | 35.41             | 53.98             | 18.57          | AV                  |
| 5427.98            | 49.13             | -1.76                                 | H                 | 47.37             | 73.98             | 26.61          | PK                  |
| 5427.98            | 36.51             | -1.76                                 | H                 | 34.75             | 53.98             | 19.23          | AV                  |
| 8141.96            | 47.33             | 5.99                                  | H                 | 53.32             | 73.98             | 20.66          | PK                  |
| 8141.96            | 35.10             | 5.99                                  | H                 | 41.09             | 53.98             | 12.89          | AV                  |
| 9046.63            | 47.21             | 7.00                                  | H                 | 54.21             | 73.98             | 19.77          | PK                  |
| 9046.63            | 35.00             | 7.00                                  | H                 | 42.00             | 53.98             | 11.98          | AV                  |

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 10 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor + Filter Loss
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak: 1 GHz – 10 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
  - b. Average (RMS): 1 GHz – 10 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

# [High Band]

Operation Mode: CH Low(DBPSK)

| Frequency<br>[MHz] | Reading<br>[dBuV] | ※A.F.+C.L.-<br>A.G.+D.F.+F.L.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|---------------------------------------|-------------------|-------------------|-------------------|----------------|---------------------|
| 2760.41            | 54.93             | -9.87                                 | V                 | 45.06             | 73.98             | 28.92          | PK                  |
| 2760.41            | 46.68             | -9.87                                 | V                 | 36.81             | 53.98             | 17.17          | AV                  |
| 3680.55            | 53.31             | -8.11                                 | V                 | 45.20             | 73.98             | 28.78          | PK                  |
| 3680.55            | 42.51             | -8.11                                 | V                 | 34.40             | 53.98             | 19.58          | AV                  |
| 4600.69            | 52.11             | -4.42                                 | V                 | 47.69             | 73.98             | 26.29          | PK                  |
| 4600.69            | 42.91             | -4.42                                 | V                 | 38.49             | 53.98             | 15.49          | AV                  |
| 7361.10            | 47.55             | 5.43                                  | V                 | 52.98             | 73.98             | 21.00          | PK                  |
| 7361.10            | 35.24             | 5.43                                  | V                 | 40.67             | 53.98             | 13.31          | AV                  |
| 8281.24            | 47.51             | 7.55                                  | V                 | 55.06             | 73.98             | 18.92          | PK                  |
| 8281.24            | 34.96             | 7.55                                  | V                 | 42.51             | 53.98             | 11.47          | AV                  |
| 2760.41            | 55.89             | -9.87                                 | H                 | 46.02             | 73.98             | 27.96          | PK                  |
| 2760.41            | 47.88             | -9.87                                 | H                 | 38.01             | 53.98             | 15.97          | AV                  |
| 3680.55            | 53.40             | -8.11                                 | H                 | 45.29             | 73.98             | 28.69          | PK                  |
| 3680.55            | 42.60             | -8.11                                 | H                 | 34.49             | 53.98             | 19.49          | AV                  |
| 4600.69            | 52.17             | -4.42                                 | H                 | 47.75             | 73.98             | 26.23          | PK                  |
| 4600.69            | 43.10             | -4.42                                 | H                 | 38.68             | 53.98             | 15.30          | AV                  |
| 7361.10            | 47.61             | 5.43                                  | H                 | 53.04             | 73.98             | 20.94          | PK                  |
| 7361.10            | 35.30             | 5.43                                  | H                 | 40.73             | 53.98             | 13.25          | AV                  |
| 8281.24            | 47.57             | 7.55                                  | H                 | 55.12             | 73.98             | 18.86          | PK                  |
| 8281.24            | 35.05             | 7.55                                  | H                 | 42.60             | 53.98             | 11.38          | AV                  |

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor / F.L. : Filter Loss

## Operation Mode: CH Mid(DBPSK)

| Frequency<br>[MHz] | Reading<br>[dBuV] | ※A.F.+C.L.-<br>A.G.+D.F.+F.L.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|---------------------------------------|-------------------|-------------------|-------------------|----------------|---------------------|
| 2764.16            | 52.35             | -9.89                                 | V                 | 42.46             | 73.98             | 31.52          | PK                  |
| 2764.16            | 42.90             | -9.89                                 | V                 | 33.01             | 53.98             | 20.97          | AV                  |
| 3685.55            | 53.69             | -8.16                                 | V                 | 45.53             | 73.98             | 28.45          | PK                  |
| 3685.55            | 43.38             | -8.16                                 | V                 | 35.22             | 53.98             | 18.76          | AV                  |
| 4606.94            | 52.31             | -4.53                                 | V                 | 47.78             | 73.98             | 26.20          | PK                  |
| 4606.94            | 42.28             | -4.53                                 | V                 | 37.75             | 53.98             | 16.23          | AV                  |
| 7371.10            | 47.70             | 5.39                                  | V                 | 53.09             | 73.98             | 20.89          | PK                  |
| 7371.10            | 35.33             | 5.39                                  | V                 | 40.72             | 53.98             | 13.26          | AV                  |
| 8292.49            | 46.82             | 7.35                                  | V                 | 54.17             | 73.98             | 19.81          | PK                  |
| 8292.49            | 34.91             | 7.35                                  | V                 | 42.26             | 53.98             | 11.72          | AV                  |
| 2764.16            | 53.15             | -9.89                                 | H                 | 43.26             | 73.98             | 30.72          | PK                  |
| 2764.16            | 44.10             | -9.89                                 | H                 | 34.21             | 53.98             | 19.77          | AV                  |
| 3685.55            | 53.88             | -8.16                                 | H                 | 45.72             | 73.98             | 28.26          | PK                  |
| 3685.55            | 43.50             | -8.16                                 | H                 | 35.34             | 53.98             | 18.64          | AV                  |
| 4606.94            | 52.43             | -4.53                                 | H                 | 47.90             | 73.98             | 26.08          | PK                  |
| 4606.94            | 42.40             | -4.53                                 | H                 | 37.87             | 53.98             | 16.11          | AV                  |
| 7371.10            | 47.74             | 5.39                                  | H                 | 53.13             | 73.98             | 20.85          | PK                  |
| 7371.10            | 35.40             | 5.39                                  | H                 | 40.79             | 53.98             | 13.19          | AV                  |
| 8292.49            | 46.89             | 7.35                                  | H                 | 54.24             | 73.98             | 19.74          | PK                  |
| 8292.49            | 35.00             | 7.35                                  | H                 | 42.35             | 53.98             | 11.63          | AV                  |

## Operation Mode: CH High(DBPSK)


| Frequency<br>[MHz] | Reading<br>[dBuV] | ※A.F.+C.L.-<br>A.G.+D.F.+F.L.<br>[dB] | ANT. POL<br>[H/V] | Total<br>[dBuV/m] | Limit<br>[dBuV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-------------------|---------------------------------------|-------------------|-------------------|-------------------|----------------|---------------------|
| 2767.99            | 53.12             | -9.91                                 | V                 | 43.21             | 73.98             | 30.77          | PK                  |
| 2767.99            | 44.61             | -9.91                                 | V                 | 34.70             | 53.98             | 19.28          | AV                  |
| 3690.65            | 54.02             | -8.22                                 | V                 | 45.80             | 73.98             | 28.18          | PK                  |
| 3690.65            | 43.77             | -8.22                                 | V                 | 35.55             | 53.98             | 18.43          | AV                  |
| 4613.31            | 51.22             | -4.64                                 | V                 | 46.58             | 73.98             | 27.40          | PK                  |
| 4613.31            | 40.03             | -4.64                                 | V                 | 35.39             | 53.98             | 18.59          | AV                  |
| 7381.30            | 48.19             | 5.48                                  | V                 | 53.67             | 73.98             | 20.31          | PK                  |
| 7381.30            | 35.38             | 5.48                                  | V                 | 40.86             | 53.98             | 13.12          | AV                  |
| 8303.96            | 48.16             | 7.48                                  | V                 | 55.64             | 73.98             | 18.34          | PK                  |
| 8303.96            | 35.54             | 7.48                                  | V                 | 43.02             | 53.98             | 10.96          | AV                  |
| 2767.99            | 54.06             | -9.91                                 | H                 | 44.15             | 73.98             | 29.83          | PK                  |
| 2767.99            | 45.80             | -9.91                                 | H                 | 35.89             | 53.98             | 18.09          | AV                  |
| 3690.65            | 54.16             | -8.22                                 | H                 | 45.94             | 73.98             | 28.04          | PK                  |
| 3690.65            | 43.90             | -8.22                                 | H                 | 35.68             | 53.98             | 18.30          | AV                  |
| 4613.31            | 51.26             | -4.64                                 | H                 | 46.62             | 73.98             | 27.36          | PK                  |
| 4613.31            | 40.10             | -4.64                                 | H                 | 35.46             | 53.98             | 18.52          | AV                  |
| 7381.30            | 48.25             | 5.48                                  | H                 | 53.73             | 73.98             | 20.25          | PK                  |
| 7381.30            | 35.43             | 5.48                                  | H                 | 40.91             | 53.98             | 13.07          | AV                  |
| 8303.96            | 48.21             | 7.48                                  | H                 | 55.69             | 73.98             | 18.29          | PK                  |
| 8303.96            | 35.60             | 7.48                                  | H                 | 43.08             | 53.98             | 10.90          | AV                  |

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 10 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor + Filter Loss
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak: 1 GHz – 10 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
  - b. Average (RMS): 1 GHz – 10 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

■ **RESULT PLOTS – Low Band**

**Radiated Spurious Emissions plot – Peak, Average Reading (DBPSK 3rd Harmonic, X-H)**

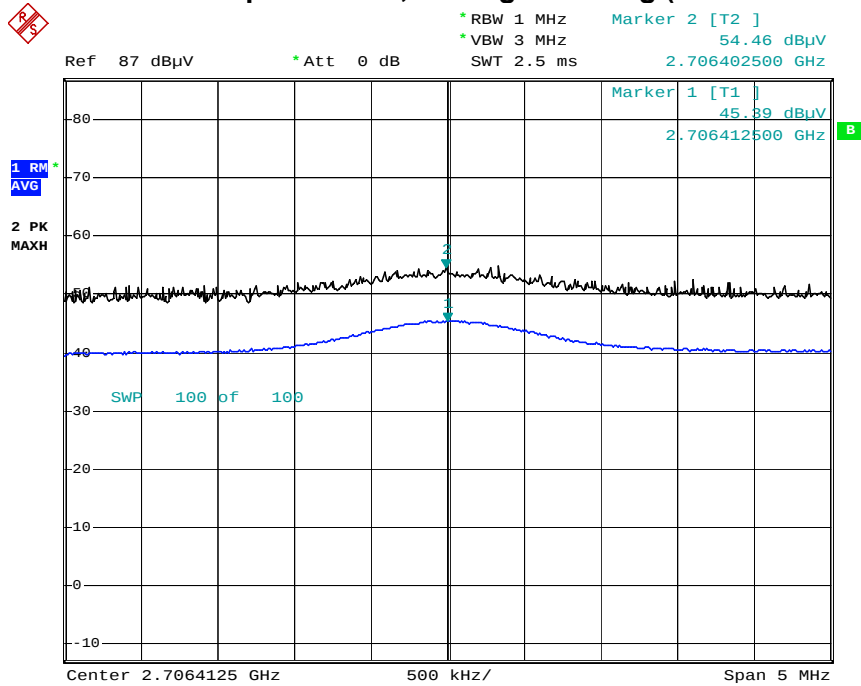


Date: 14.JUL.2017 06:51:45

**Note : Only the worst case plots for Radiated Spurious Emissions.**

## RESULT PLOTS – High Band

### Radiated Spurious Emissions plot – Peak, Average Reading (DBPSK 3rd Harmonic, Y-H)

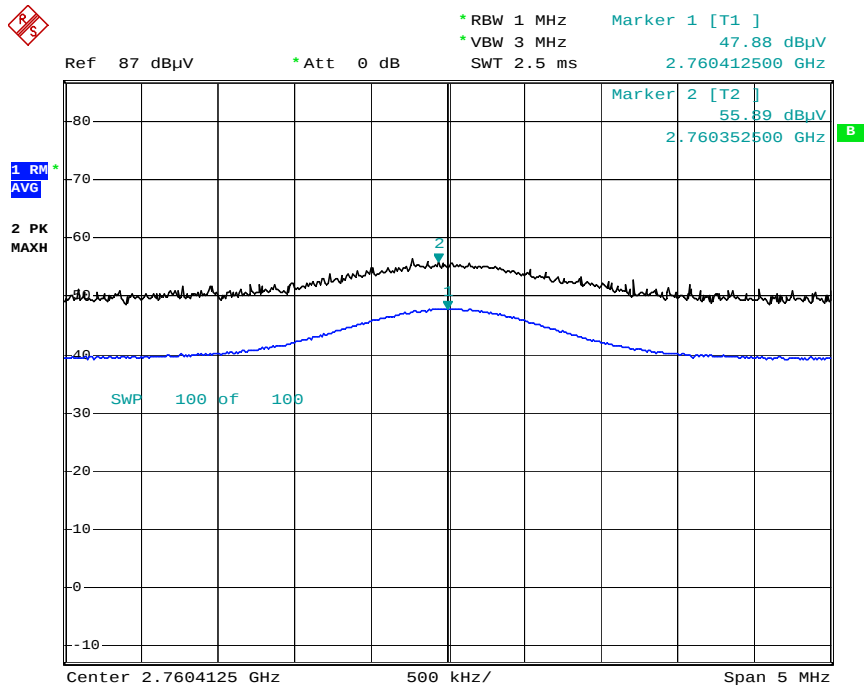

Date: 14.JUL.2017 06:43:13

**Note : Only the worst case plots for Radiated Spurious Emissions.**

### 9.6.3 RECEIVER SPURIOUS EMISSIONS

IC Rule(s) RSS-Gen  
Test Requirements: Blow the table  
Operating conditions: Under normal test conditions  
Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)  
F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
Mode of operation: Receive

| Frequency<br>(MHz) | Field Strength<br>(microvolts/m at 3 meters) |
|--------------------|----------------------------------------------|
| 30 – 88            | 100                                          |
| 88 - 216           | 150                                          |
| 216 – 960          | 200                                          |
| Above 960          | 500                                          |

#### Operation Mode: Receive:

30 MHz ~ 1 GHz

| Frequency               | Reading    | Ant. factor | Cable loss | Ant. POL | Total        | Limit        | Margin |
|-------------------------|------------|-------------|------------|----------|--------------|--------------|--------|
| MHz                     | dB $\mu$ V | dB /m       | dB         | (H/V)    | dB $\mu$ V/m | dB $\mu$ V/m | dB     |
| No critical peaks found |            |             |            |          |              |              |        |

Above 1 GHz

| Frequency               | Reading    | Ant. factor | Cable loss | Ant. POL | Total        | Limit        | Margin |
|-------------------------|------------|-------------|------------|----------|--------------|--------------|--------|
| MHz                     | dB $\mu$ V | dB /m       | dB         | (H/V)    | dB $\mu$ V/m | dB $\mu$ V/m | dB     |
| No critical peaks found |            |             |            |          |              |              |        |

## 9.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT : §15.207(a) / RSS-Gen(Issue 4) Section 8.8

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBμV) |          |
|-----------------------|---------------|----------|
|                       | Quasi-peak    | Average  |
| 0.15 to 0.50          | 66 to 56      | 56 to 46 |
| 0.50 to 5             | 56            | 46       |
| 5 to 30               | 60            | 50       |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## RESULT PLOTS

### Conducted Emissions (Line 1)

SIGFOX L1 MODE


1 / 2

## HCT TEST Report

### Common Information

EUT: SFM11R2D  
Manufacturer: WISOL  
Test Site: SHIELD ROOM  
Operating Conditions: SIGFOX MODE

FCC CLASS B

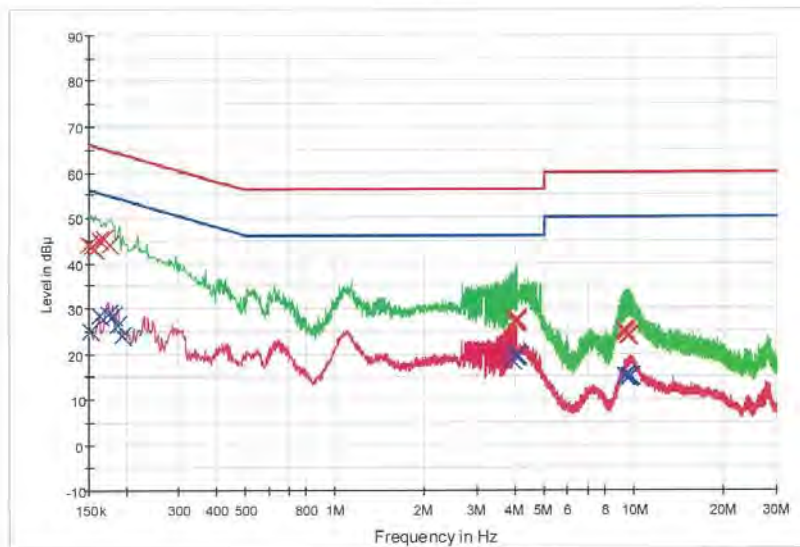

— FCC CLASS B\_QP — FCC CLASS B\_AV — Preview Result 1-PK+  
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 44.0             | 9.000           | Off    | L1   | 9.6        | 22.0        | 66.0         |
| 0.154000        | 43.7             | 9.000           | Off    | L1   | 9.6        | 22.1        | 65.8         |
| 0.158000        | 43.0             | 9.000           | Off    | L1   | 9.6        | 22.6        | 65.6         |
| 0.162000        | 45.0             | 9.000           | Off    | L1   | 9.6        | 20.3        | 65.4         |
| 0.168000        | 45.1             | 9.000           | Off    | L1   | 9.6        | 20.0        | 65.1         |
| 0.176000        | 43.7             | 9.000           | Off    | L1   | 9.6        | 20.9        | 64.7         |
| 4.016000        | 26.9             | 9.000           | Off    | L1   | 9.9        | 29.1        | 56.0         |
| 4.020000        | 27.0             | 9.000           | Off    | L1   | 9.9        | 29.0        | 56.0         |
| 4.038000        | 27.2             | 9.000           | Off    | L1   | 9.9        | 28.8        | 56.0         |
| 4.046000        | 27.1             | 9.000           | Off    | L1   | 9.9        | 28.9        | 56.0         |
| 4.070000        | 27.4             | 9.000           | Off    | L1   | 9.9        | 28.6        | 56.0         |
| 4.076000        | 27.5             | 9.000           | Off    | L1   | 9.9        | 28.5        | 56.0         |
| 9.262000        | 24.8             | 9.000           | Off    | L1   | 10.1       | 35.2        | 60.0         |
| 9.274000        | 25.2             | 9.000           | Off    | L1   | 10.1       | 34.8        | 60.0         |
| 9.466000        | 24.6             | 9.000           | Off    | L1   | 10.1       | 35.4        | 60.0         |
| 9.540000        | 23.9             | 9.000           | Off    | L1   | 10.1       | 36.1        | 60.0         |
| 9.598000        | 24.0             | 9.000           | Off    | L1   | 10.1       | 36.0        | 60.0         |
| 9.610000        | 23.8             | 9.000           | Off    | L1   | 10.1       | 36.2        | 60.0         |

### Final Result 2

2017-07-07

오전 11:11:31

SIGFOX L1 MODE

2 / 2

| Frequency (MHz) | CAverage (dBμV) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.152000        | 25.0            | 9.000           | Off    | L1   | 9.6        | 30.9        | 55.9         |
| 0.162000        | 28.5            | 9.000           | Off    | L1   | 9.6        | 26.9        | 55.4         |
| 0.174000        | 28.8            | 9.000           | Off    | L1   | 9.6        | 26.0        | 54.8         |
| 0.180000        | 28.3            | 9.000           | Off    | L1   | 9.6        | 26.2        | 54.5         |
| 0.188000        | 26.3            | 9.000           | Off    | L1   | 9.6        | 27.8        | 54.1         |
| 0.194000        | 23.9            | 9.000           | Off    | L1   | 9.6        | 29.9        | 53.9         |
| 3.908000        | 18.5            | 9.000           | Off    | L1   | 9.9        | 27.5        | 46.0         |
| 4.030000        | 19.3            | 9.000           | Off    | L1   | 9.9        | 26.7        | 46.0         |
| 4.040000        | 19.3            | 9.000           | Off    | L1   | 9.9        | 26.7        | 46.0         |
| 4.046000        | 19.5            | 9.000           | Off    | L1   | 9.9        | 26.5        | 46.0         |
| 4.068000        | 19.8            | 9.000           | Off    | L1   | 9.9        | 26.2        | 46.0         |
| 4.074000        | 19.5            | 9.000           | Off    | L1   | 9.9        | 26.5        | 46.0         |
| 9.262000        | 15.2            | 9.000           | Off    | L1   | 10.1       | 34.8        | 50.0         |
| 9.456000        | 14.9            | 9.000           | Off    | L1   | 10.1       | 35.1        | 50.0         |
| 9.466000        | 14.9            | 9.000           | Off    | L1   | 10.1       | 35.1        | 50.0         |
| 9.598000        | 14.8            | 9.000           | Off    | L1   | 10.1       | 35.2        | 50.0         |
| 9.666000        | 15.1            | 9.000           | Off    | L1   | 10.1       | 34.9        | 50.0         |
| 9.768000        | 15.1            | 9.000           | Off    | L1   | 10.1       | 34.9        | 50.0         |

2017-07-07

오전 11:11:31

## Conducted Emissions (Line 2)

SIGFOX N MODE


1 / 2

# HCT TEST Report

## Common Information

EUT: SFM11R2D  
Manufacturer: WISOL  
Test Site: SHIELD ROOM  
Operating Conditions: SIGFOX MODE

FCC CLASS B

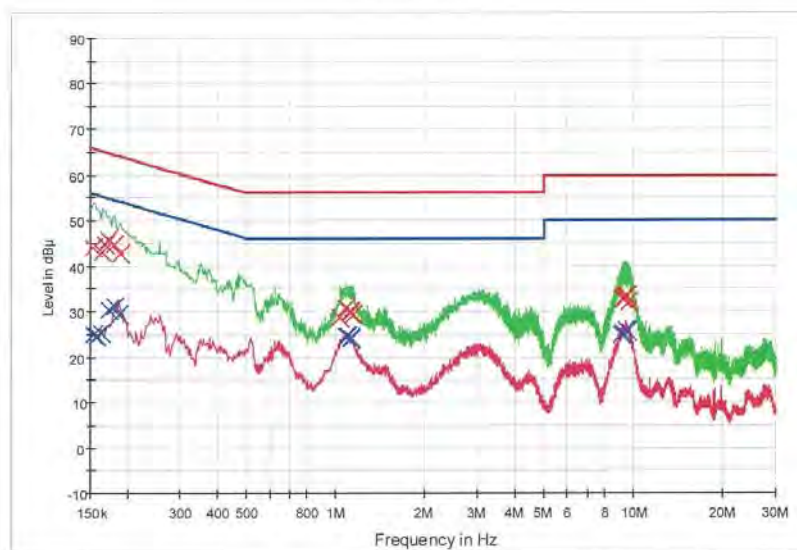

— FCC CLASS B\_QP — FCC CLASS B\_AV — Preview Result 1-PK+  
— Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

## Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----------------|--------|------|------------|-------------|--------------|
| 0.154000        | 44.1             | 9.000           | Off    | N    | 9.6        | 21.7        | 65.8         |
| 0.164000        | 42.8             | 9.000           | Off    | N    | 9.6        | 22.4        | 65.3         |
| 0.168000        | 44.6             | 9.000           | Off    | N    | 9.6        | 20.5        | 65.1         |
| 0.172000        | 45.6             | 9.000           | Off    | N    | 9.6        | 19.2        | 64.9         |
| 0.180000        | 44.7             | 9.000           | Off    | N    | 9.6        | 19.8        | 64.5         |
| 0.190000        | 42.5             | 9.000           | Off    | N    | 9.6        | 21.5        | 64.0         |
| 1.032000        | 28.6             | 9.000           | Off    | N    | 9.7        | 27.4        | 56.0         |
| 1.082000        | 30.8             | 9.000           | Off    | N    | 9.7        | 25.2        | 56.0         |
| 1.088000        | 30.7             | 9.000           | Off    | N    | 9.7        | 25.3        | 56.0         |
| 1.124000        | 29.9             | 9.000           | Off    | N    | 9.7        | 26.1        | 56.0         |
| 1.128000        | 29.7             | 9.000           | Off    | N    | 9.7        | 26.3        | 56.0         |
| 1.142000        | 29.3             | 9.000           | Off    | N    | 9.7        | 26.7        | 56.0         |
| 9.238000        | 32.6             | 9.000           | Off    | N    | 10.1       | 27.4        | 60.0         |
| 9.268000        | 32.7             | 9.000           | Off    | N    | 10.1       | 27.3        | 60.0         |
| 9.332000        | 33.1             | 9.000           | Off    | N    | 10.1       | 26.9        | 60.0         |
| 9.382000        | 33.3             | 9.000           | Off    | N    | 10.1       | 26.7        | 60.0         |
| 9.512000        | 33.5             | 9.000           | Off    | N    | 10.1       | 26.5        | 60.0         |
| 9.684000        | 31.9             | 9.000           | Off    | N    | 10.1       | 28.1        | 60.0         |

## Final Result 2

2017-07-07

오전 11:01:03

SIGFOX N MODE

2 / 2

| Frequency<br>(MHz) | CAverage<br>(dBμV) | Bandwidth<br>(kHz) | Filter | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|--------------------|--------------------|--------|------|---------------|----------------|-----------------|
| 0.154000           | 24.8               | 9.000              | Off    | N    | 9.6           | 31.0           | 55.8            |
| 0.158000           | 24.7               | 9.000              | Off    | N    | 9.6           | 30.8           | 55.6            |
| 0.162000           | 25.1               | 9.000              | Off    | N    | 9.6           | 30.2           | 55.4            |
| 0.172000           | 30.5               | 9.000              | Off    | N    | 9.6           | 24.4           | 54.9            |
| 0.180000           | 30.9               | 9.000              | Off    | N    | 9.6           | 23.6           | 54.5            |
| 0.188000           | 29.3               | 9.000              | Off    | N    | 9.6           | 24.8           | 54.1            |
| 1.078000           | 24.7               | 9.000              | Off    | N    | 9.7           | 21.3           | 46.0            |
| 1.082000           | 24.6               | 9.000              | Off    | N    | 9.7           | 21.4           | 46.0            |
| 1.088000           | 24.5               | 9.000              | Off    | N    | 9.7           | 21.5           | 46.0            |
| 1.096000           | 24.7               | 9.000              | Off    | N    | 9.7           | 21.3           | 46.0            |
| 1.124000           | 24.1               | 9.000              | Off    | N    | 9.7           | 21.9           | 46.0            |
| 1.128000           | 23.8               | 9.000              | Off    | N    | 9.7           | 22.2           | 46.0            |
| 9.118000           | 24.8               | 9.000              | Off    | N    | 10.1          | 25.2           | 50.0            |
| 9.236000           | 25.3               | 9.000              | Off    | N    | 10.1          | 24.7           | 50.0            |
| 9.376000           | 25.8               | 9.000              | Off    | N    | 10.1          | 24.2           | 50.0            |
| 9.384000           | 25.8               | 9.000              | Off    | N    | 10.1          | 24.2           | 50.0            |
| 9.512000           | 25.7               | 9.000              | Off    | N    | 10.1          | 24.3           | 50.0            |
| 9.528000           | 25.6               | 9.000              | Off    | N    | 10.1          | 24.4           | 50.0            |

2017-07-07

모든 11:01:03

## 10. LIST OF TEST EQUIPMENT

### 10.1 LIST OF TEST EQUIPMENT(Conducted Test)

| Manufacturer    | Model / Equipment            | Calibration<br>Date | Calibration<br>Interval | Serial No. |
|-----------------|------------------------------|---------------------|-------------------------|------------|
| Rohde & Schwarz | ENV216 / LISN                | 12/23/2016          | Annual                  | 100073     |
| Rohde & Schwarz | ESCI / Test Receiver         | 12/23/2016          | Annual                  | 100584     |
| Agilent         | N9020A / Signal Analyzer     | 06/13/2017          | Annual                  | MY51110085 |
| Agilent         | N9030A / Signal Analyzer     | 11/30/2016          | Annual                  | MY49431210 |
| Agilent         | N1911A / Power Meter         | 04/17/2017          | Annual                  | MY45100523 |
| Agilent         | N1921A / Power Sensor        | 04/17/2017          | Annual                  | MY52260025 |
| Agilent         | 87300B / Directional Coupler | 11/23/2016          | Annual                  | 3116A03621 |
| Hewlett Packard | 11667B / Power Splitter      | 06/12/2017          | Annual                  | 05001      |
| Hewlett Packard | E3632A / DC Power Supply     | 06/30/2017          | Annual                  | KR75303960 |
| Agilent         | 8493C / Attenuator(10 dB)    | 07/10/2017          | Annual                  | 07560      |
| Rohde & Schwarz | EMC32 / Software             | -                   | -                       | -          |

## 10.2 LIST OF TEST EQUIPMENT(Radiated Test)

| Manufacturer           | Model / Equipment                                          | Calibration Date | Calibration Interval | Serial No.  |
|------------------------|------------------------------------------------------------|------------------|----------------------|-------------|
| Audix                  | AM4000 / Antenna Position Tower                            | N/A              | N/A                  | N/A         |
| Audix                  | Turn Table                                                 | N/A              | N/A                  | N/A         |
| Audix                  | EM1000 / Controller                                        | N/A              | N/A                  | 060520      |
| Rohde & Schwarz        | Loop Antenna                                               | 04/19/2017       | Biennial             | 1513-175    |
| Schwarzbeck            | VULB 9168 / Hybrid Antenna                                 | 04/06/2017       | Biennial             | 760         |
| Schwarzbeck            | BBHA 9120D / Horn Antenna                                  | 08/25/2016       | Biennial             | 9120D-1300  |
| Schwarzbeck            | BBHA9170 /<br>Horn Antenna(15 GHz ~ 40 GHz)                | 09/04/2015       | Biennial             | BBHA9170541 |
| Rohde & Schwarz        | FSP / Spectrum Analyzer                                    | 09/10/2016       | Annual               | 100688      |
| Rohde & Schwarz        | FSV40-N / Spectrum Analyzer                                | 09/23/2016       | Annual               | 101068-SZ   |
| Wainwright Instruments | WHK3.0/18G-10EF / High Pass Filter                         | 06/12/2017       | Annual               | 8           |
| Wainwright Instruments | WHFX7.0/18G-8SS / High Pass Filter                         | 05/15/2017       | Annual               | 29          |
| Wainwright Instruments | WRCJV2400/2483.5-2370/2520-60/12SS /<br>Band Reject Filter | 06/30/2017       | Annual               | 2           |
| Wainwright Instruments | WRCJV5100/5850-40/50-8EEK /<br>Band Reject Filter          | 01/24/2017       | Annual               | 2           |
| Agilent                | 8493C-10 / Attenuator(10 dB)                               | 08/11/2016       | Annual               | 76649       |
| CERNEX                 | CBLU1183540 / Power Amplifier                              | 07/11/2017       | Annual               | 22964       |
| CERNEX                 | CBL06185030 / Power Amplifier                              | 07/11/2017       | Annual               | 22965       |
| CERNEX                 | CBL18265035 / Power Amplifier                              | 01/23/2017       | Annual               | 22966       |
| CERNEX                 | CBL26405040 / Power Amplifier                              | 06/30/2017       | Annual               | 25956       |