



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1507222025-WF-02

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: Network set-top box

Model/Type reference.....: MC800

List Model(s).....: S6, Q2

Trade Mark.....: sumavision/Perfect Sky

FCC ID.....: 2ABAB-MC800

Applicant's name.....: Sumavision Technologies Co., Ltd.

Address of applicant.....: Sumavision Plaza, No.15, KaiTuo Road, Shangdi Information and Industry Base, Haidian District, Beijing 100085, China

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm.....: Floor 1-A, Baisha Technology Park, No.3011, Shaheqi Road, Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of Receipt.....: July 25, 2015

Date of Test Date.....: July 26, 2015 – Aug. 03, 2015

Data of Issue.....: Aug. 04, 2015

Result.....: Positive

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1507222025-WF-02	Aug. 04, 2015 ----- Date of issue
--------------------------	----------------------------	---

Equipment under Test : Network set-top box

Model /Type : MC800

Listed Models : S6, Q2

Applicant : **Sumavision Technologies Co., Ltd.**

Address : Sumavision Plaza, No.15, KaiTuo Road, Shangdi
Information and Industry Base, Haidian District,
Beijing 100085, China

Manufacturer : **Sumavision Technologies Co., Ltd.**

Address : Sumavision Plaza, No.15, KaiTuo Road, Shangdi
Information and Industry Base, Haidian District,
Beijing 100085, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****

Version	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2015-08-04	CTL1507222025-WF-02	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	8
2.6. MODIFICATIONS.....	8
3. TEST CONDITIONS AND RESULTS	9
3.1. CONDUCTED EMISSIONS TEST	9
3.2. RADIATED EMISSIONS AND BAND EDGE	12
3.3. MAXIMUM PEAK OUTPUT POWER	18
3.4. 20dB BANDWIDTH.....	22
3.5. FREQUENCY SEPARATION	26
3.6. NUMBER OF HOPPING FREQUENCY.....	28
3.7. TIME OF OCCUPANCY (DWELL TIME).....	30
3.8. OUT-OF-BAND EMISSIONS	34
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	40
3.10. ANTENNA REQUIREMENT.....	41
4. TEST SETUP PHOTOS OF THE EUT	42
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	44

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#) : Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: all test are according to ANSI C63.4:2014 and ANSI C63.10:2013

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Network set-top box
Model/Type reference:	MC800
Power supply:	DC 12V from adapter
Adapter information 1:	Model No.:SW15-120S100U Input: 100-240V~ 0.4A max 50/60Hz Output: 12V---1A
Adapter information 2:	Model No.:F12CN1200100A Input: AC 100-240V 50/60Hz 0.5A max Output: 12V---1A
Hardware version:	MB.S805.03
Software version:	V1.1
Bluetooth :	
Version:	Supported BT3.0
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA Antenna
Antenna gain:	-0.5dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Preliminary tests were performed in each mode and packet length of BT, and found worst case as bellow, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	2DH5 Middle channel
Radiated Emissions and Band Edge	2DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Transient Limiter	SCHWARZCECK	VTSD 9561F	9666	2015/06/02	2016/06/01
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ABAB-MC800 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

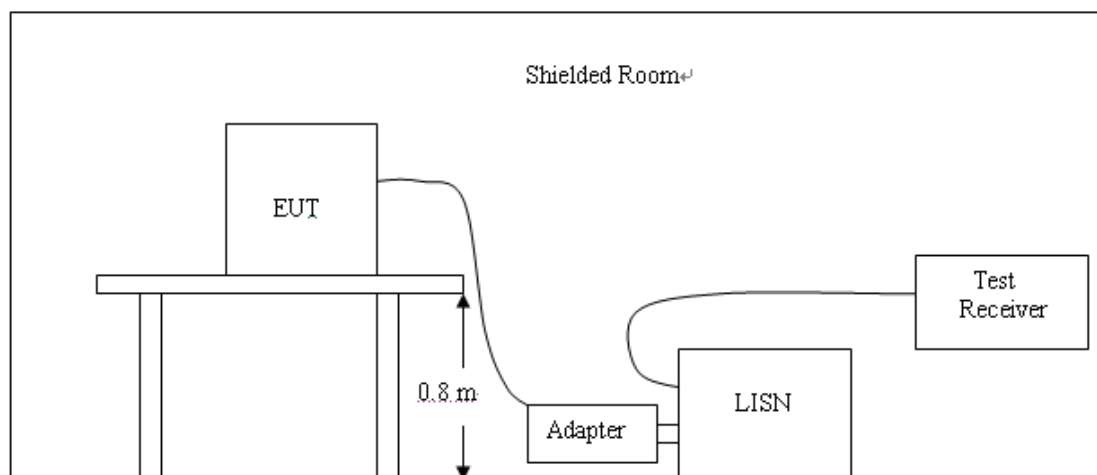


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Note: We tested all modes with adapter 1, adapter 2 and recorded the worst case at $\pi/4$ DQPSK (2DH5) low channel with adapter 1.

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

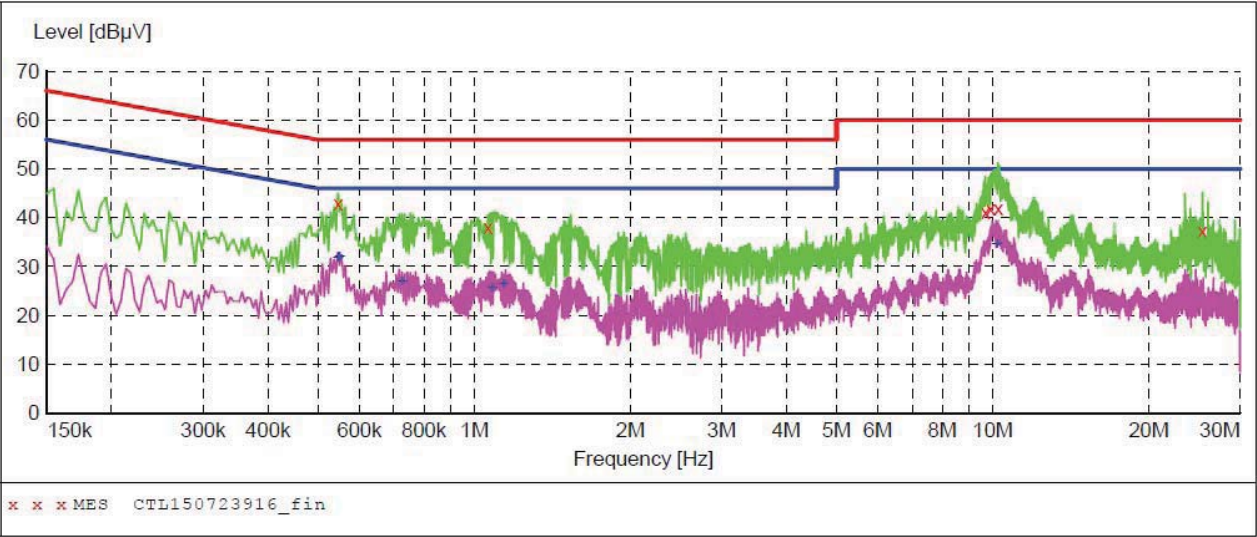

MEASUREMENT RESULT: "CTL150723916_fin"

7/23/2015 8:35PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.546001	43.00	10.2	56	13.0	QP	L1	GND
1.063501	38.10	10.3	56	17.9	QP	L1	GND
9.685501	41.00	10.6	60	19.0	QP	L1	GND
9.906001	41.90	10.6	60	18.1	QP	L1	GND
10.252501	41.90	10.6	60	18.1	QP	L1	GND
25.390501	37.40	11.1	60	22.6	QP	L1	GND


MEASUREMENT RESULT: "CTL150723916_fin2"

7/23/2015 8:35PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.546001	31.80	10.2	46	14.2	AV	L1	GND
0.550501	32.00	10.2	46	14.0	AV	L1	GND
0.726001	26.80	10.2	46	19.2	AV	L1	GND
1.081501	25.50	10.3	46	20.5	AV	L1	GND
1.140001	26.20	10.3	46	19.8	AV	L1	GND
10.189501	34.50	10.6	50	15.5	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

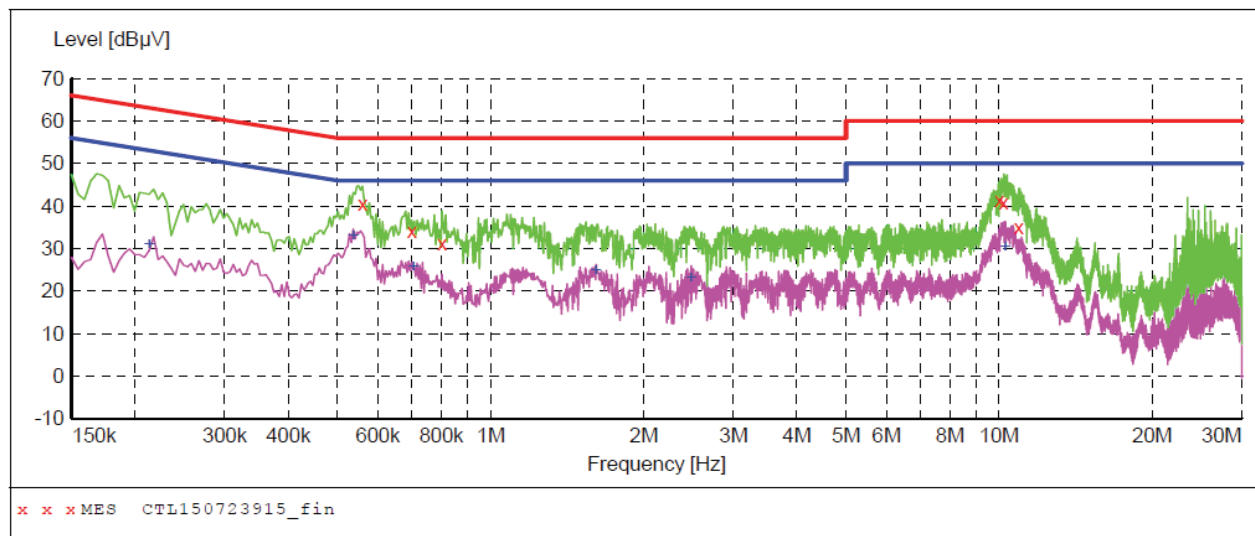**MEASUREMENT RESULT: "CTL150723915_fin"**

7/23/2015 8:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.559501	40.50	10.2	56	15.5	QP	N	GND
0.699001	34.20	10.2	56	21.8	QP	N	GND
0.802501	31.10	10.2	56	24.9	QP	N	GND
10.009501	41.30	10.6	60	18.7	QP	N	GND
10.189501	40.90	10.6	60	19.1	QP	N	GND
10.923001	34.90	10.6	60	25.1	QP	N	GND

MEASUREMENT RESULT: "CTL150723915_fin2"

7/23/2015 8:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.213001	30.80	10.2	53	22.3	AV	N	GND
0.537001	32.90	10.2	46	13.1	AV	N	GND
0.703501	25.70	10.2	46	20.3	AV	N	GND
1.608001	24.80	10.3	46	21.2	AV	N	GND
2.472001	22.90	10.4	46	23.1	AV	N	GND
10.279501	30.40	10.6	50	19.6	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

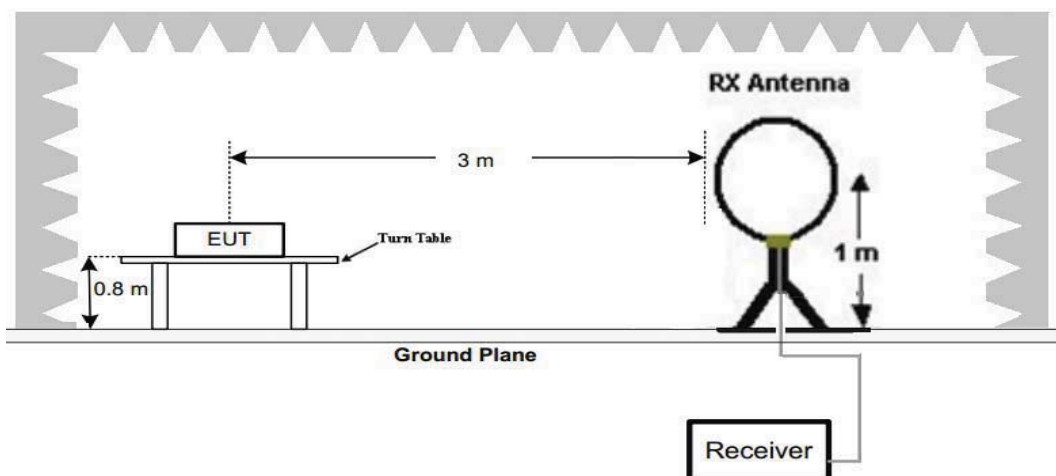

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

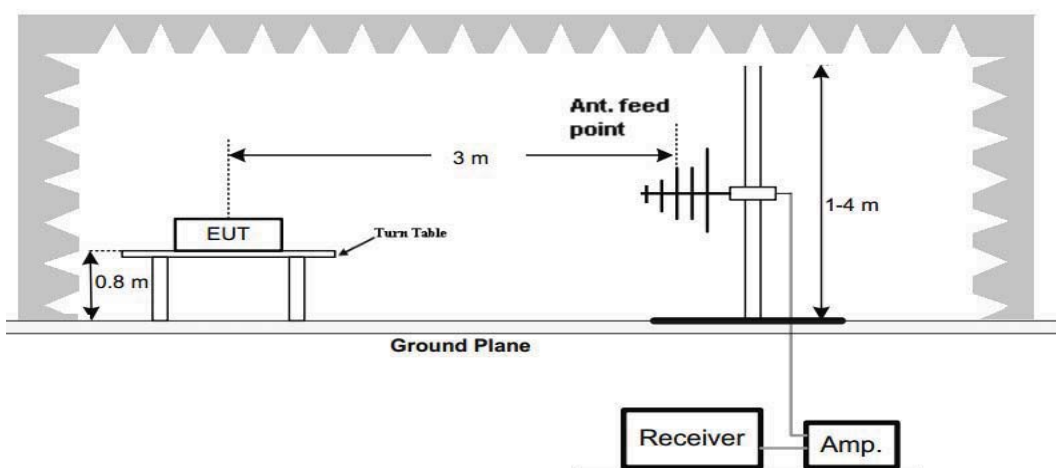

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

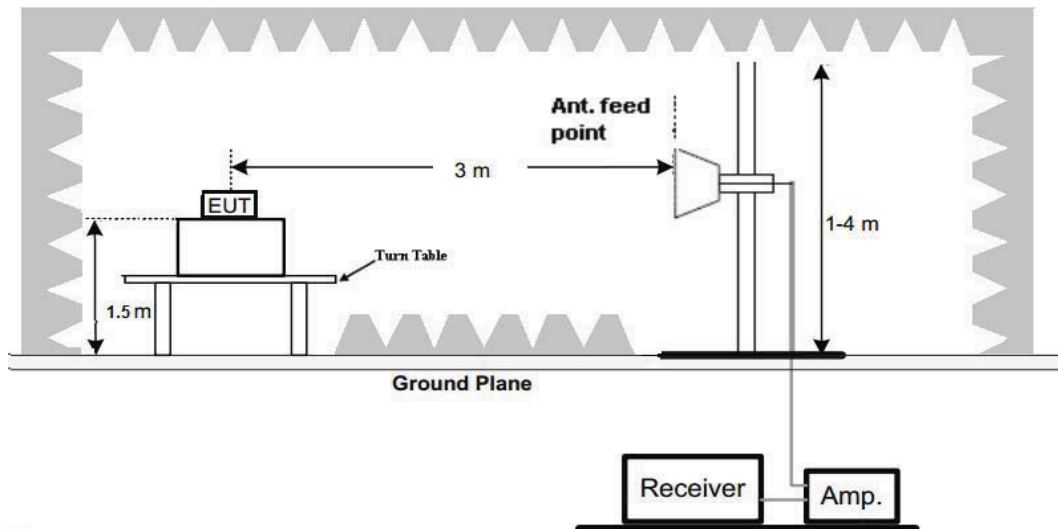**Test Procedure**

1. The EUT was placed on a low permittivity and low loss tangent turn table which is 0.8m above ground plane (for above 1GHz, 1.5m above ground plane).
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:

1. We tested three channels (lowest/middle/highest) of each mode and recorded worst case at 2DH5 low channel for measurement below 1GHz.
2. We tested three channels (lowest/middle/highest) of each mode and recorded worst case at 2DH5 mode above 1GHz.
3. Test conducted with adapter 1 and adapter 2 respectively, and worst case at adapter 1 was recorded.

For 9 KHz-30MHz


Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.18	49.75	102.50	52.75	Peak	PASS
1.60	55.36	63.52	8.16	QP	PASS
15.25	57.51	69.54	12.03	QP	PASS
20.89	49.85	69.54	19.69	QP	PASS

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:	Field Strength				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

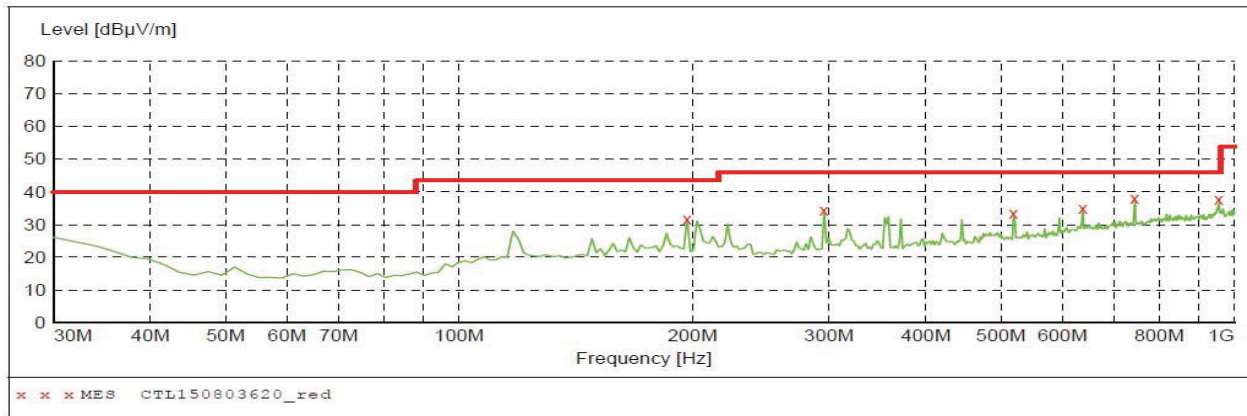**MEASUREMENT RESULT: "CTL150803620_red"**


8/3/2015 4:02PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
196.840000	31.70	13.8	43.5	11.8	---	0.0	0.00	HORIZONTAL
295.780000	34.50	15.4	46.0	11.5	---	0.0	0.00	HORIZONTAL
518.880000	33.60	20.5	46.0	12.4	---	0.0	0.00	HORIZONTAL
637.220000	35.10	22.6	46.0	10.9	---	0.0	0.00	HORIZONTAL
743.920000	38.10	24.2	46.0	7.9	---	0.0	0.00	HORIZONTAL
955.380000	37.60	26.7	46.0	8.4	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:	Field Strength				
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

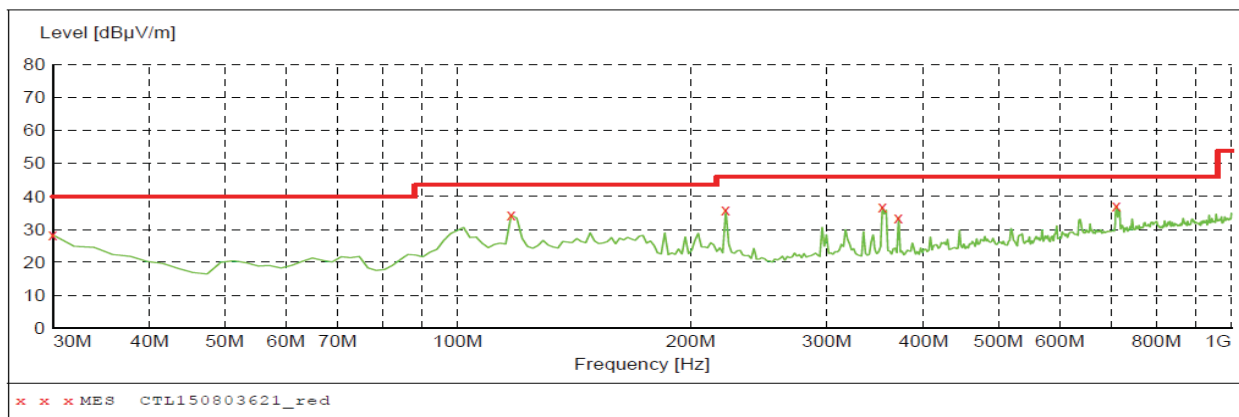**MEASUREMENT RESULT: "CTL150803621_red"**

8/3/2015 4:05PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	28.30	21.1	40.0	11.7	---	0.0	0.00	VERTICAL
117.300000	34.30	15.1	43.5	9.2	---	0.0	0.00	VERTICAL
222.060000	36.00	14.2	46.0	10.0	---	0.0	0.00	VERTICAL
353.980000	36.70	17.1	46.0	9.3	---	0.0	0.00	VERTICAL
371.440000	33.60	17.7	46.0	12.4	---	0.0	0.00	VERTICAL
710.940000	37.10	23.6	46.0	8.9	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz **$\pi/4$ DQPSK (above 1GHz):worse case**

Frequency(MHz):				2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	91.54	PK	--	--	58.14	28.78	4.61	0.00	33.40
1	2402.00	83.16	AV	--	--	49.76	28.78	4.61	0.00	33.40
2	2390.00	37.56	PK	74	36.44	4.24	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	43.16	PK	74	30.84	9.77	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	55.36	PK	74	18.64	50.85	33.49	6.91	35.89	4.51
4	4804.00	42.48	AV	54	11.52	37.97	33.49	6.91	35.89	4.51
5	5225.75	43.87	PK	74	30.13	36.46	34.57	7.16	34.31	7.41
5	5225.75	--	AV	54	--	--	--	--	--	--
6	7206.00	47.15	PK	74	26.85	36.04	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	92.48	PK	--	--	59.08	28.78	4.61	0.00	33.40
1	2402.00	85.26	AV	--	--	51.86	28.78	4.61	0.00	33.40
2	2390.00	37.74	PK	74	36.26	4.42	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	44.69	PK	74	29.31	11.30	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	55.78	PK	74	18.22	51.27	33.49	6.91	35.89	4.51
4	4804.00	42.36	AV	54	11.64	37.85	33.49	6.91	35.89	4.51
5	5440.50	44.87	PK	74	29.13	37.23	34.74	7.28	34.39	7.64
5	5440.50	--	AV	54	--	--	--	--	--	--
6	7206.00	46.98	PK	74	27.02	35.87	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Frequency(MHz):				2441		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	91.59	PK	--	--	58.08	28.85	4.66	0.00	33.51
1	2441.00	83.69	AV	--	--	50.18	28.85	4.66	0.00	33.51
2	3575.50	40.78	PK	74	33.22	37.96	32.00	5.91	35.09	2.82
2	3575.50	--	AV	54	--	--	--	--	--	--
3	4882.00	55.54	PK	74	18.46	49.18	33.60	6.95	34.19	6.36
3	4882.00	43.98	AV	54	10.02	37.62	33.60	6.95	34.19	6.36
4	5426.65	42.45	PK	74	31.55	34.42	34.74	7.27	33.99	8.03
4	5426.65	--	AV	54	--	--	--	--	--	--
5	7323.00	46.36	PK	74	27.64	34.66	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2441		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	92.65	PK	--	--	59.14	28.85	4.66	0.00	33.51
1	2441.00	85.17	AV	--	--	51.66	28.85	4.66	0.00	33.51
2	3575.75	40.26	PK	74	33.74	37.44	32.00	5.91	35.09	2.82
2	3575.75	--	AV	54	--	--	--	--	--	--
3	4882.00	56.65	PK	74	17.35	50.29	33.60	6.95	34.19	6.36
3	4882.00	44.48	AV	54	9.52	38.12	33.60	6.95	34.19	6.36
4	5350.50	43.26	PK	74	30.74	35.37	34.69	7.23	34.03	7.89
4	5350.50	--	AV	54	--	--	--	--	--	--
5	7323.00	47.48	PK	74	26.52	35.78	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Frequency(MHz):				2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	91.69	PK	--	--	58.07	28.92	4.70	0.00	33.62
1	2480.00	84.78	AV	--	--	51.16	28.92	4.70	0.00	33.62
2	2483.50	46.69	PK	74	27.31	13.06	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	39.75	PK	74	34.25	6.07	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	55.26	PK	74	18.74	50.34	33.84	7.00	35.92	4.92
4	4960.00	42.74	AV	54	11.26	37.82	33.84	7.00	35.92	4.92
5	5250.50	43.26	PK	74	30.74	35.82	34.59	7.17	34.32	7.44
5	5250.50	--	AV	54	--	--	--	--	--	--
6	7440.00	46.39	PK	74	27.61	34.44	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	92.78	PK	--	--	59.16	28.92	4.70	0.00	33.62
1	2480.00	85.36	AV	--	--	51.74	28.92	4.70	0.00	33.62
2	2483.50	46.66	PK	74	27.34	13.03	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	38.57	PK	74	35.43	4.89	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	55.26	PK	74	18.74	50.34	33.84	7.00	35.92	4.92
4	4960.00	42.87	AV	54	11.13	37.95	33.84	7.00	35.92	4.92
5	5275.00	43.14	PK	74	30.86	35.67	34.62	7.19	34.33	7.47
5	5275.00	--	AV	54	--	--	--	--	--	--
6	7440.00	45.52	PK	74	28.48	33.57	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

3.3. Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration




Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	2.766	30.00	Pass
	39	2.256		
	78	1.933		
π/4DQPSK	00	3.643	30.00	Pass
	39	3.018		
	78	2.838		
8DPSK	00	3.623	30.00	Pass
	39	3.283		
	78	2.869		


Note: 1.The test results including the cable lose.

Test plot as follows:


GFSK Modulation

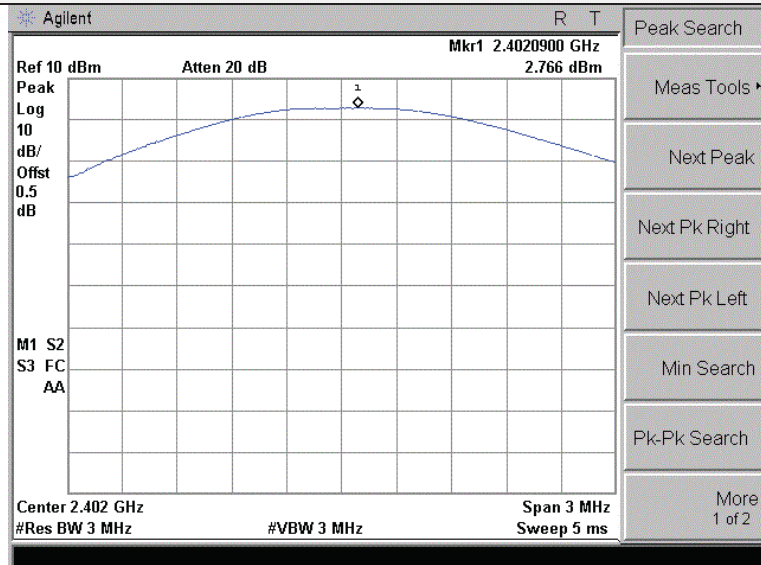


CH00

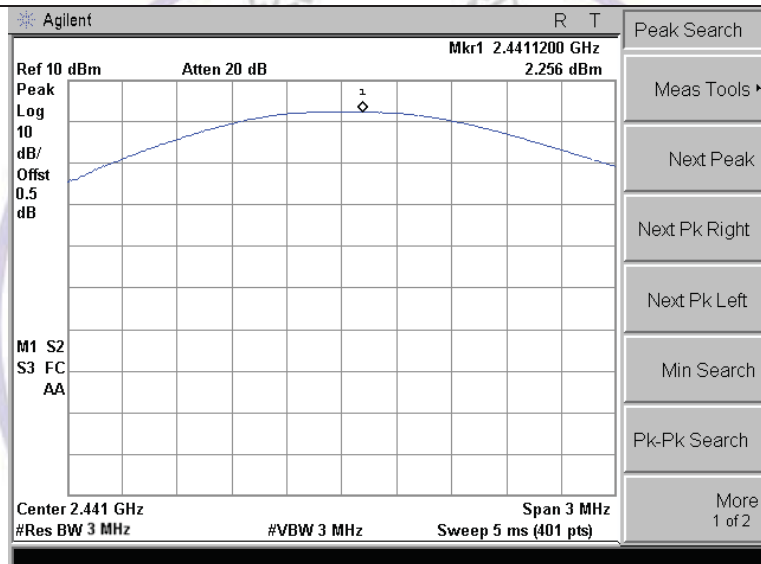


CH39

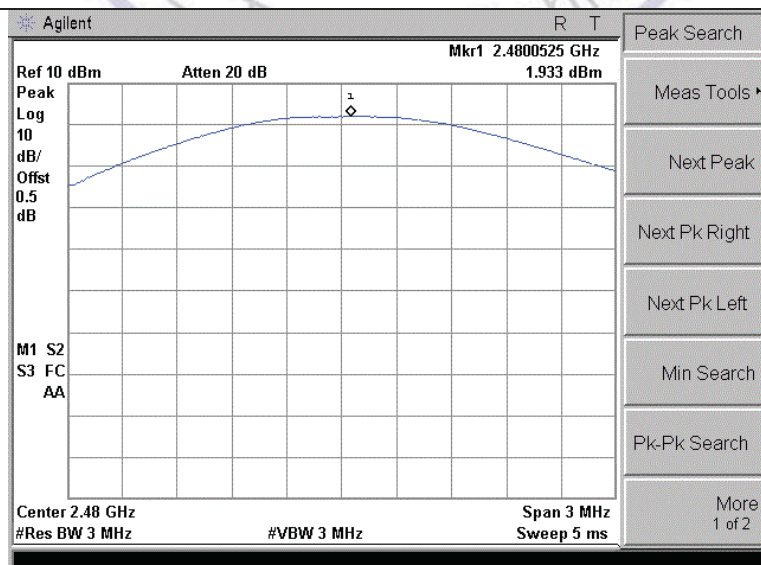


CH78

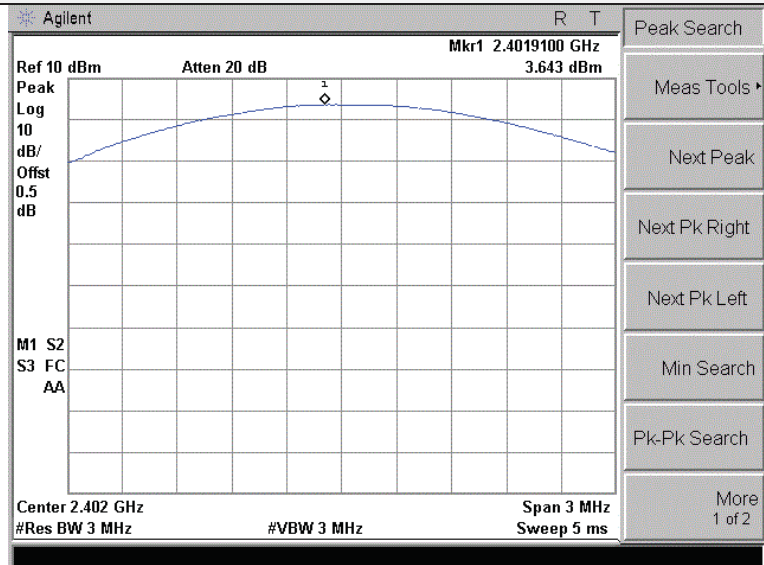$\pi/4$ DQPSK Modulation


CH00

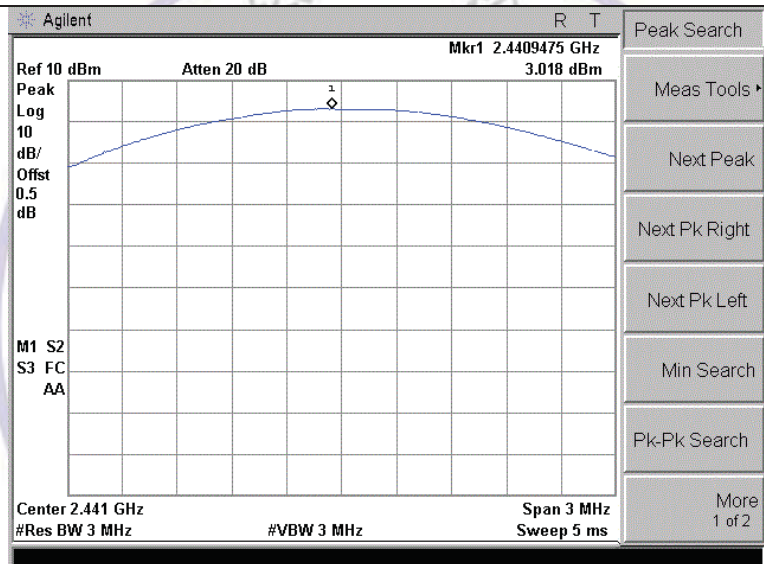

CH39

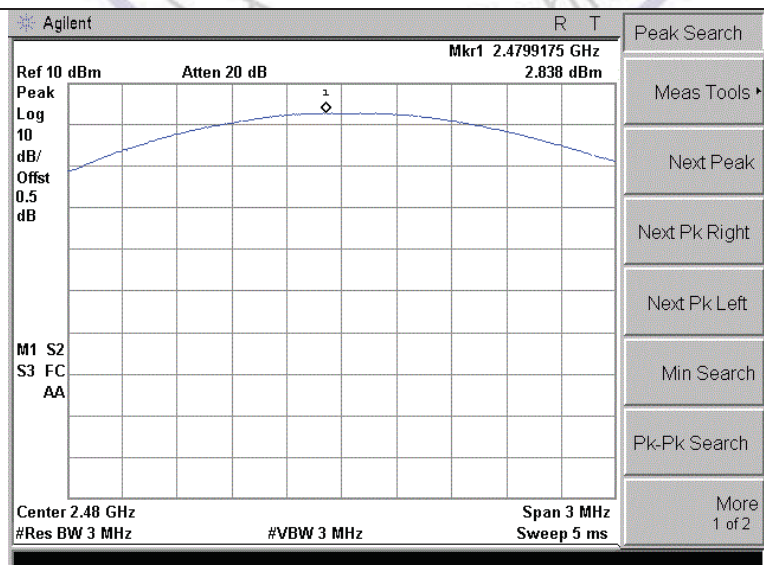

CH78

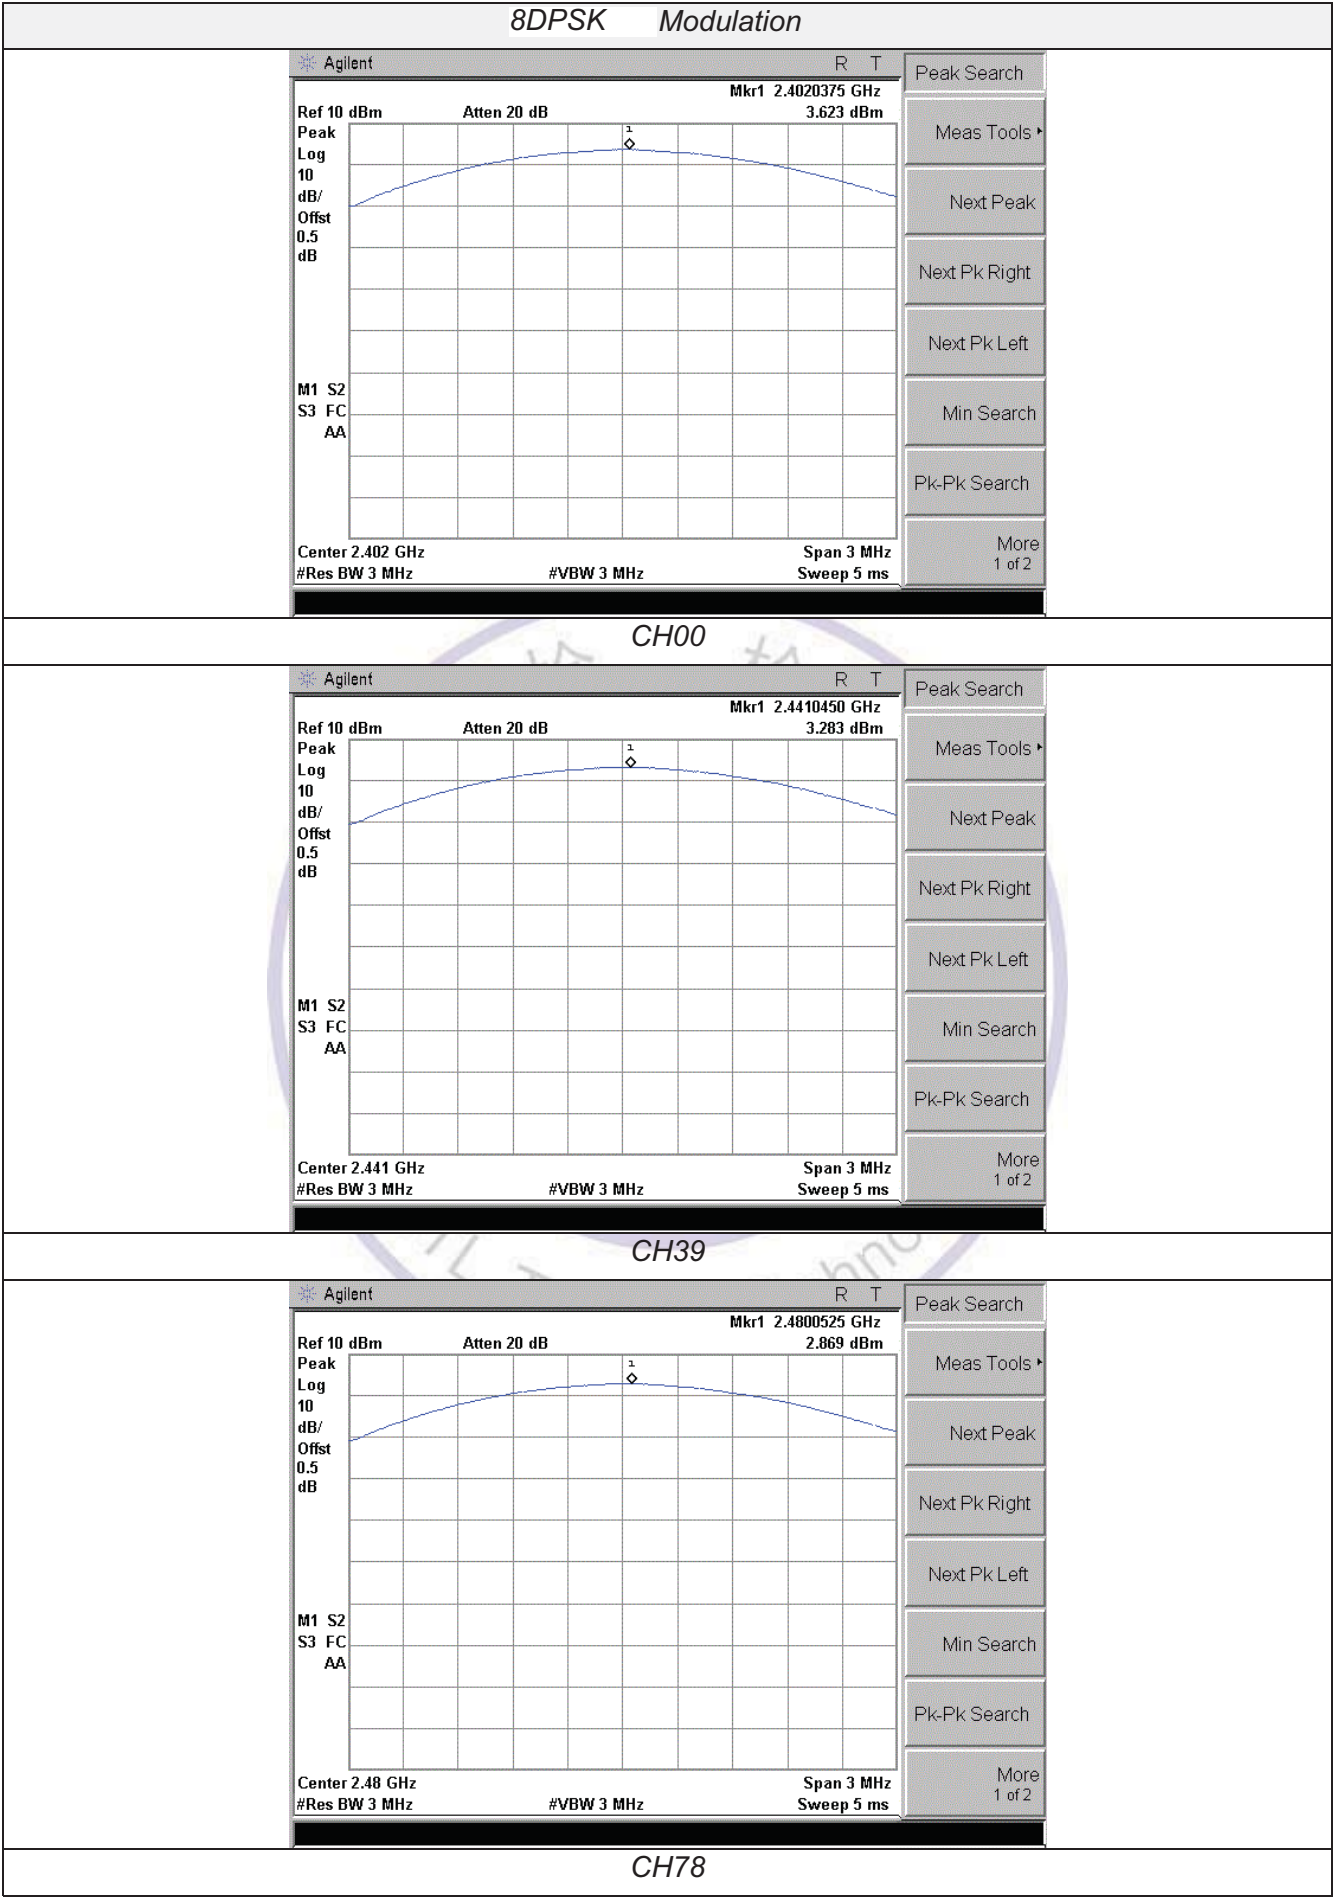

3.4. 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

Modulation	Channel	20dB bandwidth (MHz)	99% OBW(MHz)	Result
GFSK	CH00	1.029	0.927	Pass
	CH39	1.030	0.927	
	CH78	1.029	0.926	
π/4DQPSK	CH00	1.371	1.208	
	CH39	1.372	1.207	
	CH78	1.368	1.205	
8DPSK	CH00	1.318	1.189	
	CH39	1.312	1.190	
	CH78	1.311	1.188	

Test plot as follows:

Remark: Only worse mode Pi/4DQPSK and 8DPSK is reported

Agilent

Ch Freq 2.402 GHz

Trig Free

Occupied Bandwidth

Ref 10 dBm

Atten 20 dB

#Peak

Log

10

dB/

dB

0.5

dB

Center 2.402 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 3 MHz

Sweep 5 ms

Occupied Bandwidth

1.2076 MHz

Occ BW % Pwr

99.00 %

x dB

-20.00 dB

Transmit Freq Error

2.323 kHz

x dB Bandwidth

1.371 MHz

Trace/View

Trace

1 2

Clear Write

Max Hold

Min Hold

View

Blank

More

1 of 2

The screen displays the 'Occupied Bandwidth' measurement results. At the top, the channel frequency is set to 2.441 GHz. The measurement parameters are: Center 2.441 GHz, Span 3 MHz, Res BW 30 kHz, VBW 100 kHz, Sweep 5 ms. The graph shows a signal with a peak level of 10 dBm and an occupied bandwidth of 1.2071 MHz. The signal is centered at 2.441 GHz. The graph also shows the transmit frequency error of 1.931 kHz and the x dB bandwidth of 1.372 MHz.

Parameter	Value
Center	2.441 GHz
Span	3 MHz
Res BW	30 kHz
VBW	100 kHz
Sweep	5 ms
Ref	10 dBm
Atten	20 dB
Peak	10 dBm
Log	10 dB/Offset
Offset	0.5 dB
Occupied Bandwidth	1.2071 MHz
Transmit Freq Error	1.931 kHz
x dB Bandwidth	1.372 MHz

Agilent R T

Ch Freq 2.48 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak

Log

10

dB/

Offset

0.5

dB

Center 2.48 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 3 MHz

Sweep 5 ms

Occupied Bandwidth 1.2052 MHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error 1.649 kHz

x dB Bandwidth 1.368 MHz

Trace/View

Trace

1 2

Clear View

Max Hold

Min Hold


View

Blank

More

1 of 2

CH78

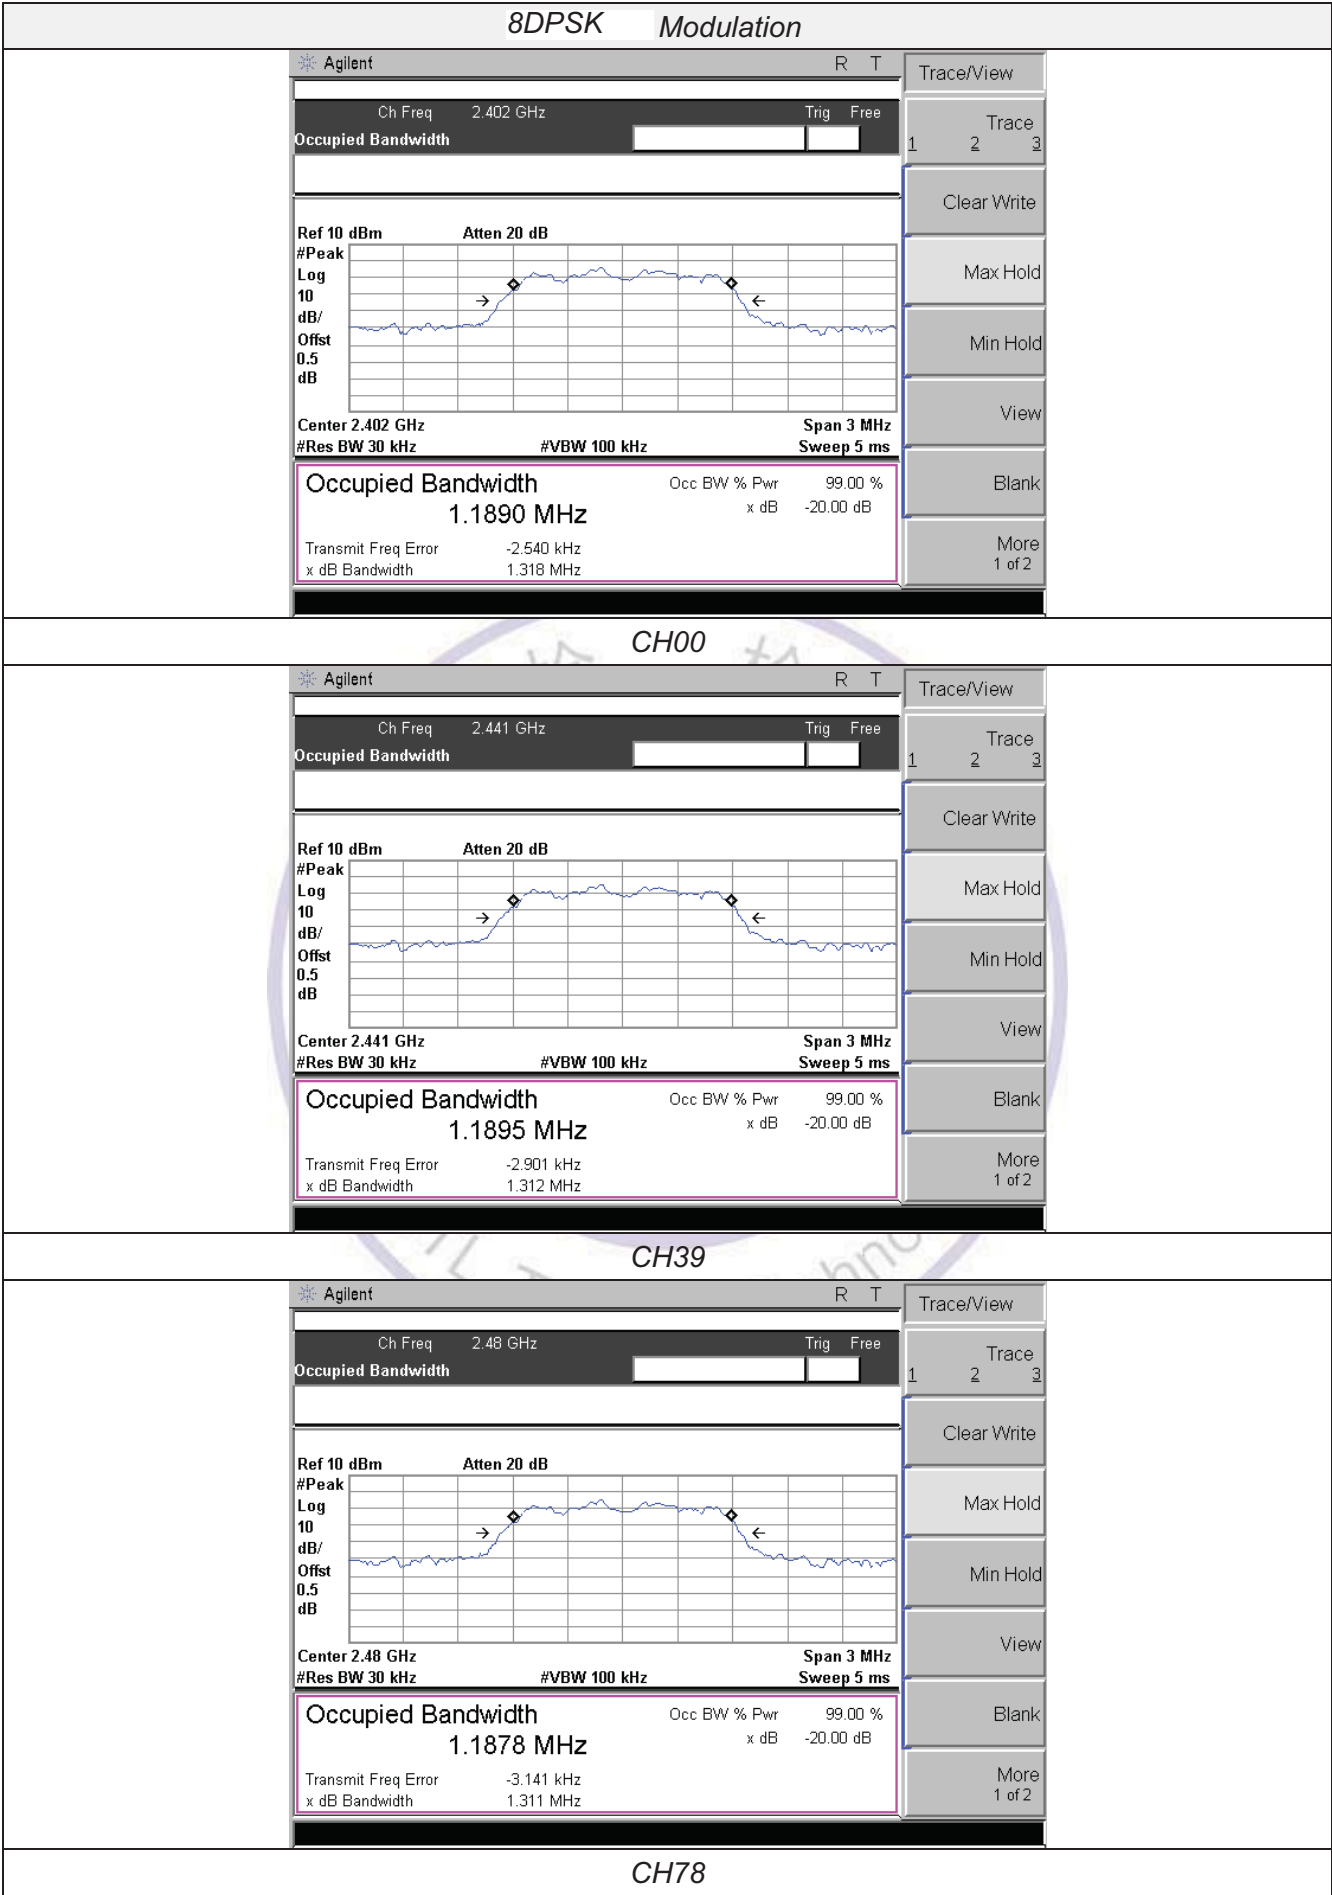

3.5. Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION




TEST RESULTS

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH38	1.005	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH39			
$\pi/4$ DQPSK	CH38	1.005	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH39			
8DPSK	CH38	1.005	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH39			


Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle


Test plot as follows:

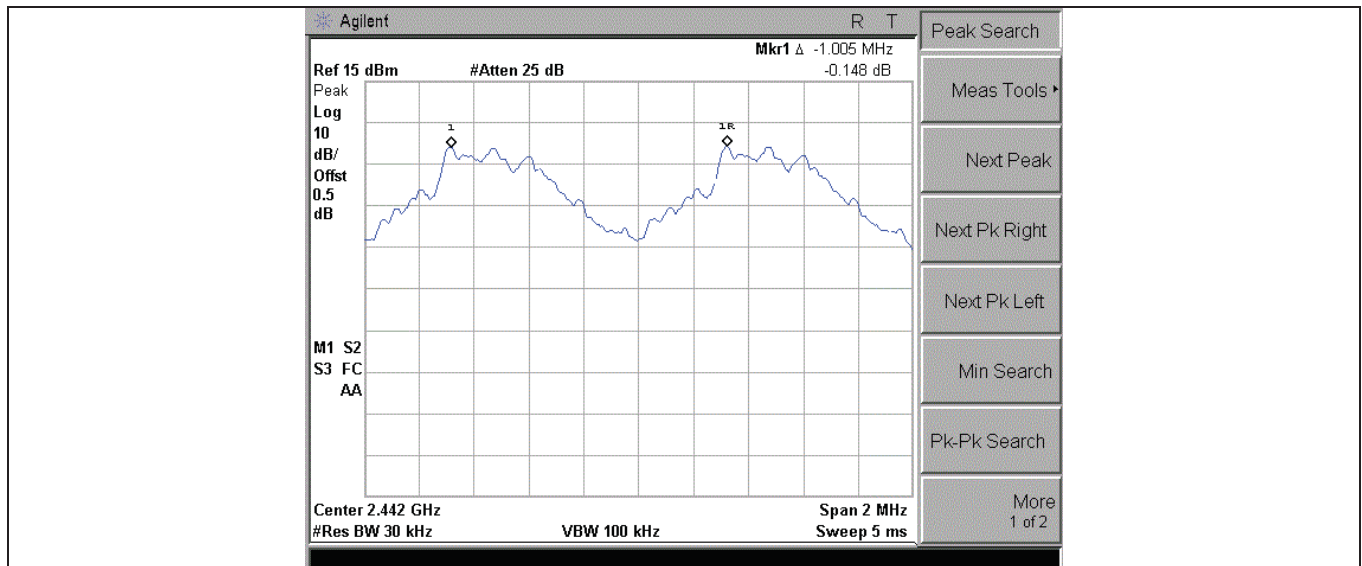

GFSK

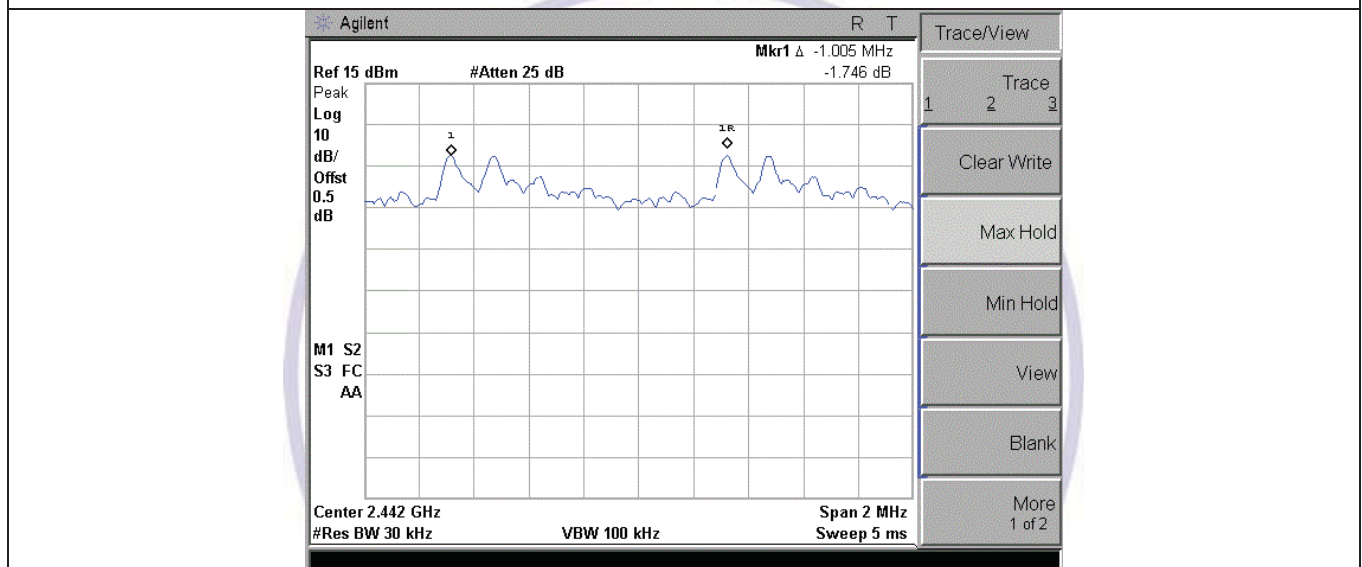

8DPSK

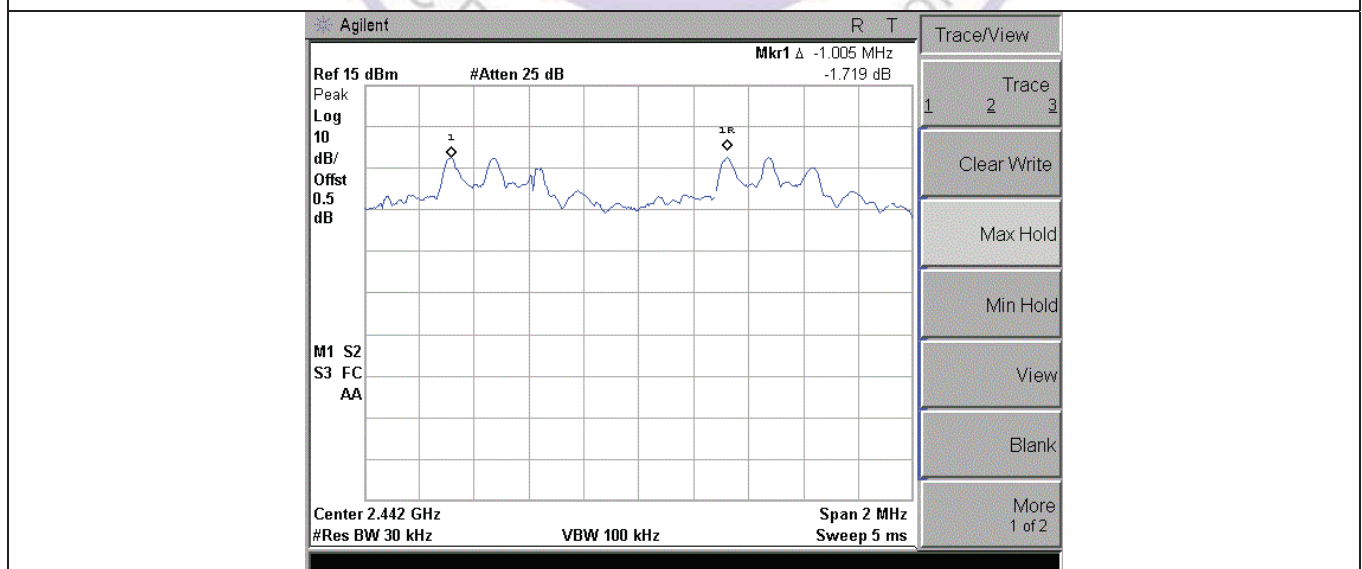 $\pi/4$ DQPSK

3.6. Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.


Test Configuration




Test Results


Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
π/4DQPSK	79		
8DPSK	79		

Test plot as follows:

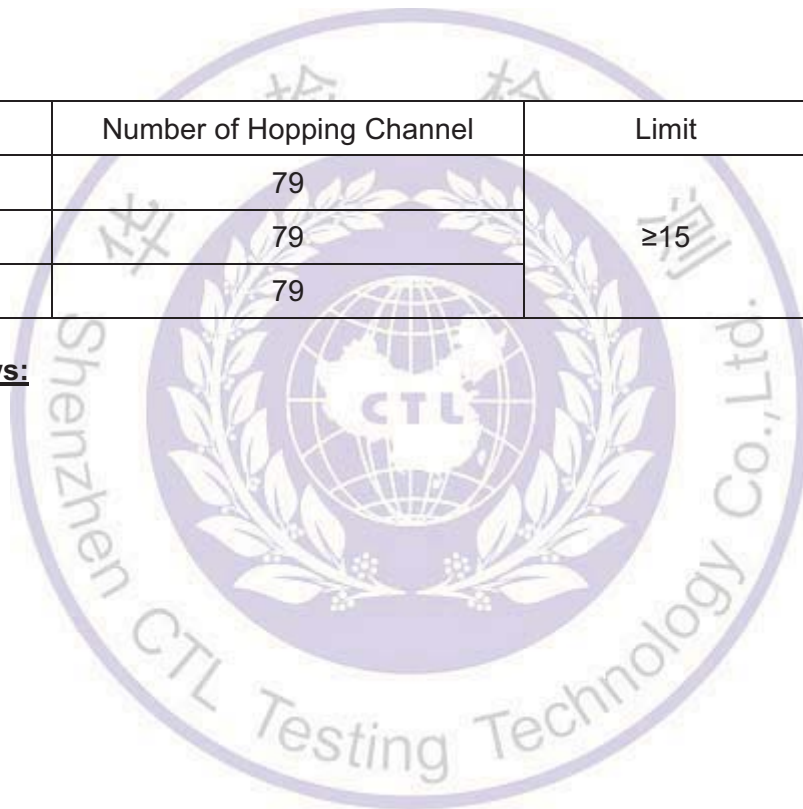


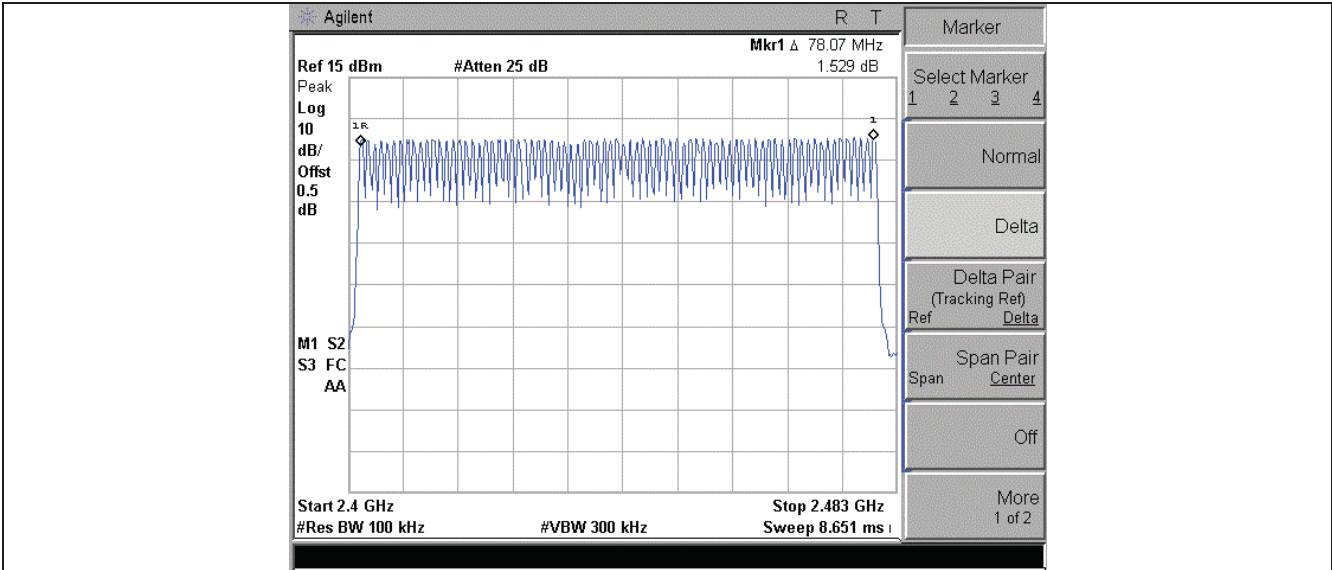

GFSK Modulation

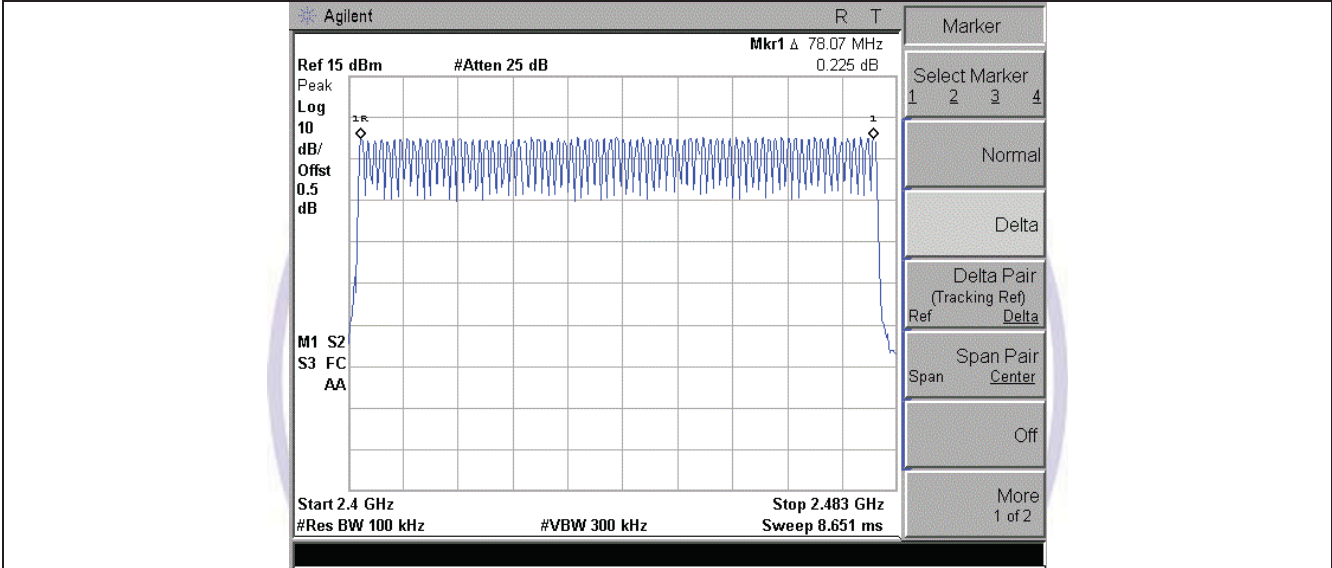

$\pi/4$ DQPSK Modulation

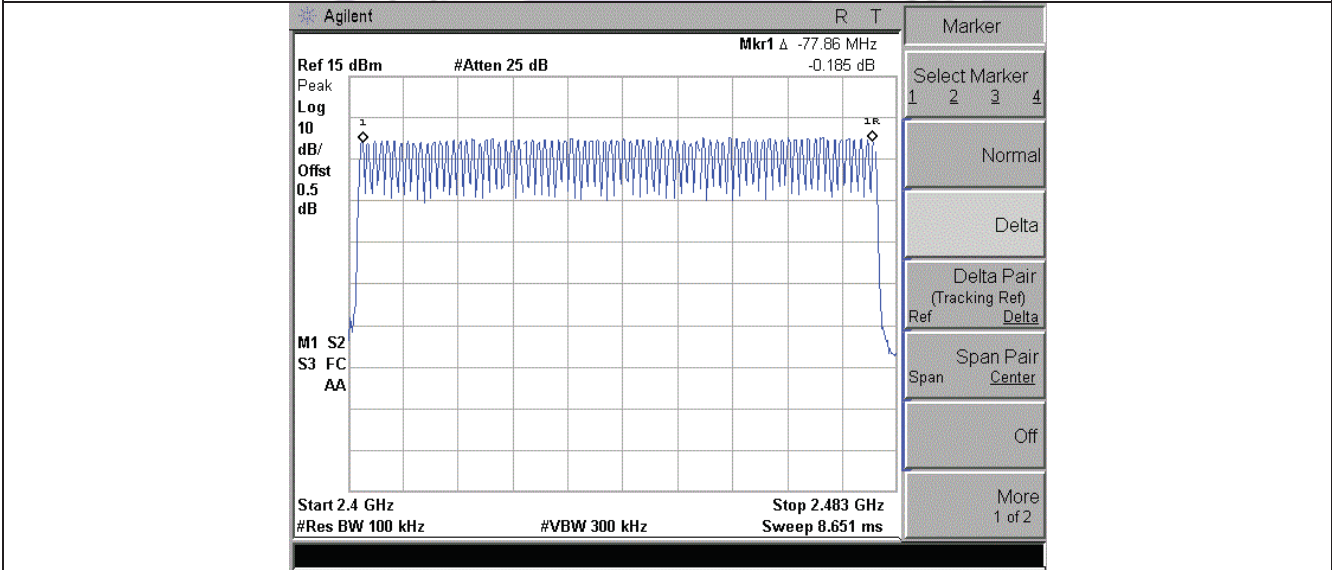

8DPSK Modulation

3.7. Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration




Test Results

Modulation	Packet	Dwell time (second)	Limit (second)	Result
GFSK	DH1	0.125	0.40	Pass
	DH3	0.267		
	DH5	0.312		
$\pi/4$ DQPSK	2-DH1	0.128	0.40	Pass
	2-DH3	0.270		
	2-DH5	0.312		
8DPSK	3-DH1	0.128	0.40	Pass
	3-DH3	0.270		
	3-DH5	0.317		

Note:

- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6$ Second for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6$ Second for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6$ Second for DH5, 2-DH5, 3-DH5

Test plot as follows:

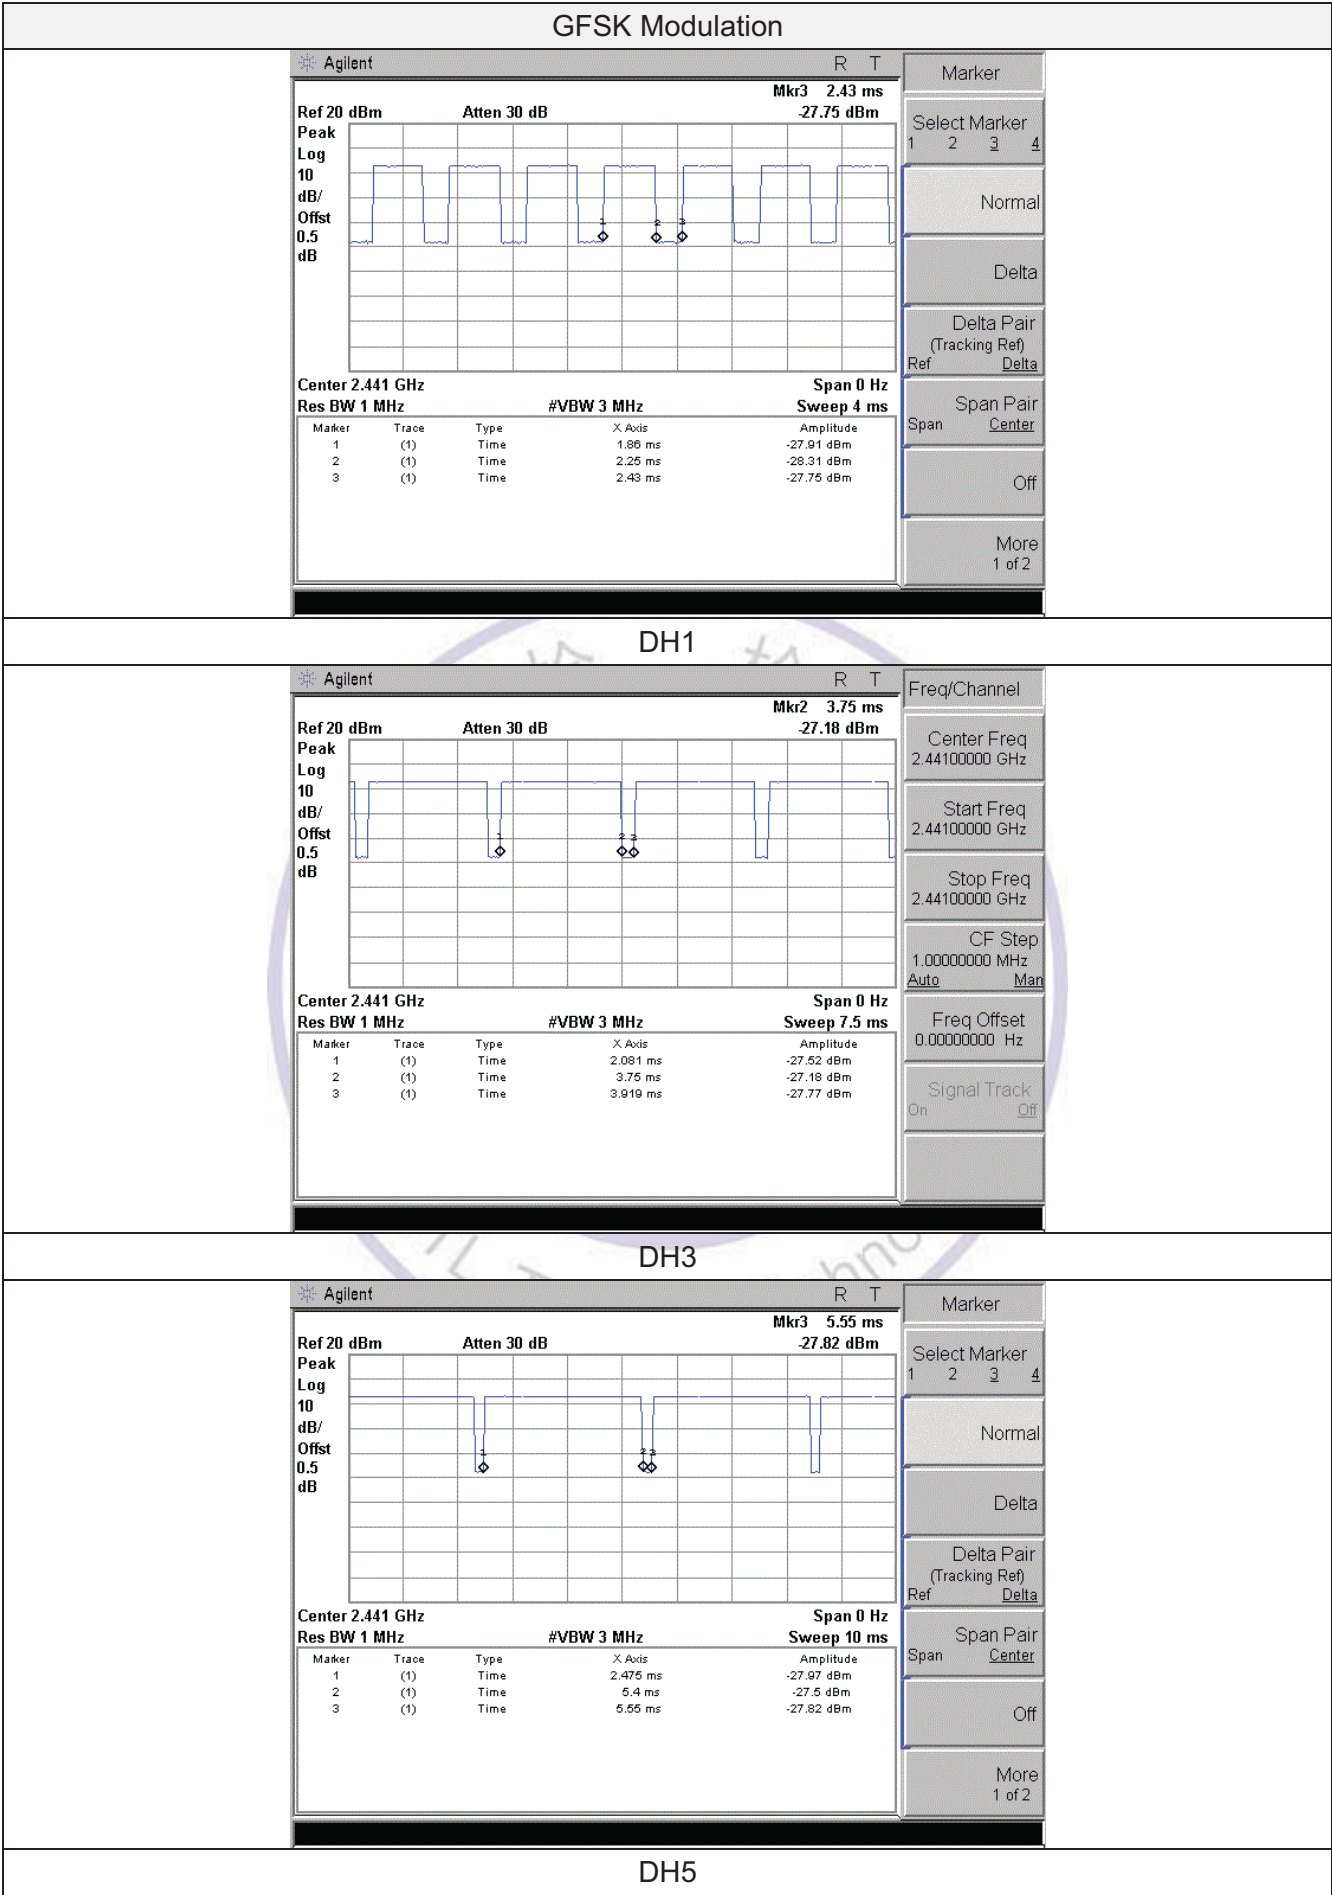

DH3

Agilent

R T

Ref 20 dBm

Atten 30 dB

Mkr3 5.55 ms

-27.82 dBm

Peak

Log

10

dB/

Offset

0.5

dB

Center 2.441 GHz

Res BW 1 MHz

#VBW 3 MHz

Span 0 Hz

Sweep 10 ms

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	2.475 ms	-27.97 dBm
2	(1)	Time	5.4 ms	-27.5 dBm
3	(1)	Time	5.55 ms	-27.82 dBm

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair

(Tracking Ref)

Ref Delta

Span Pair

Span Center


Off

More

1 of 2

DH5



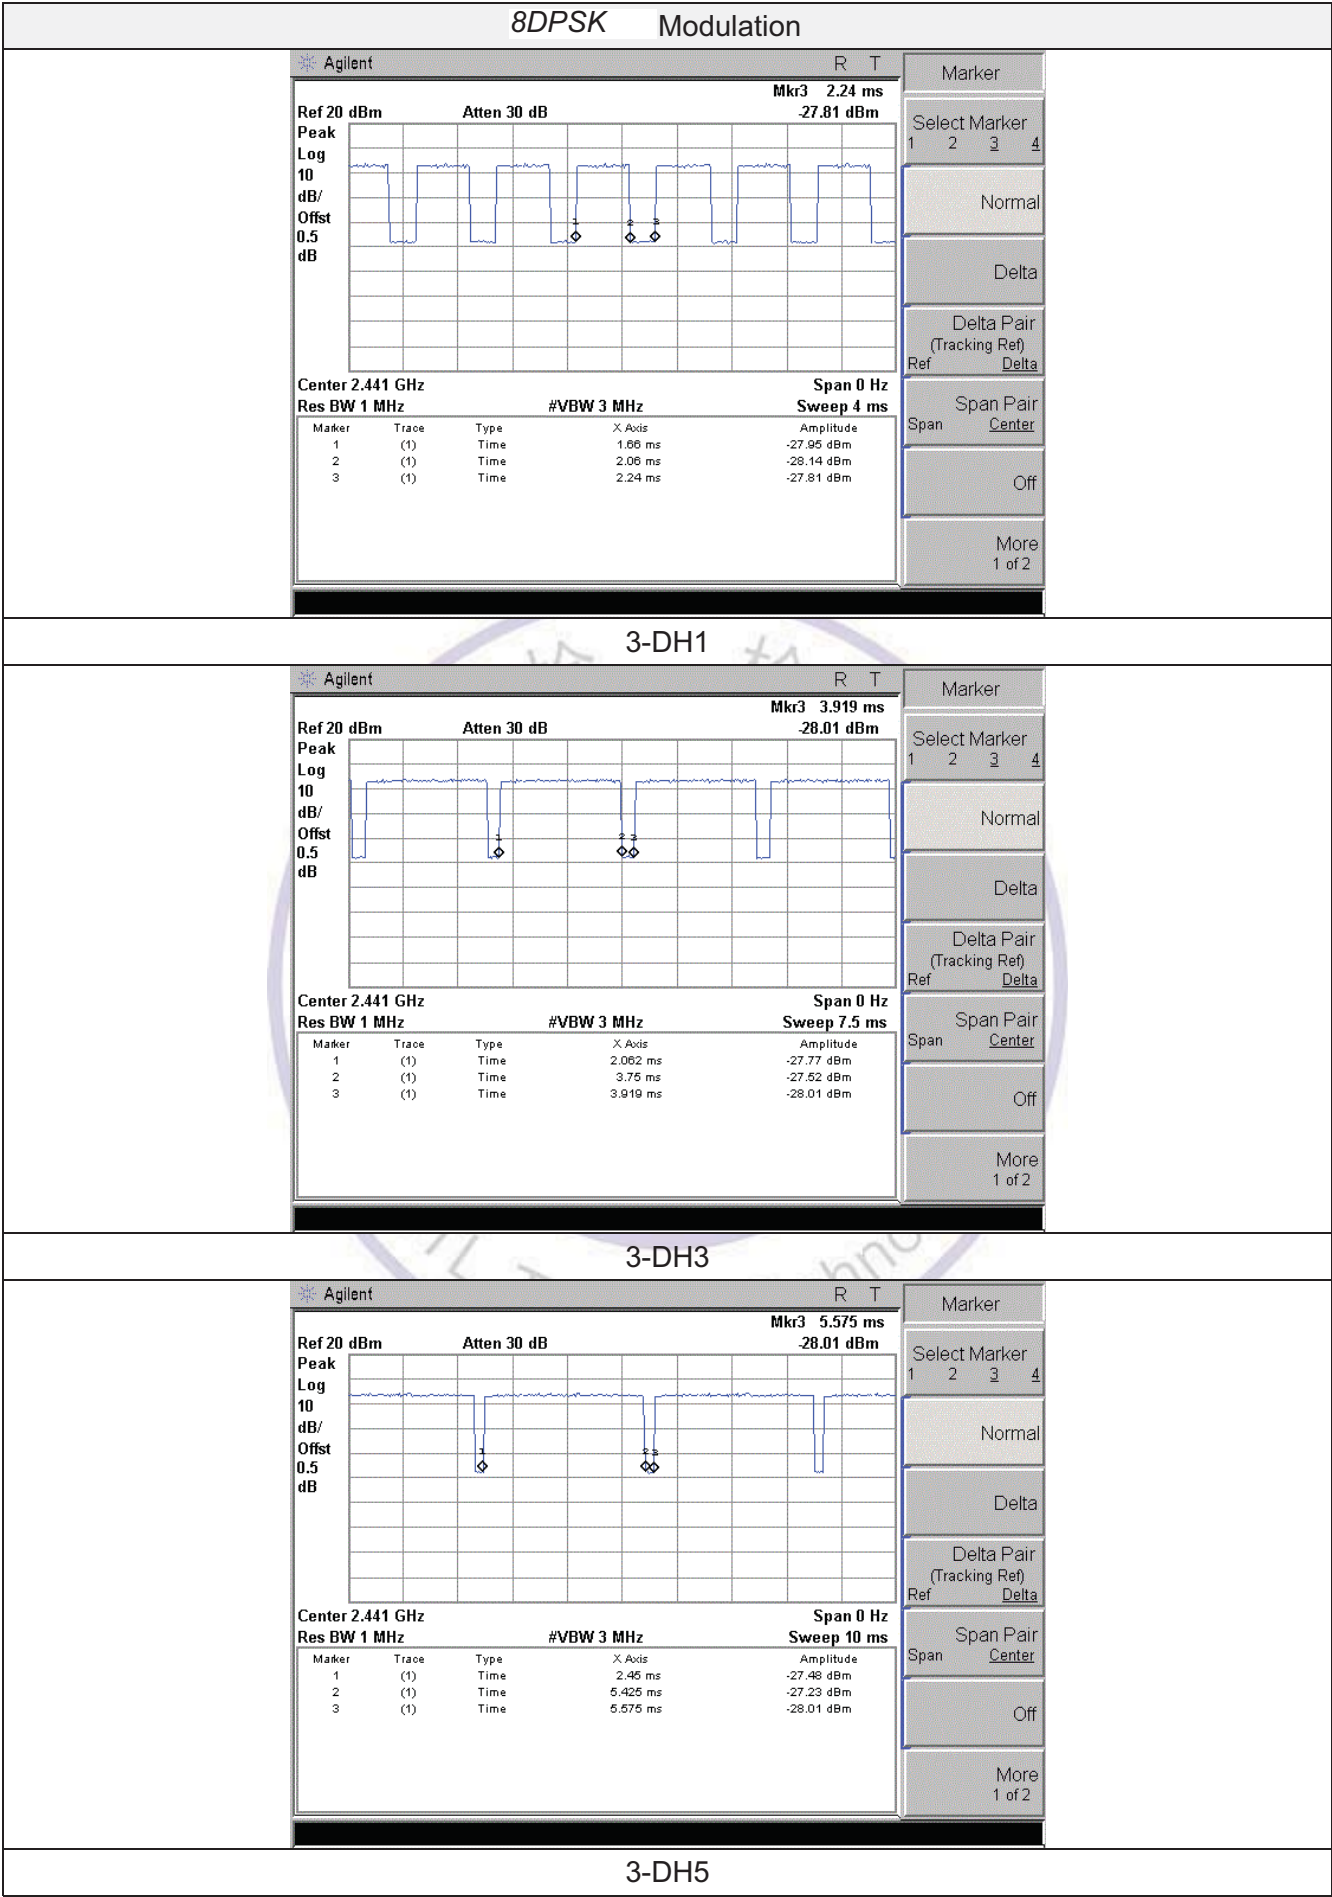

3-DH3

Agilent

Ref 20 dBm

Peak

Log

10

dB/

Offset

0.5

dB

Atten 30 dB

Mkr3 5.575 ms

-28.01 dBm

Center 2.441 GHz

Res BW 1 MHz

#VBW 3 MHz

Span 0 Hz

Sweep 10 ms

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Time	2.46 ms	-27.48 dBm
2	(1)	Time	5.425 ms	-27.23 dBm
3	(1)	Time	5.575 ms	-28.01 dBm

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair
(Tracking Ref)

Ref Delta

Span Pair

Span Center

Off

More

1 of 2

3-DH5

3.8. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration




Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


We measured all conditions (DH1/2DH1/3DH1, DH3/2DH3/ 3DH3, DH5/2DH5/3DH5) and recorded worst case at DH5, 2DH5, 3DH5

Test plot as follows:


GFSK

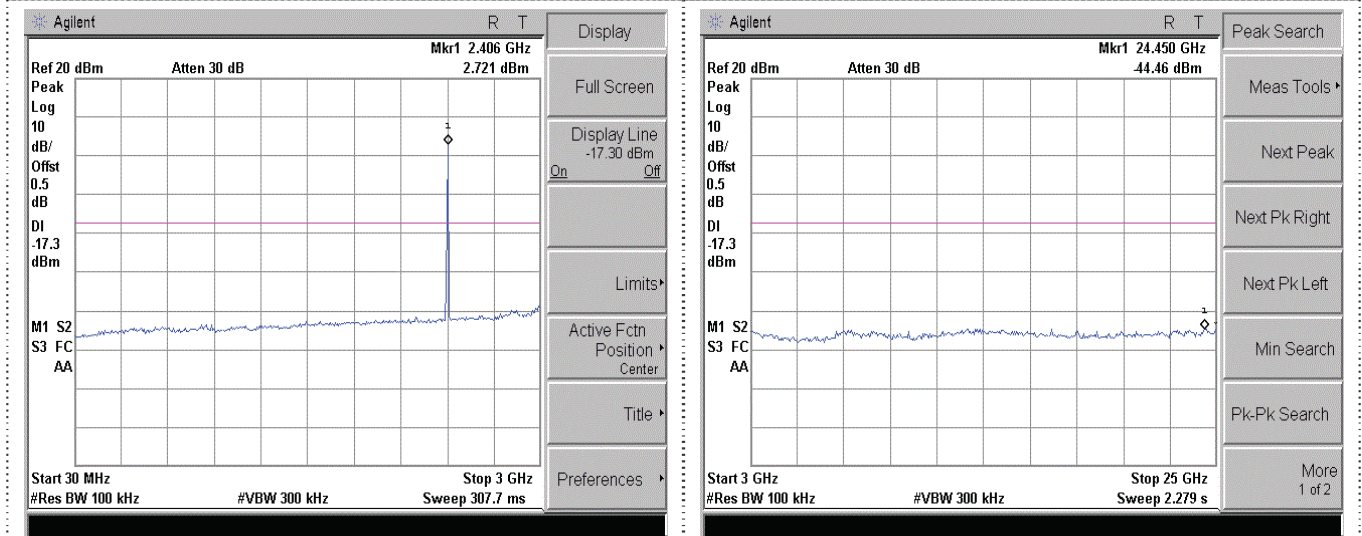


CH00

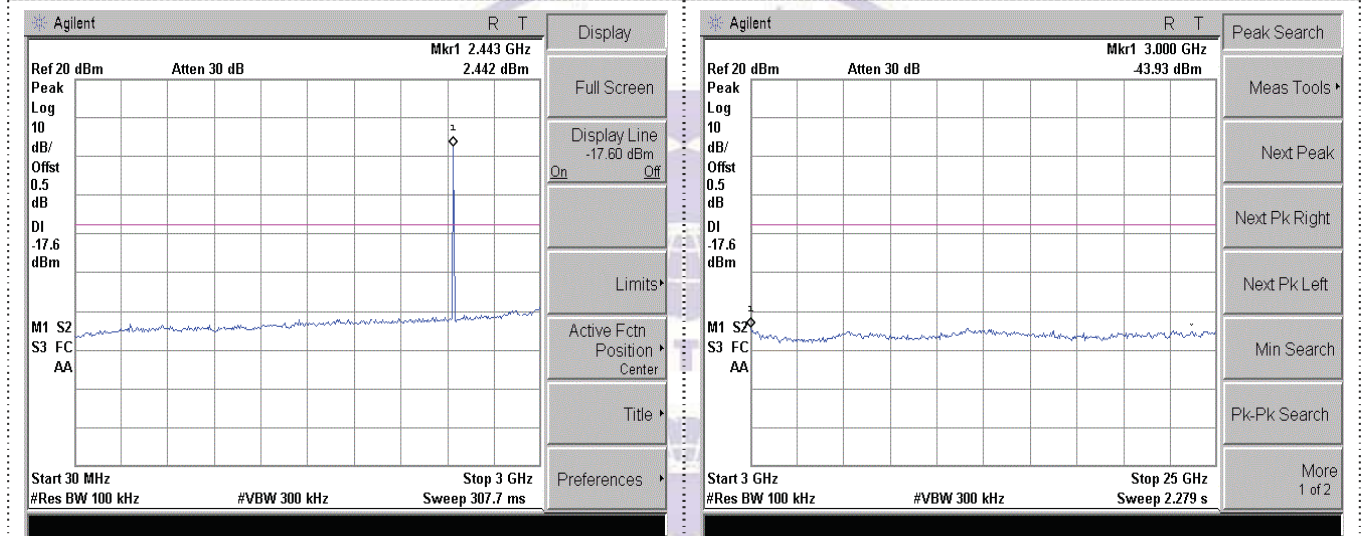

CH39

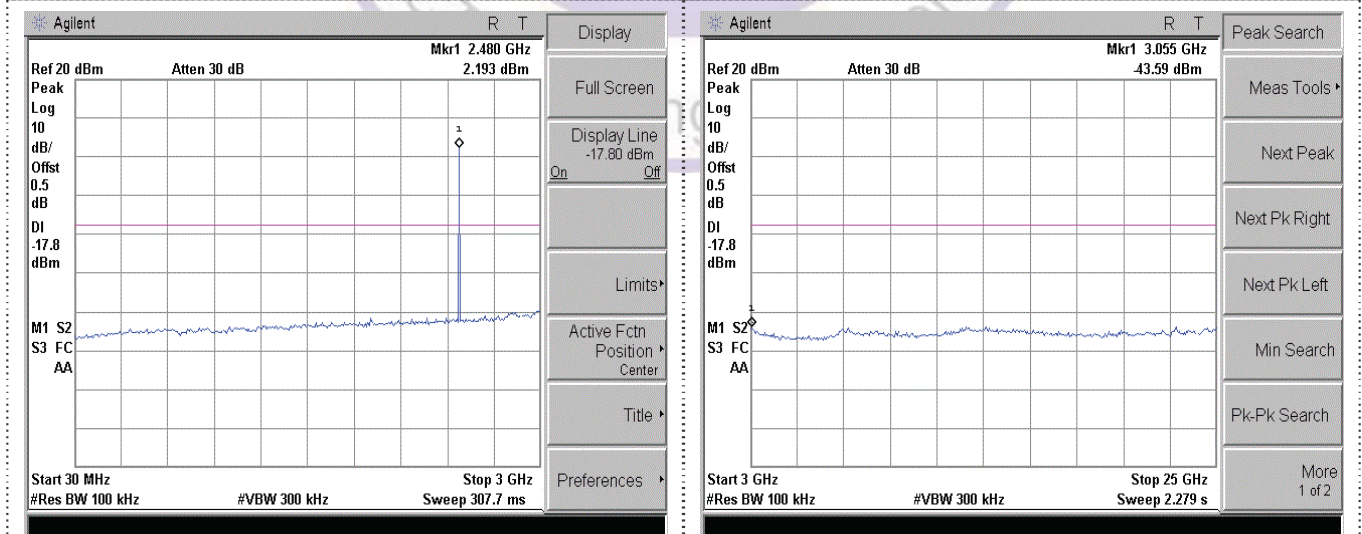


CH78

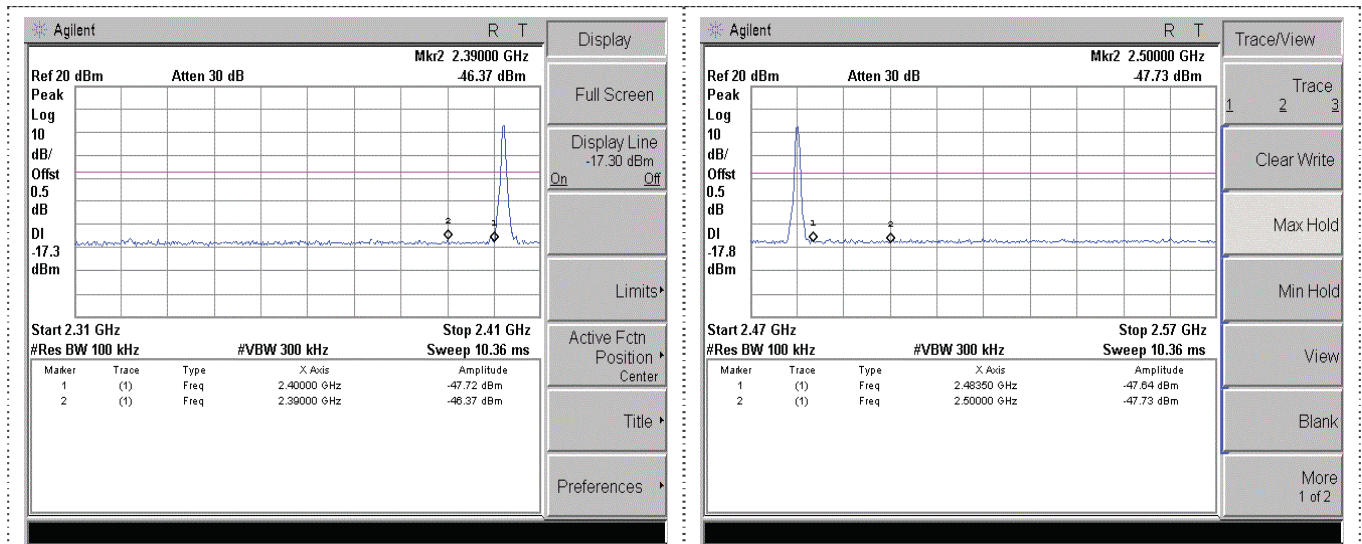


Left Band edge hopping off

Right Band edge hopping off

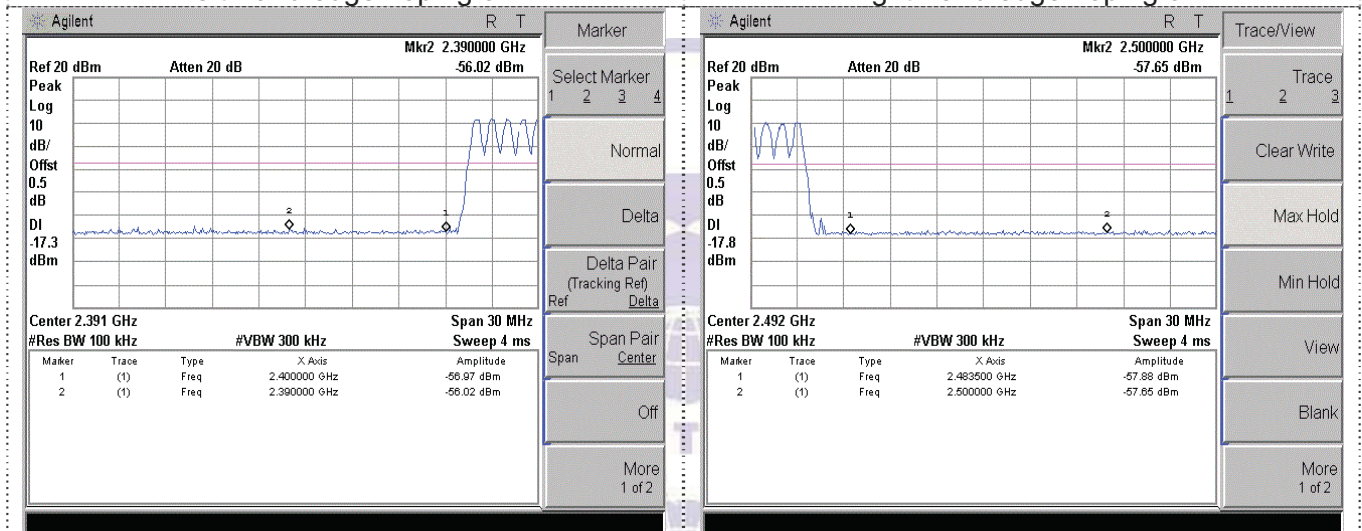


Left Band edge hopping on


Right Band edge hopping on

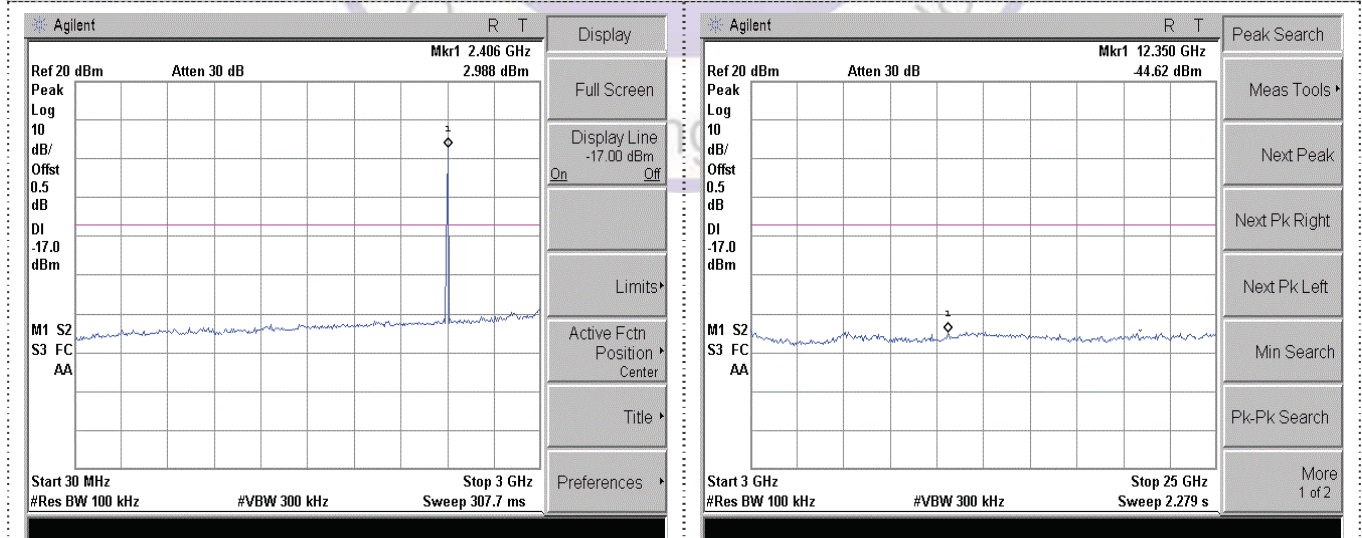 $\pi/4$ DQPSK


CH00

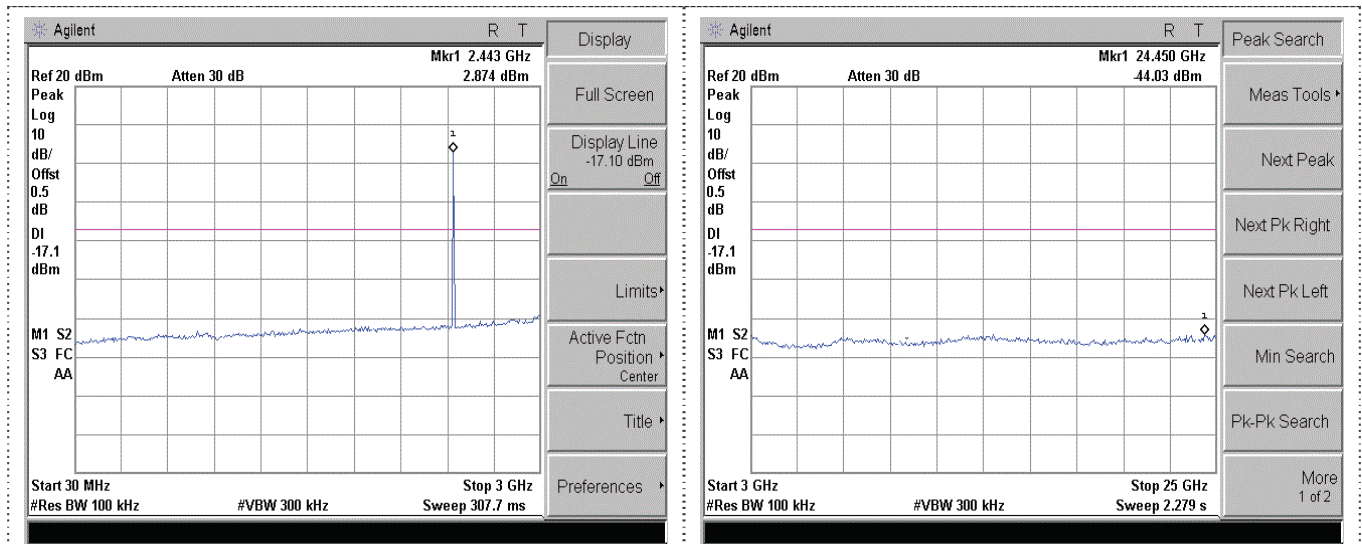

CH39



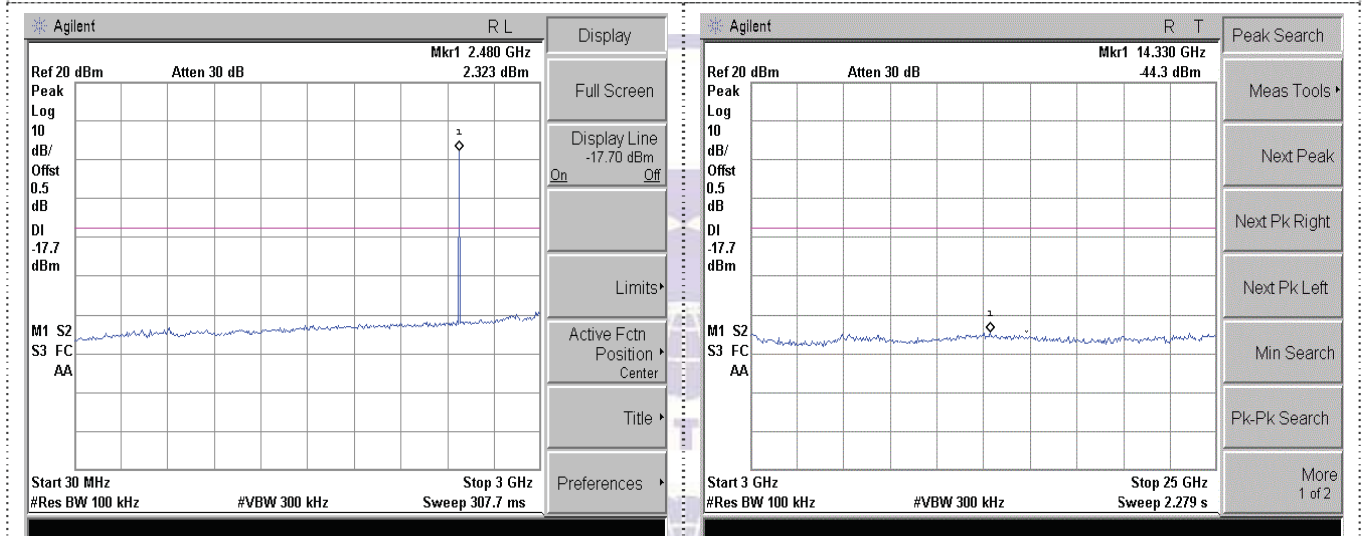



CH78

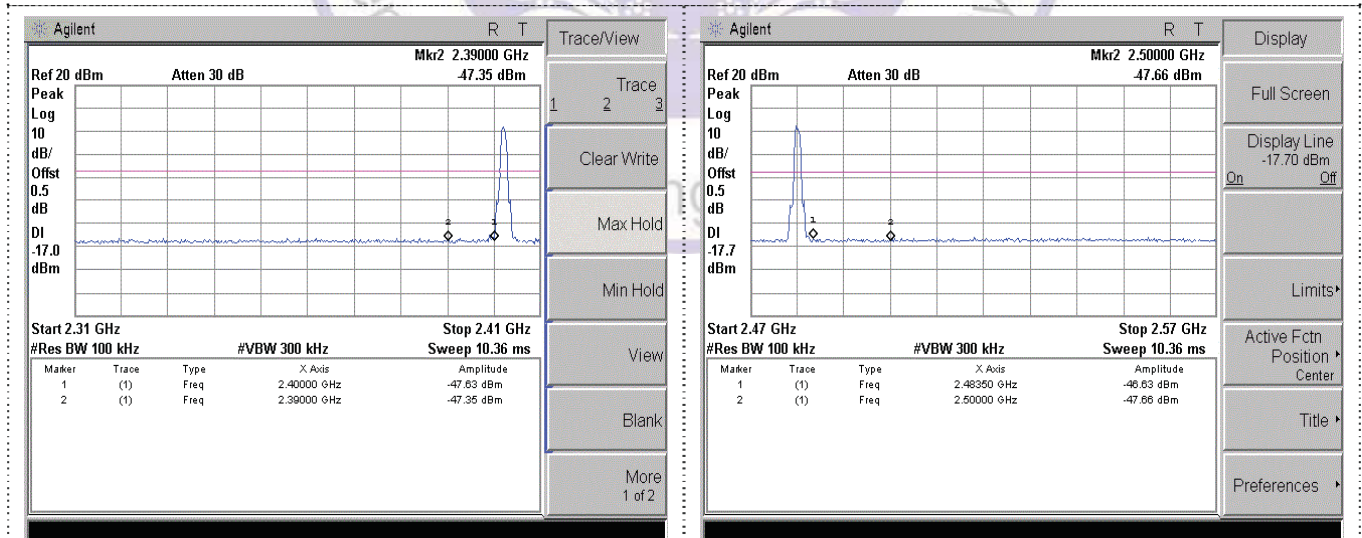


Left Band edge hopping off

Right Band edge hopping off

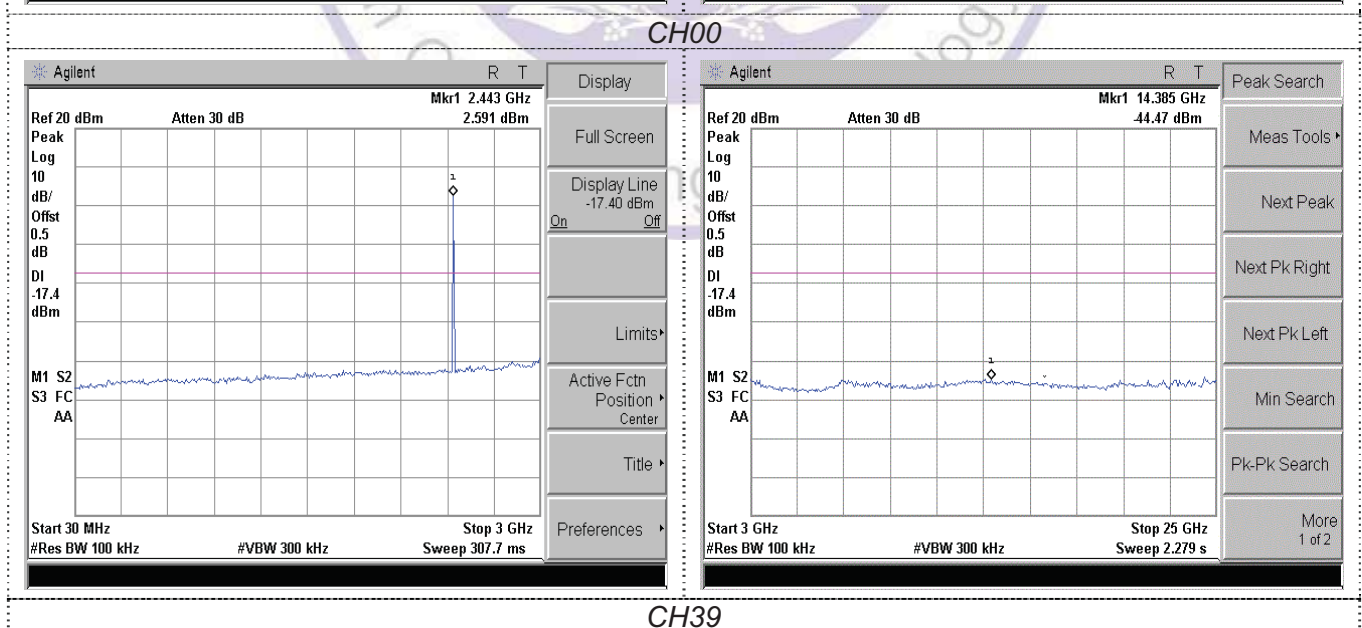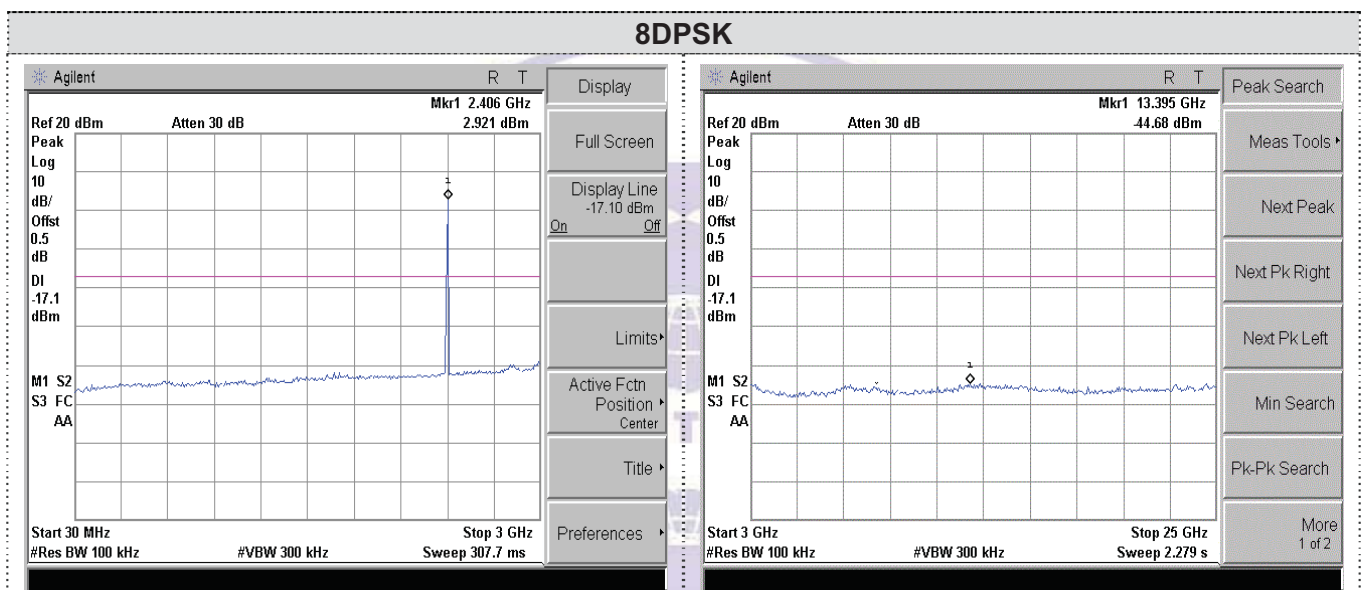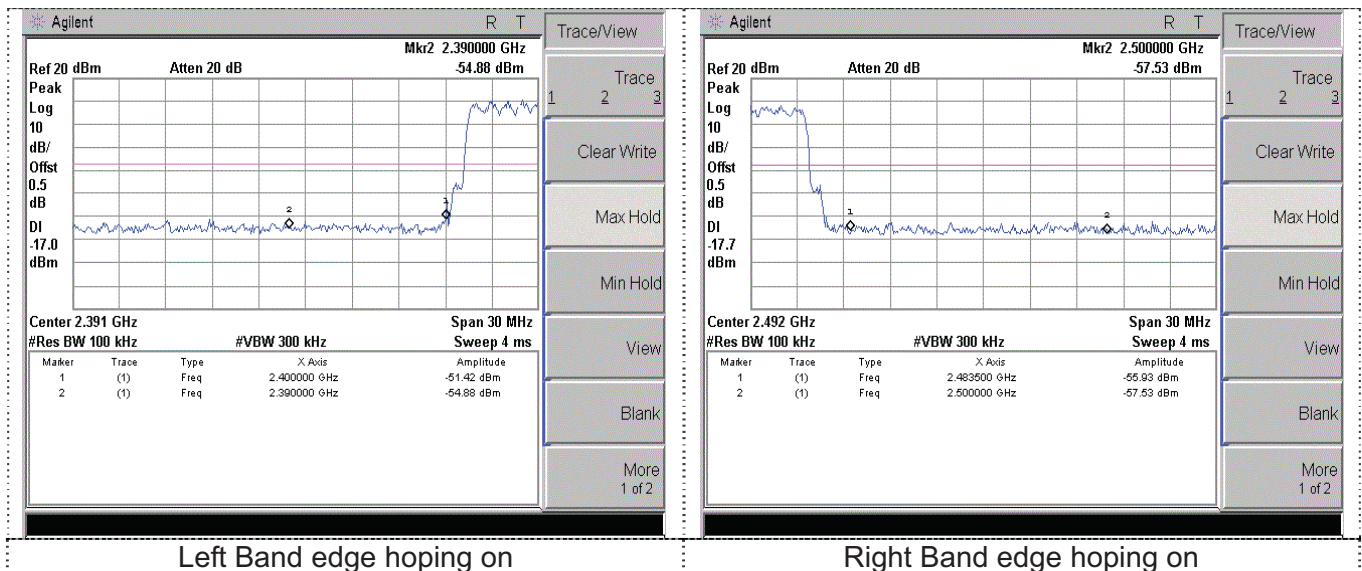


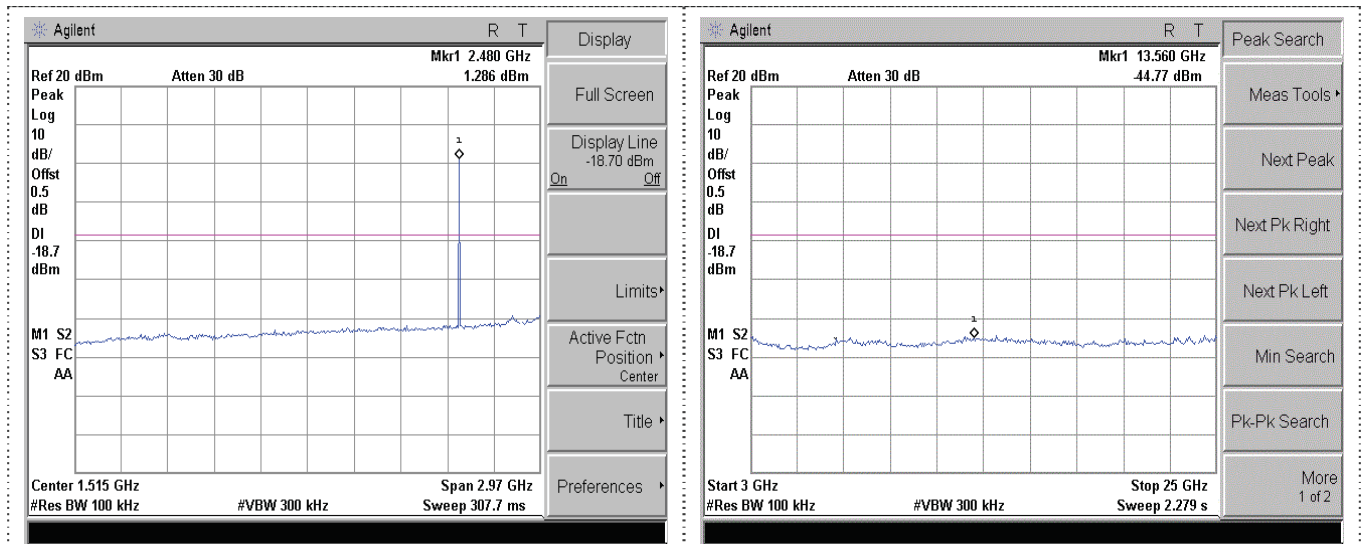

CH78

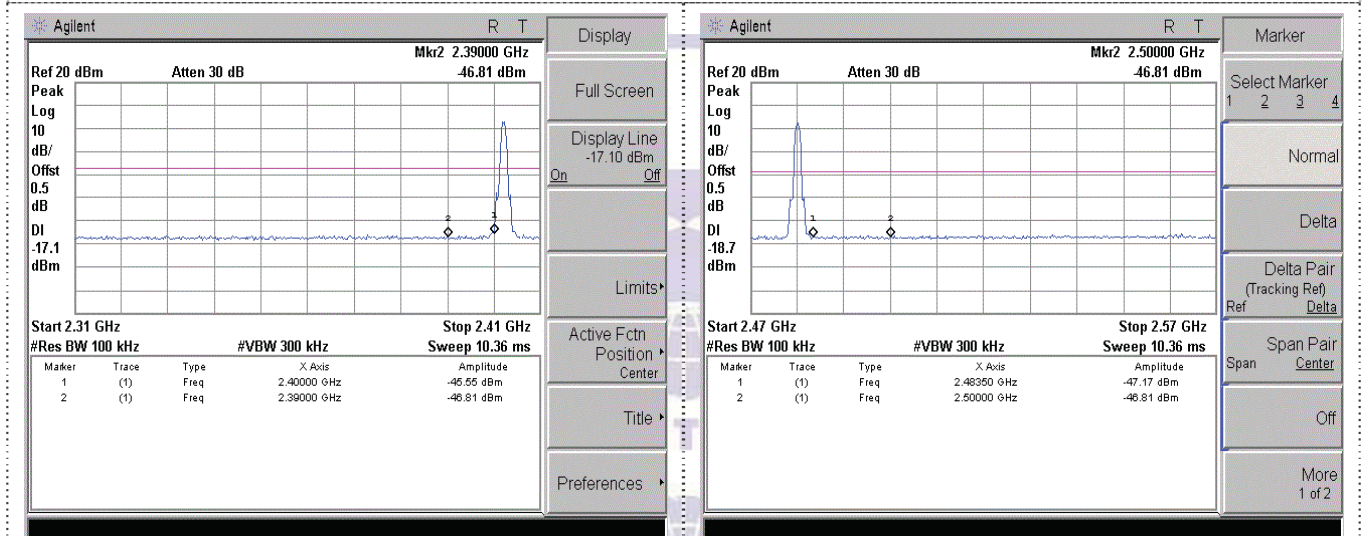

Left Band edge hopping off

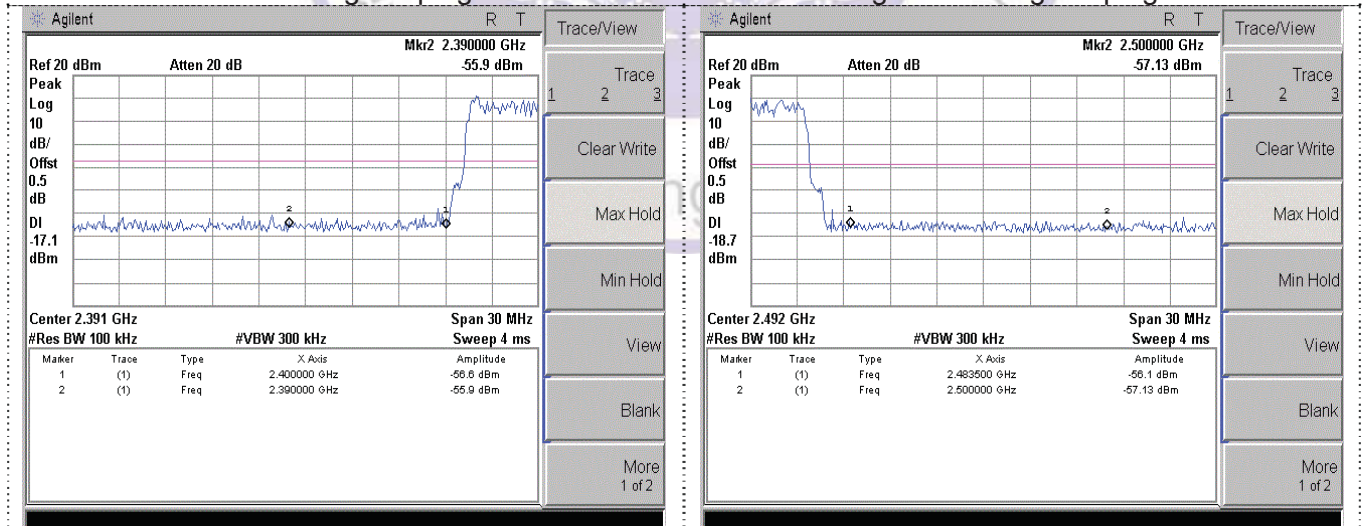

Left Band edge hopping on

Right Band edge hopping off

Right Band edge hopping on

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

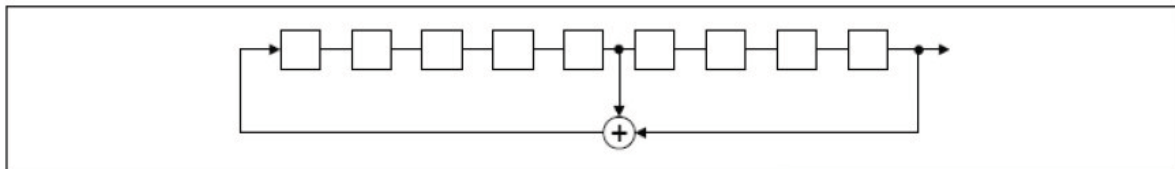

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

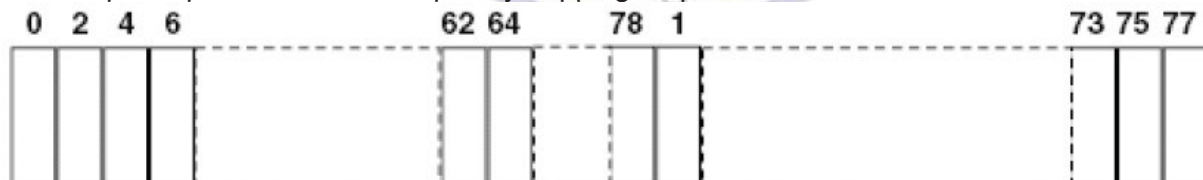

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.



Antenna Connected Construction

The maximum gain was -0.5dBi.

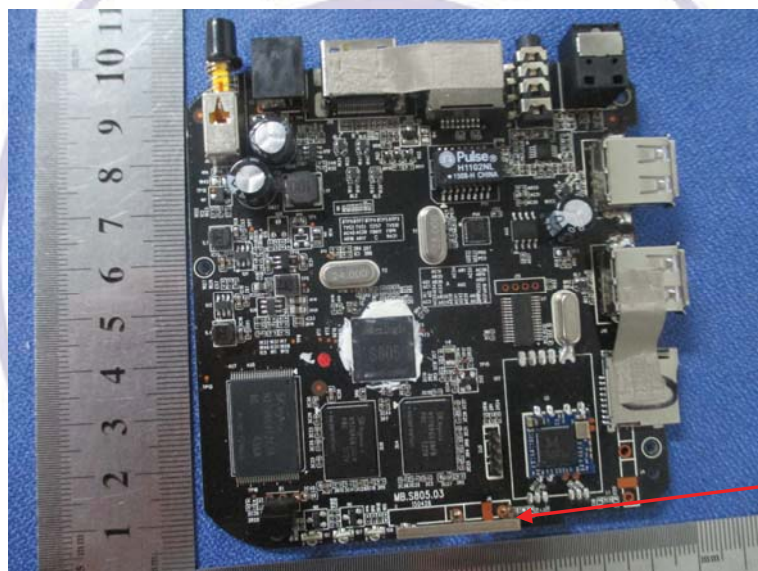

WIFI/BT
antenna

4. Test Setup Photos of the EUT

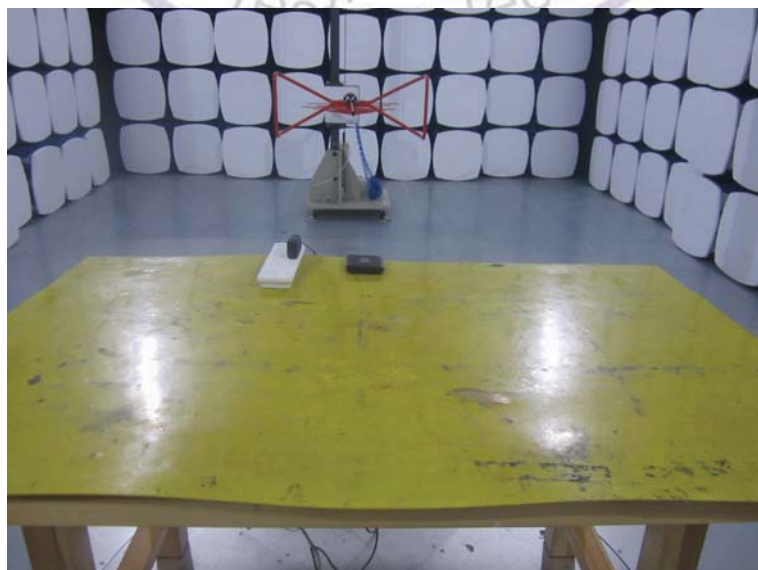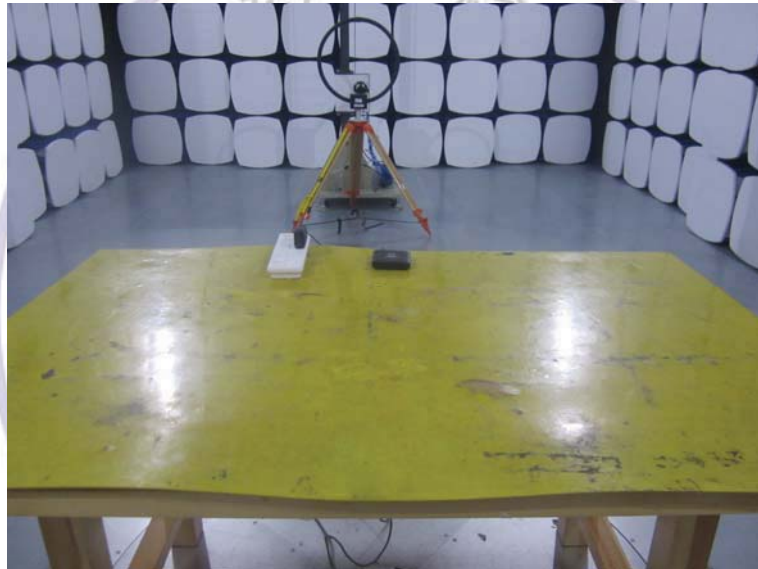



5. External and Internal Photos of the EUT

Please reference to the test report No.: CTL1507222025-WF-01

***** End of Report *****

