

FCC RF EXPOSURE REPORT

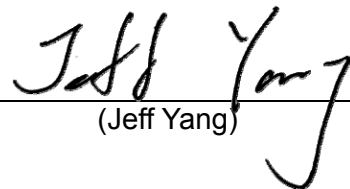
FCC ID: 2ABAMPLLB

Project No. : 1608247
Equipment : Pill
Test Model : PB15226
Series Model : N/A
Applicant : Hello Inc.
Address : 438 Shotwell St, San Francisco, CA 94110, USA

According: : FCC Guidelines for Human Exposure IEEE C95.1

Technical Manager

:


(Jeff Yang)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	Hello	N/A	PCB_Meander-IFA type	N/A	1.4

GENERAL CONCLUSION:

Maximum measured transmitter power:

OutputPower (dBm)	Output Power (mW)	Limit (mW)
3.91	2.5	10

According to FCC KDB447498 V06, Appendix A, SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

The maximum measured output peak power of this EUT is 2.5mW, less than 10mW at 5mm distance.

Conclusion: No SAR evaluation required since transmitter power is below FCC threshold