

FCC TEST REPORT

For

Mobile Phone

Model Number: MAXIM PRO

FCC ID: 2ABBT-MXMPROW7

Report Number : 158001026

Test Laboratory	:	Shenzhen Academy of Metrology and Quality Inspection
		National Digital Electronic Product Testing Center
Site Location	:	NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel	:	0086-755-86928965
Fax	:	0086-755-86009898-31396
Web	:	www.smq.com.cn
E-mail	:	emcrf@smq.com.cn

TEST REPORT DECLARATION

Applicant : XOX Technology Limited

Address : 7/F, Goldin Financial Global Square, 7 Wang Tai Road,
Kowloon Bay, Hong Kong, China

Manufacturer : XOX Technology Limited

Address : 7/F, Goldin Financial Global Square, 7 Wang Tai Road,
Kowloon Bay, Hong Kong, China

EUT Description : Mobile Phone

Model No : MAXIM PRO

Trade mark : : XOX

Serial Number : : /

FCC ID : 2ABBT-MXMPROW7

Test Standards:

FCC Part 15 15.207, 15.209, 15.247(2014)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.207, 15.209 and 15.247.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.


Project
Engineer:



(Chen Silin 陈司林)

Date: Apr.07.2015


Checked by:



(Yang Dongping 杨东平)

Date: Apr.07.2015

Approved by:



(Lin Bin 林斌)

Date: Apr.07.2015

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	2
1. TEST RESULTS SUMMARY.....	5
2. GENERAL INFORMATION.....	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION.....	8
3.1. EUT Description	8
3.2. Related Submittal(s) / Grant (s)	8
3.3. Block Diagram of EUT Configuration	9
3.4. Operating Condition of EUT	9
3.5. Directional Antenna Gain	9
3.6. Support Equipment List.....	10
3.7. Test Conditions.....	10
3.8. Special Accessories.....	10
3.9. Equipment Modifications.....	10
4. TEST EQUIPMENT USED.....	11
5. 6DB BANDWIDTH MEASUREMENT	12
5.1. LIMITS OF 6dB BANDWIDTH MEASUREMENT	12
5.2. TEST PROCEDURE.....	12
5.3. TEST SETUP	12
5.4. Test Data	13
6. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	17
6.1. LIMITS OF Maximum Conducted Output Power Measurement.....	17
6.2. TEST PROCEDURE.....	17
6.3. TEST DATA.....	17
7. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT.....	22
7.1. LIMITS OF Maximum Power Spectral Density Level Measurement	22
7.2. TEST PROCEDURE.....	22
7.3. TEST DATA.....	22

8.	CONDUCTED BANDEGE AND SPURIOUS MEASURMENT	27
8.1.	LIMITS OF Conducted Bandedge and Spurious Measurement	27
8.2.	TEST PROCEDURE	27
8.3.	TEST DATA	28
9.	RADIATED BANDEGE AND SPURIOUS MEASUREMENT	40
9.1.	LIMITS OF Radiated Bandedge and Spurious Measurement	40
9.2.	TEST PROCEDURE	40
9.3.	TEST DATA	41
10.	CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT	123
10.1.	Test Standard and Limit	123
10.2.	Test Procedure	123
10.3.	Test Arrangement	123
10.4.	Test Data	123
11.	ANTENNA REQUIREMENTS	127
11.1.	Applicable requirements	127
11.2.	Antenna Connector	127
11.3.	Antenna Gain	127

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
6dB DTS bandwidth measurement	15.247 (a) (2)	Pass
Maximum Peak Conducted Power	15.247 (b) (3)	Pass
Maximum Power Spectral Density Level	15.247 (3)	Pass
Conducted Bandedge and Spurious	15.247 (d)	Pass
Radiated Bandedge and Spurious	15.247 (d) 15.209 15.205	Pass
Conducted emission test for AC power port	15.207	Pass
Antenna Requirment	15.203	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (VCCI), and the registration number are R-1974(open area test site) , R-1966(semi anechoic chamber),C-2117(mains ports conducted interference measurement) and T-180(telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A-1 11177A-2.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

2.3.Measurement Uncertainty

Conducted Emission

9kHz~30MHz 3.5dB

Radiated Emission

30MHz~1000MHz 4.5dB

1GHz~26.5GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1.EUT Description

Description : Mobile Phone

Manufacturer : XOX Technology Limited

Model Number : MAXIM PRO

Operate Frequency : 2.412GHz~2.462GHz

Antenna Designation : PIFA Antenna
1dBi

Remark: N/A

WLAN :

Table 2 Working Frequency List

Channel	Center Frequency(MHz)	Channel	Center Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Table 3 The working Frequency List(802.11n HT40)

channel	Frequency	channel	Frequency
3	2422MHz	8	2447MHz
4	2427MHz	9	2452MHz
5	2432MHz		
6	2437MHz		
7	2442MHz		

3.2.Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2ABBT-MXMPROW7**, filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

3.3. Block Diagram of EUT Configuration



Figure 1 EUT setup

3.4. Operating Condition of EUT

The Radiated spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

802.11n HT40mode: MCS0

Test mode is configured to be with duty cycle >98%

802.11b and 802.11g operate in SISO mode. For SISO conducted measurements, the modes tested in this report will be considered as a worst case mode.

802.11n operates in SISO mode. For SISO conducted measurements, the modes tested in this report will be considered as a worst case mode.

3.5. Directional Antenna Gain

The EUT does NOT support a WIFI MIMO function.
Directional gain need NOT to be considered.

3.6.Support Equipment List

Table 4 Support Equipment List

Name	Model No	S/N	Manufacturer
Adaptor	LBT-020	--	Shenzhen Ruihaite Digital., LTD
Earphone	JS-EJ150319A01	--	XOX Technology Limited

3.7.Test Conditions

Date of test: Mar 18,2015-Apr 07, 2015

Date of EUT Receive: Mar 18,2015

Temperature: 21-24 °C

Relative Humidity: 48-54%

3.8.Special Accessories

Not available for this EUT intended for grant.

3.9.Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 5 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Dec.19, 2014	1 Year
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.18, 2015	1 Year
SB2604	AMN	Rohde & Schwarz	ESH3-Z5	Nov.18, 2015	1 Year
----	Radiated Emissions Cable set	HUBER+SUHN ER	---	Jan.19, 2015	1 Year
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Mar.19, 2015	1 Year
SB8501/04	Bilog Antenna	Schwarzbeck	VULB9163	Mar.19, 2015	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015	1 Year
SB5392/02	Horn Antenna	Amplifier Research	AT4560	May.16, 2014	1 Year
SB3450/01	3m Semi-anechoic chamber	Albatross Projects	9X6X6	Oct.09, 2014	2 Years
SB3345	Loop Antenna	Schwarzbeck	FMZB1516	Jan.20, 2015	2 Years
SB3437	Power meter	Rohde & Schwarz	NRVD	Jul.03,2015	1 Year
SB3437/01	Power sensor	Rohde & Schwarz	URV5-Z2	Jul.03,2015	1 Year
SB9721/02	Signal Analyzer	Agilent	N9020A	Jan.05, 2015	1 Year
----	Radiated Emissions Cable set	HUBER+SUHN ER	---	Jan.19, 2015	1 Year
---	Radiated Emissions Cable set	HUBER+SUHN ER	---	Jan.19, 2015	1 Year
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	Mar.27, 2015	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	Mar.27, 2015	1 Year
SB9059	Preamplifier	Rohde & Schwarz	SCU-40	May.12, 2015	1 Yea

5. 6DB BANDWIDTH MEASUREMENT

5.1.LIMITS OF 6dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (2) and 558074 D01 DTS Meas Guidance v03r01

5.2.TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer.

a) Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

c)Detector = Peak.

d)Trace mode = max hold.

e)Sweep = auto couple.

f)Allow the trace to stabilize.

g)Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.TEST SETUP



5.4. Test Data

Table 6 6dB Bandwidth Test Data 802.11b

CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	results
2412	9.575	Pass
2437	9.572	Pass
2462	10.04	Pass

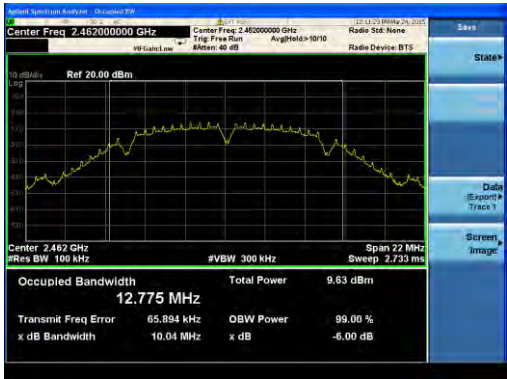


Table 7 6dB Bandwidth Test Data 802.11g

CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	results
2412	15.48	Pass
2437	15.48	Pass
2462	15.65	Pass

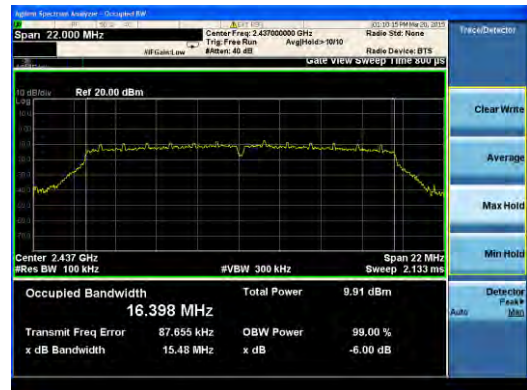
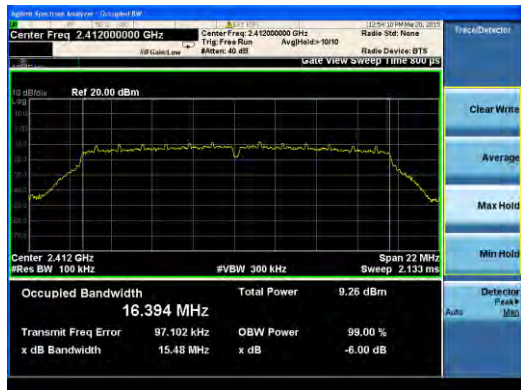


Table 8 6dB Bandwidth Test Data 802.11n HT20

CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	results
2412	15.16	Pass
2437	15.14	Pass
2462	15.70	Pass






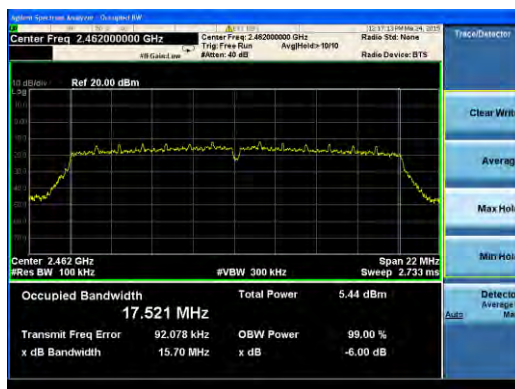


Table 9 6dB Bandwidth Test Data 802.11n HT40

CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	results
2422	35.21	Pass
2437	35.21	Pass
2452	35.21	Pass

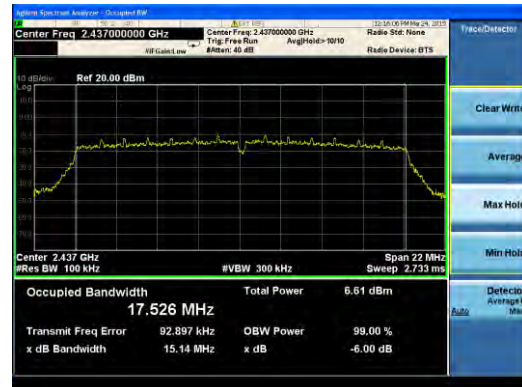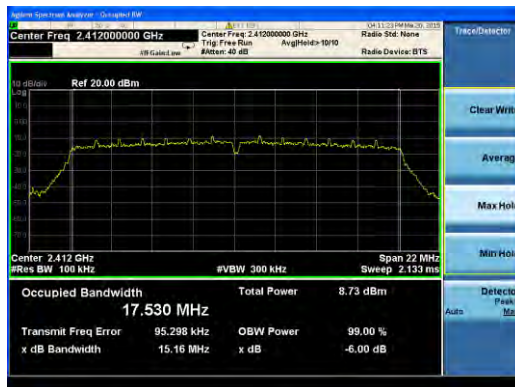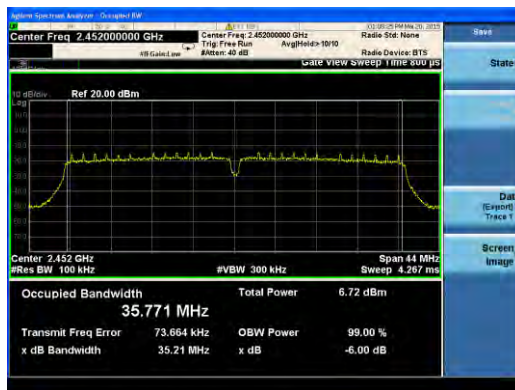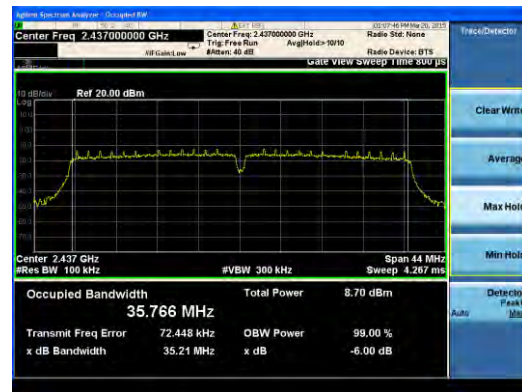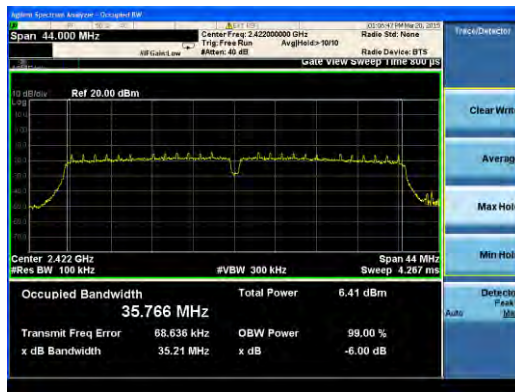

6. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

6.1.LIMITS OF Maximum Conducted Output Power Measurement

CFR 47 (FCC) part 15.247 (b) (3) and 558074 D01 DTS Meas Guidance v03r01

6.2.TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer.

a)Set the RBW = 1 MHz.

b)Set the VBW ≥ 3 RBW

c)Set the span ≥ 1.5 x DTS bandwidth.

d)Detector = peak.

e)Sweep time = auto couple.

f)Trace mode = max hold.

g)Allow trace to fully stabilize.

h)Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

6.3.TEST DATA

Table 10 Maximum Conducted Output Power Test Data 802.11b

Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
2412	14.30	< 30	Pass
2437	14.47	< 30	Pass
2462	14.66	< 30	Pass



Table 11 Maximum Conducted Output Power Test Data 802.11g

Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
2412	16.18	< 30	Pass
2437	16.92	< 30	Pass
2462	16.27	< 30	Pass

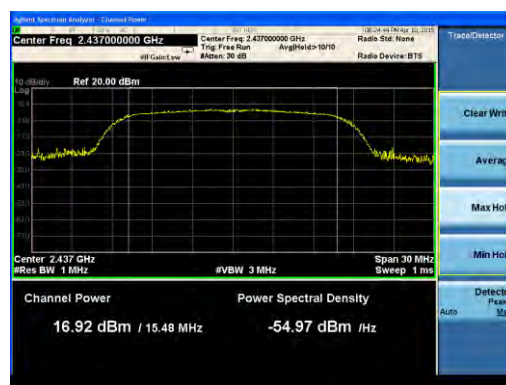


Table 12 Maximum Conducted Output Power Test Data 802.11n HT20

Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
2412	16.09	< 30	Pass
2437	16.83	< 30	Pass
2462	15.09	< 30	Pass

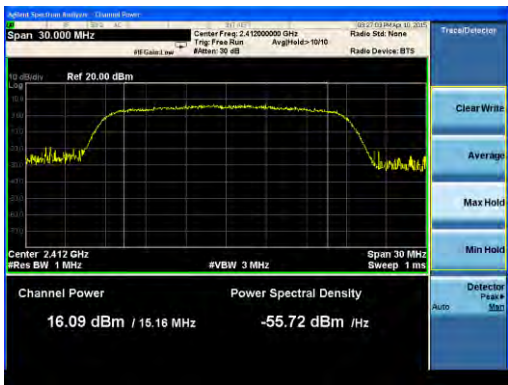


Table 13 Maximum Conducted Output Power Test Data 802.11n HT40

Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
2422	14.09	< 30	Pass
2437	15.81	< 30	Pass
2452	13.84	< 30	Pass



7. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT

7.1.LIMITS OF Maximum Power Spectral Density Level Measurement

CFR 47 (FCC) part 15.247 (e) and 558074 D01 DTS Meas Guidance v03r01

7.2.TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer.

a)Set analyzer center frequency to DTS channel center frequency.

b)Set the span to 1.5 times the DTS bandwidth.

c)Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

d)Set the VBW $\geq 3 \times \text{RBW}$.

e)Detector = peak.

f)Sweep time = auto couple.

g)Trace mode = max hold.

h)Allow trace to fully stabilize.

i)Use the peak marker function to determine the maximum amplitude level within the RBW.

j)If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.3.TEST DATA

Table 14 Maximum Power Spectral Density Level Test Data 802.11b

Center Freq.[MHz]	PSD [dBm]	Limit [dBm]	Result
2412	-5.803	8	Pass
2437	-5.823	8	Pass
2462	-6.071	8	Pass



Table 15 Maximum Power Spectral Density Level Test Data 802.11g

Center Freq.[MHz]	PSD [dBm]	Limit [dBm]	Result
2412	-11.210	8	Pass
2437	-10.465	8	Pass
2462	-11.231	8	Pass






Table 16 Maximum Power Spectral Density Level Test Data 802.11n HT20

Center Freq.[MHz]	PSD [dBm]	Limit [dBm]	Result
2412	-11.060	8	Pass
2437	-10.654	8	Pass
2462	-11.025	8	Pass



Table 17 Maximum Power Spectral Density Level Test Data 802.11n HT40

Center Freq.[MHz]	PSD [dBm]	Limit [dBm]	Result
2422	-16.593	8	Pass
2437	-14.662	8	Pass
2452	-16.781	8	Pass

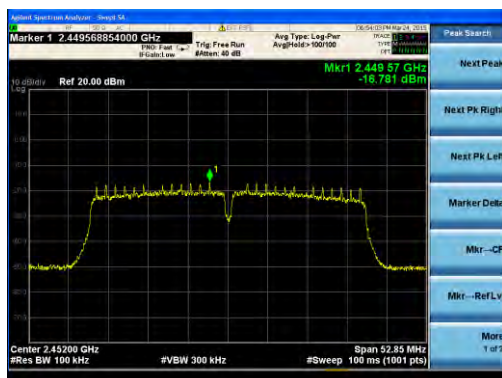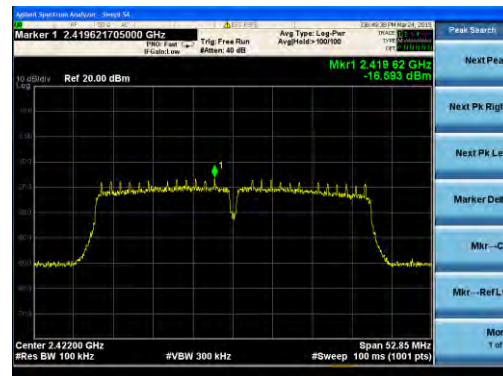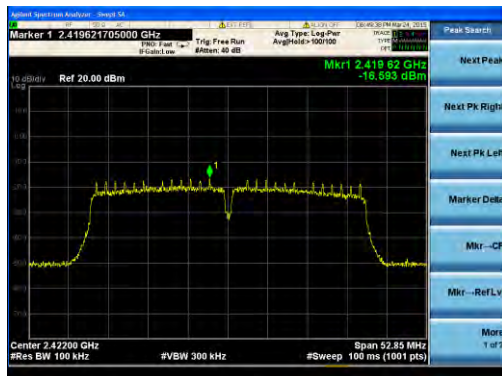

8. CONDUCTED BANDEGE AND SPURIOUS MEASUREMENT

8.1.LIMITS OF Conducted Bandedge and Spurious Measurement

CFR 47 (FCC) part 15.247 (d) and 558074 D01 DTS Meas Guidance v03r01

8.2.TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- a)Set instrument center frequency to DTS channel center frequency.
- b)Set the span to ≥ 1.5 times the DTS bandwidth.
- c)Set the RBW = 100 kHz.
- d)Set the VBW $\geq 3 \times$ RBW.
- e)Detector = peak.
- f)Sweep time = auto couple.
- g)Trace mode = max hold.
- h)Allow trace to fully stabilize.
- i)Use the peak marker function to determine the maximum PSD level.


Emission level measurement

- a)Set the center frequency and span to encompass frequency range to be measured.
- b)Set the RBW = 100 kHz.
- c)Set the VBW $\geq 3 \times$ RBW.
- d)Detector = peak.
- e)Ensure that the number of measurement points $\geq$ span/RBW
- f)Sweep time = auto couple.
- g)Trace mode = max hold.
- h)Allow trace to fully stabilize.
- i)Use the peak marker function to determine the maximum amplitude level.


Test Result : ALL emission outside of 2400-2483.5 are lower at least 30dB than fundamental frequency.

8.3.TEST DATA

802.11b CH1

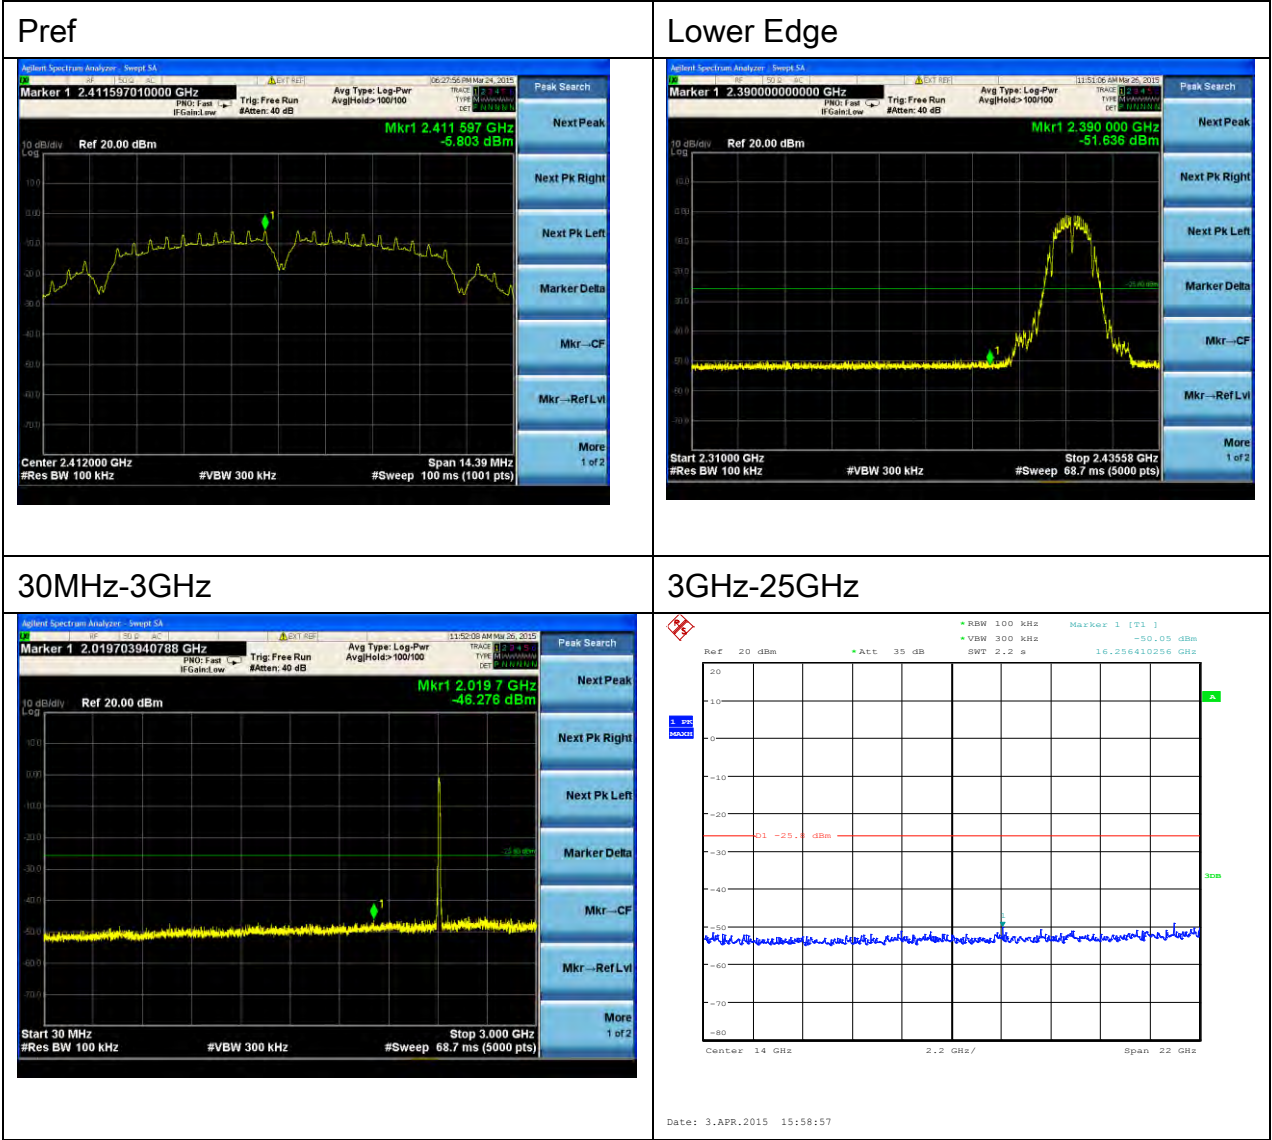

802.11b CH6

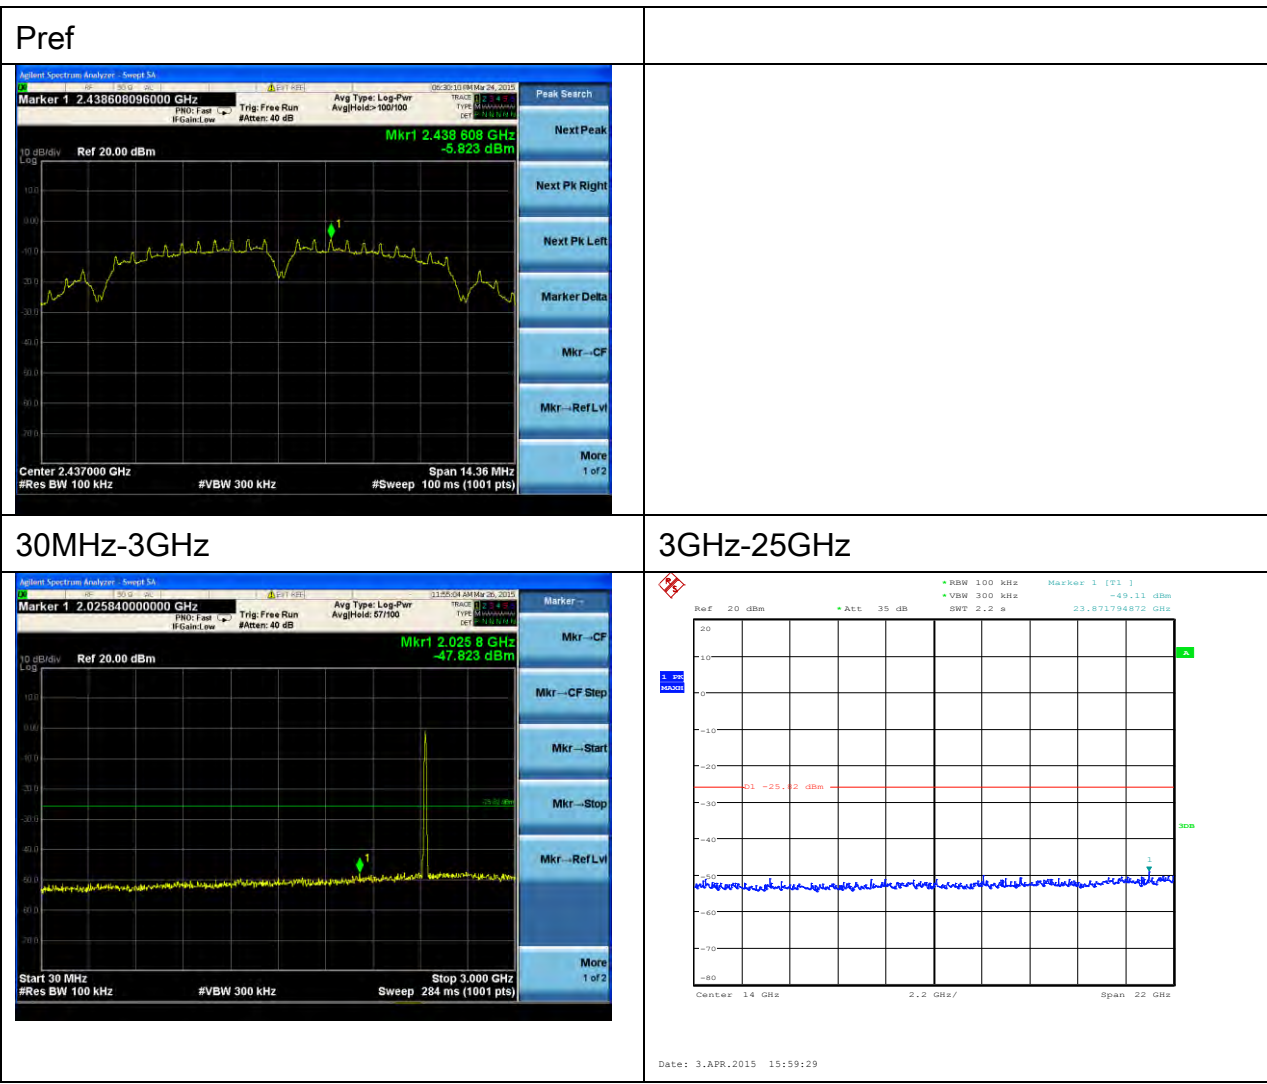

802.11b CH11

Pref




Upper Edge



30MHz-3GHz



3GHz-25GHz

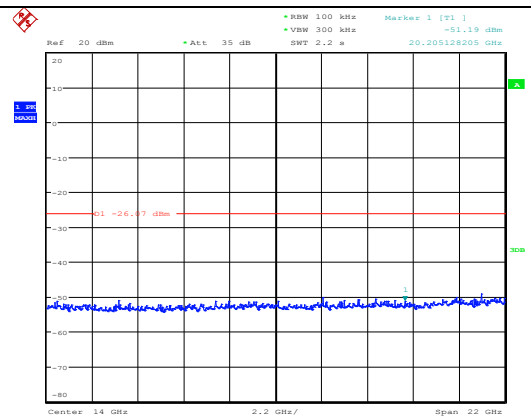

Date: 3.APR.2015 15:59:48

802.11g CH1

Pref




Lower Edge



30MHz-3GHz



3GHz-25GHz

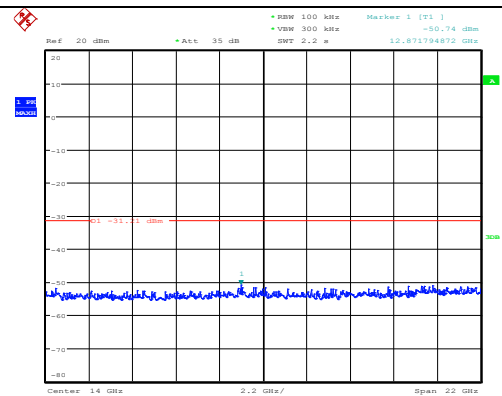

Date: 3.APR.2015 16:00:31

802.11g CH6


Pref



30MHz-3GHz



3GHz-25GHz

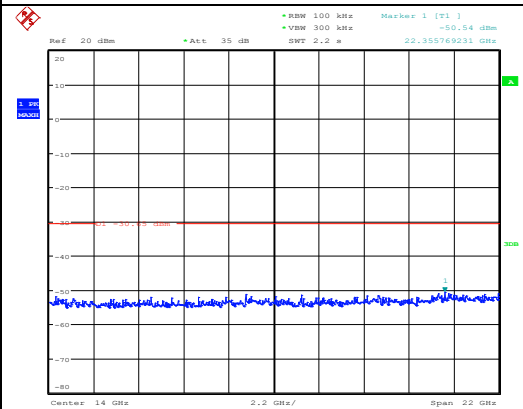

Date: 3.APR.2015 16:00:52

802.11g CH11

Pref




Upper Edge



30MHz-3GHz



3GHz-25GHz

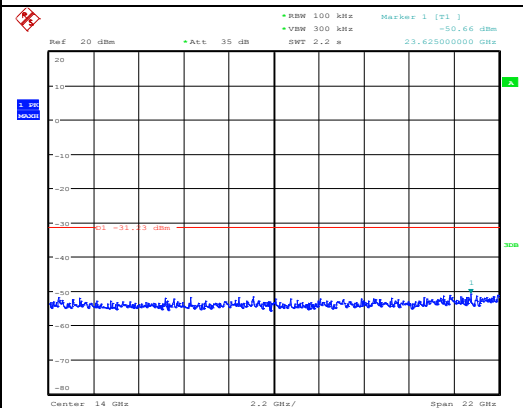

Date: 3.APR.2015 16:01:14

802.11n HT20 CH1

Pref




Lower Edge



30MHz-3GHz




3GHz-25GHz

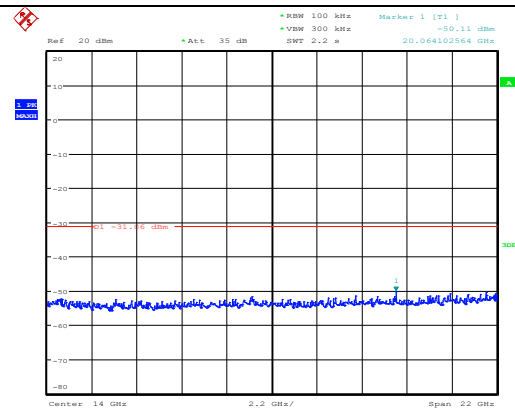

Date: 3.APR.2015 16:01:34

802.11n HT20 CH6

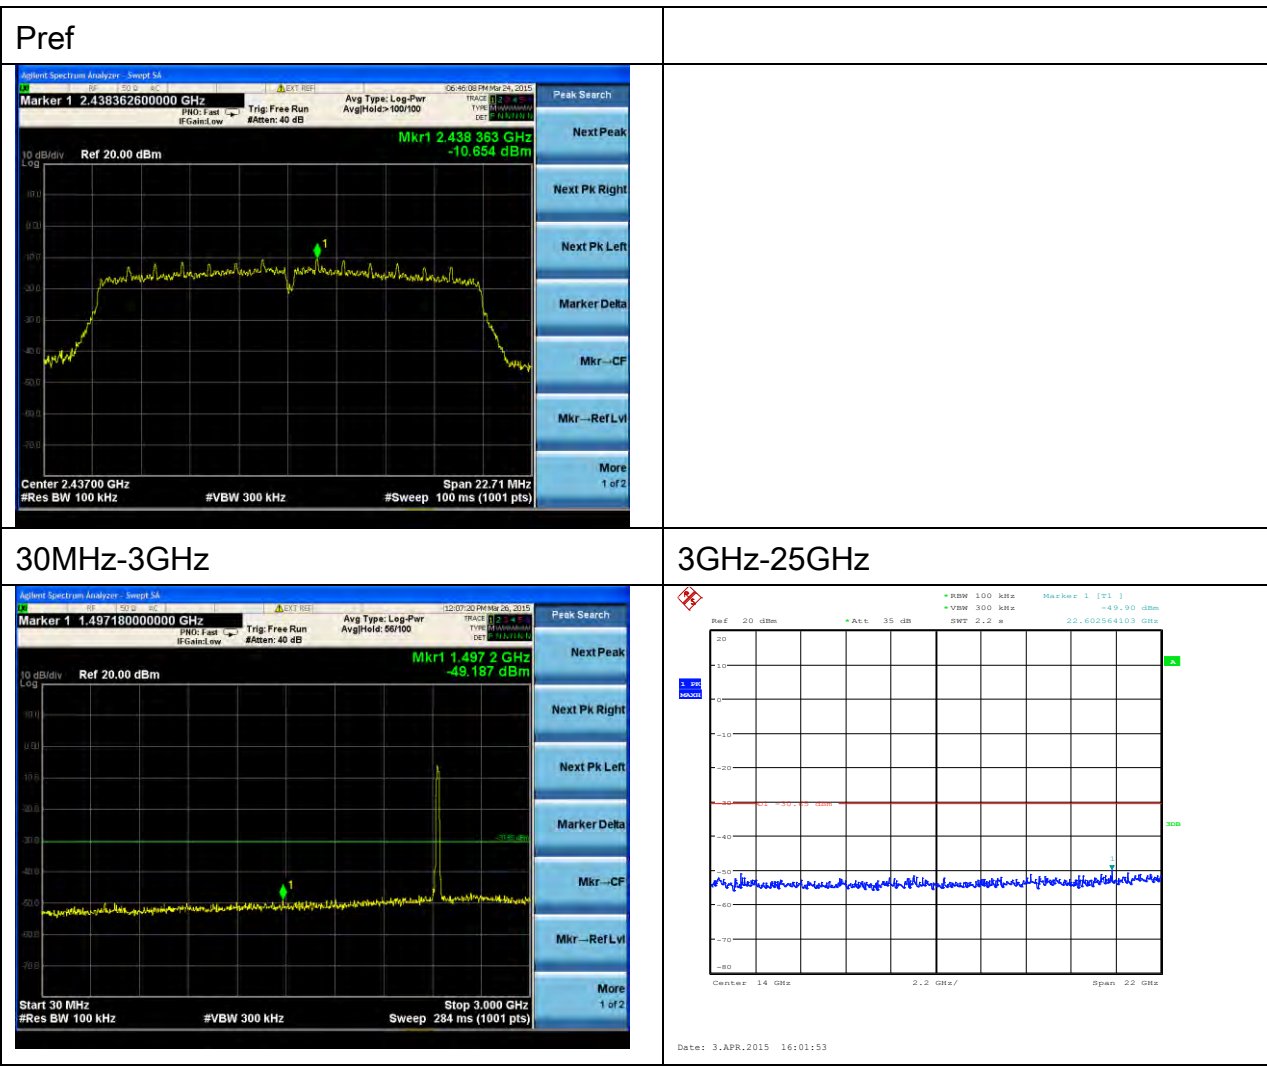

802.11n HT20 CH11

Pref




Upper Edge



30MHz-3GHz




3GHz-25GHz

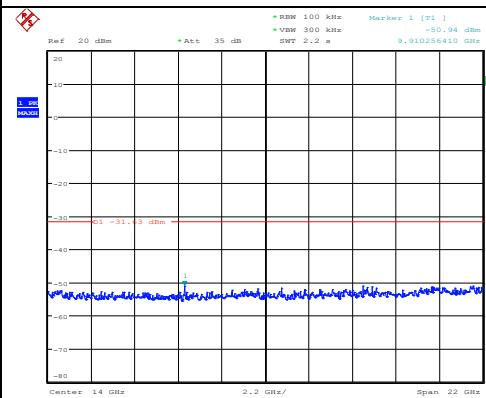


Date: 3.APR.2015 16:02:15

802.11n HT40 CH3


Pref

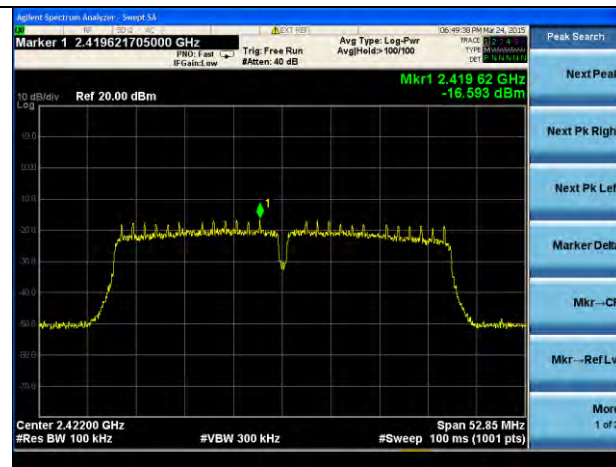


Lower Edge

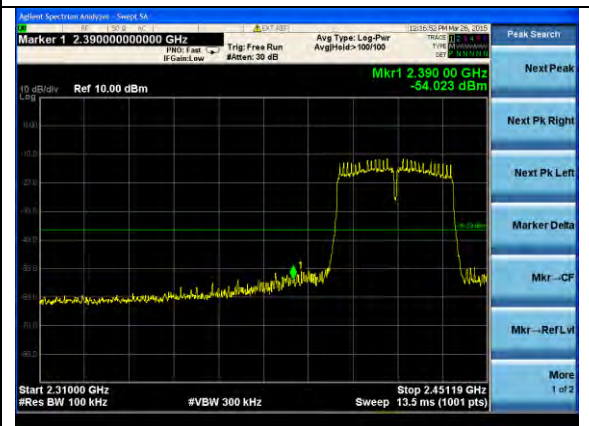

30MHz-3GHz


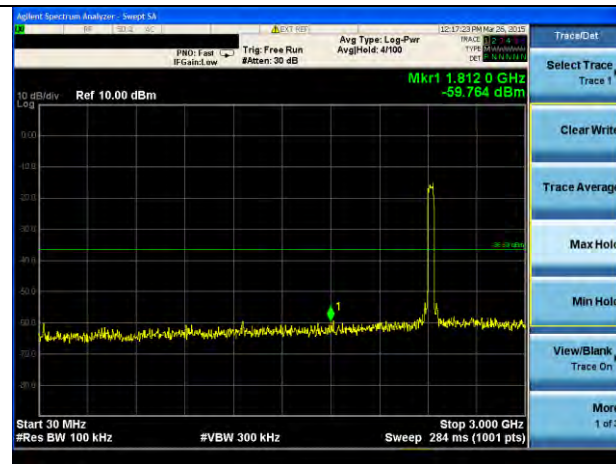


3GHz-25GHz

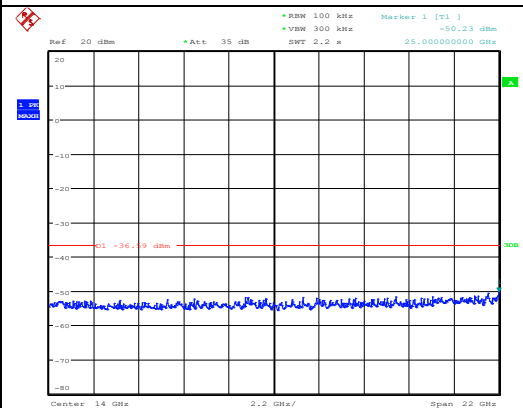


Date: 3.APR.2015 16:02:38

802.11n HT40 CH6

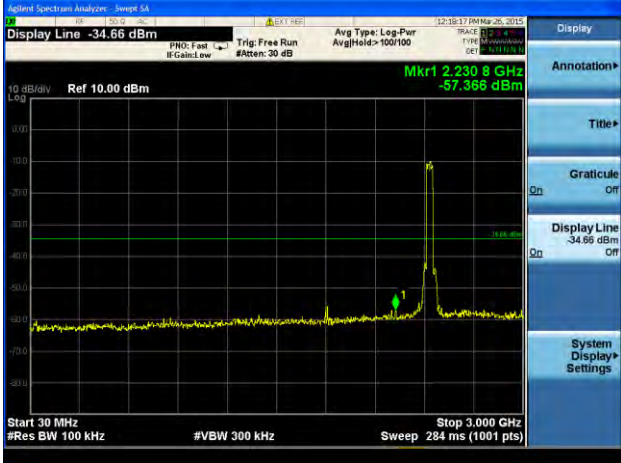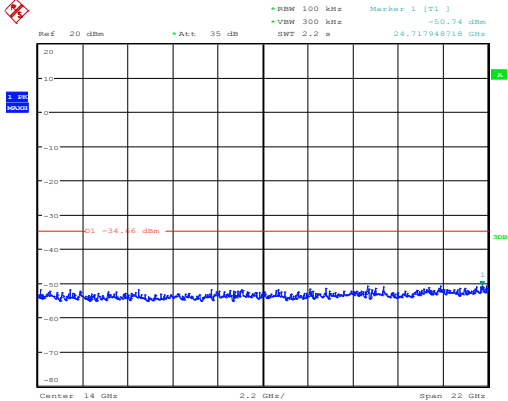Pref 	
30MHz-3GHz 	3GHz-25GHz  Date: 3.APR.2015 16:03:05

802.11n HT40 CH9


Pref

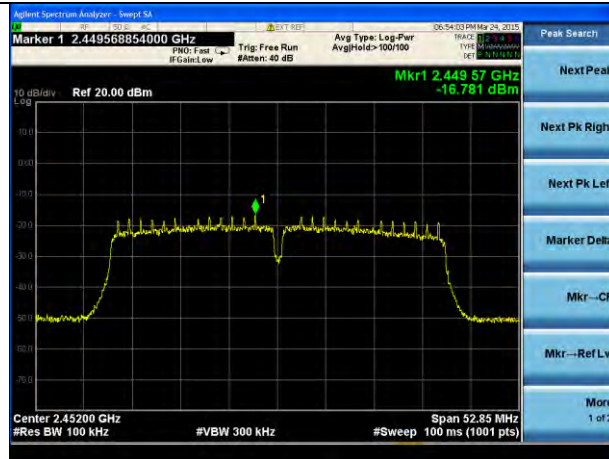


Upper Edge



30MHz-3GHz

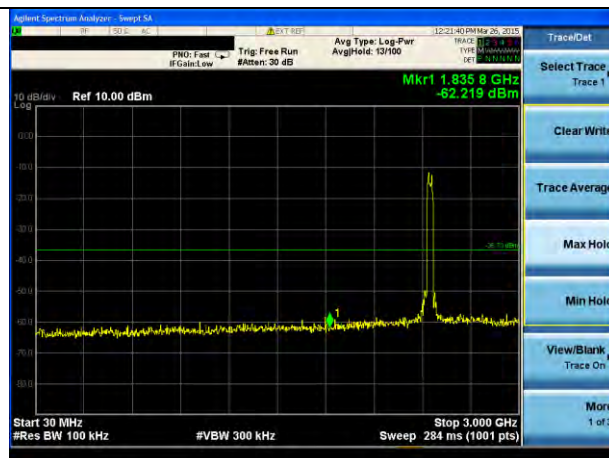

3GHz-25GHz

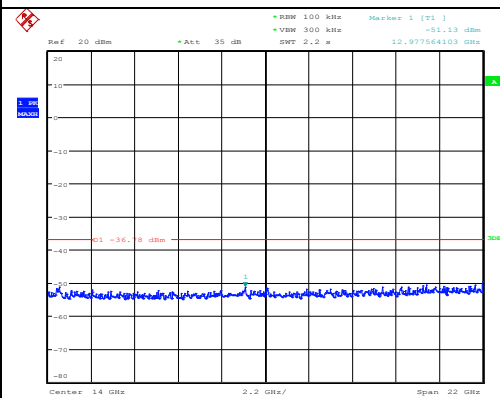

Date: 3.APR.2015 16:03:30

9. RADIATED BANDEGE AND SPURIOUS MEASUREMENT

9.1.LIMITS OF Radiated Bandedge and Spurious Measurement

CFR 47 (FCC) part 15.247 (d) and 558074 D01 DTS Meas Guidance v03r01

9.2.TEST PROCEDURE

1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz Detector function = peak for $f > 1$ GHz for peak measurement.
Set RBW = 1 MHz, VBW= 10Hz Detector function = peak for $f > 1$ GHz for AV measurement.

9.3.TEST DATA

9KHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Radiated Emission Test Data 9k Hz-30MHz

Frequency MHz	Cable Loss(dB)	Antenna Factor(dB)	Readings(dBμV/m)	Level(dBμV/m)	Polarity(H/V)	Turntable Angle(deg)	Antenna Height(m)	Limits(dBμV/m)	Margin(dB)
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--

30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.

Radiated Emission Test Data 30MHz-1GHz

Frequency MHz	Cable Loss(dB)	Antenna Factor(dB)	Readings(dBμV/m)	Level(dBμV/m)	Polarity(H/V)	Turntable Angle(deg)	Antenna Height(m)	Limits(dBμV/m)	Margin(dB)
30.000	0.6	12.3	16.2	29.1	V	60.3	1.0	40.0	10.9
38.132	0.7	12.3	22.0	35.0	V	86.4	1.0	40.0	5.0
55.27	0.8	13.0	19.3	33.1	V	342.6	1.0	40.0	3.9
80.541	0.9	8.5	18.8	28.2	V	315.3	1.1	40.0	11.8
94.148	1.1	11.9	30.5	43.5	V	27.6	1.2	43.5	13.0
99.979	1.1	12.8	14.3	28.2	V	78.2	1.1	43.5	14.7
30	0.6	12.3	14.9	27.8	H	110.7	1.0	12.2	19.9
55.27	0.8	13.0	14.8	28.6	H	143.7	1.1	11.4	20.2
80.541	0.9	8.5	18.8	28.2	H	101.1	1.1	11.8	21.6
86.372	1.1	10.3	16.5	27.9	H	335.8	1.2	12.1	22.8
94.148	1.1	11.9	15.8	28.8	H	241.7	1.3	14.7	20.3
148.577	1.5	8.2	12.2	21.9	H	330.1	1.1	21.6	17.9


Radiated Emission

EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Changing and Transmitting
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical/ Horizontal
Operator Name:
Comment:

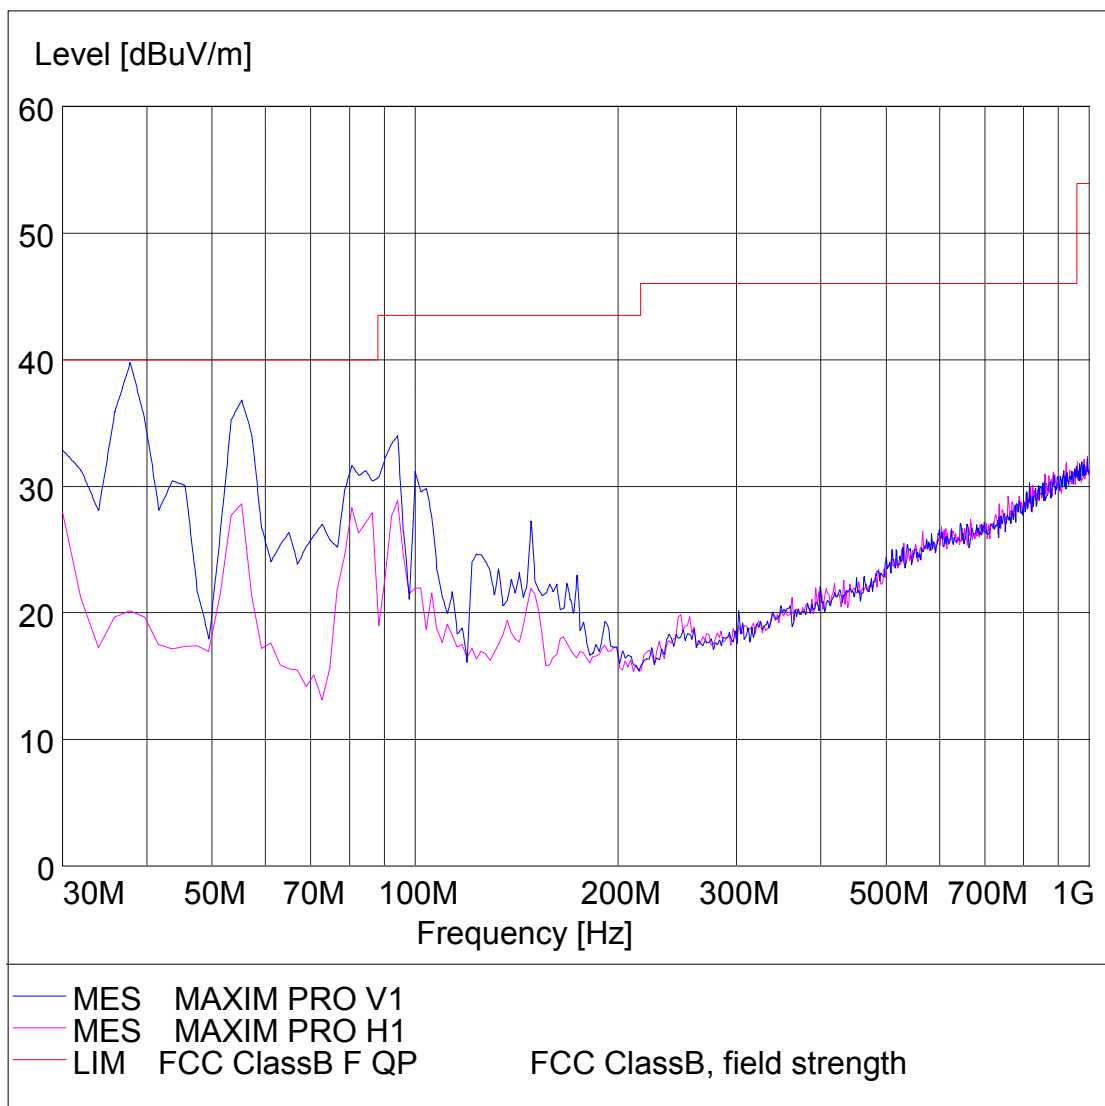

1-18G

11b

Ch1

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

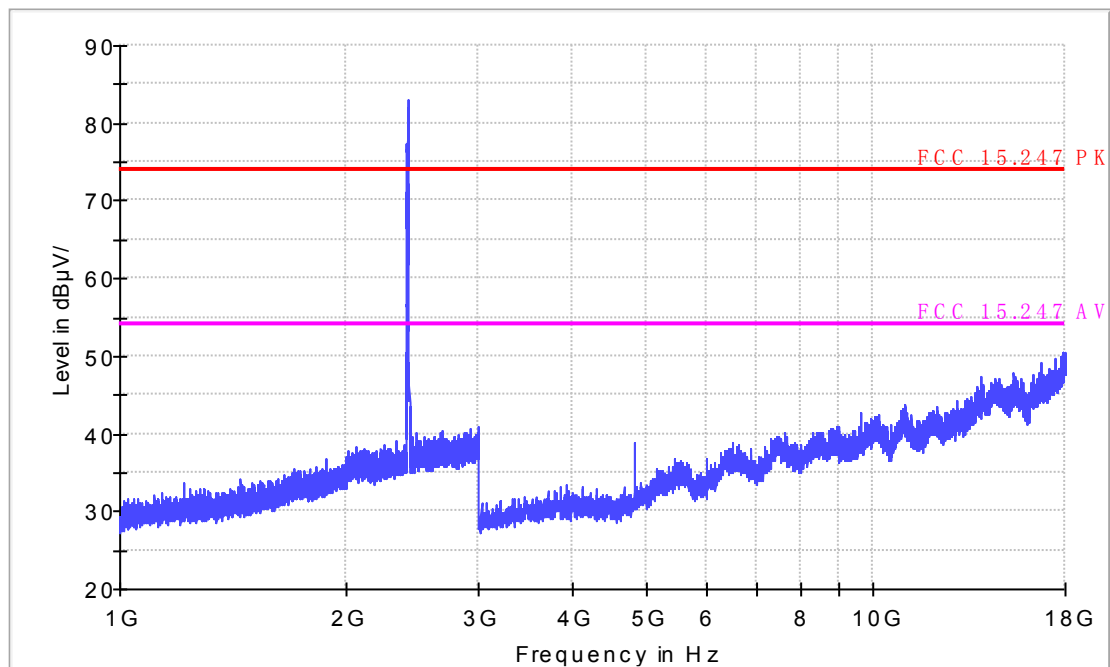

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

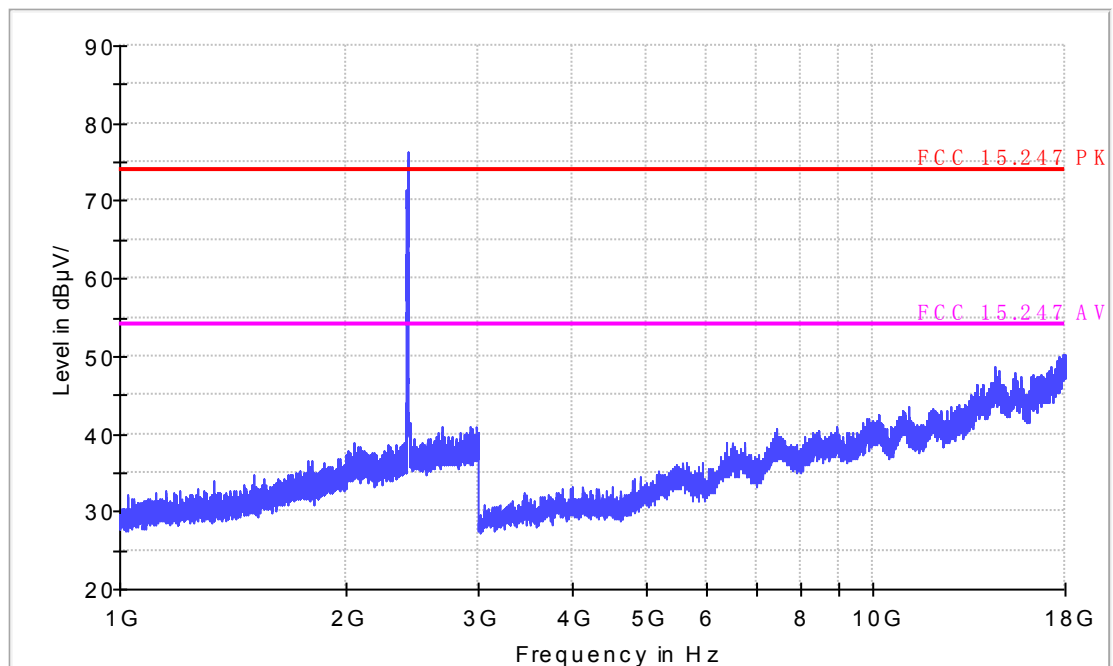

1-18G
11b
CH6

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

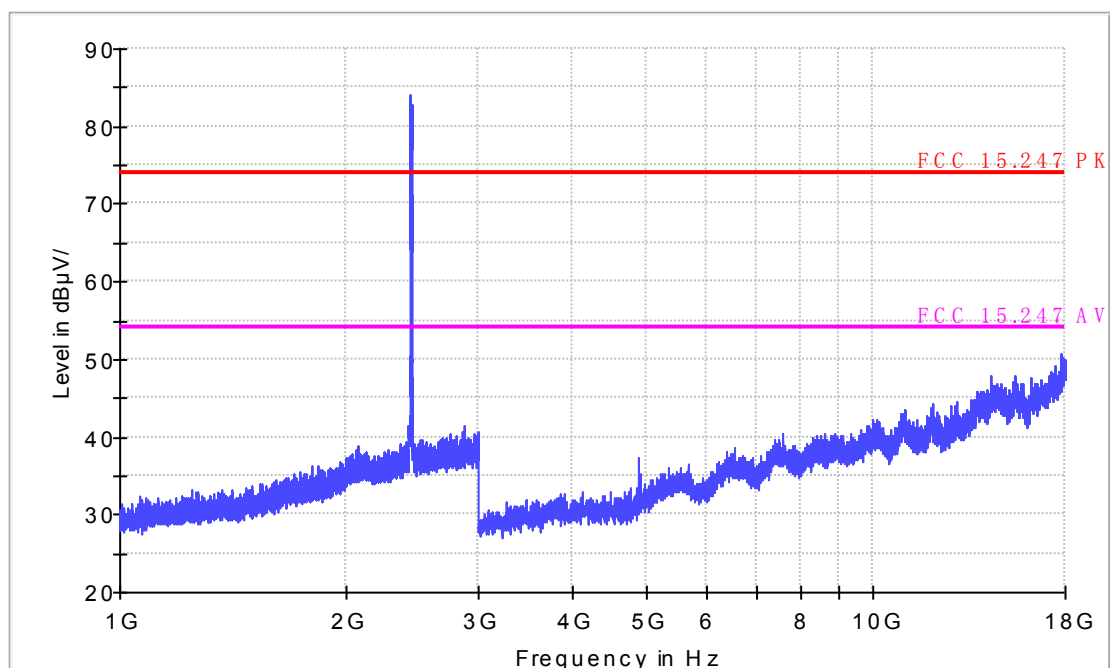

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

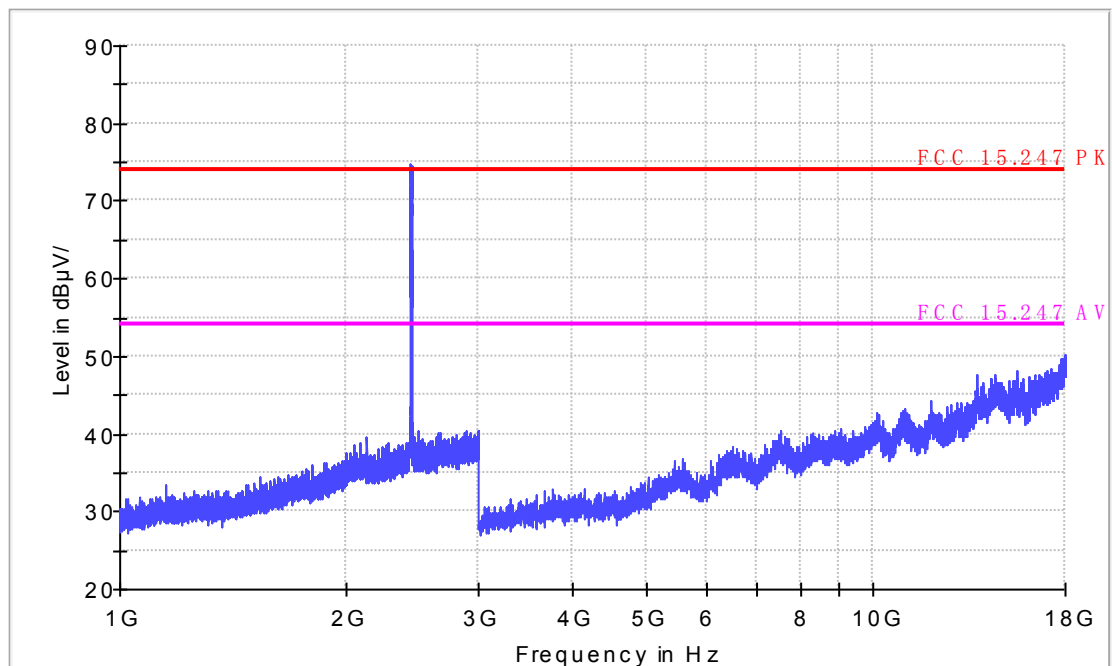

1-18G

11b

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

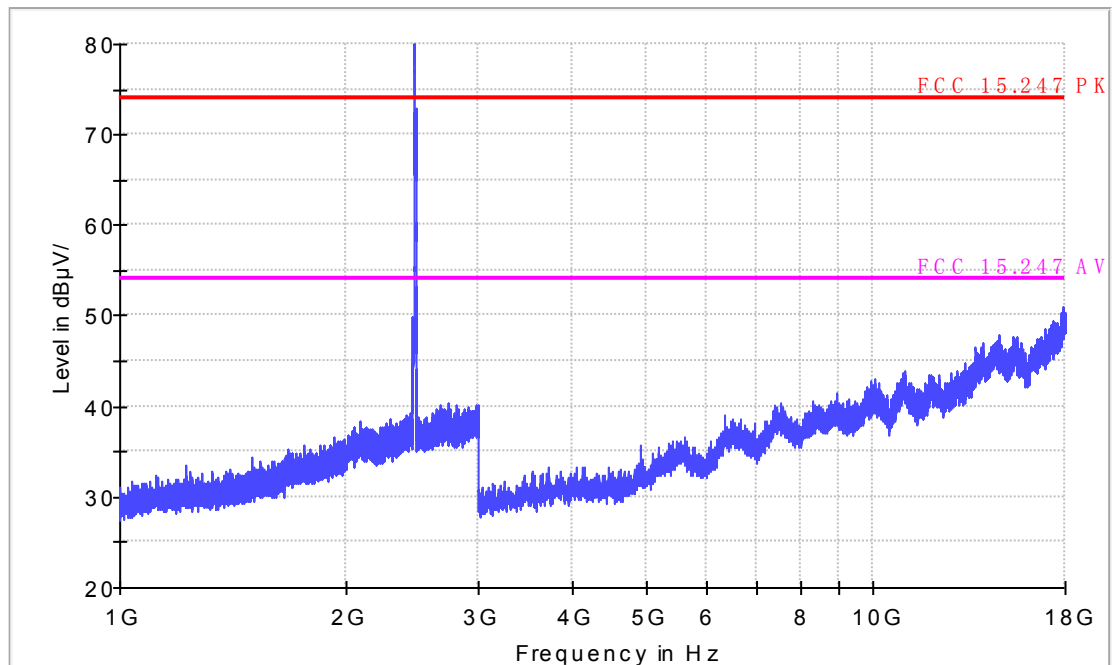

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

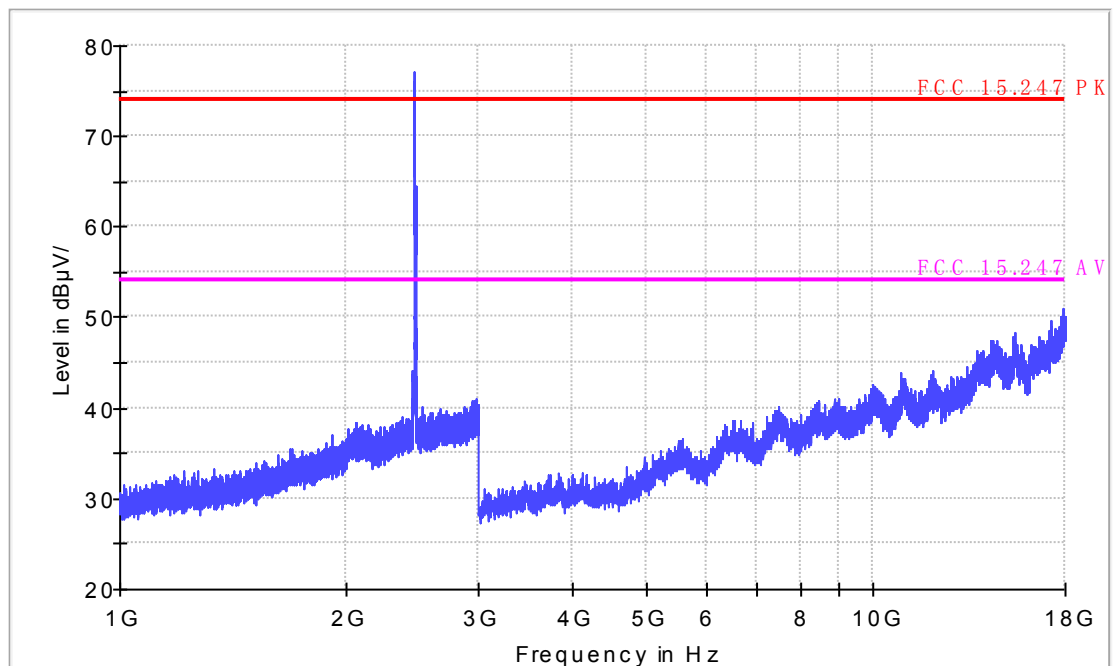

1-18G

11g

CH1

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

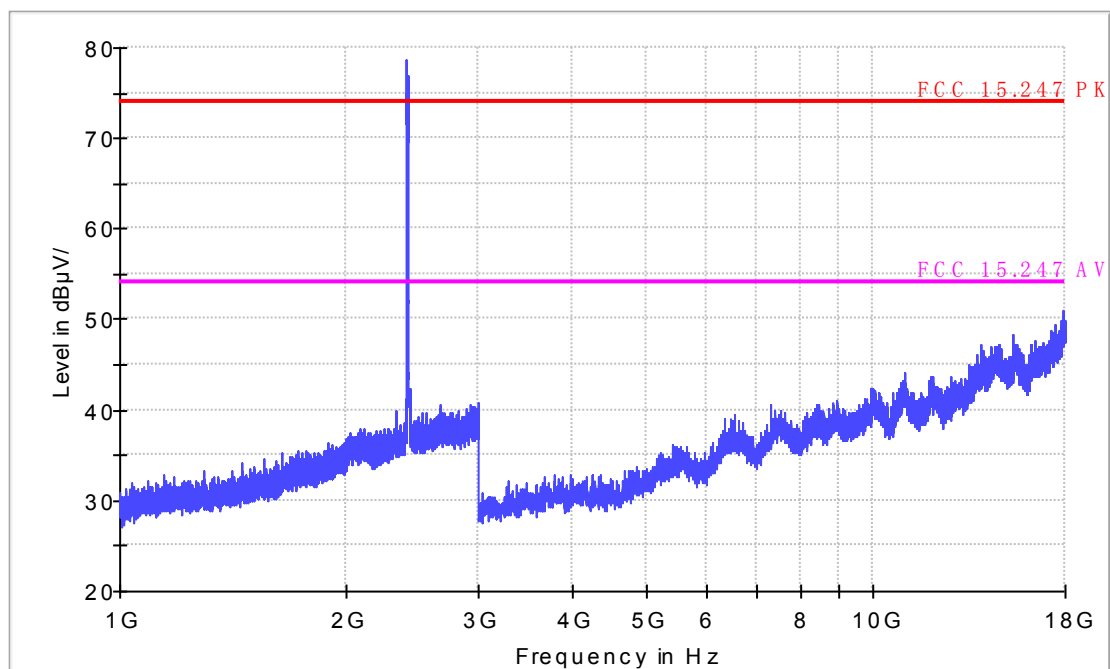

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

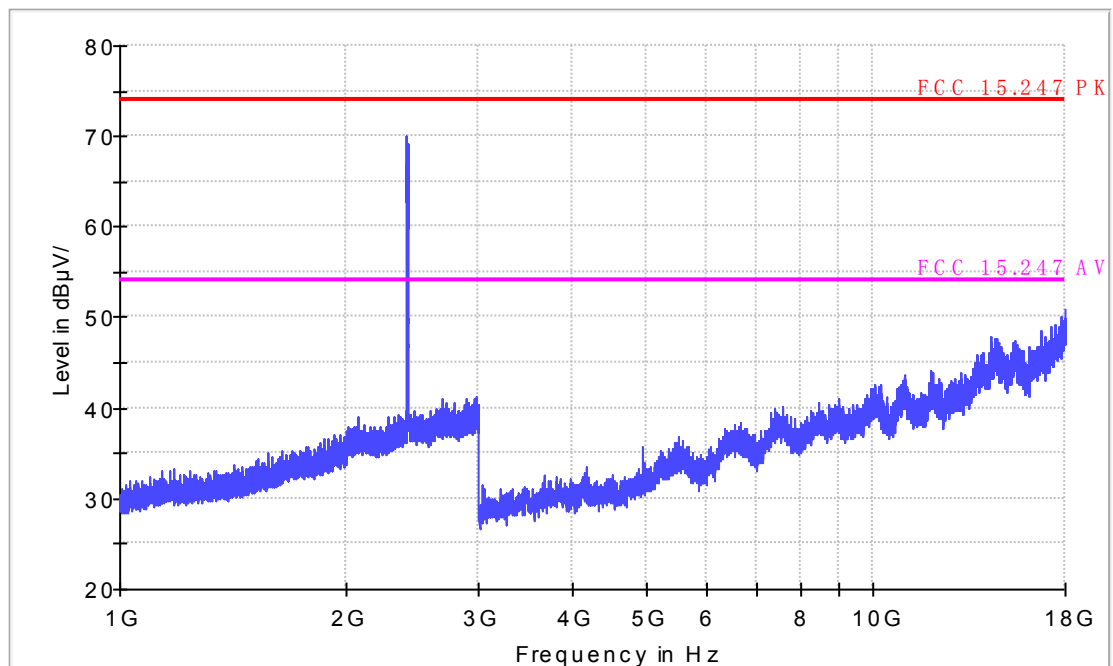

1-18G

11g

CH6

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

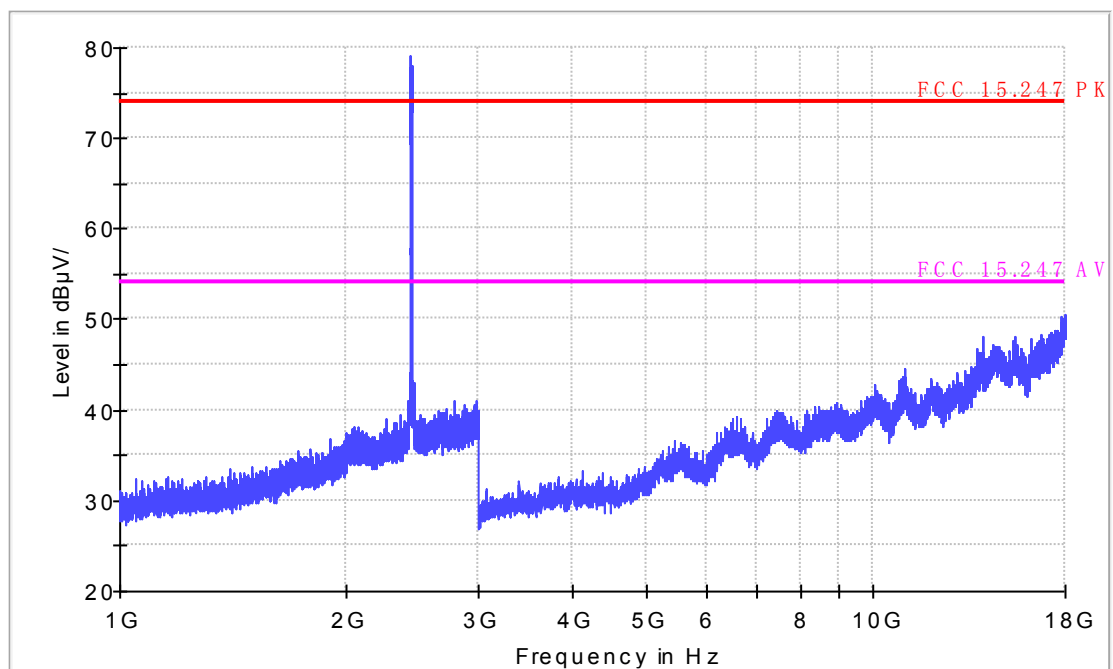

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

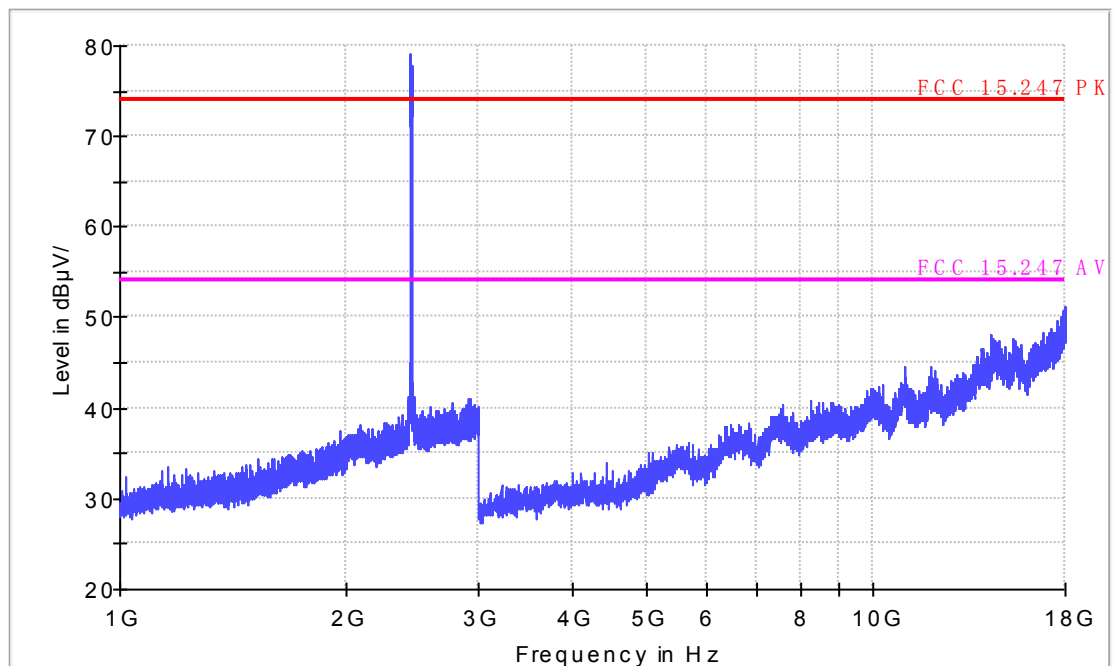

1-18G

11g

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11a CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

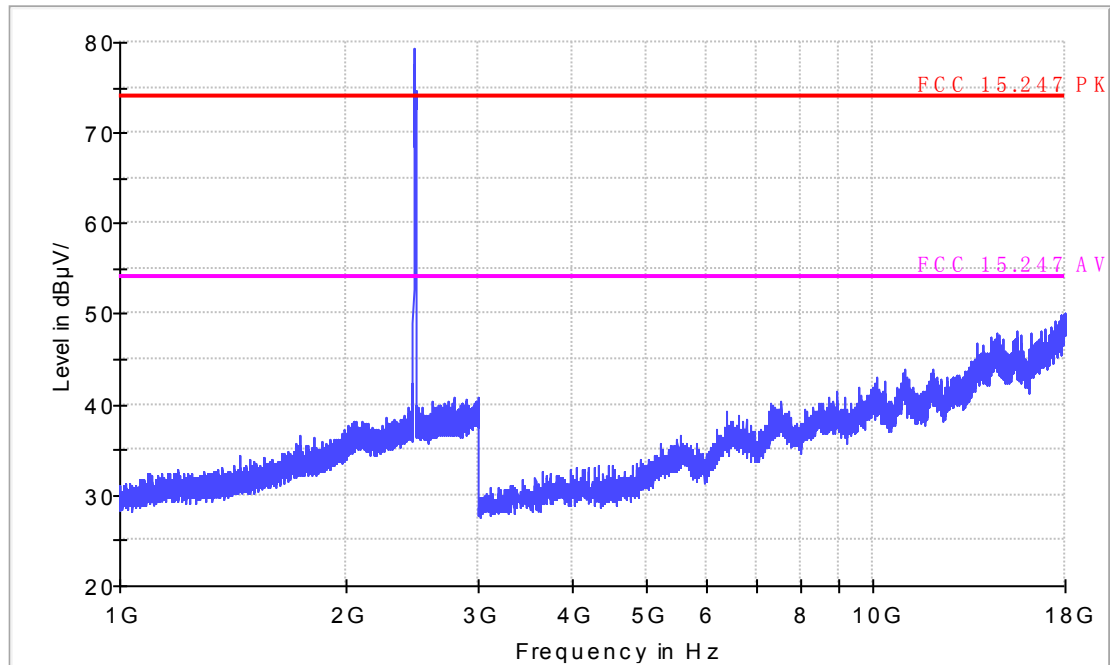

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

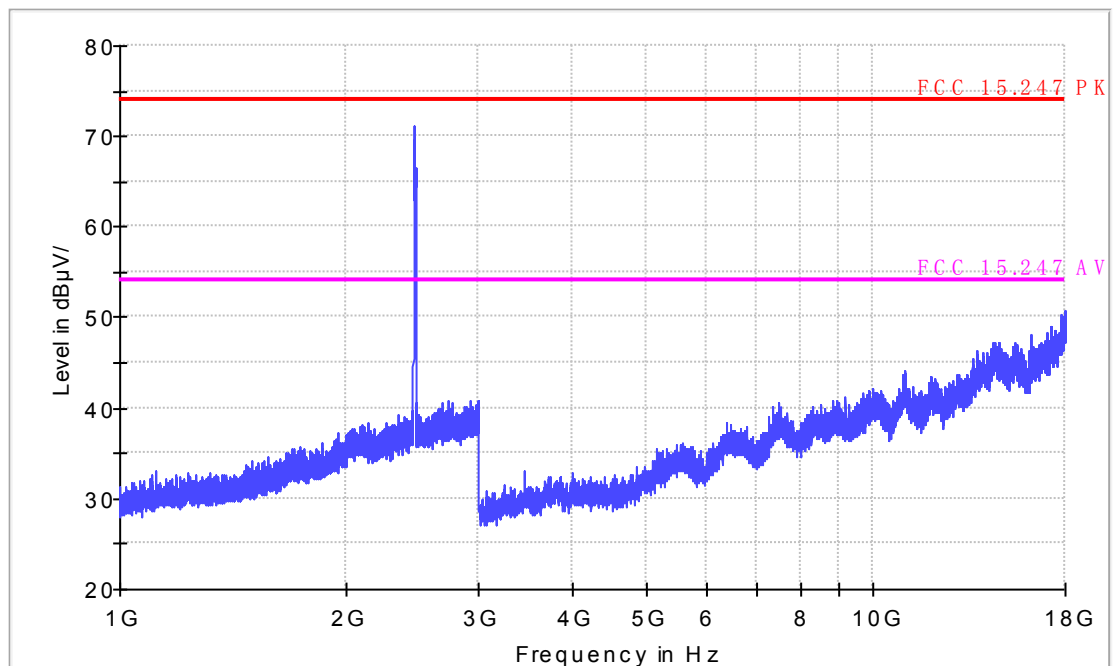

1-18G

11n-HT20

CH1

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

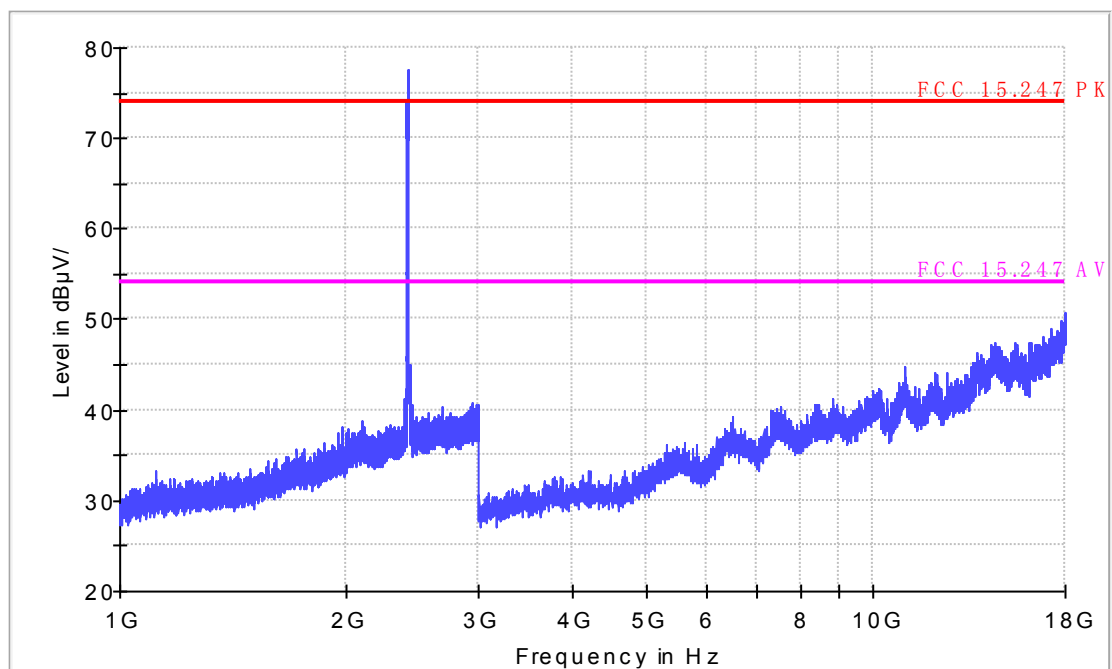

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

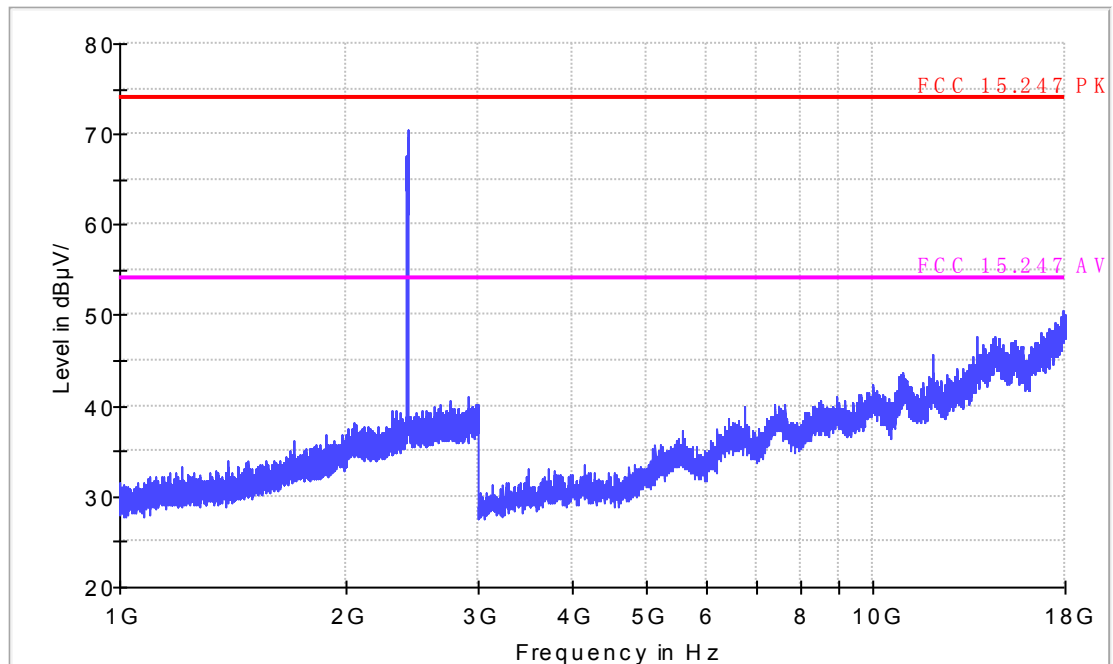

1-18G

11n-HT20

CH6

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

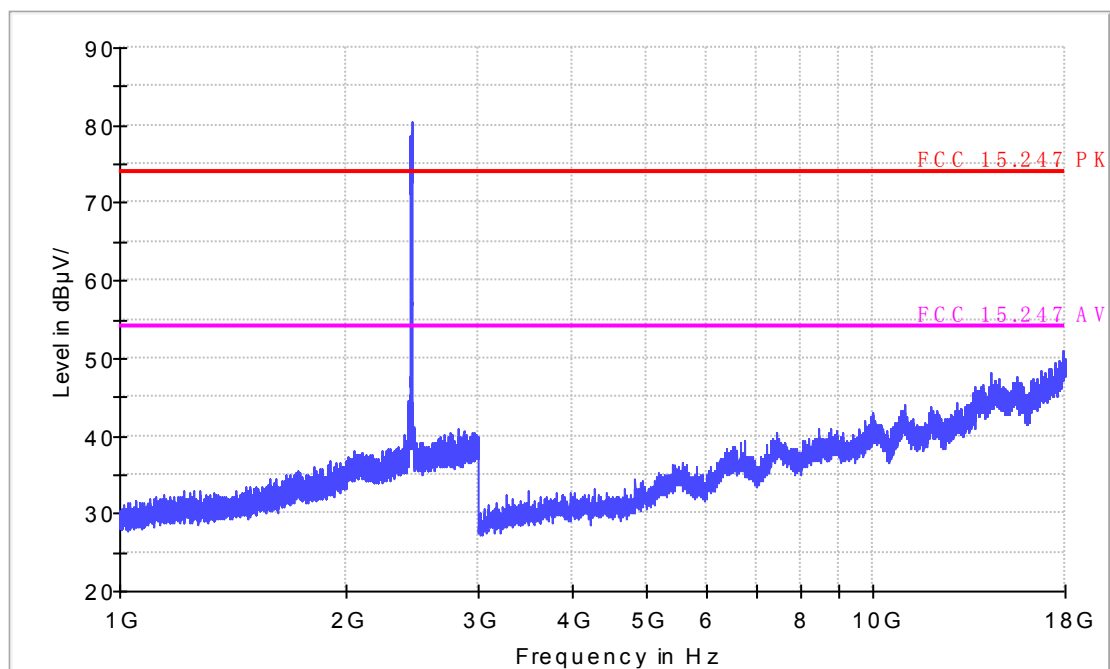

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

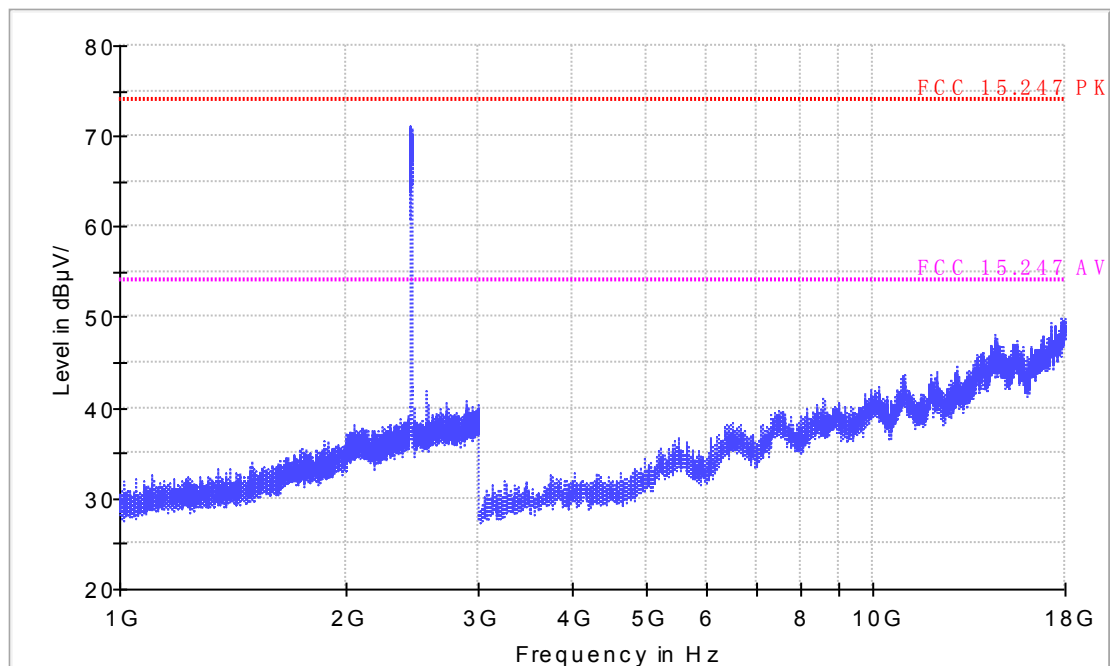

1-18G

11n-HT20

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

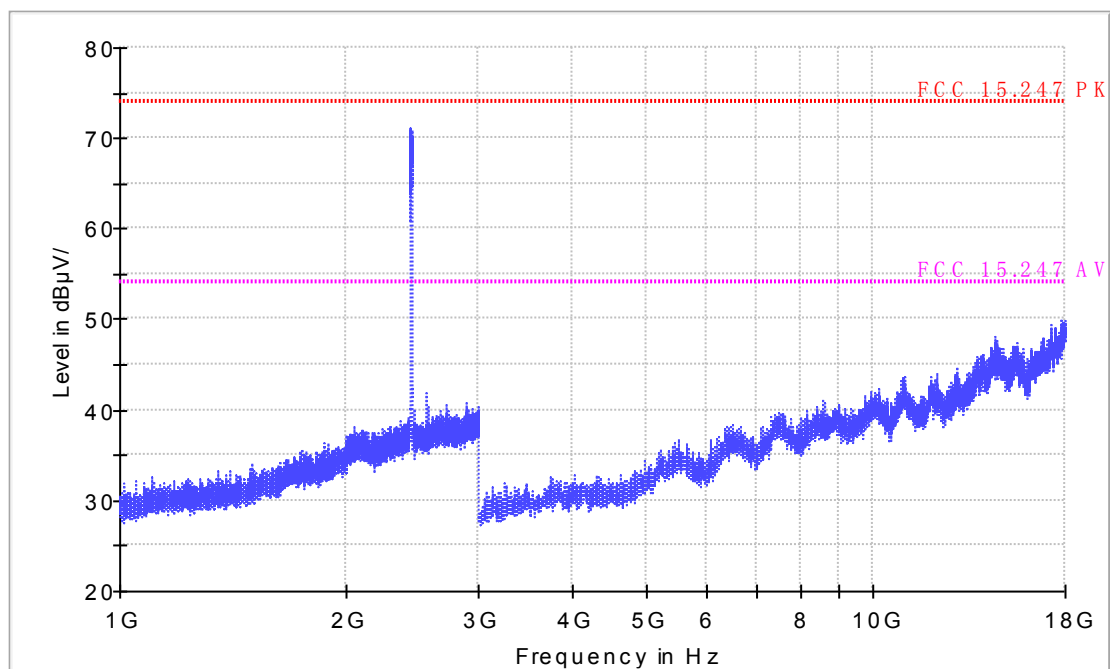

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

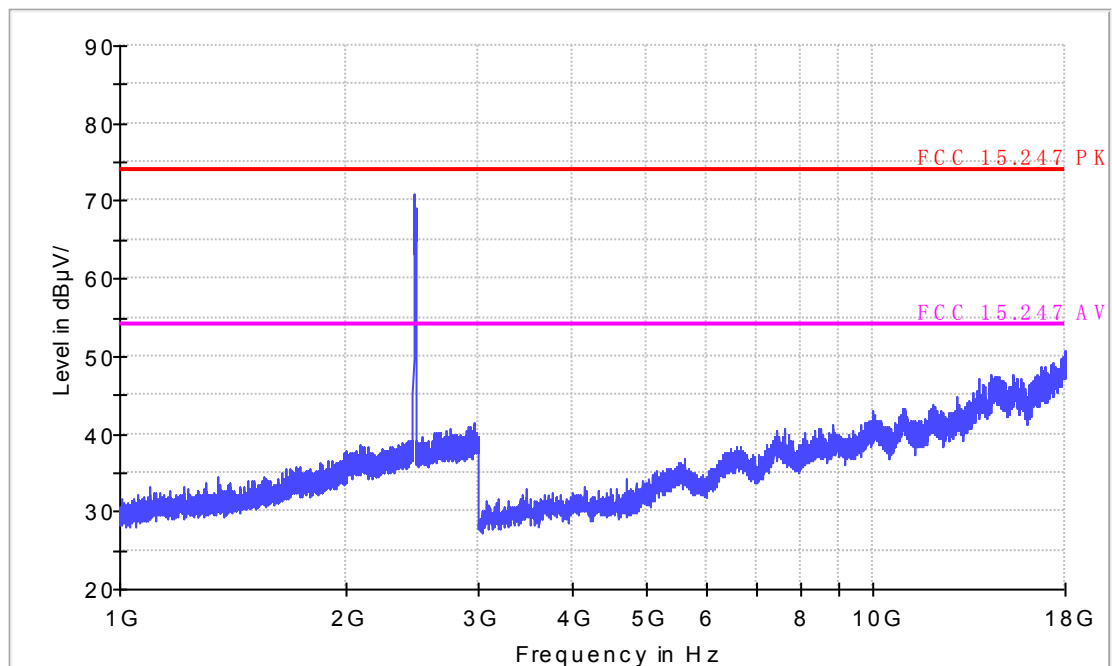

1-18G

11n-HT40

CH3

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

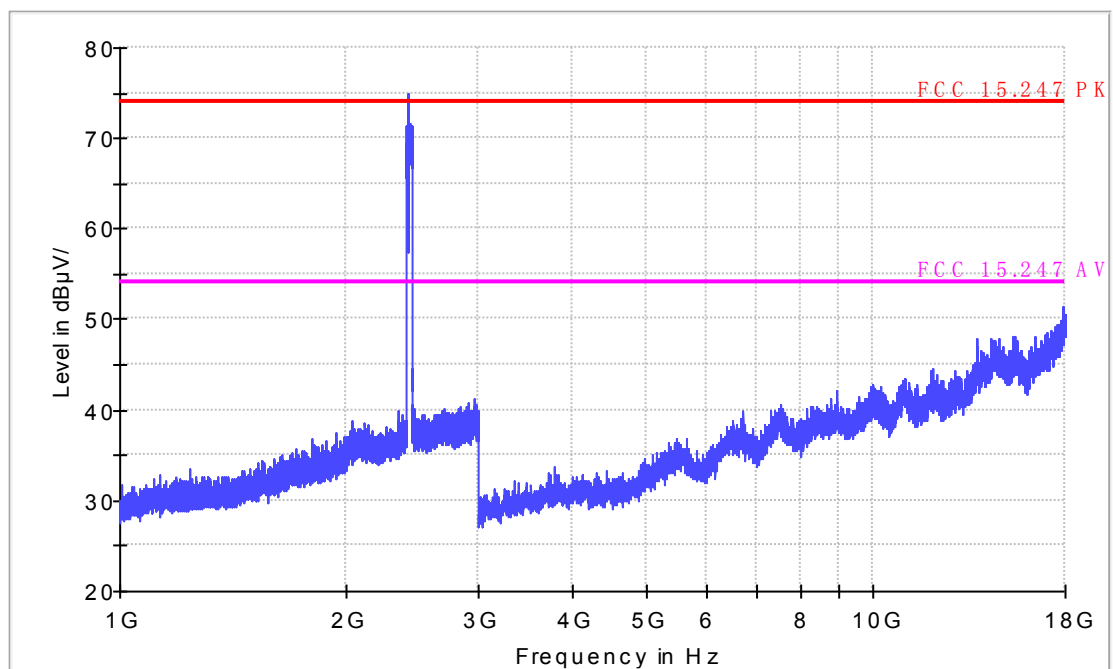

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT20 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

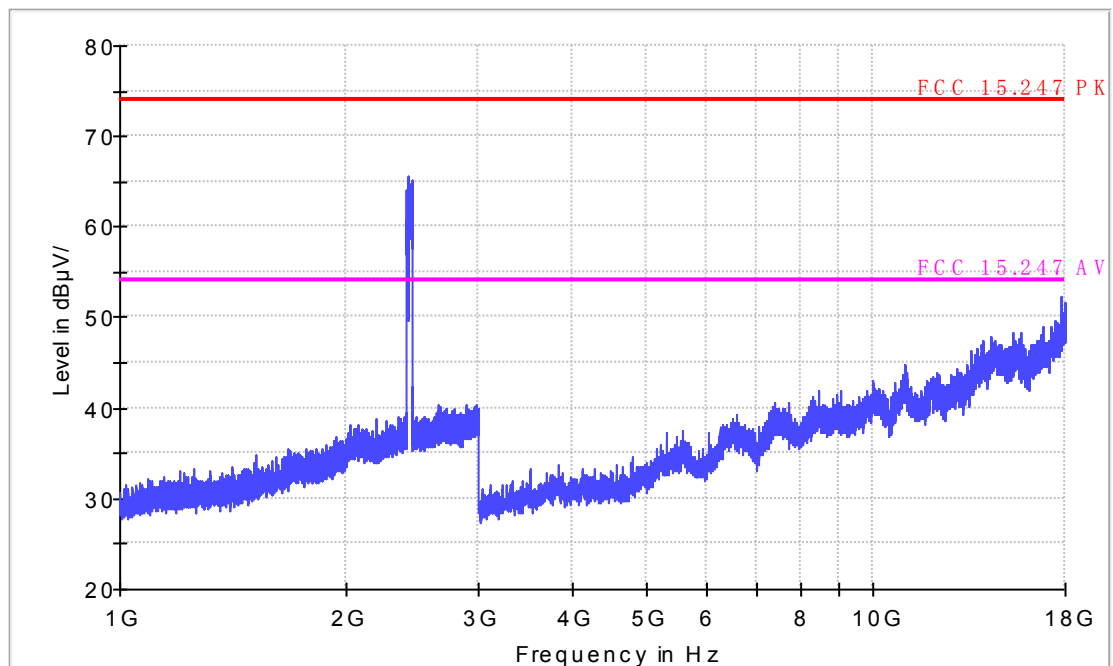

1-18G

11n-HT20

CH6

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT40 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

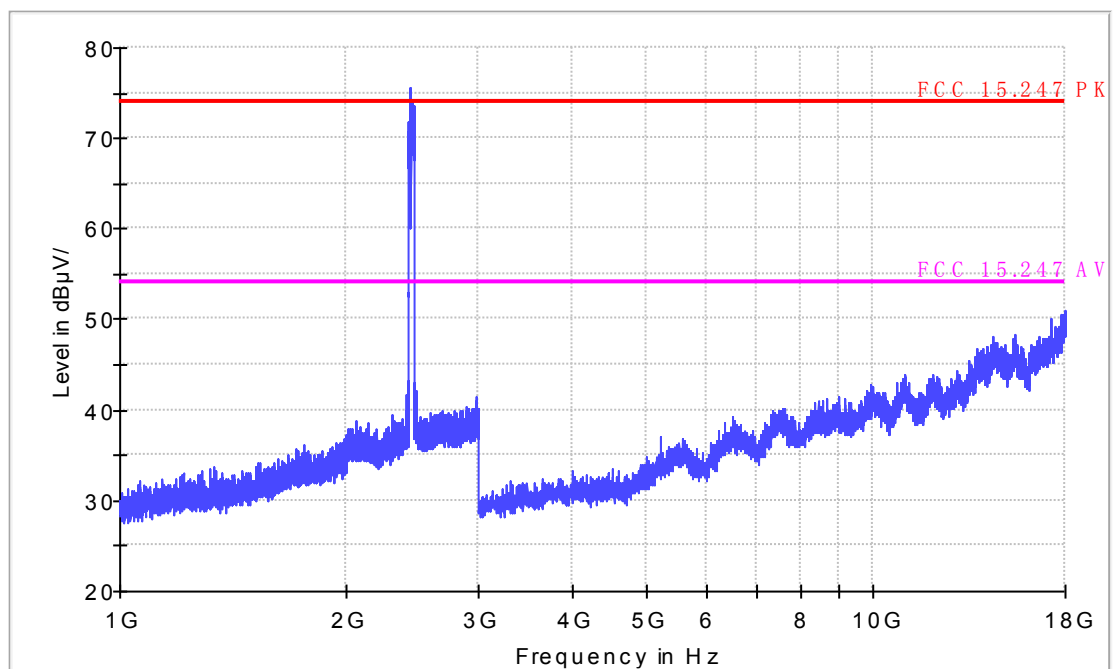

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT40 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

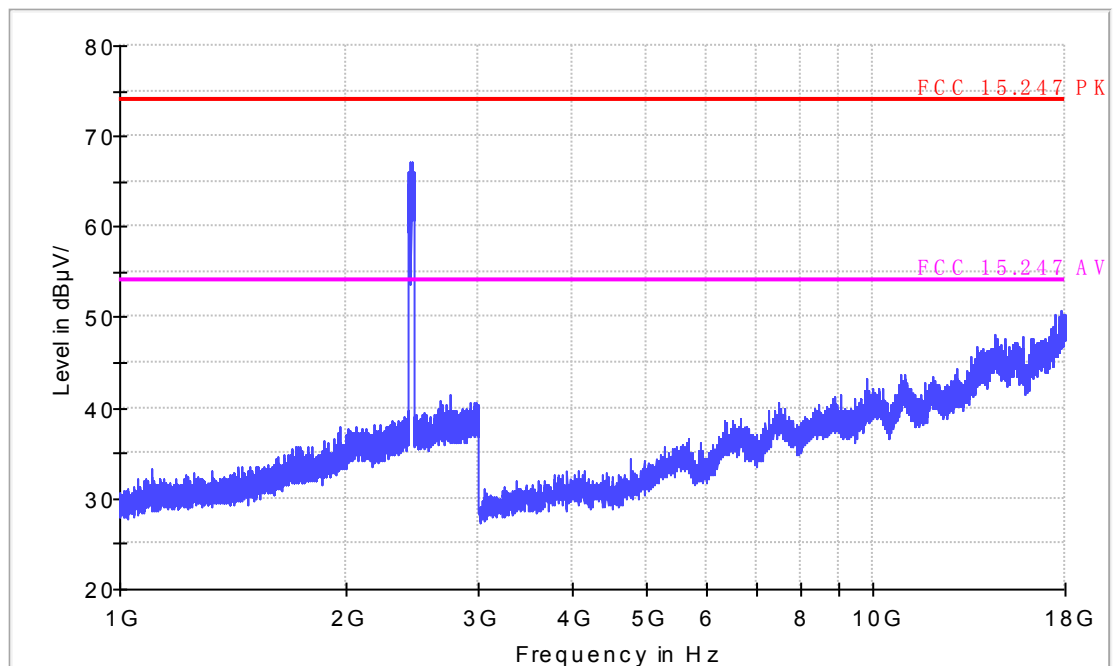

1-18G

11n-HT20

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

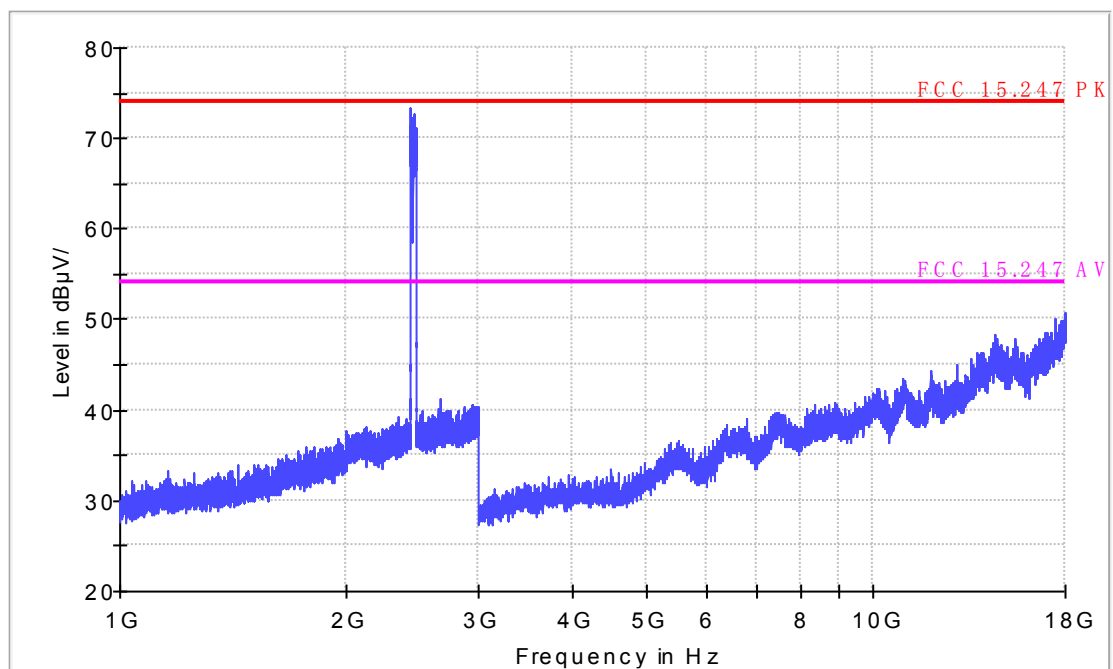

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n HT40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 1-18GHz operate on 2.4GHz

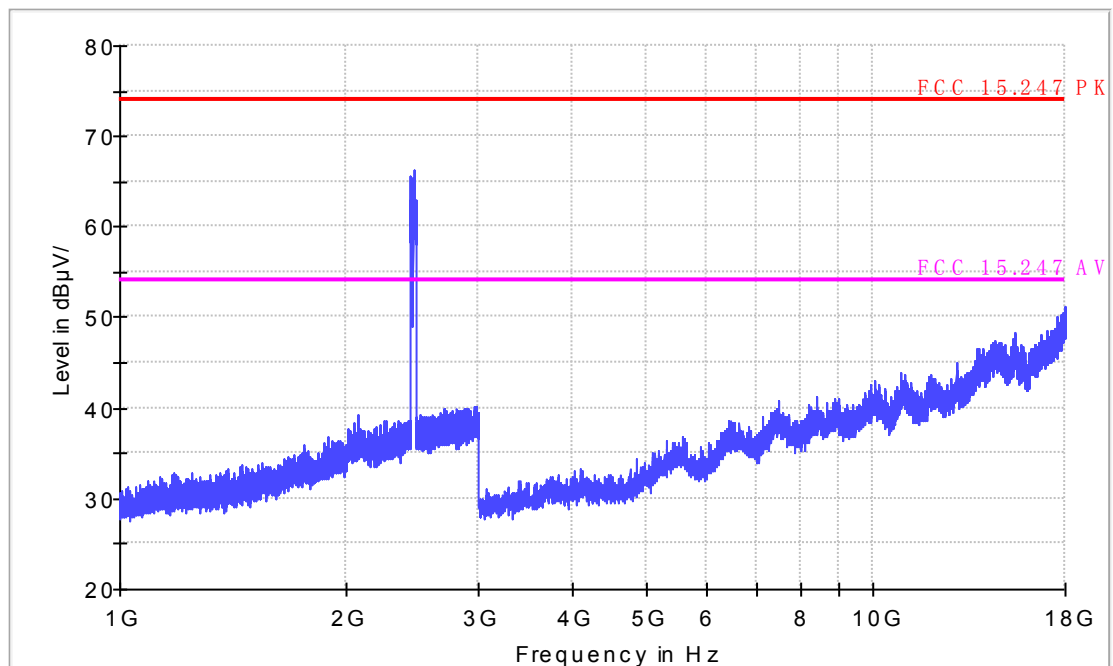

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

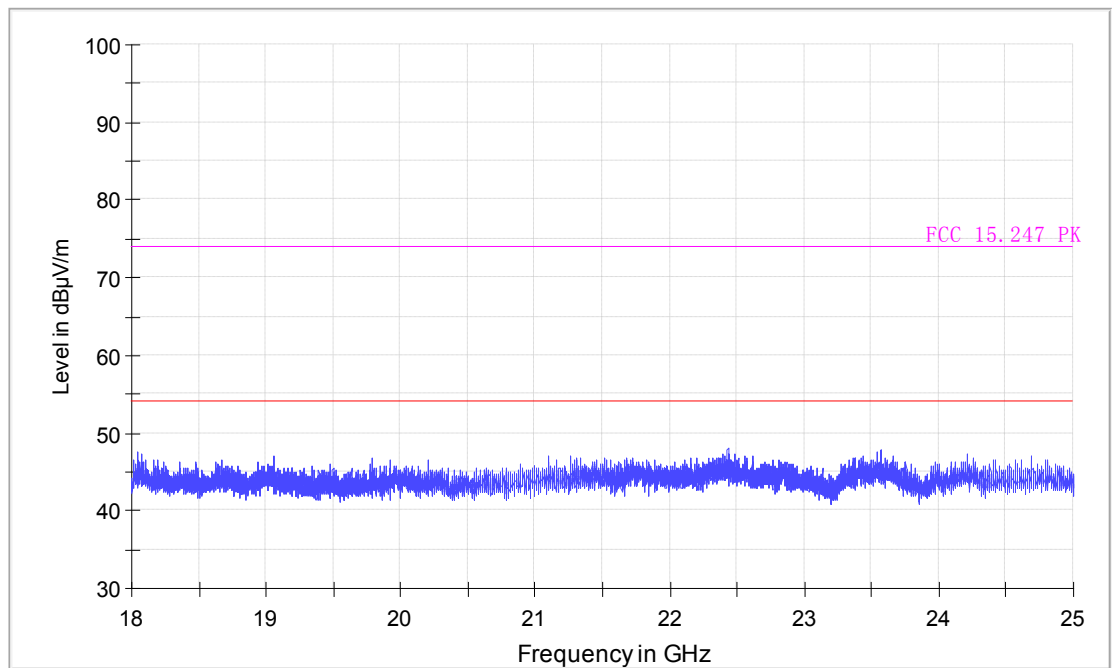

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

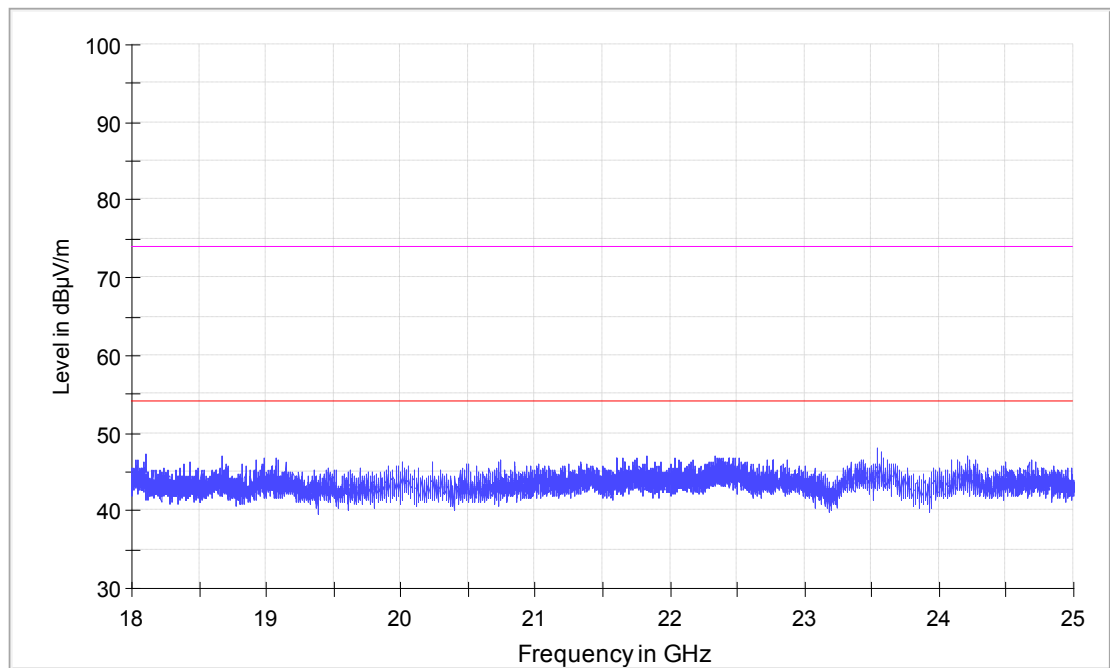

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11b CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

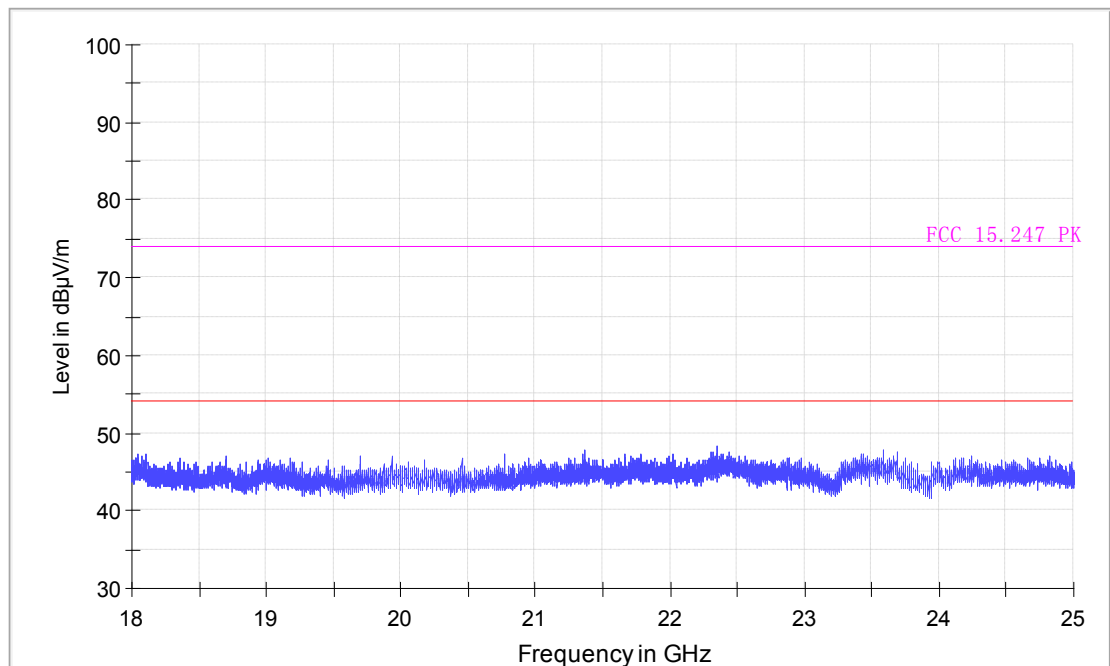

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11b CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

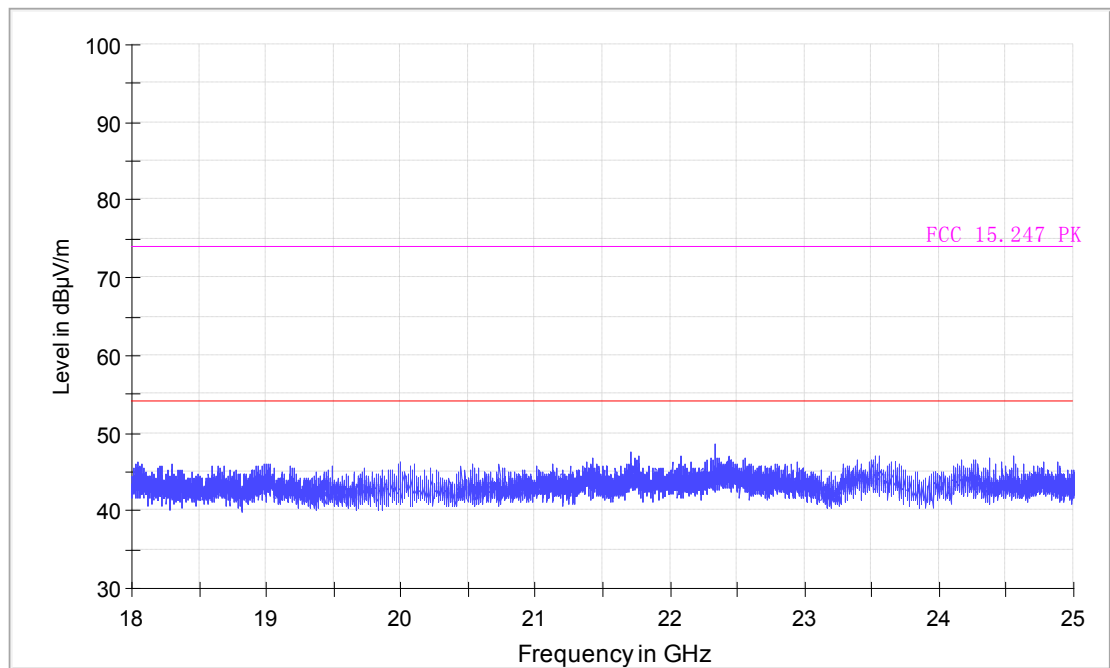

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

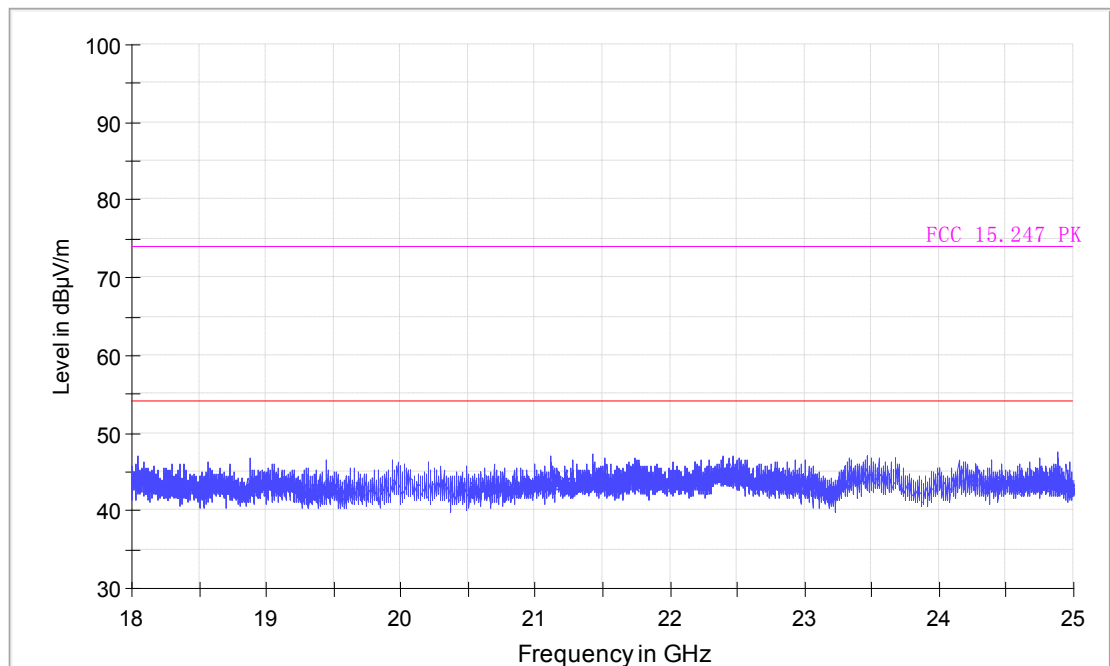

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

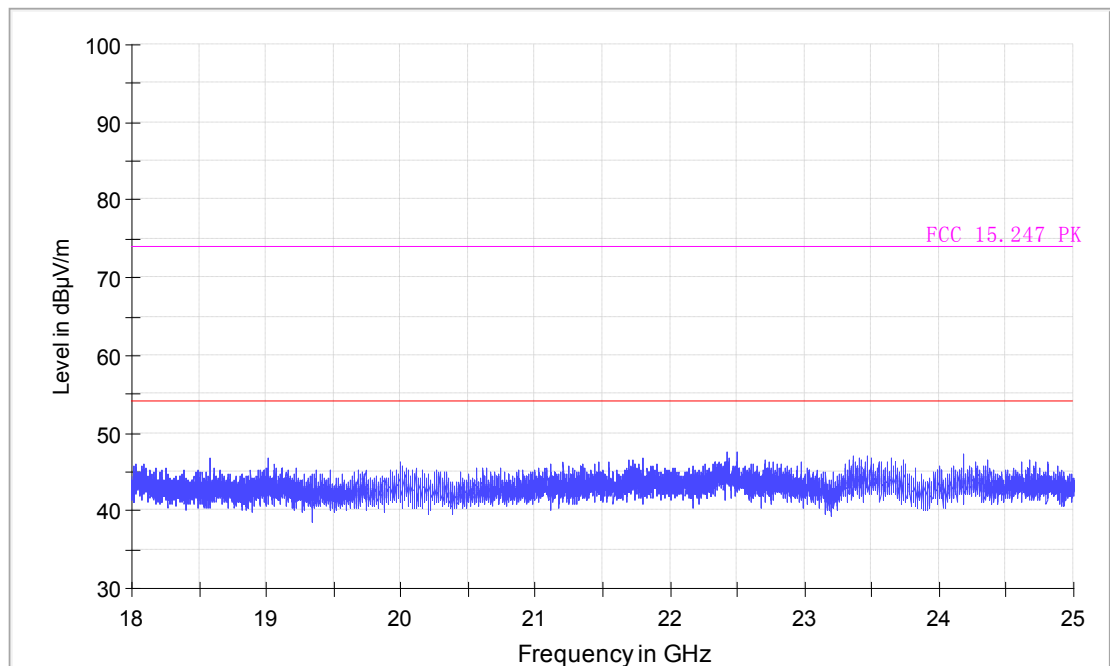

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11q CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

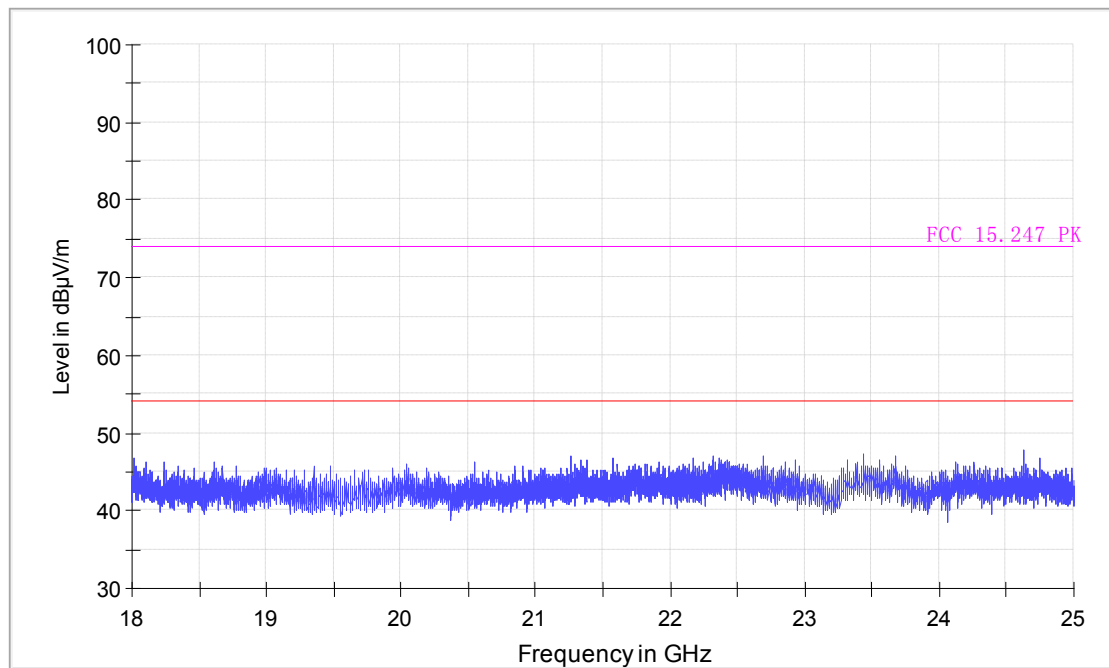

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11q CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

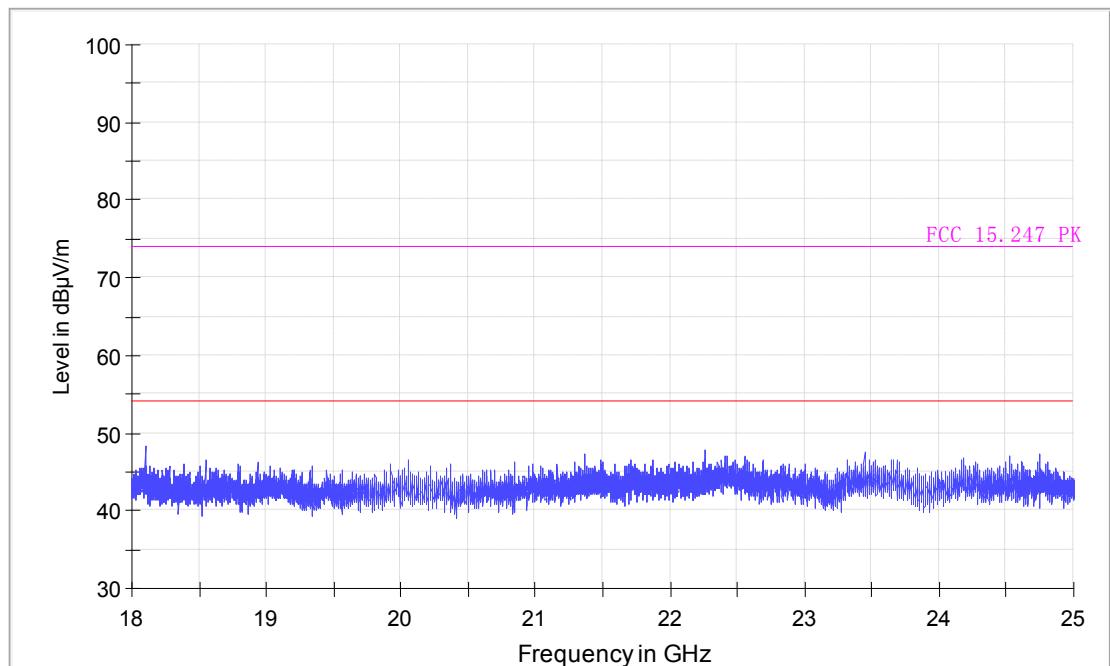

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11qCH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

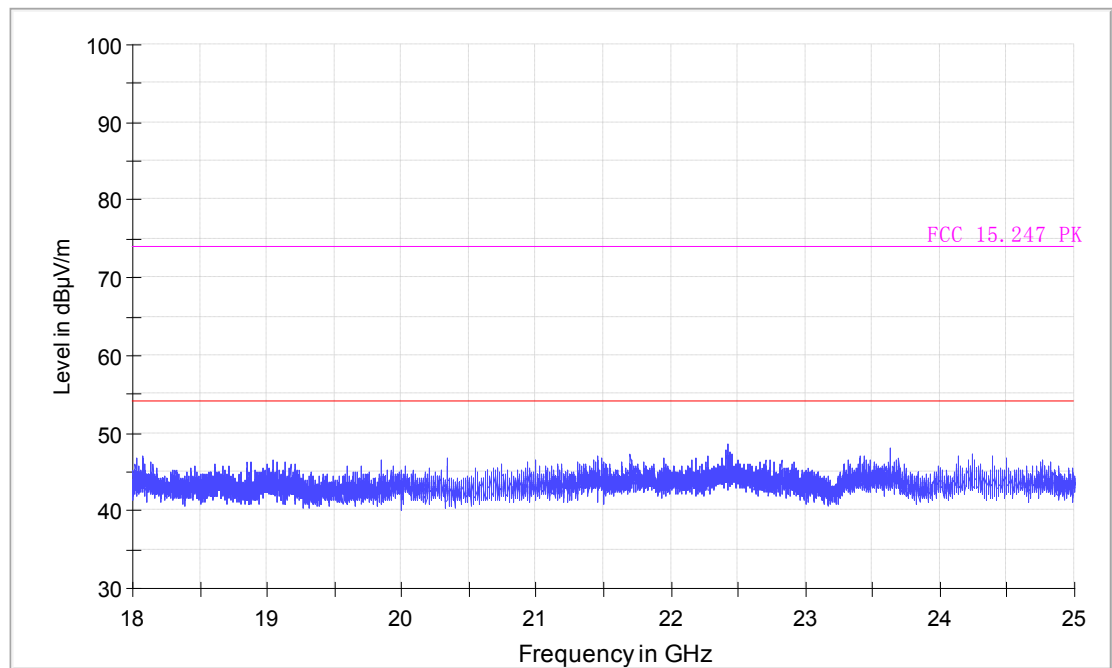

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11qCH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

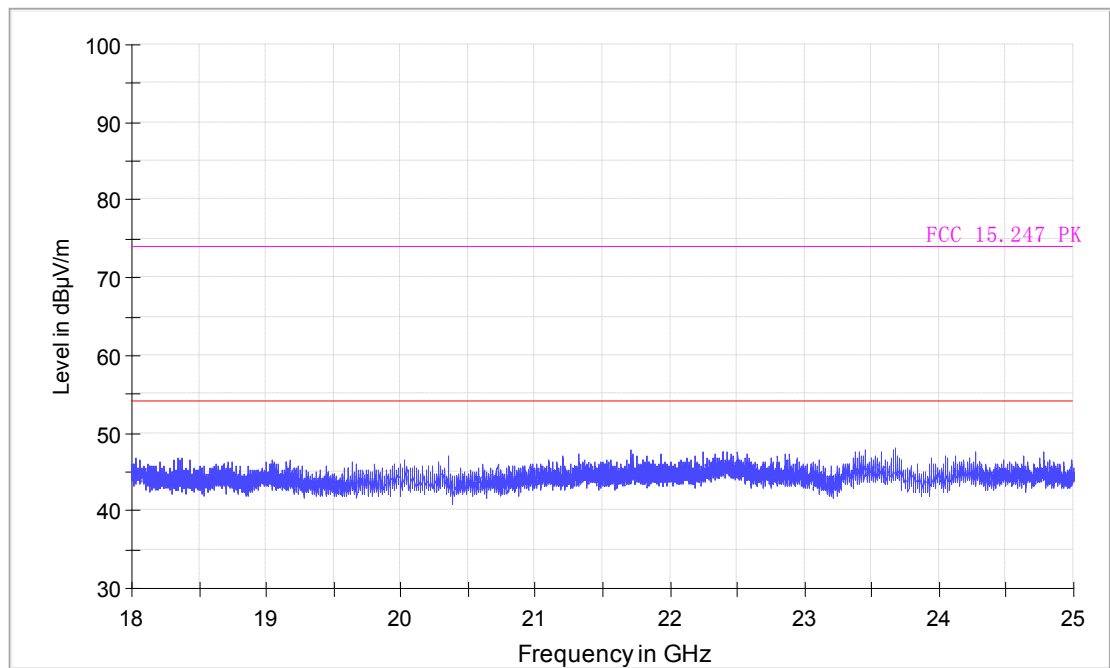

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11q CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

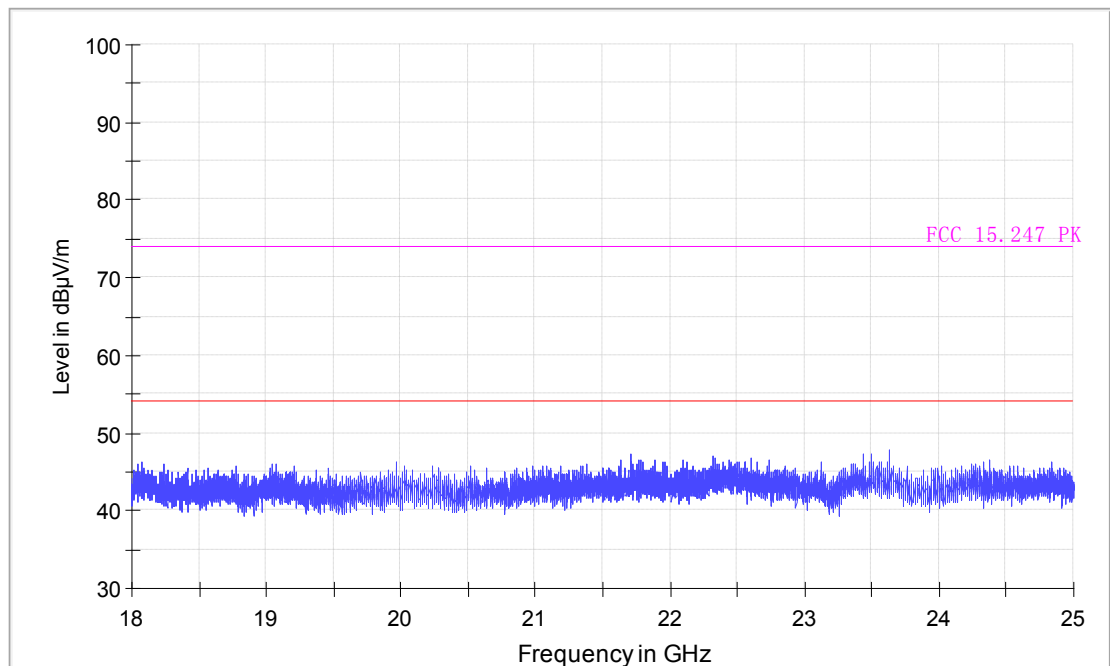

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11q CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

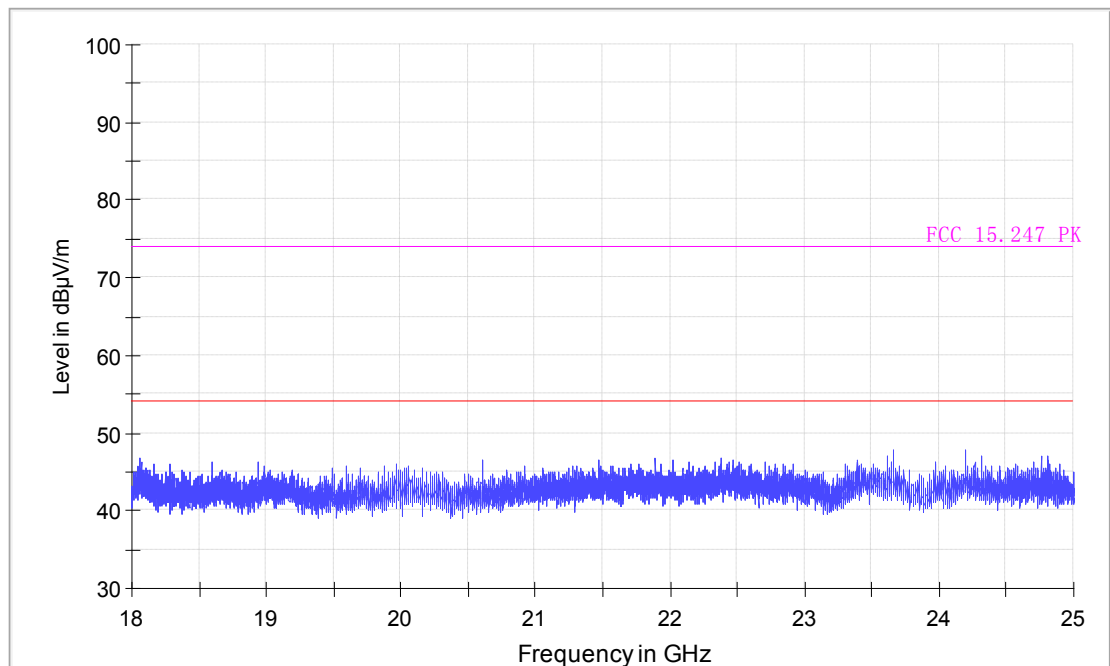

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

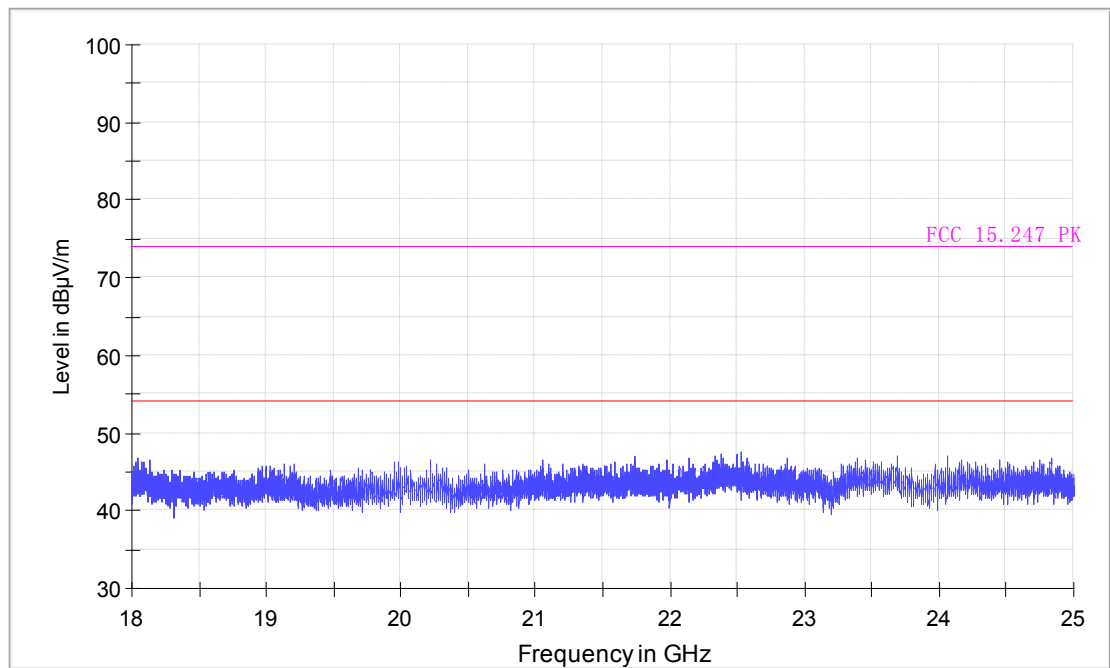

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

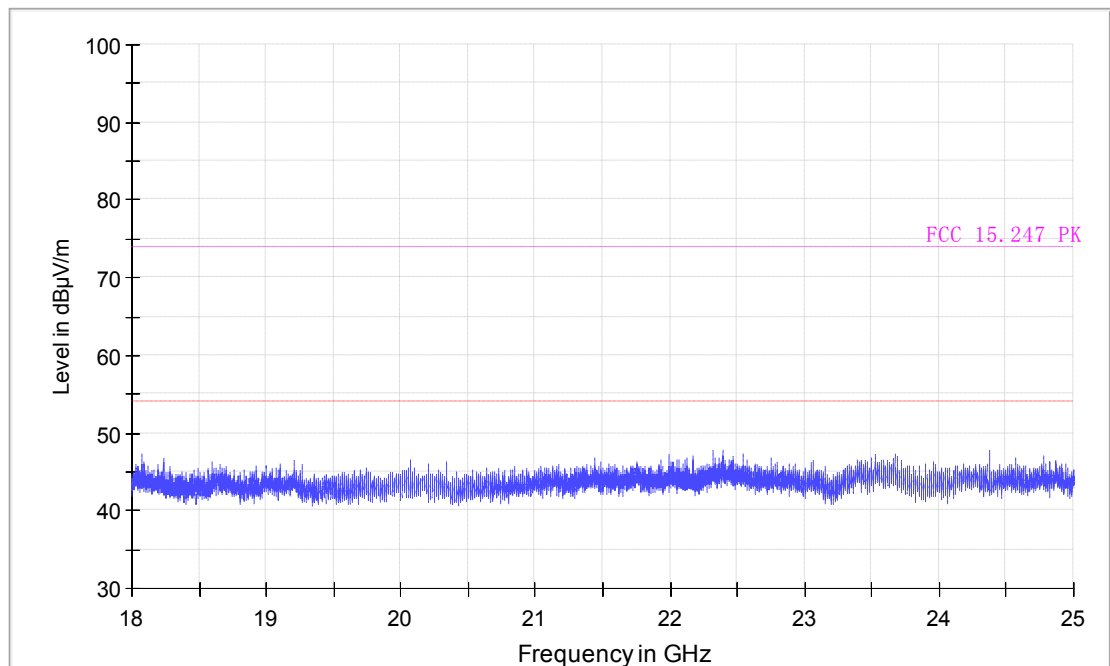

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT20 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

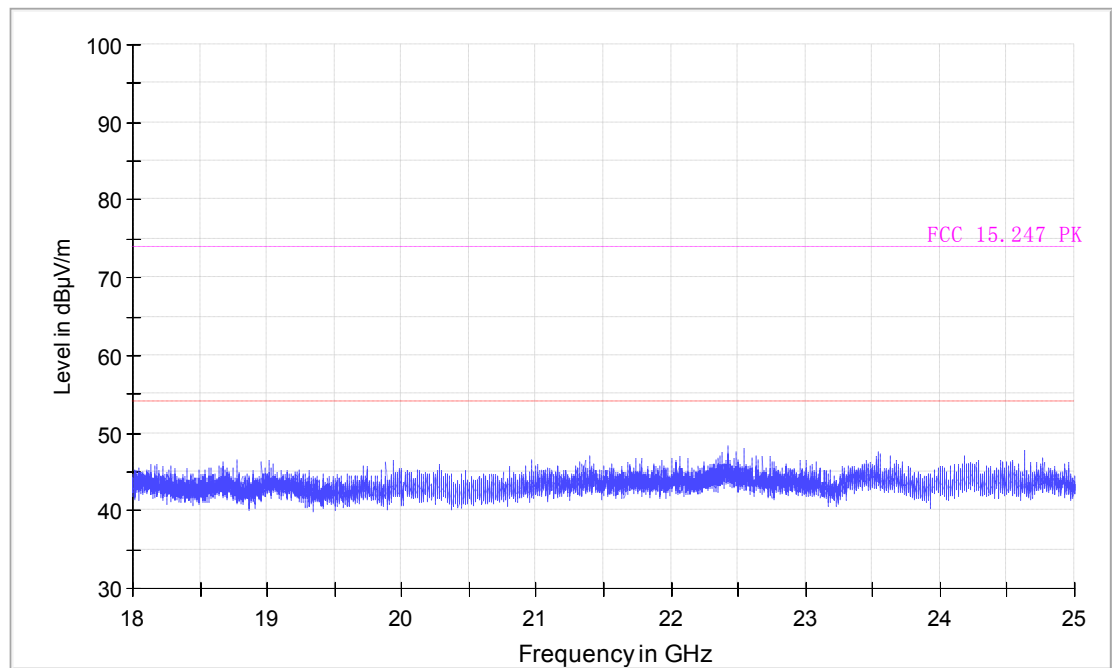

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT20 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

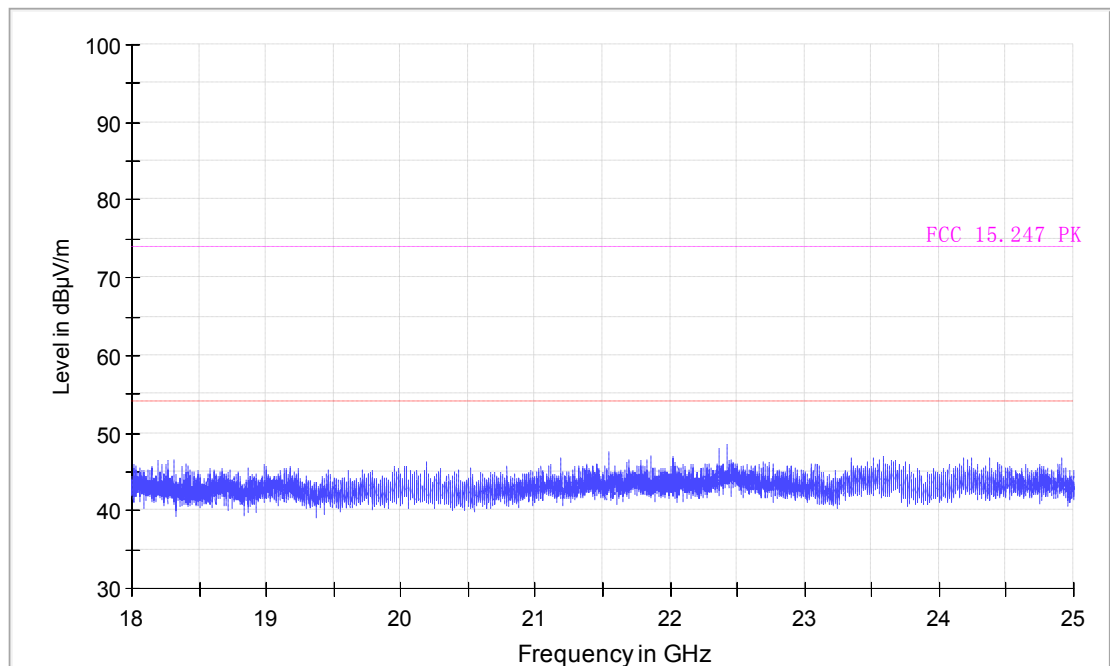

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

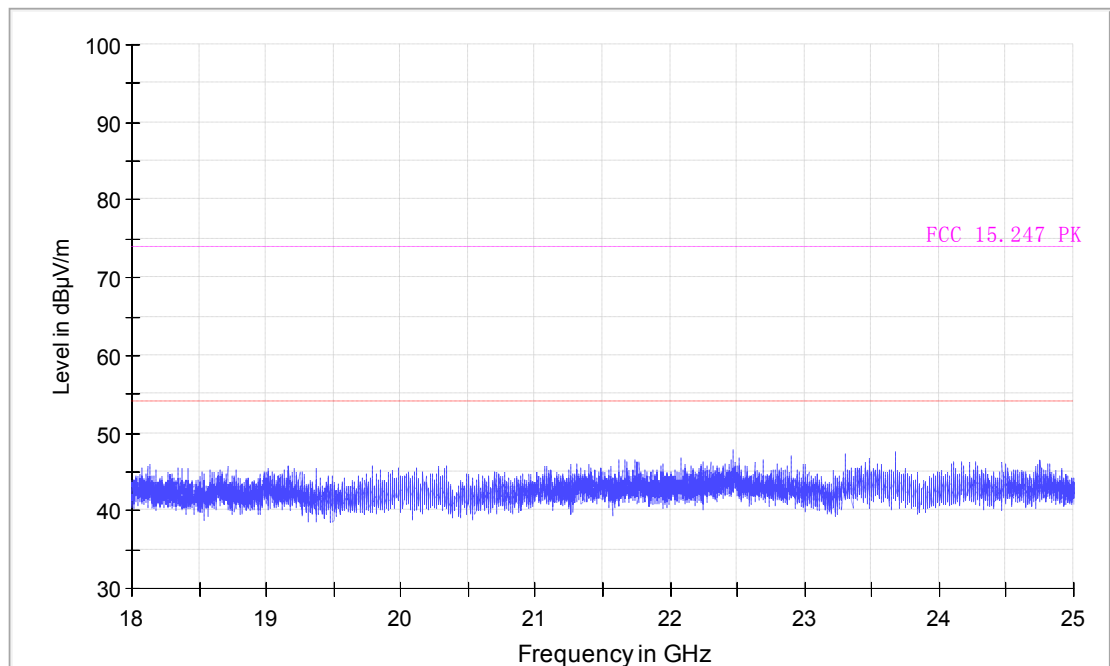

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

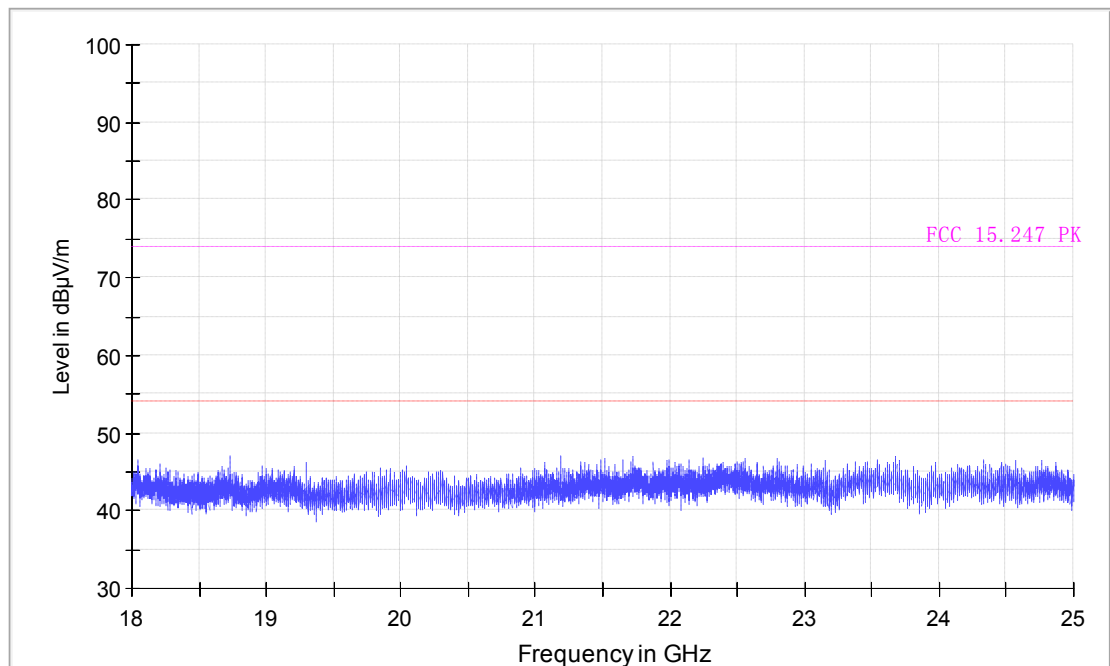

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

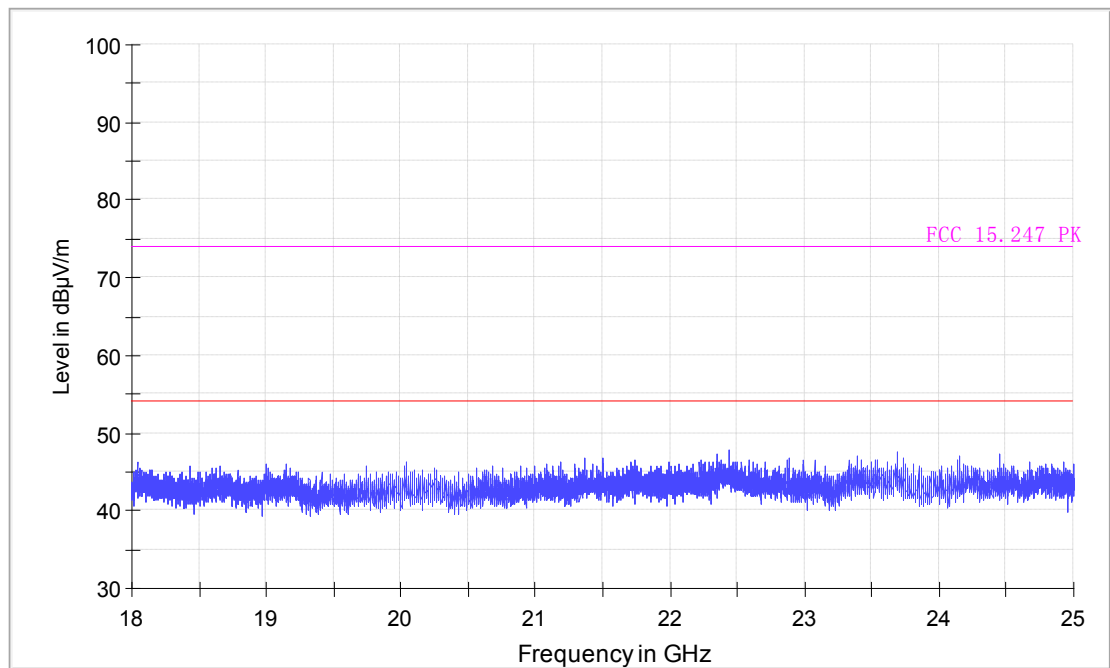

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

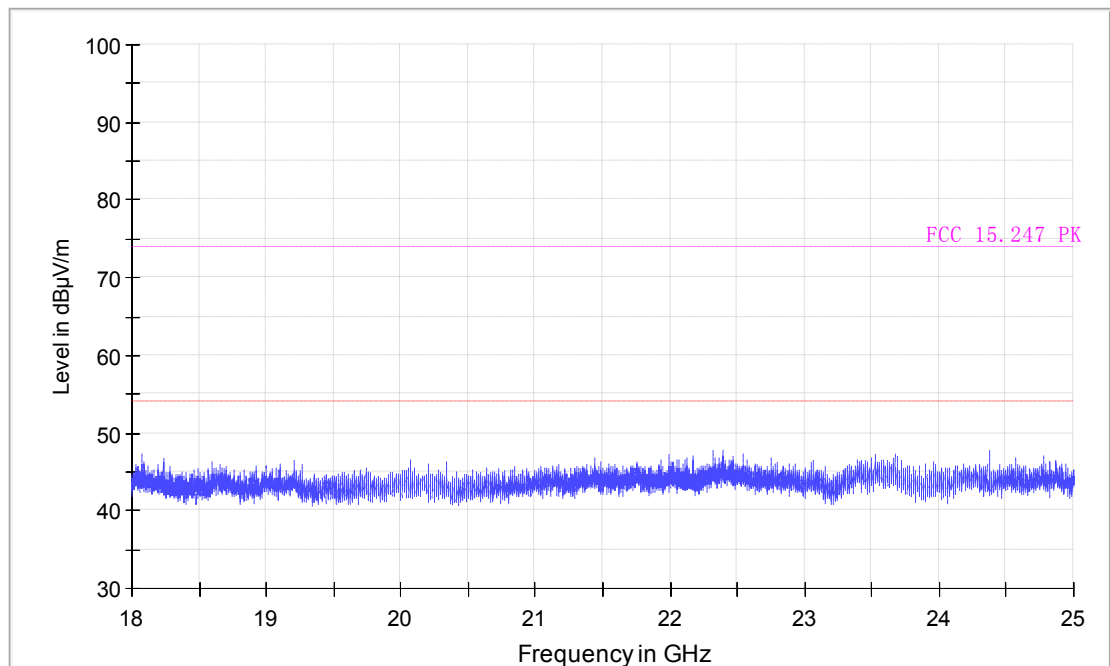

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT40 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

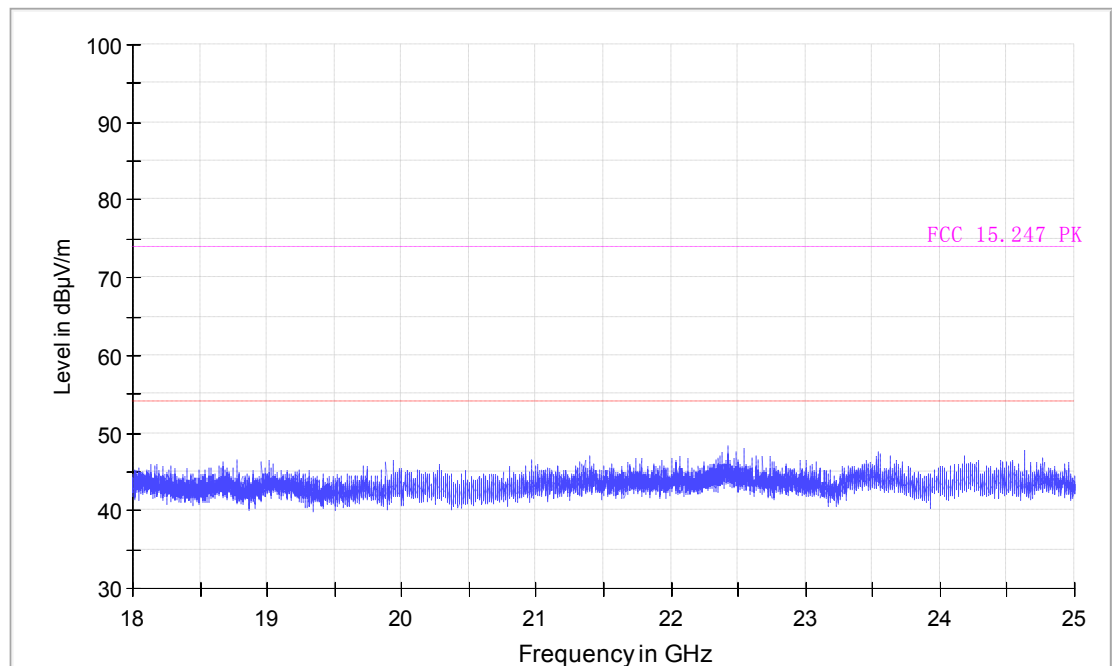

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT40 CH6
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

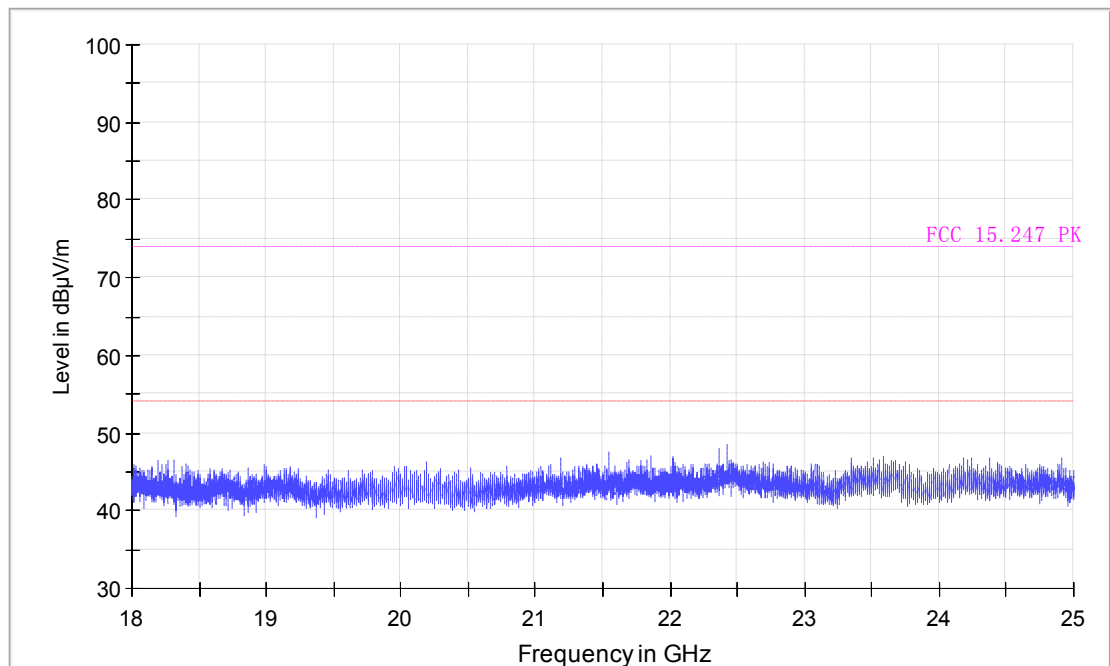

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

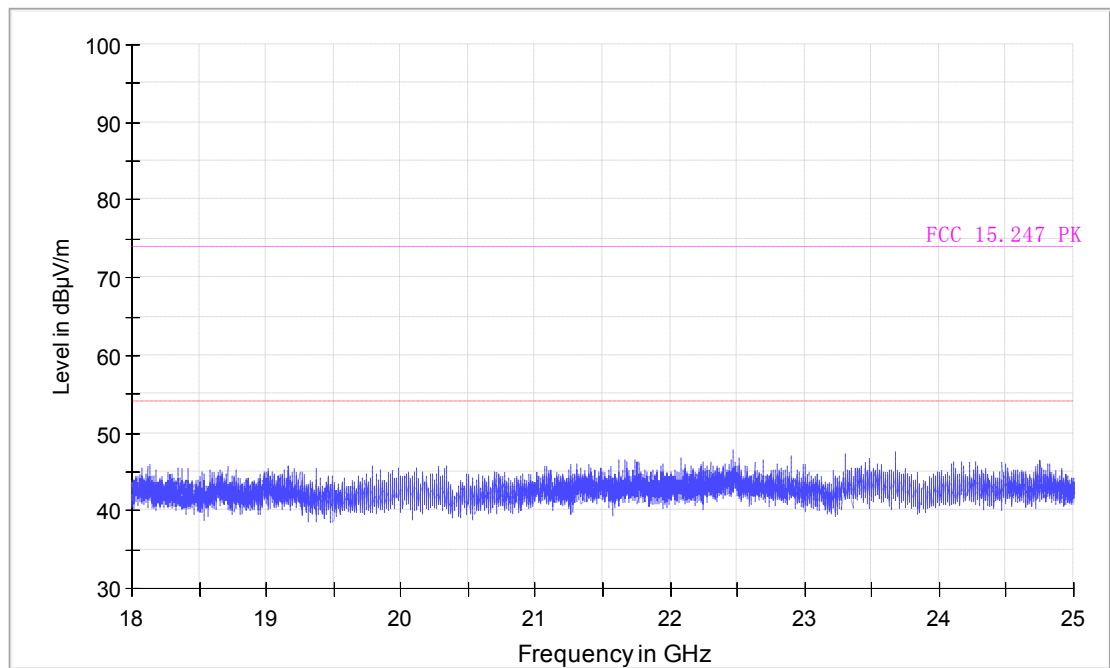

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: 11n-HT40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 18-26.5GHz

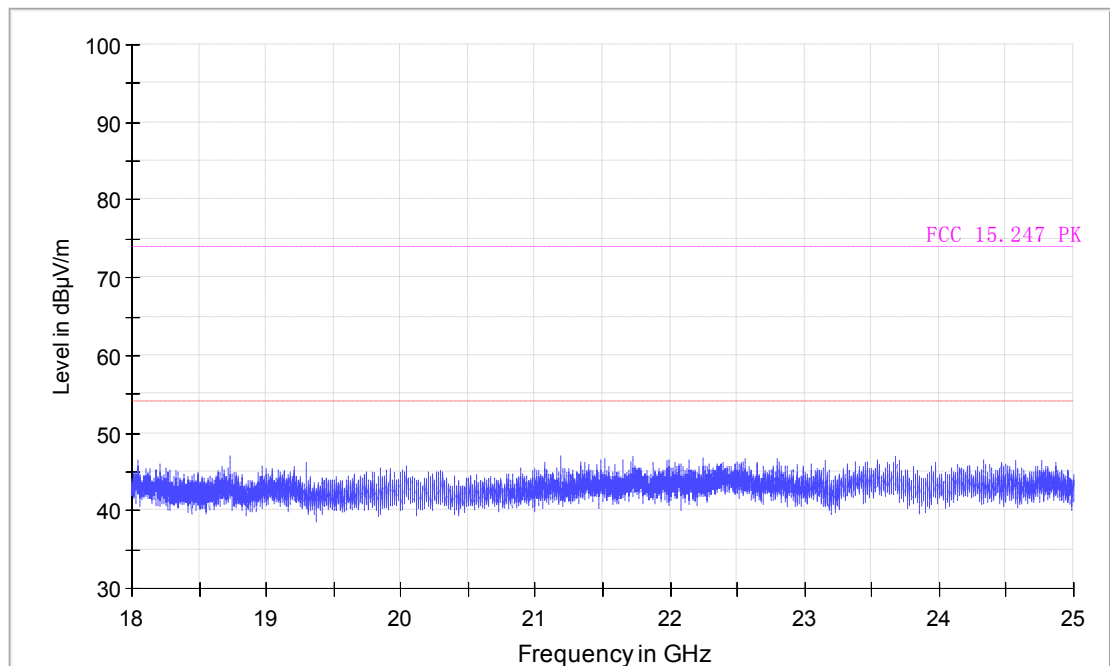

Band edge

11b

CH1

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

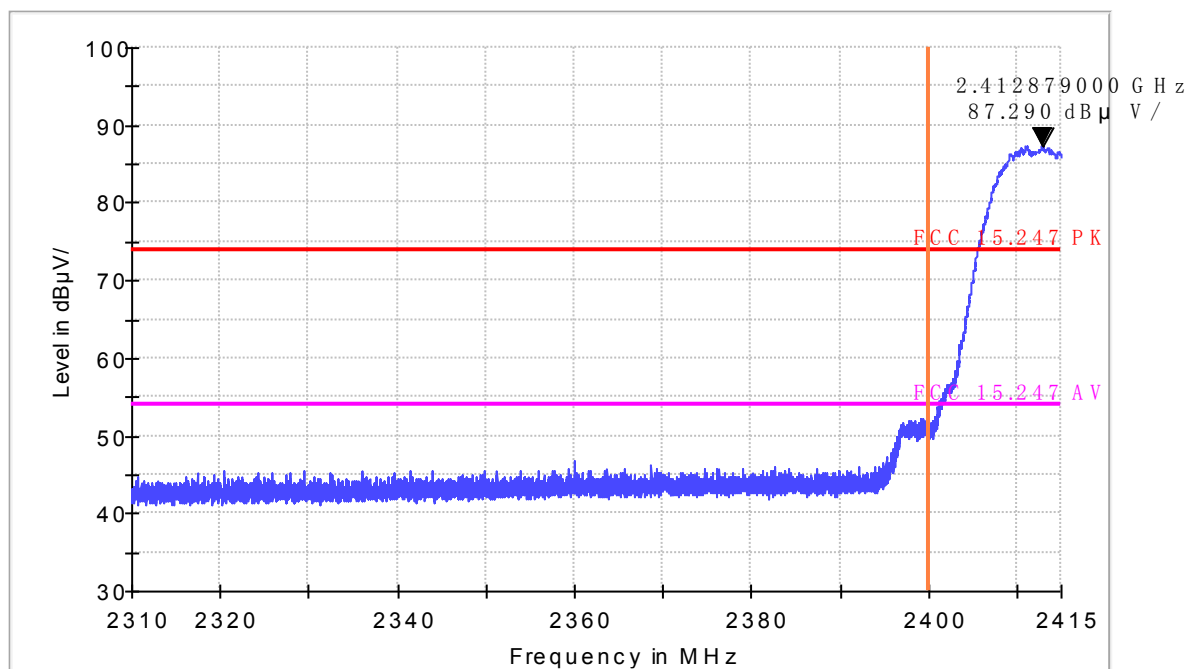

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

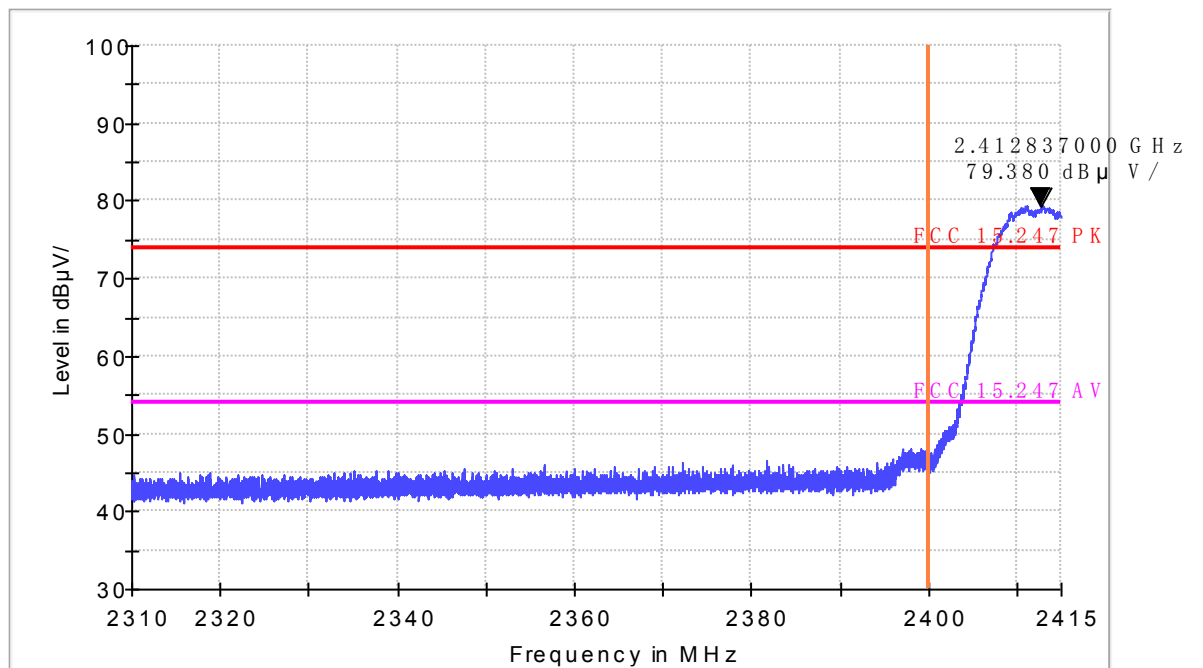

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

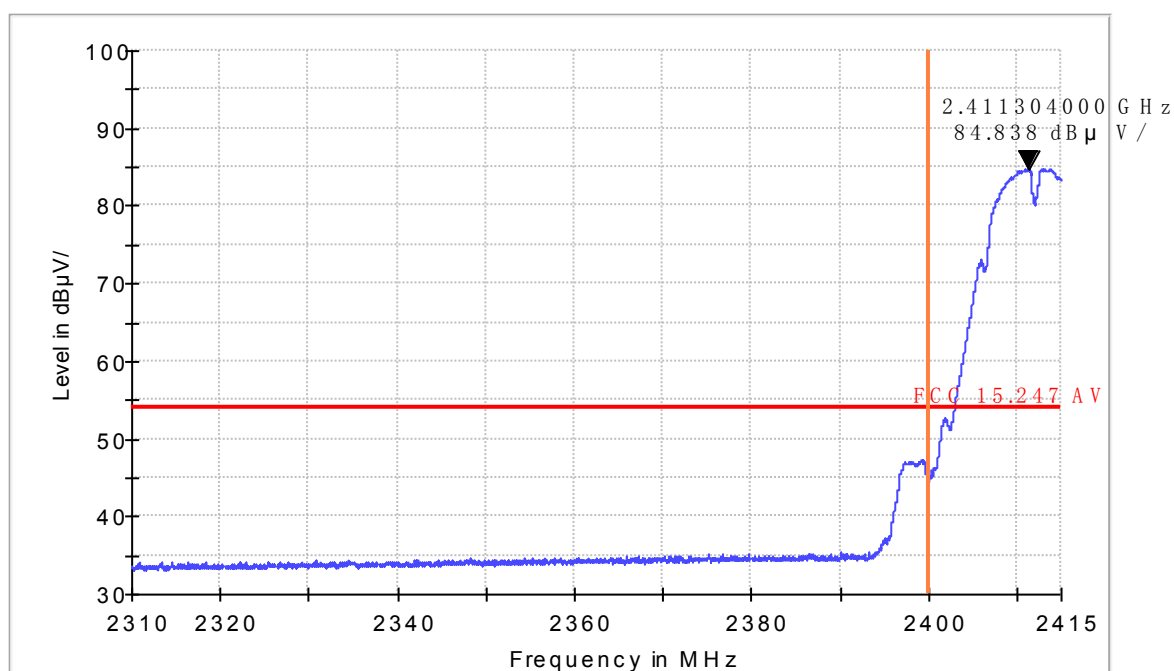

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

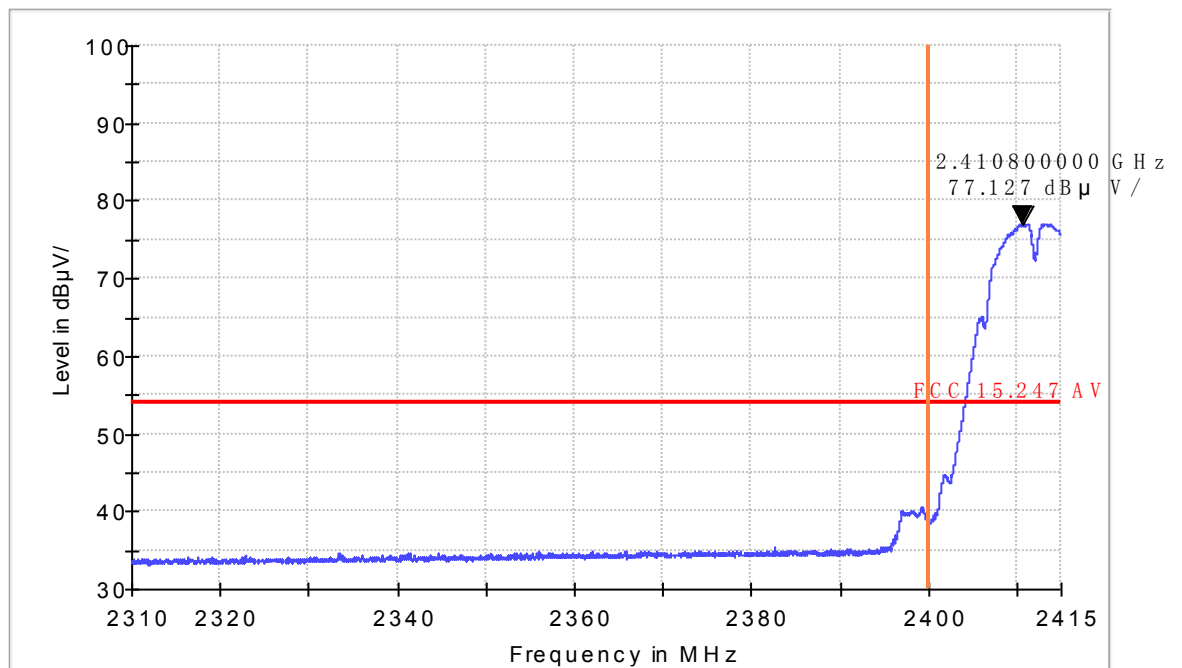

Band edge

11g

CH1

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

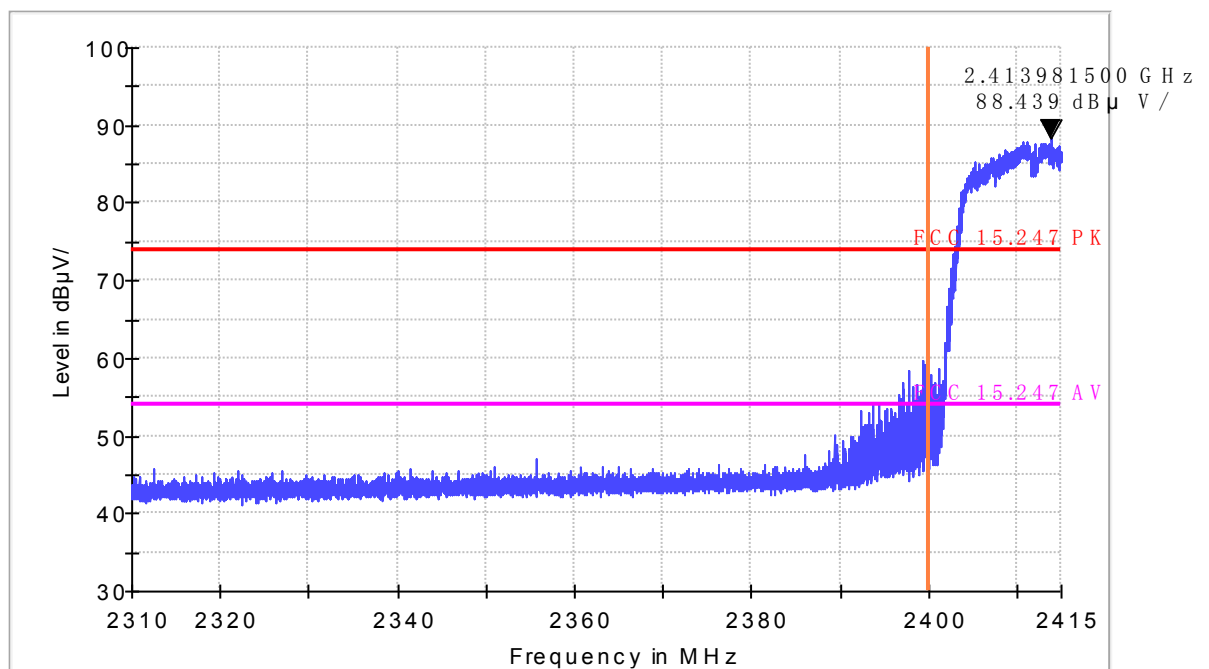

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

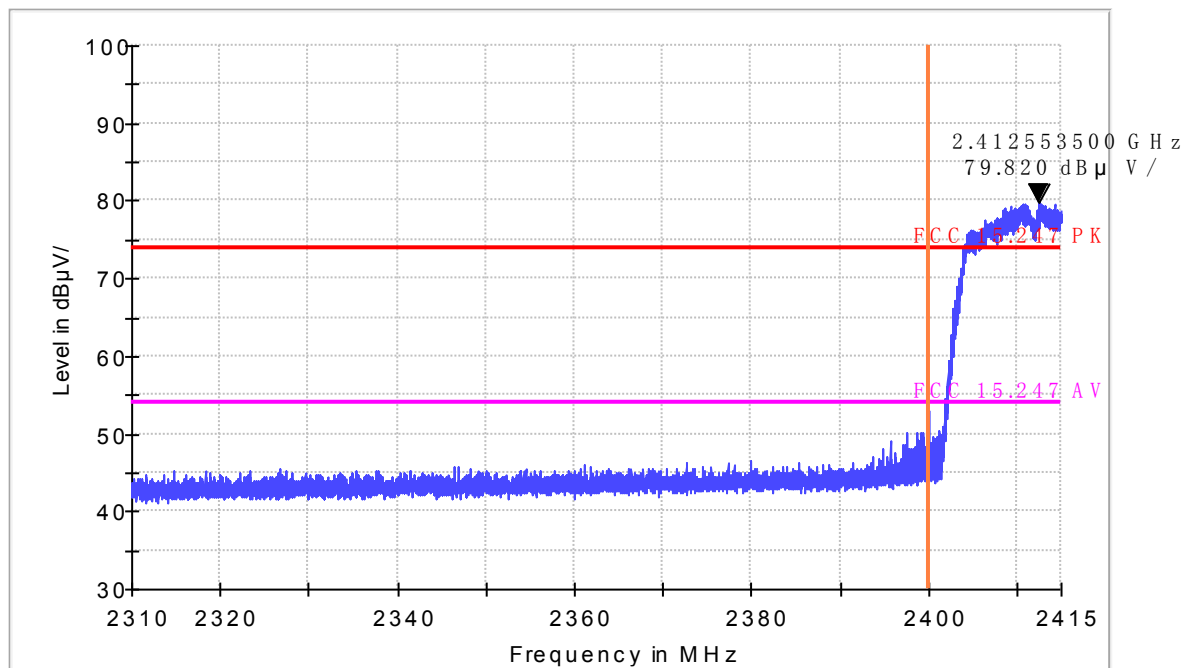

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

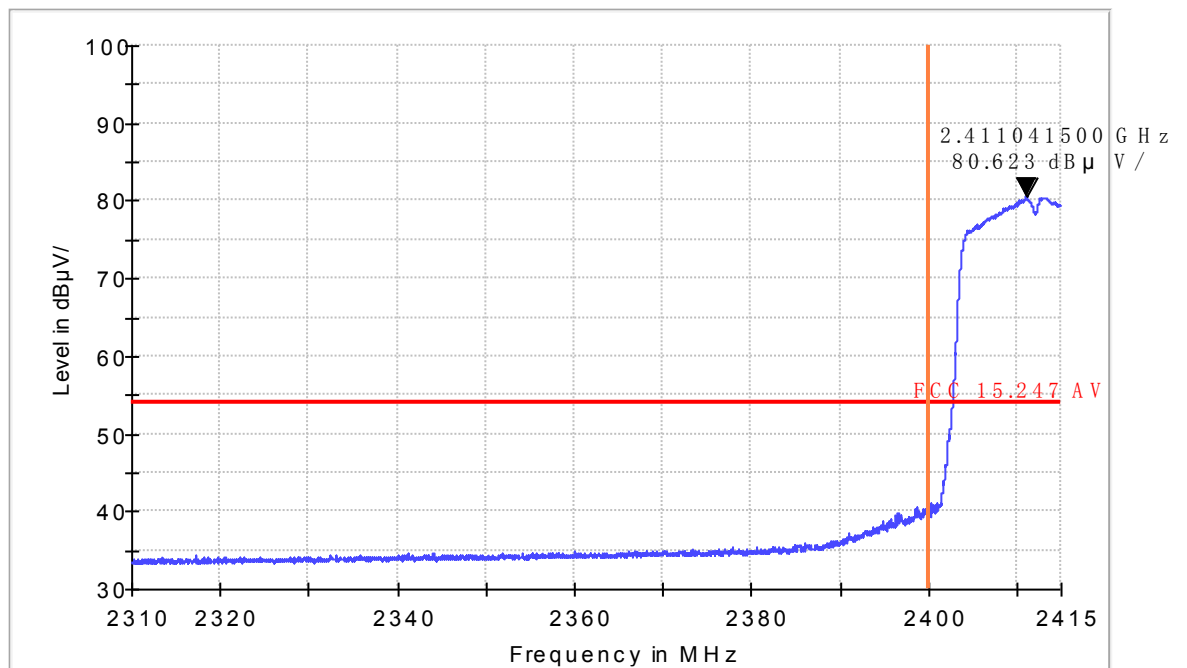

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

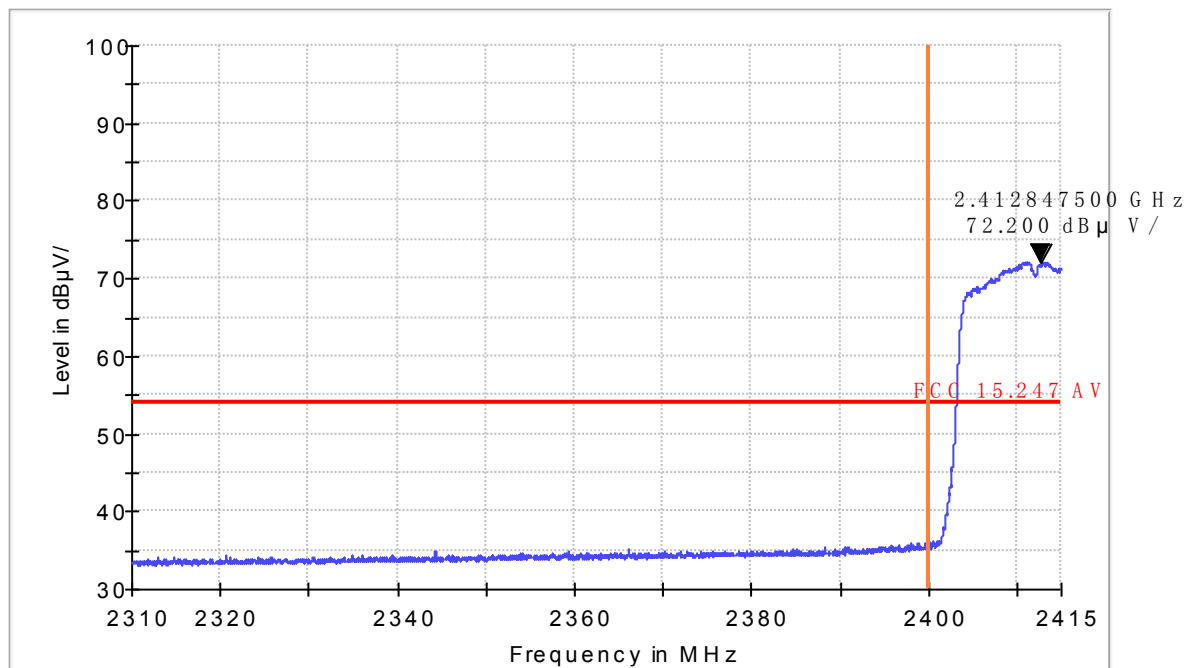

Band edge

11n-HT20

CH1

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

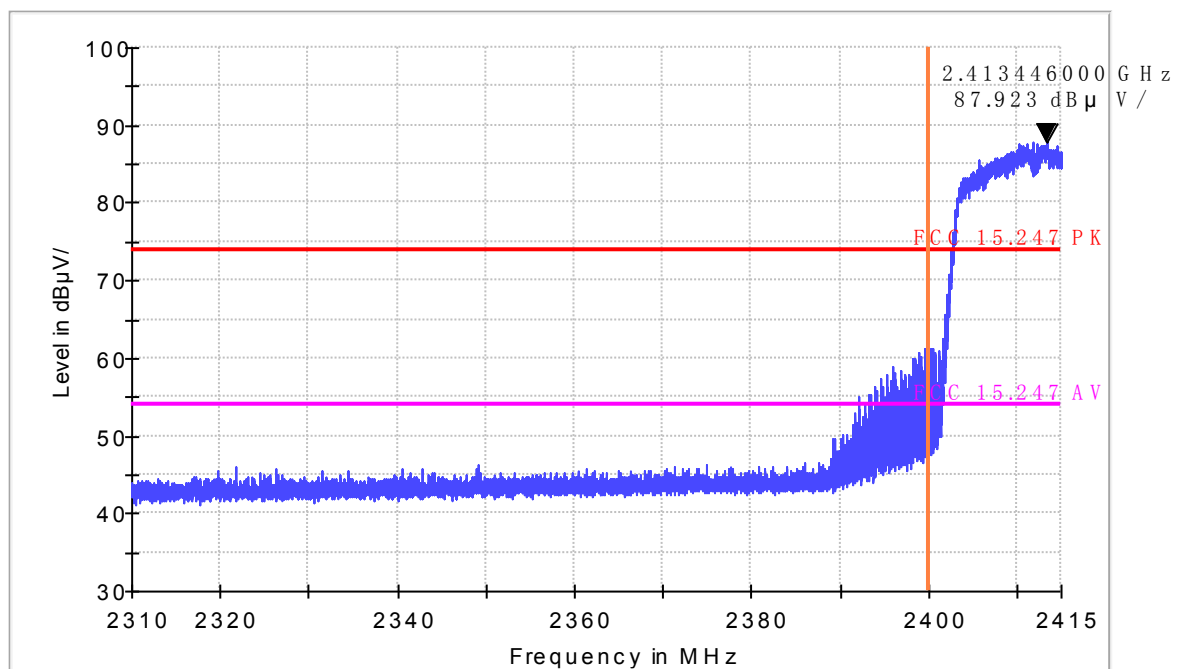

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

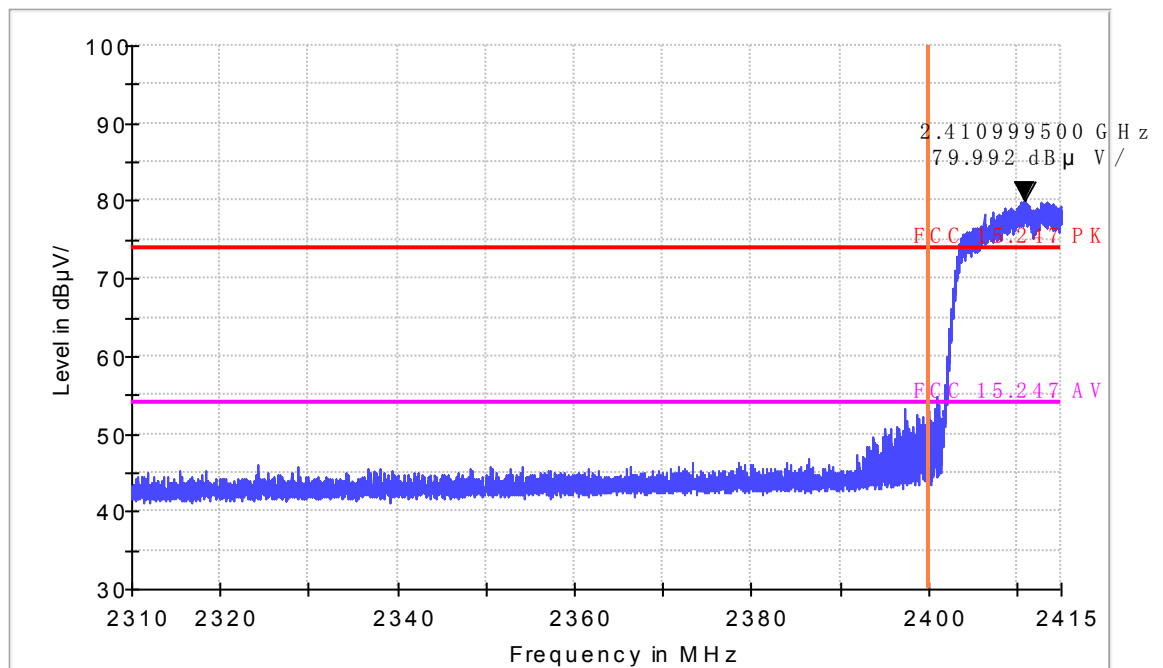

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

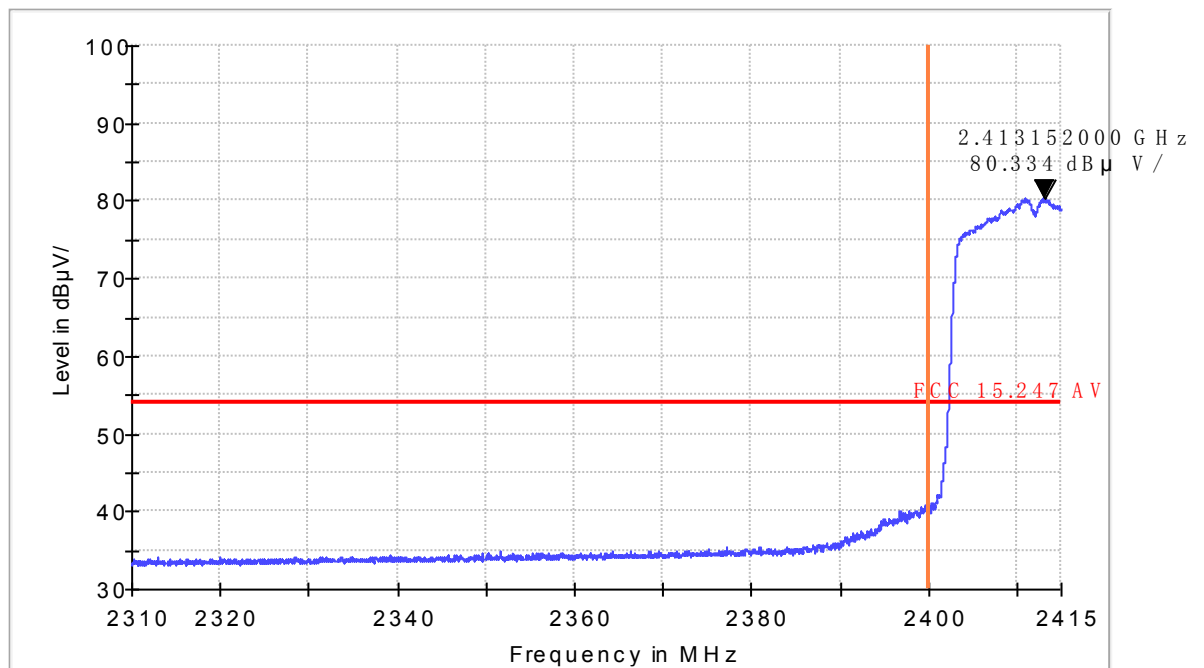

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH1
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

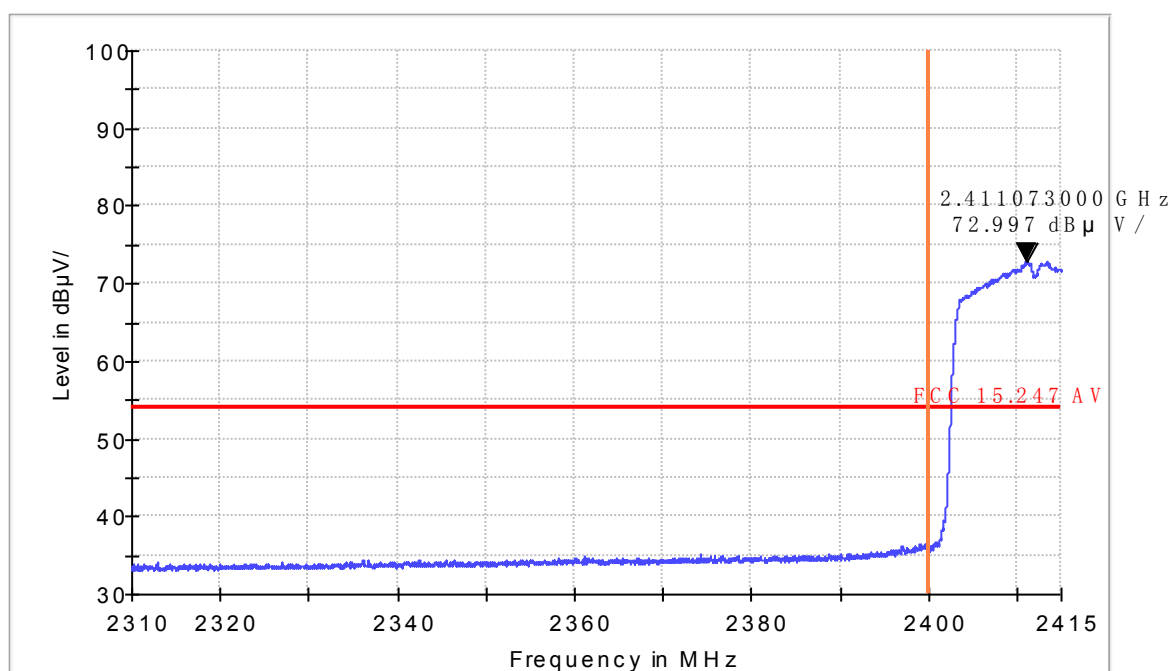

Band edge

11n-HT40

CH3

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

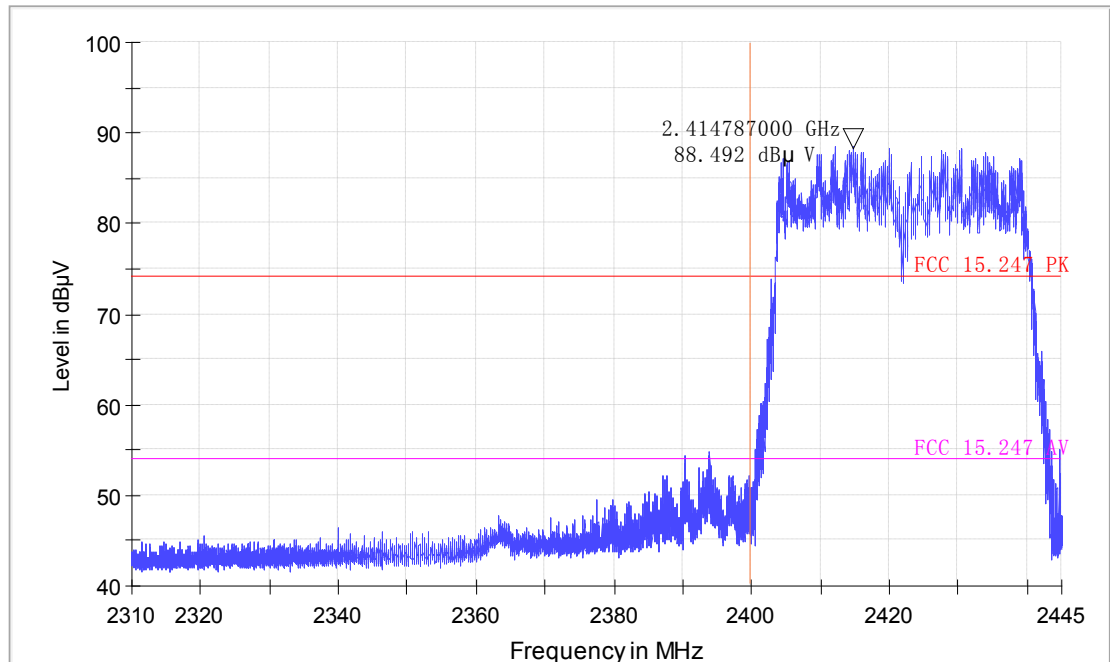

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

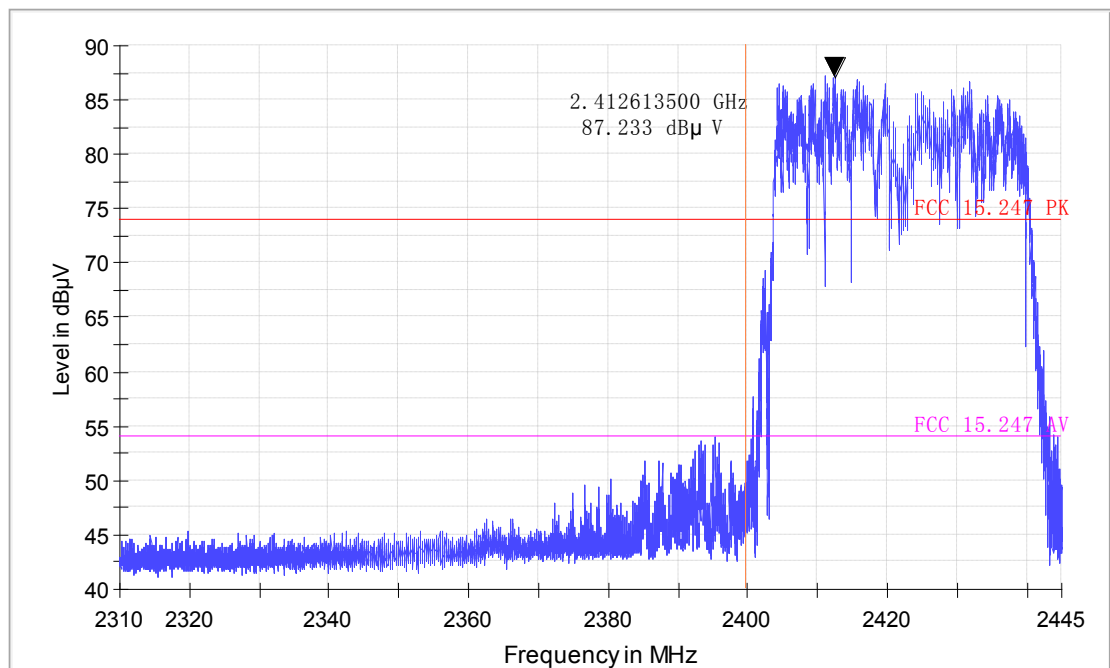

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

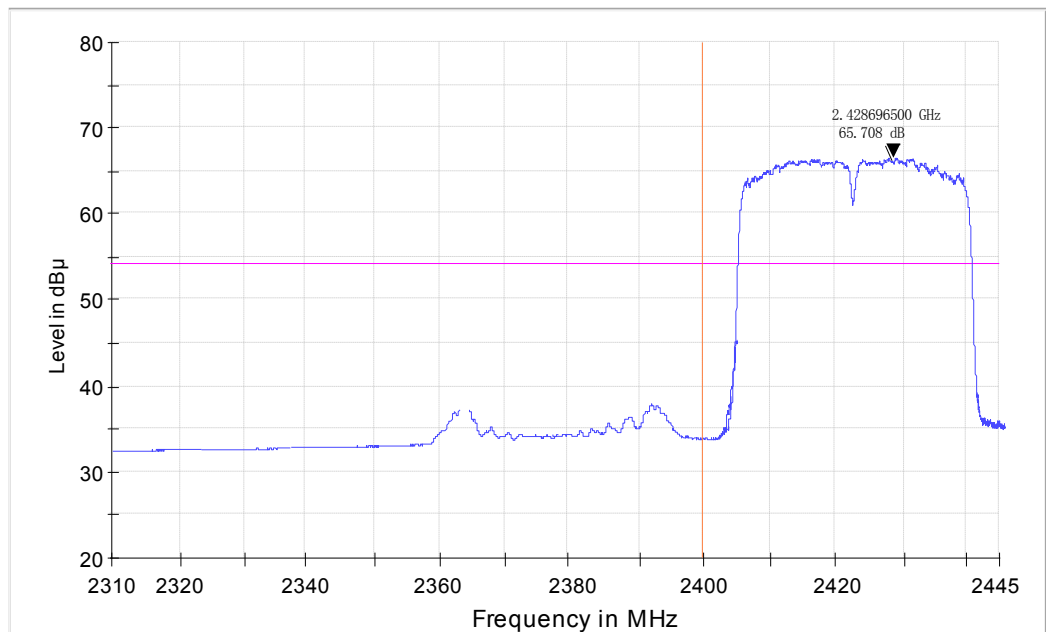

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH3
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

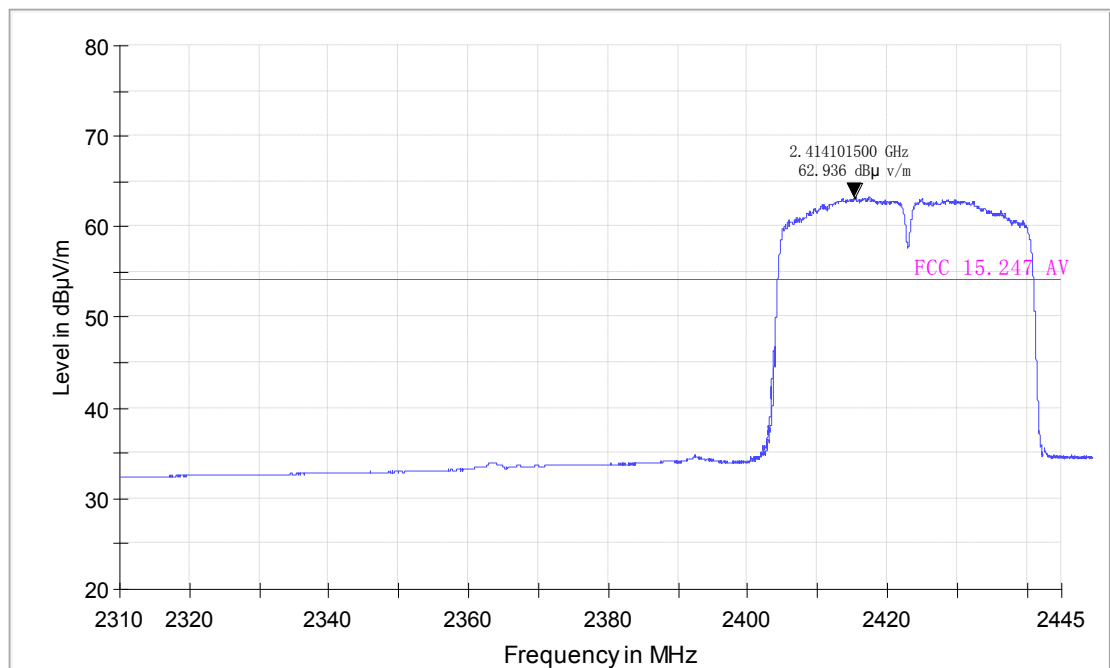

Band edge

11b

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

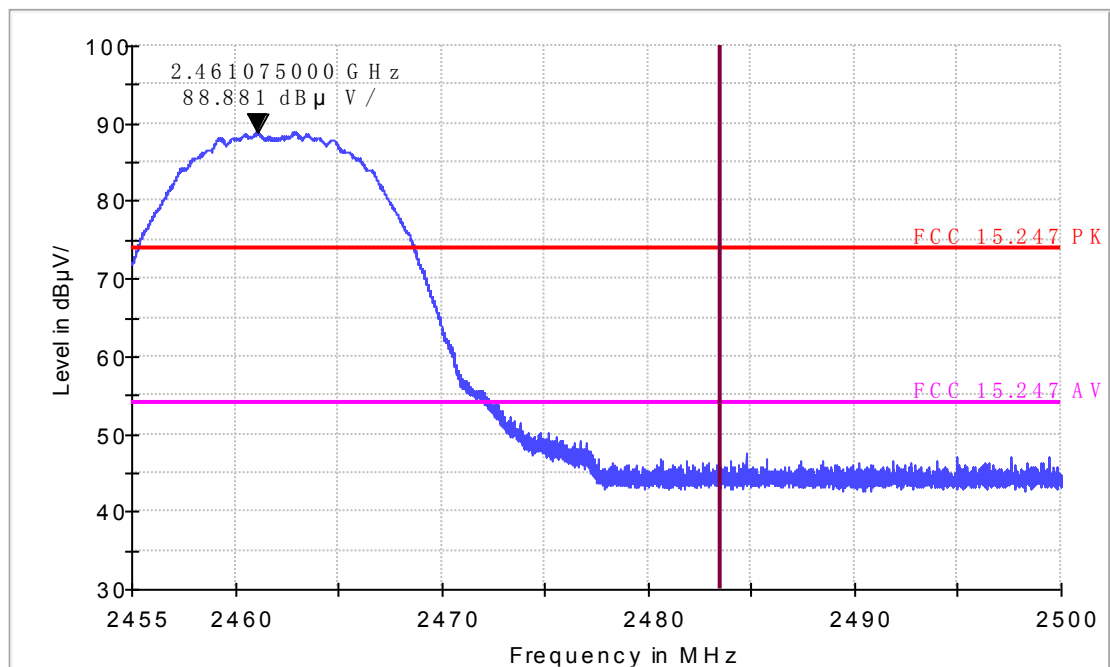

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

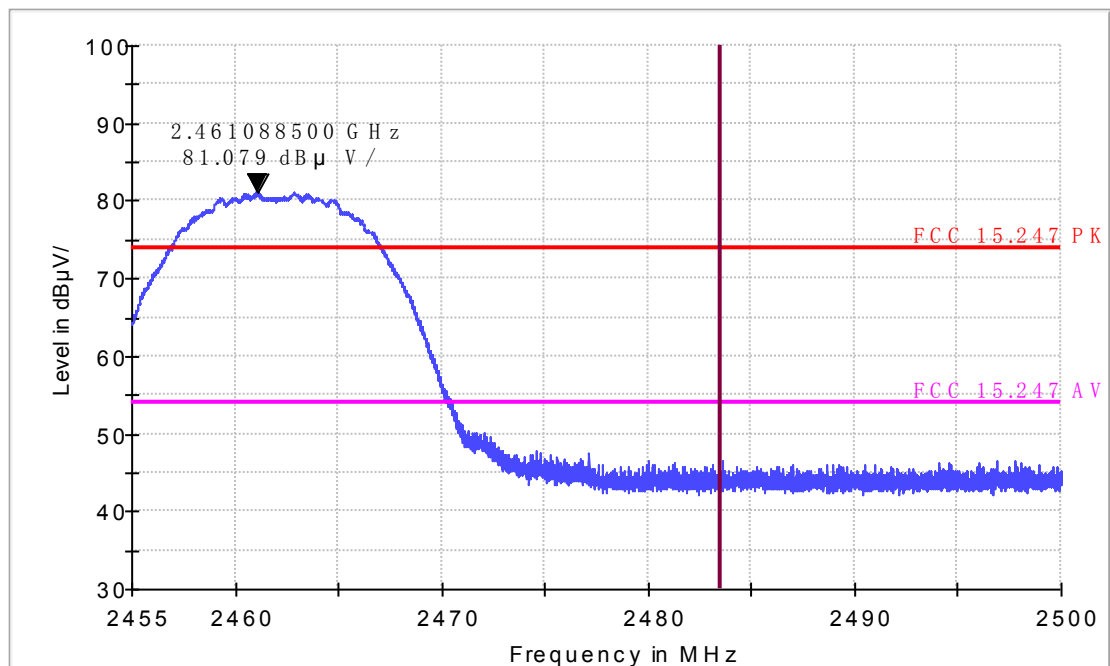

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

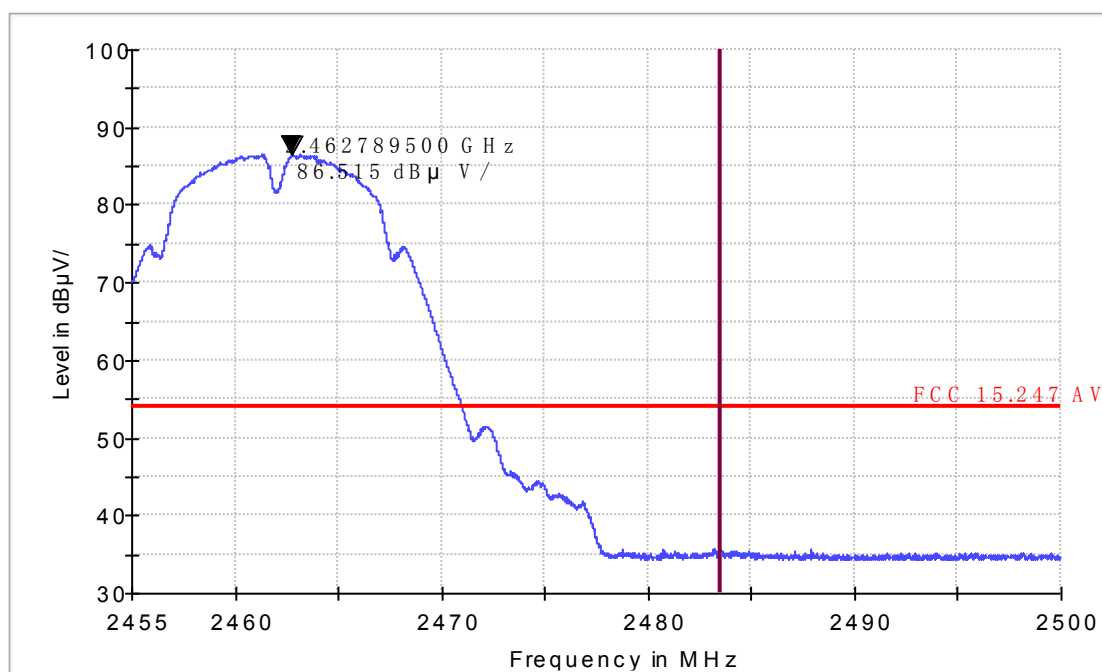

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11b CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

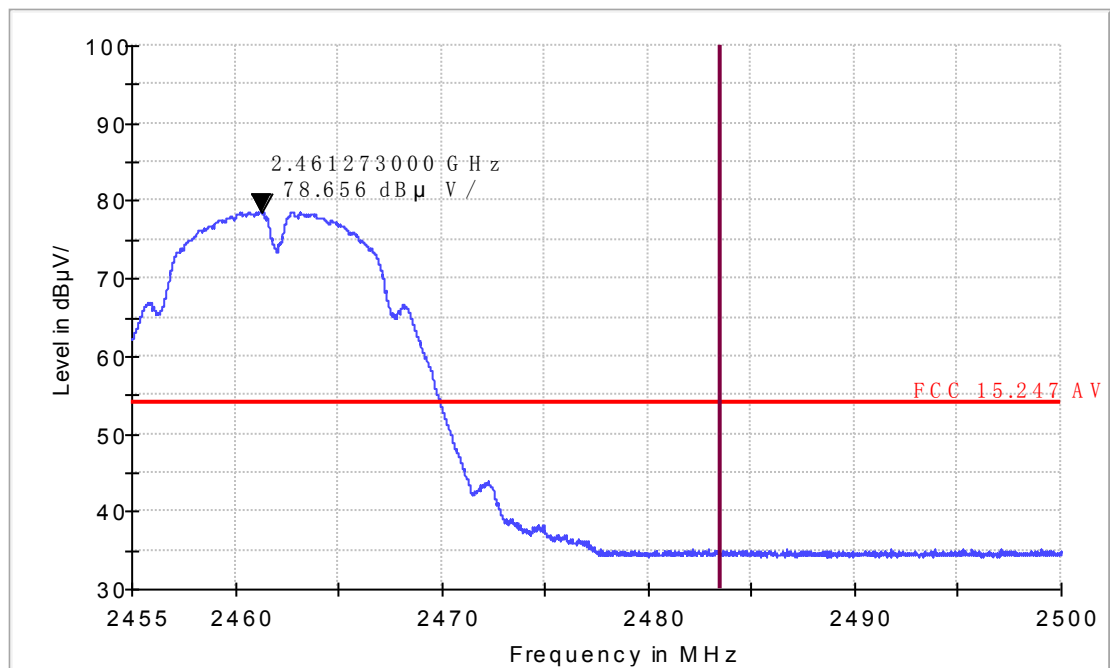

Band edge

11g

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

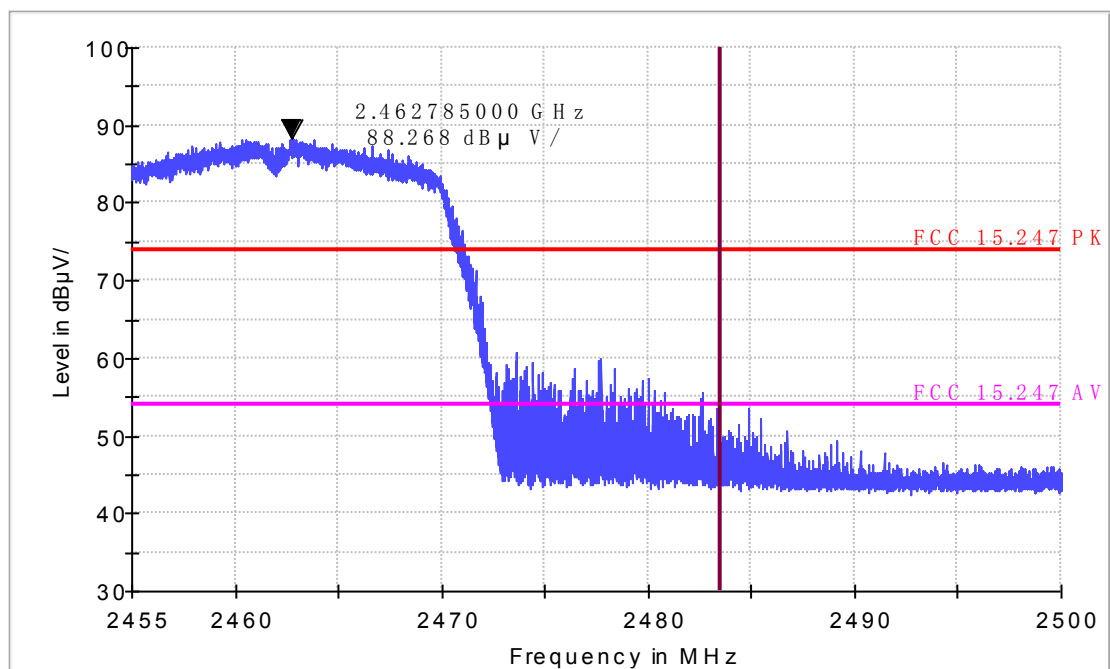

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

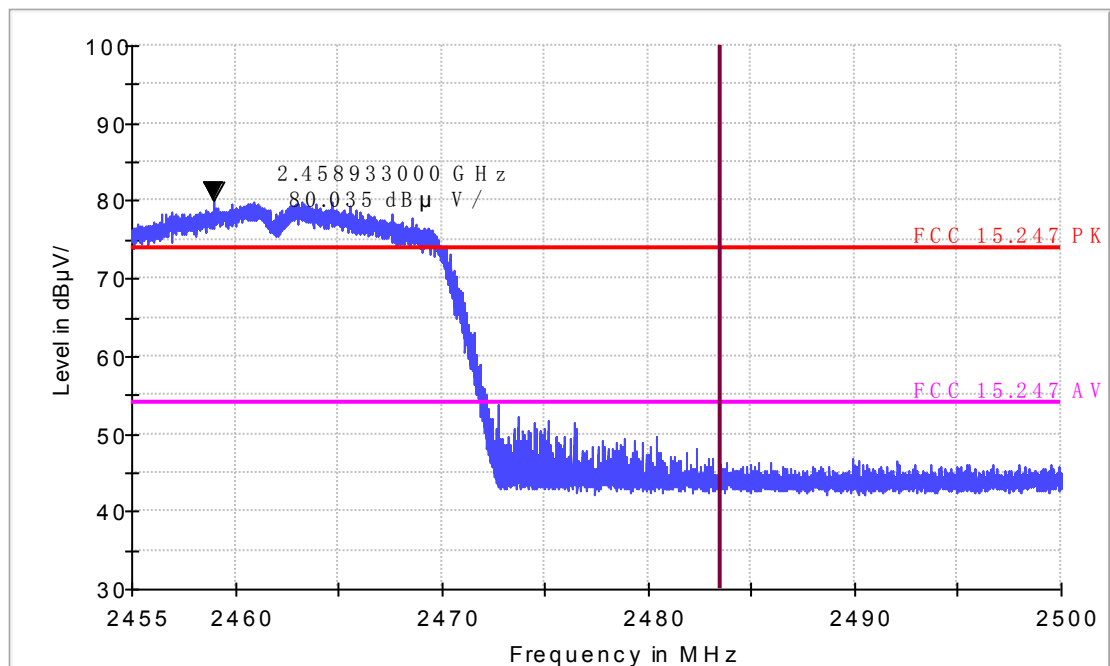

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

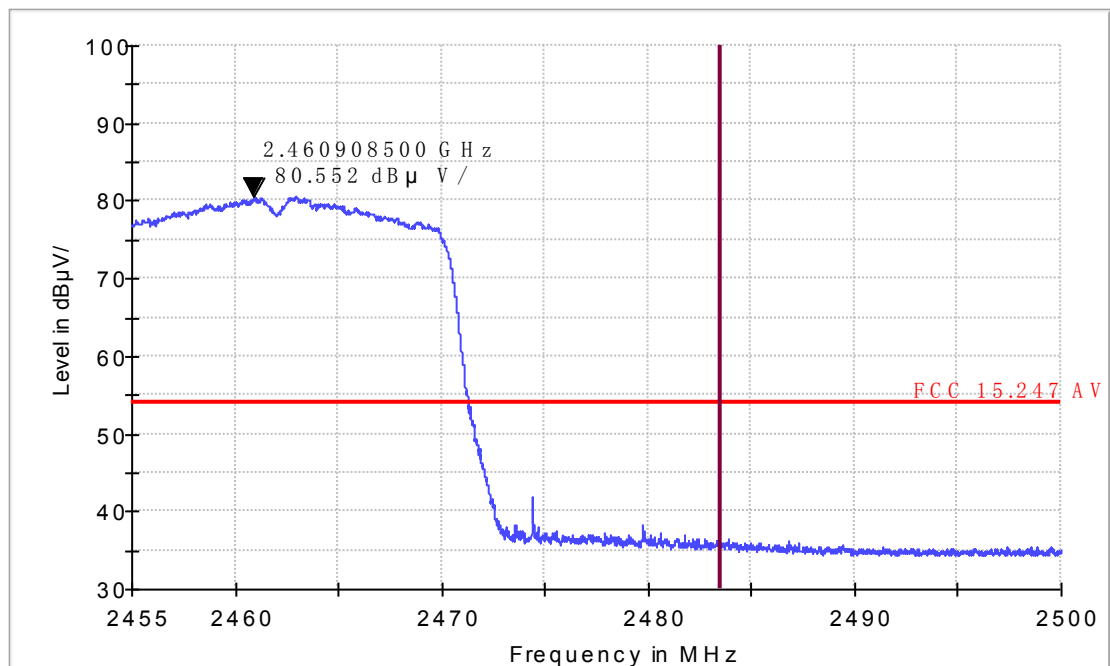

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11g CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

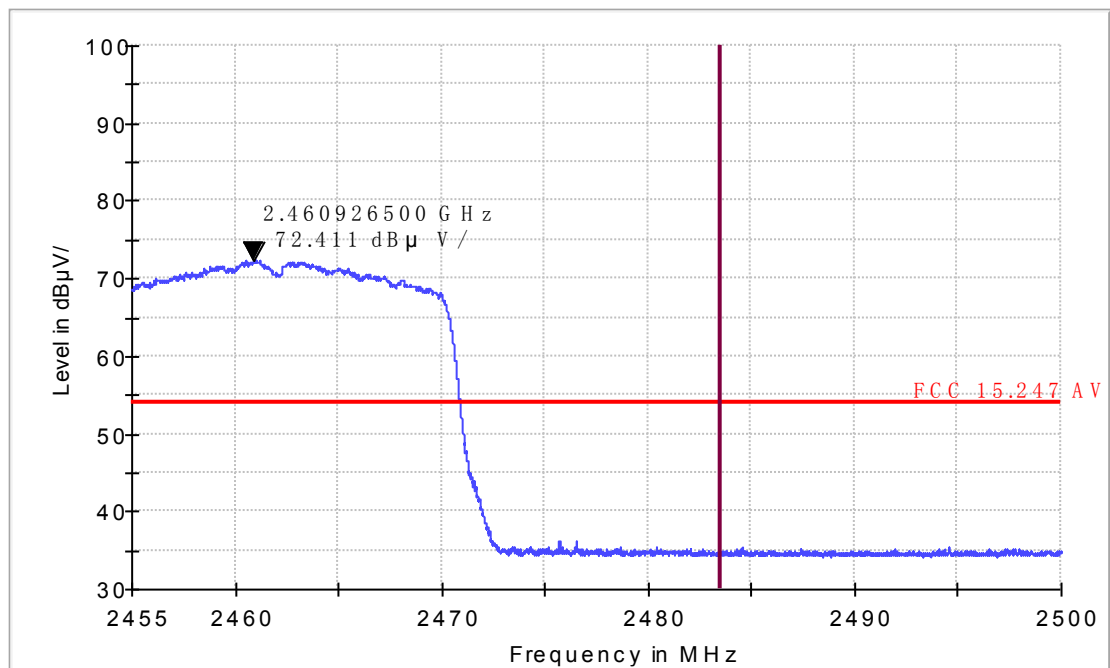

Band edge

11n-HT20

CH11

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

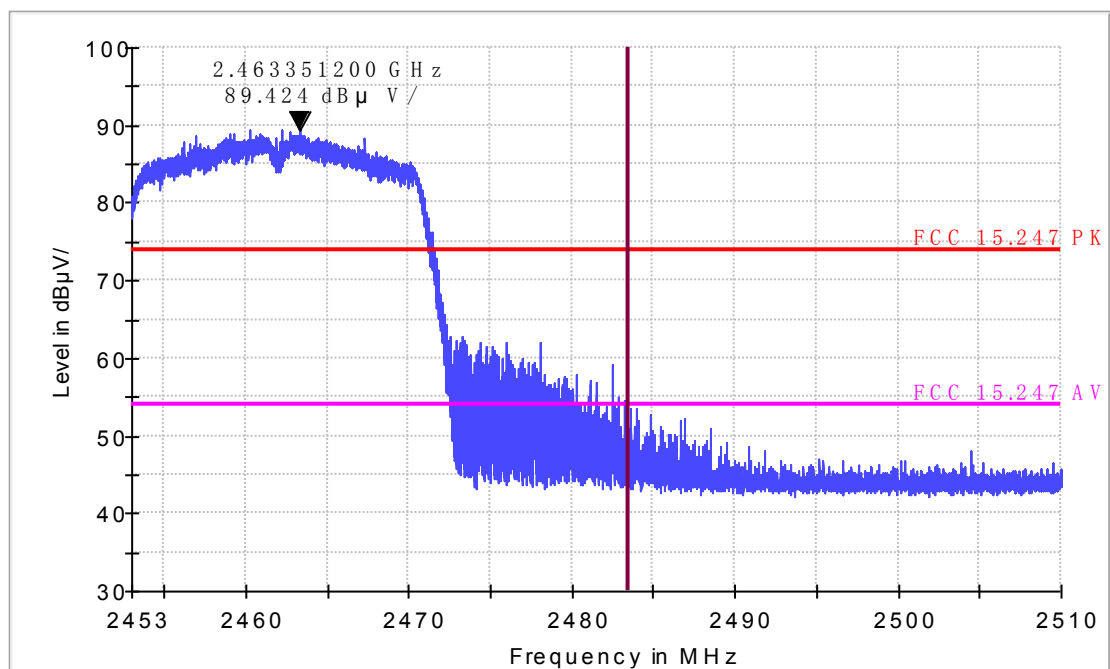

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

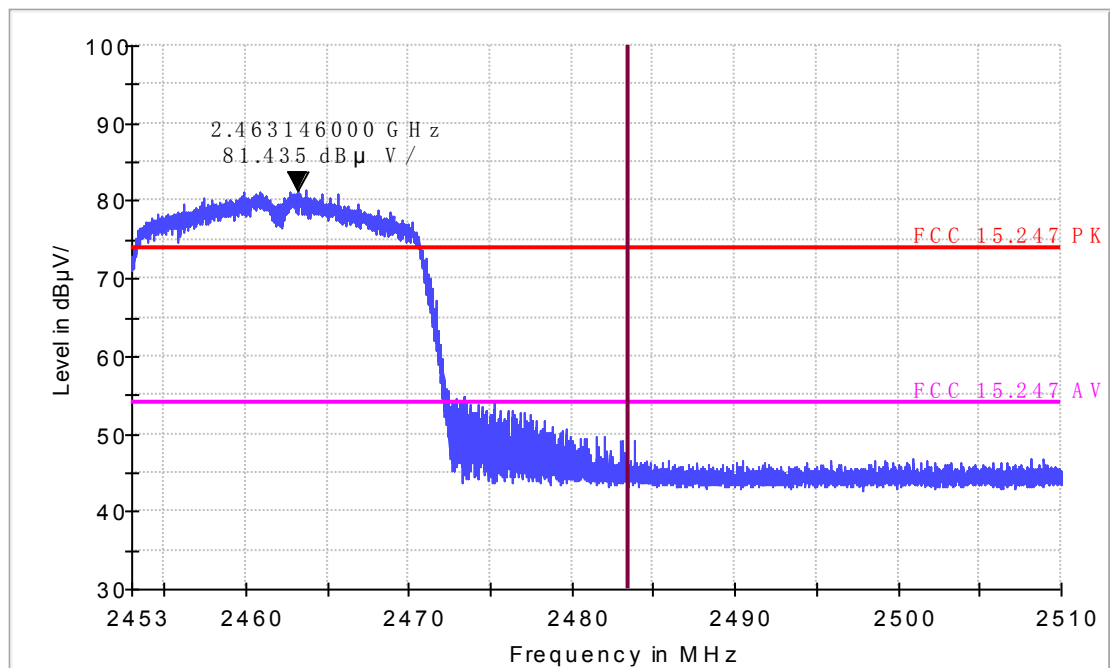

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

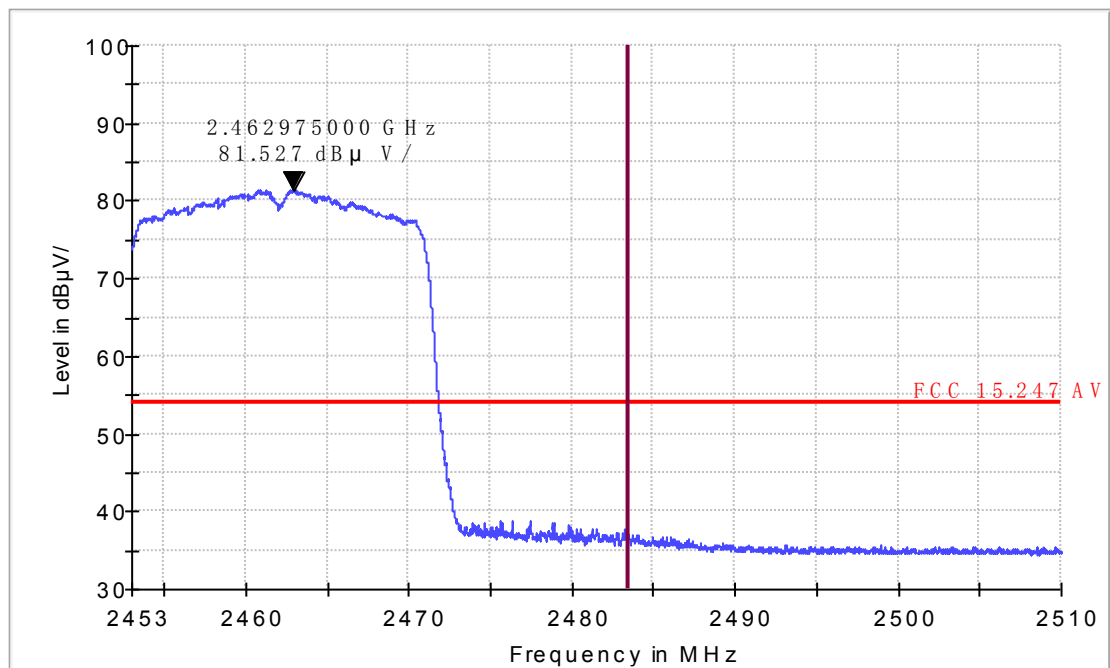

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n20 CH11
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

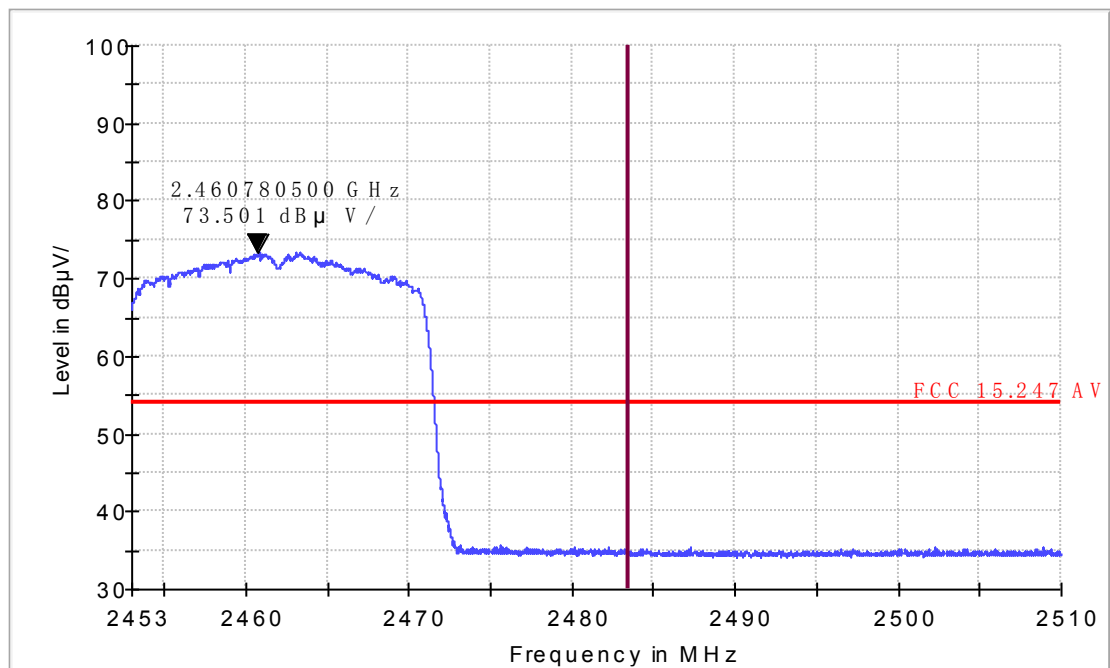

Band edge

11n-HT40

CH9

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

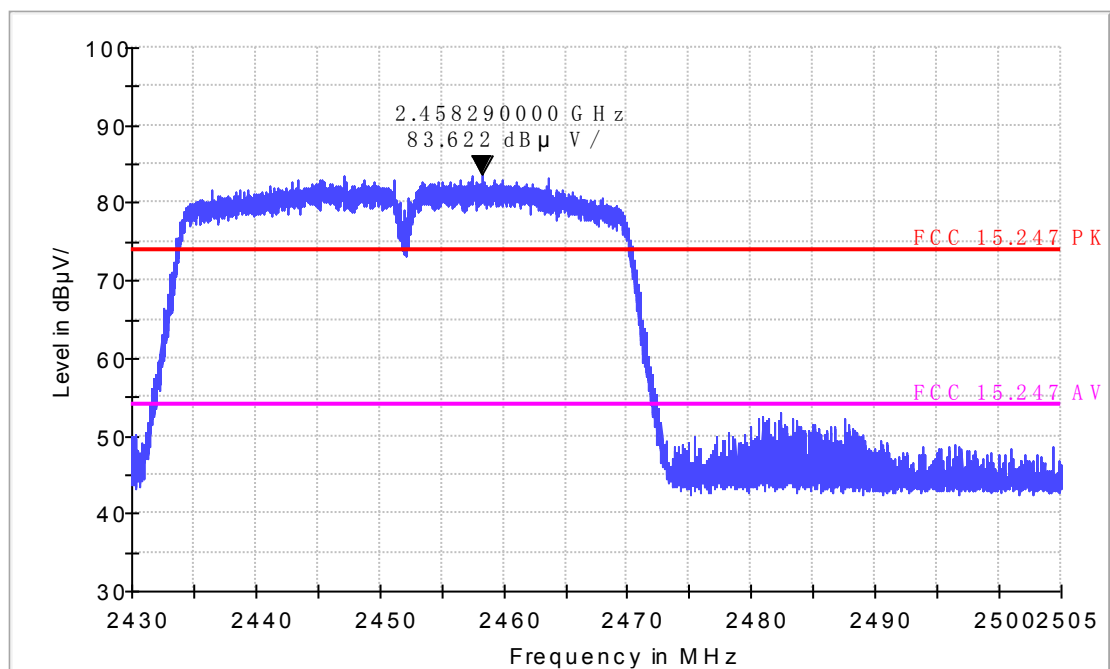

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-PK

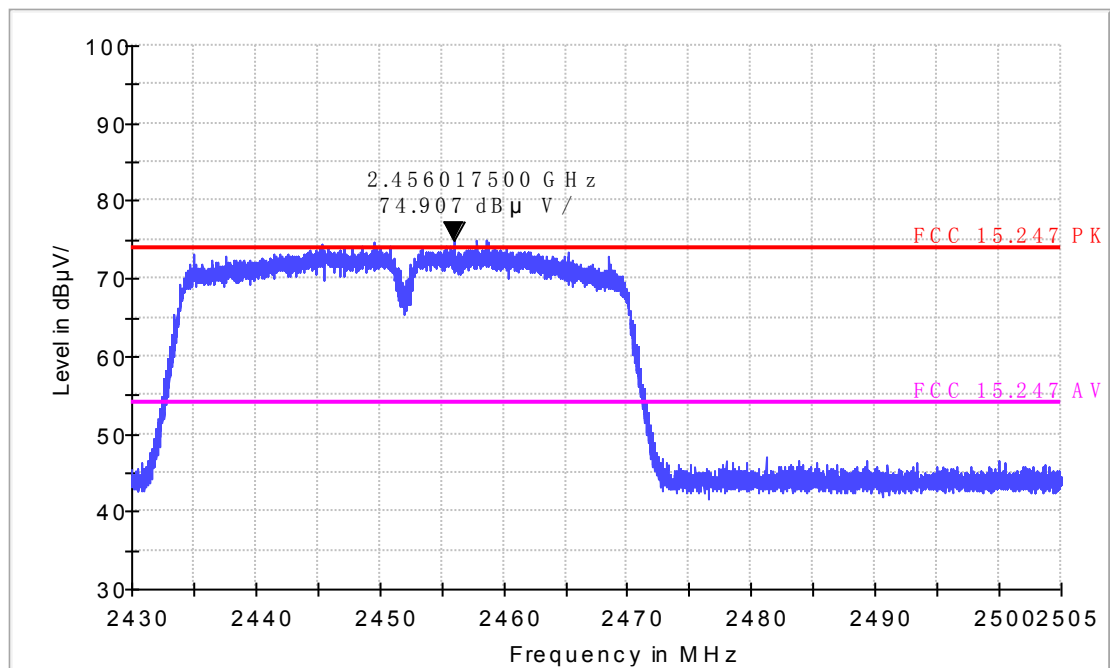

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

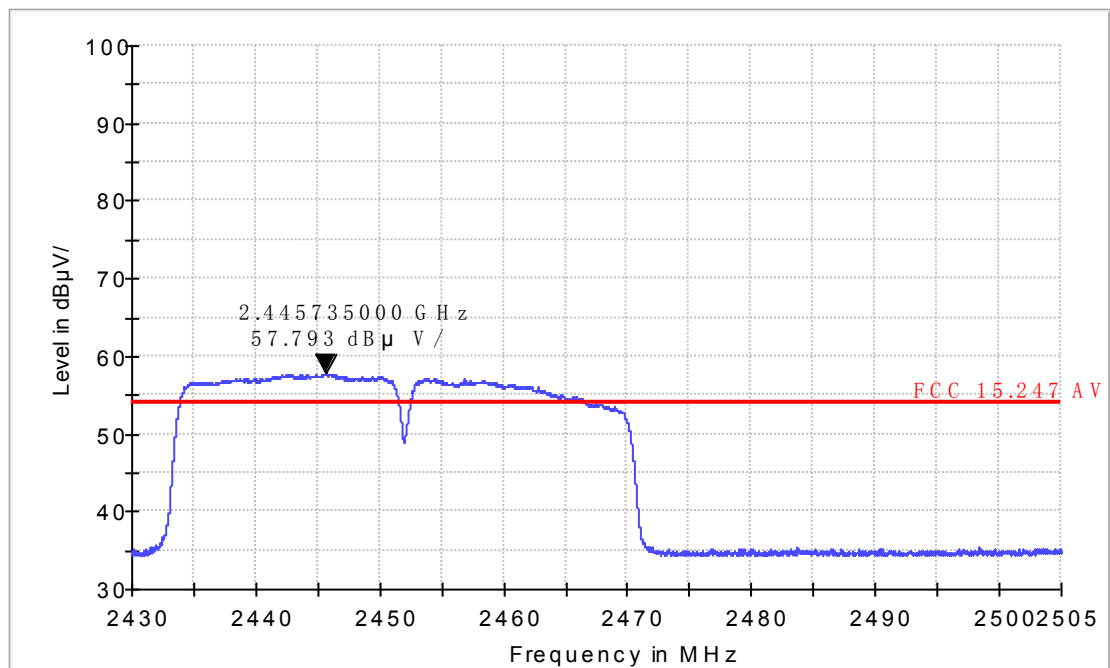

Radiated Emission


EUT Information

EUT Model Name: MAXIM PRO
Operation mode: Wifi 11n40 CH9
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 2.4GHz Bandedge-AV

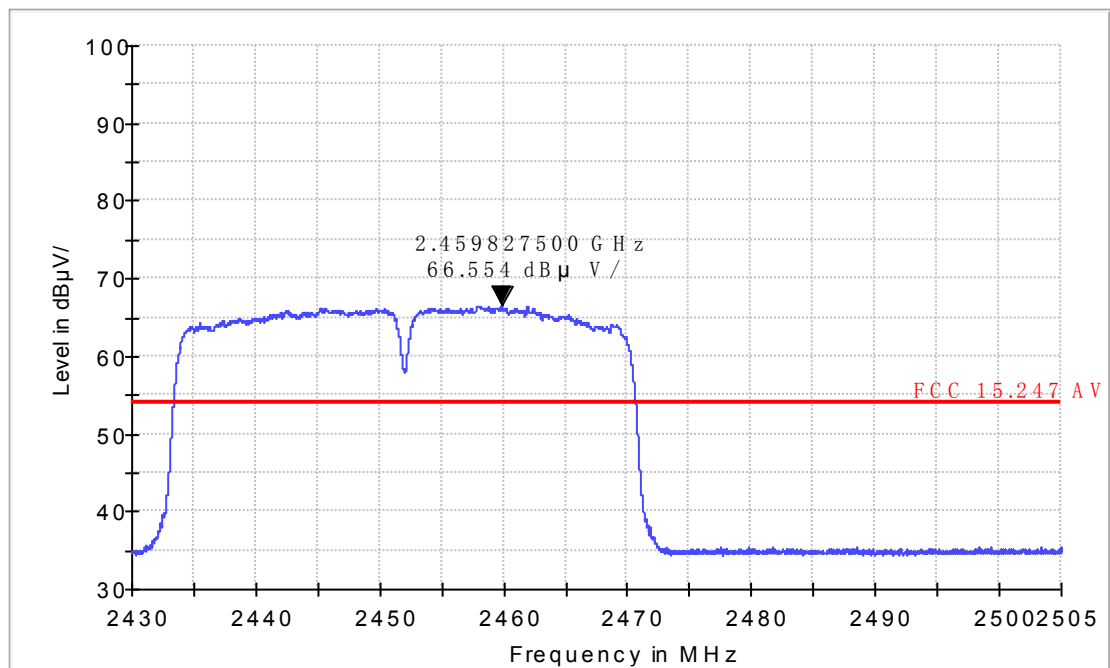

10.CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT

10.1.Test Standard and Limit

10.1.1.Test Standard

FCC Part 15 15.207

10.1.2.Test Limit

Table 18 Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

10.2.Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9kHz.

10.3.Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

10.4.Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 19 Conducted Disturbance Test Data


Model No.: MAXIM PRO								
Test mode: Charging and transmitter								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)
Line	0.39	9.7	37.8	47.5	58.1	33.7	43.4	48.1
	0.518	9.8	37.0	46.8	56	32.8	42.6	46
	0.57	9.8	32.3	42.1	56	30.2	40	46
	0.87	9.8	33.4	43.2	56	28.8	38.6	46
	1.172	9.8	32.9	42.7	56	29.6	39.4	46
	1.298	9.8	34.0	43.8	56	30.4	40.2	46
Neutral	0.43	9.7	36.8	46.5	57.3	27.6	37.3	47.3
	0.518	9.8	37.1	46.9	56	31.1	40.9	46
	0.65	9.8	37.6	47.4	56	28.7	38.5	46
	0.778	9.8	36.0	45.8	56	25.7	35.5	46
	0.91	9.8	35.3	45.1	56	27.8	37.6	46
	1.298	9.8	33.2	43	56	30.3	40.1	46

REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)


2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)

3. The other emission levels were very low against the limit.

EUT: MAXIM PRO
Manufacturer:
Operating Condition: Charging and transmitter
Test Site:
Operator:
Test Specification: L
Comment: AC 120V/60Hz

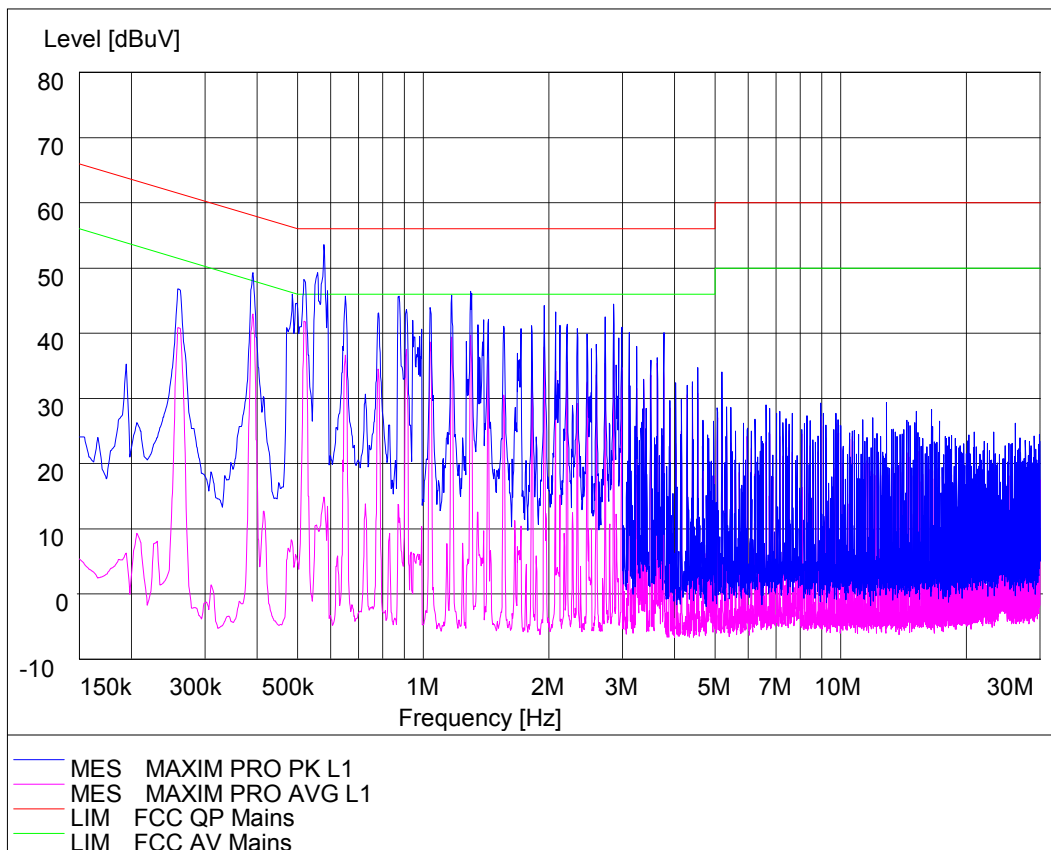

EUT: MAXIM PRO
Manufacturer:
Operating Condition: Charging
Test Site:
Operator:
Test Specification: N
Comment: AC 120V/60Hz

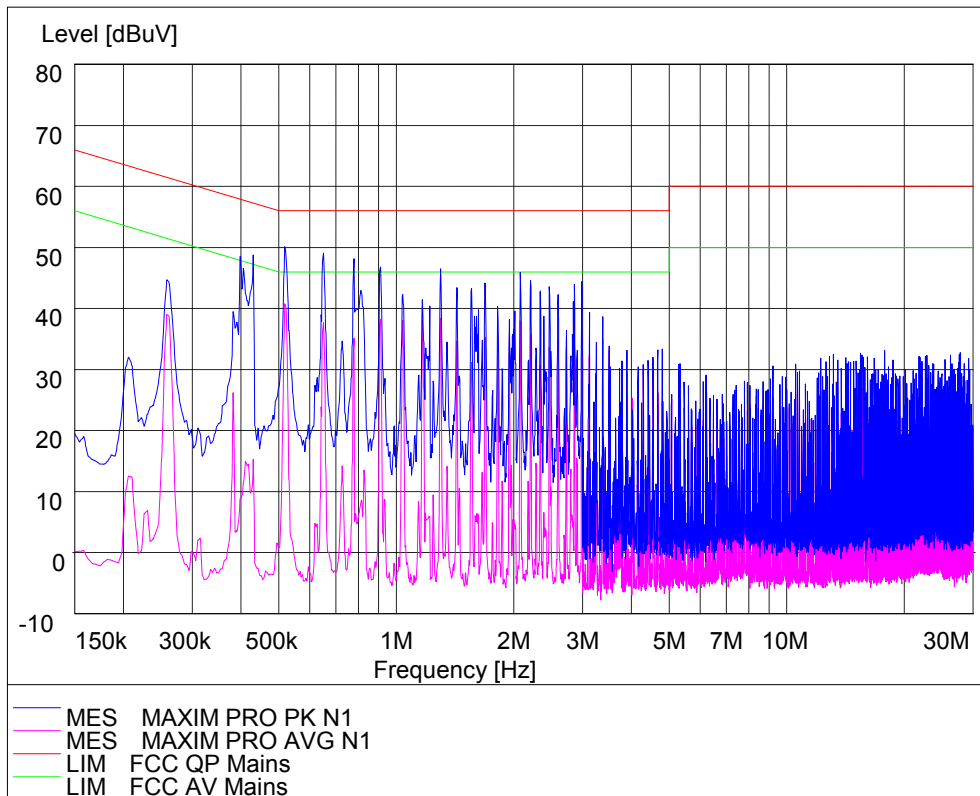

11.ANTENNA REQUIREMENTS

11.1.Applicable requirements

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

11.2.Antenna Connector

Antenna Connector is on the PCB within enclosure and not accessible to user.

11.3.Antenna Gain

The antenna gain of EUT is less than 6 dBi.