



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170800816901  
Page: 1 of 40

## **TEST REPORT**

**Application No.:** SZEM1708008169CR  
**Applicant:** Steren Electronics International, LLC  
**Address of Applicant:** 6920 Carroll Road, Suite 100 San Diego CA 92121  
**Manufacturer:** WinTide Brand Limited  
**Address of Manufacturer:** NO.18 Lufeng Road, Gangkou, Chenghai District, Shantou, China  
**Factory:** WinTide Brand Limited  
**Address of Factory:** NO.18 Lufeng Road, Gangkou, Chenghai District, Shantou, China  
**Equipment Under Test (EUT):**  
**EUT Name:** QUADCOPTER 2.4GHz  
**Model No.:** BL-775-103  
**FCC ID:** 2ABDSBL-775-103  
**Trade mark:** STEREN  
**Standards:** 47 CFR Part 15, Subpart C 15.249  
**Date of Receipt:** 2017-08-02  
**Date of Test:** 2017-08-07 to 2017-08-09  
**Date of Issue:** 2017-08-15

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2017-08-15 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                                                                                    |  |  |
|--------------------------|--|------------------------------------------------------------------------------------|--|--|
| Authorized for issue by: |  |                                                                                    |  |  |
|                          |  |  |  |  |
|                          |  | <hr/> Bill Chen /Project Engineer                                                  |  |  |
|                          |  |  |  |  |
|                          |  | <hr/> Eric Fu /Reviewer                                                            |  |  |



## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                  |        |
|--------------------------------------|----------------------------------|--------|----------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                      | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.249 | N/A    | 47 CFR Part 15, Subpart C 15.203 | Pass   |

| Radio Spectrum Matter Part                           |                                  |                                        |                                                       |        |
|------------------------------------------------------|----------------------------------|----------------------------------------|-------------------------------------------------------|--------|
| Item                                                 | Standard                         | Method                                 | Requirement                                           | Result |
| 20dB Bandwidth                                       | 47 CFR Part 15, Subpart C 15.249 | ANSI C63.10 (2013) Section 6.9         | 47 CFR Part 15, Subpart C 15.215                      | Pass   |
| Field Strength of the Fundamental Signal (15.249(a)) | 47 CFR Part 15, Subpart C 15.249 | ANSI C63.10 (2013) Section 6.5&6.6     | 47 CFR Part 15, Subpart C 15.249(a)                   | Pass   |
| Restricted Band Around Fundamental Frequency         | 47 CFR Part 15, Subpart C 15.249 | ANSI C63.10 (2013) Section 6.4&6.5&6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209 | Pass   |
| Radiated Emissions                                   | 47 CFR Part 15, Subpart C 15.249 | ANSI C63.10 (2013) Section 6.4&6.5&6.6 | 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)     | Pass   |



### 3 Contents

|                                                                | Page |
|----------------------------------------------------------------|------|
| 1 COVER PAGE .....                                             | 1    |
| 2 TEST SUMMARY .....                                           | 3    |
| 3 CONTENTS .....                                               | 4    |
| 4 GENERAL INFORMATION .....                                    | 5    |
| 4.1 DETAILS OF E.U.T. ....                                     | 5    |
| 4.2 DESCRIPTION OF SUPPORT UNITS .....                         | 6    |
| 4.3 MEASUREMENT UNCERTAINTY .....                              | 7    |
| 4.4 TEST LOCATION .....                                        | 8    |
| 4.5 TEST FACILITY .....                                        | 8    |
| 4.6 DEVIATION FROM STANDARDS .....                             | 8    |
| 4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....               | 8    |
| 5 EQUIPMENT LIST .....                                         | 9    |
| 6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....                   | 12   |
| 6.1 ANTENNA REQUIREMENT .....                                  | 12   |
| 6.1.1 Test Requirement: .....                                  | 12   |
| 6.1.2 Conclusion .....                                         | 12   |
| 7 RADIO SPECTRUM MATTER TEST RESULTS .....                     | 13   |
| 7.1 20DB BANDWIDTH .....                                       | 13   |
| 7.1.1 E.U.T. Operation .....                                   | 13   |
| 7.1.2 Measurement Procedure and Data .....                     | 13   |
| 7.2 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A)) ..... | 15   |
| 7.2.1 E.U.T. Operation .....                                   | 15   |
| 7.2.2 Measurement Procedure and Data .....                     | 15   |
| 7.3 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY .....         | 22   |
| 7.3.1 E.U.T. Operation .....                                   | 23   |
| 7.3.2 Measurement Procedure and Data .....                     | 23   |
| 7.4 RADIATED EMISSIONS .....                                   | 28   |
| 7.4.1 E.U.T. Operation .....                                   | 28   |
| 7.4.2 Measurement Procedure and Data .....                     | 29   |
| 8 PHOTOGRAPHS .....                                            | 39   |
| 8.1 RADIATED EMISSIONS TEST SETUP .....                        | 39   |
| 8.2 EUT CONSTRUCTIONAL DETAILS .....                           | 40   |



## 4 General Information

### 4.1 Details of E.U.T.

Frequency Range: 2420MHz-2475MHz  
Modulation Type: GFSK  
Number of Channels: 56  
Antenna Type: Rod  
Antenna Gain: 0dBi  
Power supply: TX: DC 6V(4 x1.5V "AA" )

| Operation Frequency each of channel |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency |
| 1CH                                 | 2420 MHz  | 20CH    | 2439 MHz  | 39CH    | 2458 MHz  |
| 2CH                                 | 2421 MHz  | 21CH    | 2440 MHz  | 40CH    | 2459 MHz  |
| 3CH                                 | 2422 MHz  | 22CH    | 2441 MHz  | 41CH    | 2460 MHz  |
| 4CH                                 | 2423 MHz  | 23CH    | 2442 MHz  | 42CH    | 2461 MHz  |
| 5CH                                 | 2424 MHz  | 24CH    | 2443 MHz  | 43CH    | 2462 MHz  |
| 6CH                                 | 2425 MHz  | 25CH    | 2444 MHz  | 44CH    | 2463 MHz  |
| 7CH                                 | 2426 MHz  | 26CH    | 2445 MHz  | 45CH    | 2464 MHz  |
| 8CH                                 | 2427 MHz  | 27CH    | 2446 MHz  | 46CH    | 2465 MHz  |
| 9CH                                 | 2428 MHz  | 28CH    | 2447 MHz  | 47CH    | 2466 MHz  |
| 10CH                                | 2429 MHz  | 29CH    | 2448 MHz  | 48CH    | 2467 MHz  |
| 11CH                                | 2430 MHz  | 30CH    | 2449 MHz  | 49CH    | 2468 MHz  |
| 12CH                                | 2431 MHz  | 31CH    | 2450 MHz  | 50CH    | 2469 MHz  |
| 13CH                                | 2432 MHz  | 32CH    | 2451 MHz  | 51CH    | 2470 MHz  |
| 14CH                                | 2433 MHz  | 33CH    | 2452 MHz  | 52CH    | 2471 MHz  |
| 15CH                                | 2434 MHz  | 34CH    | 2453 MHz  | 53CH    | 2472 MHz  |
| 16CH                                | 2435 MHz  | 35CH    | 2454 MHz  | 54CH    | 2473 MHz  |
| 17CH                                | 2436 MHz  | 36CH    | 2455 MHz  | 55CH    | 2474 MHz  |
| 18CH                                | 2437 MHz  | 37CH    | 2456 MHz  | 56CH    | 2475 MHz  |
| 19CH                                | 2438 MHz  | 38CH    | 2457 MHz  |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the



selected channel see below:

| Channel                   | Frequency |
|---------------------------|-----------|
| The Lowest channel(CH1)   | 2420MHz   |
| The Middle channel(CH28)  | 2447MHz   |
| The Highest channel(CH56) | 2475MHz   |

#### **4.2 Description of Support Units**

The EUT has been tested as an independent unit.



#### 4.3 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | $7.25 \times 10^{-8}$   |
| 2   | Duty cycle                      | 0.37%                   |
| 3   | Occupied Bandwidth              | 3%                      |
| 4   | RF conducted power              | 0.75dB                  |
| 5   | RF power density                | 2.84dB                  |
| 6   | Conducted Spurious emissions    | 0.75dB                  |
| 7   | RF Radiated power               | 4.5dB (below 1GHz)      |
|     |                                 | 4.8dB (above 1GHz)      |
| 8   | Radiated Spurious emission test | 4.5dB (30MHz-1GHz)      |
|     |                                 | 4.8dB (1GHz-18GHz)      |
| 9   | Temperature test                | 1 °C                    |
| 10  | Humidity test                   | 3%                      |
| 11  | Supply voltages                 | 1.5%                    |
| 12  | Time                            | 3%                      |



#### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.6 Deviation from Standards**

None

#### **4.7 Abnormalities from Standard Conditions**

None



## 5 Equipment List

| 20dB Bandwidth       |                 |                         |              |            |              |
|----------------------|-----------------|-------------------------|--------------|------------|--------------|
| Equipment            | Manufacturer    | Model No                | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply      | ZhaoXin         | RXN-305D                | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer    | Rohde & Schwarz | FSP                     | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Measurement Software | JS Tonscend     | JS1120-2<br>BT/WIFI V2. | N/A          | N/A        | N/A          |
| Signal Generator     | Rohde & Schwarz | SML03                   | SEM006-02    | 2017-04-14 | 2018-04-13   |
| Power Meter          | Rohde & Schwarz | NRVS                    | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Field Strength of the Fundamental Signal (15.249(a)) |                                    |                   |              |            |              |
|------------------------------------------------------|------------------------------------|-------------------|--------------|------------|--------------|
| Equipment                                            | Manufacturer                       | Model No          | Inventory No | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber                             | AUDIX                              | N/A               | SEM001-02    | 2017-05-02 | 2020-05-01   |
| Measurement Software                                 | AUDIX                              | e3 V8.2014-6-27   | N/A          | N/A        | N/A          |
| Spectrum Analyzer                                    | Rohde & Schwarz                    | FSU43             | SEM004-08    | 2017-04-14 | 2018-04-13   |
| BiConiLog Antenna (26-3000MHz)                       | ETS-Lindgren                       | 3142C             | SEM003-02    | 2017-03-05 | 2020-03-05   |
| Horn Antenna (1-18GHz)                               | Rohde & Schwarz                    | HF907             | SEM003-07    | 2015-06-14 | 2018-06-14   |
| Horn Antenna(15GHz-40GHz)                            | Schwarzbeck                        | BBHA 9170         | SEM003-14    | 2017-06-16 | 2020-06-15   |
| Pre-amplifier (0.1-1300MHz)                          | HP                                 | 8447D             | SEM005-02    | 2016-10-09 | 2017-10-09   |
| Low Noise Amplifier(100MHz-18GHz)                    | Black Diamond Series               | BDLNA-0118-352810 | SEM005-05    | 2016-10-09 | 2017-10-09   |
| Pre-amplifier(0.1-26.5GHz)                           | Compliance Directions Systems Inc. | PAP-0126          | SEM004-10    | 2016-10-17 | 2017-10-17   |
| Pre-amplifier(26GHz-40GHz)                           | Compliance Directions Systems Inc. | PAP-2640-50       | SEM005-08    | 2017-04-14 | 2018-04-13   |
| DC Power Supply                                      | Zhao Xin                           | RXN-305D          | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Active Loop Antenna                                  | ETS-Lindgren                       | 6502              | SEM003-08    | 2015-08-14 | 2018-08-14   |
| Band filter                                          | N/A                                | N/A               | SEM023-01    | N/A        | N/A          |



| Restricted Band Around Fundamental Frequency |                                    |                   |              |            |              |
|----------------------------------------------|------------------------------------|-------------------|--------------|------------|--------------|
| Equipment                                    | Manufacturer                       | Model No          | Inventory No | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber                     | AUDIX                              | N/A               | SEM001-02    | 2017-05-02 | 2020-05-01   |
| Measurement Software                         | AUDIX                              | e3 V8.2014-6-27   | N/A          | N/A        | N/A          |
| Spectrum Analyzer                            | Rohde & Schwarz                    | FSU43             | SEM004-08    | 2017-04-14 | 2018-04-13   |
| BiConiLog Antenna (26-3000MHz)               | ETS-Lindgren                       | 3142C             | SEM003-02    | 2017-03-05 | 2020-03-05   |
| Horn Antenna (1-18GHz)                       | Rohde & Schwarz                    | HF907             | SEM003-07    | 2015-06-14 | 2018-06-14   |
| Horn Antenna (15GHz-40GHz)                   | Schwarzbeck                        | BBHA 9170         | SEM003-14    | 2017-06-16 | 2020-06-15   |
| Pre-amplifier (0.1-1300MHz)                  | HP                                 | 8447D             | SEM005-02    | 2016-10-09 | 2017-10-09   |
| Low Noise Amplifier (100MHz-18GHz)           | Black Diamond Series               | BDLNA-0118-352810 | SEM005-05    | 2016-10-09 | 2017-10-09   |
| Pre-amplifier (0.1-26.5GHz)                  | Compliance Directions Systems Inc. | PAP-0126          | SEM004-10    | 2016-10-17 | 2017-10-17   |
| Pre-amplifier (26GHz-40GHz)                  | Compliance Directions Systems Inc. | PAP-2640-50       | SEM005-08    | 2017-04-14 | 2018-04-13   |
| DC Power Supply                              | Zhao Xin                           | RXN-305D          | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Active Loop Antenna                          | ETS-Lindgren                       | 6502              | SEM003-08    | 2015-08-14 | 2018-08-14   |
| Band filter                                  | N/A                                | N/A               | SEM023-01    | N/A        | N/A          |

| Radiated Emissions             |                 |                 |              |            |              |
|--------------------------------|-----------------|-----------------|--------------|------------|--------------|
| Equipment                      | Manufacturer    | Model No        | Inventory No | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber       | AUDIX           | N/A             | SEM001-02    | 2017-05-10 | 2018-05-10   |
| Measurement Software           | AUDIX           | e3 V8.2014-6-27 | N/A          | N/A        | N/A          |
| Spectrum Analyzer              | Rohde & Schwarz | FSU43           | SEM004-08    | 2017-04-14 | 2018-04-13   |
| BiConiLog Antenna (26-3000MHz) | ETS-Lindgren    | 3142C           | SEM003-02    | 2017-03-05 | 2020-03-05   |
| Double-ridged horn (1-18GHz)   | ETS-Lindgren    | 3117            | SEM003-11    | 2015-10-17 | 2018-10-17   |
| Horn Antenna (18-26GHz)        | ETS-Lindgren    | 3160            | SEM003-12    | 2014-11-24 | 2017-11-24   |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170800816901

Page: 11 of 40

|                             |                                    |                   |           |            |            |
|-----------------------------|------------------------------------|-------------------|-----------|------------|------------|
| Horn Antenna(26GHz-40GHz)   | A.H.Systems, inc.                  | SAS-573           | SEM003-13 | 2015-02-12 | 2018-02-12 |
| Pre-amplifier (0.1-1300MHz) | Agilent Technologies               | 8447D             | SEM005-01 | 2017-04-14 | 2018-04-13 |
| Low Noise Amplifier         | Black Diamond Series               | BDLNA-0118-352810 | SEM005-05 | 2016-10-09 | 2017-10-09 |
| Pre-amplifier(26GHz-40GHz)  | Compliance Directions Systems Inc. | PAP-2640-50       | SEM005-08 | 2017-04-14 | 2018-04-13 |
| DC Power Supply             | Zhao Xin                           | RXN-305D          | SEM011-02 | 2016-10-09 | 2017-10-09 |
| Active Loop Antenna         | ETS-Lindgren                       | 6502              | SEM003-08 | 2015-08-14 | 2018-08-14 |
| Band filter                 | Amindeon                           | Asi 3314          | SEM023-01 | N/A        | N/A        |

| General used equipment          |                                           |          |              |            |              |
|---------------------------------|-------------------------------------------|----------|--------------|------------|--------------|
| Equipment                       | Manufacturer                              | Model No | Inventory No | Cal Date   | Cal Due Date |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B   | SEM002-03    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature Indicator | Shanghai Meteorological Industry Factory  | ZJ1-2B   | SEM002-04    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature Indicator | Mingle                                    | N/A      | SEM002-08    | 2016-10-12 | 2017-10-12   |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3     | SEM002-01    | 2017-04-18 | 2018-04-18   |

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:


47 CFR Part 15, Subpart C 15.203

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

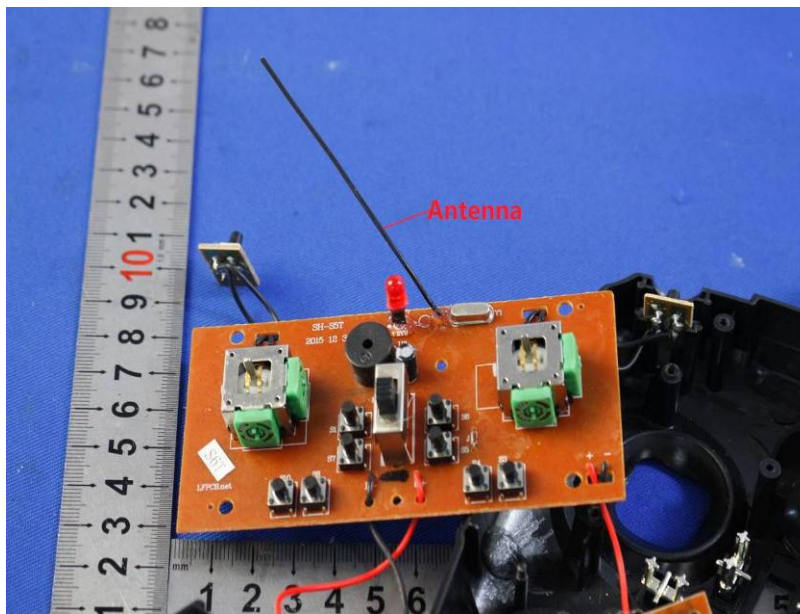

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



## 7 Radio Spectrum Matter Test Results

### 7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215  
Test Method: ANSI C63.10 (2013) Section 6.9  
Limit: N/A


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 55 % RH Atmospheric Pressure: 1000 mbar  
Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.

#### 7.1.2 Measurement Procedure and Data

| Test Channel | 20dB bandwidth (MHz) | Results |
|--------------|----------------------|---------|
| Lowest       | 2.55                 | Pass    |
| Middle       | 2.45                 | Pass    |
| Highest      | 1.41                 | Pass    |

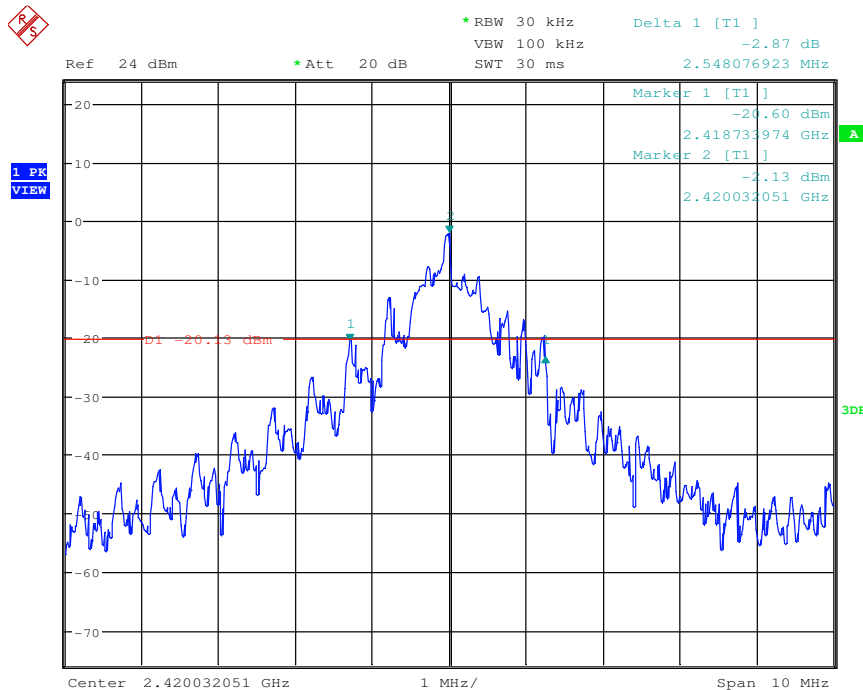




# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170800816901

Page: 14 of 40

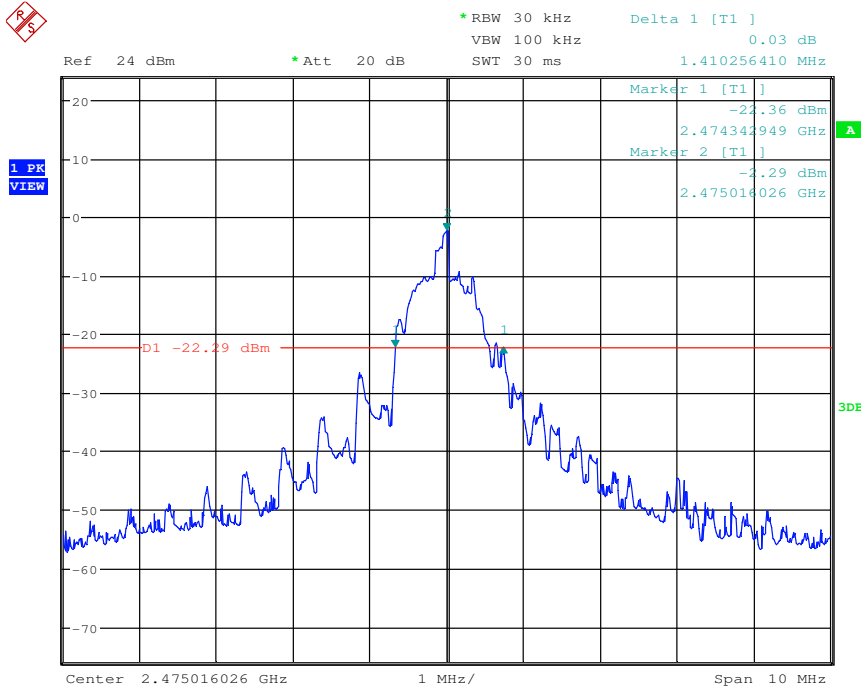



## 7.2 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)  
Test Method: ANSI C63.10 (2013) Section 6.5&6.6  
Measurement Distance: 3m  
Limit:

| Frequency         | Limit (dBuV/m @3m) | Remark        |
|-------------------|--------------------|---------------|
| 2400MHz-2483.5MHz | 94.0               | Average Value |
|                   | 114.0              | Peak Value    |

### 7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1000 mbar  
Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.

### 7.2.2 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
  - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
  - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
  - Test the EUT in the lowest channel,the middle channel,the Highest channel.
  - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
  - Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:Low

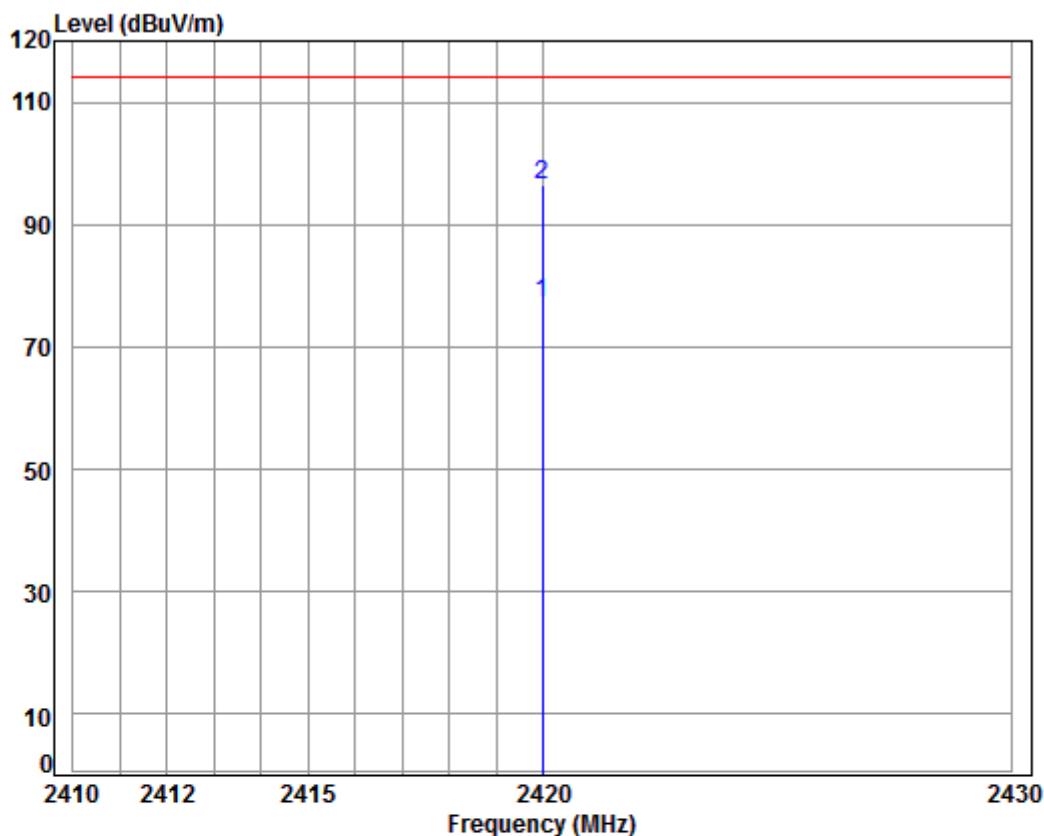

Condition: 3m HORIZONTAL


Job No : 08169CR

Mode : 2420 Field strength

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|------|----------|-------|--------|--------|-------|--------|--------|----------------|
|      | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark   |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 pp | 2420.000 | 5.52  | 29.17  | 37.95  | 80.27 | 77.01  | 94.00  | -16.99 Average |
| 2 pk | 2420.000 | 5.52  | 29.17  | 37.95  | 99.68 | 96.42  | 114.00 | -17.58 peak    |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:Low

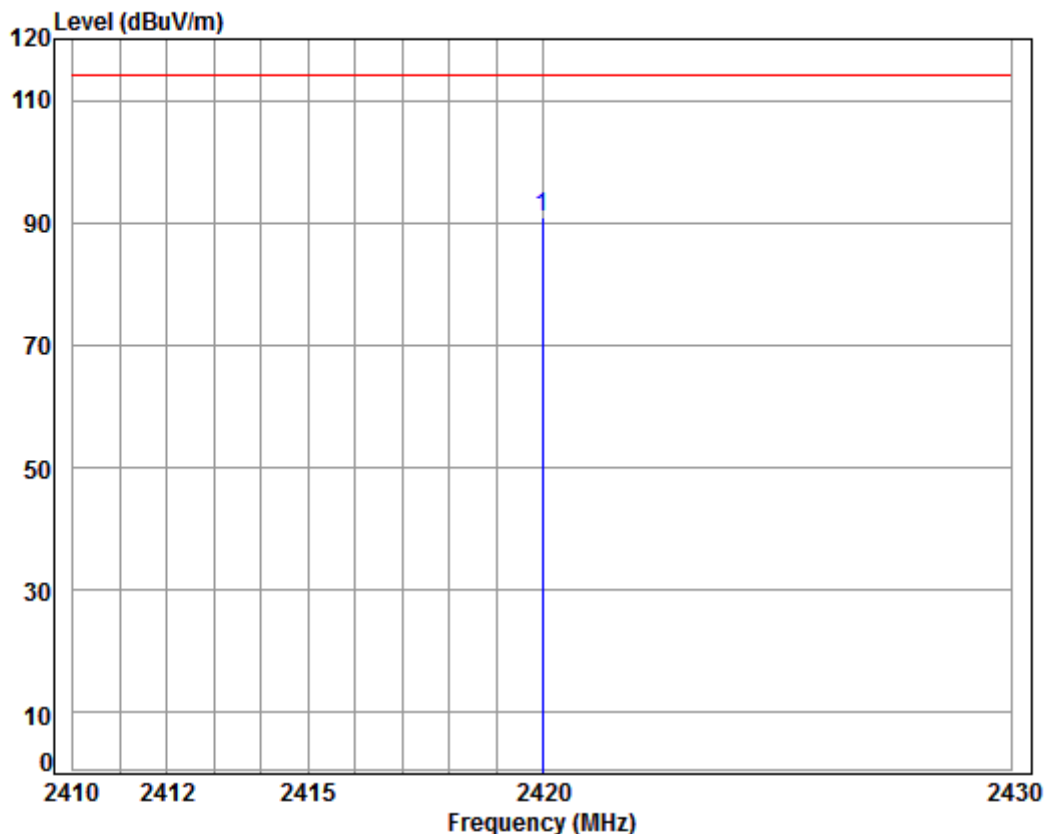

Condition: 3m VERTICAL


Job No : 08169CR

Mode : 2420 Field strength

| Freq          | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---------------|------------|------------|---------------------|------------|--------|------------|------------|--------|
| MHz           | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 pp 2420.000 | 5.52       | 29.17      | 37.95               | 94.10      | 90.84  | 114.00     | -23.16     | peak   |



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:middle

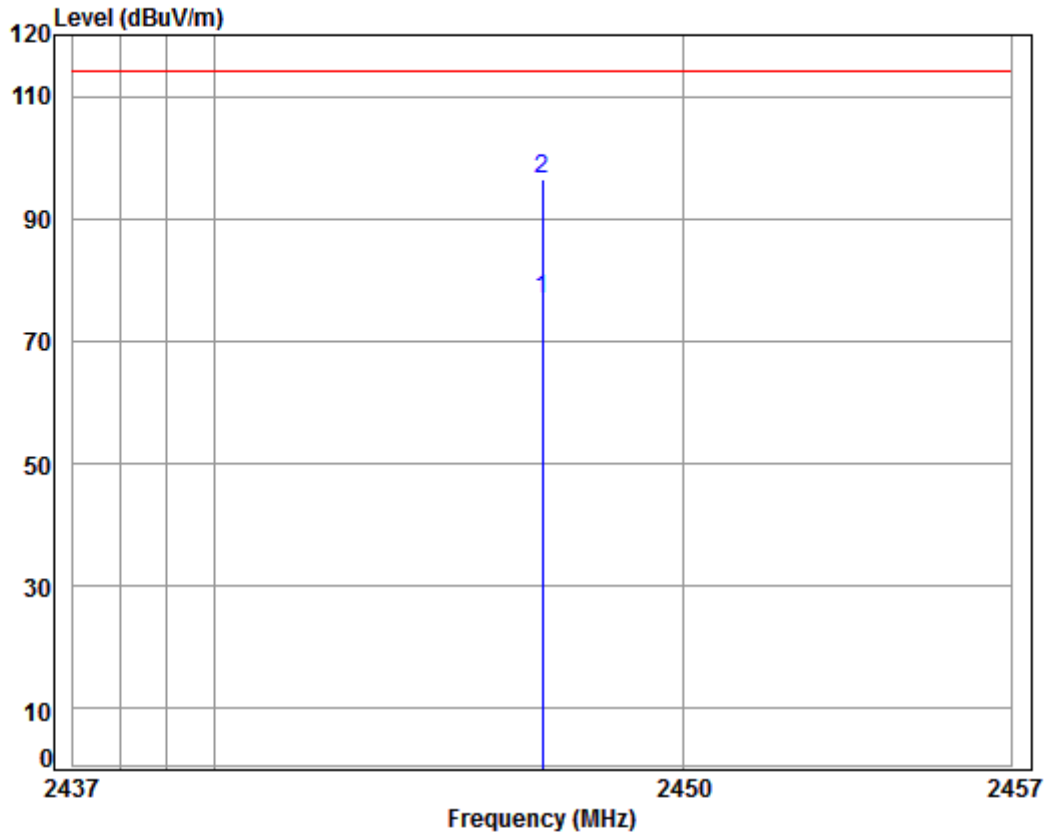

Condition: 3m HORIZONTAL


Job No : 08169CR

Mode : 2447 Field strength

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|------|----------|-------|--------|--------|-------|--------|--------|----------------|
|      | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark   |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 pp | 2447.000 | 5.55  | 29.25  | 37.95  | 80.09 | 76.94  | 94.00  | -17.06 Average |
| 2 pk | 2447.000 | 5.55  | 29.25  | 37.95  | 99.49 | 96.34  | 114.00 | -17.66 Peak    |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:middle

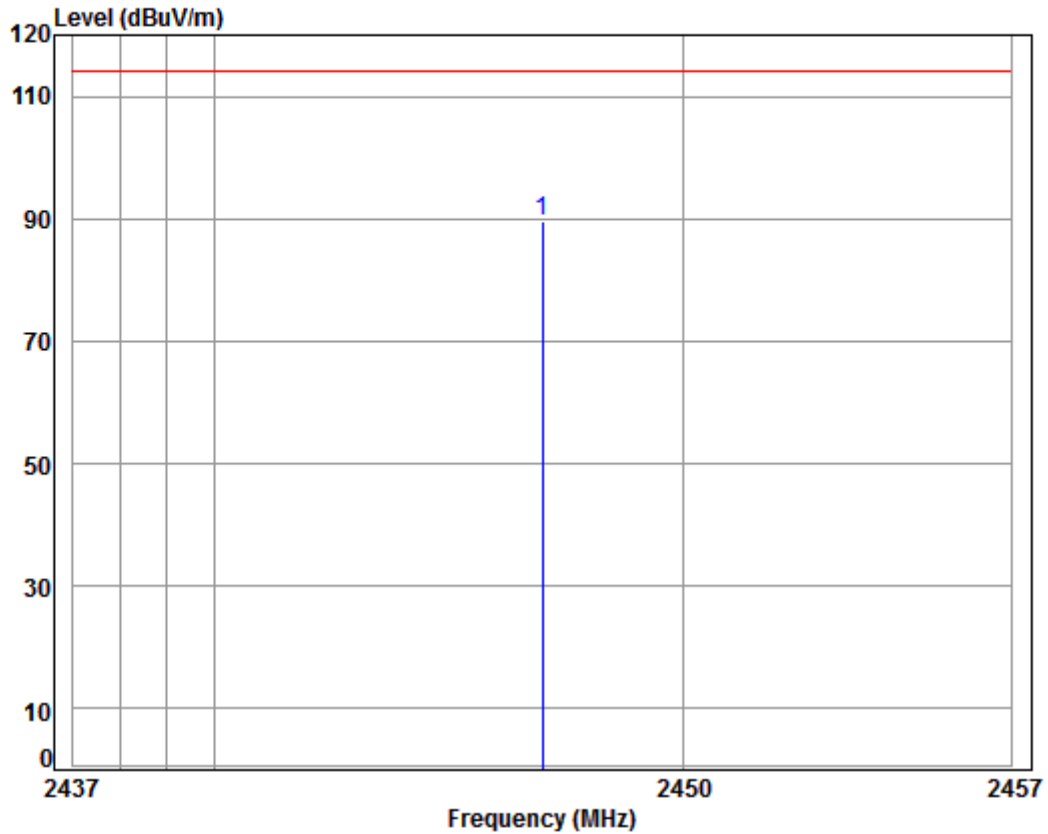

Condition: 3m VERTICAL


Job No : 08169CR

Mode : 2447 Field strength

|               | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|---------------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz           | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1 pp 2447.000 | 5.55  | 29.25  | 37.95  | 92.83 | 89.68  | 114.00 | -24.32 | Peak   |



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:High

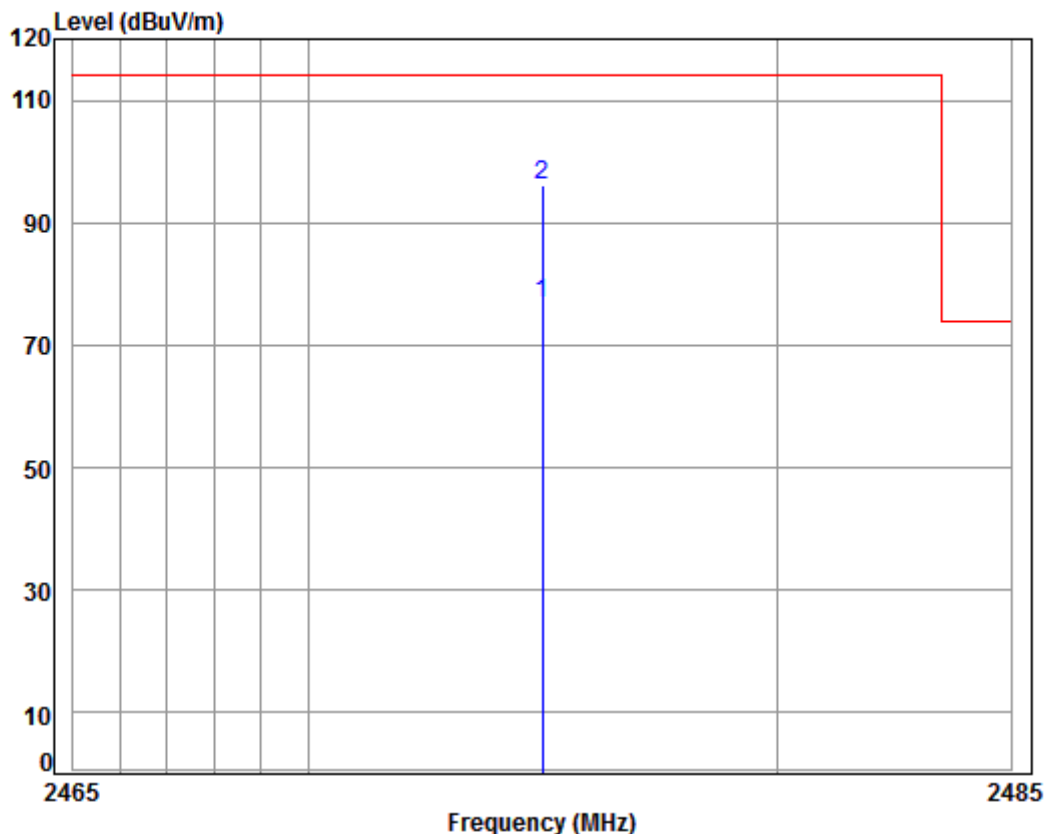

Condition: 3m HORIZONTAL


Job No : 08169CR

Mode : 2475 Field strength

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|------|----------|-------|--------|--------|-------|--------|--------|----------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark         |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 pp | 2475.000 | 5.59  | 29.33  | 37.95  | 79.88 | 76.85  | 94.00  | -17.15 Average |
| 2 pk | 2475.000 | 5.59  | 29.33  | 37.95  | 99.28 | 96.25  | 114.00 | -17.75 peak    |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:High

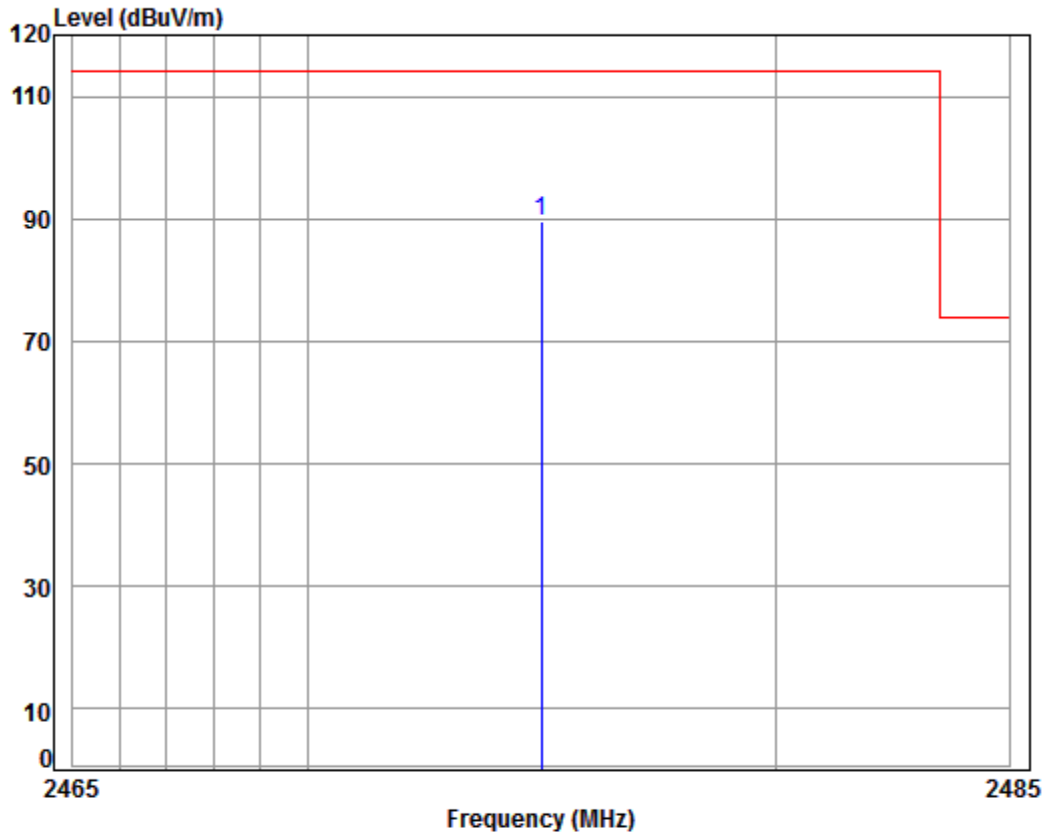

Condition: 3m VERTICAL

Job No : 08169CR

Mode : 2475 Field strength

| Freq          | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---------------|------------|------------|---------------|------------|--------|------------|------------|--------|
| MHz           | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 pp 2475.000 | 5.59       | 29.33      | 37.95         | 92.75      | 89.72  | 114.00     | -24.28     | peak   |

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.



### 7.3 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

| Frequency                                                                                                                                                                                                                                                     | Limit (dBuV/m @3m) | Remark           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------|
| 30MHz-88MHz                                                                                                                                                                                                                                                   | 40.0               | Quasi-peak Value |
| 88MHz-216MHz                                                                                                                                                                                                                                                  | 43.5               | Quasi-peak Value |
| 216MHz-960MHz                                                                                                                                                                                                                                                 | 46.0               | Quasi-peak Value |
| 960MHz-1GHz                                                                                                                                                                                                                                                   | 54.0               | Quasi-peak Value |
| Above 1GHz                                                                                                                                                                                                                                                    | 54.0               | Average Value    |
| Above 1GHz                                                                                                                                                                                                                                                    | 74.0               | Peak Value       |
| Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. |                    |                  |



### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1000 mbar  
Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.

Limit


| Frequency <sup>↕</sup>                                                                                                                                                                                                                                                     | Limit (dBuV/m @3m) <sup>↕</sup> | Remark <sup>↕</sup>           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-------------------------------|
| 30MHz-88MHz <sup>↕</sup>                                                                                                                                                                                                                                                   | 40.0 <sup>↕</sup>               | Quasi-peak Value <sup>↕</sup> |
| 88MHz-216MHz <sup>↕</sup>                                                                                                                                                                                                                                                  | 43.5 <sup>↕</sup>               | Quasi-peak Value <sup>↕</sup> |
| 216MHz-960MHz <sup>↕</sup>                                                                                                                                                                                                                                                 | 46.0 <sup>↕</sup>               | Quasi-peak Value <sup>↕</sup> |
| 960MHz-1GHz <sup>↕</sup>                                                                                                                                                                                                                                                   | 54.0 <sup>↕</sup>               | Quasi-peak Value <sup>↕</sup> |
| Above 1GHz <sup>↕</sup>                                                                                                                                                                                                                                                    | 54.0 <sup>↕</sup>               | Average Value <sup>↕</sup>    |
| Above 1GHz <sup>↕</sup>                                                                                                                                                                                                                                                    | 74.0 <sup>↕</sup>               | Peak Value <sup>↕</sup>       |
| Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. <sup>↕</sup> |                                 |                               |

### 7.3.2 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel,the middle channel,the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:Low

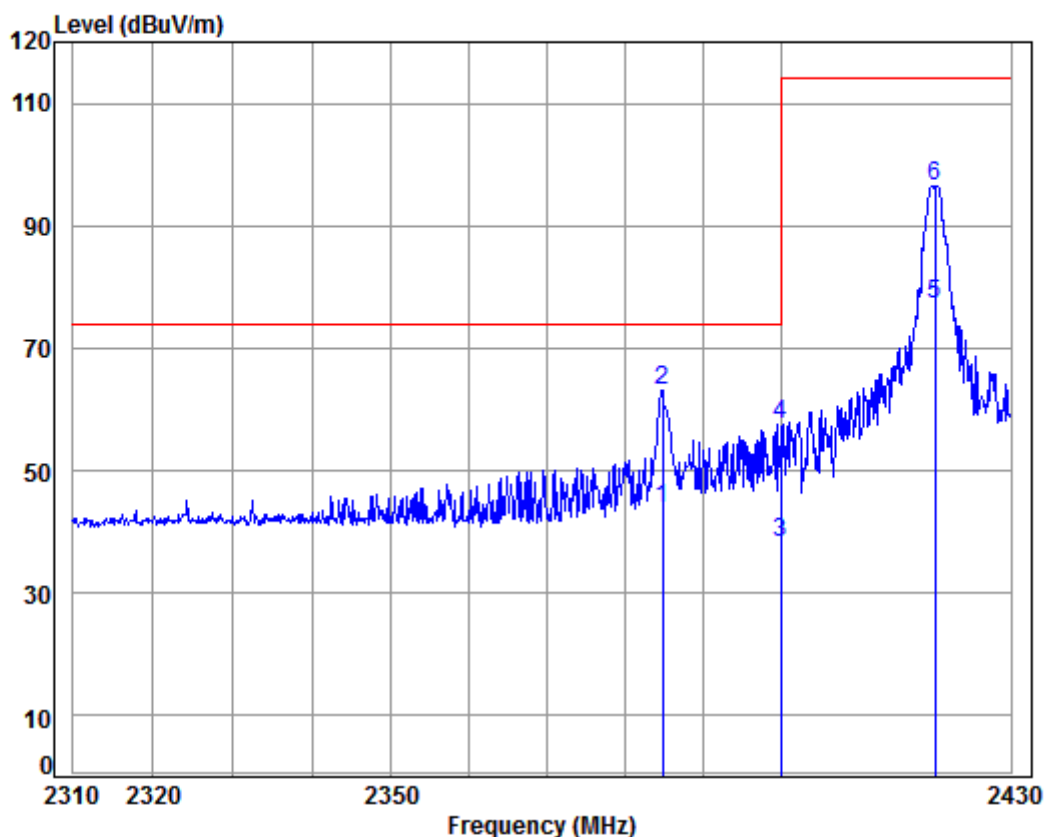


Condition: 3m HORIZONTAL

Job No : 08169CR

Mode : 2420 Band edge

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|------|----------|-------|--------|--------|-------|--------|--------|----------------|
|      | Freq     | Loss  | Factor | Factor | Level | Line   | Limit  | Remark         |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 pp | 2384.769 | 5.47  | 29.06  | 37.96  | 47.18 | 43.75  | 54.00  | -10.25 Average |
| 2 pk | 2384.769 | 5.47  | 29.06  | 37.96  | 66.58 | 63.15  | 74.00  | -10.85 Peak    |
| 3    | 2400.000 | 5.49  | 29.11  | 37.96  | 41.49 | 38.13  | 54.00  | -15.87 Average |
| 4    | 2400.000 | 5.49  | 29.11  | 37.96  | 60.89 | 57.53  | 74.00  | -16.47 peak    |
| 5    | 2420.000 | 5.52  | 29.17  | 37.95  | 80.27 | 77.01  | 94.00  | -16.99 Average |
| 6    | 2420.000 | 5.52  | 29.17  | 37.95  | 99.68 | 96.42  | 114.00 | -17.58 peak    |

Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:Low

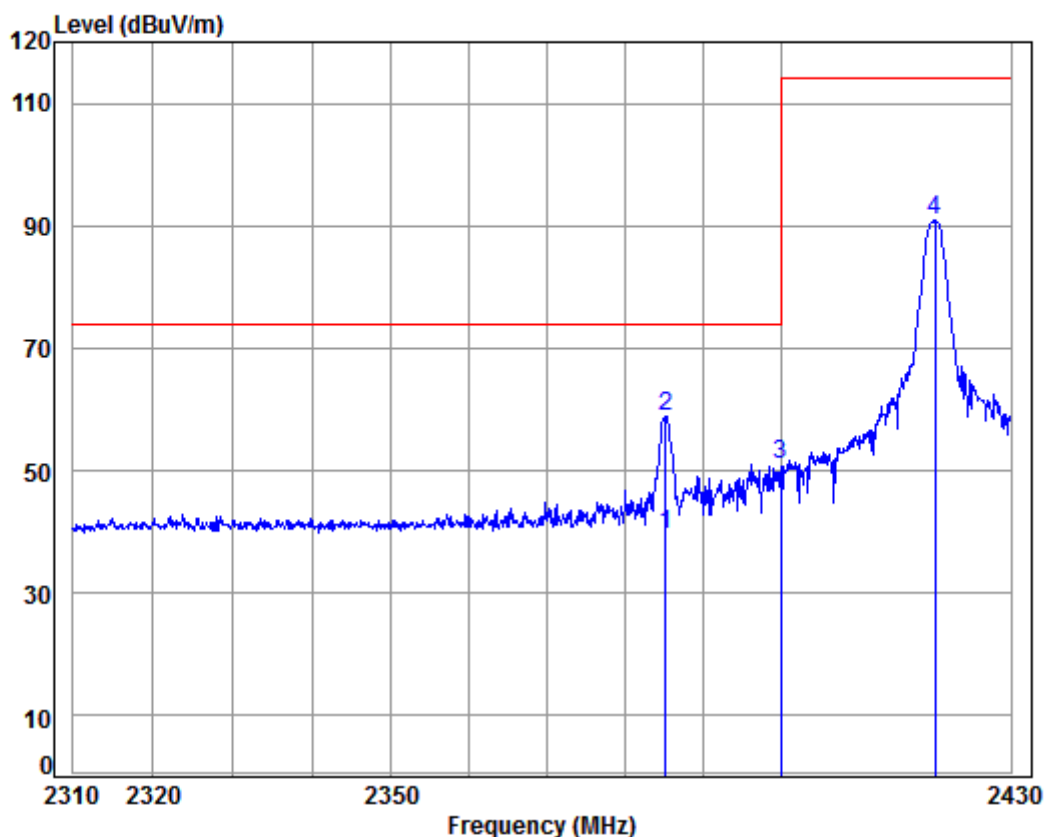


Condition: 3m VERTICAL

Job No : 08169CR

Mode : 2420 Band edge

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|------|----------|-------|--------|--------|-------|--------|--------|----------------|
|      | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark   |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 pp | 2385.132 | 5.47  | 29.06  | 37.96  | 42.89 | 39.46  | 54.00  | -14.54 Average |
| 2 pk | 2385.132 | 5.47  | 29.06  | 37.96  | 62.29 | 58.86  | 74.00  | -15.14 Peak    |
| 3    | 2400.000 | 5.48  | 29.10  | 37.96  | 54.46 | 51.08  | 74.00  | -22.92 peak    |
| 4    | 2420.000 | 5.52  | 29.17  | 37.95  | 94.10 | 90.84  | 114.00 | -23.16 peak    |

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:High

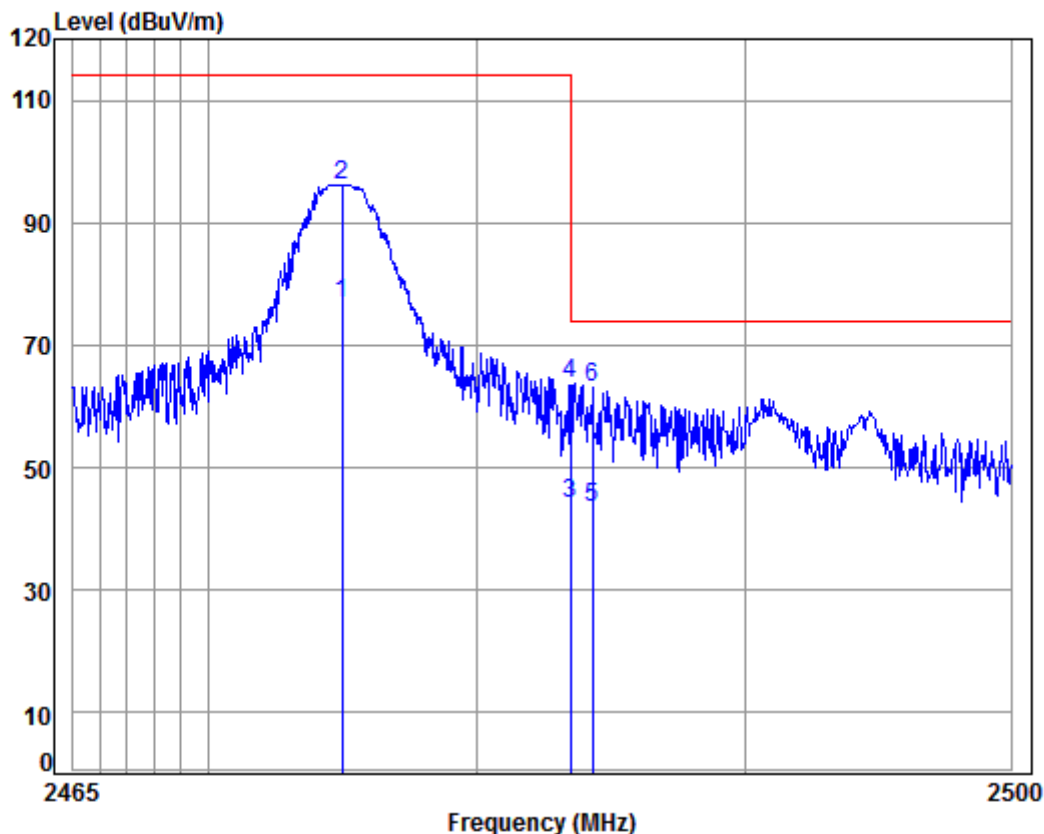


Condition: 3m HORIZONTAL

Job No : 08169CR

Mode : 2475 Band edge

|      | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|------|----------|------------|------------|---------------------|------------|--------|------------|------------|---------|
|      | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1    | 2475.000 | 5.59       | 29.33      | 37.95               | 79.88      | 76.85  | 94.00      | -17.15     | Average |
| 2    | 2475.000 | 5.59       | 29.33      | 37.95               | 99.28      | 96.25  | 114.00     | -17.75     | peak    |
| 3 pp | 2483.500 | 5.60       | 29.35      | 37.95               | 47.29      | 44.29  | 54.00      | -9.71      | Average |
| 4 pk | 2483.500 | 5.60       | 29.35      | 37.95               | 66.68      | 63.68  | 74.00      | -10.32     | peak    |
| 5    | 2484.329 | 5.60       | 29.35      | 37.95               | 46.59      | 43.59  | 54.00      | -10.41     | Average |
| 6    | 2484.329 | 5.60       | 29.35      | 37.95               | 65.98      | 62.98  | 74.00      | -11.02     | Peak    |

Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:High

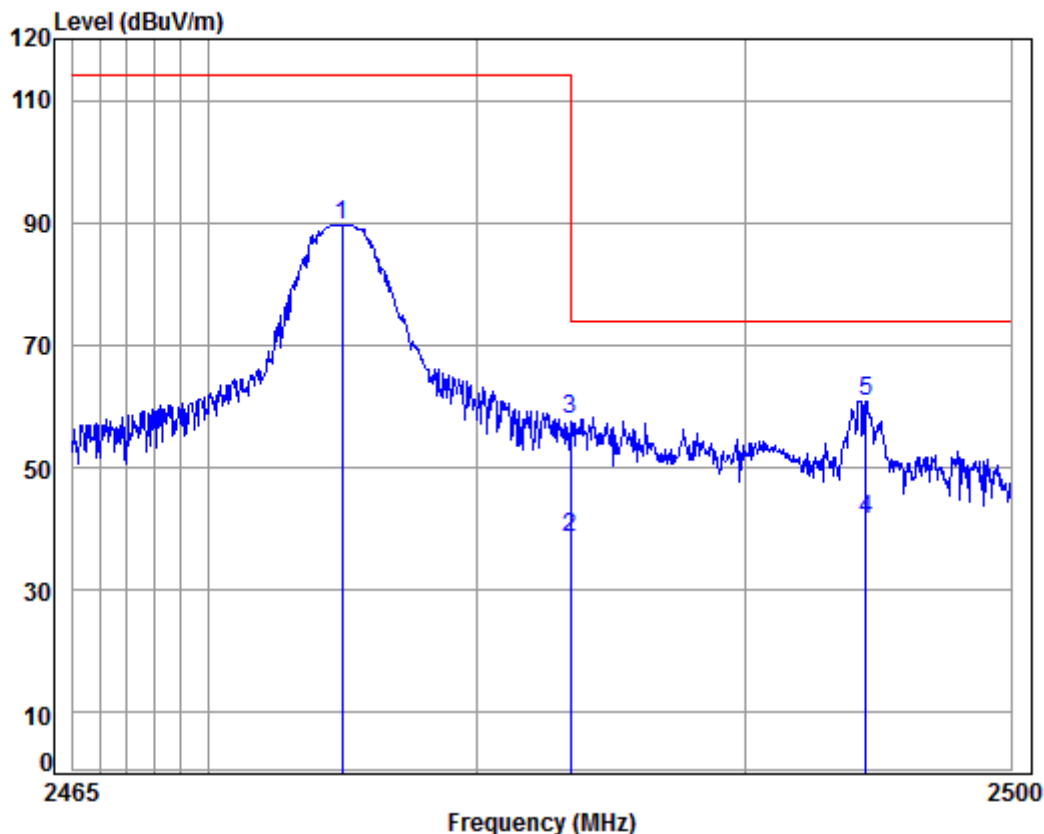

Condition: 3m VERTICAL

Job No : 08169CR

Mode : 2475 Band edge

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|------|----------|-------|--------|--------|-------|--------|--------|----------------|
|      | Freq     | Loss  | Factor | Factor | Level | Level  | Limit  | Remark         |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1    | 2475.000 | 5.59  | 29.33  | 37.95  | 92.75 | 89.72  | 114.00 | -24.28 peak    |
| 2    | 2483.500 | 5.60  | 29.35  | 37.95  | 41.62 | 38.62  | 54.00  | -15.38 Average |
| 3    | 2483.500 | 5.60  | 29.35  | 37.95  | 61.01 | 58.01  | 74.00  | -15.99 peak    |
| 4 pp | 2494.543 | 5.61  | 29.38  | 37.95  | 44.47 | 41.51  | 54.00  | -12.49 Average |
| 5 pk | 2494.543 | 5.61  | 29.38  | 37.95  | 63.86 | 60.90  | 74.00  | -13.10 Peak    |



## 7.4 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength<br>(microvolts/meter) | Limit<br>(dBuV/m) | Detector | Measurement Distance<br>(meters) |
|----------------|--------------------------------------|-------------------|----------|----------------------------------|
| 0.009-0.490    | 2400/F(kHz)                          | -                 | -        | 300                              |
| 0.490-1.705    | 24000/F(kHz)                         | -                 | -        | 30                               |
| 1.705-30       | 30                                   | -                 | -        | 30                               |
| 30-88          | 100                                  | 40.0              | QP       | 3                                |
| 88-216         | 150                                  | 43.5              | QP       | 3                                |
| 216-960        | 200                                  | 46.0              | QP       | 3                                |
| 960-1000       | 500                                  | 54.0              | QP       | 3                                |
| Above 1000     | 500                                  | 54.0              | AV       | 3                                |

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1000 mbar

Test mode a:TX mode\_Keep the EUT in transmitting with modulation mode.




#### **7.4.2 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

**Radiated Emission below 1GHz**

30MHz~1GHz (QP)

Polarization:Horizontal;

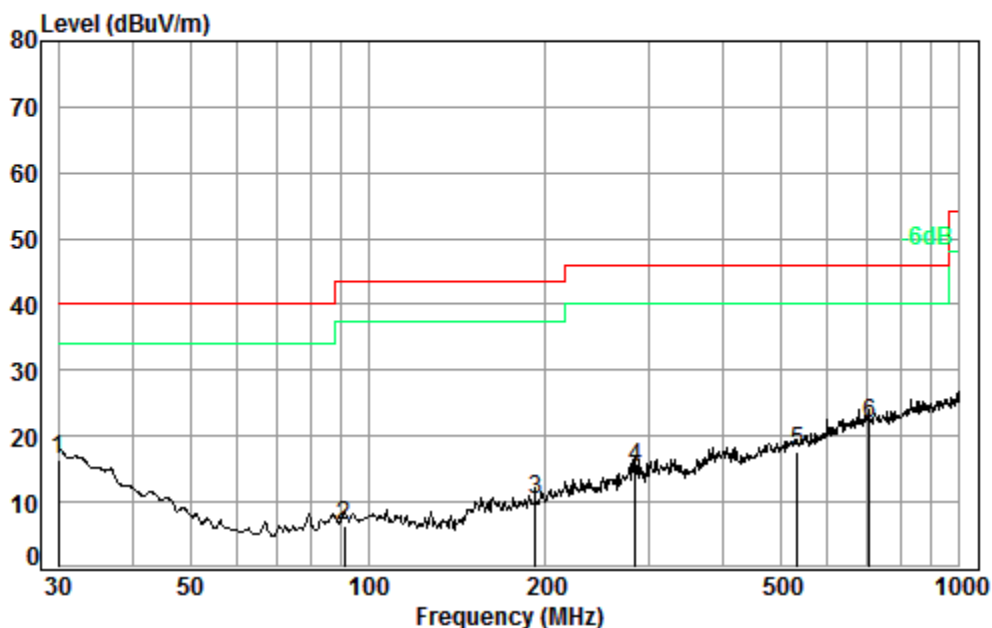


Condition: 3m HORIZONTAL

Job No. : 08169CR

Test mode: a

|   |      | Cable  | Ant    | Preamp | Read  |        | Limit  | Over         |
|---|------|--------|--------|--------|-------|--------|--------|--------------|
|   | Freq | Loss   | Factor | Factor | Level | Level  | Line   | Limit        |
|   | MHz  | dB     | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB           |
| 1 | pp   | 30.00  | 0.60   | 18.70  | 27.36 | 24.53  | 16.47  | 40.00 -23.53 |
| 2 |      | 91.17  | 1.11   | 8.75   | 27.21 | 23.77  | 6.42   | 43.50 -37.08 |
| 3 |      | 191.75 | 1.39   | 10.12  | 26.73 | 25.48  | 10.26  | 43.50 -33.24 |
| 4 |      | 283.98 | 1.83   | 13.20  | 26.44 | 26.54  | 15.13  | 46.00 -30.87 |
| 5 |      | 531.96 | 2.63   | 18.61  | 27.65 | 23.99  | 17.58  | 46.00 -28.42 |
| 6 |      | 704.23 | 2.92   | 21.60  | 27.41 | 24.77  | 21.88  | 46.00 -24.12 |

Polarization:Vertical;

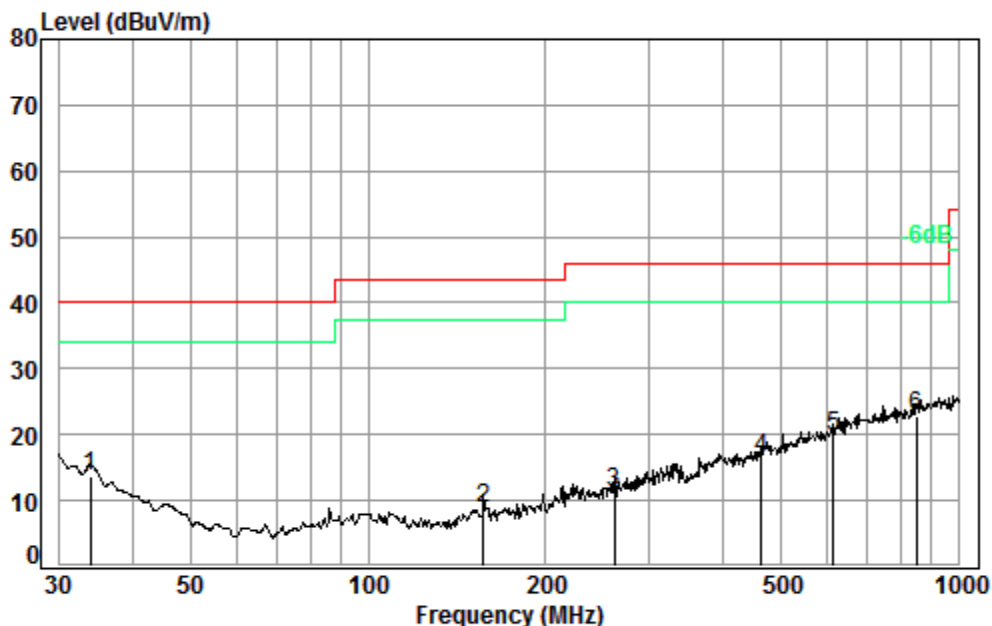

Condition: 3m HORIZONTAL

Job No. : 08169CR


Test mode: a

|      | Freq   | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 33.92  | 0.60       | 16.51      | 27.34         | 23.90      | 13.67  | 40.00      | -26.33     |
| 2    | 157.01 | 1.33       | 9.42       | 26.87         | 24.93      | 8.81   | 43.50      | -34.69     |
| 3    | 261.06 | 1.73       | 12.52      | 26.50         | 23.55      | 11.30  | 46.00      | -34.70     |
| 4    | 463.97 | 2.47       | 17.40      | 27.52         | 23.94      | 16.29  | 46.00      | -29.71     |
| 5    | 614.21 | 2.73       | 20.20      | 27.52         | 24.23      | 19.64  | 46.00      | -26.36     |
| 6 pp | 848.06 | 3.40       | 22.40      | 27.02         | 23.94      | 22.72  | 46.00      | -23.28     |



**Transmitter emission above 1GHz**

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:Low

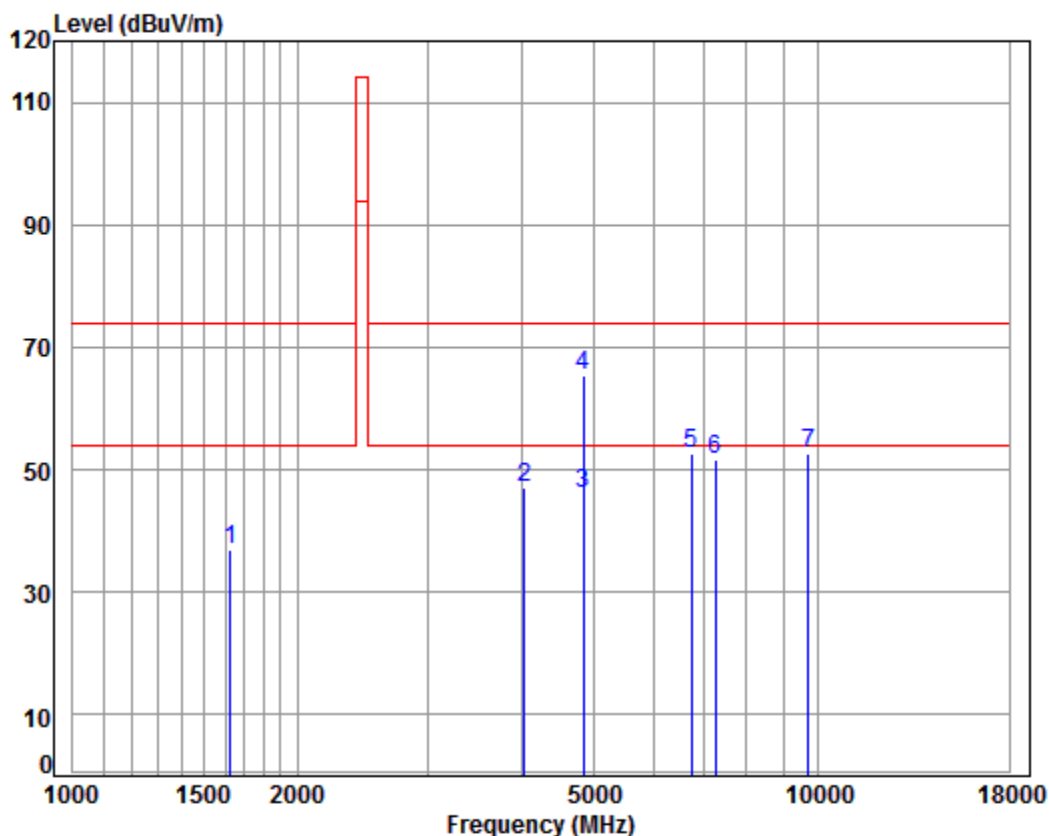

Condition: 3m HORIZONTAL


Job No : 08169CR

Mode : 2420 TX RSE

|   | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|---|----------|------------|------------|---------------------|------------|--------|------------|------------|---------|
|   | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1 | 1625.121 | 5.32       | 26.36      | 38.03               | 43.27      | 36.92  | 74.00      | -37.08     | peak    |
| 2 | 4027.554 | 7.01       | 33.60      | 38.02               | 44.54      | 47.13  | 74.00      | -26.87     | peak    |
| 3 | 4840.000 | 7.93       | 34.22      | 38.43               | 42.49      | 46.21  | 54.00      | -7.79      | Average |
| 4 | 4840.000 | 7.93       | 34.22      | 38.43               | 61.82      | 65.54  | 74.00      | -8.46      | peak    |
| 5 | 6756.708 | 10.80      | 35.83      | 37.53               | 43.69      | 52.79  | 74.00      | -21.21     | peak    |
| 6 | 7260.000 | 10.06      | 36.39      | 37.05               | 42.22      | 51.62  | 74.00      | -22.38     | peak    |
| 7 | 9680.000 | 10.78      | 37.54      | 35.05               | 39.33      | 52.60  | 74.00      | -21.40     | peak    |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:Low

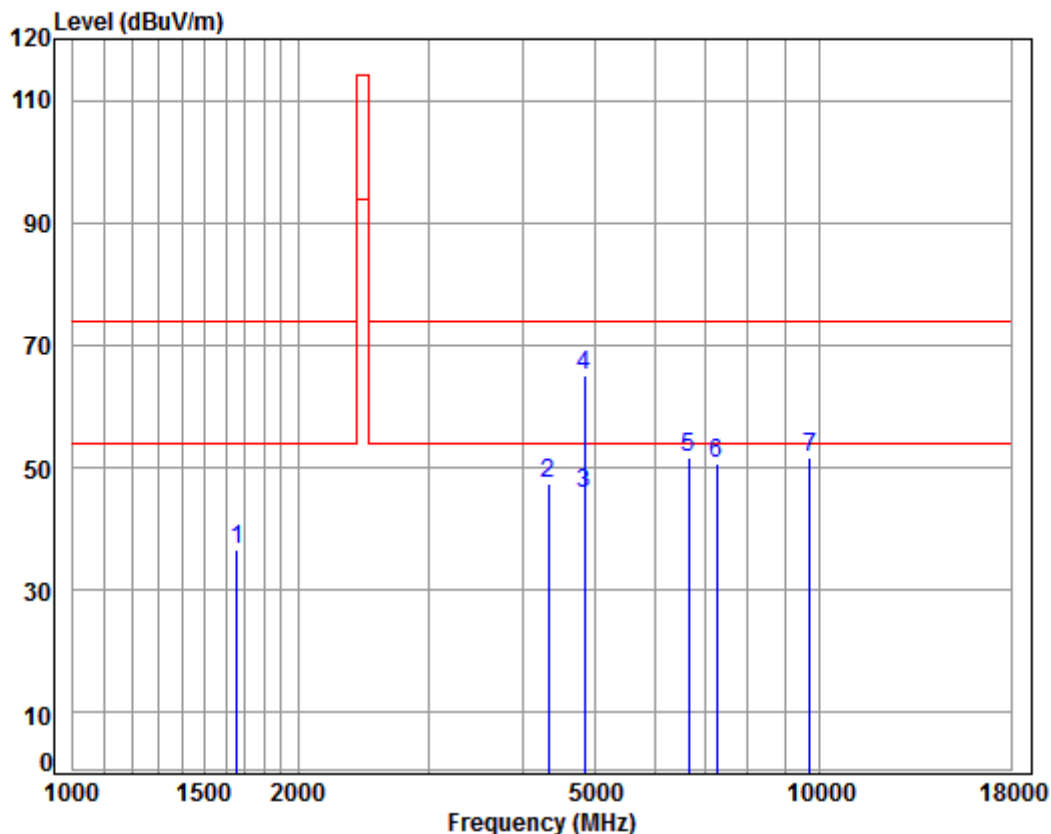

Condition: 3m VERTICAL


Job No : 08169CR

Mode : 2420 TX RSE

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|---------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1    | 1658.337 | 5.28       | 26.50      | 38.03         | 42.97      | 36.72  | 74.00      | -37.28     | peak    |
| 2    | 4329.354 | 7.37       | 33.60      | 38.18         | 44.58      | 47.37  | 74.00      | -26.63     | peak    |
| 3 pp | 4840.000 | 7.93       | 34.22      | 38.43         | 41.99      | 45.71  | 54.00      | -8.29      | Average |
| 4 pk | 4840.000 | 7.93       | 34.22      | 38.43         | 61.39      | 65.11  | 74.00      | -8.89      | peak    |
| 5    | 6659.763 | 11.08      | 35.56      | 37.62         | 42.72      | 51.74  | 74.00      | -22.26     | peak    |
| 6    | 7260.000 | 10.06      | 36.39      | 37.05         | 41.23      | 50.63  | 74.00      | -23.37     | peak    |
| 7    | 9680.000 | 10.78      | 37.54      | 35.05         | 38.50      | 51.77  | 74.00      | -22.23     | peak    |



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:middle

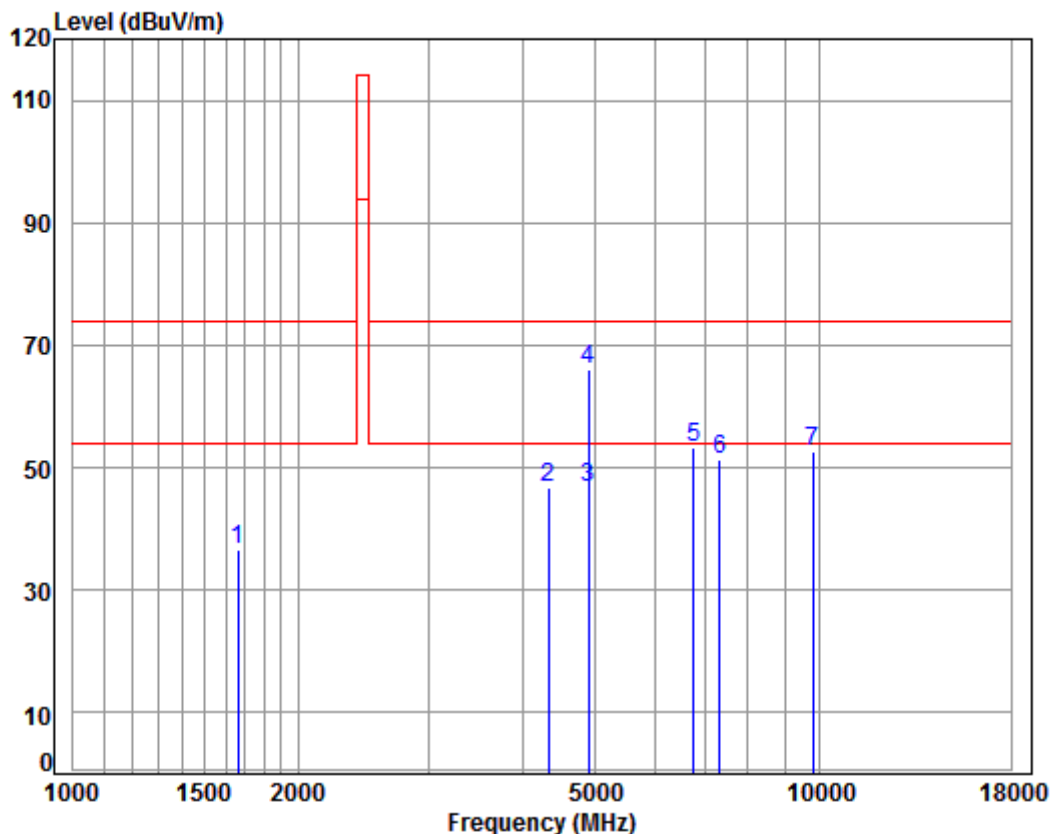

Condition: 3m HORIZONTAL


Job No : 08169CR

Mode : 2447 TX RSE

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|---------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1    | 1663.137 | 5.27       | 26.52      | 38.03         | 42.80      | 36.56  | 74.00      | -37.44     | peak    |
| 2    | 4329.354 | 7.37       | 33.60      | 38.18         | 44.08      | 46.87  | 74.00      | -27.13     | peak    |
| 3 pp | 4894.000 | 7.98       | 34.32      | 38.45         | 42.78      | 46.63  | 54.00      | -7.37      | Average |
| 4 pk | 4894.000 | 7.98       | 34.32      | 38.45         | 62.18      | 66.03  | 74.00      | -7.97      | peak    |
| 5    | 6776.265 | 10.75      | 35.89      | 37.51         | 44.20      | 53.33  | 74.00      | -20.67     | peak    |
| 6    | 7341.000 | 10.04      | 36.36      | 36.98         | 41.80      | 51.22  | 74.00      | -22.78     | peak    |
| 7    | 9788.000 | 10.84      | 37.56      | 35.00         | 39.16      | 52.56  | 74.00      | -21.44     | peak    |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:middle

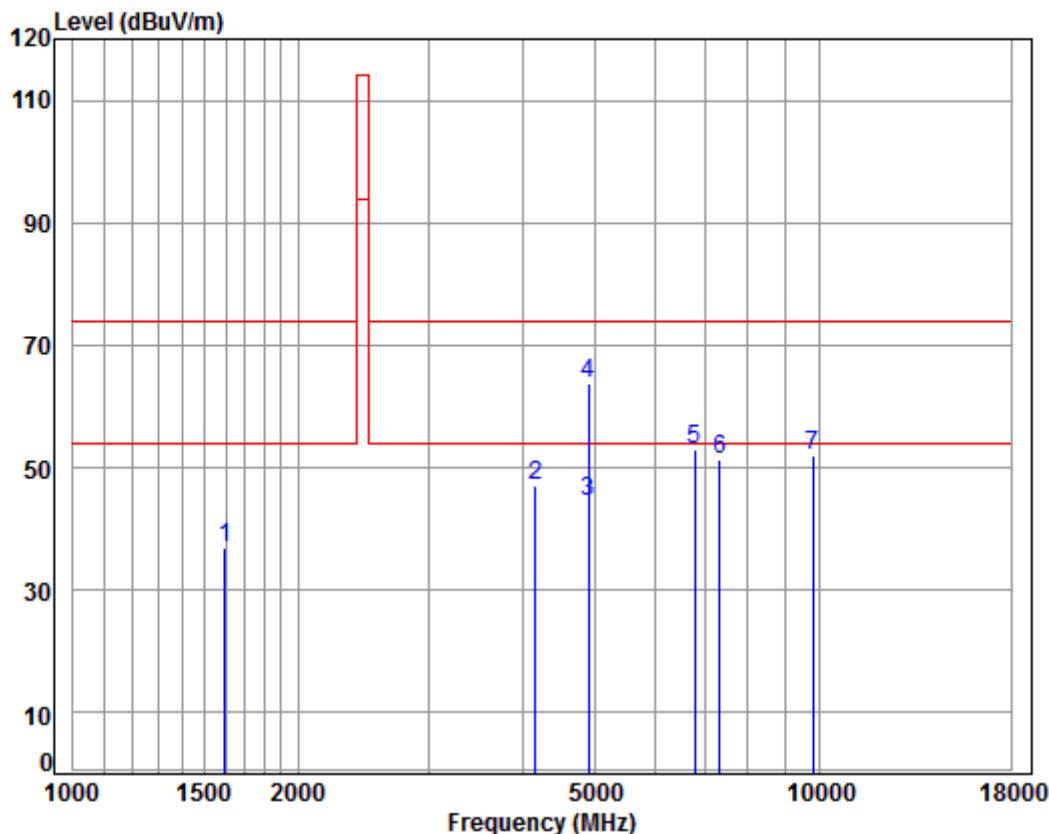


Condition: 3m VERTICAL

Job No : 08169CR

Mode : 2447 TX RSE

|      | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|------|----------|------------|------------|---------------------|------------|--------|------------|------------|---------|
|      | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1    | 1597.181 | 5.35       | 26.24      | 38.03               | 43.44      | 37.00  | 74.00      | -37.00     | peak    |
| 2    | 4157.664 | 7.17       | 33.60      | 38.09               | 44.51      | 47.19  | 74.00      | -26.81     | peak    |
| 3 pp | 4894.000 | 7.98       | 34.32      | 38.45               | 40.52      | 44.37  | 54.00      | -9.63      | Average |
| 4 pk | 4894.000 | 7.98       | 34.32      | 38.45               | 59.92      | 63.77  | 74.00      | -10.23     | peak    |
| 5    | 6795.879 | 10.69      | 35.94      | 37.49               | 43.80      | 52.94  | 74.00      | -21.06     | peak    |
| 6    | 7341.000 | 10.04      | 36.36      | 36.98               | 42.02      | 51.44  | 74.00      | -22.56     | peak    |
| 7    | 9788.000 | 10.84      | 37.56      | 35.00               | 38.64      | 52.04  | 74.00      | -21.96     | peak    |

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:High

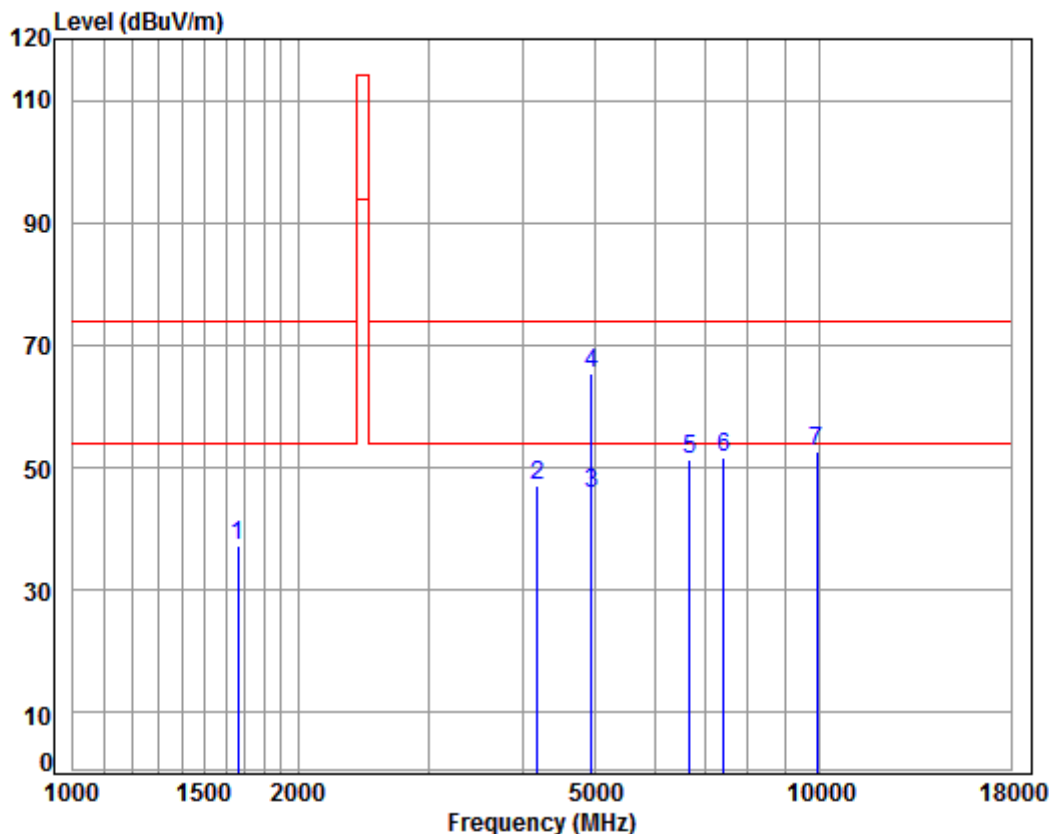

Condition: 3m HORIZONTAL


Job No : 08169CR

Mode : 2475 TX RSE

|      | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit | Remark  |
|------|----------|------------|------------|---------------------|------------|--------|------------|------------|---------|
|      | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |         |
| 1    | 1663.137 | 5.27       | 26.52      | 38.03               | 43.37      | 37.13  | 74.00      | -36.87     | peak    |
| 2    | 4181.768 | 7.20       | 33.60      | 38.10               | 44.50      | 47.20  | 74.00      | -26.80     | peak    |
| 3 pp | 4950.000 | 8.04       | 34.41      | 38.48               | 41.89      | 45.86  | 54.00      | -8.14      | Average |
| 4 pk | 4950.000 | 8.04       | 34.41      | 38.48               | 61.28      | 65.25  | 74.00      | -8.75      | peak    |
| 5    | 6679.040 | 11.02      | 35.61      | 37.60               | 42.33      | 51.36  | 74.00      | -22.64     | peak    |
| 6    | 7425.000 | 10.02      | 36.33      | 36.90               | 42.21      | 51.66  | 74.00      | -22.34     | peak    |
| 7    | 9900.000 | 10.89      | 37.58      | 34.95               | 39.02      | 52.54  | 74.00      | -21.46     | peak    |



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:High

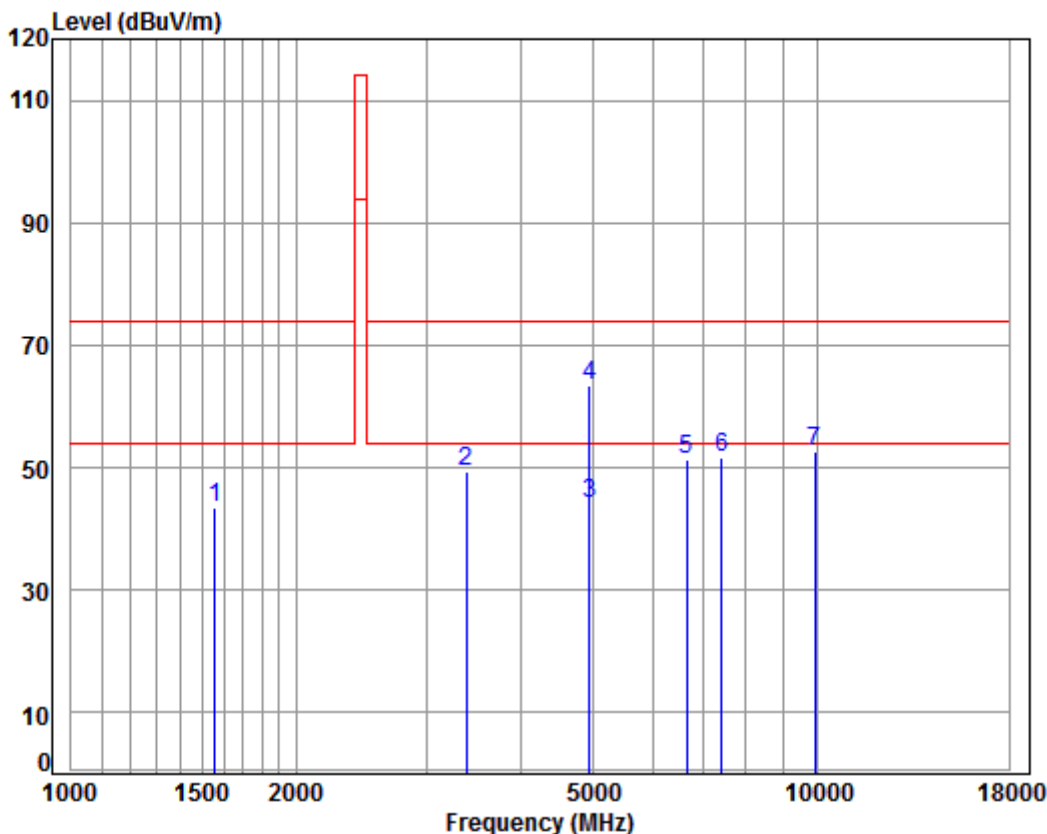

Condition: 3m VERTICAL

Job No : 08169CR

Mode : 2475 TX RSE

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |         |
|------|----------|-------|--------|--------|-------|--------|--------|--------|---------|
|      | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark  |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |         |
| 1    | 1560.673 | 5.40  | 26.08  | 38.04  | 49.91 | 43.35  | 74.00  | -30.65 | peak    |
| 2    | 3376.523 | 6.35  | 31.99  | 37.94  | 48.98 | 49.38  | 74.00  | -24.62 | peak    |
| 3 pp | 4950.000 | 8.04  | 34.41  | 38.48  | 40.13 | 44.10  | 54.00  | -9.90  | Average |
| 4 pk | 4950.000 | 8.04  | 34.41  | 38.48  | 59.52 | 63.49  | 74.00  | -10.51 | peak    |
| 5    | 6659.763 | 11.08 | 35.56  | 37.62  | 42.44 | 51.46  | 74.00  | -22.54 | peak    |
| 6    | 7425.000 | 10.02 | 36.33  | 36.90  | 42.14 | 51.59  | 74.00  | -22.41 | peak    |
| 7    | 9900.000 | 10.89 | 37.58  | 34.95  | 39.18 | 52.70  | 74.00  | -21.30 | peak    |




Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 8 Photographs

### 8.1 Radiated Emissions Test Setup

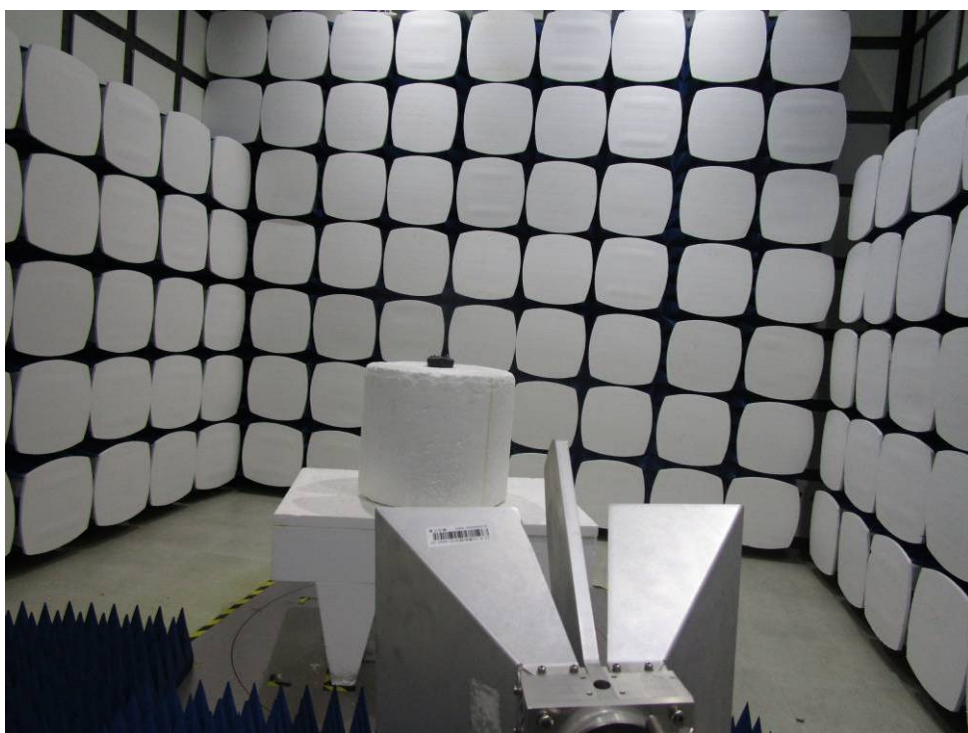



## **8.2 EUT Constructional Details**

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1708008169CR.