


Each camera has a pre-registered Skype account.

Enter your existing Skype account or a new Skype account.



Skype account

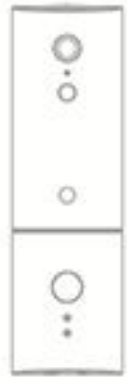

You must use your existing Skype account or create a new one in order to use the sensor.

6

If QR scan failed, it will ask:
Do you want to try again?
You can press "Retry" to try again .
It is recommended that you check your information and try again.

RETRY
QR SCAN

CHECK
INFORMATION

12

■ Installing the camera	■ Control the iSensor HD camera rotation
■ Accepting the camera as your Skype contact	■ Troubleshooting
■ Operating iSensor HD app	■ Adding a new Wi-Fi router
■ Operating Skype app	■ LED indicator lights

1

Do you have a Skype account?
You need a Skype account to call the camera and act as the camera's administrator.

YES

If yes, please press the "Yes" button and enter in your Skype name.

If the name you enter is different from your Skype name, the setup will not be successful.

NO

If no, please press the "No" button to apply for a new Skype account.

7



iSensor HD

- You will hear two beeps when the camera setup completes.

Congratulations!

The camera setup is complete.

- The green LED remains on when Wi-Fi is working properly.

13



Switch on your phone's Wi-Fi



Download "iSensor HD" App

Connect your phone to a router

2

Please check the information below

Wi-Fi (SSID)


Wi-Fi password

Skype account

8

You may need to wait at least 10~60 seconds for your mobile device (iOS and Android smartphones/tablets) to receive a confirmation message from Skype after a successful QR code installation. You must also accept the "Contact Request" from the camera that was just installed in order to make a video call.

14

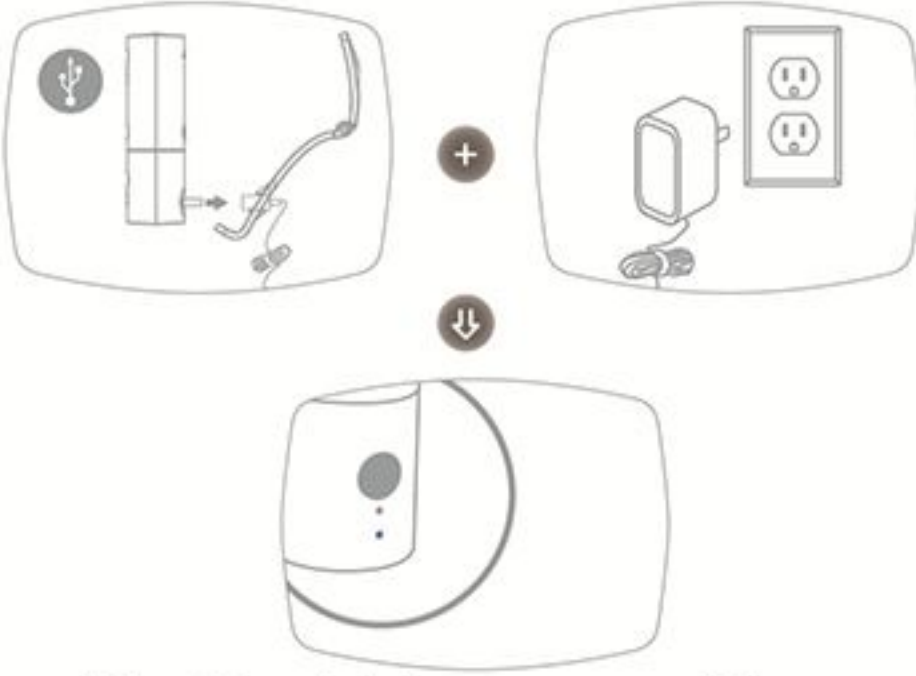

Connect the USB cable to a power outlet.
The blue LED light will be on when the camera is powered.

3 Wait for the blue LED light to start flashing before starting installation.

Follow the steps below to complete the QR code scan.

1. Your phone will generate a QR code.

2. Place the camera 4" ~11.8" (10~30 cm) in front of the smartphone or 7.8" ~11.8" (20~30 cm) in front of the tablet (the iSensor HD will scan the QR code on the mobile device screen).
Please wait for a beep to confirm scan.

After you hear a beep , you can put the phone down.

4" ~11.8"


Horizontal alignment

90 degree


Smartphone or portable device

Make sure your device and the camera are parallel to each other.

9

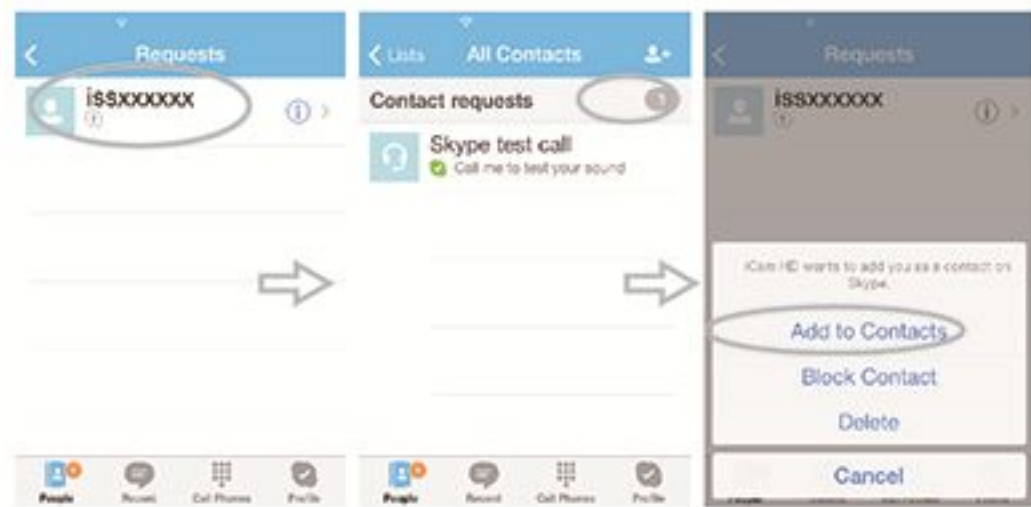

15 After successful installation, please go to "Contacts" in the Skype app to accept the iSensor HD friend request in order to access the camera.

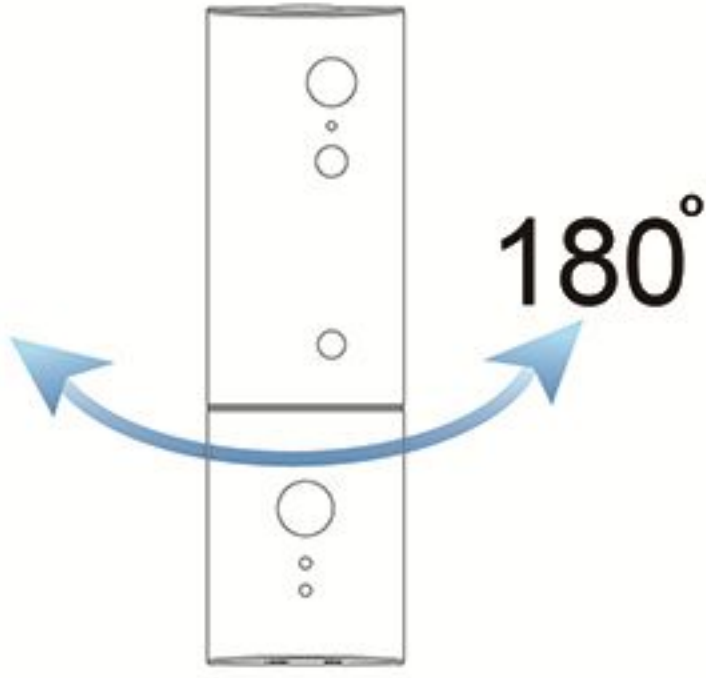

180°

After powering on, it will take about 15 seconds before starting the calibration cycle. (For remote models)

4

iOS

Android

Remaining.....

Remaining.....

Wait for Skype to confirm the camera is connected to your account. The time may vary depending on your bandwidth.
The timer will show the remaining time to finish the installation. If the timer runs out, you will need to start the installation over again.

10

About this camera

App version

Firmware version

Skype ID

Skype display name

IP address

Mac address

About us

Feedback

www.amaryllo.eu

support.ai@amaryllo.eu

16




Enter the password of your Wi-Fi AP router

JOIN

5

- You will hear one beep when the QR code is scanned.
- You will hear two beeps when the camera setup is completed.
- The green LED light remains on when the camera is connected to the Wi-Fi.

11

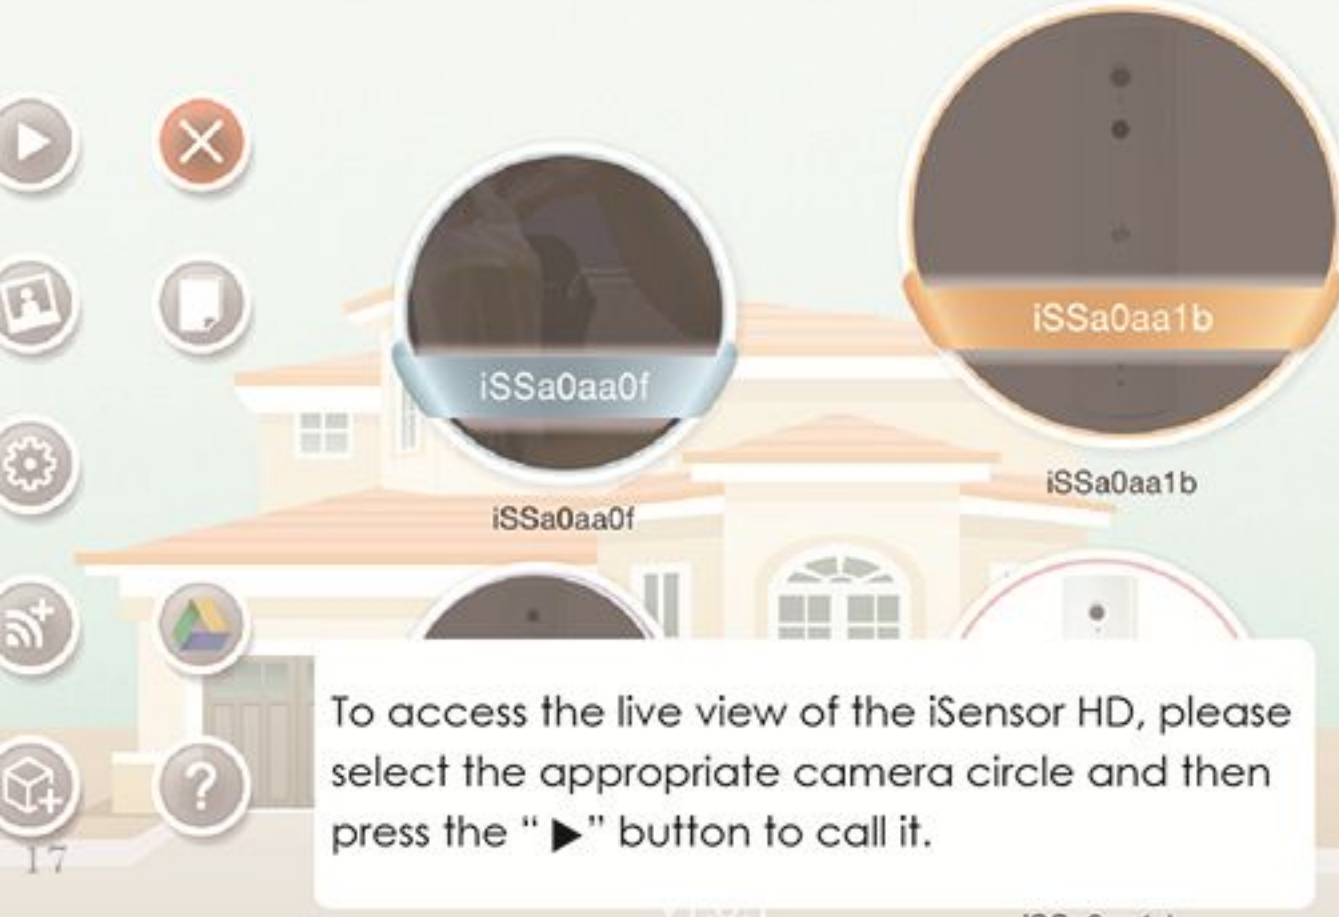

To access the live view of the iSensor HD, please select the appropriate camera circle and then press the "▶" button to call it.

17

