

FCC Radio Test Report

FCC ID: 2ABEPTW1066

Original Grant

Report No. : TB-FCC145567
Applicant : Shenzhen Tianzheng Hongye Technology Co.Ltd
Equipment Under Test (EUT)
EUT Name : 10.1 inch MID
Model No. : TM101A550L
Series No. : TM101A530L, TM101A520L, TW1066G
Brand Name : NuVision
Receipt Date : 2015-09-29
Test Date : 2015-09-30 to 2015-11-18
Issue Date : 2015-11-18
Standards : FCC Part 15, Subpart C (15.247:2015)
Test Method : ANSI C63.10:2013
Conclusions : **PASS**


In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC requirements

Test/Witness Engineer :

WANG SU

Approved& Authorized :

Ray



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	6
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting	7
1.7 Measurement Uncertainty	7
1.8 Test Facility.....	8
2. TEST SUMMARY	9
3. TEST EQUIPMENT	10
4. CONDUCTED EMISSION TEST	11
4.1 Test Standard and Limit.....	11
4.2 Test Setup.....	11
4.3 Test Procedure.....	11
4.4 EUT Operating Mode	12
4.5 Test Data.....	12
5. RADIATED EMISSION TEST	21
5.1 Test Standard and Limit.....	21
5.2 Test Setup.....	22
5.3 Test Procedure.....	23
5.4 EUT Operating Condition	24
5.5 Test Data.....	24
6. RESTRICTED BANDS REQUIREMENT	41
6.1 Test Standard and Limit.....	41
6.2 Test Setup.....	41
6.3 Test Procedure.....	41
6.4 EUT Operating Condition	42
6.5 Test Data.....	42
7. NUMBER OF HOPPING CHANNEL	55
7.1 Test Standard and Limit.....	55
7.2 Test Setup.....	55
7.3 Test Procedure.....	55
7.4 EUT Operating Condition	55
7.5 Test Data.....	55
8. AVERAGE TIME OF OCCUPANCY.....	57
8.1 Test Standard and Limit.....	57
8.2 Test Setup.....	57

8.3 Test Procedure.....	57
8.4 EUT Operating Condition	57
8.5 Test Data.....	58
9. CHANNEL SEPARATION AND BANDWIDTH TEST	76
9.1 Test Standard and Limit.....	76
9.2 Test Setup.....	76
9.3 Test Procedure.....	76
9.4 EUT Operating Condition	76
9.5 Test Data.....	77
10. PEAK OUTPUT POWER TEST.....	89
10.1 Test Standard and Limit	89
10.2 Test Setup.....	89
10.3 Test Procedure.....	89
10.4 EUT Operating Condition	89
10.5 Test Data.....	90
11. ANTENNA REQUIREMENT.....	96
11.1 Standard Requirement.....	96
11.2 Antenna Connected Construction	96

1. General Information about EUT

1.1 Client Information

Applicant : Shenzhen Tianzheng Hongye Technology Co.Ltd.
Address : Building C, Guancheng High-tech Science and Technology Park,
Zhenxing Road, Carp River Industrial Zone, Lou Village, Gongming
Town, Guangming New District, Shenzhen City, Guangdong Province,
China
Manufacturer : Shenzhen Tianzheng Hongye Technology Co.Ltd.
Address : Building C, Guancheng High-tech Science and Technology Park,
Zhenxing Road, Carp River Industrial Zone, Lou Village, Gongming
Town, Guangming New District, Shenzhen City, Guangdong Province,
China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	10.1 inch MID
Models No.	:	TM101A550L, TM101A530L, TM101A520L, TW1066G
Model Difference	:	All models are identical in the same PCB layout, interior structure and electrical circuits, The only difference is model name for commercial purpose.
Product Description	Operation Frequency: BT: 2402MHz~2480MHz BLE: 2402MHz~2480MHz ₍₂₎ WIFI: 2412~2462 MHz ₍₂₎	
	Number of Channel:	Bluetooth:79 Channels see note (3)
	Max Peak Output Power:	GFSK: 4.745 dBm
	Antenna Gain:	2.09 dBi FPC Antenna
	Modulation Type:	GFSK 1Mbps(1 Mbps) π /4-DQPSK(2 Mbps) 8-DPSK(3 Mbps)
Power Supply	:	DC Voltage supplied from AC/DC adapter DC power by Li-ion Battery
Power Rating	:	Adapter 1#(TEKA018-0502500UK 1509): Input: AC 100~240V 50/60Hz 0.5A Output: 5V/2.5A Adapter 2#(TEKA018-0502500UK 1510): Input: AC 100~240V 50/60Hz 0.5A Output: 5V/2.5A DC 3.7V from 45.6Wh Li-ion battery
Connecting I/O Port(S)	:	Please refer to the User's Manual

Note:


- (1) This Test Report is FCC Part 15.247 for Bluetooth, and test procedure in accordance with Public Notice: DA 00-705..
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. The EUT has also been tested and complied the FCC 15C for BLE and WIFI function, and recorded in the separate test report.
- (3) Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

- (4) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

TX Mode

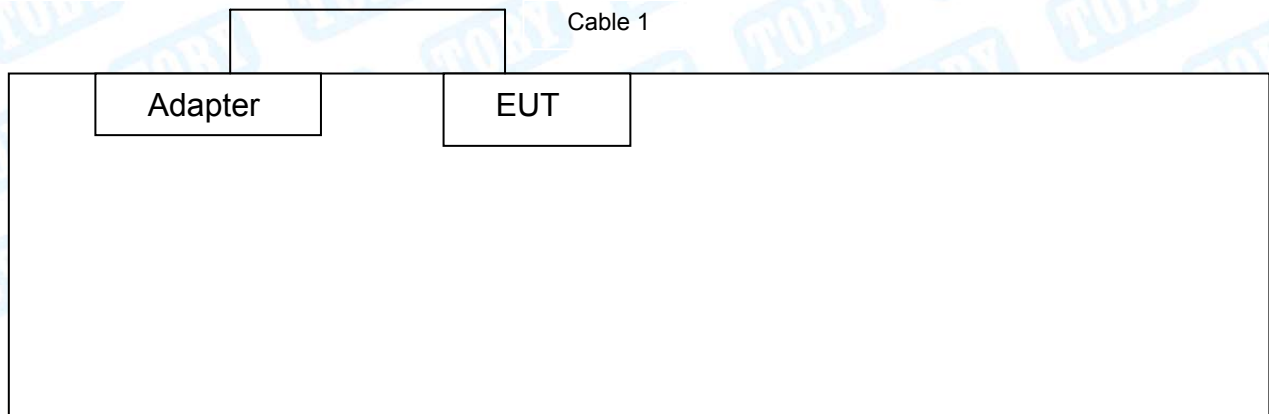

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/DOC	Manufacturer	Used “√”
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	NO	NO	0.8M	Accessory

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	AC Charging with TX GFSK Mode

For Radiated Test

Final Test Mode	Description
Mode 1	AC Charging with TX GFSK Mode
Mode 2	TX Mode(GFSK) Channel 00/39/78
Mode 3	TX Mode($\pi/4$ -DQPSK) Channel 00/39/78
Mode 4	TX Mode(8-DPSK) Channel 00/39/78
Mode 5	Hopping Mode(GFSK)
Mode 6	Hopping Mode($\pi/4$ -DQPSK)
Mode 7	Hopping Mode(8-DPSK)

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test mode above.
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:
TX Mode: GFSK (1 Mbps)
TX Mode: 8-DPSK (3 Mbps)
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on Z-plane as the normal use. Therefore only the test data of this Z-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	RF KPI Test		
Frequency	2402 MHz	2441MHz	2480 MHz
GFSK	DEF	DEF	DEF
$\pi/4$ -DQPSK	DEF	DEF	DEF
8-DPSK	DEF	DEF	DEF

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U _{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	±3.42 dB ±3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	±4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	±4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	±4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

May 22, 2014 certificated by TUV Rheinland(China) Co., Ltd. with TUV certificate No.: UA 50282953 0001 and report No.: 17026822 002. The certificate is valid until the next scheduled audit or up to 18 months, at the discretion of TUV Rhineland.

2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 1				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203		Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.2	Conducted Emission	PASS	N/A
15.205	RSS-Gen 7.2.3	Restricted Bands	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (2)	Hopping Channel Separation	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (4)	Dwell Time	PASS	N/A
15.247(b)(1)	RSS 247 5.4 (2)	Peak Output Power	PASS	N/A
15.247(b)(1)	RSS 247 5.1 (4)	Number of Hopping Frequency	PASS	N/A
15.247(c)	RSS 247 5.5	Radiated Spurious Emission	PASS	N/A
15.247(a)	RSS 247 5.1 (1)	99% Occupied Bandwidth & 20dB Bandwidth	PASS	99%OBW GFSK:838.9044kHz π /4-DQPSK: 909.8529kHz 8-DPSK:1135.40kHz
Note: N/A is an abbreviation for Not Applicable.				

3. Test Equipment

AC Main Conducted Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Aug. 07, 2015	Aug. 06, 2016
50ΩCoaxial Switch	Anritsu	MP59B	X10321	Aug. 07, 2015	Aug. 06, 2016
L.I.S.N	Rohde & Schwarz	ENV216	101131	Aug. 07, 2015	Aug. 06, 2016
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Aug. 07, 2015	Aug. 06, 2016

Radiation Spurious Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 29, 2015	Aug. 28, 2016
EMI Test Receiver	Rohde & Schwarz	ESCI	100010/007	Aug. 07, 2015	Aug. 06, 2016
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 28, 2015	Mar. 27, 2016
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 28, 2015	Mar. 27, 2016
Pre-amplifier	Sonoma	310N	185903	Mar. 28, 2015	Mar. 27, 2016
Pre-amplifier	HP	8447B	3008A00849	Mar. 28, 2015	Mar. 27, 2016
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 28, 2015	Mar. 27, 2016
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

Antenna Conducted Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 29, 2015	Aug. 28, 2016
EMI Test Receiver	Rohde & Schwarz	ESCI	100010/007	Aug. 07, 2015	Aug. 06, 2016

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard
FCC 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

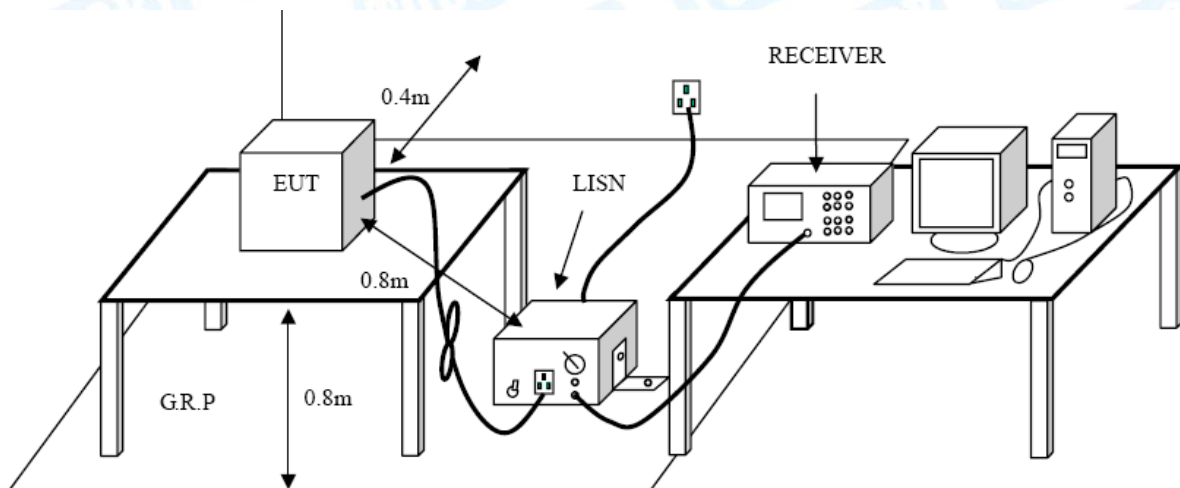

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Please see the next page.

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 1#)		
Remark:	Only worse case is reported		

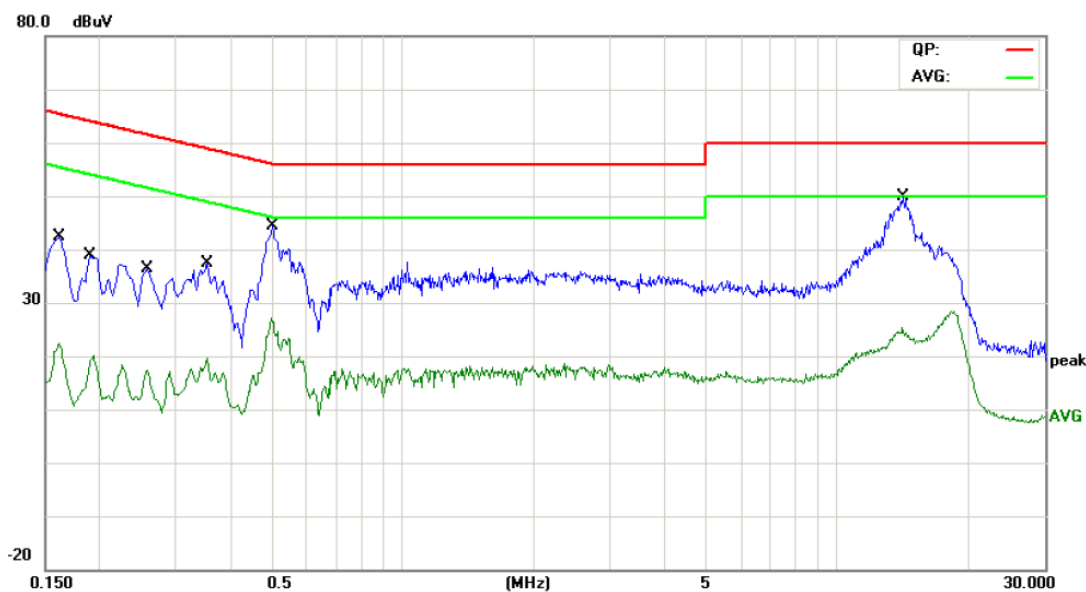


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	28.78	9.94	38.72	65.36	-26.64	QP
2		0.1620	10.76	9.94	20.70	55.36	-34.66	AVG
3		0.1900	24.35	10.00	34.35	64.03	-29.68	QP
4		0.1900	7.51	10.00	17.51	54.03	-36.52	AVG
5		0.2580	22.54	10.02	32.56	61.49	-28.93	QP
6		0.2580	6.08	10.02	16.10	51.49	-35.39	AVG
7		0.3540	23.10	10.02	33.12	58.87	-25.75	QP
8		0.3540	8.89	10.02	18.91	48.87	-29.96	AVG
9	*	0.5020	29.79	10.02	39.81	56.00	-16.19	QP
10		0.5020	15.67	10.02	25.69	46.00	-20.31	AVG
11		14.1540	31.91	10.24	42.15	60.00	-17.85	QP
12		14.1540	12.68	10.24	22.92	50.00	-27.08	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 1#)		
Remark:	Only worse case is reported		

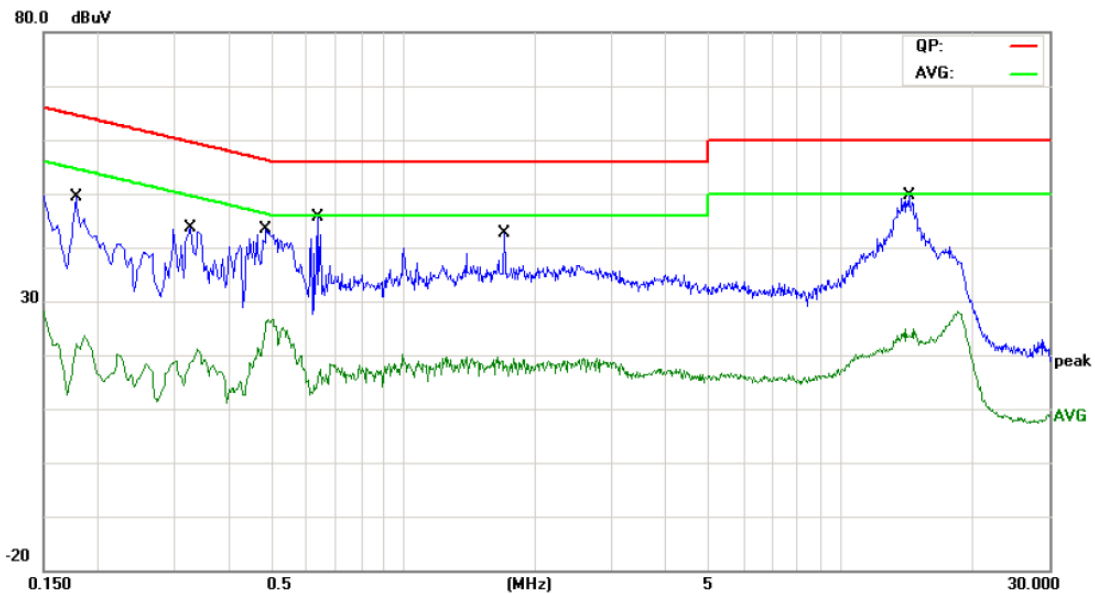


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1780	18.01	10.12	28.13	64.57	-36.44	QP
2		0.1780	1.54	10.12	11.66	54.57	-42.91	AVG
3		0.3260	19.06	10.08	29.14	59.55	-30.41	QP
4		0.3260	6.07	10.08	16.15	49.55	-33.40	AVG
5	*	0.4860	26.65	10.02	36.67	56.24	-19.57	QP
6		0.4860	13.01	10.02	23.03	46.24	-23.21	AVG
7		0.6340	12.09	10.02	22.11	56.00	-33.89	QP
8		0.6340	-0.02	10.02	10.00	46.00	-36.00	AVG
9		1.7060	20.10	10.09	30.19	56.00	-25.81	QP
10		1.7060	6.15	10.09	16.24	46.00	-29.76	AVG
11		14.3340	30.20	10.07	40.27	60.00	-19.73	QP
12		14.3340	12.05	10.07	22.12	50.00	-27.88	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 1#)		
Remark:	Only worse case is reported		

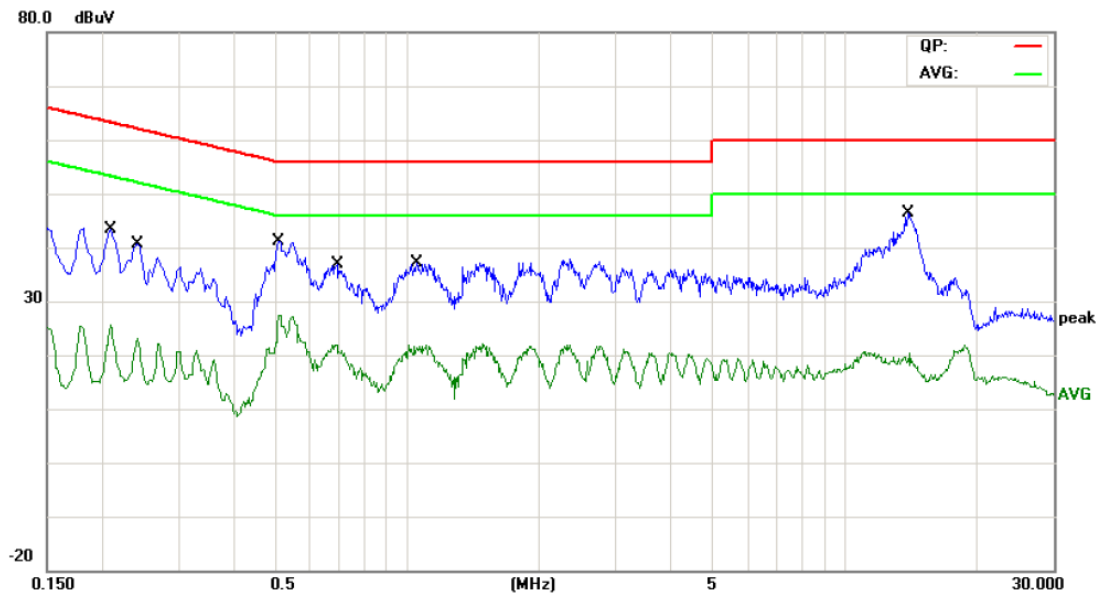


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2100	28.65	10.02	38.67	63.20	-24.53	QP
2		0.2100	12.25	10.02	22.27	53.20	-30.93	AVG
3		0.2420	27.01	10.02	37.03	62.02	-24.99	QP
4		0.2420	11.61	10.02	21.63	52.02	-30.39	AVG
5	*	0.5100	27.62	10.02	37.64	56.00	-18.36	QP
6		0.5100	15.71	10.02	25.73	46.00	-20.27	AVG
7		0.6900	22.46	10.11	32.57	56.00	-23.43	QP
8		0.6900	10.17	10.11	20.28	46.00	-25.72	AVG
9		1.0500	22.03	10.06	32.09	56.00	-23.91	QP
10		1.0500	9.80	10.06	19.86	46.00	-26.14	AVG
11		13.9220	27.79	10.24	38.03	60.00	-21.97	QP
12		13.9220	6.35	10.24	16.59	50.00	-33.41	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 1#)		
Remark:	Only worse case is reported		

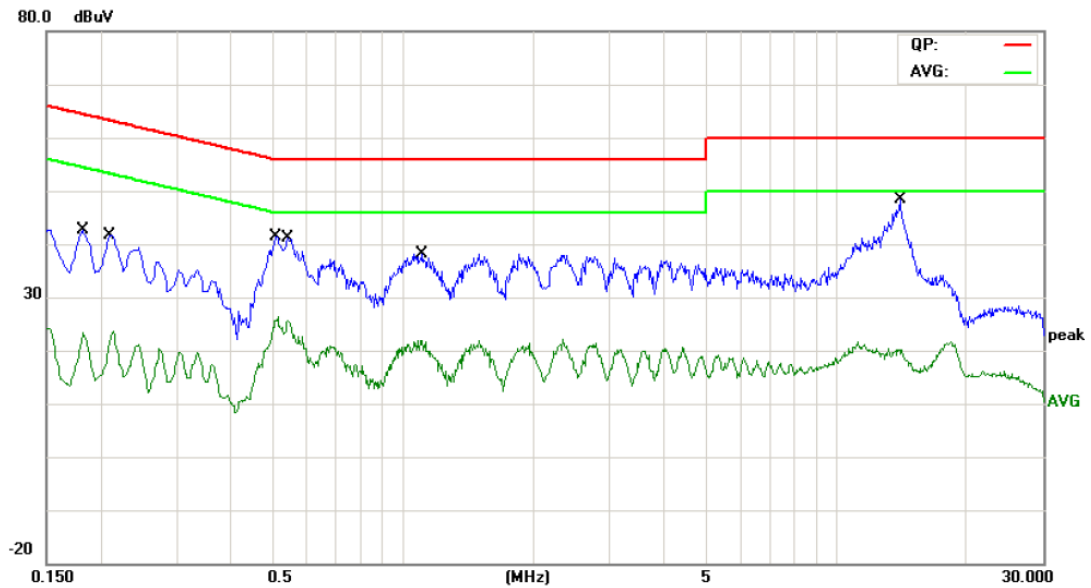


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	29.05	10.12	39.17	64.39	-25.22	QP
2		0.1819	11.60	10.12	21.72	54.39	-32.67	AVG
3		0.2100	26.25	10.12	36.37	63.20	-26.83	QP
4		0.2100	9.93	10.12	20.05	53.20	-33.15	AVG
5	*	0.5100	28.20	10.02	38.22	56.00	-17.78	QP
6		0.5100	15.15	10.02	25.17	46.00	-20.83	AVG
7		0.5420	27.60	10.02	37.62	56.00	-18.38	QP
8		0.5420	15.00	10.02	25.02	46.00	-20.98	AVG
9		1.1060	22.86	10.15	33.01	56.00	-22.99	QP
10		1.1060	9.82	10.15	19.97	46.00	-26.03	AVG
11		13.9940	27.80	10.08	37.88	60.00	-22.12	QP
12		13.9940	7.35	10.08	17.43	50.00	-32.57	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 2#)		
Remark:	Only worse case is reported		

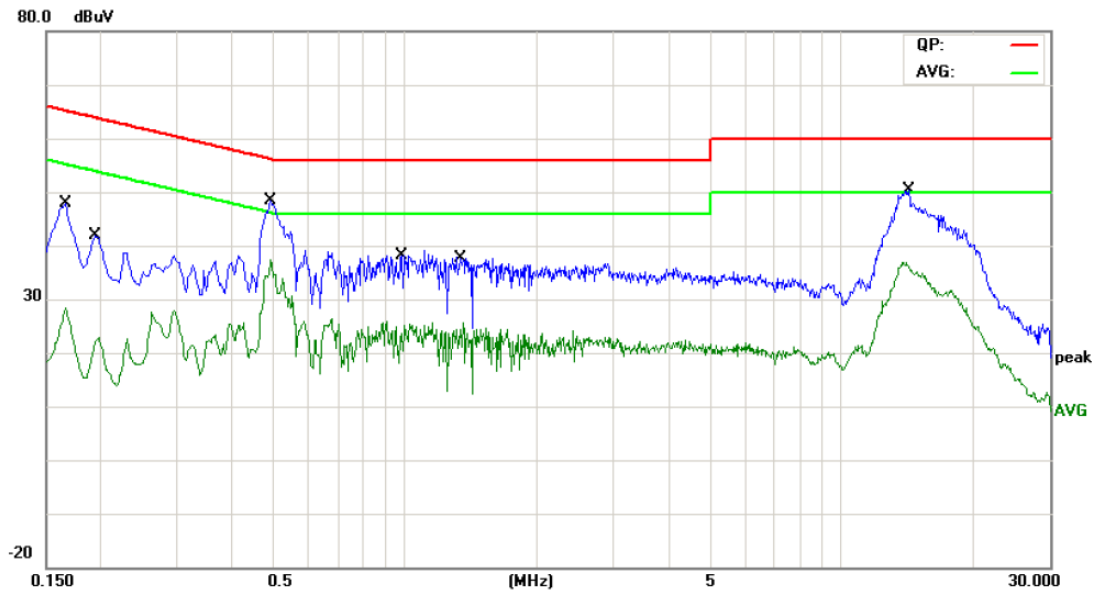


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	32.16	9.95	42.11	65.15	-23.04	QP
2		0.1660	17.29	9.95	27.24	55.15	-27.91	AVG
3		0.1940	25.16	10.01	35.17	63.86	-28.69	QP
4		0.1940	10.75	10.01	20.76	53.86	-33.10	AVG
5	*	0.4900	35.74	10.02	45.76	56.17	-10.41	QP
6		0.4900	25.71	10.02	35.73	46.17	-10.44	AVG
7		0.9820	22.51	10.06	32.57	56.00	-23.43	QP
8		0.9820	11.45	10.06	21.51	46.00	-24.49	AVG
9		1.3380	23.23	10.06	33.29	56.00	-22.71	QP
10		1.3380	12.24	10.06	22.30	46.00	-23.70	AVG
11		14.2700	32.72	10.25	42.97	60.00	-17.03	QP
12		14.2700	23.00	10.25	33.25	50.00	-16.75	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

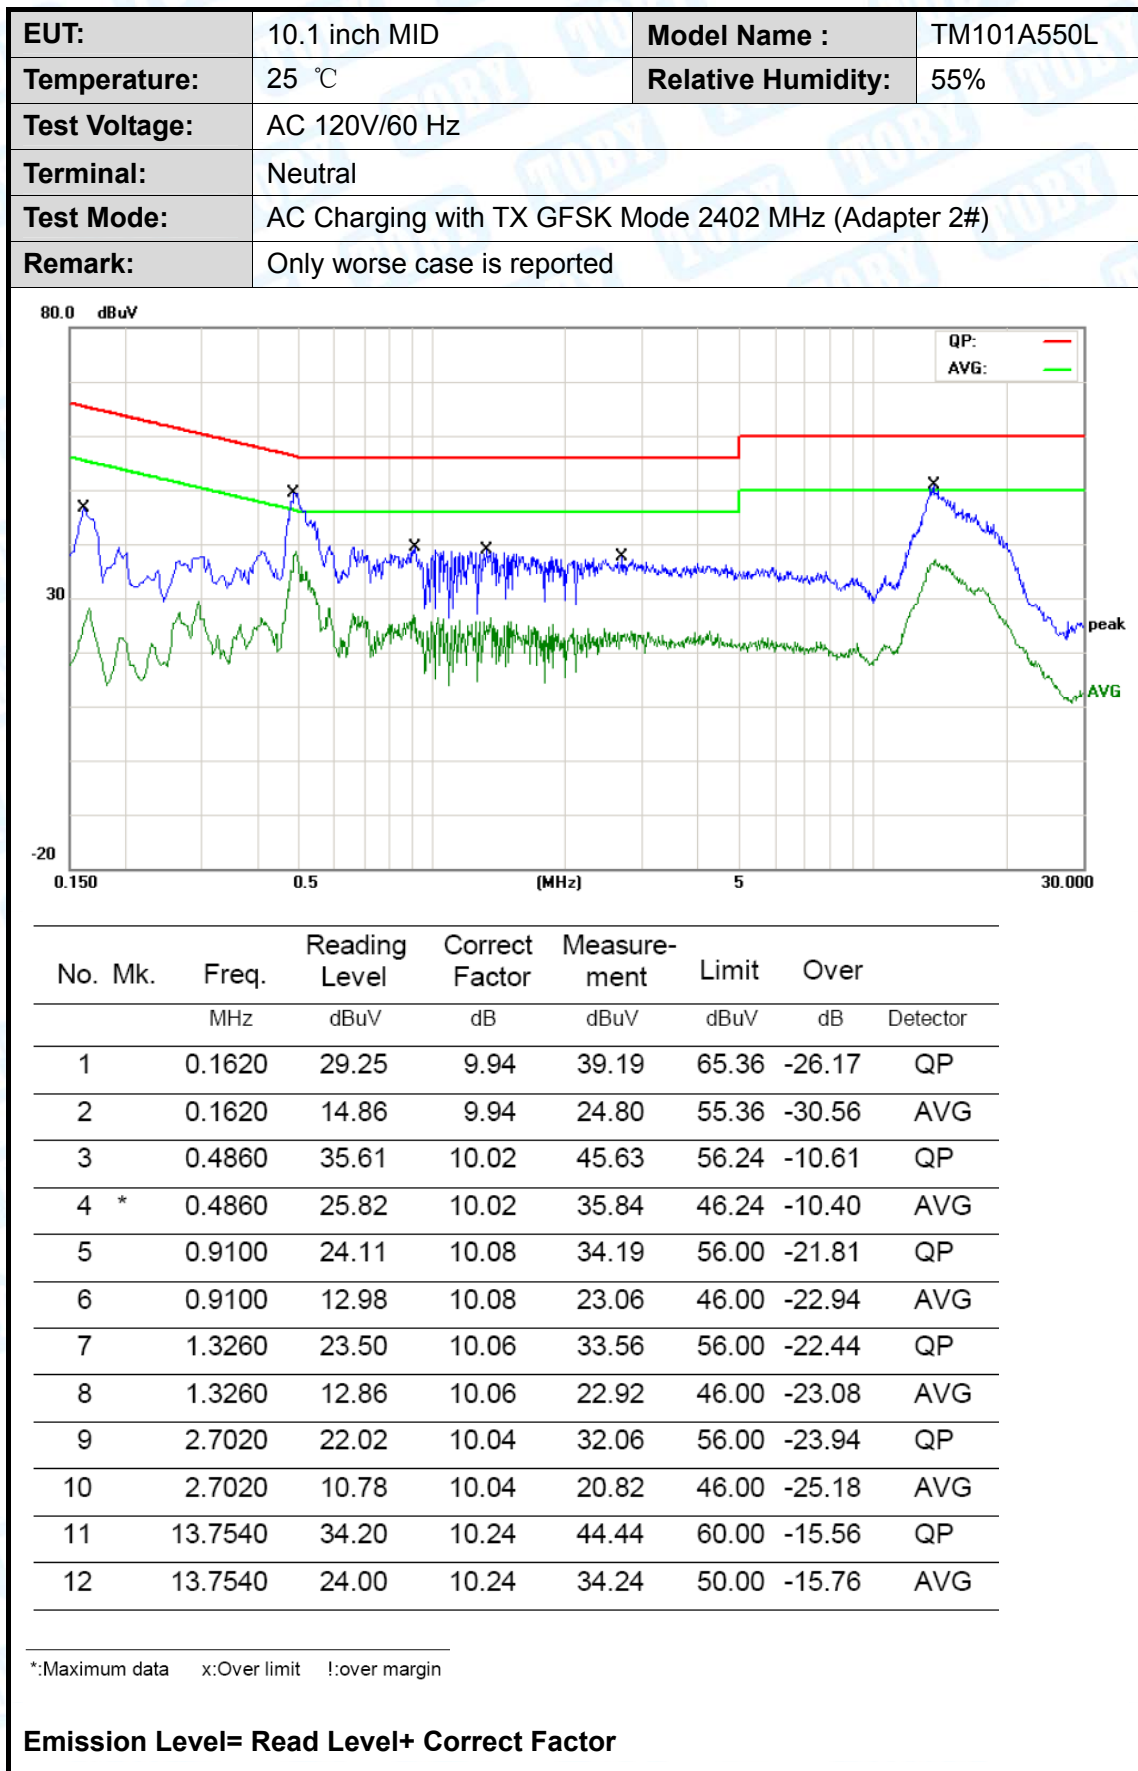

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 2#)		
Remark:	Only worse case is reported		

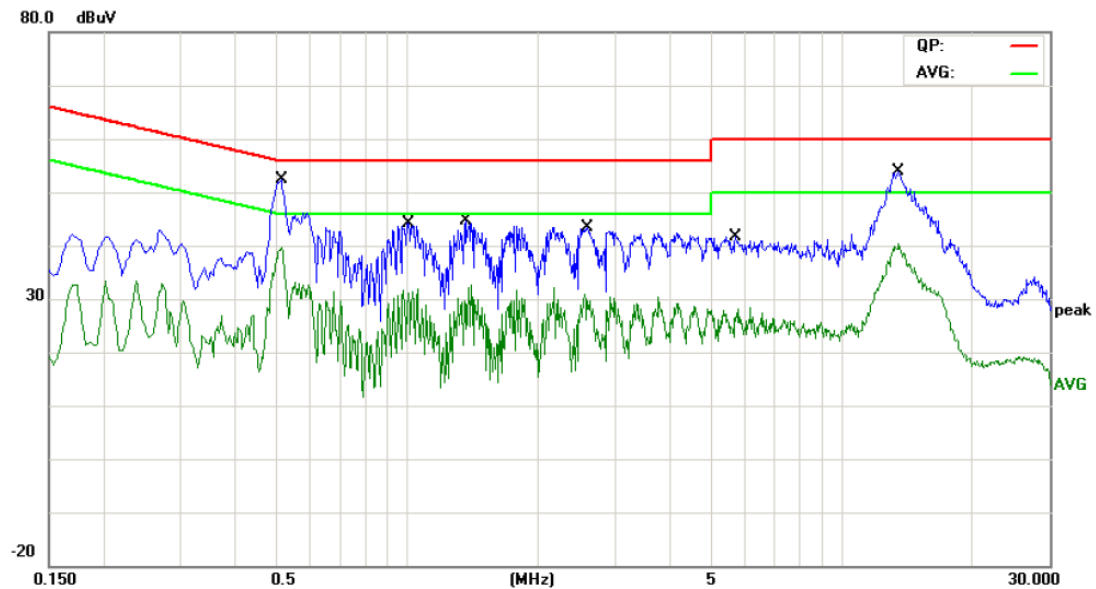


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.5140	38.02	10.03	48.05	56.00	-7.95	QP
2		0.5140	25.94	10.03	35.97	46.00	-10.03	AVG
3		1.0100	30.15	10.06	40.21	56.00	-15.79	QP
4		1.0100	17.99	10.06	28.05	46.00	-17.95	AVG
5		1.3619	29.56	10.06	39.62	56.00	-16.38	QP
6		1.3619	17.41	10.06	27.47	46.00	-18.53	AVG
7		2.6060	28.65	10.04	38.69	56.00	-17.31	QP
8		2.6060	16.41	10.04	26.45	46.00	-19.55	AVG
9		5.7100	25.74	10.00	35.74	60.00	-24.26	QP
10		5.7100	12.43	10.00	22.43	50.00	-27.57	AVG
11		13.5340	37.36	10.23	47.59	60.00	-12.41	QP
12		13.5340	25.29	10.23	35.52	50.00	-14.48	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX GFSK Mode 2402 MHz (Adapter 2#)		
Remark:	Only worse case is reported		

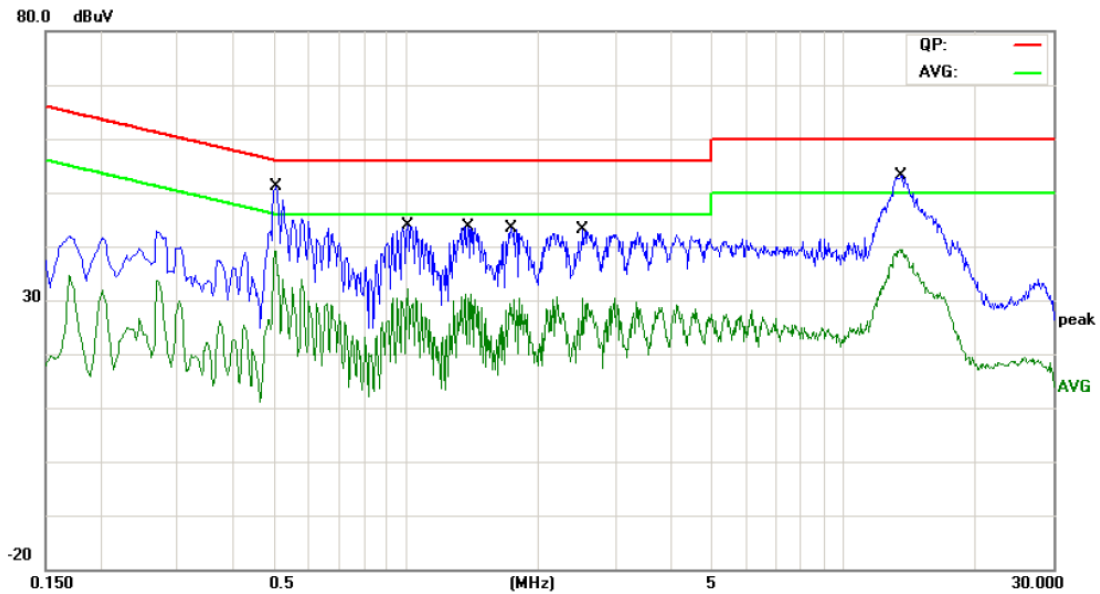

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.5060	38.49	10.02	48.51	56.00	-7.49	QP
2		0.5060	26.39	10.02	36.41	46.00	-9.59	AVG
3		1.0060	29.43	10.06	39.49	56.00	-16.51	QP
4		1.0060	17.39	10.06	27.45	46.00	-18.55	AVG
5		1.3820	29.68	10.06	39.74	56.00	-16.26	QP
6		1.3820	17.38	10.06	27.44	46.00	-18.56	AVG
7		1.7380	28.15	10.06	38.21	56.00	-17.79	QP
8		1.7380	15.84	10.06	25.90	46.00	-20.10	AVG
9		2.5300	27.91	10.04	37.95	56.00	-18.05	QP
10		2.5300	14.91	10.04	24.95	46.00	-21.05	AVG
11		13.5060	37.26	10.23	47.49	60.00	-12.51	QP
12		13.5060	25.18	10.23	35.41	50.00	-14.59	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC 15.209

5.1.2 Test Limit

Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


5.2 Test Setup

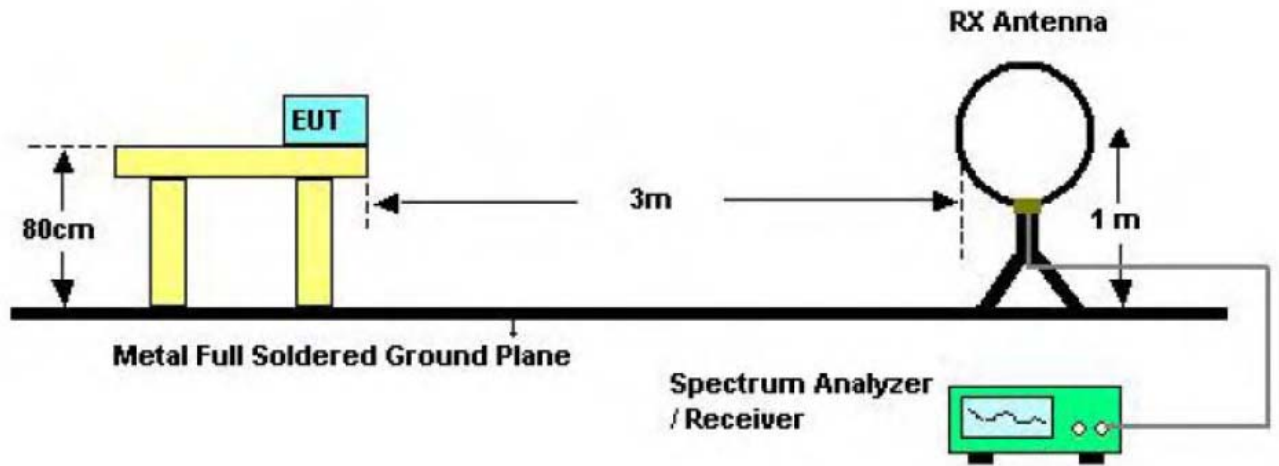

Bellow 30MHz Test Setup

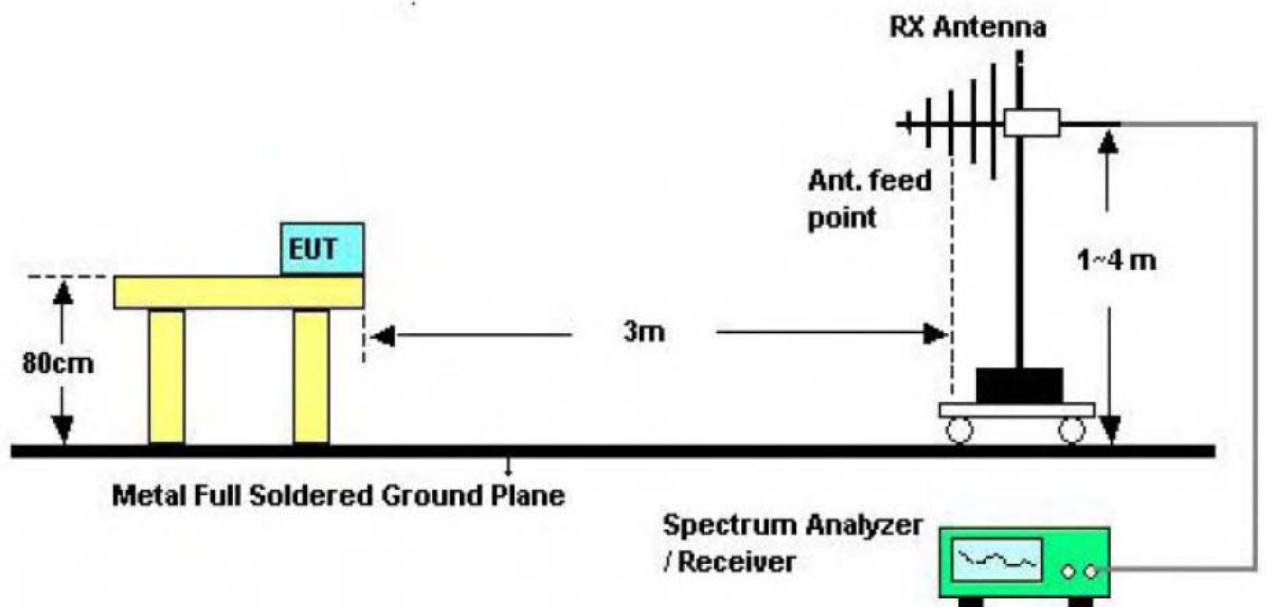

Bellow 1000MHz Test Setup

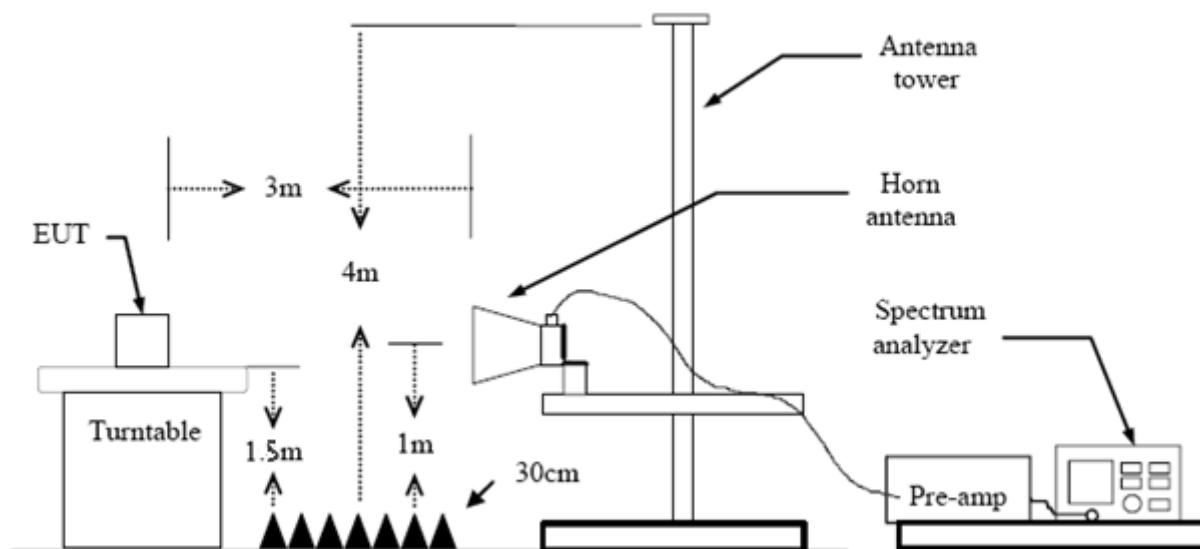

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition


The Equipment Under Test was set to Continual Transmitting in maximum power in TX mode.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=1 KHz with Peak Detector for Average Values.

Test data please refer the following pages.

EUT:	10.1 inch MID	Model Name :	TM101A55 0L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz (Adapter 1#)		
Remark:	Only worse case is reported		

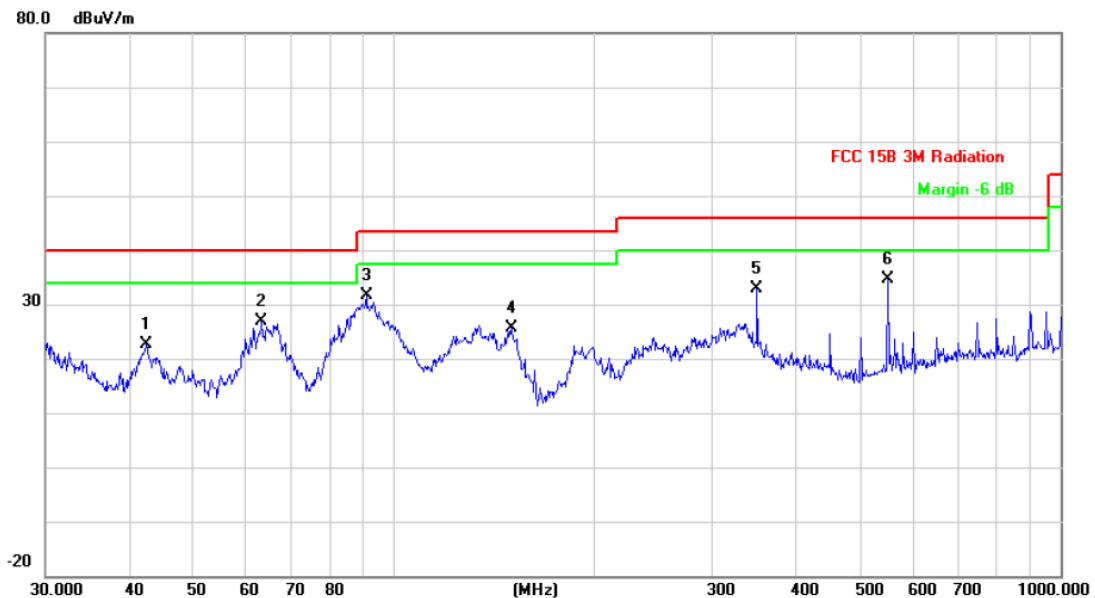


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		42.4508	43.93	-21.19	22.74	40.00	-17.26	peak
2		63.3132	51.06	-24.22	26.84	40.00	-13.16	peak
3		90.8554	54.23	-22.61	31.62	43.50	-11.88	peak
4		150.0108	46.87	-21.17	25.70	43.50	-17.80	peak
5		350.4768	47.50	-14.61	32.89	46.00	-13.11	peak
6	*	550.9480	44.83	-10.12	34.71	46.00	-11.29	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz (Adapter 1#)		
Remark:	Only worse case is reported		

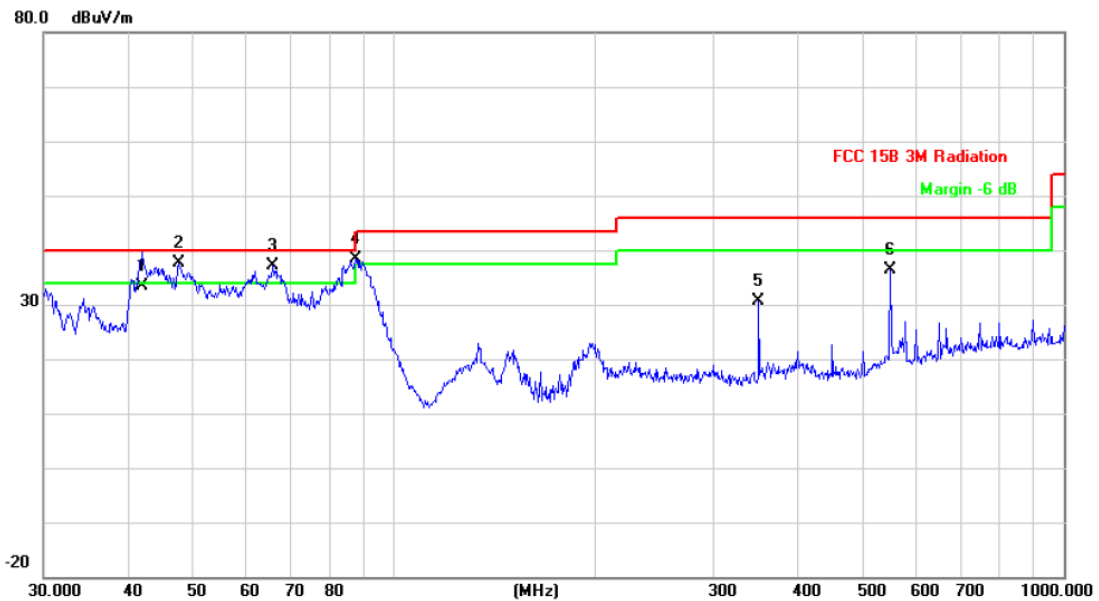


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		42.1542	54.47	-21.07	33.40	40.00	-6.60	QP
2	!	47.6586	60.99	-23.41	37.58	40.00	-2.42	peak
3	!	66.0342	61.12	-23.98	37.14	40.00	-2.86	peak
4	*	87.7248	61.25	-22.82	38.43	40.00	-1.57	peak
5		350.4768	45.25	-14.61	30.64	46.00	-15.36	peak
6		550.9480	46.49	-10.12	36.37	46.00	-9.63	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz (Adapter 2#)		
Remark:	Only worse case is reported		

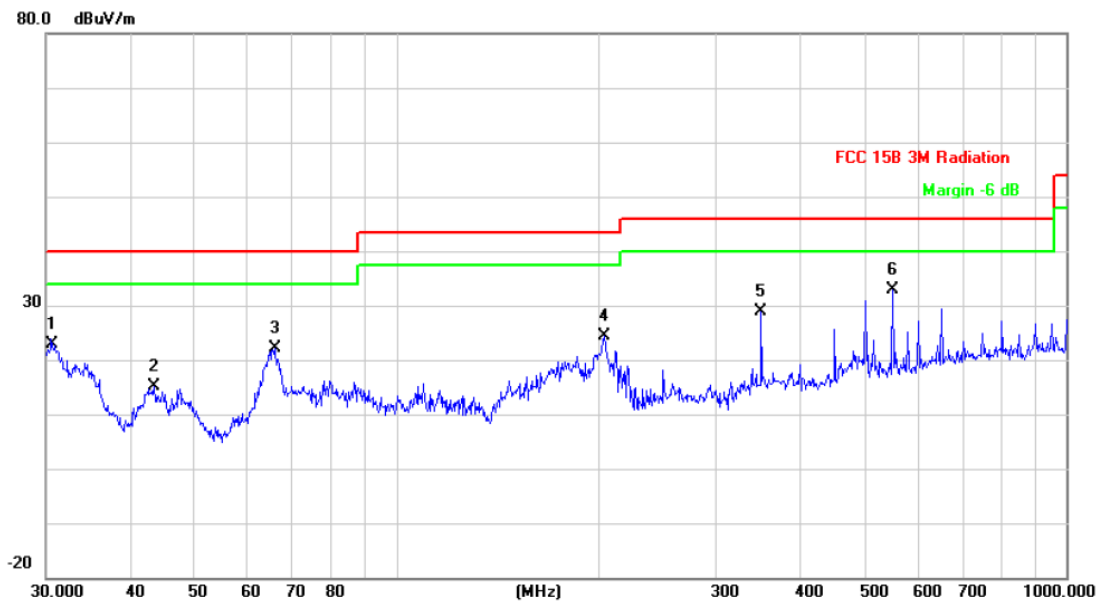


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		30.6379	37.17	-14.35	22.82	40.00	-17.18 peak
2		43.5057	36.80	-21.64	15.16	40.00	-24.84 peak
3		65.8031	46.10	-23.99	22.11	40.00	-17.89 peak
4		204.2377	44.62	-20.20	24.42	43.50	-19.08 peak
5		350.4768	43.60	-14.61	28.99	46.00	-17.01 peak
6	*	550.9480	43.03	-10.12	32.91	46.00	-13.09 peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz (Adapter 2#)		
Remark:	Only worse case is reported		

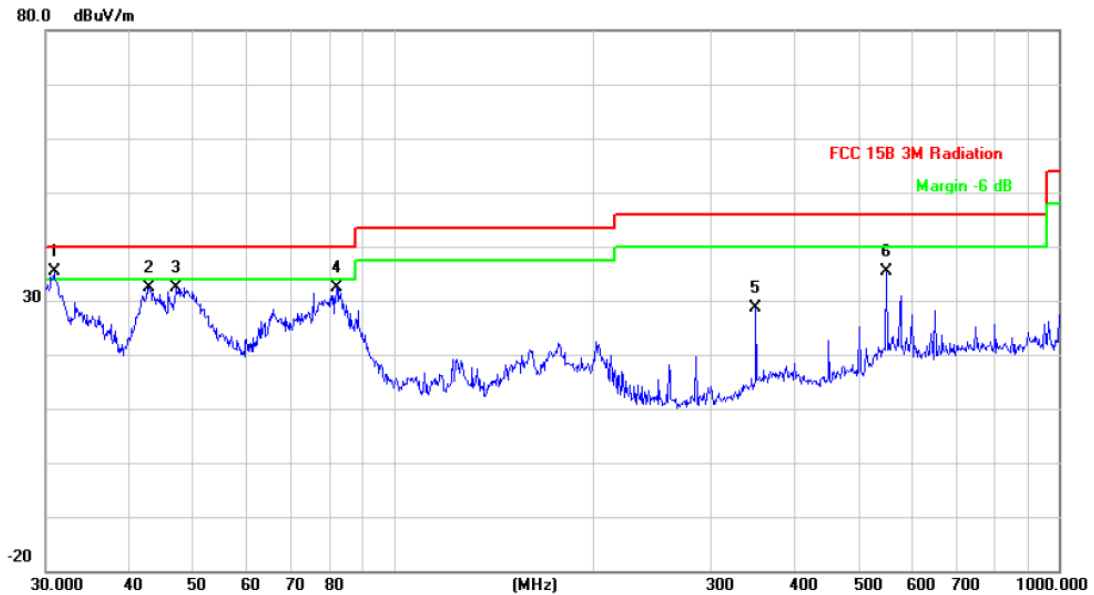


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.8535	49.89	-14.49	35.40	40.00	-4.60	peak
2		42.8998	53.83	-21.39	32.44	40.00	-7.56	peak
3		47.1599	55.52	-23.19	32.33	40.00	-7.67	peak
4		82.0706	55.48	-23.16	32.32	40.00	-7.68	peak
5		350.4768	43.31	-14.61	28.70	46.00	-17.30	peak
6		550.9480	45.39	-10.12	35.27	46.00	-10.73	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz (Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

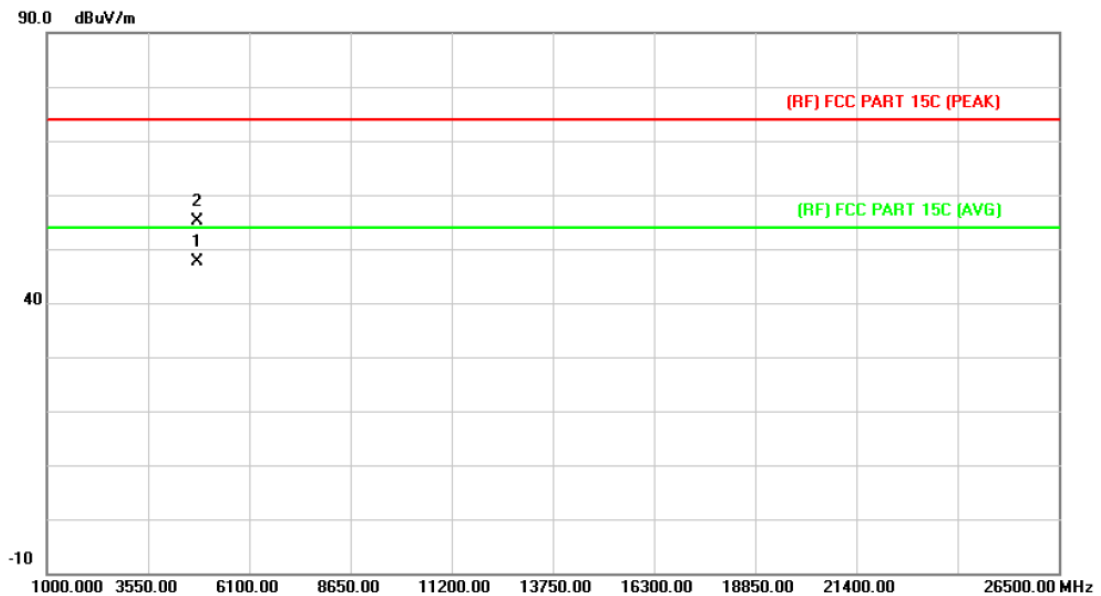

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4803.925	39.33	8.18	47.51	54.00	-6.49	AVG
2		4804.326	46.92	8.18	55.10	74.00	-18.90	peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

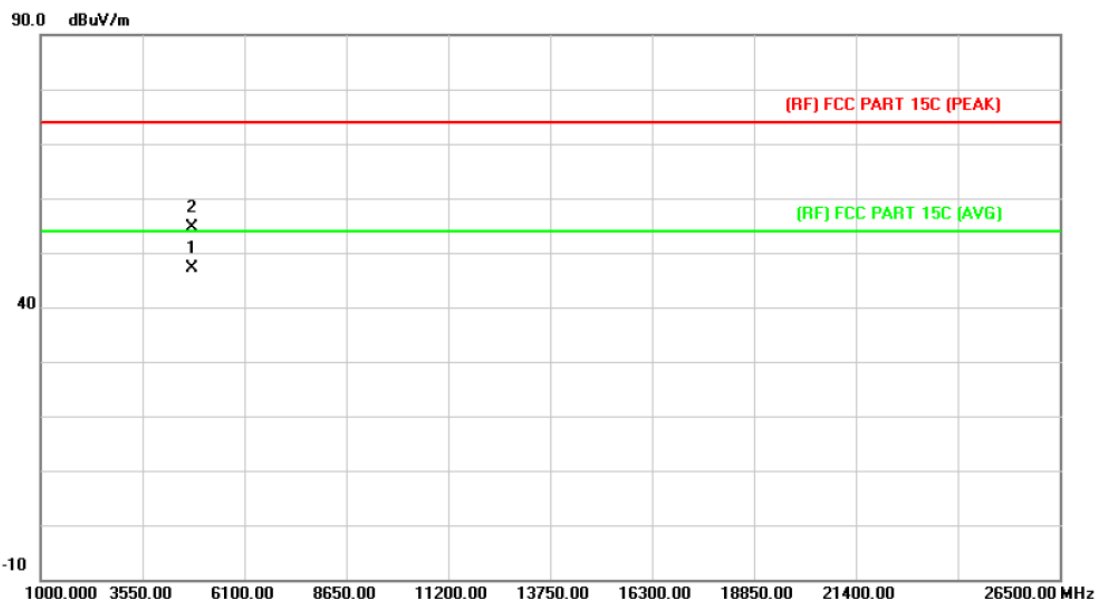

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4803.326	38.83	8.18	47.01	54.00	-6.99	AVG
2		4803.582	46.51	8.18	54.69	74.00	-19.31	peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

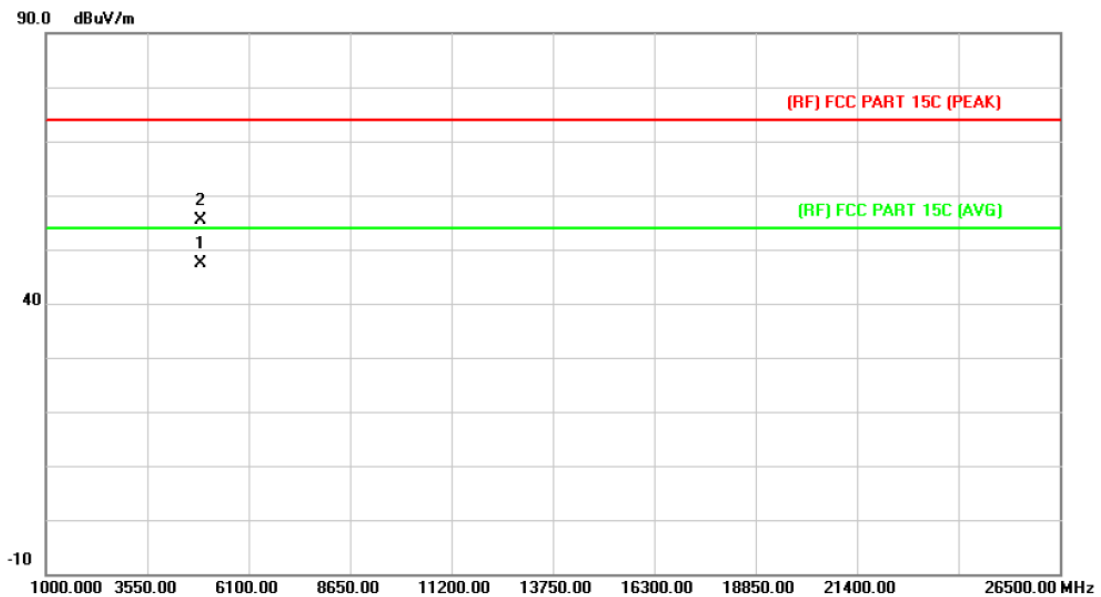

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4881.314	39.11	8.21	47.32	54.00	-6.68	AVG
2		4882.568	47.07	8.21	55.28	74.00	-18.72	peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

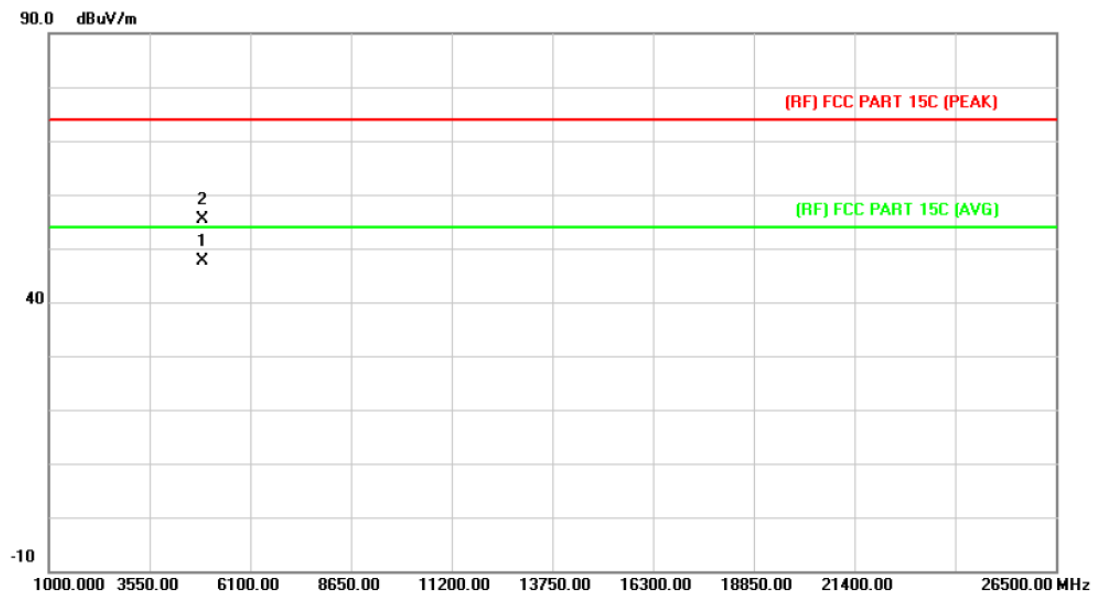

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4881.935	39.40	8.21	47.61	54.00	-6.39	AVG
2		4882.032	47.24	8.21	55.45	74.00	-18.55	peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

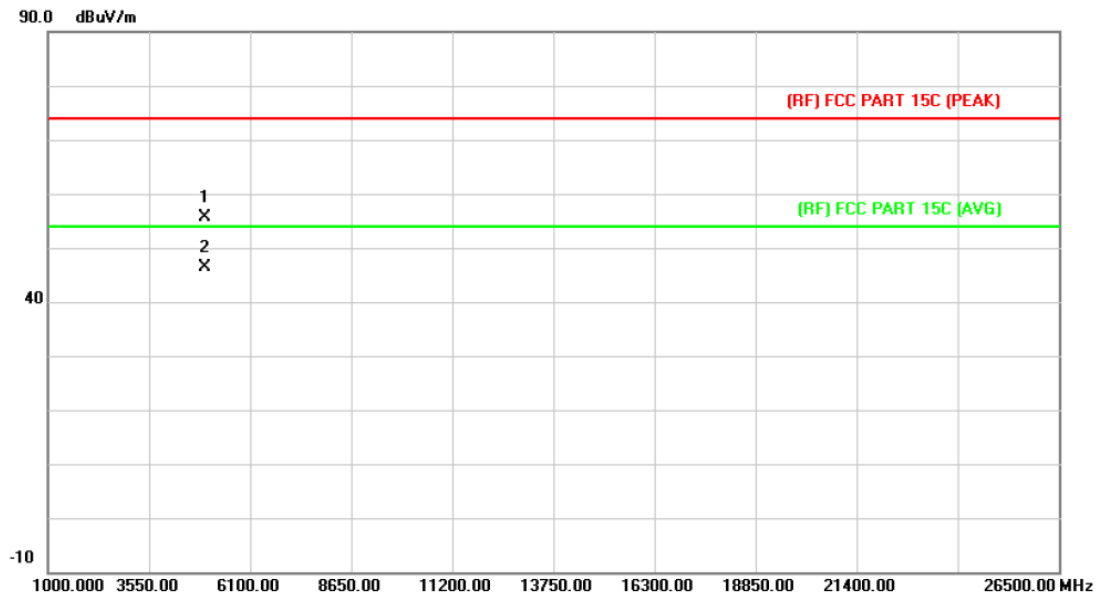

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4959.332	47.44	8.23	55.67	74.00	-18.33	peak
2	*	4959.842	38.18	8.23	46.41	54.00	-7.59	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

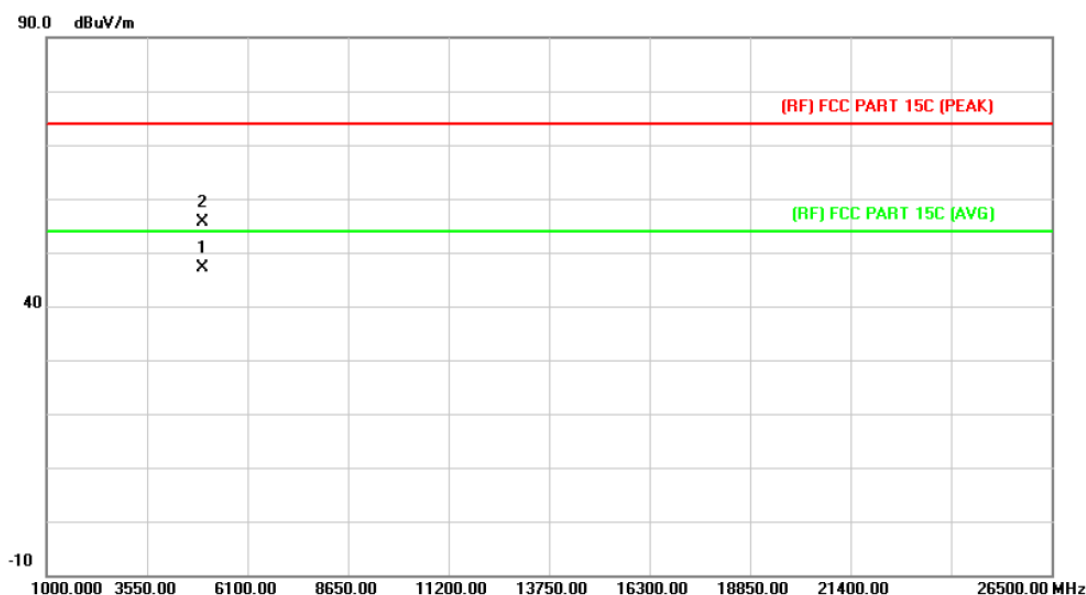

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.635	38.88	8.23	47.11	54.00	-6.89	AVG
2		4960.235	47.38	8.23	55.61	74.00	-18.39	peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

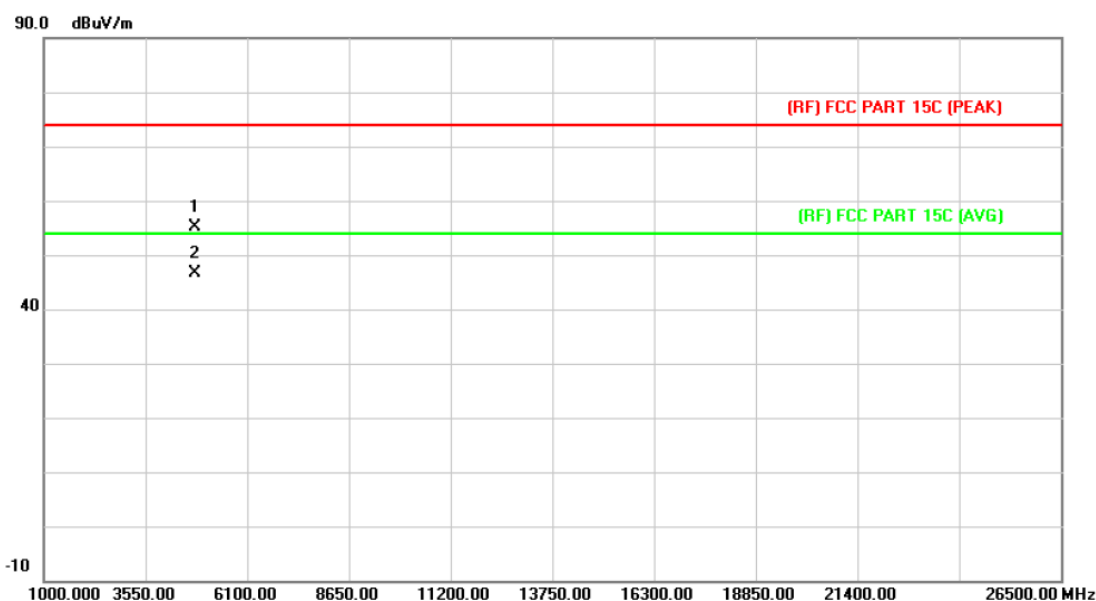

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4803.324	46.97	8.18	55.15	74.00	-18.85	peak
2	*	4803.923	38.41	8.18	46.59	54.00	-7.41	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550 L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

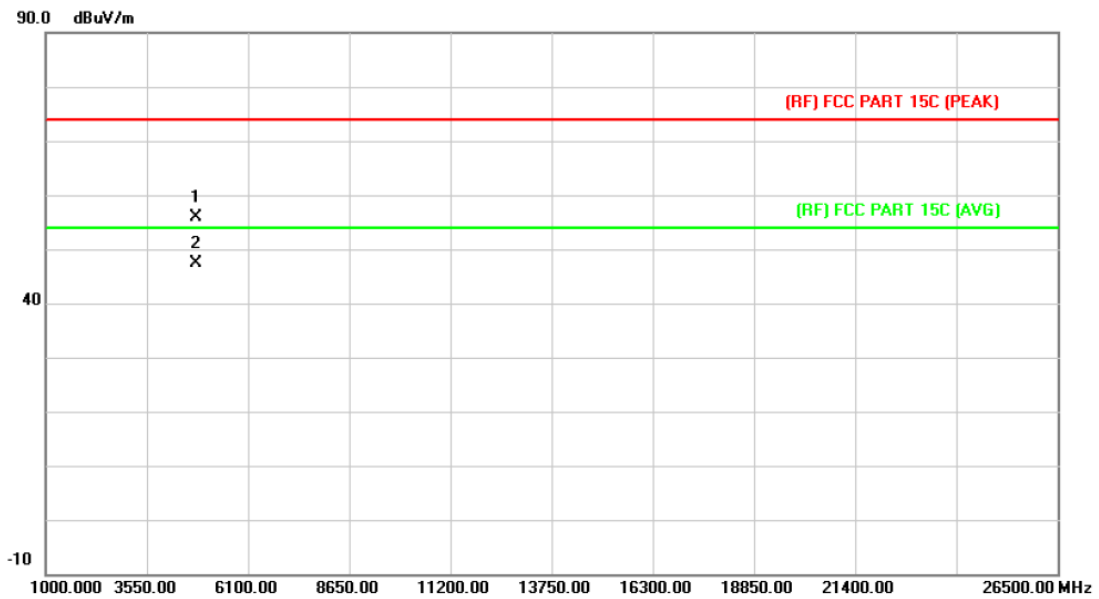

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.624	47.63	8.18	55.81	74.00	-18.19	peak
2	*	4803.928	39.18	8.18	47.36	54.00	-6.64	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A55 0L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

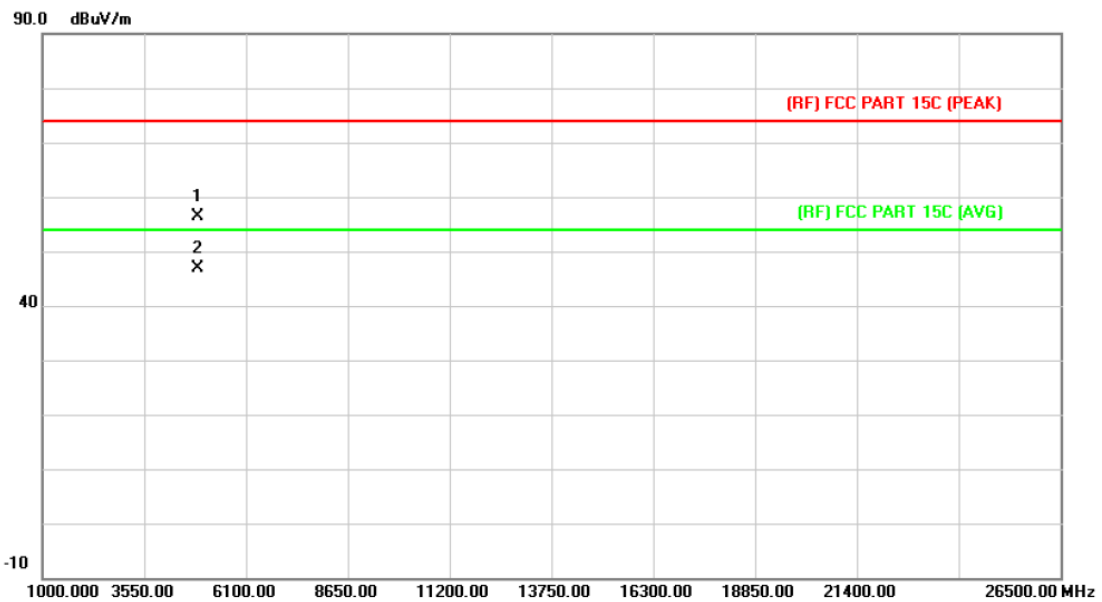

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4882.032	48.16	8.21	56.37	74.00	-17.63	peak
2	*	4882.348	38.60	8.21	46.81	54.00	-7.19	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

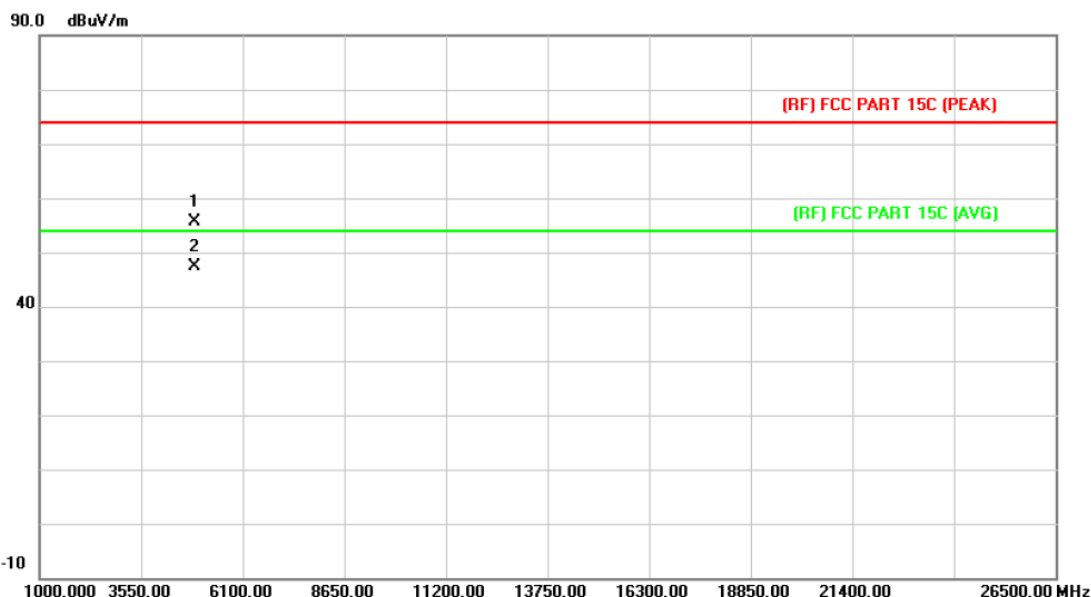

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4881.358	47.31	8.21	55.52	74.00	-18.48	peak
2	*	4881.523	39.18	8.21	47.39	54.00	-6.61	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

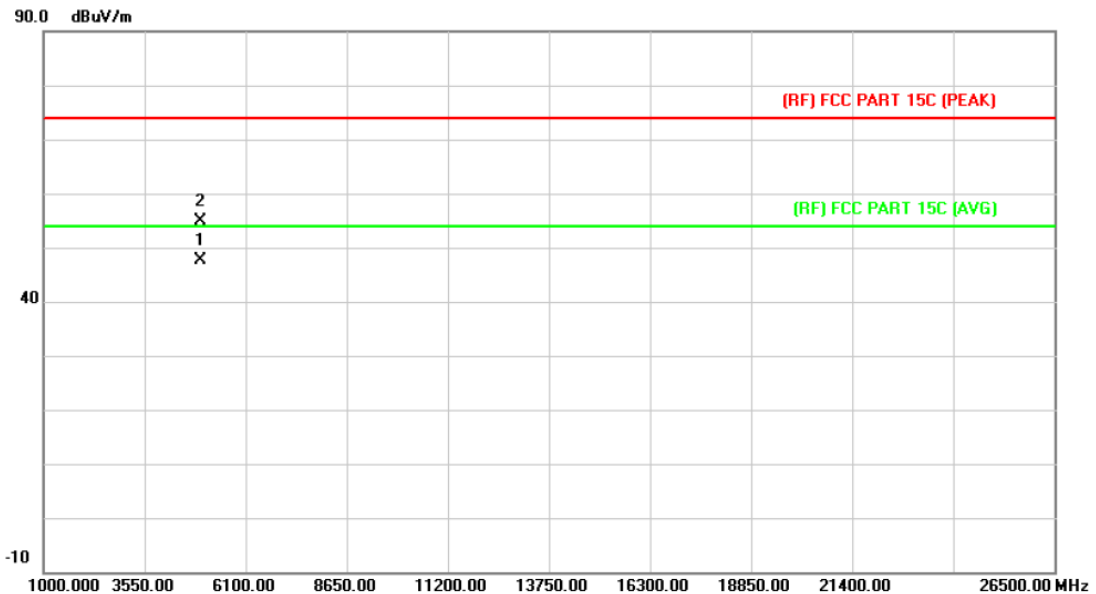

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.156	39.38	8.23	47.61	54.00	-6.39	AVG
2		4959.635	46.63	8.23	54.86	74.00	-19.14	peak

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

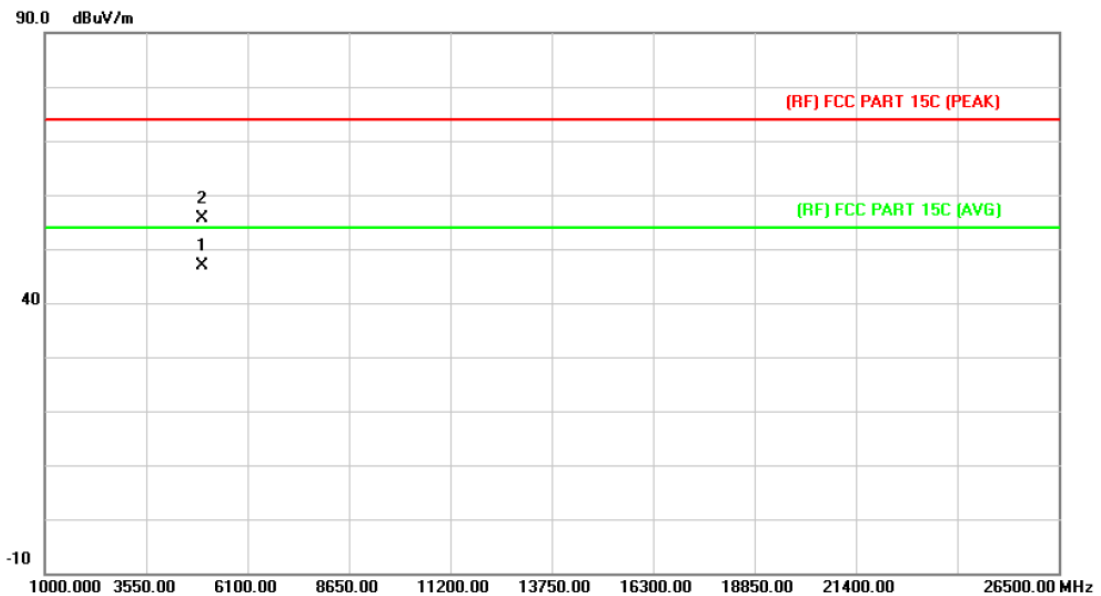

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.355	38.66	8.23	46.89	54.00	-7.11	AVG
2		4959.659	47.33	8.23	55.56	74.00	-18.44	peak

Emission Level= Read Level+ Correct Factor

6. Restricted Bands Requirement

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209


FCC Part 15.205

6.1.2 Test Limit

Restricted Frequency Band (MHz)	Class B (dBUV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

6.2 Test Setup

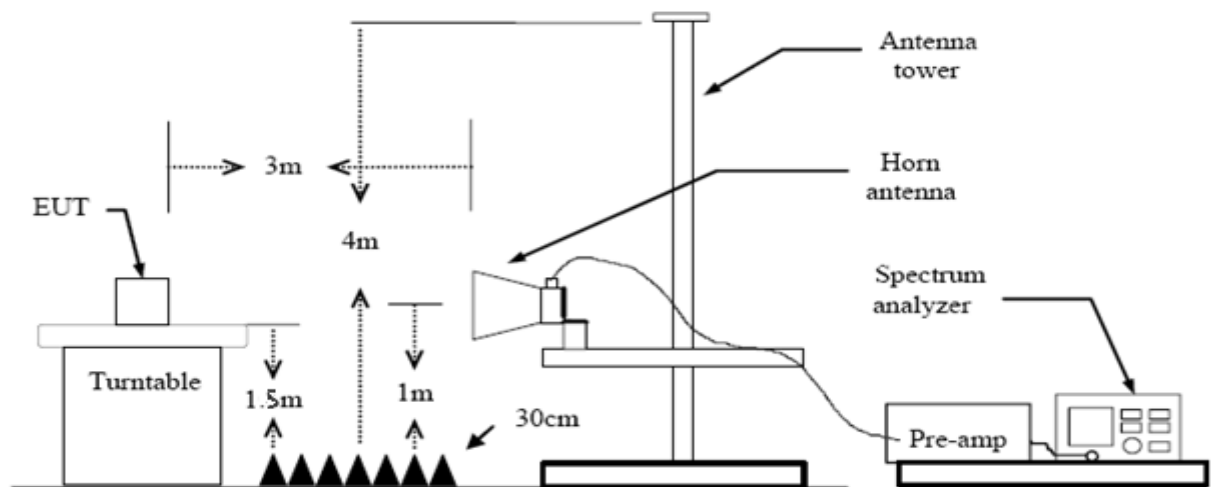

6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz. The EUT was placed on a rotating 0.8m high above the ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.

-
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
 - (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
 - (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
 - (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
 - (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.


6.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=1 KHz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

(1) Radiation Test


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	N/A		

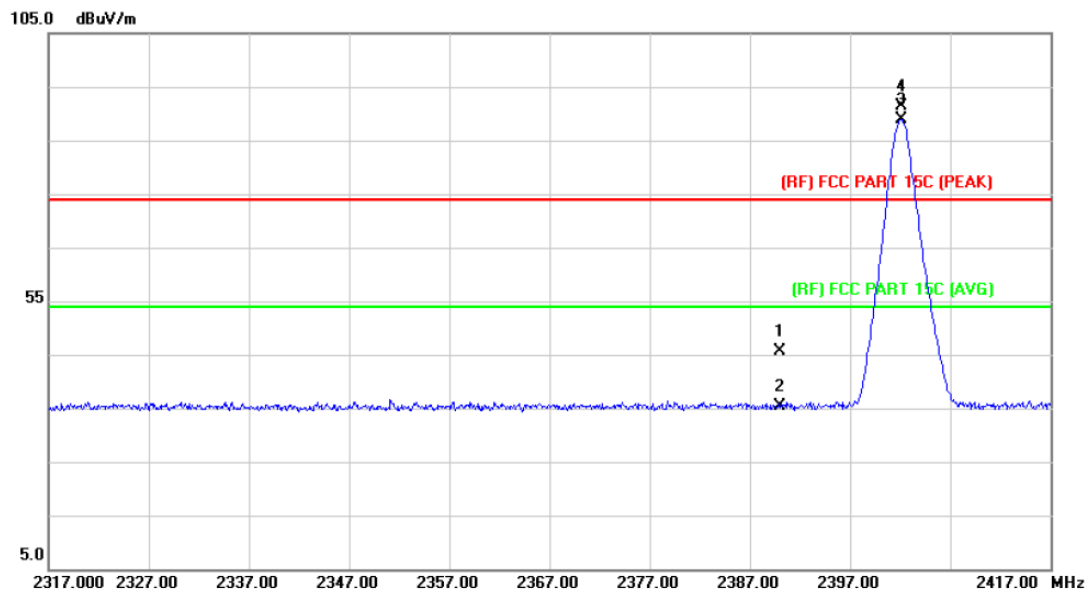

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	44.91	0.77	45.68	74.00	-28.32	peak
2		2390.000	34.49	0.77	35.26	54.00	-18.74	AVG
3	*	2402.100	88.13	0.82	88.95	Fundamental Frequency		AVG
4	X	2402.200	90.50	0.82	91.32	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	N/A		

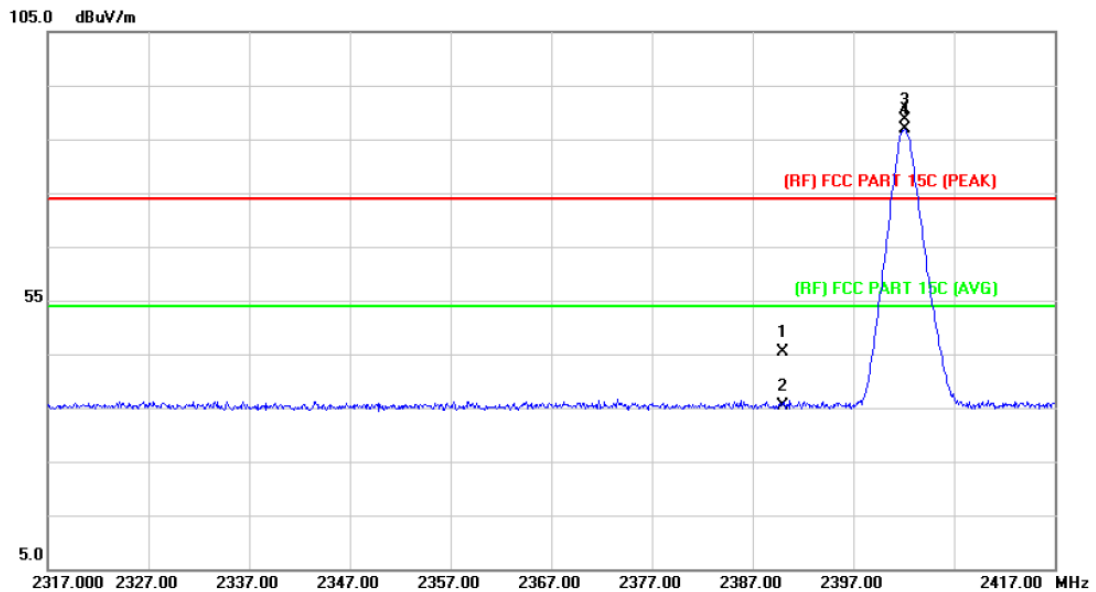

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	44.59	0.77	45.36	74.00	-28.64	peak
2		2390.000	34.72	0.77	35.49	54.00	-18.51	AVG
3	X	2402.100	87.87	0.82	88.69	Fundamental Frequency		peak
4	*	2402.200	85.94	0.82	86.76	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2480 MHz		
Remark:	N/A		

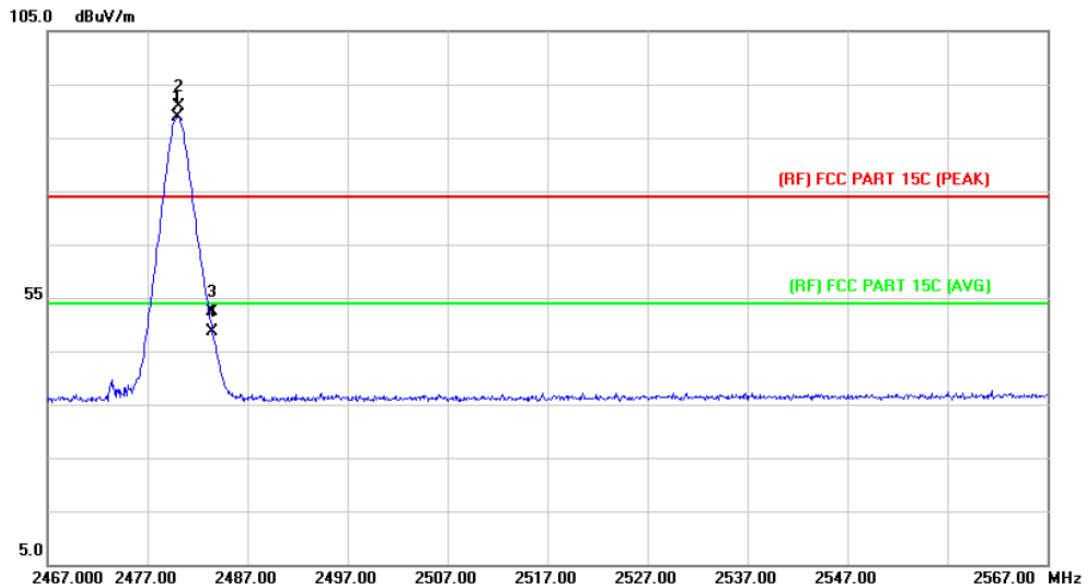

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2480.000	87.69	1.15	88.84	Fundamental Frequency		AVG
2	X	2480.100	89.64	1.15	90.79	Fundamental Frequency		peak
3		2483.500	51.19	1.17	52.36	74.00	-21.64	peak
4		2483.500	47.39	1.17	48.56	54.00	-5.44	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2480 MHz		
Remark:	N/A		

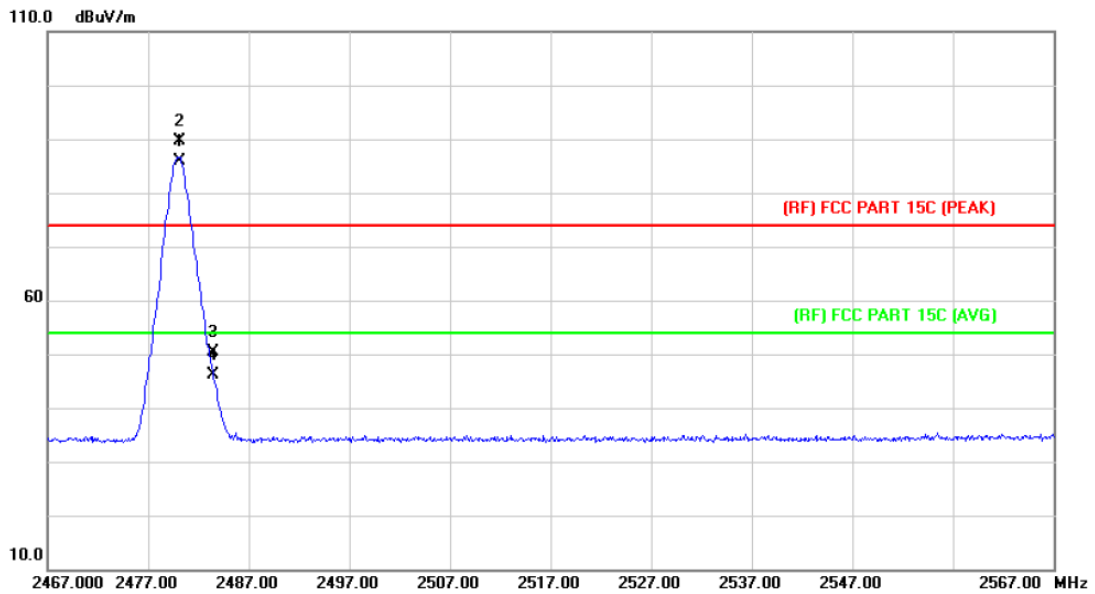

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2480.100	84.79	1.15	85.94	Fundamental Frequency		AVG
2	X	2480.200	88.54	1.15	89.69	Fundamental Frequency		peak
3		2483.500	49.14	1.17	50.31	74.00	-23.69	peak
4		2483.500	45.07	1.17	46.24	54.00	-7.76	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	N/A		

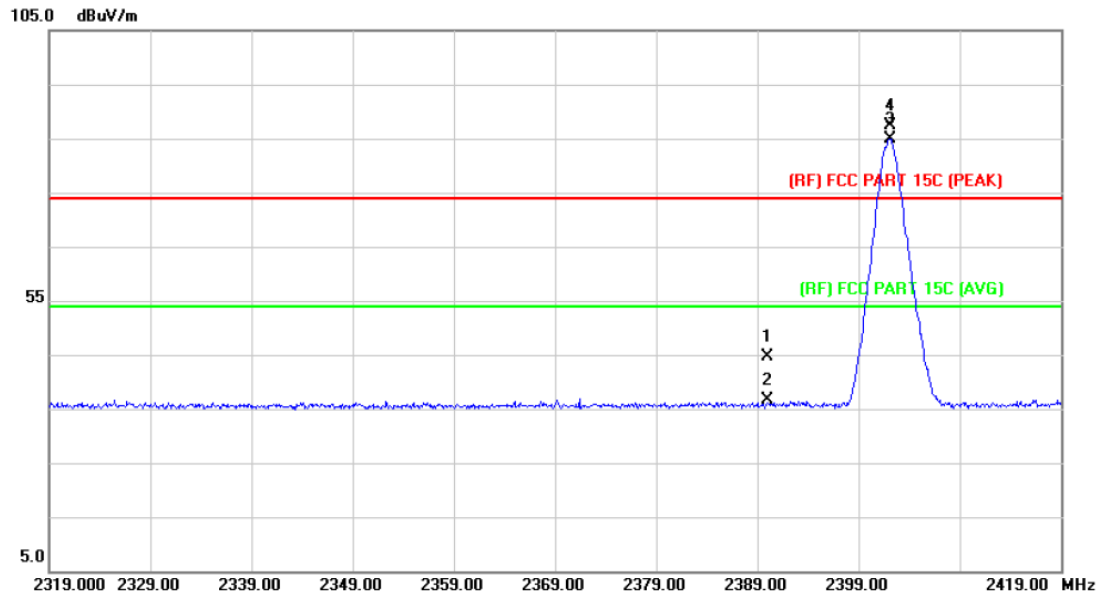

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	43.91	0.77	44.68	74.00	-29.32	peak
2		2390.000	35.80	0.77	36.57	54.00	-17.43	AVG
3	*	2402.100	84.03	0.82	84.85	Fundamental Frequency		AVG
4	X	2402.200	86.49	0.82	87.31	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	N/A		

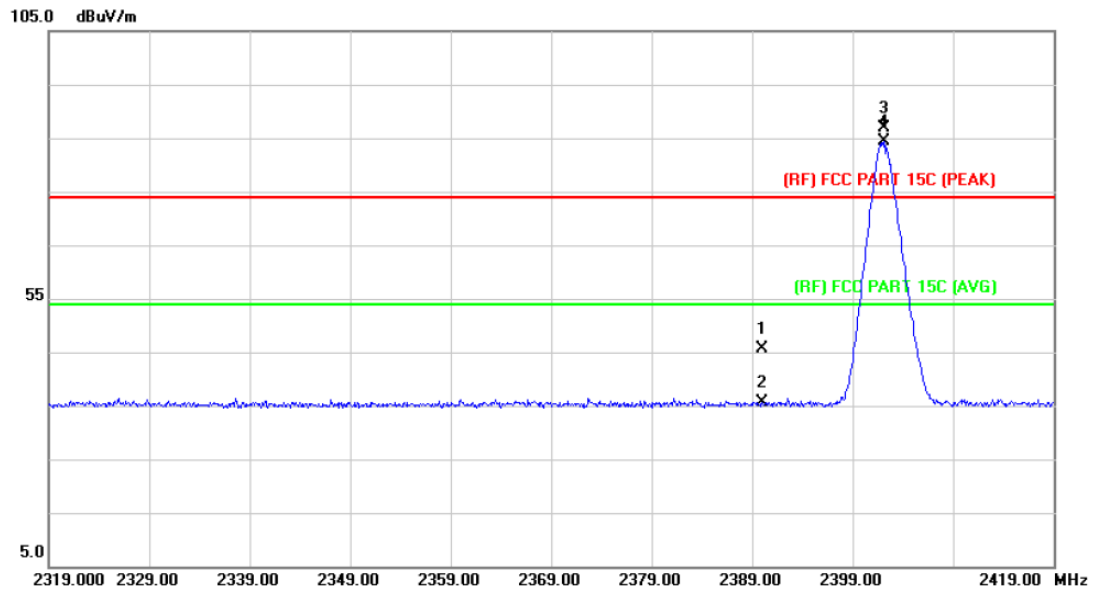

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	44.82	0.77	45.59	74.00	-28.41	peak
2		2390.000	34.74	0.77	35.51	54.00	-18.49	AVG
3	X	2402.100	86.02	0.82	86.84	Fundamental Frequency		peak
4	*	2402.200	83.60	0.82	84.42	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	N/A		

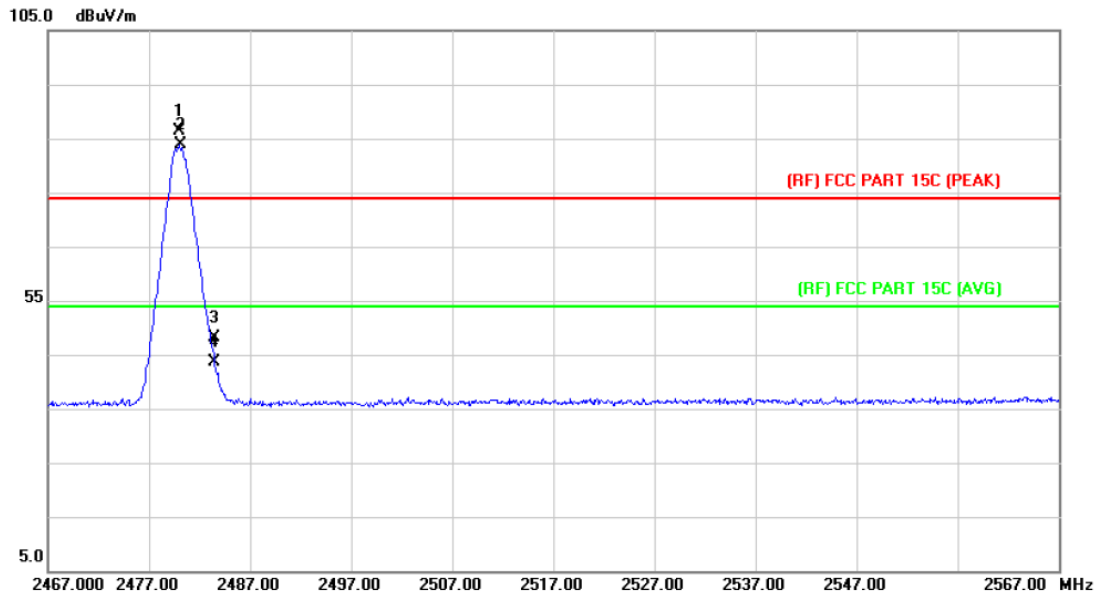

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2480.000	85.16	1.15	86.31	Fundamental Frequency		peak
2	*	2480.200	82.67	1.15	83.82	Fundamental Frequency		AVG
3		2483.500	46.99	1.17	48.16	74.00	-25.84	peak
4		2483.500	42.44	1.17	43.61	54.00	-10.39	AVG

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	N/A		


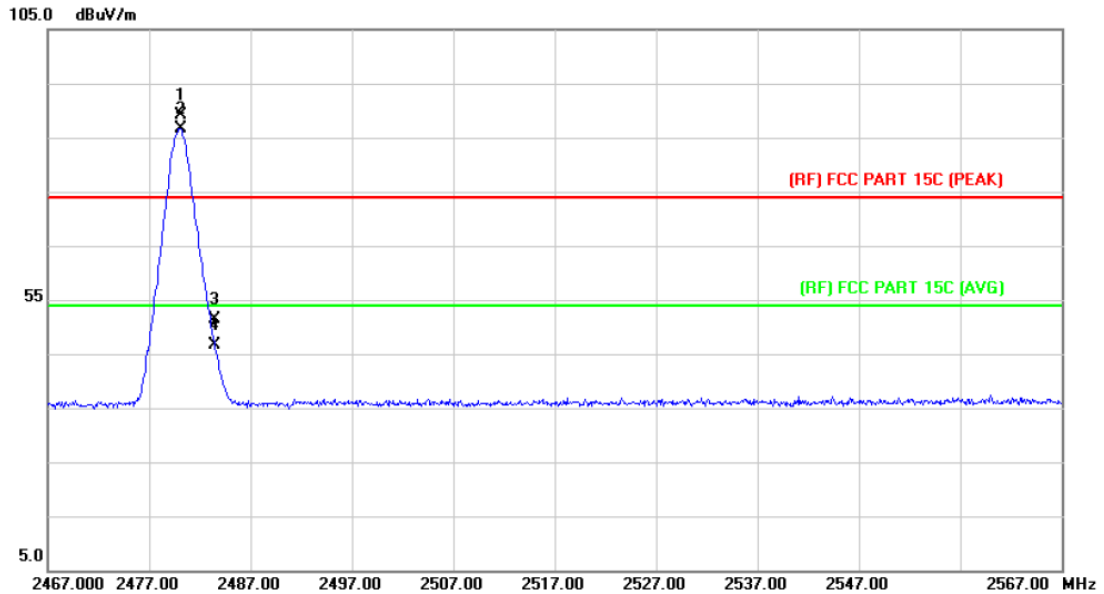


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2480.100	87.97	1.15	89.12	Fundamental Frequency		peak
2	*	2480.200	85.41	1.15	86.56	Fundamental Frequency		AVG
3		2483.500	50.17	1.17	51.34	74.00	-22.66	peak
4		2483.500	45.34	1.17	46.51	54.00	-7.49	AVG



Emission Level= Read Level+ Correct Factor

(2) Conducted Test



EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX GFSK Mode 2402MHz / 2480 MHz		
Remark:	N/A		

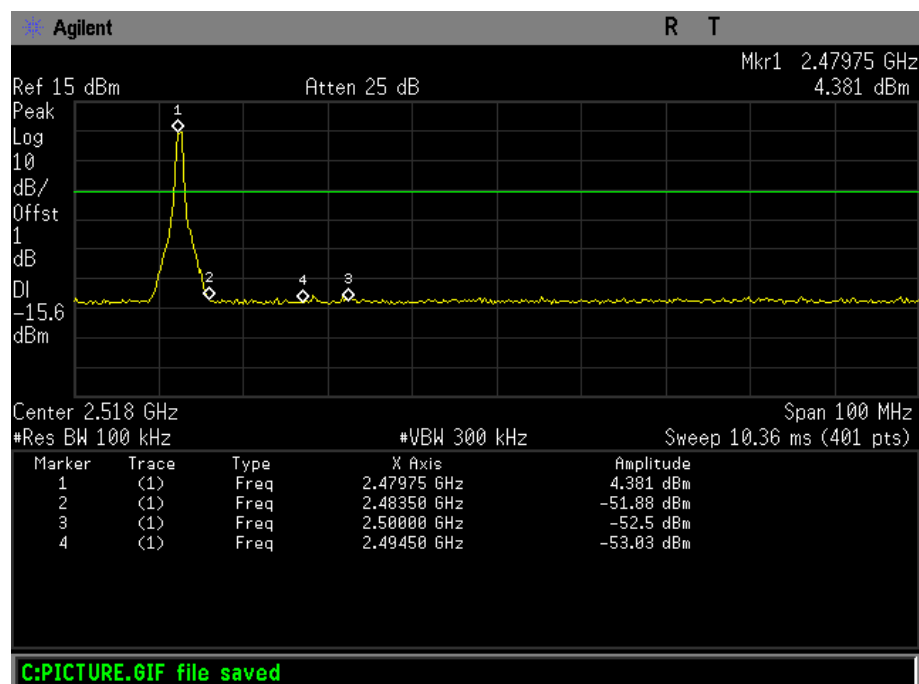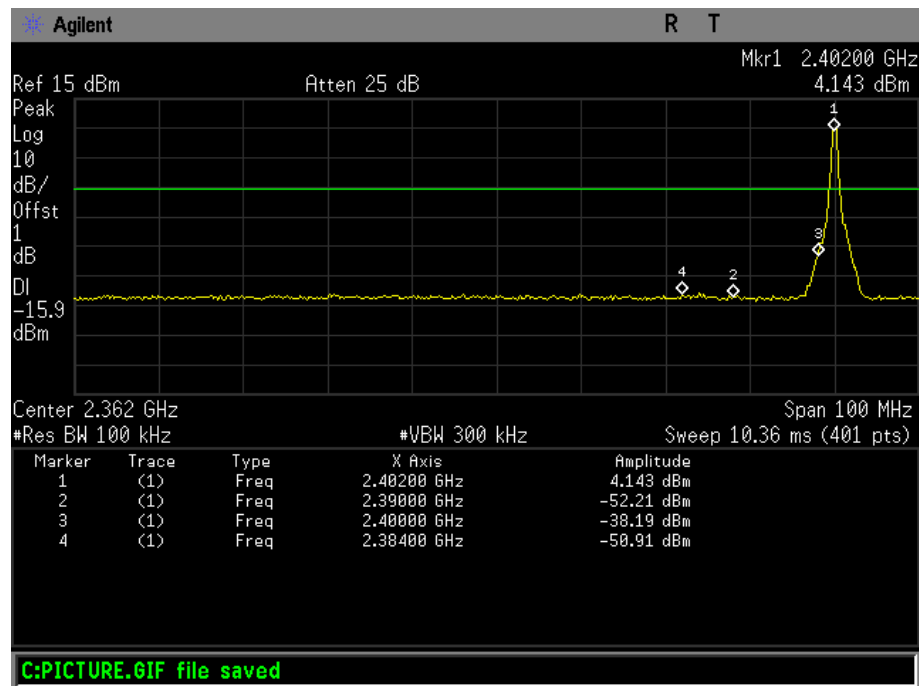



EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	GFSK Hopping Mode		
Remark:	N/A		

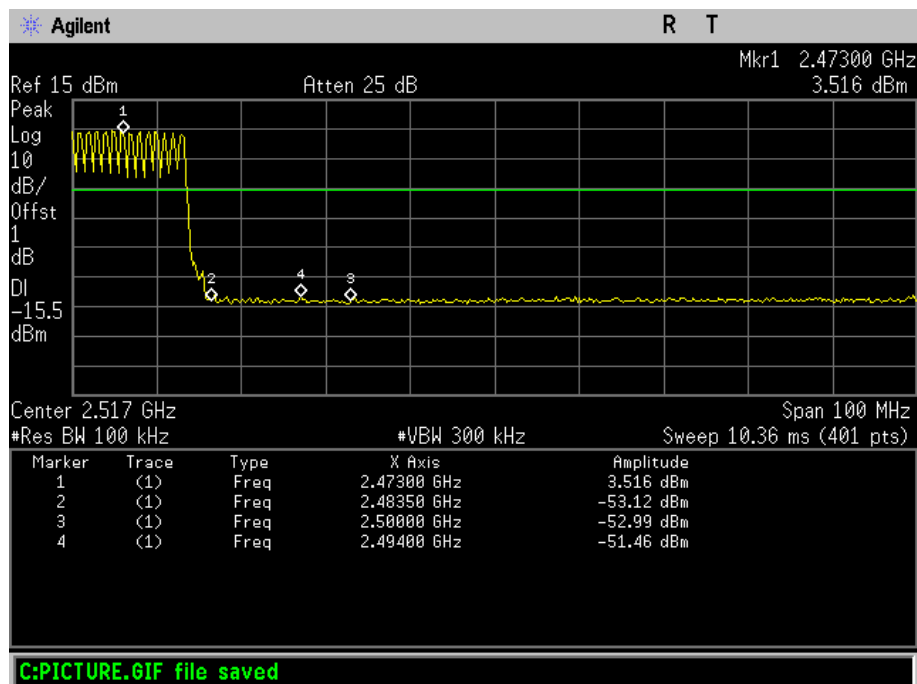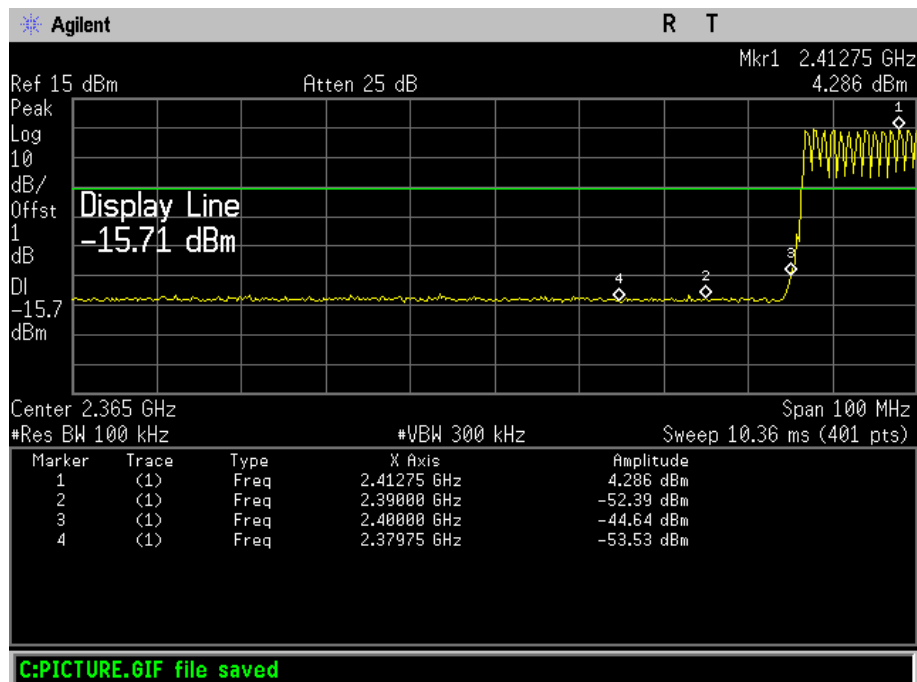

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX 8-DPSK Mode 2402MHz / 2480 MHz		
Remark:	N/A		

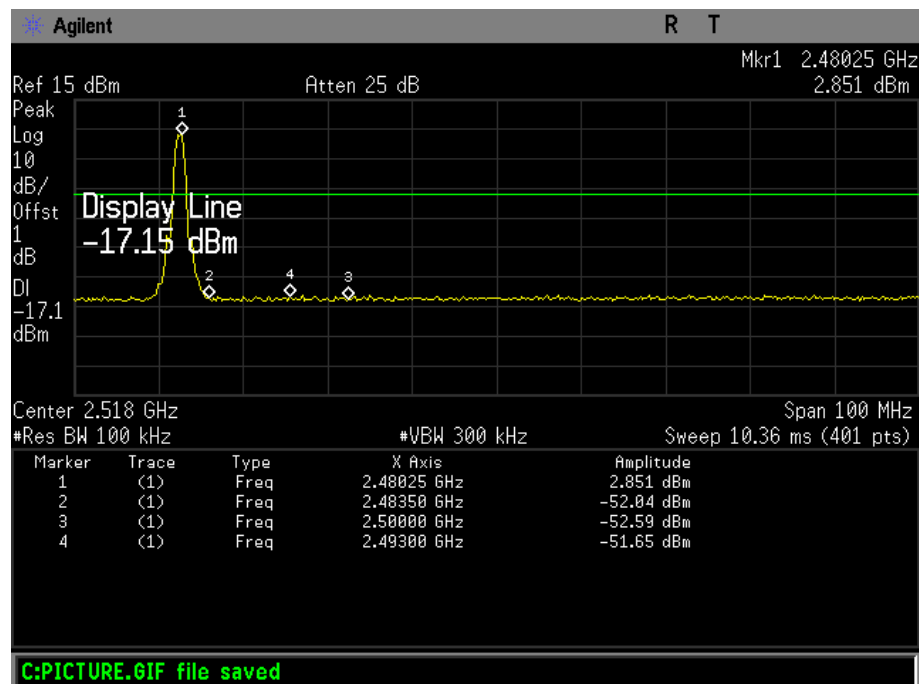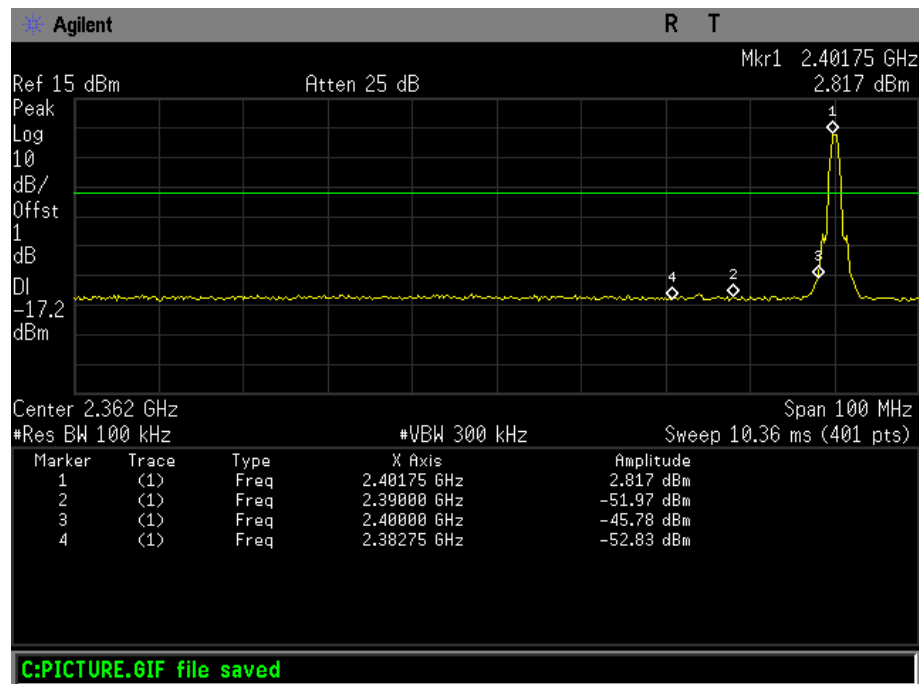

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	8-DPSK Hopping Mode		
Remark:	N/A		

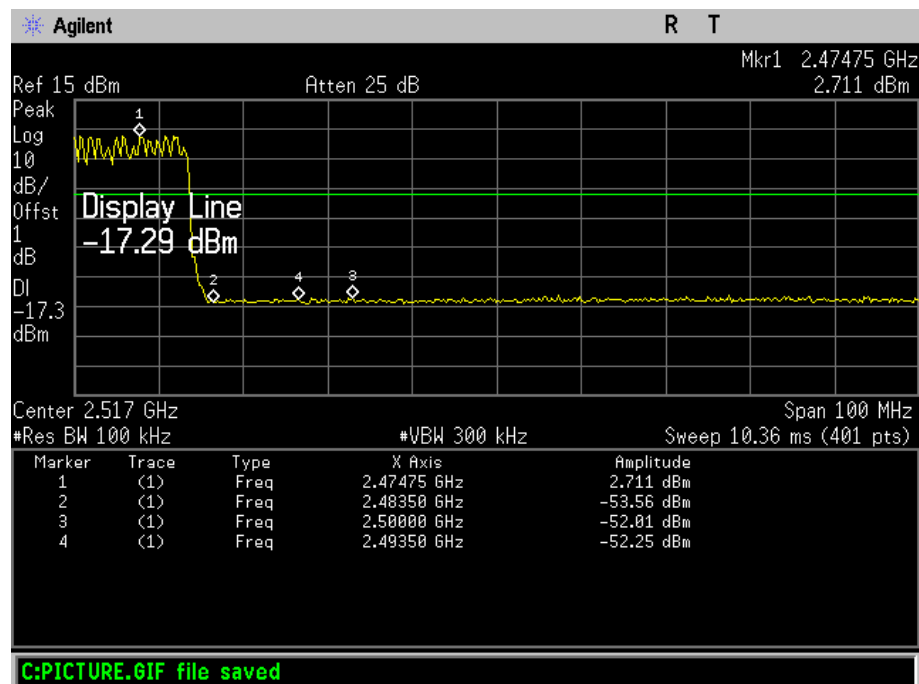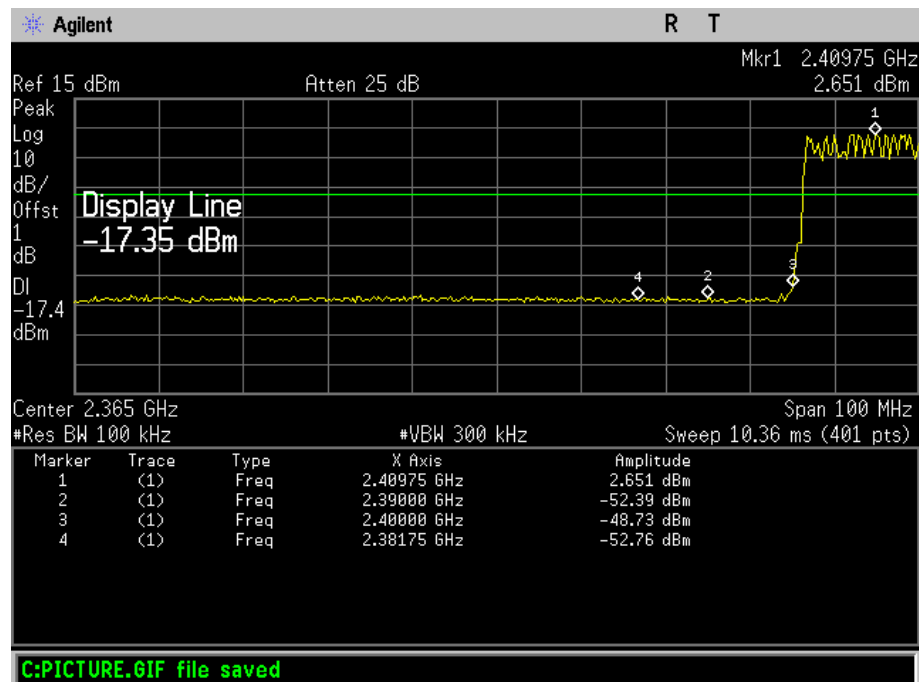

7. Number of Hopping Channel

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247 (a)(1)

7.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.


7.4 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.


7.5 Test Data

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	Hopping Mode (GFSK/ 8-DPSK)		
Frequency Range	Quantity of Hopping Channel	Limit	
2402MHz~2480MHz	79	>15	
	79		

GFSK Mode

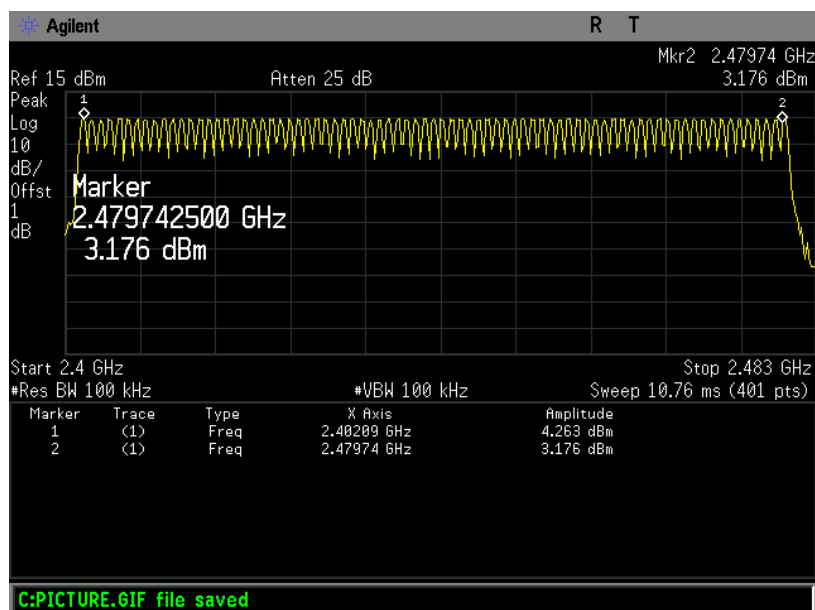

8-DPSK Mode

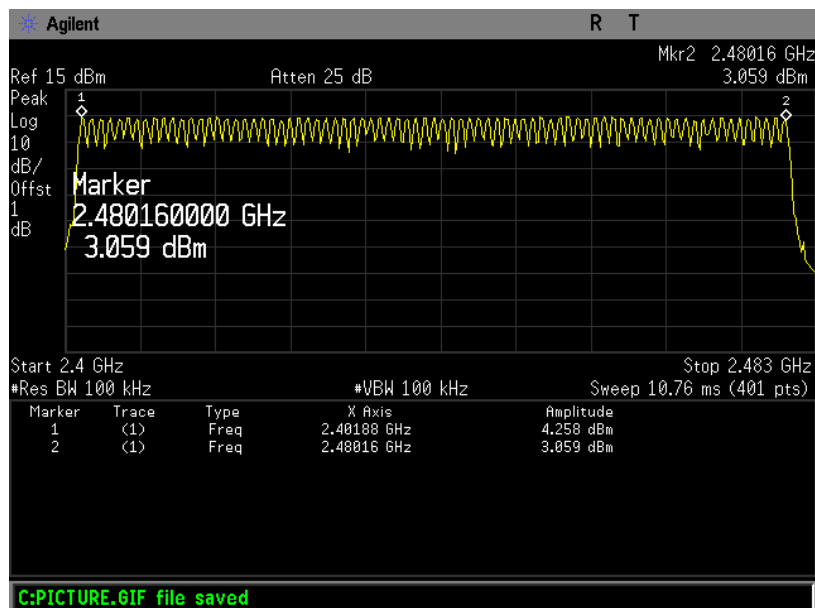

8. Average Time of Occupancy

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247 (a)(1)

8.1.2 Test Limit

Section	Test Item	Limit
15.247(a)(1)/ RSS-210 Annex 8(A8.1d)	Average Time of Occupancy	0.4 sec

8.2 Test Setup



8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

8.4 EUT Operating Condition


The EUT was set to the Hopping Mode by the Customer.

8.5 Test Data

EUT:		10.1 inch MID		Model Name :		TM101A550L	
Temperature:		25 °C		Relative Humidity:		55%	
Test Voltage:		AC 120V/60 Hz					
Test Mode:		Hopping Mode (GFSK DH1)					
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result		
2402	0.440	140.80	31.60	400	PASS		
2441	0.440	140.80					
2480	0.440	140.80					


GFSK Hopping Mode DH1

2402 MHz

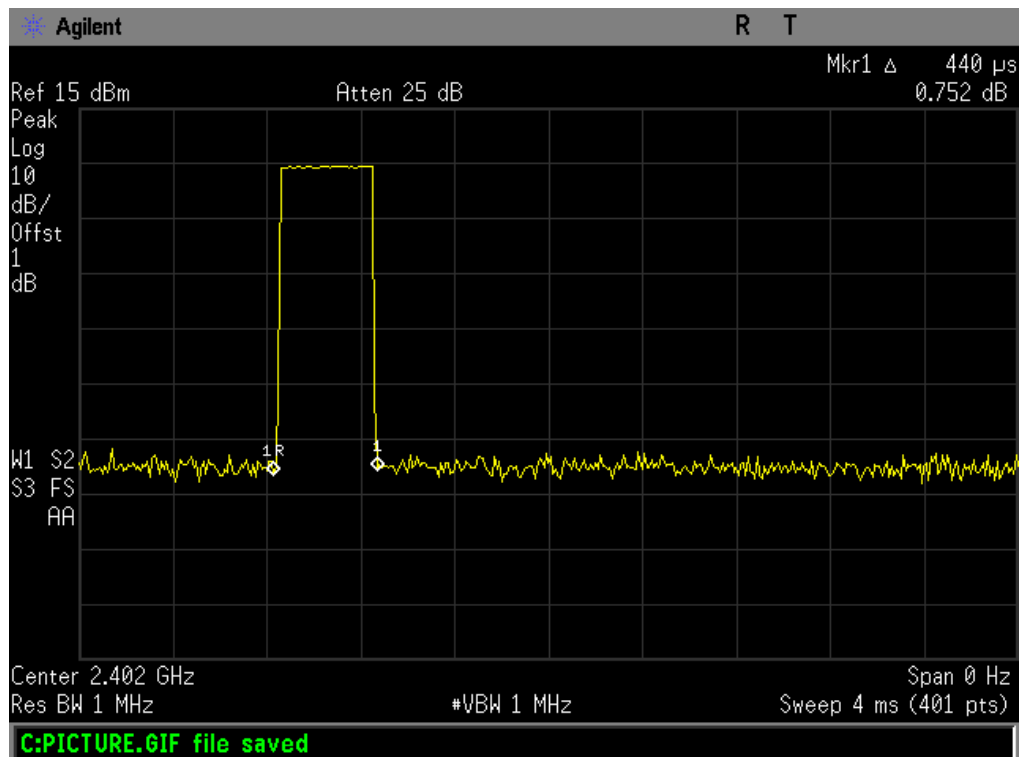


GFSK Hopping Mode DH1

2441 MHz

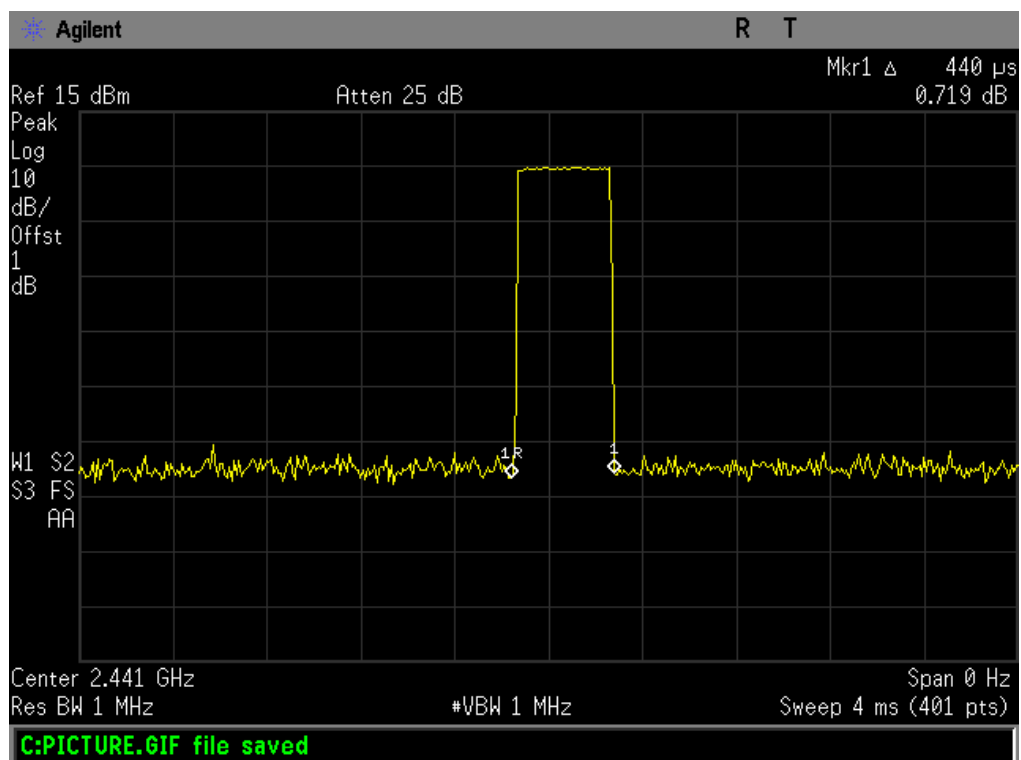

GFSK Hopping Mode DH1

2480 MHz

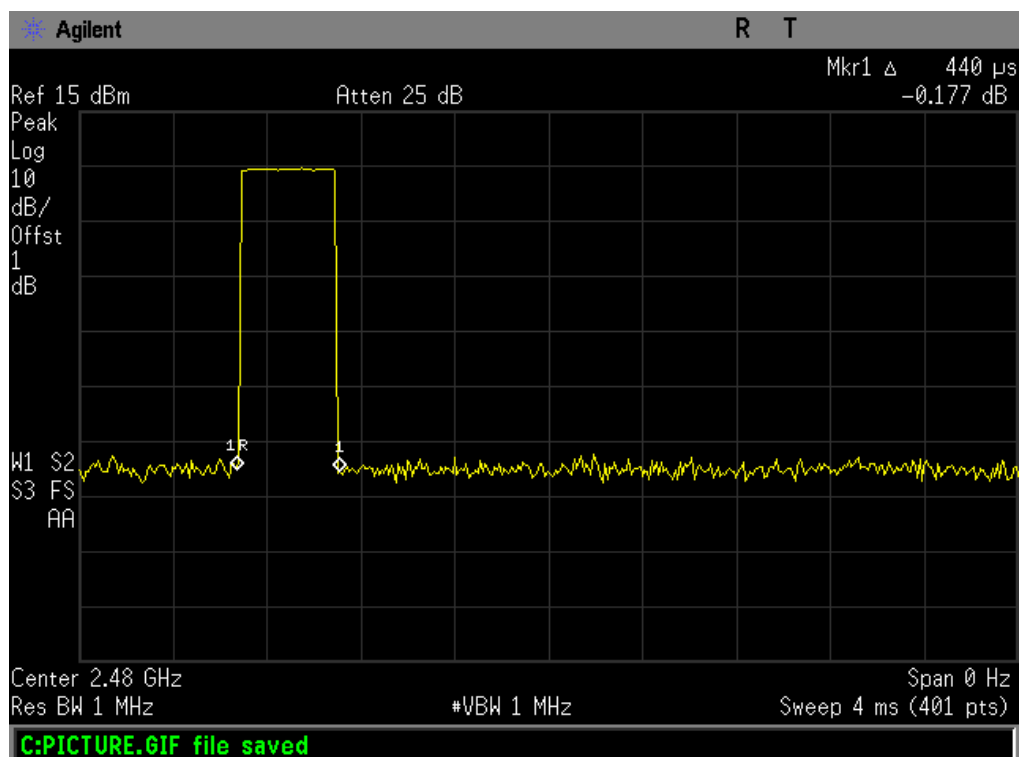

EUT:		10.1 inch MID		Model Name :		TM101A5 50L
Temperature:		25 °C		Relative Humidity:		55%
Test Voltage:		AC 120V/60 Hz				
Test Mode:		Hopping Mode (GFSK DH3)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result	
2402	1.720	275.20	31.60	400	PASS	
2441	1.720	275.20				
2480	1.720	275.20				
GFSK Hopping Mode DH3						
2402 MHz						

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 1.72 ms
-0.766 dB

Peak Log 10 dB/Offst 1 dB

W1 S2 S3 FS AA

Center 2.402 GHz

Res BW 1 MHz

#VBW 1 MHz


Span 0 Hz

Sweep 8 ms (401 pts)

C:PICTURE.GIF file saved


GFSK Hopping Mode DH3


2441 MHz

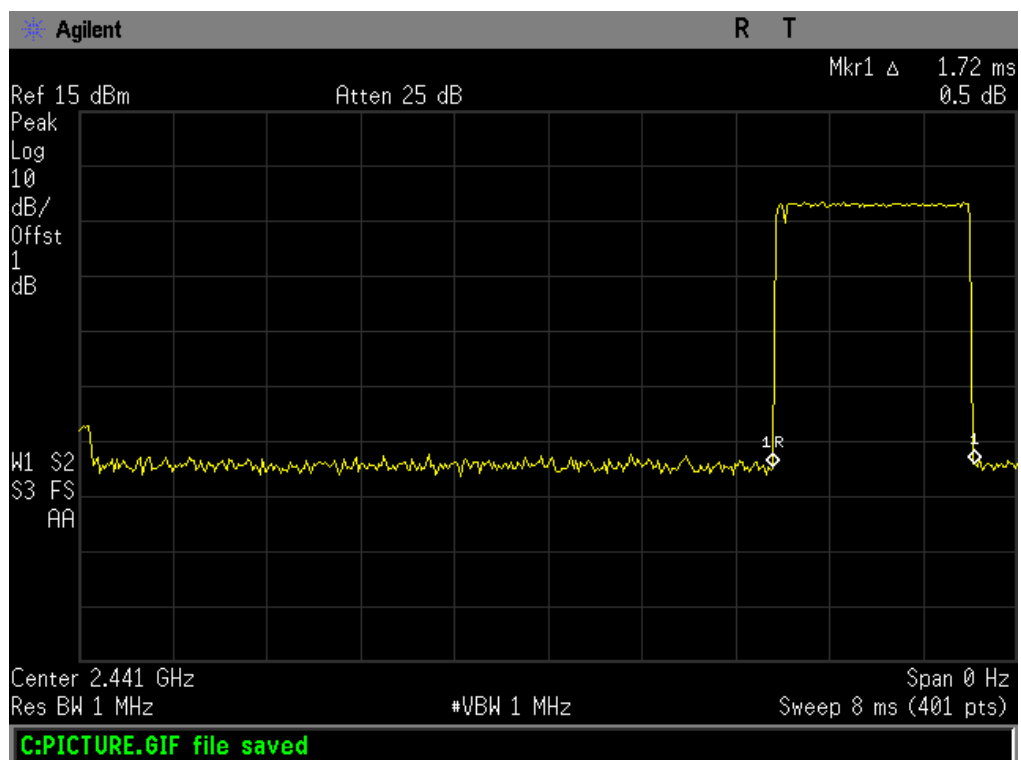

GFSK Hopping Mode DH3


2480 MHz

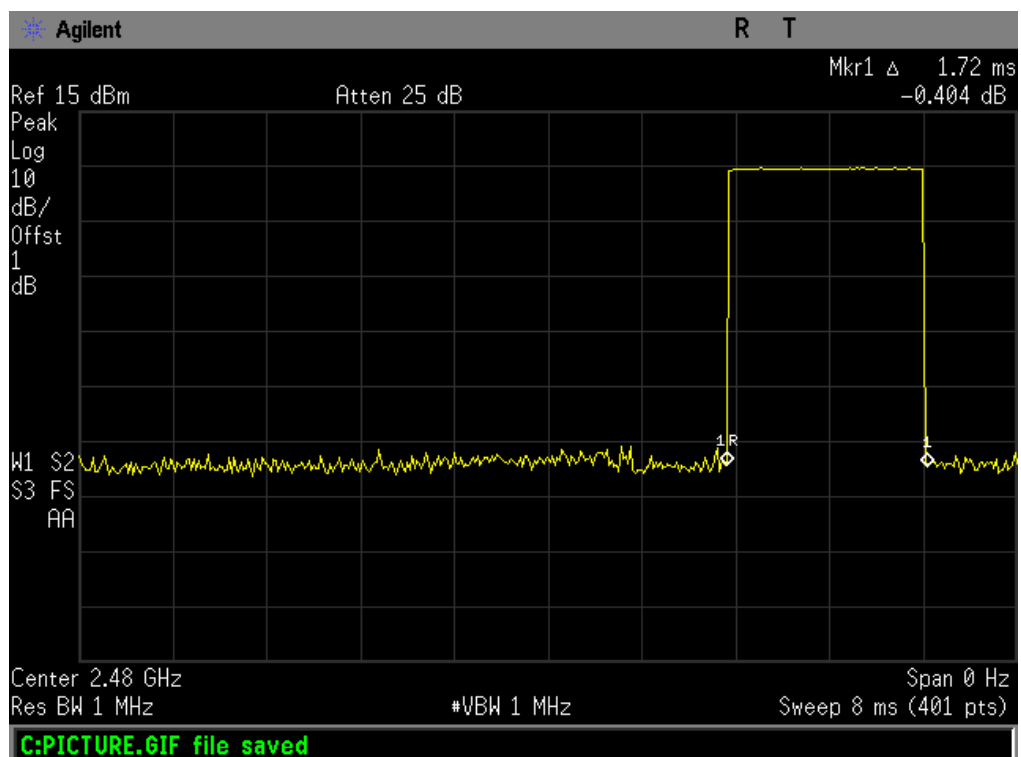

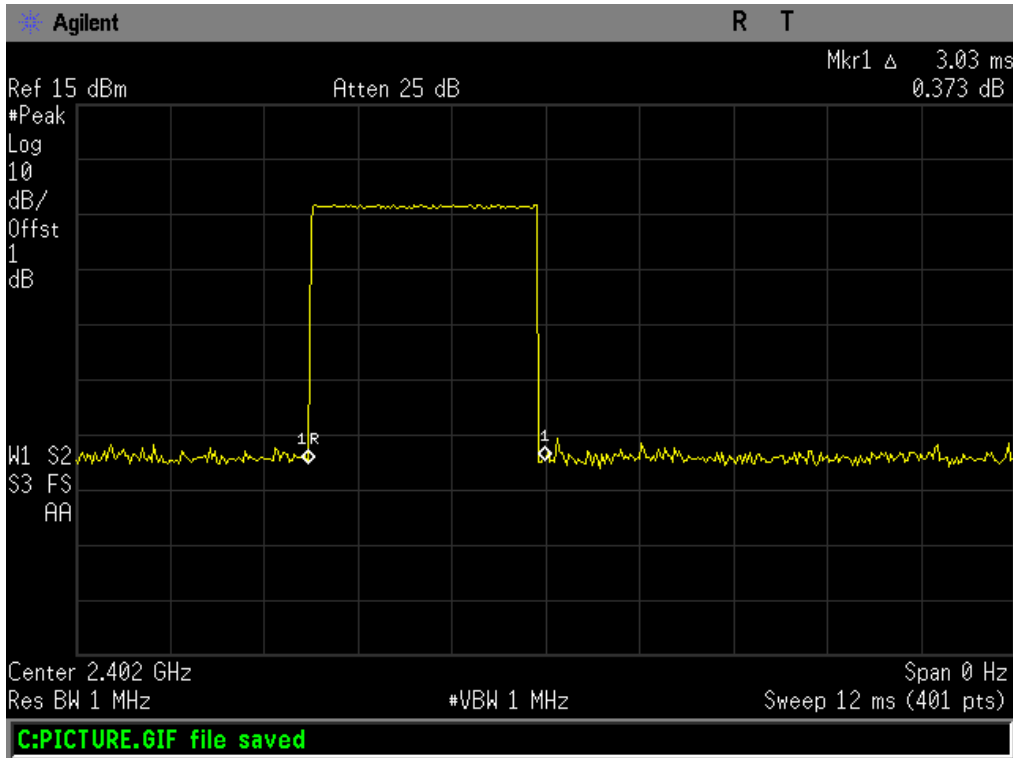EUT:		10.1 inch MID	Model Name :		TM101A550 L
Temperature:		25 °C	Relative Humidity:		55%
Test Voltage:		AC 120V/60 Hz			
Test Mode:		Hopping Mode (GFSK DH5)			
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	3.030	323.20	31.60	400	PASS
2441	3.030	323.20			
2480	3.030	323.20			
GFSK Hopping Mode DH5					
2402 MHz					
					


GFSK Hopping Mode DH5

2441 MHz

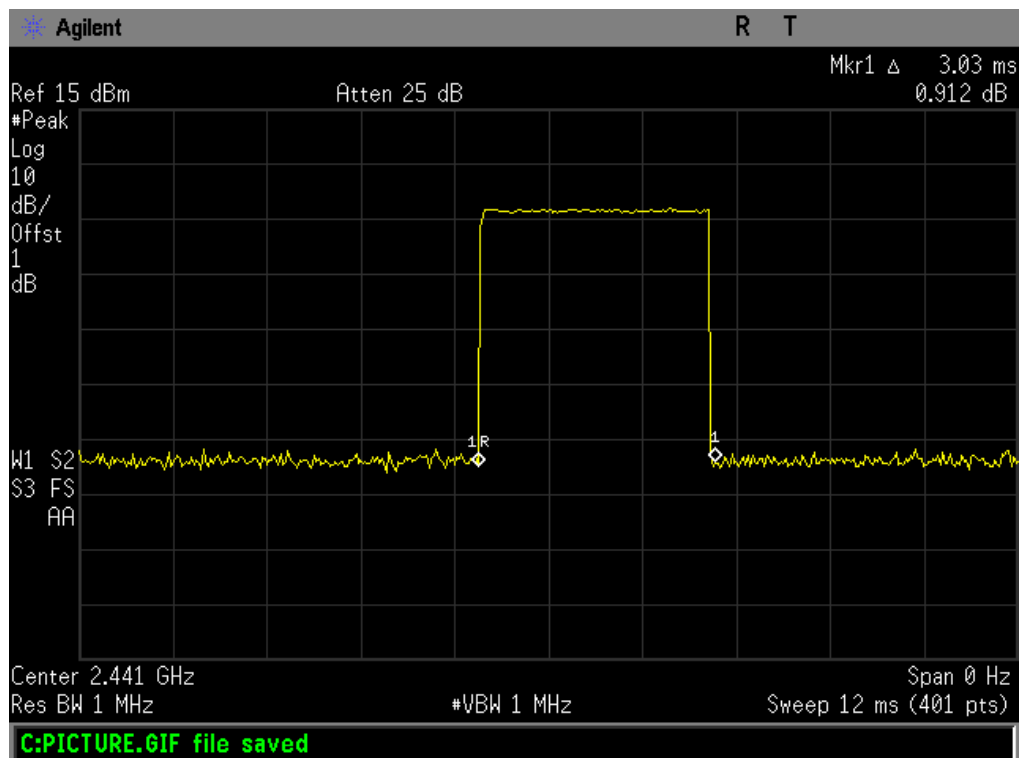

GFSK Hopping Mode DH5

2480 MHz

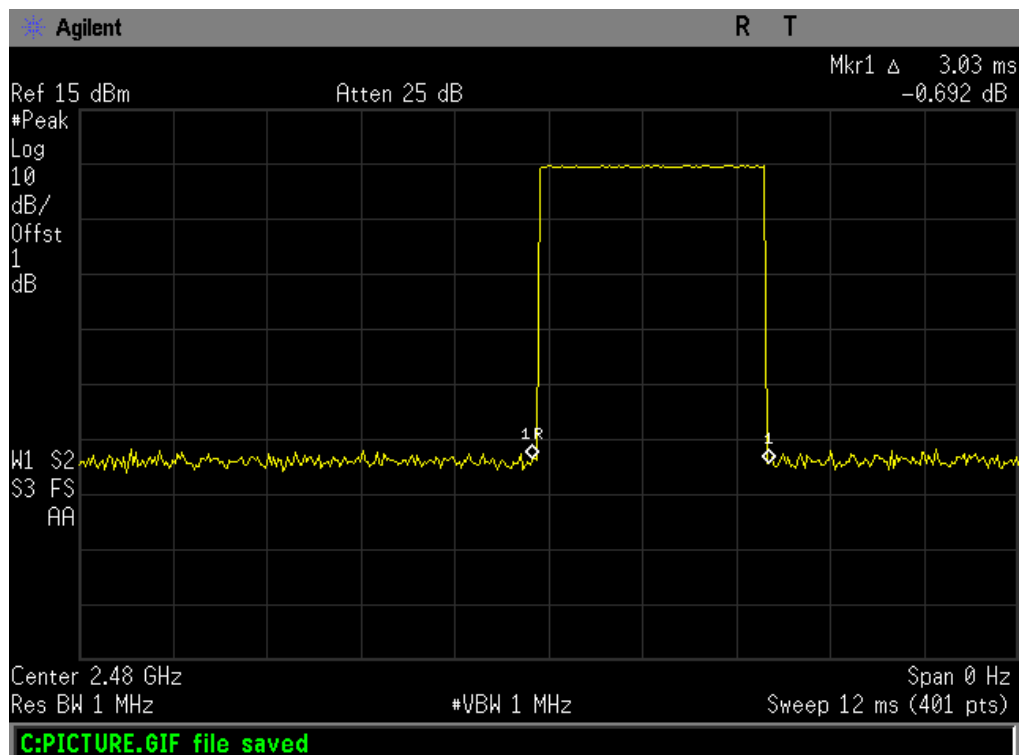

EUT:		10.1 inch MID		Model Name :		TM101A55 0L	
Temperature:		25 °C		Relative Humidity:		55%	
Test Voltage:		AC 120V/60 Hz					
Test Mode:		Hopping Mode (π /4-DQPSK DH1)					
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result		
2402	0.440	140.80	31.60	400	PASS		
2441	0.440	140.80					
2480	0.440	140.80					
π /4-DQPSK Hopping Mode DH1							
2402 MHz							

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 440 μ s
2.867 dB

Peak

Log

10

dB/

Offst

1

dB

W1 S2

S3 FS

AA

Center 2.402 GHz

Res BW 1 MHz

#VBW 1 MHz


Span 0 Hz

Sweep 4 ms (401 pts)

C:PICTURE.GIF file saved


$\pi/4$ -DQPSK Hopping Mode DH1

2441 MHz

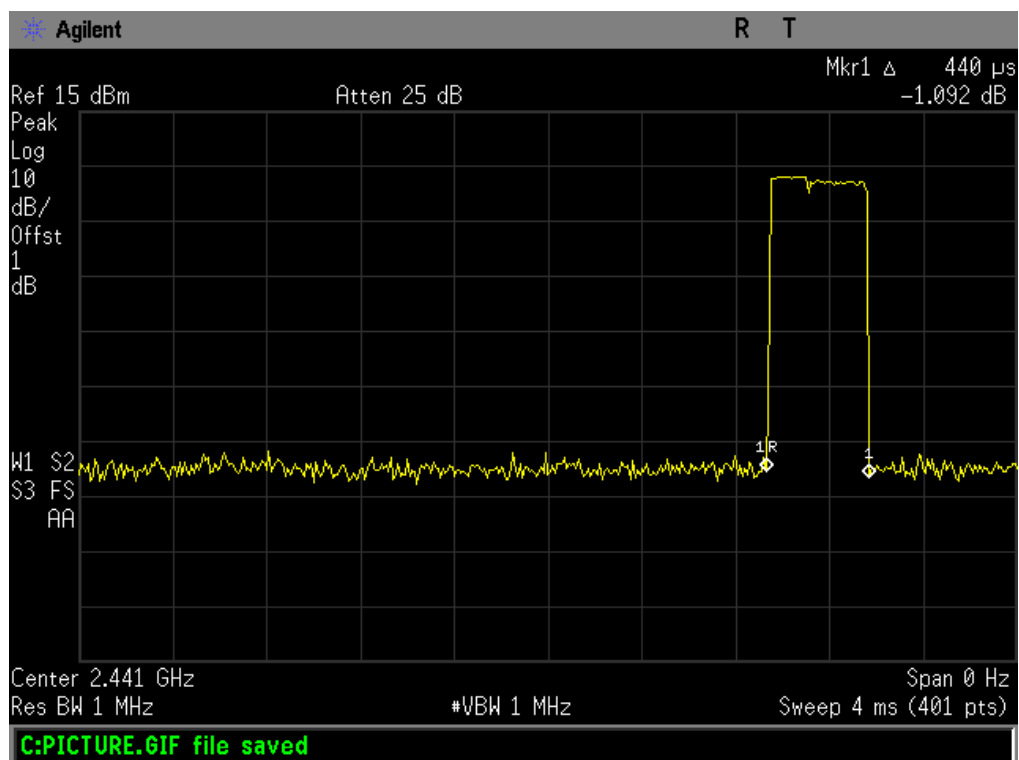


$\pi/4$ -DQPSK Hopping Mode DH1

2480 MHz

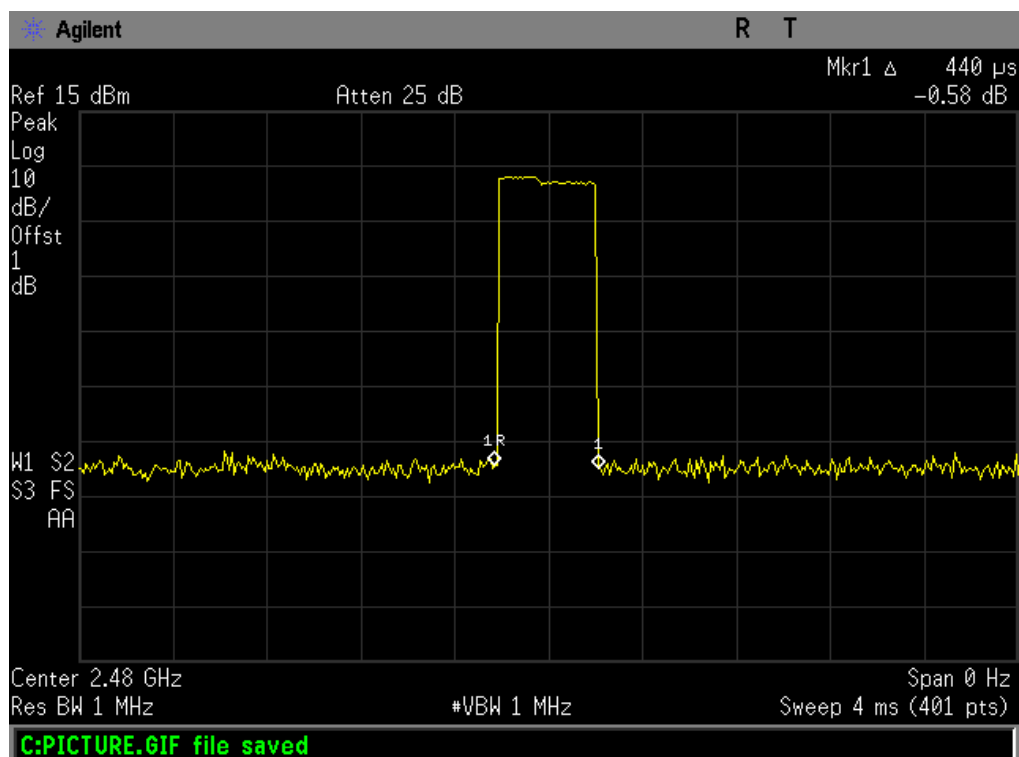


$\pi/4$ -DQPSK Hopping Mode DH3

2441 MHz

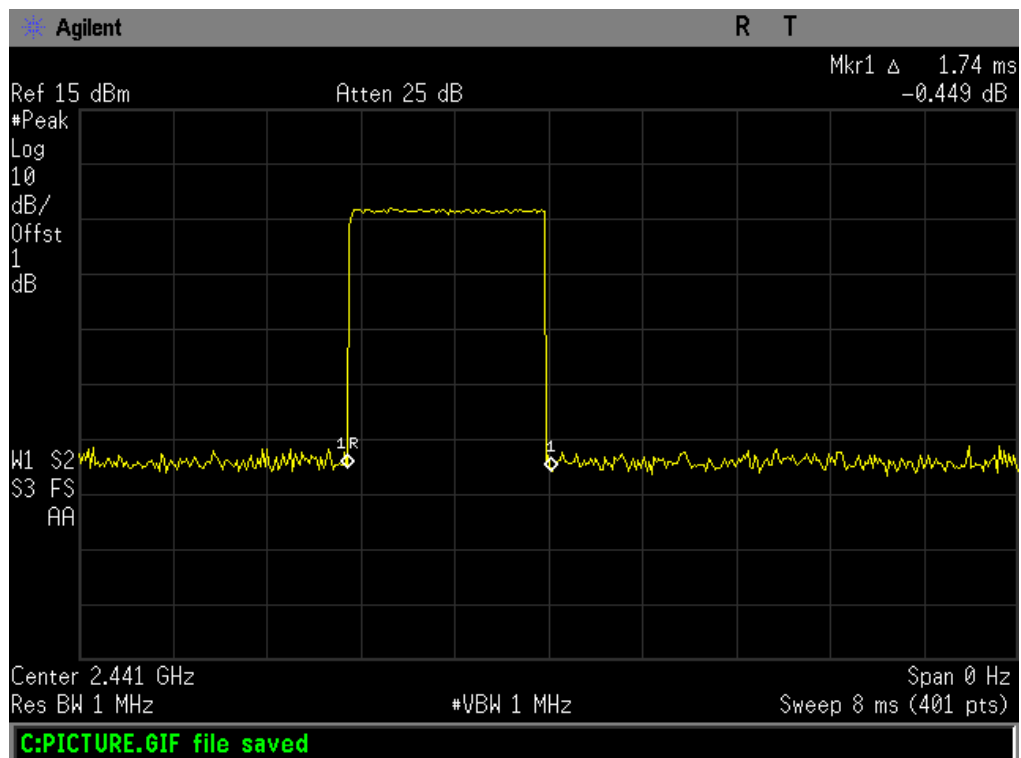

$\pi/4$ -DQPSK Hopping Mode DH3

2480 MHz

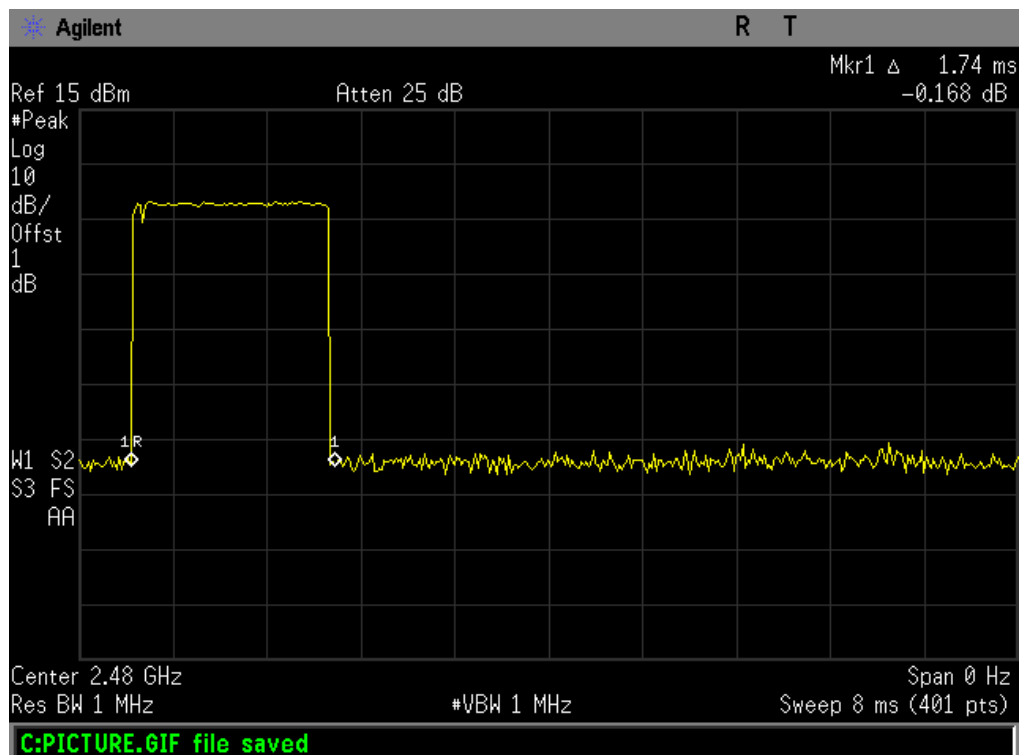

EUT:		10.1 inch MID		Model Name :		TM101A550 L	
Temperature:		25 °C		Relative Humidity:		55%	
Test Voltage:		AC 120V/60 Hz					
Test Mode:		Hopping Mode (π /4-DQPSK DH5)					
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result		
2402	3.030	323.20	31.60	400	PASS		
2441	3.030	323.20					
2480	3.030	323.20					
π /4-DQPSK Hopping Mode DH5							
2402 MHz							

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 3.03 ms
-0.144 dB

#Peak
Log
10
dB/
Offst
1
dB

W1 S2
S3 FS
AA

Center 2.402 GHz

Res BW 1 MHz


#VBW 1 MHz

Span 0 Hz
Sweep 12 ms (401 pts)

C:PICTURE.GIF file saved


π /4-DQPSK Hopping Mode DH5

2441 MHz

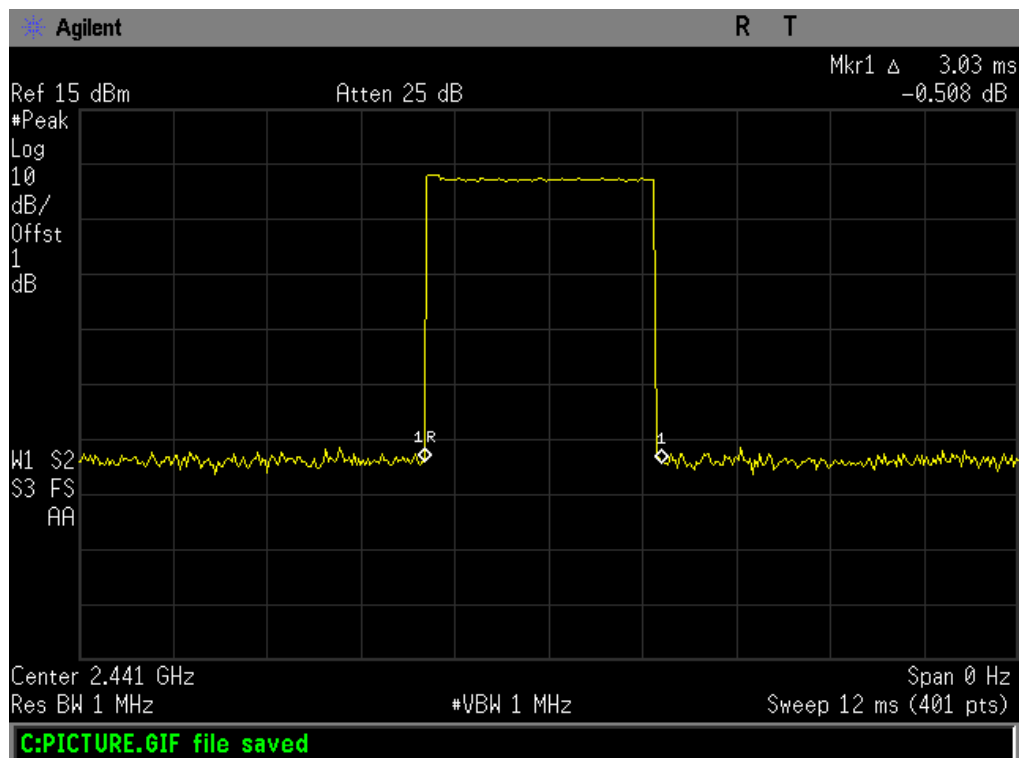

π /4-DQPSK Hopping Mode DH5

2480 MHz

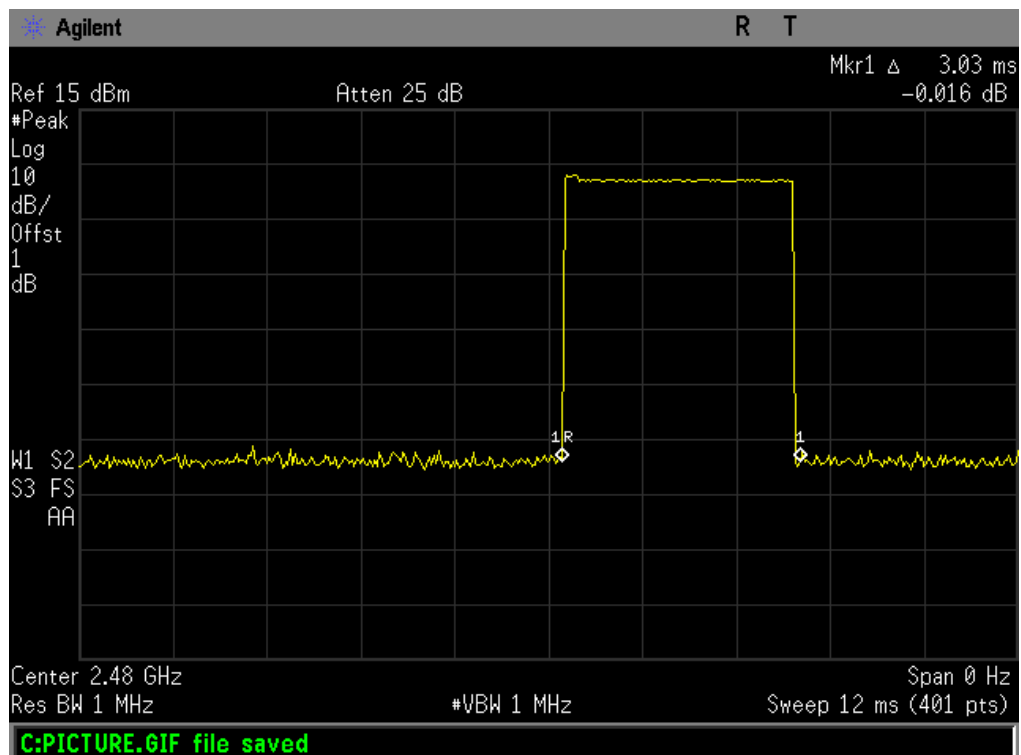

EUT:		10.1 inch MID	Model Name :		TM101A550 L
Temperature:		25 °C	Relative Humidity:		55%
Test Voltage:		AC 120V/60 Hz			
Test Mode:		Hopping Mode (8-DPSK DH1)			
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	0.440	140.80	31.60	400	PASS
2441	0.440	140.80			
2480	0.440	140.80			
8-DPSK Hopping Mode DH1					
2402 MHz					

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 440 μs
3.864 dB

Peak

Log

10

dB/

Offst

1

dB

W1 S2

S3 FS

AA

1R

Center 2.402 GHz

Res BW 1 MHz

#VBW 1 MHz


Span 0 Hz

Sweep 4 ms (401 pts)

C:PICTURE.GIF file saved


8-DPSK Hopping Mode DH1

2441 MHz

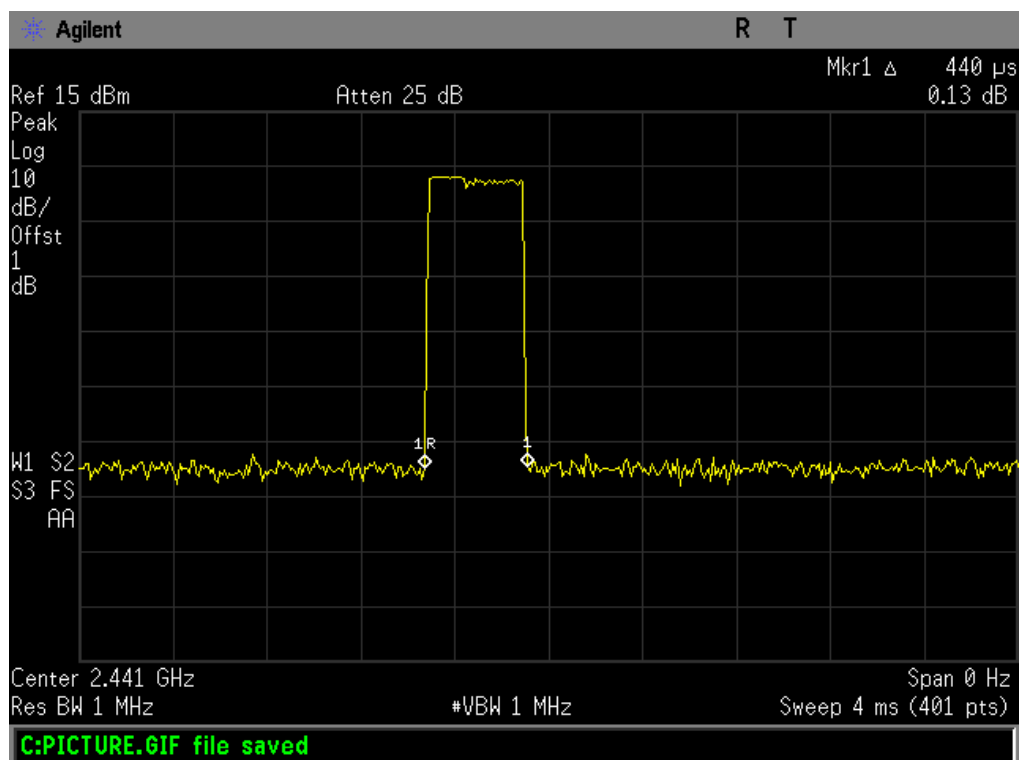

8-DPSK Hopping Mode DH1

2480 MHz

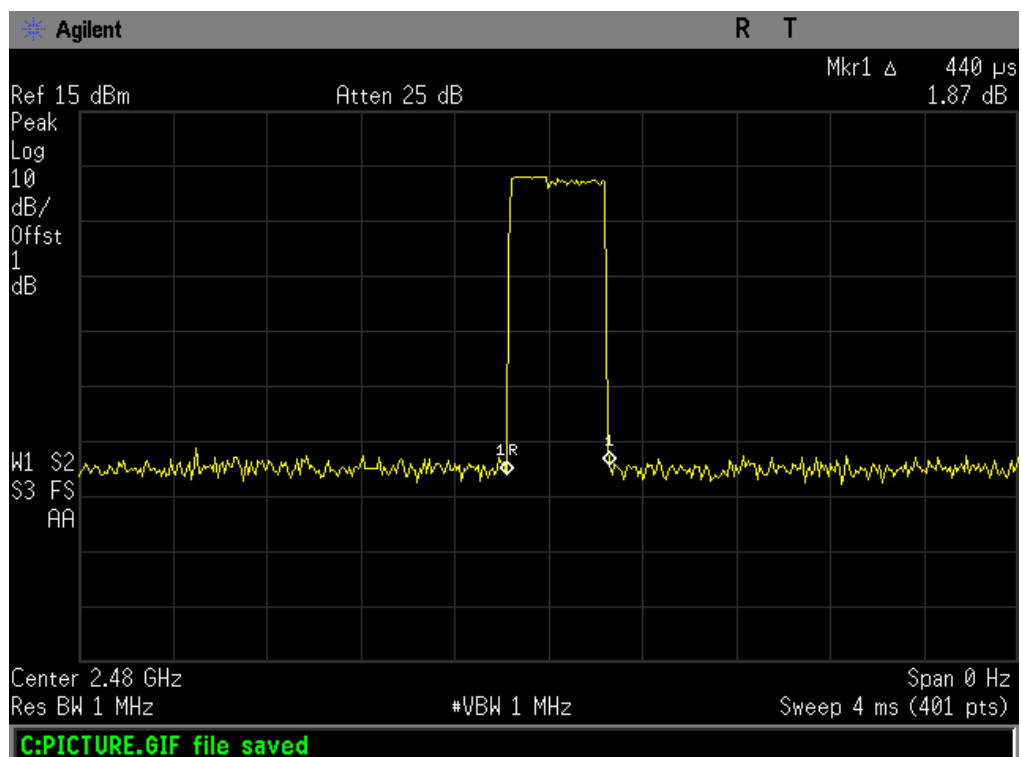

EUT:		10.1 inch MID	Model Name :		TM101A550 L
Temperature:		25 °C	Relative Humidity:		55%
Test Voltage:		AC 120V/60 Hz			
Test Mode:		Hopping Mode (8-DPSK DH3)			
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	1.740	278.40	31.60	400	PASS
2441	1.740	278.40			
2480	1.740	278.40			
8-DPSK Hopping Mode DH3					
2402 MHz					

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 1.74 ms

0.601 dB

Peak Log 10 dB/ Offst 1 dB

W1 S2 S3 FS AA

Center 2.402 GHz

Res BW 1 MHz

#VBW 1 MHz

Span 0 Hz

Sweep 8 ms (401 pts)

C:PICTURE.GIF file saved

2441 MHz




2480 MHz



EUT:		10.1 inch MID		Model Name :		TM101A550 L	
Temperature:		25 °C		Relative Humidity:		55%	
Test Voltage:		AC 120V/60 Hz					
Test Mode:		Hopping Mode (8-DPSK DH5)					
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result		
2402	3.030	323.20	31.60	400	PASS		
2441	3.030	323.20					
2480	3.030	323.20					


8-DPSK Hopping Mode DH5

2402 MHz

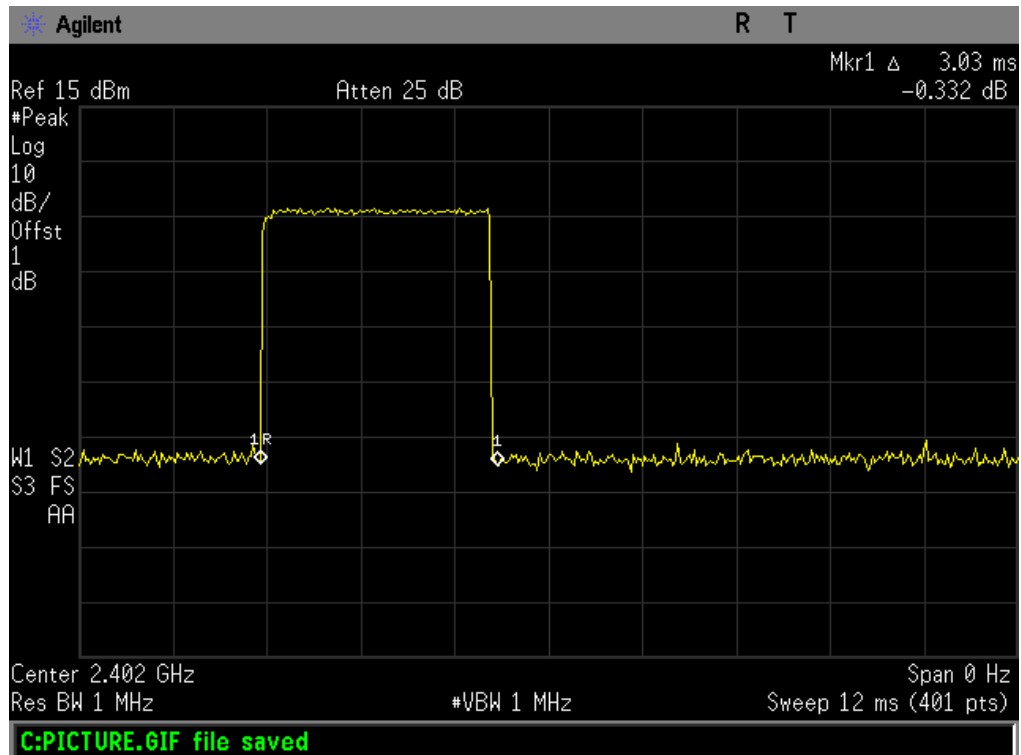


8-DPSK Hopping Mode DH5

2441 MHz

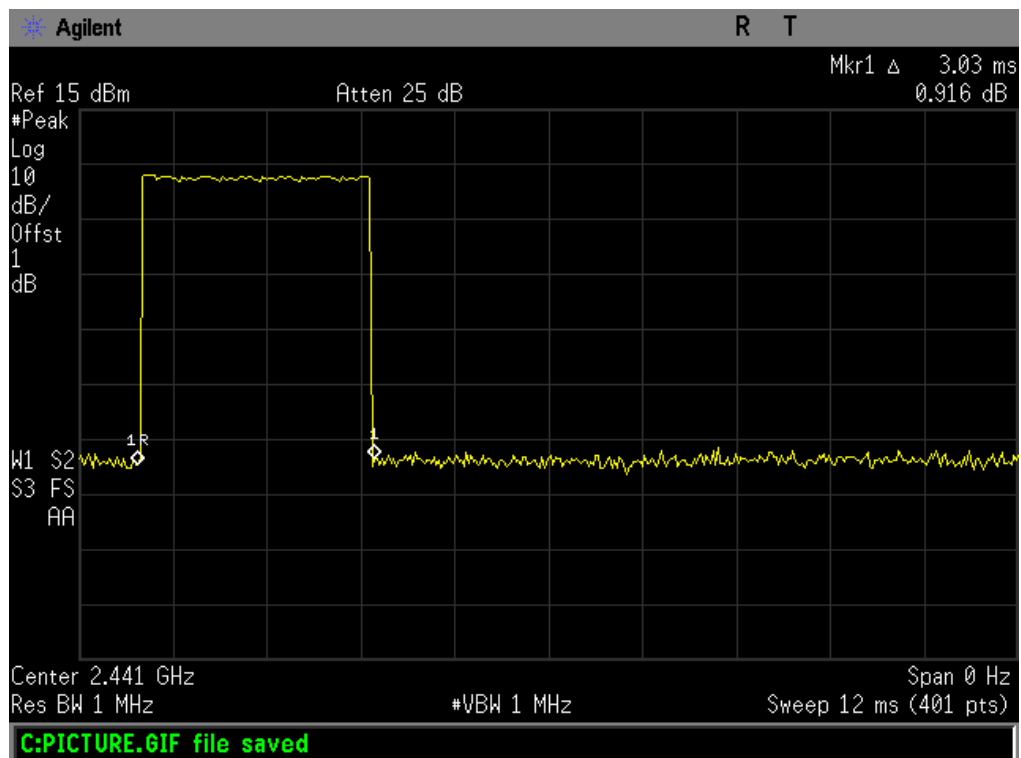

8-DPSK Hopping Mode DH5

2480 MHz

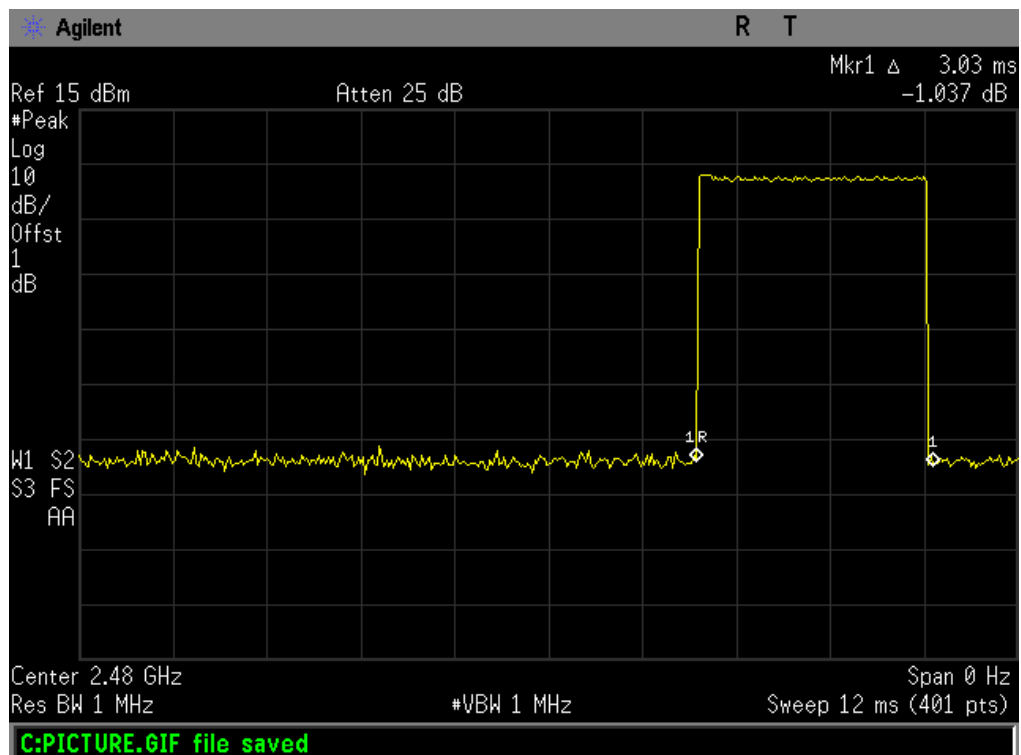

9. Channel Separation and Bandwidth Test


9.1 Test Standard and Limit

9.1.1 Test Standard
FCC Part 15.247

9.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≤ 1 MHz (20dB bandwidth)	2400~2483.5
Channel Separation	> 25 KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

9.2 Test Setup



9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Channel Separation: RBW=30 kHz, VBW=100 kHz.
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

9.4 EUT Operating Condition


The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

9.5 Test Data

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2402	845.7755	853.537	
2441	838.9044	858.971	
2480	835.1074	855.771	


GFSK TX Mode

2402 MHz

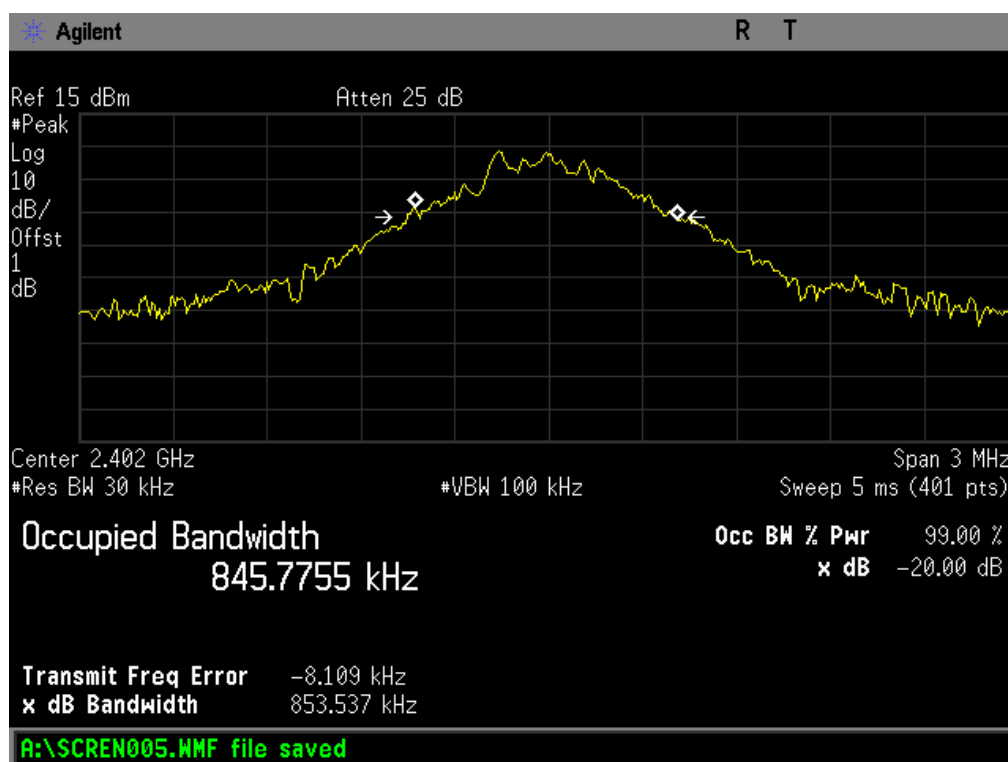


GFSK TX Mode

2441 MHz

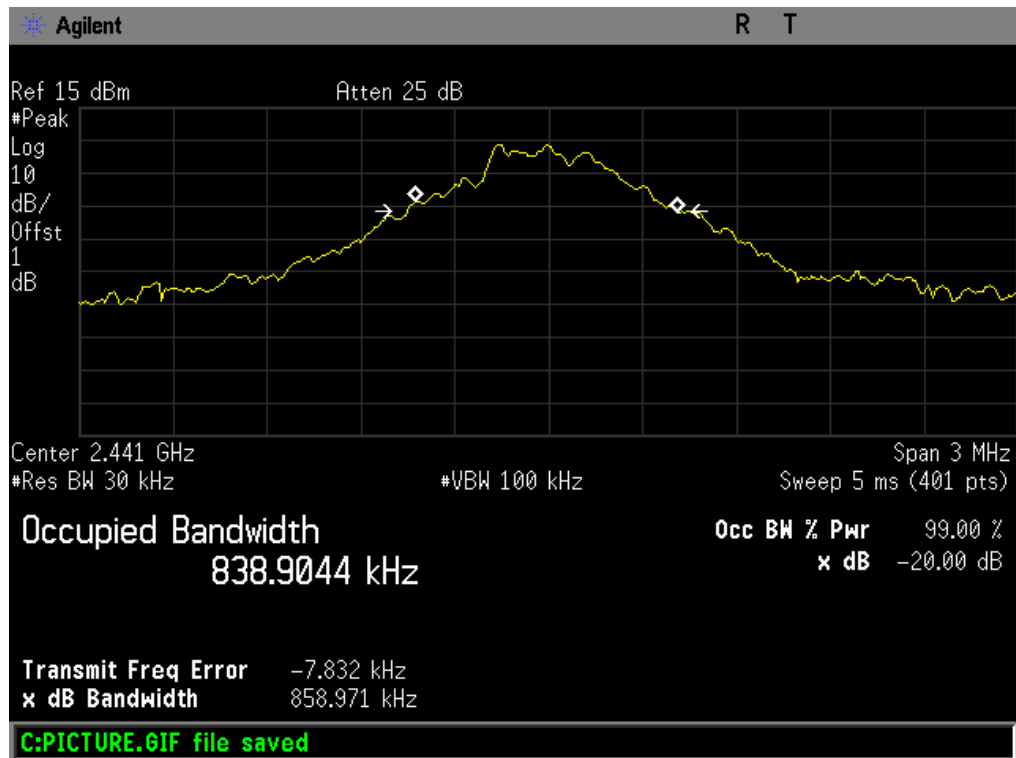

GFSK TX Mode


2480 MHz

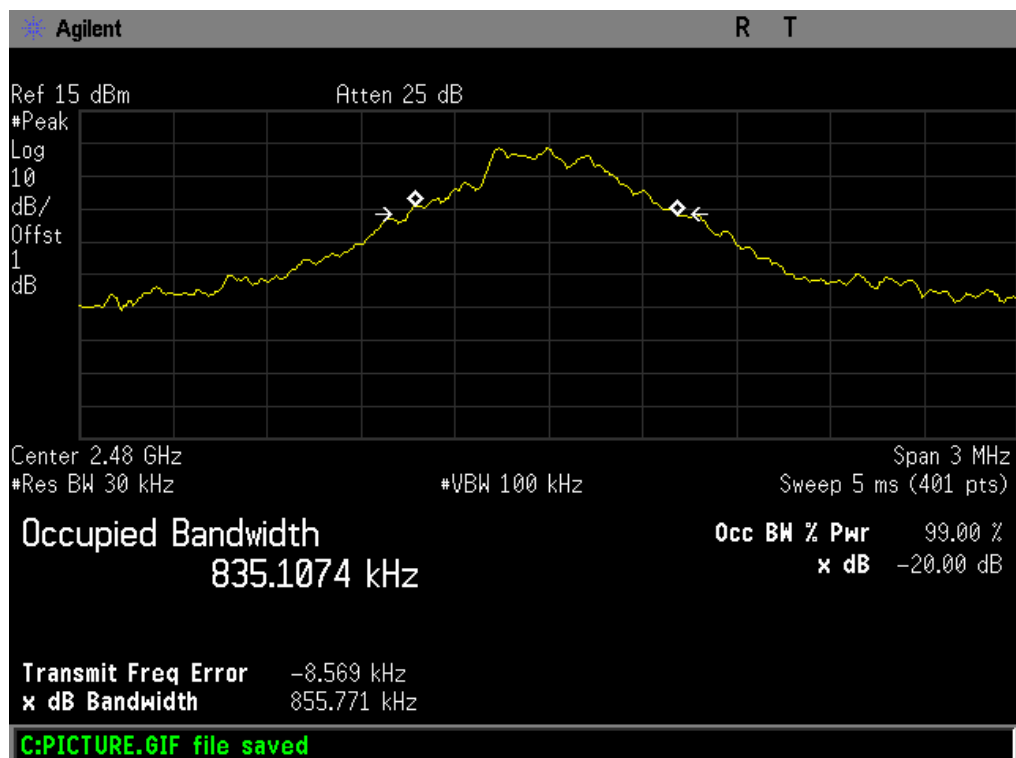

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX Mode (π /4-DQPSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2402	909.8529	1006.000	670.67
2441	908.6102	1003.000	668.67
2480	903.4369	983.835	655.89


π /4-DQPSK TX Mode

2402 MHz

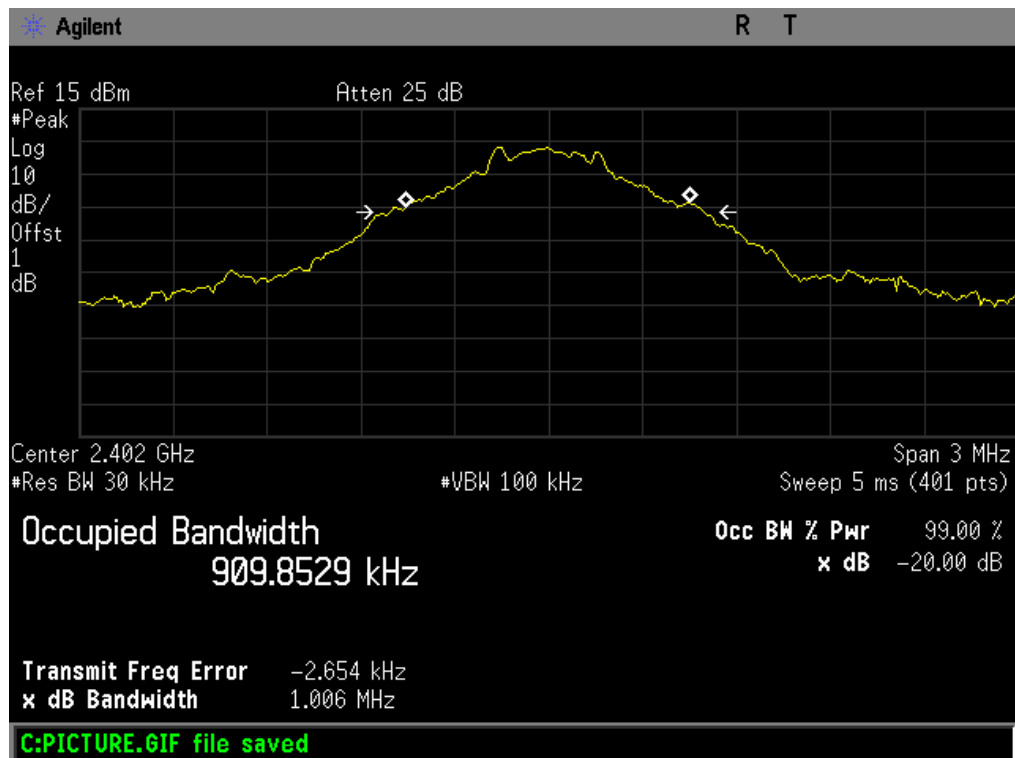


$\pi/4$ -DQPSK TX Mode

2441 MHz

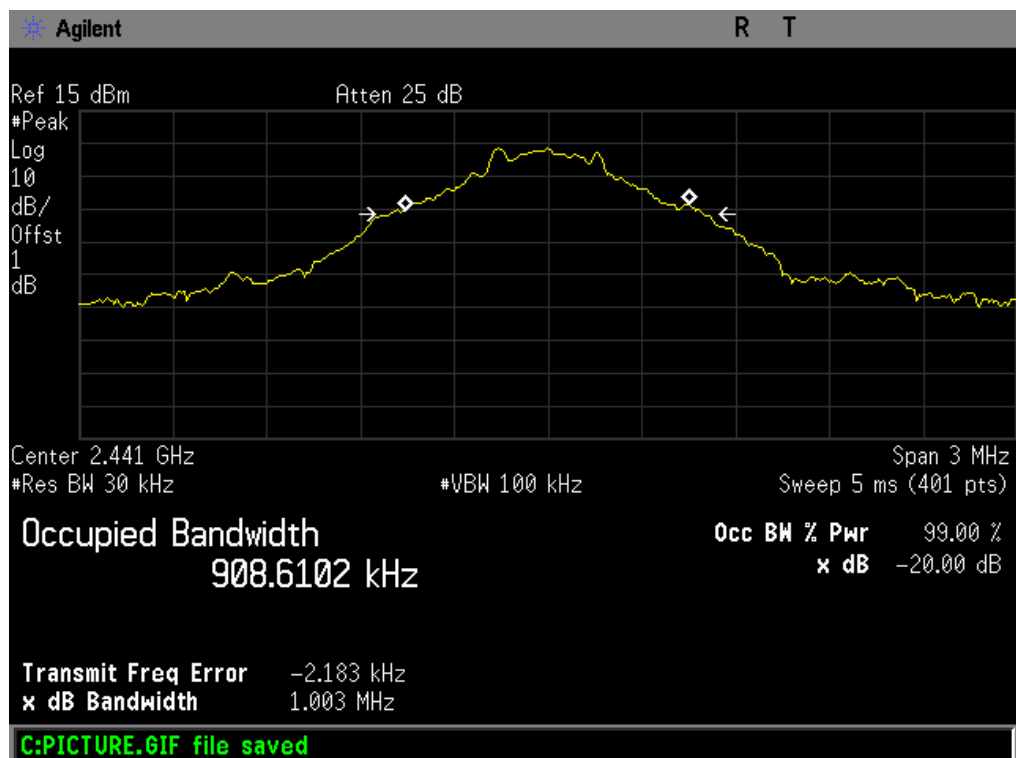 $\pi/4$ -DQPSK TX Mode


2480 MHz

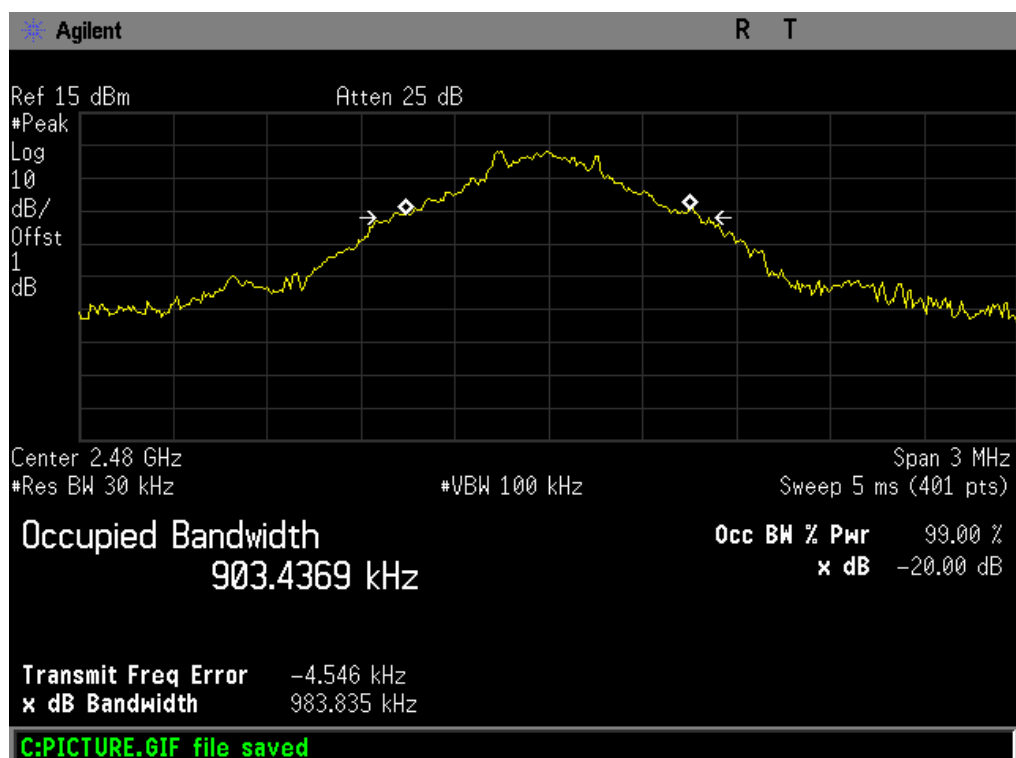

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX Mode (8-DPSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2402	1135.40	1216.00	810.67
2441	1132.00	1215.00	810.00
2480	1131.20	1220.00	813.33


8-DPSK TX Mode

2402 MHz

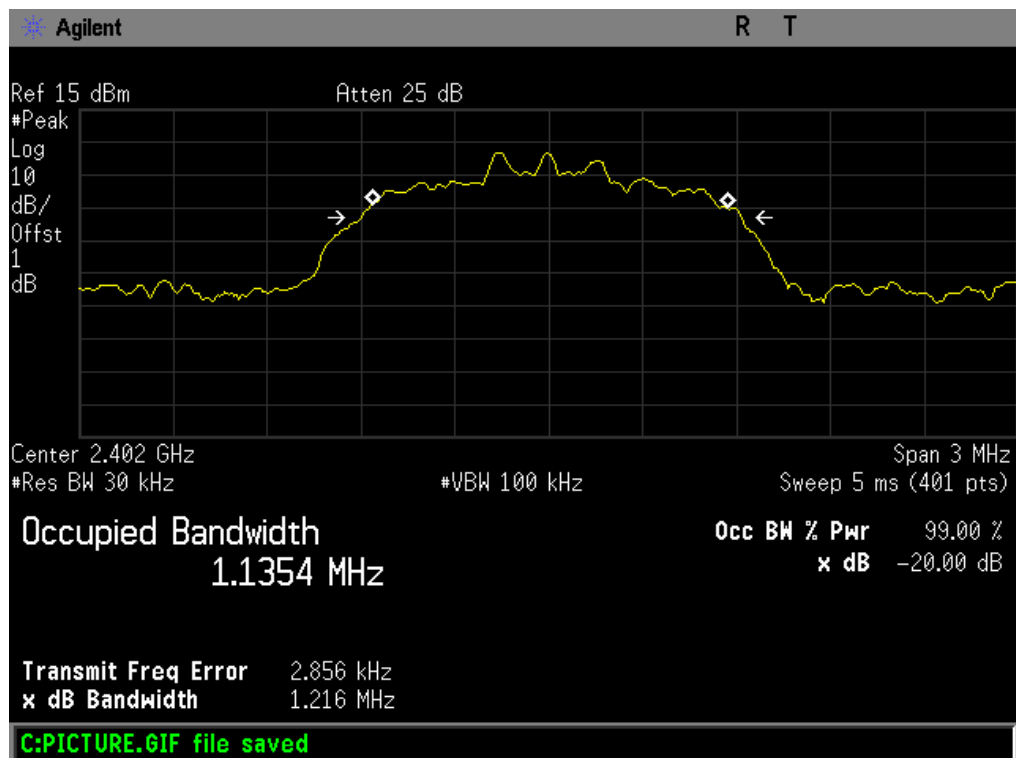


8-DPSK TX Mode

2441 MHz

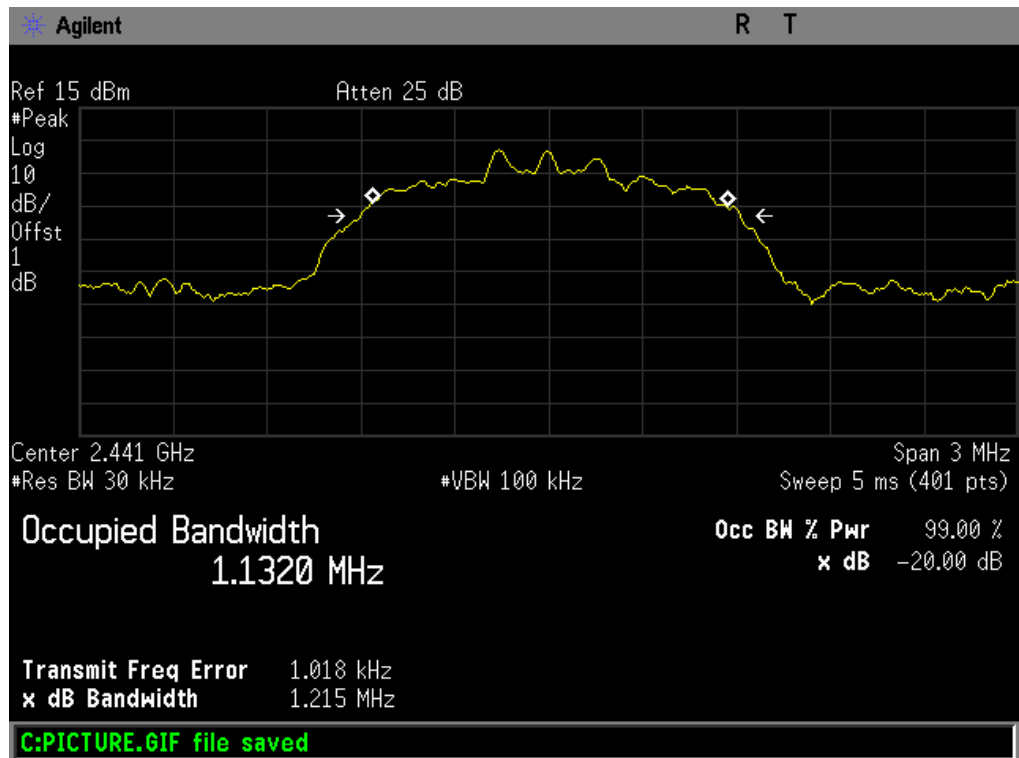

8-DPSK TX Mode

2480 MHz

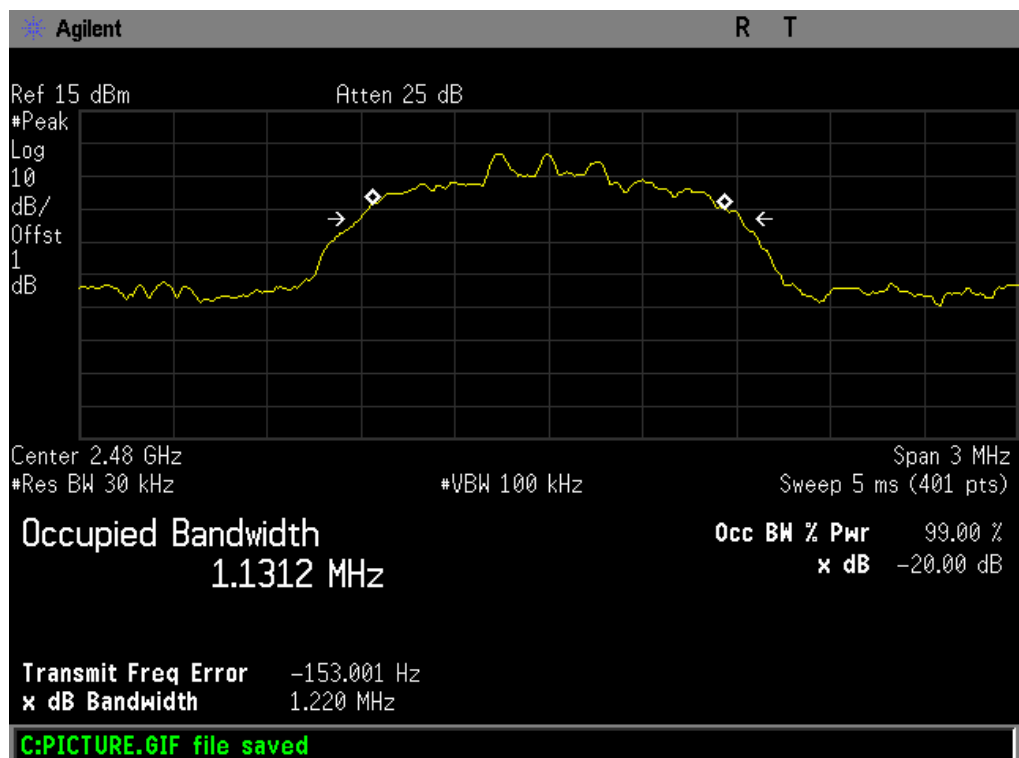

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	Hopping Mode (GFSK)		
Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)	
2402	1005.00	853.537	
2441	1005.00	858.971	
2480	1005.00	855.771	
GFSK Hopping Mode			
2402 MHz			

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 Δ 1.0050 MHz
0.091 dB

Peak

Log

10

dB/

Offset

1

dB

Marker Δ
1.005000 MHz
0.091 dB

1R

1

Center 2.402 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 3 MHz


Sweep 5 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Freq	2.4019900 GHz	3.305 dBm
1Δ	(1)	Freq	1.0050 MHz	0.091 dB

C:PICTURE.GIF file saved


GFSK Hopping Mode


2441 MHz

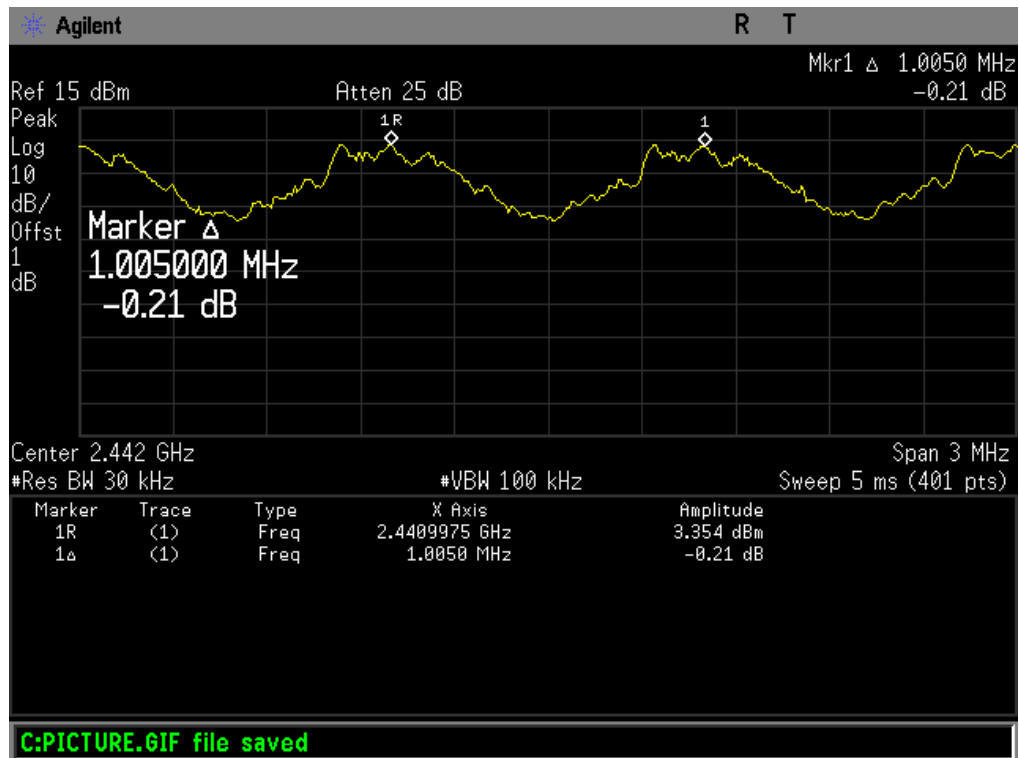

GFSK Hopping Mode


2480 MHz

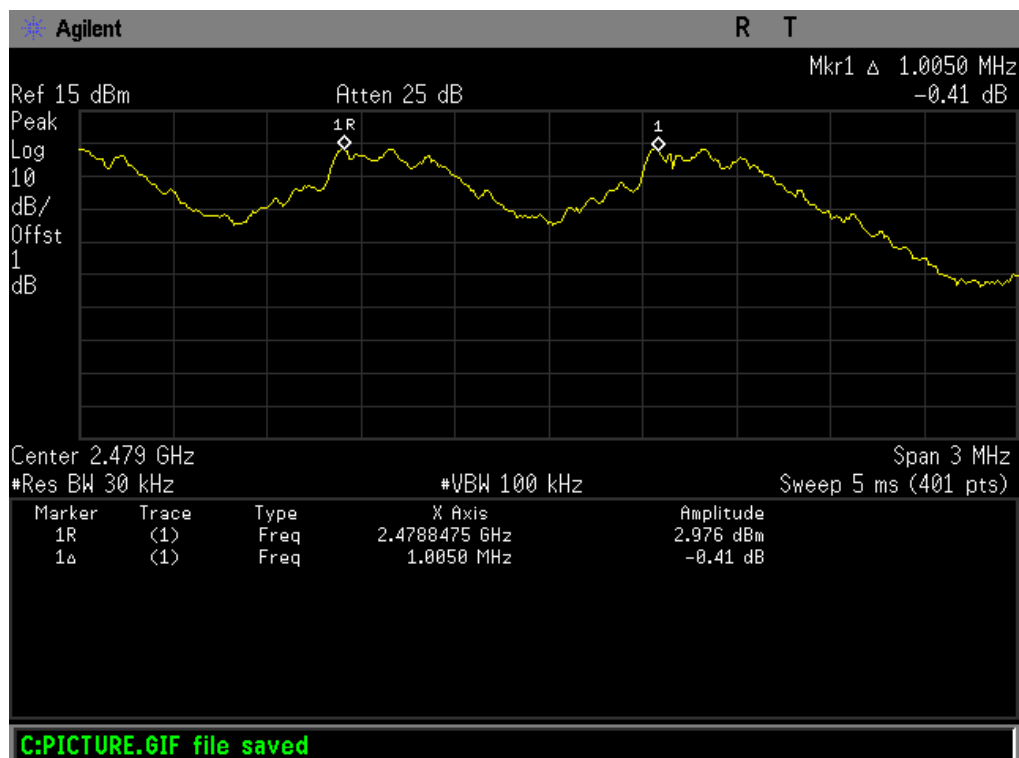

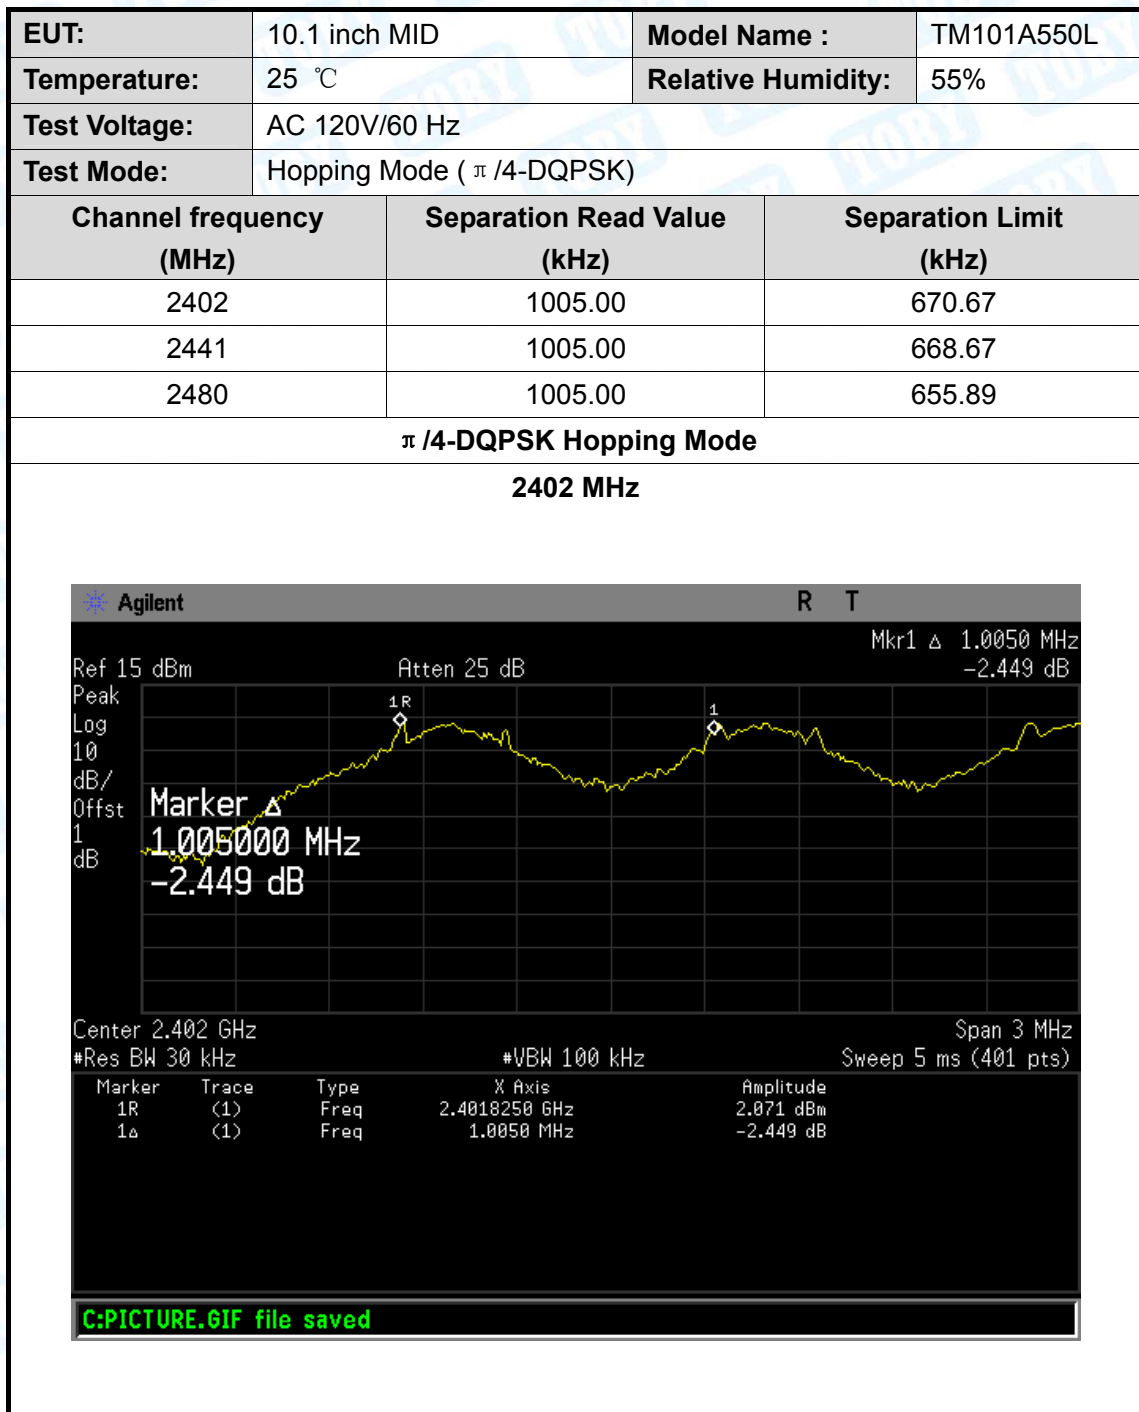


$\pi/4$ -DQPSK Hopping Mode


2441 MHz

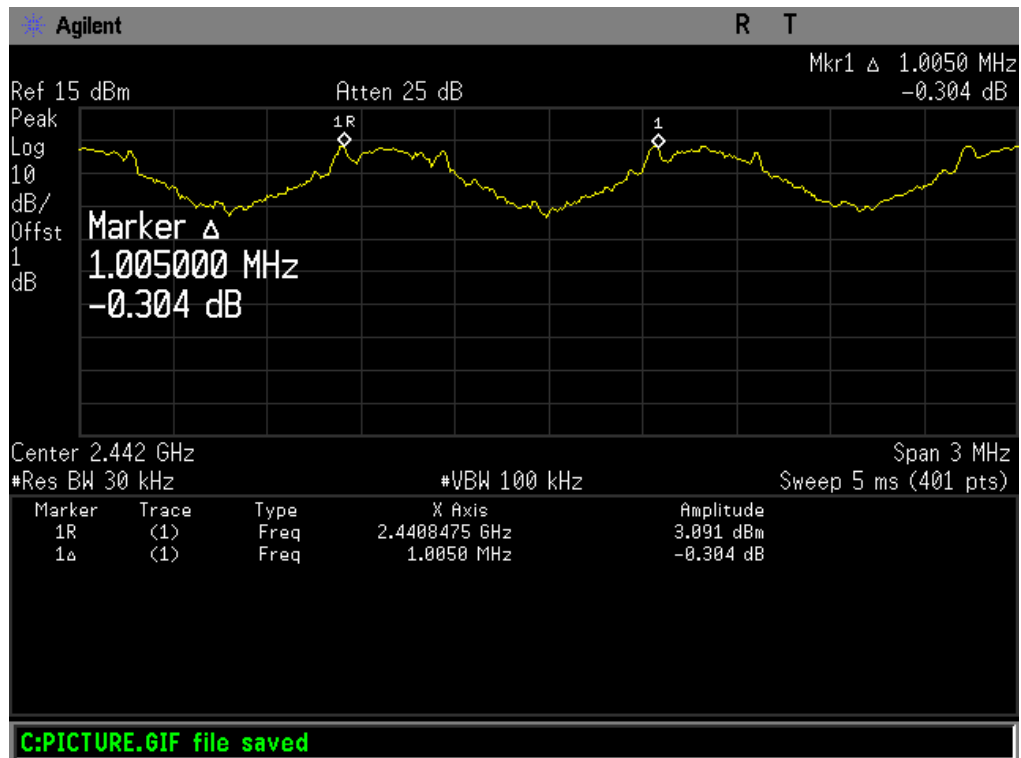

$\pi/4$ -DQPSK Hopping Mode


2480 MHz

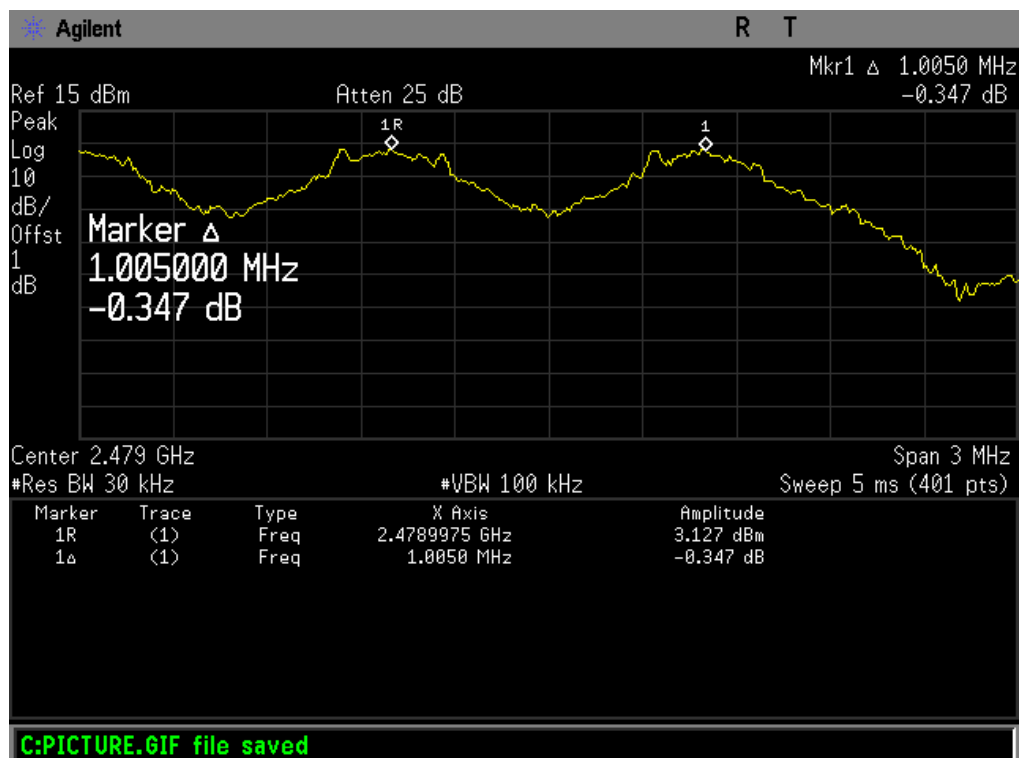

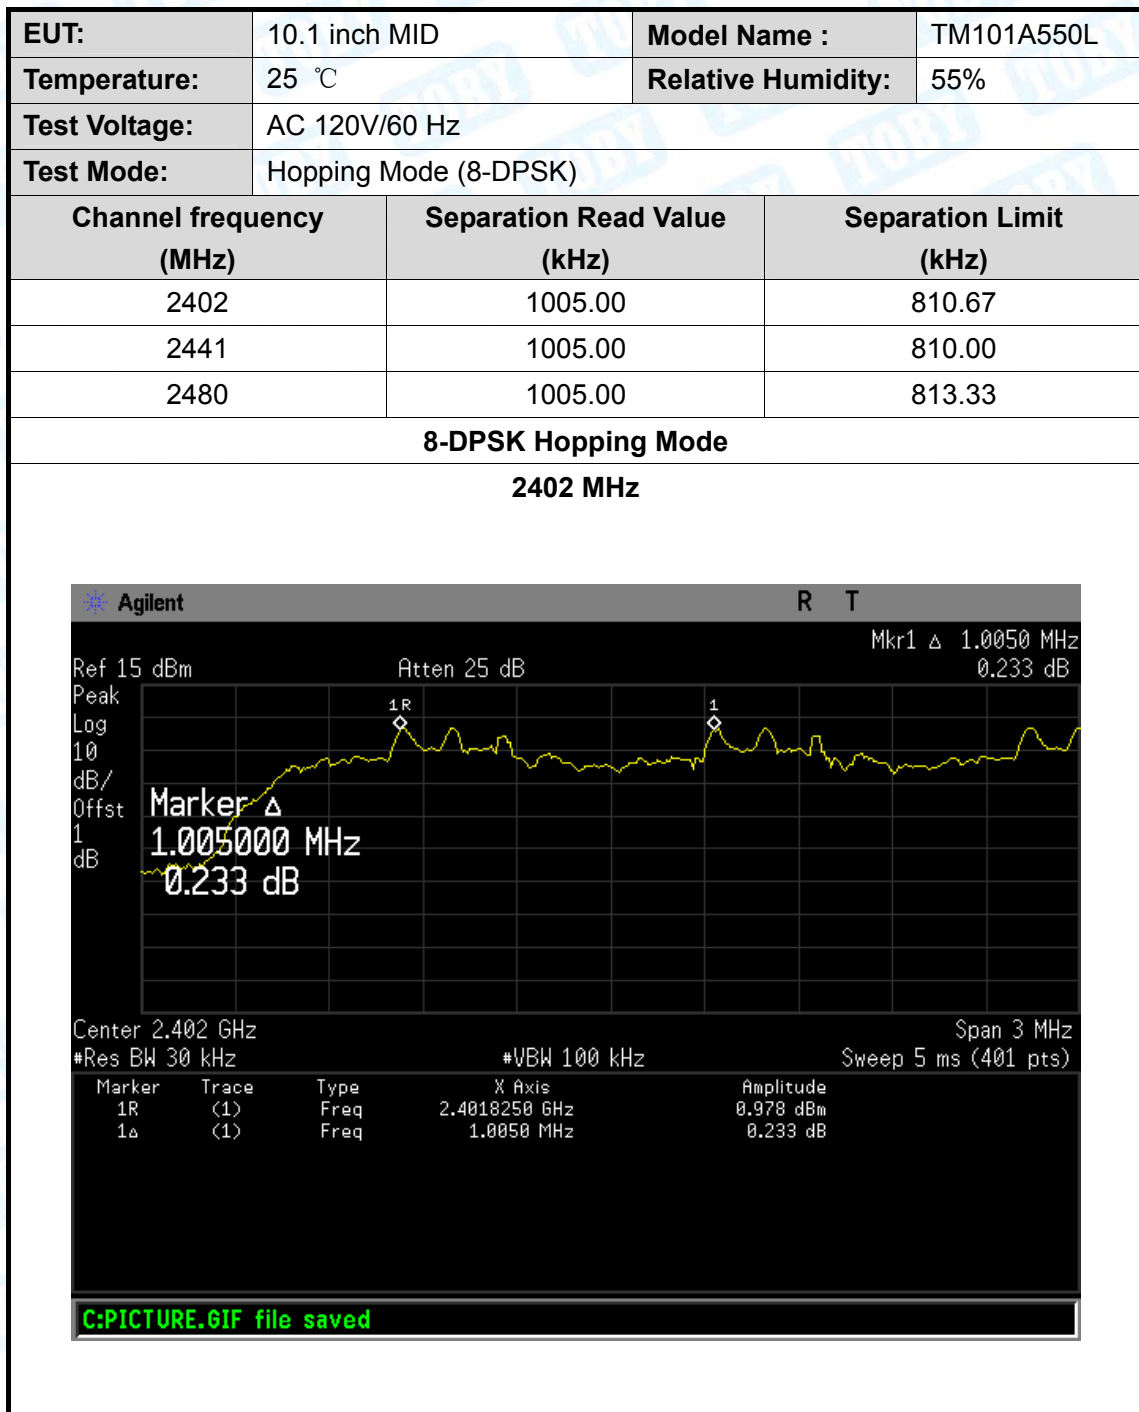


8-DPSK Hopping Mode

2441 MHz

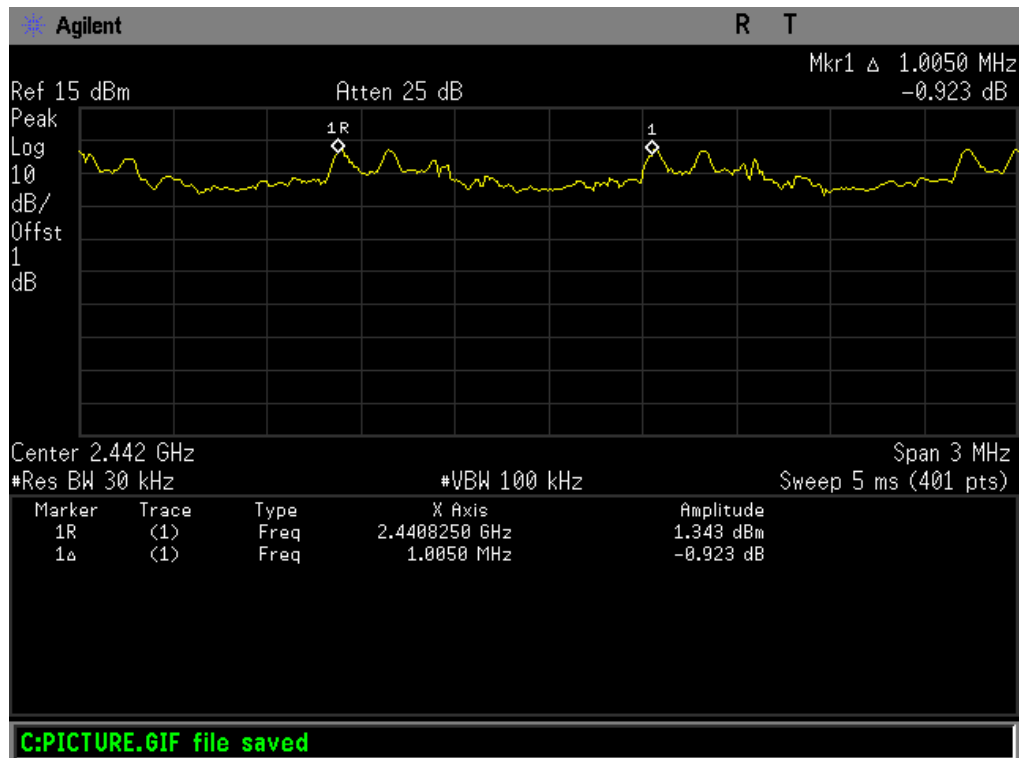

8-DPSK Hopping Mode

2480 MHz

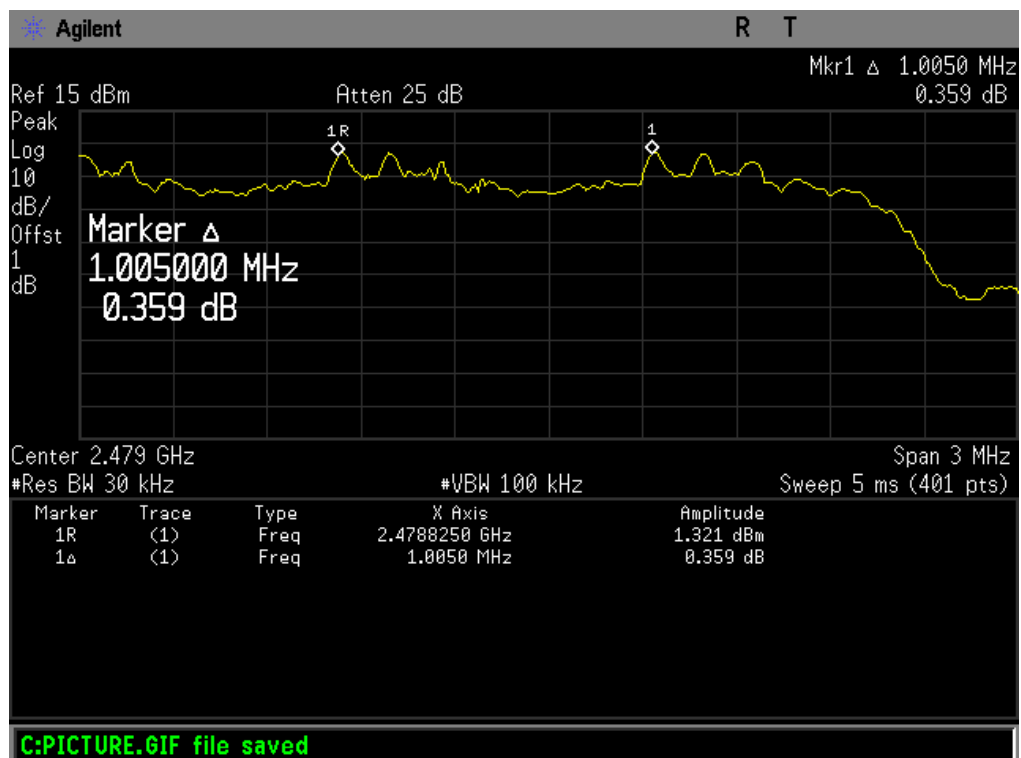

10. Peak Output Power Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247 (b) (1)

10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

10.2 Test Setup



10.3 Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

(2) Spectrum Setting:

Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.

RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

10.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

10.5 Test Data

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	4.564	30	
2441	4.745		
2480	4.724		
GFSK TX Mode			
2402 MHz			

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 2.4021125 GHz

4.564 dBm

Peak

Log

10

dB/

Offst

1

dB

Marker

2.402112500 GHz

4.564 dBm

M1 S2

S3 FC

AA

Center 2.402 GHz

#Res BW 1 MHz

#VBW 3 MHz


Span 3 MHz

Sweep 5 ms (401 pts)

C:PICTURE.GIF file saved


GFSK TX Mode

2441 MHz

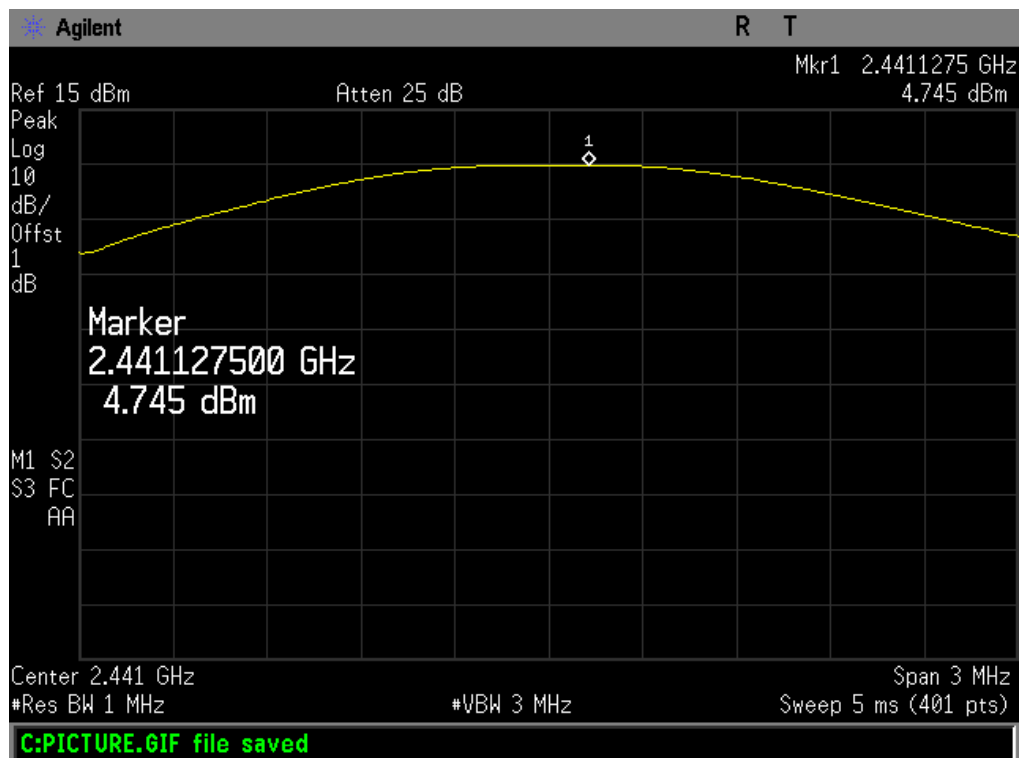

GFSK TX Mode

2480 MHz

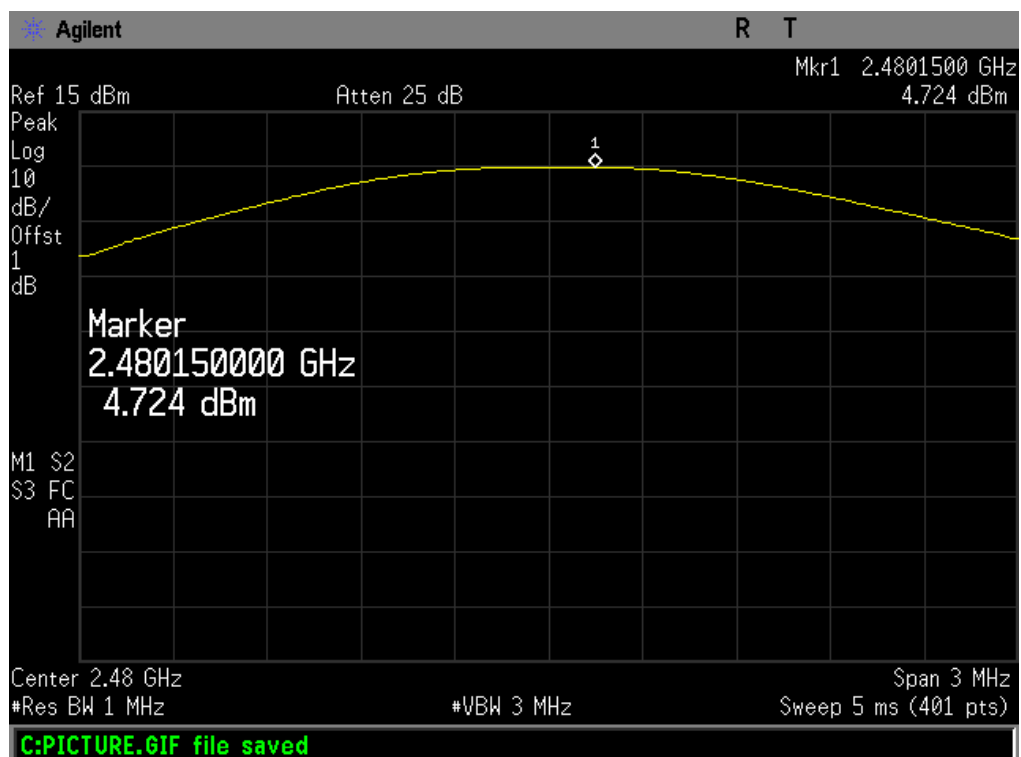

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX Mode (π /4-DQPSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	4.532	21	
2441	4.739		
2480	4.694		
π /4-DQPSK TX Mode			
2402 MHz			

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 2.4019925 GHz

4.532 dBm

Peak

Log

10

dB/

Offst

1

dB

M1 S2

S3 FC

AA

Center 2.402 GHz

#Res BW 1 MHz

#VBW 3 MHz


Span 3 MHz

Sweep 5 ms (401 pts)

C:PICTURE.GIF file saved


$\pi/4$ -DQPSK TX Mode

2441 MHz

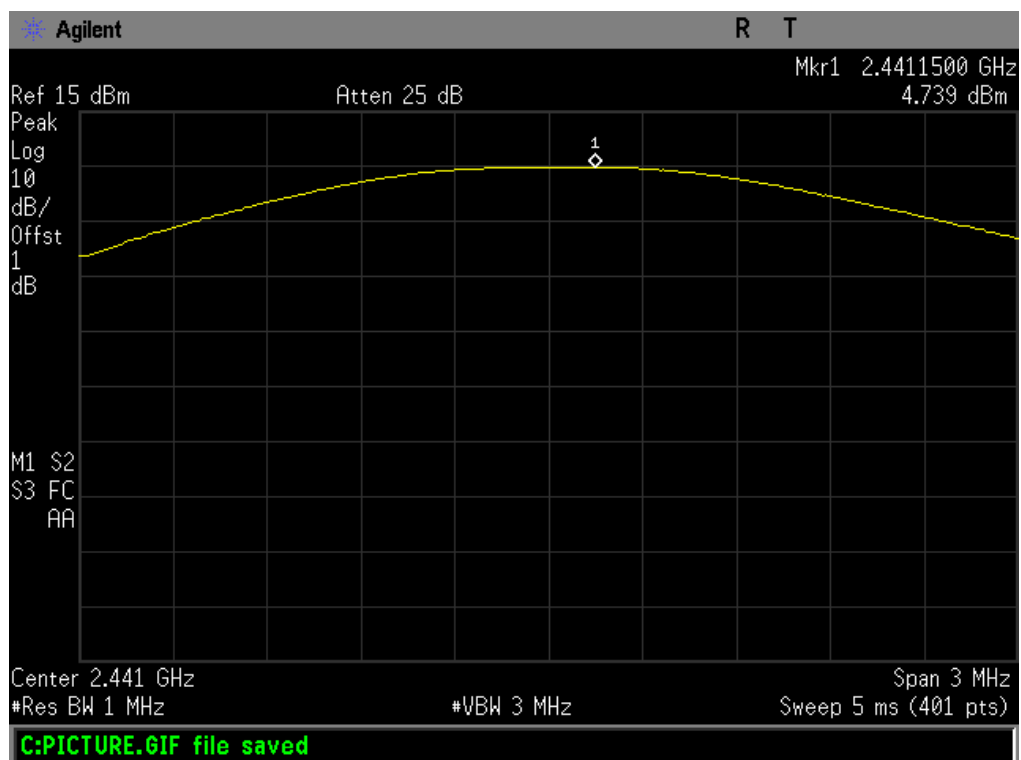

$\pi/4$ -DQPSK TX Mode

2480 MHz

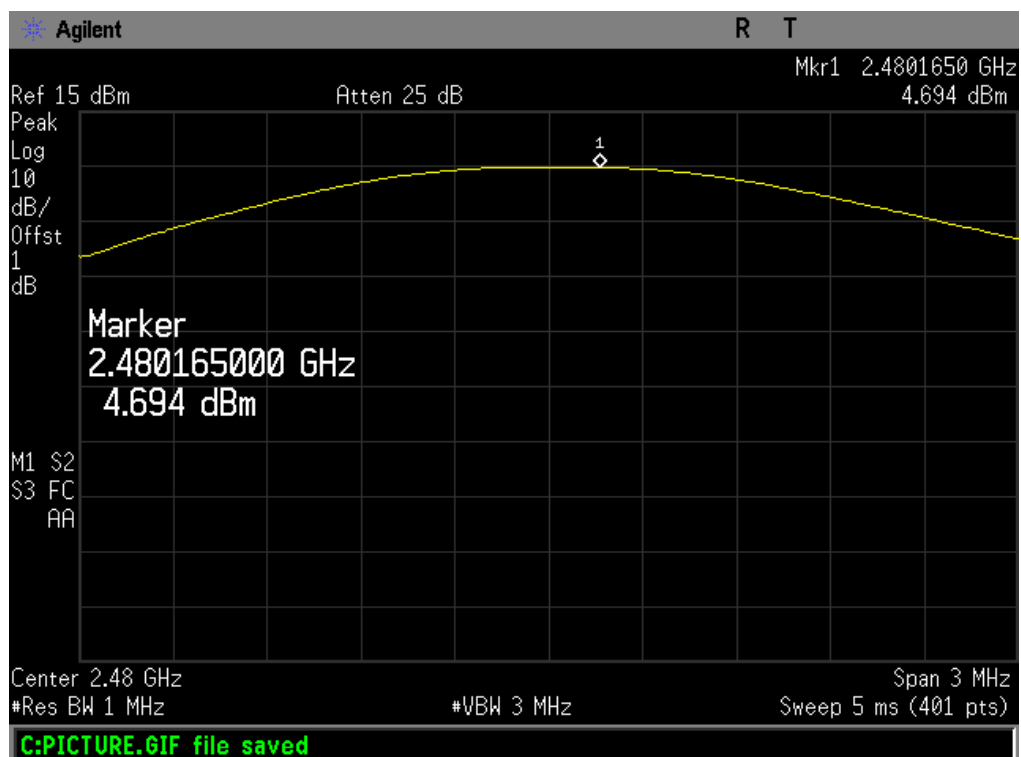

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Test Mode:	TX Mode (8-DPSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2402	3.441	21	
2441	3.552		
2480	3.454		
8-DPSK TX Mode			
2402 MHz			

Agilent

R T

Ref 15 dBm

Atten 25 dB

Mkr1 2.4021250 GHz

3.441 dBm

Peak

Log

10

dB/

Offst

1

dB

M1 S2

S3 FC

AA

Center 2.402 GHz

#Res BW 3 MHz

#VBW 3 MHz


Span 5 MHz

Sweep 5 ms (401 pts)

C:PICTURE.GIF file saved


8-DPSK TX Mode

2441 MHz

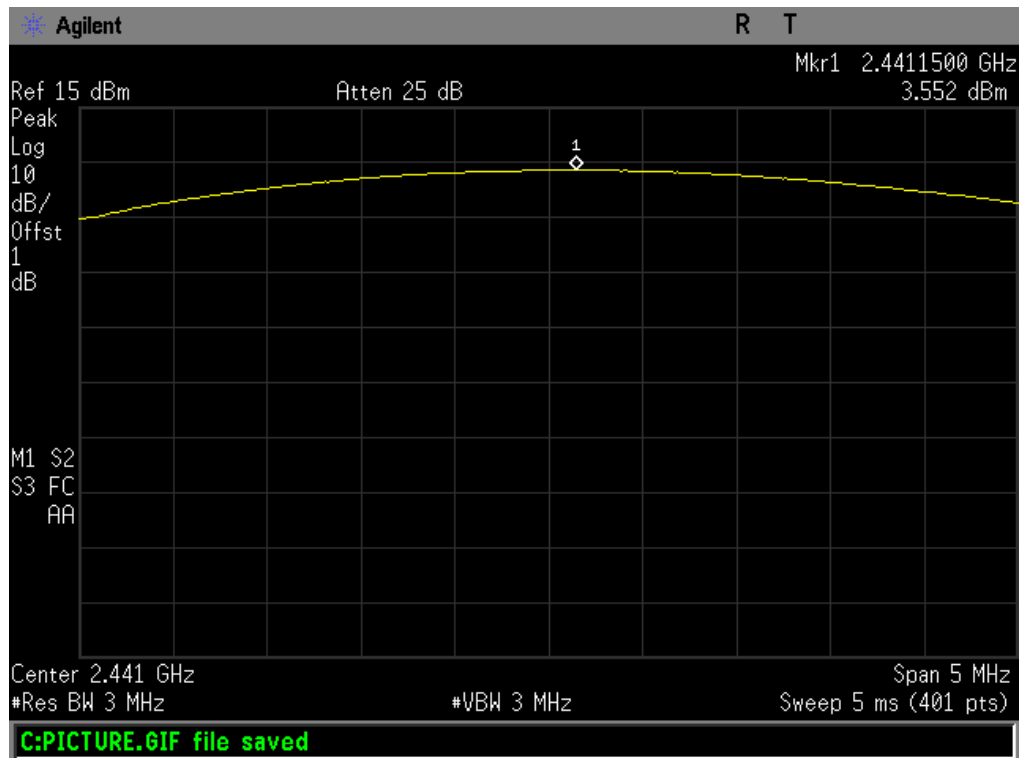

8-DPSK TX Mode

2480 MHz

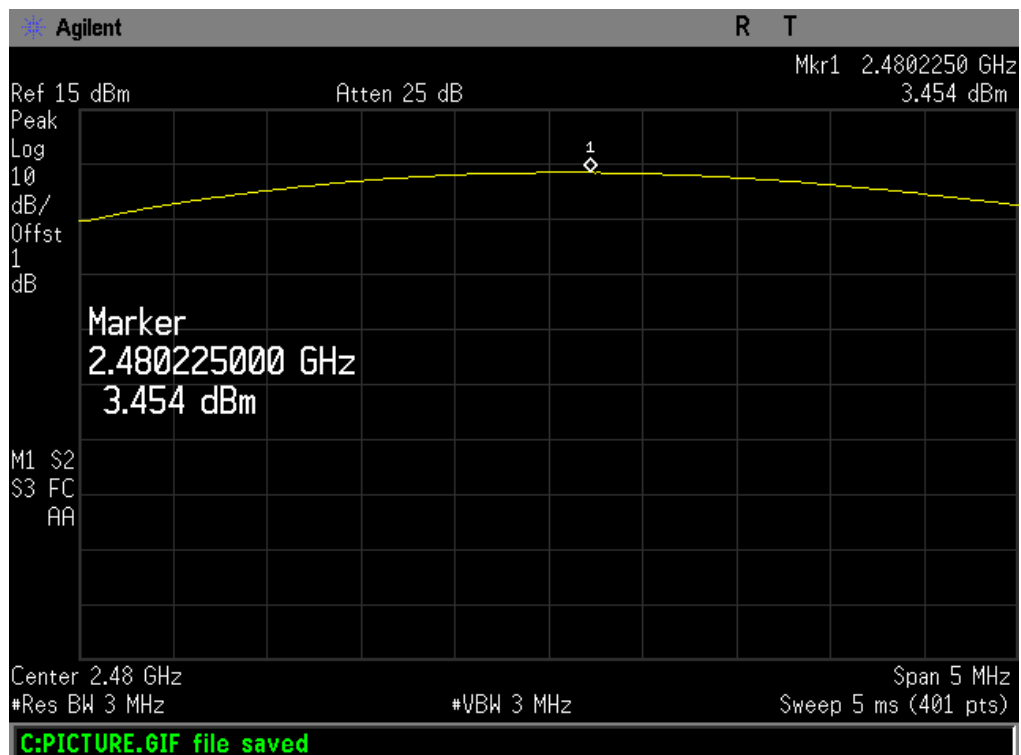

11. Antenna Requirement

11.1 Standard Requirement

11.1.1 Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 2.09 dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

Result

The EUT antenna is an FPC Antenna. It complies with the standard requirement.

Antenna Type
☒ Permanent attached antenna
☐ Unique connector antenna
☐ Professional installation antenna