

FCC PART 15.247

TEST REPORT

For

Qingdao Yeelink Information Technology Co., Ltd.

F10-B4,Bldg.B,International Innovation Park, 1# Keyuanweiyi Rd.,Laoshan,Qingdao,Shandong

FCC ID: 2ABEU-MJTD01YL

Report Type: Original Report	Product Type: MIJIA LED Desk Lamp
Test Engineer: Peter Jiang	<i>Peter Jiang</i>
Report Number: RKS160825006-00B	
Report Date: 2016-10-12	
Reviewed By: Jesse Huang	<i>Jesse Huang</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road,Kunshan Development Zone No.248,Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC§15.247 (i), §1.1310& §2.1091 –Maximum Permissible Exposure (MPE).....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED FACTOR & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	35
APPLICABLE STANDARD	35

TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(e) - POWER SPECTRAL DENSITY	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Qingdao Yeelink Information Technology Co., Ltd.'s product, model number: MJTD01YL (FCC ID: 2ABEU-MJTD01YL) or the "EUT" in this report is a MIJIA LED Desk Lamp, which was measured approximately: 150 mm (L) x 150 mm (W)x463mm(H). rated input voltage: AC 100-240 V.

**All measurement and test data in this report was gathered from production sample serial number:20160824014. (Assigned by BACL, Kunshan). The EUT was received on 2016-08-24.*

Objective

This report is prepared on behalf of Qingdao Yeelink Information Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v03r05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248,Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

88W8801 Labtool

The worst condition was performed under:

802.11b: Data rate: 1 Mbps, Power level: 13

802.11g: Data rate: 6 Mbps, Power level: 16

802.11n-HT20: Data rate: MCS0, Power level: 16

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	PC	GX620	D65874152

External I/O Cable

Cable Description	Length (m)	From/Port	To
/	/	/	/

Block Diagram of Test Setup

For conducted emission

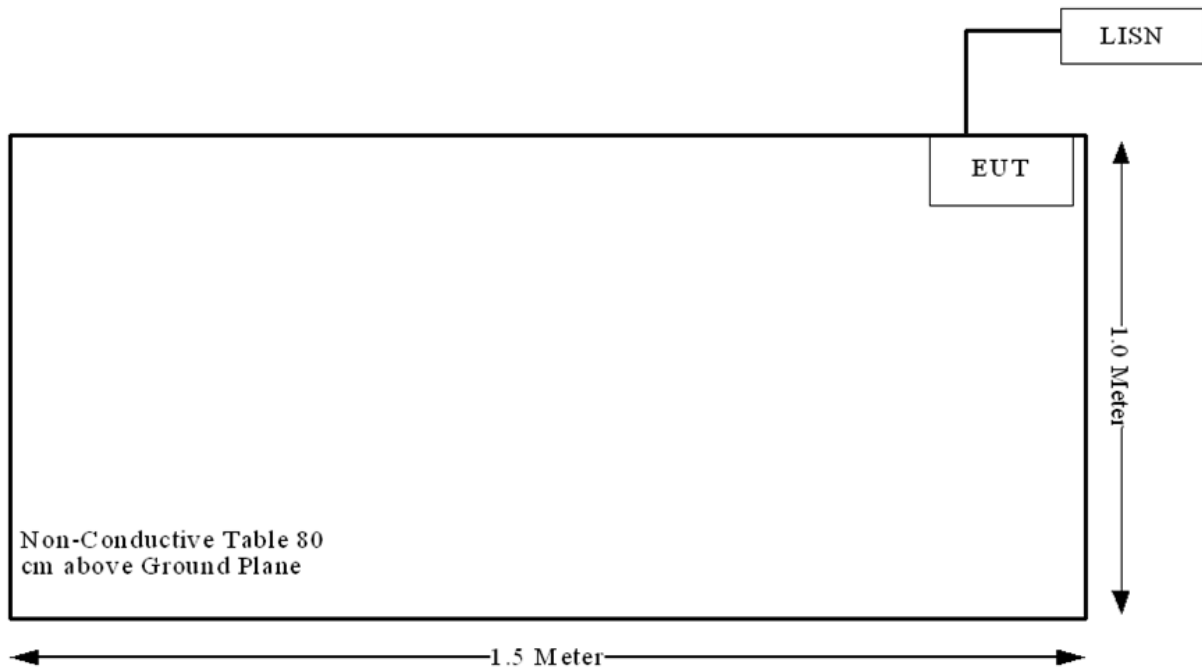

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (i), §1.1310& §2.1091 –Maximum Permissible Exposure (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2462	2.2	1.66	22	158.49	20	0.05	1.0
802.11g	2437	2.2	1.66	27	501.19	20	0.17	1.0
802.11n HT20	2437	2.2	1.66	27	501.19	20	0.17	1.0

Note: The target power : 802.11b:20 ± 2dBm,
802.11g:25 ± 2dBm,
802.11n(HT20):25 ± 2dBm

which declared by the Manufacturer.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for wifi, which the antenna gain is 2.2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Kunshan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

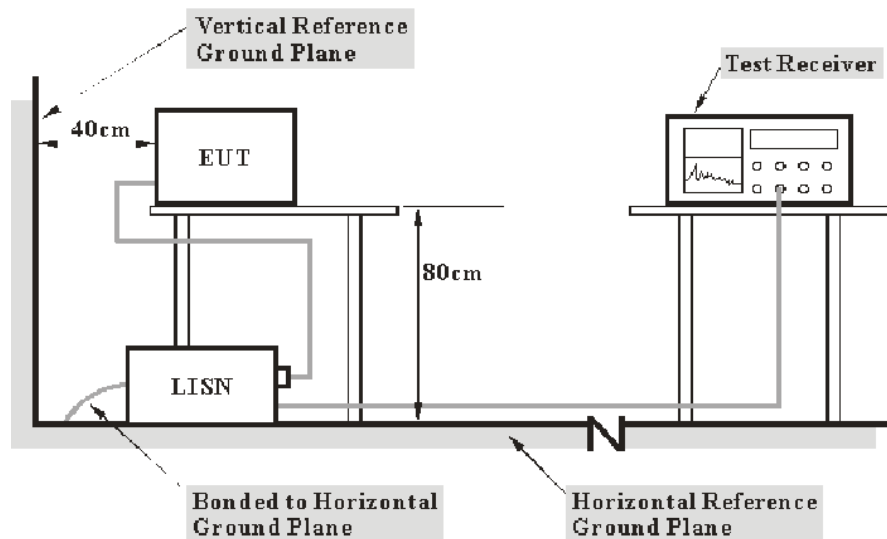

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	892239/018	2016-07-04	2017-07-03
FCC	ISN	FCC-TLISN-T8-02	20376	2016-06-23	2017-06-22
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2016-10-01	2017-10-01
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

18.39dB at **0.410000 MHz** in the **Neutral** conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-10-09.

AC 120V/60 Hz, Line

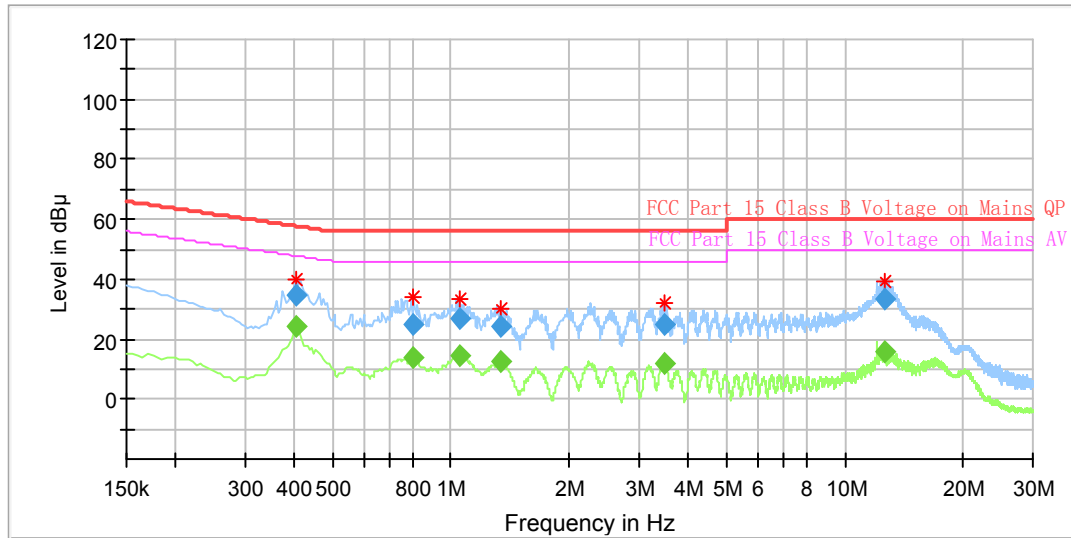

Frequency (MHz)	Corrected Amplitude		Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
	QuasiPeak (dB μ V)	Average (dB μ V)					
0.405000	---	24.39	47.75	23.36	9.000	L1	10.3
0.405000	34.94	---	57.75	22.81	9.000	L1	10.3
0.805000	---	13.87	46.00	32.13	9.000	L1	10.3
0.805000	24.61	---	56.00	31.39	9.000	L1	10.3
1.050000	---	14.70	46.00	31.30	9.000	L1	10.3
1.050000	26.75	---	56.00	29.25	9.000	L1	10.3
1.335000	---	12.47	46.00	33.53	9.000	L1	10.3
1.335000	24.22	---	56.00	31.78	9.000	L1	10.3
3.470000	---	12.09	46.00	33.91	9.000	L1	10.5
3.470000	24.72	---	56.00	31.28	9.000	L1	10.5
12.595000	---	15.89	50.00	34.11	9.000	L1	10.4
12.595000	33.30	---	60.00	26.70	9.000	L1	10.4

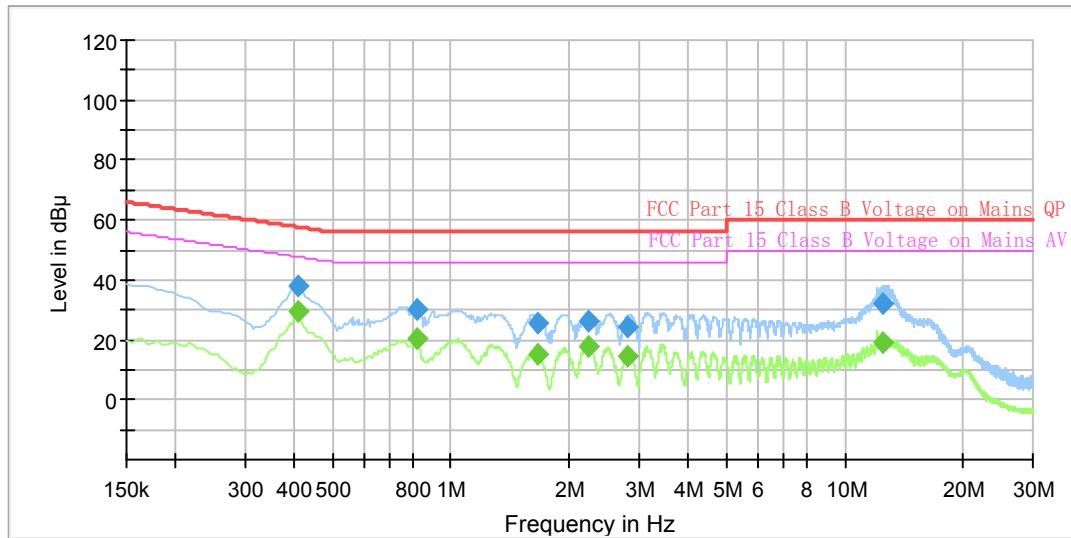AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude		Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
	QuasiPeak (dB μ V)	Average (dB μ V)					
0.410000	---	29.26	47.65	18.39	9.000	N	10.3
0.410000	37.95	---	57.65	19.70	9.000	N	10.3
0.815000	---	20.53	46.00	25.47	9.000	N	10.3
0.815000	29.99	---	56.00	26.01	9.000	N	10.3
1.660000	---	15.42	46.00	30.58	9.000	N	10.4
1.660000	25.51	---	56.00	30.49	9.000	N	10.4
2.245000	---	18.02	46.00	27.98	9.000	N	10.4
2.245000	26.04	---	56.00	29.96	9.000	N	10.4
2.820000	---	14.83	46.00	31.17	9.000	N	10.5
2.820000	24.33	---	56.00	31.67	9.000	N	10.5
12.505000	---	19.31	50.00	30.69	9.000	N	10.5
12.505000	31.79	---	60.00	28.21	9.000	N	10.5

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

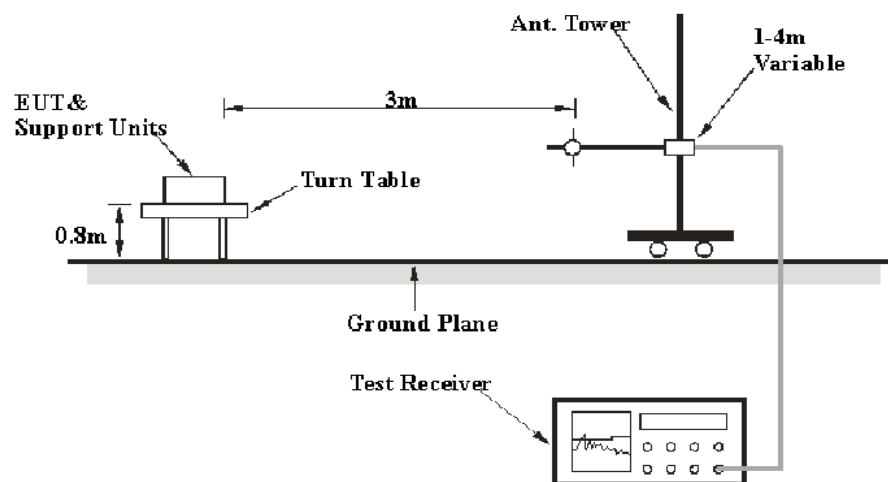

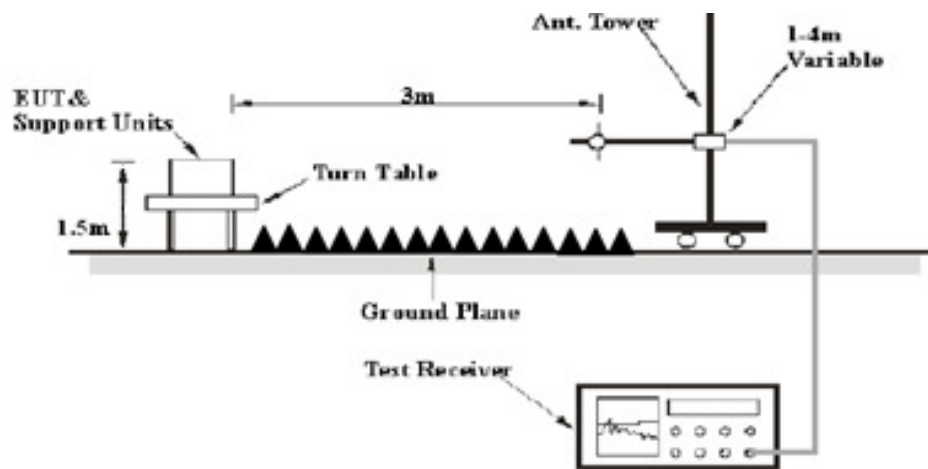Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-15
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2016-09-16	2017-09-15
champrotek	Chamber	Chamber A	1#	2016-09-17	2017-09-16
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

9.57dB at 504.006250MHz in the **Horizontal** polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if


$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-30 & 2016-10-26.

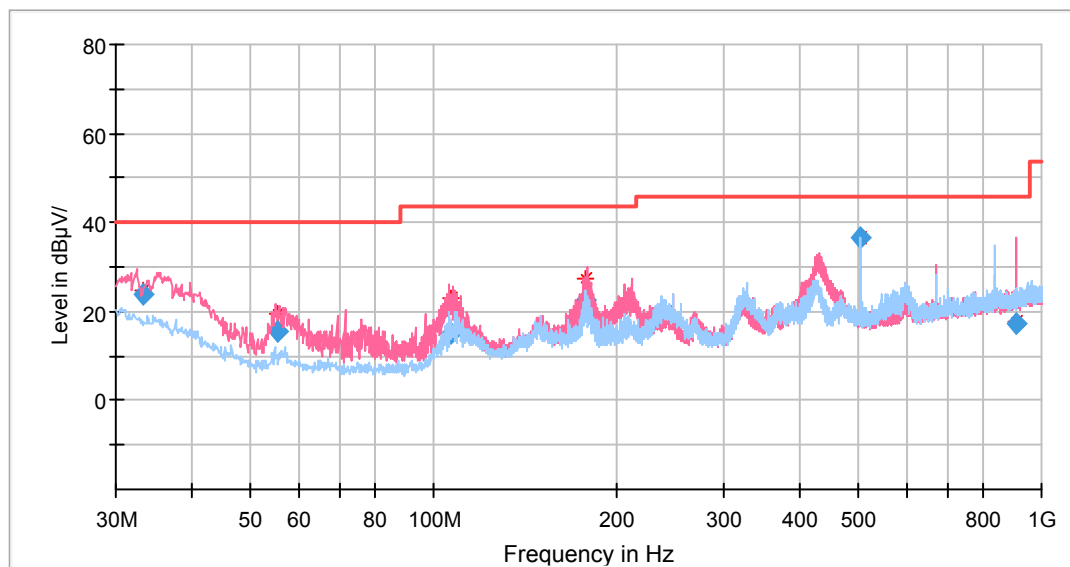30 MHz-1 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
33.345000	30.96	QP	140.0	101.0	V	-7.0	23.96	40.00	16.04
55.457500	32.11	QP	13.0	101.0	V	-16.7	15.41	40.00	24.59
106.626250	28.09	QP	1.0	101.0	V	-13.1	14.99	43.50	28.51
177.695000	34.53	QP	212.0	101.0	V	-12.0	22.53	43.50	20.97
504.006250	41.93	QP	255.0	199.0	H	-5.5	36.43	46.00	9.57
911.677500	18.15	QP	74.0	101.0	V	-0.7	17.45	46.00	28.55

1GHz-25GHz*EUT operation mode: Transmitting***802.11b Mode**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	105.24	PK	333	244	V	3.0	108.24	/	/
2412.0	100.33	Ave	333	244	V	3.0	103.33	/	/
2412.0	101.47	PK	18	157	H	3.0	104.47	/	/
2412.0	96.61	Ave	18	157	H	3.0	99.61	/	/
2390.0	42.58	PK	274	216	V	2.9	45.48	74	28.52
2390.0	30.66	Ave	274	216	V	2.9	33.56	54	20.44
2400.0	45.86	PK	165	127	V	2.9	48.76	74	25.24
2400.0	37.51	Ave	165	127	V	2.9	40.41	54	13.59
4824.0	34.51	PK	358	234	H	13.8	48.31	74	25.69
4824.0	29.59	Ave	358	234	H	13.8	43.39	54	10.61
6620.0	29.19	PK	132	137	V	18.8	47.99	74	26.01
6620.0	23.56	Ave	132	137	V	18.8	42.36	54	11.64
7236.0	28.02	PK	159	106	H	18.8	46.82	74	27.18
7236.0	22.44	Ave	159	106	H	18.8	41.24	54	12.76
Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.0	105.56	PK	345	158	V	3.0	108.56	/	/
2437.0	101.30	Ave	345	158	V	3.0	104.30	/	/
2437.0	102.31	PK	90	218	H	3.0	105.31	/	/
2437.0	98.25	Ave	90	218	H	3.0	101.25	/	/
1477.0	42.18	PK	136	217	V	0.0	42.18	74	31.82
1477.0	33.11	Ave	136	217	V	0.0	33.11	54	20.89
1696.0	44.71	PK	301	189	H	0.7	45.41	74	28.59
1696.0	37.33	Ave	301	189	H	0.7	38.03	54	15.97
4874.0	33.75	PK	237	119	V	13.9	47.65	74	26.35
4874.0	27.97	Ave	237	119	V	13.9	41.87	54	12.13
6677.0	30.76	PK	34	169	H	18.8	49.56	74	24.44
6677.0	21.73	Ave	34	169	H	18.8	40.53	54	13.47
7311.0	28.23	PK	342	166	H	18.9	47.13	74	26.87
7311.0	23.19	Ave	342	166	H	18.9	42.09	54	11.91

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	105.07	PK	331	160	V	3.0	108.07	/	/
2462.0	100.89	Ave	331	160	V	3.0	103.89	/	/
2462.0	100.29	PK	132	220	H	3.0	103.29	/	/
2462.0	95.59	Ave	132	220	H	3.0	98.59	/	/
2483.5	44.01	PK	112	135	V	3.2	47.21	74	26.79
2483.5	31.93	Ave	112	135	V	3.2	35.13	54	18.87
2563.0	46.74	PK	213	156	V	4.2	50.94	74	23.06
2563.0	36.47	Ave	213	156	V	4.2	40.67	54	13.33
4924.0	34.41	PK	94	231	H	14.0	48.41	74	25.59
4924.0	28.65	Ave	94	231	H	14.0	42.65	54	11.35
6681.0	31.35	PK	127	158	H	18.8	50.15	74	23.85
6681.0	23.94	Ave	127	158	H	18.8	42.74	54	11.26
7386.0	26.88	PK	345	135	H	19.8	46.68	74	27.32
7386.0	22.63	Ave	345	135	H	19.8	42.43	54	11.57

802.11g Mode

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	105.40	PK	338	238	V	3.0	108.40	/	/
2412.0	100.36	Ave	338	238	V	3.0	103.36	/	/
2412.0	101.39	PK	178	217	H	3.0	104.39	/	/
2412.0	96.31	Ave	178	217	H	3.0	99.31	/	/
2390.0	42.16	PK	325	192	V	2.9	45.06	74	28.94
2390.0	32.02	Ave	325	192	V	2.9	34.92	54	19.08
2400.0	42.39	PK	11	101	V	2.9	45.29	74	28.71
2400.0	37.01	Ave	11	101	V	2.9	39.91	54	14.09
4824.0	33.54	PK	231	228	H	13.8	47.34	74	26.66
4824.0	28.27	Ave	231	228	H	13.8	42.07	54	11.93
6620.0	29.37	PK	82	186	V	18.8	48.17	74	25.83
6620.0	21.59	Ave	82	186	V	18.8	40.39	54	13.61
7236.0	27.84	PK	226	161	H	18.8	46.64	74	27.36
7236.0	22.59	Ave	226	161	H	18.8	41.39	54	12.61

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.0	108.37	PK	204	181	V	3.0	111.37	/	/
2437.0	102.52	Ave	204	181	V	3.0	105.52	/	/
2437.0	103.22	PK	258	159	H	3.0	106.22	/	/
2437.0	97.53	Ave	258	159	H	3.0	100.53	/	/
1477.0	45.97	PK	83	193	V	0.0	45.97	74	28.03
1477.0	33.43	Ave	83	193	V	0.0	33.43	54	20.57
1696.0	44.01	PK	354	134	H	0.7	44.71	74	29.29
1696.0	35.55	Ave	354	134	H	0.7	36.25	54	17.75
4874.0	32.07	PK	180	176	V	13.9	45.97	74	28.03
4874.0	25.19	Ave	180	176	V	13.9	39.09	54	14.91
6677.0	29.88	PK	230	206	H	18.8	48.68	74	25.32
6677.0	22.36	Ave	230	206	H	18.8	41.16	54	12.84
7311.0	28.52	PK	223	107	H	18.9	47.42	74	26.58
7311.0	21.88	Ave	223	107	H	18.9	40.78	54	13.22
Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	108.59	PK	216	113	V	3.0	111.59	/	/
2462.0	103.50	Ave	216	113	V	3.0	106.50	/	/
2462.0	103.66	PK	153	143	H	3.0	106.66	/	/
2462.0	98.12	Ave	153	143	H	3.0	101.12	/	/
2483.5	43.23	PK	28	209	V	3.2	46.43	74	27.57
2483.5	33.35	Ave	28	209	V	3.2	36.55	54	17.45
2563.0	44.84	PK	41	105	V	4.2	49.04	74	24.96
2563.0	36.02	Ave	41	105	V	4.2	40.22	54	13.78
4924.0	33.60	PK	276	101	H	14.0	47.60	74	26.40
4924.0	27.88	Ave	276	101	H	14.0	41.88	54	12.12
6681.0	30.76	PK	295	219	H	18.8	49.56	74	24.44
6681.0	22.43	Ave	295	219	H	18.8	41.23	54	12.77
7386.0	27.91	PK	216	111	H	19.8	47.71	74	26.29
7386.0	21.55	Ave	216	111	H	19.8	41.35	54	12.65


802.11n-HT20 Mode



Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412.0	105.68	PK	341	199	V	3.0	108.68	/	/
2412.0	99.76	Ave	341	199	V	3.0	102.76	/	/
2412.0	99.71	PK	349	193	H	3.0	102.71	/	/
2412.0	94.69	Ave	349	193	H	3.0	97.69	/	/
2390.0	42.92	PK	105	169	V	2.9	45.82	74	28.18
2390.0	31.71	Ave	105	169	V	2.9	34.61	54	19.39
2400.0	46.94	PK	252	105	V	2.9	49.84	74	24.16
2400.0	37.87	Ave	252	105	V	2.9	40.77	54	13.23
4824.0	33.71	PK	220	207	H	13.8	47.51	74	26.49
4824.0	28.20	Ave	220	207	H	13.8	42.00	54	12.00
6620.0	29.59	PK	334	146	V	18.8	48.39	74	25.61
6620.0	23.51	Ave	334	146	V	18.8	42.31	54	11.69
7236.0	28.05	PK	180	138	H	18.8	46.85	74	27.15
7236.0	22.27	Ave	180	138	H	18.8	41.07	54	12.93
Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437.0	107.40	PK	212	213	V	3.0	110.40	/	/
2437.0	102.28	Ave	212	213	V	3.0	105.28	/	/
2437.0	102.66	PK	94	148	H	3.0	105.66	/	/
2437.0	97.24	Ave	94	148	H	3.0	100.24	/	/
1477.0	43.32	PK	173	163	V	0.0	43.32	74	30.68
1477.0	31.53	Ave	173	163	V	0.0	31.53	54	22.47
1696.0	42.06	PK	21	146	H	0.7	42.76	74	31.24
1696.0	35.60	Ave	21	146	H	0.7	36.30	54	17.70
4874.0	33.29	PK	202	231	V	13.9	47.19	74	26.81
4874.0	28.19	Ave	202	231	V	13.9	42.09	54	11.91
6677.0	30.20	PK	304	147	H	18.8	49.00	74	25.00
6677.0	22.68	Ave	304	147	H	18.8	41.48	54	12.52
7311.0	28.05	PK	134	140	H	18.9	46.95	74	27.05
7311.0	22.72	Ave	134	140	H	18.9	41.62	54	12.38

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462.0	107.91	PK	229	159	V	3.0	110.91	/	/
2462.0	102.25	Ave	229	159	V	3.0	105.25	/	/
2462.0	104.79	PK	19	128	H	3.0	107.79	/	/
2462.0	99.52	Ave	19	128	H	3.0	102.52	/	/
2483.5	43.68	PK	24	133	V	3.2	46.88	74	27.12
2483.5	32.54	Ave	24	133	V	3.2	35.74	54	18.26
2563.0	44.61	PK	35	188	V	4.2	48.81	74	25.19
2563.0	36.84	Ave	35	188	V	4.2	41.04	54	12.96
4924.0	33.12	PK	286	151	H	14.0	47.12	74	26.88
4924.0	27.32	Ave	286	151	H	14.0	41.32	54	12.68
6681.0	31.33	PK	227	103	H	18.8	50.13	74	23.87
6681.0	21.06	Ave	227	103	H	18.8	39.86	54	14.14
7386.0	28.38	PK	104	229	H	19.8	48.18	74	25.82
7386.0	22.98	Ave	104	229	H	19.8	42.78	54	11.22


Conducted Spurious Emissions at Antenna Port

802.11b Low Channel

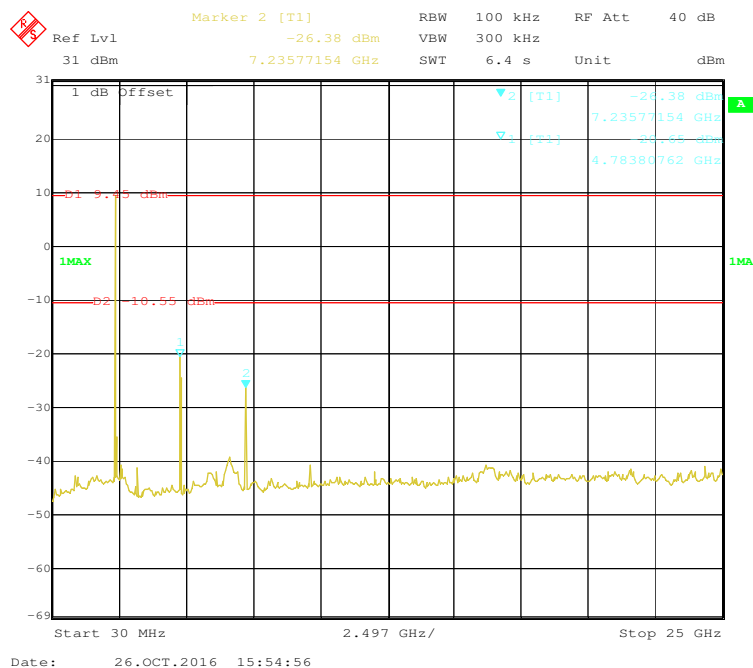


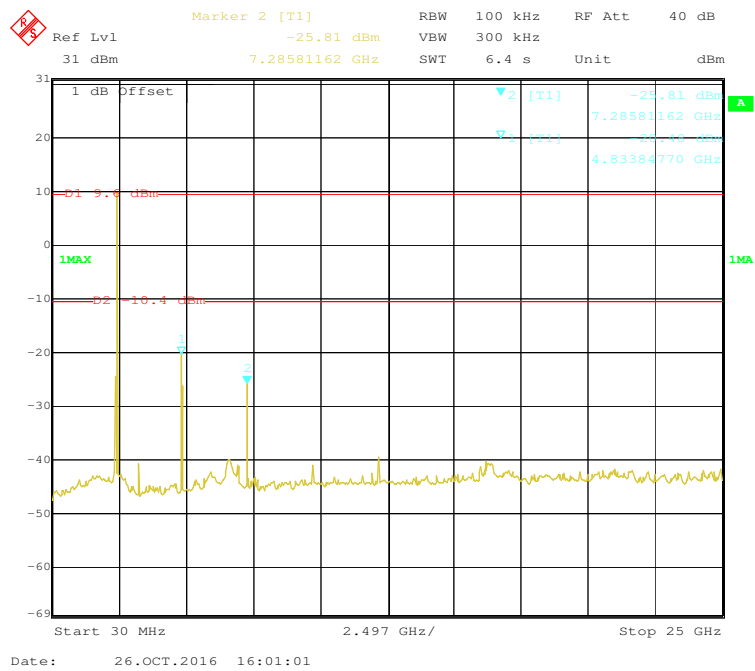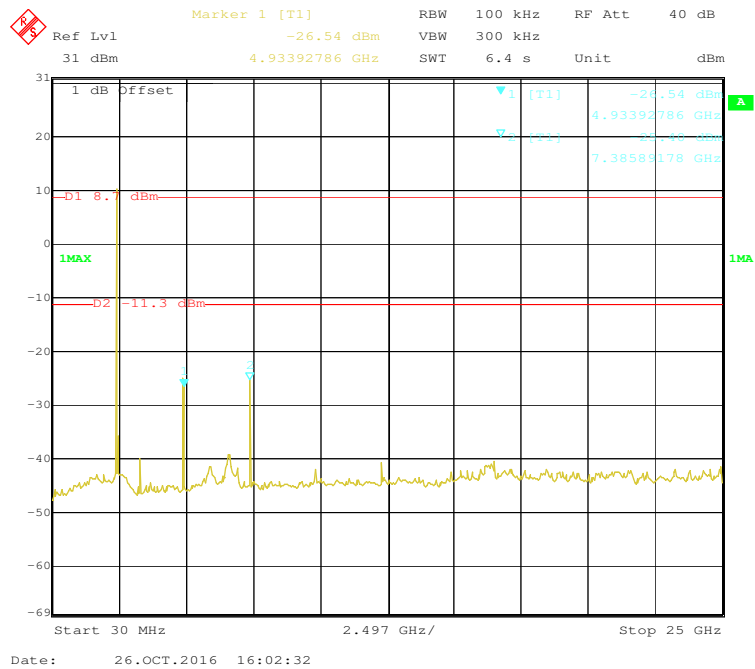802.11b Middle Channel**802.11b High Channel**


802.11g Low Channel

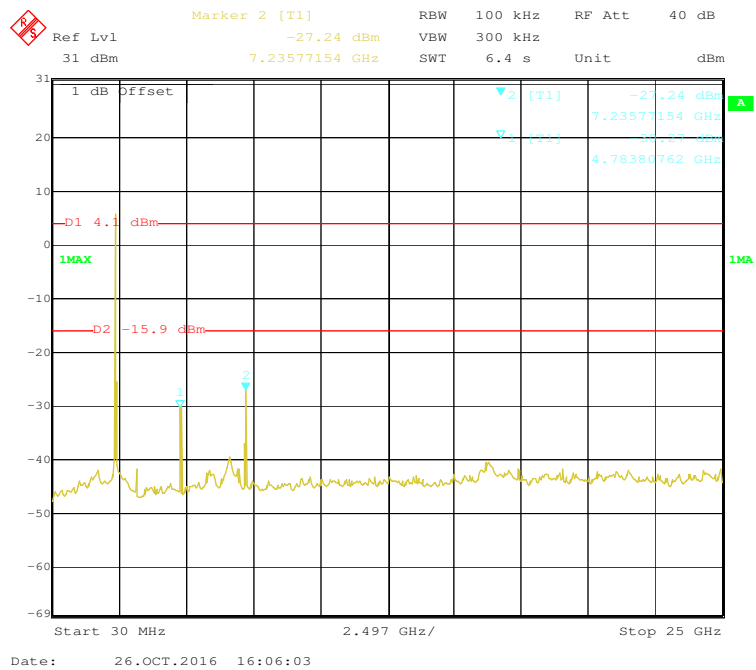


802.11g Middle Channel

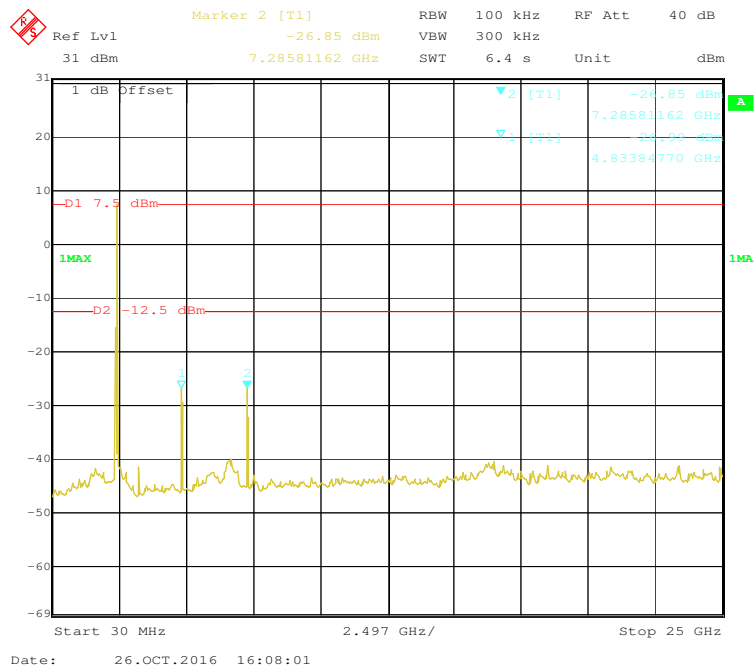


802.11g High Channel

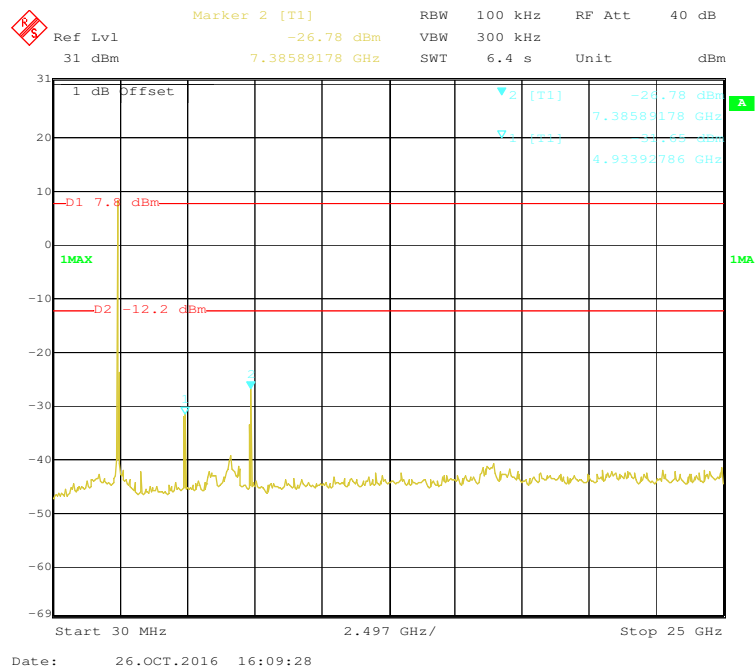


802.11n-HT20 Low Channel

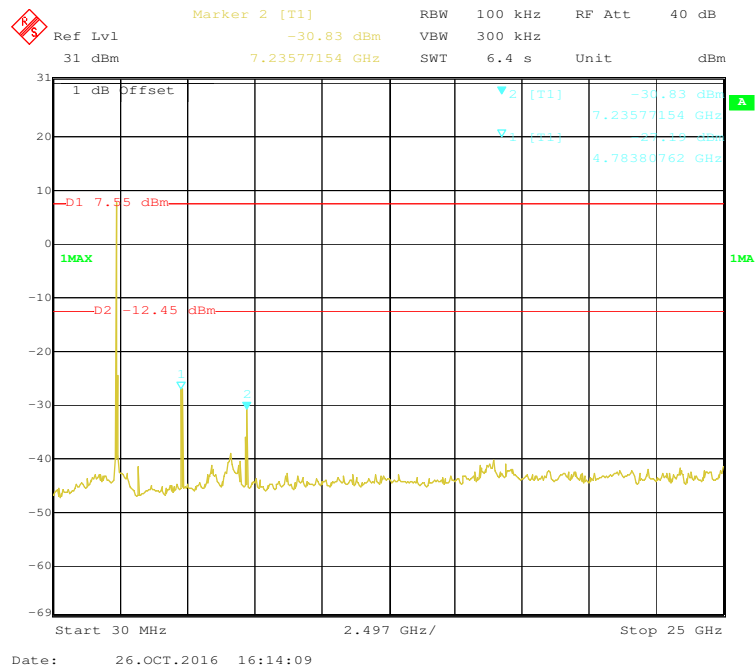

802.11n-HT20 Middle Channel

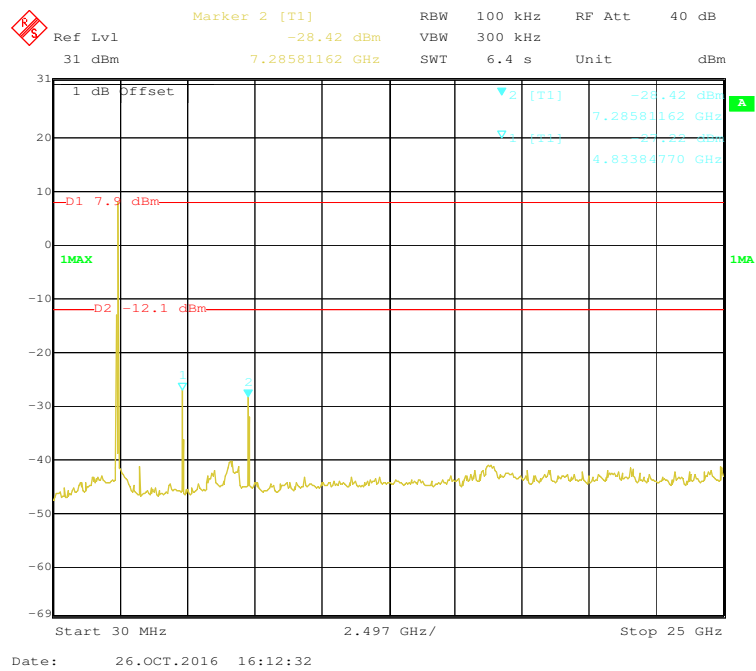

802.11n-HT20 High Channel

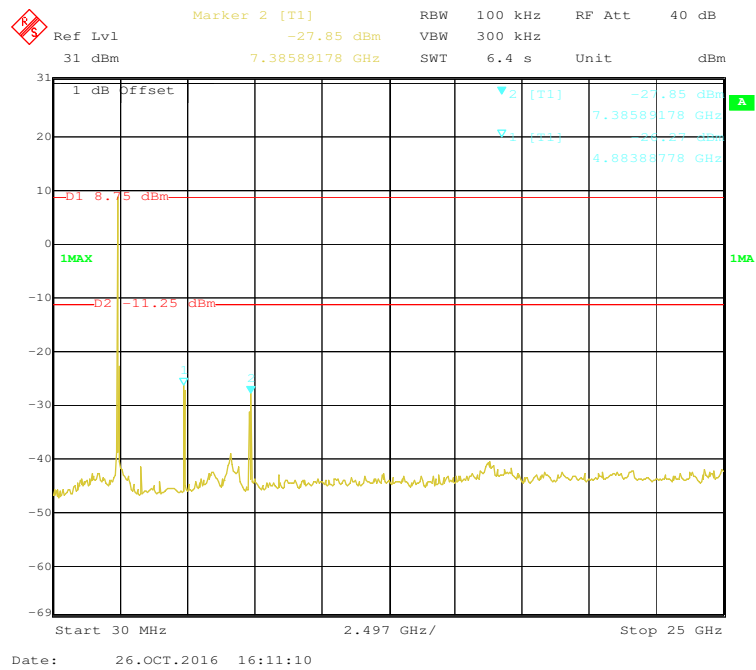


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2016-07-04	2017-07-03
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-30.


Test Result: Pass.

Please refer to the following tables and plots.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	8.08	≥ 500
Middle	2437	8.10	≥ 500
High	2462	8.10	≥ 500
802.11g mode			
Low	2412	16.38	≥ 500
Middle	2437	16.38	≥ 500
High	2462	16.35	≥ 500
802.11n-HT20 mode			
Low	2412	17.71	≥ 500
Middle	2437	17.71	≥ 500
High	2462	17.71	≥ 500

802.11b Low Channel

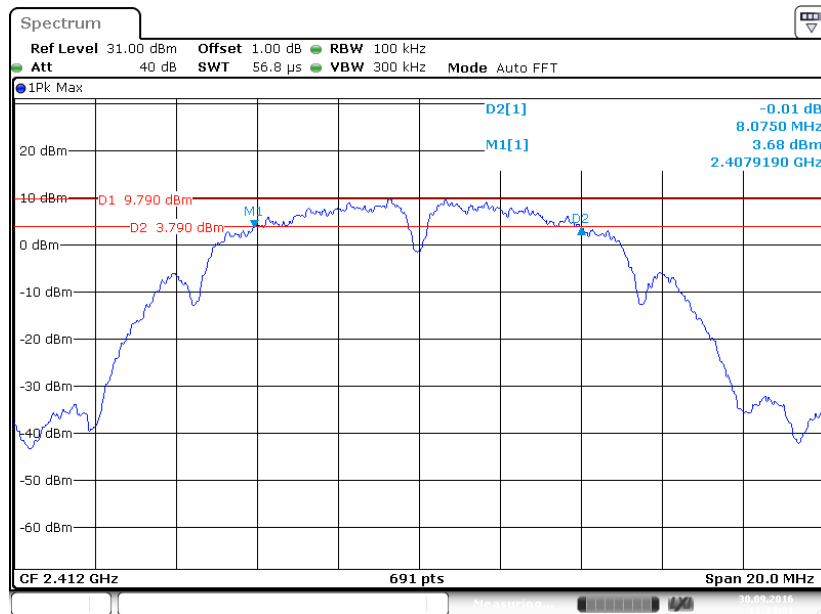


Date: 30.SEP.2016 11:14:41

802.11b Middle Channel

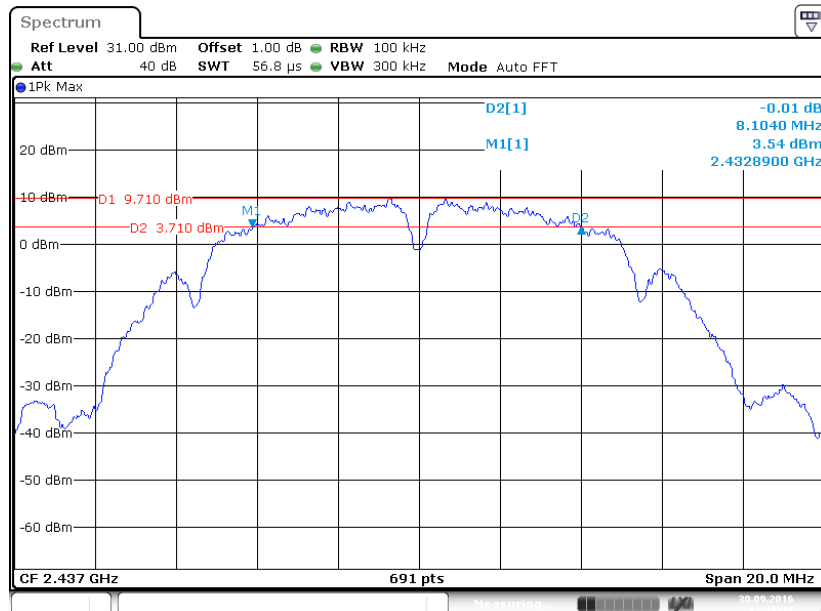


Date: 30.SEP.2016 11:18:43

802.11b High Channel

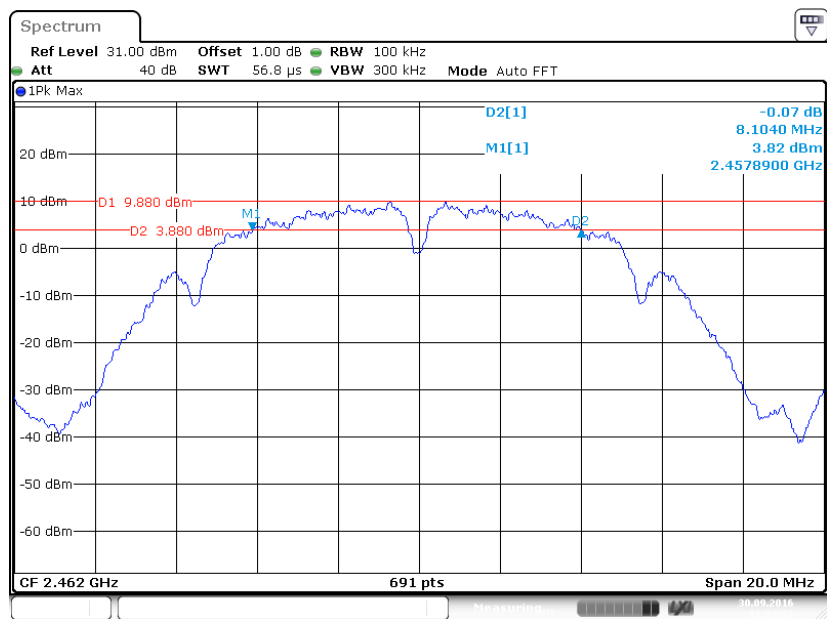


Date: 30.SEP.2016 11:23:32

802.11g Low Channel

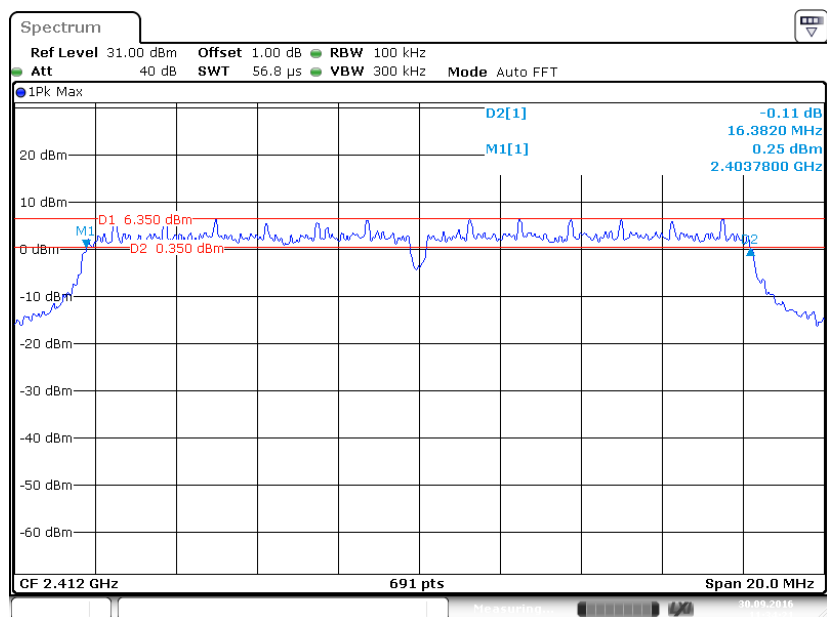


Date: 30.SEP.2016 11:34:21

802.11g Middle Channel

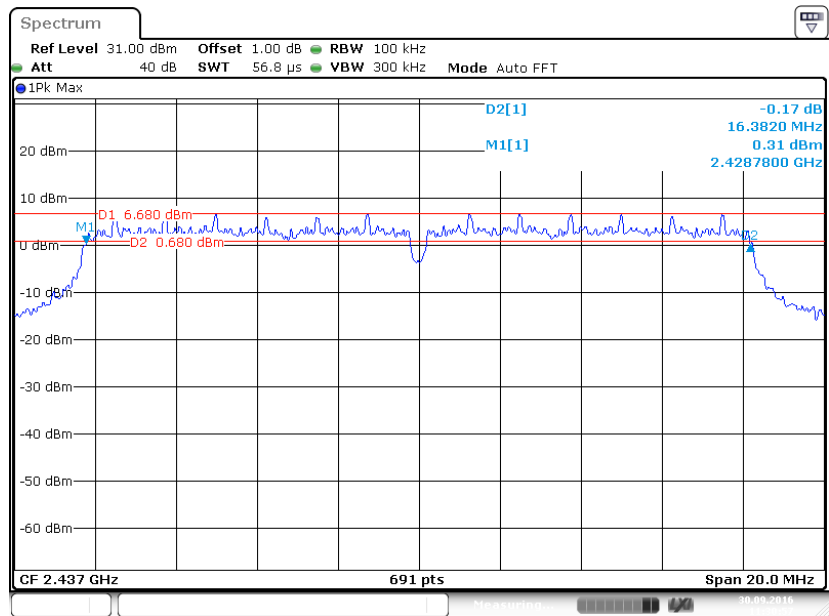


Date: 30.SEP.2016 11:30:57

802.11g High Channel

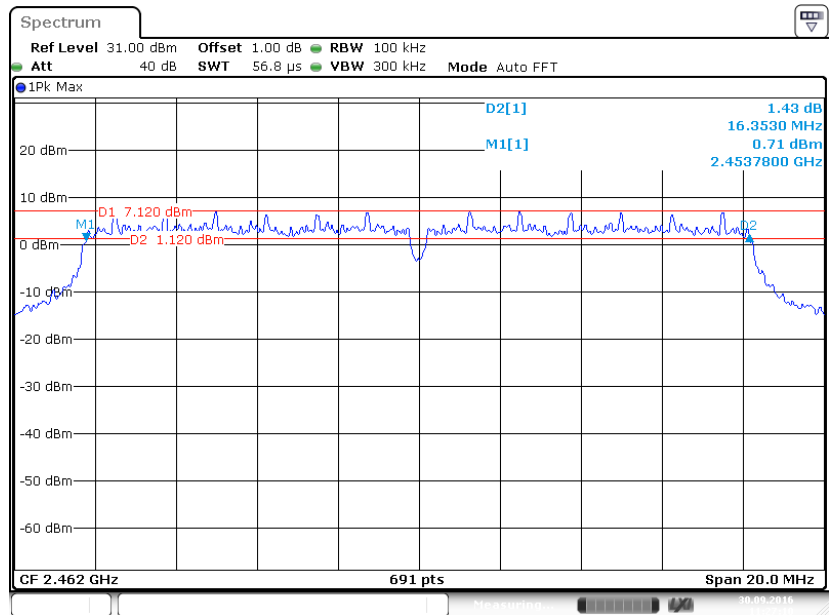


Date: 30.SEP.2016 11:27:10

802.11n-HT20 Low Channel

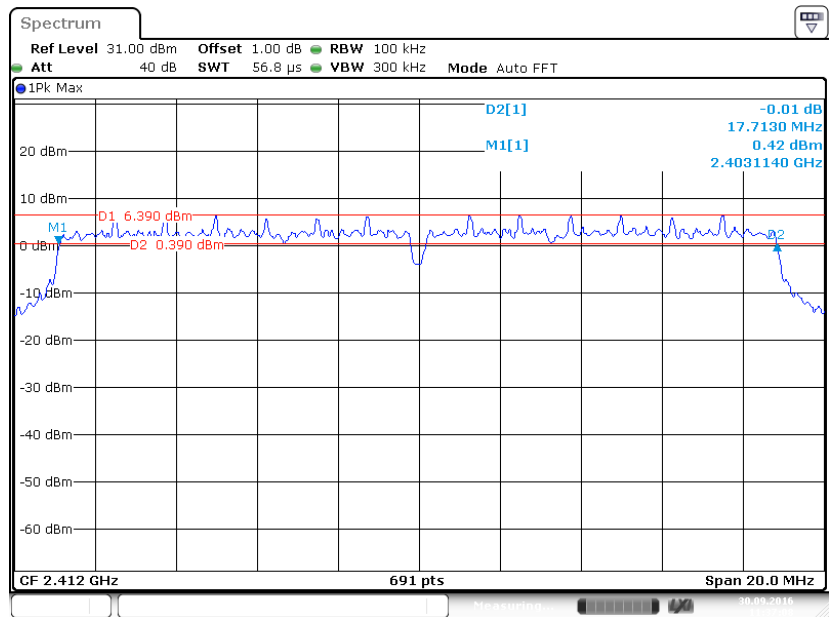


Date: 30.SEP.2016 11:37:08

802.11n-HT20 Middle Channel

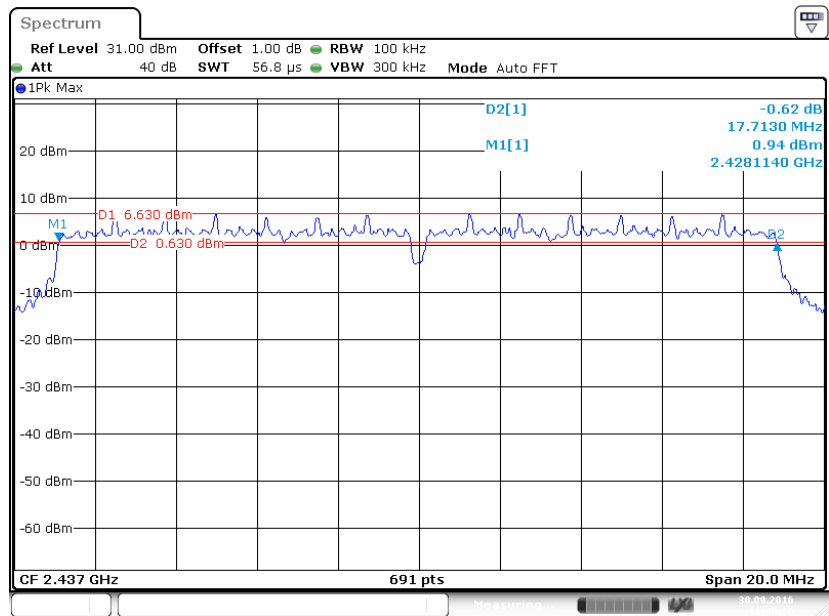

Date: 30.SEP.2016 11:40:36

802.11n-HT20 High Channel

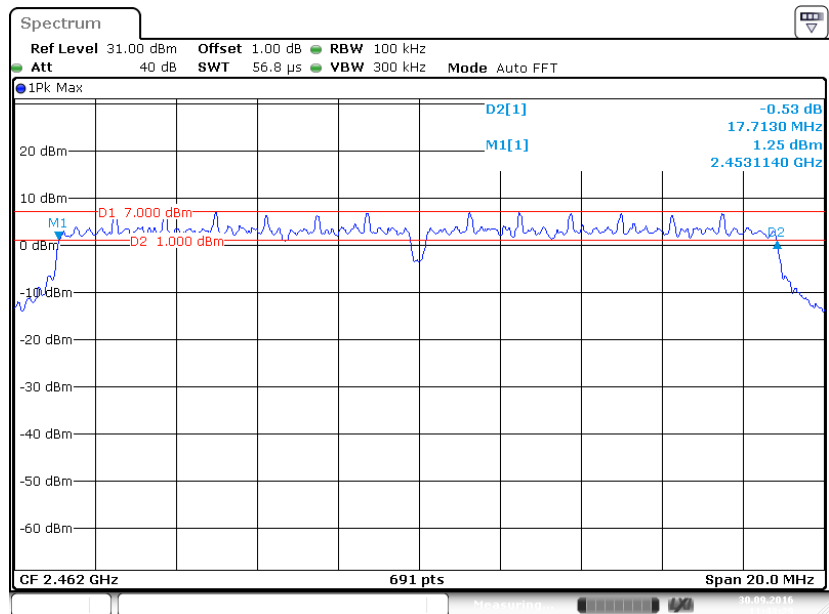

Date: 30.SEP.2016 11:43:30


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Power Sensor	NRP-Z91	200014	2015-08-01	2017-07-31
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-30.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Reading (dBm)	Corrected Factor $10\log(1/x)$ (dB)	Conducted Average Output Power (dBm)	Limit (dBm)	Result
802.11b							
Low	2412	21.03	16.05	0	16.05	30	Pass
Middle	2437	20.98	16.76	0	16.76	30	Pass
High	2462	21.19	16.88	0	16.88	30	Pass
802.11g							
Low	2412	24.07	18.27	0.11	18.38	30	Pass
Middle	2437	26.22	21.00	0.11	21.11	30	Pass
High	2462	26.43	20.98	0.11	21.09	30	Pass
802.11n-HT20							
Low	2412	24.43	17.72	0.14	17.86	30	Pass
Middle	2437	26.96	20.50	0.14	20.64	30	Pass
High	2462	26.93	20.44	0.14	20.58	30	Pass

Note: x is the duty cycle. For 802.11b: x=1.0, 11g: x=0.976, 802.11n20: x=0.968.


Conducted Average Output Power= Reading+ Corrected Factor

The reading value is reading from the test software.

802.11b Mode Middle Channel

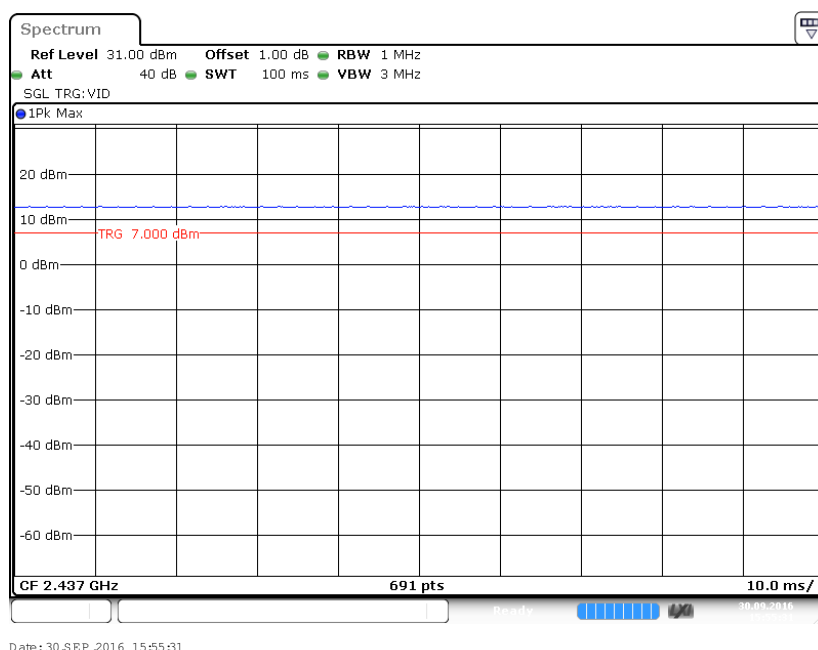


802.11g Mode Middle Channel

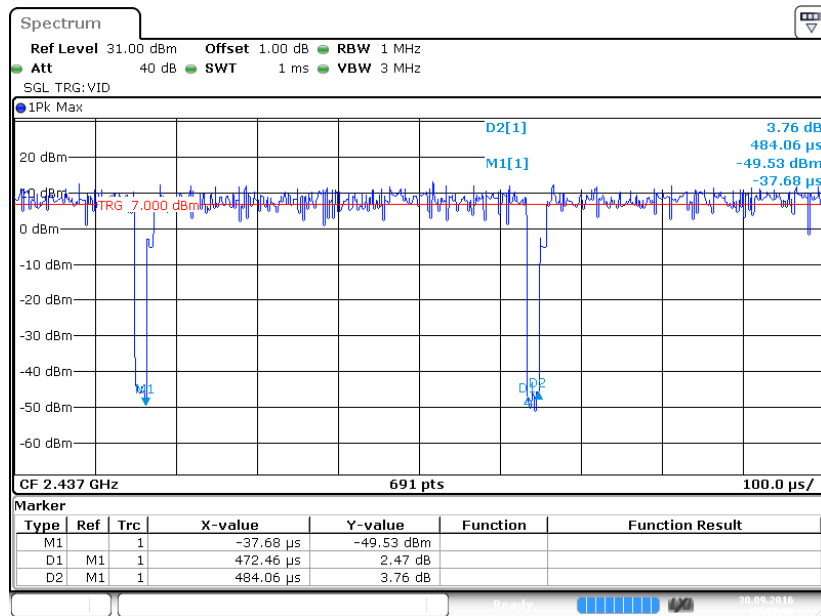

Date: 30.SEP.2016 15:19:31

802.11n20 Mode Middle Channel

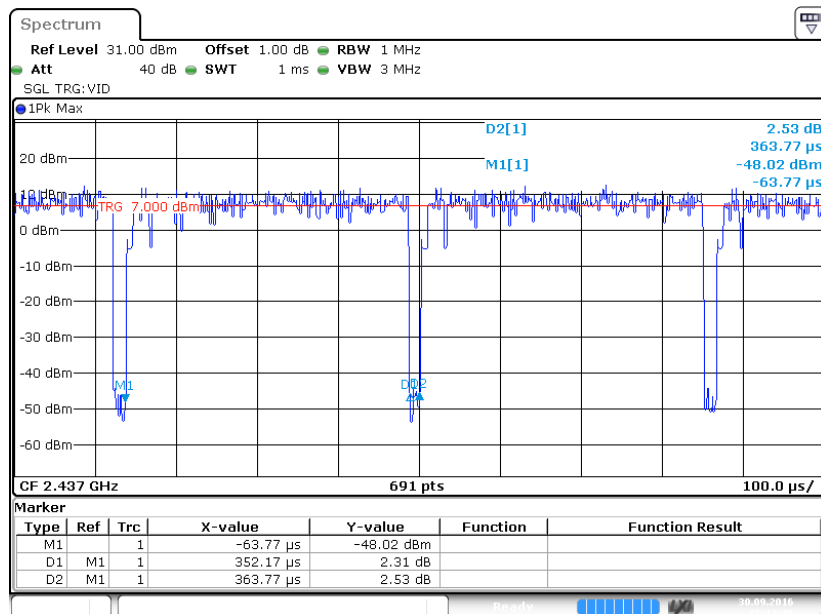

Date: 30.SEP.2016 15:13:27

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	FSV40 Signal Analyzer	FSV40	101116	2016-07-04	2017-07-03
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-09-30.


Test Result: Compliance

Please refer to the following table and plots.


802.11b: Band Edge, Left Side

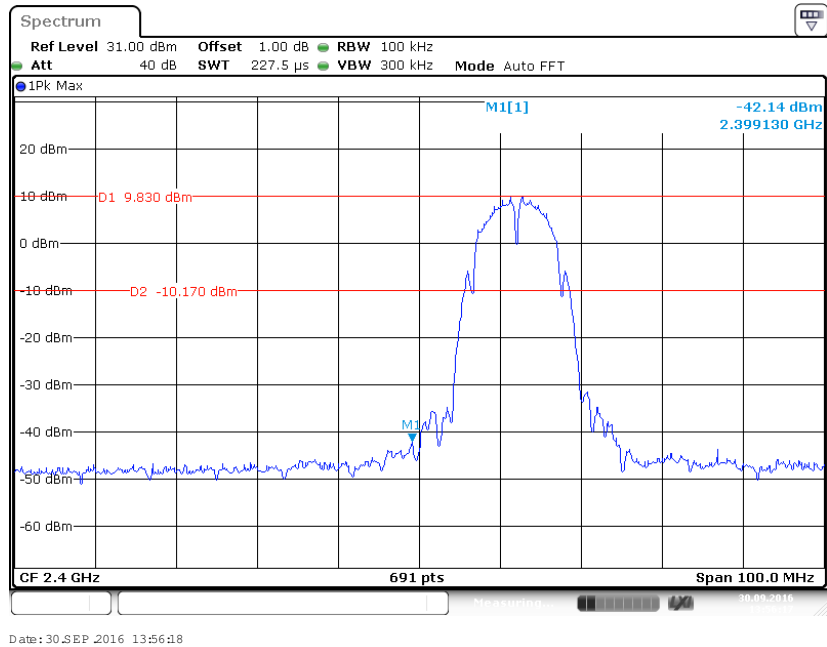


802.11b: Band Edge, Right Side

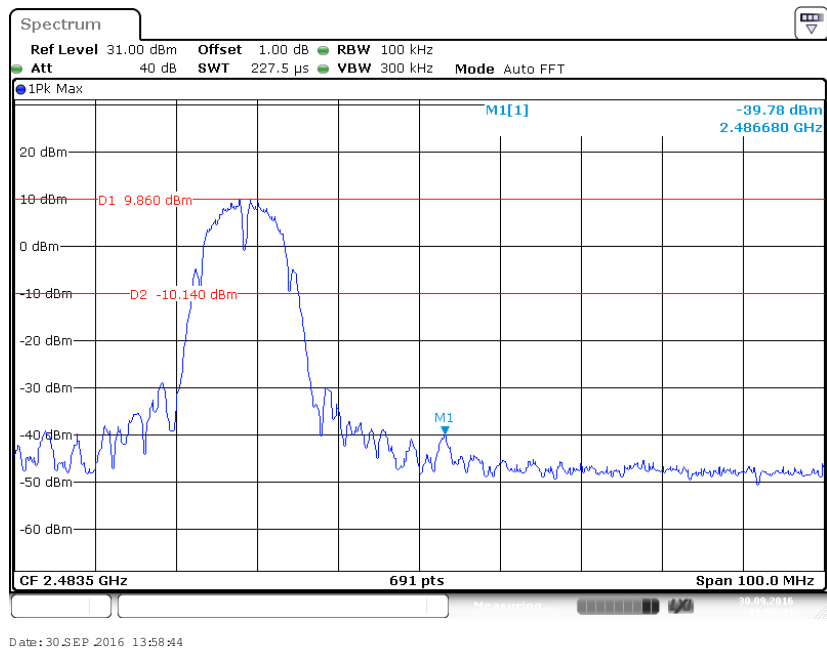


802.11g: Band Edge, Left Side

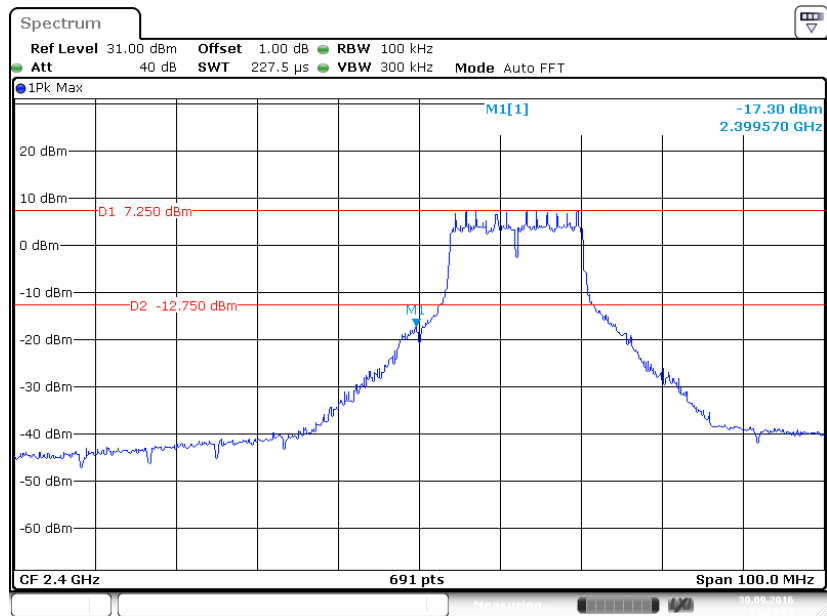


802.11g: Band Edge, Right Side

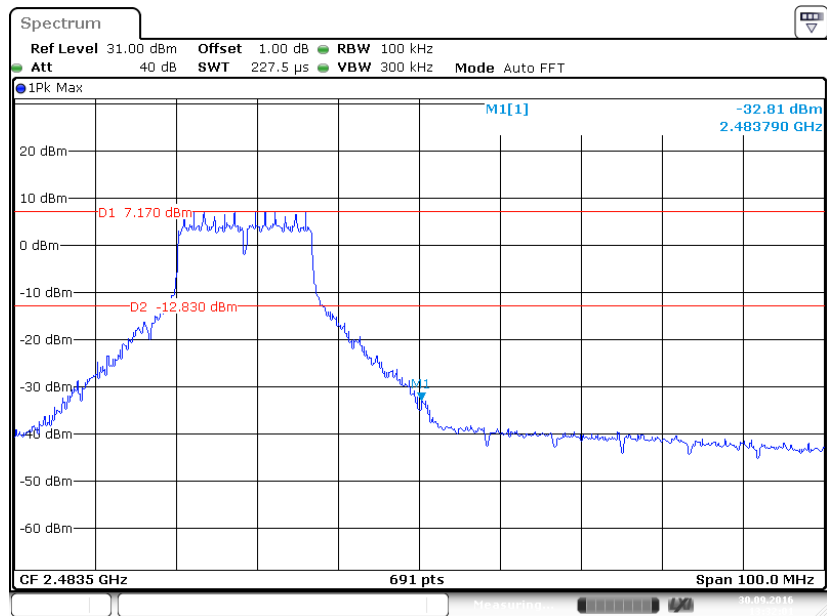

802.11n-HT20: Band Edge, Left Side

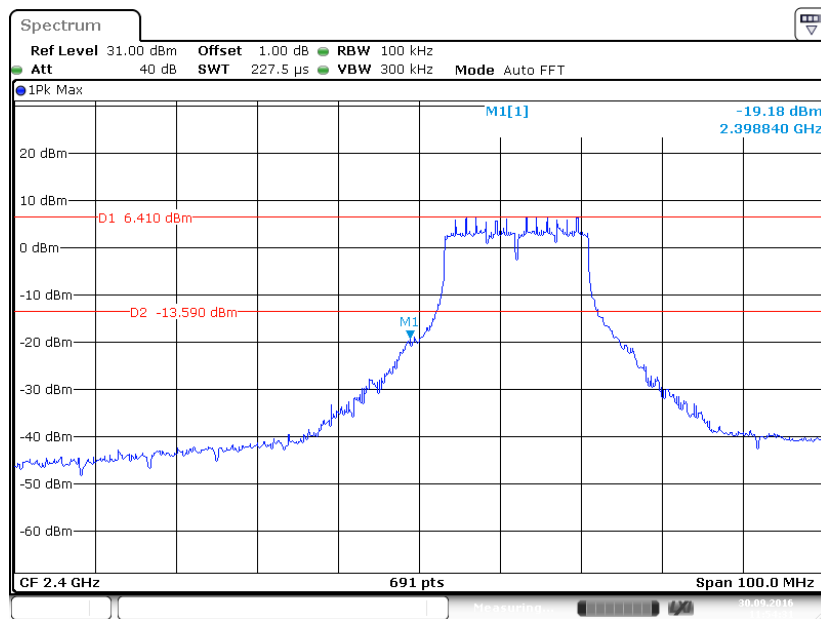

802.11n-HT20: Band Edge, Right Side

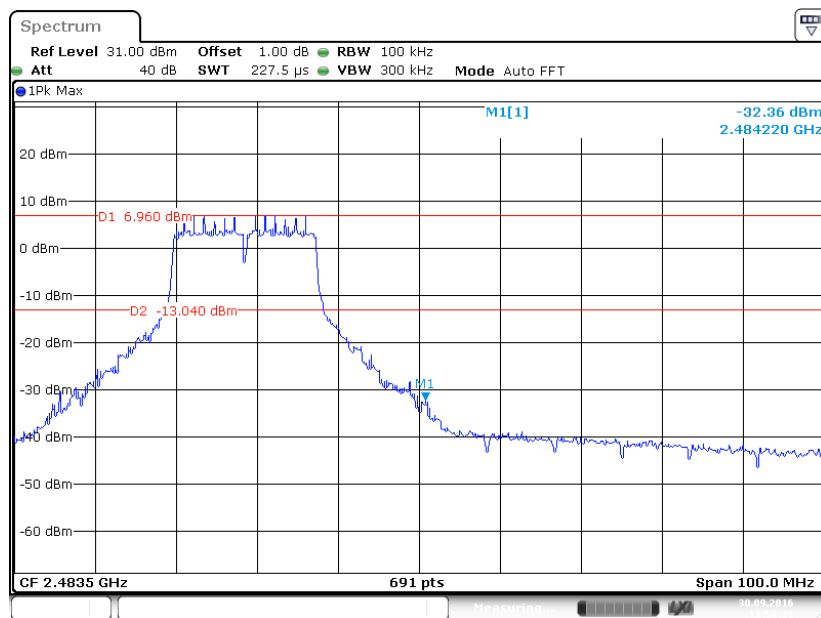

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r05 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	FSV40 Signal Analyzer	FSV40	101116	2016-07-04	2017-07-03
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Peter Jiang on 2016-09-30.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-3.46	≤ 8
Middle	2437	-3.39	≤ 8
High	2462	-3.21	≤ 8
802.11g mode			
Low	2412	-6.00	≤ 8
Middle	2437	-5.52	≤ 8
High	2462	-5.33	≤ 8
802.11n-HT20 mode			
Low	2412	-5.74	≤ 8
Middle	2437	-5.61	≤ 8
High	2462	-5.64	≤ 8


Power Spectral Density, 802.11b Low Channel

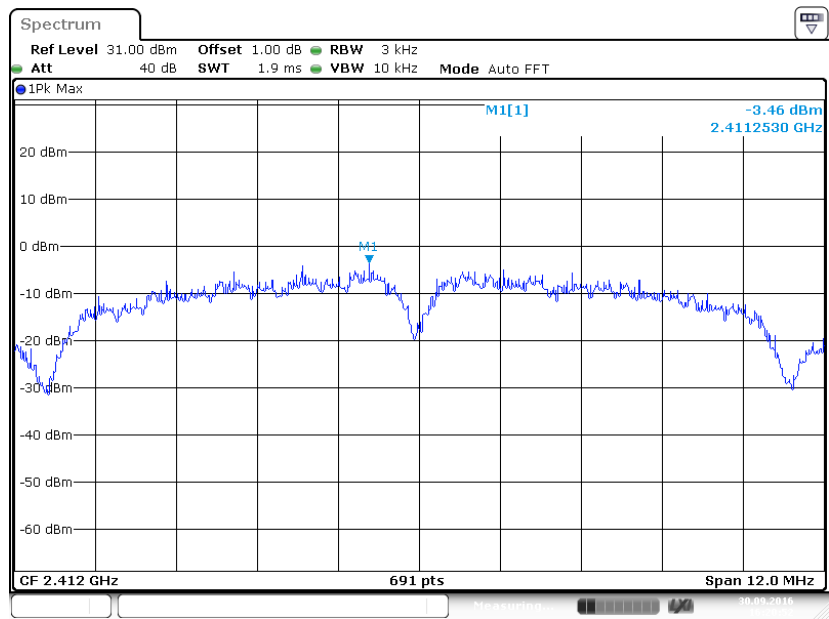


Power Spectral Density, 802.11b Middle Channel

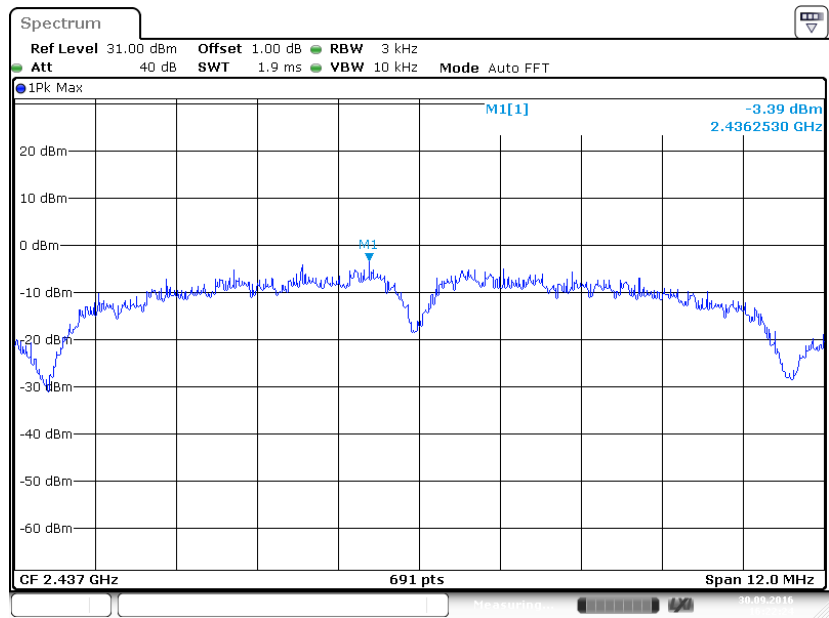


Power Spectral Density, 802.11b High Channel

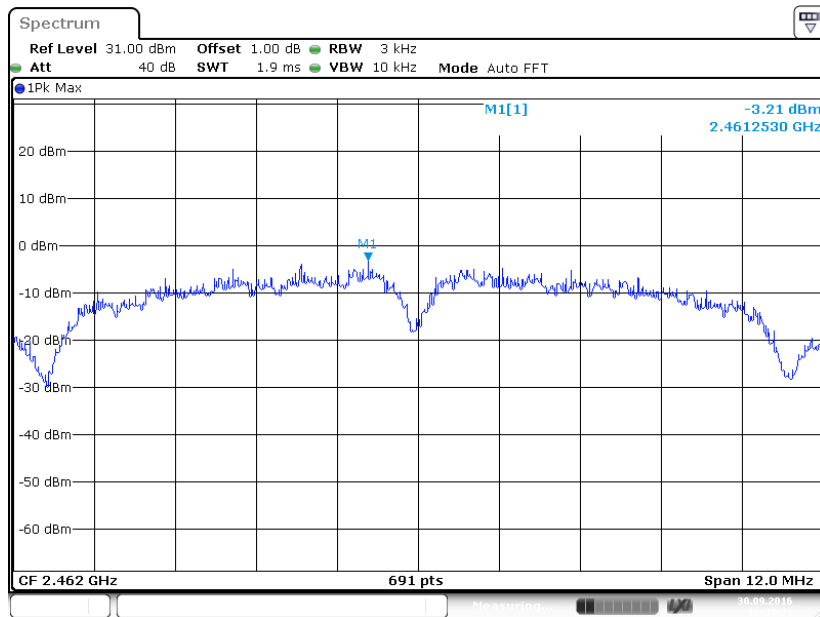


Power Spectral Density, 802.11g Low Channel

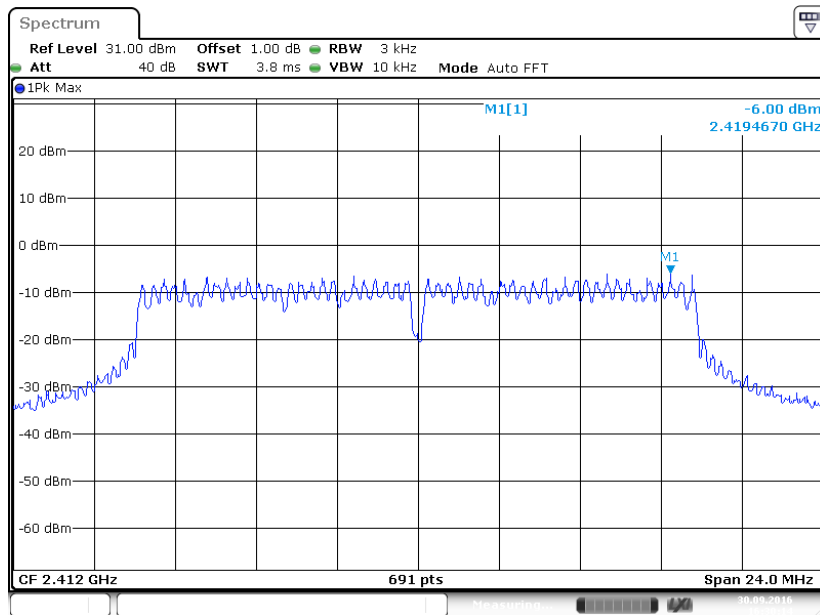


Power Spectral Density, 802.11g Middle Channel

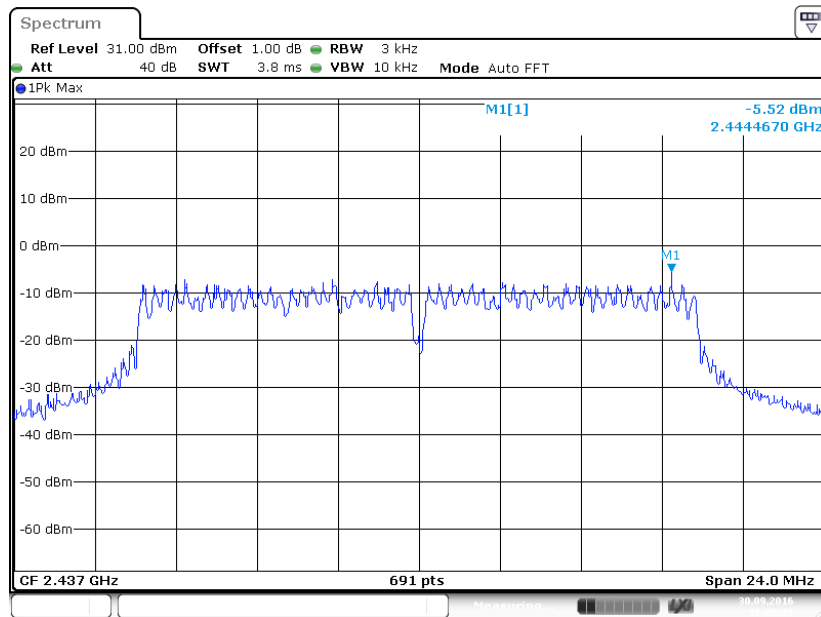


Power Spectral Density, 802.11g High Channel

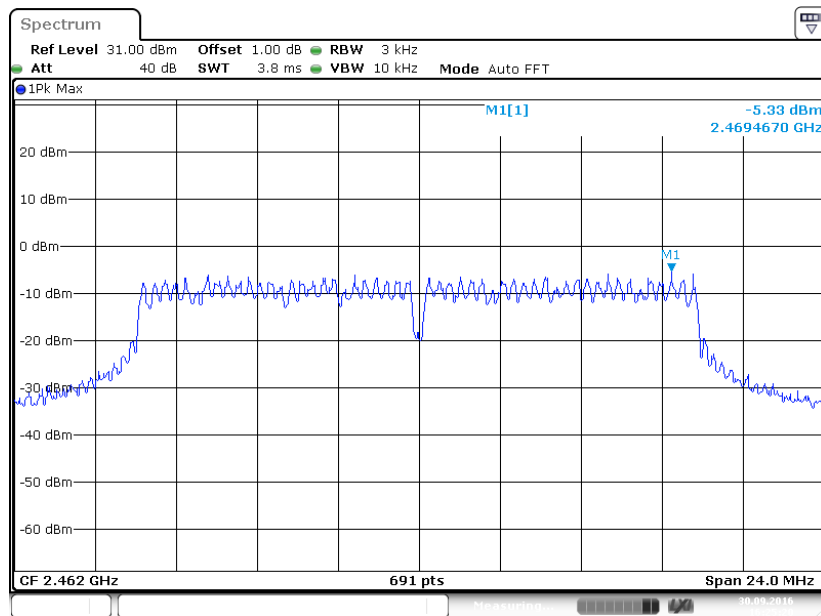


Power Spectral Density, 802.11n-HT20 Low Channel

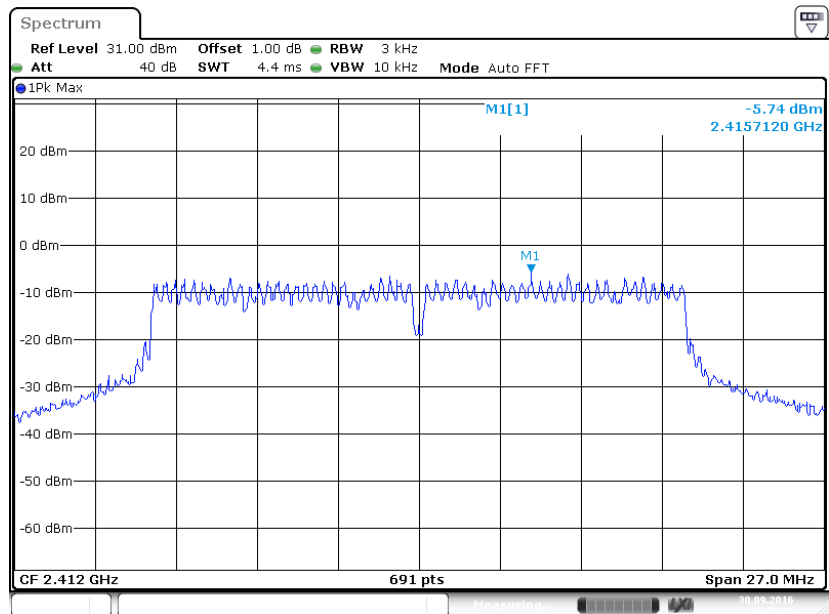

Power Spectral Density, 802.11n-HT20 Middle Channel

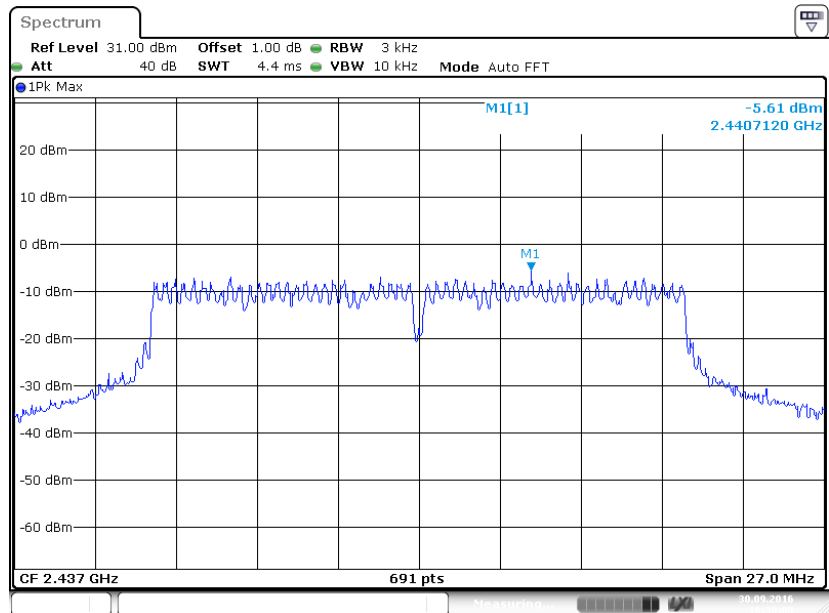

Power Spectral Density, 802.11n-HT20 High Channel

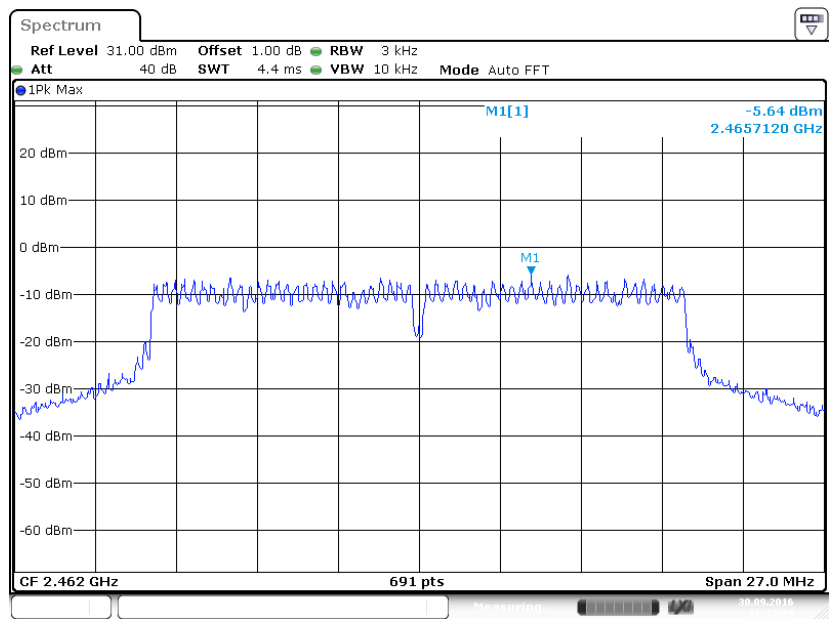

Date: 30.SEP.2016 16:39:29

***** END OF REPORT *****