

FCC TEST REPORT

For

Polyconcept Trading (Shanghai) Co., Ltd.

Remote Control

Model No.: 7140-91BK

Prepared For : Polyconcept Trading (Shanghai) Co., Ltd.

Address : 5F, Hero Bldg., 2669 Xie Tu Road, Shanghai, 200030, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited

Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217050025W

Date of Test : May 05~Jun. 23, 2017

Date of Report : Jun. 23, 2017

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	7
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiated Emission and Band Edge.....	11
4.1. Test Standard and Limit.....	11
4.2. Test Setup.....	12
4.3. Test Procedure.....	13
4.4. Test Data.....	13
5. 20dB Bandwidth Test.....	20
5.1. Test Standard and Limit.....	20
5.2. Test Setup.....	20
5.3. Test Procedure.....	20
5.4. Test Data.....	20
6. Antenna Requirement.....	23
6.1. Test Standard and Requirement.....	23
6.2. Antenna Connected Construction.....	23
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	24
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	25
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28

TEST REPORT

Applicant : Polyconcept Trading (Shanghai) Co., Ltd.
Manufacturer : DOWELLIN GROUR LIMITED
Product Name : Remote Control
Model No. : 7140-91BK
Trade Mark : N.A.
Rating(s) : DC 3V By "AA" Battery*2

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : May 05~Jun. 23, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Dolly mo

(Project Manager / Dolly Mo)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Polyconcept Trading (Shanghai) Co., Ltd.
Address	:	5F, Hero Bldg., 2669 Xie Tu Road, Shanghai, 200030, China
Manufacturer	:	DOWELLIN GROUR LIMITED
Address	:	Taian Rd,ChengHai District, ShanTou ,GuangDong, China

1.2. Description of Device (EUT)

Product Name	:	Remote Control	
Model No.	:	7140-91BK	
Trade Mark	:	N.A.	
Test Power Supply	:	DC 3V Battery inside	
Product Description	:	Operation Frequency:	2440-2478MHz
		Number of Channel:	24 Channels
		Modulation Type:	FSK
		Antenna Type:	Wire Antenna
		Antenna Gain(Peak):	5 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

--	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charge Mode
Mode 2	CH01
Mode 3	CH06
Mode 4	CH24

For Conducted Emission	
Final Test Mode	Description
Mode 1	Charge Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH06
Mode 3	CH24


Remark: The channel spacing of the IC itself is 1 MHz, but there are 14 channels between channel 01 (2440 MHz) and channel 02 (2455 MHz) are not used in the actual product. Information interval is 1MHz from channel 02 (2455MHz) to channel 24 (2478MHz). Middle channel selection algorithm provided by the scenario provider is based on $2478-2440 = 38$, $38/2 = 19$, $2440 + 19 = 2459\text{MHz}$, so the middle channel selects channel 06 (2459MHz).

1.5. List of Channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2440	09	2462	17	2470
02	2455	10	2463	18	2471
03	2456	11	2464	19	2472
04	2457	12	2465	20	2473
05	2458	13	2466	21	2474
06	2459	14	2467	22	2475
07	2460	15	2468	23	2476
08	2461	16	2469	24	2478

1.6. Description of Test Setup

RE

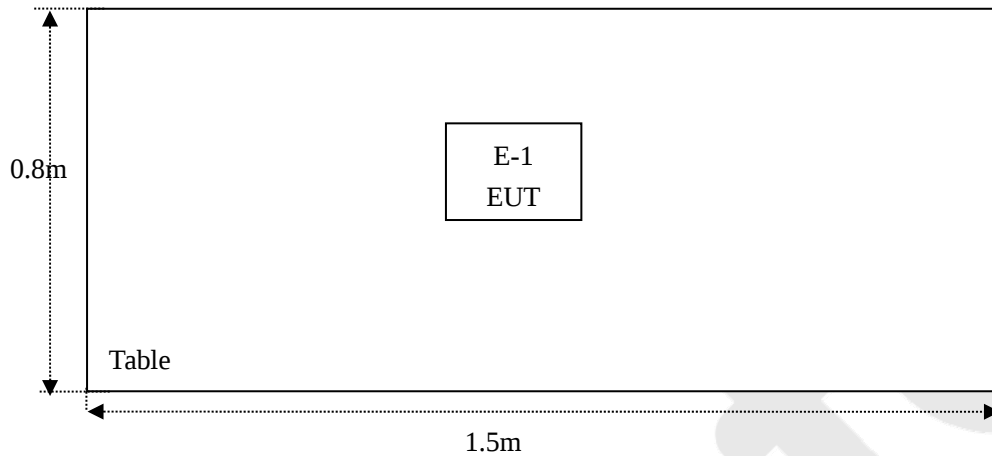

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	May 27, 2017	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
14.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
17.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
18.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80B	ZJ-17042804	Mar. 03, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		

Note: This product is low voltage products. It is using the battery as a power source.


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

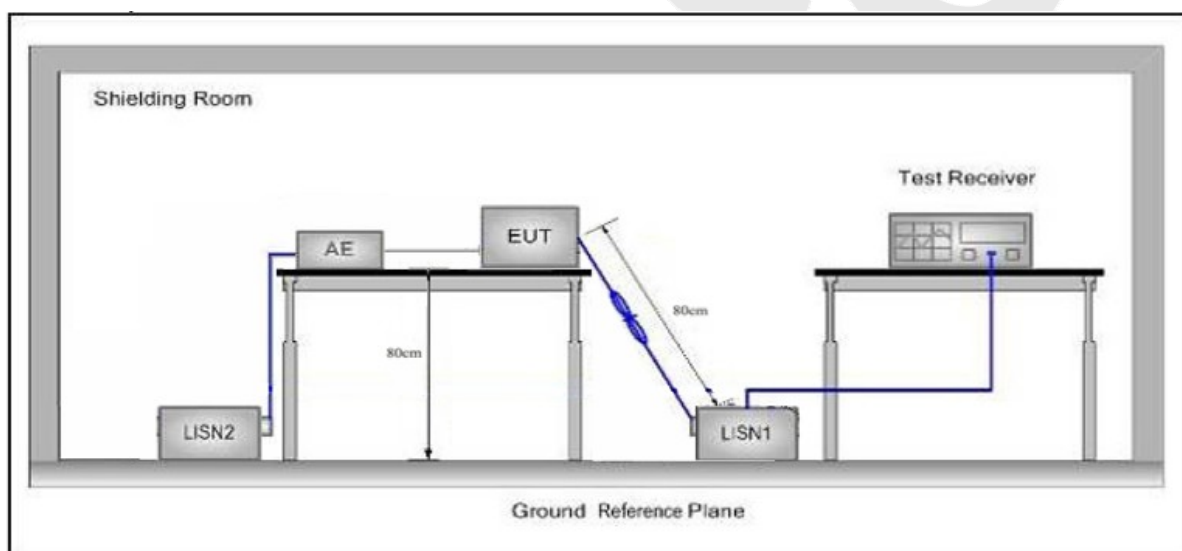

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

The EUT is powered by DC 3V battery inside, so there is no need to conduct this test.

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

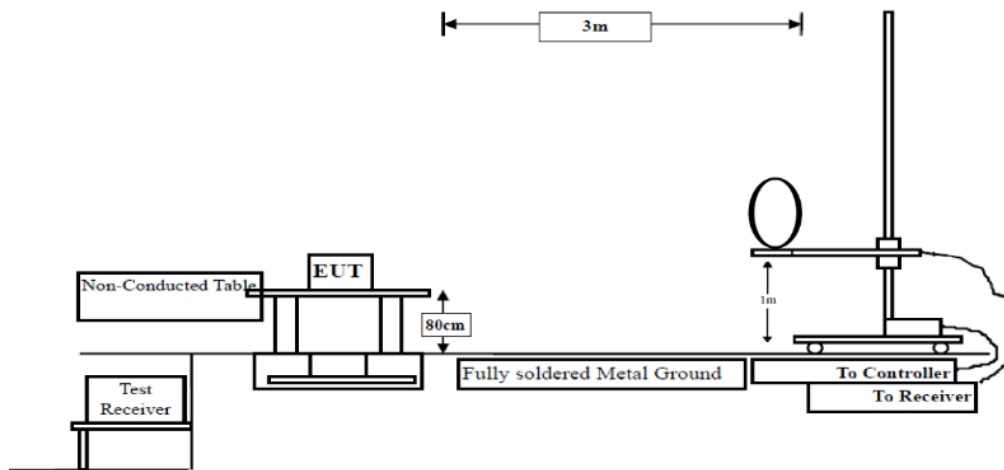


Figure 1. Below 30MHz

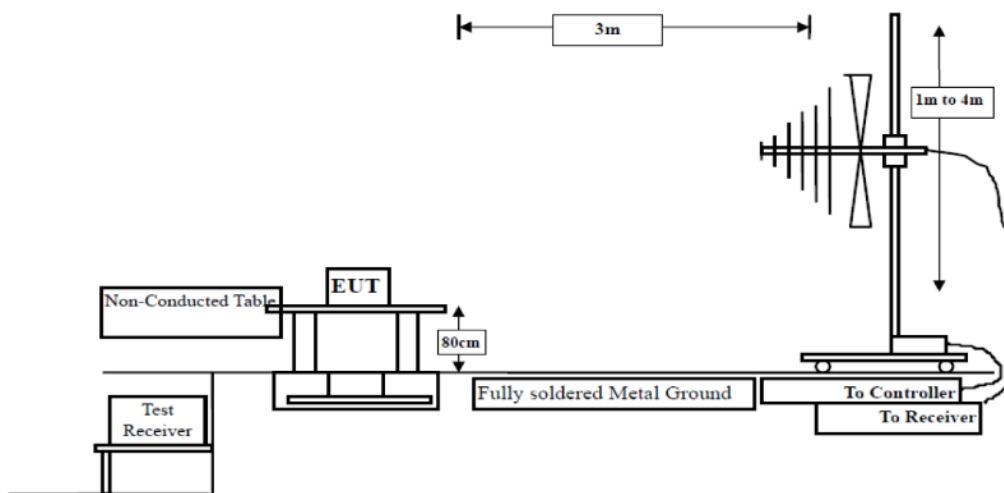


Figure 2. 30MHz to 1GHz

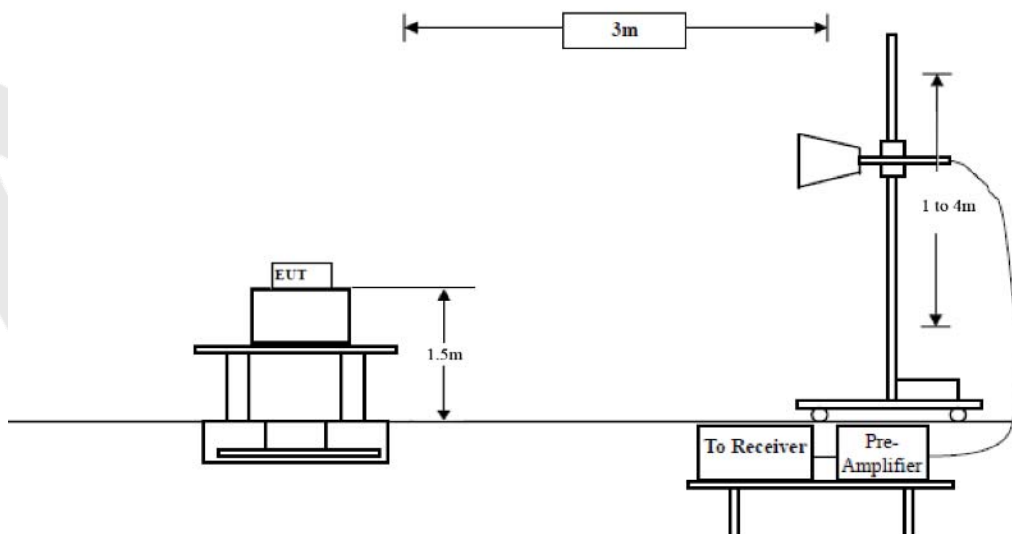


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: 0217040070W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 3V Battery inside
Test Mode: TX Mode Polarization: Horizontal

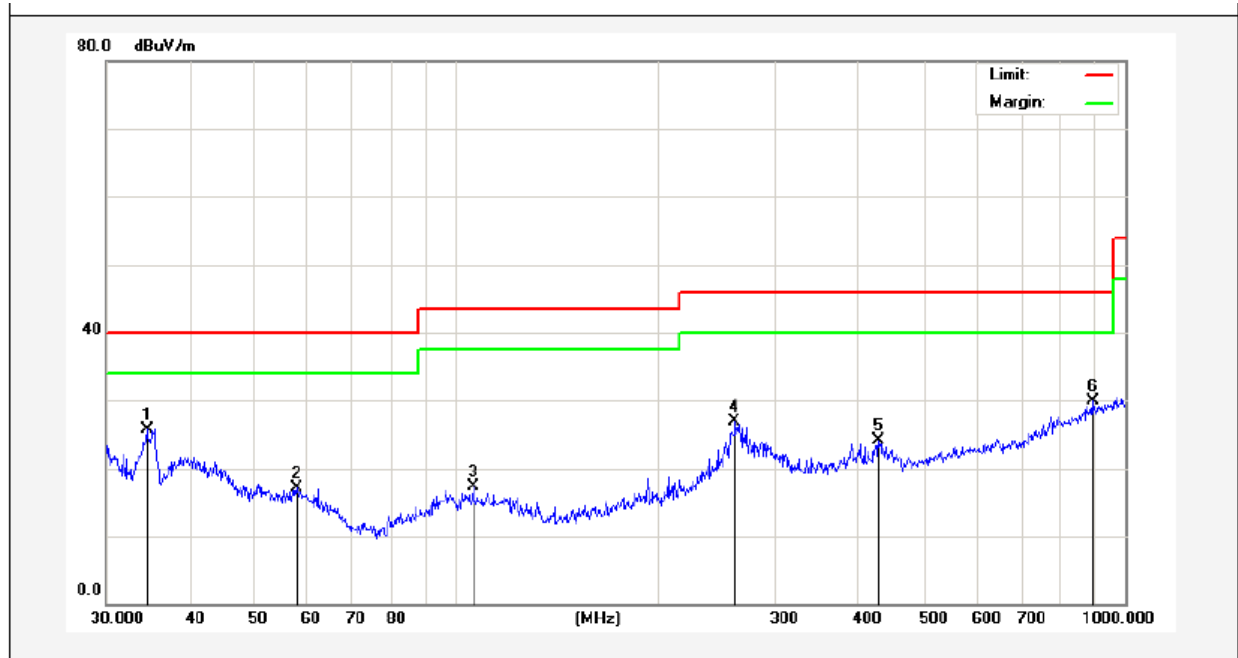

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.5173	40.30	-14.55	25.75	40.00	-14.25	peak			
2	57.7962	32.24	-15.19	17.05	40.00	-22.95	peak			
3	106.0126	38.00	-20.69	17.31	43.50	-26.19	peak			
4	261.0583	45.87	-18.96	26.91	46.00	-19.09	peak			
5	428.0193	36.34	-12.31	24.03	46.00	-21.97	peak			
6	893.8567	34.68	-4.86	29.82	46.00	-16.18	peak			

Test Results (30~1000MHz)

Job No.: 0217040070W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 3V Battery inside
Test Mode: TX Mode Polarization: Vertical

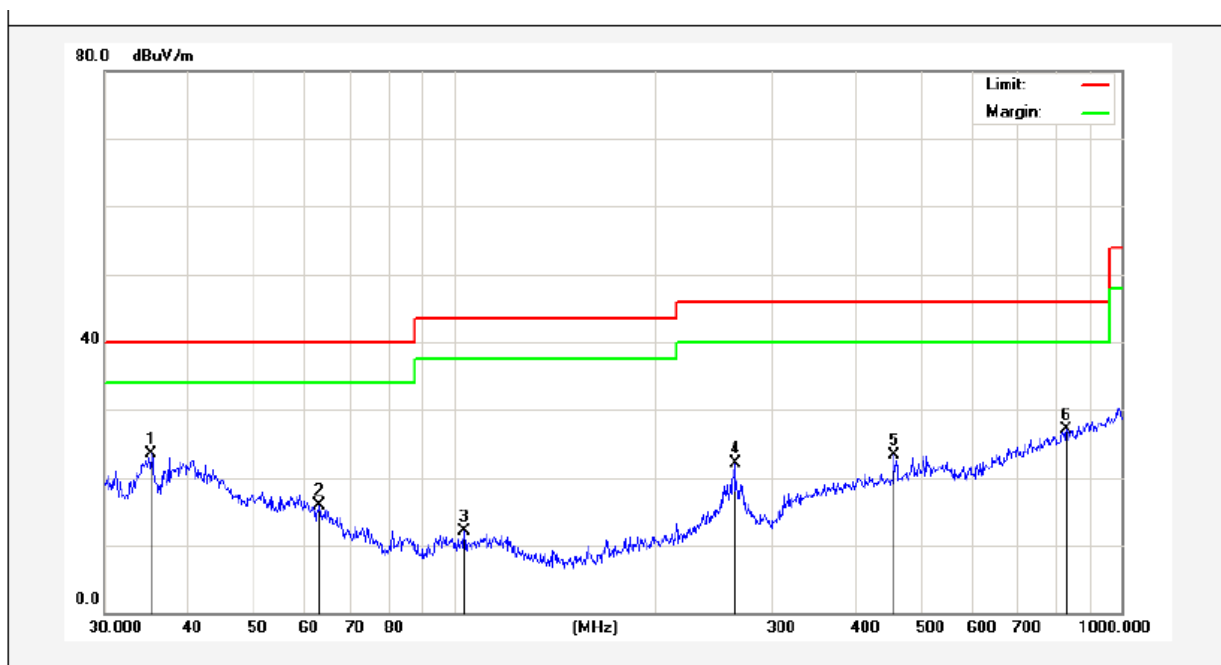

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	35.2512	37.62	-14.10	23.52	40.00	-16.48	peak			
2	62.8708	32.43	-16.59	15.84	40.00	-24.16	peak			
3	103.8055	27.87	-15.71	12.16	43.50	-31.34	peak			
4	263.8190	36.29	-14.22	22.07	46.00	-23.93	peak			
5	457.5073	35.31	-11.99	23.32	46.00	-22.68	peak			
6	827.4934	32.18	-5.05	27.13	46.00	-18.87	peak			

Test Results (Above 1000MHz)

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2440.0000	92.17	31.24	2.17	35.40	90.18	114.00	-23.82	V	Peak
2440.0000	86.05	31.24	2.17	35.40	84.06	94.00	-9.94	V	AVG
4880.0000	45.95	34.21	2.53	34.47	48.22	74.00	-25.78	V	Peak
4880.0000	41.01	34.21	2.53	34.47	43.28	54.00	-10.72	V	AVG
7320.0000	41.77	35.87	3.11	34.25	46.50	74.00	-27.50	V	Peak
7320.0000	36.22	35.87	3.11	34.25	40.95	54.00	-13.05	V	AVG
9760.0000	*								
12200.0000	*								
14640.0000	*								
17080.0000	*								
2440.0000	90.57	31.24	2.17	35.40	88.58	114.00	-25.42	H	Peak
2440.0000	81.64	31.24	2.17	35.40	79.65	94.00	-14.35	H	AVG
4880.0000	42.37	34.21	2.53	34.47	44.64	74.00	-29.36	H	Peak
4880.0000	37.58	34.21	2.53	34.47	39.85	54.00	-14.15	H	AVG
7320.0000	39.77	35.87	3.11	34.25	44.50	74.00	-29.50	H	Peak
7320.0000	32.86	35.87	3.11	34.25	37.59	54.00	-16.41	H	AVG
9760.0000	*								
12200.0000	*								
14640.0000	*								
17080.0000	*								

Test Mode: CH06 (Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2459.0000	91.94	31.42	2.13	35.47	90.02	114.00	-23.98	V	Peak
2459.0000	80.85	31.42	2.13	35.47	78.93	94.00	-15.07	V	AVG
4918.0000	48.54	34.78	2.43	34.43	51.32	74.00	-22.68	V	Peak
4918.0000	40.76	34.78	2.43	34.43	43.54	54.00	-10.46	V	AVG
7377.0000	39.03	36.02	3.12	34.53	43.64	74.00	-30.36	V	Peak
7377.0000	32.84	36.02	3.12	34.53	37.45	54.00	-16.55	V	AVG
9836.0000	*								
12295.0000	*								
14754.0000	*								
17213.0000	*								
2459.0000	90.45	31.42	2.13	35.47	88.53	114.00	-25.47	H	Peak
2459.0000	79.05	31.42	2.13	35.47	77.13	94.00	-16.87	H	AVG
4918.0000	43.04	34.78	2.43	34.43	45.82	74.00	-28.18	H	Peak
4918.0000	35.84	34.78	2.43	34.43	38.62	54.00	-15.38	H	AVG
7377.0000	39.04	36.02	3.12	34.53	43.65	74.00	-30.35	H	Peak
7377.0000	33.07	36.02	3.12	34.53	37.68	54.00	-16.32	H	AVG
9836.0000	*								
12295.0000	*								
14754.0000	*								
17213.0000	*								

Test Mode: CH24 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2478.0000	95.03	31.77	2.25	36.07	92.98	114.00	-21.02	V	Peak
2478.0000	84.05	31.77	2.25	36.07	82.00	94.00	-12.00	V	AVG
4956.0000	50.11	35.24	2.64	35.12	52.87	74.00	-21.13	V	Peak
4956.0000	39.05	35.24	2.64	35.12	41.81	54.00	-12.19	V	AVG
7434.0000	37.02	36.13	3.14	34.95	41.34	74.00	-32.66	V	Peak
7434.0000	33.14	36.13	3.14	34.95	37.46	54.00	-16.54	V	AVG
9912.0000	*								
12390.0000	*								
14868.0000	*								
17346.0000	*								
2478.0000	92.46	31.77	2.25	36.07	90.41	114.00	-23.59	H	Peak
2478.0000	74.03	31.77	2.25	36.07	71.98	94.00	-22.02	H	AVG
4956.0000	46.27	35.24	2.64	35.12	49.03	74.00	-24.97	H	Peak
4956.0000	39.07	35.24	2.64	35.12	41.83	54.00	-12.17	H	AVG
7434.0000	42.14	36.13	3.14	34.95	46.46	74.00	-27.54	H	Peak
7434.0000	35.07	36.13	3.14	34.95	39.39	54.00	-14.61	H	AVG
9912.0000	*								
12390.0000	*								
14868.0000	*								
17346.0000	*								

Radiated Band Edge:

Test Mode:					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.10	29.15	3.41	34.01	50.65	74.00	-23.35	V
2400.00	59.83	29.16	3.43	34.01	58.41	74.00	-15.59	V
2390.00	54.07	29.15	3.41	34.01	52.62	74.00	-21.38	H
2400.00	63.55	29.16	3.43	34.01	62.13	74.00	-11.87	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.13	29.15	3.41	34.01	37.68	54.00	-16.32	V
2400.00	47.10	29.16	3.43	34.01	45.68	54.00	-8.32	V
2390.00	39.75	29.15	3.41	34.01	38.30	54.00	-15.70	H
2400.00	48.11	29.16	3.43	34.01	46.69	54.00	-7.31	H

Test Mode:					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.44	29.28	3.53	34.03	50.22	74.00	-23.78	V
2500.00	49.18	29.30	3.56	34.03	48.01	74.00	-25.99	V
2483.50	54.29	29.28	3.53	34.03	53.07	74.00	-20.93	H
2500.00	51.33	29.30	3.56	34.03	50.16	74.00	-23.84	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.21	29.28	3.53	34.03	37.99	54.00	-16.01	V
2500.00	35.44	29.30	3.56	34.03	34.27	54.00	-19.73	V
2483.50	41.42	29.28	3.53	34.03	40.20	54.00	-13.80	H
2500.00	38.61	29.30	3.56	34.03	37.44	54.00	-16.56	H

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. 20dB Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

5.2. Test Setup




5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq$ 3*RBW = 300kHz,
Detector= Average
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


5.4. Test Data

Test Item	: 20dB Bandwidth	Test Mode	: TX Mode
Test Voltage	: DC 3V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Frequency (MHz)	Bandwidth (kHz)	Result
2440MHZ	1530	PASS
2459MHZ	1264	PASS
2478MHZ	1224	PASS

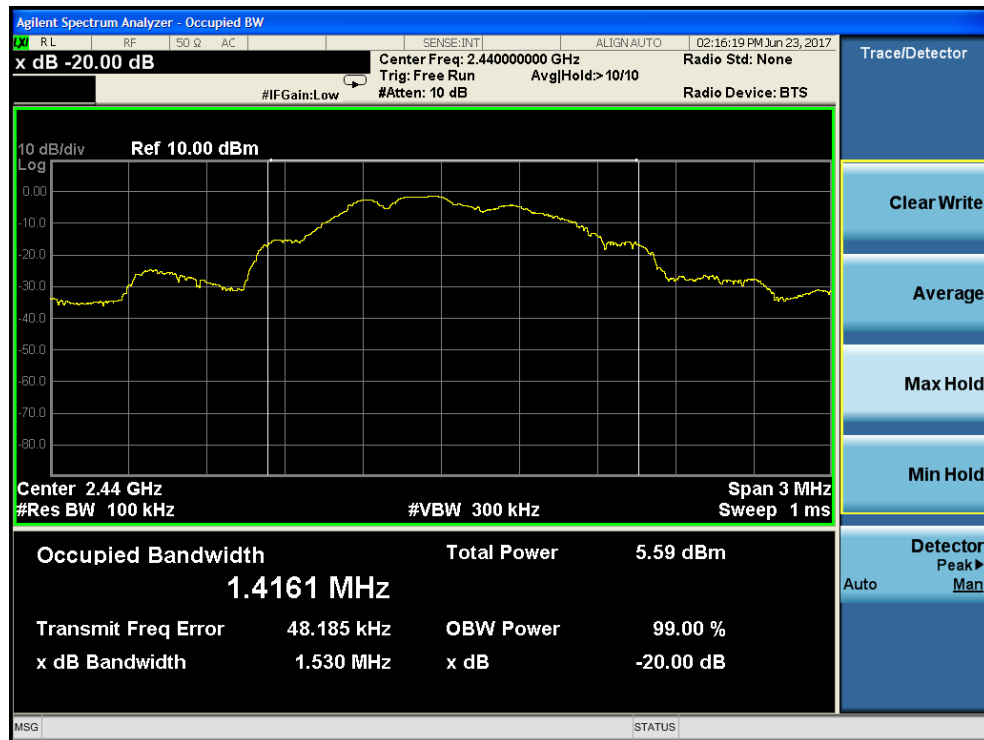

Test Mode: Low

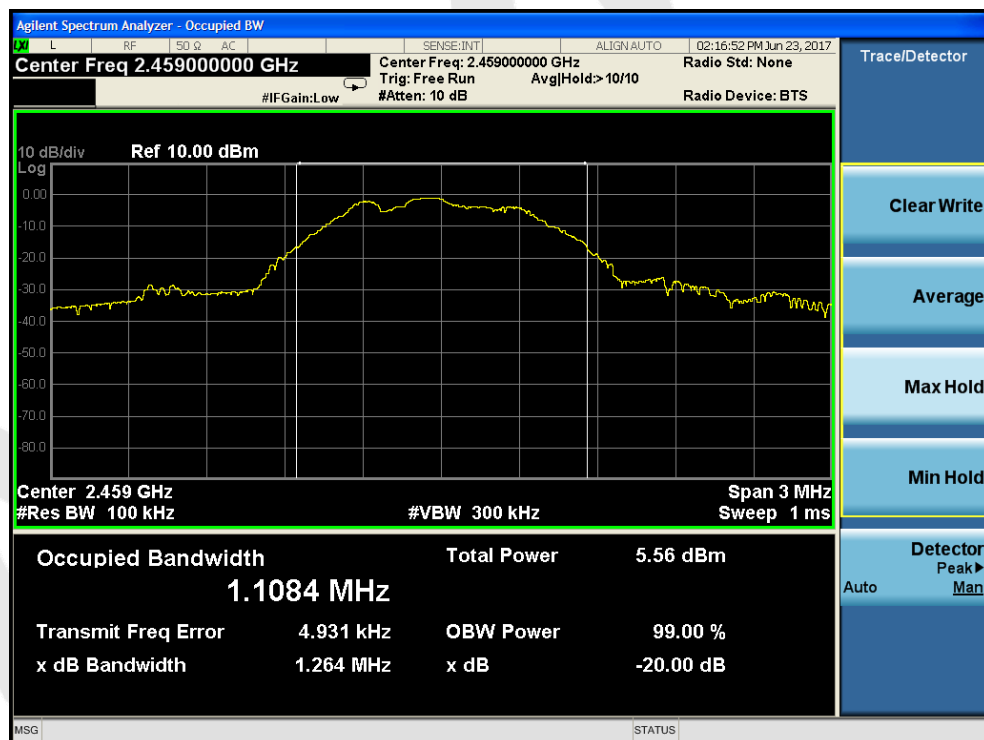

Test Mode: Middle

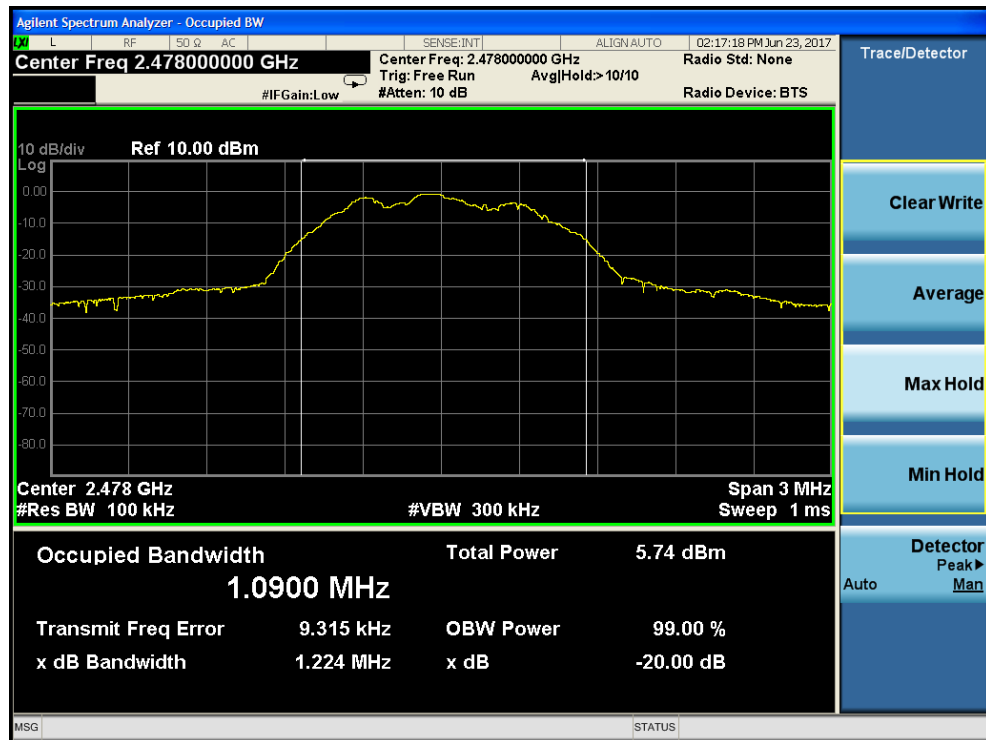

Test Mode: High


6. Antenna Requirement

6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



6.2. Antenna Connected Construction

The antenna is a wire Antenna which permanently attached, and the best case gain of the antenna is 5dBi. It complies with the standard requirement.

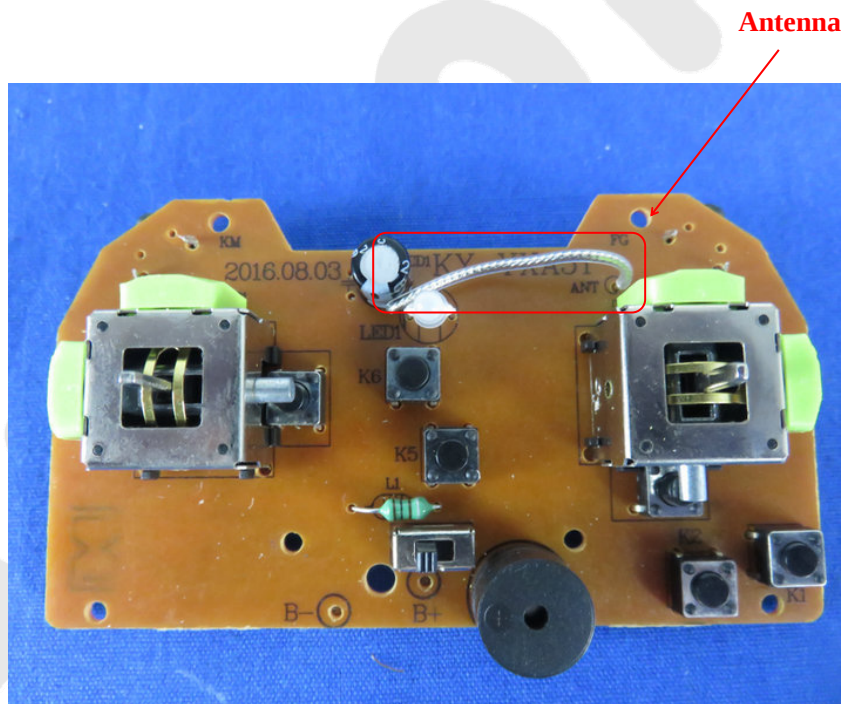

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test

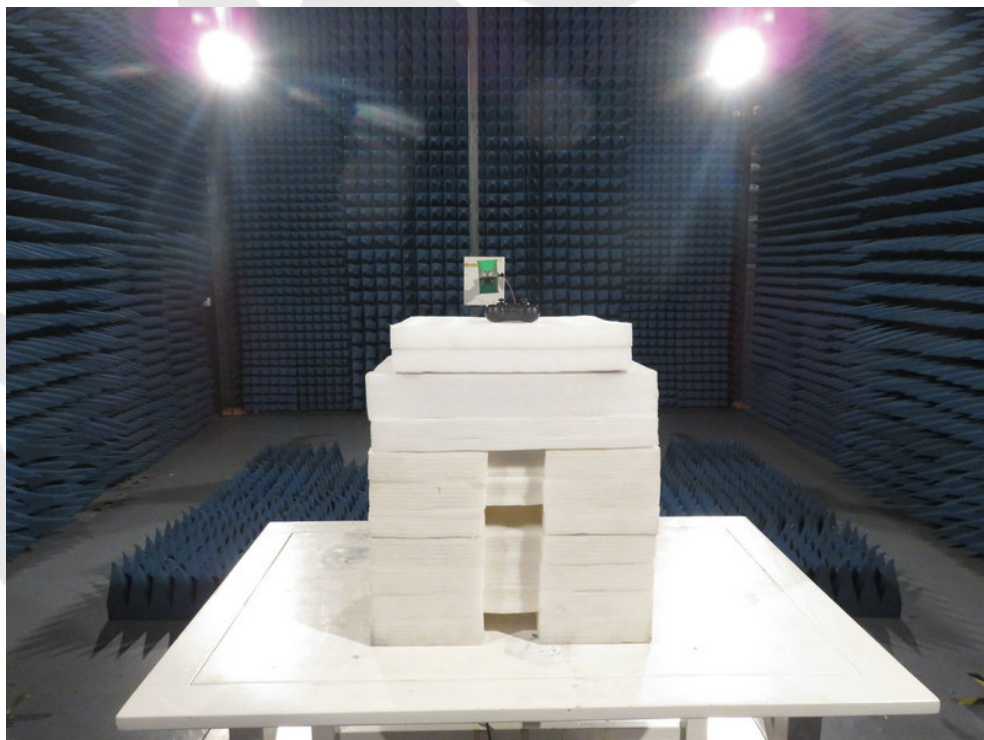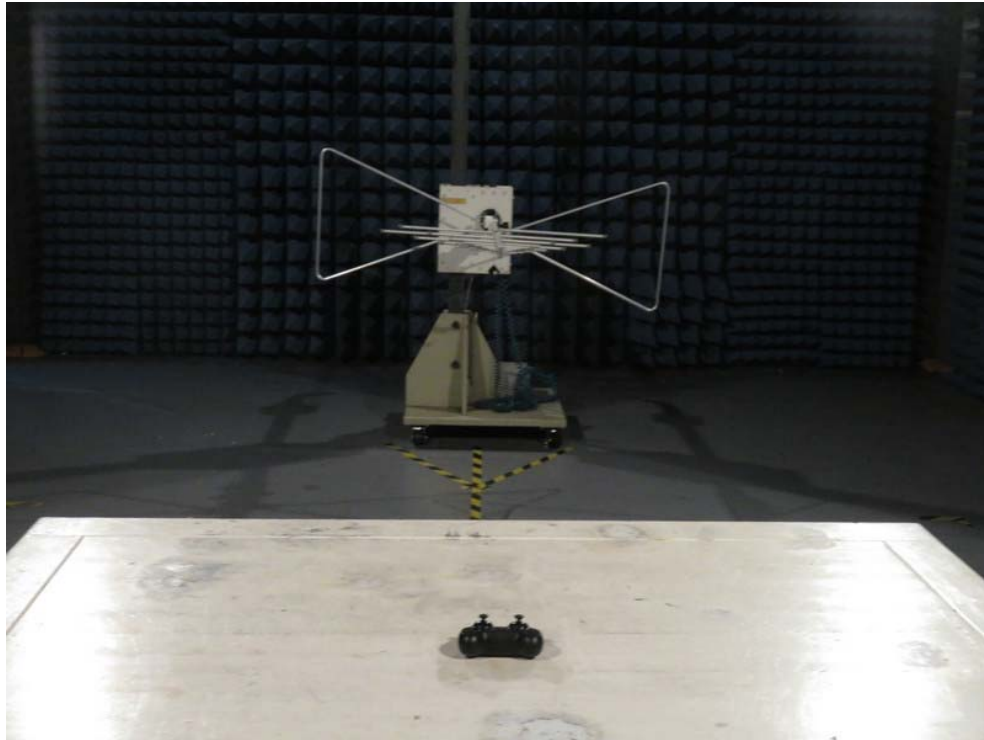

APPENDIX II -- EXTERNAL PHOTOGRAPH







APPENDIX III -- INTERNAL PHOTOGRAPH

