

FCC PART 15C TEST REPORT



Issued to

The Nest Network S.L.

For

eNest

Model Name: NE101SA
Trade Name: eNest
Brand Name: Nestwork
FCC ID: 2ABF8-NE101SA
Standard: 47 CFR Part 15 Subpart C
Test date: 2013-10-23 to 2013-11-18
Issue date: 2014-2-10

by

Shenzhen Morlab Communications Technology Co., Ltd.

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District,
ShenZhen, GuangDong Province, P. R. China 518101

Tested by

Nie Quan

Nie Quan
(Test Engineer)

Date 2014.2.10

Approved by



Zeng Dexin
Zeng Dexin
(Chief Engineer)

Date

2014.2.10

Reviewed by

Peng Huarui

Peng Huarui
(Dept. Manager)

Date

2014.2.10

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1. EUT DESCRIPTION	3
1.2. TEST STANDARDS AND RESULTS	4
1.3. FACILITIES AND ACCREDITATIONS	5
1.3.1. FACILITIES.....	5
1.3.2. TEST ENVIRONMENT CONDITIONS	5
2. 47 CFR PART 15C REQUIREMENTS	6
2.1. ANTENNA REQUIREMENT	6
2.1.1. APPLICABLE STANDARD.....	6
2.1.2. RESULT: COMPLIANT	6
2.2. 20dBANDWIDTH	6
2.2.1. REQUIREMENT	6
2.2.2. TEST DESCRIPTION	6
2.2.1. TEST PROCEDURE	6
2.2.2. TEST RESULT.....	7
2.3. BAND EDGE.....	9
2.3.1. REQUIREMENT.....	9
2.3.2. TEST DESCRIPTION	9
2.3.3. TEST PROCEDURE	10
2.3.4. TEST RESULT.....	10
2.4. CONDUCTED EMISSION	13
2.4.1. REQUIREMENT	13
2.4.2. TEST DESCRIPTION.....	13
2.4.3. TEST RESULT.....	14
2.5. FIELD STRENGTH	17
2.5.1. REQUIREMENT	17
2.5.2. TEST DESCRIPTION	18
2.5.3. TEST PROCEDURE	19
2.5.4. TEST RESULT.....	20

Change History		
Issue	Date	Reason for change
1.0	February 10, 2014	First edition

1. GENERAL INFORMATION

1.1. EUT Description

EUT Type.....: eNest
Serial No.: (n.a, marked #1 by test site)
Hardware Version.....: V4.0
Software Version.....: V1.5.2
Applicant.....: The Nest Network S.L.
Plaza Republica Argentina 3 Madrid Spain
Manufacturer: The Nest Network S.L.
Plaza Republica Argentina 3 Madrid Spain
Frequency Range.....: The frequency range used is 2427MHz~2431MHz
Channel Number: 3(2427MHz,2429MHz,2431MHz)
Modulation Type.....: GFSK
Antenna Type.....: Integral Antenna
Antenna Gain.....: 0dBi

Note:

1. The EUT is a eNest, it contains 2.4G Module operating at 2.4GHz ISM band, they are all tested in this report.
2. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	<u>PASS</u>
2	15.215	20dB Bandwidth	<u>N/A</u>
3	15.249(d)	Band Edge	<u>PASS</u>
4	15.207	Conducted Emission	<u>PASS</u>
5	15.209	Radiated Emission	<u>PASS</u>
	15.249(a)	Field Strength	

NOTE:

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Equipment in the range of 9 kHz to 40GHz for FCC ID Certification,.

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. 20dB Bandwidth

2.2.1. Requirement

None; for reporting purpose only.

2.2.2. Test Description

A. Test Setup:

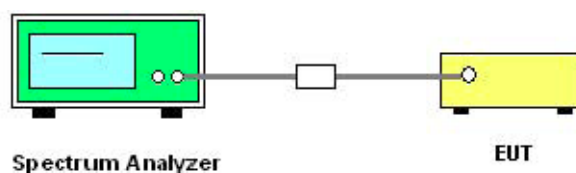

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum analyzer	Agilent	E4407B	MY45101810	2013.05.12	2014.05.11

2.2.1. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth

RBW =100KHz

VBW =300kHz

Sweep = auto

Detector function = peak


Trace = max hold

2.2.2. Test Result


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
L	2427	1.439	Plot A
M	2429	1.423	Plot B
H	2431	1.532	Plot C

B. Test Plots:

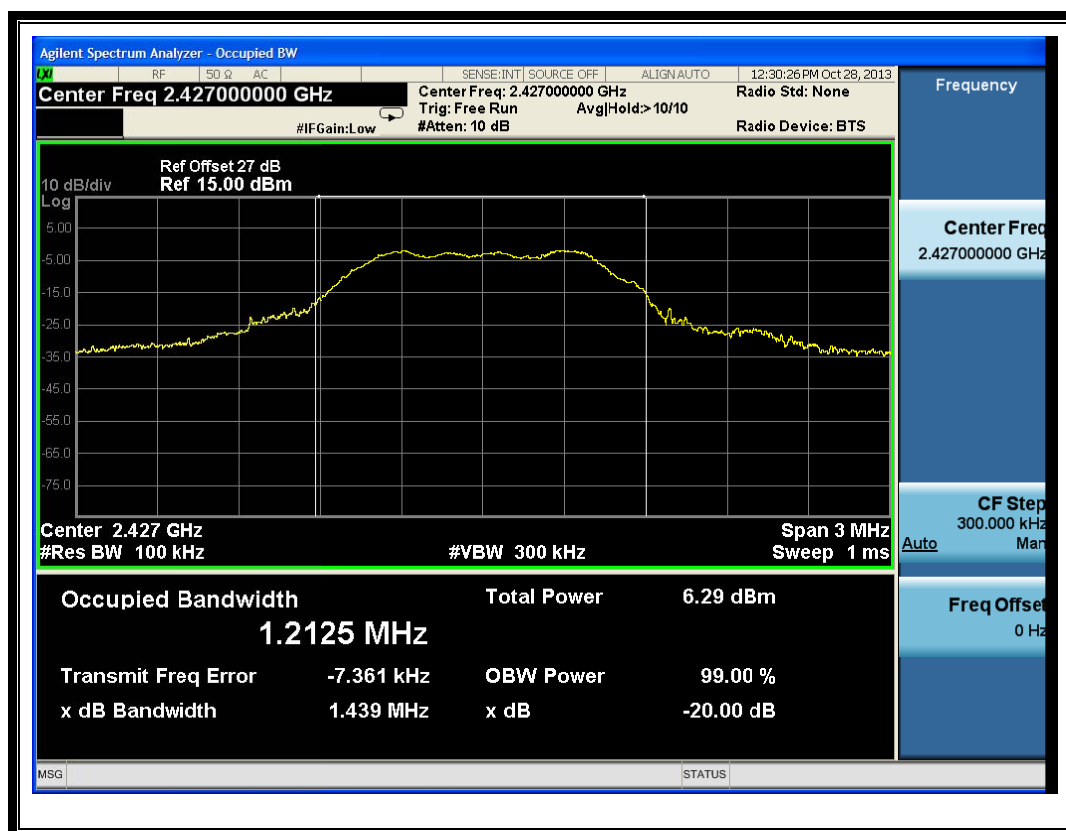

(Plot A: Channel = 2427 @ GFSK)

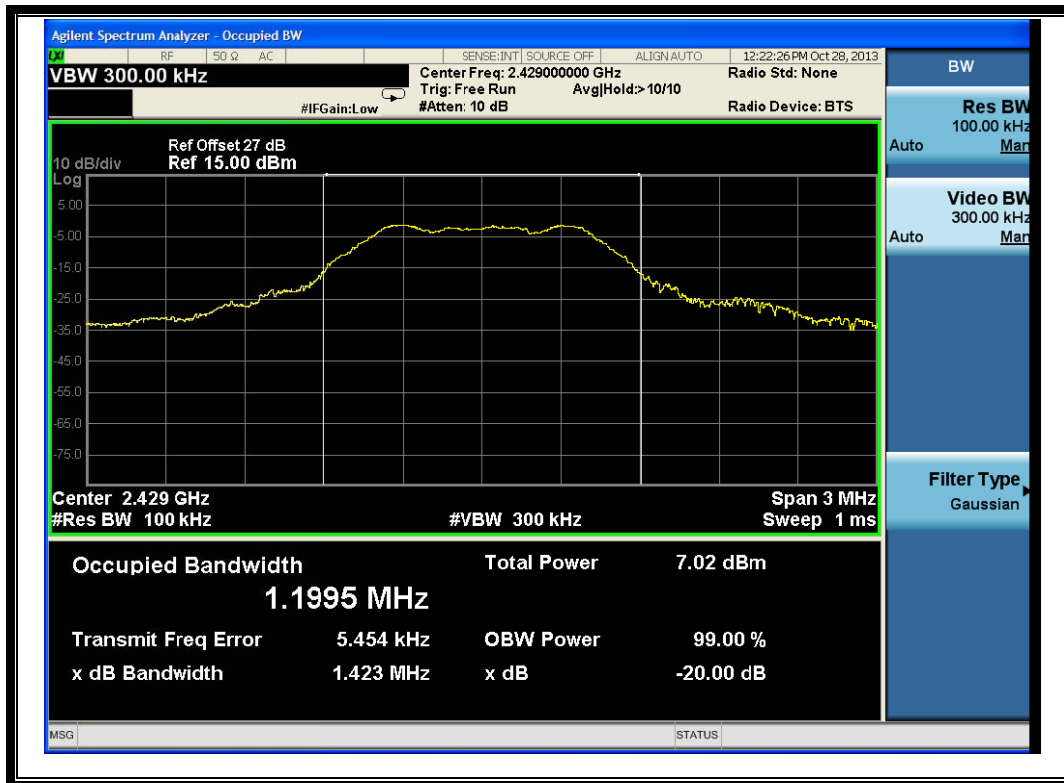

(Plot B: Channel = 2429 @ GFSK)



(Plot C: Channel = 2431 @ GFSK)


2.3. Band Edge

2.3.1. Requirement

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

2.3.2. Test Description

A. Test Setup:

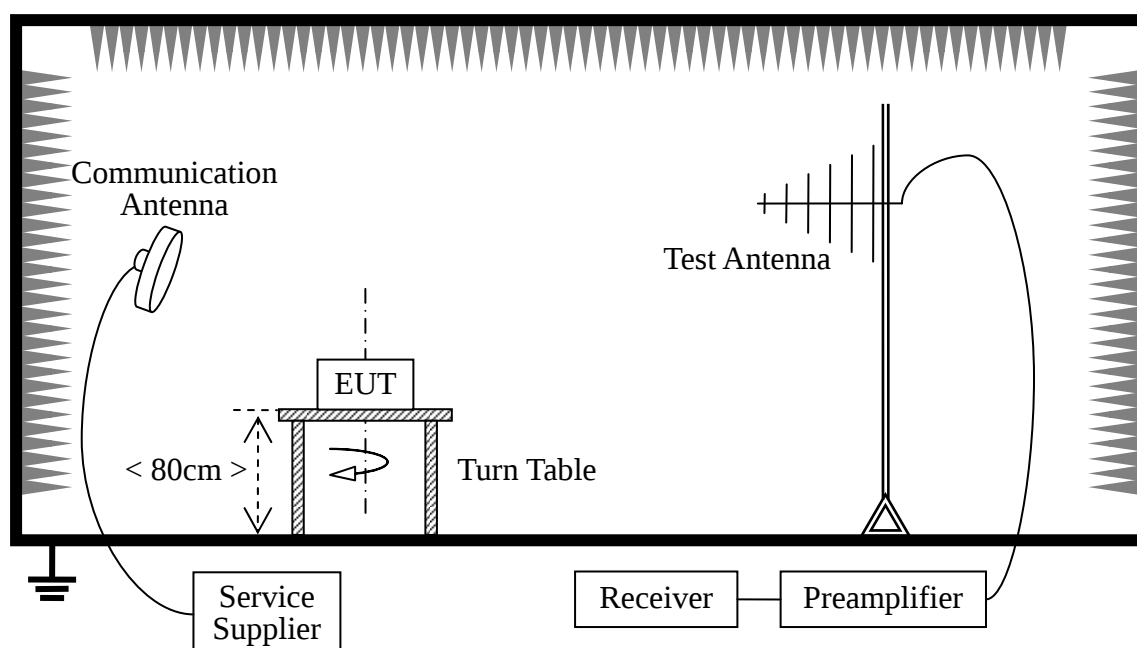

The RF Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the RF Module is activated and controlled by the software.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05.12	2014.05.11
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2013.05.12	2014.05.11

2.3.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.3.4. Test Result

The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

Note: Test were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
L	2387.40	PK	51.52	-30.93	32.56	53.15	74	Pass
L	2389.60	AV	39.96	-30.93	32.56	41.59	54	Pass
H	2484.60	PK	54.52	-29.05	32.50	57.97	74	Pass
H	2491.25	AV	42.41	-29.05	32.50	45.86	54	Pass


B. Test Plots:

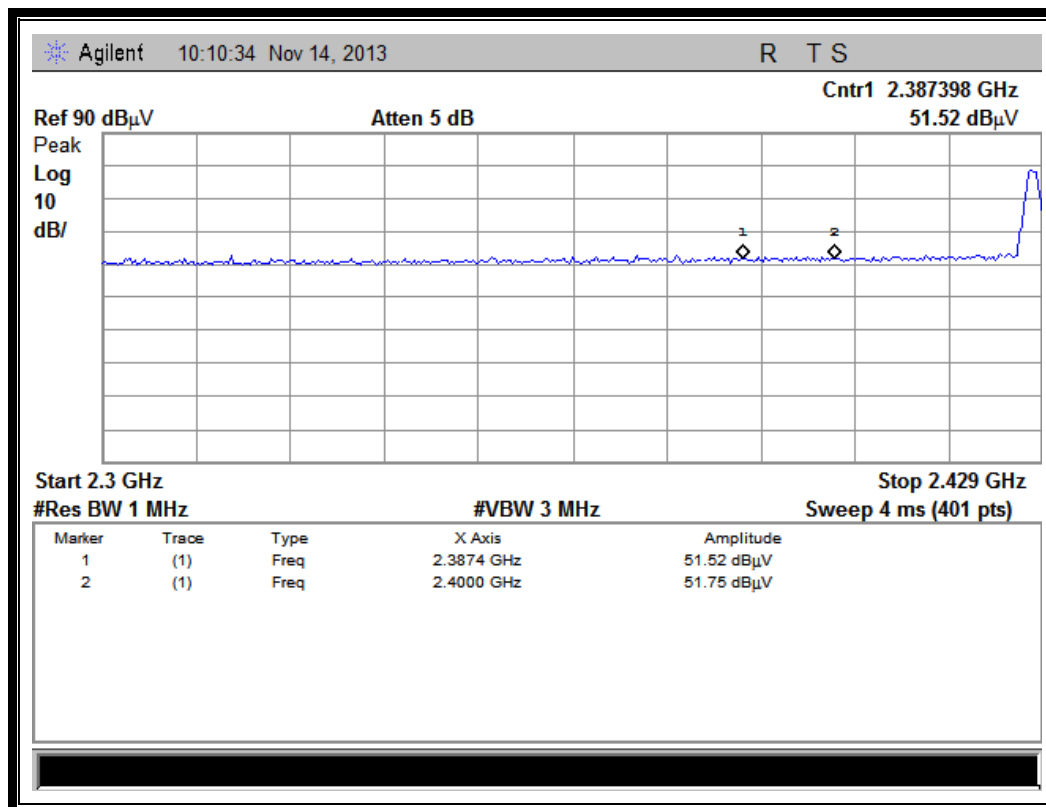


(Plot A1:Channel L PEAK @ GFSK)

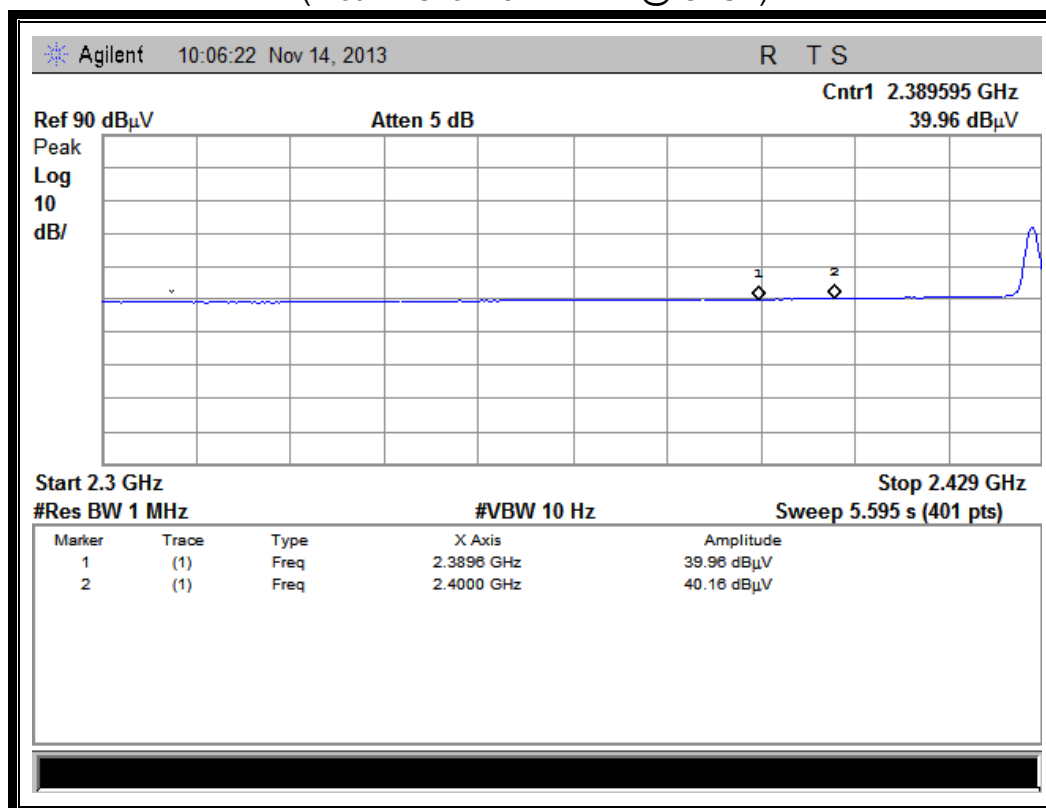

(Plot A2:Channel = L AVERAGE @ GFSK)

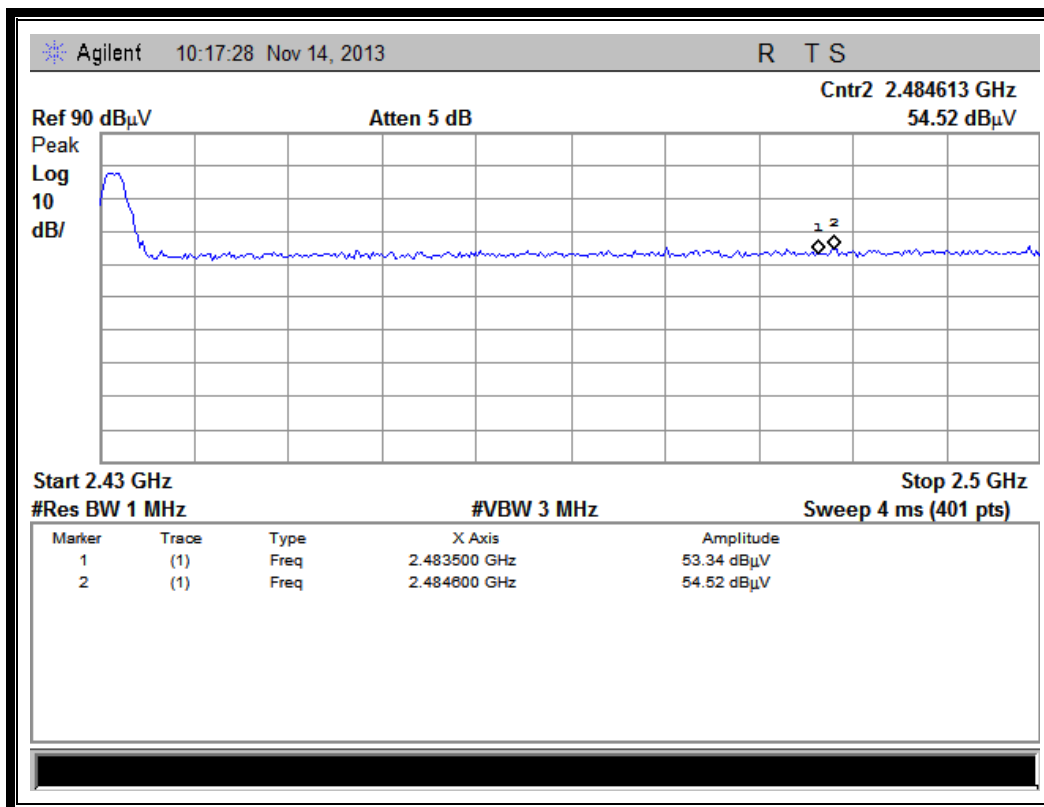

(Plot B1: Channel H PEAK @ GFSK)

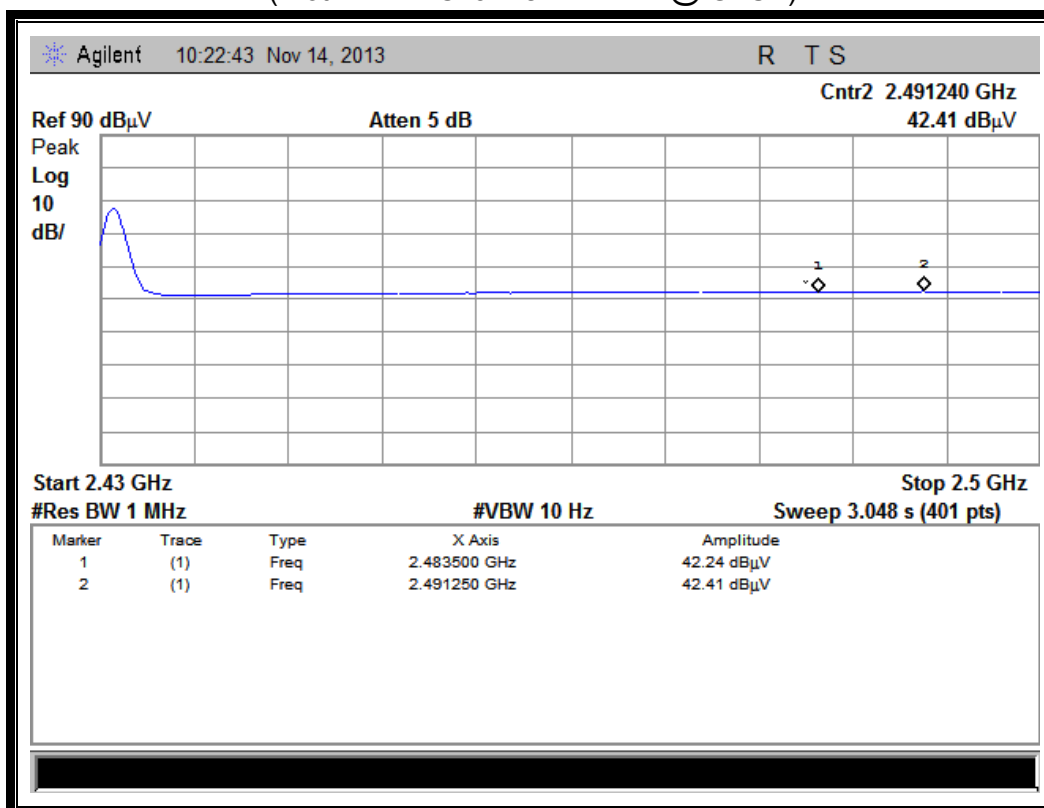

(Plot B2: Channel = H AVERAGE @ GFSK)

2.4. Conducted Emission

2.4.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.4.2. Test Description

A. Test Setup:

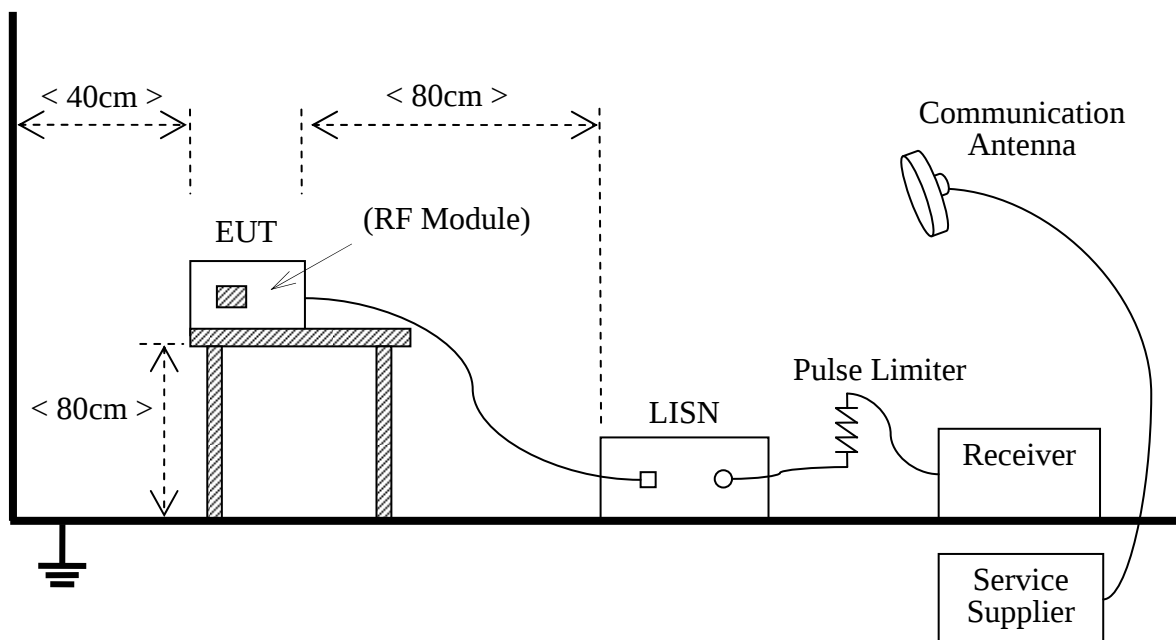

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
LISN	Schwarzbeck	NSLK 8127	812744	2013.05.12	2014.05.11
Service Supplier	R&S	CMU200	100448	2013.05.12	2014.05.11
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	2013.05.12	2014.05.11


2.4.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:


The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

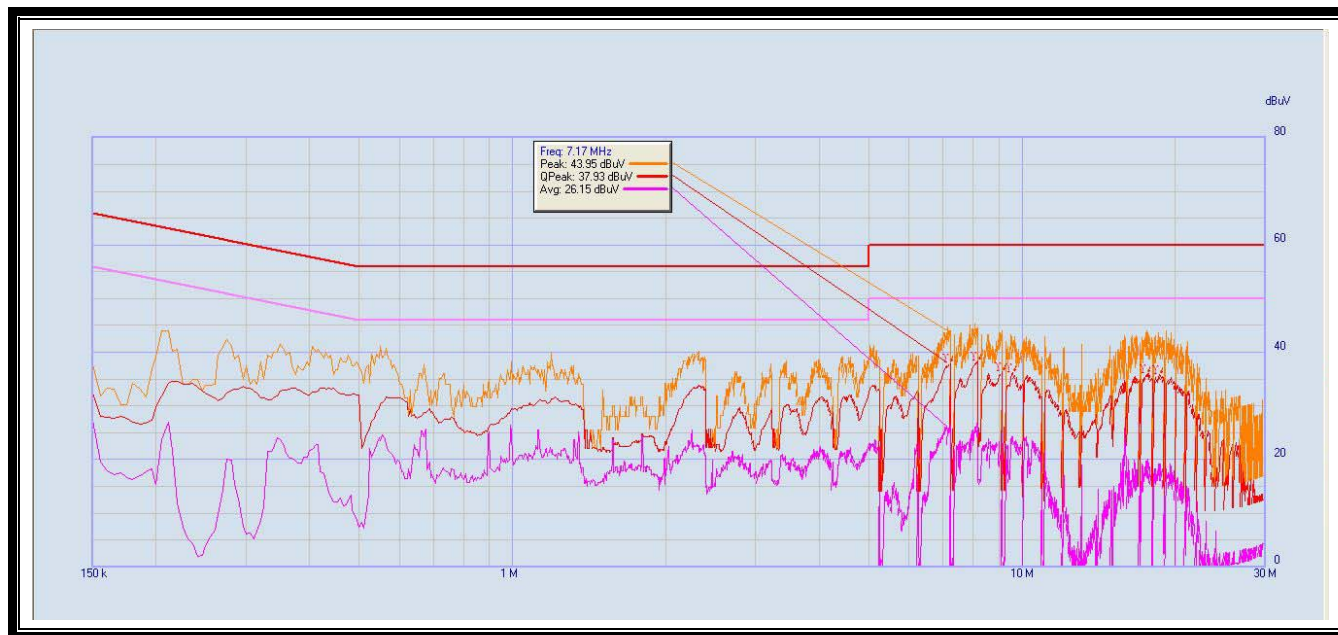

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	7.17	37.54	25.52	60	50	Line	PASS
2	8.145	38.03	25.91	60	50		PASS
3	9.105	36.35	21.10	60	50		PASS
4	9.530	35.83	24.32	60	50		PASS
5	17.445	35.79	18.99	60	50		PASS
6	18.535	35.34	17.6	60	50		PASS

(Plot A: L Phase)

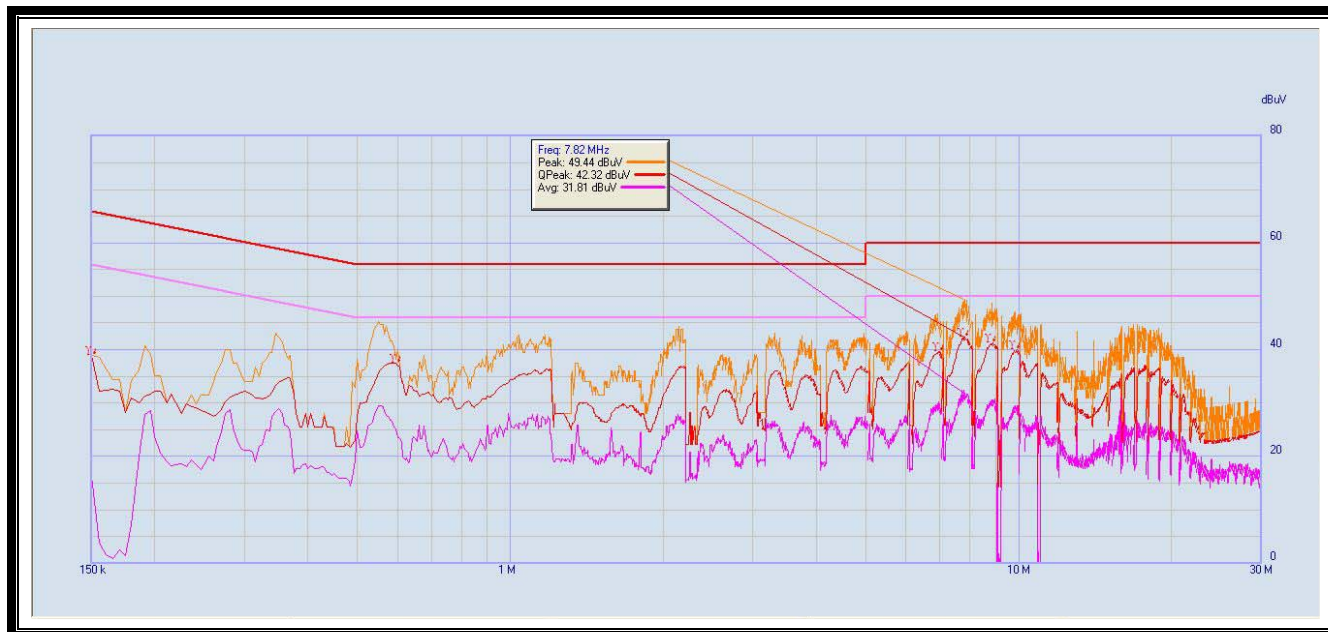

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	38.89	16.25	66	56	Neutral	PASS
2	0.595	37.56	25.12	56	46		PASS
3	6.94	39.48	29.18	60	50		PASS
4	7.82	42.14	30.88	60	50		PASS
5	8.815	41.20	30.04	60	50		PASS
6	9.865	39.52	28.72	60	50		PASS

(Plot B: N Phase)

2.5. Field strength

2.5.1. Requirement

According to section 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902~928	50mV/m (94dB μ V/m)	500 μ V/m (54dB μ V/m)	3
2400~2483.5	50mV/m (94dB μ V/m)	500 μ V/m (54dB μ V/m)	3
5725~5875	50mV/m (94dB μ V/m)	500 μ V/m (54dB μ V/m)	3

According to section 15.249(d), Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	μ V/m	Dist	(μ V/m)	(dB μ V/m)
0.009 - 0.490	2400/F(KHz)	300m	10000* 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 - 1.705	2400/F(KHz)	30m	100* 2400/F(KHz)	20log 2400/F(KHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

According to section 15.249(e), for frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB μ V/m is calculated by 20log Emission Level(μ V/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.


Example: F.S Limit at 30m distance is 30 μ V/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}$$


2.5.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

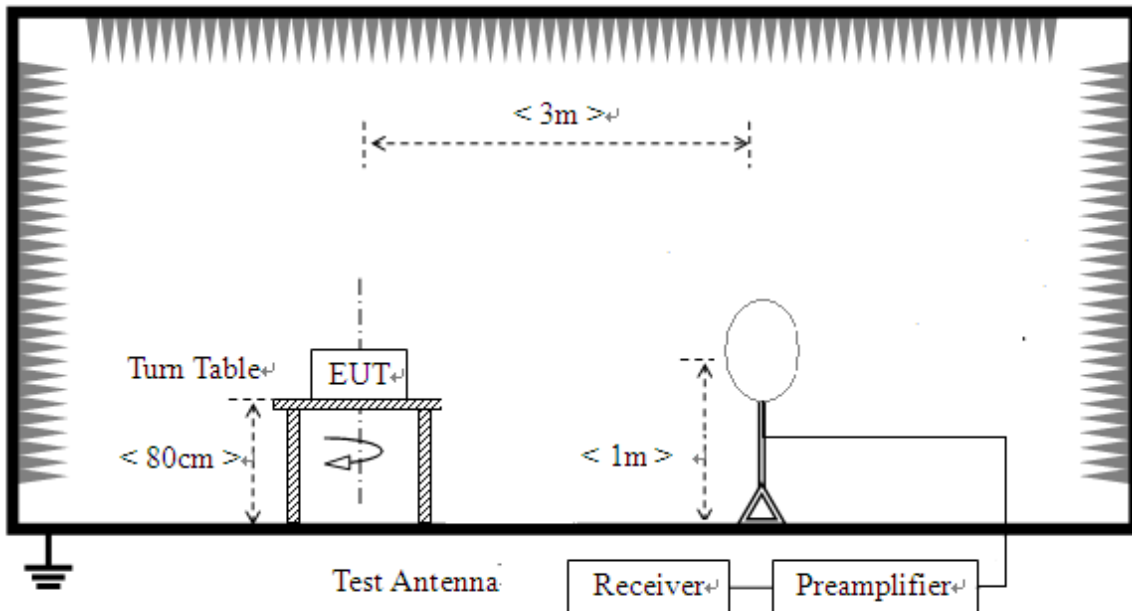

- 2) For radiated emissions from 30MHz to 1GHz

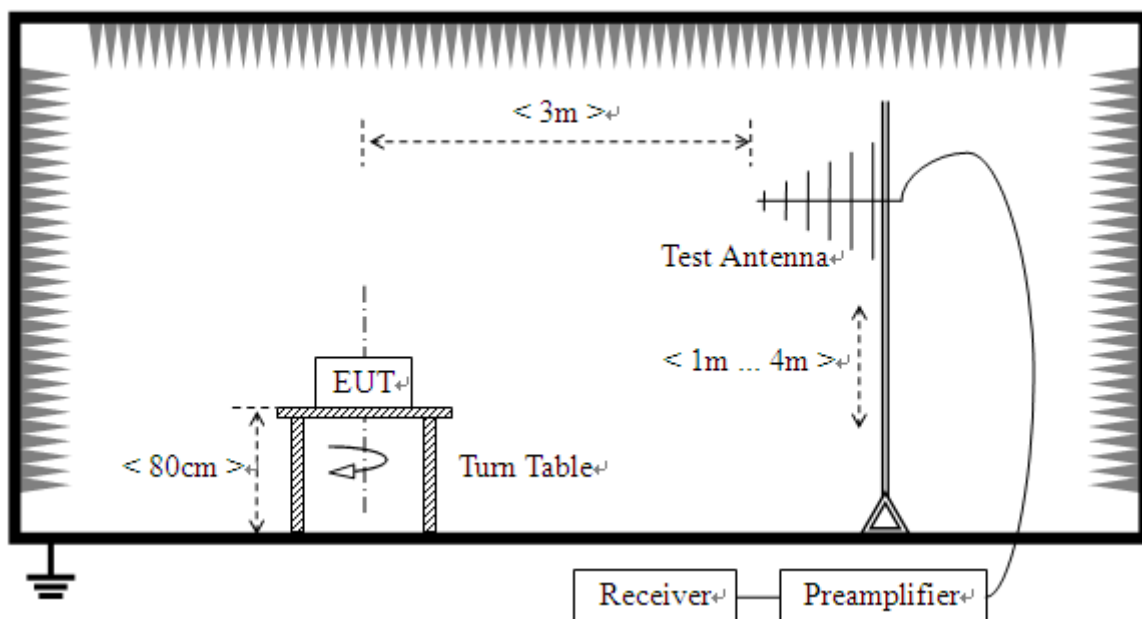

3) For radiated emissions above 1GHz

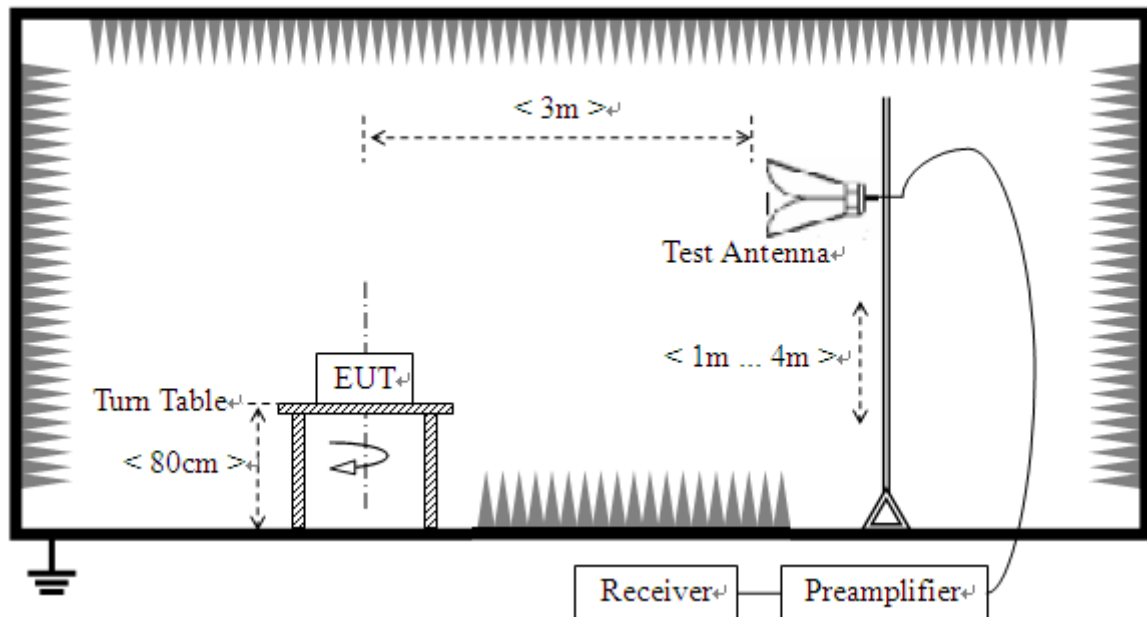

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2013.05.12	2014.05.11
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05.12	2014.05.11
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2013.05.12	2014.05.11
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2013.05.12	2014.05.11
Test Antenna - Horn	R&S	HL050S7	71688	2013.05.12	2014.05.11
Test Antenna - Loop	Schwarzbeck	FMZB 1519	1519-022	2013.05.12	2014.05.11

2.5.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.5.4. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

A. Test Plots for Field strength of Fundamental:


Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	Antenna polarization	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
	PK/ AV							
2427	PK	78.35	H	-30.93	32.56	79.98	114	Pass
		78.55	V	-30.93	32.56	80.18		Pass
	AV	65.63	H	-30.93	32.56	67.26	94	Pass
		65.56	V	-30.93	32.56	67.19		Pass

Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	Antenna polarization	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
	PK/ AV							
2429	PK	80.51	H	-30.93	32.56	82.14	114	Pass
		80.41	V	-30.93	32.56	82.04		Pass
	AV	66.71	H	-30.93	32.56	68.34	94	Pass
		66.62	V	-30.93	32.56	68.25		Pass


Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	Antenna polarization	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
	PK/ AV							
2431	PK	75.00	H	-30.93	32.56	76.63	114	Pass
		75.36	V	-30.93	32.56	76.99		Pass
	AV	65.23	H	-30.93	32.56	66.86	94	Pass
		65.29	V	-30.93	32.56	66.92		Pass

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel L

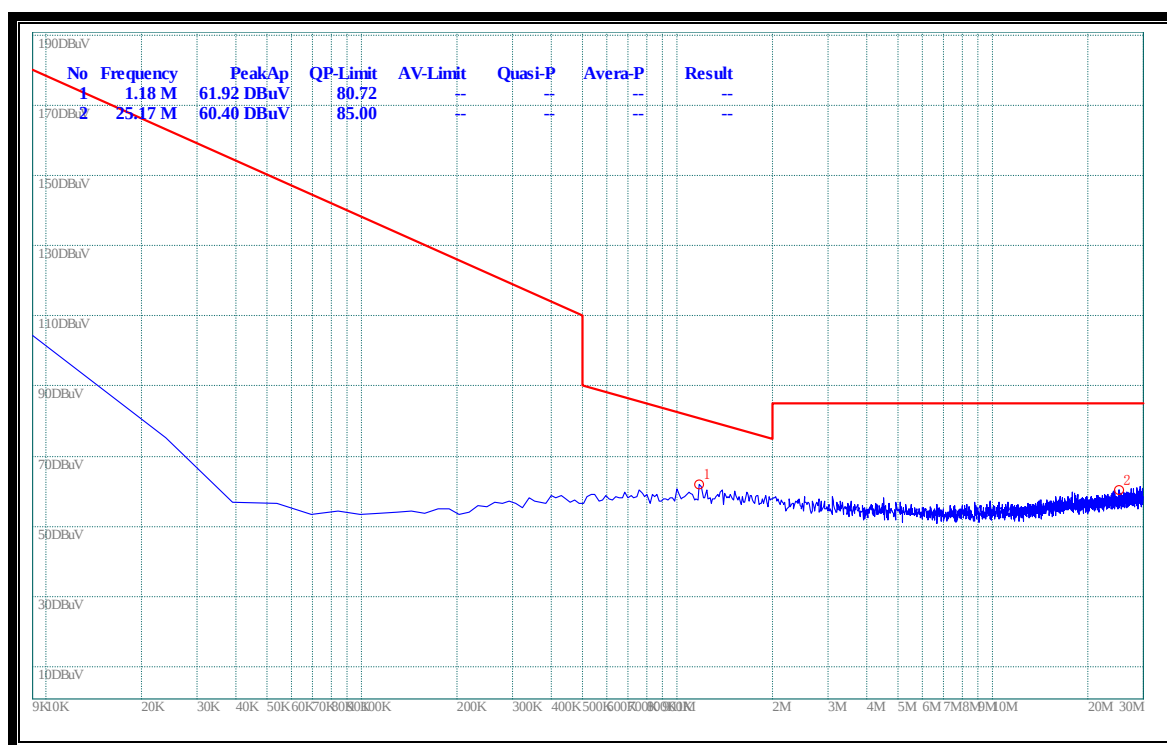

(Plot A.0: 9kHz to 30MHz)

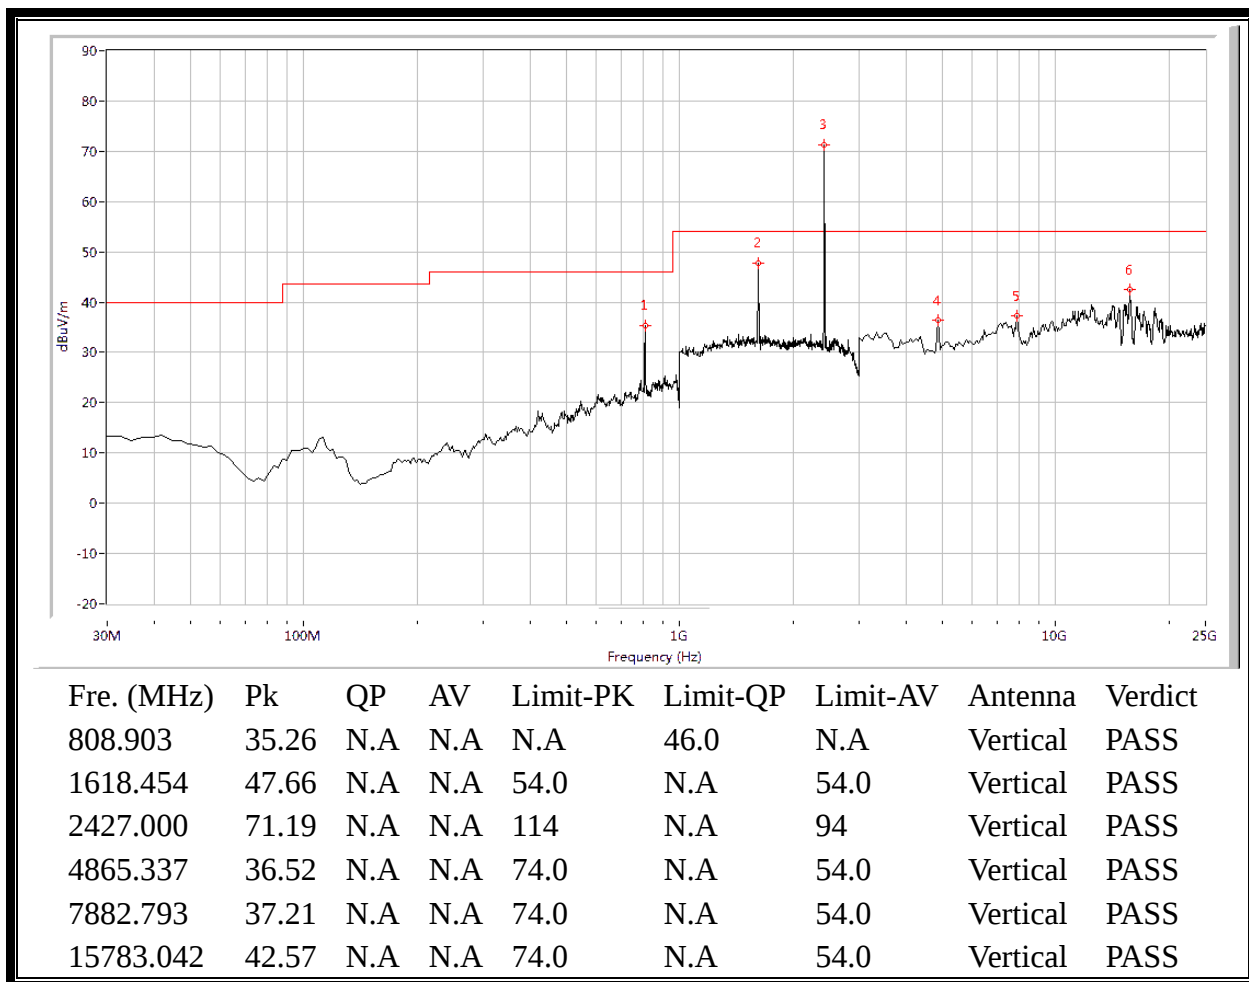


(Plot A.1: 30MHz to 25GHz, Antenna Horizontal)

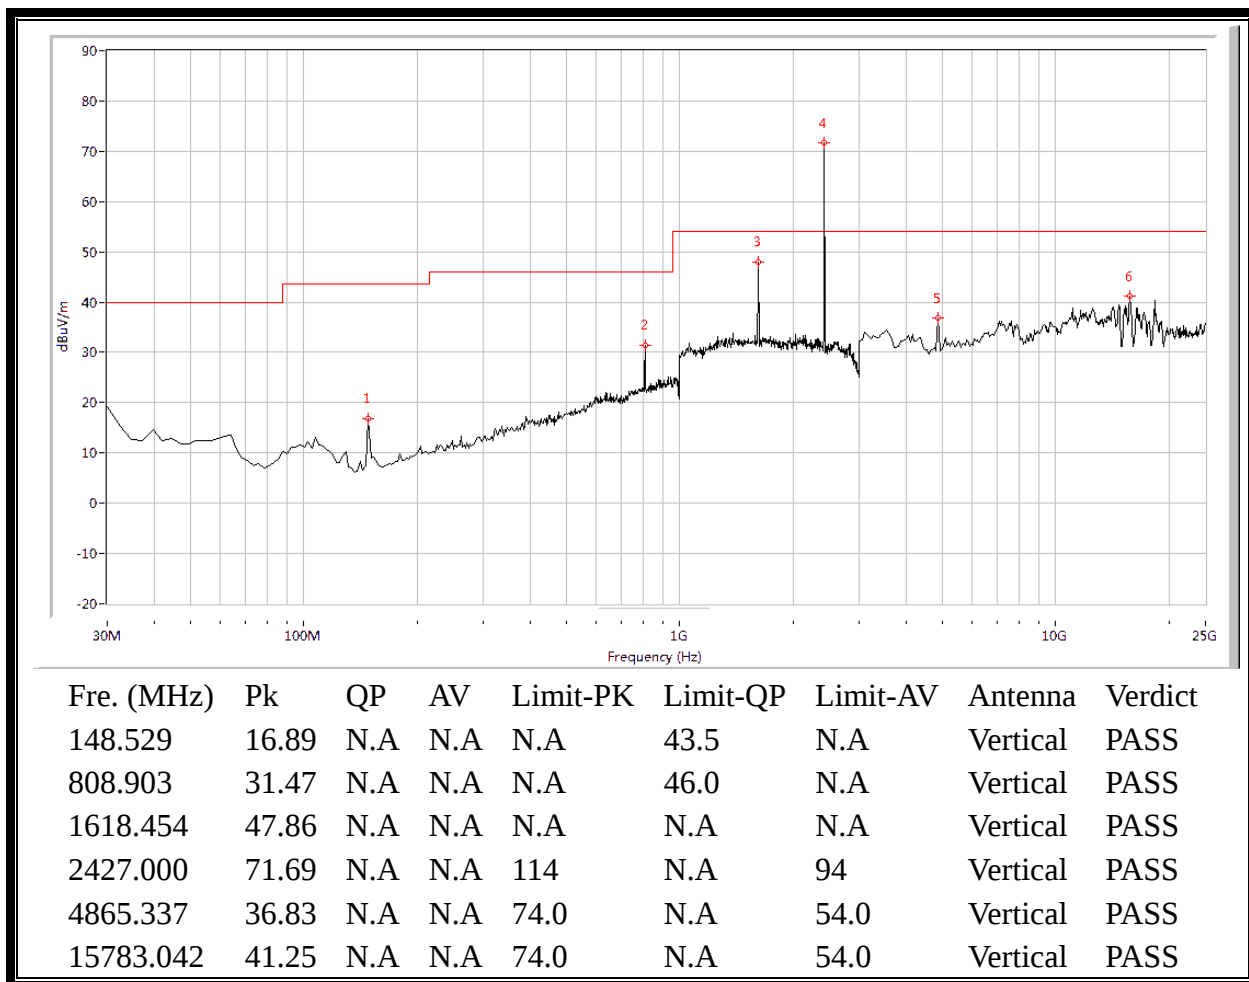


(Plot A.2: 30MHz to 25GHz, Antenna Vertical)


Plots for Channel M

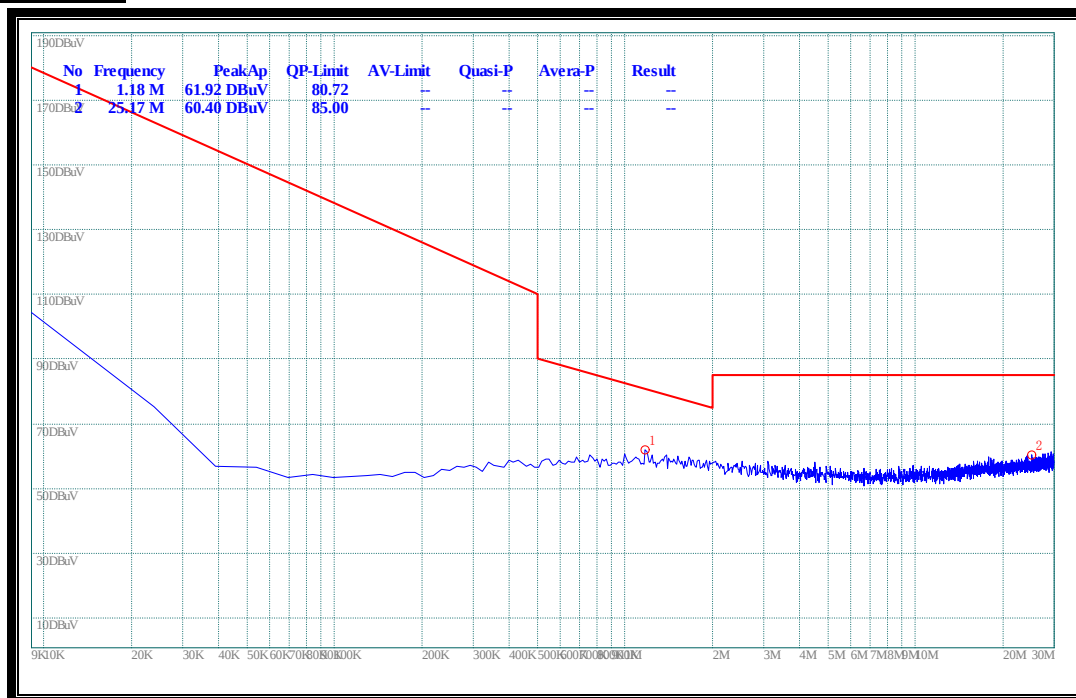

(Plot A.0: 9kHz to 30MHz)

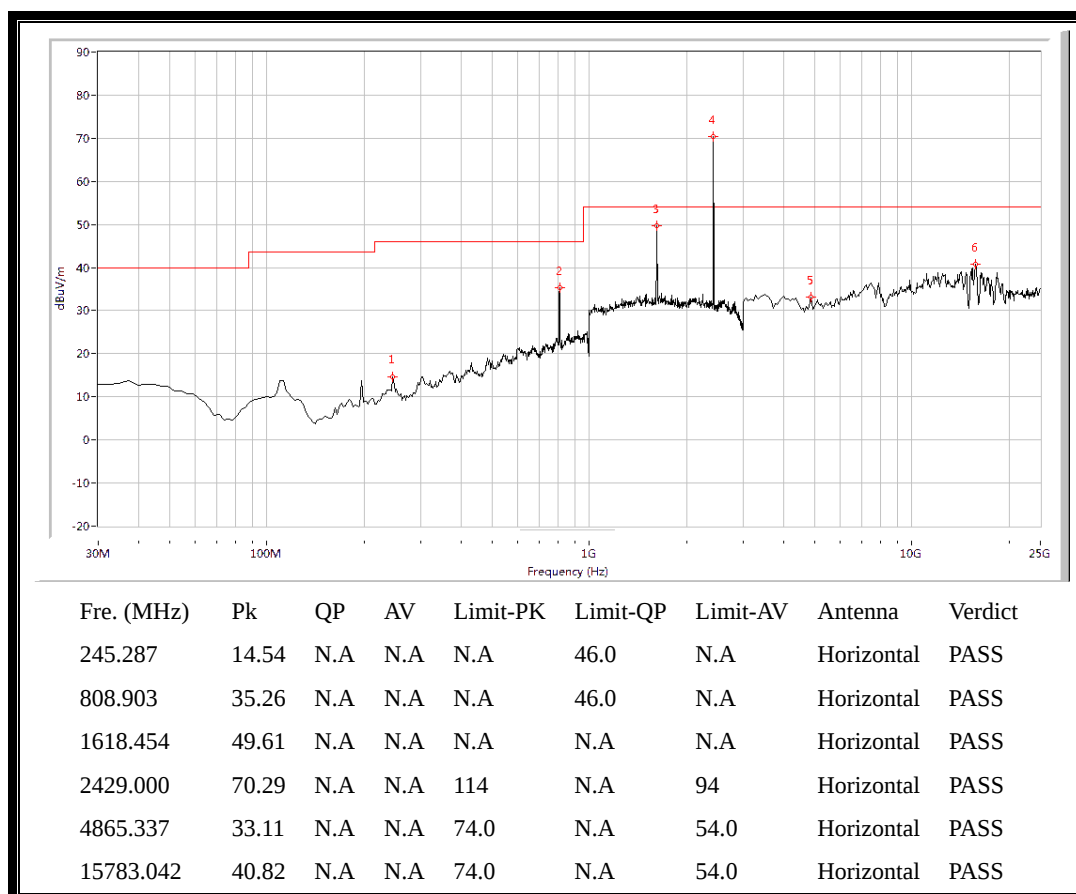


(Plot A.1: 30MHz to 25GHz, Antenna Horizontal)

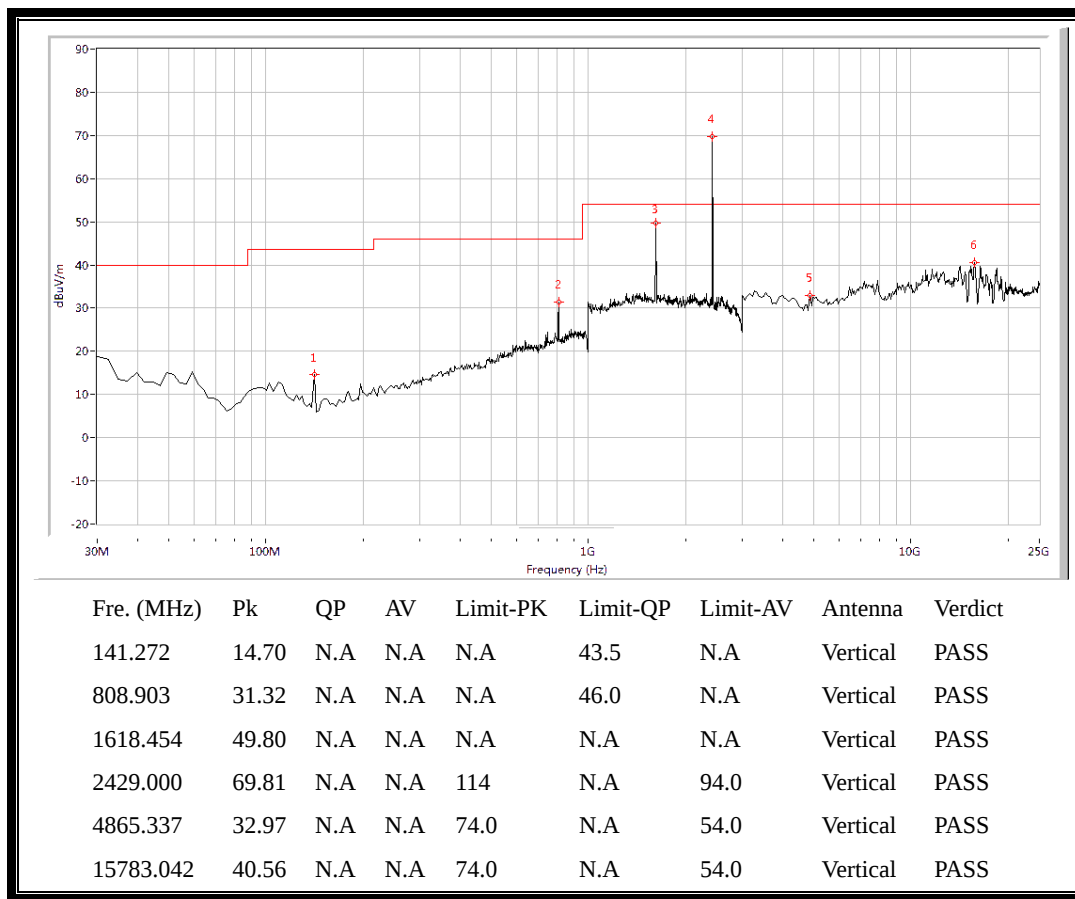


(Plot A.2: 30MHz to 25GHz, Antenna Vertical)


Plots for Channel H

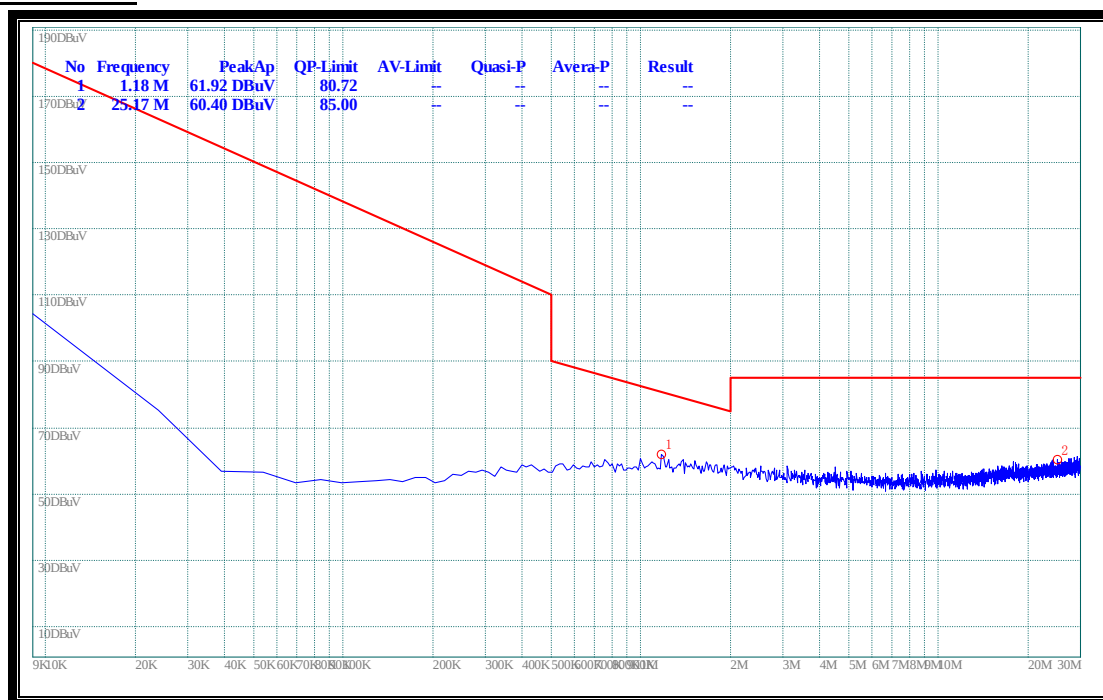

(Plot A.0: 9kHz to 30MHz)

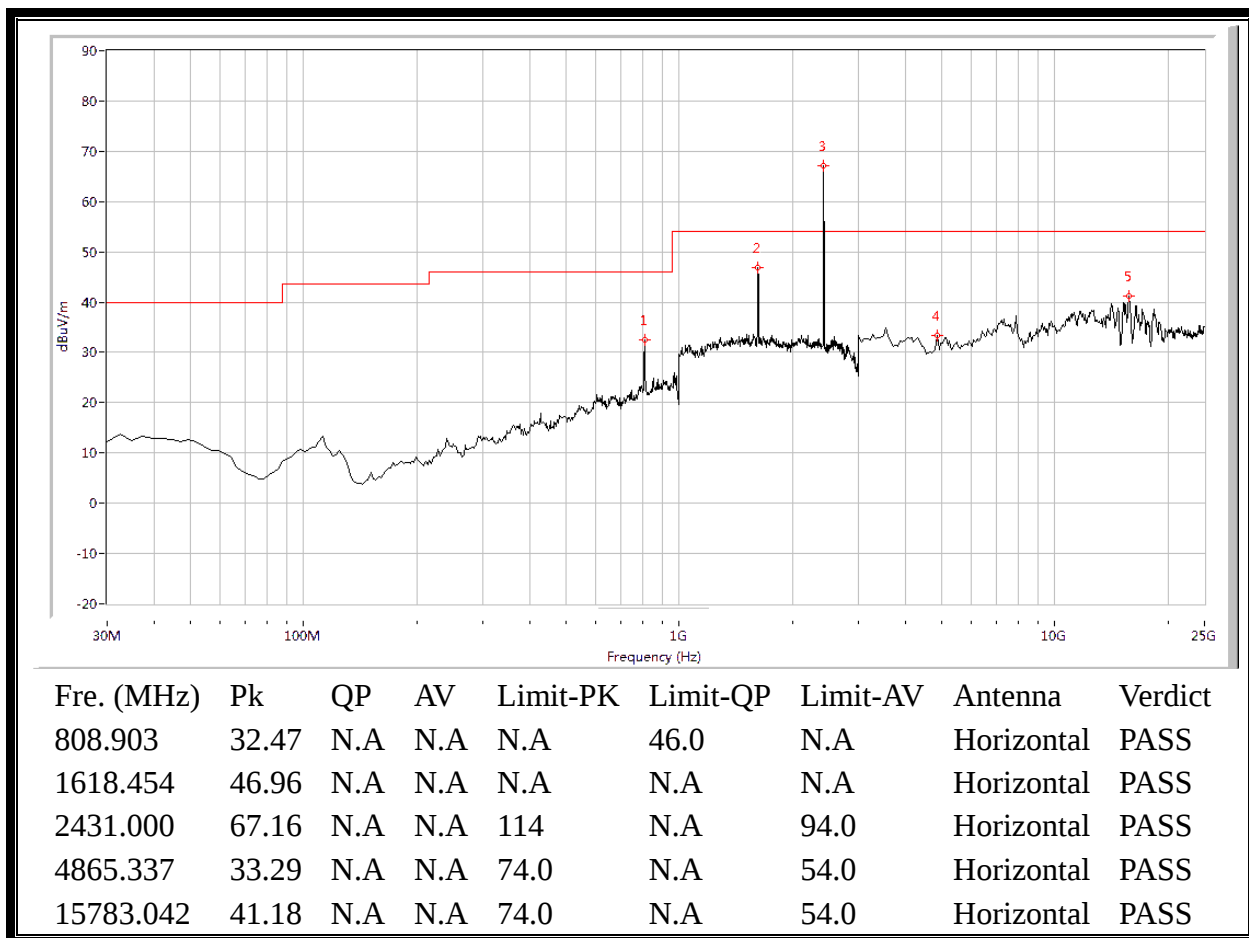

(Plot A.1: 30MHz to 25GHz, Antenna Horizontal)

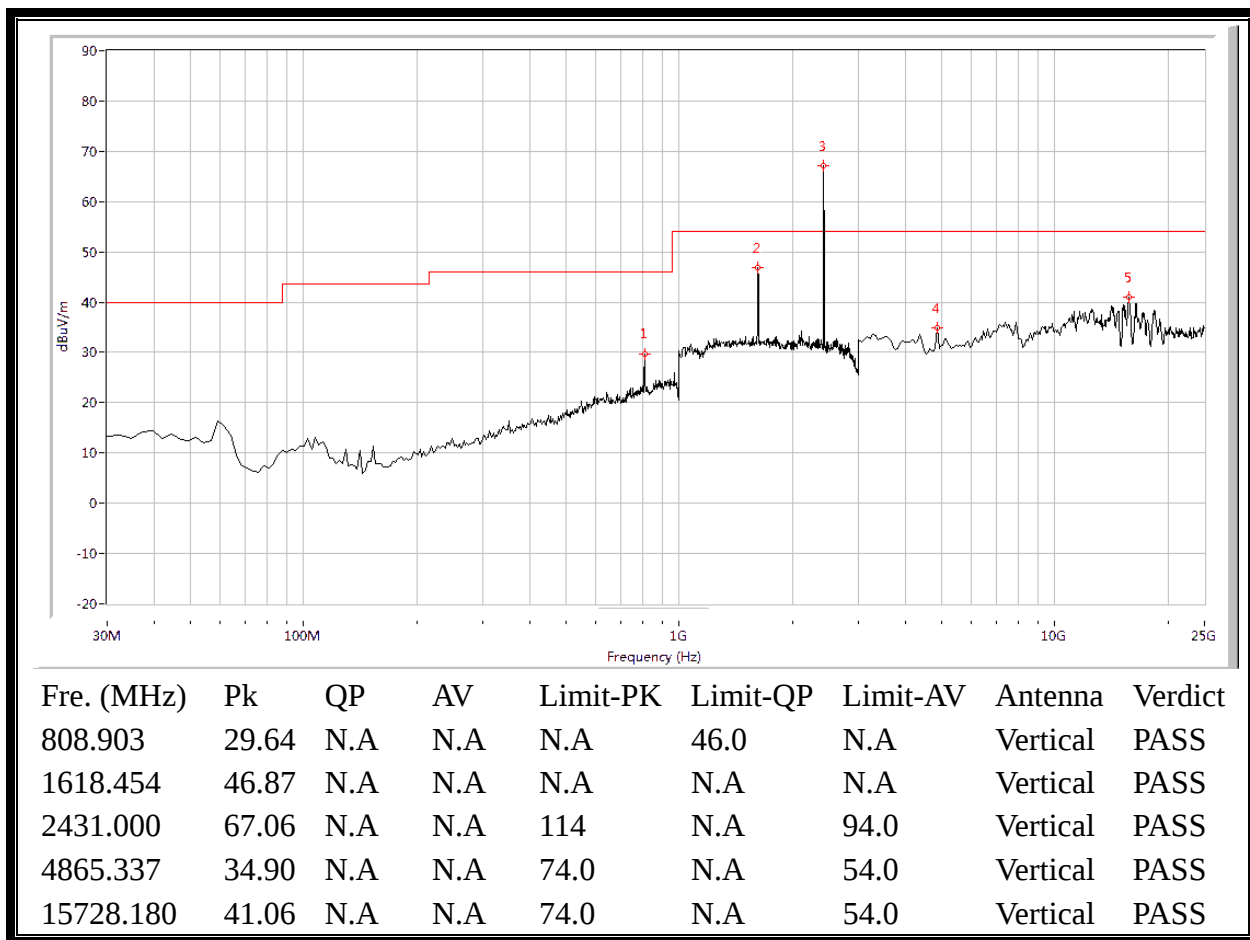

(Plot A.2: 30MHz to 25GHz, Antenna Vertical)

**** END OF REPORT ****