



EMISSIONS TEST REPORT

Report Number: 102172761BOX-001b

Project Number: G102172761

Report Issue Date: 09/04/2015

Product Designation: NC-210

Standards: CFR47 FCC Part 15 Subpart C 15.247:2015
CFR47 FCC Part 15 Subpart B:2015
IC RSS-247 Issue 1 May 2015
IC RSS-Gen Issue 4 November 2014
IC ICES-003 Issue 5 August 2012
IC RSS-102 Issue 5 March 2015 updated December 2010

Tested by:
Intertek Testing Services NA, Inc.
70 Codman Hill Road
Boxborough, MA 01719

Client:
Mircom Technologies Ltd.
25 Interchange Way
Vaughan ON L4K 5W3
Canada

Report prepared by Reviewer

A handwritten signature in black ink, appearing to read "Vathana F. Ven".

Vathana F. Ven/Seni Engineer, EMC

Report reviewed by

A handwritten signature in black ink, appearing to read "Kouma Sinn".

Kouma Sinn / Staff Engineer, EMC

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	
4	Description of Equipment Under Test	
5	System Setup and Method	
6	RF Output Power, Duty Cycle, and Human RF Exposure (CFR47 FCC Part 15 Subpart C 15.247(b)(3), KDB 558074, IC RSS-247 Issue 1 May 2015 5.4(4), IC RSS-102 Issue 5 March 2015)	Pass
7	6 dB Bandwidth (CFR47 FCC Part 15 Subpart C 15.247(a)(2), IC RSS-247 Issue 1 May 2015 5.2, IC RSS-Gen Section 6.6, KDB 558074)	Pass
8	Peak Power Spectral Density (FCC 15:2015 Subpart C Section 15.247 (e), RSS-247 Issue 1 May 2015 5.2(2), KDB 558074)	Pass
9	Band Edge Compliance (FCC 15:2015 Subpart C Section 15.247 (d), RSS-247 Issue 1 May 2015 5.2(2), KDB 558074)	Pass
10	Transmitter Radiated Spurious Emissions (CFR47 FCC Part 15:2015 Subpart C 15.247(d), IC RSS-247 Issue 1 May 2015 5.5, KDB 558074)	Pass
11	Digital Devices and Receiver Radiated Spurious Emissions (CFR47 FCC Part 15 Subpart B 15.109, IC RSS-Gen Sections 7.1 & IC ICES-003 Issue 5 August 2012)	Pass
12	AC Mains Conducted Emissions CFR47 FCC Part 15:2015 Subpart B Section 15.207 IC RSS-Gen Issue 4 November 2014, 7.2.2 (Table 2)	Pass
13	Revision History	

3 Client Information

This EUT was tested at the request of:

Company: Mircom Technologies Ltd.
25 Interchange Way
Vaughan ON L4K 5W3
Canada

Contact: Mr. Mike Mahoney
Telephone: (905) 660-4655
Fax: (905) 695-3538
Email: mmahoney@mircomgroup.com

4 Description of Equipment Under Test

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Zigbee Wireless Beacon-Router	Mircom Technologies Ltd.	NC-210	0006 Transmit mode
Zigbee Wireless Beacon-Router	Mircom Technologies Ltd.	NC-210	0009 Normal mode
Zigbee Wireless Beacon-Router	Mircom Technologies Ltd.	NC-210	00309 Transmit mode

Receive Date:	06/04/2012, 07/30/2015	Start Date:	09/18/2012
Received Condition:	Good	Complete date:	08/27/2015
Type:	Prototype		

Description of Equipment Under Test (provided by client)

The EUT is a Beacon-Router with Zigbee wireless application. The Zigbee transceiver operates in the 2400-2483.5 MHz band from 2405-2480MHz using an integral antenna.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
120VAC	N/A	50/60	1

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	The device was in transmit mode, channels 11 (2405 MHz), 18 (2440 MHz), 26 (2480 MHz)
2	The device was also tested in receive mode


5 System Setup and Method

Cables					
ID	Description	Length (m)	Shielding	Ferrites	Termination
	None				

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Laptop	HP	350	N/A
AC adapter	Direct Plug-in	35-D12-200	N/A

5.1 Method:

Configuration as required by ANSI C63.10:2013, ANSI C63.4:2014, and KDB 558074.

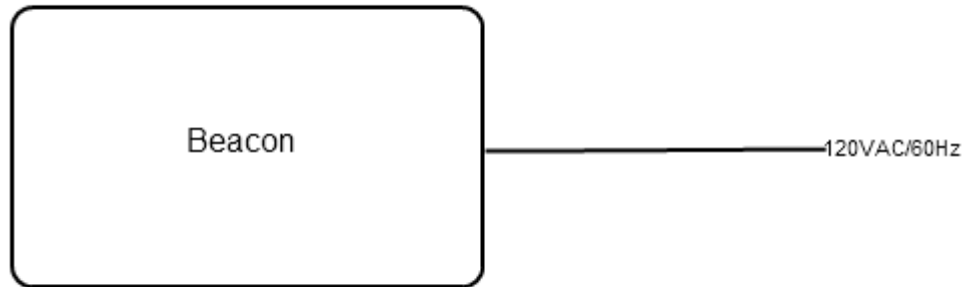5.2 EUT Block Diagram:

6 RF Output Power, Duty Cycle, and Human RF Exposure

6.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, RSS-102, FCC Part 2 and KDB 447498, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) $< U_{CISPR}$ (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61 A	10/06/2014	10/06/2015
145128'	EMI Receiver (20 Hz - 40 Ghz)	Rohde & Schwarz	ESIB 40	839283/001	03/14/2015	03/14/2016
ETS001'	1-18GHz DRG Horn Antenna	ETS-Lindgren	3117	00143259	01/14/2015	01/14/2016
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	10/04/2014	10/04/2015



Software Utilized:

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

6.3 Results:

The sample tested was found to Comply. The EIRP must not exceed 30 dBm. The RSS-102 Issue 5 Human Exposure Limit at 2.48 GHz = 5.47 W/m².

6.4 Setup Photographs:

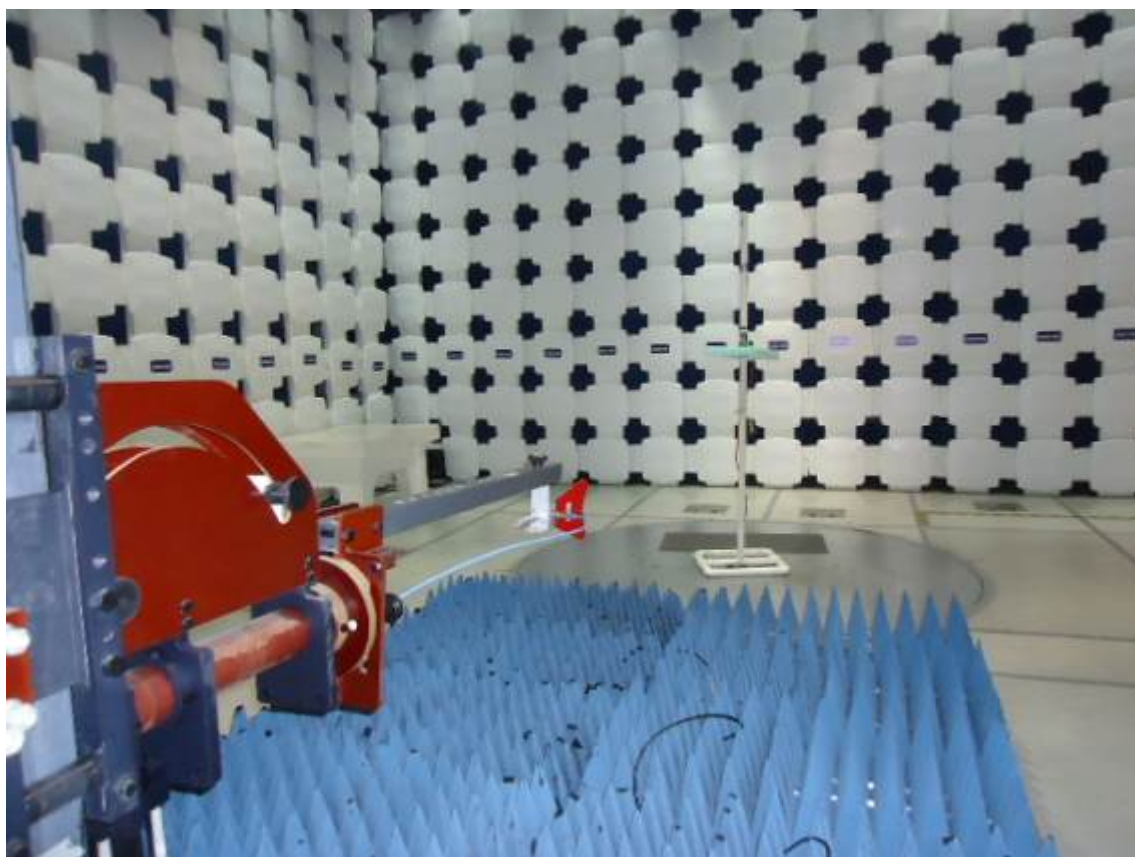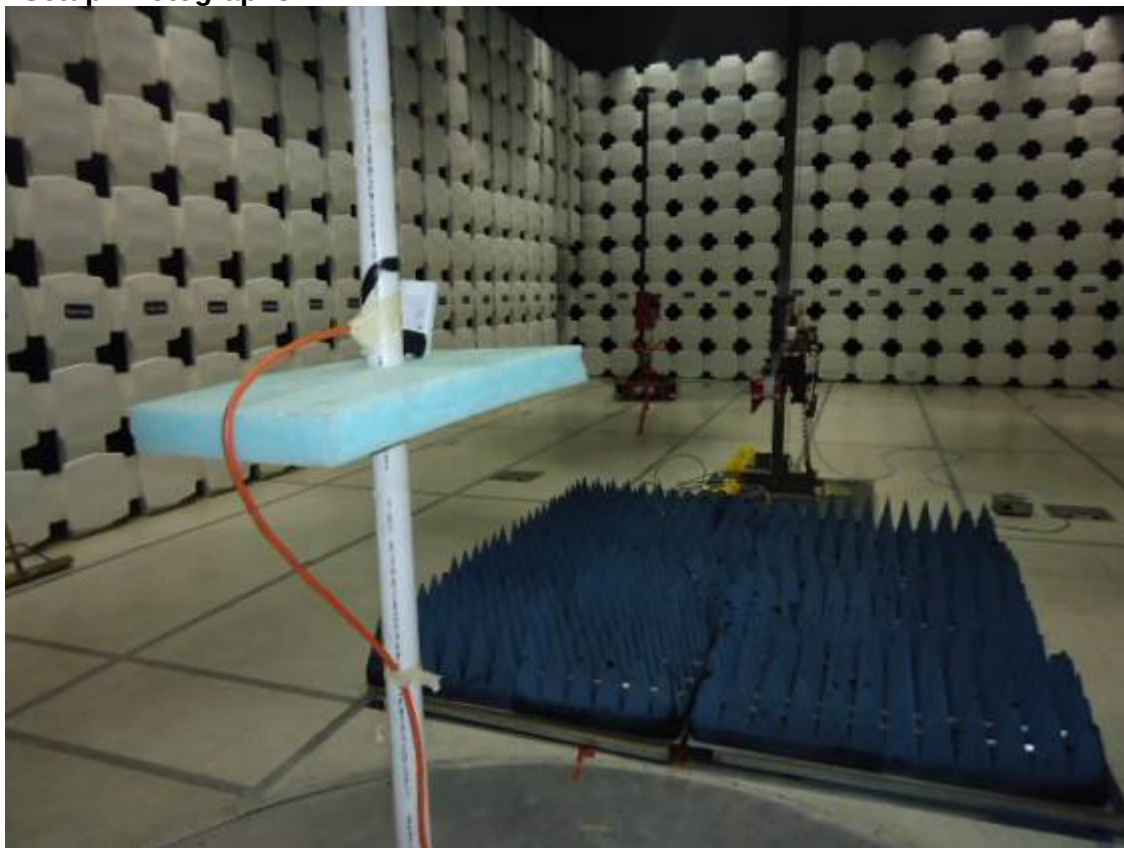

6.5 Plots/Data:

RF Output Power

Radiated Emissions

Company: Mircom Technologies Ltd.

Model #: NC-210

Serial #: 00309

Engineers: Vathana Ven

Project #: G102179505

Standard: FCC Part 15C, 15.247

Receiver: R&S ESI (145-128) 10-01-2014

PreAmp: 145014 05-13-16.txt

PreAmp Used? (Y or N): N

Date(s): 08/27/15

Location: 10M

Limit Distance (m): 3

Test Distance (m): 3

Voltage/Frequency: Battery powered

Frequency Range: Fundamental

Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)


Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Bandwidth
Note: RF Output Power											
Note: EIRP Obtained by applying the path loss correction for a 3m test distance, E(dBuV/m)@3m - 95.22 = dBm EIRP											
CH11 - 2405MHz, No pre-amp, Typical Orientation											
PK	H	2405.000	46.70	31.97	5.92	0.00	0.00	-10.63	30.00	-40.63	5/10MHz
PK	V	2405.000	43.68	31.97	5.92	0.00	0.00	-13.65	30.00	-43.65	5/10MHz
CH18 - 2440MHz, No pre-amp, Typical Orientation											
PK	H	2440.000	47.46	32.11	5.98	0.00	0.00	-9.67	30.00	-39.67	5/10MHz
PK	V	2440.000	47.85	32.11	5.98	0.00	0.00	-9.28	30.00	-39.28	5/10MHz
CH26 - 2480MHz, No pre-amp, Typical Orientation											
PK	H	2480.000	48.24	32.26	6.06	0.00	0.00	-8.66	30.00	-38.66	5/10MHz
PK	V	2480.000	47.98	32.26	6.06	0.00	0.00	-8.92	30.00	-38.92	5/10MHz

FCC

Duty Cycle


The worst-case duty cycle for typical EUT operation is shown below. The pulse train of the EUT extends beyond 100 ms as shown in the following plot.

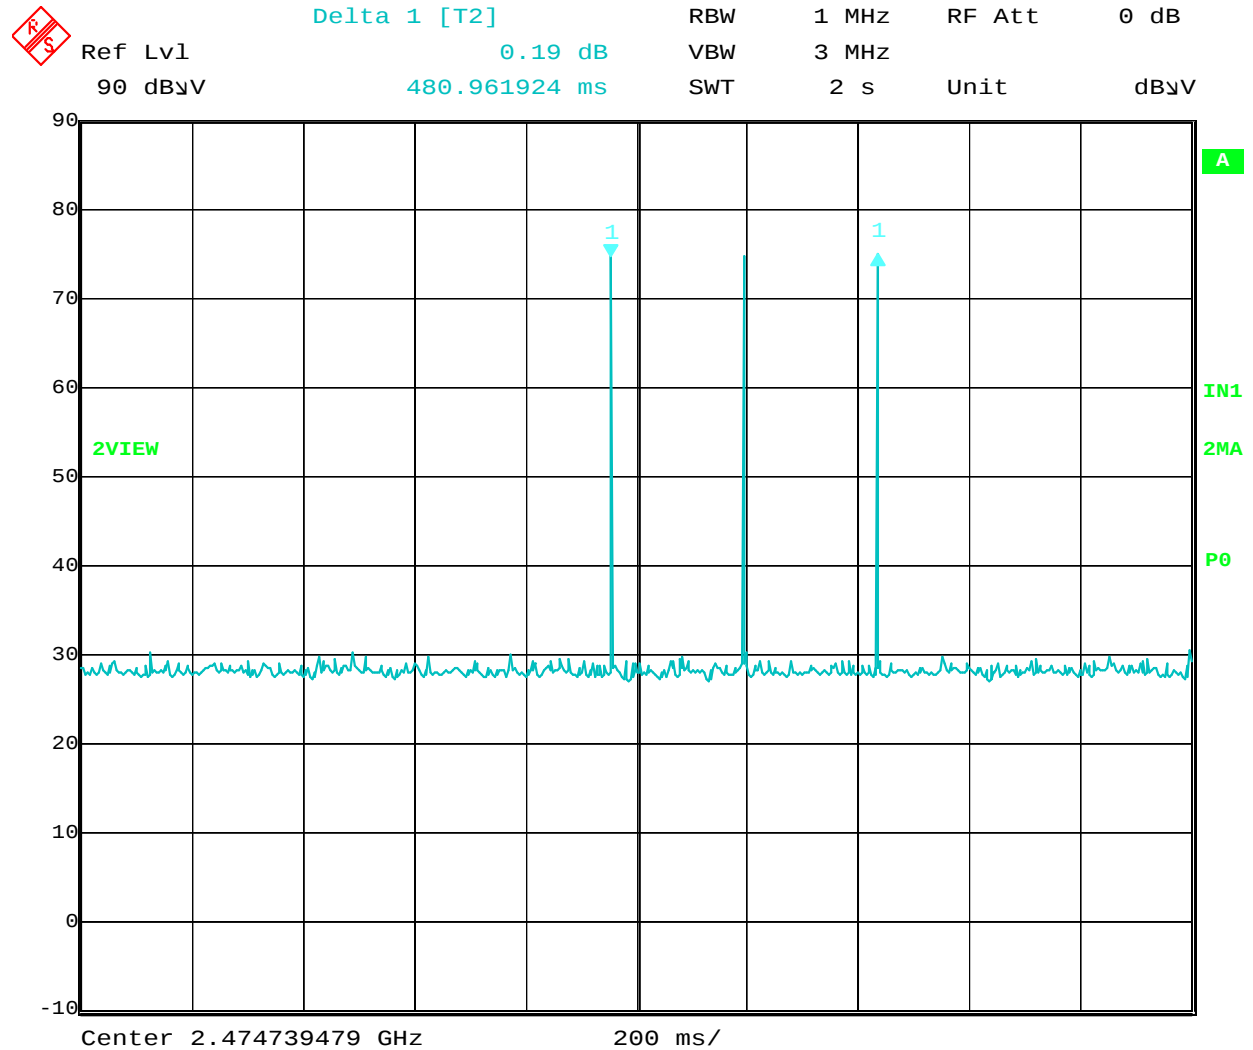

Date: 22.SEP.2012 20:06:16




Delta 1 [T2] RBW 1 MHz RF Att 0 dB
 Ref Lvl 0.00 dB VBW 3 MHz
 90 dBμV 0.000000 s SWT 100 ms Unit dBμV

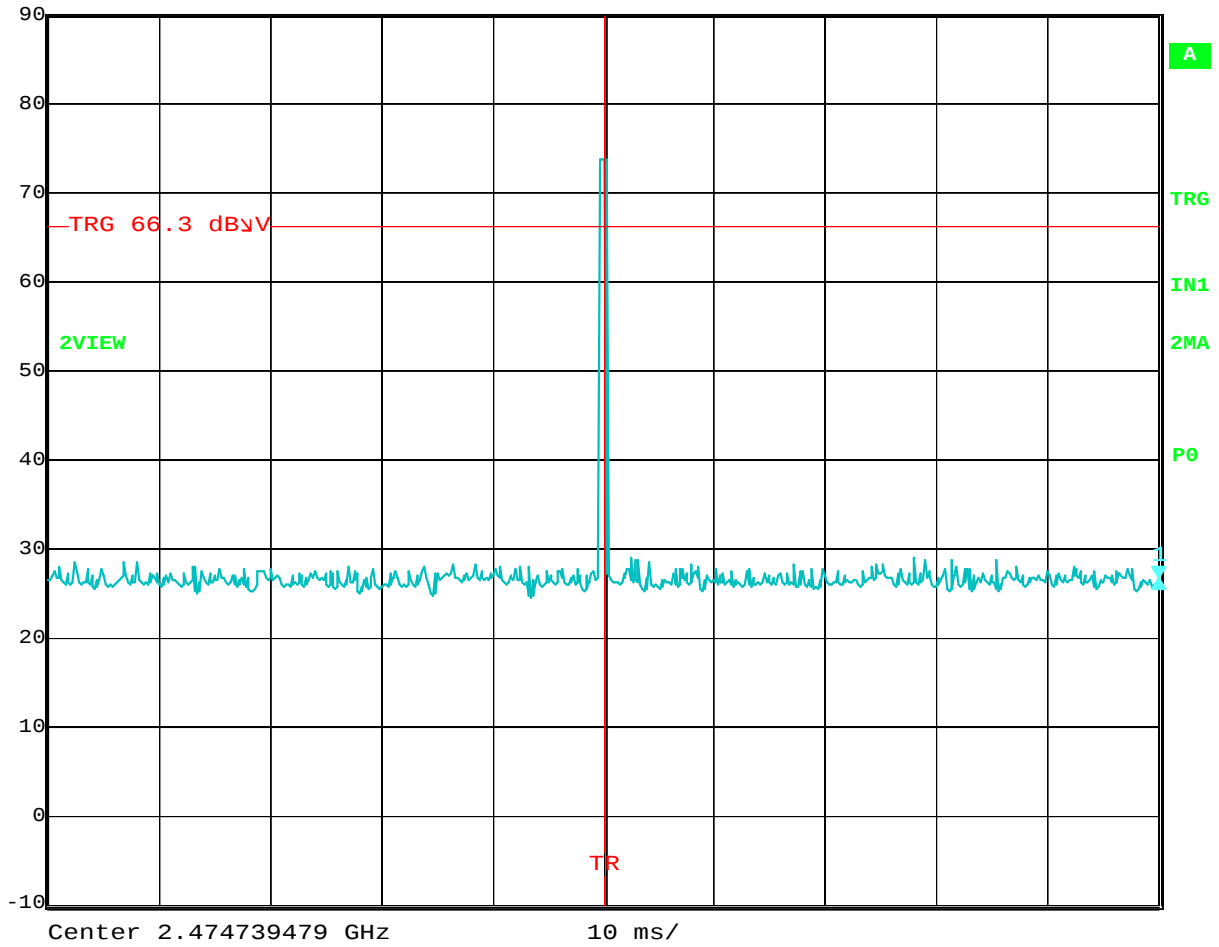

Date: 22.SEP.2012 20:11:28



Ref Lvl	Delta 1 [T2]	RBW	1 MHz	RF Att	0 dB
90 dBμV	0.69 dB	VBW	3 MHz		
	551.102204 μs	SWT	5 ms	Unit	dBμV

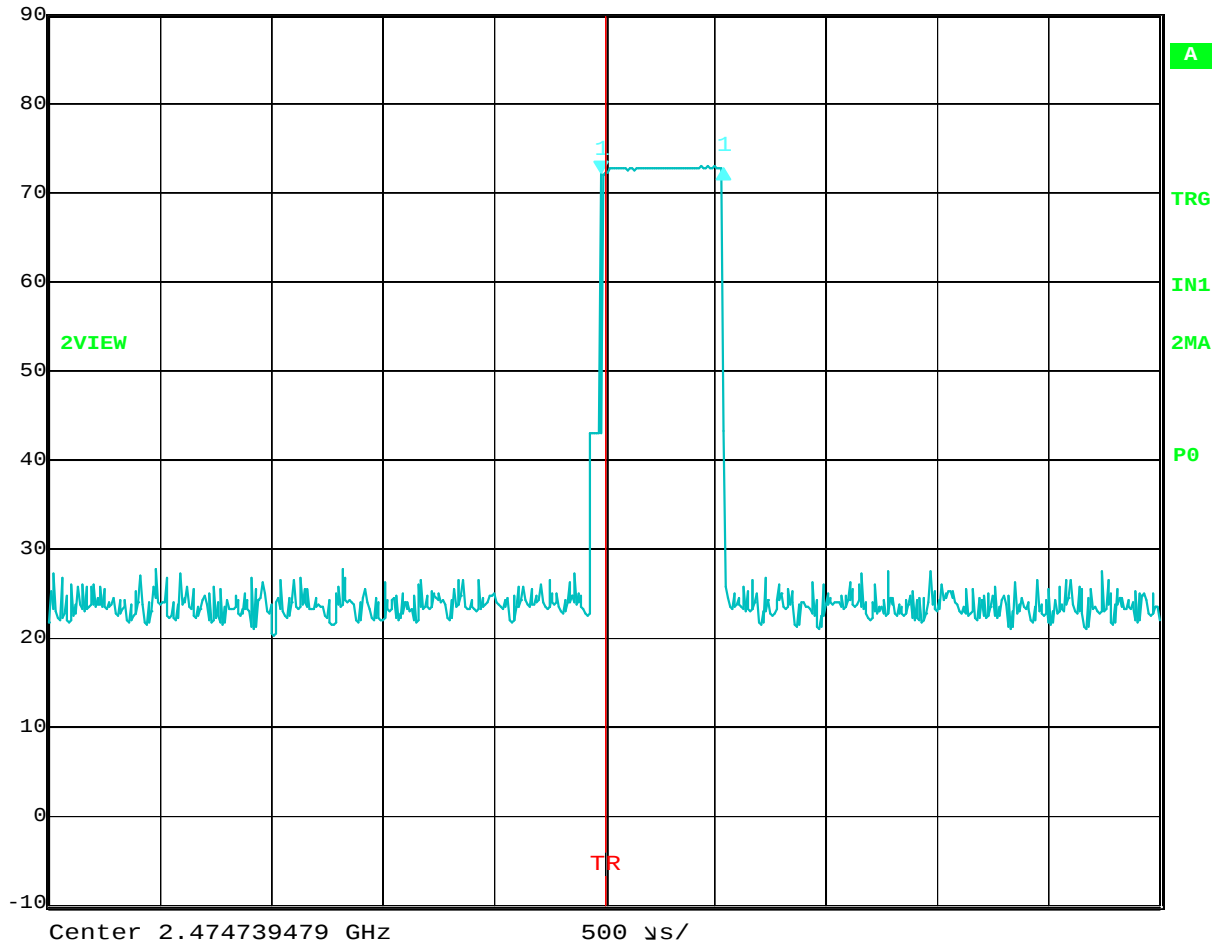

Date: 22.SEP.2012 20:16:41

There was 1 pulse train in 100 ms period and the length of the pulse train was 551.102 μS. The duty cycle is therefore, 0.5511 ms in a 100ms period, or 0.5511%, for a duty cycle correction factor of 45.18 dB.

RSS-102 Issue 5 Exposure Limits:**Table 4: RF Field Strength Limits for Devices Used by the General Public
(Uncontrolled Environment)**

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ <i>f</i>	-	6**
1.1-10	87/ <i>f</i> ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ <i>f</i> ^{0.25}	0.1540/ <i>f</i> ^{0.25}	8.944/ <i>f</i> ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 <i>f</i> ^{0.3417}	0.008335 <i>f</i> ^{0.3417}	0.02619 <i>f</i> ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}
150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616000/ <i>f</i> ^{1.2}
Note: <i>f</i> is frequency in MHz. *Based on nerve stimulation (NS). ** Based on specific absorption rate (SAR).				

1.1 Test Procedure

The EUT was measured in a radiated fashion. The RF output power was measured using a resolution bandwidth which encompassed the entire emission bandwidth. The data obtained was adjusted for equipment losses and converted from a field strength reading to a power reading using the provisions of RSS-Gen 4.6.

1.2 Results:

RSS-102 Issue 5 Exposure Limit at 2.48 GHz = 5.47 W/m²

Maximum EIRP measured at 2480 MHz -8.66 dBm or 0.136 mW

Power Density = EIRP/(4* π *20²)

Power Density = 0.0000271 mW/cm²

Power Density = 0.000271 W/m²

The calculated maximum power density at 20 cm distance is less than the limit for general population / uncontrolled exposure. The device has also met the higher FCC RF exposure limits.

Test Personnel: Vathana Ven *VSV*
Supervising/Reviewing
Engineer:
(Where Applicable) N/A
Product Standard: FCC Part 15 Subpart C
15.247; IC RSS-247
Input Voltage: 120VAC/60Hz
Pretest Verification w/
Ambient Signals or
BB Source: **Ambient**

Test Date: 09/22/2012, 08/27/2015

Test Levels: See tables

Ambient Temperature: 24, 22 °C

Relative Humidity: 49, 41 %

Atmospheric Pressure: 1009, 1006 mbars

Deviations, Additions, or Exclusions: None

7 6 dB Bandwidth & 99% Power Bandwidth

7.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61 A	10/06/2014	10/06/2015
145128'	EMI Receiver (20 Hz - 40 Ghz)	Rohde & Schwarz	ESIB 40	839283/001	03/14/2015	03/14/2016
ETS001'	1-18GHz DRG Horn Antenna	ETS-Lindgren	3117	00143259	01/14/2015	01/14/2016
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	10/04/2014	10/04/2015

Software Utilized:


Name	Manufacturer	Version
None		

7.3 Results:


The 99% power bandwidth, or 6 dB bandwidth, must not be less than 500 kHz. The sample tested was found to Comply.

Channel	6 dB Bandwidth	99% Power Bandwidth
Channel 11 (2405 MHz)	1.488 MHz	3.151 MHz
Channel 18 (2440 MHz)	1.507 MHz	2.975 MHz
Channel 26 (2480 MHz)	1.527 MHz	2.975 MHz

Plots were taken using an RBW of ~1-5% of the measured emission bandwidth, per *KDB 558074* and IC RSS-Gen 6.6.

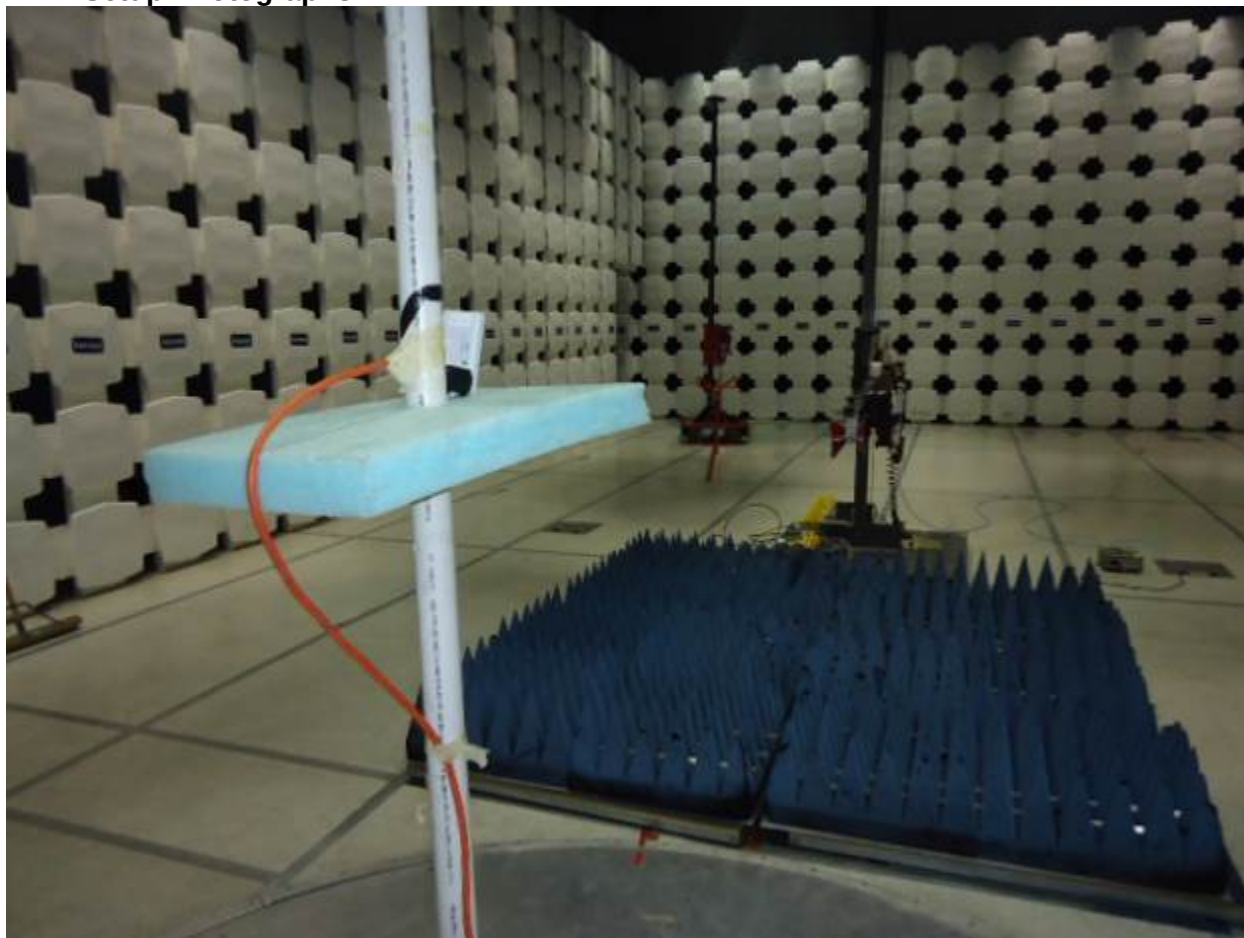7.4 Setup Photographs:

7.5 Plots/Data:

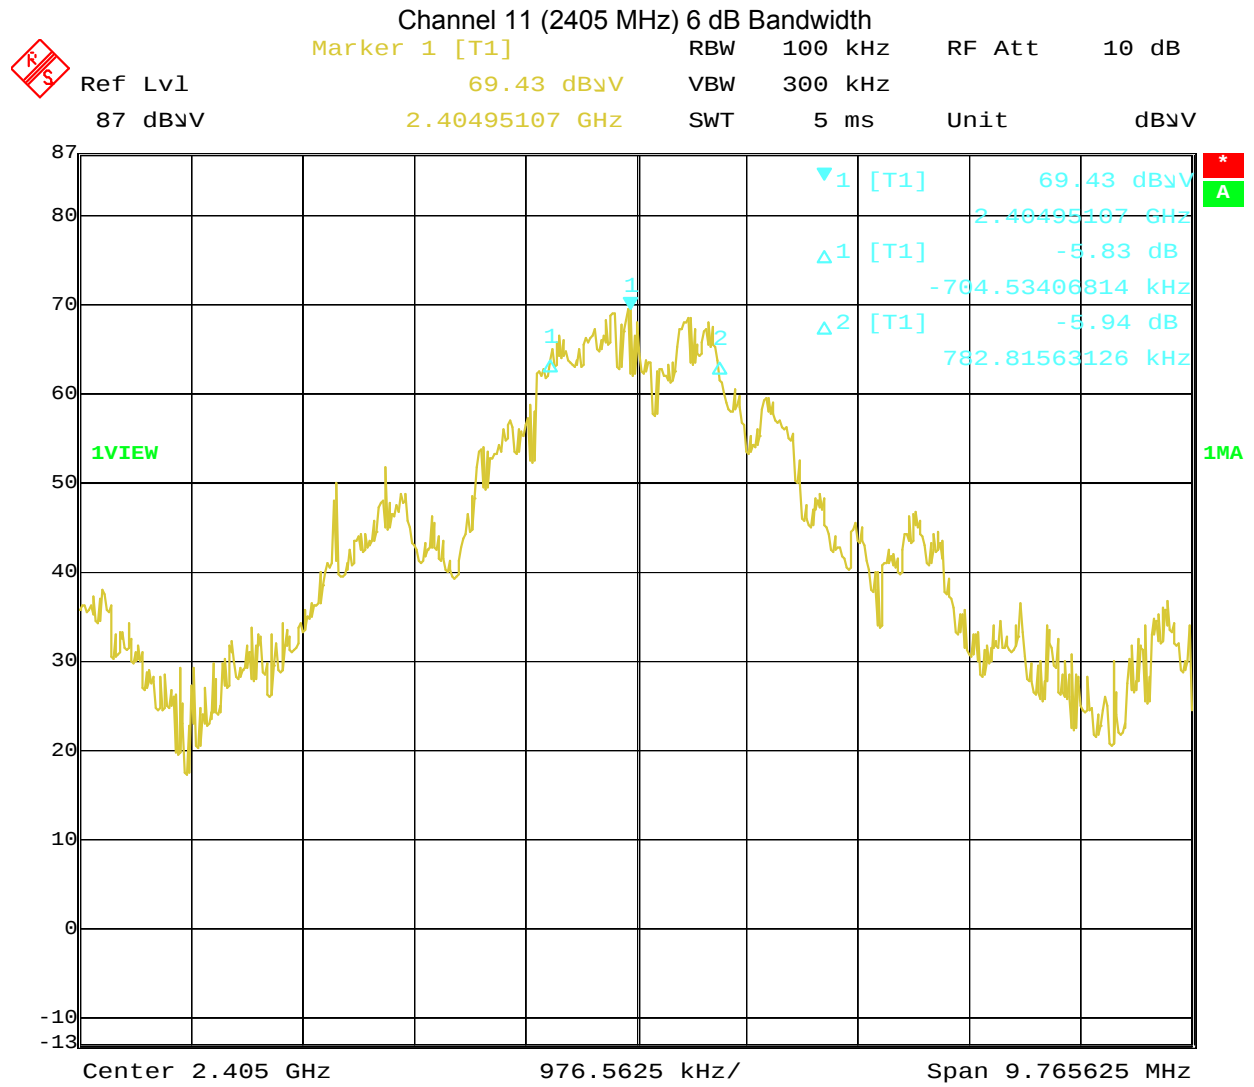


Date: 1.JAN.1997 00:09:04

Channel 18 (2440 MHz) 6 dB Bandwidth



Ref Lvl	Delta 2 [T1]	RBW	100 kHz	RF Att	10 dB
87 dBμV	-7.20 dB	VBW	300 kHz		
	782.81563126 kHz	SWT	5 ms	Unit	dBμV

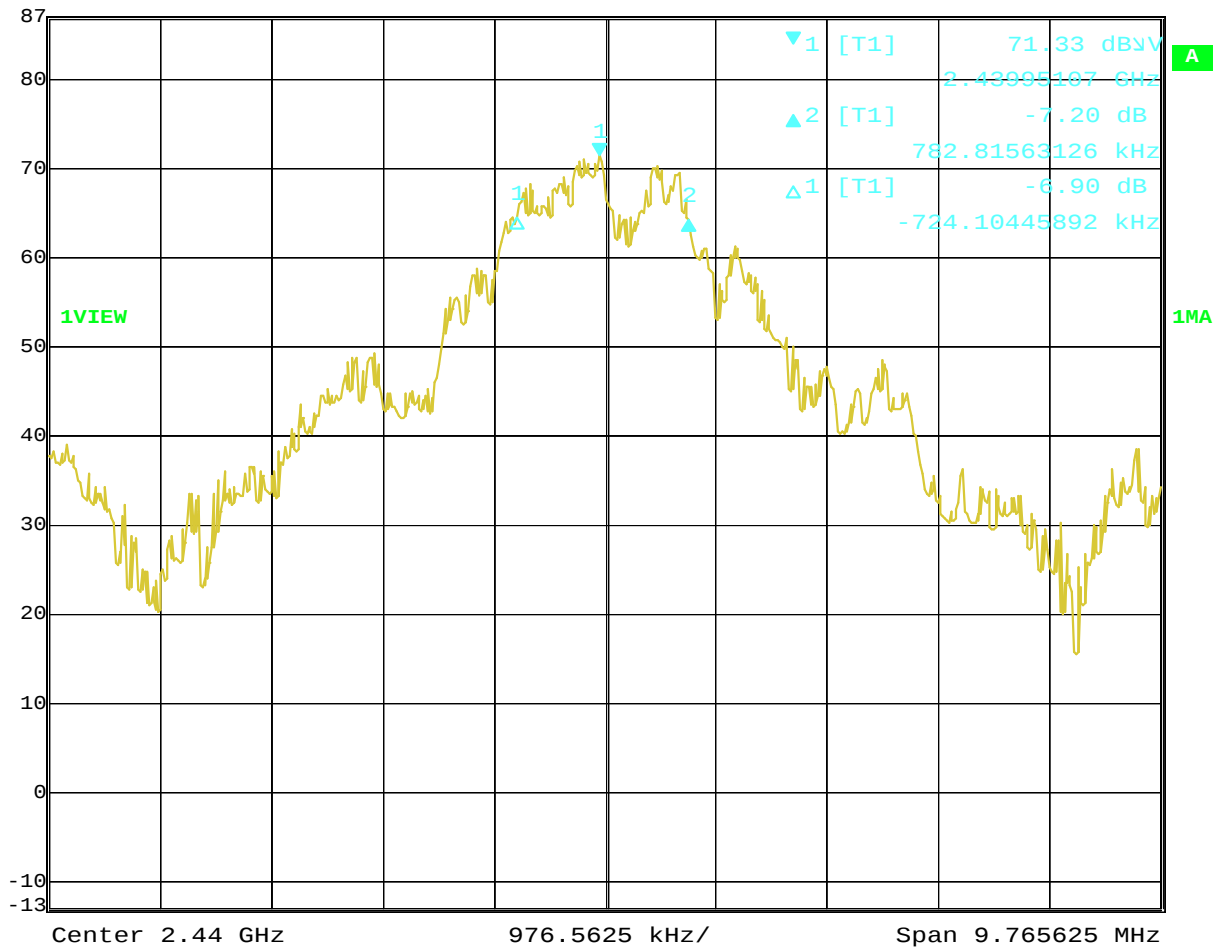


Date: 1.JAN.1997 00:10:20

Channel 26 (2480 MHz) 6 dB Bandwidth



Ref Lvl	Delta 1 [T1]	RBW	100 kHz	RF Att	10 dB
87 dBμV	-6.59 dB	VBW	300 kHz		
	-606.68211423 kHz	SWT	5 ms	Unit	dBμV

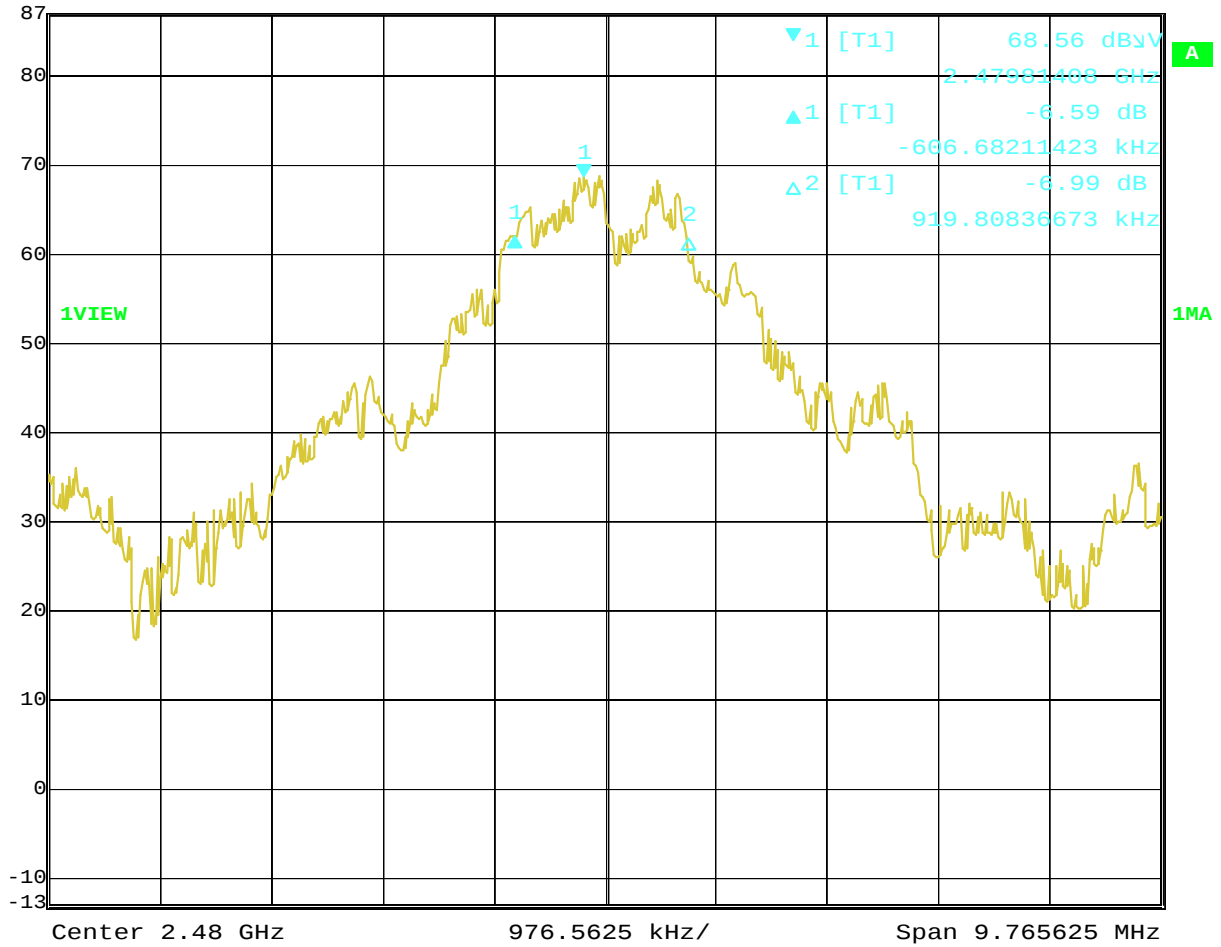


Date: 1.JAN.1997 00:11:50

Channel 11 (2405 MHz) 99% Power Bandwidth



Marker 1 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl 65.18 dBμV VBW 300 kHz
 87 dBμV 2.40494442 GHz SWT 5 ms Unit dBμV

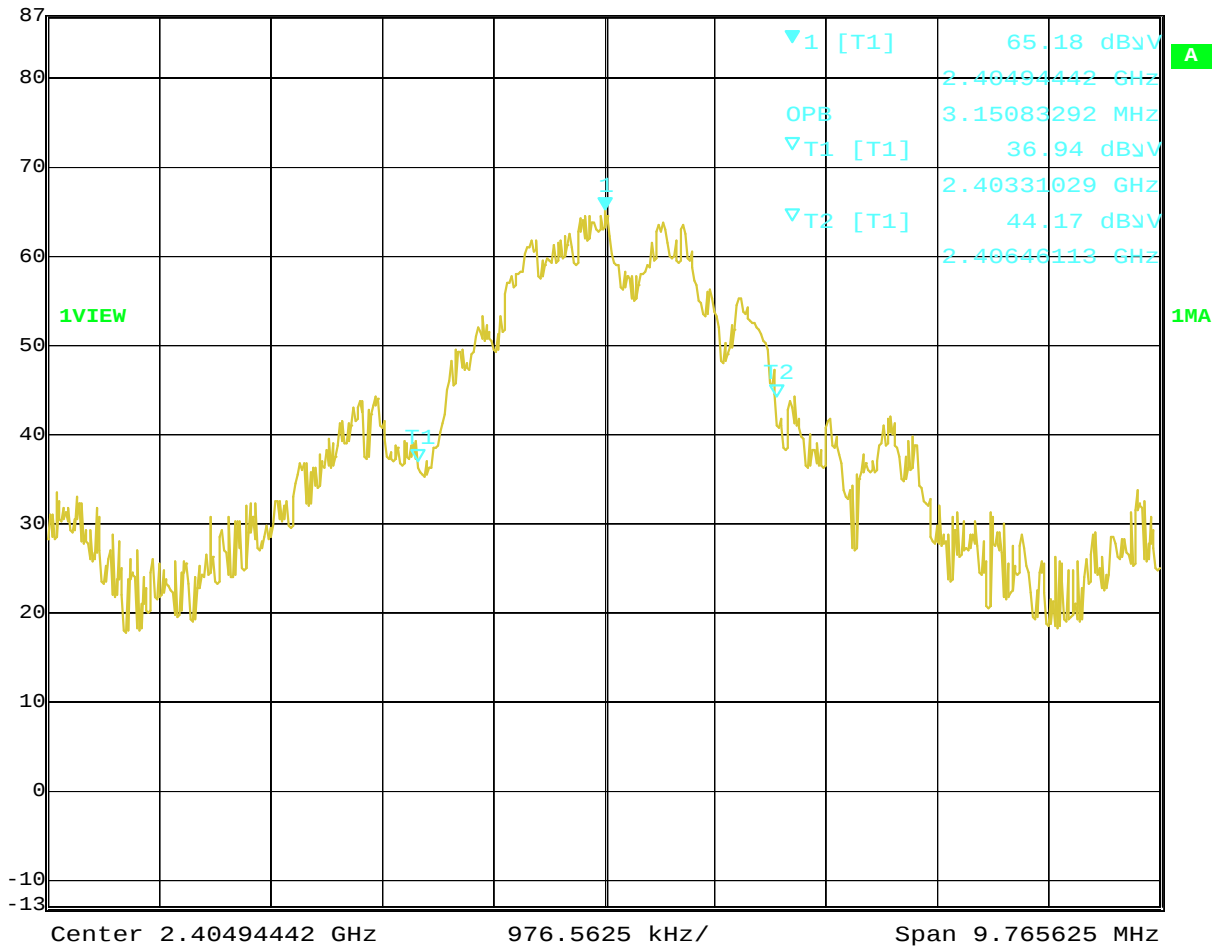


Date: 1.JAN.1997 00:13:45


Channel 18 (2440 MHz) 99% Power Bandwidth



Ref Lvl 87 dBμV
 Marker 1 [T1] 66.00 dBμV
 2.43995107 GHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dBμV

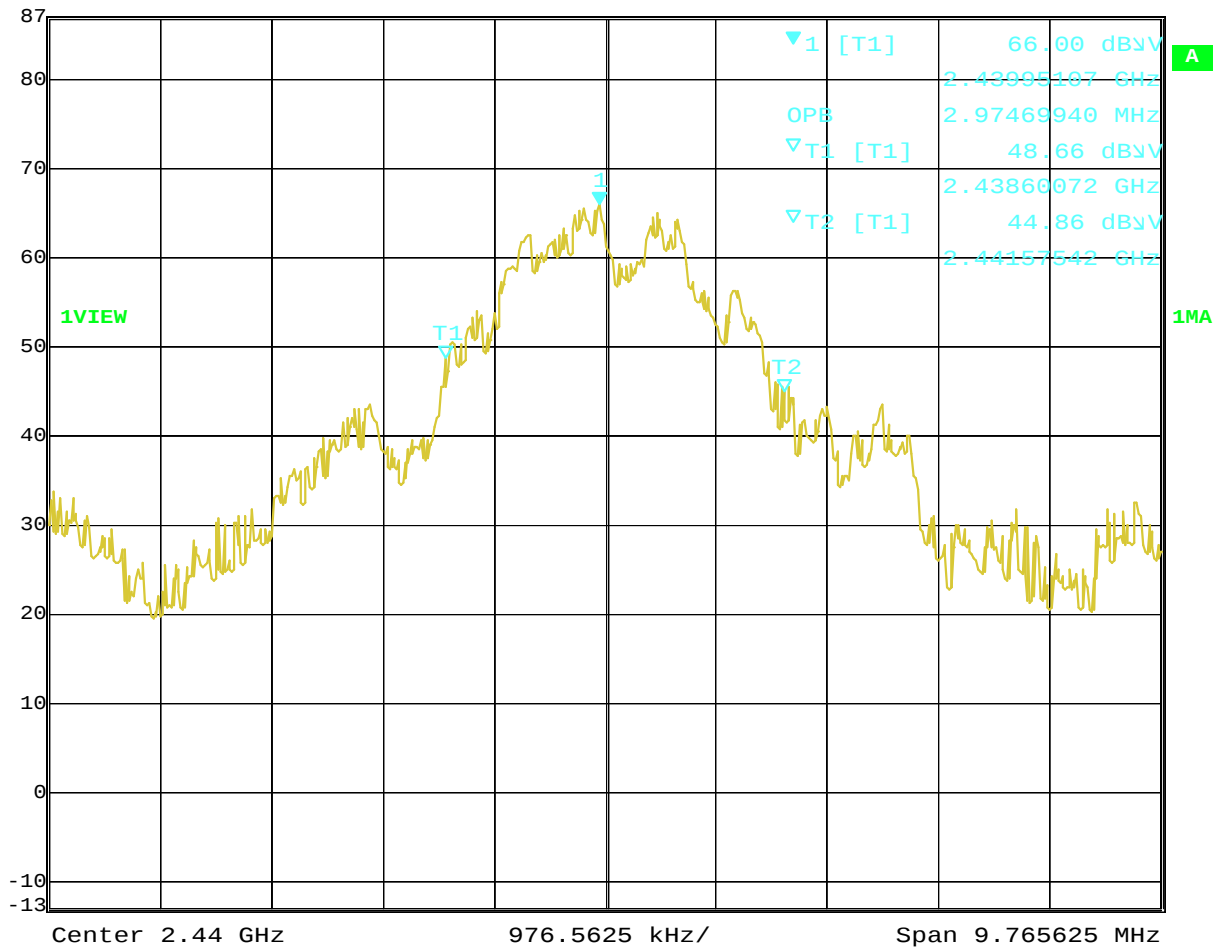

Date: 1.JAN.1997 00:15:46

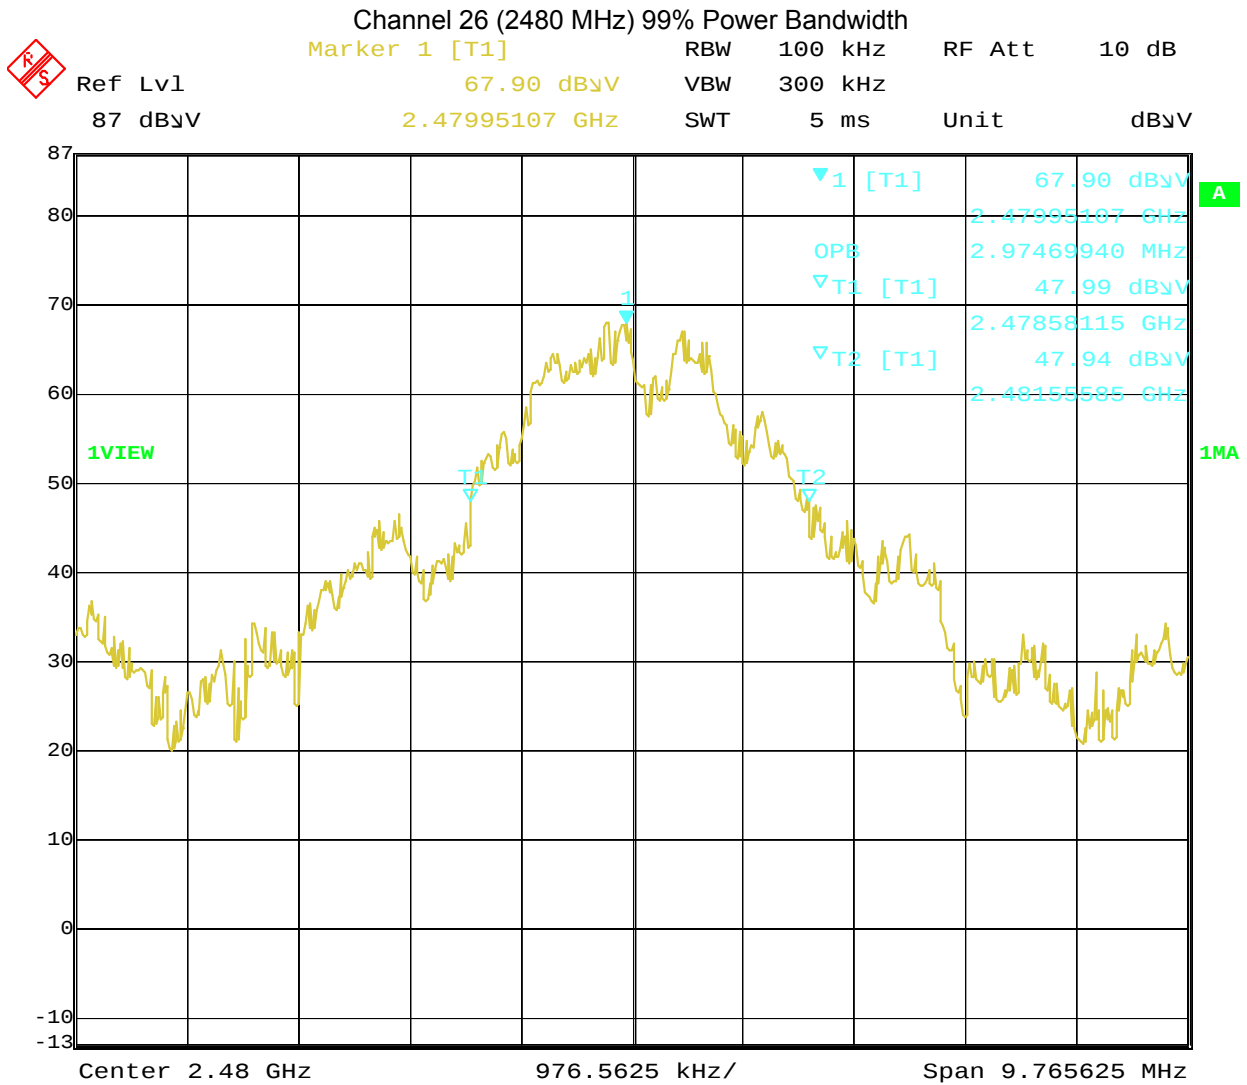

Date: 1.JAN.1997 00:18:45

Test Personnel: Vathana Ven

Supervising/Reviewing Engineer: N/A

(Where Applicable) FCC Part 15 Subpart C

Product Standard: 15.247; IC RSS-247

Input Voltage: 3V Fresh battery

Pretest Verification w/ Ambient Signals or BB Source: Ambient

Test Date: 09/08/2015

Test Levels: See section 7.3

Ambient Temperature: 24 °C

Relative Humidity: 49 %

Atmospheric Pressure: 1009 mbars

Deviations, Additions, or Exclusions: None

8 Peak Power Spectral Density

8.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.4:2013, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

8.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004'	Weather Station	Davis Instruments	7400	PE80529A61 A	10/06/2014	10/06/2015
145128'	EMI Receiver (20 Hz - 40 Ghz)	Rohde & Schwarz	ESIB 40	839283/001	03/14/2015	03/14/2016
ETS001'	1-18GHz DRG Horn Antenna	ETS-Lindgren	3117	00143259	01/14/2015	01/14/2016
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	10/04/2014	10/04/2015



Software Utilized:

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

8.3 Results:

The sample tested was found to Comply. The peak power spectral density must not exceed 8 dBm in any 3 kHz bandwidth using the methods of KDB 558074.

8.4 Setup Photographs:

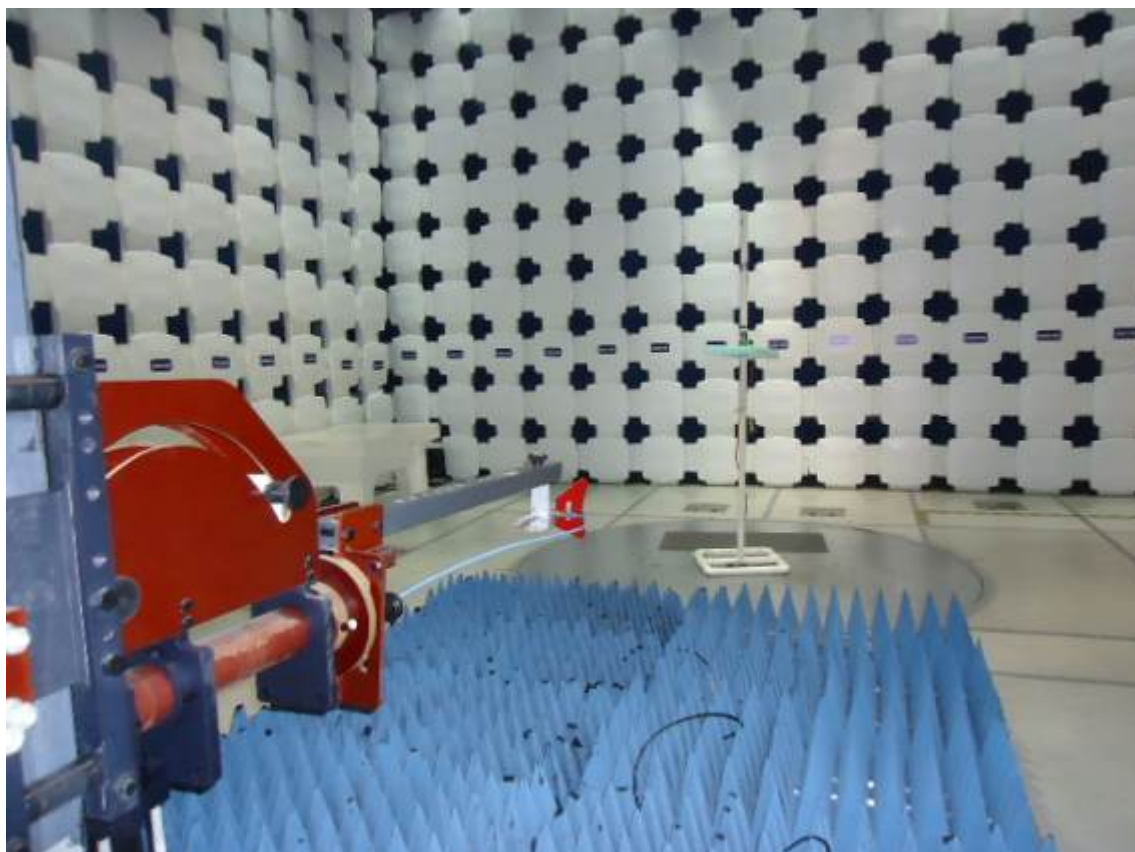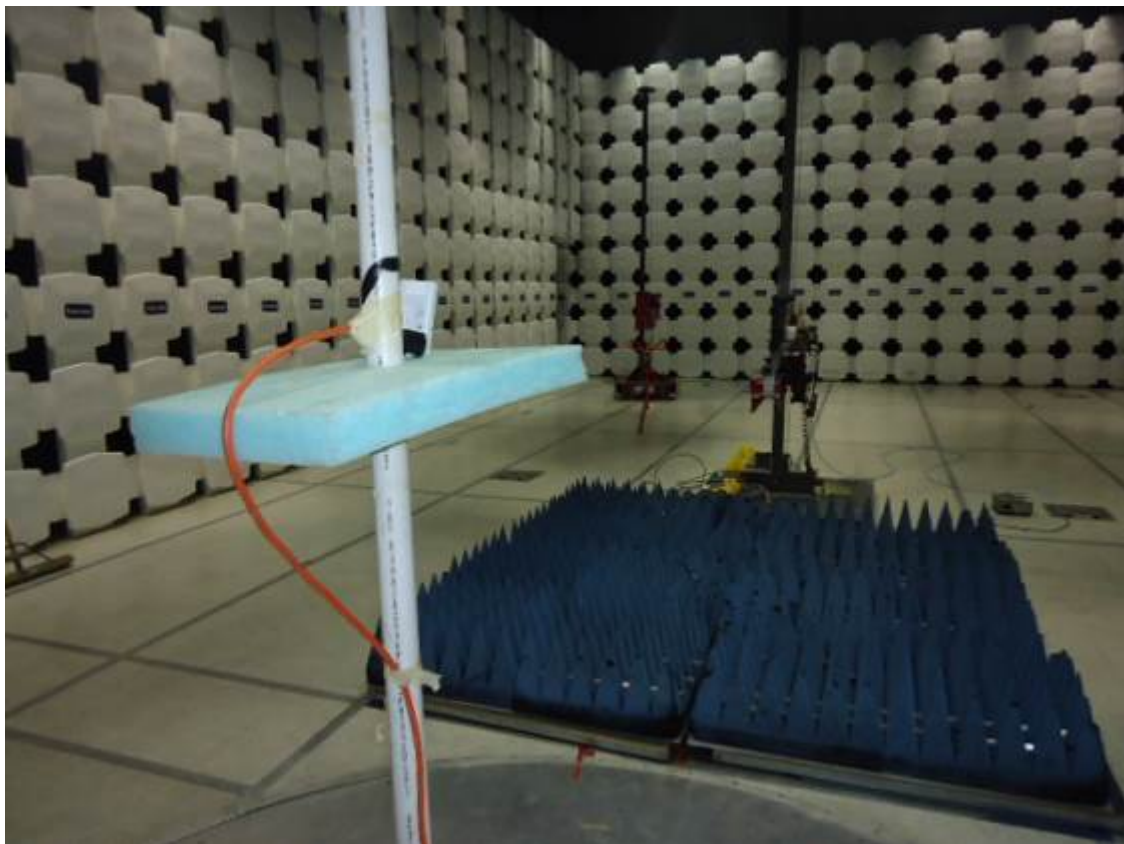

8.5 Plots/Data:

Radiated Emissions

Company: Mircom Technologies Ltd.

Model #: NC-210

Serial #: 00309

Engineers: Vathana Ven

Project #: G102179505

Standard: FCC Part 15C, 15.247

Receiver: R&S ESI (145-128) 10-01-2014

PreAmp: 145014 05-13-16.txt

PreAmp Used? (Y or N): N

Date(s): 08/27/15

Limit Distance (m): 3

Test Distance (m): 3

Voltage/Frequency: Battery powered

Frequency Range: Fundamental

Net = Reading (dBuV/m) + Antenna Factor (dB(1/m)) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)

Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Bandwidth
Peak Power Spectral Density, normalized from 100kHz to 3 kHz using Bandwidth Correction Factor 10LOG(3/100 kHz)=-15.2 dB											
Note: EIRP Obtained by applying the path loss correction for a 3m test distance, E(dBuV/m)@3m - 95.22 = dBm EIRP											
CH11 - 2405MHz, No pre-amp, Typical Orientation											
PK	H	2405.000	28.20	31.97	5.92	0.00	0.00	-44.33	8.00	-52.33	3/10kHz
PK	V	2405.000	24.85	31.97	5.92	0.00	0.00	-47.68	8.00	-55.68	3/10kHz
CH18 - 2440MHz, No pre-amp, Typical Orientation											
PK	H	2440.000	34.71	32.11	5.98	0.00	0.00	-37.62	8.00	-45.62	3/10kHz
PK	V	2440.000	31.53	32.11	5.98	0.00	0.00	-40.80	8.00	-48.80	3/10kHz
CH26 - 2480MHz, No pre-amp, Typical Orientation											
PK	H	2480.000	35.88	32.26	6.06	0.00	0.00	-36.22	8.00	-44.22	3/10kHz
PK	V	2480.000	35.71	32.26	6.06	0.00	0.00	-36.39	8.00	-44.39	3/10kHz

FCC

IC

Test Personnel: Vathana Ven *VSV*
 Supervising/Reviewing Engineer:
 (Where Applicable) N/A
 Product Standard: FCC Part 15 Subpart C
 15.247; IC RSS-247
 Input Voltage: 120VAC/60Hz
 Pretest Verification w/
 Ambient Signals or
 BB Source: **Ambient**

Test Date: 08/27/2015

Test Levels: See section 8.3

Ambient Temperature: 22 °C

Relative Humidity: 41 %

Atmospheric Pressure: 1006 mbars

Deviations, Additions, or Exclusions: None

9 Band Edge Compliance

9.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.4:2013, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where
 FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

9.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV001	Weather Station	Davis Instruments	7400	PE80519A61	08/28/2012	08/28/2014
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
HORN2'	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012


Software Utilized:

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010


9.3 Results:

Spurious emissions at the band edges must be at least 20 dB lower than the fundamental field strength when measured with a 100 kHz bandwidth, without the need to be below the general limits of FCC Part 15 Section 15.209 and of RSS-Gen 7.2.5 Table 5. Emissions in restricted bands must meet the general limits of FCC Part 15 Section 15.209 and of RSS-Gen 7.2.5 Table 5.

The sample tested was found to Comply.

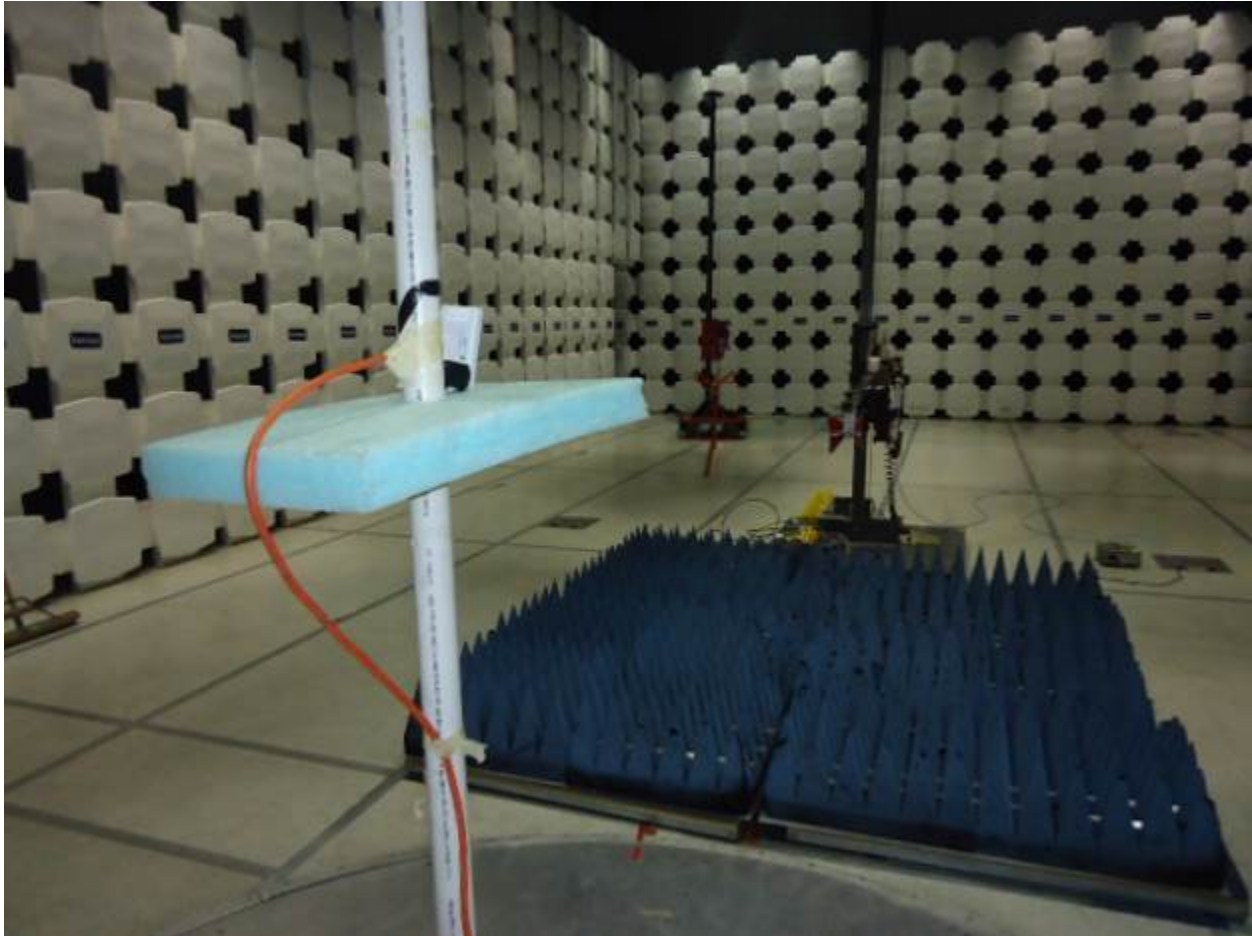9.4 Setup Photographs:

9.5 Plots/Data:

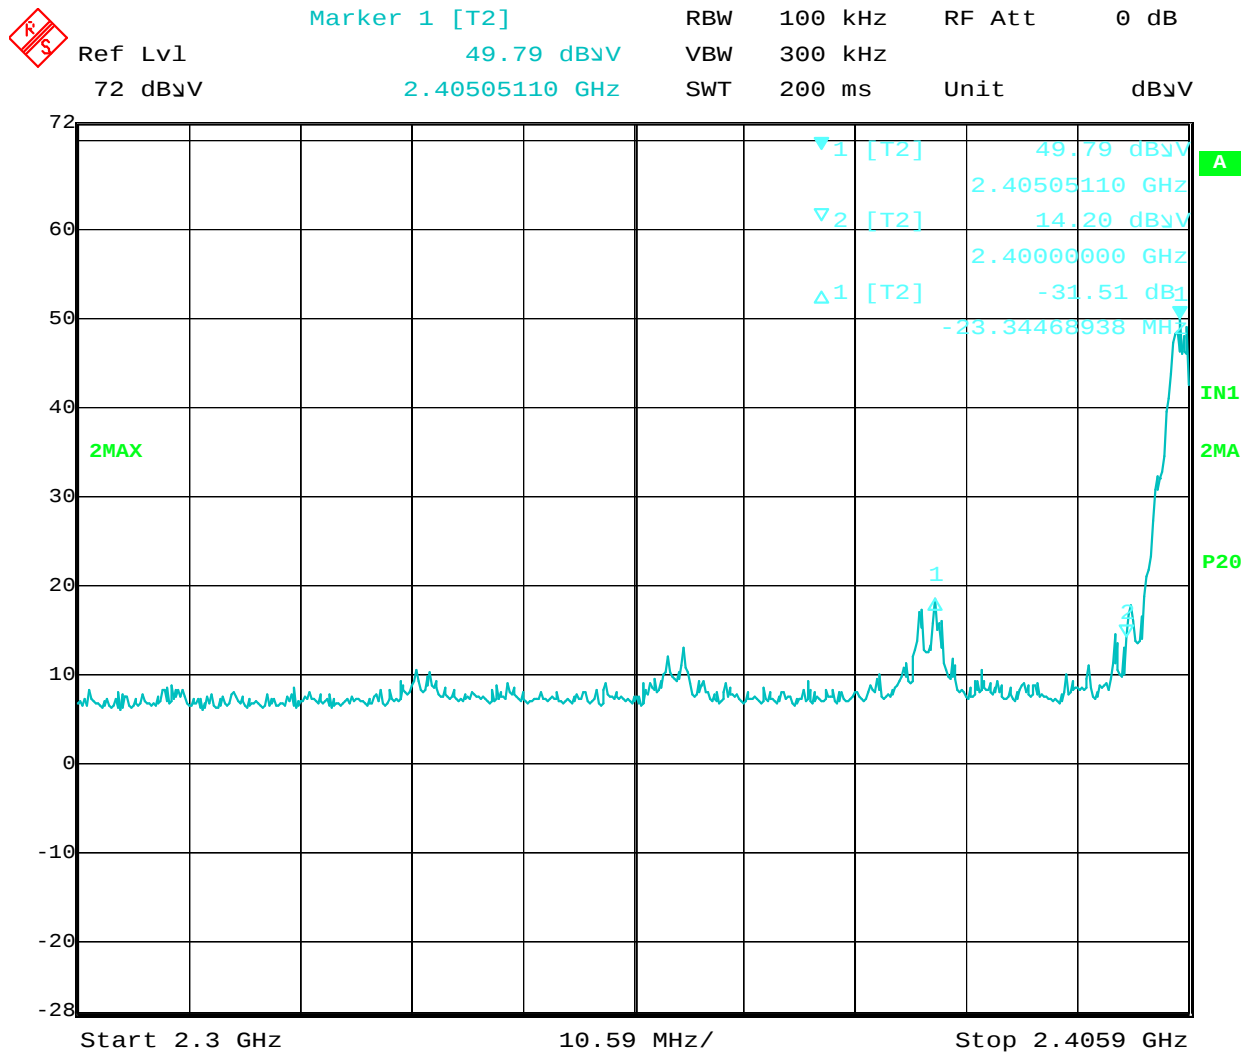


Date: 18.SEP.2012 22:35:36

Lower Band Edge Compliance, 31.51 dB down



Marker 1 [T2]
 Ref Lvl 25.70 dBμV
 72 dBμV 2.48350000 GHz
 RBW 500 kHz RF Att 0 dB
 VBW 3 MHz
 SWT 500 ms Unit dBμV

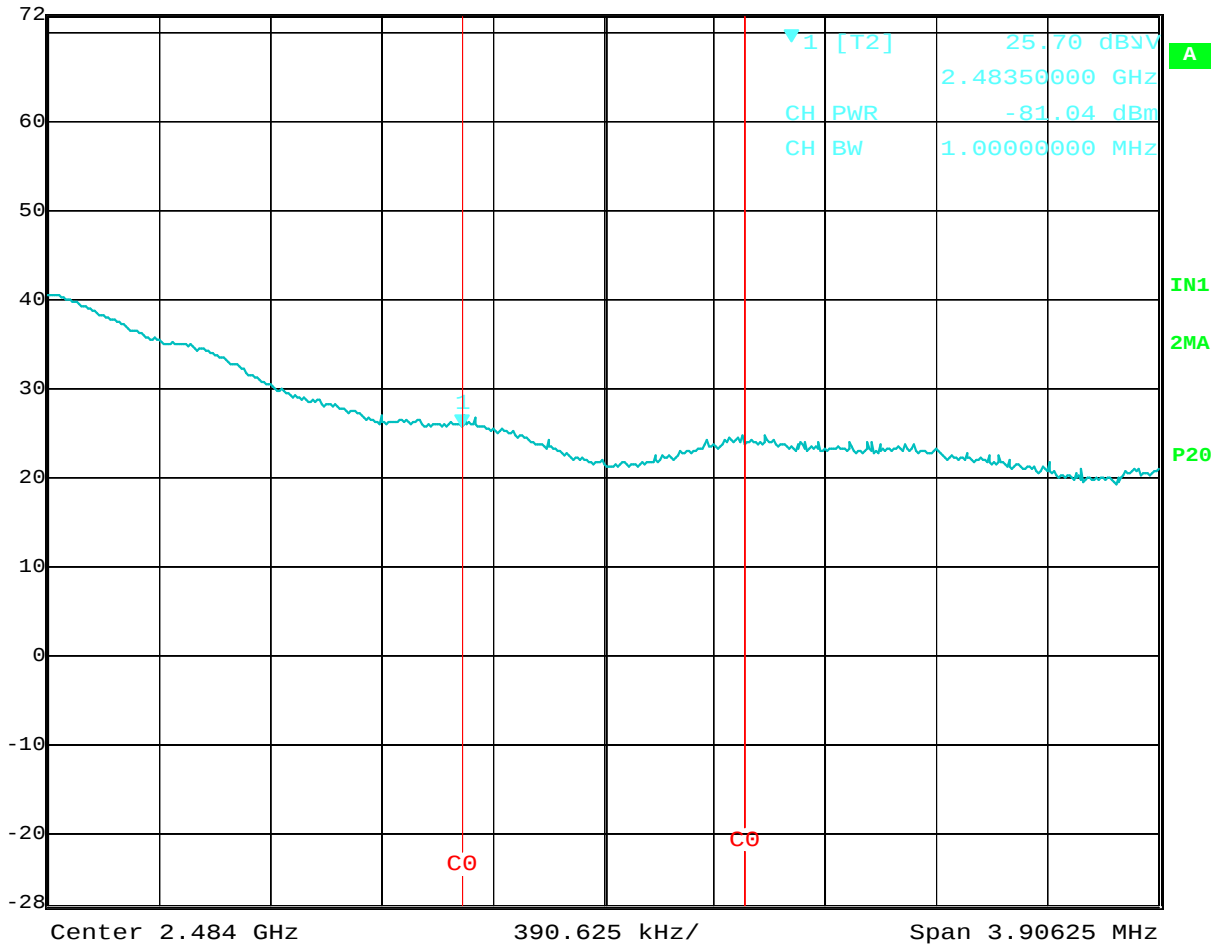

Date: 21.SEP.2012 22:39:04

Upper Band Edge Compliance

Company: Mircom

Model #: NC-210

Serial #: 0006

Antenna & Cables: SHF Bands: N, LF, HF, SHF

Antenna: HORN2 V3m 10-24-2012.txt HORN2 H3m 10-24-2012.txt

Cable(s): 145-416 3mTrkB 09-04-2012.txt

Engineers: Vathana Ven

Location: 10m Chamber Barometer: DAV001

Filter:

Project #: G100876115

Date(s): 09/21/12

Standard: FCC Part 15 Subpart C 15.247

Temp/Humidity/Pressure: 24C 49% 1009mbar

Receiver: R&S ESI (145-128) 09-23-2012

Limit Distance (m): 3

PreAmp: PRE145014 12-16-2012.txt

Test Distance (m): 3

PreAmp Used? (Y or N): N

Voltage/Frequency: 120VAC/60Hz

Frequency Range: See Frequency

Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)

Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Bandwidth
Note: Power integrated across 1 MHz bandwidth; dBm reading converted to dBuV inside the receiver using dBm + 107 = dBuV											
Note: Upper Band Edge Compliance, Integrated to 1 MHz RBW Equivalent											
PK	H	2484.000	25.10	28.56	6.04	0.00	0.00	59.69	74.00	-14.31	500kHz/3MHz
AVG	H	2484.000	-20.08	28.56	6.04	0.00	0.00	14.51	54.00	-39.49	500kHz/3MHz

Test Personnel: Vathana Ven
 Supervising/Reviewing Engineer: N/A
 (Where Applicable) FCC Part 15 Subpart C
 Product Standard: 15.247; IC RSS-210 Annex 8
 Input Voltage: 120VAC/60Hz
 Pretest Verification w/ Ambient Signals or BB Source: Ambient

Test Date: 09/18/2012, 09/21/2012

Test Levels: See section 7.3

Ambient Temperature: 23, 25 °C

Relative Humidity: 47, 50 %

Atmospheric Pressure: 999. 1014 mbars

Deviations, Additions, or Exclusions: None

10 Transmitter Radiated Spurious Emissions

10.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.4:2013, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) $< U_{CISPR}$ (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

10.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV001	Weather Station	Davis Instruments	7400	PE80519A61	08/28/2012	08/28/2014
'145128	EMI Receiver 40 GHz (20 Hz - 40 GHz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
'ROS001	Spectrum Analyzer 20Hz - 40 GHz	Rohde & Schwarz	FSEK-30	100225	02/10/2012	02/10/2013
'REA004	3GHz High Pass Filter	Reactel, Inc	7HSX-3G/18G-S11	06-1	11/30/2011	11/30/2012
'REA006	18GHz High Pass Filter	Reactel, Inc	7HS-18G/40G K11	(06)1	08/08/2012	08/08/2013
'145-410	Cables 145-400 145-403 145-405 145-406 145-407	Huber + Suhner	10m Track A Cables	multiple	09/04/2011	10/04/2012
'145-416	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
'CBL030	High Frequency Cable 40GHz	Megaphase	TM40 K1K1-80	CBL030	02/08/2012	02/08/2013
'MEG005	High Frequency Cable	Megaphase	TM40-K1K1-197	8148601-001	02/07/2012	02/07/2013
'PRE8	PREAMPLIFIER 1- 40 GHz	MITEQ	NSP4000-NF	507145	01/26/2012	01/26/2013
'145003	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2011	10/04/2012
'145014	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	12/16/2011	12/16/2012
'145034	BiLog Antenna (30 MHz to 1GHz)	Schaffner Chase EMC	CBL6111C	2564	02/07/2012	02/07/2013
'HORN2	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012
'EMC04	ANTENNA, RIDGED GUIDE, 18-40 GHZ	EMCO	3116	2090	02/08/2012	02/08/2013

Tested 08/28/2015

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV004	Weather Station	Davis Instruments	7400	PE80529A61A	10/06/2014	10/06/2015
145128	EMI Receiver (20 Hz - 40 GHz)	Rohde & Schwarz	ESIB 40	839283/001	03/14/2015	03/14/2016
ROS001	Spectrum Analyzer 20Hz - 40 GHz	Rohde & Schwarz	FSEK-30	100225	06/04/2015	06/04/2016
REA004	3GHz High Pass Filter	Reactel, Inc	7HSX-3G/18G-S11	06-1	12/30/2013	12/30/2015
REA006	18GHz High Pass Filter	Reactel, Inc	7HS-18G/40G K11	(06)1	08/28/2014	08/28/2016
145-416	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	10/04/2014	10/04/2015
CBLHF2012-2M-2	2m 9kHz-40GHz Coaxial Cable - SET2	Huber & Suhner	SF102	252675002	02/05/2015	02/05/2016
CBLHF2012-5M-2	5m 9kHz-40GHz Coaxial Cable - SET2	Huber & Suhner	SF102	252676002	02/05/2015	02/05/2016
PRE9	100MHz-40GHz Preamp	MITEQ	NSP4000-NFG	1260417	09/06/2013	09/06/2014
145014	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	05/13/2015	05/13/2016
ETS001	1-18GHz DRG Horn Antenna	ETS-Lindgren	3117	00143259	01/14/2015	01/14/2016
EMC04	ANTENNA, RIDGED GUIDE, 18-40 GHZ	EMCO	3116	2090	04/07/2015	04/07/2016

Software Utilized:

Name	Manufacturer	Version
C5	Teseq	Build 5.26.00.3

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

10.3 Results:

The sample tested was found to Comply.


FCC Part 15.247(d) & RSS-247 Section 5.5 – Non Restricted Band Radiated Spurious/Harmonics Limits

In any 100 kHz bandwidth outside the frequency band, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) and RSS-Gen Section 6.13 Table 4 is not required. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a) and RSS-Gen Section 8.10, must also comply with the radiated emission limits specified in 15.209(a) and IC RSS-Gen Section 6.13).


FCC Part 15.209(a) & RSS-247 Section 5.5 & RSS-Gen Section 8.10 – Restricted Band Radiated Spurious/Harmonics Limits

Frequency (MHz)	Field Strength		Test Distance (meters)
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
30–88	100	40.00	3
88–216	150	43.52	3
216–960	200	46.02	3
Above 960	500	53.98	3



10.4 Setup Photographs:

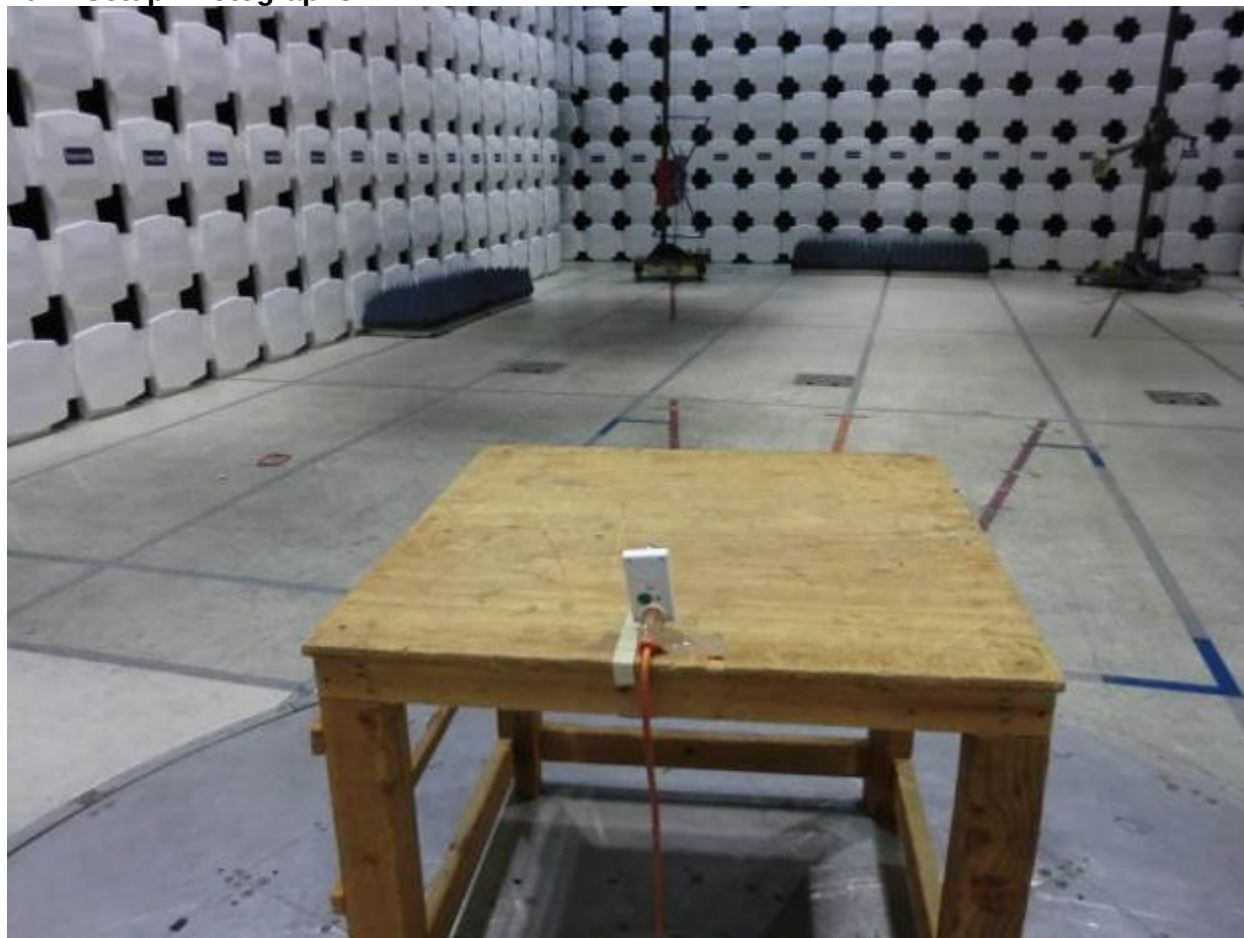

30-1000MHz

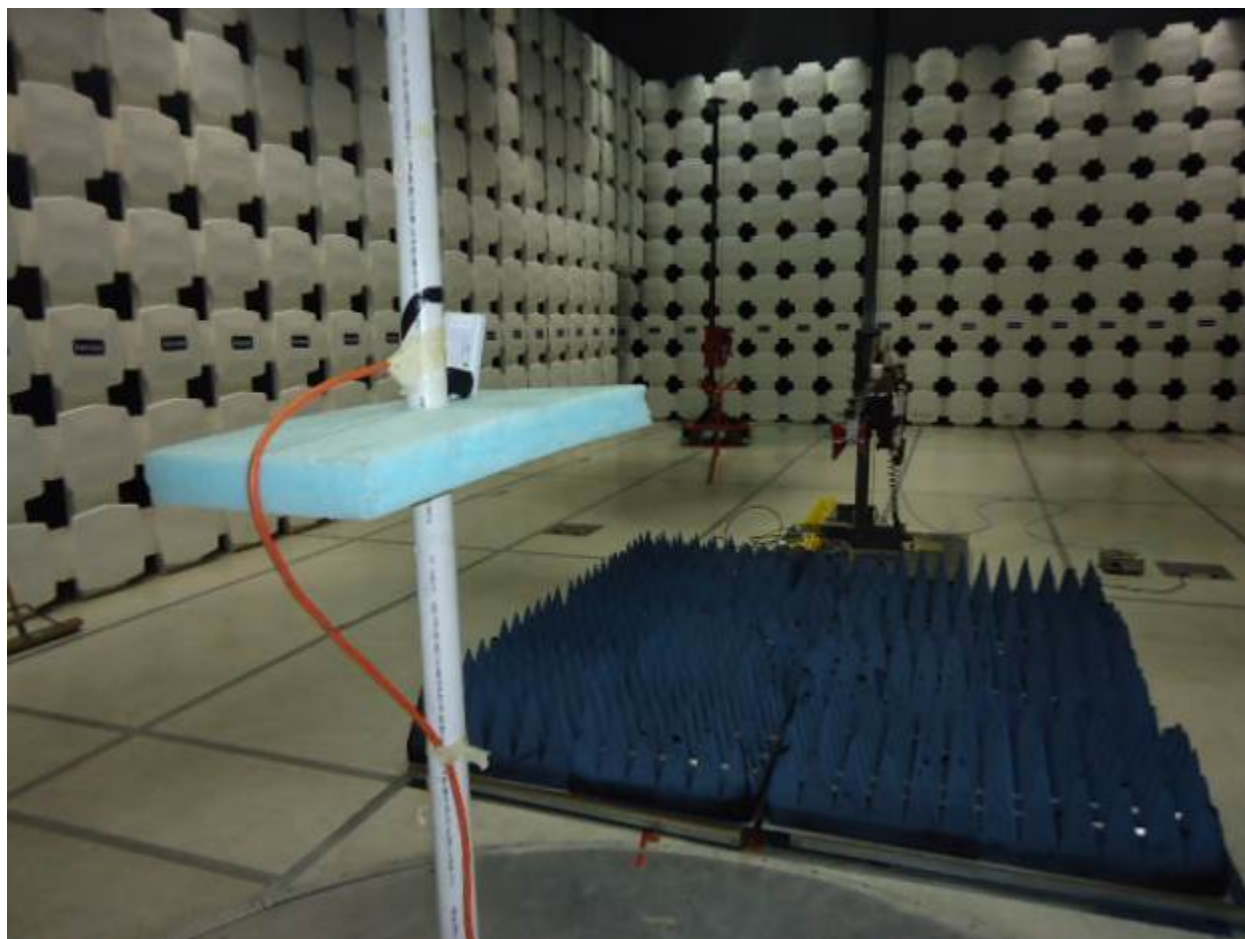

1-18GHz

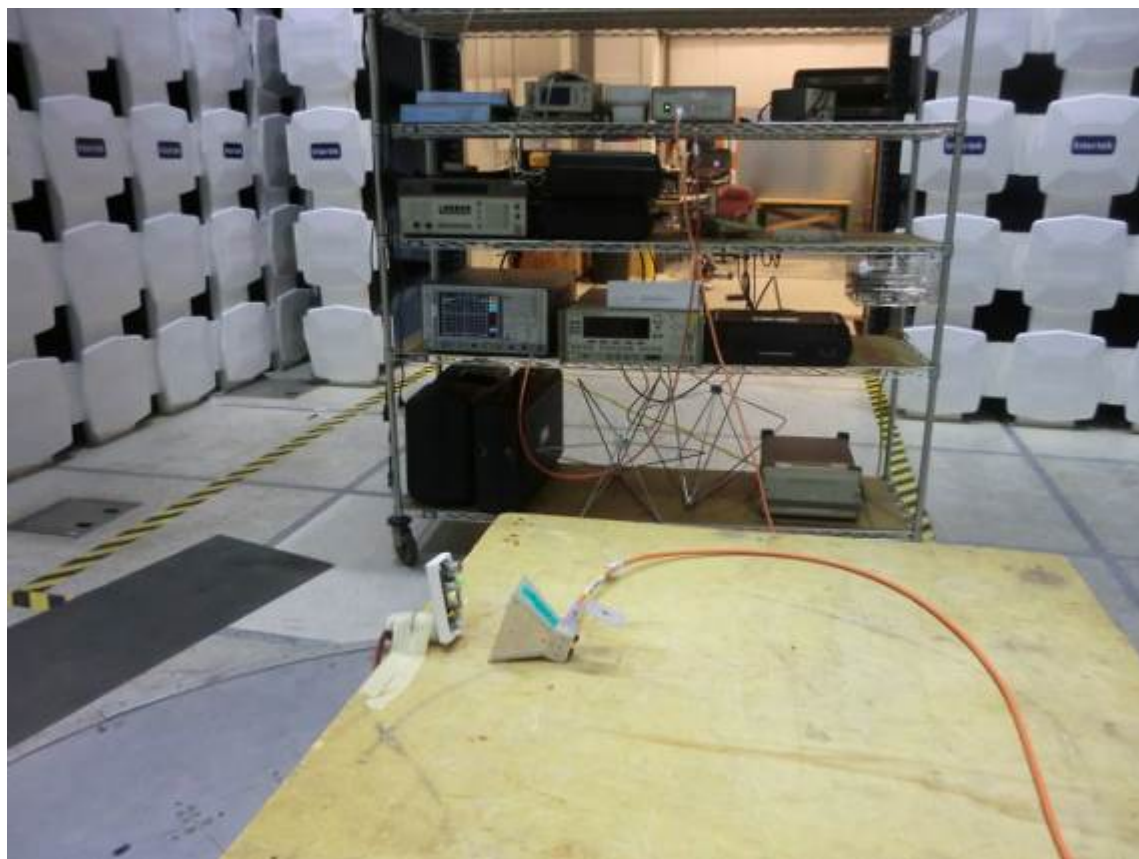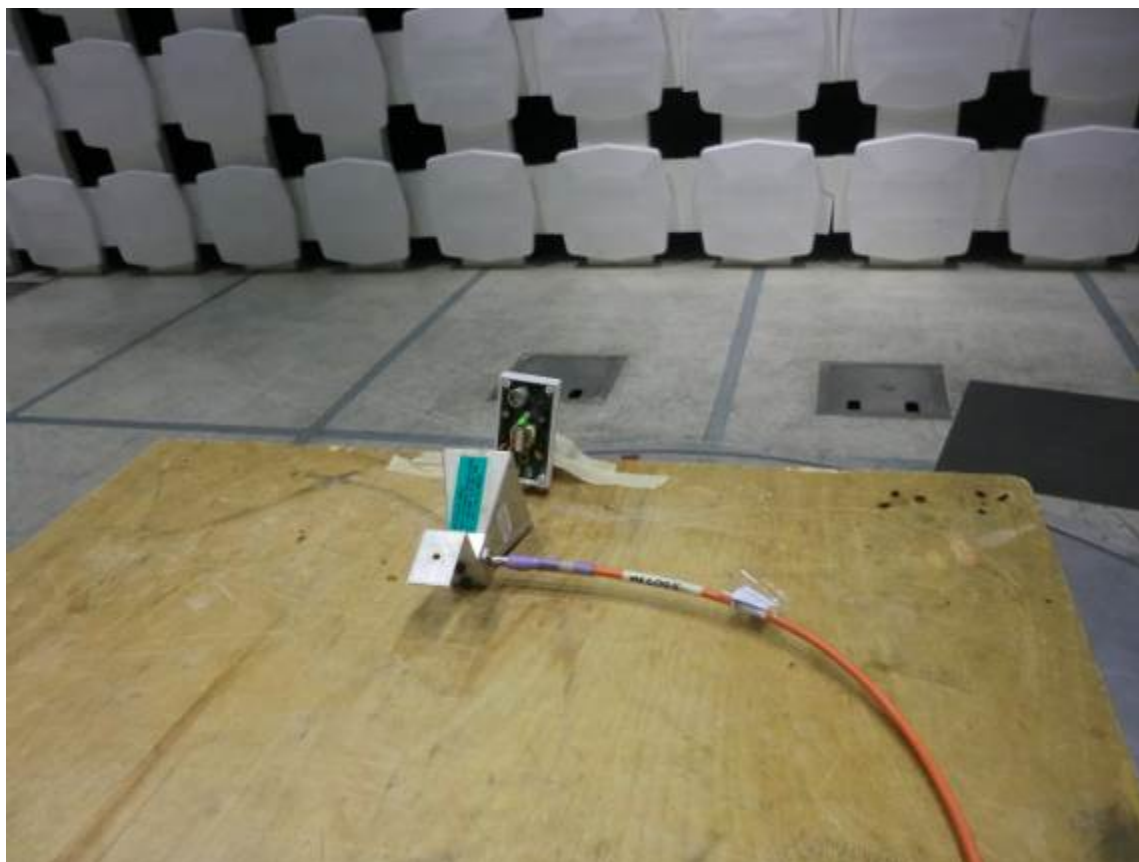

18-25GHz Hand scans

10.5 Plots/Data:

Spurious Emissions 30-1000MHz

Test Information

Test Details


Test: Radiated - FCC15 Class B @ 10m
Project: Mircom (IgeaCare_G100357410_Beacon)
Test Notes: 1006mB, CH11_Tx mode
Temperature: 25 deg C
Humidity: 38%
Tested by: Vathana Ven
Test Started: 17 Sep 2012 22 : 39

User Entry

Radiated - FCC15 Class B @ 10m
Mircom (IgeaCare_G100357410_Beacon)
1006mB, CH11_Tx mode
25 deg C
38%
Vathana Ven
17 Sep 2012 22 : 39

Additional Information

Prescan Emission Graph

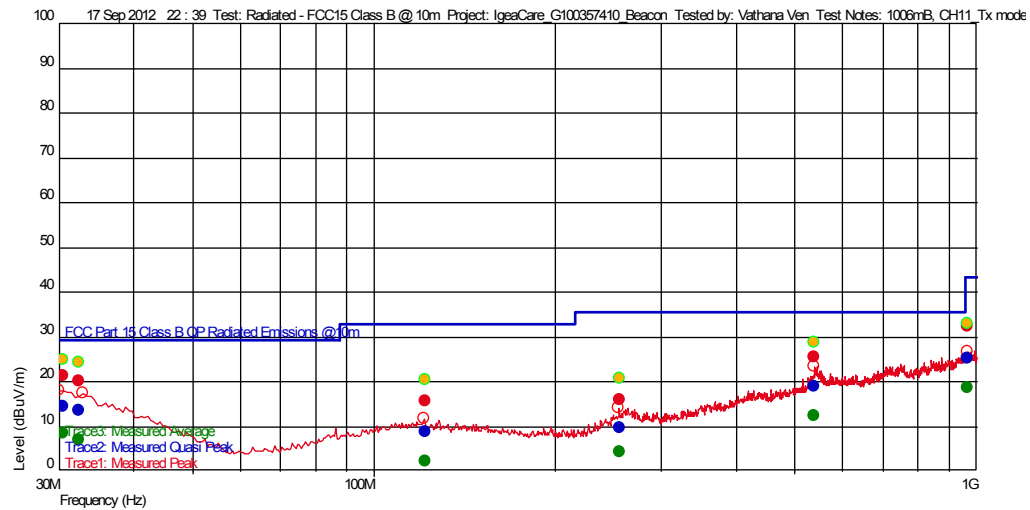

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
255.656112261 M	9.58	13.579	-24.138	35.540	-25.96		158	1.75	120 k
121.775550651 M	8.80	11.378	-25.073	33.040	-24.24	--	321	3.93	120 k
967.682164625 M	25.13	24.907	-22.386	43.540	-18.41		134	3.29	120 k
539.157314379 M	19.06	21.831	-23.979	35.540	-16.48	--	321	1.04	120 k
32.515030397 M	13.52	17.691	-26.106	29.540	-16.02	--	1	1.67	120 k
30.608416834 M	14.38	18.674	-26.113	29.540	-15.16	--	1	1.87	120 k

Azimuth Plots

Turntable Plot (30.608416834 MHz)

Level (dBuV/m)

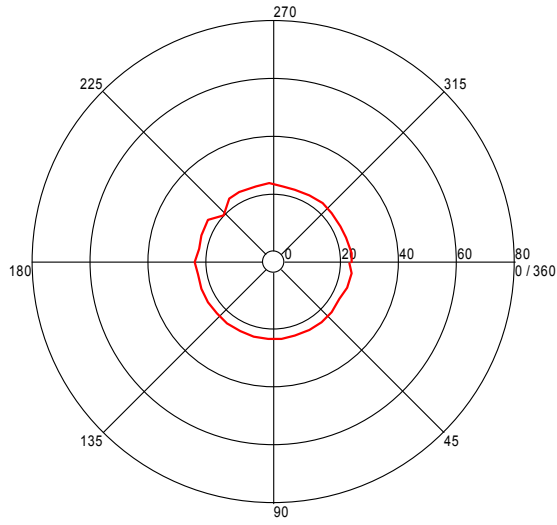


All Polarities

Azimuth (Degrees)

Turntable Plot (32.515030397 MHz)

Level (dBuV/m)

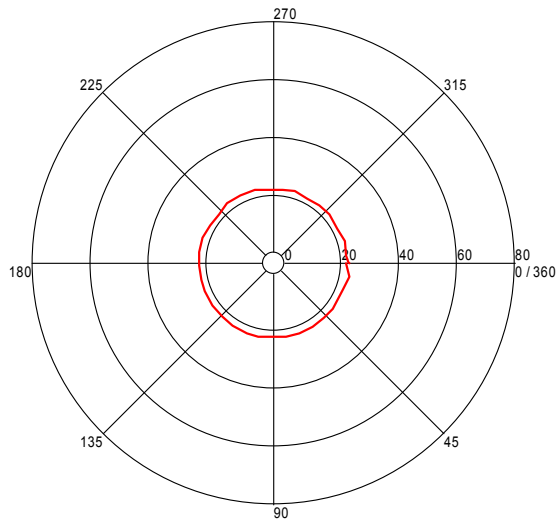


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (30.608416834 MHz)

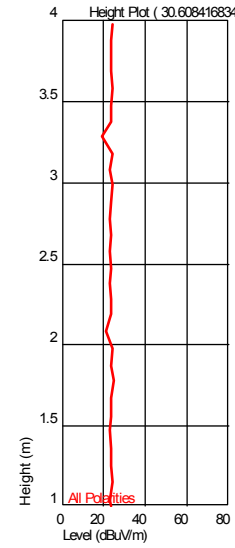


Height Plot (32.515030397 MHz)

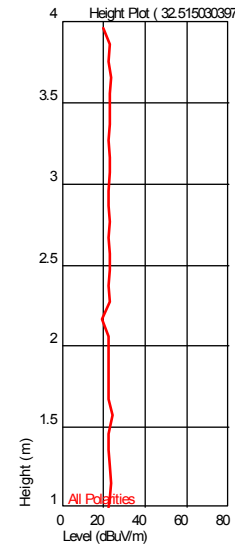


Turntable Plot (121.775550651 MHz)

Level (dBuV/m)

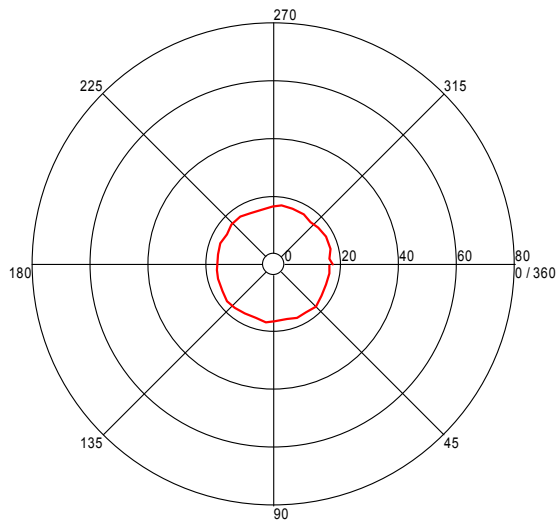


All Polarities

Azimuth (Degrees)

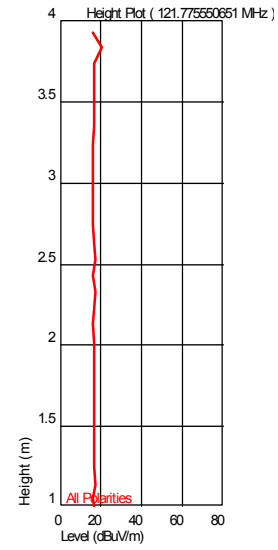


Turntable Plot (255.656112261 MHz)

Level (dBuV/m)

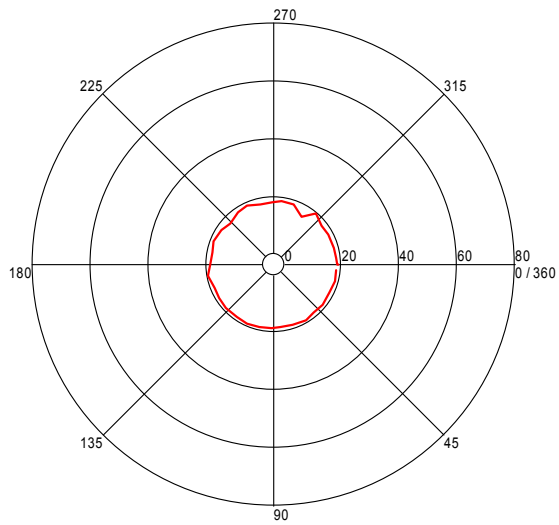


All Polarities

Azimuth (Degrees)

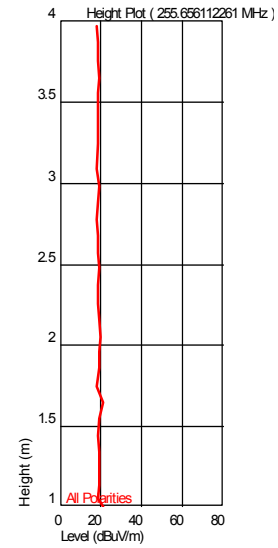

Turntable Plot (539.157314379 MHz)


Level (dBuV/m)

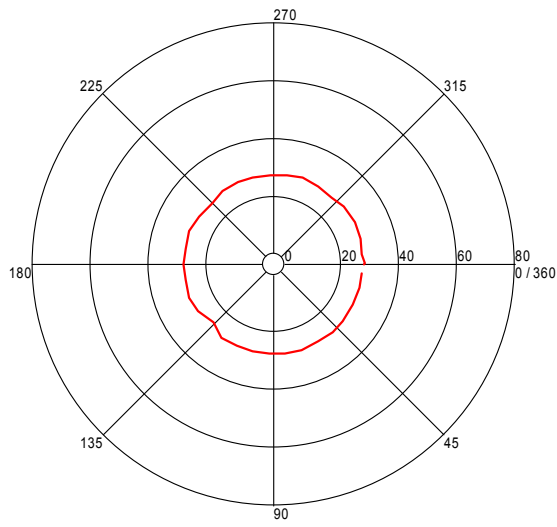

All Polarities


Azimuth (Degrees)

Height Plot (539.157314379 MHz)

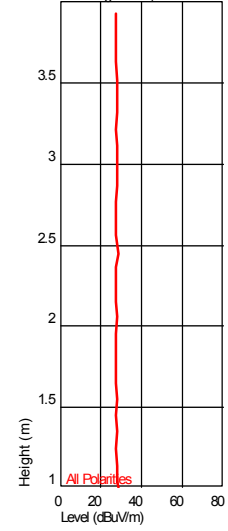

Turntable Plot (967.682164625 MHz)


Level (dBuV/m)

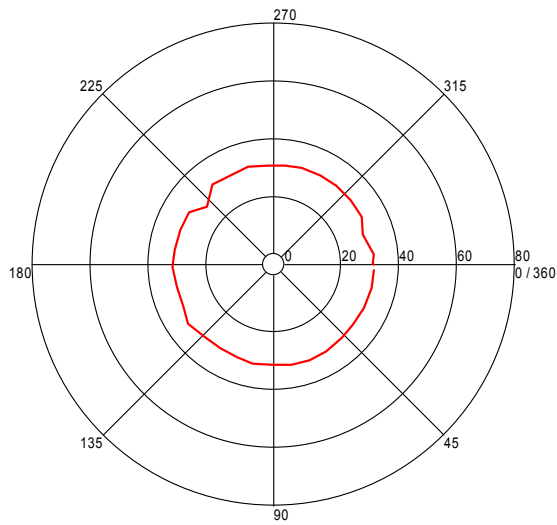

All Polarities

Azimuth (Degrees)

Height Plot (967.682164625 MHz)



Test Information

Test Details


Test:
Project:
Test Notes:
Temperature:
Humidity:
Tested by:
Test Started:

User Entry

Radiated - FCC15 Class B @ 10m
Mircom (IgeaCare_G100357410_Beacon)
1006mB, CH18_Tx mode
25 deg C
38%
Vathana Ven
17 Sep 2012 23 : 16

Additional Information

Prescan Emission Graph

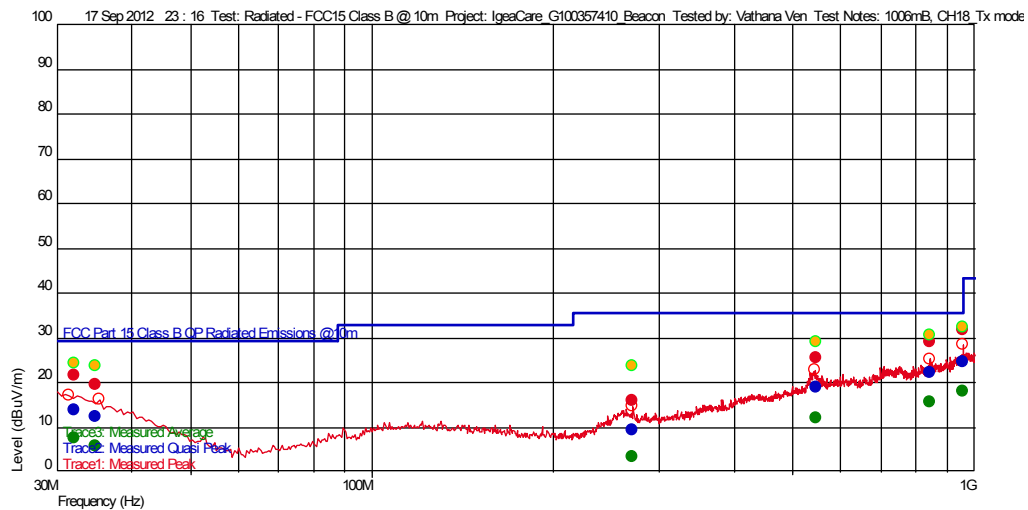

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable
- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
271.363727343 M	9.27	13.245	-24.112	35.540	-26.27		360	1.46	120 k
34.866332283 M	12.29	16.567	-26.098	29.540	-17.25		169	4.00	120 k
545.449299076 M	18.88	21.637	-23.974	35.540	-16.66		106	2.19	120 k
32.156913996 M	13.73	17.906	-26.107	29.540	-15.81	--	181	1.05	120 k
844.028456846 M	22.32	23.303	-23.036	35.540	-13.22		93	3.09	120 k
958.995391012 M	24.65	24.560	-22.406	35.540	-10.89	--	103	4.00	120 k

Azimuth Plots

Turntable Plot (32.156913996 MHz)

Level (dBuV/m)

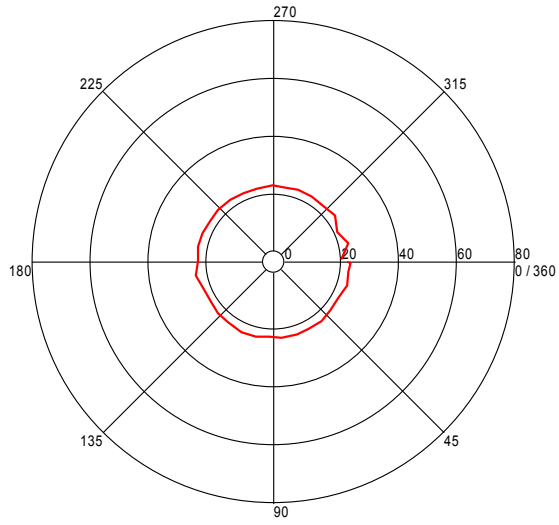


All Polarities

Azimuth (Degrees)

Turntable Plot (34.866332283 MHz)

Level (dBuV/m)

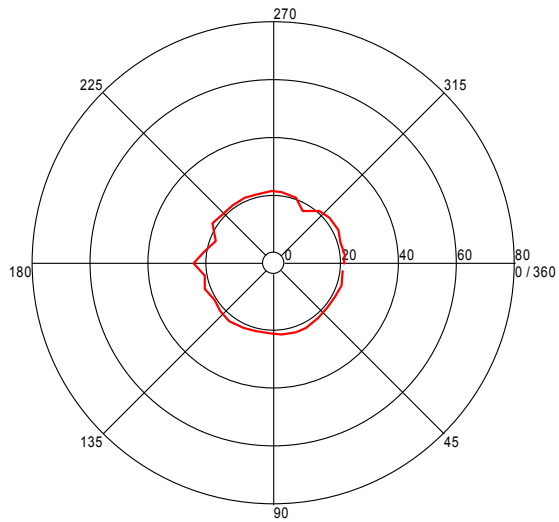


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (32.156913996 MHz)

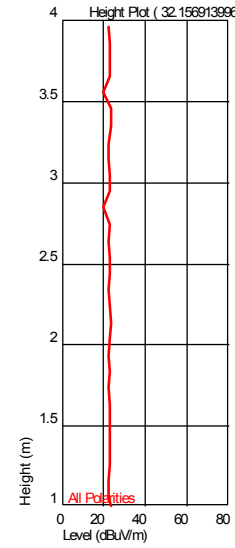


Height Plot (34.866332283 MHz)

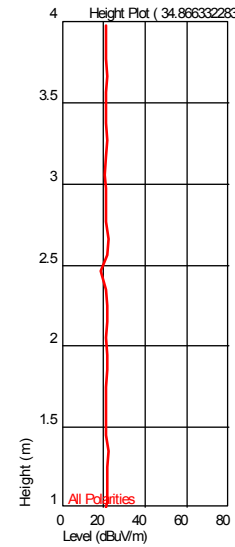

Turntable Plot (271.363727343 MHz)


Level (dBuV/m)

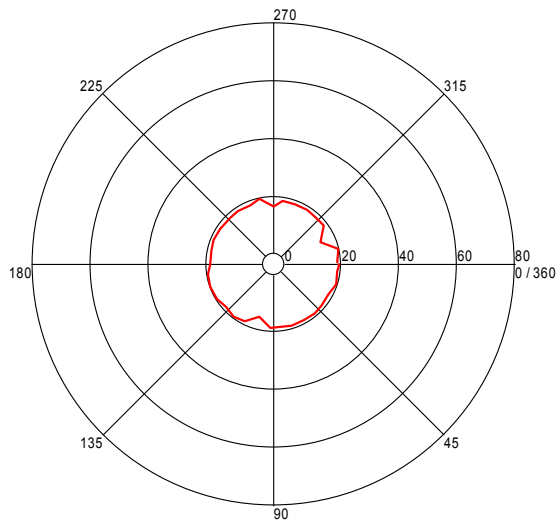

All Polarities


Azimuth (Degrees)

Height Plot (271.363727343 MHz)

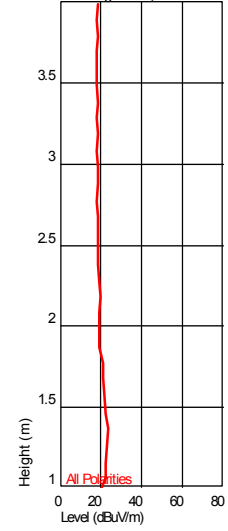

Turntable Plot (545.449299076 MHz)


Level (dBuV/m)

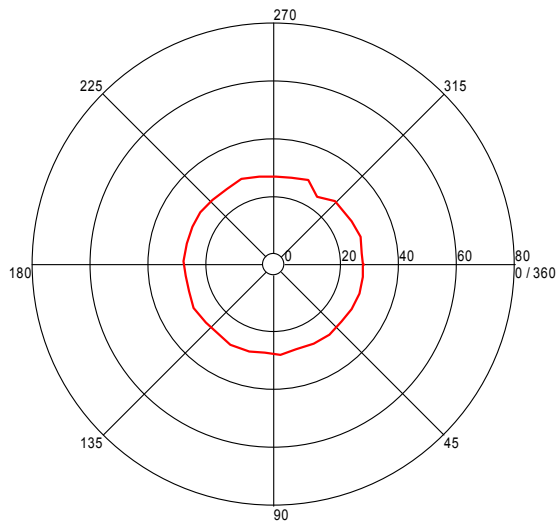

All Polarities


Azimuth (Degrees)

Height Plot (545.449299076 MHz)



Turntable Plot (844.028456846 MHz)


Level (dBuV/m)

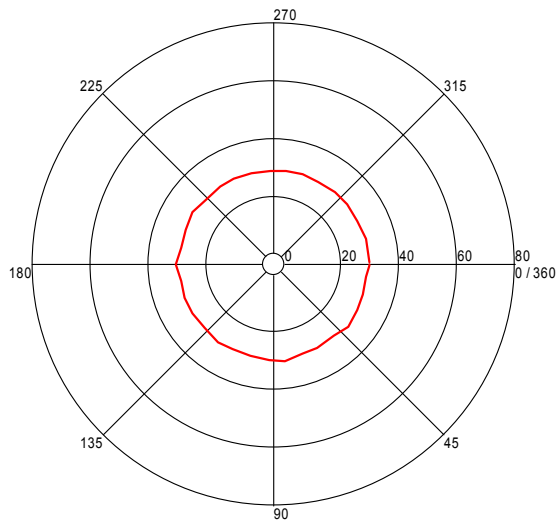

All Polarities


Azimuth (Degrees)

Height Plot (844.028456846 MHz)



Turntable Plot (958.995391012 MHz)


Level (dBuV/m)

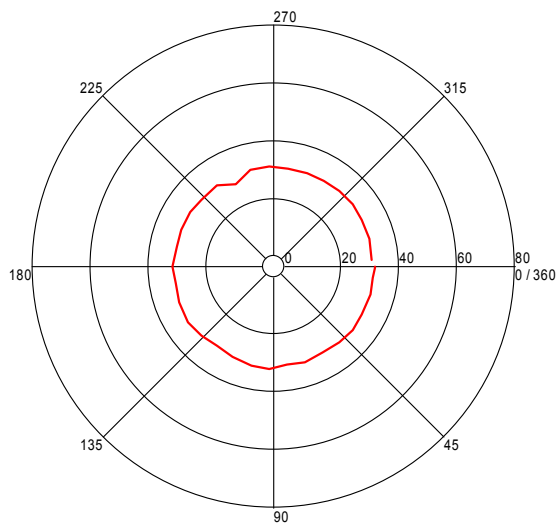

All Polarities

Azimuth (Degrees)

Height Plot (958.995391012 MHz)



Test Information

Test Details


Test:
Project:
Test Notes:
Temperature:
Humidity:
Tested by:
Test Started:

User Entry

Radiated - FCC15 Class B @ 10m
Mircom (IgeaCare_G100357410_Beacon)
1006mB, CH26_Tx mode
25 deg C
38%
Vathana Ven
17 Sep 2012 23 : 53

Additional Information

Prescan Emission Graph

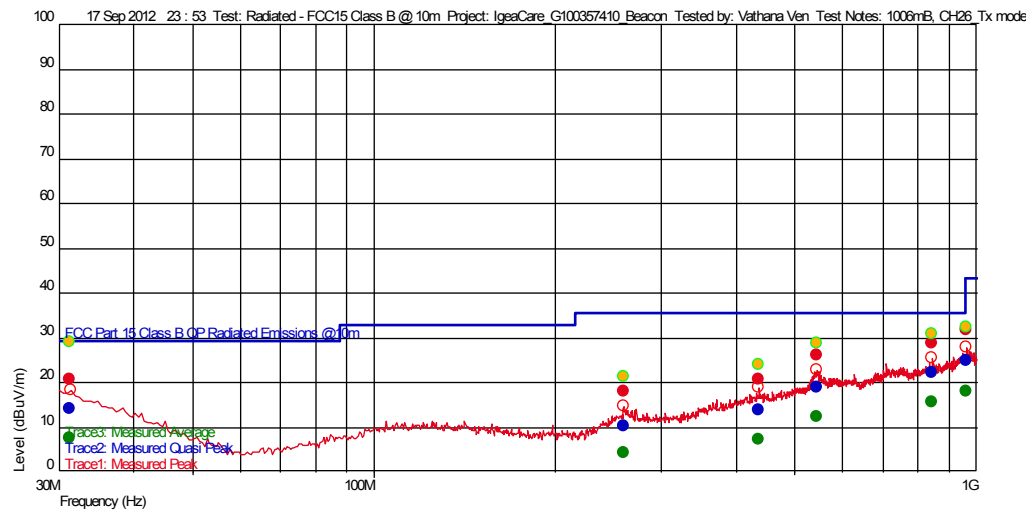

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data


Emissions Test Data

Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
260.027454451 M	10.25	14.100	-24.131	35.540	-25.29		0	1.64	120 k
435.34168322 M	14.00	17.093	-23.921	35.540	-21.54	--	186	2.29	120 k
964.846292489 M	24.90	24.794	-22.393	43.540	-18.64	--	14	3.73	120 k
543.01883793 M	19.05	21.819	-23.976	35.540	-16.49	--	256	2.04	120 k
31.356913996 M	14.08	18.257	-26.110	29.540	-15.46		291	2.66	120 k
844.102605255 M	22.33	23.310	-23.036	35.540	-13.21		360	3.83	120 k

Azimuth Plots


Turntable Plot (31.356913996 MHz)

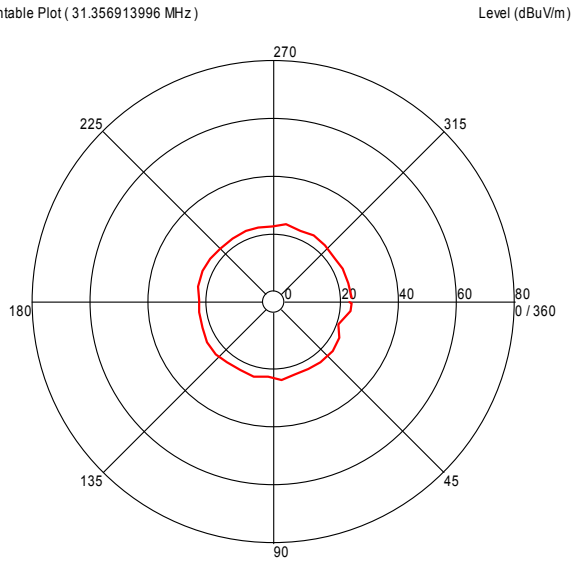

All Polarities

Azimuth (Degrees)

Turntable Plot (260.027454451 MHz)

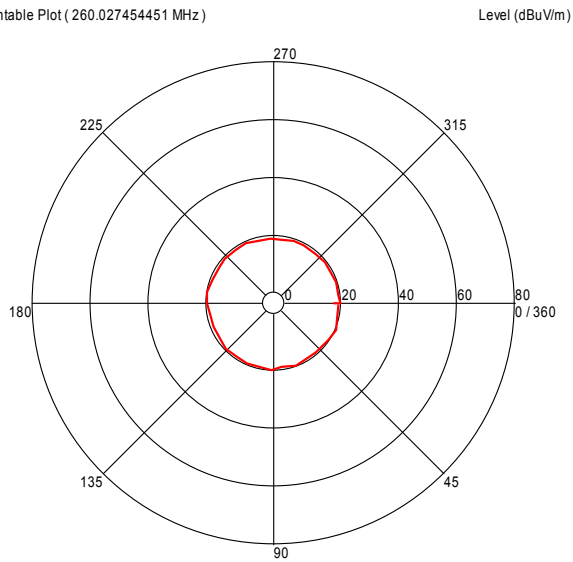


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (31.356913996 MHz)

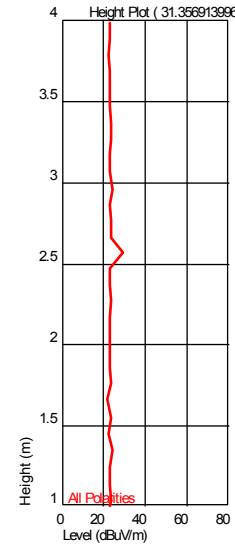


Height Plot (260.027454451 MHz)

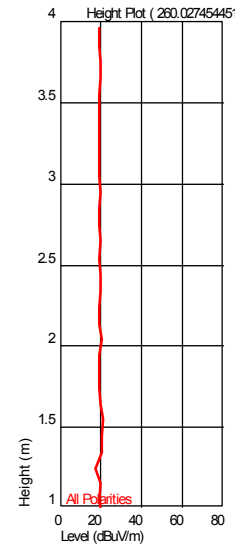

Turntable Plot (435.34168322 MHz)


Level (dBuV/m)

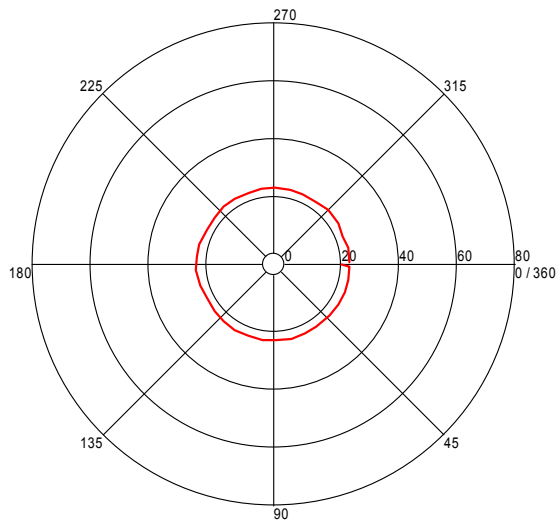

All Polarities


Azimuth (Degrees)

Height Plot (435.34168322 MHz)

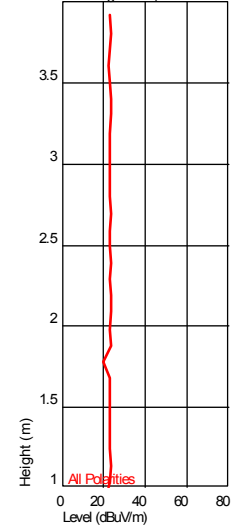

Turntable Plot (543.01883793 MHz)


Level (dBuV/m)

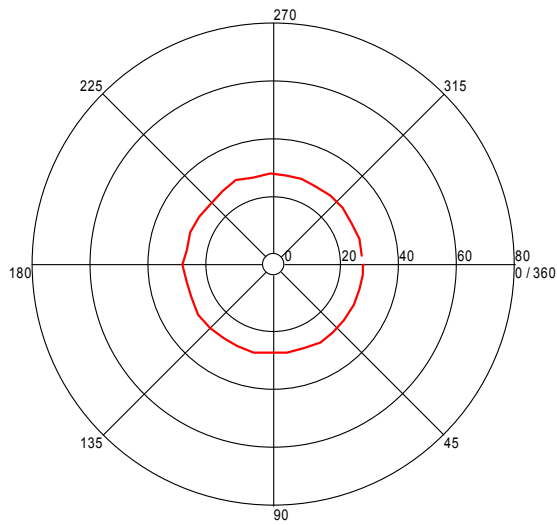

All Polarities


Azimuth (Degrees)

Height Plot (543.01883793 MHz)

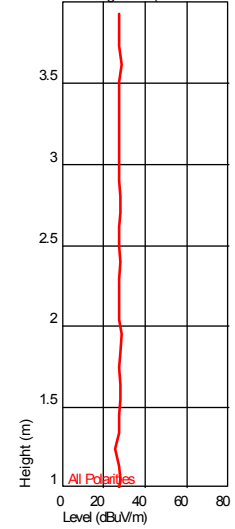

Turntable Plot (844.102605255 MHz)


Level (dBuV/m)

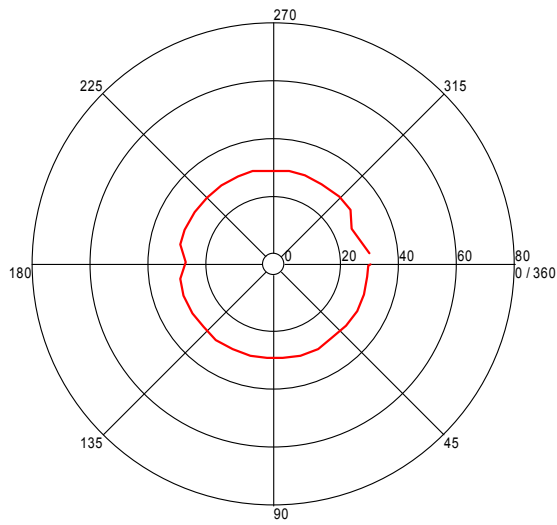

All Polarities


Azimuth (Degrees)

Height Plot (844.102605255 MHz)



Turntable Plot (964.846292489 MHz)


Level (dBuV/m)

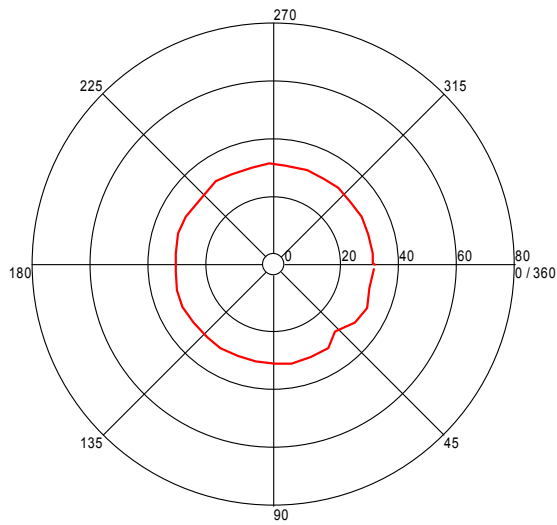

All Polarities

Azimuth (Degrees)

Height Plot (964.846292489 MHz)



Tx Spurious Emissions above 1GHz
Radiated Emissions

Company: Mircom Technologies Ltd.

Model #: NC-210

Serial #: 00309

Engineers: Vathana Ven

Project #: G102179505

Standard: FCC Part 15C, 15.247

Receiver: R&S ESI (145-128) 10-01-2014

PreAmp: 145014 05-13-16.txt

PreAmp Used? (Y or N): Y

Date(s): 08/27/15

Limit Distance (m): 3

Test Distance (m): 3

Voltage/Frequency: Battery powered

Antenna & Cables: HF Bands: N, LF, HF, SHF

Antenna: ETS001 01-14-16.txt ETS001 01-14-16.txt

Cable(s): 145-416 3mTrkB 10-04-2015.txt NONE.

Barometer: DAV004

Filter: REA004

Temp/Humidity/Pressure: 22 deg C 41% 1006 mB

Frequency Range: 1-25 GHz

Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)

Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Bandwidth	FCC	IC	Harmo
Note: Spurious Emissions Reference. Fundamental frequencies (modulated) at 3 meters with no pre-amp														
CH11 - 2405MHz, No pre-amp, Typical Orientation														
PK	H	2405.000	39.55	31.97	5.92	0.00	0.00	77.44	-	-	100/300 kHz			
PK	V	2405.000	36.02	31.97	5.92	0.00	0.00	73.91	-	-	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Typical Orientation														
PK	H	2440.000	40.76	32.11	5.98	0.00	0.00	78.85	-	-	100/300 kHz			
PK	V	2440.000	41.17	32.11	5.98	0.00	0.00	79.26	-	-	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Typical Orientation														
PK	H	2480.000	41.24	32.26	6.06	0.00	0.00	79.56	-	-	100/300 kHz			
PK	V	2480.000	40.04	32.26	6.06	0.00	0.00	78.36	-	-	100/300 kHz			
CH11 - 2405MHz, Spurious Emissions from 1-18GHz, REA004														
PK	H	4810.000	37.31	34.19	8.65	31.62	0.00	48.53	74.00	-25.47	1/3MHz	Noise Floor		
AVG	H	4810.000	12.13	34.19	8.65	31.62	0.00	23.35	54.00	-30.65	1/3MHz	Noise Floor		
PK	H	7215.000	27.10	35.68	11.02	31.08	0.00	42.73	57.44	-14.71	100/300kHz	Noise Floor		
PK	H	9620.000	26.49	36.69	12.78	28.47	0.00	47.49	57.44	-9.95	100/300kHz	Noise Floor		
PK	H	12025.000	34.76	38.81	14.93	24.91	0.00	63.58	74.00	-10.42	1/3MHz	Noise Floor		
AVG	H	12025.000	9.58	38.81	14.93	24.91	0.00	38.40	54.00	-15.60	1/3MHz	Noise Floor		
PK	H	14430.000	25.93	39.30	15.12	26.24	0.00	54.12	57.44	-3.32	100/300kHz	Noise Floor		
PK	H	16835.000	23.00	41.41	18.22	26.75	0.00	55.88	57.44	-1.56	100/300kHz	Noise Floor		
CH18 - 2440MHz, Spurious Emissions from 1-18GHz, REA004														
PK	H	4880.000	35.84	34.16	8.75	31.60	0.00	47.14	74.00	-26.86	1/3MHz	Noise Floor		
AVG	H	4880.000	10.66	34.16	8.75	31.60	0.00	21.96	54.00	-32.04	1/3MHz	Noise Floor		
PK	H	7320.000	36.90	35.61	11.10	31.05	0.00	52.56	74.00	-21.44	1/3MHz	Noise Floor		
AVG	H	7320.000	11.72	35.61	11.10	31.05	0.00	27.38	54.00	-26.62	1/3MHz	Noise Floor		
PK	H	9760.000	24.70	36.85	13.11	28.26	0.00	46.40	58.85	-12.45	100/300kHz	Noise Floor		
PK	H	12200.000	35.90	38.96	14.80	25.01	0.00	64.65	74.00	-9.35	1/3MHz	Noise Floor		
AVG	H	12200.000	10.72	38.96	14.80	25.01	0.00	39.47	54.00	-14.53	1/3MHz	Noise Floor		
PK	H	14640.000	24.30	39.64	15.25	26.35	0.00	52.83	58.85	-6.02	100/300kHz	Noise Floor		
PK	H	17080.000	23.00	41.73	19.00	26.64	0.00	57.09	58.85	-1.76	100/300kHz	Noise Floor		
CH26 - 2480MHz, Spurious Emissions from 1-18GHz, REA004														
PK	H	4960.000	36.96	34.24	8.86	31.58	0.00	48.47	74.00	-25.53	1/3MHz	Noise Floor		
AVG	H	4960.000	11.78	34.24	8.86	31.58	0.00	23.29	54.00	-30.71	1/3MHz	Noise Floor		
PK	H	7440.000	37.74	35.63	11.19	31.03	0.00	53.53	74.00	-20.47	1/3MHz	Noise Floor		
AVG	H	7440.000	12.56	35.63	11.19	31.03	0.00	28.35	54.00	-25.65	1/3MHz	Noise Floor		
PK	H	9920.000	26.46	37.01	13.49	28.02	0.00	48.94	58.85	-9.91	100/300kHz	Noise Floor		
PK	H	12400.000	36.30	38.99	14.65	25.12	0.00	64.82	74.00	-9.18	1/3MHz	Noise Floor		
AVG	H	12400.000	11.12	38.99	14.65	25.12	0.00	39.64	54.00	-14.36	1/3MHz	Noise Floor		
PK	H	14880.000	23.00	39.76	15.67	26.48	0.00	51.94	58.85	-6.91	100/300kHz	Noise Floor		
PK	H	17360.000	20.00	41.83	20.94	26.52	0.00	56.25	58.85	-2.60	100/300kHz	Noise Floor		

Average factor = 20*LOG((0.5511*10)/100) = 25.18 dB

Hand scans were performed from 18-25GHz at a distance of <1m, no emissions were detected above the measuring equipment noise floor.

Test Personnel: Vathana Ven *VSV*
Supervising/Reviewing
Engineer:
(Where Applicable)
Product Standard: FCC Part 15 Subpart C
15.247; IC RSS-247
Input Voltage: 120VAC/60Hz
Pretest Verification w/
Ambient Signals or
BB Source: **Ambient**

Test Date: 09/21/2012, 08/27/2015

Test Levels: See tables

Ambient Temperature: 24, 22 °C

Relative Humidity: 49, 41 %

Atmospheric Pressure: 1009, 1006 mbars

Deviations, Additions, or Exclusions: None

11 Digital Device and Receiver Radiated Spurious Emissions

11.1 Method

Tests are performed in accordance with CFR47 FCC Part 15 Subpart B 15.109, IC RSS-Gen Section 7.1, IC ICES-003.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz)

$< U_{CISPR}$ (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
 AF = 7.4 dB/m
 CF = 1.6 dB
 AG = 29.0 dB
 FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where UF = Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

11.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
~145034	BiLog Antenna (30 MHz to 1GHz)	Schaffner Chase EMC	CBL6111C	2564	02/07/2012	02/07/2013
~145003	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2011	10/04/2012
~145 128	EMI Test Receiver (20Hz - 40GHz)	Rohde & Schwarz	ESI	837771/027	08/23/2011	09/23/2012
~145-410	Cables 145-400 145-406 145-407 145-405 145-403	Huber + Suhner	10m Track A Cables	multiple	09/04/2011	10/04/2012
~145-416	Cables 145-400 145-408 145-402 145-404	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
~HORN2	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012
~145 014	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	12/16/2011	12/16/2012
DAV001	Weather Station	Davis Instruments	7400	PE80519A61	08/28/2012	08/28/2014


Software Utilized:

Name	Manufacturer	Version
C5	Teseq	Build 5.26.00.3

11.3 Results:

Emissions must be below the general limits of FCC 15.109 and IC RSS-Gen Issue 3 December 2010 Section 6.0 Table 2.

The sample tested was found to Comply.

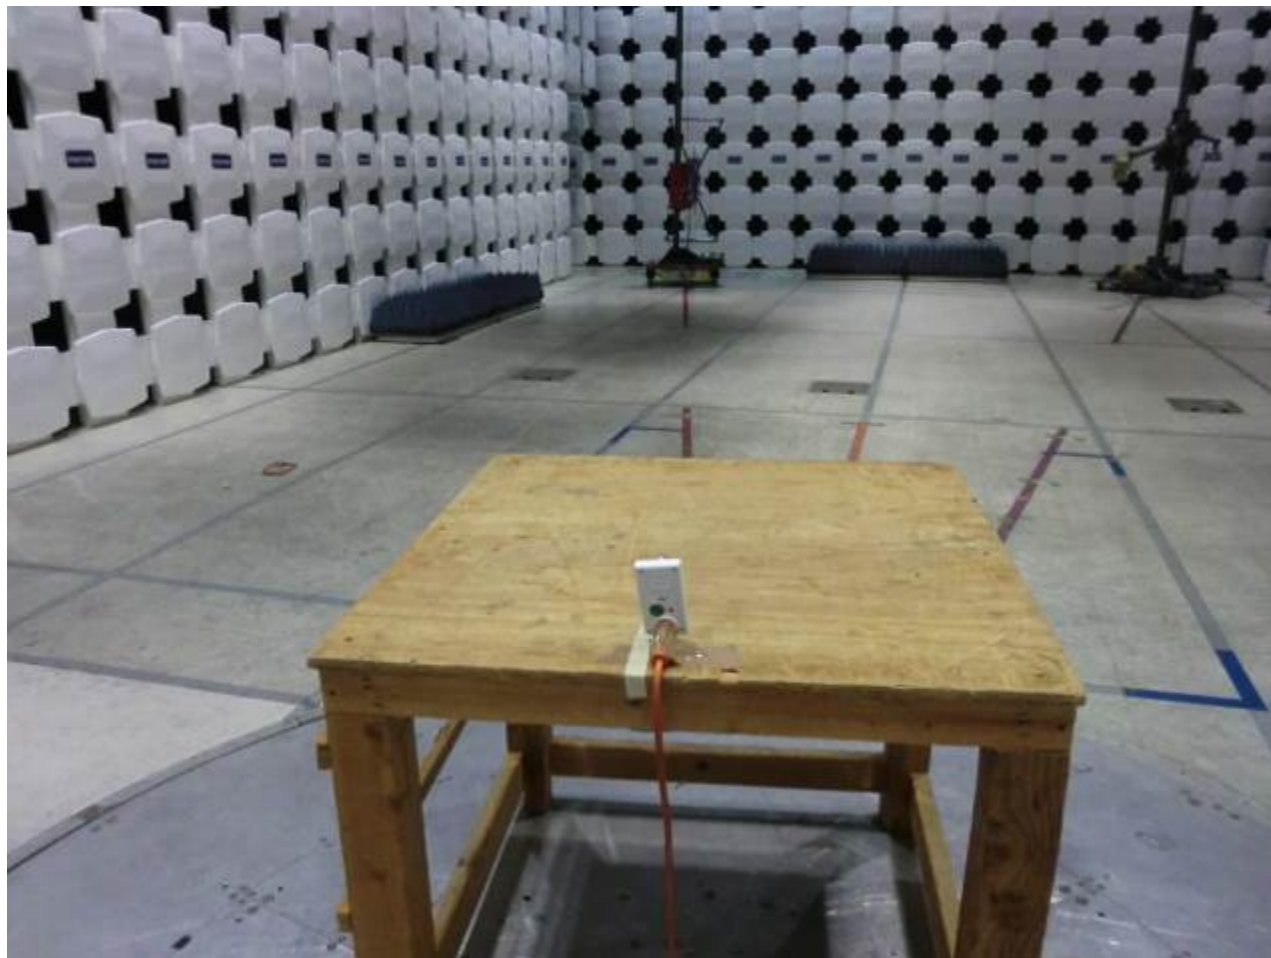11.4 Setup Photographs:

30-1000MHz

11.5 Plots/Data:

Rx Spurious Emissions 30-1000MHz

Test Information

Test Details


Test:
Project:
Test Notes:
Temperature:
Humidity:
Tested by:
Test Started:

User Entry

Radiated - FCC15 Class B @ 10m
Mircom (IgeaCare_G100357410_Beacon)
1006mB, Rx mode
25 deg C
38%
Vathana Ven
18 Sep 2012 00 : 34

Additional Information

Prescan Emission Graph

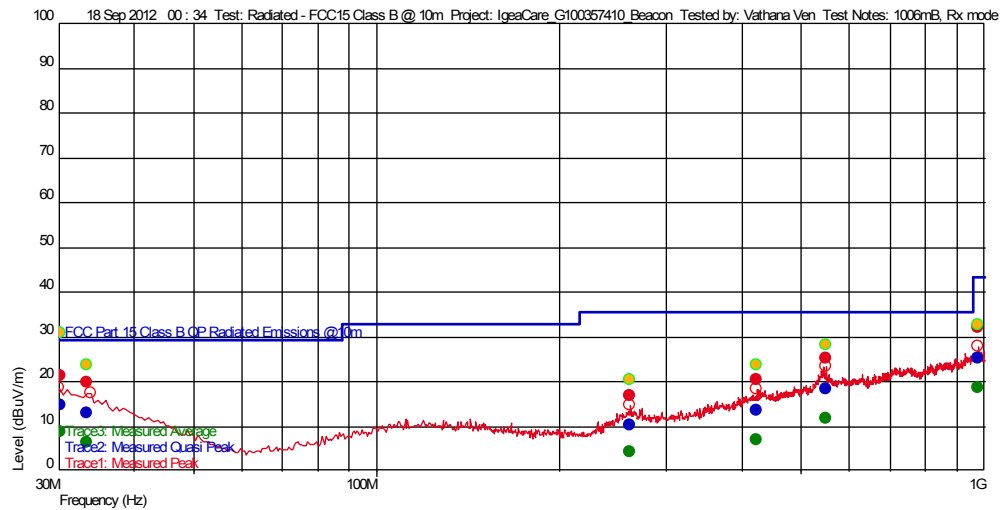

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
261.47114205 M	16.82	14.100	-24.129	35.540	--	--	158	4.00	120 k
422.574148691 M	20.54	16.851	-23.914	35.540	--		213	1.05	120 k
978.164328188 M	32.05	24.873	-22.361	43.540	--		192	1.25	120 k
548.846693371 M	25.20	21.161	-23.971	35.540	--	--	63	3.78	120 k
33.419639727 M	19.75	17.232	-26.103	29.540	--		178	3.70	120 k
30.16993988 M	21.33	18.981	-26.114	29.540	--	--	360	3.83	120 k

Trace2: Measured Quasi Peak


Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
261.47114205 M	10.25	14.100	-24.129	35.540	-25.29	--	158	4.00	120 k
422.574148691 M	13.63	16.851	-23.914	35.540	-21.91		213	1.05	120 k
978.164328188 M	25.33	24.873	-22.361	43.540	-18.21		192	1.25	120 k
548.846693371 M	18.40	21.161	-23.971	35.540	-17.14	--	63	3.78	120 k
33.419639727 M	13.06	17.232	-26.103	29.540	-16.48		178	3.70	120 k
30.16993988 M	14.80	18.981	-26.114	29.540	-14.74	--	360	3.83	120 k

Trace3: Measured Average

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
261.47114205 M	4.23	14.100	-24.129	--	--	--	158	4.00	120 k
33.419639727 M	6.45	17.232	-26.103	--	--		178	3.70	120 k
422.574148691 M	6.92	16.851	-23.914	--	--		213	1.05	120 k
30.16993988 M	8.67	18.981	-26.114	--	--	--	360	3.83	120 k
548.846693371 M	11.73	21.161	-23.971	--	--	--	63	3.78	120 k
978.164328188 M	18.77	24.873	-22.361	--	--		192	1.25	120 k

Azimuth Plots


Turntable Plot (30.16993988 MHz)

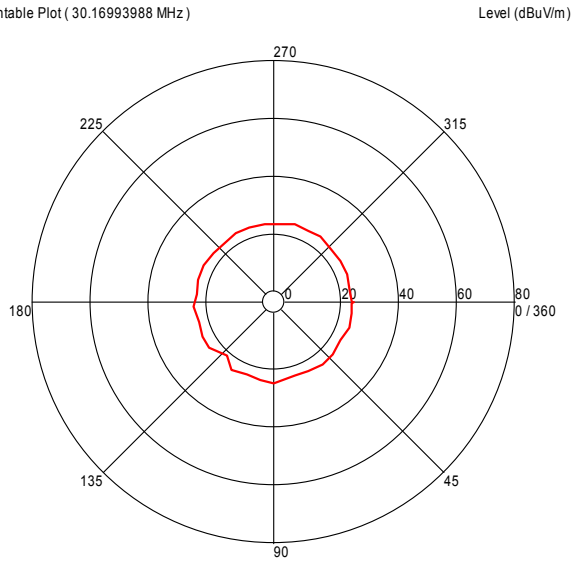

All Polarities

Azimuth (Degrees)



Turntable Plot (33.419639727 MHz)

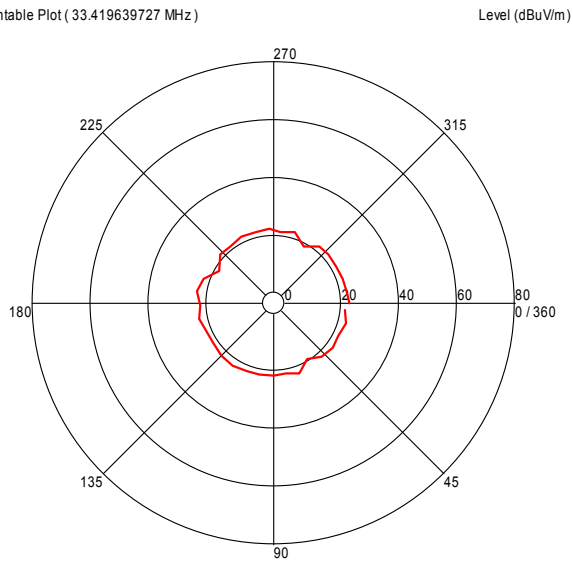

All Polarities


Azimuth (Degrees)

Turntable Plots

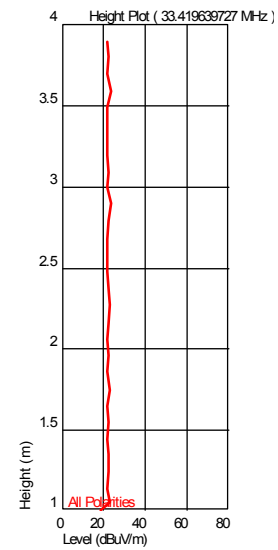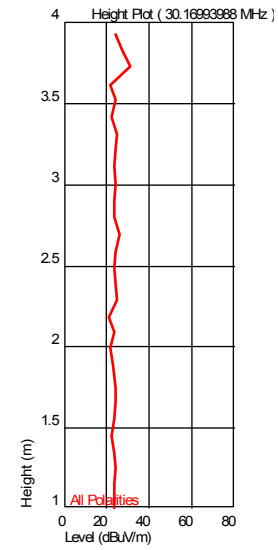

Turntable Plot (261.47114205 MHz)


Level (dBuV/m)

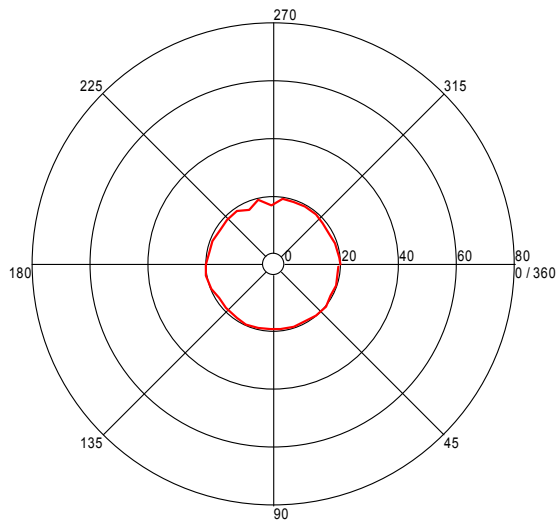

All Polarities


Azimuth (Degrees)

Height Plot (261.47114205 MHz)

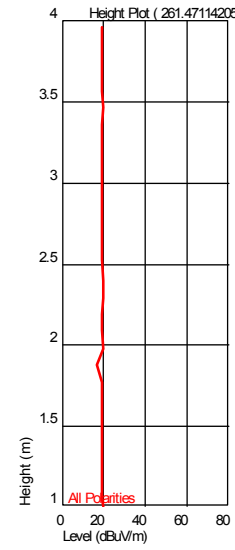

Turntable Plot (422.574148691 MHz)


Level (dBuV/m)

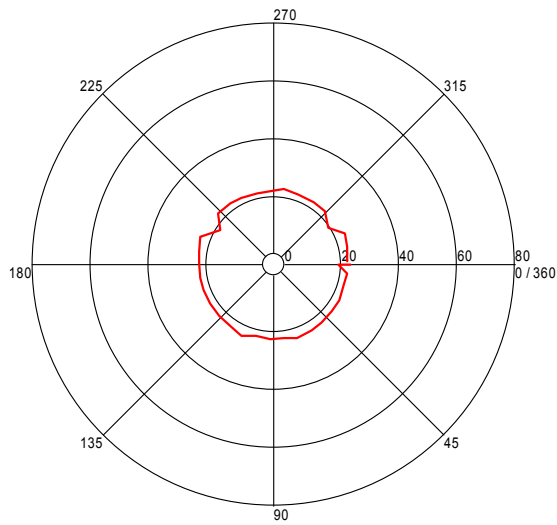

All Polarities


Azimuth (Degrees)

Height Plot (422.574148691 MHz)

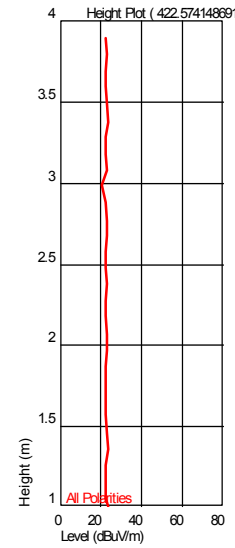

Turntable Plot (548.846693371 MHz)


Level (dBuV/m)

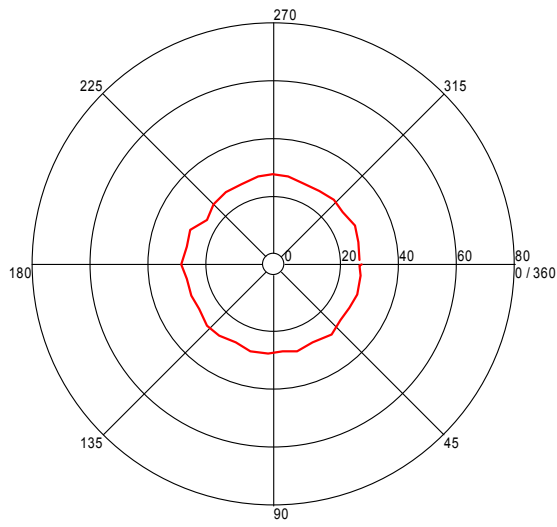

All Polarities


Azimuth (Degrees)

Height Plot (548.846693371 MHz)



Turntable Plot (978.164328188 MHz)


Level (dBuV/m)

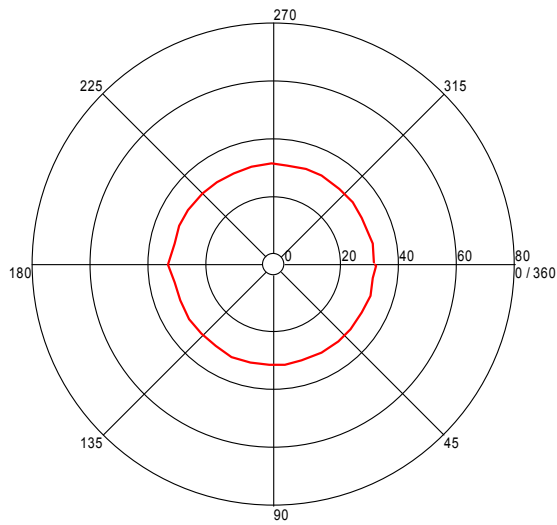

All Polarities

Azimuth (Degrees)

Height Plot (978.164328188 MHz)

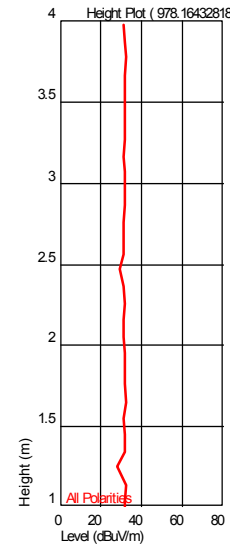


Rx Spurious Emissions 1-13GHz

Test Information

Test Details
 Test: Radiated - FCC15 Class B @ 3m
 Project: Mircom (IgeaCare_G100357410_Beacon)
 Test Notes: 1000mB, Rx mode
 Temperature: 24 deg C
 Humidity: 24%
 Tested by: Vathana Ven
 Test Started: 22 Sep 2012 17:51

Additional Information

Prescan Emission Graph

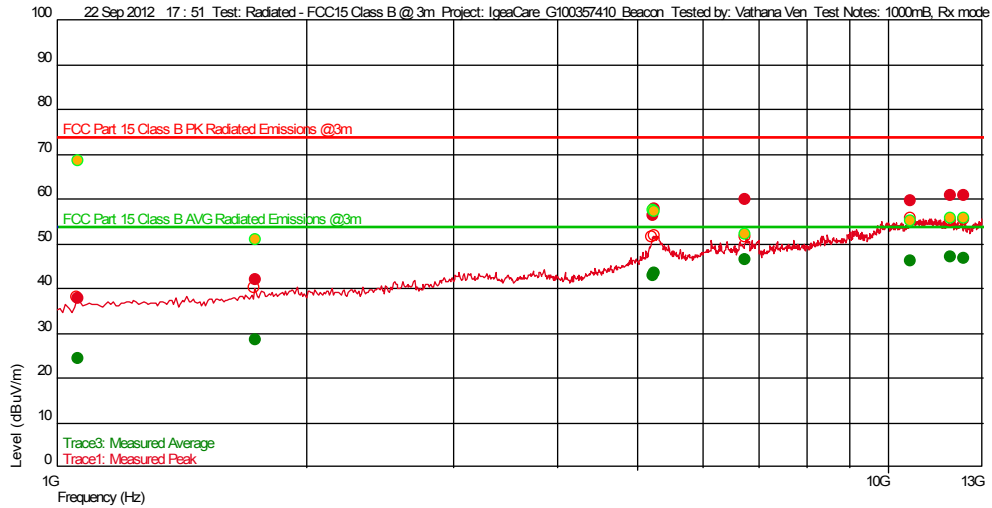

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak


Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
1.061583166 G	37.76	24.825	-30.224	74.000	-36.24		60	1.56	1 M
1.734462258 G	41.83	26.867	-28.596	74.000	-32.17		84	3.40	1 M
5.219271877 G	56.33	33.691	-20.517	74.000	-17.67		288	1.80	1 M
5.25239145 G	57.73	33.720	-19.428	74.000	-16.27	--	137	1.93	1 M
10.657768871 G	59.69	38.339	-19.973	74.000	-14.31	--	181	2.88	1 M
6.748223113 G	59.85	35.074	-24.477	74.000	-14.15		88	1.34	1 M
11.915330661 G	60.64	39.569	-20.365	74.000	-13.36		0	1.69	1 M
12.385490982 G	60.76	38.955	-20.722	74.000	-13.24		147	3.84	1 M

Trace3: Measured Average

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
1.061583166 G	24.45	24.825	-30.224	54.000	-29.55		60	1.56	1 M
1.734462258 G	28.41	26.867	-28.596	54.000	-25.59		84	3.40	1 M
5.219271877 G	42.73	33.691	-20.517	54.000	-11.27		288	1.80	1 M
5.25239145 G	43.53	33.720	-19.428	54.000	-10.47	--	137	1.93	1 M
10.657768871 G	46.06	38.339	-19.973	54.000	-7.94	--	181	2.88	1 M
6.748223113 G	46.47	35.074	-24.477	54.000	-7.53		88	1.34	1 M
12.385490982 G	46.82	38.955	-20.722	54.000	-7.18		147	3.84	1 M
11.915330661 G	47.08	39.569	-20.365	54.000	-6.92		0	1.69	1 M

Azimuth Plots


Turntable Plot (1.061583166 GHz)

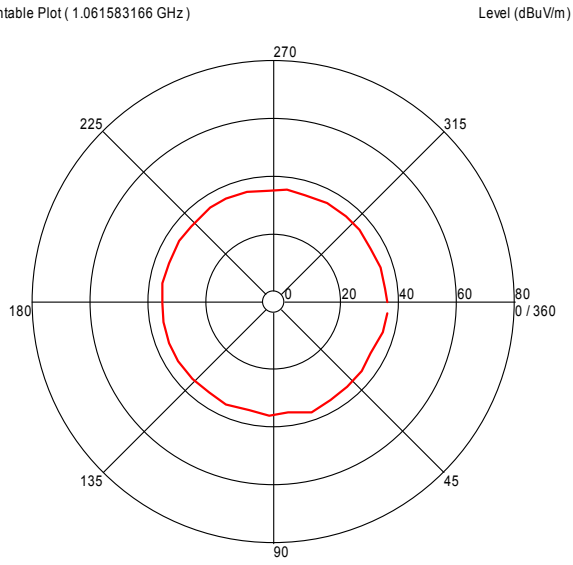

All Polarities

Azimuth (Degrees)



Turntable Plot (1.734462258 GHz)

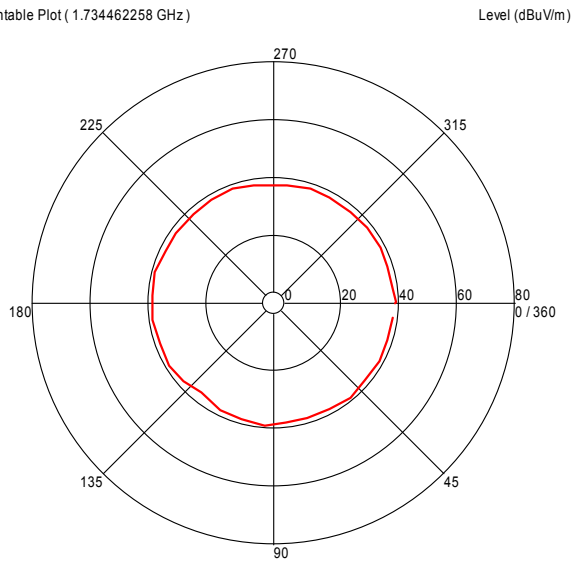

All Polarities


Azimuth (Degrees)

Turntable Plots

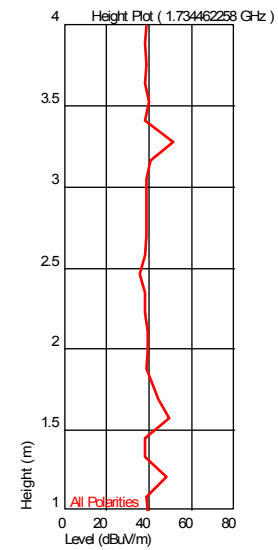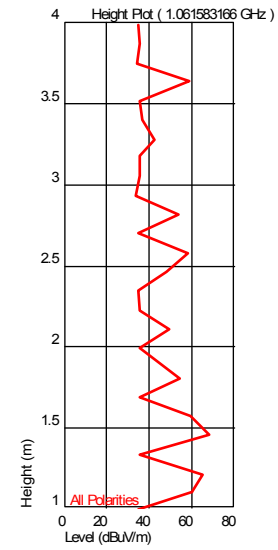

Turntable Plot (5.219271877 GHz)


Level (dBuV/m)

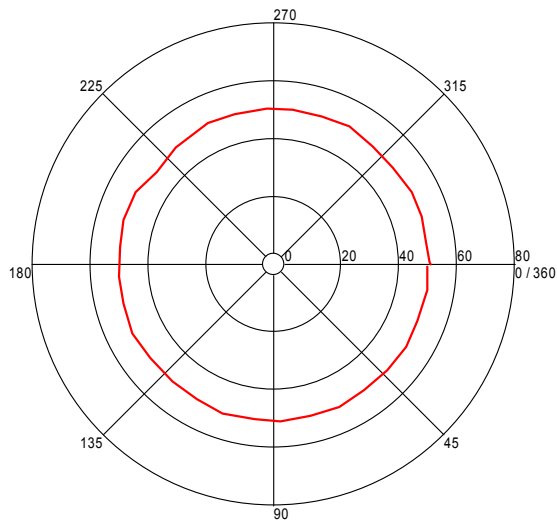

All Polarities


Azimuth (Degrees)

Height Plot (5.219271877 GHz)



Turntable Plot (5.25239145 GHz)


Level (dBuV/m)

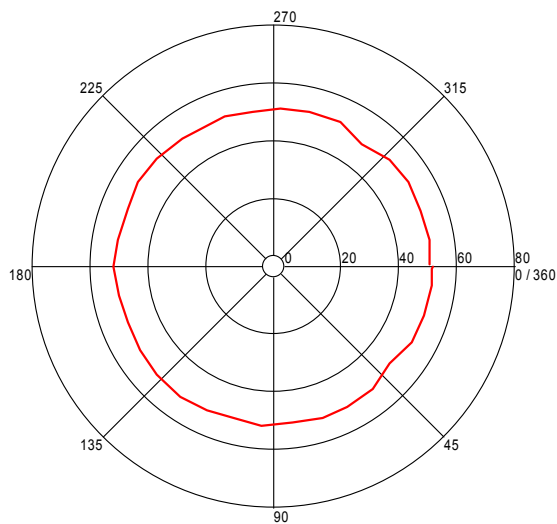

All Polarities


Azimuth (Degrees)

Height Plot (5.25239145 GHz)



Turntable Plot (6.748223113 GHz)


Level (dBuV/m)

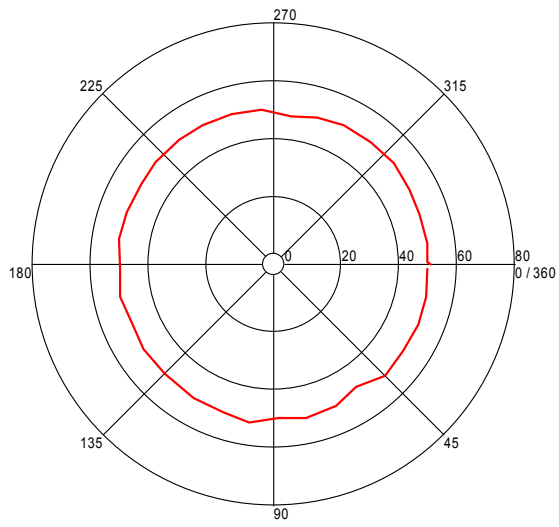

All Polarities


Azimuth (Degrees)

Height Plot (6.748223113 GHz)

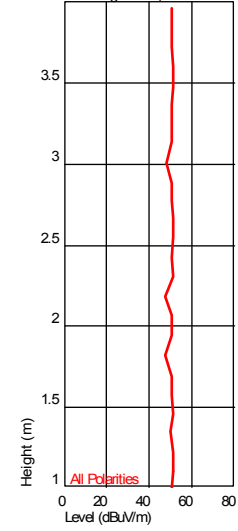

Turntable Plot (10.657768871 GHz)


Level (dBuV/m)

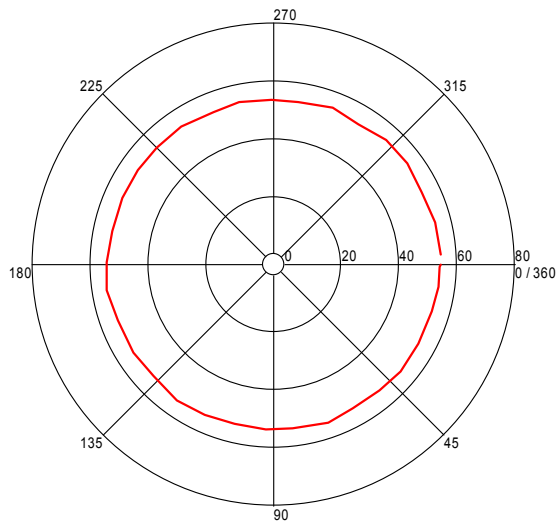

All Polarities


Azimuth (Degrees)

Height Plot (10.657768871 GHz)



Turntable Plot (11.915330661 GHz)


Level (dBuV/m)

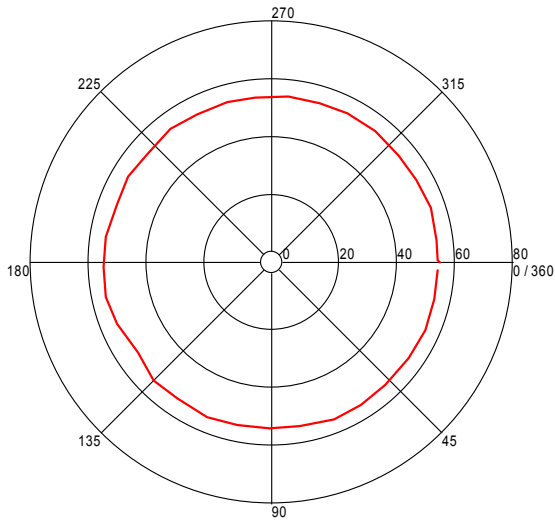

All Polarities


Azimuth (Degrees)

Height Plot (11.915330661 GHz)

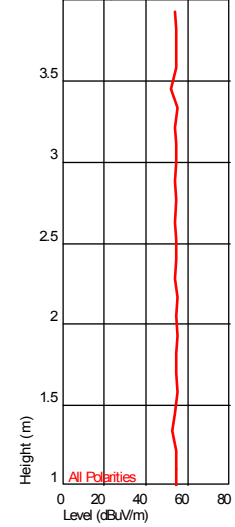

Turntable Plot (12.385490982 GHz)


Level (dBuV/m)

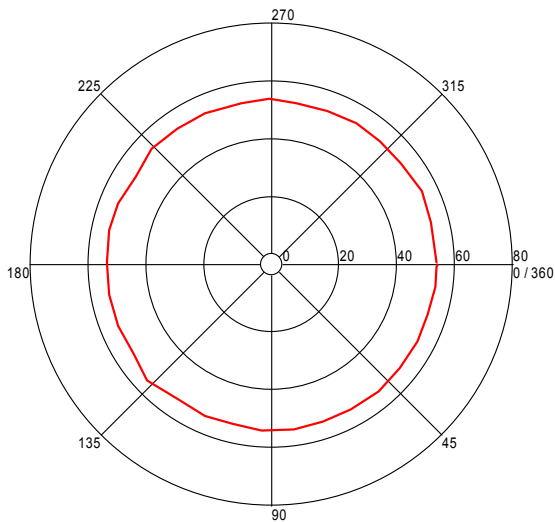

All Polarities

Azimuth (Degrees)

Height Plot (12.385490982 GHz)

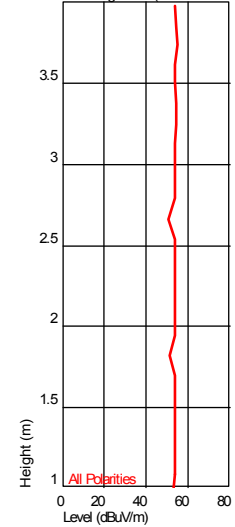

Test Personnel: Vathana Ven
 Supervising/Reviewing Engineer:
 (Where Applicable)
 Product Standard: FCC Part 15 Subpart B; IC RSS-247, IC RSS-Gen, IC ICES-003
 Input Voltage: 120VAC/60Hz
 Pretest Verification w/ Ambient Signals or BB Source: Ambient

Test Date: 09/18/2012, 09/22/2012

Test Levels: Class B

Ambient Temperature: 25, 24 °C

Relative Humidity: 38, 24 %

Atmospheric Pressure: 1005, 1000 mbars

Deviations, Additions, or Exclusions: None

12 AC Mains Conducted Emissions

12.1 Method

Tests are performed in accordance with CFR47 FCC Part 15:2012 Subpart B Section 15.207 IC RSS-Gen Issue 4 November, 7.2.2.

TEST SITE: AMAP (Bump Out)

The EMC Lab has two Semi-anechoic Chambers and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

The AMAP Building and Lab includes general lab space that can be used for testing where a shielded/enclosed environment is not required.

Measurement Uncertainty

For conducted emissions, U_{lab} (3.1 dB in worst case) $< U_{CISPR}$ (3.6 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculations

The following is how net line-conducted readings were determined:

$$NF = RF + LF + CF + AF$$

Where NF = Net Reading in dB μ V

RF = Reading from receiver in dB μ V

LF = LISN or ISN Correction Factor in dB

CF = Cable Correction Factor in dB

AF = Attenuator Loss Factor in dB

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$NF = RF + LF + CF + AF = 28.5 + 0.2 + 0.4 + 20.0 = 49.1 \text{ dB}\mu\text{V}$$

$$UF = 10^{(49.1 \text{ dB}\mu\text{V} / 20)} = 285.1 \mu\text{V/m}$$

12.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
Ros002	9kHz to 3GHz EMI Test Receiver	Rohde & Schwartz	ESCI 1166.5950K03	100067	06/13/2012	06/13/2013
Ds26a	Attenuator, 20dB	Mini Circuits	20dB, 50 ohm	DS26A	10/04/2011	10/04/2012
Ds23a	Attenuator, 20dB	Mini Circuits	20dB, 50 ohm	DS23A	09/15/2010	09/15/2011
145015	LISN: 50 Ohm/50 microHenry	Solar Electronics	9252-50-R-24-BNC	971617	02/06/2012	02/06/2013
Dav001	Weather Station	Davis Instruments	7400	PE80519A61	08/28/2012	08/28/2014

Software Utilized:

Name	Manufacturer	Version
C5	Teseq	5.26.46.46

12.3 Results:

The sample tested was found to Comply.

12.4 Setup Photographs:

12.5 Plots/Data:

Test Information

Test Details


Test: LISN - FCC15 Class B
Project: Mircom (IgeaCare_G100357410_Beacon)
Test Notes: 1000mB, 120VAC/60Hz, Tx mode
Temperature: 24 deg C
Humidity: 24%
Tested by: Vathana Ven
Test Started: 22 Sep 2012 19:08

User Entry

LISN - FCC15 Class B
Mircom (IgeaCare_G100357410_Beacon)
1000mB, 120VAC/60Hz, Tx mode
24 deg C
24%
Vathana Ven
22 Sep 2012 19:08

Additional Information

Prescan Emission Graph

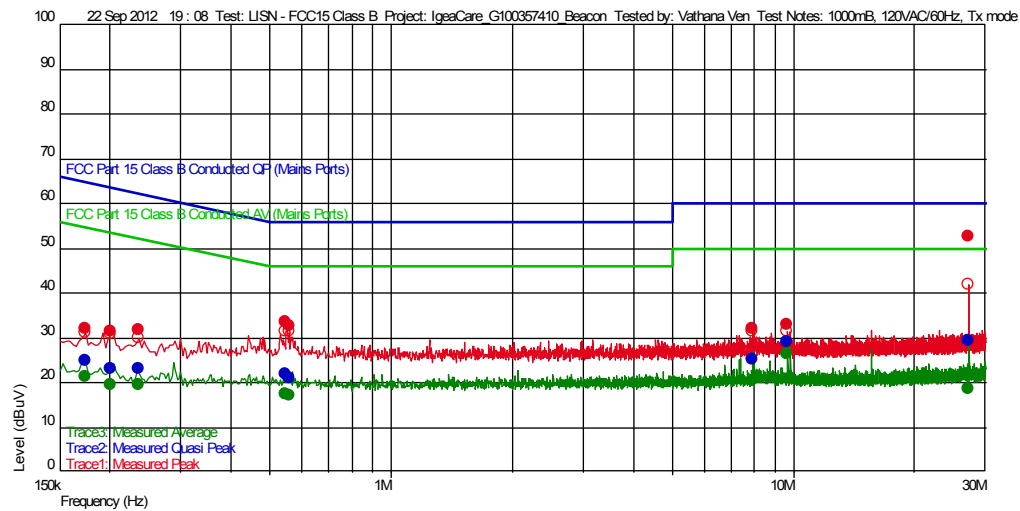

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace2: Measured Quasi Peak

Frequency(Hz)	Level(dBuV)	TF	PA+CL	Limit(dBuV)	Margin(dBuV)	RBW(Hz)	Comment	LINE
201.0 k	23.08	0.120	20.868	63.569	-40.49	9 k		L1
174.0 k	24.80	0.123	20.863	64.767	-39.97	9 k		L1
237.0 k	23.02	0.113	20.874	62.201	-39.18	9 k		L1
558.0 k	21.02	0.104	20.915	56.000	-34.98	9 k		L1
7.926 M	25.17	0.169	21.530	60.000	-34.83	9 k		N
549.0 k	21.93	0.104	20.914	56.000	-34.07	9 k		N
9.666 M	28.97	0.187	21.614	60.000	-31.03	9 k		L1
27.28395 M	29.28	0.651	22.349	60.000	-30.72	9 k		L1

Trace3: Measured Average

Frequency(Hz)	Level(dBuV)	TF	PA+CL	Limit(dBuV)	Margin(dBuV)	RBW(Hz)	Comment	LINE
201.0 k	19.64	0.120	20.868	53.569	-33.93	9 k		L1
174.0 k	21.42	0.123	20.863	54.767	-33.35	9 k		L1
237.0 k	19.57	0.113	20.874	52.201	-32.64	9 k		L1
27.28395 M	18.71	0.651	22.349	50.000	-31.29	9 k		L1
7.926 M	20.59	0.169	21.530	50.000	-29.41	9 k		N
558.0 k	17.27	0.104	20.915	46.000	-28.73	9 k		L1
549.0 k	17.36	0.104	20.914	46.000	-28.64	9 k		N
9.666 M	26.40	0.187	21.614	50.000	-23.60	9 k		L1

Test Information

Test Details

Test:

Project:

Test Notes:

Temperature:

Humidity:

Tested by:

Test Started:

User Entry

LISN - FCC15 Class B

IgeaCare_G100357410_Beacon

1000mB, 120VAC/60Hz, Rx mode

24 deg C


24%

Vathana Ven

22 Sep 2012 19 : 33

Additional Information

Prescan Emission Graph

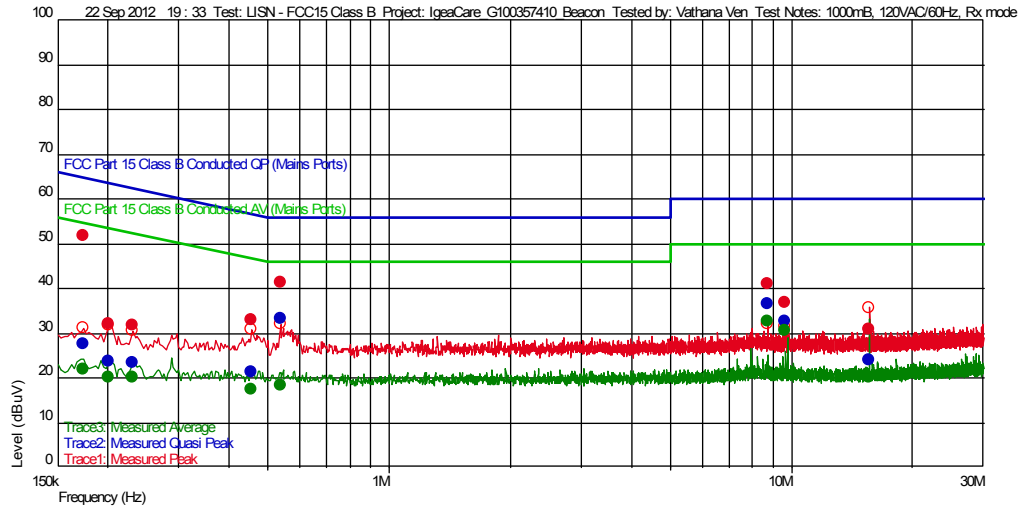

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace2: Measured Quasi Peak

Frequency(Hz)	Level(dBuV)	TF	PA+CL	Limit(dBuV)	Margin(dBuV)	RBW(Hz)	Comment	LINE
201.0 k	23.64	0.120	20.868	63.569	-39.93	9 k		L1
231.0 k	23.53	0.114	20.873	62.414	-38.89	9 k		L1
174.0 k	27.48	0.123	20.863	64.767	-37.29	9 k		L1
15.606 M	24.04	0.420	21.890	60.000	-35.96	9 k		N
456.0 k	21.44	0.102	20.902	56.765	-35.32	9 k		L1
9.654 M	32.79	0.187	21.613	60.000	-27.21	9 k		N
8.718 M	36.62	0.177	21.568	60.000	-23.38	9 k		N
537.0 k	33.23	0.103	20.913	56.000	-22.77	9 k		N

Trace3: Measured Average

Frequency(Hz)	Level(dBuV)	TF	PA+CL	Limit(dBuV)	Margin(dBuV)	RBW(Hz)	Comment	LINE
201.0 k	20.21	0.120	20.868	53.569	-33.36	9 k		L1
174.0 k	21.83	0.123	20.863	54.767	-32.94	9 k		L1
231.0 k	20.10	0.114	20.873	52.414	-32.31	9 k		L1
15.606 M	20.28	0.420	21.890	50.000	-29.72	9 k		N
456.0 k	17.52	0.102	20.902	46.765	-29.24	9 k		L1
537.0 k	18.45	0.103	20.913	46.000	-27.55	9 k		N
9.654 M	30.72	0.187	21.613	50.000	-19.28	9 k		N
8.718 M	32.79	0.177	21.568	50.000	-17.21	9 k		N

Test Personnel: Vathana Ven *VSV*
Supervising/Reviewing Engineer:
(Where Applicable)
Product Standard: FCC Part 15 Subpart B; IC
ICES-003
Input Voltage: 120VAC/60Hz
Pretest Verification w/
Ambient Signals or
BB Source: **Ambient**

Test Date: 09/22/2012

Test Levels: Class B

Ambient Temperature: 24 °C

Relative Humidity: 24 %

Atmospheric Pressure: 1000 mbars

Deviations, Additions, or Exclusions: None

12 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	09/27/2012	100876115BOX-001	VHV	NNA	Original issue
1	03/25/2015	100876115BOX-001a	VHV		Company name and model number changed
2	09/04/2015	102172761BOX-001b	VHV		Added data above 1 GHz