



EMISSIONS TEST REPORT

Report Number: 101930181BOX-001

Project Number: G101930181

Report Issue Date: 02/03/2015

Product Designation: NC-500 (originally tested as Igeacom II)

Standards: CFR47 FCC Part 15 Subpart C 15.247:2015
CFR47 FCC Part 15 Subpart B:2015
IC RSS-247 Issue 1 May 2015
IC RSS-Gen Issue 4 November 2014
IC ICES-003 Issue 5 August 2012
IC RSS-102 Issue 5 March 2015 updated December 2010

Tested by:
Intertek Testing Services NA, Inc.
70 Codman Hill Road
Boxborough, MA 01719

Client:
Mircom Technologies Ltd.
25 Interchange Way
Vaughan ON L4K 5W3
Canada

Testing was originally performed for IGEACare Solutions Inc.
163 Rivalda Road
North York M9M 2M7
Canada

As company name and model number changed, output power and spurious emissions was spot checked on 01/10/2015 and found that emissions didn't get worst.

Report prepared by Reviewer

Vathana F. Ven / Staff Engineer

Report reviewed by

Kouma Sinn / Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	
4	Description of Equipment Under Test	
5	System Setup and Method	
6	RF Output Power, Duty Cycle, and Human RF Exposure (CFR47 FCC Part 15 Subpart C 15.247(b)(3), KDB 558074, IC RSS-247 Issue 1 May 2015 5.4(4), IC RSS-102 Issue 5 March 2015)	Pass
7	6 dB Bandwidth (CFR47 FCC Part 15 Subpart C 15.247(a)(2), IC RSS-247 Issue 1 May 2015 5.2, IC RSS-Gen Section 6.6, KDB 558074)	Pass
8	Peak Power Spectral Density (FCC 15:2015 Subpart C Section 15.247 (e), RSS-247 Issue 1 May 2015 5.2(2), KDB 558074)	Pass
9	Band Edge Compliance (FCC 15:2015 Subpart C Section 15.247 (d), RSS-247 Issue 1 May 2015 5.2(2), KDB 558074)	Pass
10	Transmitter Radiated Spurious Emissions (CFR47 FCC Part 15 Subpart C 15.247(d), IC RSS-247 Issue 1 May 2015 5.5, KDB 558074)	Pass
11	Receiver Radiated Spurious Emissions (CFR47 FCC Part 15 Subpart B 15.109, IC RSS-Gen Sections 4.10 & 6.0)	Pass
--	AC Mains Conducted Emissions CFR47 FCC Part 15:2015 Subpart B Section 15.207 IC RSS-Gen Issue 3 December 2010, 7.2.2 (Table 2)	N/A, Battery Powered
12	Revision History	

* - The EUT is battery powered and does not have facility to connect to the AC mains, directly or indirectly.

3 Client Information

This EUT was tested at the request of:

Company: Mircom Technologies Ltd.
25 Interchange Way
Vaughan ON L4K 5W3
Canada

Contact: Mr. Mike Mahoney
Telephone: (905) 660-4655
Fax: (905) 695-3538
Email: mmahoney@mircomgroup.com

4 Description of Equipment Under Test

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Zigbee Wireless Pendant	Mircom Technologies Ltd. (tested as IGEACare Solutions Inc)	NC-500 (originally tested as Igeacom II)	00005 00003

Receive Date:	01/25/2012, 01/10/2015	Start Date:	09/13/2012
Received Condition:	Good	Complete date:	01/10/2015
Type:	Prototype		

Description of Equipment Under Test (provided by client)

The NC-500 is a Wireless Pendant with Zigbee wireless application. Wireless communication to a host via an internal chip antenna and Zigbee application with O-PQSK modulation is used. The Zigbee transceiver operates in the 2400-2483.5 MHz band from 2405-2480MHz using an integral antenna.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
2x1.5VDC	N/A	N/A	N/A

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	The device was in transmit mode, channels 11 (2405 MHz), 18 (2440 MHz), 26 (2480 MHz)
2	The device was also tested in receive mode


5 System Setup and Method

Cables					
ID	Description	Length (m)	Shielding	Ferrites	Termination
	None				

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Laptop	HP	350	N/A
AC adapter	Direct Plug-in	35-D12-200	N/A

5.1 Method:

Configuration as required by ANSI C 63.4:2009, ANSI C63.10:2009, FCC Part 15:2015, Subpart C Section 15.247, IC RSS-247 Issue 1 May 2015, RSS-Gen Issue 4 November 2014, and KDB 558074.

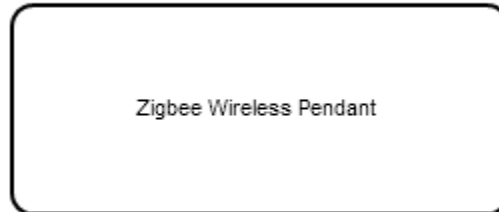5.2 EUT Block Diagram:

6 RF Output Power, Duty Cycle, and Human RF Exposure

6.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, RSS-102, FCC Part 2 and KDB 447498, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) $< U_{CISPR}$ (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV003'	Weather Station	Davis Instruments	7400	PE80529A39 A	08/17/2011	09/17/2012
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
HORN2'	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
DAV001	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012

Software Utilized:

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

6.3 Results:

The sample tested was found to Comply. The EIRP must not exceed 36 dBm. The Human RF Exposure limit is 1 mW/cm².


6.4 Setup Photographs:



Axis1 orientation



Axis 2 orientation

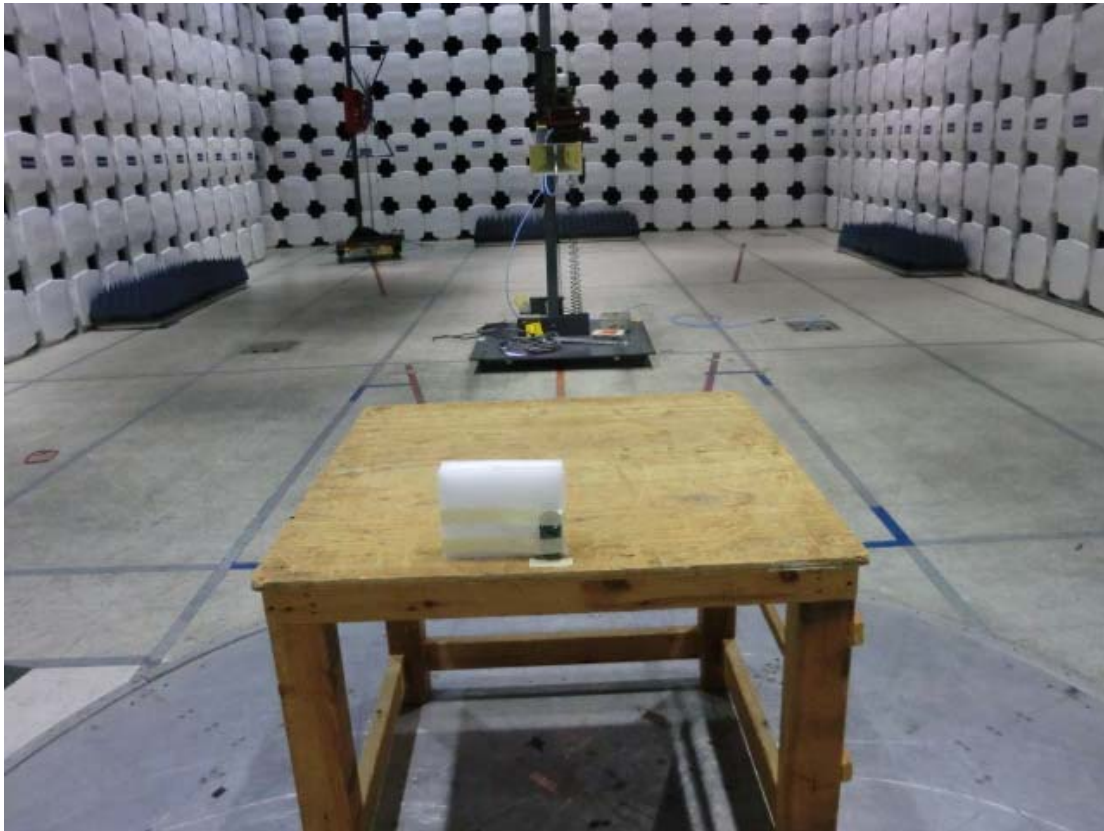

Axis 3 orientation

6.5 Plots/Data:

RF Output Power

Radiated Emissions


Company: IGEACare Solutions Inc
 Model #: Igeacom II
 Serial #: 00005
 Engineers: Vathana Ven
 Project #: G100357410
 Standard: FCC Part 15 Subpart C 15.247
 Receiver: R&S ESI (145-128) 09-23-2012
 PreAmp: PRE145014 12-16-2012.txt
 Antenna & Cables: SHF Bands: N, LF, HF, SHF
 Antenna: HORN2 V3m 10-24-2012.txt HORN2 H3m 10-24-2012.txt
 Cable(s): 145-416 3mTrkB 09-04-2012.txt NONE
 Location: 10m Chamber Barometer: DAV003 Filter: NONE
 Date(s): 09/13/12
 Limit Distance (m): 3
 Test Distance (m): 3
 Temp/Humidity/Pressure: 24C 51% 1014mbar
 Voltage/Frequency: Battery Powered Frequency Range: Frequencies Shown
 PreAmp Used? (Y or N): N
 Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	EIRP Net dBm	EIRP Limit dBm	Margin dB	Bandwidth
Note: RF Output Power											
Note: EIRP Obtained by applying the path loss correction for a 3m test distance, E(dBuV/m)@3m - 95.22 = dBm EIRP											
PK	H	2405.000	58.37	28.33	5.93	0.00	0.00	-2.59	36.00	-38.59	5/10MHz
PK	H	2440.000	58.68	28.43	5.98	0.00	0.00	-2.13	36.00	-38.13	5/10MHz
PK	H	2480.000	59.52	28.54	6.03	0.00	0.00	-1.12	36.00	-37.12	5/10MHz


FCC IC Harmonic?

Duty Cycle

The worst-case duty cycle for typical EUT operation is shown below. The pulse train of the EUT extends beyond 100 ms as shown in the following plot.

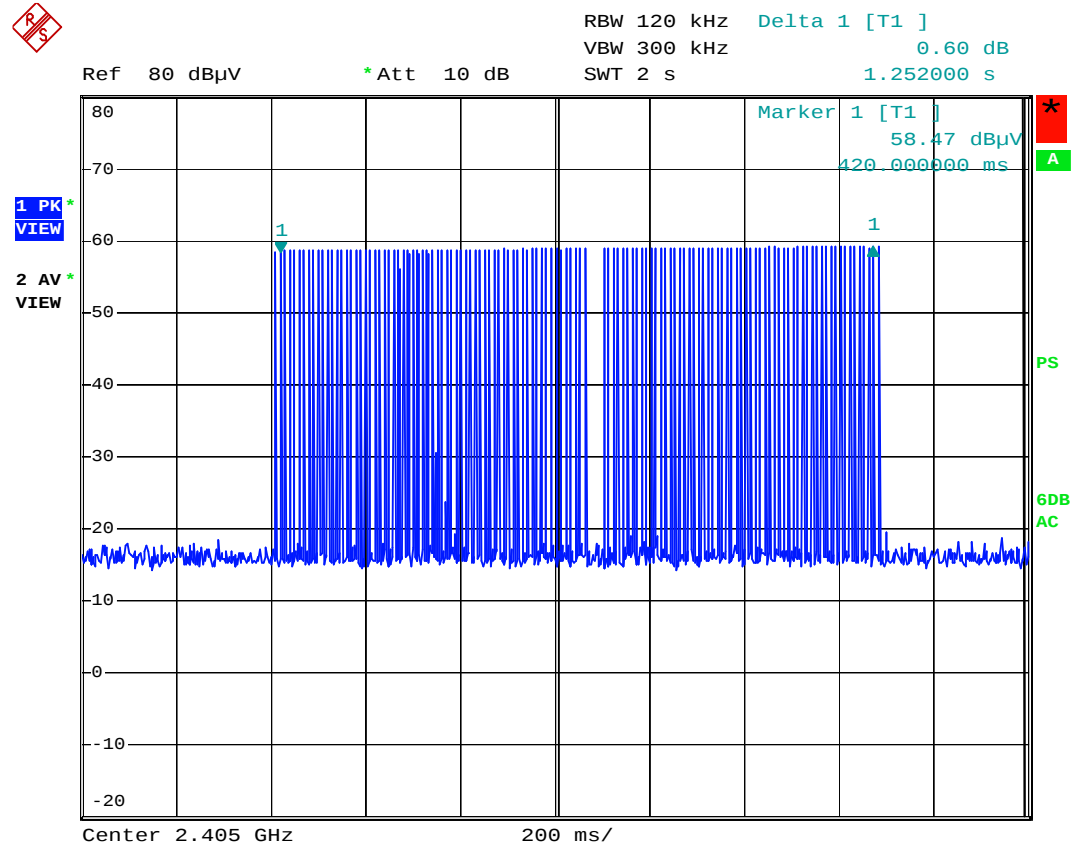


Date: 17.SEP.2012 11:49:42

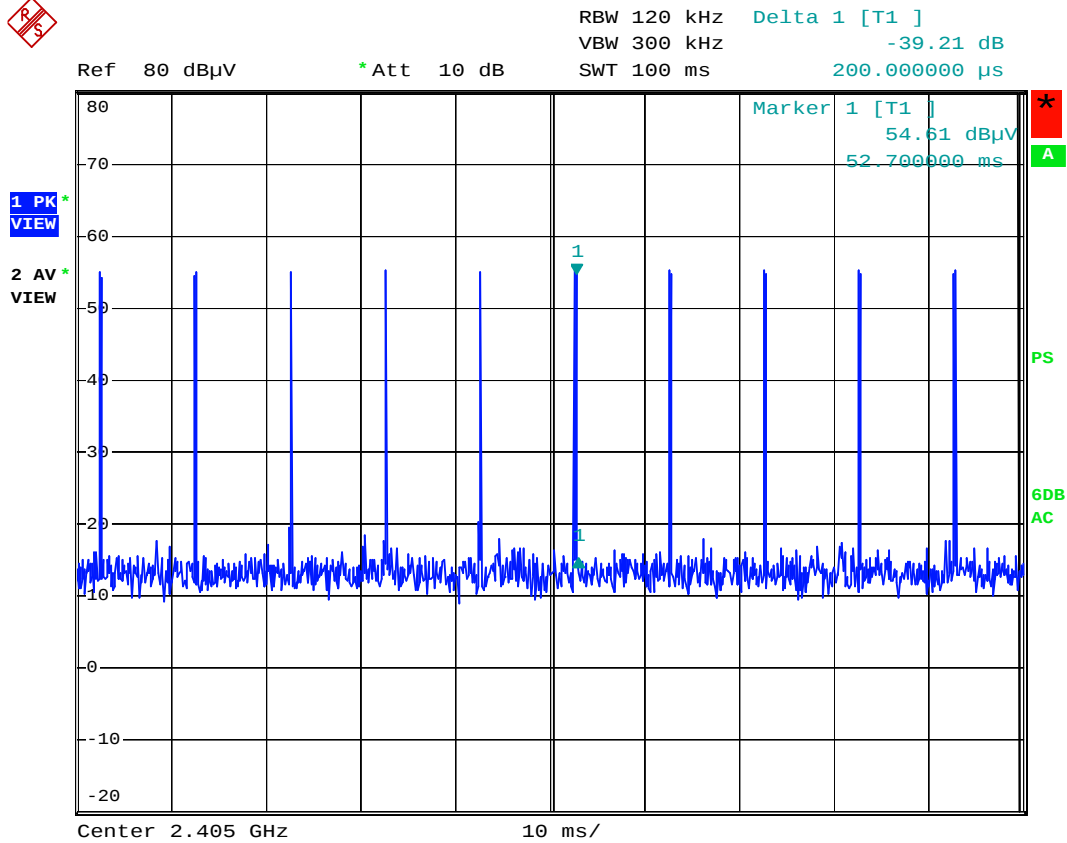

Date: 17.SEP.2012 11:58:20



Delta 1 [T2] RBW 1 MHz RF Att 0 dB
 Ref Lvl 0.69 dB VBW 3 MHz
 90 dBμV 551.102204 μs SWT 5 ms Unit dBμV

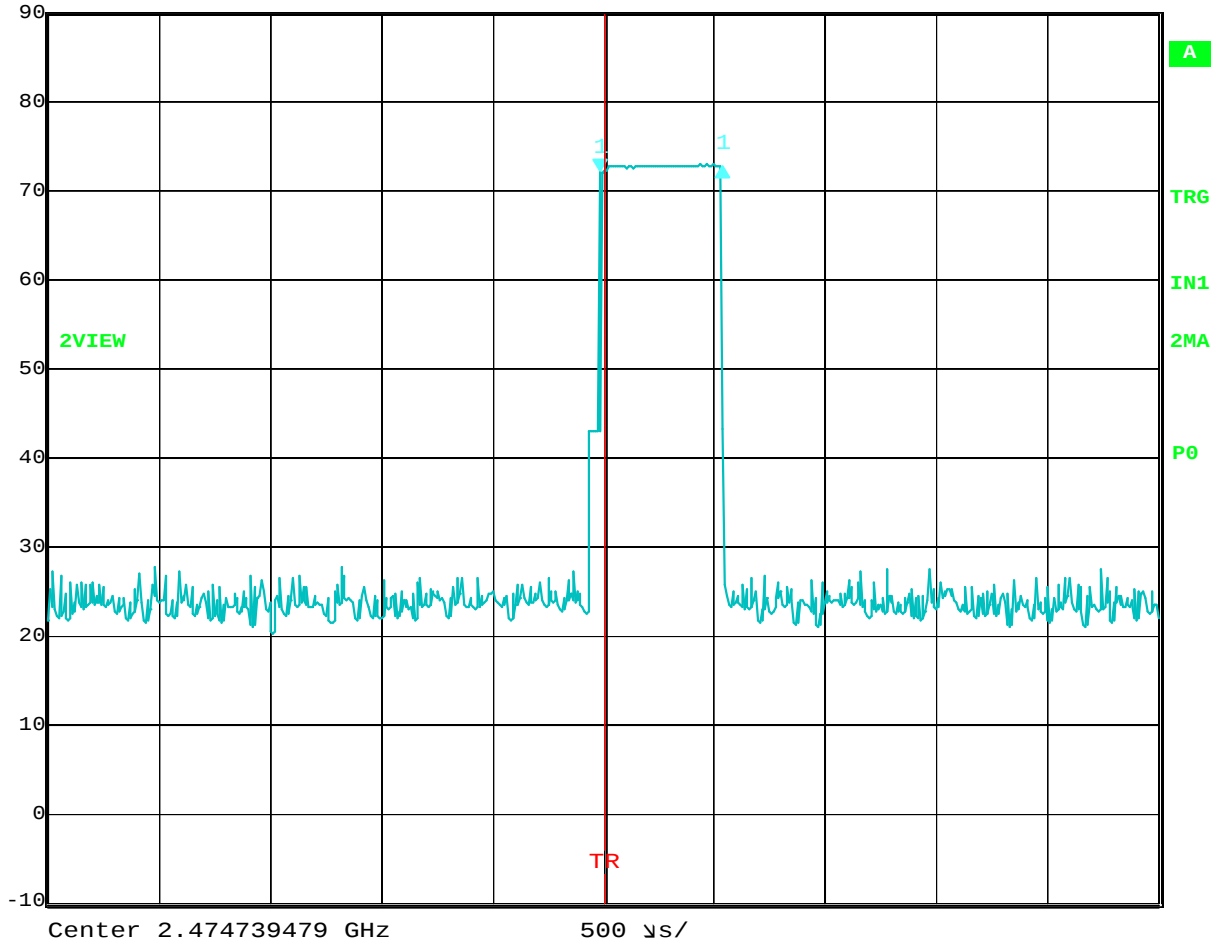

Date: 22.SEP.2012 20:16:41

There were 10 pulse trains in 100 ms period and the length of each pulse train was 551,102 μs. The duty cycle is therefore, 5.511 ms in a 100ms period, or 5.511%, for a duty cycle correction factor of 25.18 dB.

Human RF Exposure:

The EUT is a fixed installation device and was measured in a radiated fashion. The RF output power was measured using a resolution bandwidth larger than the bandwidth of the emission. The data obtained was adjusted for equipment losses and converted from a field strength reading to a power reading using the provisions of FCC KDB 558074 and RSS-Gen 4.6. The human RF exposure limit is 1 mW/cm^2 . The power density S in mW/cm^2 generated by some value of EIRP in mW at a given distance d in cm is related by the equation:

$$S = \text{EIRP} / (4\pi d^2)$$

The distance, given a maximum EIRP of -1.12 dBm (0.773 mW), at which the radiated power density of the EUT is equal to the human RF exposure limit is 0.248 cm from the antenna. This result does not take averaging into account.

The EUT is exempt from FCC RF exposure evaluation due to the peak output power being below $60/f_{(\text{GHz})}$ where f is the frequency in GHz. This expression yields an exemption threshold of 24.2 mW (13.84 dBm) at 2480 MHz.

The EUT is exempt from IC SAR RF exposure evaluation as referenced in IC RSS-102 Issue 4 March 2010 section 2.5.2 because the operating frequency is above 1.5 GHz and the EIRP does not exceed 5 Watts (37.0 dBm).

Test Personnel:	Vathana Ven <i>VSV</i>
Supervising/Reviewing Engineer:	
(Where Applicable)	N/A
Product Standard:	FCC Part 15 Subpart C 15.247; IC
Input Voltage:	RSS-247
Pretest Verification w/ Ambient Signals or BB Source:	Battery
	Ambient

Test Date: 09/13/2012, 09/22/2012

Test Levels: See tables

Ambient Temperature: 24 °C

Relative Humidity: 51 %

Atmospheric Pressure: 1014 mbars

Deviations, Additions, or Exclusions: None

7 6 dB Bandwidth & 99% Power Bandwidth

7.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV003'	Weather Station	Davis Instruments	7400	PE80529A39 A	08/17/2011	09/17/2012
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
HORN2'	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012

Software Utilized:

Name	Manufacturer	Version
None		

7.3 Results:

The 99% power bandwidth, or 6 dB bandwidth, must not be less than 500 kHz. The sample tested was found to Comply.


Channel	6 dB Bandwidth	99% Power Bandwidth
Channel 11 (2405 MHz)	1.576 MHz	3.661MHz
Channel 18 (2440 MHz)	1.602 MHz	3.712 MHz
Channel 26 (2480 MHz)	1.475 MHz	3.483 MHz

Plots were taken using an RBW of ~1-5% of the measured emission bandwidth, per *KDB 558074v01* 01/18/2012 and IC RSS-Gen Section 4.6.2.


7.4 Setup Photographs:




7.5 Plots/Data:

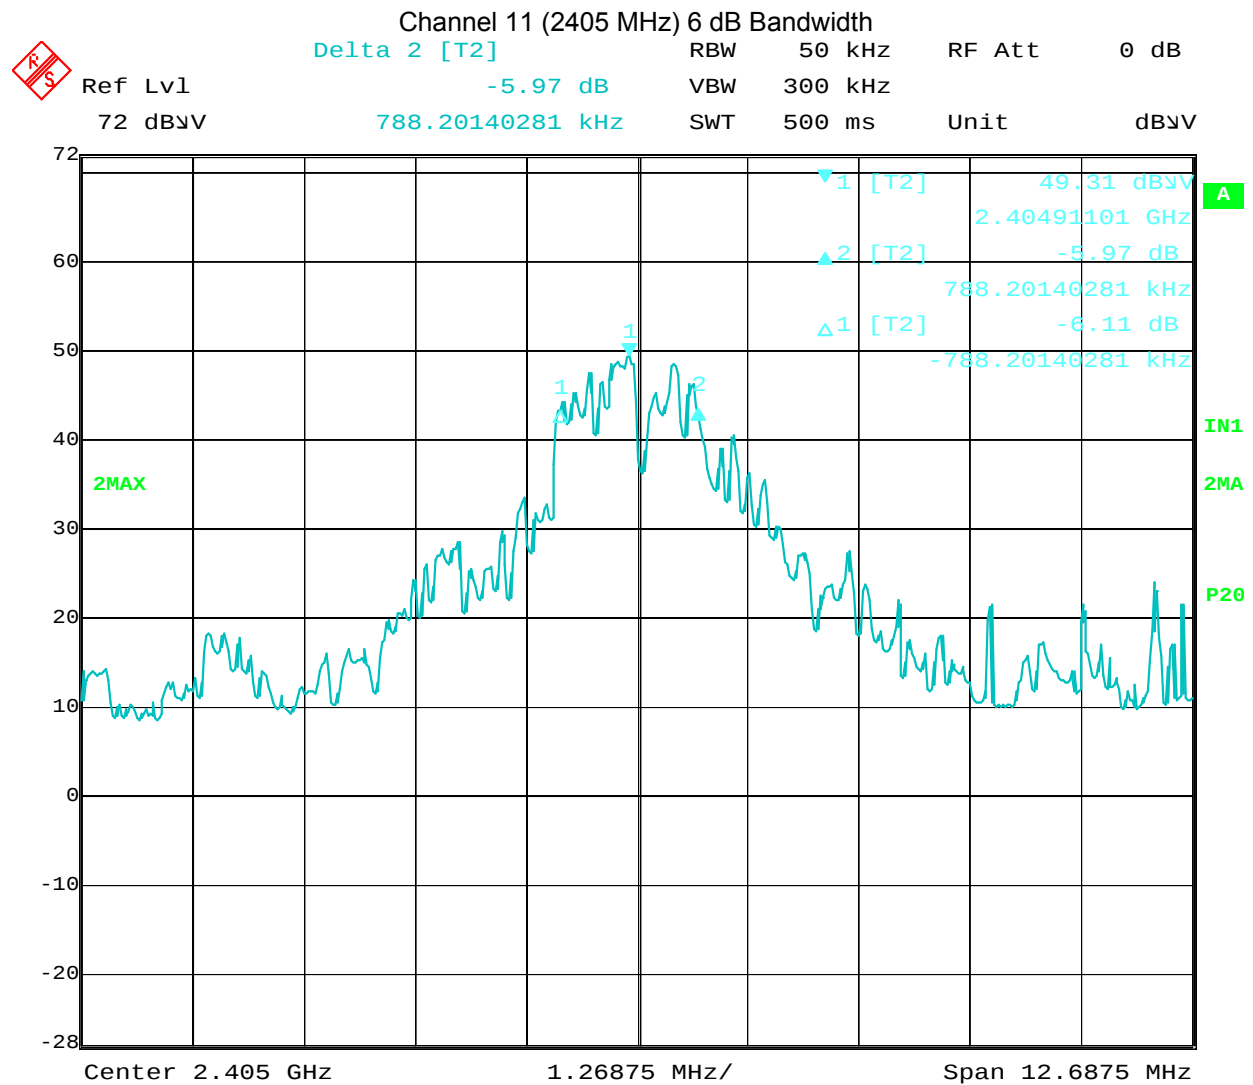



Date: 13.SEP.2012 18:36:21

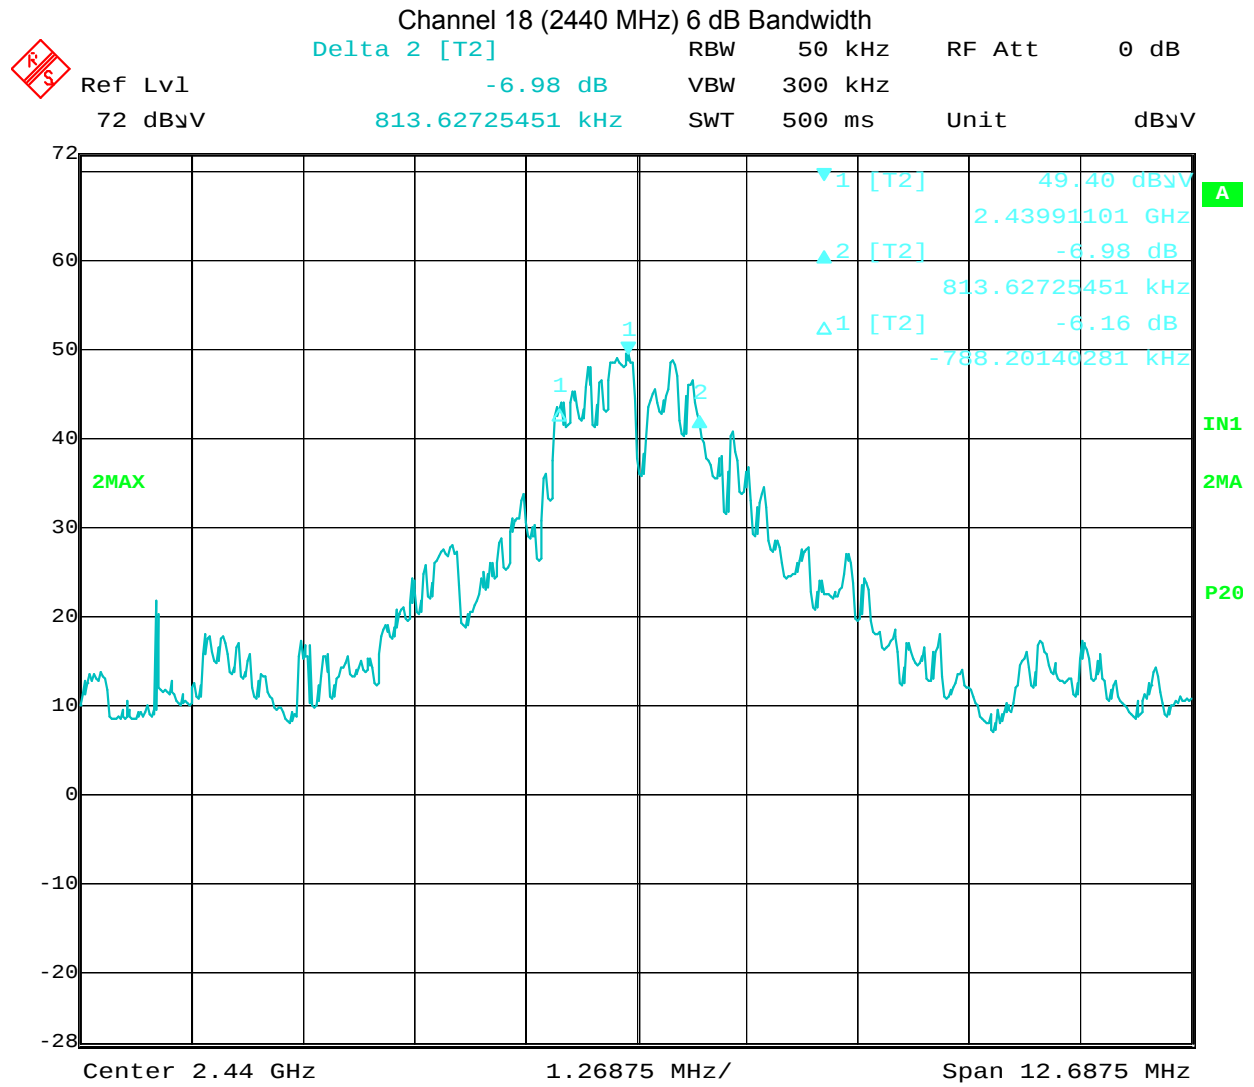


Date: 13.SEP.2012 19:03:42

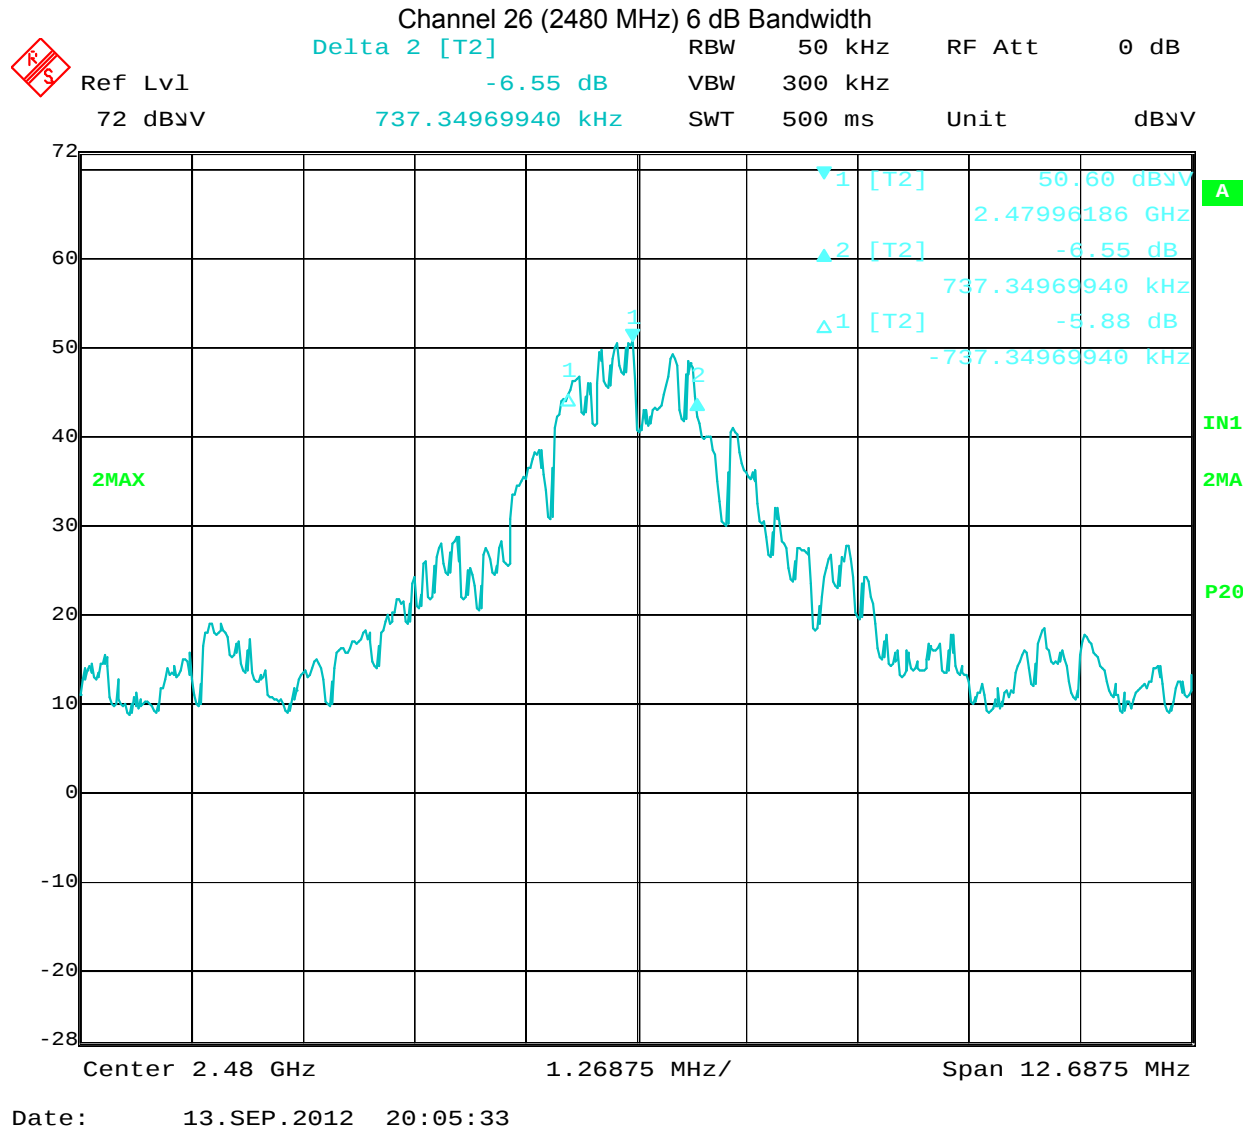

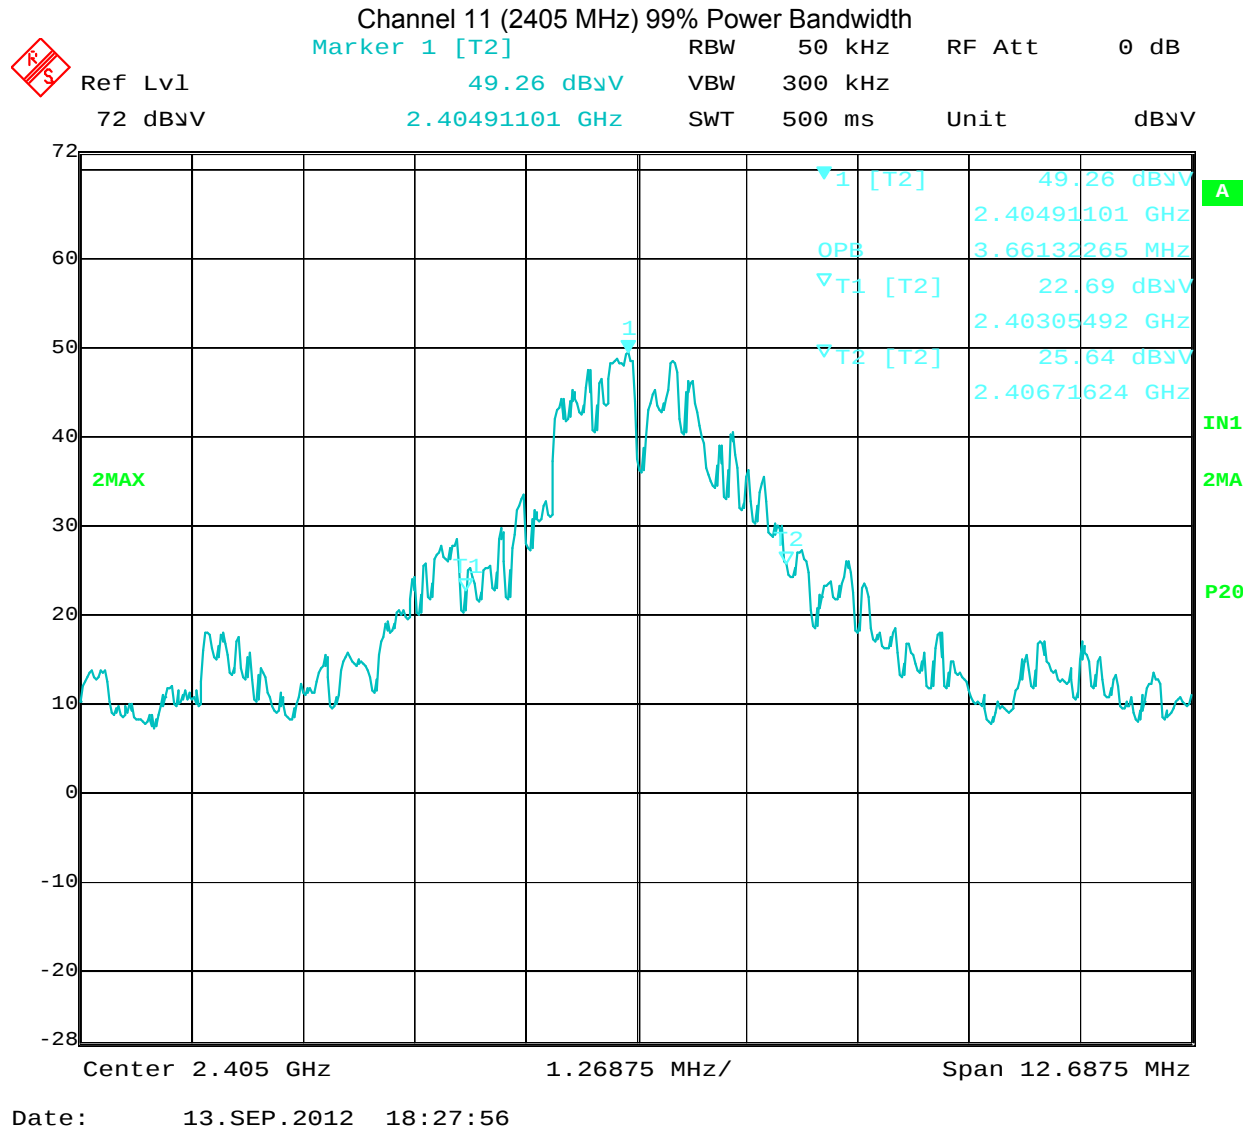

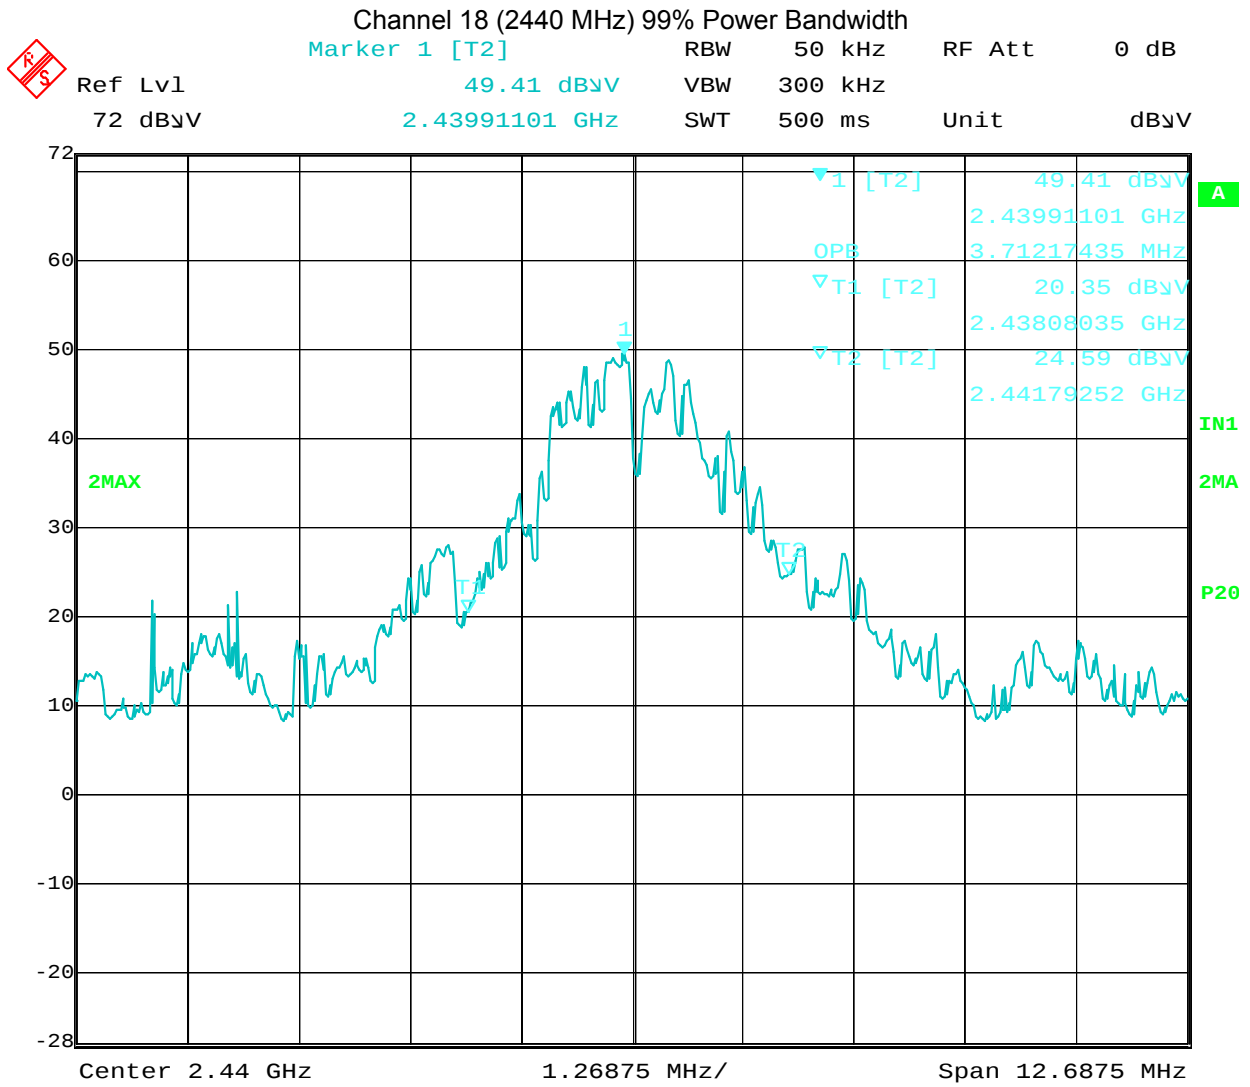

Date: 13.SEP.2012 19:04:21

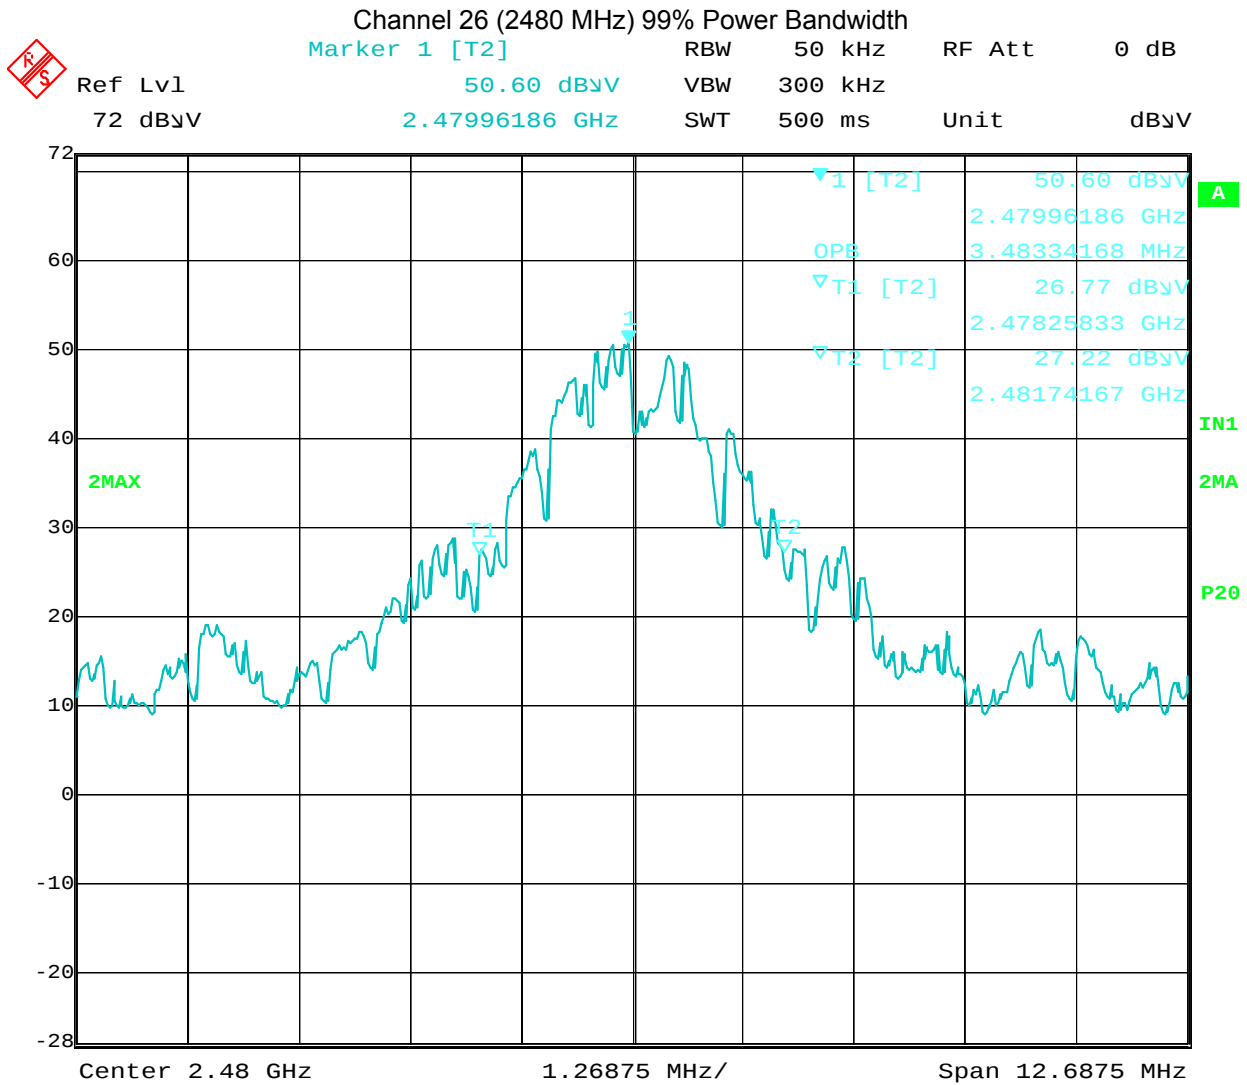

Date: 13.SEP.2012 20:06:02

Test Personnel: Vathana Ven *VSV*

Supervising/Reviewing Engineer: _____

(Where Applicable) N/A

Product Standard: FCC Part 15 Subpart C

Input Voltage: 15.247; IC RSS-247

Pretest Verification w/ Ambient Signals or BB Source: Battery

BB Source: Ambient

Test Date: 09/13/2012

Test Levels: See section 7.3

Ambient Temperature: 24 °C

Relative Humidity: 51 %

Atmospheric Pressure: 1014 mbars

Deviations, Additions, or Exclusions: None

8 Peak Power Spectral Density

8.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB/m}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$FS = 32 \text{ dB}\mu\text{V/m}$$

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$
$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

8.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV003'	Weather Station	Davis Instruments	7400	PE80529A39 A	08/17/2011	09/17/2012
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
HORN2'	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012

Software Utilized:

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

8.3 Results:

The sample tested was found to Comply. The peak power spectral density must not exceed 8 dBm in any 3 kHz bandwidth using the methods of KDB 558074.


8.4 Setup Photographs:



Axis1 orientation



Axis 2 orientation

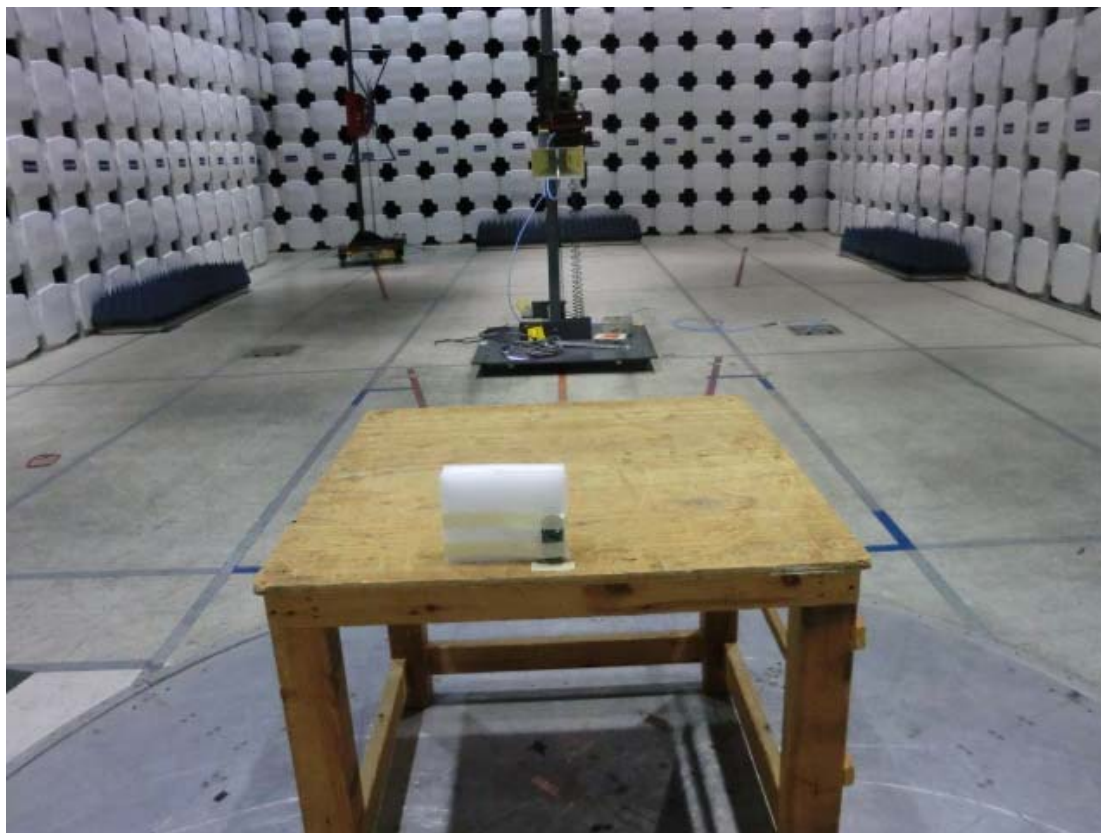

Axis 3 orientation

8.5 Plots/Data:

Radiated Emissions

Company: IGEACare Solutions Inc
 Model #: Igeacom II
 Serial #: 00005
 Engineers: Vathana Ven
 Project #: G100357410
 Standard: FCC Part 15 Subpart C 15.247
 Receiver: R&S ESI (145-128) 09-23-2012
 PreAmp: PRE145014 12-16-2012.txt
 PreAmp Used? (Y or N): N
 Antenna & Cables: SHF Bands: N, LF, HF, SHF
 Antenna: HORN2 V3m 10-24-2012.txt HORN2 H3m 10-24-2012.txt
 Cable(s): 145-416 3mTrkB 09-04-2012.txt NONE.
 Location: 10m Chamber Barometer: DAV003 Filter: NONE
 Date(s): 09/13/12
 Temp/Humidity/Pressure: 24C 51% 1014mbar
 Limit Distance (m): 3
 Test Distance (m): 3
 Voltage/Frequency: Battery Powered Frequency Range: Frequencies Shown
 Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	EIRP Net dBm	EIRP Limit dBm	Margin dB	Bandwidth	FCC	IC	Harmonic?
Peak Power Spectral Density, normalized from 100kHz to 3 kHz using Bandwidth Correction Factor 10LOG(3/100 kHz)=-15.2 dB														
Note: EIRP Obtained by applying the path loss correction for a 3m test distance, E(dBuV/m)@3m - 95.22 = dBm EIRP														
CH11 - 2405MHz, No pre-amp, Orientation 1 - EUT is flat														
PK	H	2405.000	52.40	28.33	5.93	0.00	0.00	-23.76	8.00	-31.76	100/300 kHz			
PK	V	2405.000	45.56	28.55	5.93	0.00	0.00	-30.38	8.00	-38.38	100/300 kHz			
CH11 - 2405MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2405.000	49.47	28.33	5.93	0.00	0.00	-26.69	8.00	-34.69	100/300 kHz			
PK	V	2405.000	43.63	28.55	5.93	0.00	0.00	-32.31	8.00	-40.31	100/300 kHz			
CH11 - 2405MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2405.000	42.47	28.33	5.93	0.00	0.00	-33.69	8.00	-41.69	100/300 kHz			
PK	V	2405.000	48.59	28.55	5.93	0.00	0.00	-27.35	8.00	-35.35	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Orientation 1 - EUT is flat														
PK	H	2440.000	52.84	28.43	5.98	0.00	0.00	-23.17	8.00	-31.17	100/300 kHz			
PK	V	2440.000	45.74	28.60	5.98	0.00	0.00	-30.10	8.00	-38.10	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2440.000	50.71	28.43	5.98	0.00	0.00	-25.30	8.00	-33.30	100/300 kHz			
PK	V	2440.000	46.92	28.60	5.98	0.00	0.00	-28.92	8.00	-36.92	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2440.000	43.06	28.43	5.98	0.00	0.00	-32.95	8.00	-40.95	100/300 kHz			
PK	V	2440.000	43.63	28.60	5.98	0.00	0.00	-32.21	8.00	-40.21	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Orientation 1 - EUT is flat														
PK	H	2480.000	53.86	28.54	6.03	0.00	0.00	-21.98	8.00	-29.98	100/300 kHz			
PK	V	2480.000	46.53	28.67	6.03	0.00	0.00	-29.19	8.00	-37.19	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2480.000	51.26	28.54	6.03	0.00	0.00	-24.58	8.00	-32.58	100/300 kHz			
PK	V	2480.000	45.93	28.67	6.03	0.00	0.00	-29.79	8.00	-37.79	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2480.000	44.38	28.54	6.03	0.00	0.00	-31.46	8.00	-39.46	100/300 kHz			
PK	V	2480.000	50.25	28.67	6.03	0.00	0.00	-25.47	8.00	-33.47	100/300 kHz			
Peak Power Spectral Density, normalized from 100kHz to 3 kHz using Bandwidth Correction Factor 10LOG(3/100 kHz)=-15.2 dB														
Note: EIRP Obtained by applying the path loss correction for a 3m test distance, E(dBuV/m)@3m - 95.22 = dBm EIRP														
CH11 - 2405MHz, No pre-amp, Orientation 1 - EUT is flat														
PK	H	2405.000	43.31	28.33	5.93	0.00	0.00	-32.85	8.00	-40.85	3/10kHz			
PK	V	2405.000	35.91	28.55	5.93	0.00	0.00	-40.03	8.00	-48.03	3/10kHz			
CH11 - 2405MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2405.000	43.33	28.33	5.93	0.00	0.00	-32.83	8.00	-40.83	3/10kHz			
PK	V	2405.000	36.89	28.55	5.93	0.00	0.00	-39.05	8.00	-47.05	3/10kHz			
CH11 - 2405MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2405.000	35.90	28.33	5.93	0.00	0.00	-40.26	8.00	-48.26	3/10kHz			
PK	V	2405.000	42.34	28.55	5.93	0.00	0.00	-33.60	8.00	-41.60	3/10kHz			
CH18 - 2440MHz, No pre-amp, Orientation 1 - EUT is flat														
PK	H	2440.000	47.21	28.43	5.98	0.00	0.00	-28.80	8.00	-36.80	3/10kHz			
PK	V	2440.000	40.05	28.60	5.98	0.00	0.00	-35.79	8.00	-43.79	3/10kHz			
CH18 - 2440MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2440.000	44.88	28.43	5.98	0.00	0.00	-31.13	8.00	-39.13	3/10kHz			
PK	V	2440.000	39.54	28.60	5.98	0.00	0.00	-36.30	8.00	-44.30	3/10kHz			
CH18 - 2440MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2440.000	37.37	28.43	5.98	0.00	0.00	-38.64	8.00	-46.64	3/10kHz			
PK	V	2440.000	37.80	28.60	5.98	0.00	0.00	-38.04	8.00	-46.04	3/10kHz			
CH26 - 2480MHz, No pre-amp, Orientation 1 - EUT is flat														
PK	H	2480.000	49.08	28.54	6.03	0.00	0.00	-26.76	8.00	-34.76	3/10kHz			
PK	V	2480.000	41.66	28.67	6.03	0.00	0.00	-34.06	8.00	-42.06	3/10kHz			
CH26 - 2480MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2480.000	46.33	28.54	6.03	0.00	0.00	-29.51	8.00	-37.51	3/10kHz			
PK	V	2480.000	41.02	28.67	6.03	0.00	0.00	-34.70	8.00	-42.70	3/10kHz			
CH26 - 2480MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2480.000	39.41	28.54	6.03	0.00	0.00	-36.43	8.00	-44.43	3/10kHz			
PK	V	2480.000	45.32	28.67	6.03	0.00	0.00	-30.40	8.00	-38.40	3/10kHz			

Test Personnel: Vathana Ven *VSV*
Supervising/Reviewing
Engineer:
(Where Applicable) N/A
Product Standard: FCC Part 15 Subpart C
15.247; IC RSS-247
Input Voltage: 120VAC/60Hz
Pretest Verification w/
Ambient Signals or
BB Source: **Ambient**

Test Date: 09/13/2012

Test Levels: See section 8.3

Ambient Temperature: 24 °C

Relative Humidity: 51 %

Atmospheric Pressure: 1014 mbars

Deviations, Additions, or Exclusions: None

9 Band Edge Compliance

9.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) < U_{CISPR} (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

9.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DAV003'	Weather Station	Davis Instruments	7400	PE80529A39 A	08/17/2011	09/17/2012
145128'	EMI Receiver 40 GHz (20 Hz - 40 Ghz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
145-416'	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
HORN2'	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012

Software Utilized:

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

9.3 Results:


Spurious emissions at the band edges must be at least 20 dB lower than the fundamental field strength when measured with a 100 kHz bandwidth, without the need to be below the general limits of FCC Part 15 Section 15.209 and of RSS-Gen 7.2.5 Table 5. Emissions in restricted bands must meet the general limits of FCC Part 15 Section 15.209 and of RSS-Gen 7.2.5 Table 5.

The sample tested was found to Comply.

9.4 Setup Photographs:



9.5 Plots/Data:

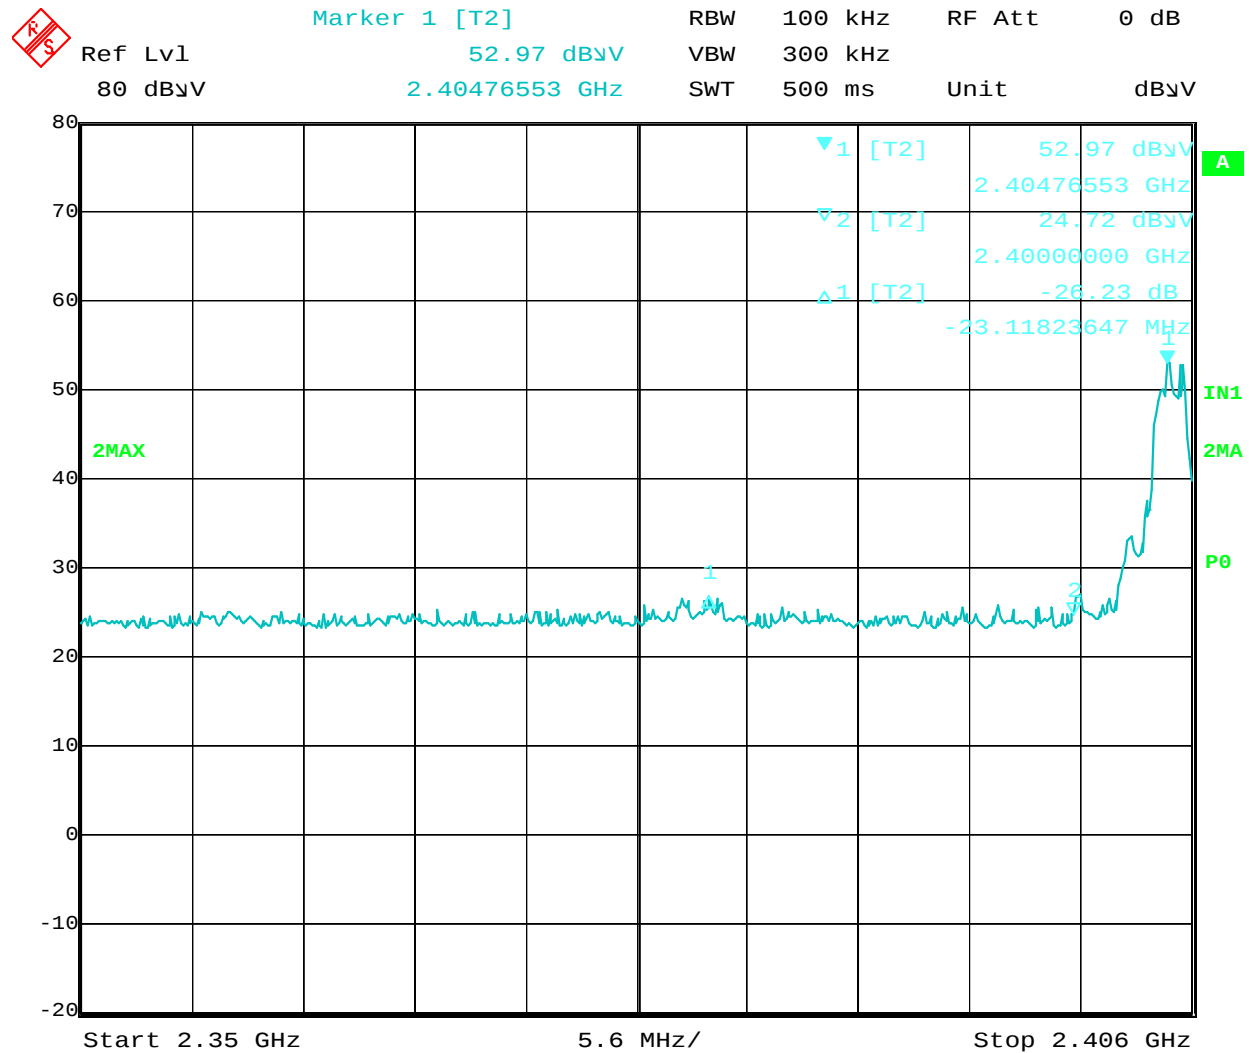


Date: 13.SEP.2012 18:23:06

Lower Band Edge Compliance, 26.23 dB down



Ref Lvl 72 dBμV
 Marker 1 [T2] 25.63 dBμV
 2.48350000 GHz
 RBW 500 kHz
 VBW 1 MHz
 SWT 500 ms
 RF Att 0 dB
 Unit dBμV

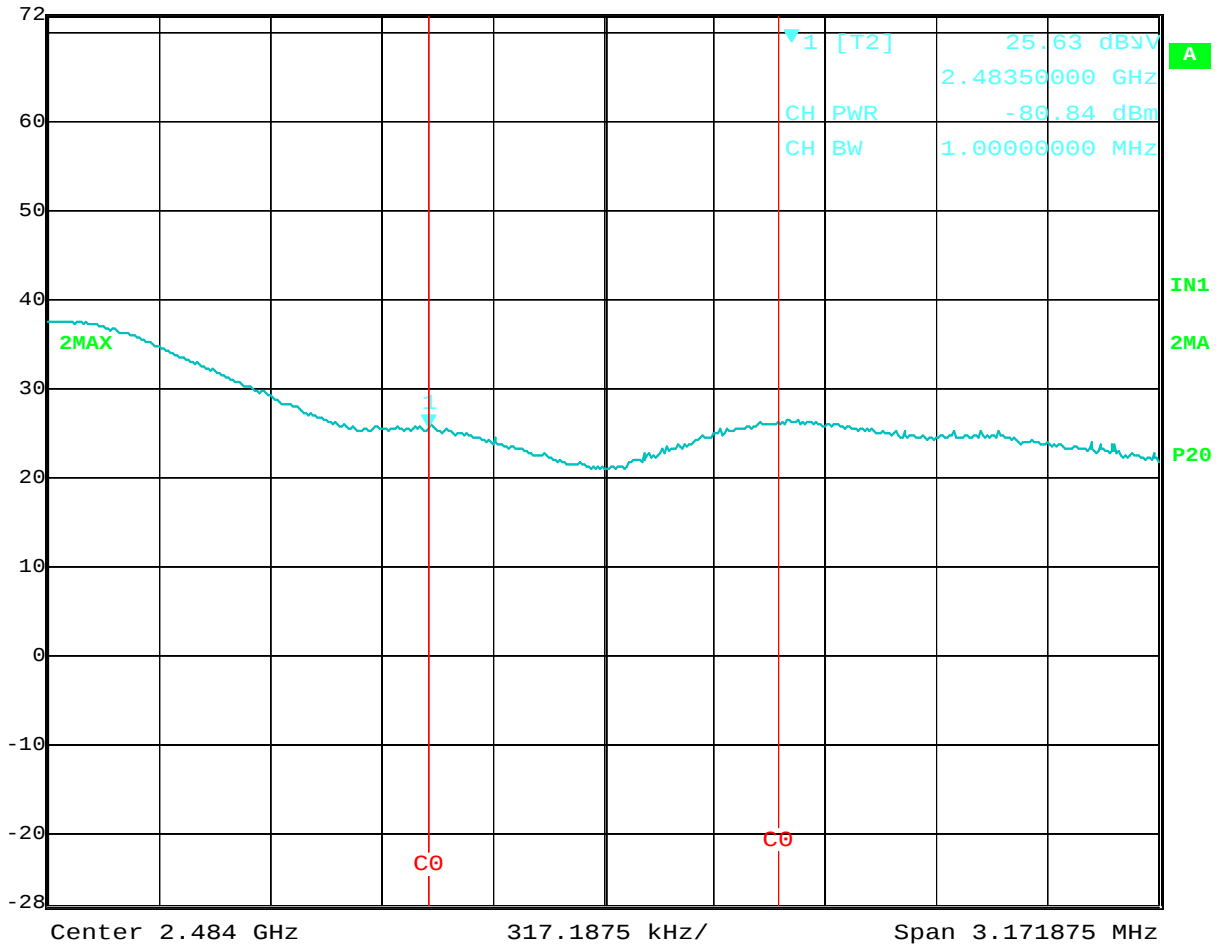

Date: 13.SEP.2012 20:12:19

Upper Band Edge Compliance

Special Radiated Emissions

Company: IGEACare Solutions Inc
 Model #: Igeacom II
 Serial #: 00005
 Engineers: Vathana Ven
 Project #: G100357410
 Standard: FCC Part 15 Subpart C 15.247/RSS-247
 Receiver: R&S ESI (145-128) 09-23-2012
 PreAmp: PRE145014 12-16-2012.txt
 PreAmp Used? (Y or N): N
 Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)
 Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Antenna & Cables: SHF Bands: N, LF, HF, SHF
 Antenna: HORN2 V3m 10-24-2012.txt HORN2 H3m 10-24-2012.txt
 Cable(s): 145-416 3mTrkB 09-04-2012.txt
 Location: 10m Chamber Barometer: DAV003 Filter:
 Date(s): 09/13/12
 Temp/Humidity/Pressure: 24C 51% 1014mbar
 Limit Distance (m): 3
 Test Distance (m): 3
 Voltage/Frequency: Battery powered Frequency Range: See Frequencies

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Bandwidth	FCC	IC	Harmonic?
Note: Upper Band Edge Compliance, Integrated to 1 MHz RBW Equivalent														
PK	V	2484.000	26.16	28.67	6.04	0.00	0.00	60.87	74.00	-13.13	500kHz/3MHz	RB		
AVG	V	2484.000	0.98	28.67	6.04	0.00	0.00	35.69	54.00	-18.31	500kHz/3MHz	RB		

Test Personnel: Vathana Ven *VSV*
 Supervising/Reviewing Engineer:
 (Where Applicable) N/A
 Product Standard: FCC Part 15 Subpart C 15.247; IC RSS-247
 Input Voltage: 120VAC/60Hz
 Pretest Verification w/ Ambient Signals or BB Source: **Ambient**

Test Date: 09/13/2012
 Test Levels: See section 9.3
 Ambient Temperature: 24 °C
 Relative Humidity: 51 %
 Atmospheric Pressure: 1014 mbars

Deviations, Additions, or Exclusions: None

10 Transmitter Radiated Spurious Emissions

10.1 Method

Tests are performed in accordance with FCC Part 15 Subpart C Section 15.247, *KDB 558074*, ANSI C63.10, and RSS-247.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz) $< U_{CISPR}$ (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

10.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
'DAV003	Weather Station	Davis Instruments	7400	PE80529A39 A	08/17/2011	09/17/2012
'145128	EMI Receiver 40 GHz (20 Hz - 40 GHz)	Rohde & Schwarz	ESI	8392831001	08/23/2011	09/23/2012
'ROS001	Spectrum Analyzer 20Hz - 40 GHz	Rohde & Schwarz	FSEK-30	100225	02/10/2012	02/10/2013
'REA004	3GHz High Pass Filter	Reactel, Inc	7HSX- 3G/18G-S11	06-1	11/30/2011	11/30/2012
'REA006	18GHz High Pass Filter	Reactel, Inc	7HS- 18G/40G K11	(06)1	08/08/2012	08/08/2013
'145-410	Cables 145-400 145-403 145-405 145-406 145-407	Huber + Suhner	10m Track A Cables	multiple	09/04/2011	10/04/2012
'145-416	Cables 145-400 145-402 145-404 145-408	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
'CBL030	High Frequency Cable 40GHz	Megaphase	TM40 K1K1- 80	CBL030	02/08/2012	02/08/2013
'MEG005	High Frequency Cable	Megaphase	TM40-K1K1- 197	8148601-001	02/07/2012	02/07/2013
'PRE8	PREAMPLIFIER 1- 40 GHz	MITEQ	NSP4000-NF	507145	01/26/2012	01/26/2013
'145003	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2011	10/04/2012
'145014	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	12/16/2011	12/16/2012
'145034	BiLog Antenna (30 MHz to 1GHz)	Schaffner Chase EMC	CBL6111C	2564	02/07/2012	02/07/2013
'HORN2	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012
'EMC04	ANTENNA, RIDGED GUIDE, 18-40 GHZ	EMCO	3116	2090	02/08/2012	02/08/2013

Software Utilized:

Name	Manufacturer	Version
C5	Teseq	Build 5.26.00.3

Name	Manufacturer	Version
EMI Boxborough.xls	Intertek	08/27/2010

10.3 Results:

The sample tested was found to Comply.


FCC Part 15.247(d) & RSS-210 A8.5 – Non Restricted Band Radiated Spurious/Harmonics Limits

In any 100 kHz bandwidth outside the frequency band, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) and RSS-Gen Section 7.2.5 Table 5 is not required. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a) and RSS-Gen Section 7.2.2 Table 3, must also comply with the radiated emission limits specified in 15.209(a) and IC RSS-Gen Section 7.2.5 Table 5).

FCC Part 15.209(a) & RSS-210 A8.5 & RSS-Gen Section 7.2.5 Table 5 – Restricted Band Radiated Spurious/Harmonics Limits

Frequency	Field Strength		Test Distance
(MHz)	μV/m	dBμV/m	(meters)
30–88	100	40.00	3
88–216	150	43.52	3
216–960	200	46.02	3
Above 960	500	53.98	3


10.4 Setup Photographs:

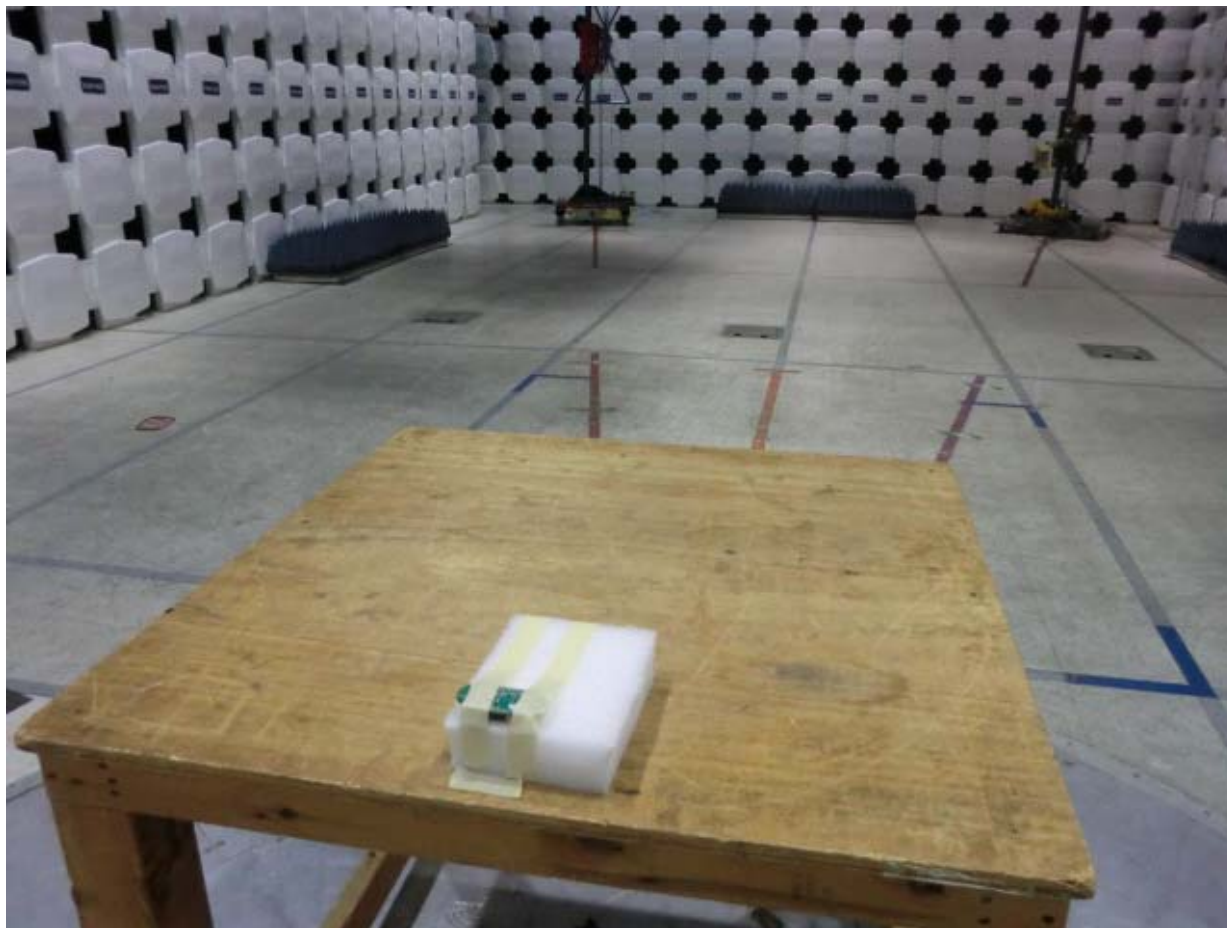

30-1000MHz



1-18GHz

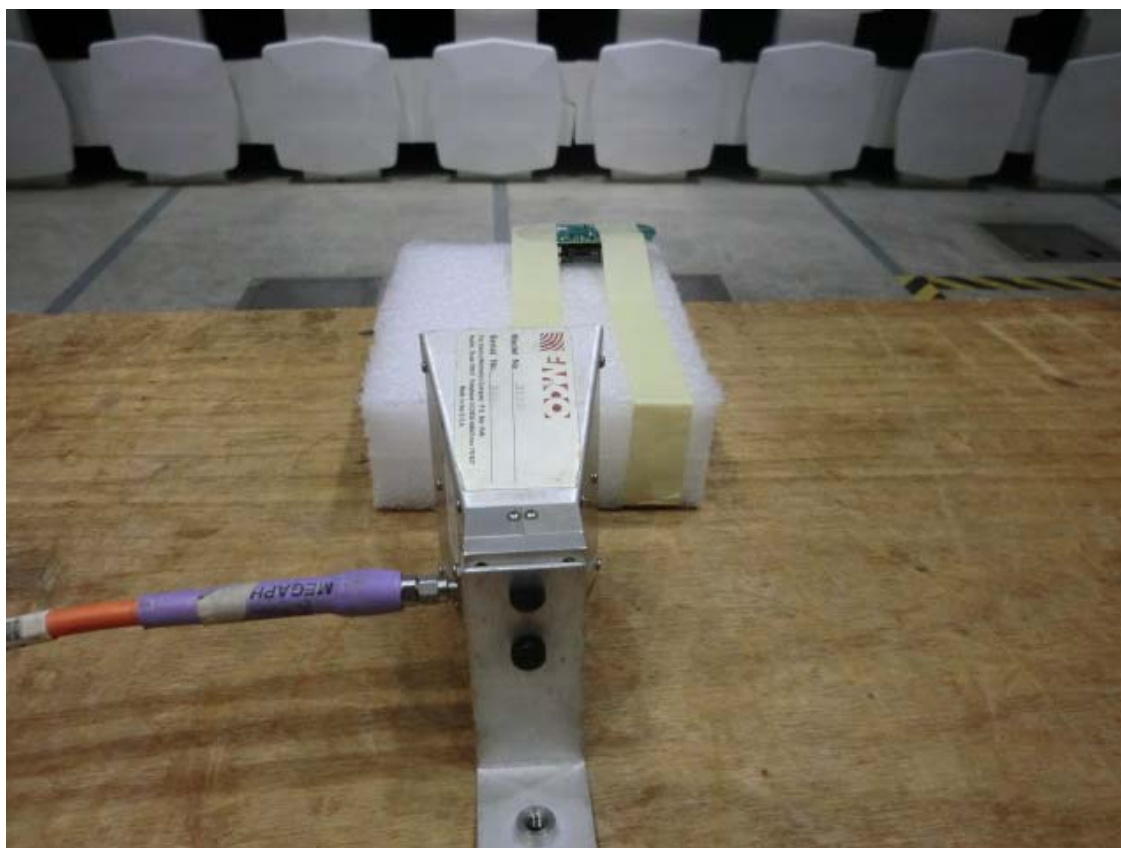

18-25GHz Hand scans

10.5 Plots/Data:

Spurious Emissions 30-1000MHz

Test Information

Test Details


Test:
Project:
Test Notes:
Temperature:
Humidity:
Tested by:
Test Started:

User Entry

Radiated - FCC15 Class B @ 10m
IgeaCare_G100357410
1014mB, CH11_Tx mode
24 deg C
51%
Vathana Ven
13 Sep 2012 23 : 33

Additional Information

Prescan Emission Graph

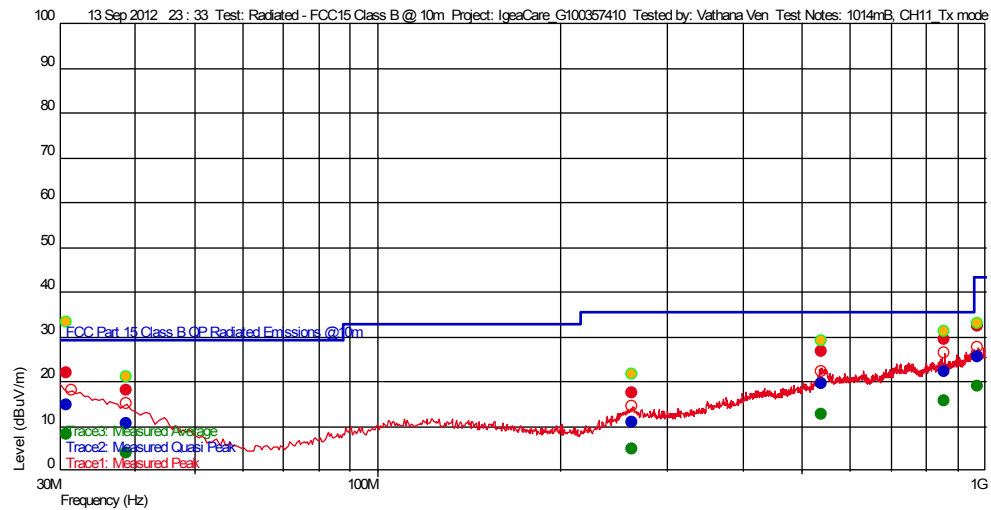

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data


Emissions Test Data

Trace2: Measured Quasi Peak

Frequency(Hz)	Level (dBuV/m)	AF	PA+CL	Limit(dBuV/m)	Margin(dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
262.523246371 M	10.80	14.100	-24.127	35.540	-24.74		353	1.24	120 k
38.801202415 M	10.65	14.680	-26.084	29.540	-18.89		0	1.24	120 k
970.690179994 M	25.64	25.000	-22.379	43.540	-17.90		18	1.31	120 k
537.848095886 M	19.41	21.570	-23.980	35.540	-16.13		0	4.00	120 k
30.859118405 M	14.77	18.499	-26.112	29.540	-14.77	--	342	3.55	120 k
859.114428529 M	22.26	22.718	-22.955	35.540	-13.28		129	2.83	120 k

Azimuth Plots


Turntable Plot (30.859118405 MHz)

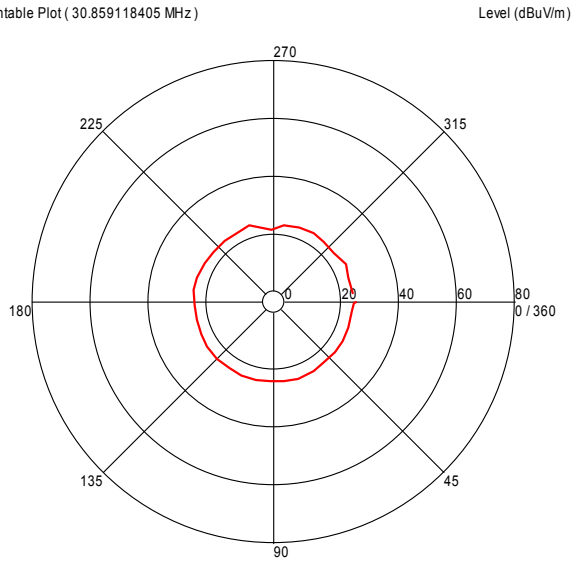

All Polarities

Azimuth (Degrees)



Turntable Plot (38.801202415 MHz)

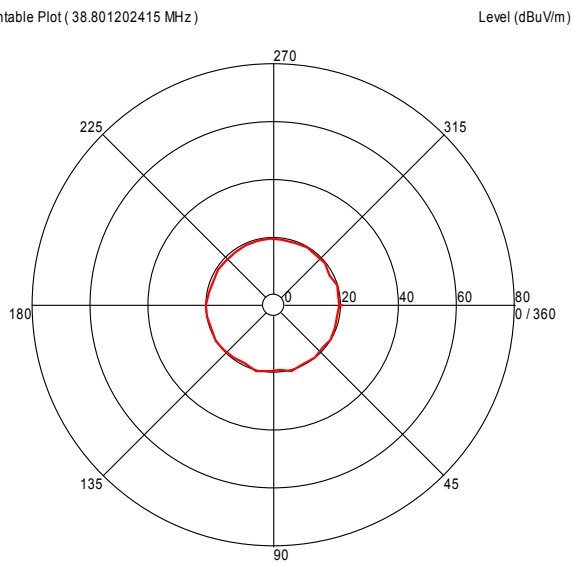

All Polarities


Azimuth (Degrees)

Turntable Plots

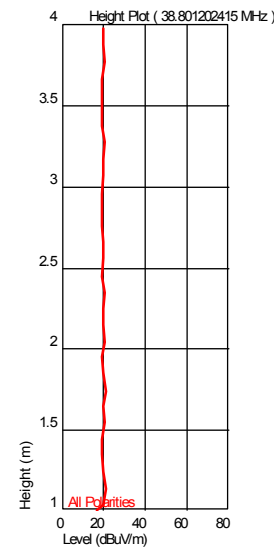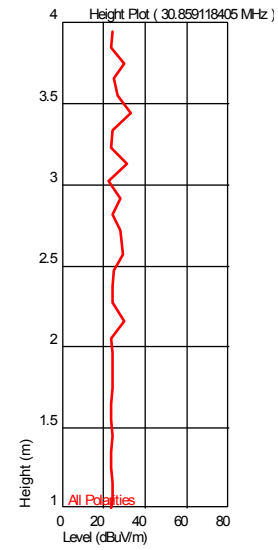


Turntable Plot (262.523246371 MHz)

Level (dBuV/m)

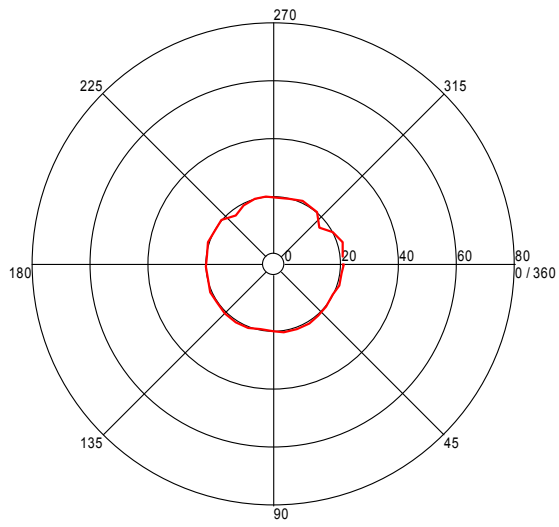


All Polarities

Azimuth (Degrees)

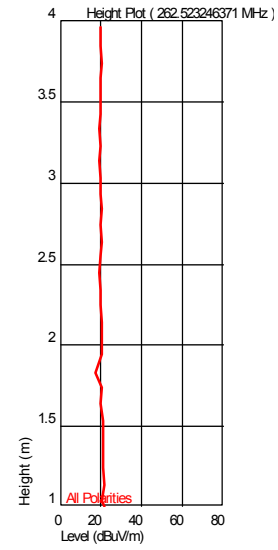


Turntable Plot (537.848095886 MHz)

Level (dBuV/m)

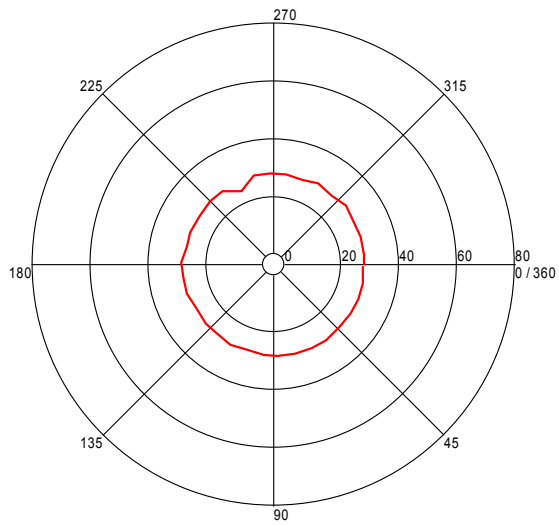


All Polarities

Azimuth (Degrees)

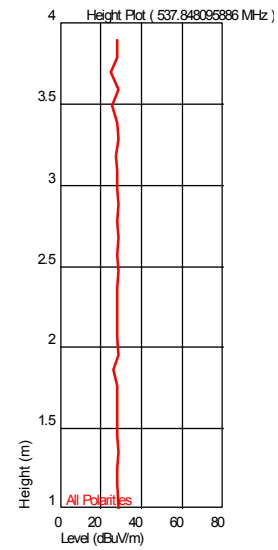

Turntable Plot (859.114428529 MHz)


Level (dBuV/m)

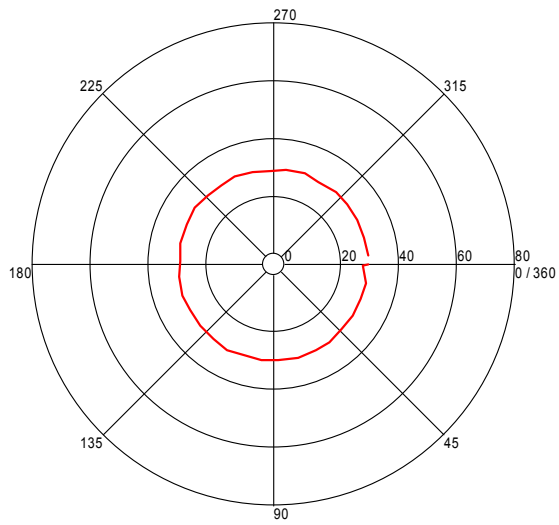

All Polarities


Azimuth (Degrees)

Height Plot (859.114428529 MHz)

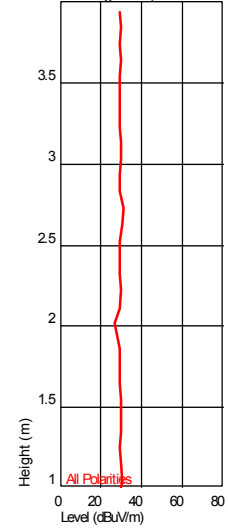

Turntable Plot (970.690179994 MHz)


Level (dBuV/m)

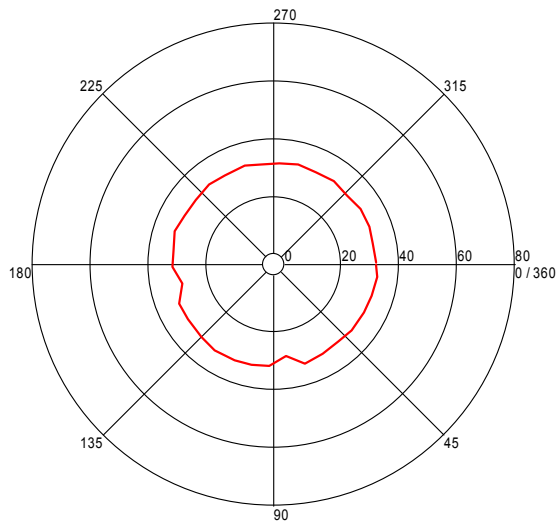

All Polarities

Azimuth (Degrees)

Height Plot (970.690179994 MHz)

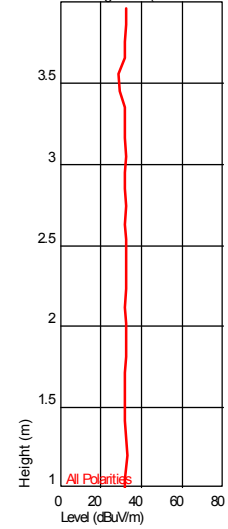

Test Information

Test Details


Test: Radiated - FCC15 Class B @ 10m
Project: IgeaCare_G100357410
Test Notes: 1014mB, CH18_Tx mode
Temperature: 24 deg C
Humidity: 51%
Tested by: Vathana Ven
Test Started: 14 Sep 2012 00 : 10

User Entry

Radiated - FCC15 Class B @ 10m
IgeaCare_G100357410
1014mB, CH18_Tx mode
24 deg C
51%
Vathana Ven
14 Sep 2012 00 : 10

Additional Information

Prescan Emission Graph

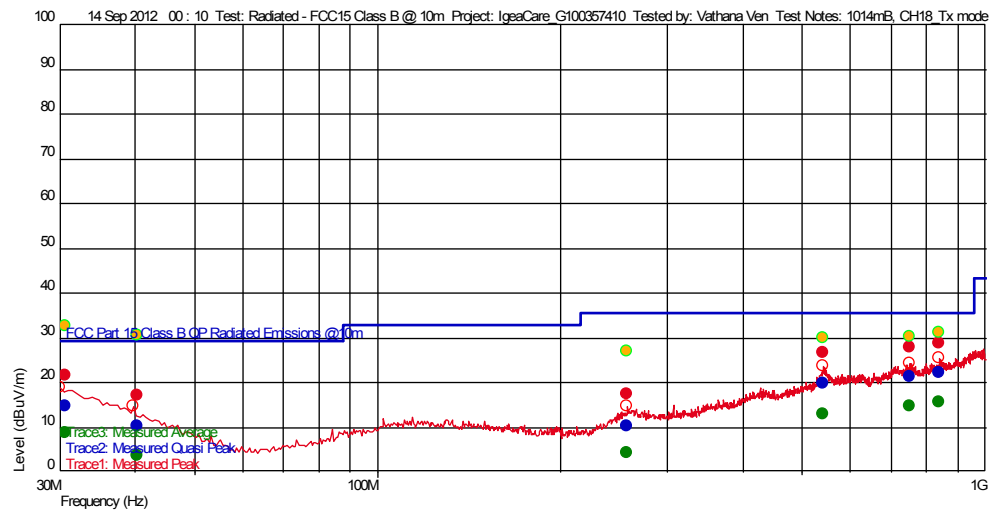

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data


Emissions Test Data

Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
257.45491008 M	10.35	13.795	-24.135	35.540	-25.19	--	129	1.04	120 k
40.230060242 M	10.33	13.908	-26.075	29.540	-19.21	--	298	2.91	120 k
541.630460952 M	19.74	21.902	-23.977	35.540	-15.80	--	308	1.57	120 k
30.75991984 M	14.84	18.568	-26.112	29.540	-14.70	--	240	3.23	120 k
750.838477224 M	21.34	22.466	-23.404	35.540	-14.20	--	248	2.05	120 k
839.309419321 M	22.16	22.831	-23.055	35.540	-13.38		204	1.86	120 k

Azimuth Plots


Turntable Plot (30.75991984 MHz)

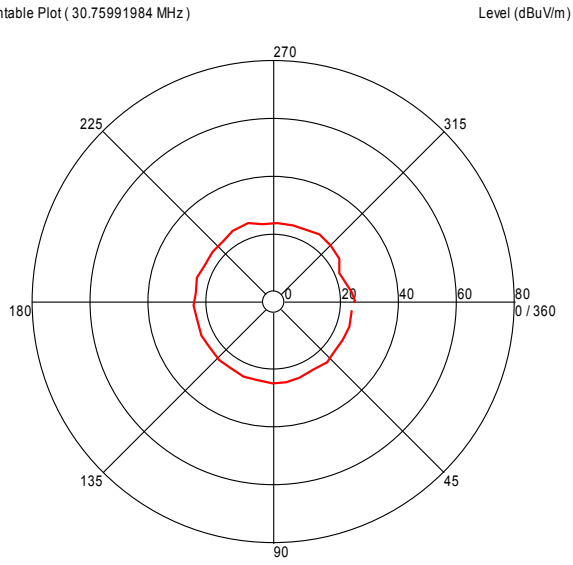

All Polarities

Azimuth (Degrees)



Turntable Plot (40.230060242 MHz)

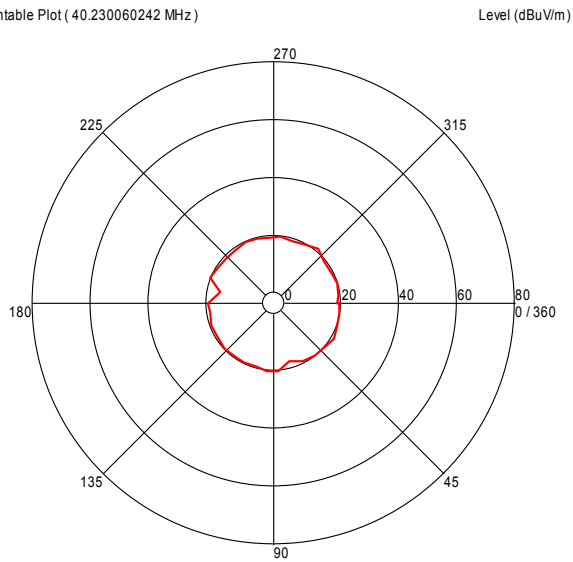

All Polarities


Azimuth (Degrees)

Turntable Plots

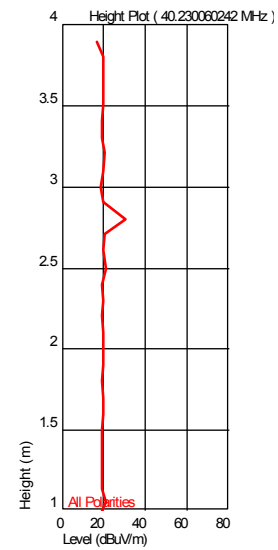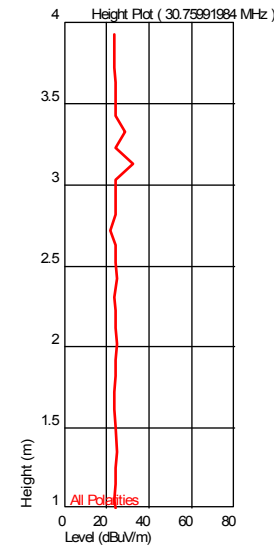

Turntable Plot (257.45491008 MHz)


Level (dBuV/m)

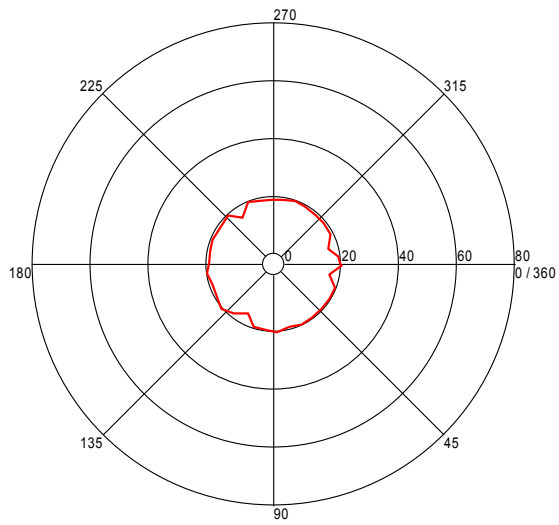

All Polarities


Azimuth (Degrees)

Height Plot (257.45491008 MHz)

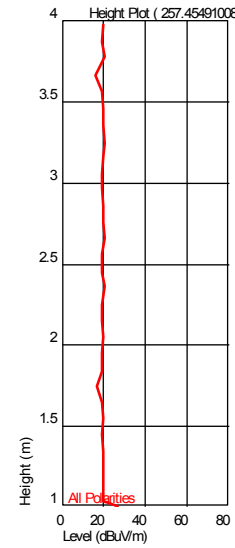

Turntable Plot (541.630460952 MHz)


Level (dBuV/m)

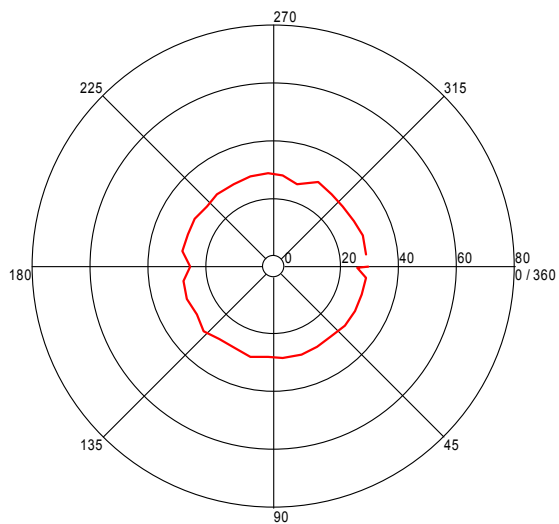

All Polarities


Azimuth (Degrees)

Height Plot (541.630460952 MHz)

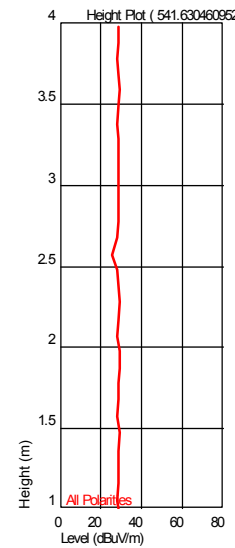

Turntable Plot (750.838477224 MHz)


Level (dBuV/m)

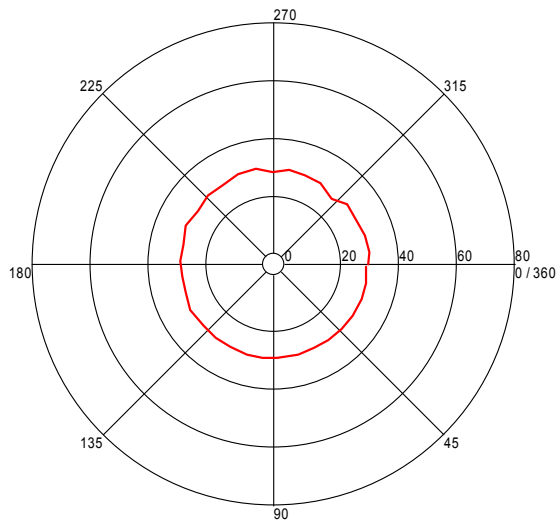

All Polarities


Azimuth (Degrees)

Height Plot (750.838477224 MHz)

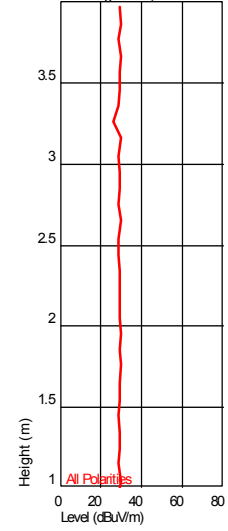

Turntable Plot (839.309419321 MHz)


Level (dBuV/m)

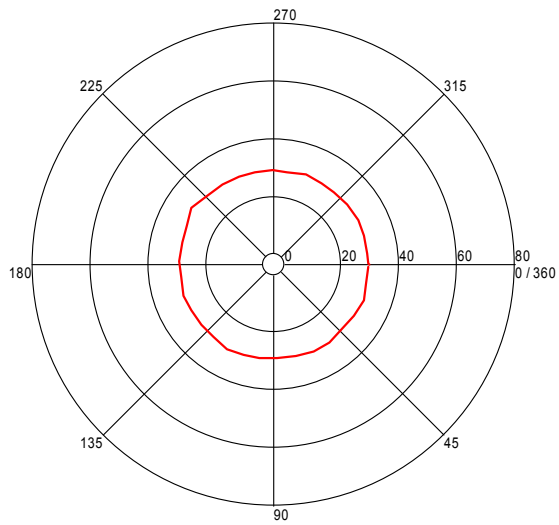

All Polarities

Azimuth (Degrees)

Height Plot (839.309419321 MHz)

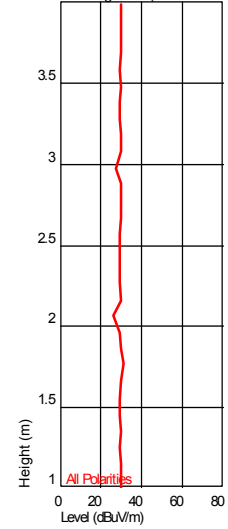

Test Information

Test Details


Test: Radiated - FCC15 Class B @ 10m
Project: IgeaCare_G100357410
Test Notes: 1014mB, CH26_Tx mode
Temperature: 24 deg C
Humidity: 51%
Tested by: Vathana Ven
Test Started: 14 Sep 2012 00 : 47

User Entry

Radiated - FCC15 Class B @ 10m
IgeaCare_G100357410
1014mB, CH26_Tx mode
24 deg C
51%
Vathana Ven
14 Sep 2012 00 : 47

Additional Information

Prescan Emission Graph

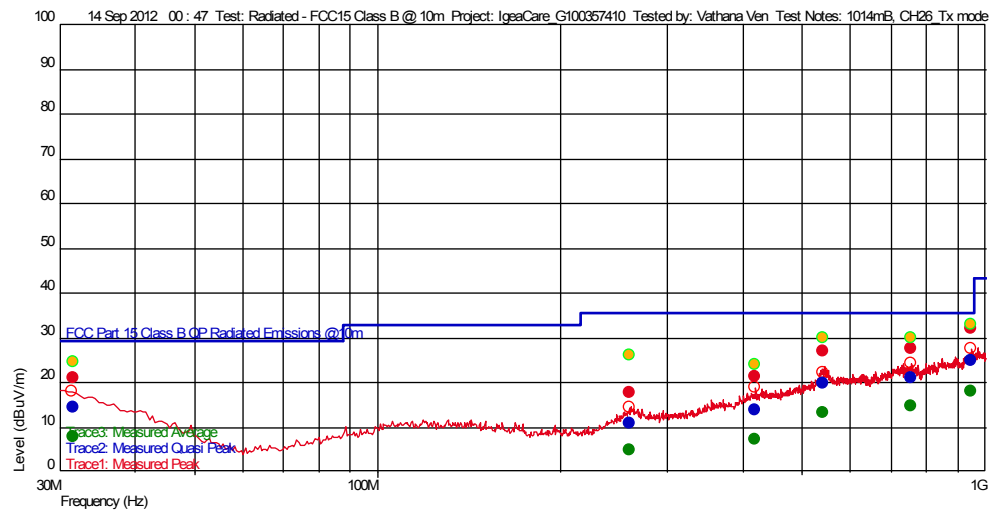

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data


Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
260.356913369 M	10.80	14.100	-24.130	35.540	-24.74		275	1.75	120 k
417.984568972 M	14.02	16.719	-23.911	35.540	-21.52	--	205	1.21	120 k
540.886573176 M	19.79	21.947	-23.977	35.540	-15.75		125	4.00	120 k
31.675150469 M	14.41	18.130	-26.109	29.540	-15.13		0	2.17	120 k
756.134067912 M	21.13	22.232	-23.383	35.540	-14.41		171	3.22	120 k
950.169539355 M	24.88	24.593	-22.427	35.540	-10.66	--	82	2.66	120 k

Azimuth Plots

Turntable Plot (31.675150469 MHz)

Level (dBuV/m)

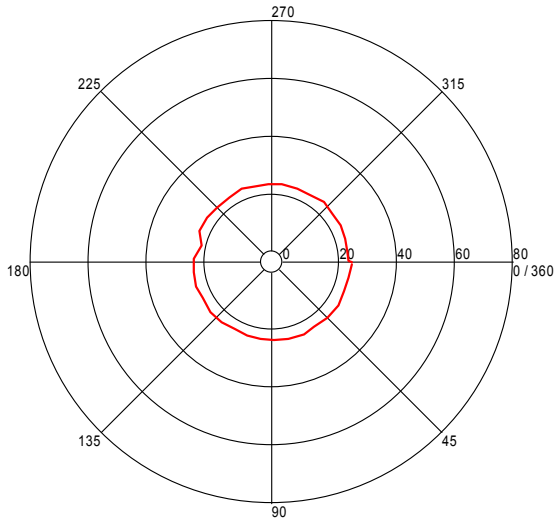


All Polarities

Azimuth (Degrees)

Turntable Plot (260.356913369 MHz)

Level (dBuV/m)

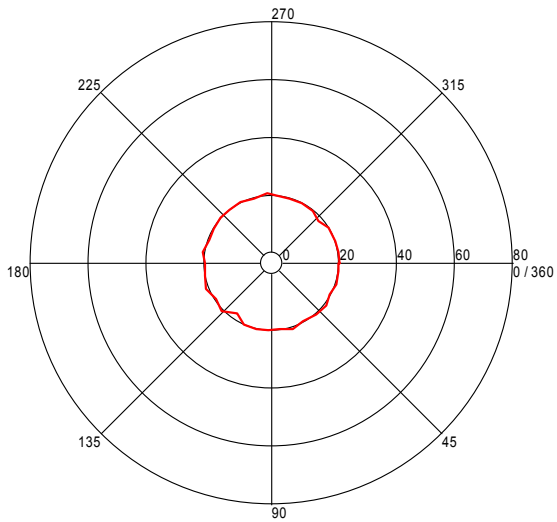


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (31.675150469 MHz)

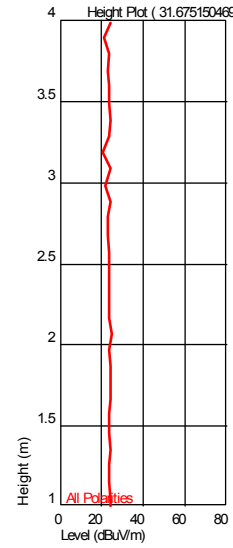


Height Plot (260.356913369 MHz)

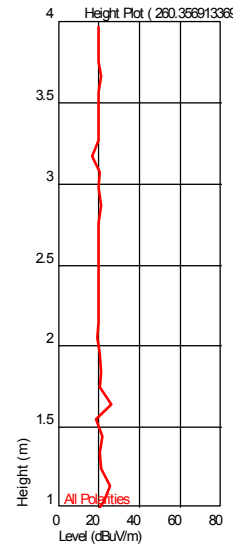

Turntable Plot (417.984568972 MHz)


Level (dBuV/m)

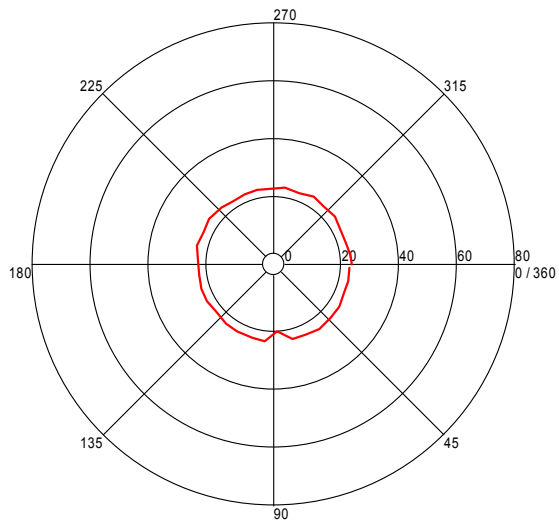

All Polarities


Azimuth (Degrees)

Height Plot (417.984568972 MHz)



Turntable Plot (540.886573176 MHz)


Level (dBuV/m)

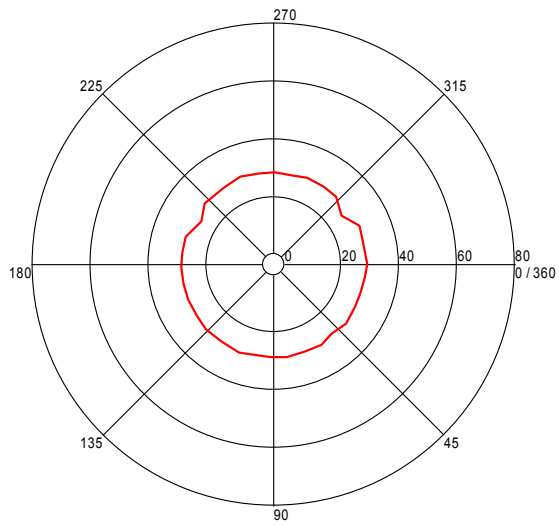

All Polarities


Azimuth (Degrees)

Height Plot (540.886573176 MHz)



Turntable Plot (756.134067912 MHz)


Level (dBuV/m)

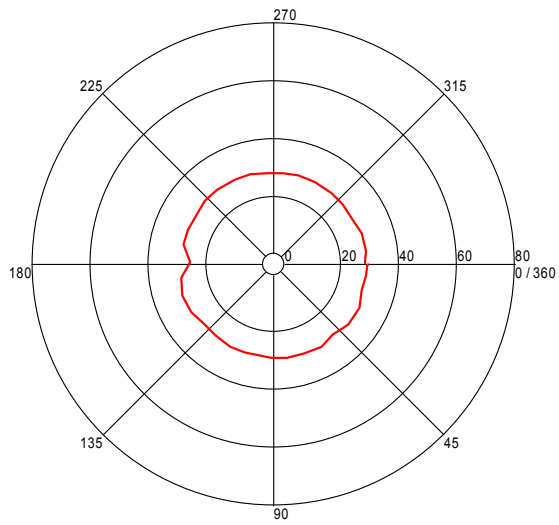

All Polarities


Azimuth (Degrees)

Height Plot (756.134067912 MHz)

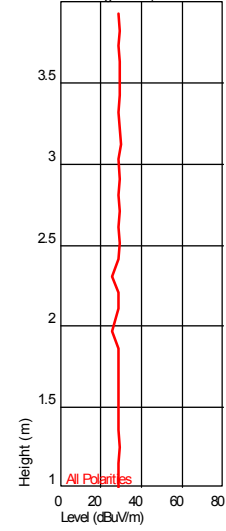

Turntable Plot (950.169539355 MHz)


Level (dBuV/m)

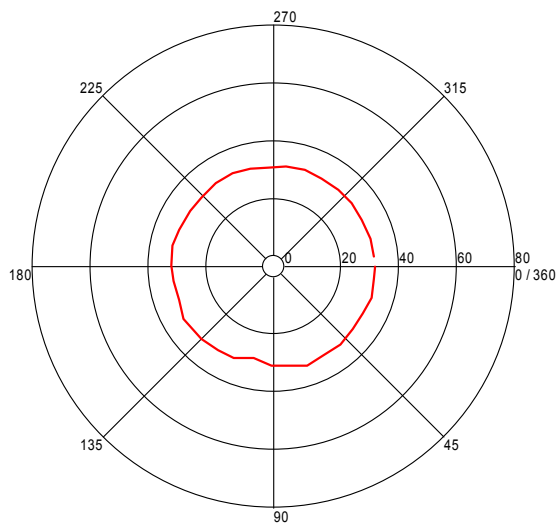

All Polarities

Azimuth (Degrees)

Height Plot (950.169539355 MHz)

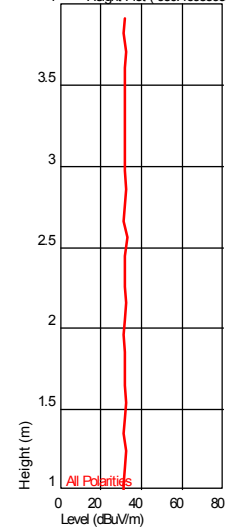

Tx Spurious Emissions above 1GHz
Special Radiated Emissions

Company: IGECare Solutions Inc
Model #: Igeacom II
Serial #: 00005
Engineers: Vathana Ven
Project #: G100357410
Standard: FCC Part 15 Subpart C 15.247/RSS-247
Receiver: R&S ESI (145-128) 09-23-2012
PreAmp: PRE145014 12-16-2012.txt
Antenna & Cables: SHF
Antenna: HORN2 V3m 10-24-2012.txt
Cable(s): 145-416 3mTrkB 09-04-2012.txt
Location: 10m Chamber
Barometer: DAV003
Filter: REA003 REA004
Bands: N, LF, HF, SHF
EMC04
CBL030
ROS001
Temp/Humidity/Pressure: 24C 51% 1014mbar
Limit Distance (m): 3
Test Distance (m): 3
PreAmp Used? (Y or N): Y
Voltage/Frequency: Battery powered
Frequency Range: 1-25GHz
Net = Reading (dBuV/m) + Antenna Factor (dB1/m) + Cable Loss (dB) - Preamp Factor (dB) - Distance Factor (dB)
Peak: PK Quasi-Peak: QP Average: AVG RMS: RMS; NF = Noise Floor, RB = Restricted Band; Bandwidth denoted as RBW/VBW

Detector Type	Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Distance Factor dB	Net dB(uV/m)	Limit dB(uV/m)	Margin dB	Bandwidth	FCC	IC	Harmonic?
Note: Spurious Emissions Reference. Fundamental frequencies (modulated) at 3 meters with no pre-amp														
CH11 - 2405MHz, No pre-amp, Orientation 1 - EUT flat														
PK	H	2405.000	52.40	28.33	5.93	0.00	0.00	86.66	-	-	100/300 kHz			No Pre-Amp
PK	V	2405.000	45.56	28.55	5.93	0.00	0.00	80.04	-	-	100/300 kHz			
CH11 - 2405MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2405.000	49.47	28.33	5.93	0.00	0.00	83.73	-	-	100/300 kHz			No Pre-Amp
PK	V	2405.000	43.63	28.55	5.93	0.00	0.00	78.11	-	-	100/300 kHz			
CH11 - 2405MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2405.000	42.47	28.33	5.93	0.00	0.00	76.73	-	-	100/300 kHz			No Pre-Amp
PK	V	2405.000	48.59	28.55	5.93	0.00	0.00	83.07	-	-	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Orientation 1 - EUT flat														
PK	H	2440.000	52.84	28.43	5.98	0.00	0.00	87.25	-	-	100/300 kHz			No Pre-Amp
PK	V	2440.000	45.74	28.60	5.98	0.00	0.00	80.32	-	-	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2440.000	50.71	28.43	5.98	0.00	0.00	85.12	-	-	100/300 kHz			No Pre-Amp
PK	V	2440.000	46.92	28.60	5.98	0.00	0.00	81.50	-	-	100/300 kHz			
CH18 - 2440MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2440.000	43.06	28.43	5.98	0.00	0.00	77.47	-	-	100/300 kHz		RB	No Pre-Amp
PK	V	2440.000	43.63	28.60	5.98	0.00	0.00	78.21	-	-	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Orientation 1 - EUT flat														
PK	H	2480.000	53.86	28.54	6.03	0.00	0.00	88.44	-	-	100/300 kHz			No Pre-Amp
PK	V	2480.000	46.53	28.67	6.03	0.00	0.00	81.23	-	-	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Orientation 2 - EUT on its long side														
PK	H	2480.000	51.26	28.54	6.03	0.00	0.00	85.84	-	-	100/300 kHz			No Pre-Amp
PK	V	2480.000	45.93	28.67	6.03	0.00	0.00	80.63	-	-	100/300 kHz			
CH26 - 2480MHz, No pre-amp, Orientation 3 - EUT on its short side														
PK	H	2480.000	44.38	28.54	6.03	0.00	0.00	78.96	-	-	100/300 kHz			No Pre-Amp
PK	V	2480.000	50.25	28.67	6.03	0.00	0.00	84.95	-	-	100/300 kHz			
CH11 - 2405MHz, Spurious Emissions from 1-18GHz, REA003, REA004														
PK	H	4810.000	44.66	32.86	9.17	34.54	0.00	52.14	74.00	-21.86	1/3MHz	RB		Noise Floor
AVG	H	4810.000	19.48	32.86	9.17	34.54	0.00	26.96	54.00	-27.04	1/3MHz	RB		Noise Floor
PK	H	7215.000	29.33	36.00	10.85	35.66	0.00	40.53	66.66	-26.14	100/300kHz			Noise Floor
PK	H	9620.000	28.60	37.76	13.16	35.85	0.00	43.67	66.66	-22.99	100/300kHz			Noise Floor
PK	H	12025.000	37.22	39.40	14.97	35.38	0.00	56.21	74.00	-17.79	1/3MHz	RB		Noise Floor
AVG	H	12025.000	25.10	39.40	14.97	35.38	0.00	44.09	54.00	-9.91	1/3MHz	RB		Noise Floor
PK	H	14430.000	24.76	42.11	15.16	34.64	0.00	47.39	66.66	-19.27	100/300kHz			Noise Floor
PK	H	16835.000	25.70	39.81	25.50	37.74	0.00	53.27	66.66	-13.39	100/300kHz			Noise Floor
CH18 - 2440MHz, Spurious Emissions from 1-18GHz, REA003, REA004														
PK	H	4880.000	44.33	32.97	9.28	34.41	0.00	52.17	74.00	-21.83	1/3MHz	RB		Noise Floor
AVG	H	4880.000	19.15	32.97	9.28	34.41	0.00	26.99	54.00	-27.01	1/3MHz	RB		Noise Floor
PK	H	7320.000	39.40	36.42	10.97	35.73	0.00	51.05	74.00	-22.95	1/3MHz	RB		Noise Floor
AVG	H	7320.000	26.95	36.42	10.97	35.73	0.00	38.60	54.00	-15.40	1/3MHz	RB		Noise Floor
PK	H	9760.000	27.93	37.95	13.35	35.35	0.00	43.88	67.25	-23.37	100/300kHz			Noise Floor
PK	H	12200.000	36.91	39.14	14.88	35.45	0.00	55.49	74.00	-18.51	1/3MHz	RB		Noise Floor
AVG	H	12200.000	25.15	39.14	14.88	35.45	0.00	43.73	54.00	-10.27	1/3MHz	RB		Noise Floor
PK	H	14640.000	25.44	41.61	15.25	34.87	0.00	47.43	67.25	-19.82	100/300kHz			Noise Floor
PK	H	17080.000	24.79	40.68	18.66	37.60	0.00	46.53	67.25	-20.72	100/300kHz			Noise Floor
CH26 - 2480MHz, Spurious Emissions from 1-18GHz, REA003, REA004														
PK	H	4960.000	43.59	33.15	9.41	34.25	0.00	51.90	74.00	-22.10	1/3MHz	RB		Noise Floor
AVG	H	4960.000	18.41	33.15	9.41	34.25	0.00	26.72	74.00	-47.28	1/3MHz	RB		Noise Floor
PK	H	7440.000	38.12	36.50	11.10	35.81	0.00	49.91	74.00	-24.09	1/3MHz	RB		Noise Floor
AVG	H	7440.000	27.10	36.50	11.10	35.81	0.00	38.89	74.00	-35.11	1/3MHz	RB		Noise Floor
PK	H	9920.000	28.17	38.23	13.57	34.78	0.00	45.19	68.44	-23.25	100/300kHz			Noise Floor
PK	H	12400.000	37.70	38.93	14.79	35.52	0.00	55.90	74.00	-18.10	1/3MHz	RB		Noise Floor
AVG	H	12400.000	25.55	38.93	14.79	35.52	0.00	43.75	54.00	-10.25	1/3MHz	RB		Noise Floor
PK	H	14880.000	25.85	40.42	15.75	35.32	0.00	46.70	68.44	-21.74	100/300kHz			Noise Floor
PK	H	17360.000	25.25	42.03	23.22	36.91	0.00	53.59	68.44	-14.85	100/300kHz			Noise Floor

Average factor = 20*LOG(0.5511/100) = 25.18 dB

Hand scans were performed from 18-25GHz at a distance of <1m, no emissions were detected above the measuring equipment noise floor.

Test Personnel: Vathana Ven *VSV*
Supervising/Reviewing
Engineer:
(Where Applicable)
Product Standard: FCC Part 15 Subpart C
15.247; IC RSS-247
Input Voltage: Battery
Pretest Verification w/
Ambient Signals or
BB Source: **Ambient**

Test Date: 09/13/2012, 09/14/2012

Test Levels: See tables

Ambient Temperature: 24 °C

Relative Humidity: 51 %

Atmospheric Pressure: 1014 mbars

Deviations, Additions, or Exclusions: None

11 Receiver Radiated Spurious Emissions

11.1 Method

Tests are performed in accordance with CFR47 FCC Part 15 Subpart B 15.109, IC RSS-Gen Sections 4.10 & 6.0.

TEST SITE: 10m ALSE

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A wooden table 80 cm high is used for table-top equipment.

Measurement Uncertainty

For radiated emissions, U_{lab} (3.5 dB at 3m and 3.5 dB at 10m below 1 GHz, and 4.2 dB at 3m above 1 GHz)

$< U_{CISPR}$ (5.2 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$

11.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
~145034	BiLog Antenna (30 MHz to 1GHz)	Schaffner Chase EMC	CBL6111C	2564	02/07/2012	02/07/2013
~145003	Preamplifier (150 KHz to 1.3 GHz)	Hewlett Packard	8447D	2443A04077	10/04/2011	10/04/2012
~145 128	EMI Test Receiver (20Hz - 40GHz)	Rohde & Schwarz	ESL	837771/027	08/23/2011	09/23/2012
~145-410	Cables 145-400 145-406 145-407 145-405 145-403	Huber + Suhner	10m Track A Cables	multiple	09/04/2011	10/04/2012
~145-416	Cables 145-400 145-408 145-402 145-404	Huber + Suhner	3m Track B cables	multiple	09/04/2011	10/04/2012
~HORN2	HORN ANTENNA	EMCO	3115	9602-4675	10/24/2011	10/24/2012
~145 014	Preamplifier (1 GHz to 26.5 GHz)	Hewlett Packard	8449B	3008A00232	12/16/2011	12/16/2012
~DAV003	Weather Station	Davis Instruments	7400	PE80529A39A	08/17/2011	09/17/2012

Software Utilized:


Name	Manufacturer	Version
C5	Teseq	Build 5.26.00.3

11.3 Results:

Emissions must be below the general limits of FCC 15.109 and IC RSS-Gen Issue 3 December 2010 Section 6.0 Table 2.

The sample tested was found to Comply.

11.4 Setup Photographs:

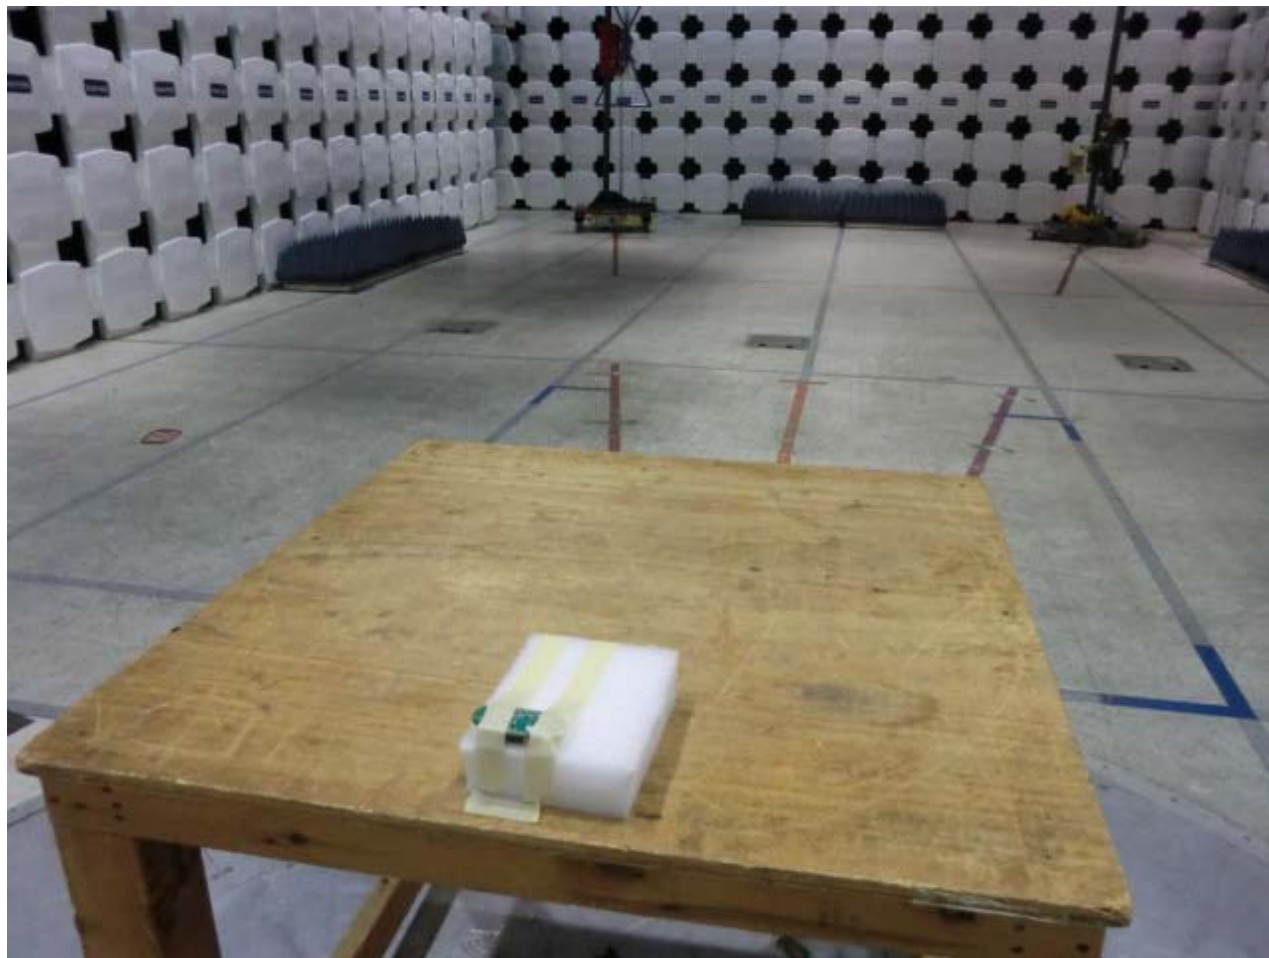

30-1000MHz



1-13GHz

11.5 Plots/Data:

Rx Spurious Emissions 30-1000MHz

Test Information

Test Details

Test:

Project:

Test Notes:

Temperature:

Humidity:

Tested by:

Test Started:

User Entry

Radiated - FCC15 Class B @ 10m

IgeaCare_G100357410

1009mB, Rx mode

24 deg


50%

Vathana Ven

14 Sep 2012 16 : 48

Additional Information

Prescan Emission Graph

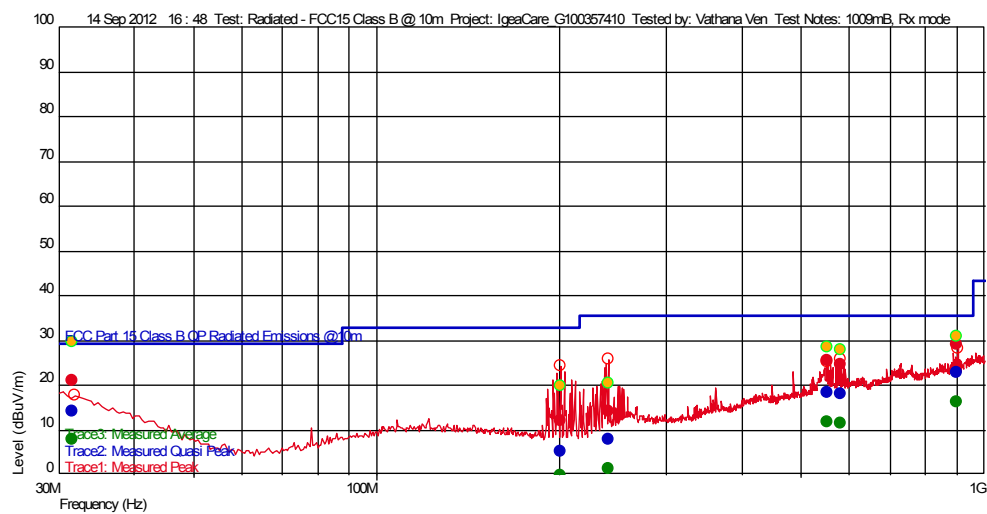

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data


Emissions Test Data

Trace2: Measured Quasi Peak

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
200.814428609 M	5.24	9.133	-24.317	33.040	-27.80		195	1.96	120 k
240.936673699 M	7.81	11.431	-24.179	35.540	-27.73	--	360	1.04	120 k
582.250099944 M	18.00	20.090	-24.022	35.540	-17.54		251	2.47	120 k
552.091783832 M	18.36	20.749	-23.973	35.540	-17.18		261	1.65	120 k
31.664128481 M	14.30	18.134	-26.109	29.540	-15.24	--	1	3.11	120 k
903.84108211 M	22.98	23.270	-22.674	35.540	-12.56		100	3.37	120 k

Azimuth Plots


Turntable Plot (31.664128481 MHz)

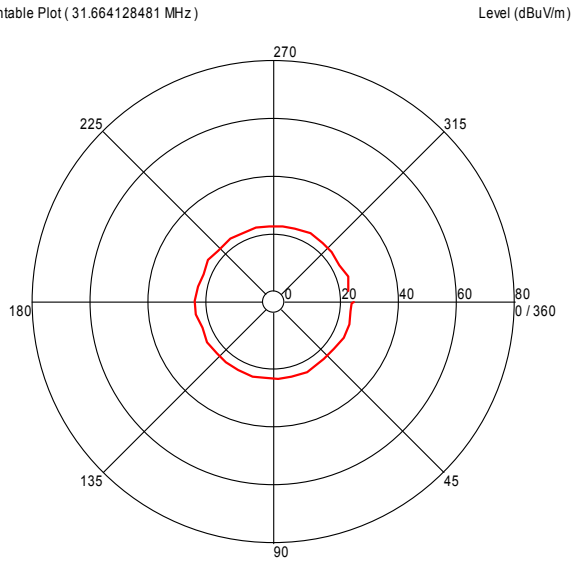

All Polarities

Azimuth (Degrees)

Turntable Plot (200.814428609 MHz)

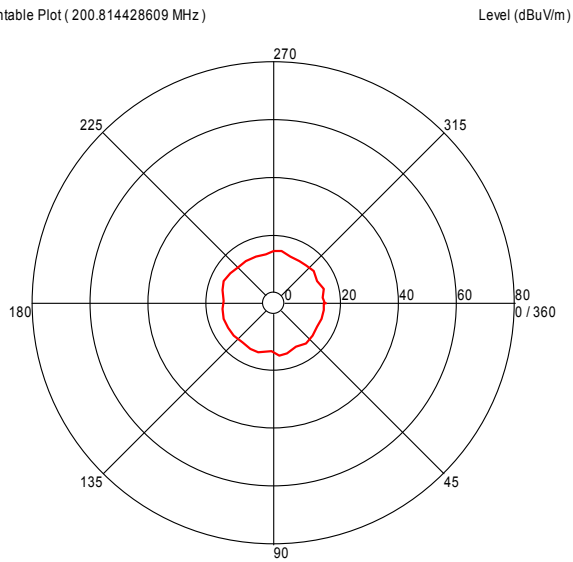


All Polarities


Azimuth (Degrees)

Turntable Plots

Height Plot (31.664128481 MHz)

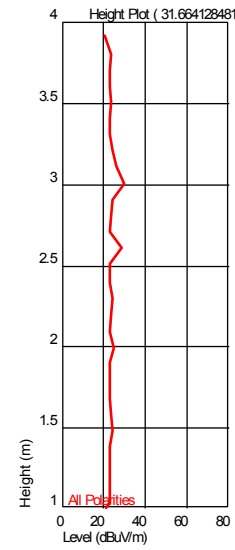


Height Plot (200.814428609 MHz)

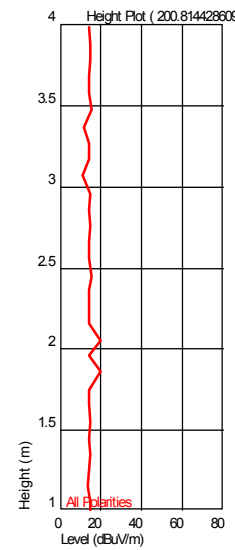


Turntable Plot (240.936673699 MHz)

Level (dBuV/m)

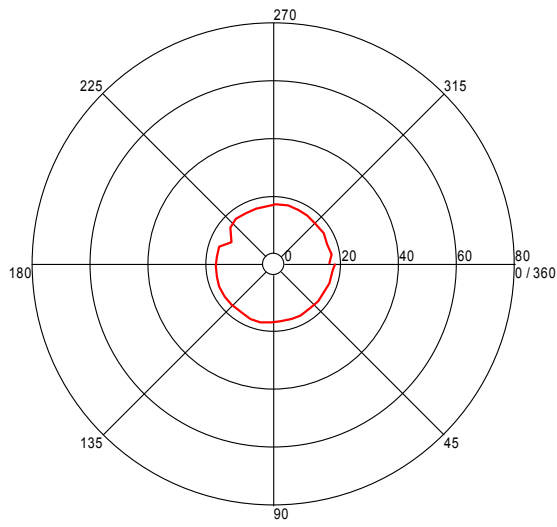


All Polarities

Azimuth (Degrees)

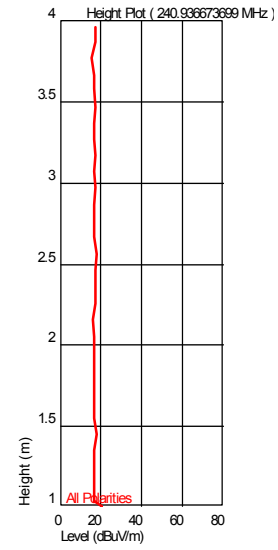


Turntable Plot (552.091783832 MHz)

Level (dBuV/m)

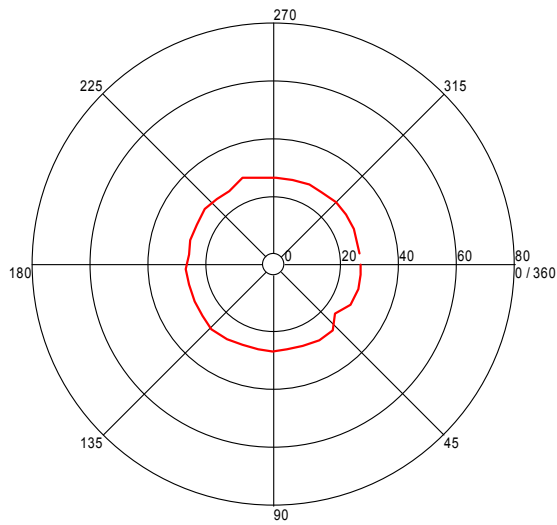


All Polarities

Azimuth (Degrees)

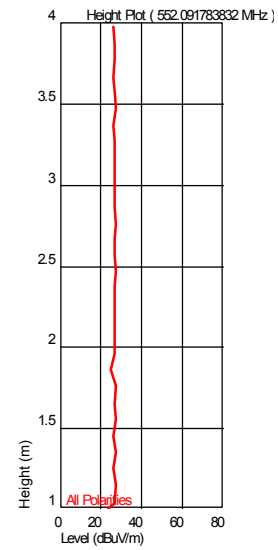

Turntable Plot (582.250099944 MHz)


Level (dBuV/m)

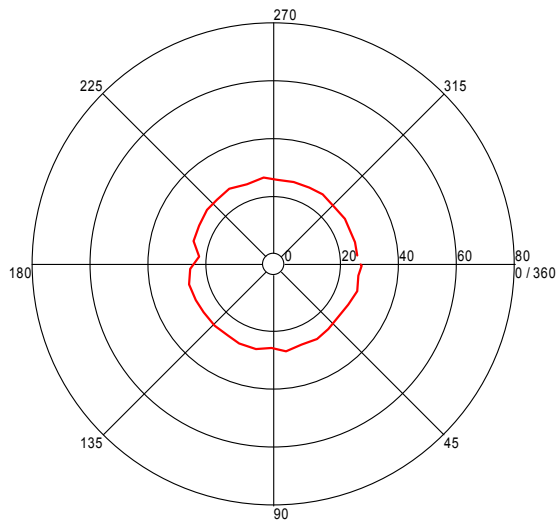

All Polarities


Azimuth (Degrees)

Height Plot (582.250099944 MHz)

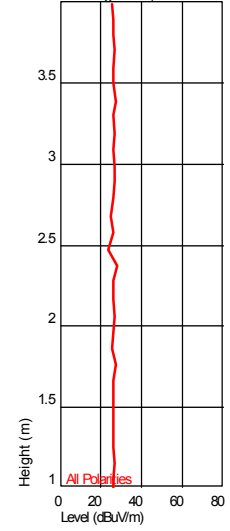

Turntable Plot (903.84108211 MHz)


Level (dBuV/m)

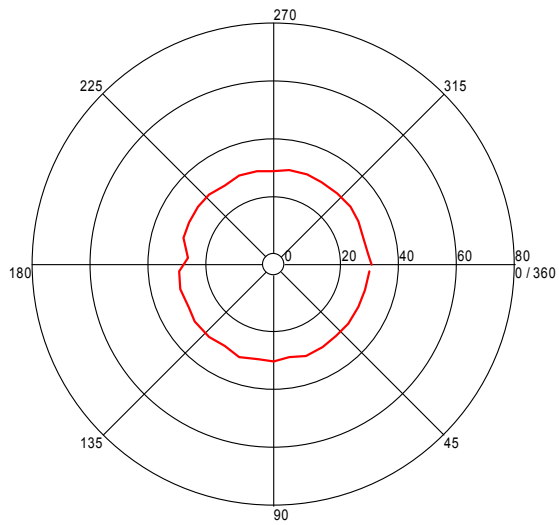

All Polarities

Azimuth (Degrees)

Height Plot (903.84108211 MHz)

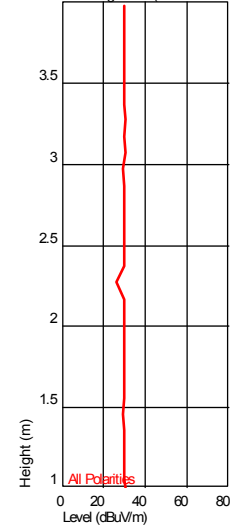

Rx Spurious Emissions 1-13GHz

Test Information

Test Details


Test:
Project:
Test Notes:
Temperature:
Humidity:
Tested by:
Test Started:

User Entry

Radiated - FCC15 Class B @ 3m
IgeaCare_G100357410
1009mB, Rx mode
24 deg
50%
Vathana Ven
14 Sep 2012 17 : 33

Additional Information

Prescan Emission Graph

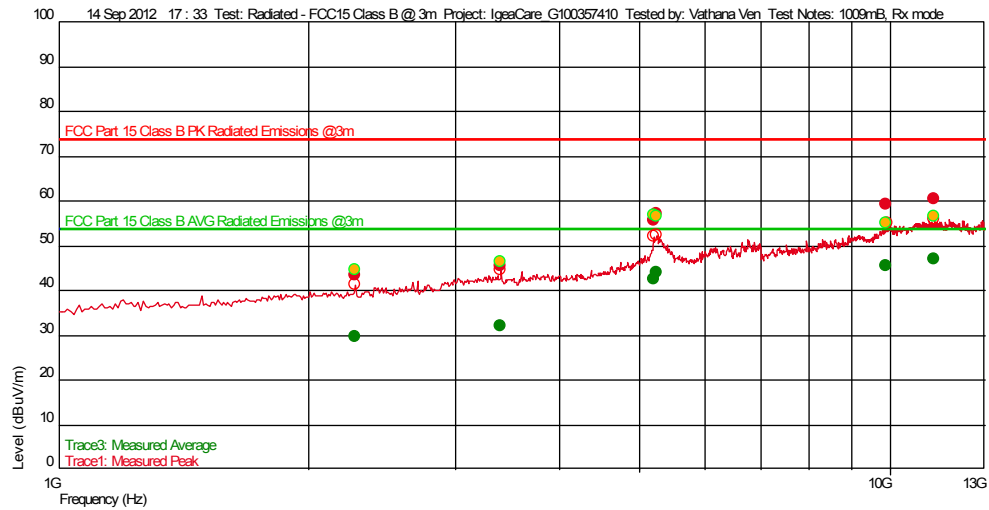

- Measured Peak Value
- Measured Quasi Peak Value
- Measured Average Value
- Maximum Value of Mast and Turntable

- Swept Peak Data
- Swept Quasi Peak Data
- Swept Average Data

Emissions Test Data

Trace1: Measured Peak


Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
2.274088176 G	43.48	27.827	-28.326	74.000	-30.52		275	1.45	1 M
3.406726787 G	45.54	31.111	-27.466	74.000	-28.46		299	1.09	1 M
5.201055445 G	55.67	33.676	-21.191	74.000	-18.33		0	1.70	1 M
5.250207081 G	57.27	33.718	-19.384	74.000	-16.73		346	1.68	1 M
9.924201736 G	59.33	38.236	-21.193	74.000	-14.67	--	150	1.22	1 M
11.322150969 G	60.38	38.876	-19.970	74.000	-13.62		360	3.79	1 M

Trace3: Measured Average

Frequency (Hz)	Level (dBuV/m)	AF	PA+CL	Limit (dBuV/m)	Margin (dBuV/m)	Hor (--), Ver ()	Azimuth (deg) (Deg)	Mast Height (m)	RBW (Hz)
2.274088176 G	29.78	27.827	-28.326	54.000	-24.22		275	1.45	1 M
3.406726787 G	32.06	31.111	-27.466	54.000	-21.94		299	1.09	1 M
5.201055445 G	42.48	33.676	-21.191	54.000	-11.52		0	1.70	1 M
5.250207081 G	43.89	33.718	-19.384	54.000	-10.11		346	1.68	1 M
9.924201736 G	45.63	38.236	-21.193	54.000	-8.37	--	150	1.22	1 M
11.322150969 G	46.97	38.876	-19.970	54.000	-7.03		360	3.79	1 M

Azimuth Plots


Turntable Plot (2.274088176 GHz)

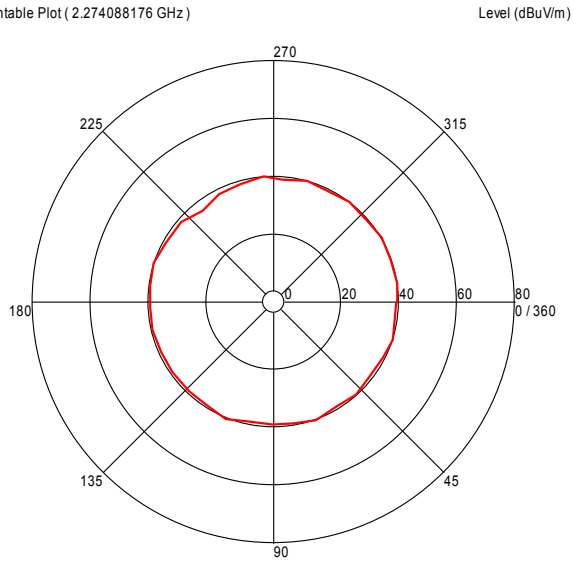

All Polarities

Azimuth (Degrees)



Turntable Plot (3.406726787 GHz)

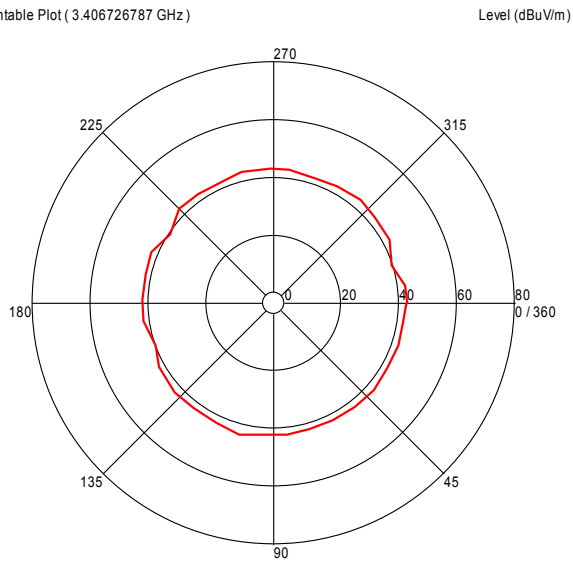

All Polarities


Azimuth (Degrees)

Turntable Plots

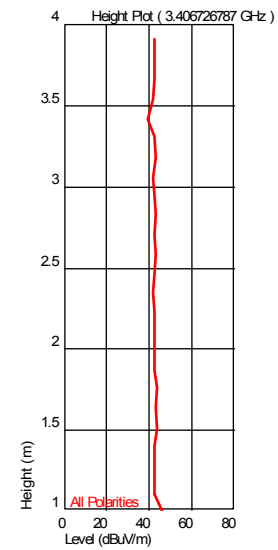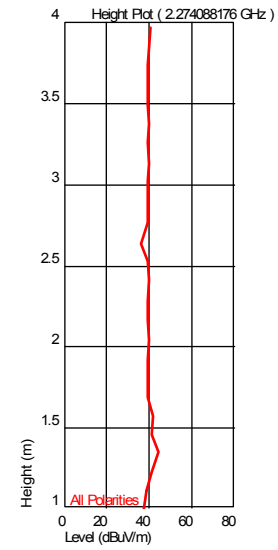


Turntable Plot (5.201055445 GHz)

Level (dBuV/m)

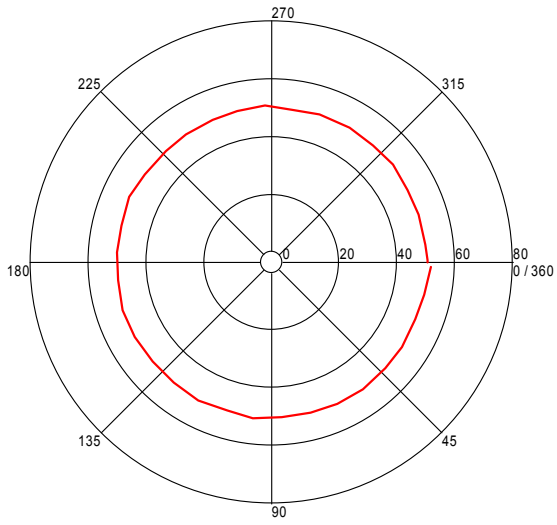


All Polarities

Azimuth (Degrees)

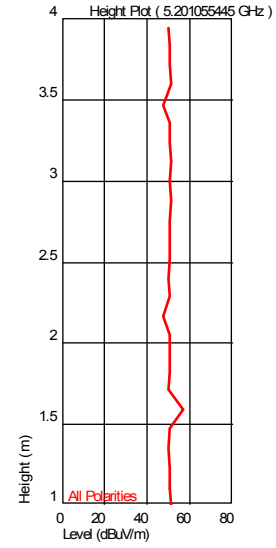


Turntable Plot (5.250207081 GHz)

Level (dBuV/m)

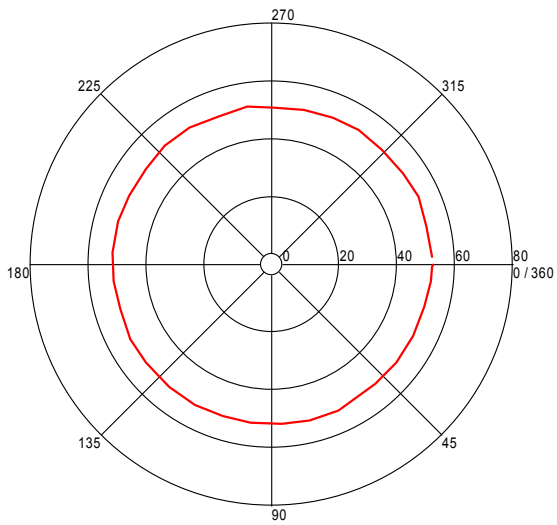


All Polarities

Azimuth (Degrees)

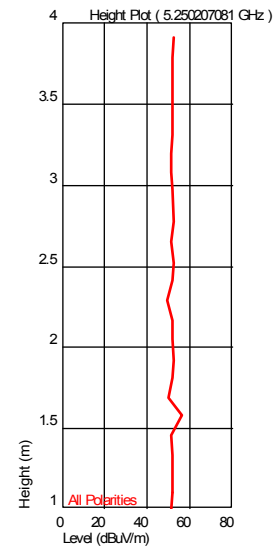

Turntable Plot (9.924201736 GHz)


Level (dBuV/m)

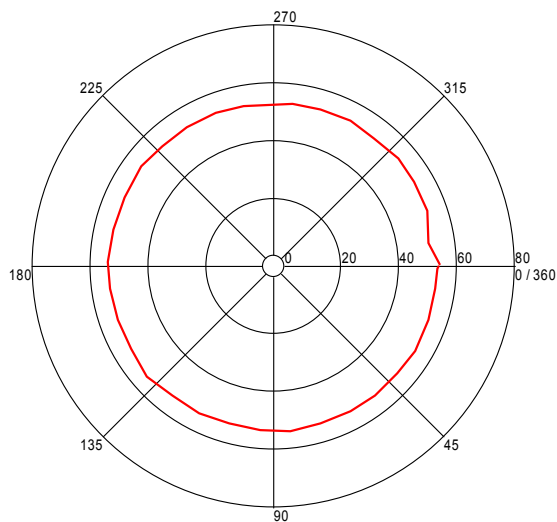

All Polarities


Azimuth (Degrees)

Height Plot (9.924201736 GHz)

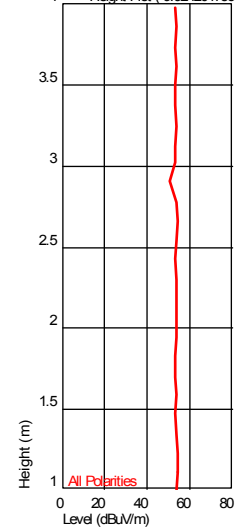

Turntable Plot (11.322150969 GHz)


Level (dBuV/m)

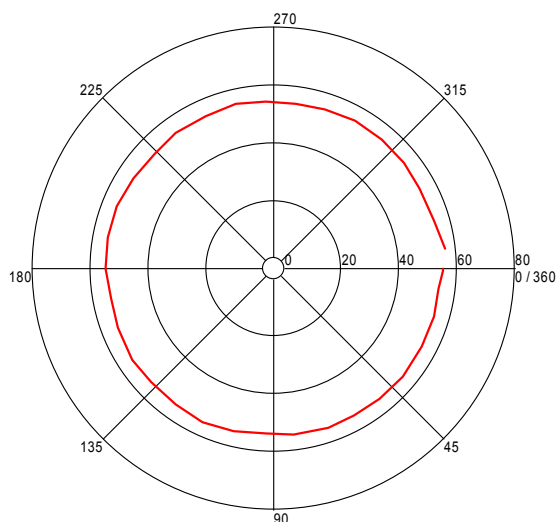

All Polarities

Azimuth (Degrees)

Height Plot (11.322150969 GHz)

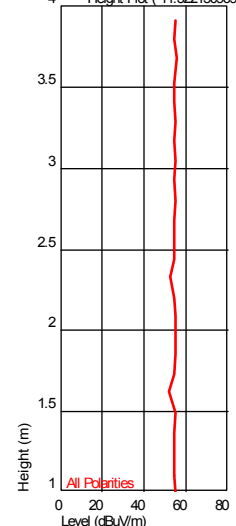

Test Personnel: Vathana Ven
 Supervising/Reviewing Engineer:
 (Where Applicable)
 Product Standard: FCC Part 15 Subpart B; IC RSS-247, IC RSS-Gen, IC ICES-003
 Input Voltage: Battery
 Pretest Verification w/ Ambient Signals or BB Source: Ambient

Test Date: 09/14/2012

Test Levels: Class B

Ambient Temperature: 24 °C

Relative Humidity: 50 %

Atmospheric Pressure: 1009 mbars

Deviations, Additions, or Exclusions: None

12 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	09/23/2012	100357410BOX-025	VTV	KPS <i>kps</i>	notes
1	02/03/2015	101930181BOX-001	VTV	KPS <i>kps</i>	Company name and model number changed