

FCC/IC TEST REPORT

Job No. : GPEM2206000291EC

Applicant : iRevo-ASSA ABLOY Korea

Equipment Under Test (EUT) :

Product Name : Digital Door Lock

Model Name : YRD137-ZW-619

Alt. Model Name : YRD137-ZW-605, YRD137-ZW-0BP, YRD137-ZW-BSP

FCC Authorization Type : Certification

Applied Standards : FCC Part 15 Subpart B, Class B

ICES-003 Issue 7:2020

FCC ID : 2ABFG-YRIZW2USPB2

IC Certification : 11626A-YRIZW2USPB2

Date of Receipt : June 21, 2022

Date of Test : June 22, 2022

Date of Issue : August 2, 2022

Test Results : Complied

Tested by :



DoHyeon Lee

Reviewed by :



Julia Choi

This test report does not assure KOLAS accreditation.

1) The results of this test report are effective only to the items tested.

2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.

Remarks :

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Contents

1. General Information.....	4
1.1 Client Information.....	4
1.2 Test Laboratory.....	4
1.3 General Information of E.U.T.	4
1.4 Operating Modes and Conditions.....	4
1.5 Peripheral Equipments.....	4
1.6 Cable List.....	5
1.7 System Configurations.....	5
1.8 Test System Layout	5
1.9 Modifications/Notes.....	5
1.10 Applicable Standards for Testing	5
1.11 Summary of Test Results.....	5
2. Emission Test.....	6
2.1 Test Results.....	6
2.2 Test Method and Limits.....	6
2.2.1 Test Method	6
2.2.2 Test Limits.....	6
2.3 Radiated Emission	8
2.3.1 Test Equipments	8
2.3.2 Test Site.....	8
2.3.3 Environment Conditions	8
2.3.4 Test Results	9
Appendix A : Measurement Uncertainty	12



Revision History

Revision	Report number	Description
0	F690501-RF-EMC000707	Initial

1. General Information

1.1 Client Information

Applicant	iRevo-ASSA ABLOY Korea
Applicant Address	10f of JEI PLATZ Bldg., 186, Gasandigital 1-ro, Geumcheon-gu, Seoul, 08502, Korea
Manufacturer	iRevo-ASSA ABLOY Korea
Manufacturer Address	10f of JEI PLATZ Bldg., 186, Gasandigital 1-ro, Geumcheon-gu, Seoul, 08502, Korea

1.2 Test Laboratory

Name and Address	SGS Korea Co., Ltd.
- Giheung Laboratory	35, Giheungdanji-ro 121beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
- Gunpo Laboratory	4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807, Republic of Korea
FCC Registration No.	KR0150
IC Registration No.	7837B
Phone	+ 82 31 548 0710
Fax	+ 82 31 548 0719
e-mail	julia.choi@sgs.com

1.3 General Information of E.U.T.

Classification	Specification
Product Name	Digital Door Lock
Model Name	YRD137-ZW-619
Alt. Model Name	YRD137-ZW-605, YRD137-ZW-0BP, YRD137-ZW-BSP
Model Differences	Refer Note1.
Serial No.	None
EMI Classification	Class B
Test Voltage	DC 6 V (AA Battery 4 EA)
Rated Voltage	DC 6 V
Highest Internal Frequency	916 MHz
H/W Version	PV01
S/W Version	V2.2.6
Function	This product is an electronic door locking equipment

Note1. Model Differences

Model Name	Differences (Color of appearance)
Basic Model	YRD157-ZW-619 SILVER
Alt. Model	YRD157-ZW-605 GOLD
	YRD157-ZW-0BP Oil Rubbed Bronze
	YRD157-ZW-BSP Matt BLACK

1.4 Operating Modes and Conditions

Operating mode	Operating Condition
1) unlocking operation	Status that pressing a button on the EUT for unlocking.

1.5 Peripheral Equipments

Description	Model	Serial No.	Manufacturer
-	-	-	-

1.6 Cable List

Start		END		Cable Spec.		Used core
Name	I/O Port	Name	I/O Port	Length (m)	Shield	
EUT	-	-	-	-	-	-

1.7 System Configurations

Description	Model	Serial No.	Manufacturer	Note
Main Board	WGA5.8V MAIN PV01 220428	PC4M-D448S-E1	-	-
Front Board	WGA5.8V PB FRONT PV01 220502	PC2F-D449S-E1	-	-
Motor	-	-	-	-

1.8 Test System Layout

Test System Layout
EUT

1.9 Modifications/Notes

- There was no modified item during the test.

1.10 Applicable Standards for Testing

Standards	Status	Deviation
FCC Part 15 Subpart B ICES-003 Issue 7:2020 ANSI C63.4a:2017	Applicable	No Deviation

1.11 Summary of Test Results

Test Item	Standards	Results
Conducted Emission	FCC Part 15 Subpart B Section 15.107 ICES-003 Issue 7:2020	N/A
Radiated Emission	FCC Part 15 Subpart B Section 15.109 ICES-003 Issue 7:2020	Complied

Note : Test methods of all test items are performed according to the basic standards in this table.

EMISSION

2.1 Test Results

Test Items	Standards	Test Results
Conducted Emission	FCC Part 15 Subpart B Section 15.107 ICES-003 Issue 7:2020 ANSI C63.4a:2017	N/A
Radiated Emission	FCC Part 15 Subpart B Section 15.109 ICES-003 Issue 7:2020 ANSI C63.4a:2017	Complied

2.2 Test Method and Limits

2.2.1 Test Method

Test Items	Measuring Frequency Range	RBW	Measuring Distance
Conducted Emission	0.15 MHz ~ 30 MHz	9 kHz	-
Radiated Emission	30 MHz ~ 1 GHz	120 kHz	10 m & 3 m
	Above 1 GHz	1 MHz	3 m

Note : 10 m method of radiated emission measurement is only applied to Class A equipment over the frequency range of 30 MHz ~ 1 GHz. Except this, 3 m method is applied to Class B equipment over the frequency range of 30 MHz ~ 1 GHz and Class A and Class B equipment above 1 GHz.

2.2.2 Test Limits

-Conducted Emission Limits

Frequency Range	Limits(dB μ V)		Class
	Quasi-peak	Average	
0.15 MHz ~ 0.5 MHz	79	66	Class A
0.5 MHz ~ 30 MHz	73	60	
0.15 MHz ~ 0.5 MHz	66 to 56	56 to 46	Class B
0.5 MHz ~ 5 MHz	56	46	
5 MHz ~ 30 MHz	60	50	

Note : The lower limit shall apply at the transition frequencies. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

-Radiated Emission Limits below 1 GHz

[FCC Part 15 Subpart B]

Frequency Range	Limits(dB μ V/m)	Class
	Quasi-peak	
30 MHz ~ 88 MHz	39.0	Class A (10 m method)
88 MHz ~ 216 MHz	43.5	
216 MHz ~ 960 MHz	46.4	
960 MHz ~ 1 GHz	49.5	
30 MHz ~ 88 MHz	40.0	Class B (3 m method)
88 MHz ~ 216 MHz	43.5	
216 MHz ~ 960 MHz	46.0	
960 MHz ~ 1 GHz	54.0	

[ICES-003 Issue 7 : 2020]

Frequency Range	Limits(dB μ V/m)	Class
	Quasi-peak	
30 MHz ~ 88 MHz	40.0	Class A (10 m method)
88 MHz ~ 216 MHz	43.5	
216 MHz ~ 230 MHz	46.4	
230 MHz ~ 960 MHz	47.0	
960 MHz ~ 1 GHz	49.5	
30 MHz ~ 88 MHz	50.0	Class A (3 m method)
88 MHz ~ 216 MHz	54.0	
216 MHz ~ 230 MHz	56.9	
230 MHz ~ 960 MHz	57.0	
960 MHz ~ 1 GHz	60.0	
30 MHz ~ 88 MHz	30.0	Class B (10 m method)
88 MHz ~ 216 MHz	33.1	
216 MHz ~ 230 MHz	35.6	
230 MHz ~ 960 MHz	37.0	
960 MHz ~ 1 GHz	43.5	
30 MHz ~ 88 MHz	40.0	Class B (3 m method)
88 MHz ~ 216 MHz	43.5	
216 MHz ~ 230 MHz	46.0	
230 MHz ~ 960 MHz	47.0	
960 MHz ~ 1 GHz	54.0	

-Radiated Emission Limits above 1 GHz (3 m method)

[FCC Part 15 Subpart B]

Frequency Range	Limits(dB μ V/m)		Class
	Average	Peak	
Above 1 GHz	59.5	79.5	Class A
Above 1 GHz	54.0	74.0	Class B

Note : The limits of class A equipment is extrapolated using an extrapolation factor of 20 dB/decade because it was measured at 3 m distance not 10 m distance.

[ICES-003 Issue 7 : 2020]

Frequency Range	Limits(dB μ V/m)		Class
	Average	Peak	
Above 1 GHz	60.0	80.0	Class A
Above 1 GHz	54.0	74.0	Class B

2.3 Radiated Emission

The initial preliminary exploratory scans were performed over the measuring frequency range (30 MHz to 6 GHz) using a max hold mode incorporating a Peak detector by using the EMI measuring software. The final test data was measured using a Quasi-Peak detector below 1 GHz, Peak and CISPR-Average detector above 1 GHz. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Note. Measuring software

- Giheung Lab.: EMC32(V9.26.01) from R&S
- Gunpo Lab.: EP5RE(V5.3.70) from TOYO

2.3.1 Test Equipments

Equipment	Model	Manufacturer	Serial No	Cal Due. Date
Horn Antenna	HF906	R & S	100326	2023.02.18
Signal Conditioning Unit	SCU 18	R & S	10117	2023.06.13
Test Receiver	ESU26	R & S	100109	2023.01.18
Hybrid Antenna	VULB9163	SCHWARZBECK	01126	2023.02.07
Amplifier	8447F	HP	2944A03909	2022.08.06

Note: The calibration period of every equipment is 1 year.

2.3.2 Test Site

3 m SEMI-ANECHOIC CHAMBER in Gunpo Laboratory

2.3.3 Environment Conditions

Below 1 GHz

Temperature	(Minimum 23.3, Maximum 23.4) °C
Humidity	(Minimum 53.0, Maximum 54.0) % R.H.
Atmospheric Pressure	(Minimum 100.0, Maximum 100.0) kPa
Test Date	June 22, 2022


Above 1 GHz

Temperature	(Minimum 23.3, Maximum 23.4) °C
Humidity	(Minimum 53.0, Maximum 54.0) % R.H.
Atmospheric Pressure	(Minimum 100.0, Maximum 100.0) kPa
Test Date	June 22, 2022

2.3.4 Test Results


Below 1 GHz (3 m method)

[FCC Part 15 Subpart B]

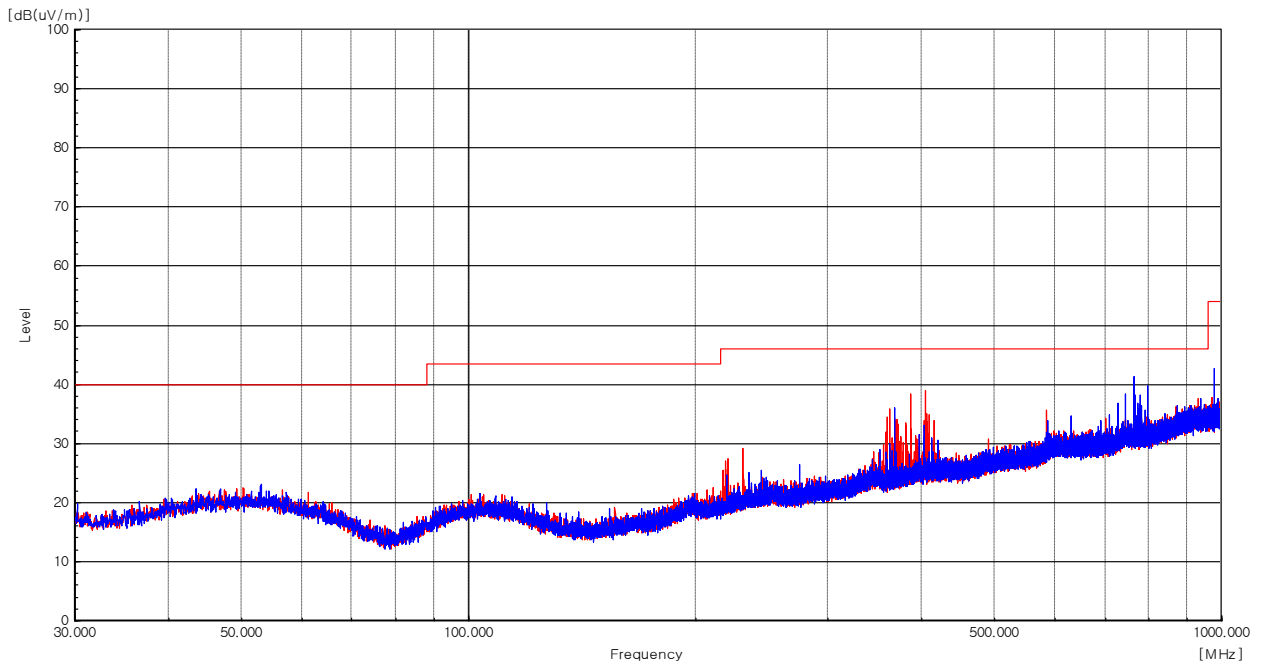

Freq. (MHz)	Reading (dBμV)	Pol. (H/V)	A (°)	H (cm)	AF (dB/m)	CL (dB)	Amp. (dB)	F/S (dBμV/m)	Limit (dBμV/m)	Margin (dB)
221.92	26.90	H	65	107	17.25	3.19	27.73	19.61	46.00	26.39
367.74	27.00	V	360	109	20.61	3.92	27.74	23.79	46.00	22.21
395.00	28.00	H	110	195	21.50	4.07	27.96	25.61	46.00	20.39
601.86	23.90	H	310	100	25.34	4.87	28.71	25.40	46.00	20.60
763.57	28.50	V	145	115	26.63	5.54	28.87	31.80	46.00	14.20
977.17	25.00	V	140	100	28.20	6.22	28.35	31.07	54.00	22.93

[ICES-003 Issue 7:2020]

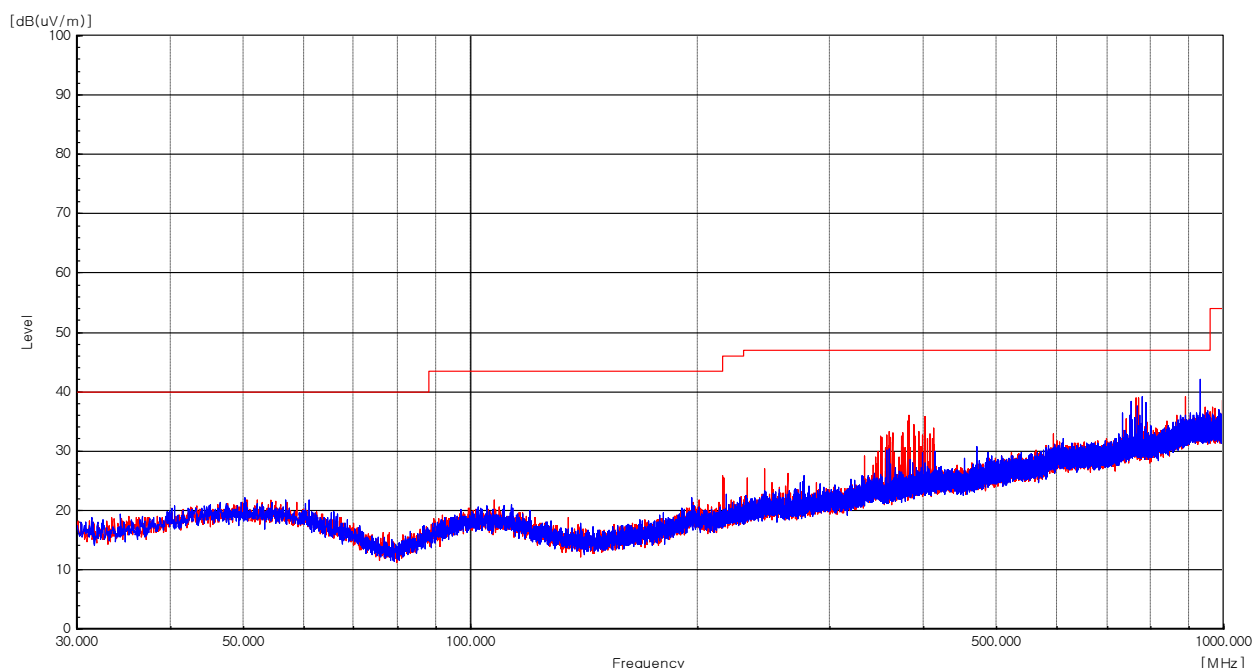


Freq. (MHz)	Reading (dBμV)	Pol. (H/V)	A (°)	H (cm)	AF (dB/m)	CL (dB)	Amp. (dB)	F/S (dBμV/m)	Limit (dBμV/m)	Margin (dB)
360.27	25.90	V	358	100	20.22	3.88	27.68	22.32	46.00	23.68
378.89	28.00	H	281	100	20.88	3.99	27.83	25.04	46.00	20.96
401.63	24.90	V	129	100	21.63	4.11	28.01	22.63	46.00	23.37
770.24	26.00	V	269	100	26.60	5.55	28.86	29.29	46.00	16.71
893.00	23.40	H	310	200	27.86	6.05	28.53	28.78	46.00	17.22
989.32	24.50	V	16	100	28.30	6.21	28.32	30.69	54.00	23.31

Measurement Uncertainty :See the Appendix A

Note:

- AF = Antenna Factor
- CL = Cable Loss
- Amp. = Amplifier Gain
- Pol. H = Horizontal
- Pol. V = Vertical
- A = Angle
- H = Height
- Margin = Limit – Result
- F/S = Level + AF + CL – AMP

Above 1 GHz (1 GHz - 18 GHz)(3 m method)

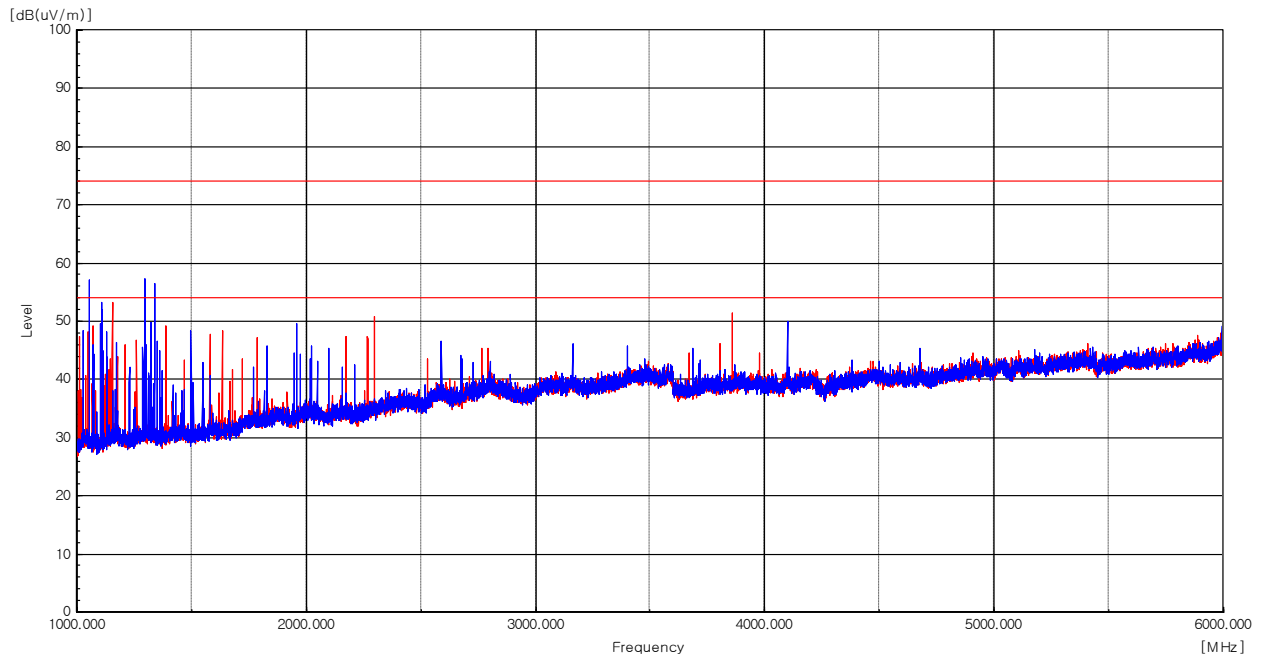

Freq. (MHz)	Level (dB μ V)		Pol. (H/V)	A (°)	H (cm)	AF (dB)	CL (dB)	Amp. (dB)	F/S (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Peak	C-AV									
1 055.81	78.20	-	V	10	110	24.42	7.00	45.57	64.05	74.00	9.95
1 055.81	-	33.40	V	10	110	24.42	7.00	45.57	19.25	54.00	34.75
1 153.00	72.90	-	H	325	105	25.02	7.32	45.52	59.72	74.00	14.28
1 153.00	-	33.40	H	325	105	25.02	7.32	45.52	20.22	54.00	33.78
1 295.78	73.30	-	V	300	190	25.00	7.79	45.45	60.64	74.00	13.36
1 295.78	-	33.00	V	300	190	25.00	7.79	45.45	20.34	54.00	33.66
2 295.00	57.90	-	H	290	100	27.88	10.60	45.30	51.08	74.00	22.92
2 295.00	-	30.80	H	290	100	27.88	10.60	45.30	23.98	54.00	30.02
3 859.91	52.00	-	H	195	200	32.14	14.06	45.40	52.80	74.00	21.20
3 859.91	-	38.00	H	195	200	32.14	14.06	45.40	38.80	54.00	15.20
4 097.54	48.80	-	V	0	100	31.90	15.23	45.35	50.58	74.00	23.42
4 097.54	-	29.20	V	0	100	31.90	15.23	45.35	30.98	54.00	23.02

Measurement Uncertainty: See the Appendix A

Note: • AF = Antenna Factor

• Pol.(H) = Horizontal

• Margin = Limit – F/S

• A: Angle

• CL = Cable Loss

• Pol.(V) = Vertical

• F/S = Level + AF + CL – Amp.

• H: Height

• F/S = Field Strength

• Amp. = Amplifier Gain

Appendix A : Measurement Uncertainty

- Giheung Laboratory

Test Method		Measurement Uncertainty	
Conducted Emission		ENV216	3.5 dB (The confidential level is 95 %, k=2)
		ESH2-Z5	3.2 dB (The confidential level is 95 %, k=2)
		ESH3-Z6	3.2 dB (The confidential level is 95 %, k=2)
		NNLK8129	3.2 dB (The confidential level is 95 %, k=2)
Conducted Emission - Signal		ISN T800	5.6 dB (The confidential level is 95 %, k=2)
		ISNT8-Cat6	5.4 dB (The confidential level is 95 %, k=2)
		ISN S751	5.6 dB (The confidential level is 95 %, k=2)
Discontinuous		3.4 dB (The confidential level is 95 %, k=2)	
Disturbance Voltage at Antenna Terminal		2.0 dB (The confidential level is 95 %, k=2)	
Radiated Emission	9 kHz ~30 MHz	Horizontal	3.4 dB (The confidential level is 95 %, k=2)
		Vertical	3.4 dB (The confidential level is 95 %, k=2)
	30 MHz ~ 1 000 MHz	Horizontal	4.4 dB (The confidential level is 95 %, k=2)
		Vertical	4.6 dB (The confidential level is 95 %, k=2)
	1 GHz ~ 18 GHz	Horizontal	4.0 dB (The confidential level is 95 %, k=2)
		Vertical	4.0 dB (The confidential level is 95 %, k=2)

- Gunpo Laboratory

Test Method		Measurement Uncertainty	
Conducted Emission		ENV216	3.4 dB (The confidential level is 95 %, k=2)
		ESH2-Z5	3.2 dB (The confidential level is 95 %, k=2)
		ESH3-Z6	3.4 dB (The confidential level is 95 %, k=2)
Conducted Emission - Signal		ISN T800	5.6 dB (The confidential level is 95 %, k=2)
		ISNT8-Cat6	5.6 dB (The confidential level is 95 %, k=2)
		ISN S751	7.3 dB (The confidential level is 95 %, k=2)
Disturbance Voltage at Antenna Terminal		2.4 dB (The confidential level is 95 %, k=2)	
Radiated Emission	9 kHz ~30 MHz	Horizontal	3.3 dB (The confidential level is 95 %, k=2)
		Vertical	3.3 dB (The confidential level is 95 %, k=2)
	30 MHz ~ 1 000 MHz	Horizontal	4.8 dB (The confidential level is 95 %, k=2)
		Vertical	5.2 dB (The confidential level is 95 %, k=2)
	1 GHz ~ 18 GHz	Horizontal	3.9 dB (The confidential level is 95 %, k=2)
		Vertical	4.0 dB (The confidential level is 95 %, k=2)

- End of Test Report -