





LTE CA 41C

Channel Bandwidth: 10MHz+15MHz


Low 1RB0 and 1RB74

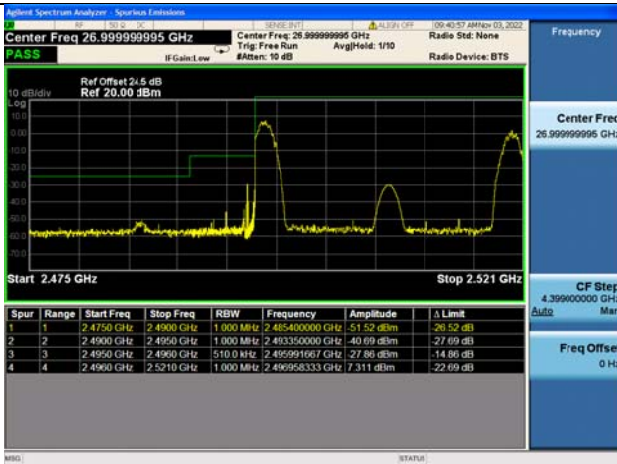


High 1RB0 and 1RB74

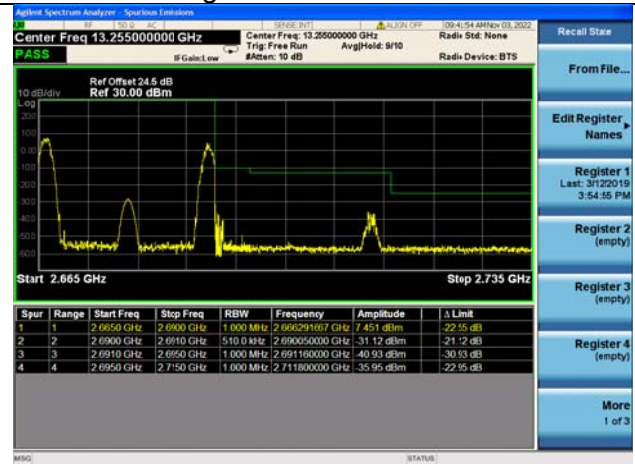


Low 1RB49 and 1RB0

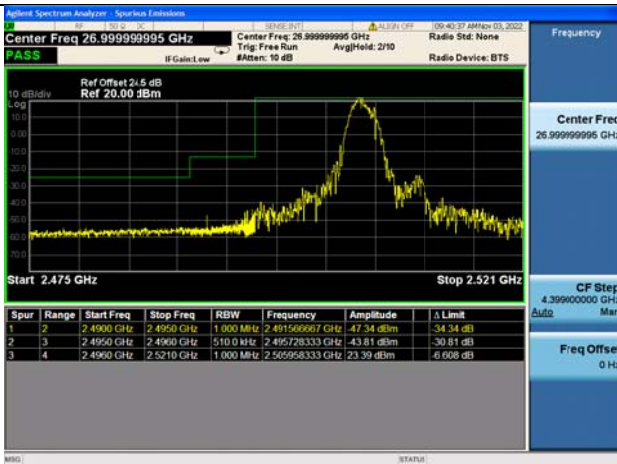

High 1RB49 and 1RB0

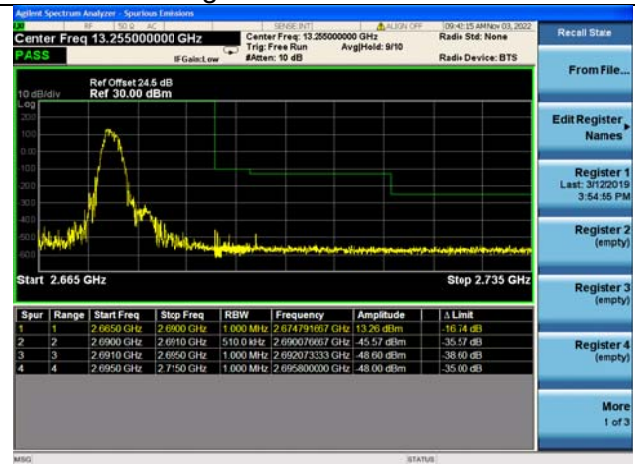

Low FULL RB

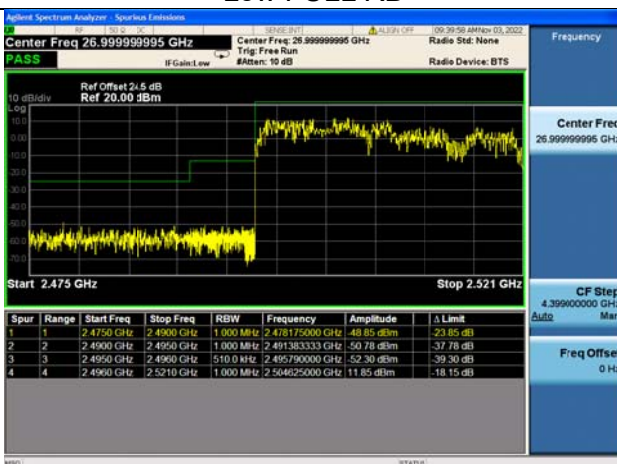

High FULL RB







LTE CA 41C

Channel Bandwidth: 10MHz+20MHz

Low 1RB0 and 1RB99

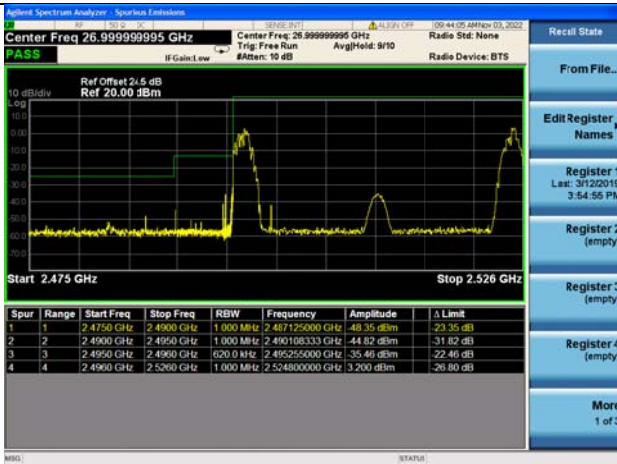

High 1RB0 and 1RB99

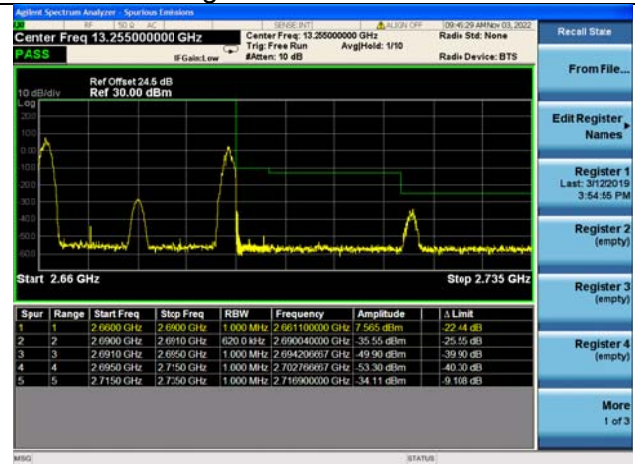


Low 1RB49 and 1RB0




High 1RB49 and 1RB0



Low FULL RB

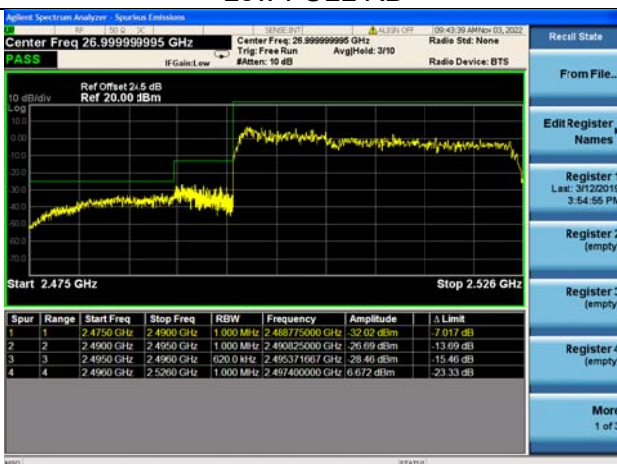

High FULL RB

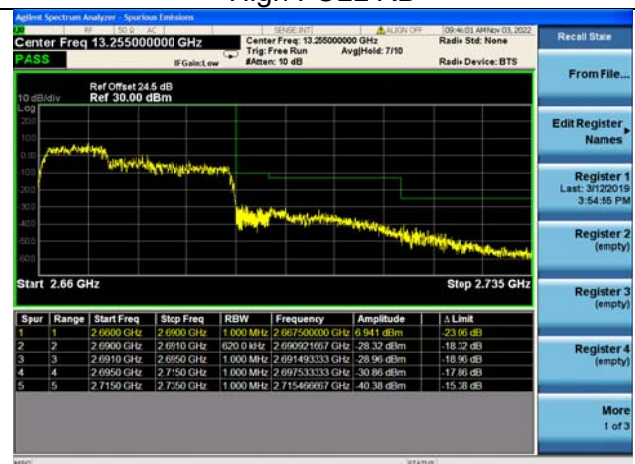





LTE CA 41C

Channel Bandwidth: 15MHz+10MHz


Low 1RB0 and 1RB49

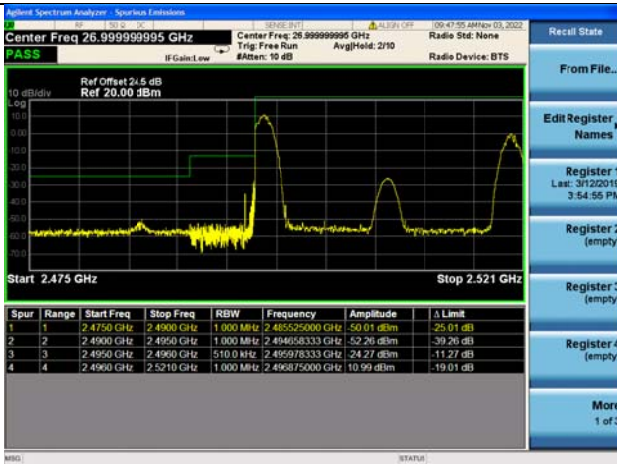


High 1RB0 and 1RB49

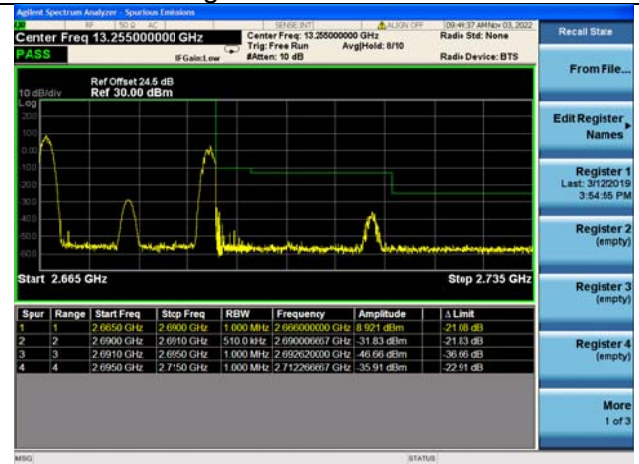


Low 1RB74 and 1RB0

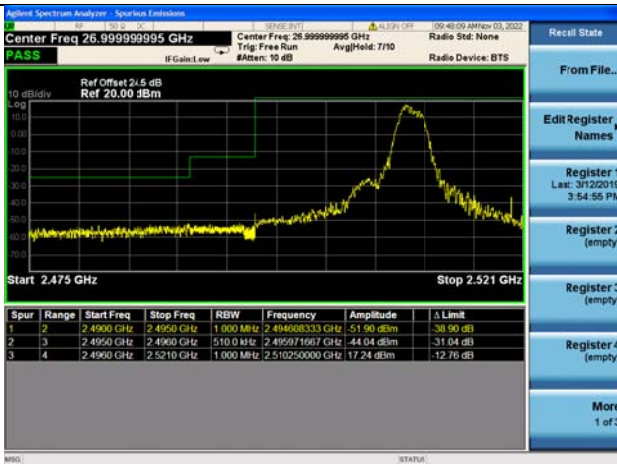

High 1RB74 and 1RB0

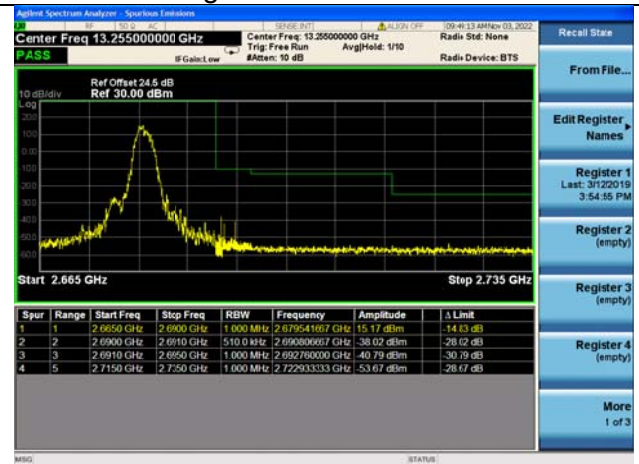

Low FULL RB

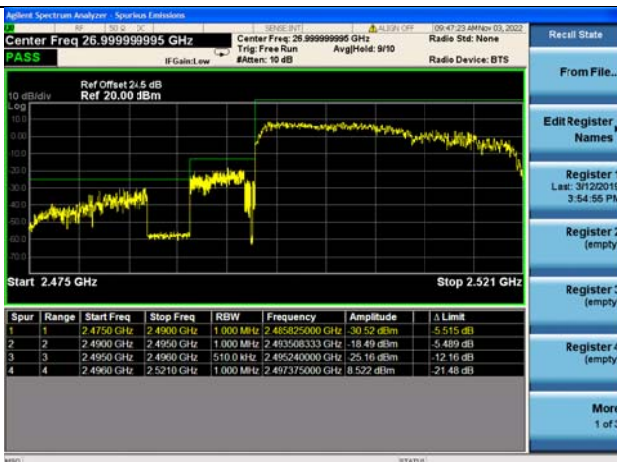

High FULL RB







LTE CA 41C

Channel Bandwidth: 15MHz+15MHz


Low 1RB0 and 1RB74

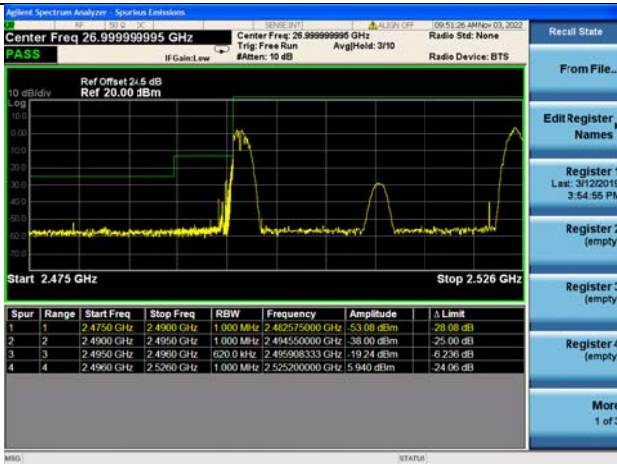


High 1RB0 and 1RB74

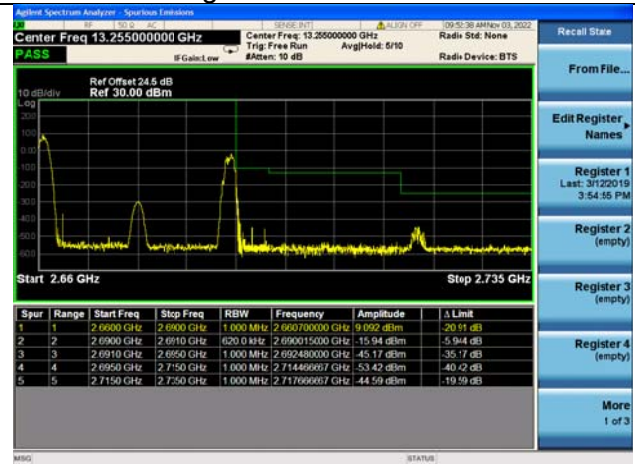


Low 1RB74 and 1RB0

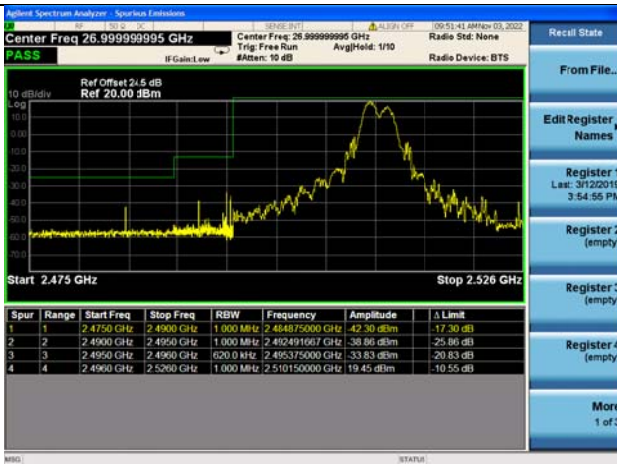


High 1RB74 and 1RB0

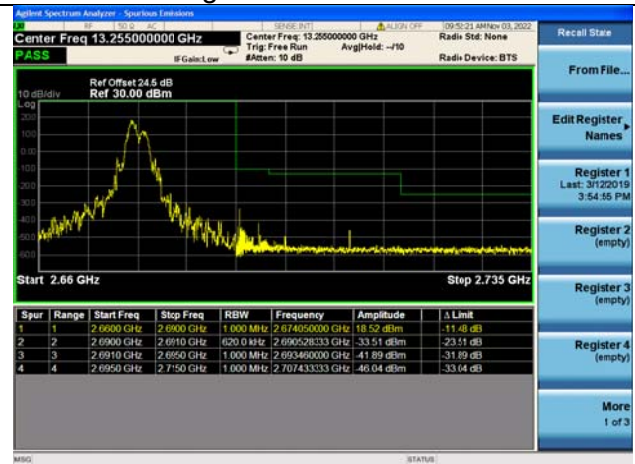

Low FULL RB

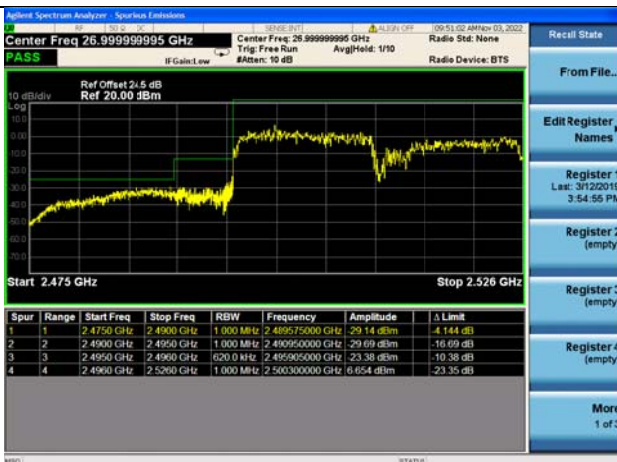

High FULL RB

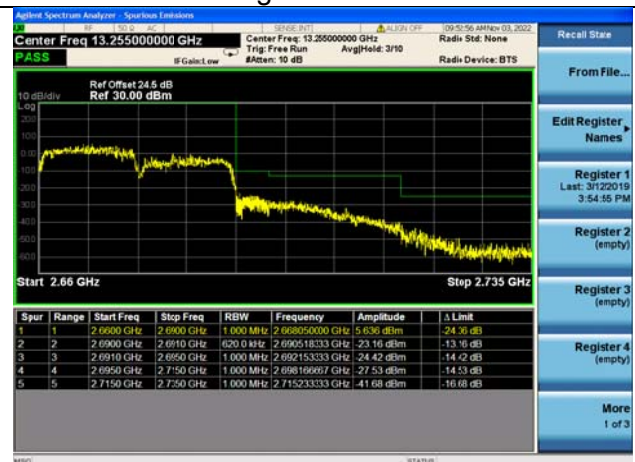





LTE CA 41C

Channel Bandwidth: 15MHz+20MHz


Low 1RB0 and 1RB99

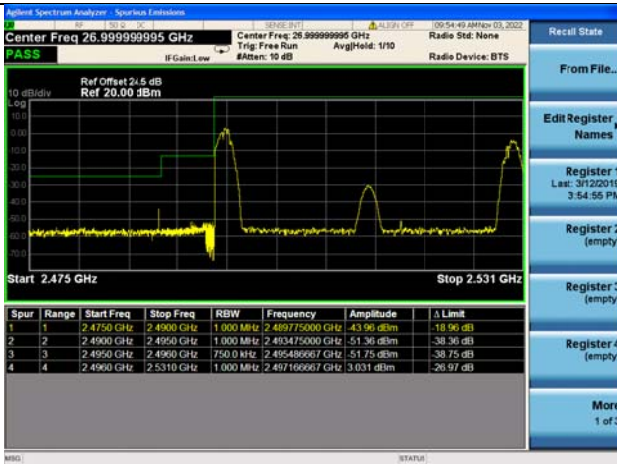

High 1RB0 and 1RB99

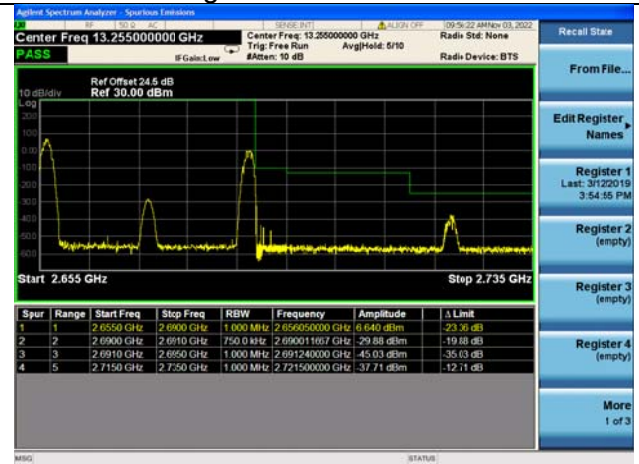


Low 1RB74 and 1RB0

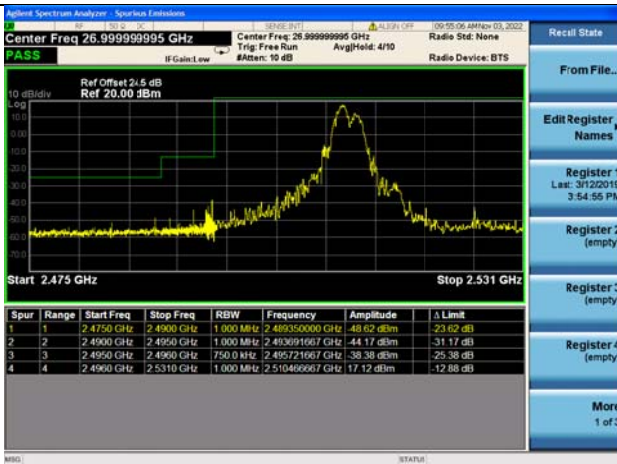

High 1RB74 and 1RB0



Low FULL RB

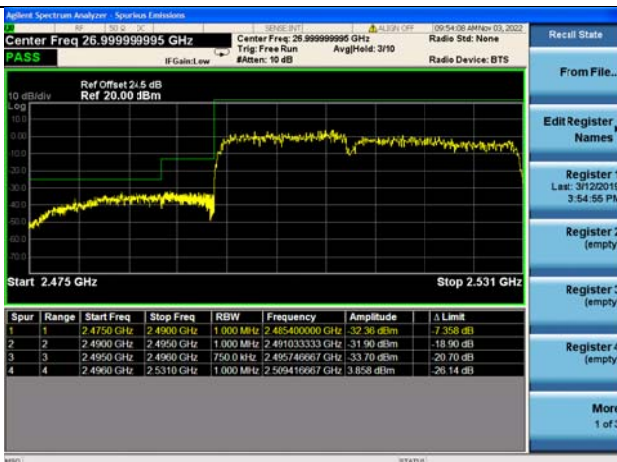

High FULL RB







LTE CA 41C

Channel Bandwidth: 20MHz+5MHz


Low 1RB0 and 1RB24

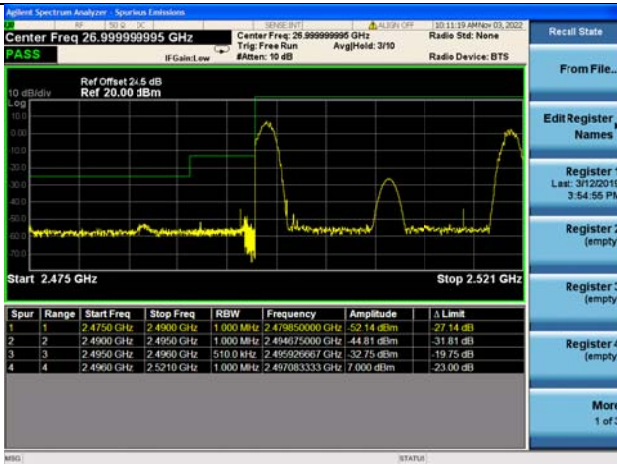


High 1RB0 and 1RB24

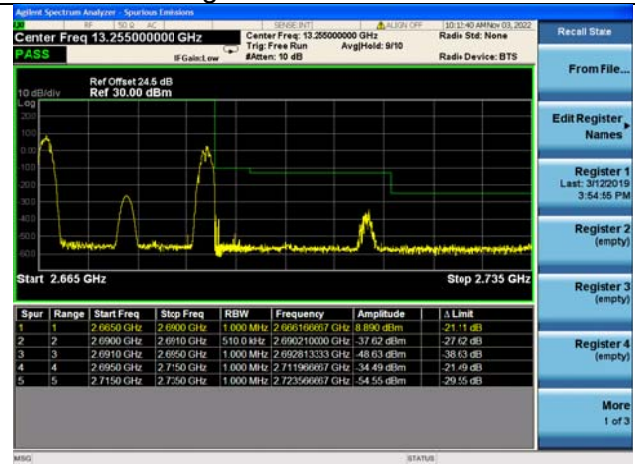


Low 1RB99 and 1RB0

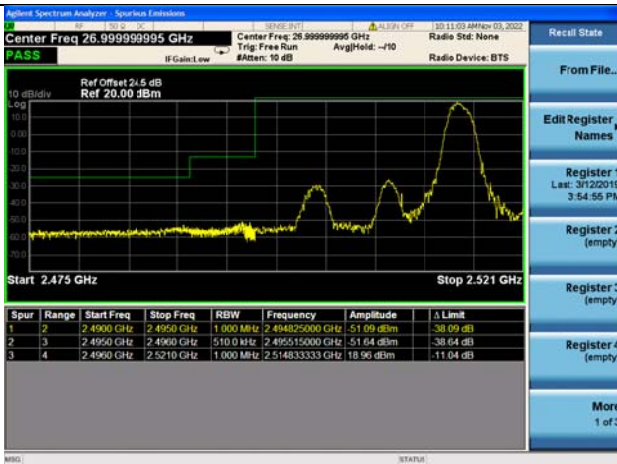


High 1RB99 and 1RB0

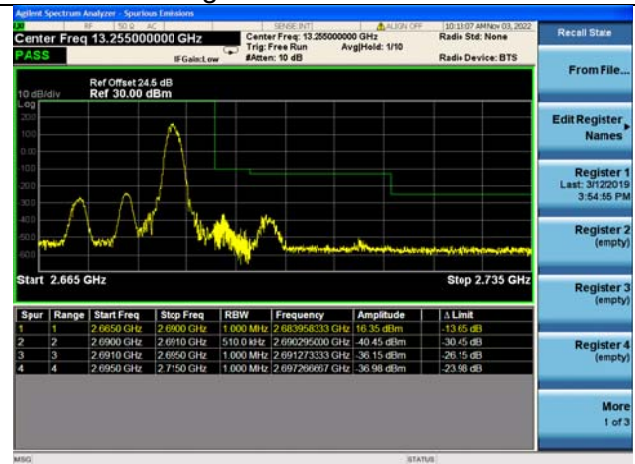

Low FULL RB

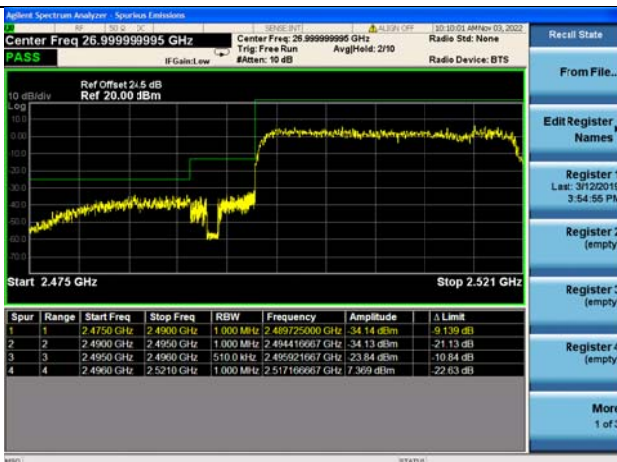

High FULL RB

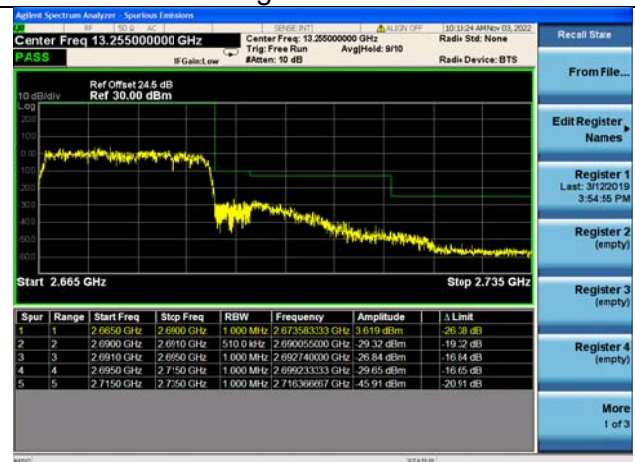





LTE CA 41C

Channel Bandwidth: 20MHz+10MHz

Low 1RB0 and 1RB49

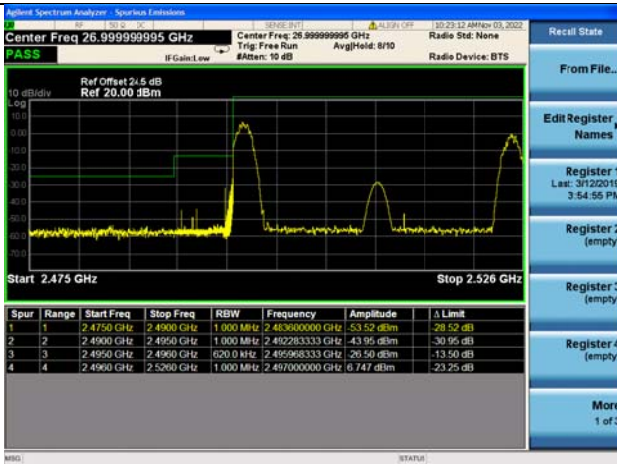

High 1RB0 and 1RB49

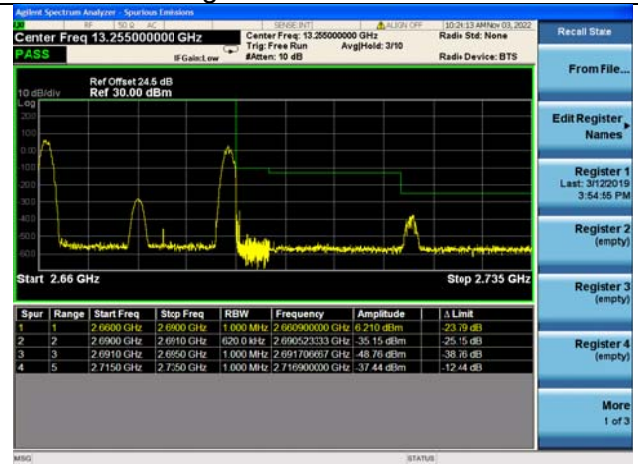


Low 1RB99 and 1RB0



High 1RB99 and 1RB0



Low FULL RB

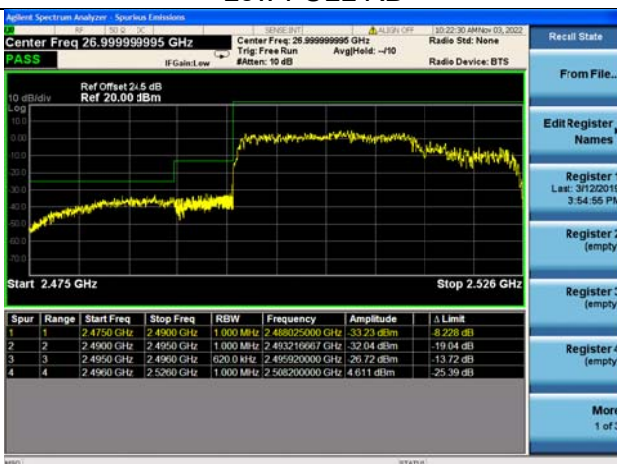

High FULL RB







LTE CA 41C

Channel Bandwidth: 20MHz+15MHz


Low 1RB0 and 1RB74

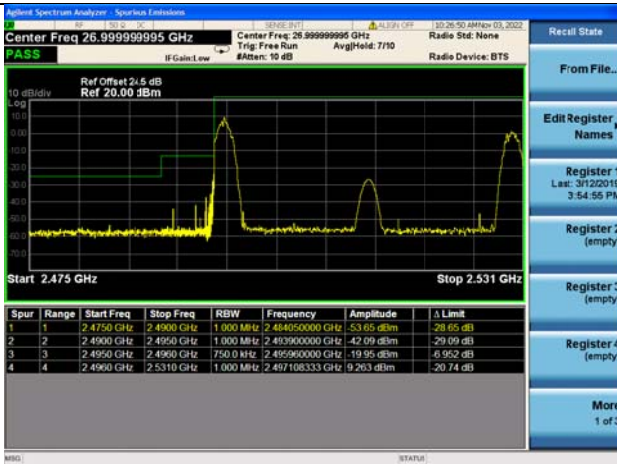


High 1RB0 and 1RB74

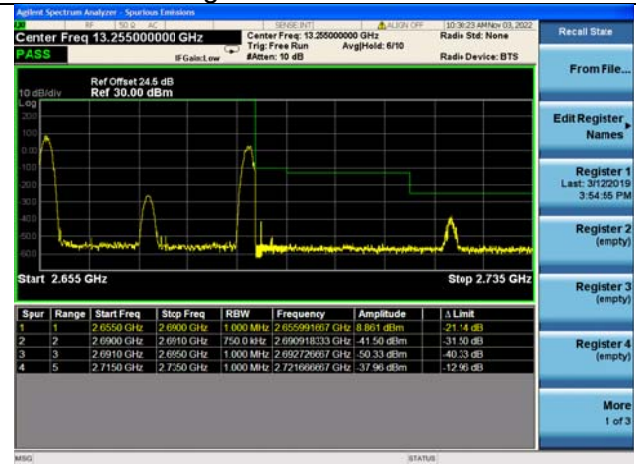


Low 1RB99 and 1RB0

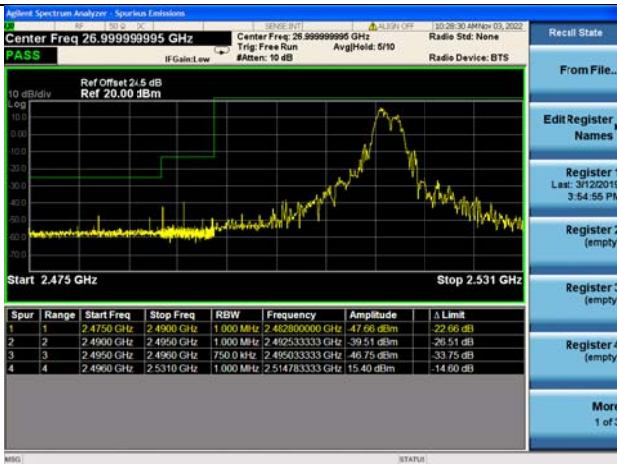


High 1RB99 and 1RB0

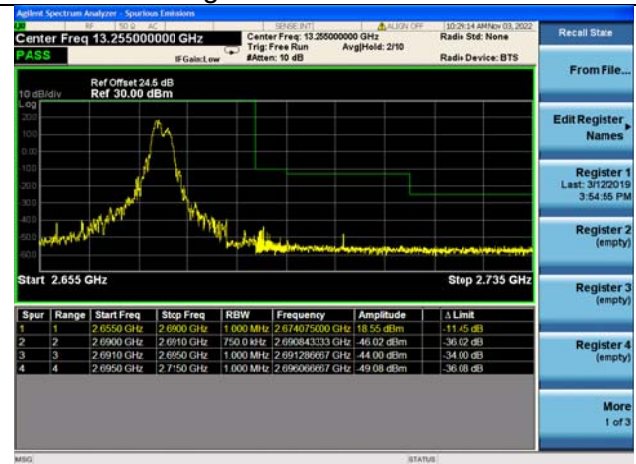

Low FULL RB

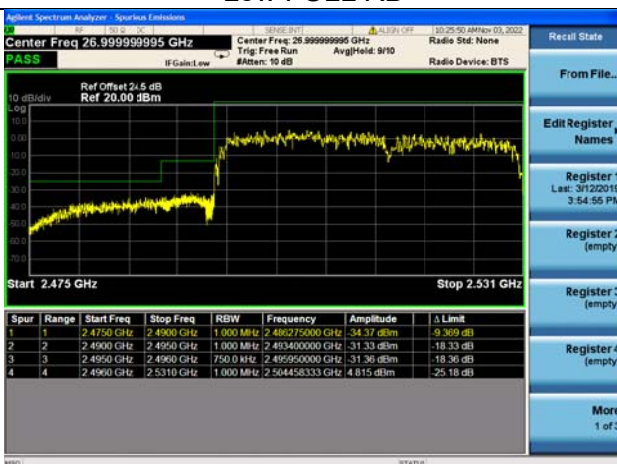

High FULL RB

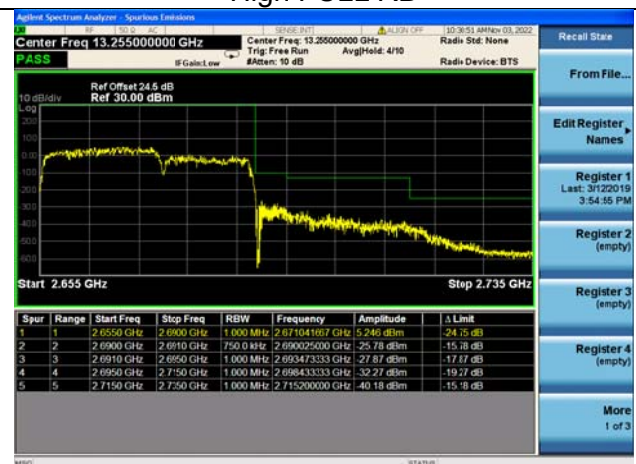





LTE CA 41C

Channel Bandwidth: 20MHz+20MHz


Low 1RB0 and 1RB99

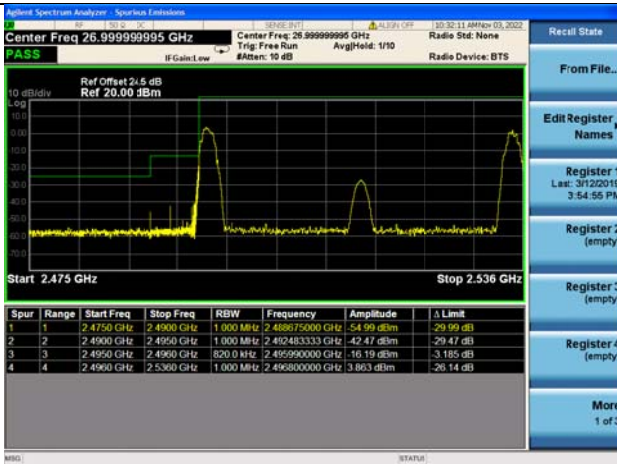


High 1RB0 and 1RB99

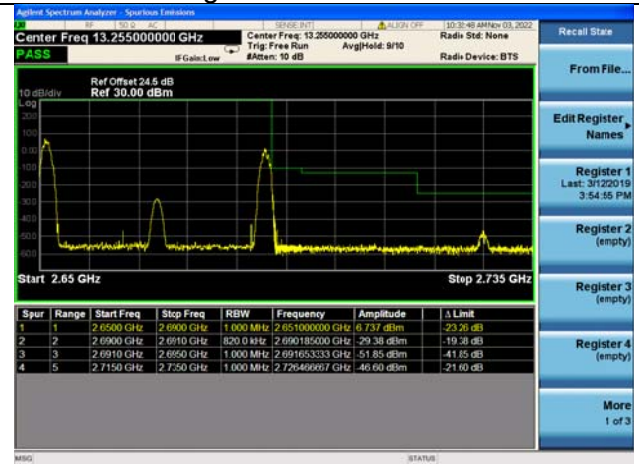


Low 1RB99 and 1RB0

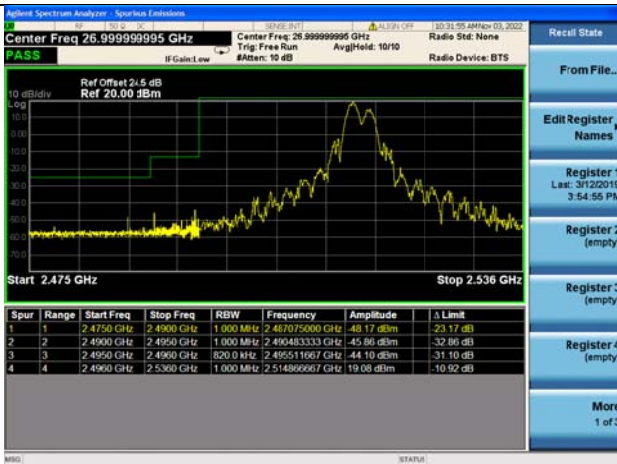

High 1RB99 and 1RB0

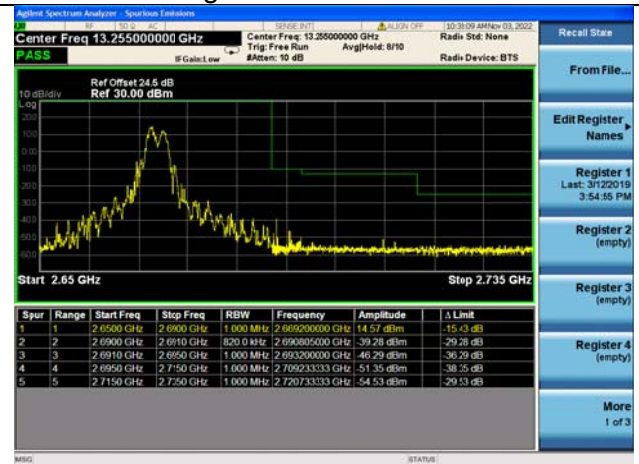

Low FULL RB

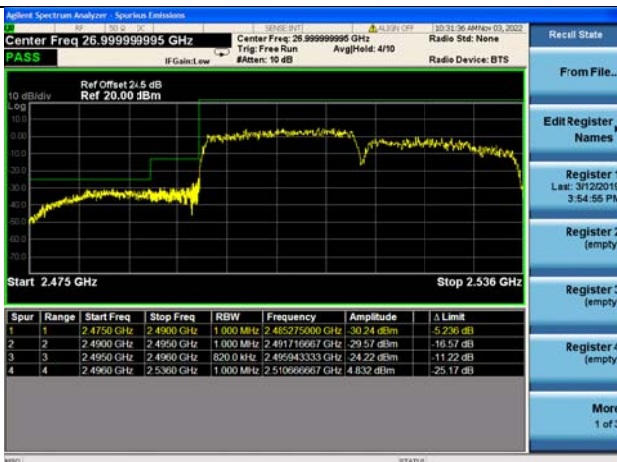

High FULL RB




2.5. Radiated Spurious Emissions

2.5.1. Requirement


According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

Additional requirement for LTE Band 41: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. This calculated to be -25dBm.

2.5.2. Test Description

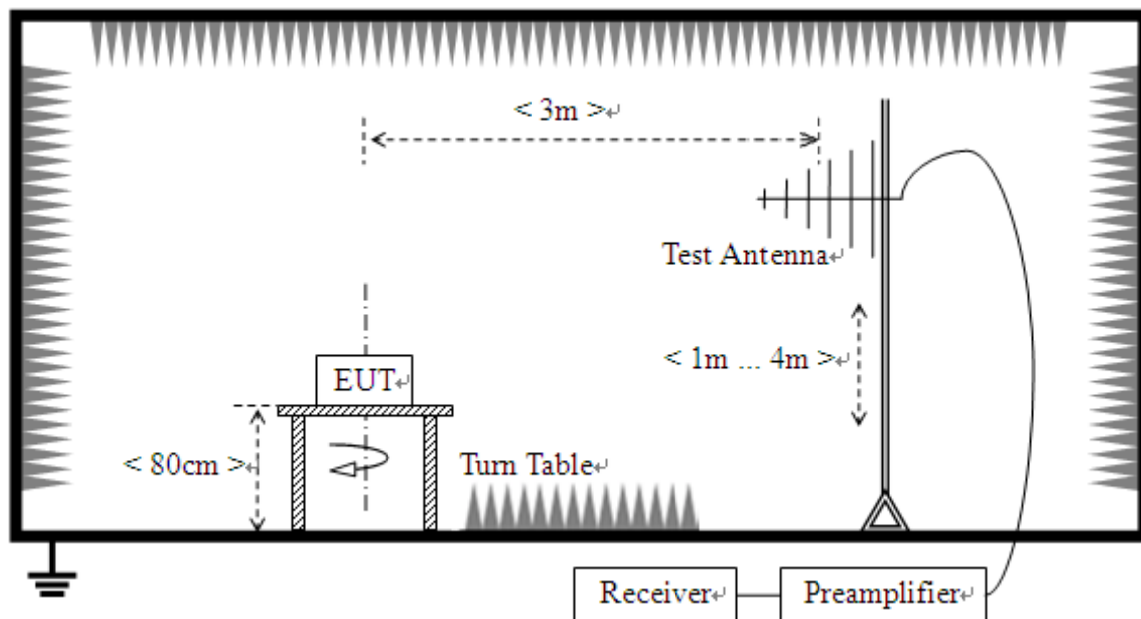

(For the test frequency from 30MHz to 1GHz)

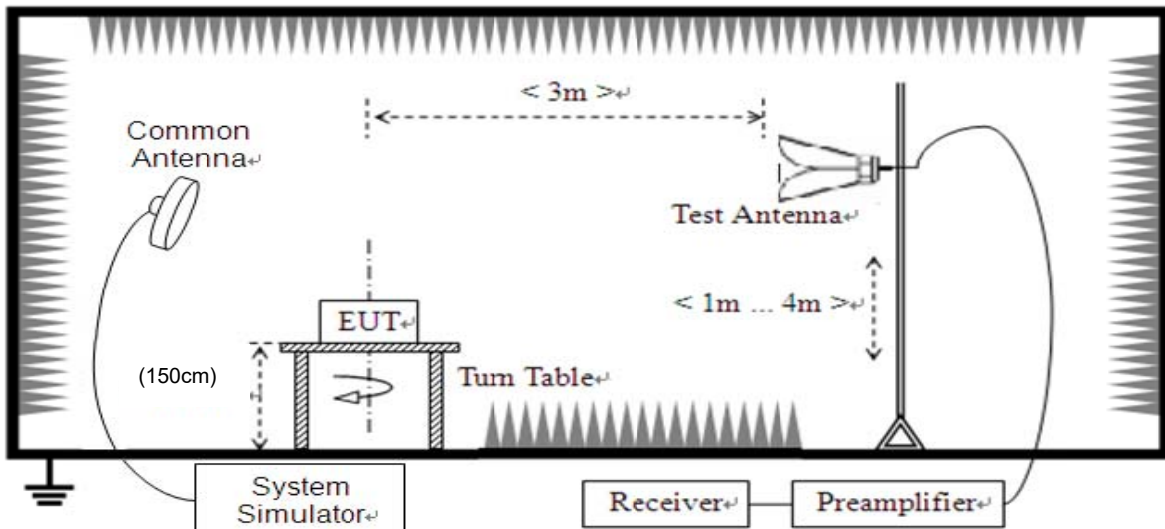

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.5.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

2.5.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. Test Antenna height is varied from 1m to 4m above the ground, and the Turn Table is actuated to turn from 0° to 360°, both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction


During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT} .

Note1: The power of the EUT transmitting frequency should be ignored.

Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note3: All bandwidth and test channel were considered and evaluated respectively by performing full test for each band, only the worst cases were recorded in this test report.


Test Graph

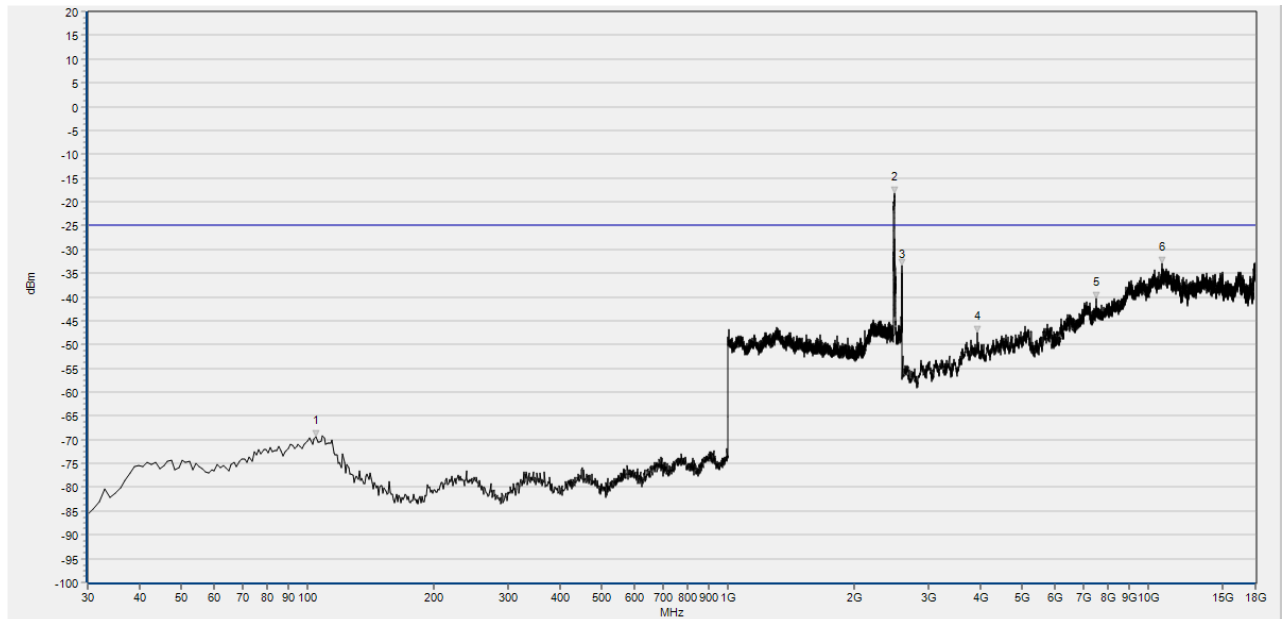

Num	Freq(MHz)	PK	limit PK	Degree	Antenna	Verdict
1	104.765	-69.45	-25.00	360.0	H	PASS
2	2486.362	-18.17	-25.00	360.0	H	N/A
3	2589.330	-33.47	-25.00	360.0	H	N/A
4	3921.584	-47.56	-25.00	154.2	H	PASS
5	7507.421	-40.26	-25.00	178.3	H	PASS
6	10809.842	-33.01	-25.00	178.3	H	PASS

CA_41C Low 20M QPSK 30M-18G H


Test Graph

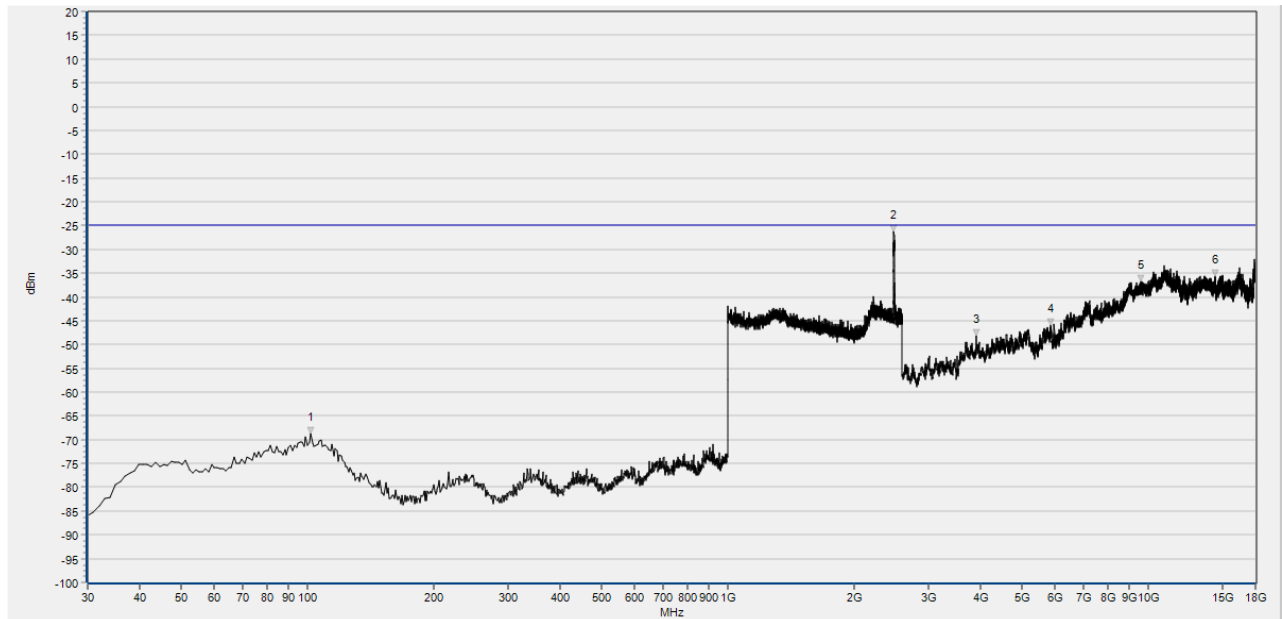

Num	Freq(MHz)	PK	limit PK	Degree	Antenna	Verdict
1	101.852	-68.77	-25.00	0.0	V	PASS
2	2484.762	-26.19	-25.00	0.0	V	N/A
3	3900.020	-48.05	-25.00	7.6	V	PASS
4	5874.695	-45.85	-25.00	289.1	V	PASS
5	9596.079	-36.77	-25.00	360.0	V	PASS
6	14411.082	-35.55	-25.00	301.4	V	PASS

CA_41C Low 20M QPSK 30M-18G V


Test Graph

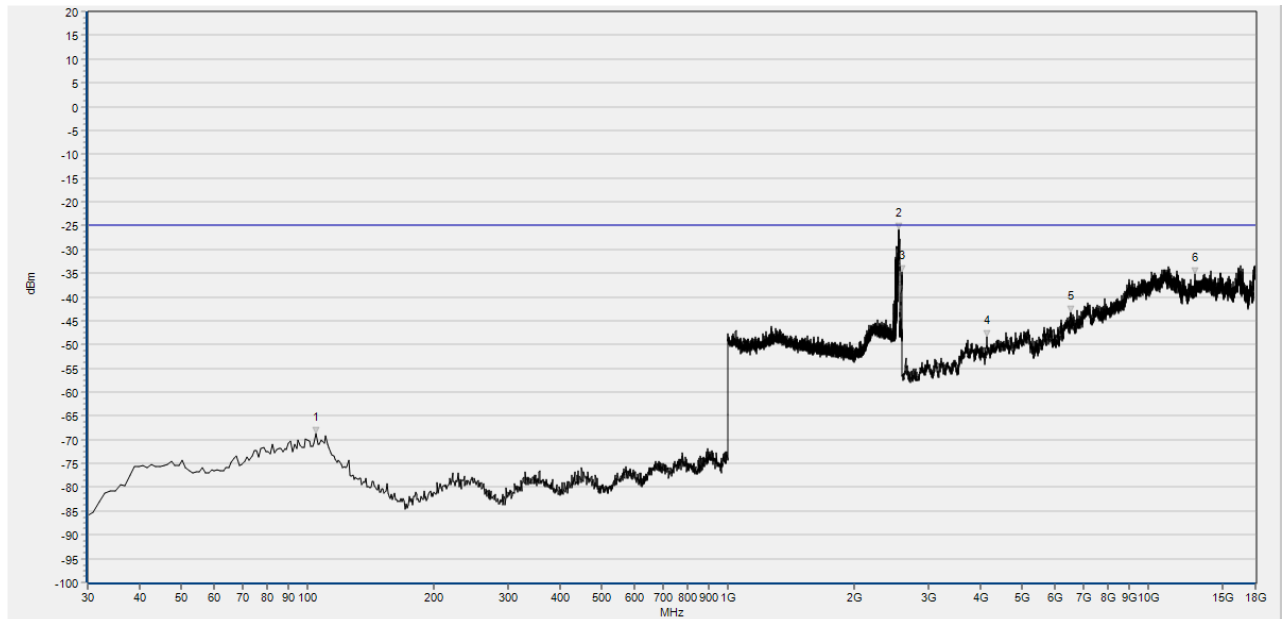

Num	Freq(MHz)	PK	limit PK	Degree	Antenna	Verdict
1	104.765	-68.77	-25.00	0.0	H	PASS
2	2548.249	-25.79	-25.00	0.0	H	N/A
3	2592.531	-34.68	-25.00	0.0	H	N/A
4	4131.066	-48.30	-25.00	116.6	H	PASS
5	6546.269	-43.35	-25.00	43.3	H	PASS
6	12892.338	-35.11	-25.00	178.0	H	PASS

CA_41C Mid 20M QPSK 30M-18G H


Test Graph

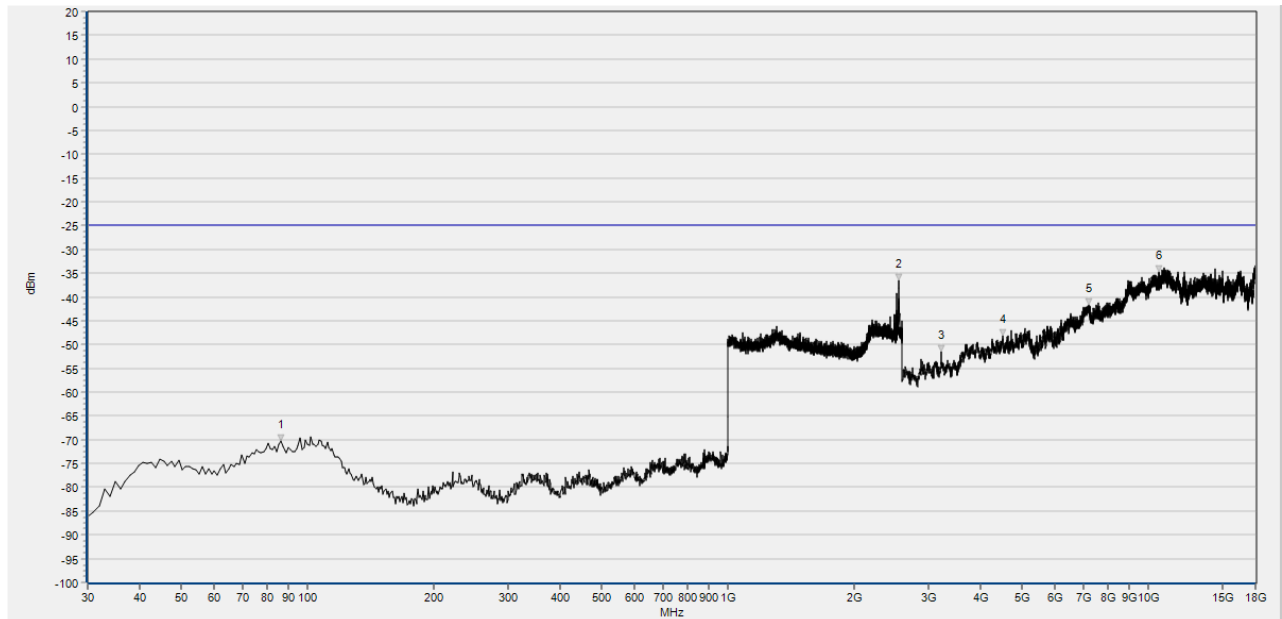

Num	Freq(MHz)	PK	limit PK	Degree	Antenna	Verdict
1	86.316	-70.34	-25.00	360.0	V	PASS
2	2554.118	-36.63	-25.00	360.0	V	NA
3	3222.284	-51.46	-25.00	58.5	V	PASS
4	4513.063	-48.17	-25.00	327.2	V	PASS
5	7233.247	-41.75	-25.00	70.8	V	PASS
6	10631.166	-34.74	-25.00	193.2	V	PASS

CA_41C Mid 20M QPSK 30M-18G V


Test Graph

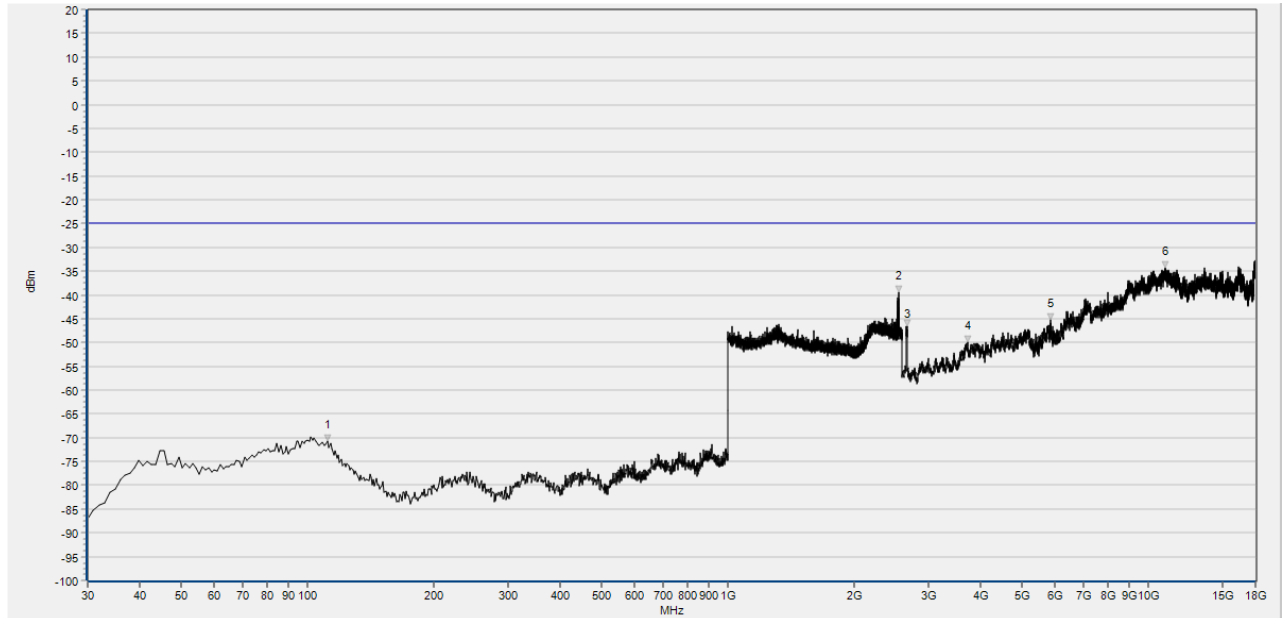

Num	Freq(MHz)	PK	limit PK	Degree	Antenna	Verdict
1	111.562	-70.64	-25.00	360.0	H	PASS
2	2545.048	-39.54	-25.00	360.0	H	N/A
3	2664.693	-46.54	-25.00	340.6	H	N/A
4	3715.183	-49.97	-25.00	316.8	H	PASS
5	5862.372	-45.21	-25.00	243.1	H	PASS
6	10973.115	-34.28	-25.00	144.4	H	PASS

CA_41C High 20M QPSK 30M-18G H

Test Graph

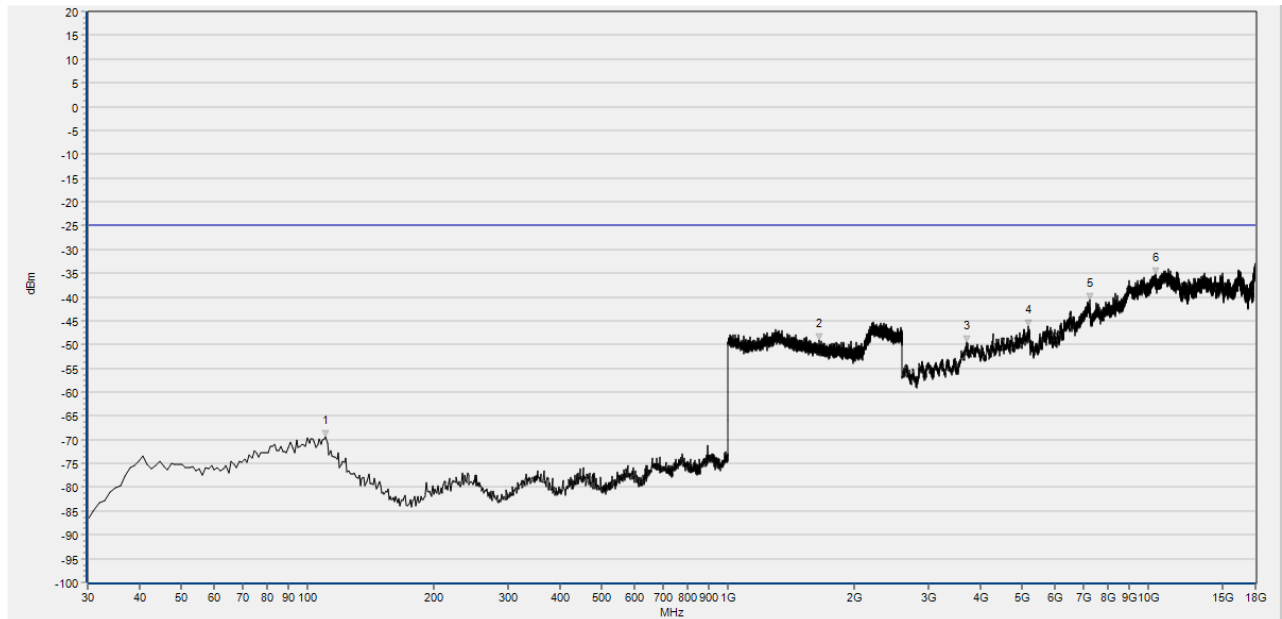

Num	Freq(MHz)	PK	limit PK	Degree	Antenna	Verdict
1	110.591	-69.50	-25.00	0.0	V	PASS
2	1652.484	-49.06	-25.00	0.0	V	PASS
3	3690.538	-49.57	-25.00	331.6	V	PASS
4	5184.637	-46.16	-25.00	319.3	V	PASS
5	7257.892	-40.49	-25.00	182.1	V	PASS
6	10446.329	-35.12	-25.00	32.5	V	PASS

CA_41C High 20M QPSK 30M-18G V



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	± 2.22 dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	± 2.77 dB
Band Edge	± 2.77 dB
Equivalent Isotropic Radiated Power	± 2.22 dB
Radiated Spurious Emissions	± 6 dB

When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipment Utilized

4.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	versions	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	N/A	Weinschel	N/A	N/A
Attenuator	N/A	10dB	N/A	Resnet	N/A	N/A
EXA Signal Analyzer	MY54170556	N9030A	N/A	Keysight	2021.10.20	2023.10.09
System Simulator	6261830572	MT8821C	000221422	Anritsu	2022.02.14	2023.02.13
RF cable (30MHz-26GHz)	CB01	RF01	N/A	Morlab	N/A	N/A
Computer	T430i	Think Pad	N/A	Lenovo	N/A	N/A