



FCC TEST REPORT

FCC ID: 2ABGJ-CG-11

On Behalf of

Portal 724, LLC

RPM Hub

Model No.: CG-11

Prepared for : Portal 724, LLC
Address : 275 Hartz Way:: 105, Secaucus, New Jersey, United States, 07094

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2503167-C01-R04
Date of Receipt : December 4, 2024
Date of Test : December 4, 2024-March 25, 2025
Date of Report : April 10, 2025
Version Number : V0

TABLE OF CONTENTS

Description
Page

1 TEST SUMMARY	5
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 TEST MODE	7
2.3 TEST FACILITY	7
2.4 DESCRIPTION OF SUPPORT UNITS	7
2.5 DEVIATION FROM STANDARDS	8
2.6 ABNORMALITIES FROM STANDARD CONDITIONS	8
2.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.8 ADDITIONAL INSTRUCTIONS	8
2.9 TEST CONDITIONS	8
3 TEST INSTRUMENTS LIST	9
4 TEST RESULTS AND MEASUREMENT DATA	10
4.1 ANTENNA REQUIREMENT:	10
4.2 CONDUCTED EMISSIONS	11
4.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	14
OCCUPIED CHANNEL BANDWIDTH	26
4.4 MAXIMUM CONDUCTED OUTPUT POWER	59
4.5 POWER SPECTRAL DENSITY	83
4.5 BAND EDGE	106
4.6 RADIATED EMISSION	126
4.7 FREQUENCY STABILITY	135

TEST REPORT DECLARATION

Applicant : Portal 724, LLC

Address : 275 Hartz Way:: 105, Secaucus, New Jersey, United States, 07094

Manufacturer : Shenzhen Jinwu Technologies Co., Ltd.
4th Floor, Building R3-A, Gaoxin Industrial Park of No. 018 of Gaoxin

Address : South 7th Road, Gaoxin District Community, Yuehai Street, Nanshan
District, Shenzhen

EUT Description : RPM Hub

(A) Model No. : CG-11

(B) Trademark : CAREdotGLOBAL

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang

Test Engineer



Approved by (name + signature).....:

Simple Guan

Project Manager



Date of issue.....:

April 10, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 10, 2025	Initial released Issue	Felix Pang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
occupied bandwidth	Section 15.407 (e)	PASS
Maximum Conducted Output Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 3, ANSI C63.10	PASS
Frequency Stability	15.407(g), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power Line Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V)
	4.30dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : RPM Hub
Model : CG-11
Diff : /
Test Voltage : Input: 5 V $\pm$ 3 A or DC 7.74 V powered by battery
Adapter : /

Radio Technology : 5G WIFI

Operation frequency : 802.11a/802.11ac20/802.11ax20/802.11n(HT20): 5180-5240MHz, 5745-5825MHz
802.11ac40/802.11ax40/802.11n(HT40): 5190-5230MHz, 5755-5795MHz
802.11ac80/802.11ax80: 5210MHz, 5775MHz
Channel separation : 20MHz for 802.11a/802.11ac20/802.11ax20/802.11n(HT20)
40MHz for 802.11ac40/802.11ax40/802.11n(HT40)
80MHz for 802.11ac80/802.11ax80
Modulation technology: : IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK)
IEEE 802.11ac/ax: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Antenna Type : FPC Antenna, maximum gain is 4.9 dBi.

PMN : N/A
HVIN : N/A

Software version : V1.0
Hardware version : V1.0
FVIN

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories 1 : /
Manufacturer : /
Model : /
Rating : /

Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	/	M20-C020AUS	/

2.6 Deviation from Standards

None.

2.7 Abnormalities from Standard Conditions

None.

2.8 Other Information Requested by the Customer

None.

2.9 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.10 Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

3 Test Instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

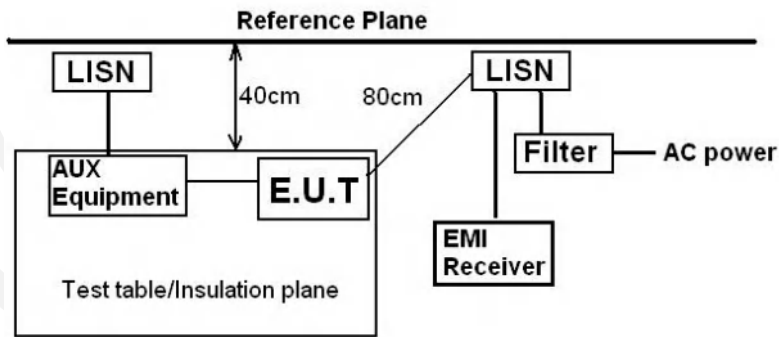
4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203, RSS-GEN(6.8)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
FPC antenna , Maximum Gain is 4.9dBi.	




4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data


An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

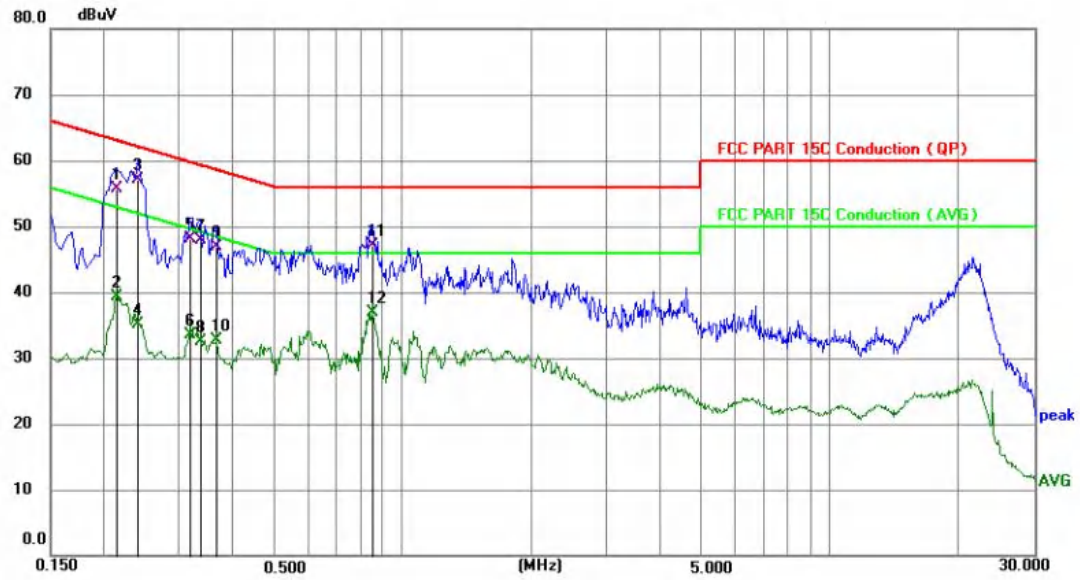Line:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2130	45.88	9.92	55.80	63.09	-7.29	QP	P	
2	0.2130	29.38	9.92	39.30	53.09	-13.79	AVG	P	
3 *	0.2400	47.16	9.93	57.09	62.10	-5.01	QP	P	
4	0.2400	25.09	9.93	35.02	52.10	-17.08	AVG	P	
5	0.3183	38.24	9.96	48.20	59.75	-11.55	QP	P	
6	0.3183	23.56	9.96	33.52	49.75	-16.23	AVG	P	
7	0.3345	38.03	9.96	47.99	59.34	-11.35	QP	P	
8	0.3345	22.52	9.96	32.48	49.34	-16.86	AVG	P	
9	0.3660	37.03	9.97	47.00	58.59	-11.59	QP	P	
10	0.3660	22.68	9.97	32.65	48.59	-15.94	AVG	P	
11	0.8520	37.03	10.05	47.08	56.00	-8.92	QP	P	
12	0.8520	26.86	10.05	36.91	46.00	-9.09	AVG	P	

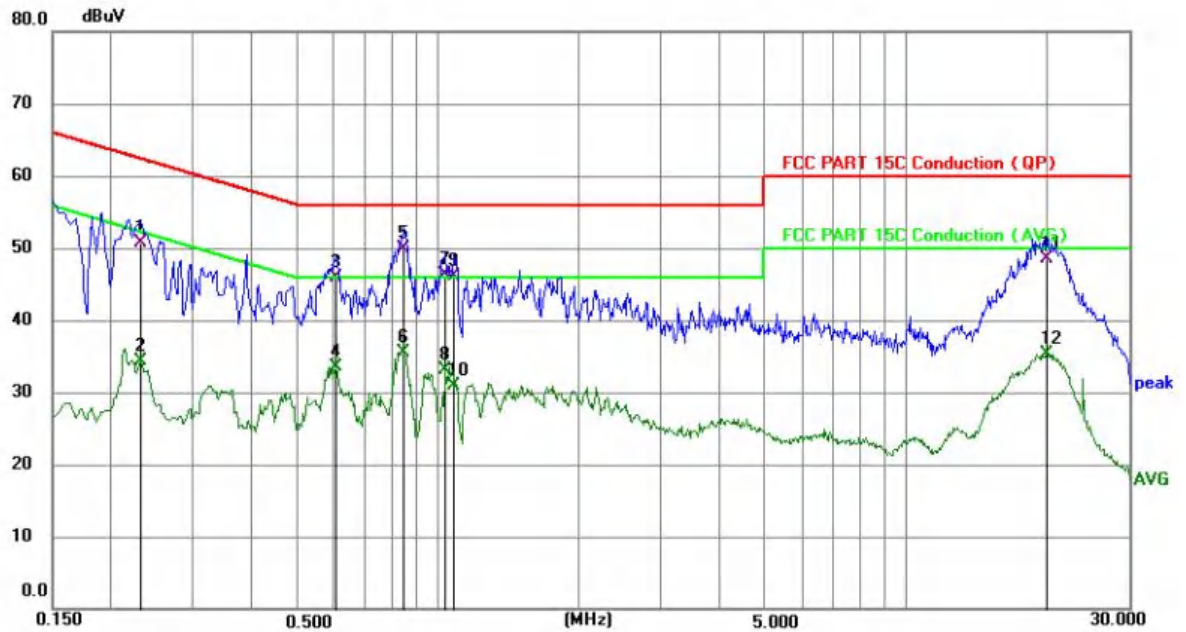Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit


Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2316	40.79	9.92	50.71	62.39	-11.68	QP	P	
2	0.2316	24.32	9.92	34.24	52.39	-18.15	AVG	P	
3	0.6043	35.81	10.03	45.84	56.00	-10.16	QP	P	
4	0.6043	23.43	10.03	33.46	46.00	-12.54	AVG	P	
5 *	0.8438	39.94	10.05	49.99	56.00	-6.01	QP	P	
6	0.8438	25.44	10.05	35.49	46.00	-10.51	AVG	P	
7	1.0375	36.17	10.06	46.23	56.00	-9.77	QP	P	
8	1.0375	23.09	10.06	33.15	46.00	-12.85	AVG	P	
9	1.0824	36.04	10.06	46.10	56.00	-9.90	QP	P	
10	1.0824	20.93	10.06	30.99	46.00	-15.01	AVG	P	
11	19.9500	38.45	10.11	48.56	60.00	-11.44	QP	P	
12	19.9500	25.15	10.11	35.26	50.00	-14.74	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

All modes and channels have been tested and only the 5.2GWIFI n40 5190MHz mode with the worst data is listed.

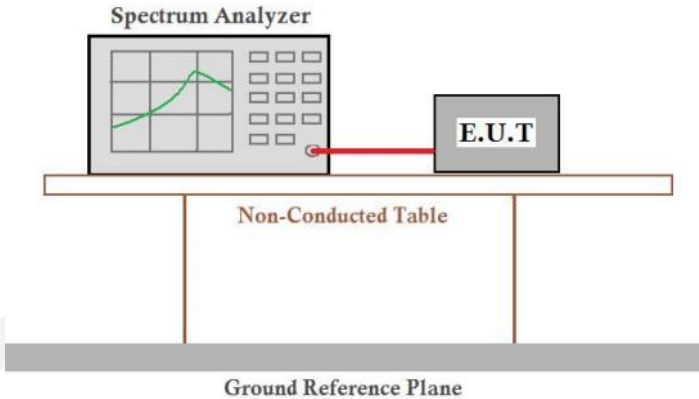4.3 Emission Bandwidth and 99% Occupied Bandwidth


Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen §6.7; RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green signal trace, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs that rest on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:**5.2GWIFI (5150-5250 MHz)**


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	24.95	Pass
NVNT	a	5200	Ant1	25.39	Pass
NVNT	a	5240	Ant1	26.41	Pass
NVNT	n20	5180	Ant1	27.15	Pass
NVNT	n20	5200	Ant1	26.28	Pass
NVNT	n20	5240	Ant1	26.66	Pass
NVNT	n40	5190	Ant1	44.03	Pass
NVNT	n40	5230	Ant1	44.31	Pass
NVNT	ac20	5180	Ant1	26.56	Pass
NVNT	ac20	5200	Ant1	26.31	Pass
NVNT	ac20	5240	Ant1	26.66	Pass
NVNT	ac40	5190	Ant1	43.84	Pass
NVNT	ac40	5230	Ant1	44.21	Pass
NVNT	ac80	5210	Ant1	81.62	Pass
NVNT	ax20	5180	Ant1	24.34	Pass
NVNT	ax20	5200	Ant1	26.07	Pass
NVNT	ax20	5240	Ant1	25.01	Pass
NVNT	ax40	5190	Ant1	42.56	Pass
NVNT	ax40	5230	Ant1	43.55	Pass
NVNT	ax80	5210	Ant1	81.18	Pass



Test Graphs


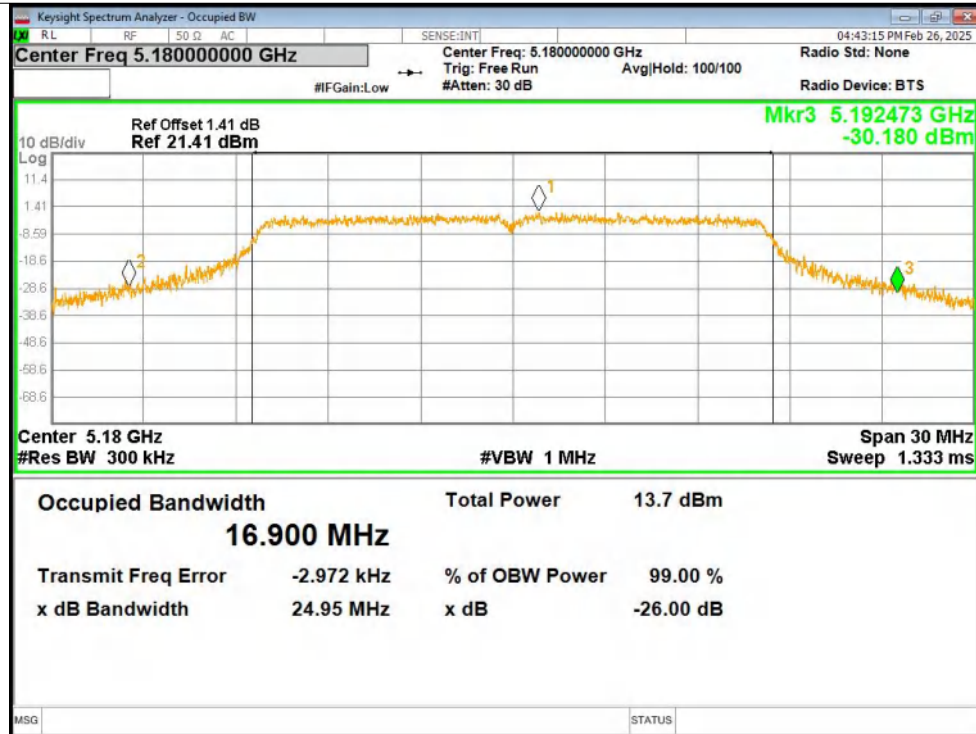
-26dB Bandwidth NVNT a 5180MHz Ant1







-26dB Bandwidth NVNT a 5200MHz Ant1


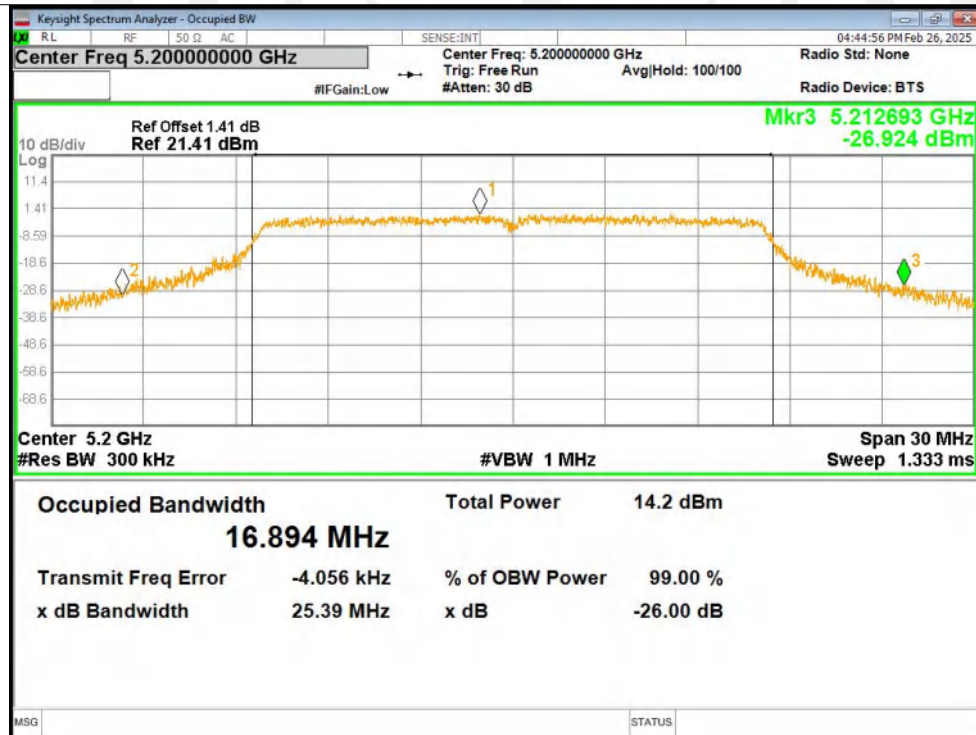


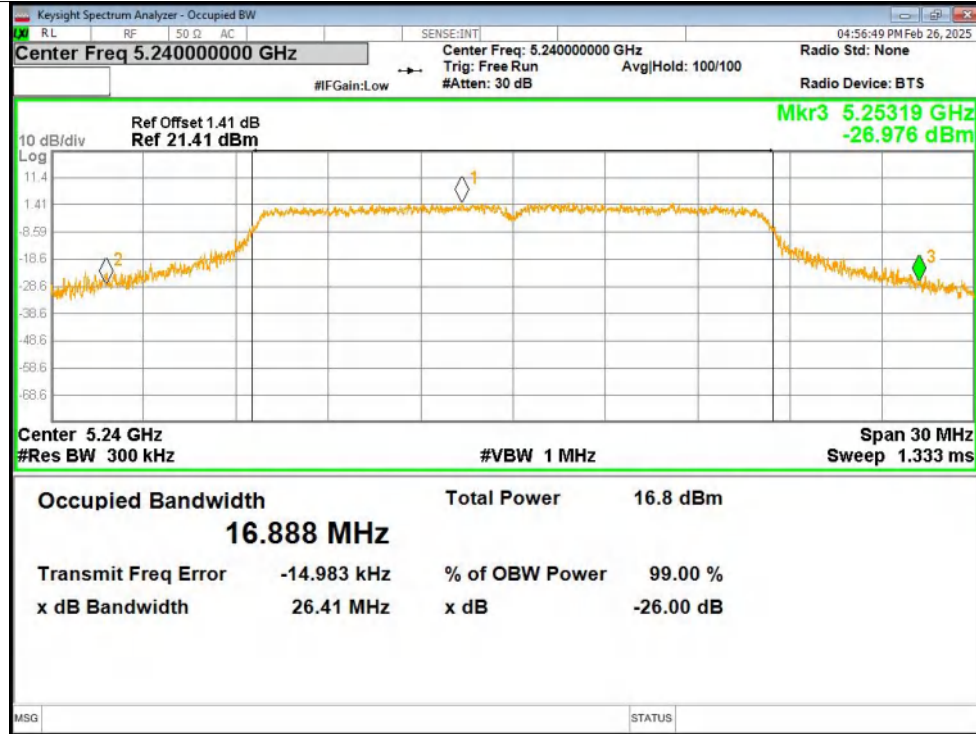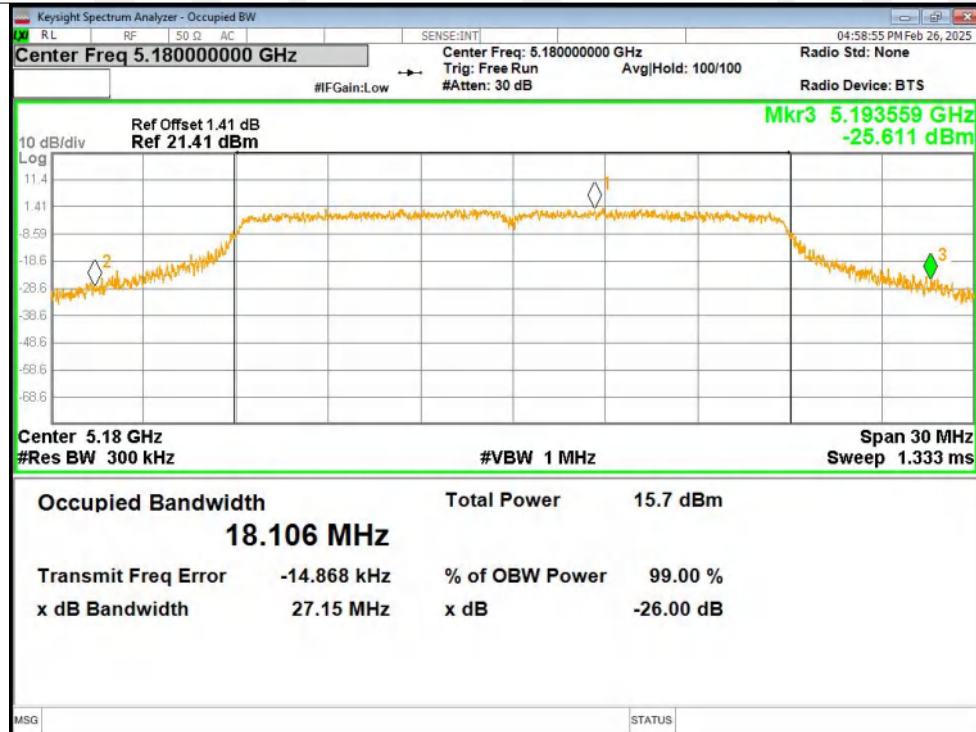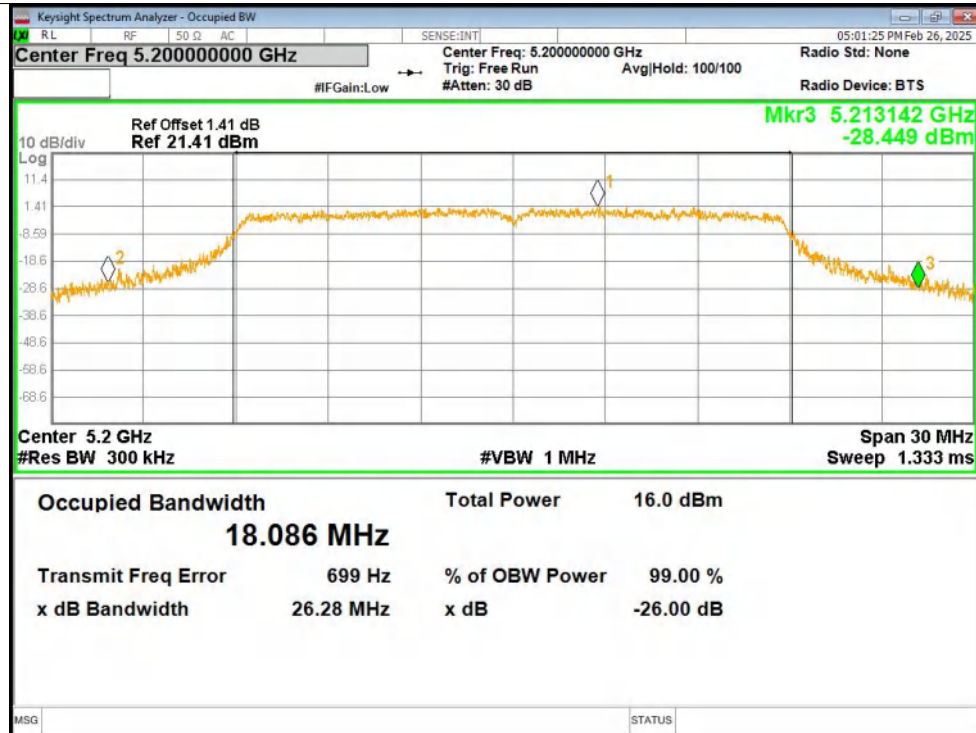
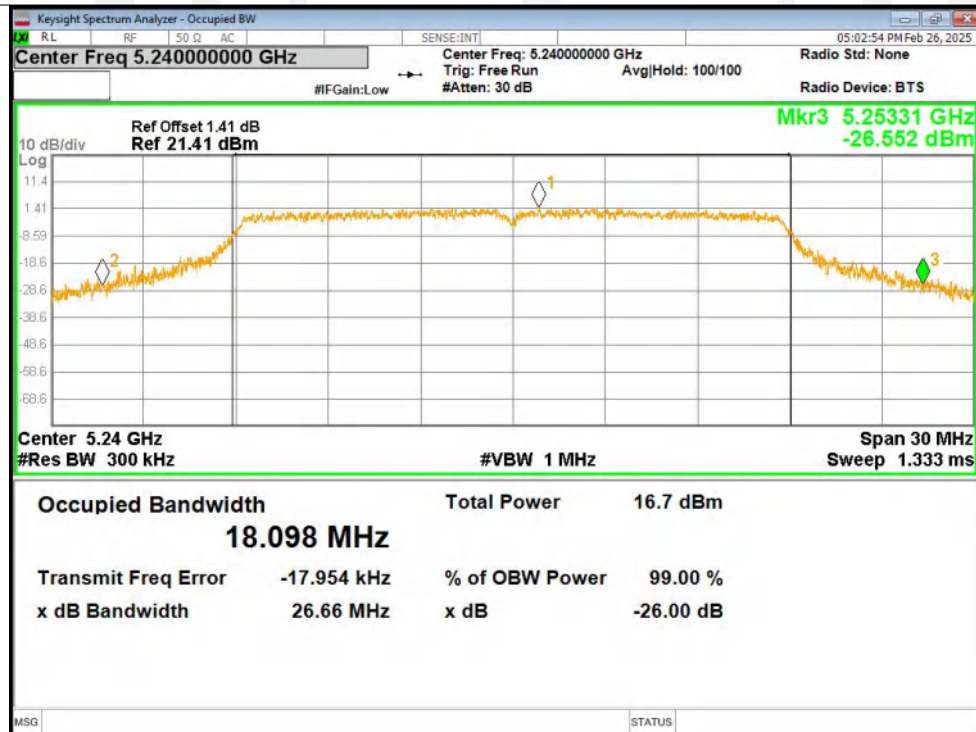
-26dB Bandwidth NVNT a 5240MHz Ant1**-26dB Bandwidth NVNT n20 5180MHz Ant1**

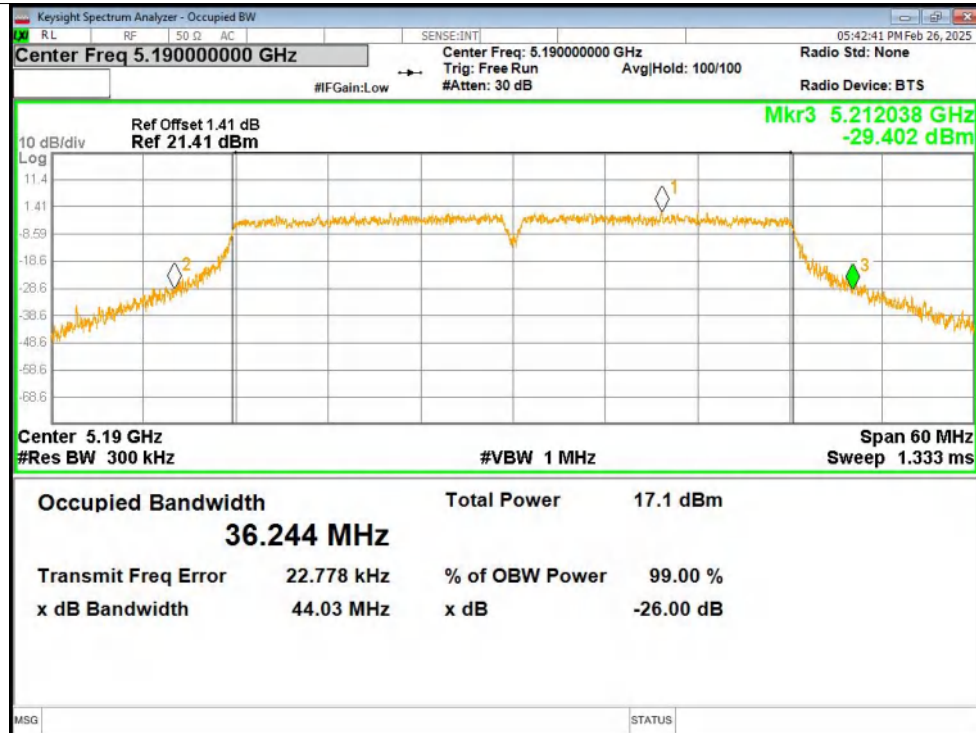
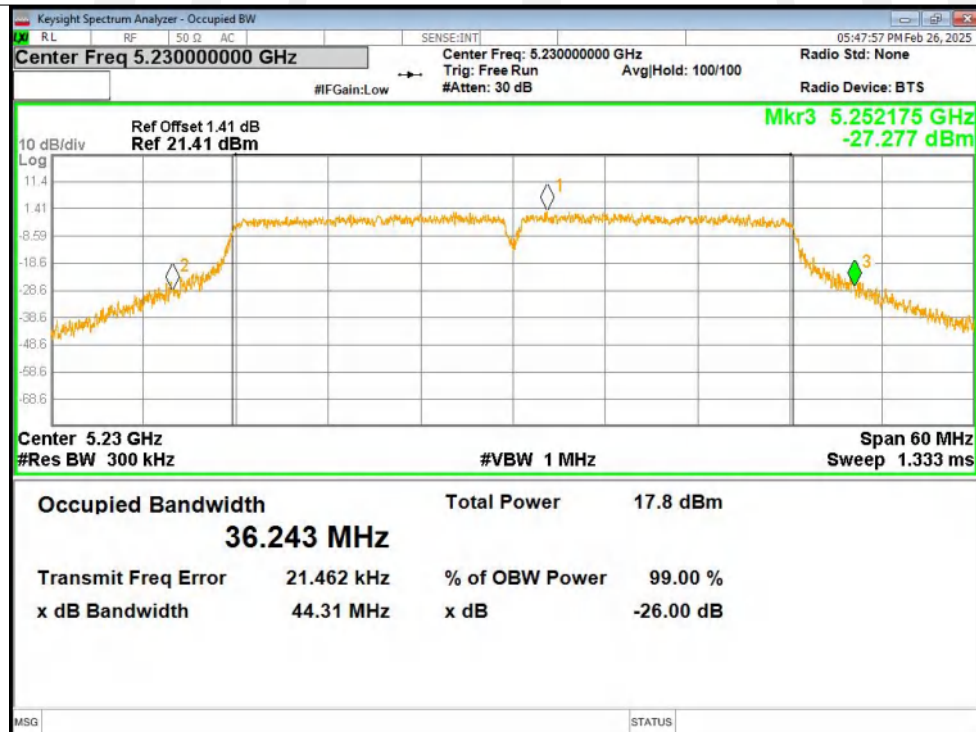
-26dB Bandwidth NVNT n20 5200MHz Ant1**-26dB Bandwidth NVNT n20 5240MHz Ant1**

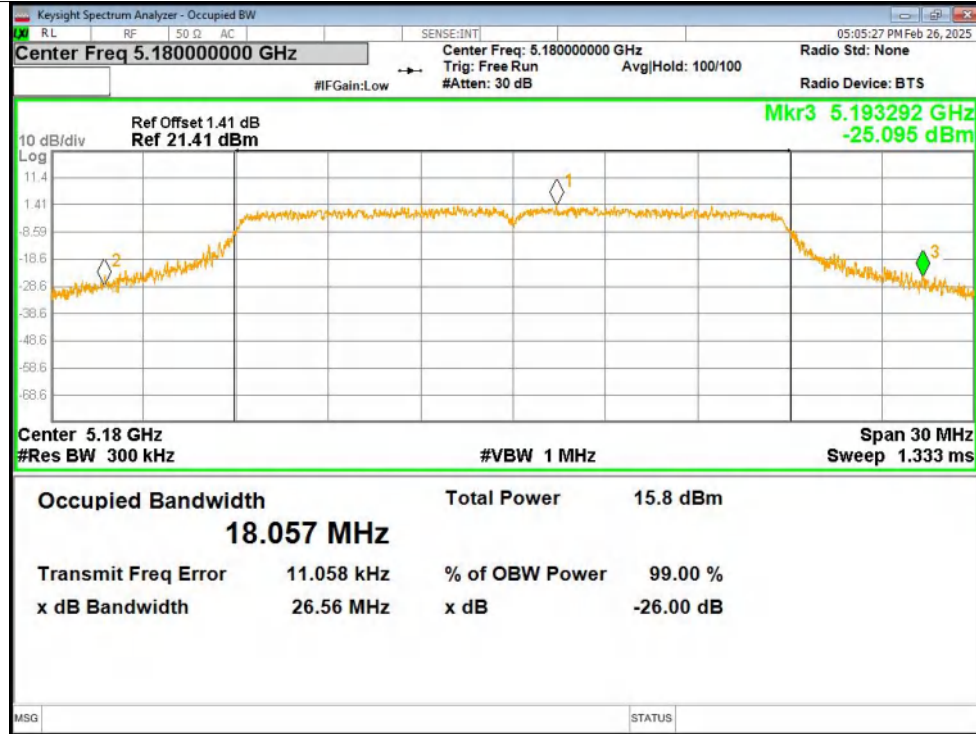
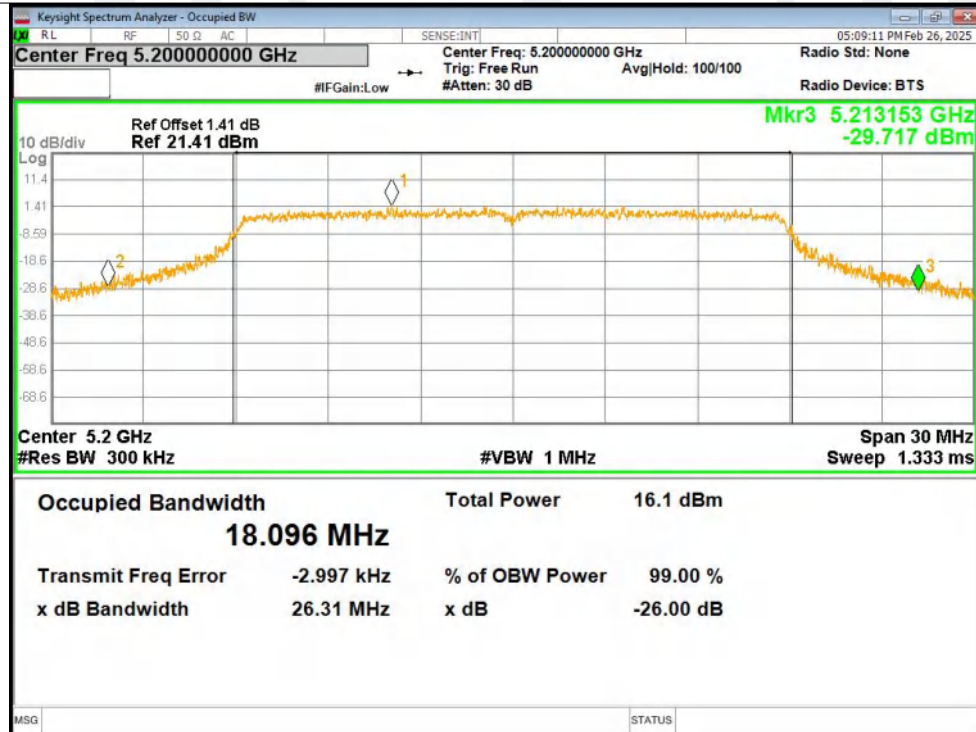
-26dB Bandwidth NVNT n40 5190MHz Ant1**-26dB Bandwidth NVNT n40 5230MHz Ant1**

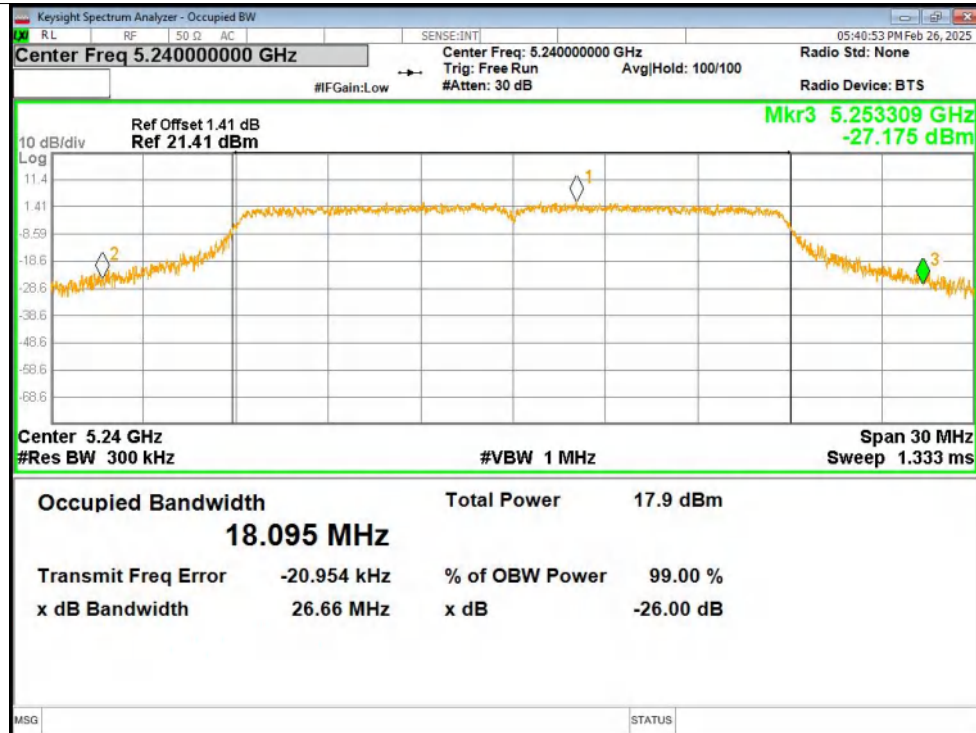
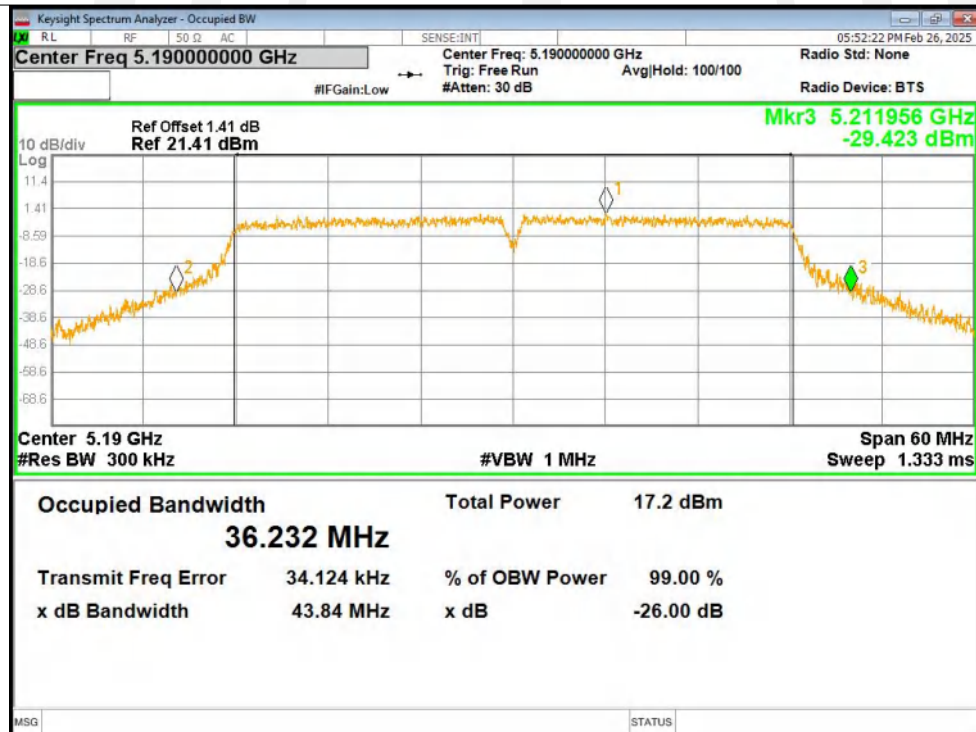
-26dB Bandwidth NVNT ac20 5180MHz Ant1**-26dB Bandwidth NVNT ac20 5200MHz Ant1**

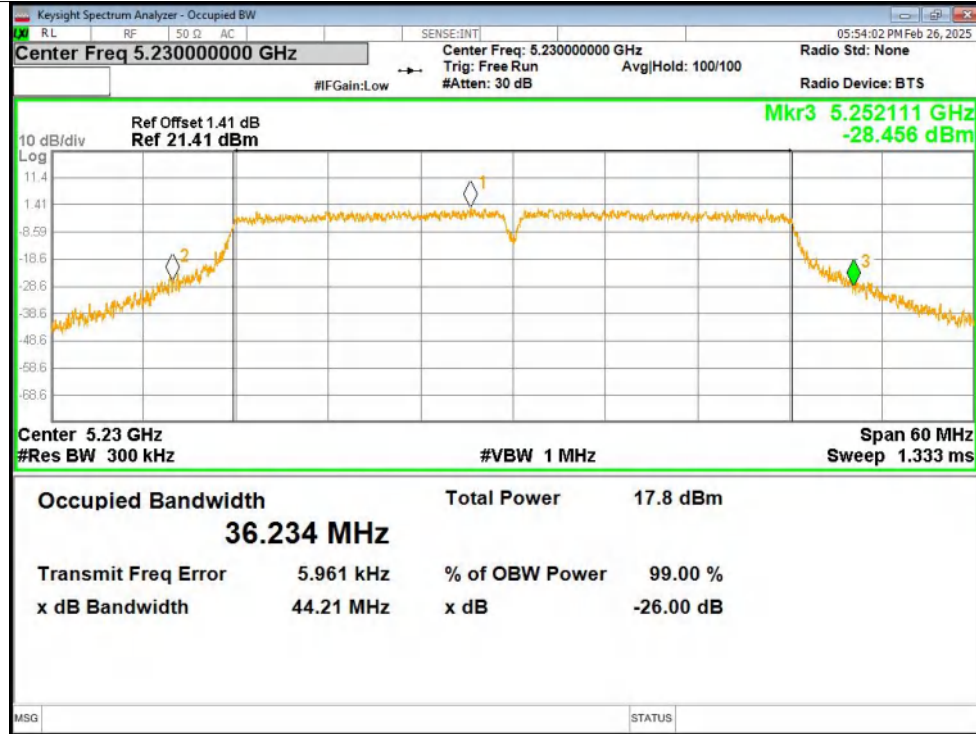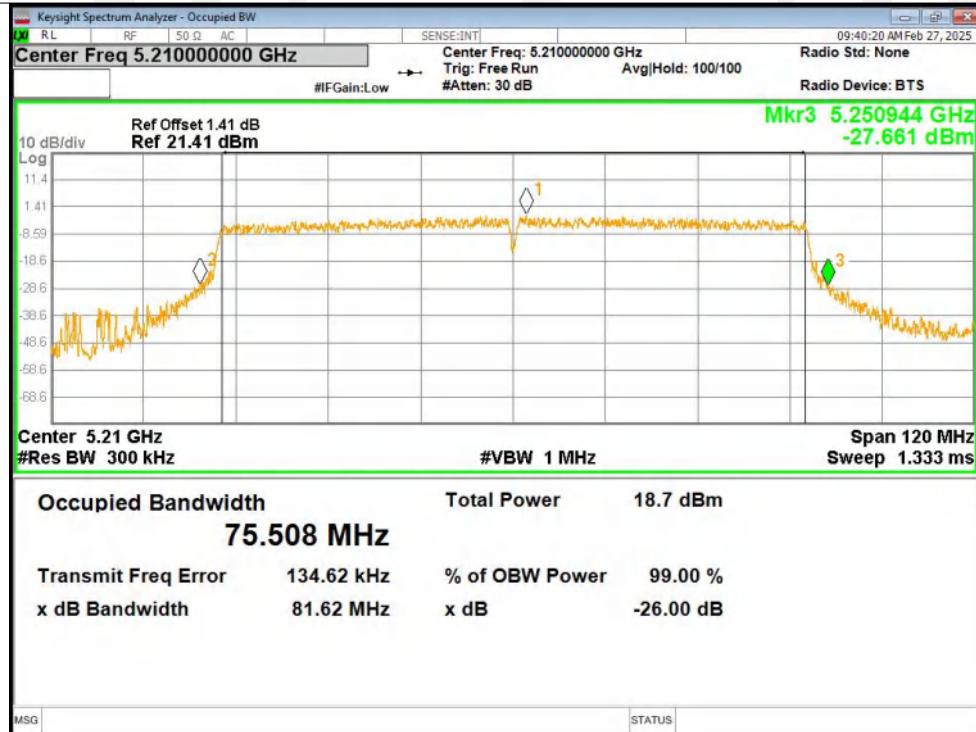-26dB Bandwidth NVNT ac20 5240MHz Ant1**-26dB Bandwidth NVNT ac40 5190MHz Ant1**

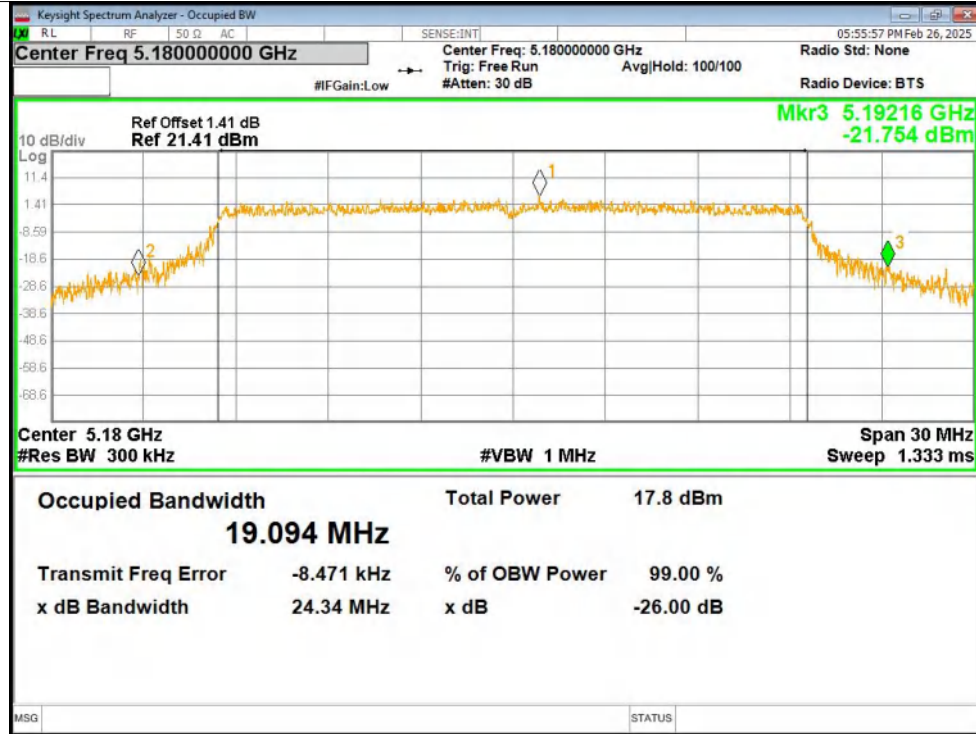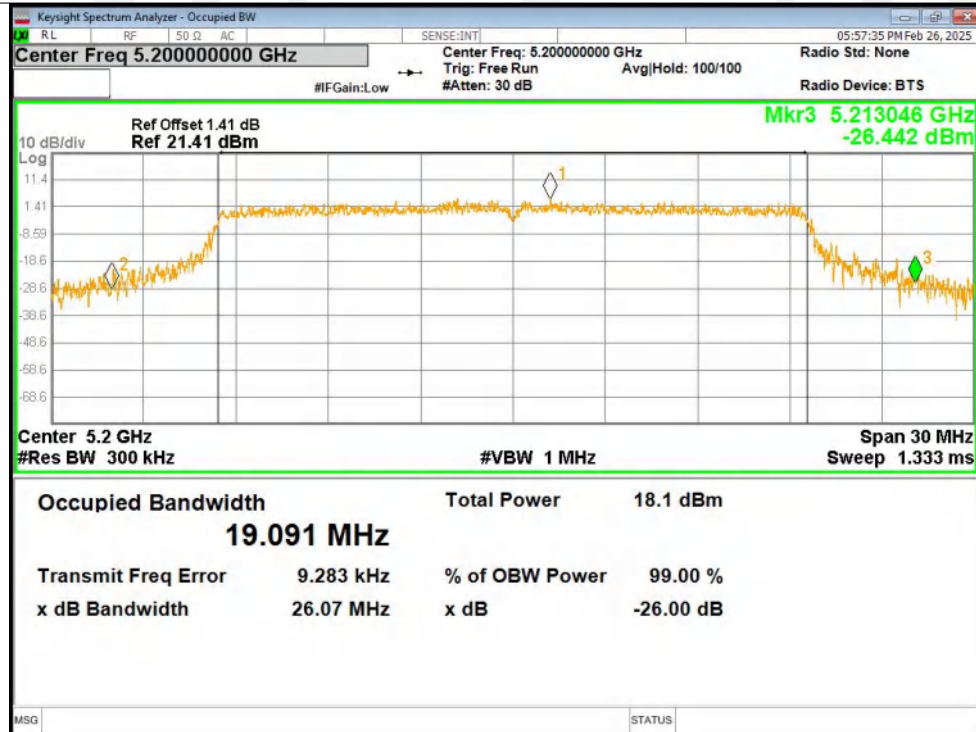-26dB Bandwidth NVNT ac40 5230MHz Ant1**-26dB Bandwidth NVNT ac80 5210MHz Ant1**

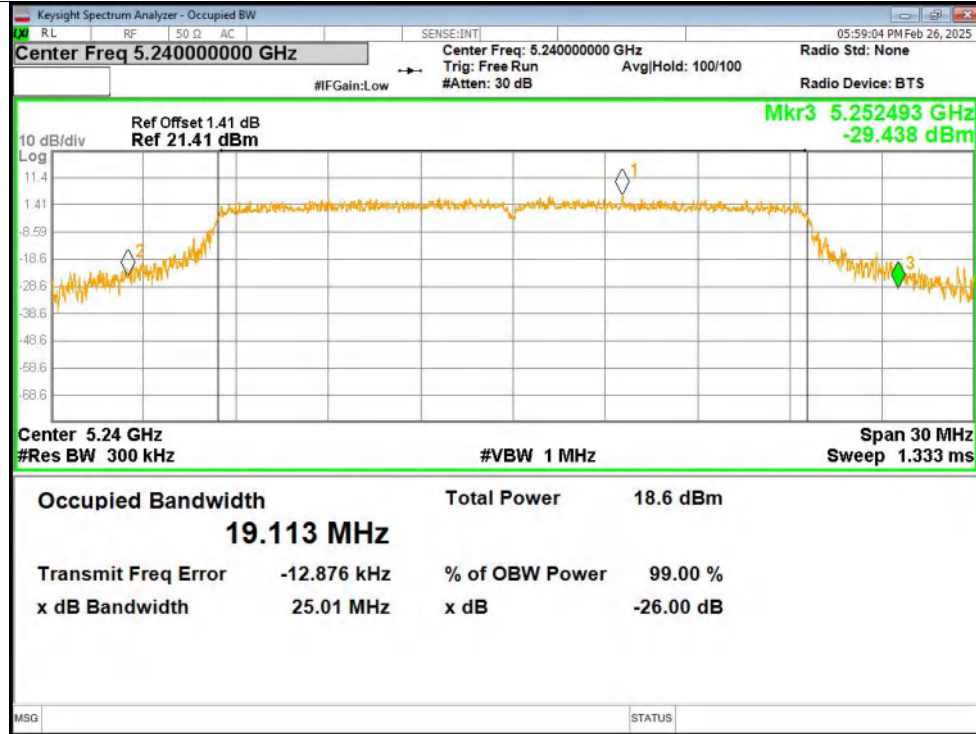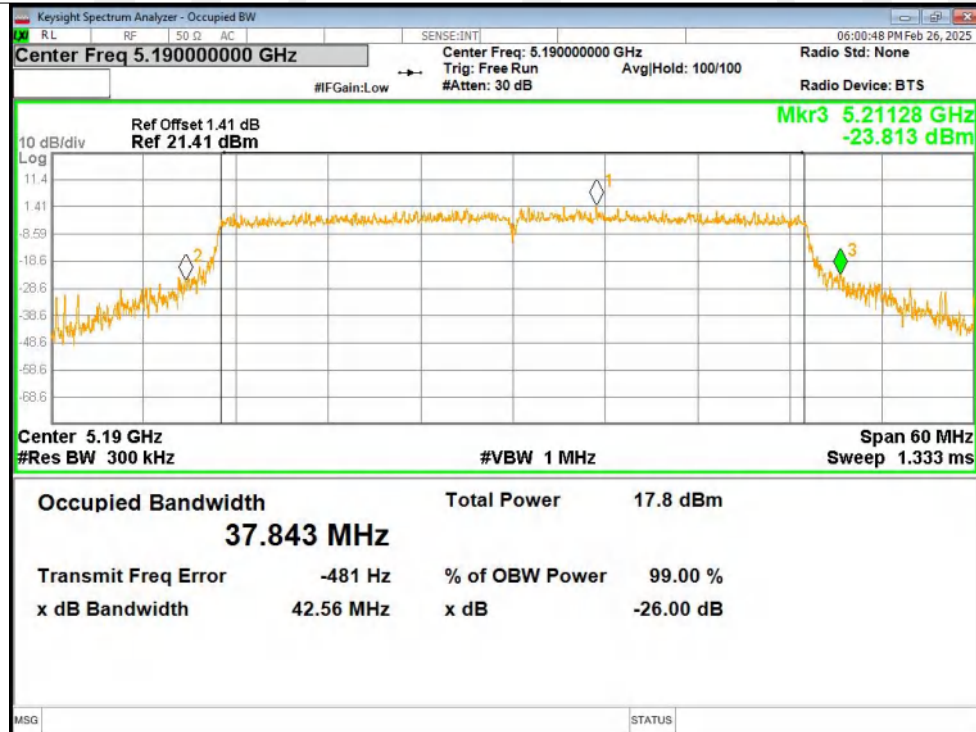-26dB Bandwidth NVNT ax20 5180MHz Ant1**-26dB Bandwidth NVNT ax20 5200MHz Ant1**

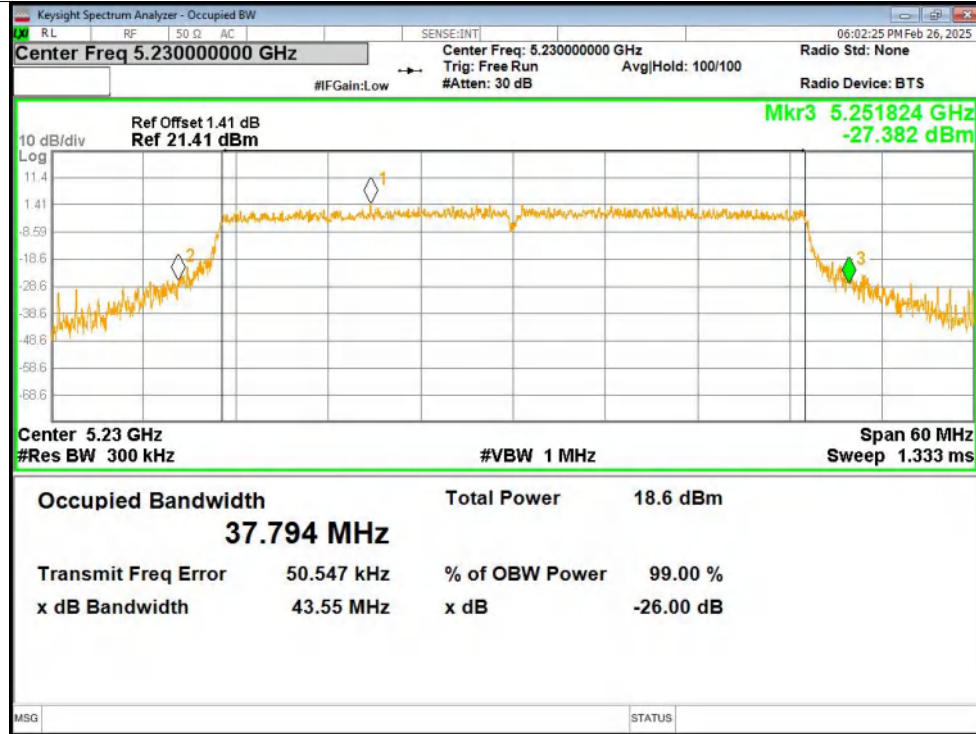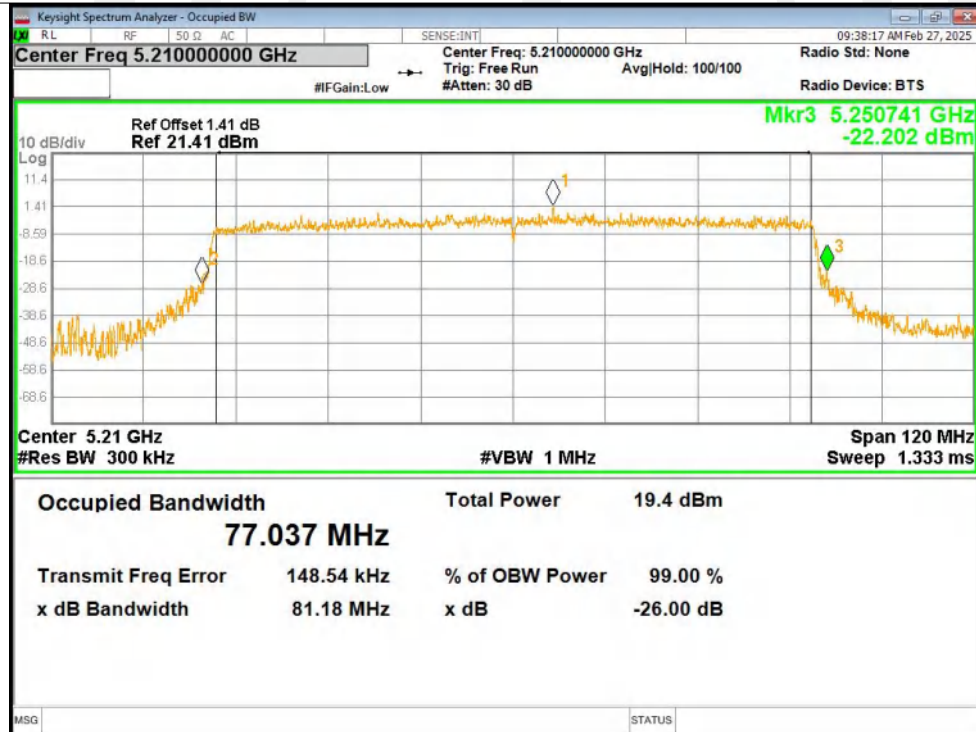-26dB Bandwidth NVNT ax20 5240MHz Ant1**-26dB Bandwidth NVNT ax40 5190MHz Ant1**


-26dB Bandwidth NVNT ax40 5230MHz Ant1**-26dB Bandwidth NVNT ax80 5210MHz Ant1**

5.2GWIFI (5150-5250 MHz)


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.630
NVNT	a	5200	Ant1	16.628
NVNT	a	5240	Ant1	16.631
NVNT	n20	5180	Ant1	17.872
NVNT	n20	5200	Ant1	17.856
NVNT	n20	5240	Ant1	17.859
NVNT	n40	5190	Ant1	36.379
NVNT	n40	5230	Ant1	36.325
NVNT	ac20	5180	Ant1	17.85
NVNT	ac20	5200	Ant1	17.807
NVNT	ac20	5240	Ant1	17.859
NVNT	ac40	5190	Ant1	36.353
NVNT	ac40	5230	Ant1	36.401
NVNT	ac80	5210	Ant1	75.682
NVNT	ax20	5180	Ant1	19.015
NVNT	ax20	5200	Ant1	19.022
NVNT	ax20	5240	Ant1	19.011
NVNT	ax40	5190	Ant1	37.908
NVNT	ax40	5230	Ant1	37.834
NVNT	ax80	5210	Ant1	77.2

Test Graphs

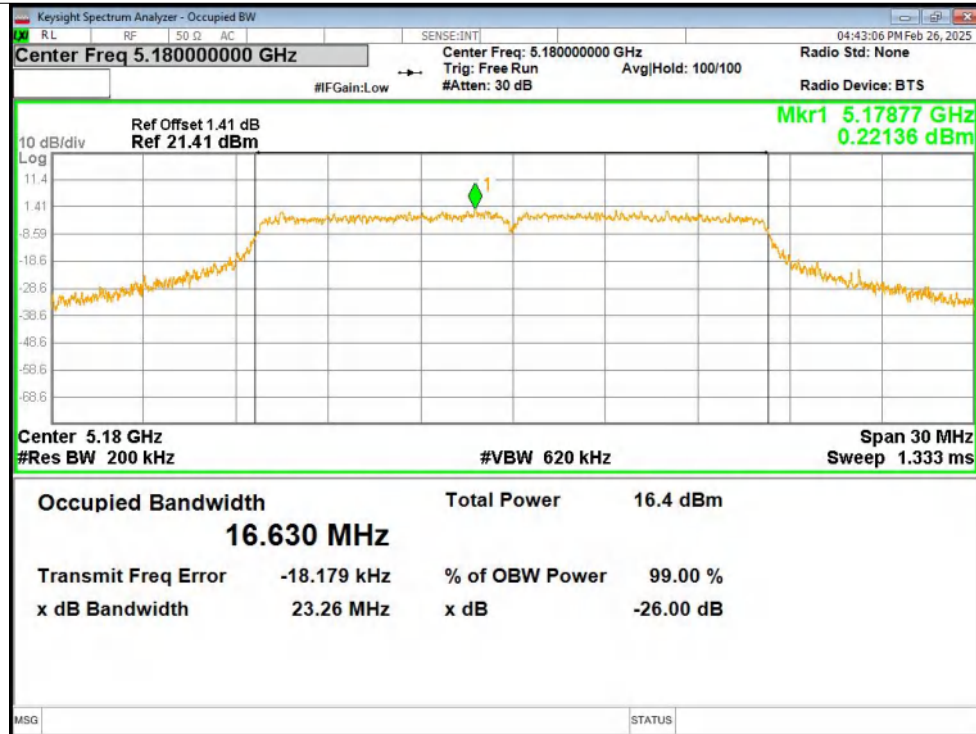
OBW NVNT a 5180MHz Ant1




OBW NVNT a 5200MHz Ant1

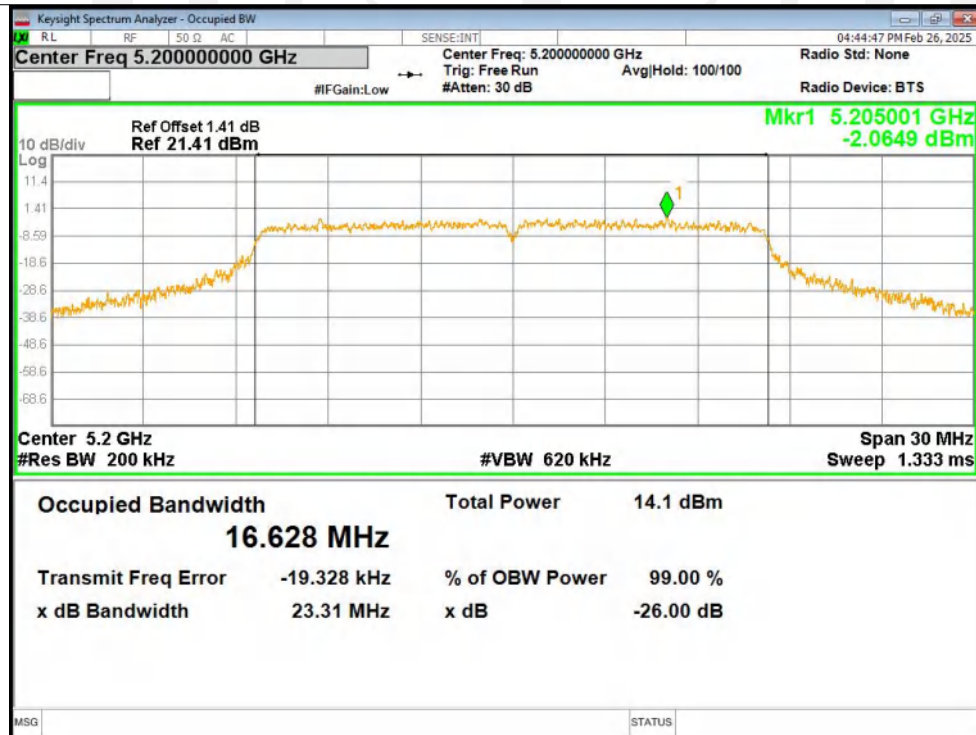


OBW NVNT a 5240MHz Ant1

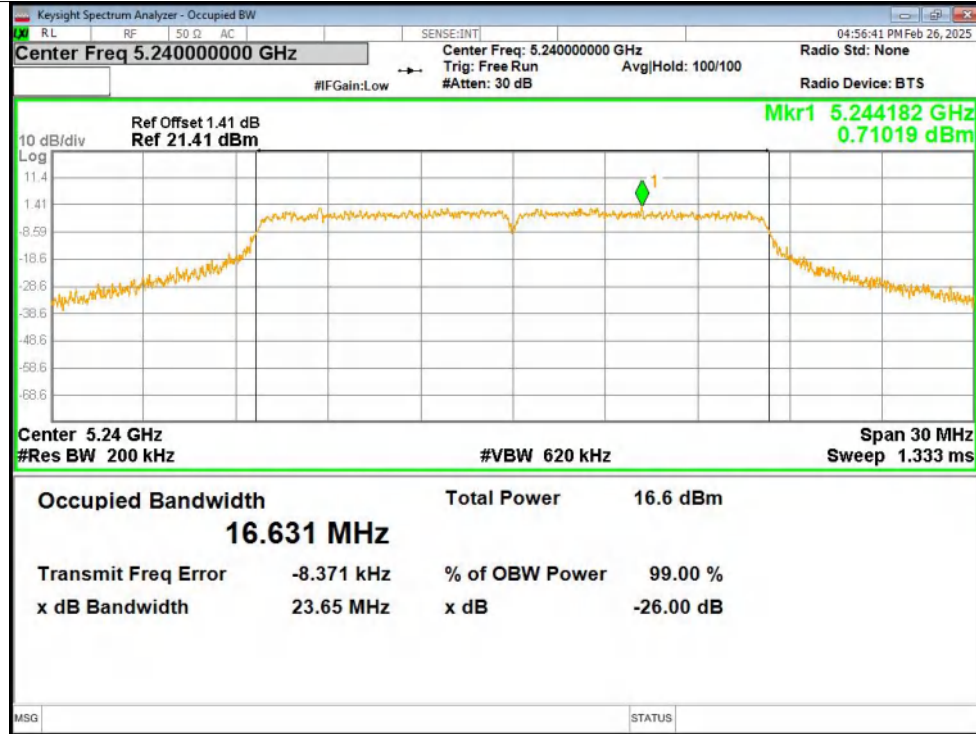


OBW NVNT n20 5180MHz Ant1

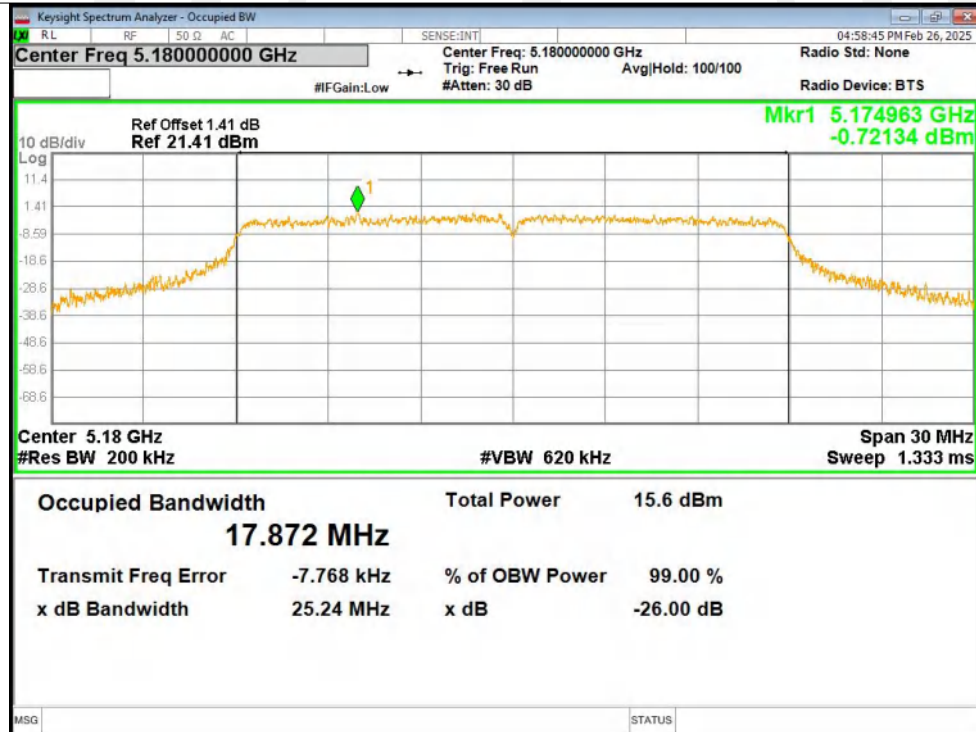


OBW NVNT n20 5200MHz Ant1

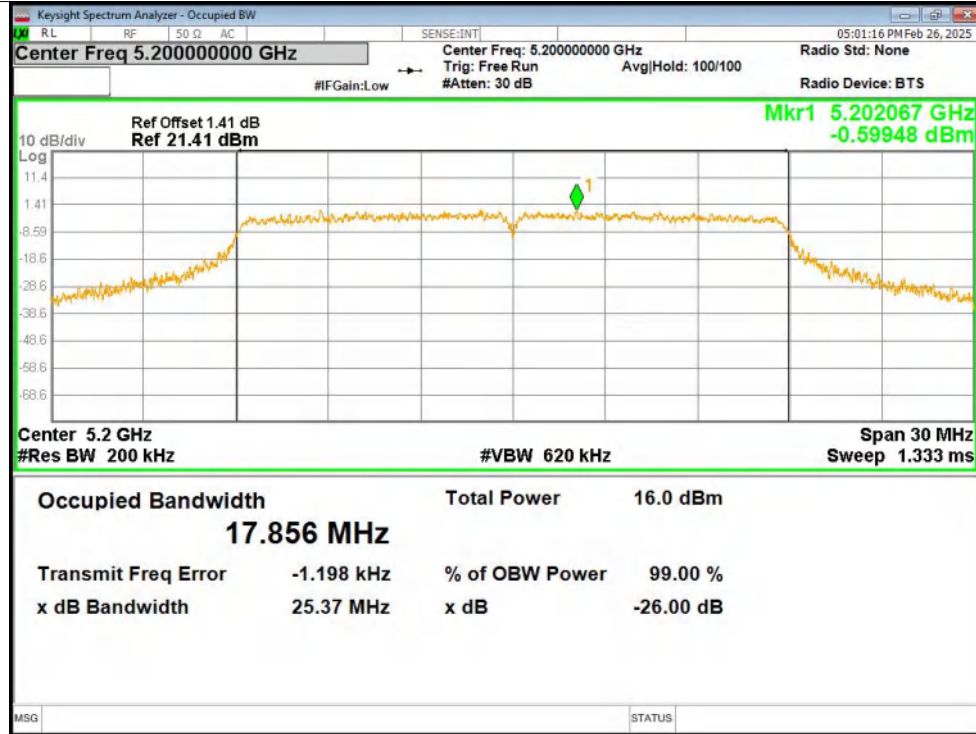


OBW NVNT n20 5240MHz Ant1

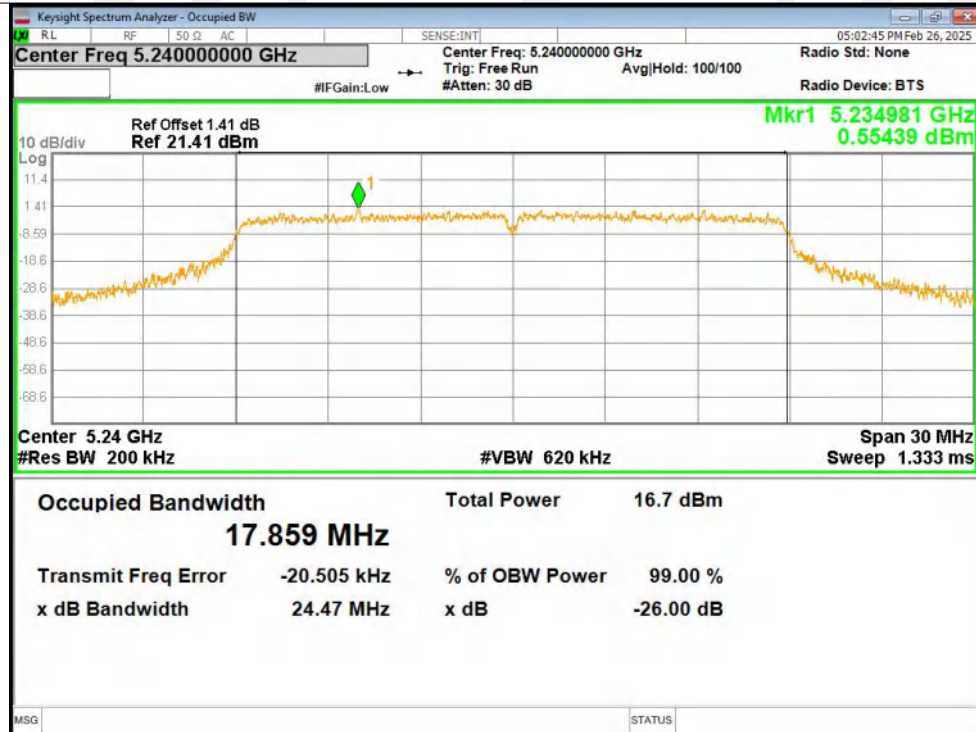


OBW NVNT n40 5190MHz Ant1

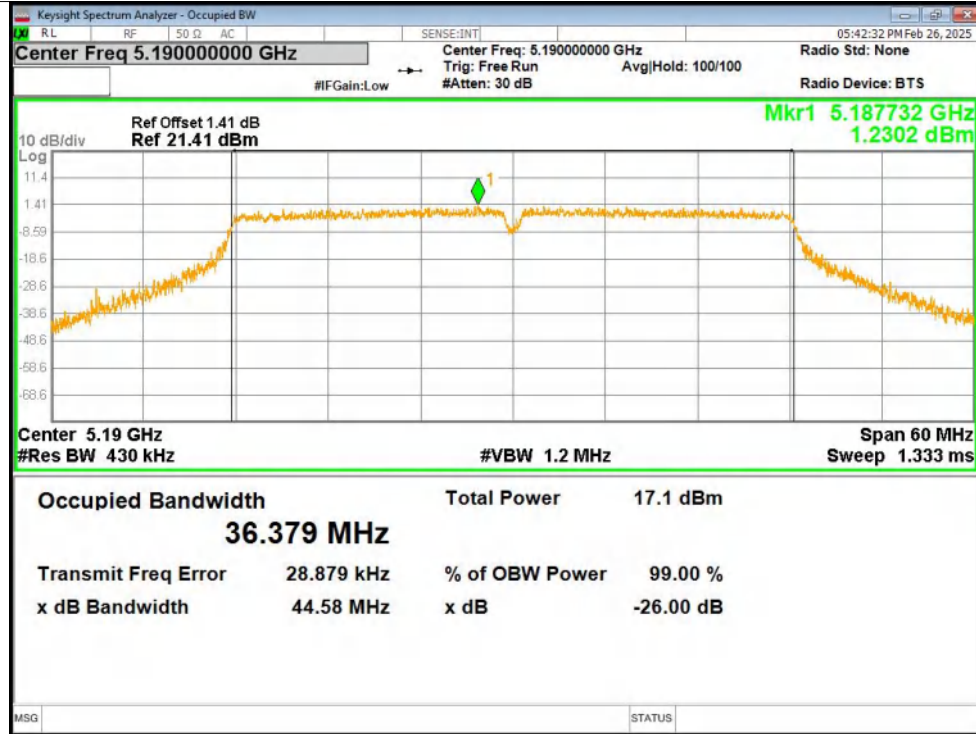


OBW NVNT n40 5230MHz Ant1

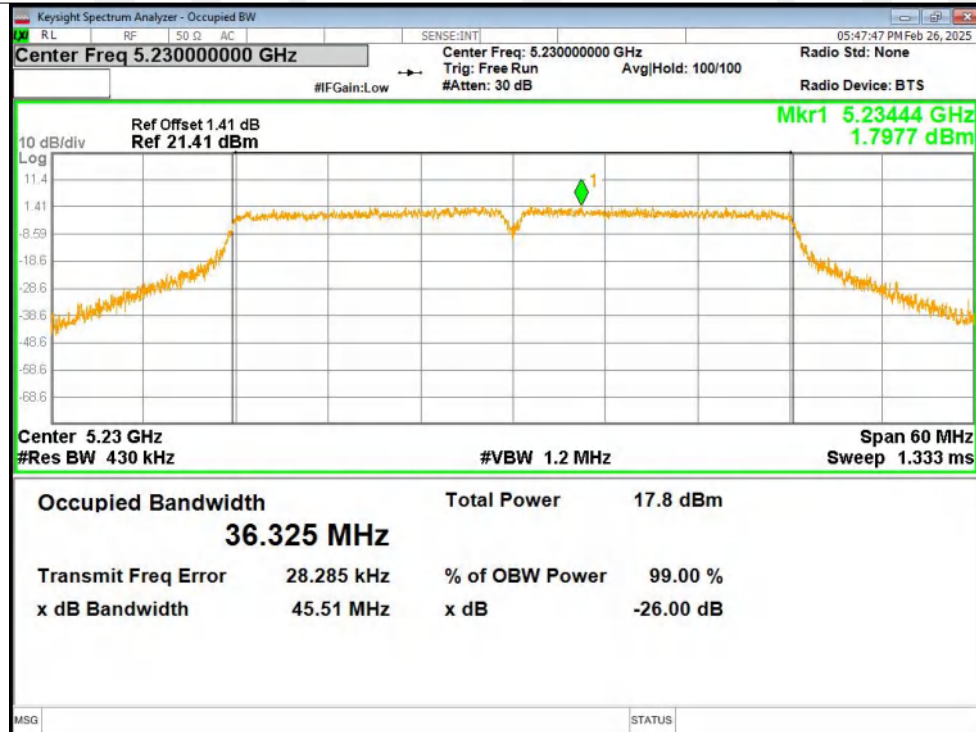


OBW NVNT ac20 5180MHz Ant1

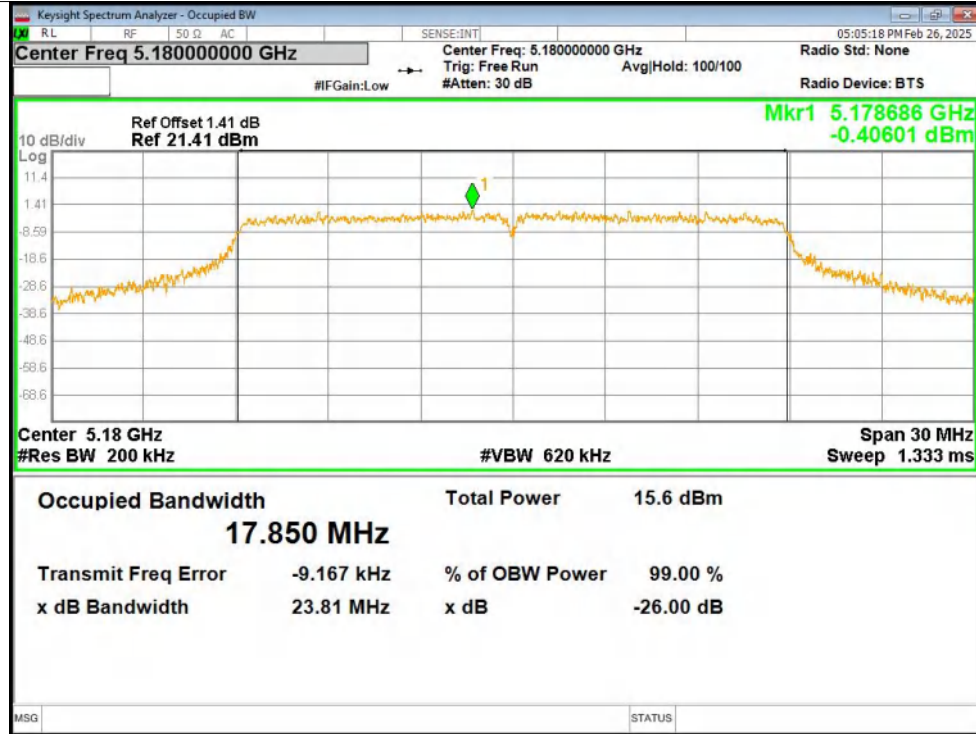


OBW NVNT ac20 5200MHz Ant1

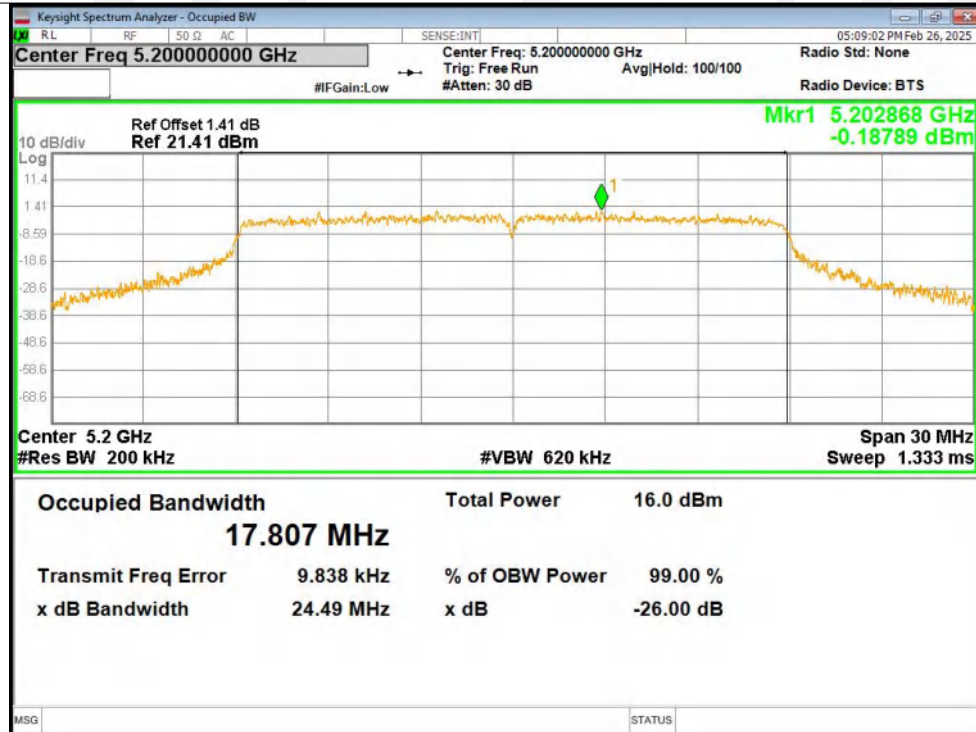


OBW NVNT ac20 5240MHz Ant1

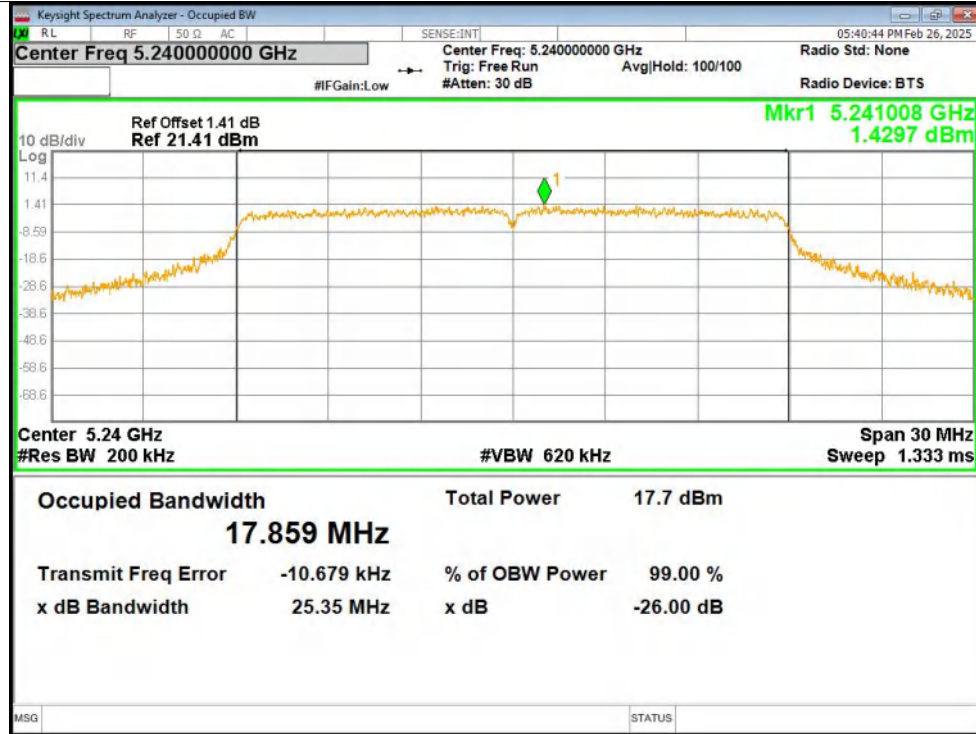


OBW NVNT ac40 5190MHz Ant1

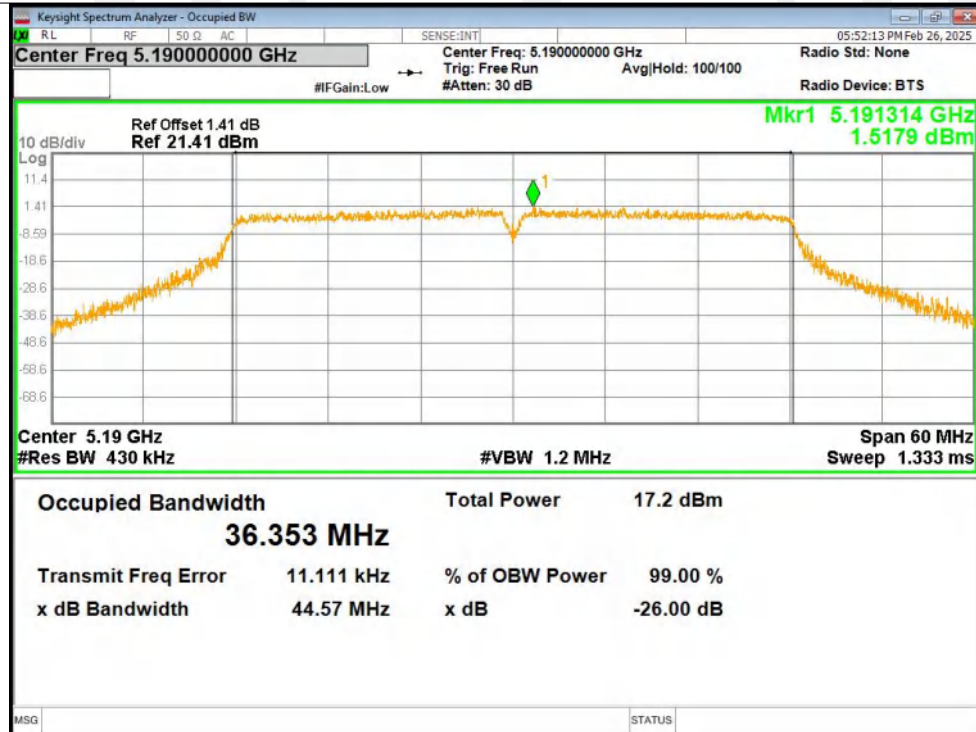


OBW NVNT ac40 5230MHz Ant1

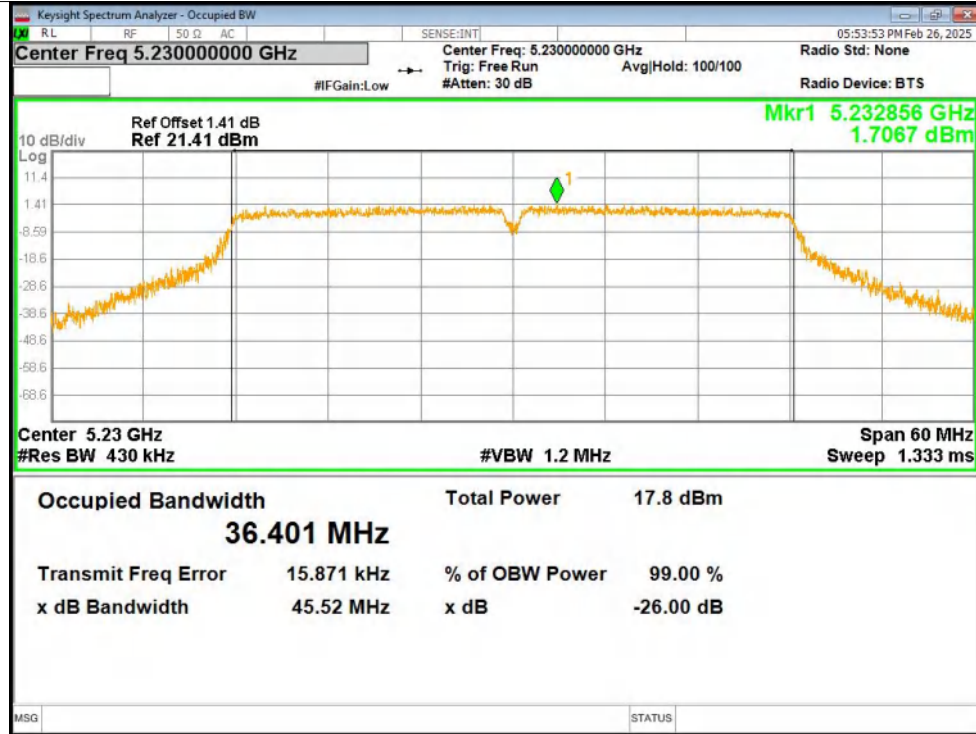


OBW NVNT ac80 5210MHz Ant1

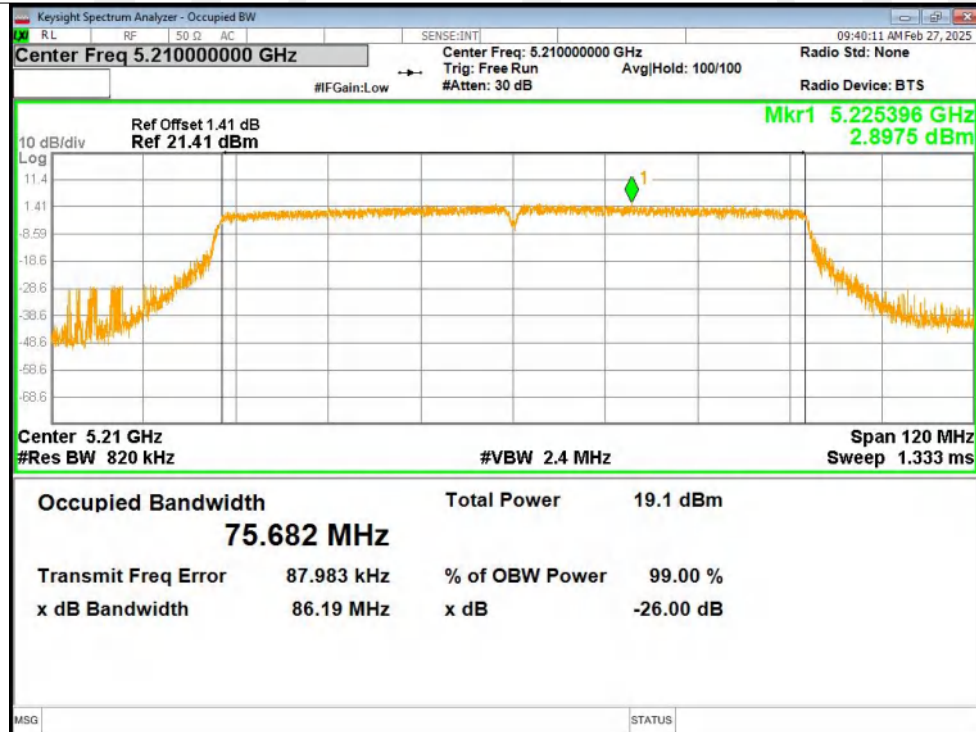


OBW NVNT ax20 5180MHz Ant1

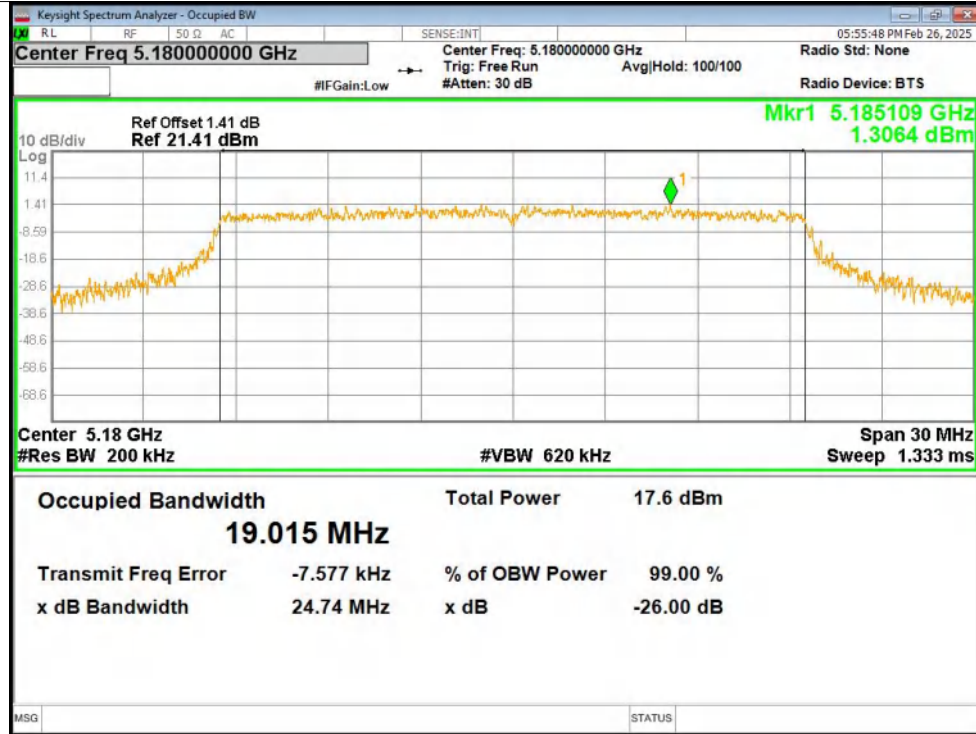


OBW NVNT ax20 5200MHz Ant1

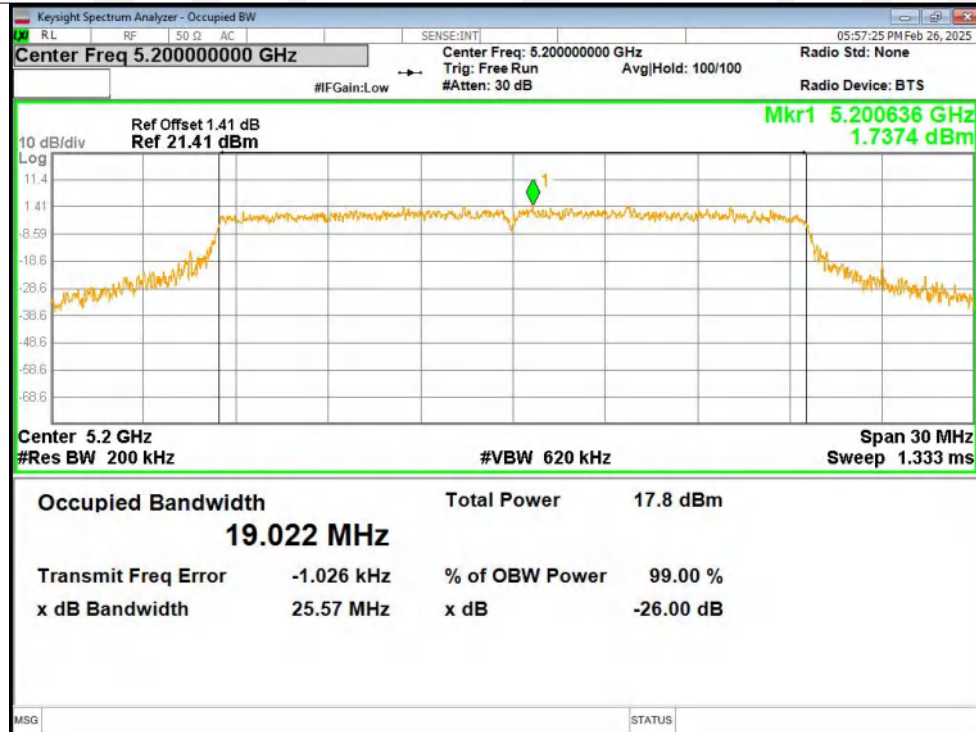


OBW NVNT ax20 5240MHz Ant1

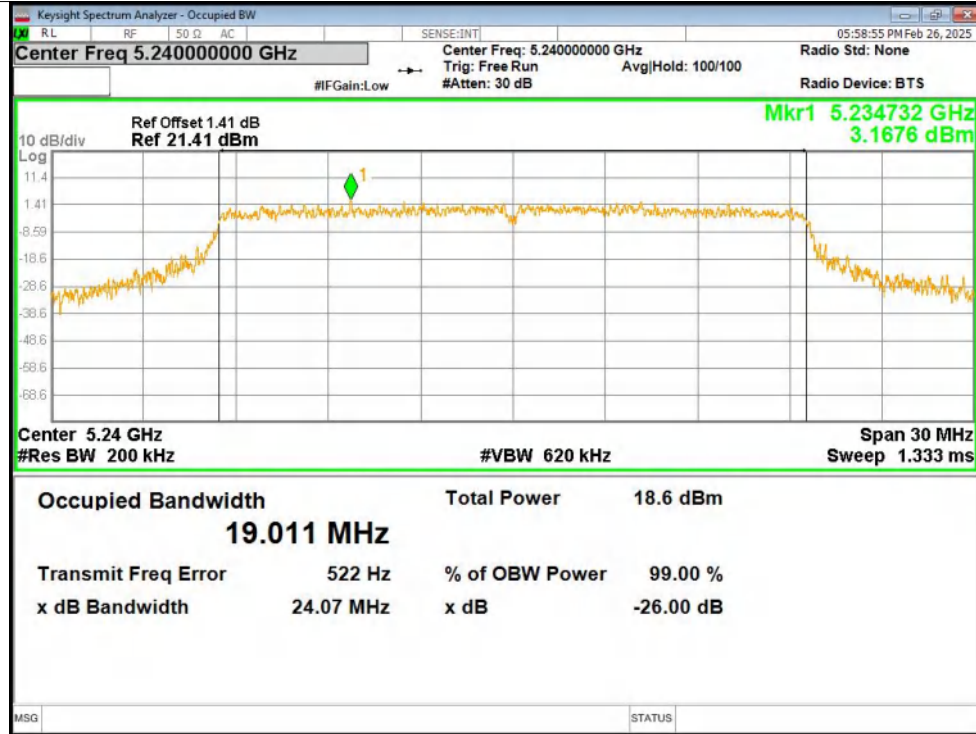


OBW NVNT ax40 5190MHz Ant1

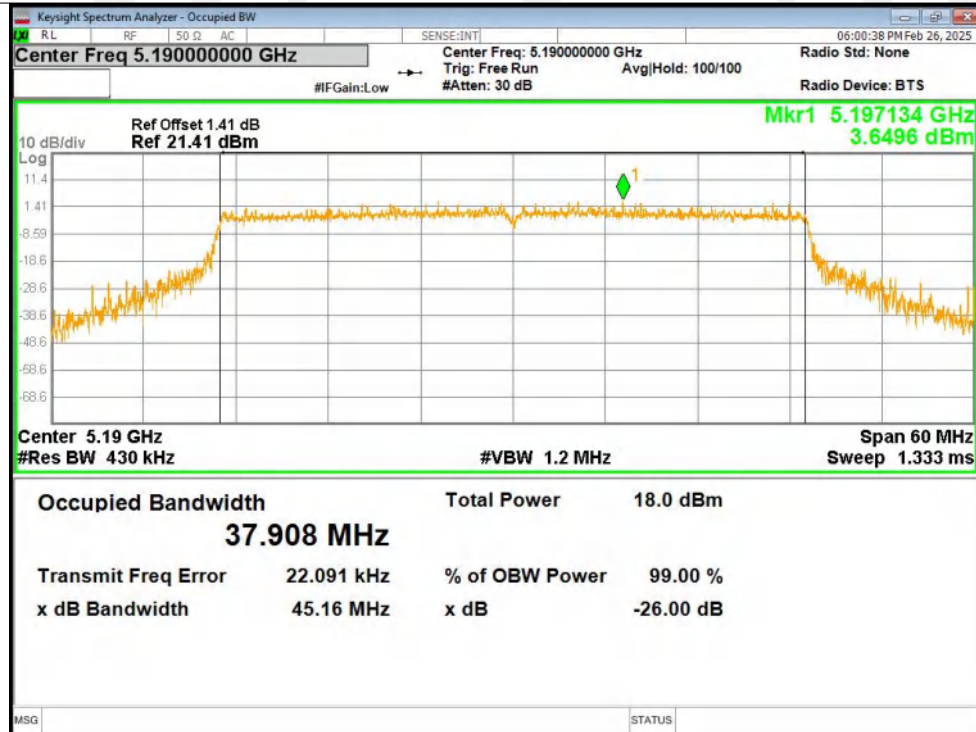

OBW NVNT ax40 5230MHz Ant1

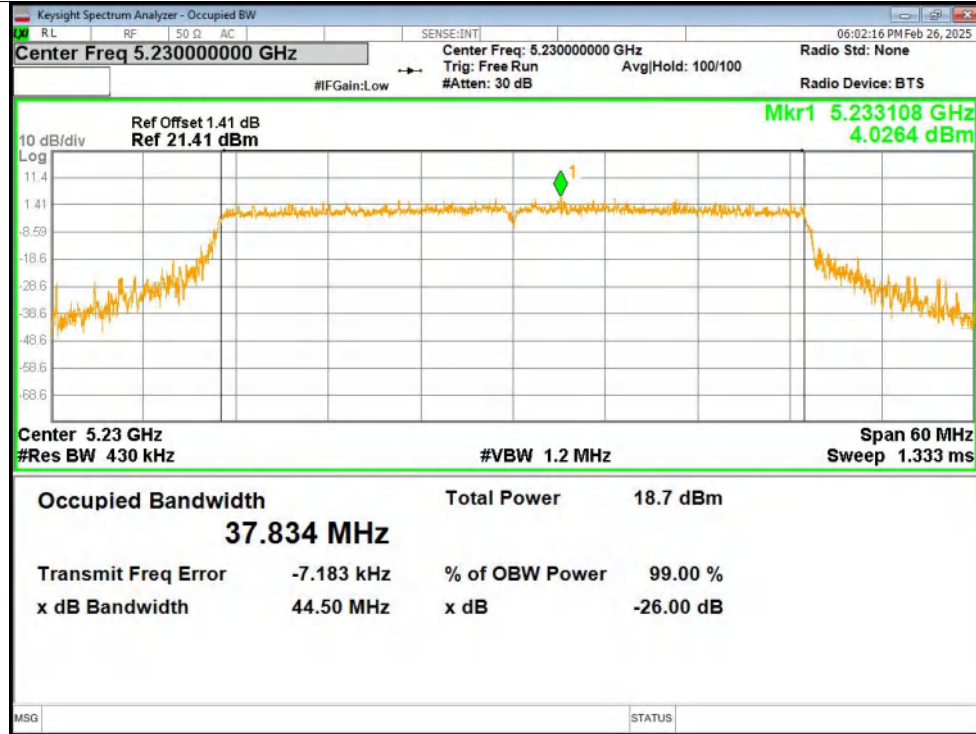

OBW NVNT ax80 5210MHz Ant1

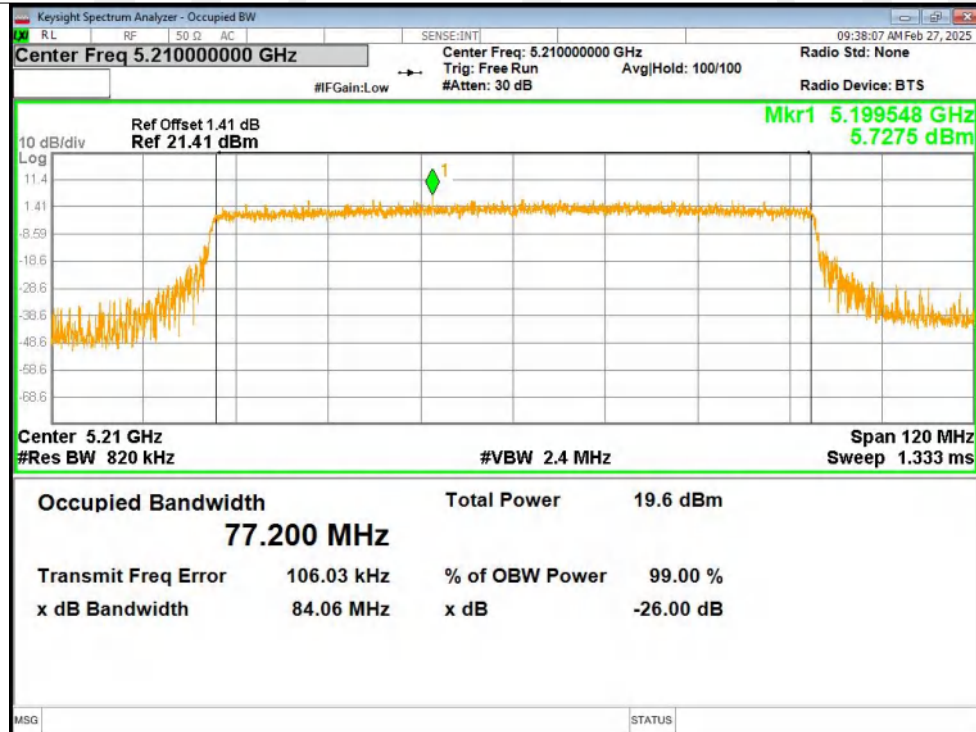


5.8GWIFI (5725MHz-5850 MHz)


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.40	0.5	Pass
NVNT	a	5785	Ant1	16.37	0.5	Pass
NVNT	a	5825	Ant1	16.36	0.5	Pass
NVNT	n20	5745	Ant1	17.63	0.5	Pass
NVNT	n20	5785	Ant1	17.59	0.5	Pass
NVNT	n20	5825	Ant1	17.59	0.5	Pass
NVNT	n40	5755	Ant1	36.33	0.5	Pass
NVNT	n40	5795	Ant1	36.34	0.5	Pass
NVNT	ac20	5745	Ant1	17.82	0.5	Pass
NVNT	ac20	5785	Ant1	17.59	0.5	Pass
NVNT	ac20	5825	Ant1	17.59	0.5	Pass
NVNT	ac40	5755	Ant1	36.34	0.5	Pass
NVNT	ac40	5795	Ant1	36.33	0.5	Pass
NVNT	ac80	5775	Ant1	75.72	0.5	Pass
NVNT	ax20	5745	Ant1	18.96	0.5	Pass
NVNT	ax20	5785	Ant1	19.06	0.5	Pass
NVNT	ax20	5825	Ant1	18.92	0.5	Pass
NVNT	ax40	5755	Ant1	38.12	0.5	Pass
NVNT	ax40	5795	Ant1	38.01	0.5	Pass
NVNT	ax80	5775	Ant1	77.78	0.5	Pass



Test Graphs


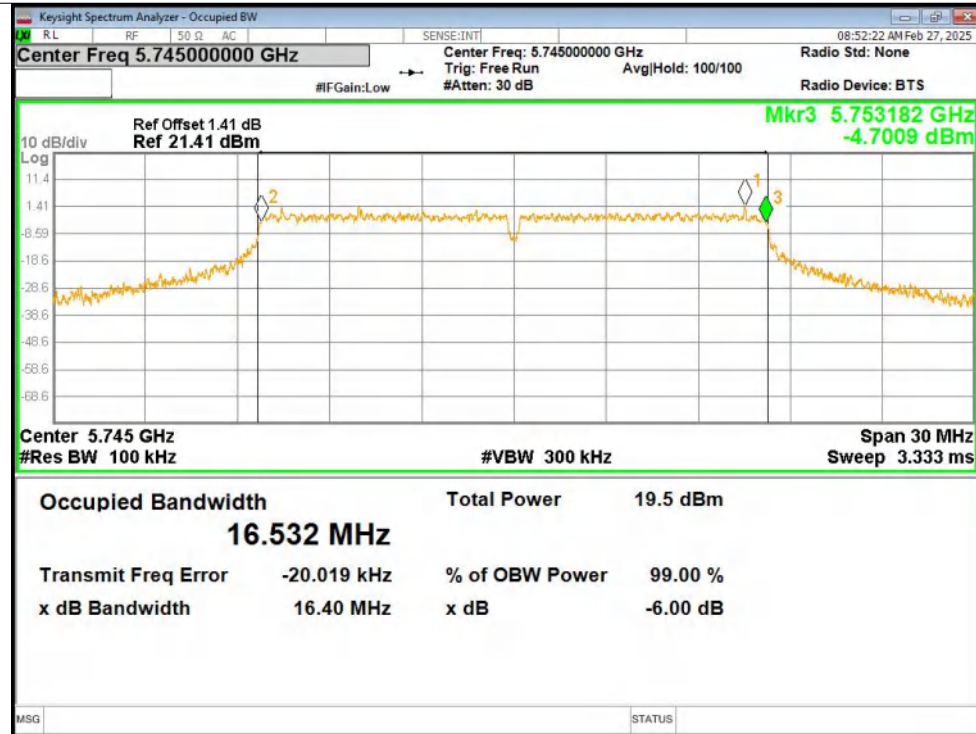
-6dB Bandwidth NVNT a 5745MHz Ant1







-6dB Bandwidth NVNT a 5785MHz Ant1


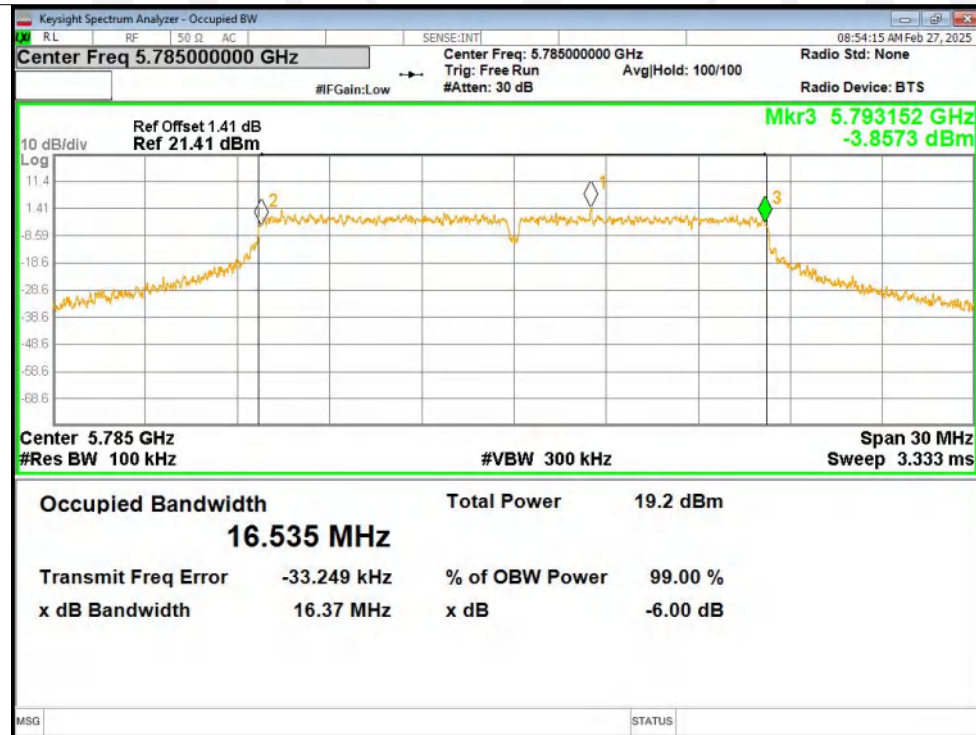


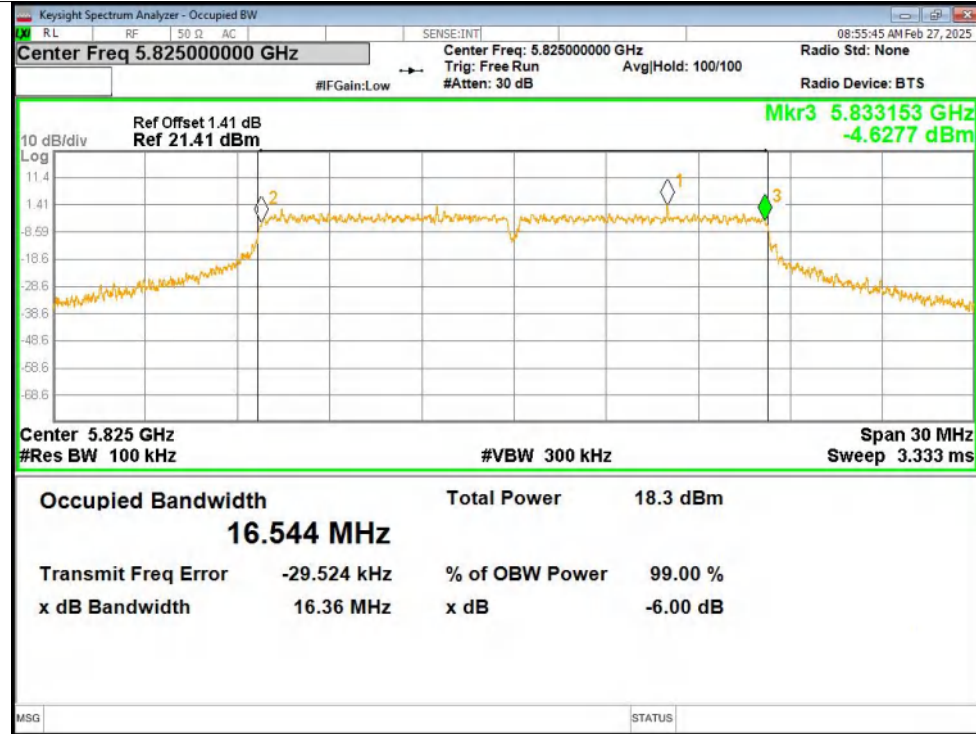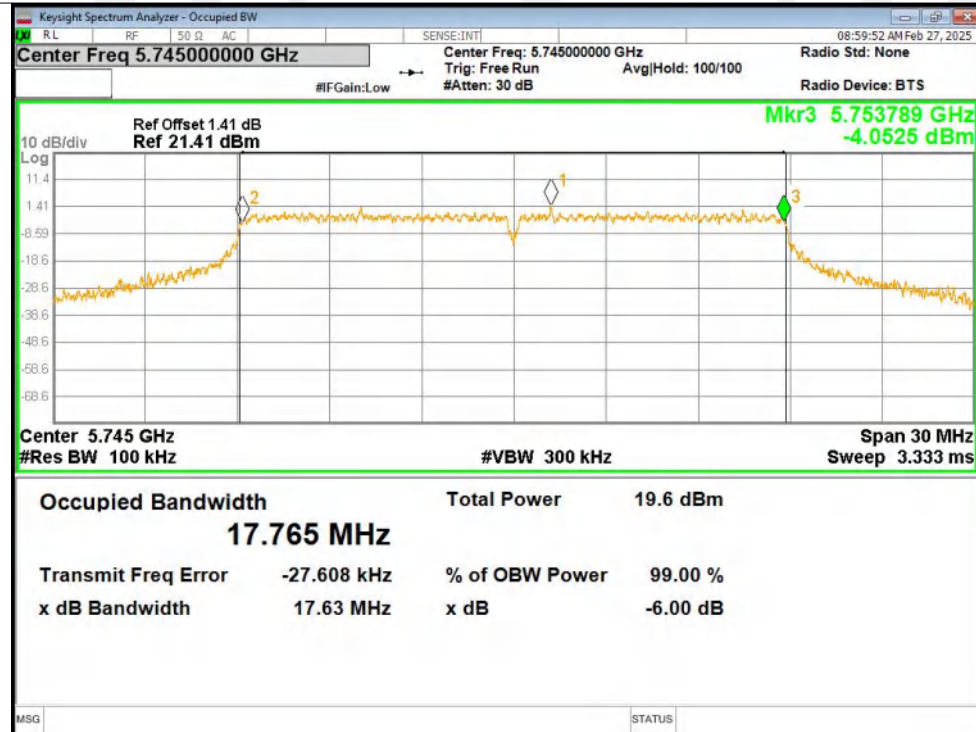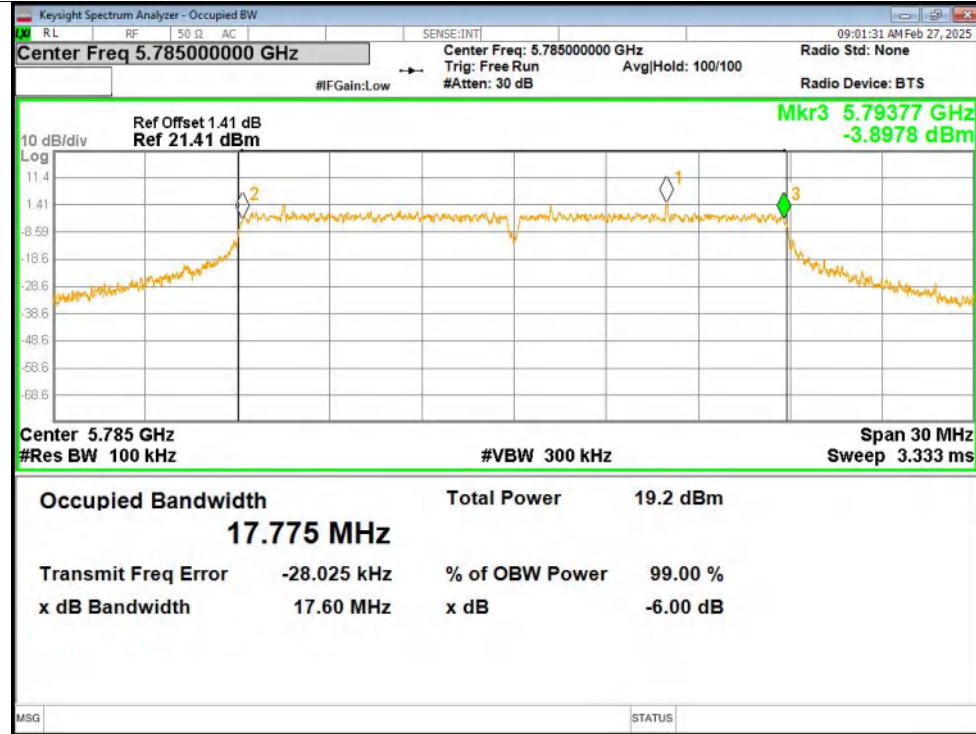
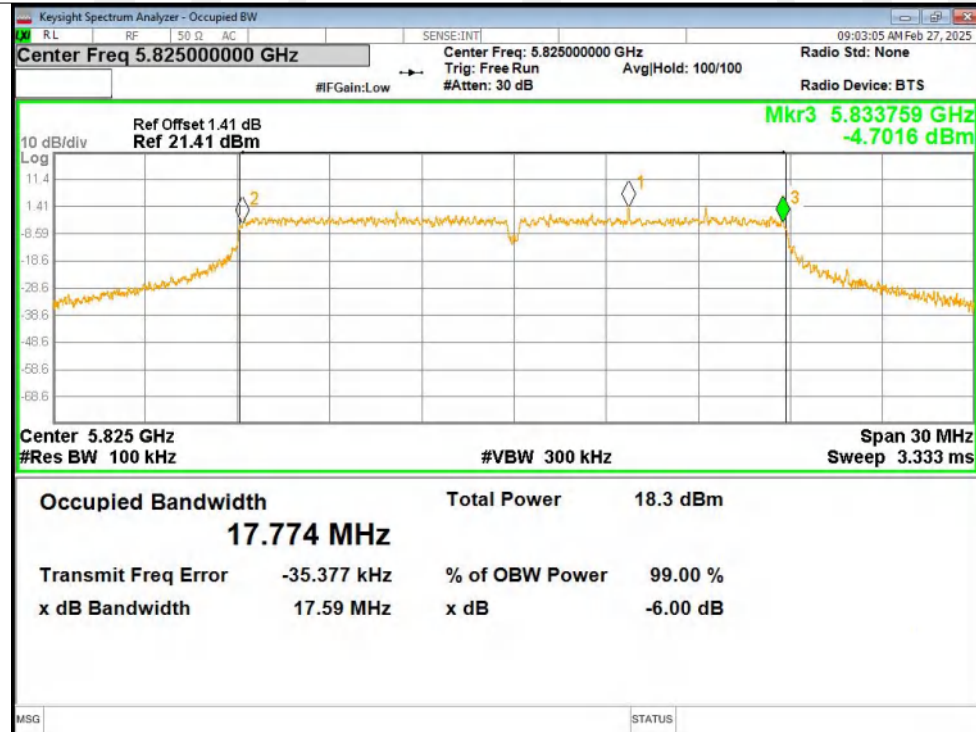
-6dB Bandwidth NVNT a 5825MHz Ant1**-6dB Bandwidth NVNT n20 5745MHz Ant1**

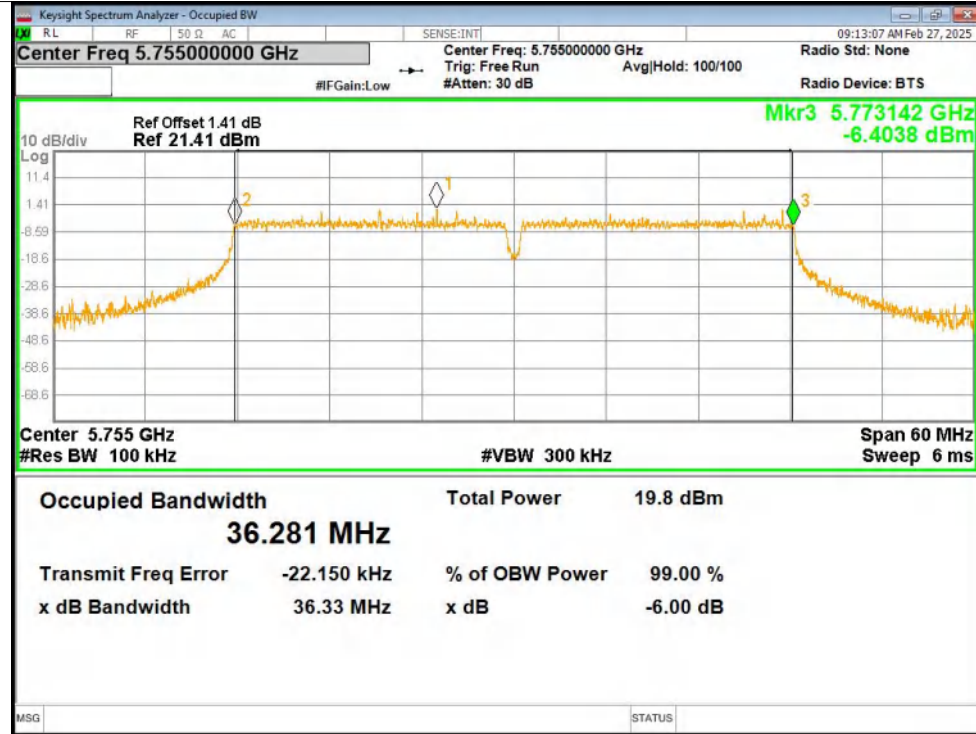
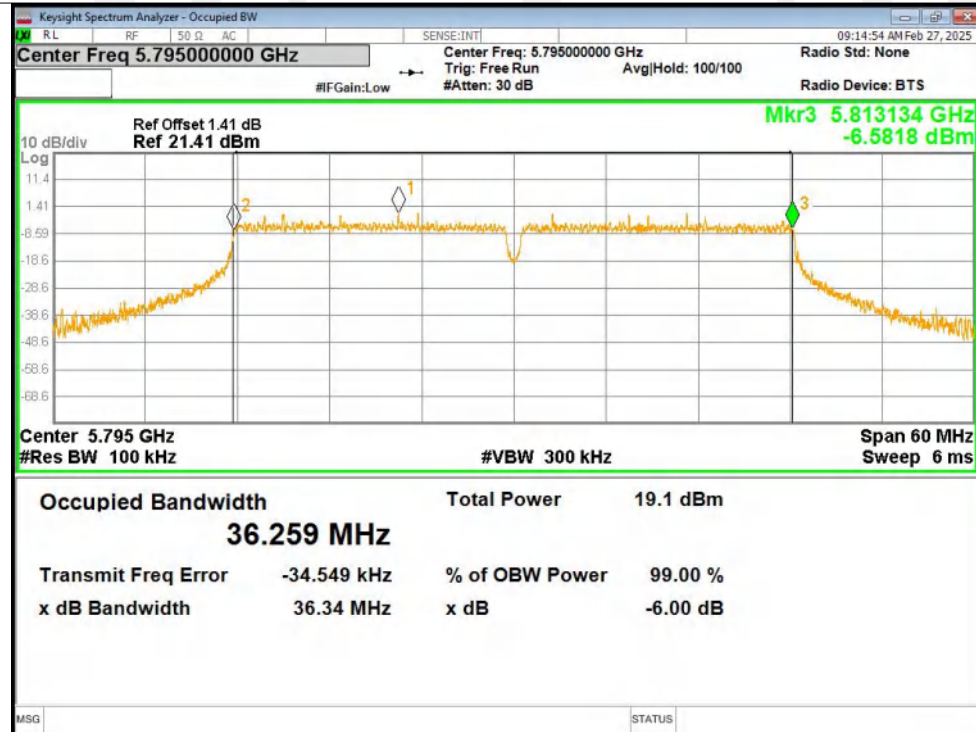
-6dB Bandwidth NVNT n20 5785MHz Ant1**-6dB Bandwidth NVNT n20 5825MHz Ant1**

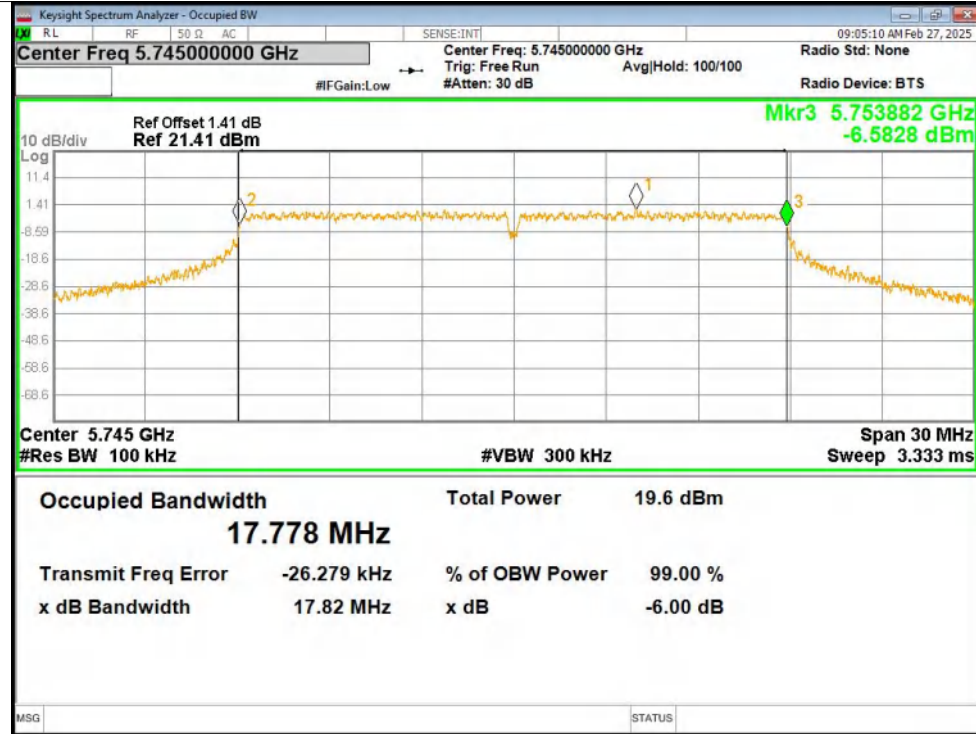
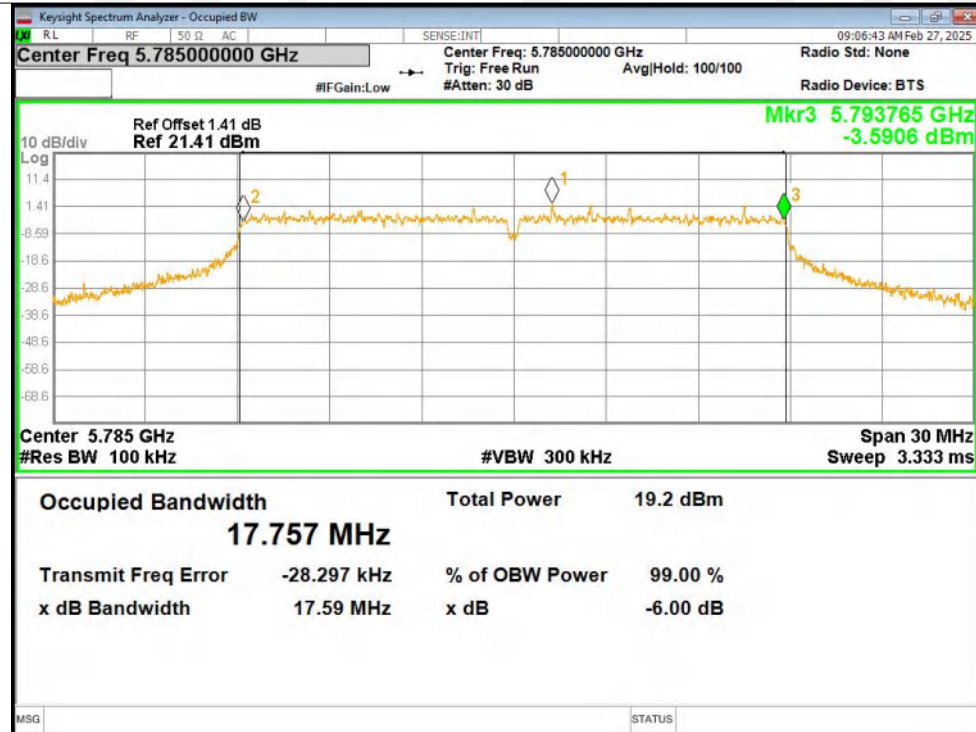
-6dB Bandwidth NVNT n40 5755MHz Ant1**-6dB Bandwidth NVNT n40 5795MHz Ant1**

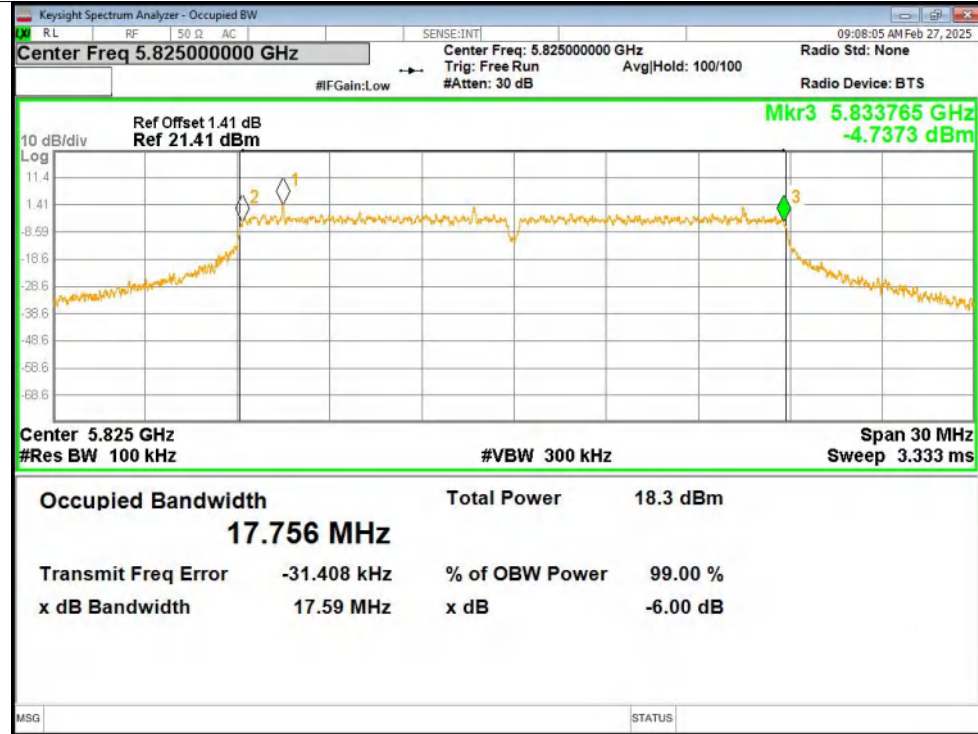
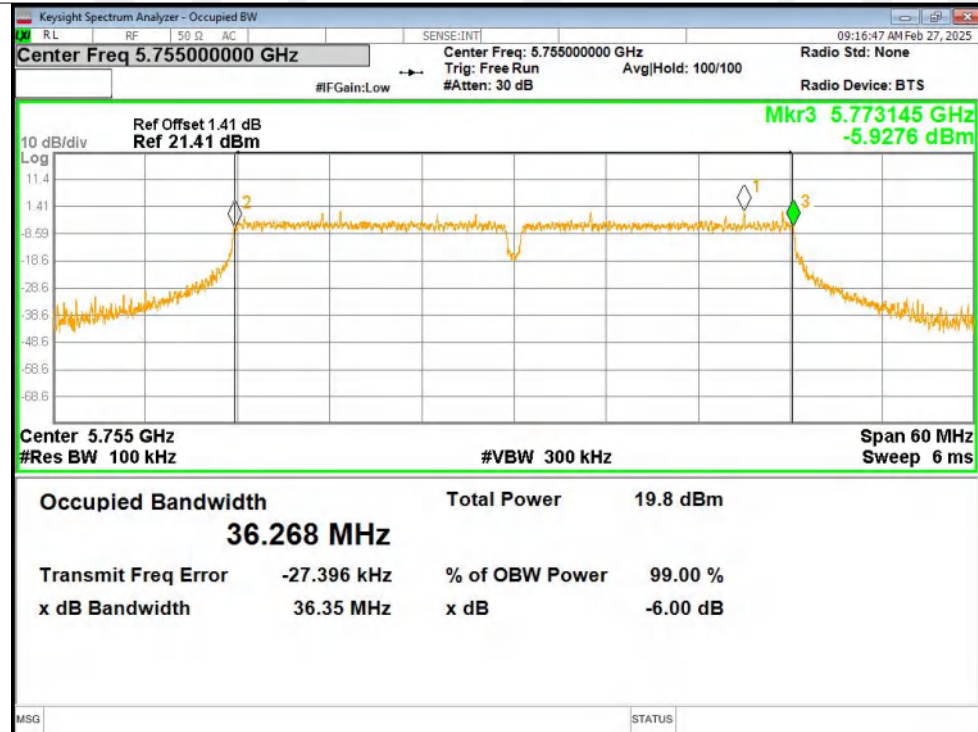
-6dB Bandwidth NVNT ac20 5745MHz Ant1**-6dB Bandwidth NVNT ac20 5785MHz Ant1**

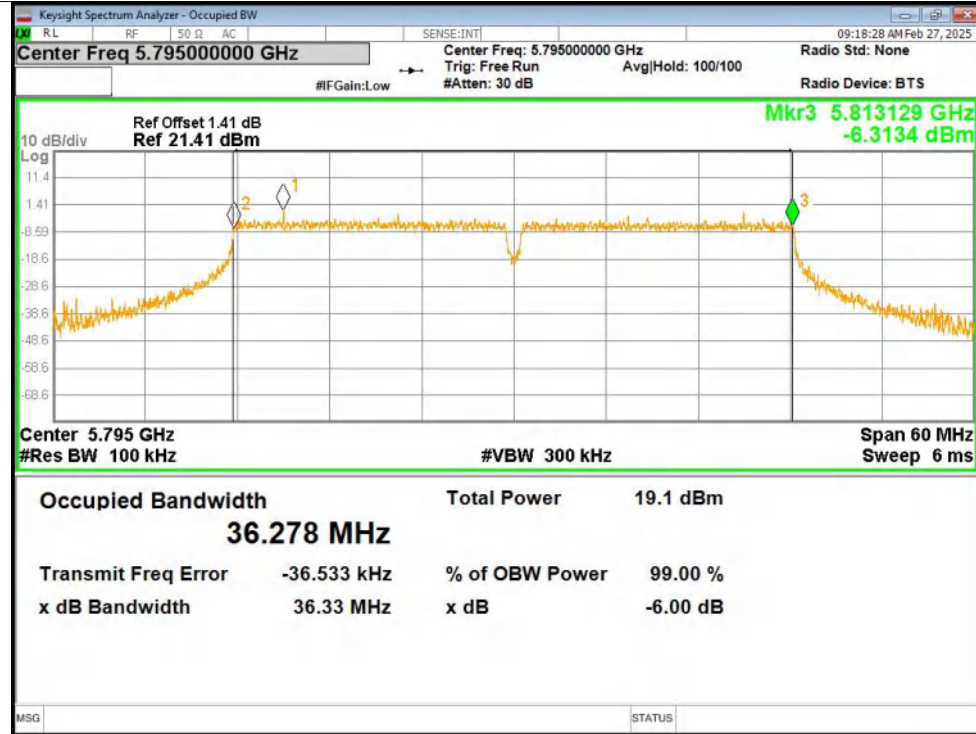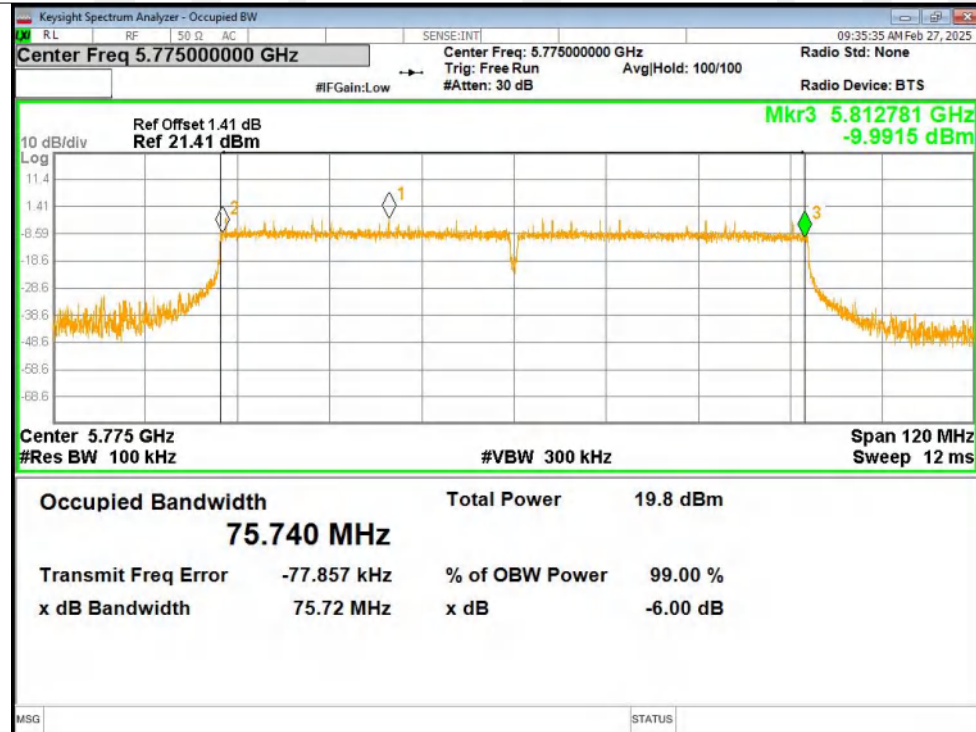-6dB Bandwidth NVNT ac20 5825MHz Ant1**-6dB Bandwidth NVNT ac40 5755MHz Ant1**

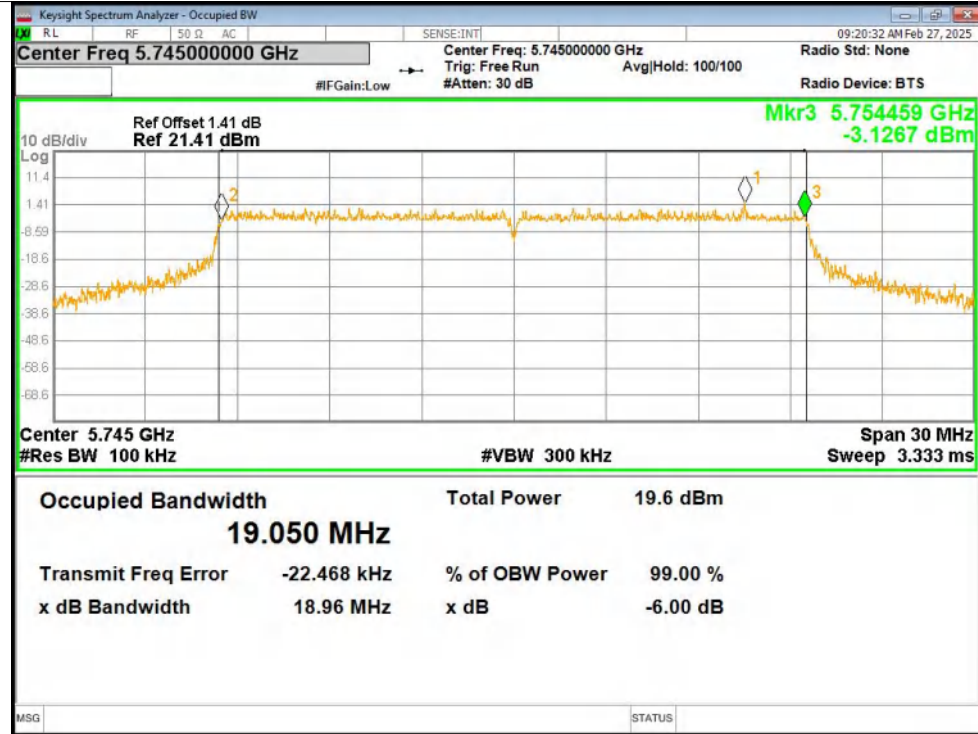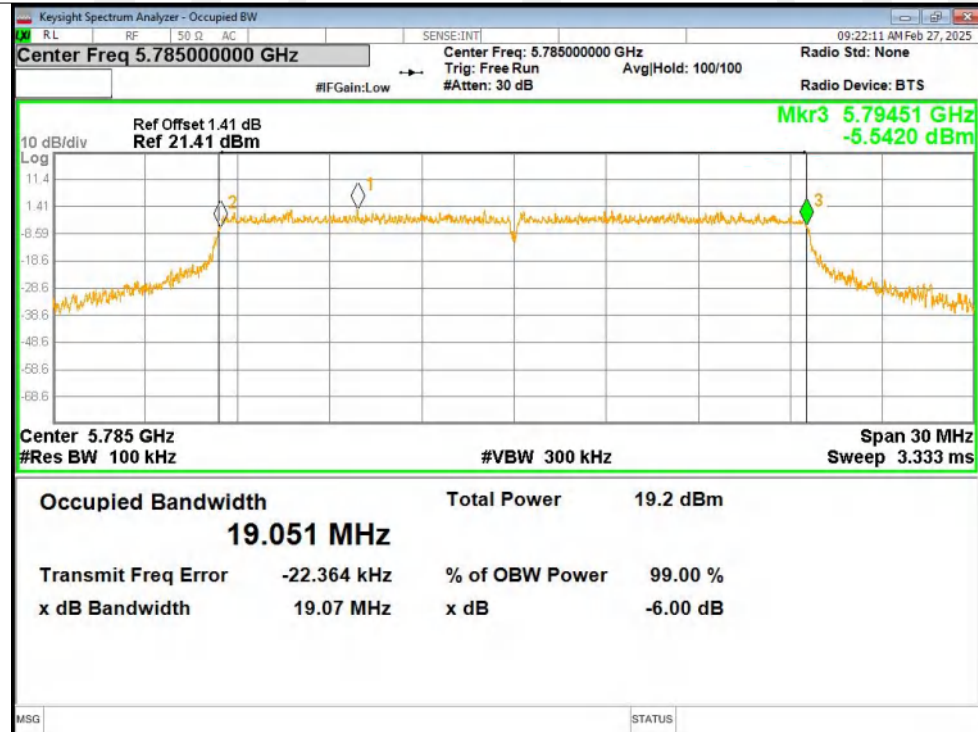-6dB Bandwidth NVNT ac40 5795MHz Ant1**-6dB Bandwidth NVNT ac80 5775MHz Ant1**

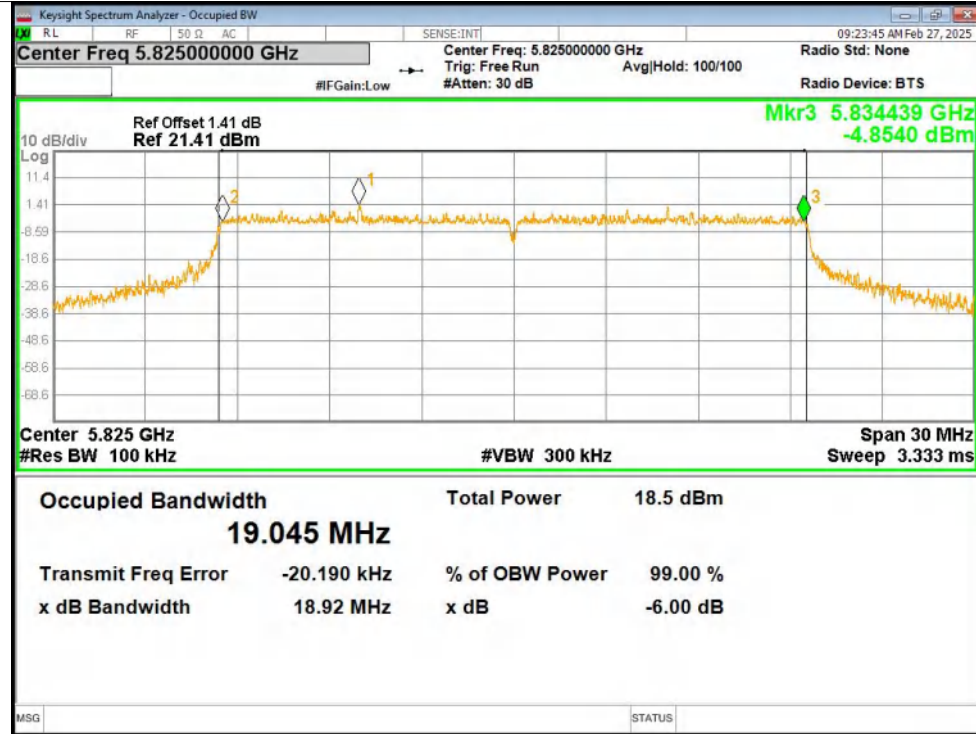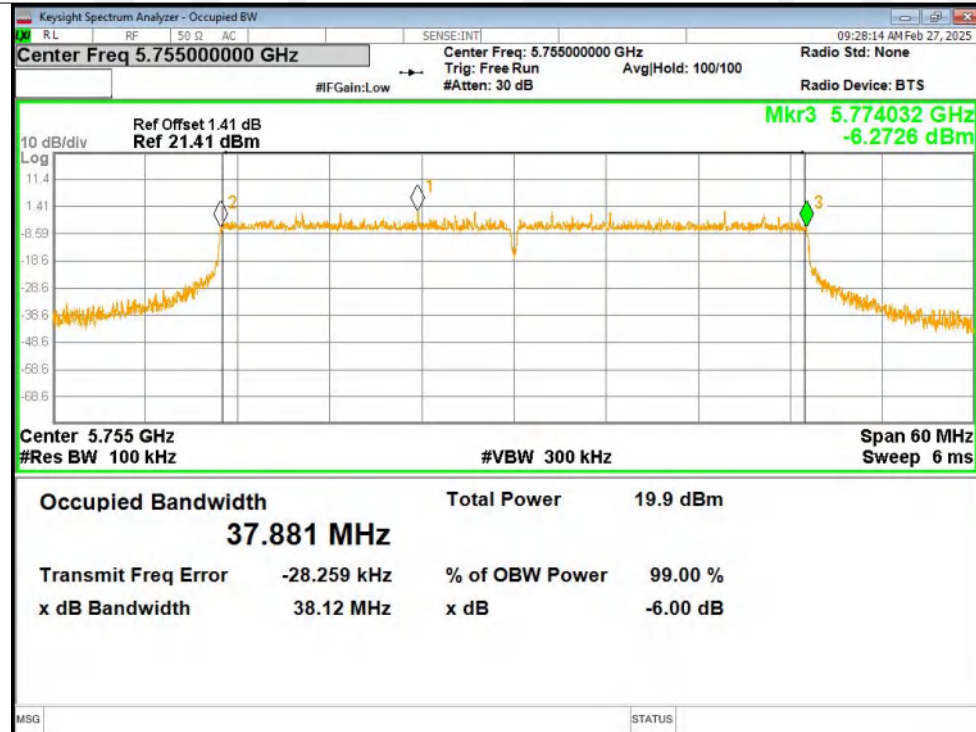-6dB Bandwidth NVNT ax20 5745MHz Ant1**-6dB Bandwidth NVNT ax20 5785MHz Ant1**

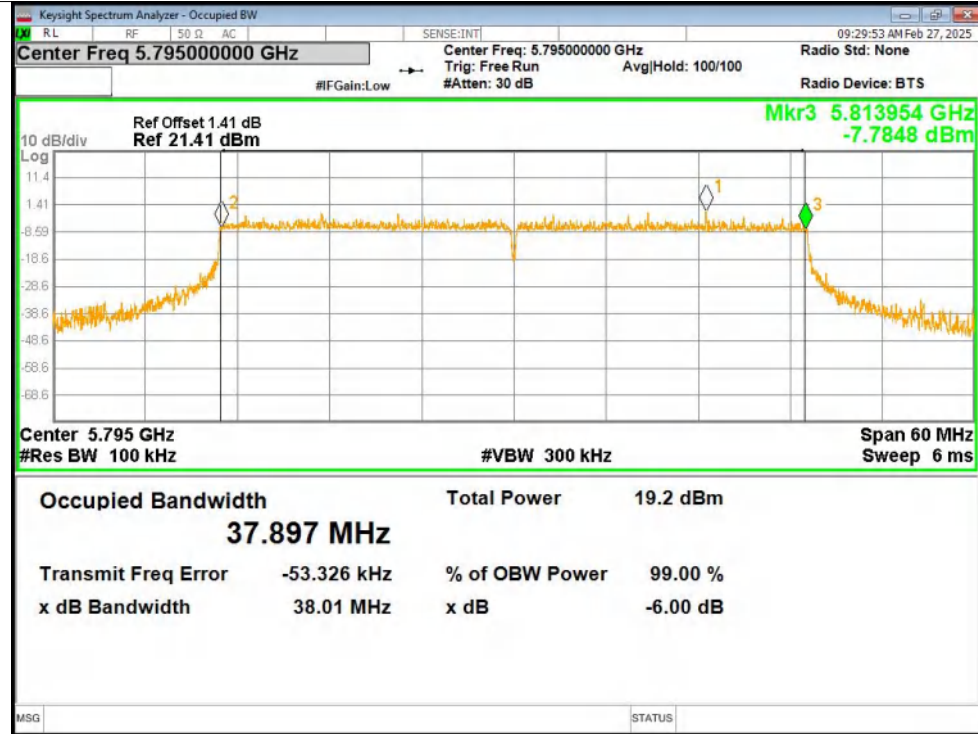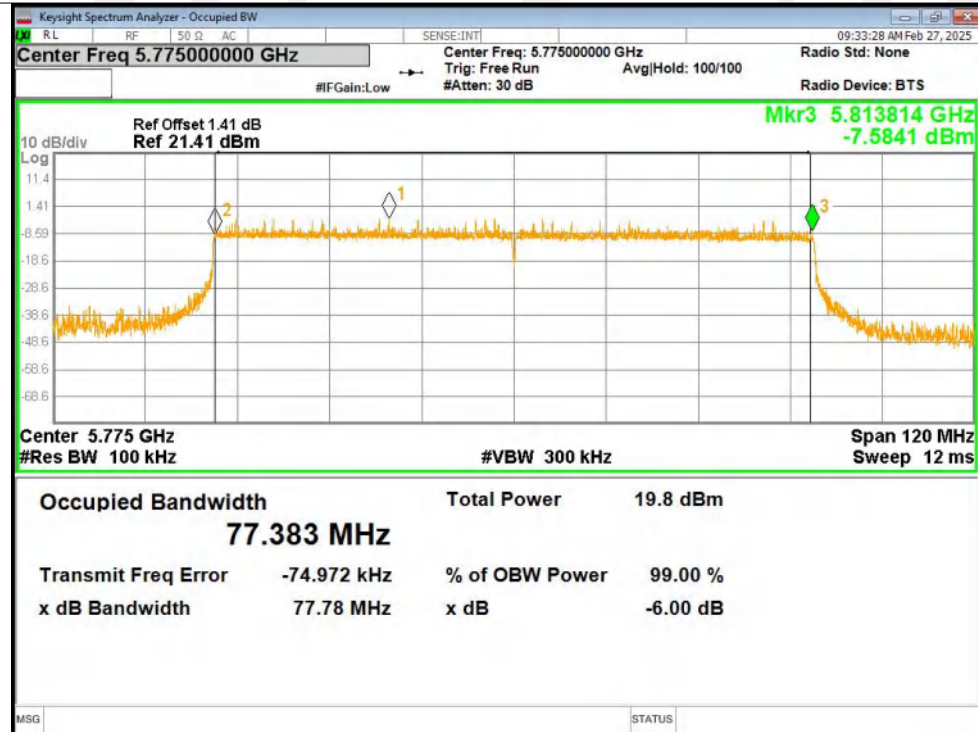-6dB Bandwidth NVNT ax20 5825MHz Ant1**-6dB Bandwidth NVNT ax40 5755MHz Ant1**


-6dB Bandwidth NVNT ax40 5795MHz Ant1**-6dB Bandwidth NVNT ax80 5775MHz Ant1**

5.8GWIFI (5725MHz-5850 MHz)


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.756
NVNT	a	5785	Ant1	16.756
NVNT	a	5825	Ant1	16.75
NVNT	n20	5745	Ant1	17.947
NVNT	n20	5785	Ant1	17.934
NVNT	n20	5825	Ant1	17.989
NVNT	n40	5755	Ant1	36.555
NVNT	n40	5795	Ant1	36.531
NVNT	ac20	5745	Ant1	17.965
NVNT	ac20	5785	Ant1	17.912
NVNT	ac20	5825	Ant1	17.951
NVNT	ac40	5755	Ant1	36.608
NVNT	ac40	5795	Ant1	36.568
NVNT	ac80	5775	Ant1	76.007
NVNT	ax20	5745	Ant1	19.092
NVNT	ax20	5785	Ant1	19.146
NVNT	ax20	5825	Ant1	19.116
NVNT	ax40	5755	Ant1	38.043
NVNT	ax40	5795	Ant1	37.993
NVNT	ax80	5775	Ant1	77.477

Test Graphs

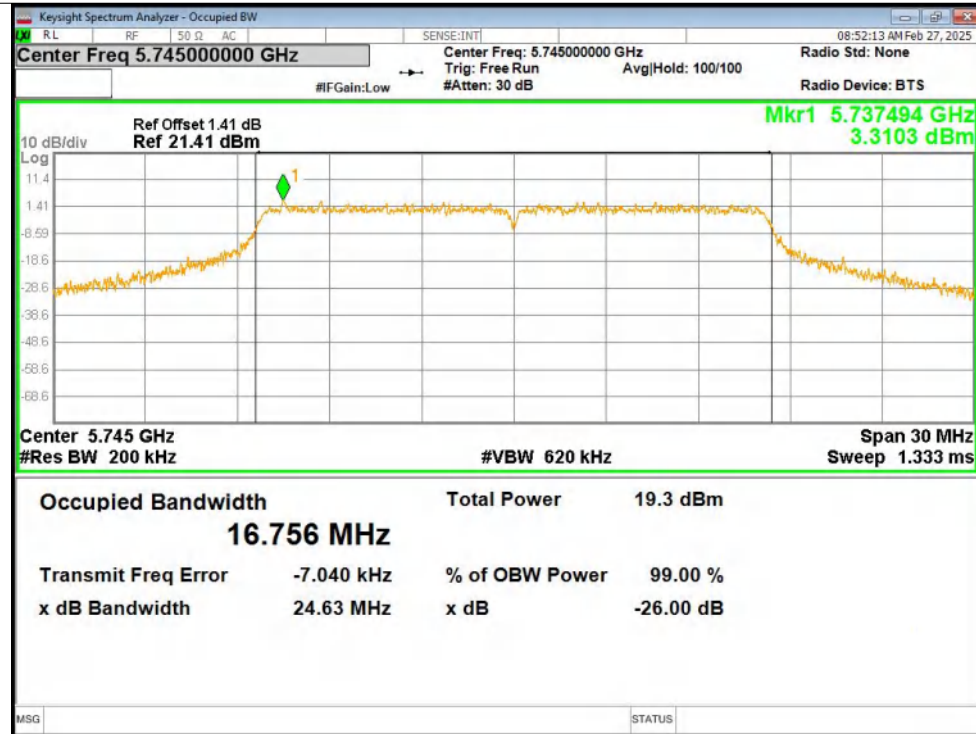
OBW NVNT a 5745MHz Ant1




OBW NVNT a 5785MHz Ant1

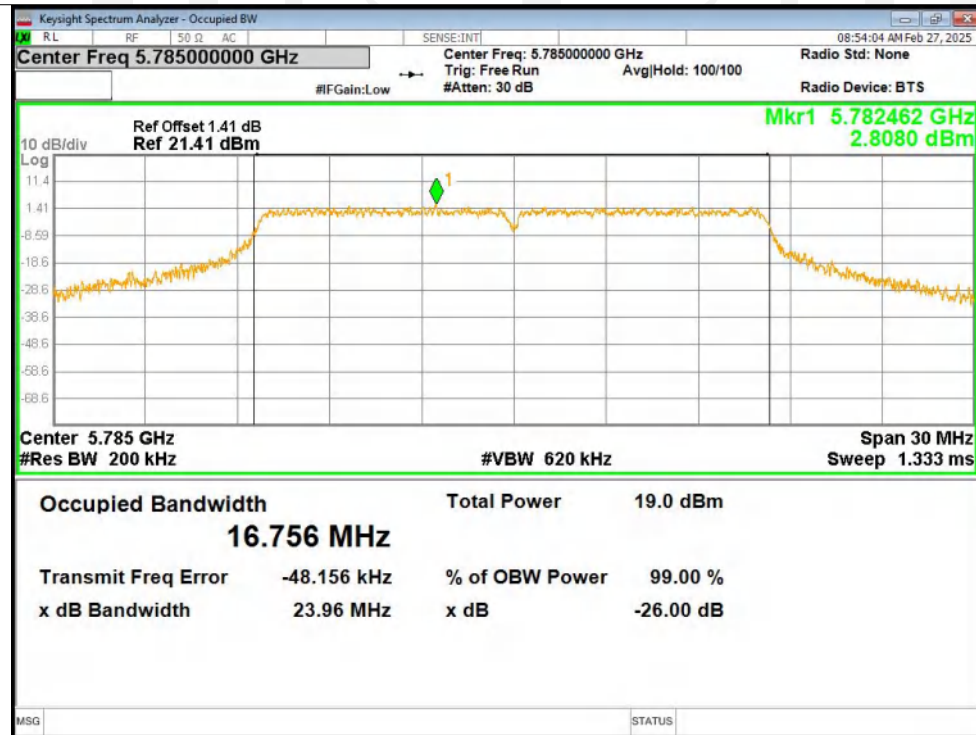


OBW NVNT a 5825MHz Ant1

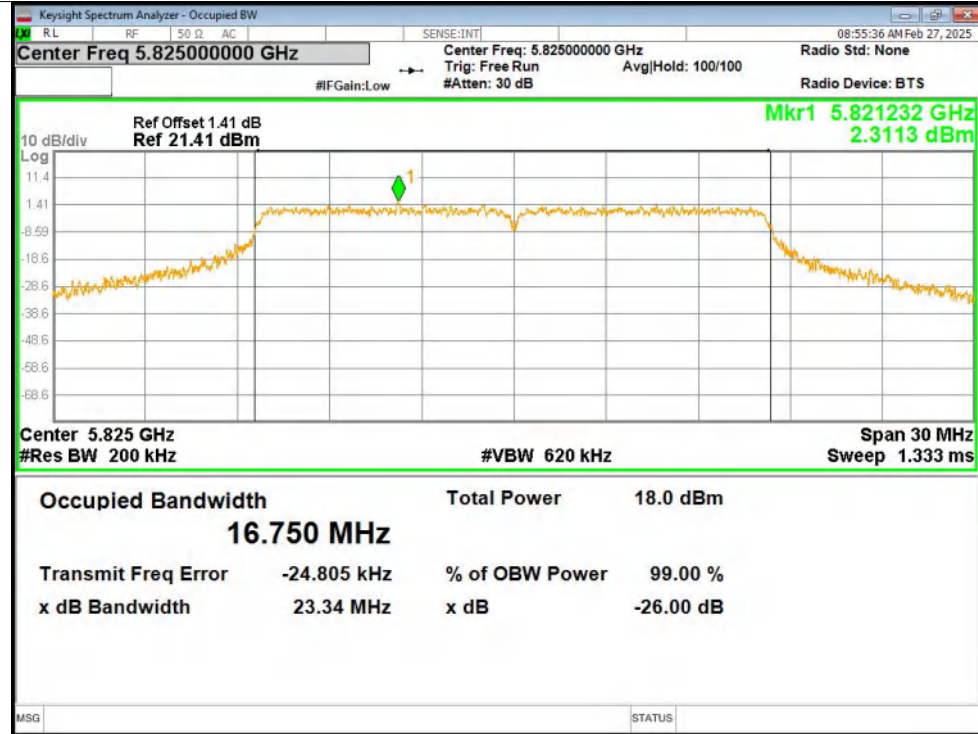


OBW NVNT n20 5745MHz Ant1

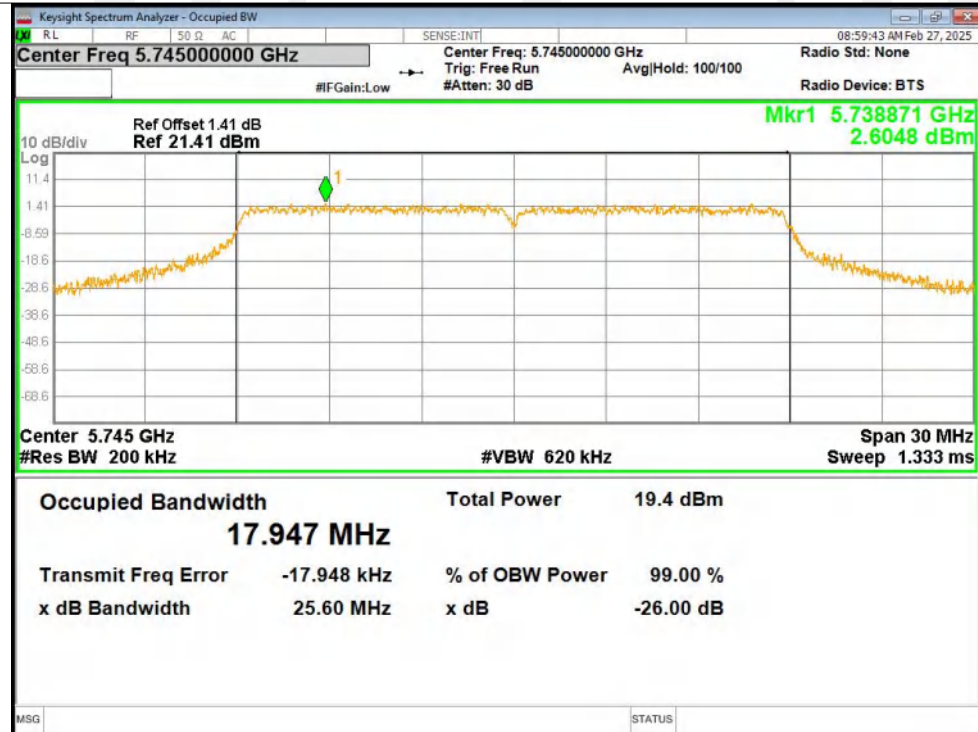


OBW NVNT n20 5785MHz Ant1

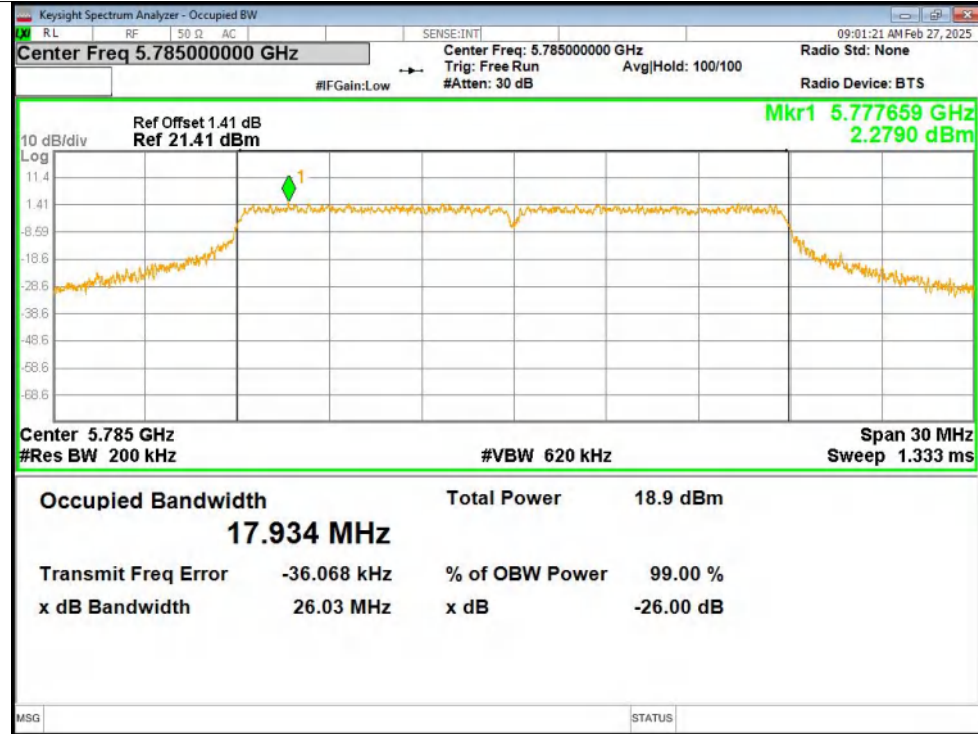

OBW NVNT n20 5825MHz Ant1

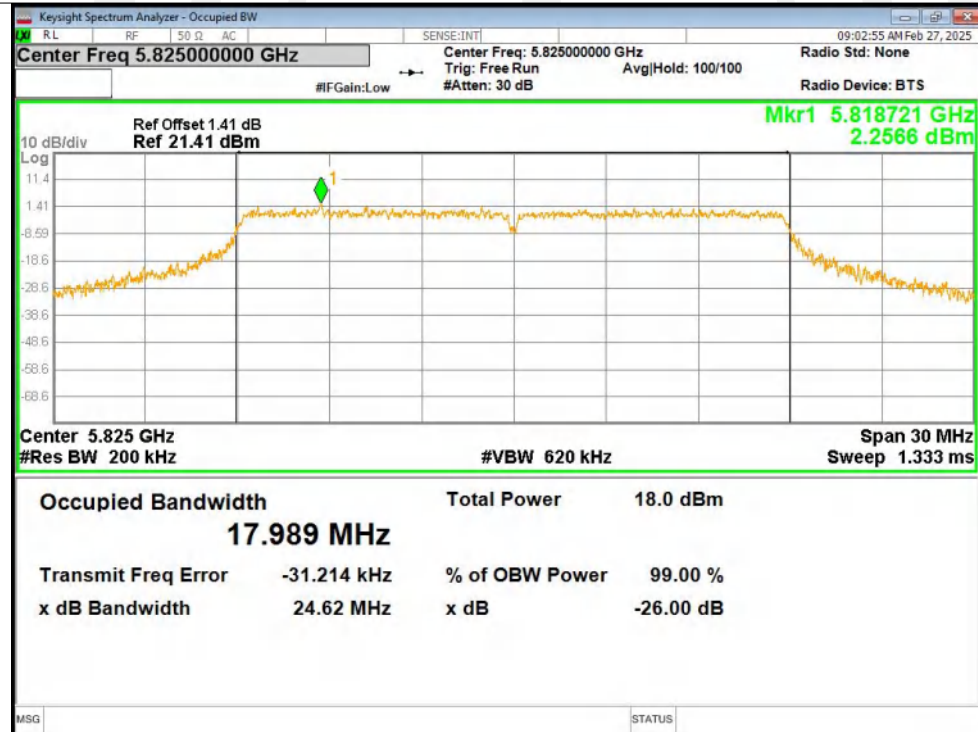

OBW NVNT n40 5755MHz Ant1

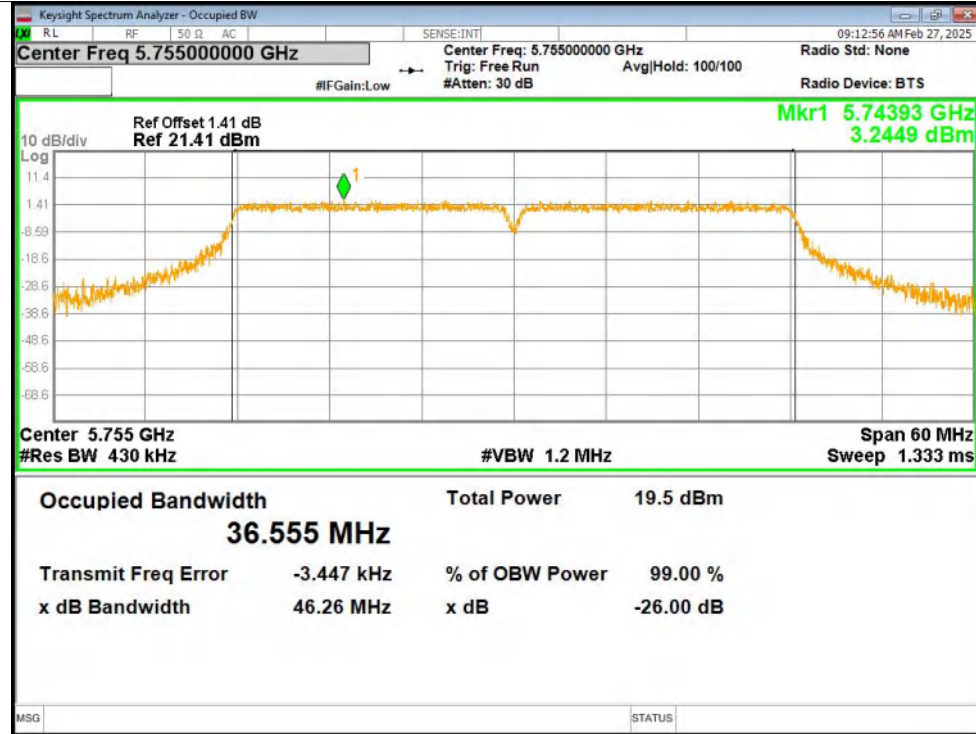

OBW NVNT n40 5795MHz Ant1

