

FCC RF TEST REPORT

No. 170501973SHA-001

Applicant : PACIFIC CYCLE INC.
4902 HAMMERSLEY RD, MADISION,WI 53711,
USA

Manufacturer : PINGHU YONGHUABABY CARRIER CO.,LTD
No.358 Yousheng Duan, Provincial Highway 01,
Dushan Harbor Town, Pinghu City, Zhejiang Province

Product Name : 6V Audi Spyder Gray With Remote & 6V Audi Spyder
White With Remote

Type/Model : KT1395MX, KT1396MX

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s) or specification:

47CFR Part 15 (2016): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Date of issue: June 30, 2017

Prepared by: 

Jesse Xu (*Project Engineer*)

Reviewed by: 

Daniel Zhao (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Service Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China

FCC Registration Number: 236597
IC Assigned Code: 2402B-1

Name of contact: Jonny Jing
Tel: 86 21 61278271
Fax: 86 21 54262353

Content

SUMMARY.....	1
1 GENERAL INFORMATION	4
1.1 Description of Client.....	4
1.2 Identification of the EUT	4
1.3 Technical Specification.....	5
2 TEST SPECIFICATIONS.....	6
2.1 Standards or specification	6
2.2 Mode of operation during the test.....	6
2.3 Test software list	6
2.4 Test peripherals list	6
2.5 Instrument list	7
2.6 Test Summary	8
3 RADIATED EMISSION	10
3.1 Test limit	10
3.2 Test Configuration	10
3.3 Test procedure and test setup	11
3.4 Test protocol	12
4 ASSIGNED BANDWIDTH (20dB BANDWIDTH).....	15
4.1 Limit.....	15
4.2 Test Configuration	15
4.3 Test procedure and test setup	15
4.4 Test protocol	16
5 POWER LINE CONDUCTED EMISSION	17
5.1 Limit.....	17
5.2 Test configuration	17
5.3 Test procedure and test set up	18
5.4 Test protocol	19

1 GENERAL INFORMATION

1.1 Description of Client

Applicant : PACIFIC CYCLE INC.
4902 HAMMERSLEY RD, MADISION,WI 53711,
USA

Name of contact : Ryan Shiroma

Tel : 608 268 8313

Fax : 608 268 8389

Email : rshiroma@pacific-cycle.com

Manufacturer : PINGHU WEIKESI CHILDREN TOYS CO., LTD.
No.358 Yousheng Duan, Provincial Highway 01, Dushan
Harbor Town, Pinghu City, Zhejiang Province

1.2 Identification of the EUT

Product Name : 6V Audi Spyder Gray With Remote & 6V Audi Spyder
White With Remote

Type/model : KT1395MX, KT1396MX

FCC ID : 2ABGL-002

1.3 Technical Specification

Operation Frequency : 2422MHz
Band

Type of Modulation : GFSK

Description of EUT : KT1395MX, KT1396MX are the same on schematic diagram, PCB layout and electronic construction, also have same electric parameters except its appearance. We listed the worst data in this report.

Antenna Designation : PCB antenna, 0 dBi peak gain

Rating : Battery 3.0V

Category of EUT : Class B

EUT type : ☒ Table top
☐ Floor standing

Software applied : None

Sample received date : 2017-05-18

Date of test : 2017-05-18

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2016)
ANSI C63.10 (2013)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded. Compare with the test results that X axis is the worst case.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description

2.5 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2016-10-21	2017-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2016-10-20	2017-10-19
A.M.N.	ESH2-Z5	R&S	EC 3119	2017-1-9	2018-1-8
A.M.N.	ENV 216	R&S	EC 3393	2016-8-9	2017-8-8
A.M.N.	ENV 216	R&S	EC 3394	2016-8-9	2017-8-8
A.M.N.	ENV4200	R&S	EC3558	2016-8-9	2017-8-8
Ultra-broadband antenna	HL 562	R&S	EC 3046-1	2017-5-16	2018-5-14
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2017-4-28	2018-4-27
Horn antenna	HF 906	R&S	EC 3049	2017-4-28	2018-4-27
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2017-4-12	2018-4-11
Semi-anechoic chamber	-	Albatross project	EC 3048	2017-5-12	2018-5-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2017-1-8	2018-1-7
Power sensor / Power meter	N1911A/N1921A	Agilent	EC4318	2017-04-12	2018-04-11
Horn antenna	HAP18-26W	TOYO	EC 4792-3	2017-07-10	2020-07-09

2.6 Test Summary

This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	RESULT
Radiated emission	15.249 & 15.205	Pass
Assigned bandwidth (20dB bandwidth)	15.215(c)	Pass
Occupied bandwidth	N/A	Tested
Power line conducted emission	15.207	N/A
Antenna requirement	15.203	Pass

Notes: 1: N/A =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST ITEM	MEASUREMENT UNCERTAINTY
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Radiated emission

Test result: Pass


3.1 Test limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
☐ 902 - 928	94	54
☒ 2400 - 2483.5	94	54
☐ 5725 - 5875	94	54
☐ 24000 - 24250	108	68

The radiated emissions which fall outside allocated band (2400-2483.5MHz), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

3.2 Test Configuration

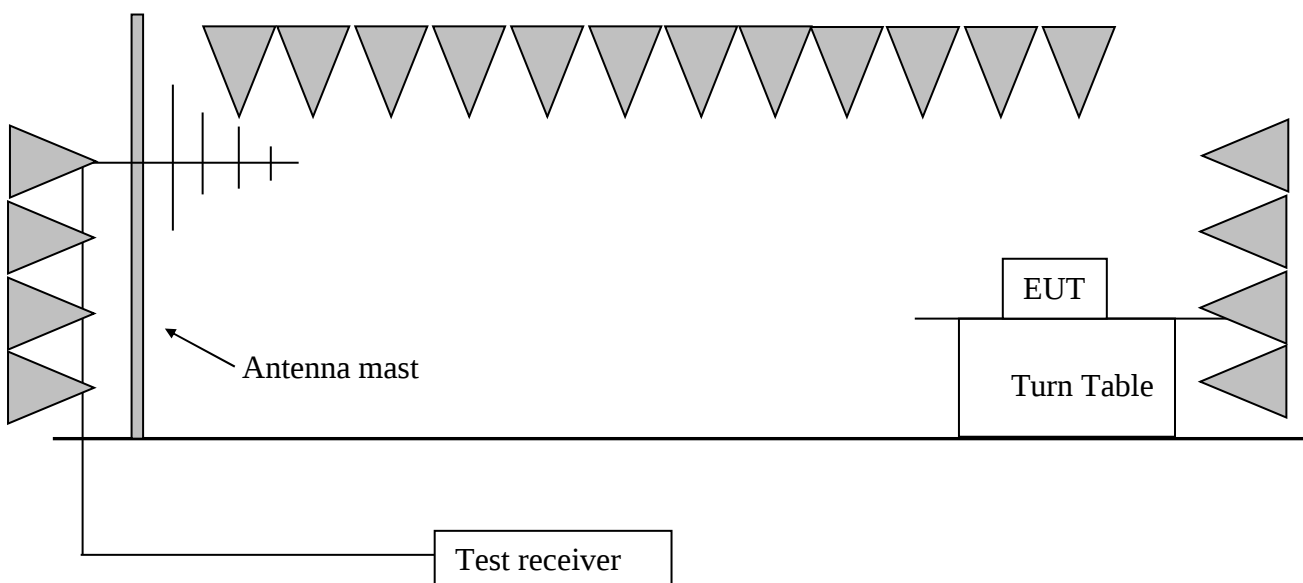

3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:


RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

3.4 Test protocol


Temperature : 23 °C
Relative Humidity : 56 %

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Horizontal

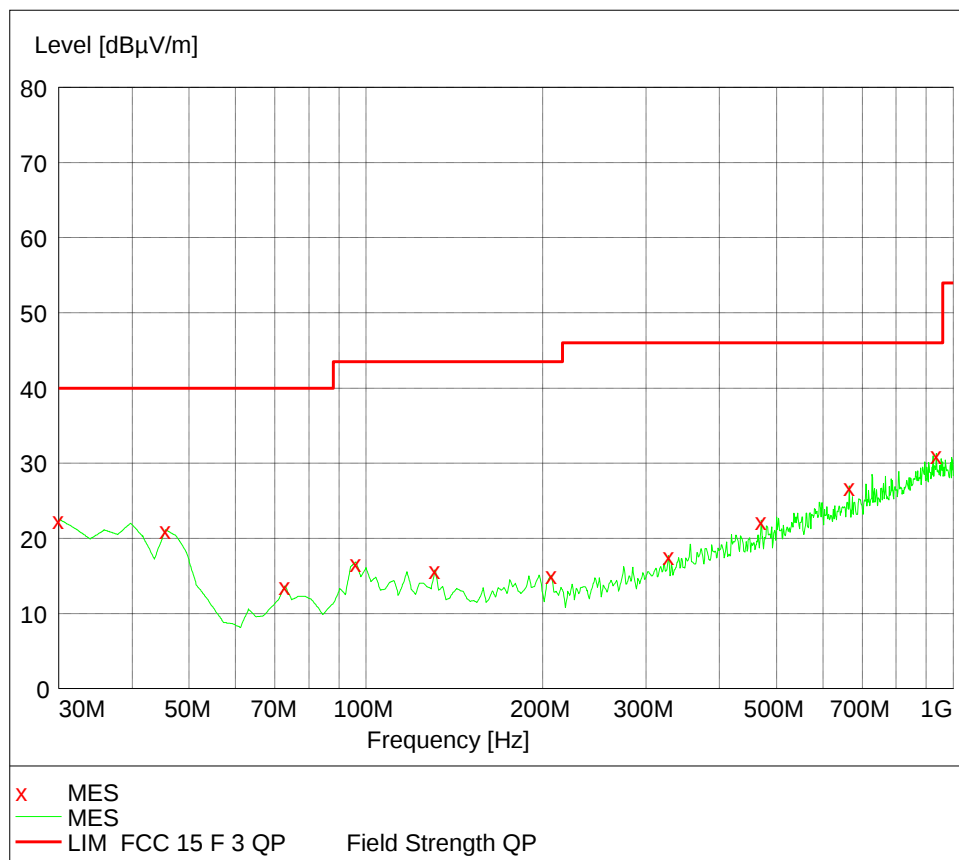

Vertical

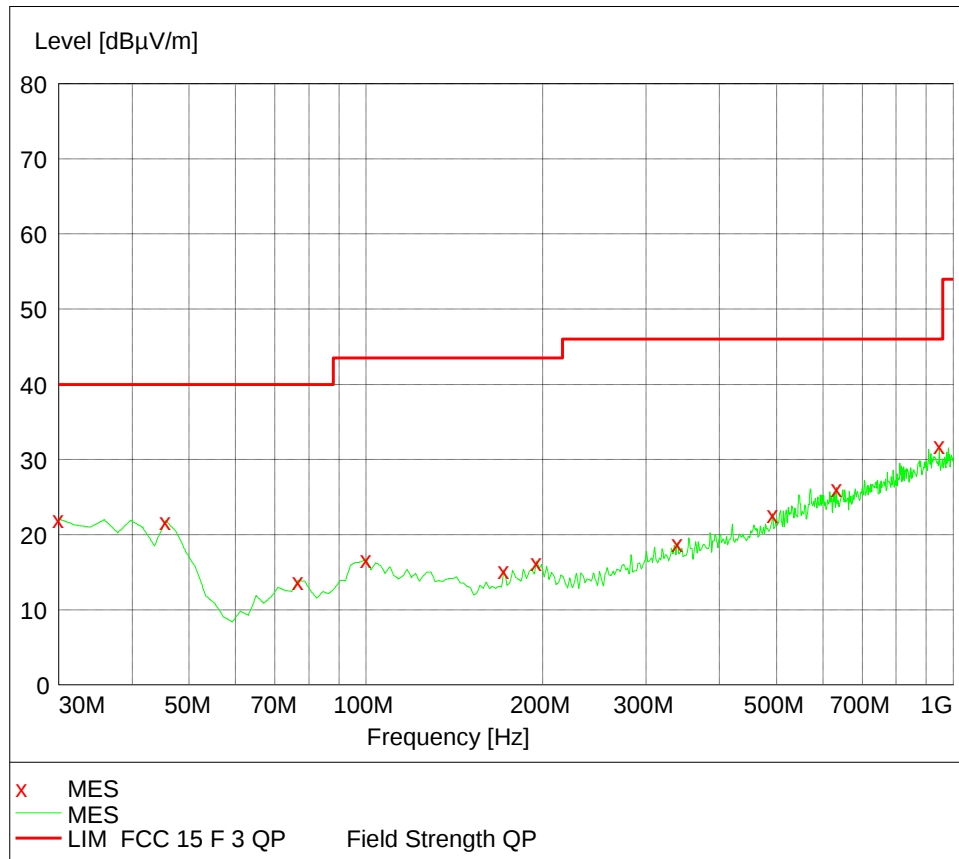

Test result below 1GHz:

Channel	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
2422MHz	H	197.00	*	13.18	43.00	*	QP
	H	307.48	*	24.79	46.00	*	QP
	H	960.00	*	19.86	46.00	*	QP
	V	30.00	*	21.40	40.00	*	QP
	V	55.15	*	12.70	40.00	*	QP
	V	68.95	*	10.22	40.00	*	QP
	V	197.76	*	9.30	43.50	*	QP
	V	480.00	*	20.10	46.00	*	QP
	V	960.00	*	20.70	46.00	*	QP
Remark: If the margin higher than 20dB, it would be marked as *.							

Note: The worst test result (30MHz to 1GHz) of 2450MHz chosen to list in the report as representative.

Test result above 1GHz:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Detector
2422MHz	H	2422.08	30.70	73.21	94.00	20.79	PK
	H	2389.02	30.30	36.26	54.00	17.74	PK
	H	2484.55	30.80	36.25	54.00	17.75	PK
	V	2422.02	30.70	75.33	94.00	18.67	PK
	V	2389.02	30.30	37.19	54.00	16.81	PK
	V	2484.51	30.80	36.78	54.00	17.22	PK

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed);
2. Corrected Reading = Original Receiver Reading + Correct Factor;
3. Margin = Limit – Corrected Reading;
4. If the PK Corrected reading is lower than AV limit, the AV test can be elided;

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV,
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m,
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m,
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m,
Then Margin = 54 -10.20 = 43.80dBuV/m.


4 Assigned bandwidth (20dB bandwidth)

Test result: Pass

4.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

4.2 Test Configuration

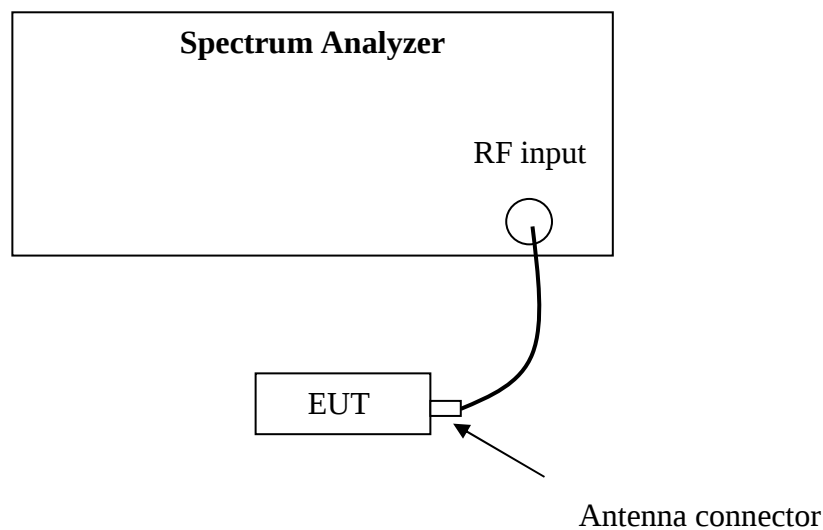


4.3 Test procedure and test setup

The 20dB Bandwidth per FCC § 15.215(c) is measured using the Spectrum Analyzer. Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW > RBW, Sweep = auto, Detector = peak, Trace = max hold.

4.4 Test protocol

Temperature : 24 °C
Relative Humidity : 56 %

20dB bandwidth (MHz)	permitted band (MHz)	Result
	2400 ~ 2483.5	Pass

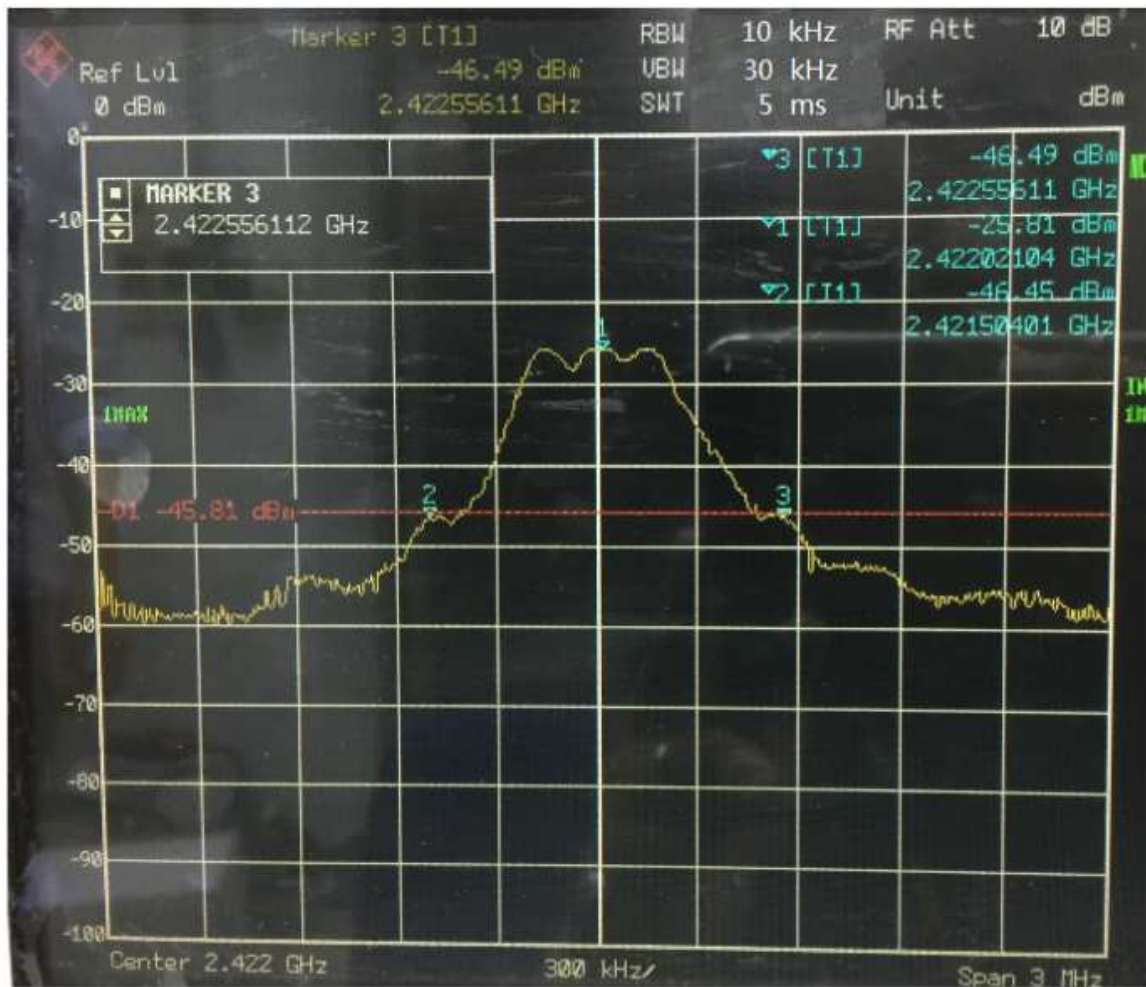


5 Power line conducted emission

Test result: N/A

5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

5.2 Test configuration

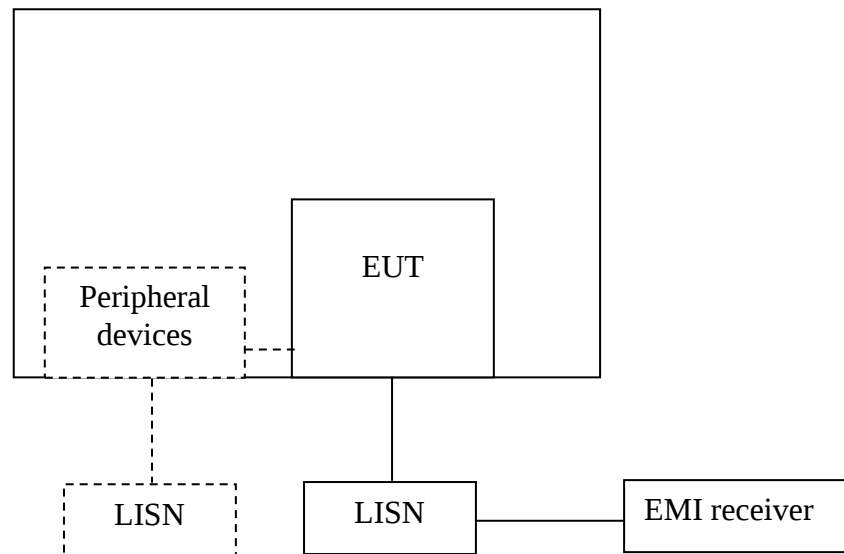

- ☐ For table top equipment, wooden support is 0.8m height table
- ☐ For floor standing equipment, wooden support is 0.1m height rack.

5.3 Test procedure and test set up

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

5.4 Test protocol

Temperature : °C

Relative Humidity : %

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.15						
0.663						
1.167						
1.719						
2.229						
25.863						
Remark: If the margin higher than 10dB, it would be marked as *.						

N-line

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.15						
0.663						
1.167						
1.719						
2.229						
25.863						
Remark: If the margin higher than 10dB, it would be marked as *.						

6 Antenna requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section