



TEST REPORT

For

Applicant : Shenzhen GGMM Industrial Company Limited

Address : Room110, F518 Idea Land, Baoyuan Road, Baoan District, Shenzhen, China, Shenzhen, China

Product Name : M4

Model Name : WS-401

Brand Name : GGMM

FCC ID : 2ABH6-GGMMWS-401

IC ID : 12623A-GGMMWS-401

Report No. : MTE/SAL/A15020211

Date of Issue : Feb. 05, 2015

Issued by : Most Technology Service Co., Ltd.

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

Tel : 86-755-8602 6850

Fax : 86-755-2698 0464

The report consists 59 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1 Product Information	5
2.2 Objective	5
2.3 Test Standards and Results.....	6
2.4 Environmental Conditions.....	6
3. TEST METHODOLOGY	7
3.1 TEST FACILITY	7
3.2 GENERAL TEST PROCEDURES	7
4. SETUP OF EQUIPMENT UNDER TEST	8
4.1 SETUP CONFIGURATION OF EUT	8
4.2 SUPPORT EQUIPMENT	8
4.3 TEST EQUIPMENT LIST	9
5. 47 CFR Part 15 C Requirements.....	10
5.1 RF EXPOSURE	10
5.1.1 Applicable Standard	10
5.1.2 Measurement Result	10
5.2 ANTENNA REQUIREMENT	11
5.2.1 Applicable Standard	11
5.2.2 Evaluation Criteria	11
5.2.3 Result: Compliance.....	11
5.3 AC Power Line Conducted Emission	12
5.3.1 Requirement	12
5.3.2 Block Diagram of Test Setup.....	12
5.3.3 Test procedure	12
5.3.4 Test Result	12
5.4 Radiated Emission	15
5.4.1 Requirement	15
5.4.2 Test Configuration	15
5.4.3 Test Procedure:.....	16
5.4.4 Test Result	17
5.5 Conducted Peak Output Power.....	26
5.5.1 Requirement.....	26
5.5.2 Block Diagram of Test Setup.....	26
5.5.3 Test Procedure.....	26
5.5.4 Test Result	26
5.6 6dB Emission Bandwidth	27
5.6.1 Test Requirement.....	27
5.6.2 Block Diagram of Test Setup.....	27
5.6.3 Test Procedure.....	27
5.6.4 Test Result	27
5.7 POWER SPECTRAL DENSITY	33
5.7.1 Applicable Standard	33

5.7.2 Block Diagram of Test Setup.....	33
5.7.3 Test Procedure	33
5.7.4 Test Result	33
5.8 Band Edge and Conducted Spurious Emissions	39
5.8.1 Test Requirement.....	39
5.8.2 Test Procedure.....	39
5.8.3 Test Result	39
5.9 Restricted Frequency Bands	43
5.9.1 Test Requirement.....	43
5.9.2 Test Configuration	43
5.9.3 Test Procedure:.....	43
5.9.4 Test Result	43

VERIFICATION OF CONFORMITY

Equipment Under Test: M4
Brand Name: GGMM
Model Number: WS-401
FCC ID: 2ABH6-GGMMWS-401
IC ID: 12623A-GGMMWS-401
Applicant: Shenzhen GGMM Industrial Company Limited
 Room110, F518 Idea Land, Baoyuan Road, BaoanDistrict,
 Shenzhen, China Shenzhen, China
Manufacturer: Shenzhen GGMM Industrial Company Limited
 Room110, F518 Idea Land, Baoyuan Road, BaoanDistrict,
 Shenzhen, China Shenzhen, China
Technical Standards: 47 CFR Part 15 Subpart C
File Number: MTE/SAL/A15020211
Date of test: Feb. 01-04, 2015
Deviation: None
Condition of Test Sample: Normal
Test Result: PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

Sophia Liu

Feb. 01-04, 2015

Review by (+ signature):

Henry Chen

Feb. 05, 2015

Approved by (+ signature):

Yvette Zhou(Manager)

Feb. 05, 2015

2. GENERAL INFORMATION

2.1 Product Information

Product	M4
Brand Name	N/A
Model Number	WS-401
Series Model Name:	WS-401-XX
Series Model Difference description:	“XX” means the different color.
Power Supply	DC 18V
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Modulation Type:	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM 802.11n Standard-20 MHz Channel mode: OFDM 802.11n Standard-40 MHz Channel mode: OFDM
Channel Number	802.11b/g/n(20MHz): 11 802.11n(40MHz): 7
Antenna Type	Internal PCB Antenna, -2.0dBi
Temperature Range	-20°C ~ +55°C

NOTE:

1. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

The objective of the report is to perform tests according to RSS-210 Issue 8, RSS-102 Issue 4 and RSS-Gen Issue 4 for the EUT IC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

2.3 Test Standards and Results

No.	Section	Test Items	Result	Date of Test
1	FCC 15.247 (i)	RF EXPOSURE	PASS	2015-02-04
2	FCC 15.203	Antenna Requirement	PASS	2015-02-04
3	FCC15.207 (a)	AC Power Line Conducted Emission	PASS	2015-02-04
4	FCC15.209, 15.247(d)	Radiated Emission	PASS	2015-02-04
5	FCC15.247(b)(3)	Conducted Peak Output Power	PASS	2015-02-04
6	FCC15.247(a)(2)	6dB Emission Bandwidth	PASS	2015-02-04
7	FCC15.247(e)	Power Spectral Density	PASS	2015-02-04
8	FCC15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	2015-02-04
9	FCC15.247(d)	Restricted Frequency Bands	PASS	2015-02-04

Note: 1. The test result judgment is decided by the limit of measurement standard
 2. The information of measurement uncertainty is available upon the customer's request.

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST METHODOLOGY

3.1 TEST FACILITY

Test Site:	Most Technology Service Co., Ltd
Location:	No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China
Description:	There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014 and CISPR 16 requirements. The FCC Registration Number is 490827 . The IC Registration Number is 7103A-1 .
Site Filing:	The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
Instrument	All measuring equipment is in accord with ANSI C63.4:2014 and CISPR 16
Tolerance:	requirements that meet industry regulatory agency and accreditation agency requirement.
Ground Plane:	Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2014.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2014, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

4. SETUP OF EQUIPMENT UNDER TEST

4.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

4.2 SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Notebook	Lenovo	E425	R9-KZL4B	1.6m Un-shielded	1.8m Un-shielded

Remark:

All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.3 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator Interval
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2014/03/10	1 Year
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2014/03/10	1 Year
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2014/03/07	1 Year
4	Terminator	Hubersuhner	50Ω	No.1	2014/03/07	1 Year
5	RF Cable	SchwarzBeck	N/A	No.1	2014/03/07	1 Year
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2014/03/10	1 Year
7	Bilog Antenna	Sunol	JB3	A121206	2014/03/14	1 Year
8	Horn Antenna	SCHWARZBECK	BBHA9120D	756	2014/03/14	1 Year
9	Horn Antenna	Penn Engineering	9034	8376	2014/03/14	1 Year
10	Cable	Resenberger	N/A	NO.1	2014/03/07	1 Year
11	Cable	SchwarzBeck	N/A	NO.2	2014/03/07	1 Year
12	Cable	SchwarzBeck	N/A	NO.3	2014/03/07	1 Year
13	DC Power Filter	DuoJi	DL2×30B	N/A	2014/03/07	1 Year
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2014/03/07	1 Year
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2014/03/07	1 Year
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2014/03/10	1 Year
17	Absorbing Clamp	Luthi	MDS21	3635	2014/03/12	1 Year
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2014/03/07	1 Year
19	AC Power Source	Kikusui	AC40MA	LM003232	2014/03/10	1 Year
20	Test Analyzer	Kikusui	KHA1000	LM003720	2014/03/10	1 Year
21	Line Impedence Network	Kikusui	LIN40MA-PCR-L	LM002352	2014/03/10	1 Year
22	ESD Tester	Kikusui	KES4021	LM003537	2014/03/07	1 Year
23	EMC PRO System	EM Test	UCS-500-M4	V0648102026	2014/03/10	1 Year
24	Signal Generator	IFR	2032	203002/100	2014/03/10	1 Year
25	Amplifier	A&R	150W1000	301584	2014/03/14	1 Year
26	CDN	FCC	FCC-801-M2-25	47	2014/03/10	1 Year
27	CDN	FCC	FCC-801-M3-25	107	2014/03/10	1 Year
28	EM Injection Clamp	FCC	F-203I-23mm	403	2014/03/10	1 Year
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2014/03/10	1 Year
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2014/03/10	1 Year
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2014/03/10	1 Year
32	Telecommunication Test Equipment	R&S	CMU200	N/A	2014/03/07	1 Year
33	8 Loop Antenna	ARA	PLA-1030/B	1029	2015/01/10	1 Year

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15 C Requirements

5.1 RF EXPOSURE

5.1.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.1.2 Measurement Result

The maximum conducted output power = 7.86 dBm (6.10 mW) at 2437 MHz $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$

$$= 0.61/5 \cdot (\sqrt{2.437}) = 1.873 < 3.0$$

So the stand-alone SAR evaluation is not necessary.

5.2 ANTENNA REQUIREMENT

5.2.1 Applicable Standard

According to FCC § 15.203 , An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2.2 Evaluation Criteria

(a) Antenna must be permanently attached to the unit.

(b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, Installer shall be responsible for verifying that the correct antenna is employed with the unit.

5.2.3 Result: Compliance.

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is -2.0 dBi, fulfill the requirement of this section.

5.3 AC Power Line Conducted Emission

5.3.1 Requirement


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the and 150 kHz-30 MHz, shall not exceed the limits in the following table:

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

****Note:** 1. the lower limit shall apply at the band edges.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.3.2 Block Diagram of Test Setup

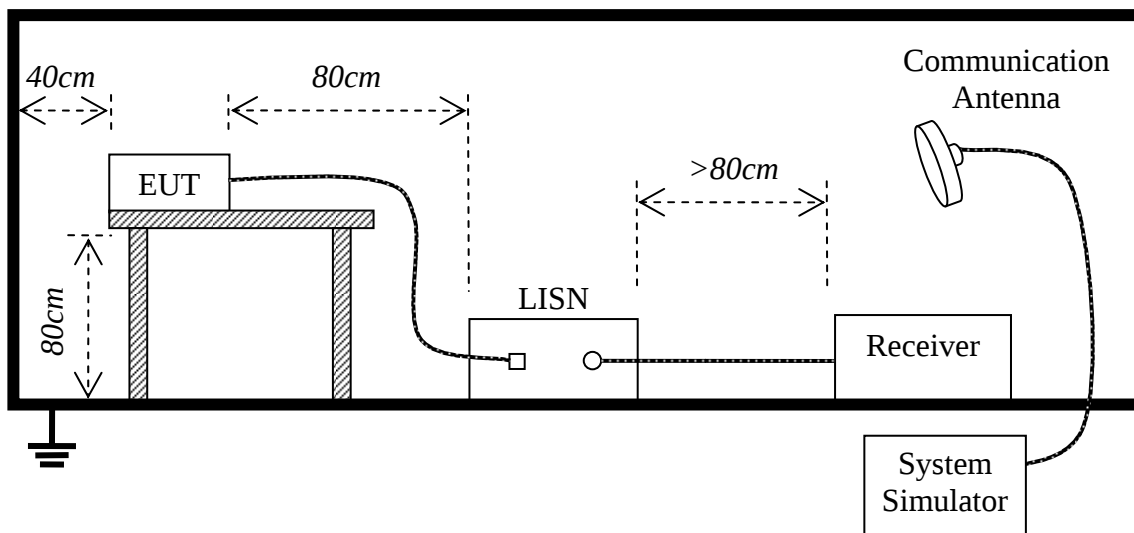

5.3.3 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.
4. The bandwidth of test receiver (ESCI) set at 9 KHz.
5. All data was recorded in the Quasi-peak and average detection mode.

5.3.4 Test Result

Pass


Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages.



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Conducted Emission Measurement

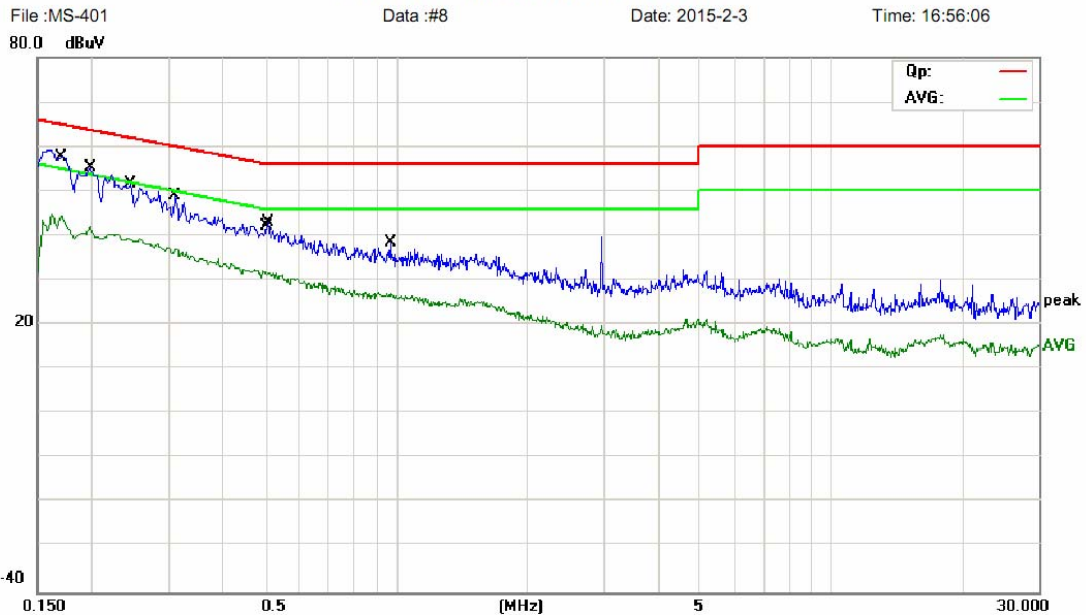

Site MOST #1

Phase: **L1**

Temperature: 25.3

Limit: FCC Part15 C Class B QP

Power: DC 18V by Adapter

Humidity: 52.8 %

EUT: M4

M/N: WS-401

Mode: 802.11b Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1700	47.41	10.20	57.61	64.96	-7.35	QP	
2		0.1700	34.39	10.20	44.59	54.96	-10.37	AVG	
3		0.1980	43.49	11.88	55.37	63.69	-8.32	QP	
4		0.1980	30.26	11.88	42.14	53.69	-11.55	AVG	
5		0.2430	27.62	11.71	39.33	51.99	-12.66	AVG	
6		0.2460	40.09	11.69	51.78	61.89	-10.11	QP	
7		0.3100	37.72	11.27	48.99	59.97	-10.98	QP	
8		0.3100	25.79	11.27	37.06	49.97	-12.91	AVG	
9		0.4994	21.72	10.00	31.72	46.01	-14.29	AVG	
10		0.5100	32.83	10.00	42.83	56.00	-13.17	QP	
11		0.9700	28.53	10.00	38.53	56.00	-17.47	QP	
12		0.9700	16.95	10.00	26.95	46.00	-19.05	AVG	

*:Maximum data x:Over limit !:over margin

Engineer Signature: Robert



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350


Conducted Emission Measurement

File: WS-401

Data: #9

Date: 2015-2-3

Time: 9:51:24

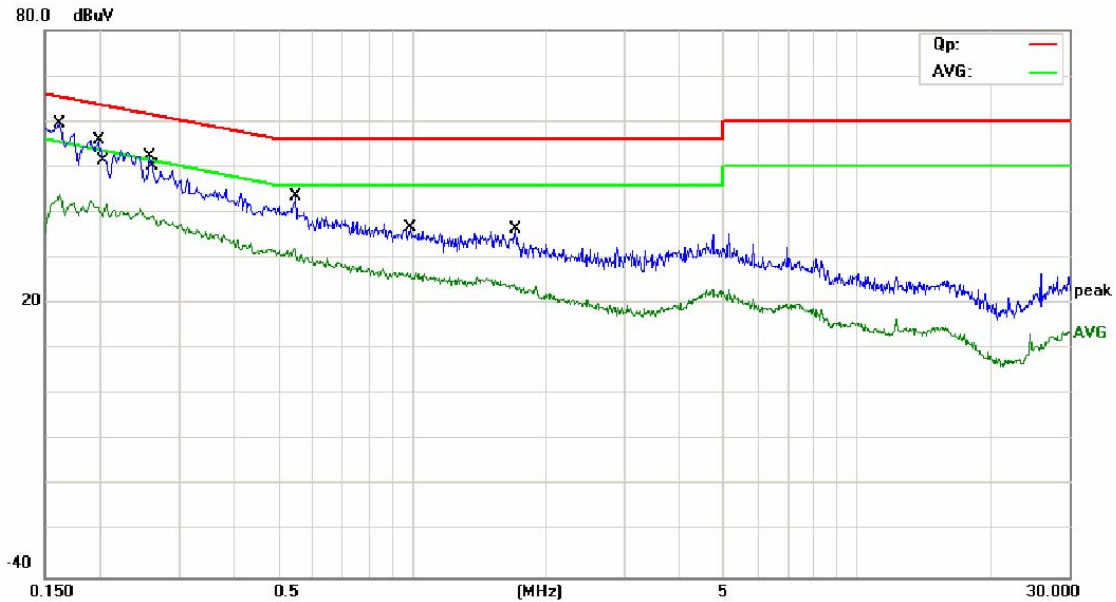

Site: MOST #1

Phase: **N**

Temperature: 25.3

Limit: FCC Part15 C Class B QP

Power: DC 18V by Adapter

Humidity: 52.8 %

EUT: M4

M/N: WS-401

Mode: 802.11b Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1620	49.69	9.72	59.41	65.36	-5.95	QP	
2		0.1620	34.08	9.72	43.80	55.36	-11.56	AVG	
3		0.1980	43.83	11.88	55.71	63.69	-7.98	QP	
4		0.2060	29.74	11.96	41.70	53.37	-11.67	AVG	
5		0.2580	40.58	11.61	52.19	61.50	-9.31	QP	
6		0.2620	27.70	11.59	39.29	51.37	-12.08	AVG	
7		0.5460	22.05	10.00	32.05	46.00	-13.95	AVG	
8		0.5500	33.51	10.00	43.51	56.00	-12.49	QP	
9		0.9820	16.75	10.00	26.75	46.00	-19.25	AVG	
10		0.9980	26.70	10.00	36.70	56.00	-19.30	QP	
11		1.7060	15.04	9.29	24.33	46.00	-21.67	AVG	
12		1.7100	27.01	9.29	36.30	56.00	-19.70	QP	

*:Maximum data x:Over limit !:over margin

Engineer Signature: Robert

5.4 Radiated Emission

5.4.1 Requirement

According to FCC section 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Test Distance (m)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
0.009 - 0.490	2400/F(kHz)	300	
0.490 - 1.705	24000/F(kHz)	30	
1.705-30	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


2. For above 1000MHz, limit field strength of harmonics: 54dB $\mu\text{V/m}$ @3m (AV) and 74dB $\mu\text{V/m}$ @3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-Gen Cl.8.10, also should comply with the radiated emission limits specified in RSS-Gen Cl.8.9 (above table)


5.4.2 Test Configuration

Test Setup:


1) For radiated emissions from 9kHz to 30MHz

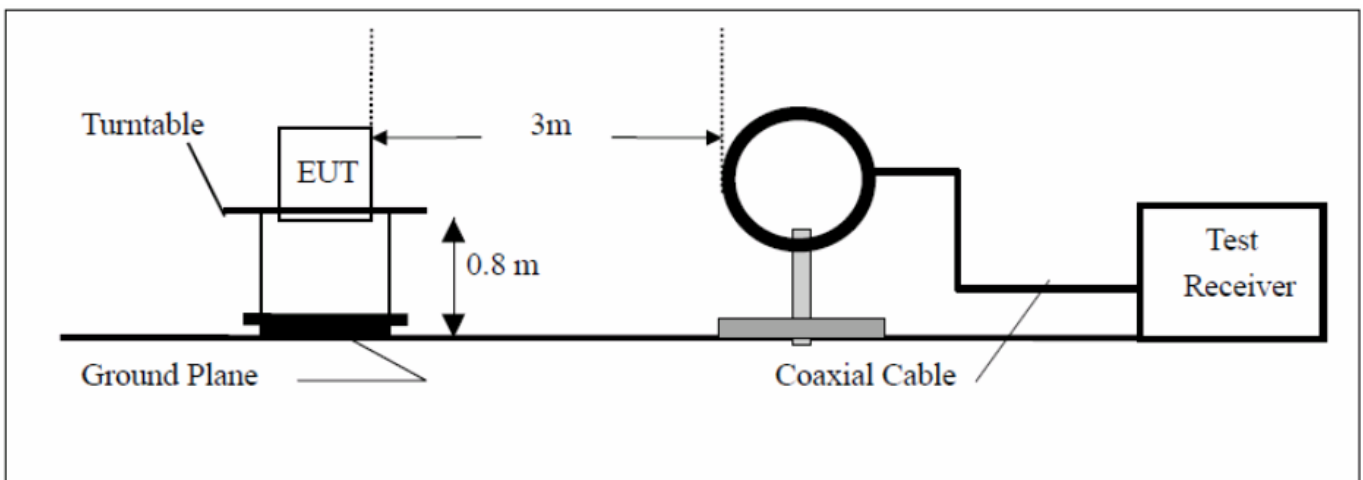

2) For radiated emissions from 30MHz to 1GHz

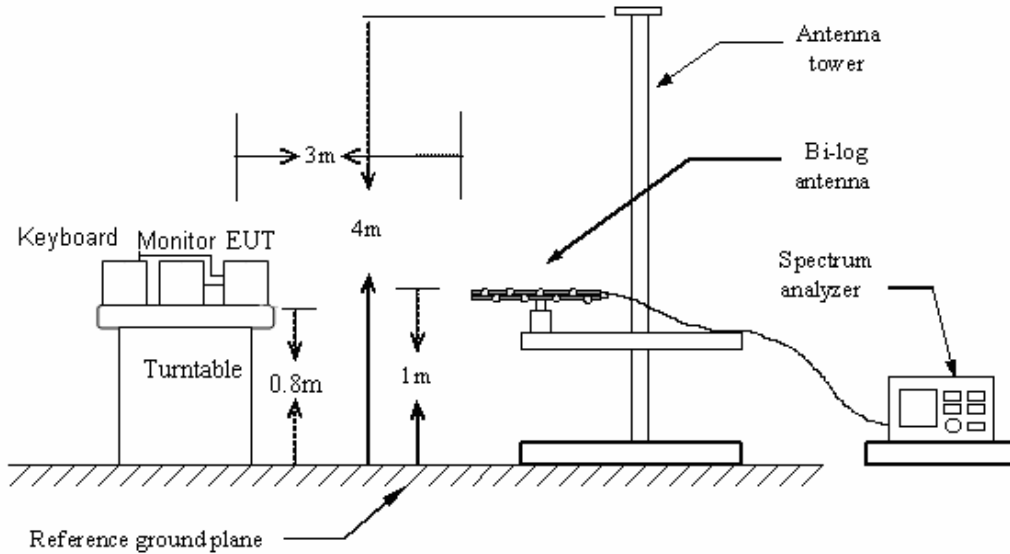

3) For radiated emissions above 1GHz

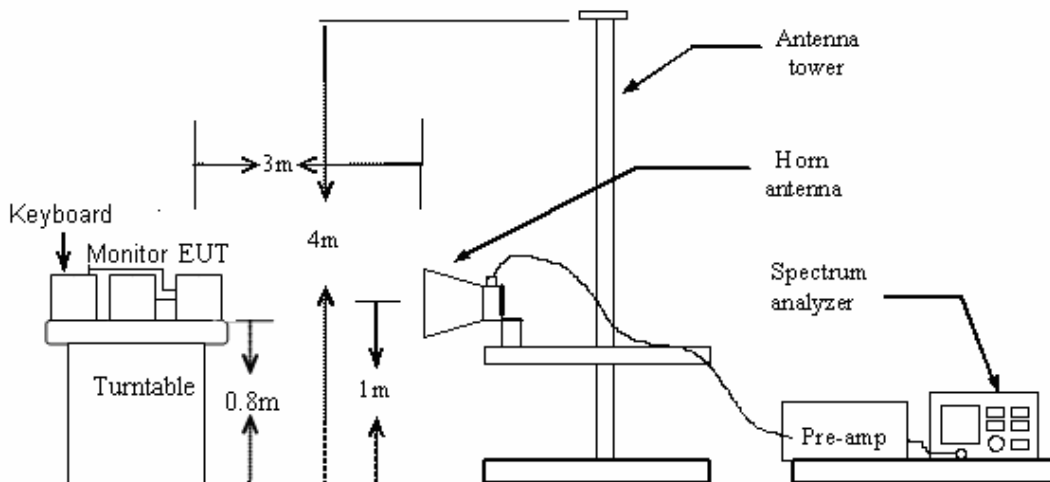**5.4.3 Test Procedure:**

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

5. Set the spectrum analyzer in the following setting as:

Below 1GHz: PEAK: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO QP: RBW=120 kHz / Sweep=AUTO

Above 1GHz: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

5.4.4 Test Result

Pass

Remark:

1. During the test, pre-scan the 802.11b, 802.11g, 802.11n(20M), 802.11n(40M) modulation, and found the 802.11b modulation which it is worse case in above 1GHz and the 802.11b Low channel modulation which it is worse case in below 1GHz.

2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Please refer the following pages.

Below 1GHz:

Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File: WS-401

Data: #12

Date: 2015-2-4

Time: 12:53:01

70.0 dBuV/m



Site Chamber #1

Polarization: **Horizontal**

Temperature: 25.4

Limit: FCC Part15 C 3M Radiation

Power: DC 18V by Adapter

Humidity: 53 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b Mode (Ch1)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		109.0286	16.41	15.82	32.23	43.50	-11.27	QP		
2		133.6187	18.78	17.52	36.30	43.50	-7.20	QP		
3		221.3920	20.54	16.33	36.87	46.00	-9.13	QP		
4	*	283.9791	23.40	19.40	42.80	46.00	-3.20	QP		
5	!	356.6758	24.50	18.13	42.63	46.00	-3.37	QP		
6		677.5797	14.46	24.50	38.96	46.00	-7.04	QP		

*:Maximum data x:Over limit !:over margin

Engineer Signature:

John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #13

Date: 2015-2-4

Time: 13:00:04

70.0 dBuV/m

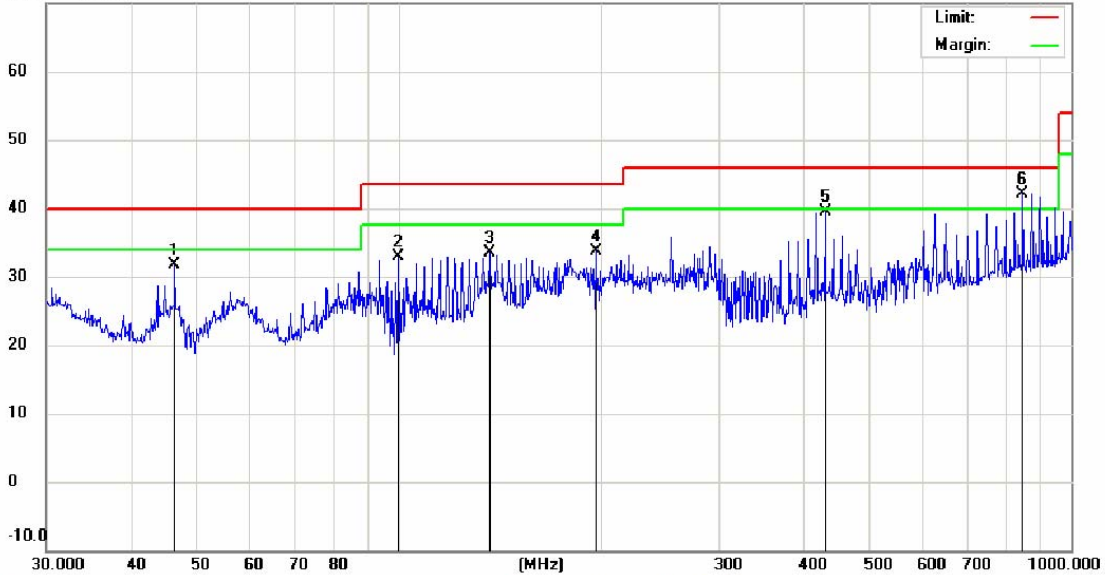

Site Chamber #1

Polarization: **Vertical**

Temperature: 25.4

Limit: FCC Part15 C 3M Radiation

Power: DC 18V by Adapter

Humidity: 53 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b Mode (Ch1)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		46.5030	19.34	12.29	31.63	40.00	-8.37	QP		
2		99.8777	19.77	13.18	32.95	43.50	-10.55	QP		
3		136.4598	16.22	17.37	33.59	43.50	-9.91	QP		
4		196.5098	16.66	17.13	33.79	43.50	-9.71	QP		
5		431.0314	19.14	20.30	39.44	46.00	-6.56	QP		
6	*	848.0563	15.08	27.10	42.18	46.00	-3.82	QP		

*:Maximum data x:Over limit !:over margin


Engineer Signature:

John

Above 1GHz



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guanlan Shengzhen
Tel: 0755-86026850 Fax: 0755-26013350

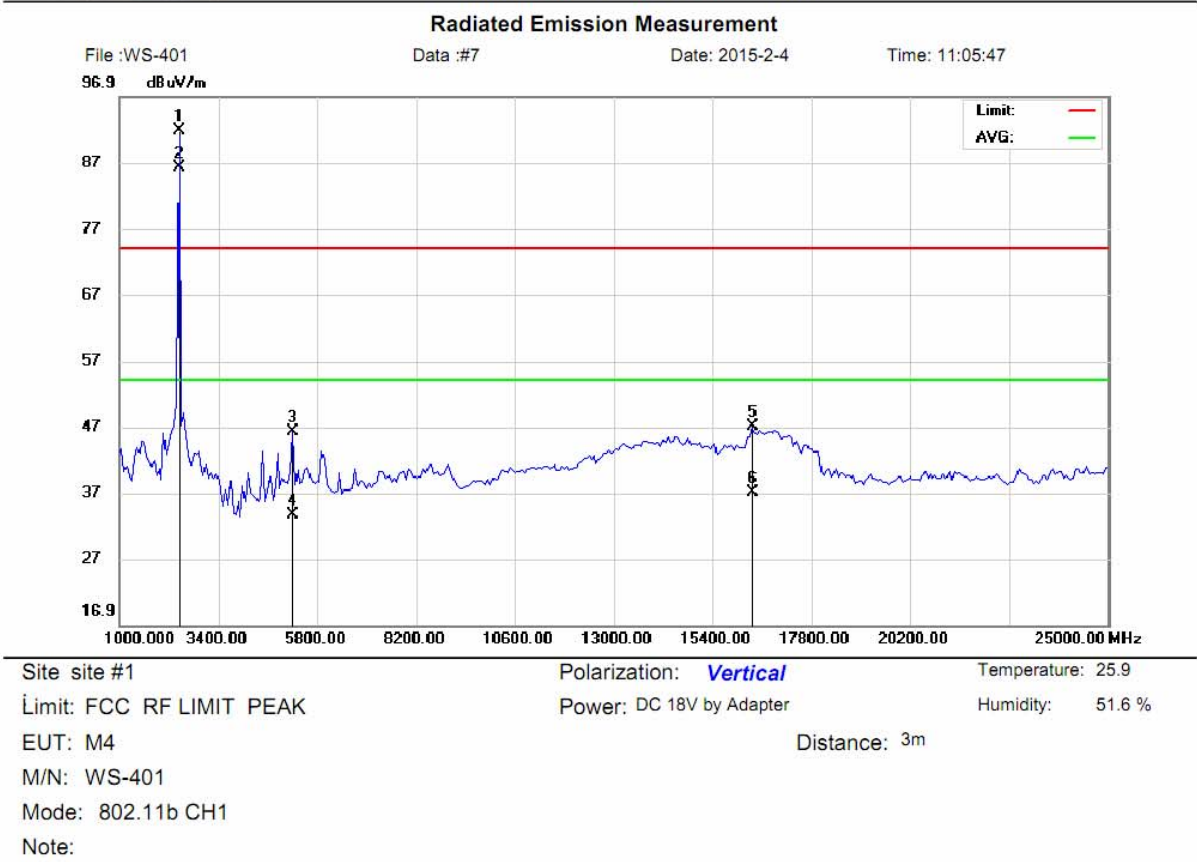

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	2413.400	100.20	-8.41	91.79	74.00	17.79	peak		
2	*	2413.400	94.53	-8.41	86.12	54.00	32.12	AVG		
3		5196.800	50.69	-4.48	46.21	74.00	-27.79	peak		
4		5196.800	38.13	-4.48	33.65	54.00	-20.35	AVG		
5		16360.00	42.51	4.49	47.00	74.00	-27.00	peak		
6		16360.00	32.54	4.49	37.03	54.00	-16.97	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Qianjiang, Shenzhen
 Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File : WS-401

Data : #8

Date: 2015-2-4

Time: 11:16:48

96.9 dBuV/m



Site site #1

Polarization: **Horizontal**

Temperature: 25.9

Limit: FCC RF LIMIT PEAK

Power: DC 18V by Adapter

Humidity: 51.6 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b CH1

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2410.600	100.00	-8.41	91.59	74.00	17.59	peak		
2	*	2410.600	95.92	-8.41	87.51	54.00	33.51	AVG		
3		4823.300	51.60	-5.92	45.68	74.00	-28.32	peak		
4		4823.300	42.69	-5.92	36.77	54.00	-17.23	AVG		
5		17020.00	40.23	6.82	47.05	74.00	-26.95	peak		
6		17020.00	31.92	6.82	38.74	54.00	-15.26	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature:

John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Qianjiang, Shenzhen
 Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File : WS-401

Data : #9

Date: 2015-2-4

Time: 11:26:57

96.9 dBuV/m



Site site #1

Polarization: **Horizontal**

Temperature: 25.9

Limit: FCC RF LIMIT PEAK

Power: DC 18V by Adapter

Humidity: 51.6 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b CH6

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2438.500	99.46	-8.37	91.09	74.00	17.09	peak		
2	*	2438.500	96.43	-8.37	88.06	54.00	34.06	AVG		
3		4874.000	51.17	-5.31	45.86	74.00	-28.14	peak		
4		4874.000	49.39	-5.31	44.08	54.00	-9.92	AVG		
5		16780.00	40.53	6.20	46.73	74.00	-27.27	peak		
6		16780.00	32.01	6.20	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature:

John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Guangzhou, China
 Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File : WS-401

Data : #10

Date: 2015-2-4

Time: 11:41:00

96.9 dBuV/m



Site site #1

Polarization: **Vertical**

Temperature: 25.9

Limit: FCC RF LIMIT PEAK

Power: DC 18V by Adapter

Humidity: 51.6 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b CH6

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2438.450	101.30	-8.37	92.93	74.00	18.93	peak		
2		4874.000	54.83	-5.31	49.52	74.00	-24.48	peak		
3		4874.000	53.72	-5.31	48.41	54.00	-5.59	AVG		
4		16420.00	41.91	4.83	46.74	74.00	-27.26	peak		
5		16420.00	32.50	4.83	37.33	54.00	-16.67	AVG		
6	*	2438.450	97.52	-8.37	89.15	54.00	35.15	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature:

John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Qianjiang Shenzhen
 Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File : WS-401

Data : #11

Date: 2015-2-4

Time: 11:55:23



Site site #1

Polarization: **Vertical**

Temperature: 25.9

Limit: FCC RF LIMIT PEAK

Power: DC 18V by Adapter

Humidity: 51.6 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b CH11

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	2463.400	102.60	-8.33	94.27	74.00	20.27	peak		
2	*	2463.400	98.44	-8.33	90.11	54.00	36.11	AVG		
3		4924.000	55.44	-4.71	50.73	74.00	-23.27	peak		
4		4924.000	47.50	-4.71	42.79	54.00	-11.21	AVG		
5		16840.00	40.10	6.40	46.50	74.00	-27.50	peak		
6		16840.00	29.82	6.40	36.22	54.00	-17.78	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
 Qianjiang, Shenzhen
 Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File : WS-401

Data : #12

Date: 2015-2-4

Time: 12:06:56

96.9 dBuV/m



Site site #1

Polarization: **Horizontal**

Temperature: 25.9

Limit: FCC RF LIMIT PEAK

Power: DC 18V by Adapter

Humidity: 51.6 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: 802.11b CH11

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2463.450	101.60	-8.33	93.27	74.00	19.27	peak		
2	*	2463.450	97.37	-8.33	89.04	54.00	35.04	AVG		
3		4923.000	53.16	-4.72	48.44	74.00	-25.56	peak		
4		4923.000	46.81	-4.72	42.09	54.00	-11.91	AVG		
5		16900.00	40.31	6.60	46.91	74.00	-27.09	peak		
6		16900.00	31.68	6.60	38.28	54.00	-15.72	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature:


John

5.5 Conducted Peak Output Power

5.5.1 Requirement

According to FCC section 15.247(b)(3), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725– 5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

5.5.2 Block Diagram of Test Setup

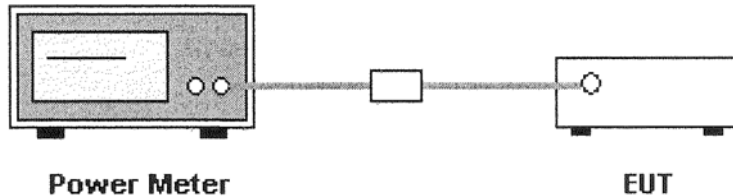

5.5.3 Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
3. Add a correction factor to the reading.

5.5.4 Test Result

Test Item:	Peak Output Power	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%

Mode	Channel	Frequency (MHz)	Peak Output Power(dBm)	Limit		Pass/Fail
				(mW)	(dBm)	
802.11b	Low	2412	6.79	1000	30	Pass
	Middle	2437	7.29	1000	30	Pass
	High	2462	7.42	1000	30	Pass
802.11g	Low	2412	6.76	1000	30	Pass
	Middle	2437	7.35	1000	30	Pass
	High	2462	7.48	1000	30	Pass
802.11n (20MHz)	Low	2412	7.62	1000	30	Pass
	Middle	2437	7.86	1000	30	Pass
	High	2462	7.84	1000	30	Pass
802.11n (40MHz)	Low	2422	7.23	1000	30	Pass
	Middle	2437	7.44	1000	30	Pass
	High	2452	7.25	1000	30	Pass

5.6 6dB Emission Bandwidth

5.6.1 Test Requirement

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.6.2 Block Diagram of Test Setup



5.6.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause 8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


5.6.4 Test Result

Pass


Test Item:	6dB Emission Bandwidth	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%

Mode	Channel	Frequency (MHz)	6dB Bandwidth(MHz)	Limit(KHz)
802.11b	Low	2412	9.639	≥ 500
	Middle	2437	9.634	≥ 500
	High	2462	9.969	≥ 500
802.11g	Low	2412	16.549	≥ 500
	Middle	2437	16.582	≥ 500
	High	2462	16.584	≥ 500
802.11n (20MHz)	Low	2412	17.813	≥ 500
	Middle	2437	17.765	≥ 500
	High	2462	17.795	≥ 500
802.11n (20MHz)	Low	2422	36.514	≥ 500
	Middle	2437	36.250	≥ 500
	High	2452	36.399	≥ 500


802.11 b Mode

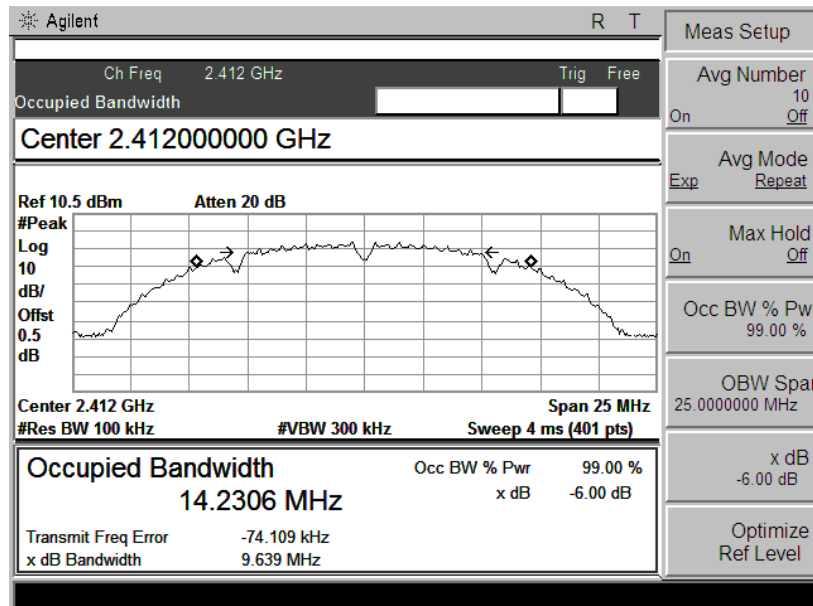

Ch 1

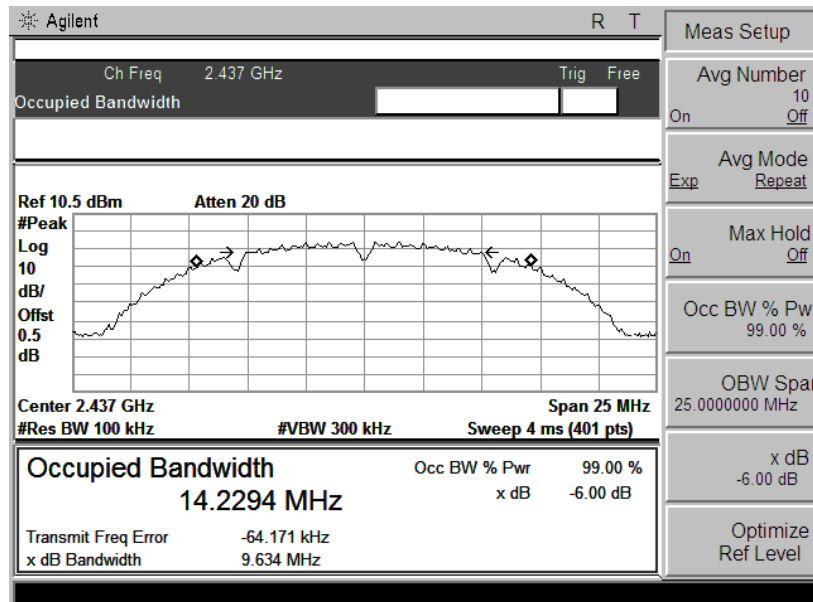


Ch 6

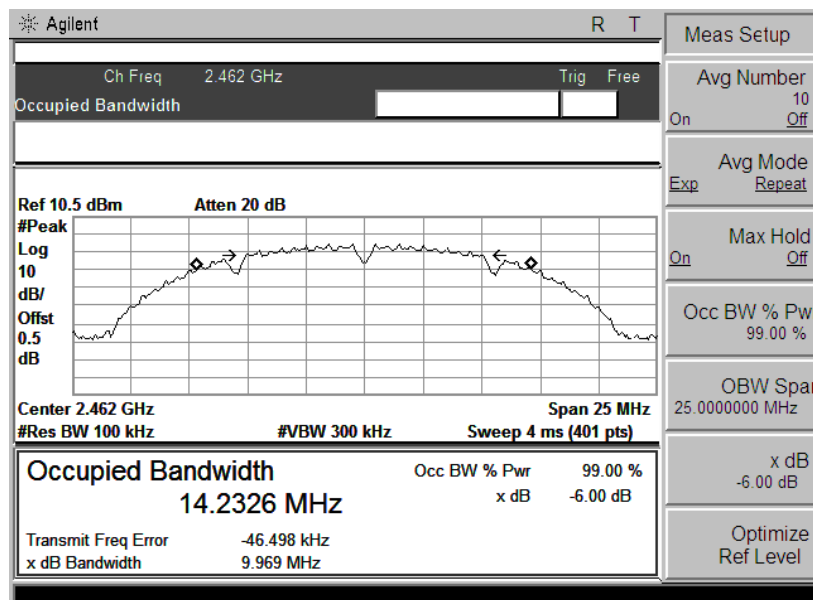


Ch 11


802.11 g Mode

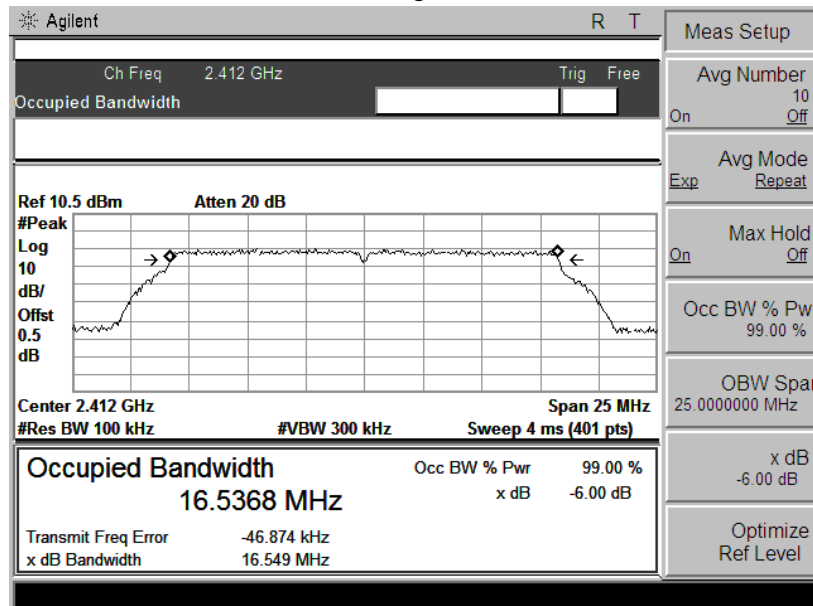

Ch 1

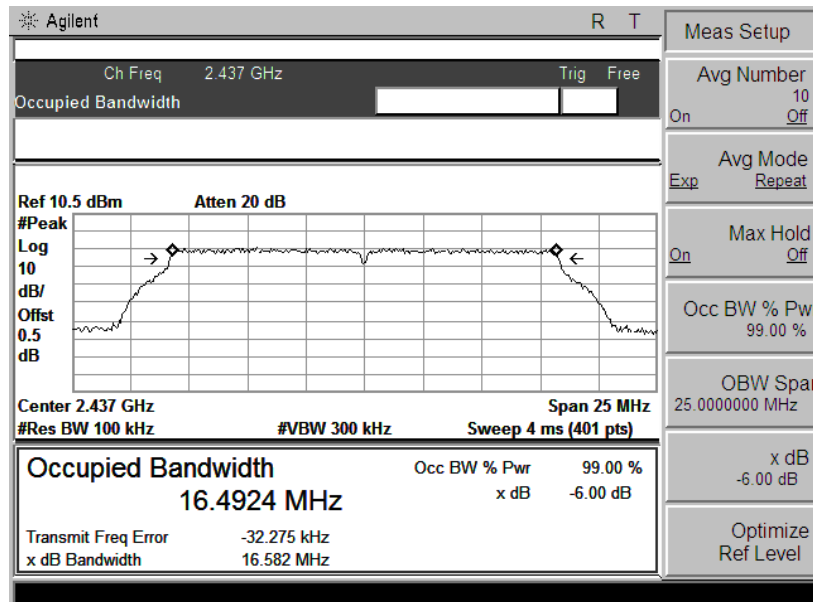


Ch 6

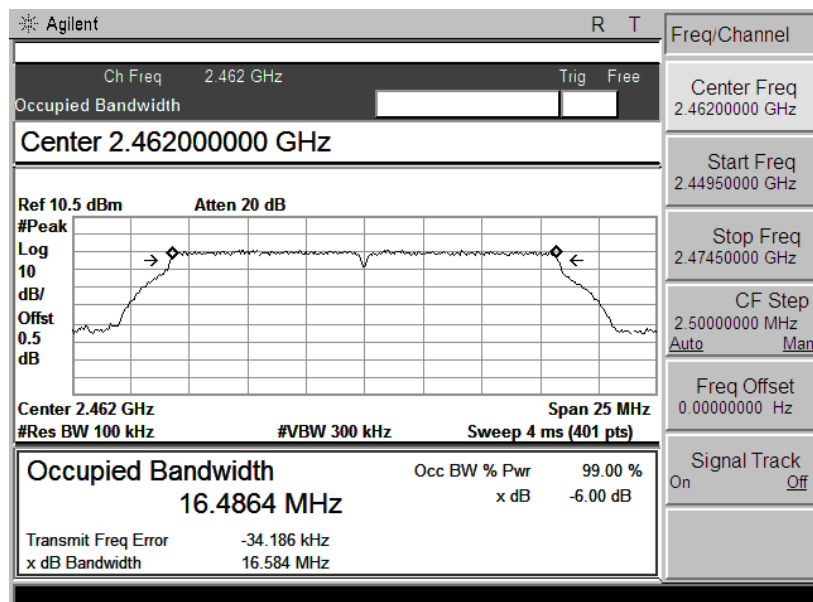


Ch 11


802.11 n(20M) Mode

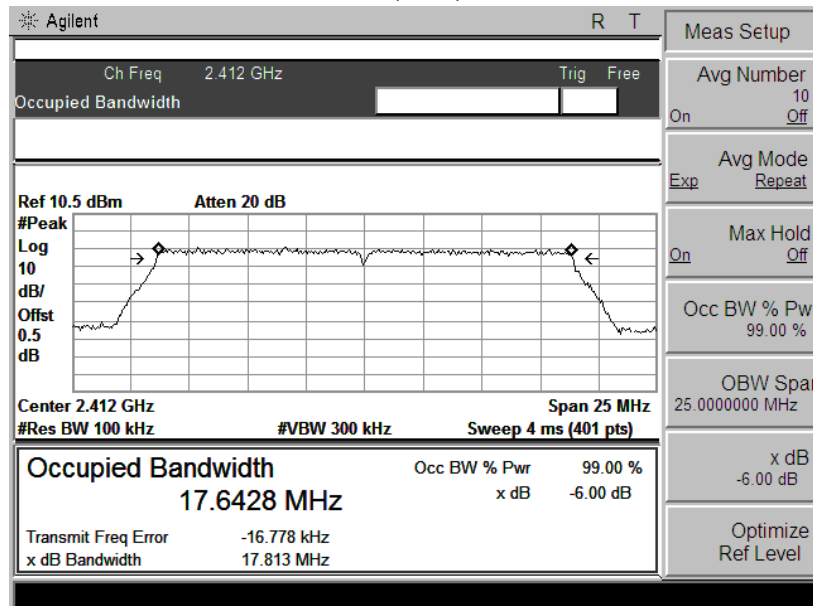

Ch 1

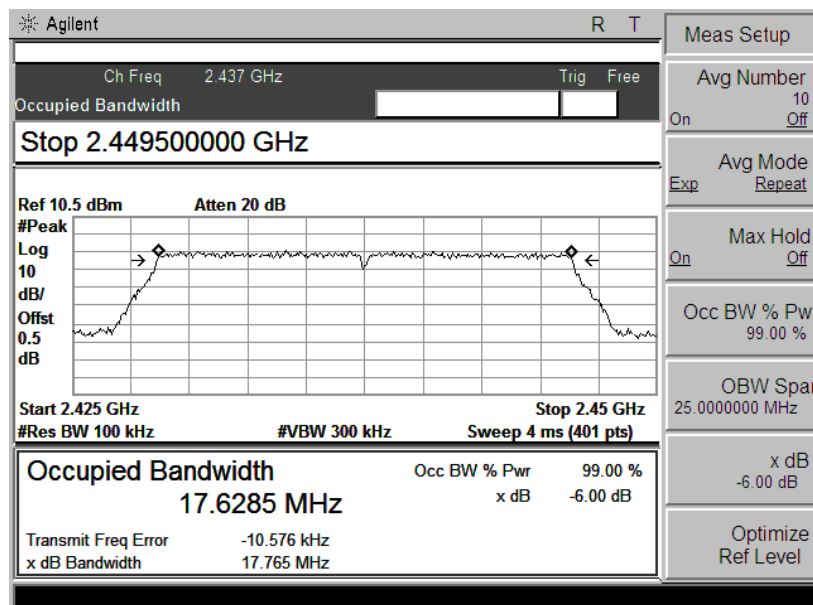


Ch 6

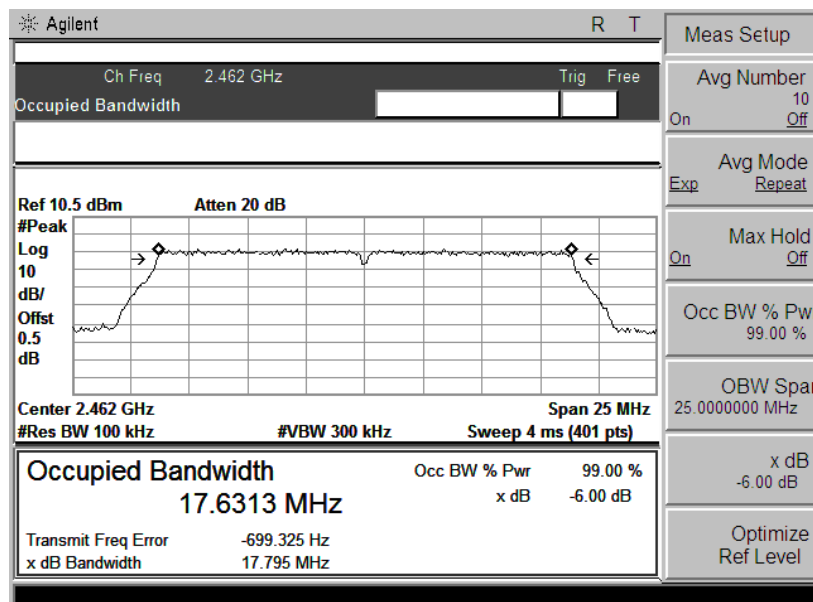


Ch 11


802.11 n(40M) Mode

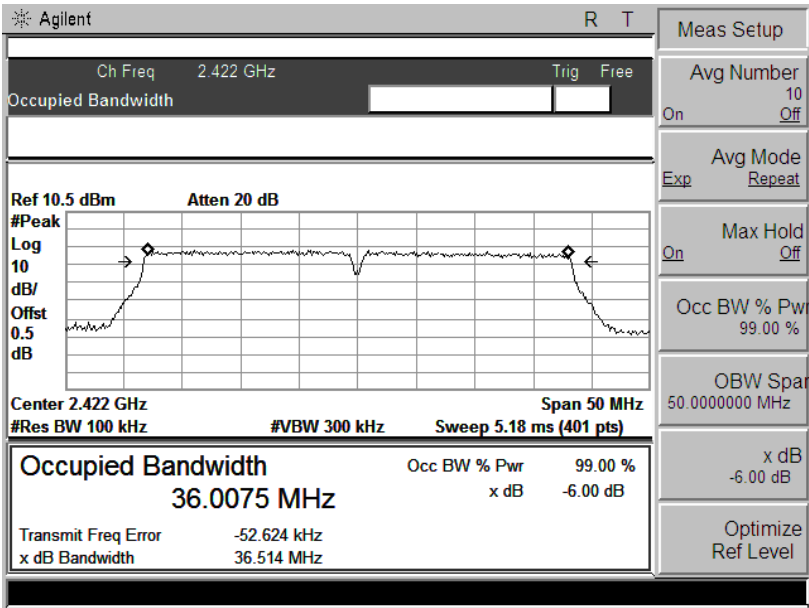

Ch 3

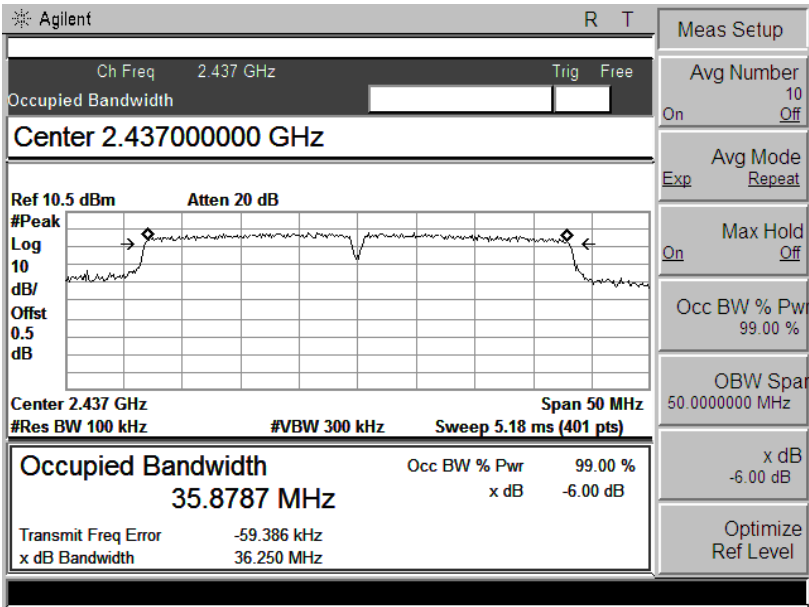

Ch 6

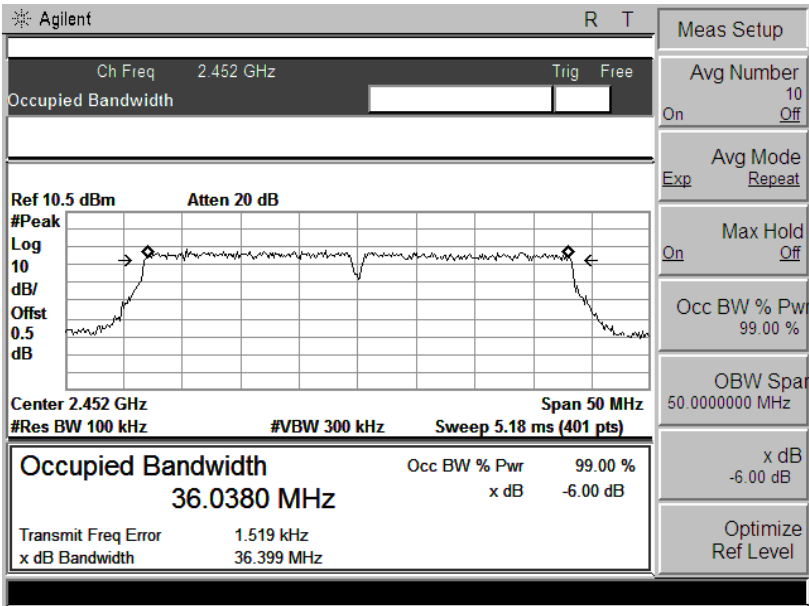


Ch 9

5.7 POWER SPECTRAL DENSITY

5.7.1 Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.7.2 Block Diagram of Test Setup

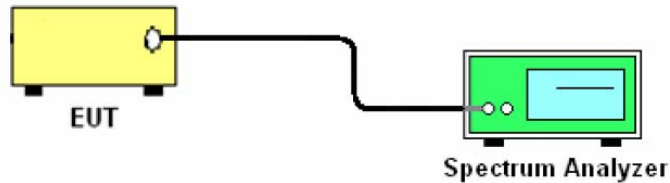

5.7.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause10.2:


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.7.4 Test Result


Test Item:	POWER SPECTRAL DENSITY	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%

Mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	Low	2412	-6.423	≤ 8	Pass
	Middle	2437	-6.142	≤ 8	Pass
	High	2462	-6.093	≤ 8	Pass
802.11g	Low	2412	-11.33	≤ 8	Pass
	Middle	2437	-11.26	≤ 8	Pass
	High	2462	-10.72	≤ 8	Pass
802.11n (20MHz)	Low	2412	-12.25	≤ 8	Pass
	Middle	2437	-11.73	≤ 8	Pass
	High	2462	-11.08	≤ 8	Pass
802.11n (20MHz)	Low	2422	-15.06	≤ 8	Pass
	Middle	2437	-15.00	≤ 8	Pass
	High	2452	-14.48	≤ 8	Pass


802.11 b Mode

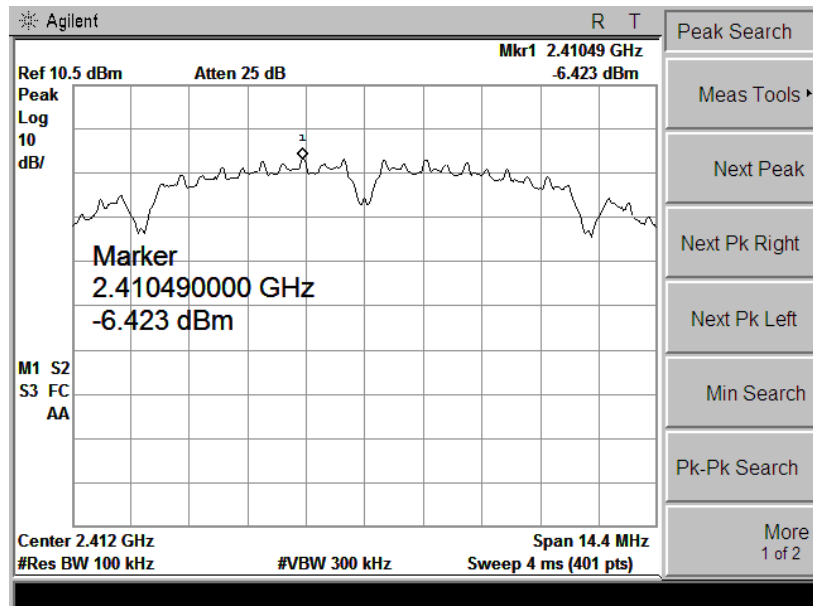

Ch 1

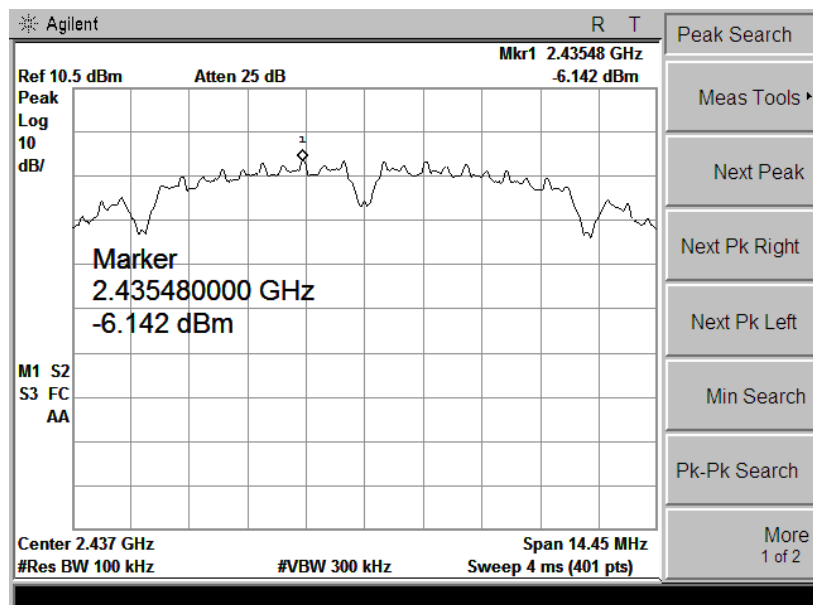


Ch 6

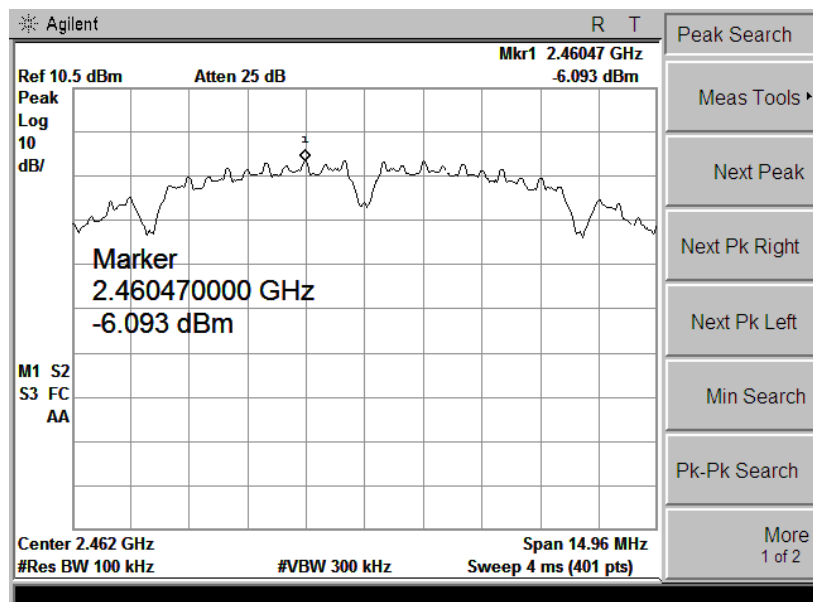


Ch 11


802.11 g Mode

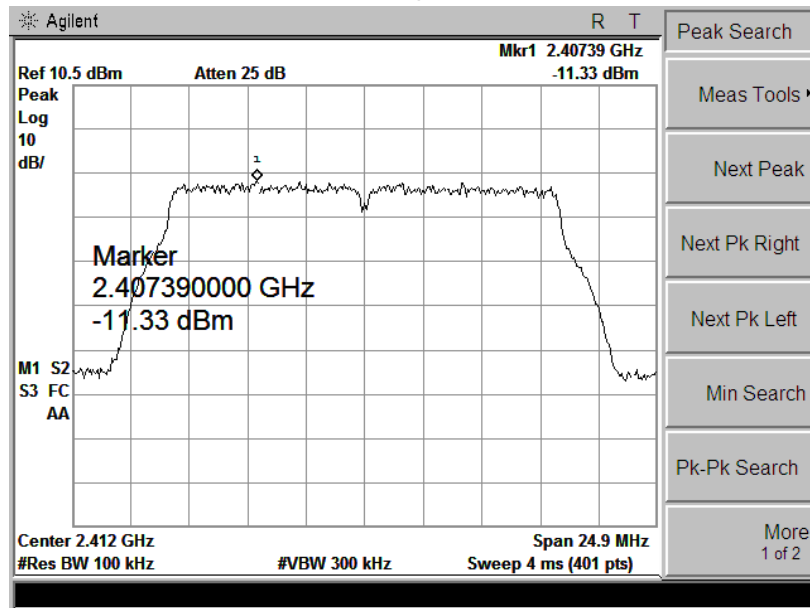

Ch 1

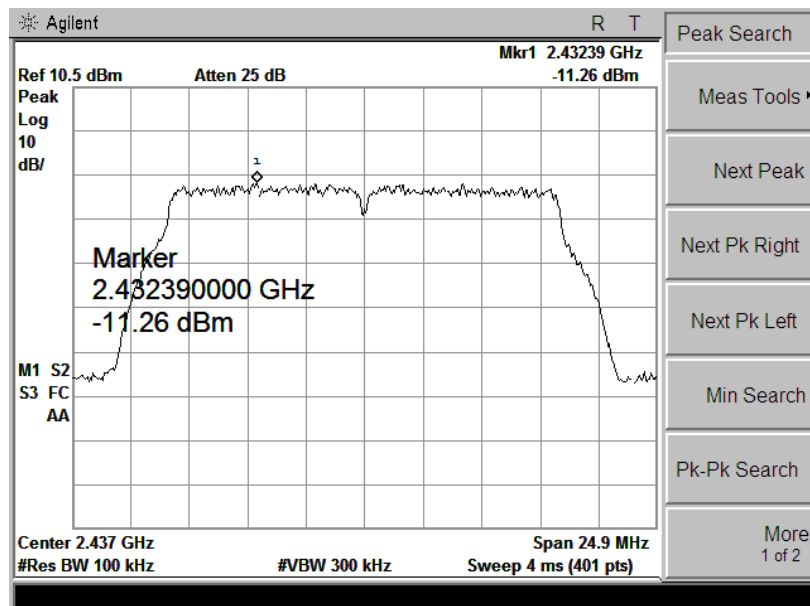


Ch 6

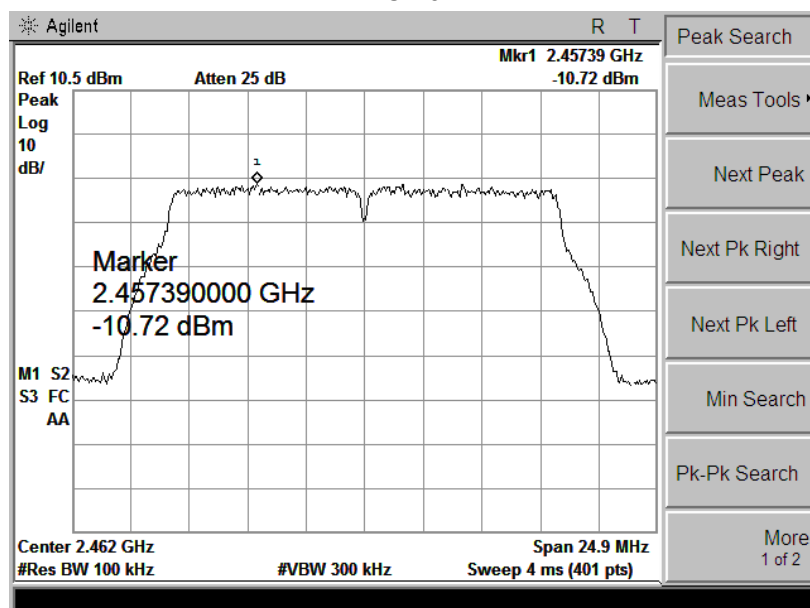


Ch 11


802.11 n(20M) Mode

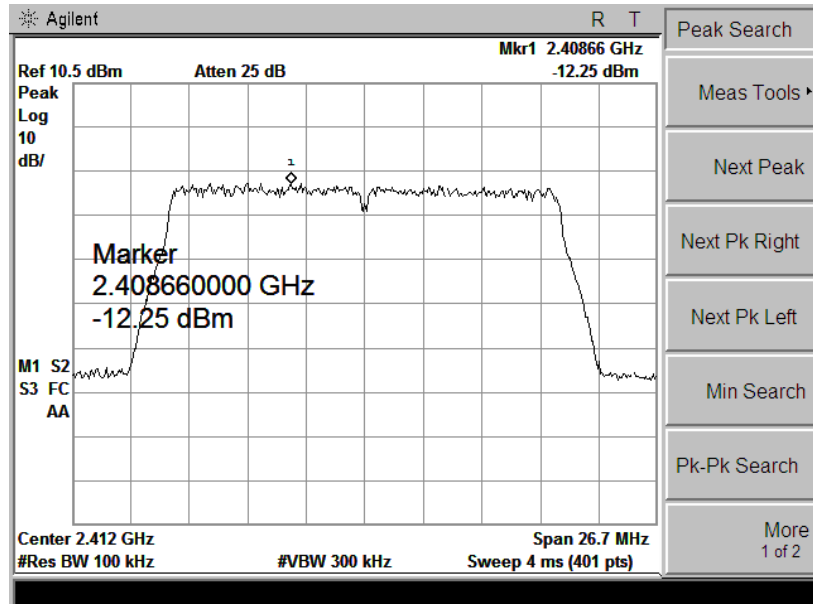

Ch 1

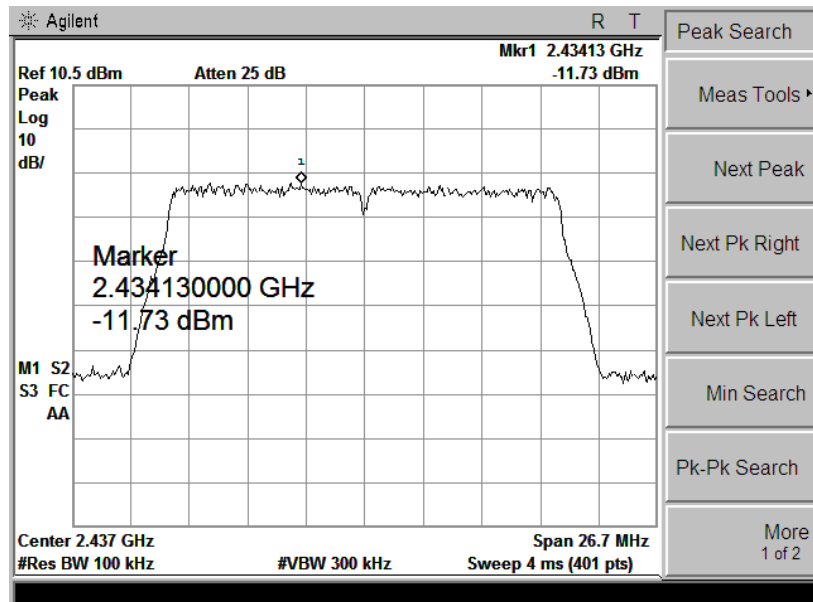


Ch 6

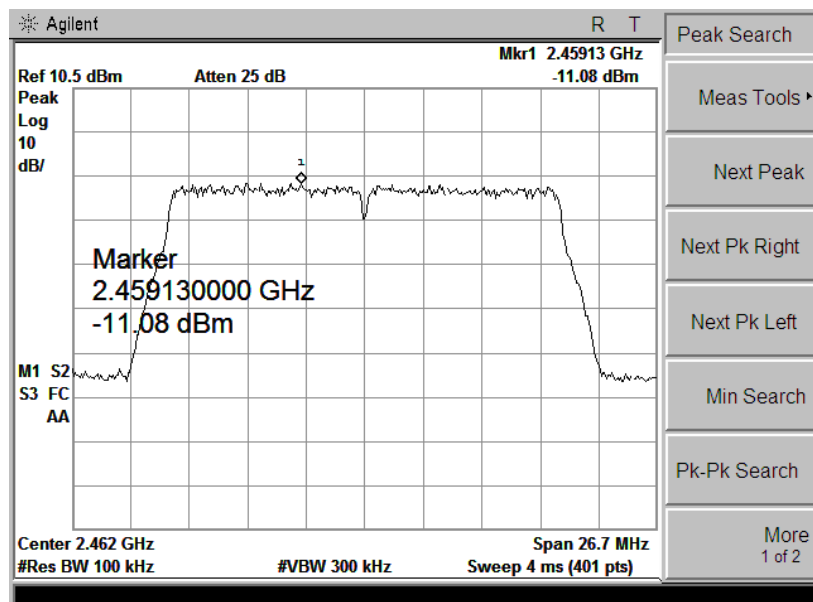


Ch 11


802.11 n(40M) Mode

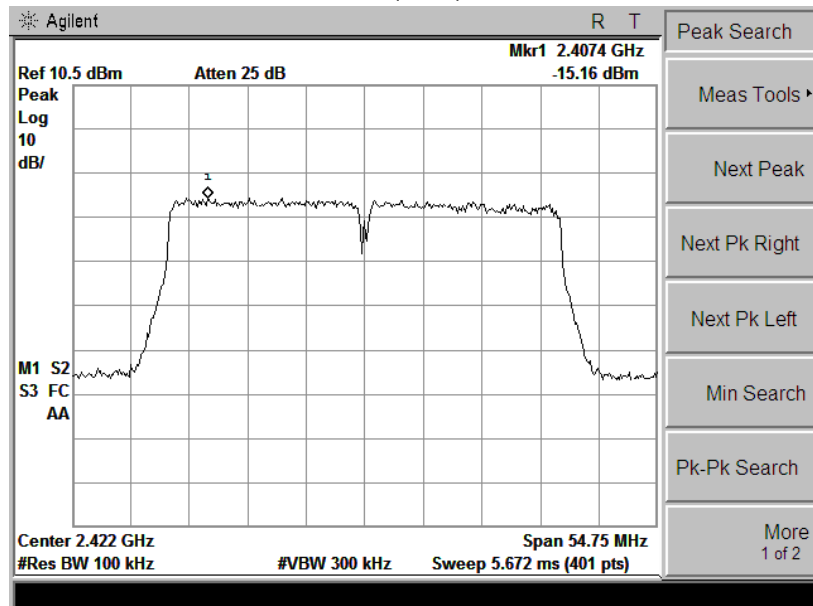

Ch 1

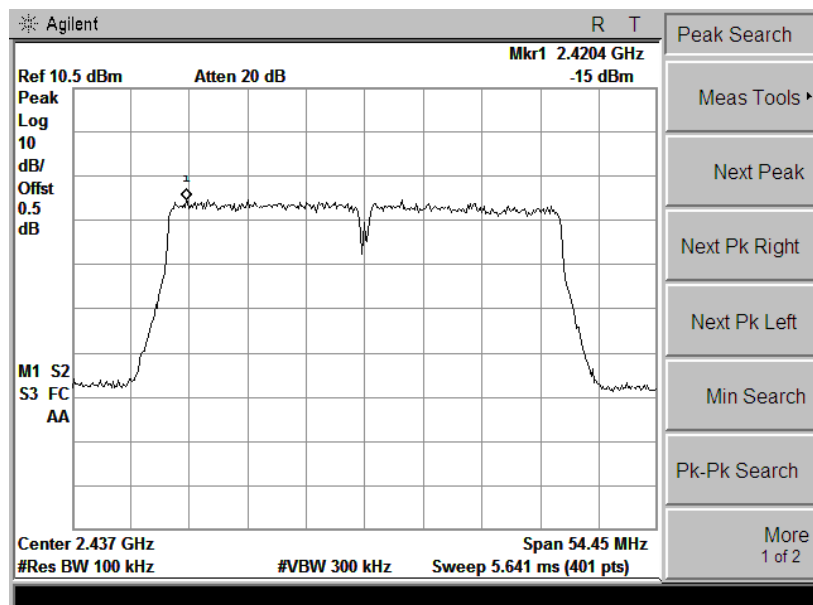

Ch 6

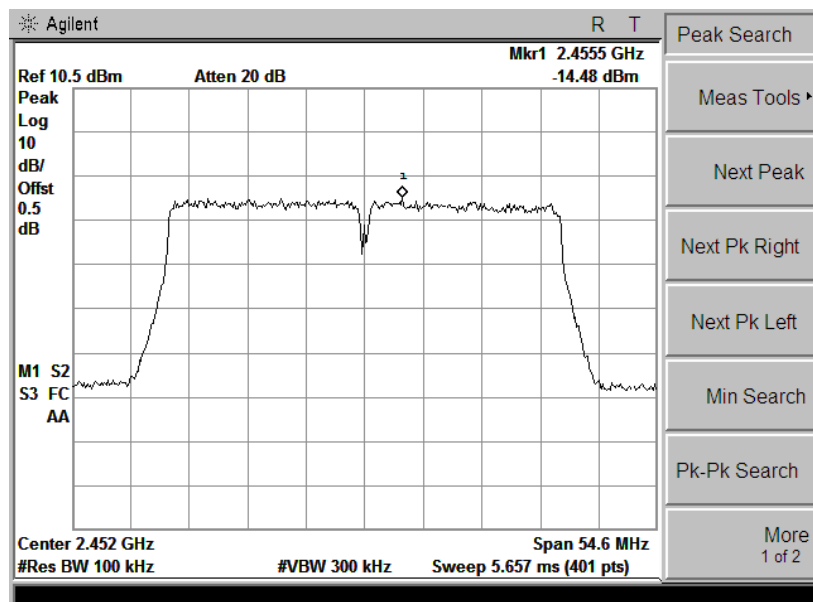

Ch 9

5.8 Band Edge and Conducted Spurious Emissions

5.8.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

5.8.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

5.8.3 Test Result


Pass

Remark:


During the Conducted Spurious Emissions test, pre-scan the 802.11b, 802.11g, 802.11n(20/40)modulation, and found the 802.11b modulation which it is worse case.

Test Item:	Band Edge	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%


Band Edge, Left Side

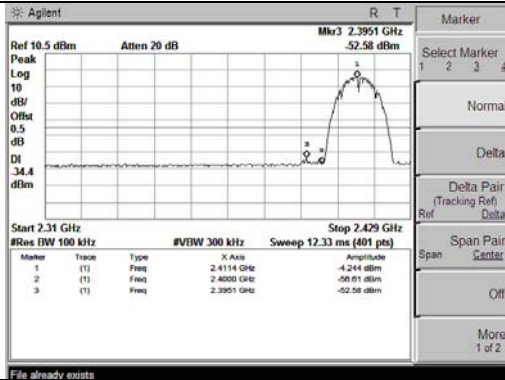


Band Edge, Right Side

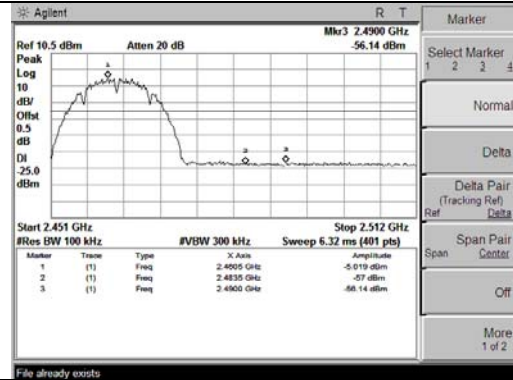


802.11 b Mode

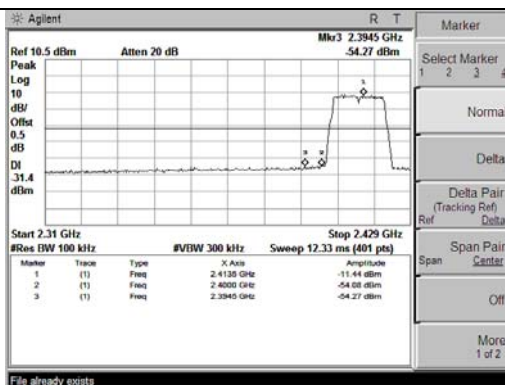


802.11 b Mode

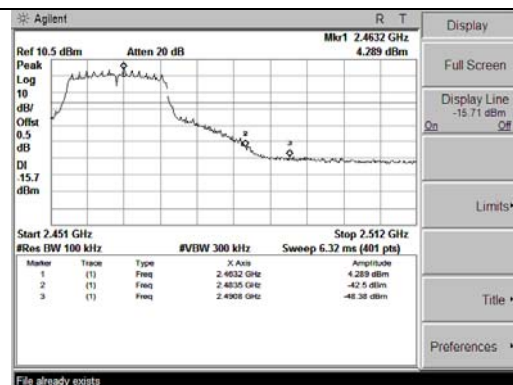


802.11 g Mode

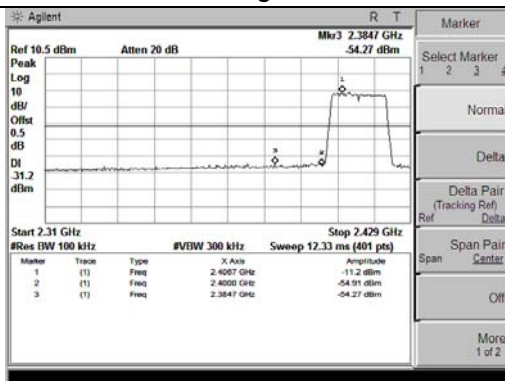


802.11 g Mode

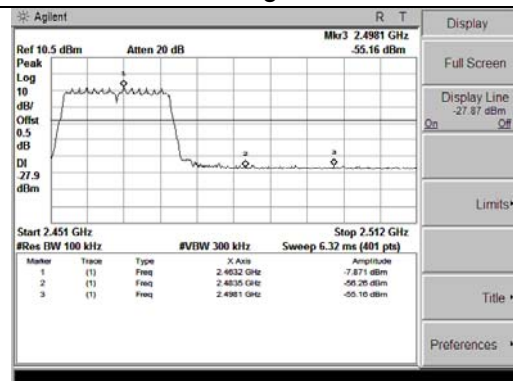


802.11 n(20M) Mode

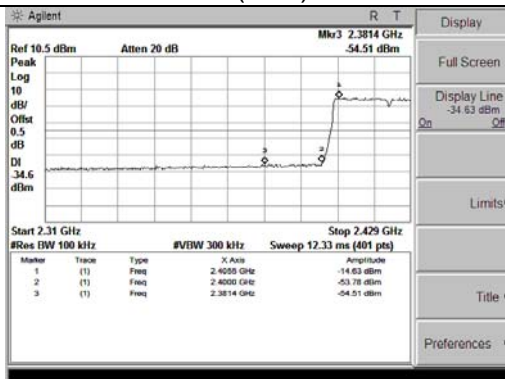


802.11 n(20M) Mode

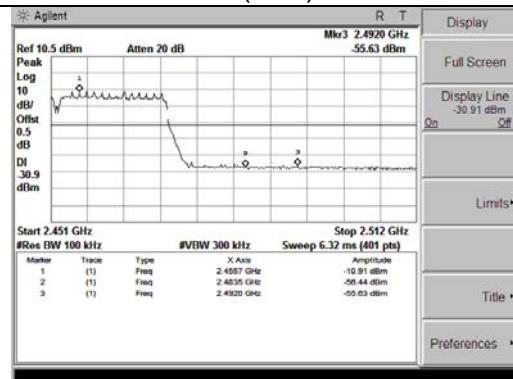



802.11 n(40M) Mode





802.11 n(40M) Mode



Conducted Spurious Emissions

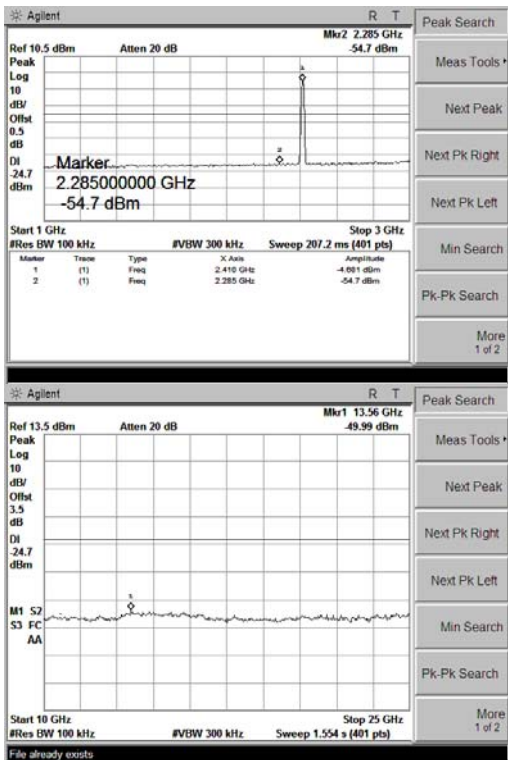
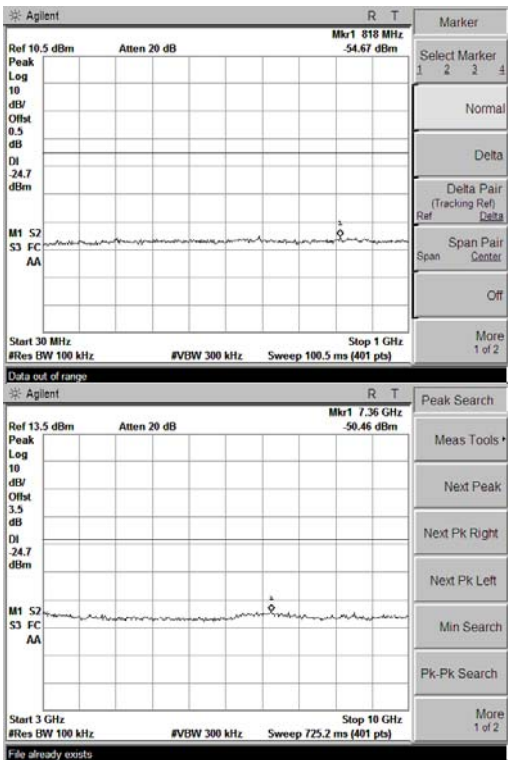


802.11b Mode, Ch1

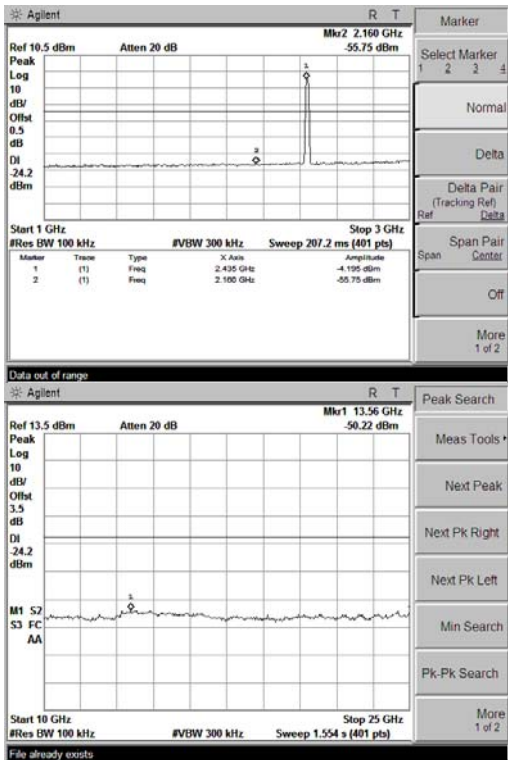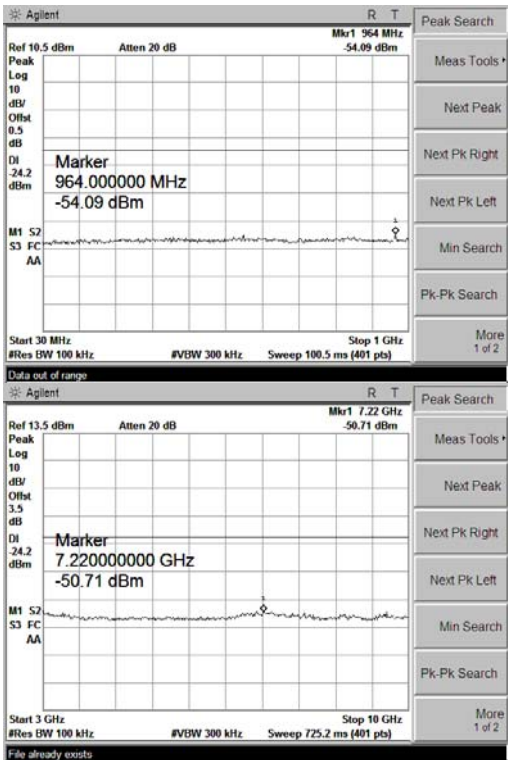

802.11g Mode, Ch6

Conducted Spurious Emissions

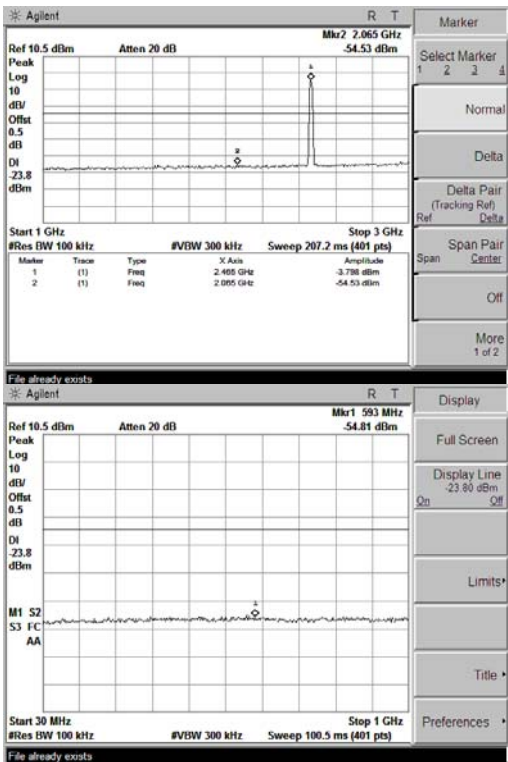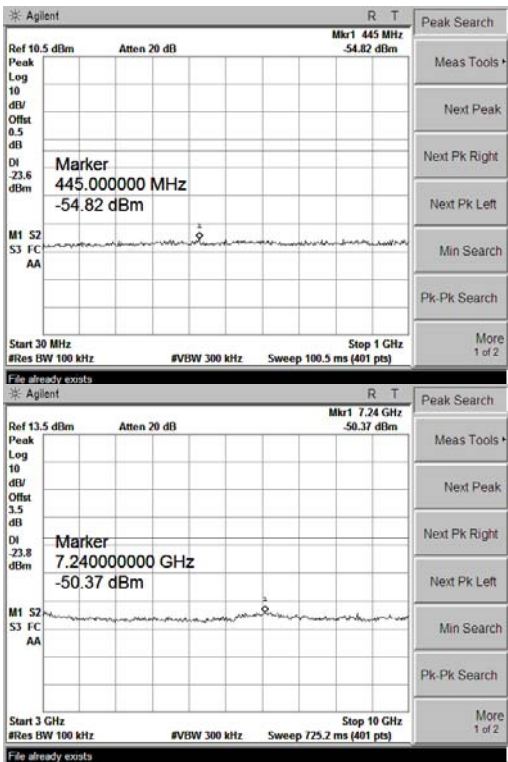

GFSK Mode, Ch39


5.9 Restricted Frequency Bands

5.9.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.9.2 Test Configuration

Test Setup:

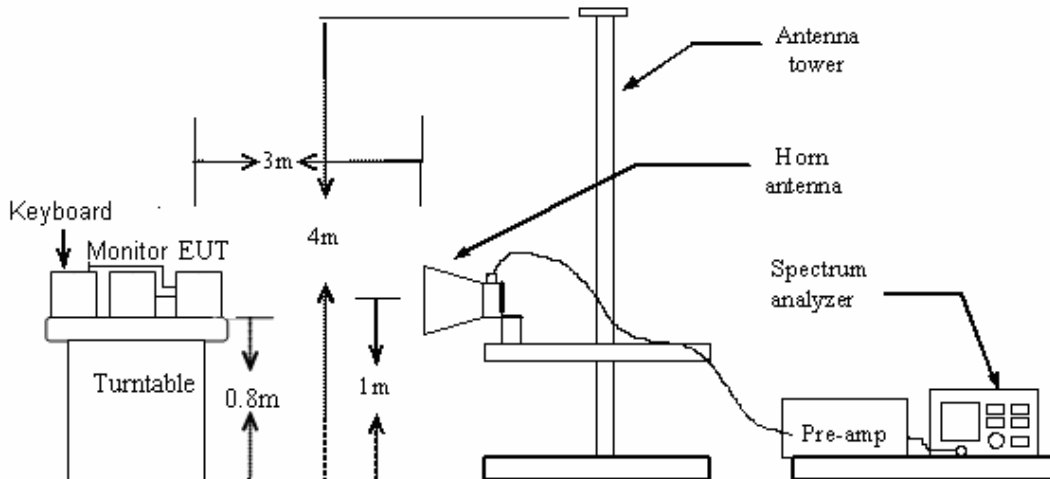

5.9.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

5.9.4 Test Result

Pass

Please refer the following plots.



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #3

Date: 2015-2-4

Time: 13:03:56

116.0 dBuV/m

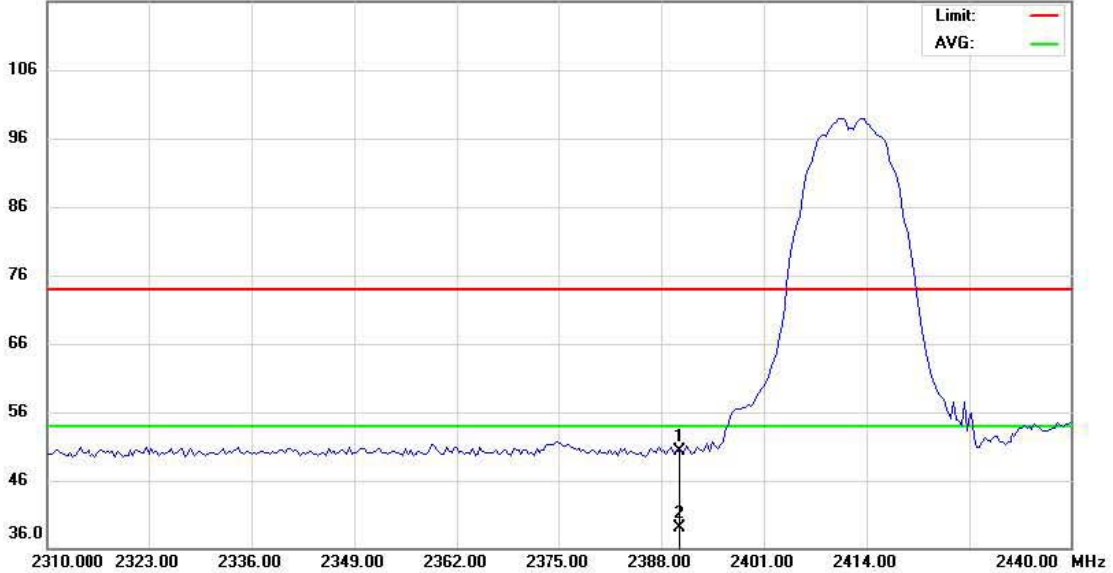

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11b

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	58.74	-8.43	50.31	74.00	-23.69	peak		
2	*	2390.000	47.35	-8.43	38.92	54.00	-15.08	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #4

Date: 2015-2-4

Time: 13:09:23

116.0 dBuV/m

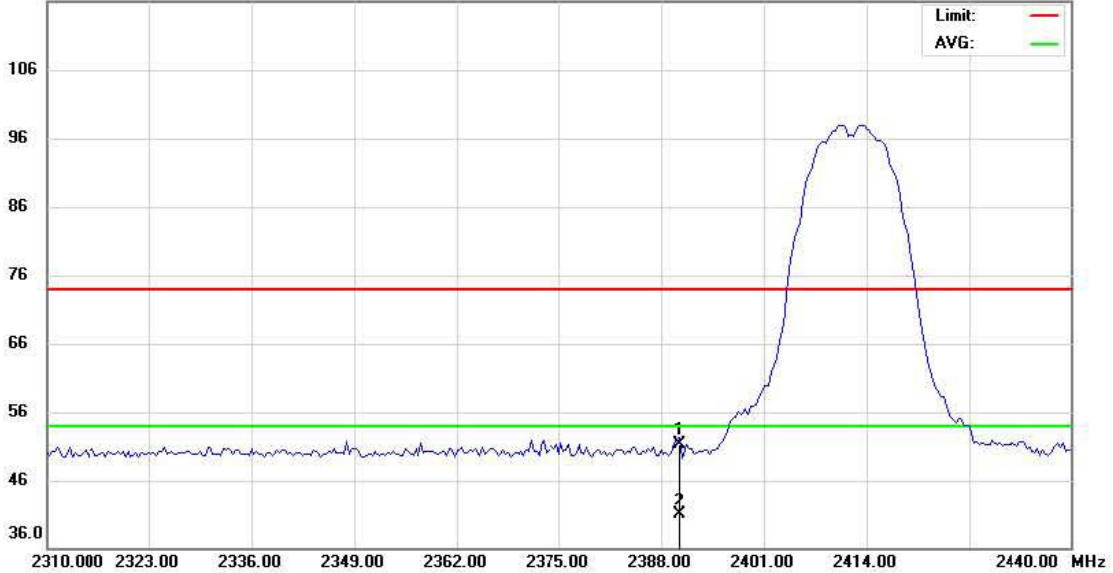

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11b

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	59.74	-8.43	51.31	74.00	-22.69	peak		
2	*	2390.000	49.30	-8.43	40.87	54.00	-13.13	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File: WS-401

Data: #12

Date: 2015-2-4

Time: 14:00:41

116.0 dBuV/m



Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11b

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	60.27	-8.29	51.98	74.00	-22.02	peak		
2	*	2483.500	46.10	-8.29	37.81	54.00	-16.19	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #11

Date: 2015-2-4

Time: 13:54:21

116.0 dBuV/m

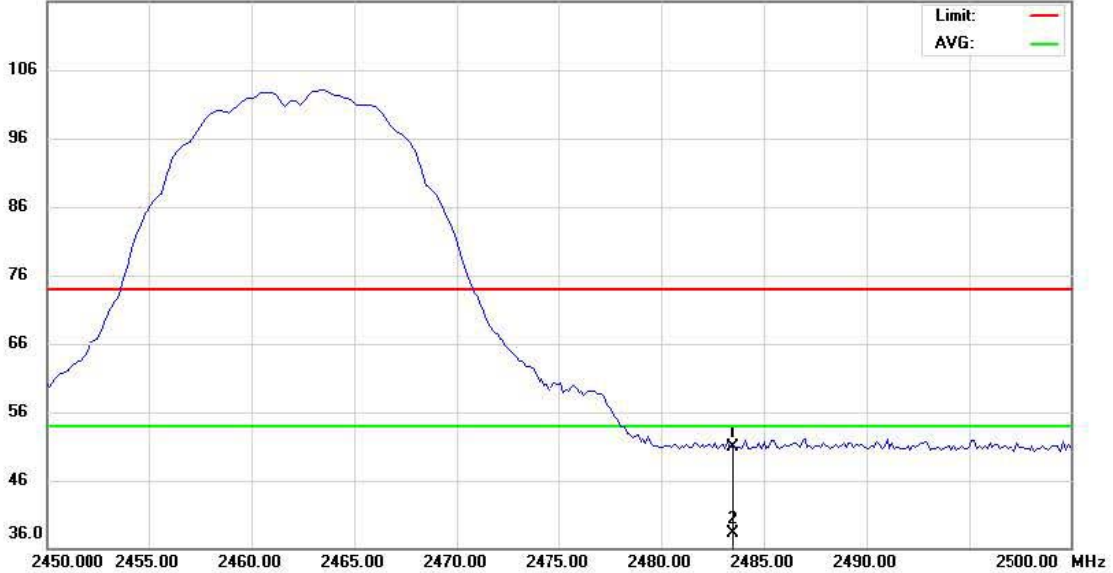

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11b

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	59.27	-8.29	50.98	74.00	-23.02	peak		
2	*	2483.500	46.30	-8.29	38.01	54.00	-15.99	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John

FCC RF Limit



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #2

Date: 2015-2-4

Time: 12:58:55

116.0 dBuV/m

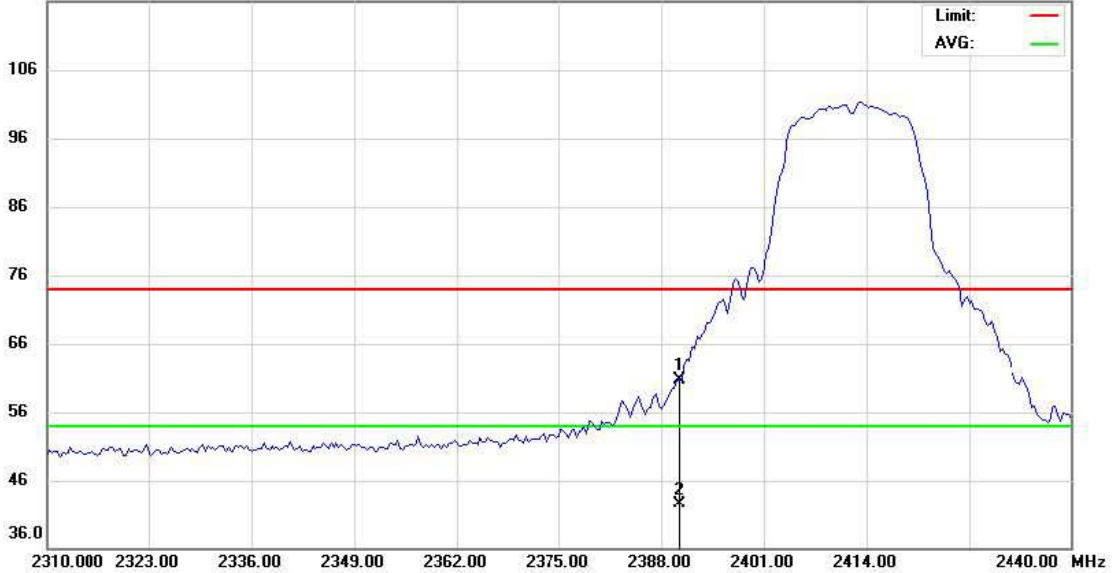

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11g

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	69.12	-8.43	60.69	74.00	-13.31	peak		
2	*	2390.000	50.94	-8.43	42.51	54.00	-11.49	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #1

Date: 2015-2-4

Time: 12:50:37

116.0 dBuV/m

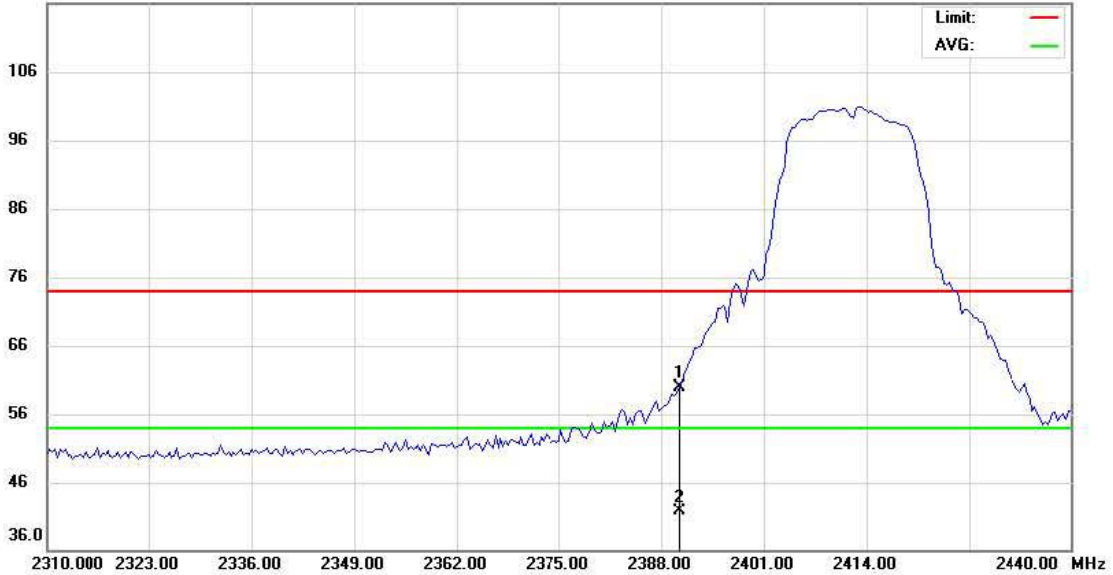

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11g

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	68.41	-8.43	59.98	74.00	-14.02	peak		
2	*	2390.000	50.23	-8.43	41.80	54.00	-12.20	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File: WS-401

Data: #13

Date: 2015-2-4

Time: 14:09:00

116.0 dBuV/m



Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11g

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	73.31	-8.29	65.02	74.00	-8.98	peak		
2	*	2483.500	55.38	-8.29	47.09	54.00	-6.91	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #14

Date: 2015-2-4

Time: 14:15:02

116.0 dBuV/m

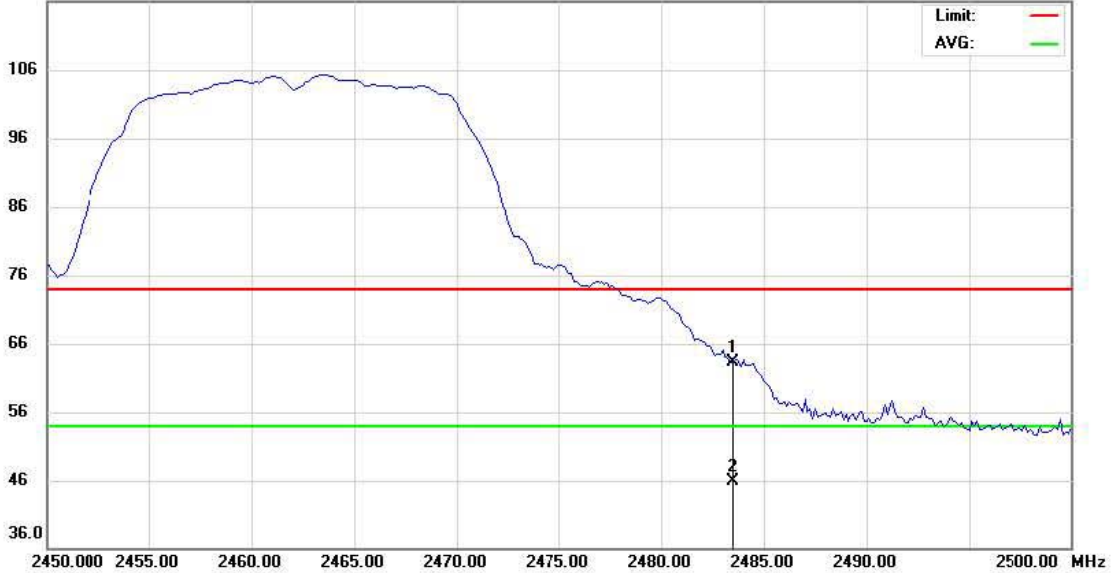

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11g

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	71.67	-8.29	63.38	74.00	-10.62	peak		
2	*	2483.500	54.19	-8.29	45.90	54.00	-8.10	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #6

Date: 2015-2-4

Time: 13:20:23

116.0 dBuV/m

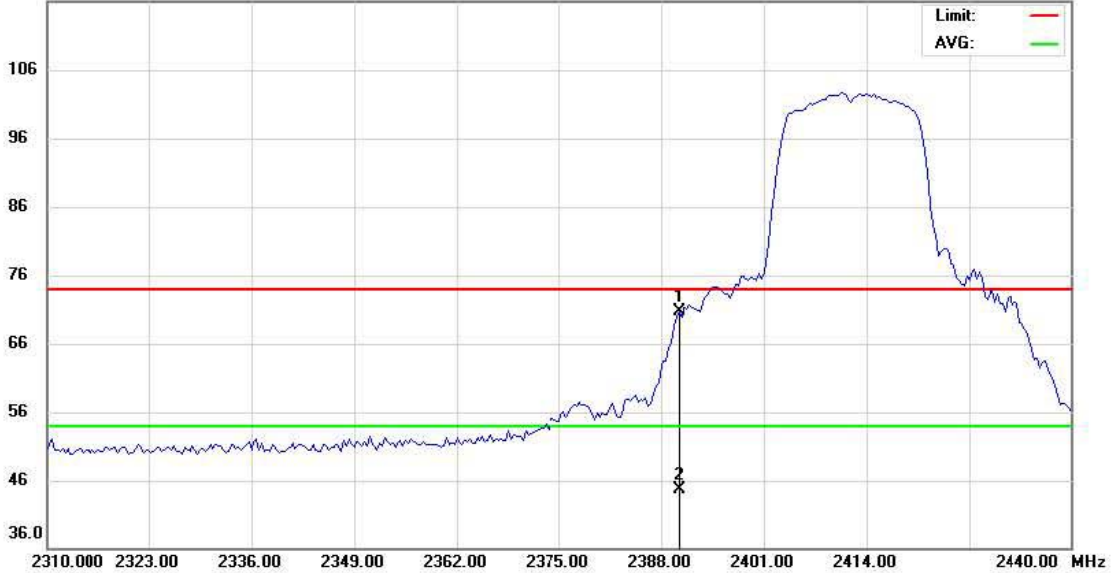

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC EF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11n-HT20

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2390.000	79.05	-8.43	70.62	74.00	-3.38	peak		
2		2390.000	53.19	-8.43	44.76	54.00	-9.24	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #5

Date: 2015-2-4

Time: 13:15:00

116.0 dBuV/m

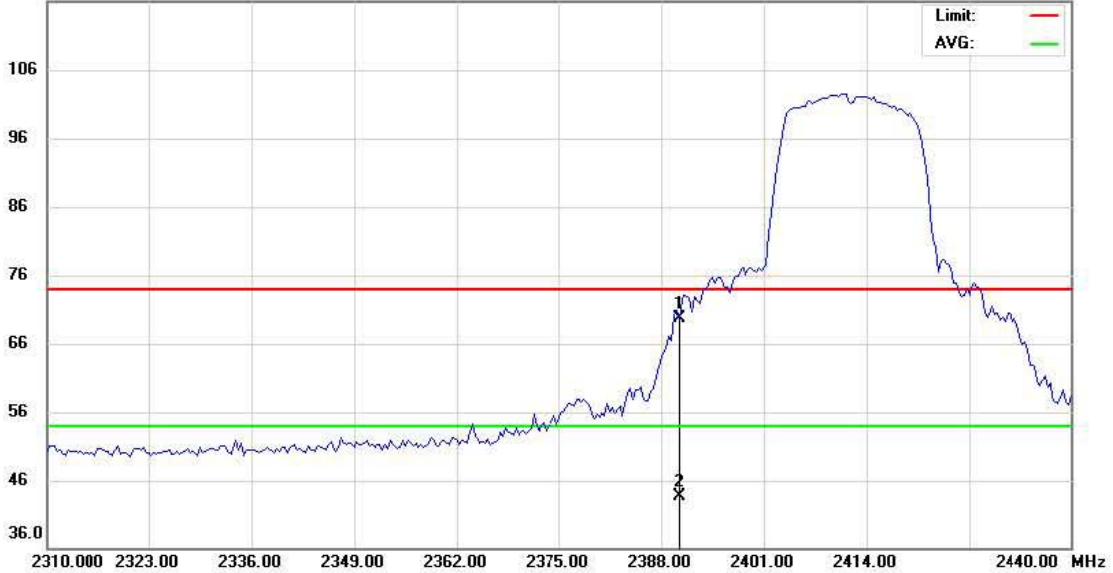

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11n-HT20

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2390.000	78.21	-8.43	69.78	74.00	-4.22	peak		
2		2390.000	52.03	-8.43	43.60	54.00	-10.40	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #15

Date: 2015-2-4

Time: 14:21:51

116.0 dBuV/m

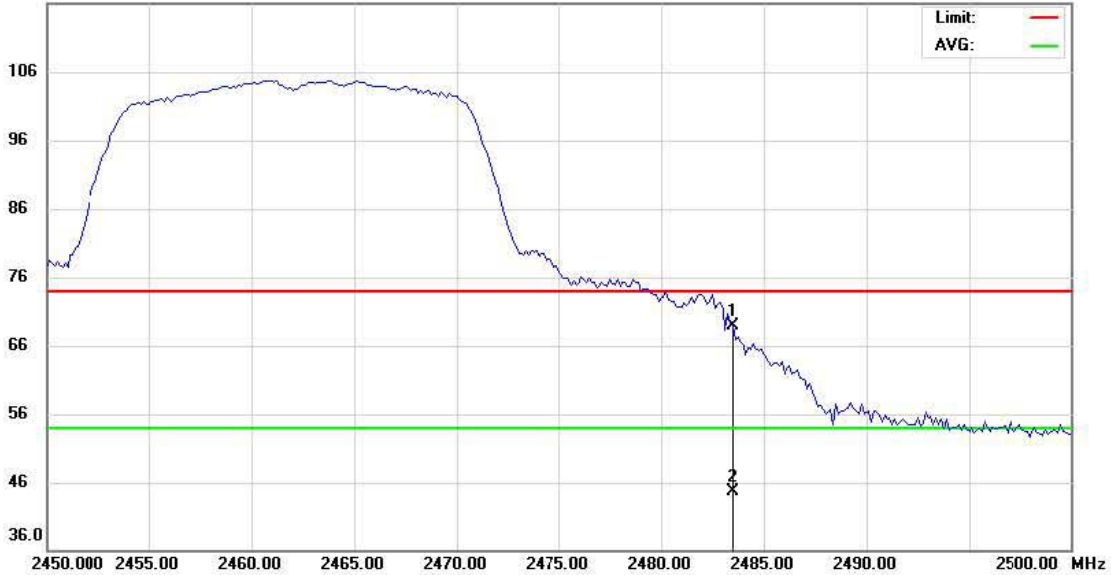

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11n-HT20

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2483.500	77.20	-8.29	68.91	74.00	-5.09	peak		
2		2483.500	53.09	-8.29	44.80	54.00	-9.20	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #16

Date: 2015-2-4

Time: 14:29:18

116.0 dBuV/m

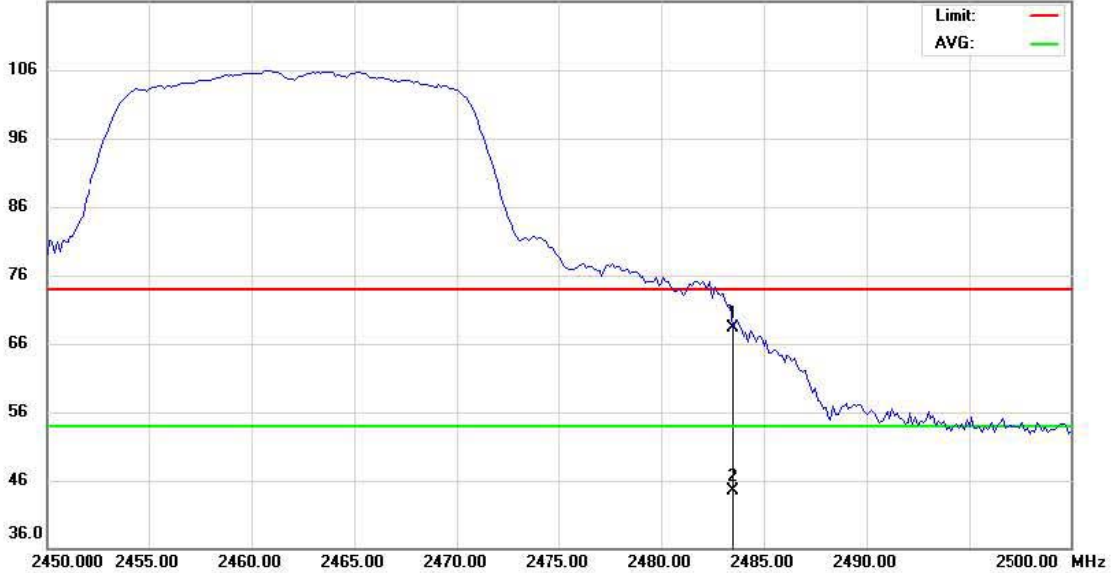

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11n-HT20

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2483.500	76.63	-8.29	68.34	74.00	-5.66	peak		
2		2483.500	52.88	-8.29	44.59	54.00	-9.41	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #7

Date: 2015-2-4

Time: 13:25:18

116.0 dBuV/m

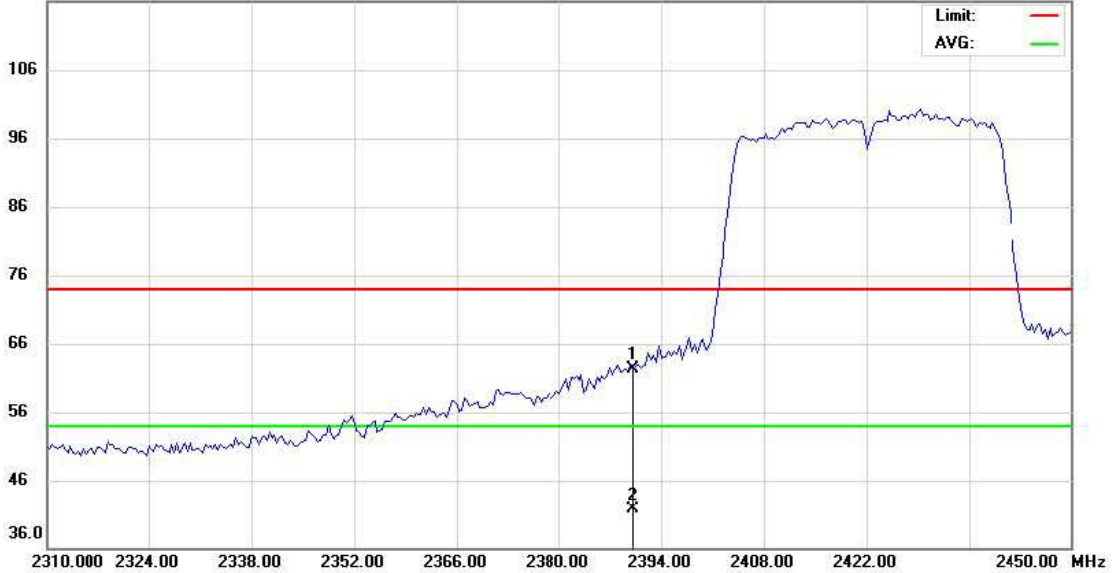

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11n-HT40

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2390.000	70.69	-8.43	62.26	74.00	-11.74	peak		
2		2390.000	50.21	-8.43	41.78	54.00	-12.22	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement


File: WS-401

Data: #8

Date: 2015-2-4

Time: 13:30:39

116.0 dBuV/m

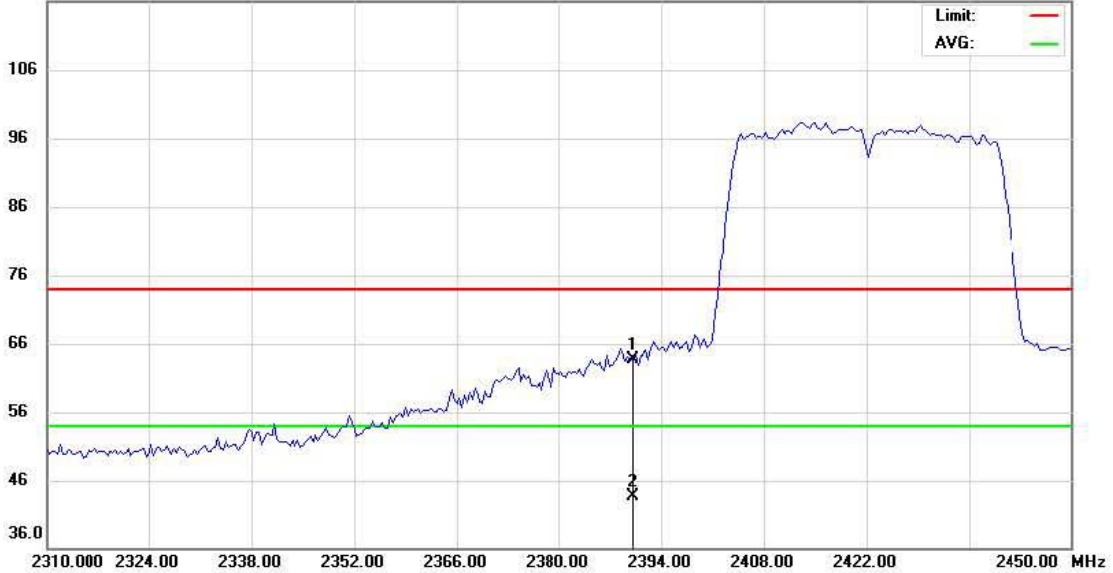

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: Low CH

Note: 802.11n-HT40

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2390.000	72.16	-8.43	63.73	74.00	-10.27	peak		
2		2390.000	52.10	-8.43	43.67	54.00	-10.33	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File: WS-401

Data: #9

Date: 2015-2-4

Time: 13:39:38

116.0 dBuV/m



Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11n-HT40

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2483.500	72.25	-8.29	63.96	74.00	-10.04	peak		
2		2483.500	50.31	-8.29	42.02	54.00	-11.98	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86026850 Fax: 0755-26013350

Radiated Emission Measurement

File: WS-401

Data: #10

Date: 2015-2-4

Time: 13:46:49

116.0 dBuV/m



Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF Limit

Power: DC 18V by Adapter

Humidity: 54 %

EUT: M4

Distance: 3m

M/N: WS-401

Mode: High CH

Note: 802.11n-HT40

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2483.500	71.72	-8.29	63.43	74.00	-10.57	peak		
2		2483.500	51.34	-8.29	43.05	54.00	-10.95	AVG		

*:Maximum data x:Over limit !:over margin

Engineer Signature: John

End of Report