

FCC Radio Test Report

FCC ID: 2ABHA0014

Original Grant

Report No. : TB-FCC150866
Applicant : NINGBO CSTAR IMP&EXP CO., LTD.
Equipment Under Test (EUT)
EUT Name : Micro Truwireless Earbuds
Model No. : 7199-99BK
Series Model No. : SL066, 7199-99, 7198-04
Brand Name : Cstar
Receipt Date : 2016-12-05
Test Date : 2016-12-06 to 2016-12-15
Issue Date : 2016-12-16
Standards : FCC Part 15: 2016, Subpart C(15.247)
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC requirements

Test/Witness Engineer :

WANG SU

Approved& Authorized :

Longhai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing the Configuration of System Tested.....	5
1.4 Description of Support Units	6
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting	7
1.7 Measurement Uncertainty	7
1.8 Test Facility.....	8
2. TEST SUMMARY	9
3. TEST EQUIPMENT	10
4. CONDUCTED EMISSION TEST	11
4.1 Test Standard and Limit.....	11
4.2 Test Setup.....	11
4.3 Test Procedure.....	11
4.4 EUT Operating Mode	12
4.5 Test Data.....	12
5. RADIATED EMISSION TEST	17
5.1 Test Standard and Limit.....	17
5.2 Test Setup.....	18
5.3 Test Procedure.....	19
5.4 EUT Operating Condition	19
5.5 Test Data.....	19
6. RESTRICTED BANDS REQUIREMENT	44
6.1 Test Standard and Limit.....	44
6.2 Test Setup.....	44
6.3 Test Procedure.....	44
6.4 EUT Operating Condition	45
6.5 Test Data.....	45
7. NUMBER OF HOPPING CHANNEL	64
7.1 Test Standard and Limit.....	64
7.2 Test Setup.....	64
7.3 Test Procedure.....	64
7.4 EUT Operating Condition	64
7.5 Test Data.....	64
8. AVERAGE TIME OF OCCUPANCY.....	67
8.1 Test Standard and Limit.....	67
8.2 Test Setup.....	67

8.3 Test Procedure.....	67
8.4 EUT Operating Condition	67
8.5 Test Data.....	68
9. CHANNEL SEPARATION AND BANDWIDTH TEST	86
9.1 Test Standard and Limit.....	86
9.2 Test Setup.....	86
9.3 Test Procedure.....	86
9.4 EUT Operating Condition	86
9.5 Test Data.....	87
10. PEAK OUTPUT POWER TEST.....	99
10.1 Test Standard and Limit	99
10.2 Test Setup.....	99
10.3 Test Procedure.....	99
10.4 EUT Operating Condition	99
10.5 Test Data.....	100
11. ANTENNA REQUIREMENT.....	106
11.1 Standard Requirement.....	106
11.2 Antenna Connected Construction.....	106

1. General Information about EUT

1.1 Client Information

Applicant : NINGBO CSTAR IMP&EXP CO., LTD
Address : Floor 4, Building E, No. 655-90, Qiming Road, Yinzhou Investment & Innovation Center, Ningbo, China
Manufacturer : ShenZhen C-Star Electronic Tech. Co., Ltd
Address : 2, 3/F, Building B, No. 2 Bada Industrial Park, Yongfu Road, Heping Community, Fuyong Town, Baoan District, Shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Micro Truwireless Earbuds	
Models No.	:	7199-99BK, SL066, 7199-99, 7198-04	
Model Difference	:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name for commercial.	
Product Description	:	Operation Frequency:	Bluetooth V4.1+EDR: 2402~2480 MHz
		Number of Channel:	Bluetooth: 79 Channels See Note 2
		Max Peak Output Power:	Bluetooth: 6.06 dBm(GFSK)
		Antenna Gain:	0 dBi PCB Antenna
		Modulation Type:	GFSK 1Mbps(1 Mbps) π /4-DQPSK(2 Mbps) 8-DPSK(3 Mbps)
Power Supply	:	DC power by USB cable. DC power by Li-ion battery.	
Power Rating	:	DC 5V by USB Cable.(Charging Box) DC 3.7V by 450mAh Li-ion Battery. (Charging Box) DC 3.7V by 40mAh Li-ion Battery.(Headsets)	
Connecting I/O Port(S)	:	Please refer to the User's Manual	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Channel List:


Bluetooth Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458

03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


(3) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

Charging with TX Mode

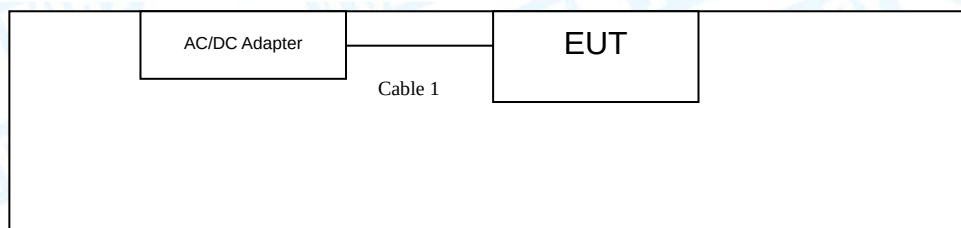

TX Mode

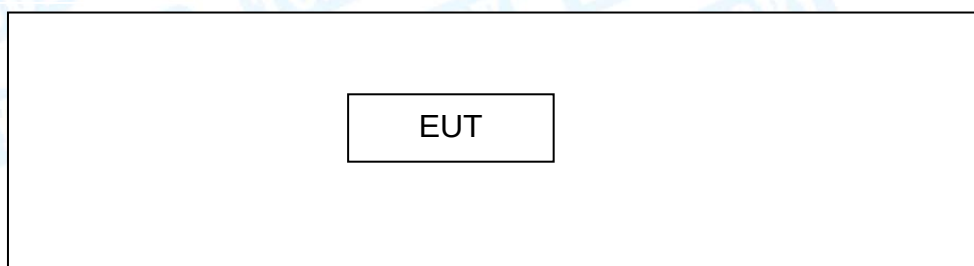

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
AC/DC Adapter	TEKA012	VOC	TEKA	√
AC/DC Adapter: Input:100~240V, 50/60Hz, 0.2A. Output: 5V, 1A				
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	NO	NO	0.4M	

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	USB Charging Mode
For Radiated Test	
Final Test Mode	Description
Mode 1	TX GFSK Mode
Mode 2	TX Mode(GFSK) Channel 00/39/78
Mode 3	TX Mode($\pi/4$ -DQPSK) Channel 00/39/78
Mode 4	TX Mode(8-DPSK) Channel 00/39/78
Mode 5	Hopping Mode(GFSK)
Mode 6	Hopping Mode($\pi/4$ -DQPSK)
Mode 7	Hopping Mode(8-DPSK)

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

TX Mode: GFSK (1 Mbps)
TX Mode: $\pi/4$ -DQPSK (2 Mbps)
TX Mode: 8-DPSK (3Mbps)

- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	Airoha.AB1500_FamilyLabTestTool_20151127_1.4.17.0_Verifying		
Frequency	2402 MHz	2441MHz	2480 MHz
GFSK	DEF	DEF	DEF
$\pi/4$ -DQPSK	DEF	DEF	DEF
8-DPSK	DEF	DEF	DEF

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.42 dB ± 3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 1				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203		Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.2	Conducted Emission	PASS	N/A
15.205	RSS-Gen 7.2.3	Restricted Bands	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (2)	Hopping Channel Separation	PASS	N/A
15.247(a)(1)	RSS 247 5.1 (4)	Dwell Time	PASS	N/A
15.247(b)(1)	RSS 247 5.4 (2)	Peak Output Power	PASS	N/A
15.247(b)(1)	RSS 247 5.1 (4)	Number of Hopping Frequency	PASS	N/A
15.247(d)	RSS 247 5.5	Band Edge	PASS	N/A
15.247(c)& 15.209	RSS 247 5.5	Radiated Spurious Emission	PASS	N/A
15.247(a)	RSS 247 5.1 (1)	99% Occupied Bandwidth & 20dB Bandwidth	PASS	99%OBW GFSK:894.00kHz π /4-DQPSK: 1350.00kHz 8-DPSK: 1344.00KHz
Note: N/A is an abbreviation for Not Applicable.				

3. Test Equipment

AC Main Conducted Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	Rohde & Schwarz	ENV216	101131	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 22, 2016	Jul. 21, 2017

Radiation Spurious Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
EMI Test Receiver	Rohde & Schwarz	ESPI	107199-99BK0/007	Jul. 22, 2016	Jul. 21, 2017
Bilog Antenna	ETS-LINDGREN	3142E	7199-99BK17537	Mar. 20, 2016	Mar. 19, 2017
Horn Antenna	ETS-LINDGREN	3117	7199-99BK43207	Mar. 19, 2016	Mar. 18, 2017
Pre-amplifier	Sonoma	310N	185903	Mar. 20, 2016	Mar. 19, 2017
Pre-amplifier	HP	8449B	3008A00849	Mar. 26, 2016	Mar. 25, 2017
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 26, 2016	Mar. 25, 2017
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A

Antenna Conducted Emission

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
Spectrum Analyzer	Rohde & Schwarz	ESPI	100321	Jul. 22, 2016	Jul. 21, 2017

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15.207

4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

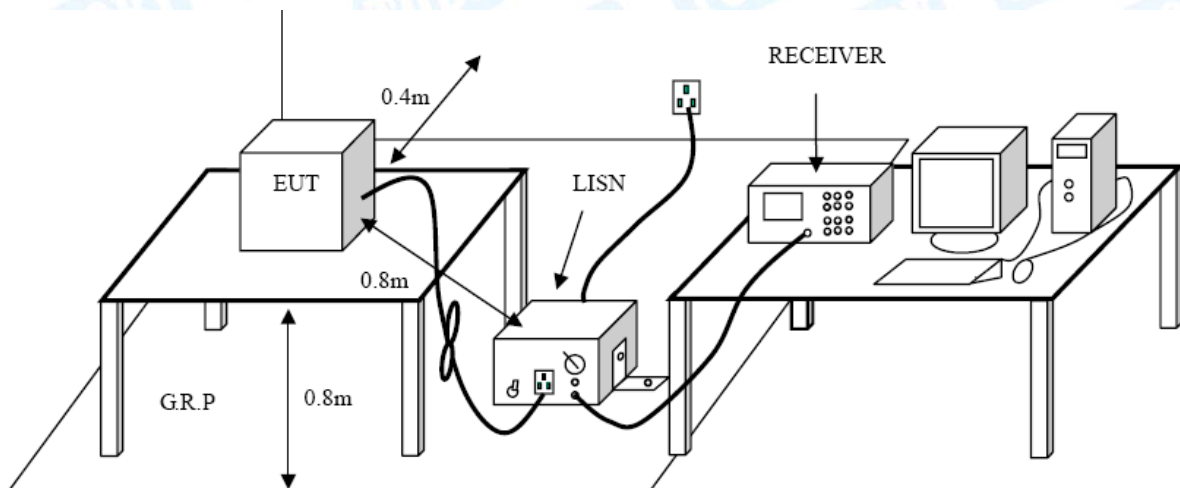

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Test data please refer the following pages.


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	USB Charging Mode		
Remark:	Only worse case is reported		

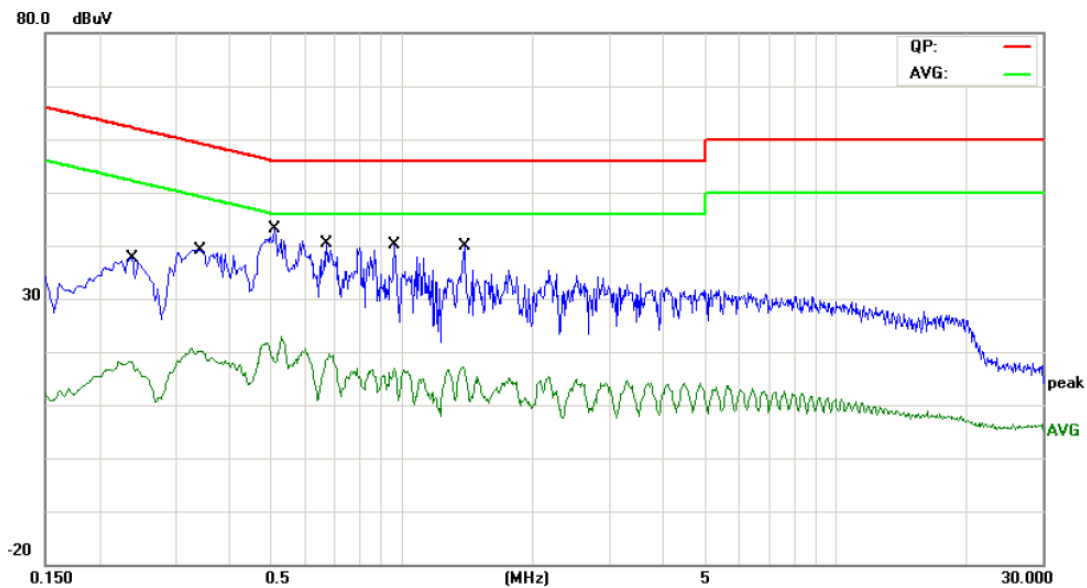

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2380	19.99	10.02	30.01	62.16	-32.15	QP
2		0.2380	6.59	10.02	16.61	52.16	-35.55	AVG
3		0.3420	22.83	10.02	32.85	59.15	-26.30	QP
4		0.3420	9.69	10.02	19.71	49.15	-29.44	AVG
5		0.5100	20.80	10.02	30.82	56.00	-25.18	QP
6		0.5100	6.35	10.02	16.37	46.00	-29.63	AVG
7	*	0.6700	21.37	10.10	31.47	56.00	-24.53	QP
8		0.6700	8.26	10.10	18.36	46.00	-27.64	AVG
9		0.9620	18.68	10.07	28.75	56.00	-27.25	QP
10		0.9620	5.74	10.07	15.81	46.00	-30.19	AVG
11		1.3900	19.59	10.06	29.65	56.00	-26.35	QP
12		1.3900	6.14	10.06	16.20	46.00	-29.80	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	USB Charging Mode		
Remark:	Only worse case is reported		

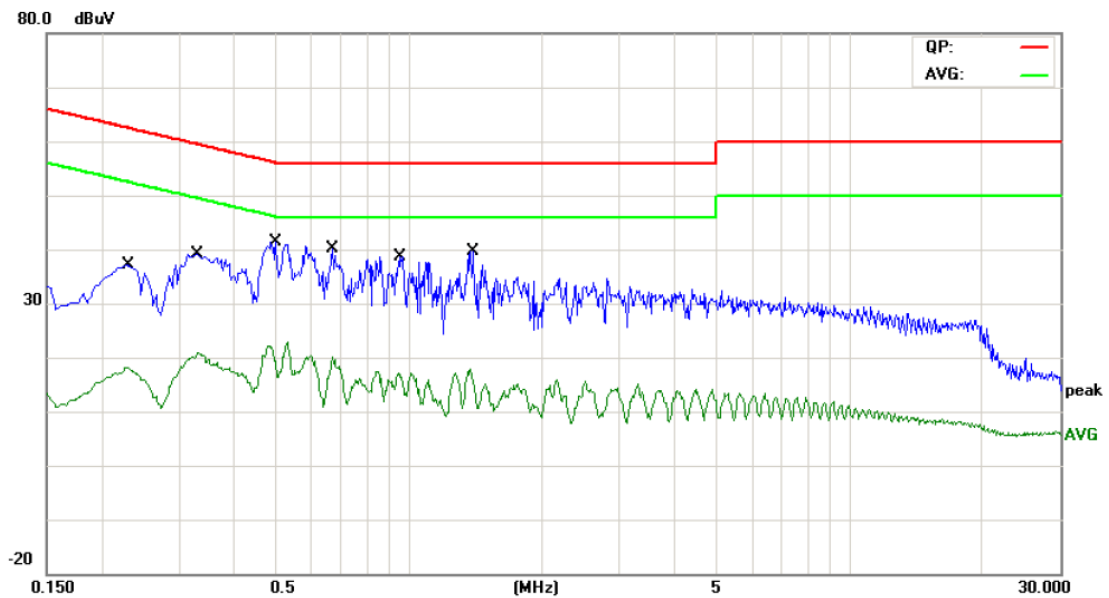

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2300	23.35	10.11	33.46	62.45	-28.99	QP
2		0.2300	8.97	10.11	19.08	52.45	-33.37	AVG
3		0.3300	26.55	10.08	36.63	59.45	-22.82	QP
4		0.3300	11.78	10.08	21.86	49.45	-27.59	AVG
5	*	0.4980	26.83	10.02	36.85	56.03	-19.18	QP
6		0.4980	10.69	10.02	20.71	46.03	-25.32	AVG
7		0.6700	25.62	10.02	35.64	56.00	-20.36	QP
8		0.6700	10.38	10.02	20.40	46.00	-25.60	AVG
9		0.9580	23.64	10.14	33.78	56.00	-22.22	QP
10		0.9580	8.07	10.14	18.21	46.00	-27.79	AVG
11		1.3900	23.03	10.12	33.15	56.00	-22.85	QP
12		1.3900	7.45	10.12	17.57	46.00	-28.43	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Line		
Test Mode:	USB Charging Mode		
Remark:	Only worse case is reported		

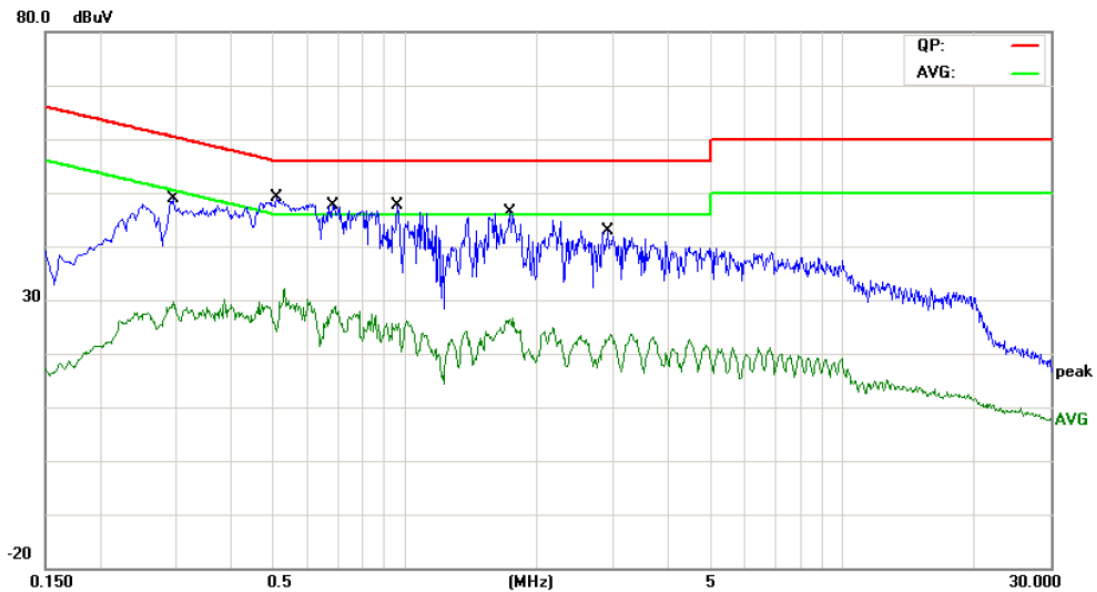

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2938	13.76	10.02	23.78	60.41	-36.63	QP
2		0.2938	2.91	10.02	12.93	50.41	-37.48	AVG
3		0.5100	19.49	10.02	29.51	56.00	-26.49	QP
4	*	0.5100	14.86	10.02	24.88	46.00	-21.12	AVG
5		0.6860	17.28	10.11	27.39	56.00	-28.61	QP
6		0.6860	10.57	10.11	20.68	46.00	-25.32	AVG
7		0.9618	14.21	10.07	24.28	56.00	-31.72	QP
8		0.9618	6.16	10.07	16.23	46.00	-29.77	AVG
9		1.7419	17.88	10.06	27.94	56.00	-28.06	QP
10		1.7419	12.92	10.06	22.98	46.00	-23.02	AVG
11		2.9100	16.65	10.03	26.68	56.00	-29.32	QP
12		2.9100	9.43	10.03	19.46	46.00	-26.54	AVG

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 240V/60 Hz		
Terminal:	Neutral		
Test Mode:	USB Charging Mode		
Remark:	Only worse case is reported		

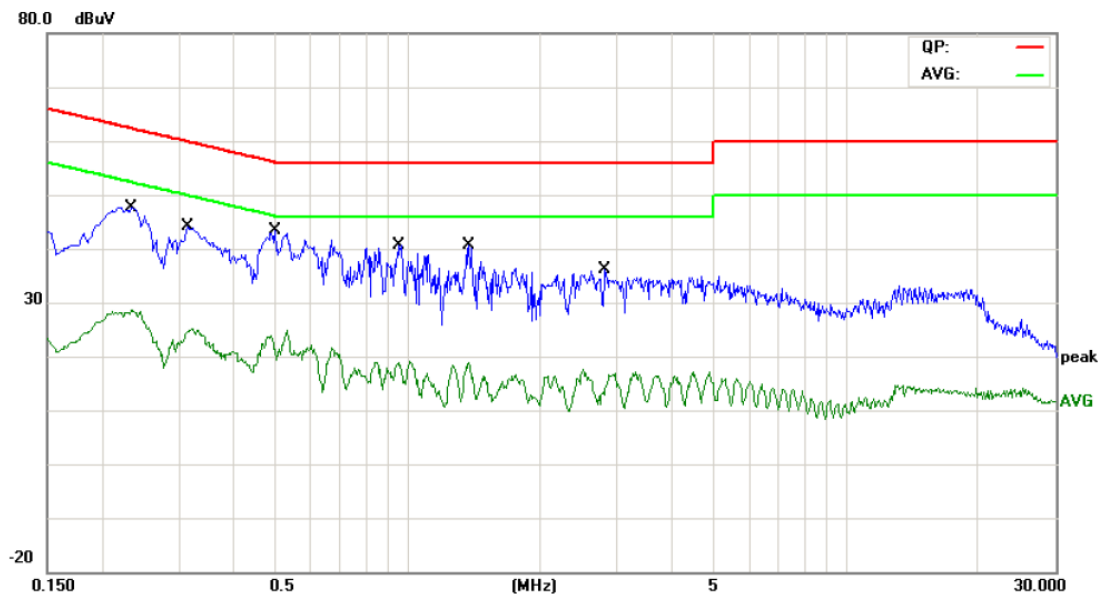

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2340	25.13	10.11	35.24	62.30	-27.06	QP
2		0.2340	11.11	10.11	21.22	52.30	-31.08	AVG
3		0.3140	19.38	10.08	29.46	59.86	-30.40	QP
4		0.3140	7.44	10.08	17.52	49.86	-32.34	AVG
5		0.4979	24.03	10.02	34.05	56.03	-21.98	QP
6	*	0.4979	14.10	10.02	24.12	46.03	-21.91	AVG
7		0.9577	17.04	10.14	27.18	56.00	-28.82	QP
8		0.9577	8.75	10.14	18.89	46.00	-27.11	AVG
9		1.3740	21.35	10.12	31.47	56.00	-24.53	QP
10		1.3740	11.95	10.12	22.07	46.00	-23.93	AVG
11		2.8220	18.68	10.06	28.74	56.00	-27.26	QP
12		2.8220	7.44	10.06	17.50	46.00	-28.50	AVG

Emission Level= Read Level+ Correct Factor

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard
FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Class B (dBuV/m)(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


5.2 Test Setup

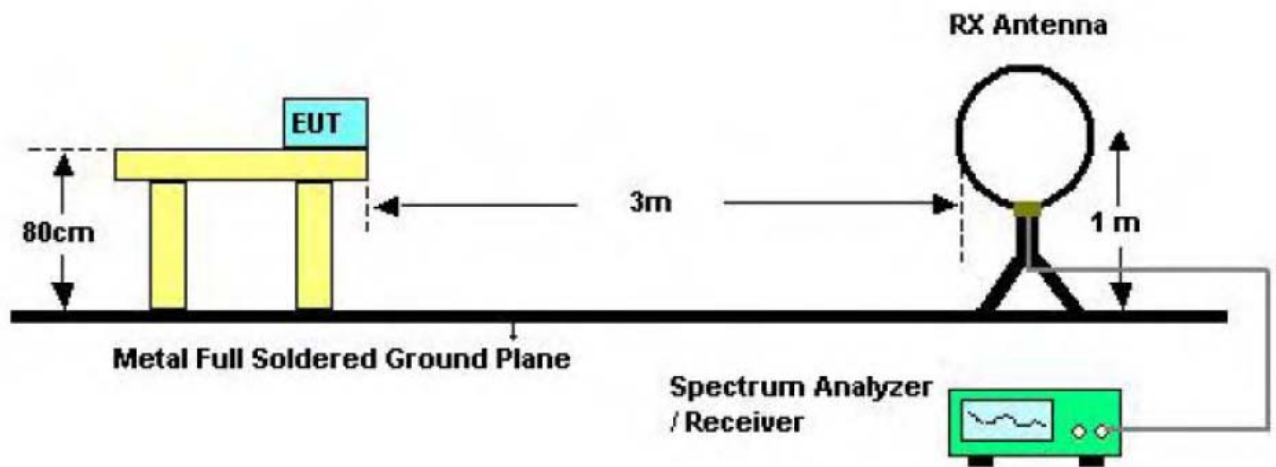

Below 30MHz Test Setup

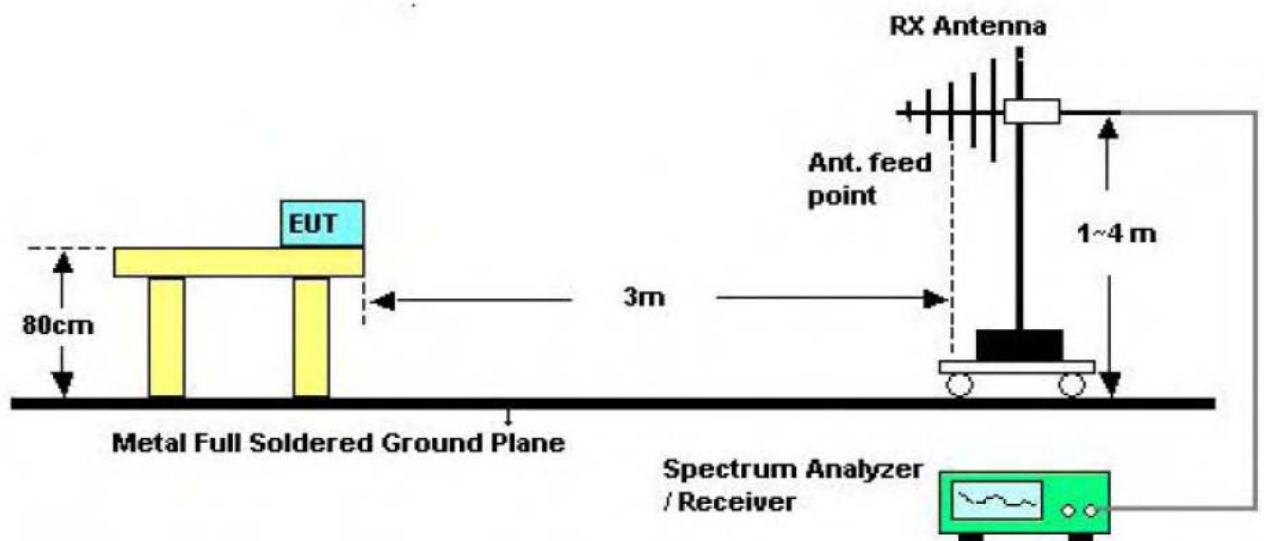

Below 1000MHz Test Setup

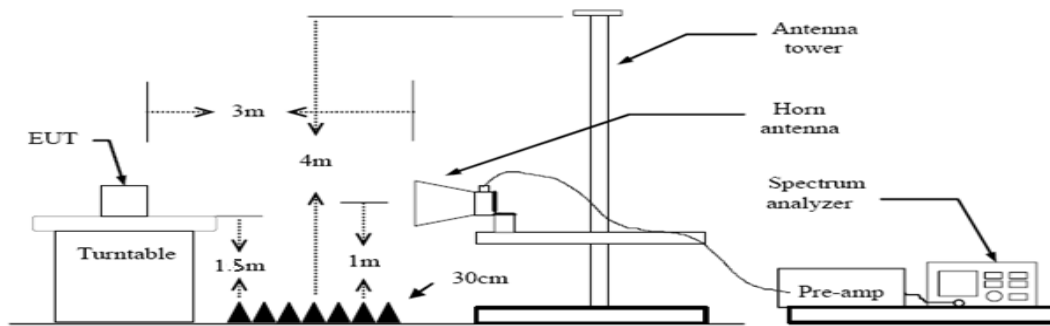

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power in TX mode.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	Only worse case is reported		

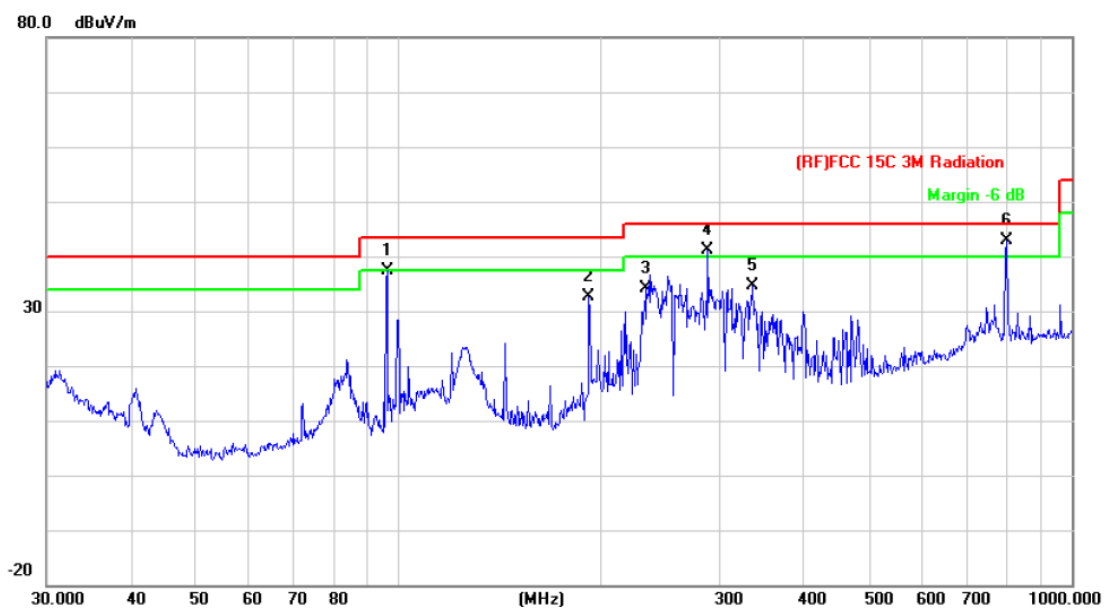


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		143.8295	46.99	-21.51	25.48	43.50	-18.02	peak
2		191.7450	54.58	-20.45	34.13	43.50	-9.37	peak
3	*	239.9874	56.98	-18.18	38.80	46.00	-7.20	peak
4		250.3012	51.40	-17.69	33.71	46.00	-12.29	peak
5		287.9904	45.82	-16.89	28.93	46.00	-17.07	peak
6		833.3171	38.03	-5.12	32.91	46.00	-13.09	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	Only worse case is reported		

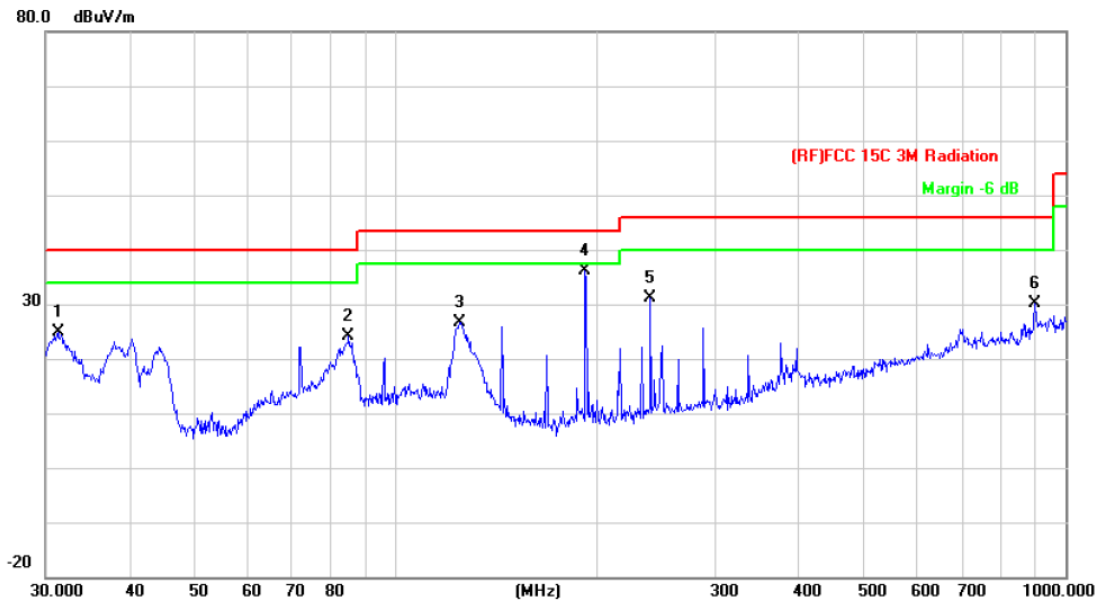


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		31.2893	39.72	-14.94	24.78	40.00	-15.22 peak
2		84.9995	47.12	-23.04	24.08	40.00	-15.92 peak
3		124.5690	49.00	-22.27	26.73	43.50	-16.77 peak
4	*	191.7450	56.62	-20.45	36.17	43.50	-7.33 peak
5		239.9874	49.32	-18.18	31.14	46.00	-14.86 peak
6		900.1474	33.68	-3.60	30.08	46.00	-15.92 peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX π /4-DQPSK Mode 2402MHz		
Remark:	Only worse case is reported		

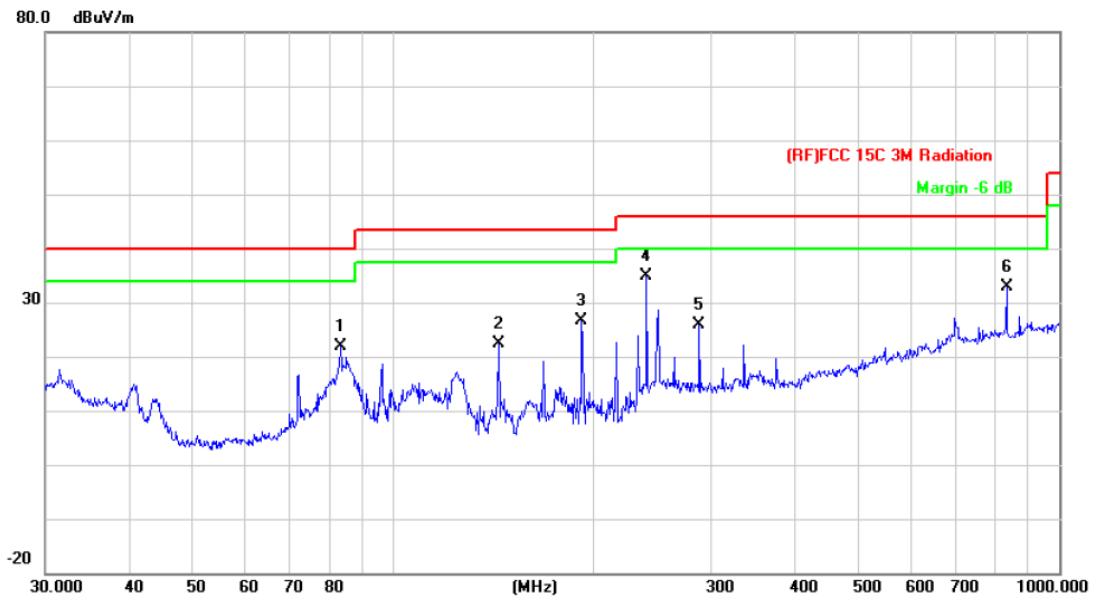


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		83.2296	44.94	-23.14	21.80	40.00	-18.20	peak
2		143.8291	43.99	-21.51	22.48	43.50	-21.02	peak
3		191.7450	47.08	-20.45	26.63	43.50	-16.87	peak
4	*	239.9874	52.98	-18.18	34.80	46.00	-11.20	peak
5		287.9904	42.82	-16.89	25.93	46.00	-20.07	peak
6		833.3170	38.03	-5.12	32.91	46.00	-13.09	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz		
Remark:	Only worse case is reported		

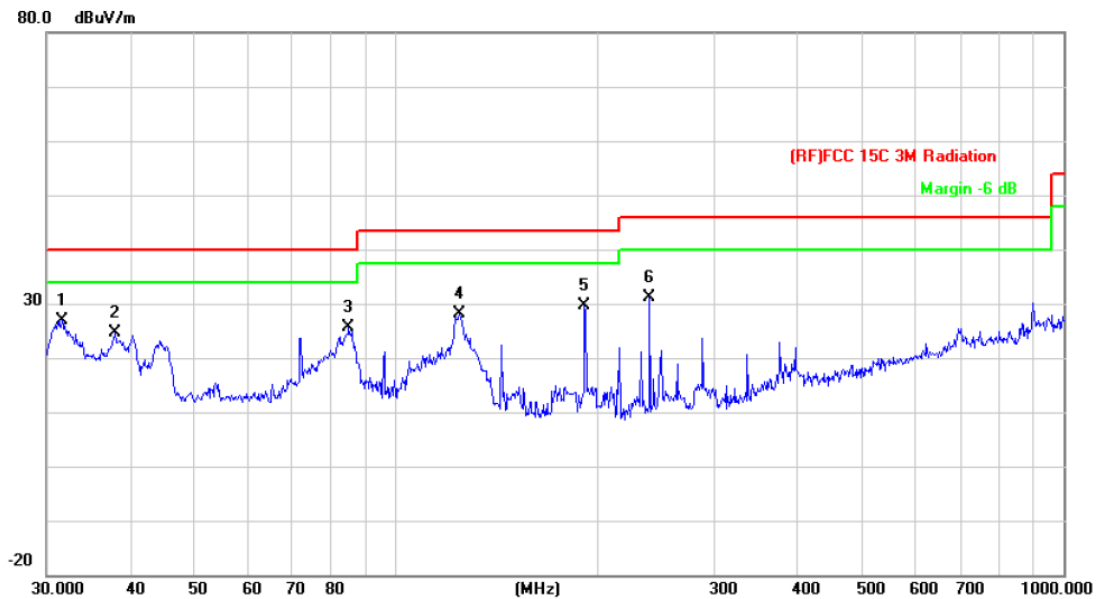


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	31.6202	41.97	-15.14	26.83	40.00	-13.17	peak
2		37.9450	43.62	-19.04	24.58	40.00	-15.42	peak
3		84.9993	48.62	-23.04	25.58	40.00	-14.42	peak
4		124.5690	50.50	-22.27	28.23	43.50	-15.27	peak
5		191.7450	50.12	-20.45	29.67	43.50	-13.83	peak
6		239.9874	49.32	-18.18	31.14	46.00	-14.86	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	Only worse case is reported		

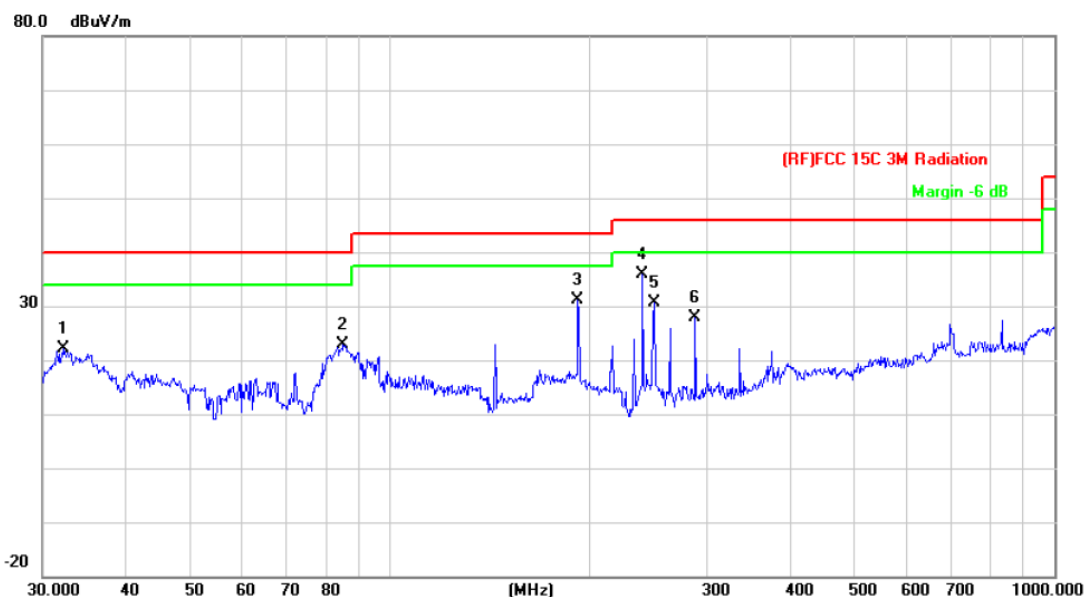


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.2924	37.71	-15.56	22.15	40.00	-17.85	peak
2		84.9993	45.98	-23.04	22.94	40.00	-17.06	peak
3		191.7450	51.58	-20.45	31.13	43.50	-12.37	peak
4	*	239.9874	53.98	-18.18	35.80	46.00	-10.20	peak
5		250.3009	48.40	-17.69	30.71	46.00	-15.29	peak
6		287.9904	44.82	-16.89	27.93	46.00	-18.07	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	Only worse case is reported		

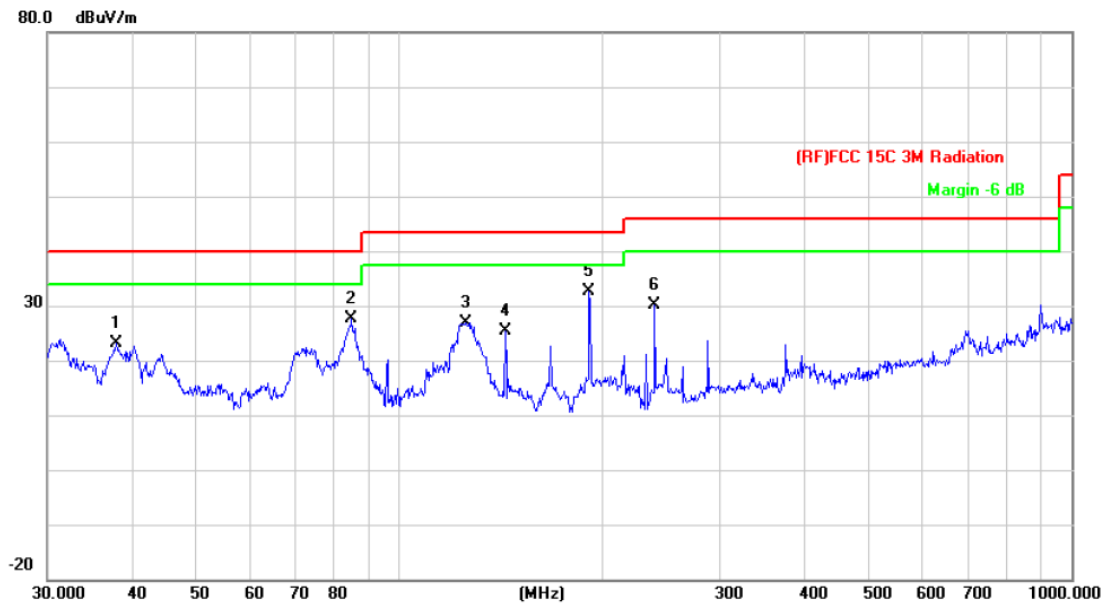


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		37.9450	42.12	-19.04	23.08	40.00	-16.92 peak
2		84.9993	50.62	-23.04	27.58	40.00	-12.42 peak
3		125.4457	49.21	-22.25	26.96	43.50	-16.54 peak
4		143.8292	46.95	-21.51	25.44	43.50	-18.06 peak
5	*	191.7450	53.12	-20.45	32.67	43.50	-10.83 peak
6		239.9874	48.32	-18.18	30.14	46.00	-15.86 peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Above 1GHz


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

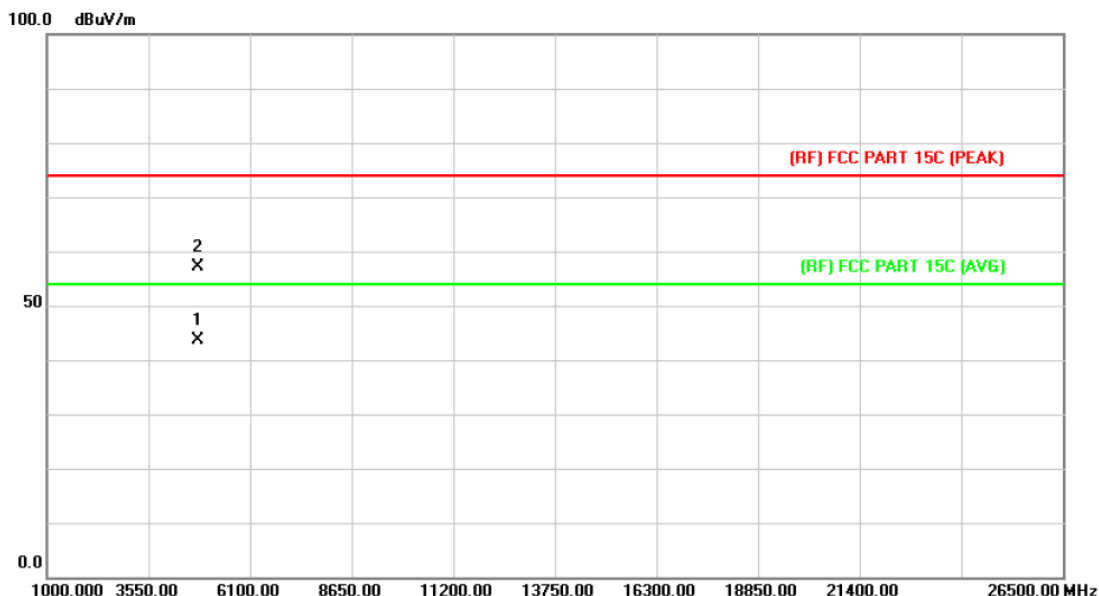

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4804.514	30.10	13.44	43.54	54.00	-10.46	AVG
2		4804.780	43.69	13.44	57.13	74.00	-16.87	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

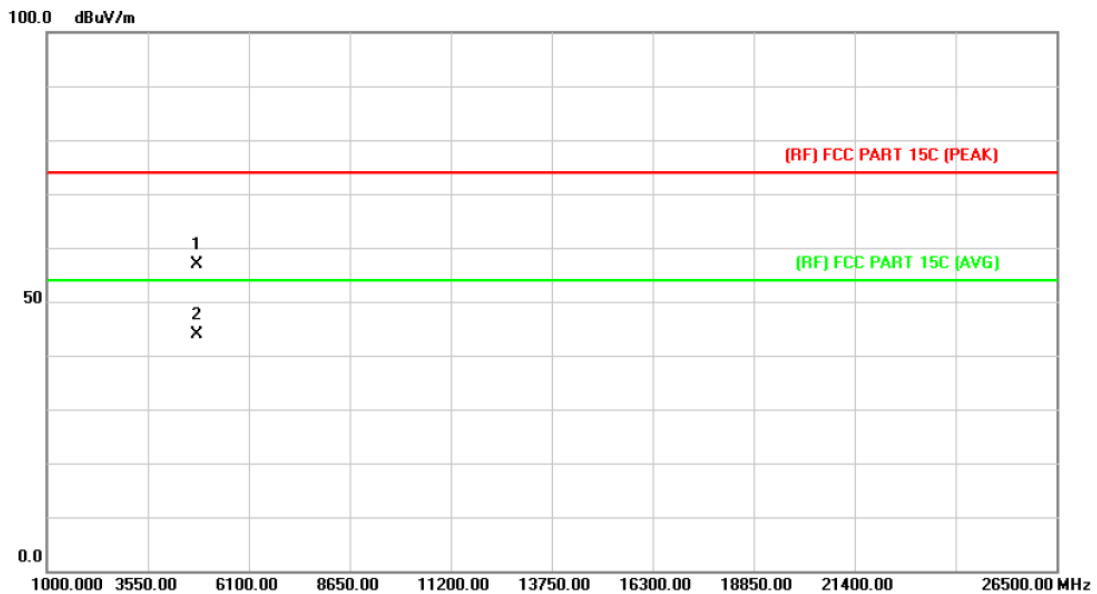

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.522	43.56	13.44	57.00	74.00	-17.00	peak
2	*	4803.772	30.35	13.44	43.79	54.00	-10.21	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

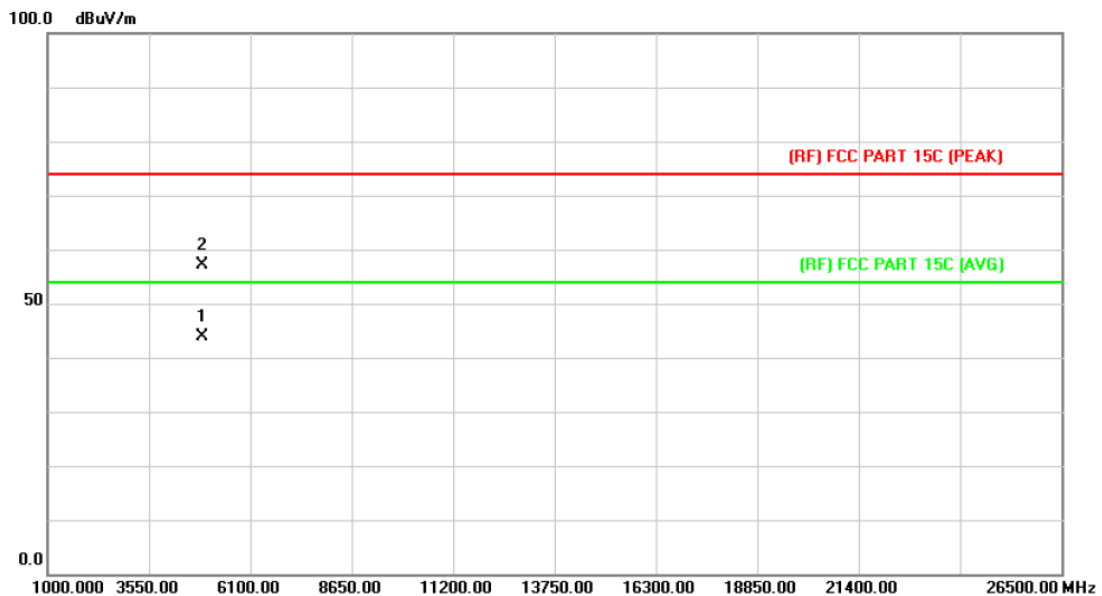

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4881.492	30.08	13.90	43.98	54.00	-10.02	AVG
2		4882.196	43.24	13.90	57.14	74.00	-16.86	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

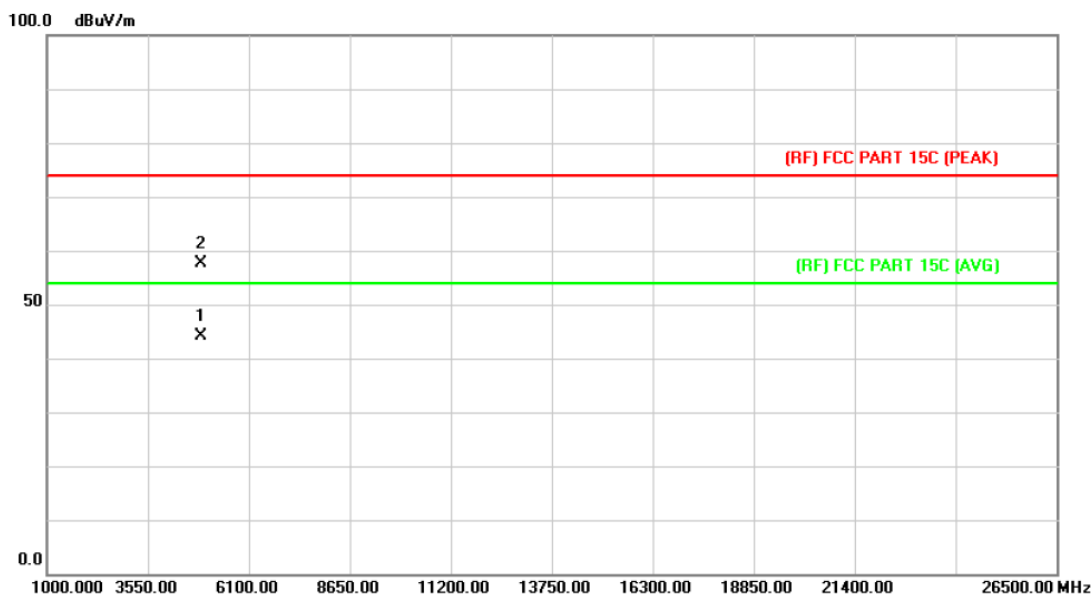

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4881.792	30.34	13.90	44.24	54.00	-9.76	AVG
2		4882.106	43.78	13.90	57.68	74.00	-16.32	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

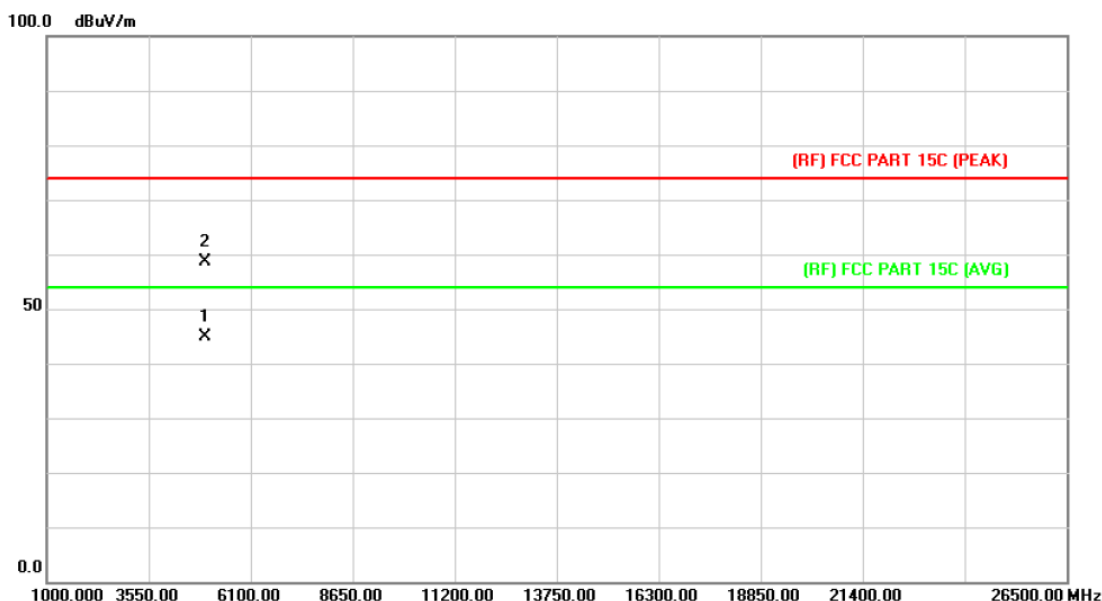

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4960.394	30.64	14.36	45.00	54.00	-9.00	AVG
2		4960.506	44.34	14.36	58.70	74.00	-15.30	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

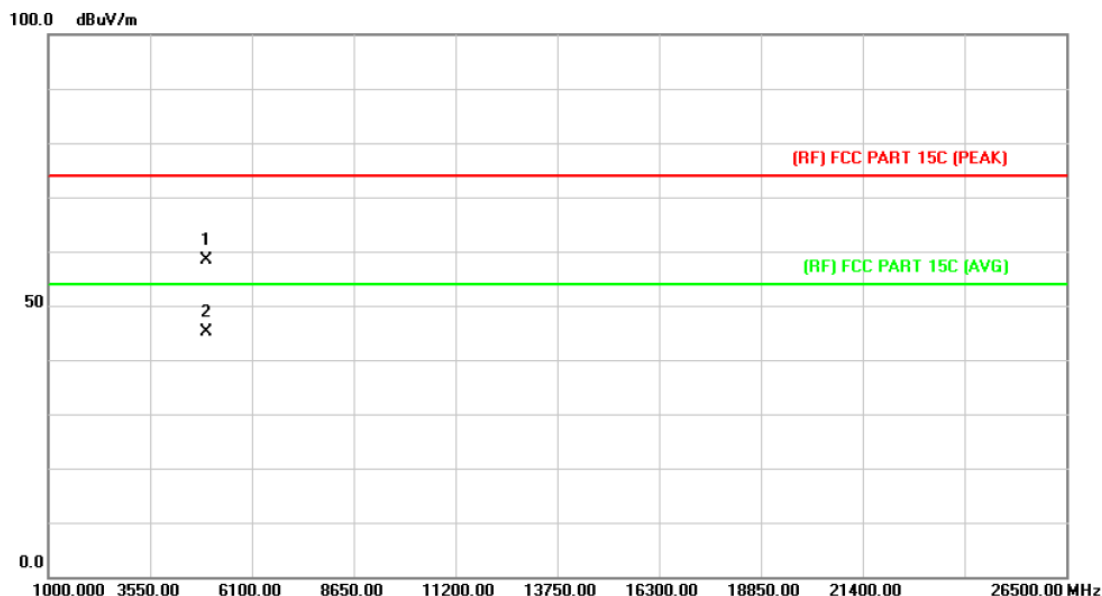

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4959.648	44.09	14.36	58.45	74.00	-15.55	peak
2	*	4960.780	30.87	14.36	45.23	54.00	-8.77	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX π /4-DQPSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

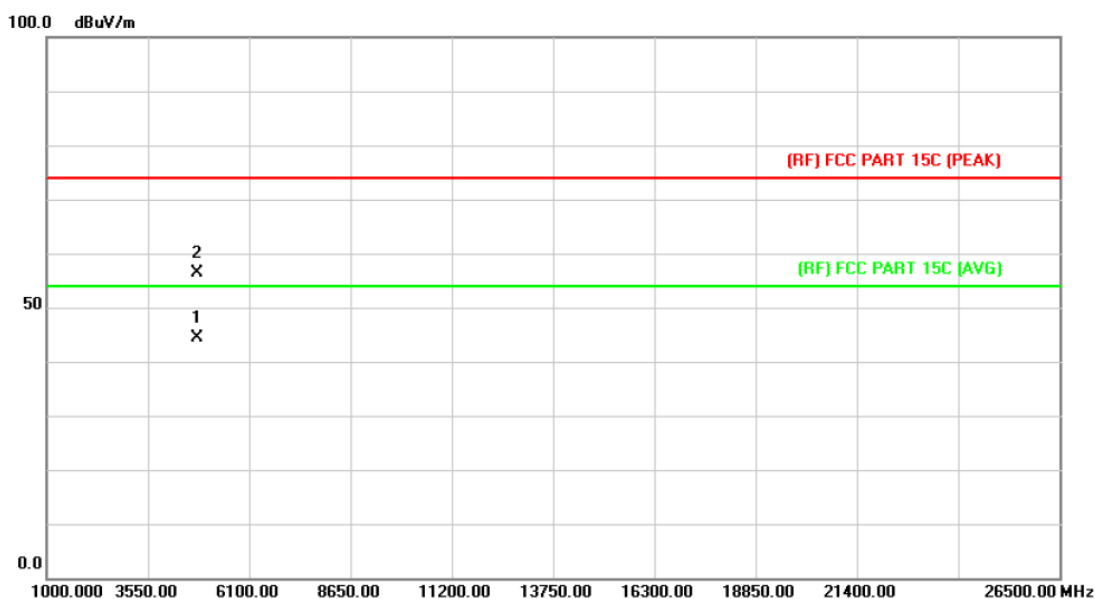

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4804.238	30.84	13.44	44.28	54.00	-9.72	AVG
2		4805.461	42.82	13.45	56.27	74.00	-17.73	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX π /4-DQPSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

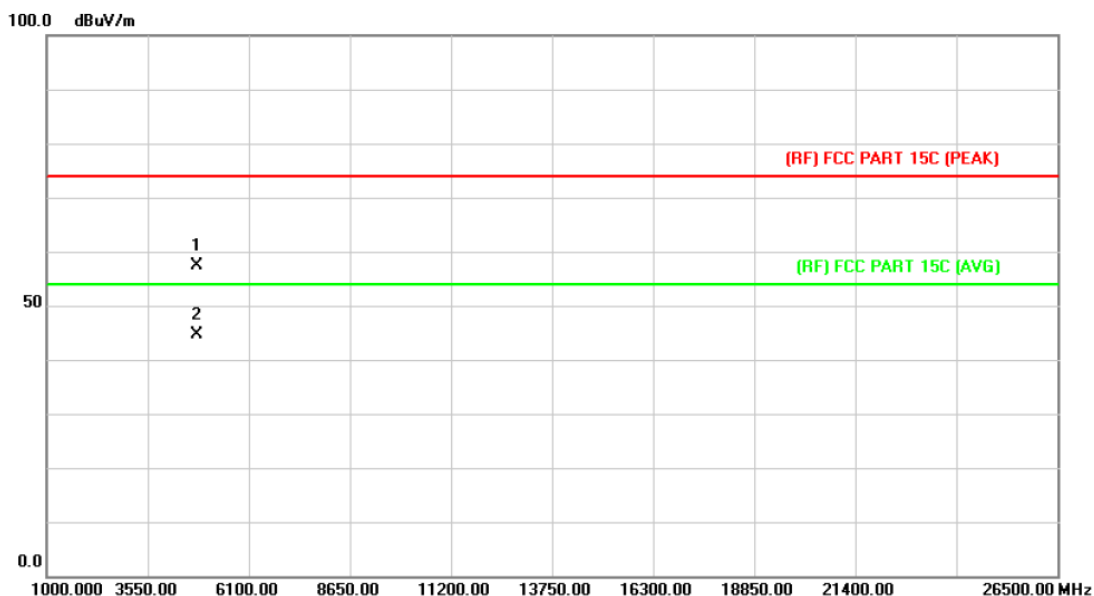

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4804.272	43.82	13.44	57.26	74.00	-16.74	peak
2	*	4805.372	31.15	13.45	44.60	54.00	-9.40	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX π /4-DQPSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

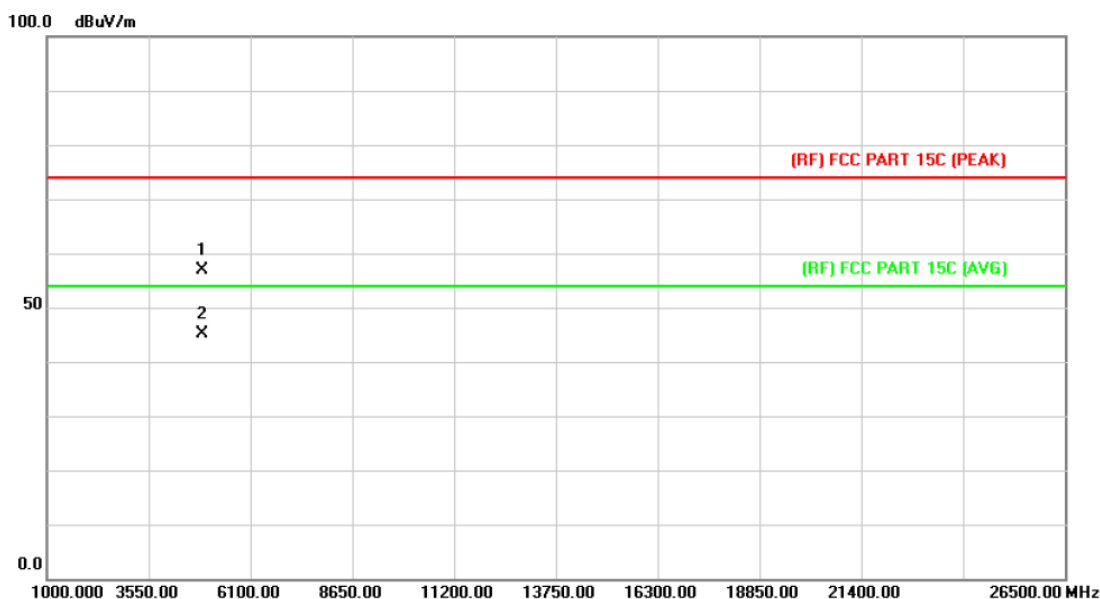

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4881.736	42.86	13.90	56.76	74.00	-17.24	peak
2	*	4883.627	31.31	13.92	45.23	54.00	-8.77	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX π /4-DQPSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

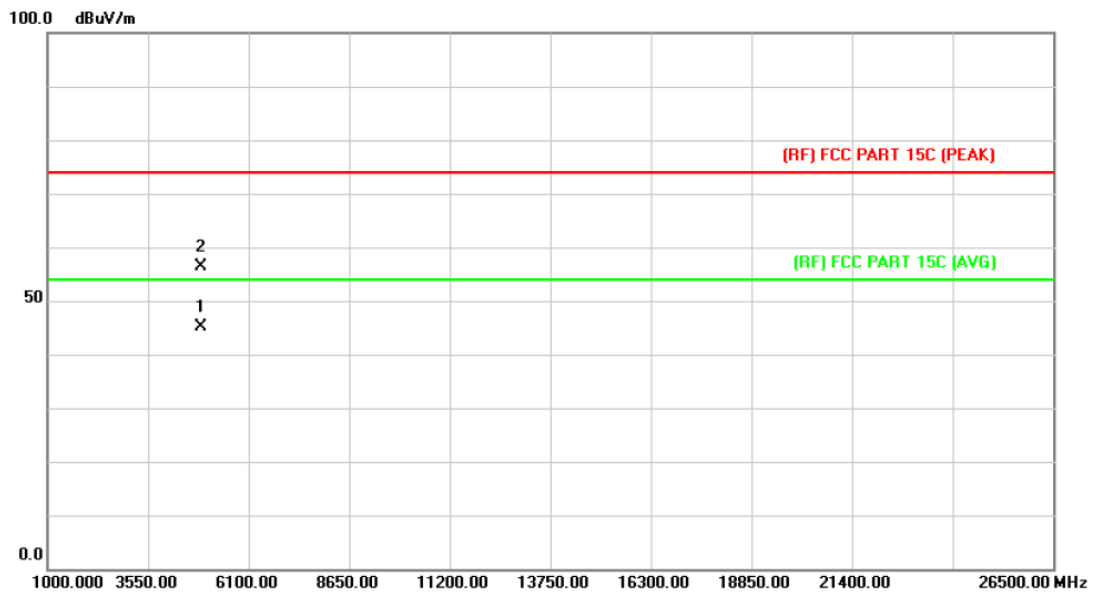

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4881.235	31.33	13.90	45.23	54.00	-8.77	AVG
2		4882.672	42.37	13.90	56.27	74.00	-17.73	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX π /4-DQPSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

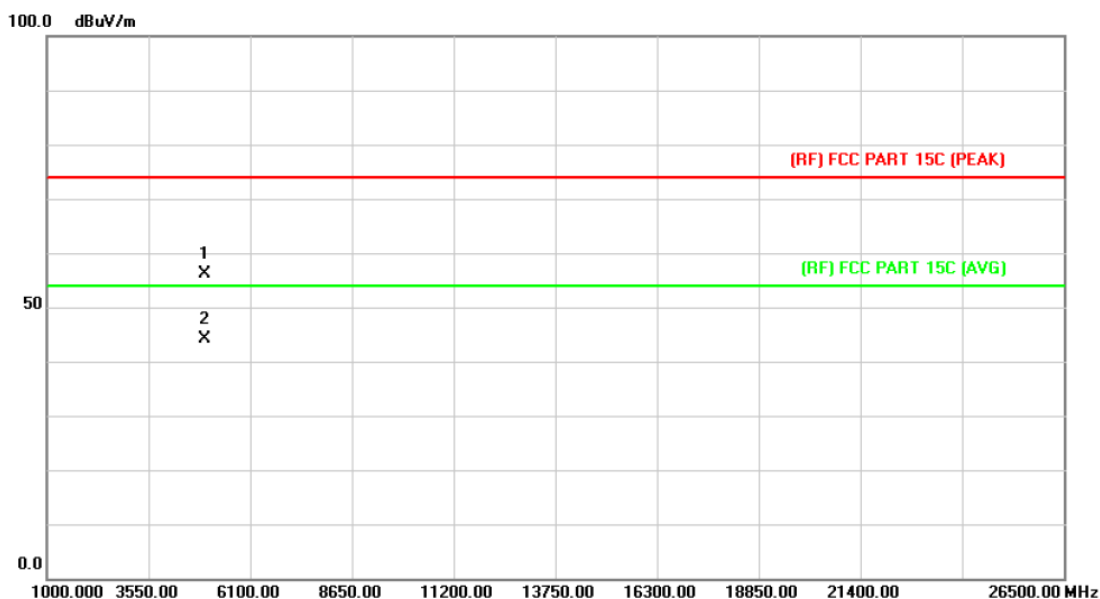

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4960.752	41.77	14.36	56.13	74.00	-17.87	peak
2	*	4961.034	29.79	14.37	44.16	54.00	-9.84	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX π /4-DQPSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

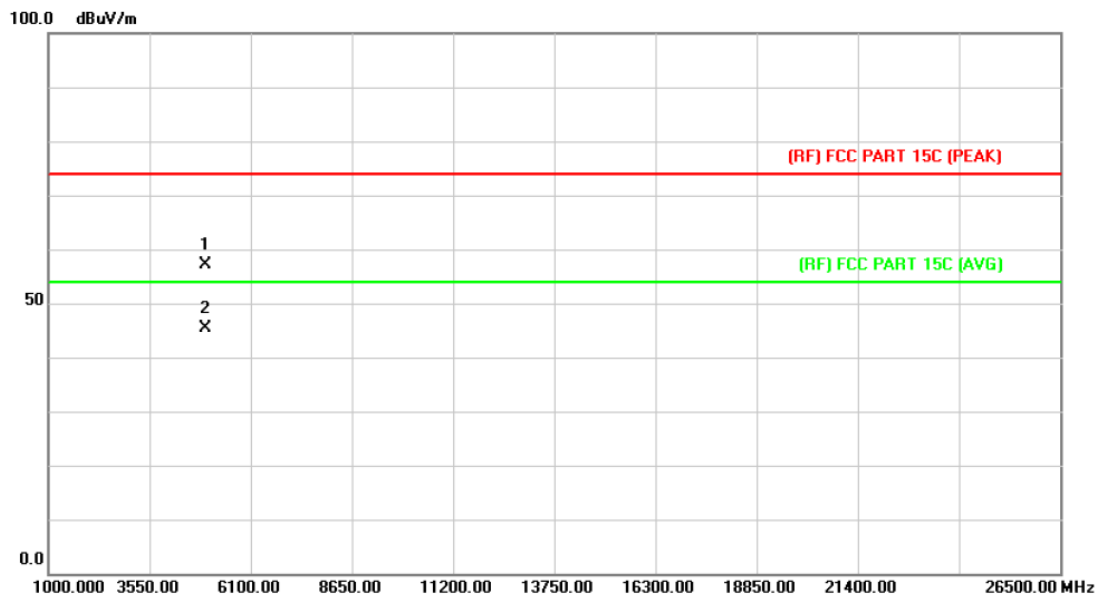

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4960.174	42.87	14.36	57.23	74.00	-16.77	peak
2	*	4960.237	30.91	14.36	45.27	54.00	-8.73	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

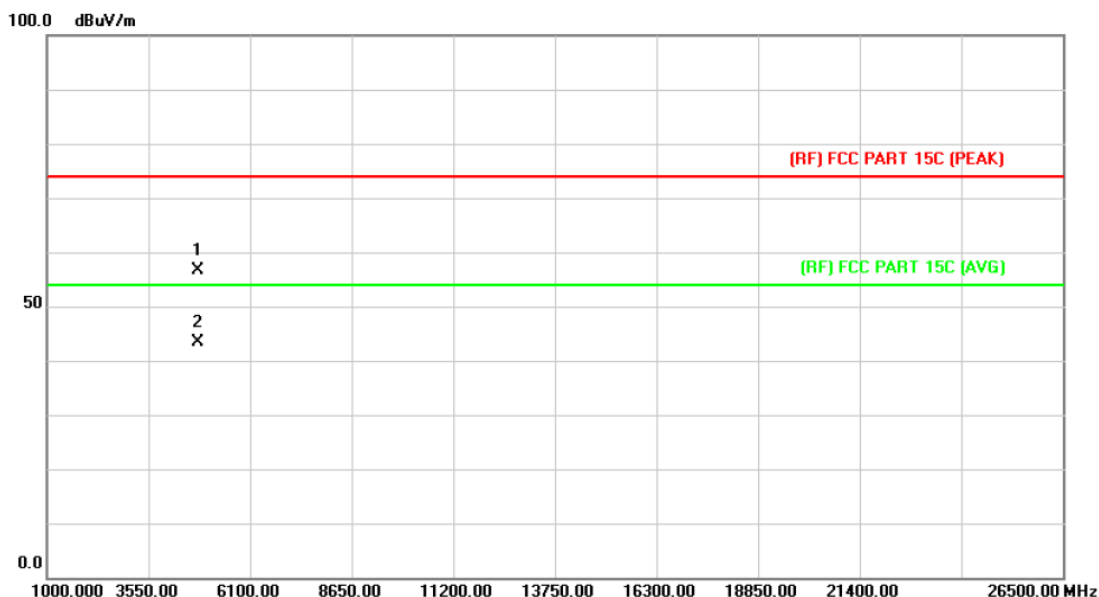

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.438	43.23	13.44	56.67	74.00	-17.33	peak
2	*	4804.072	30.03	13.44	43.47	54.00	-10.53	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

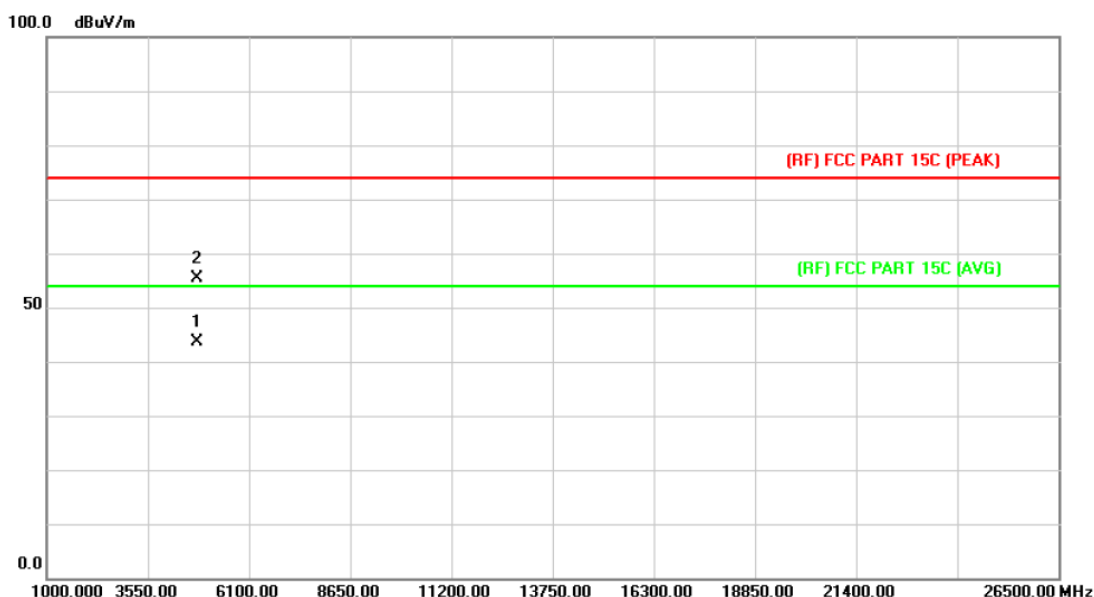

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4803.356	30.10	13.44	43.54	54.00	-10.46	AVG
2		4803.886	41.96	13.44	55.40	74.00	-18.60	peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

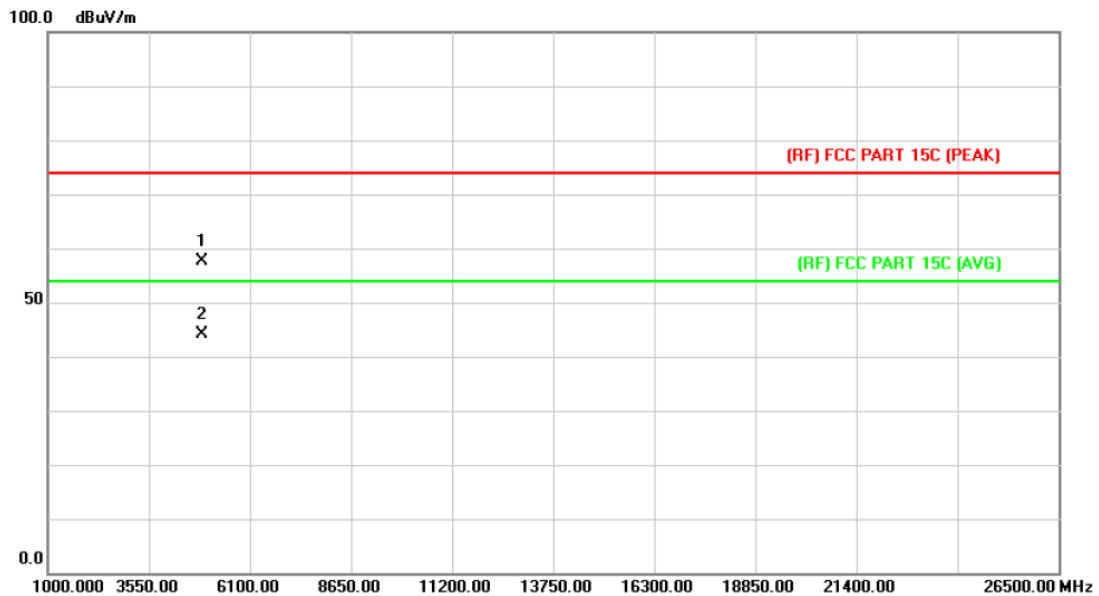

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4881.538	43.76	13.90	57.66	74.00	-16.34	peak
2	*	4881.948	30.23	13.90	44.13	54.00	-9.87	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2441MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

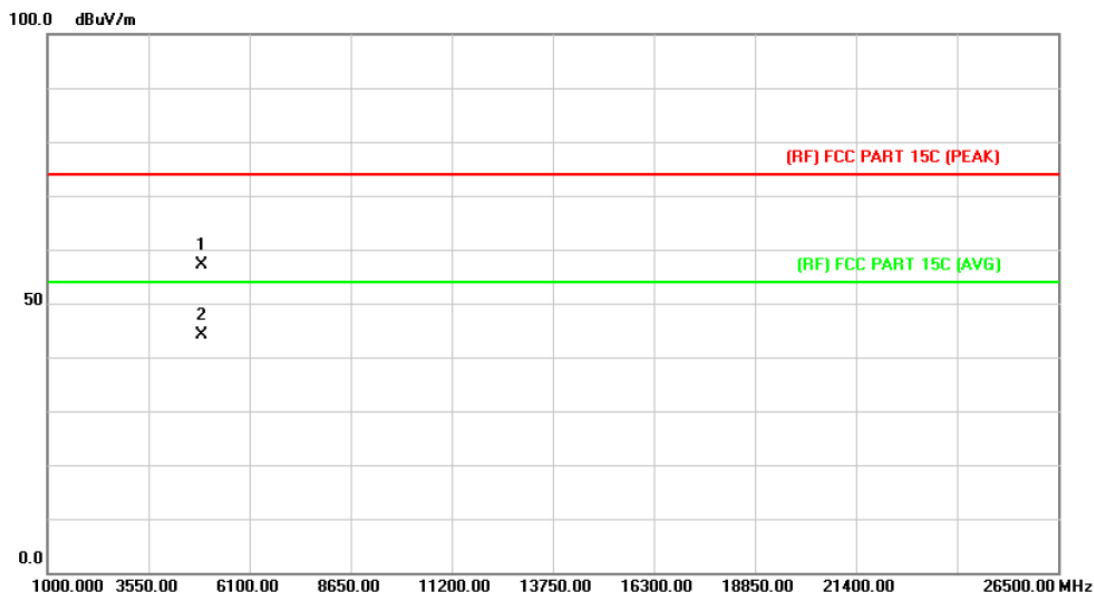

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4881.368	43.26	13.90	57.16	74.00	-16.84	peak
2	*	4882.108	30.13	13.90	44.03	54.00	-9.97	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

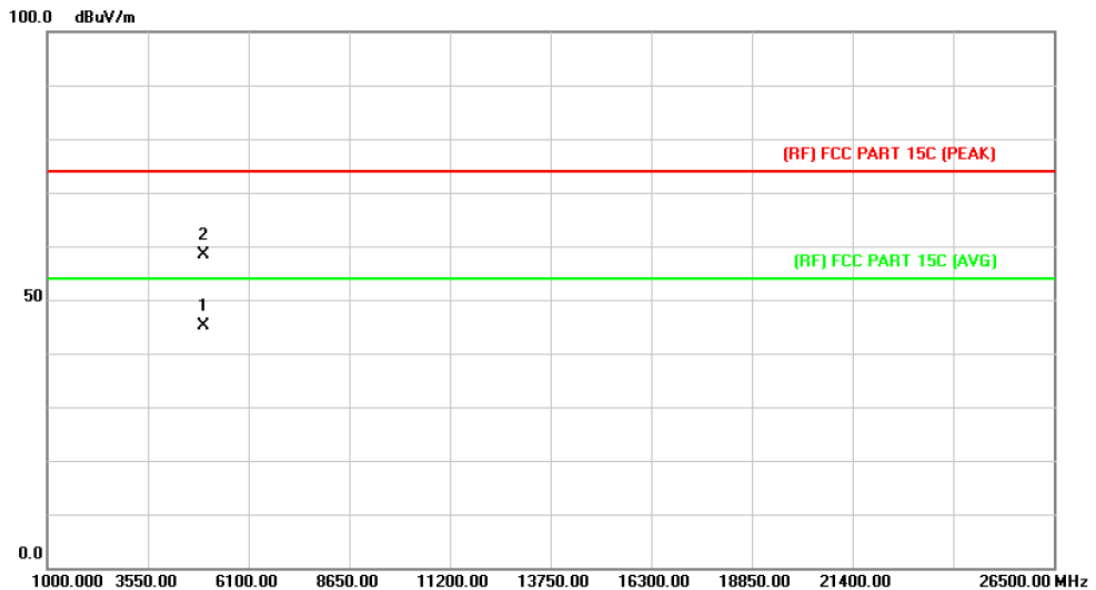

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4959.516	30.72	14.36	45.08	54.00	-8.92	AVG
2		4959.784	44.08	14.36	58.44	74.00	-15.56	peak

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

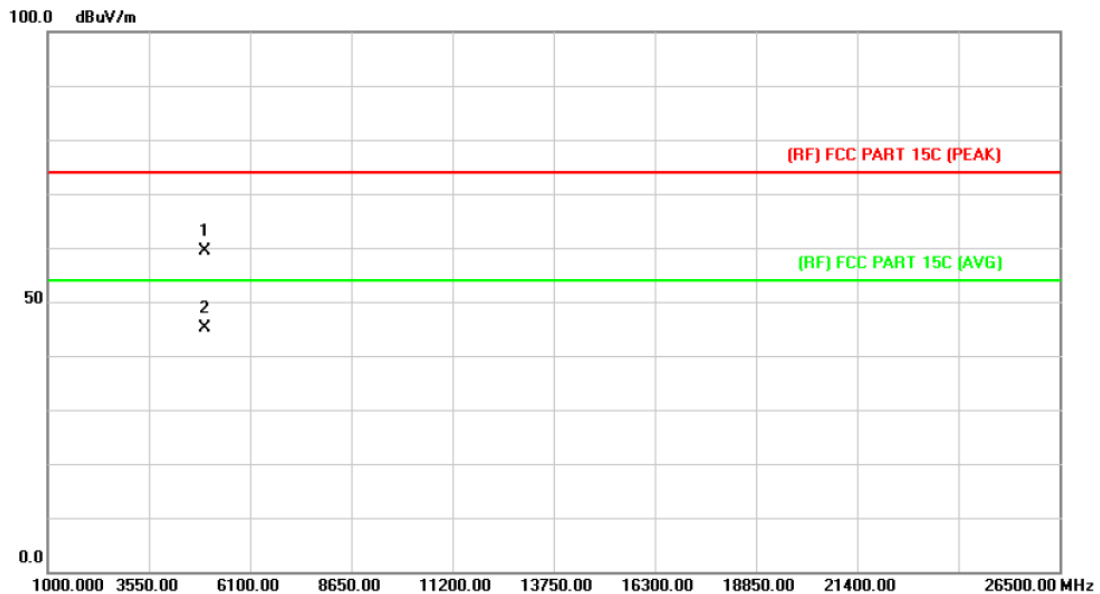

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4959.778	45.08	14.36	59.44	74.00	-14.56	peak
2	*	4960.870	30.66	14.36	45.02	54.00	-8.98	AVG

Emission Level= Read Level+ Correct Factor

6. Restricted Bands Requirement

6.1 Test Standard and Limit


- 6.1.1 Test Standard
FCC Part 15.247(d)
FCC Part 15.209
FCC Part 15.205

6.1.2 Test Limit

Restricted Frequency Band (MHz)	Class B (dBUV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

6.2 Test Setup

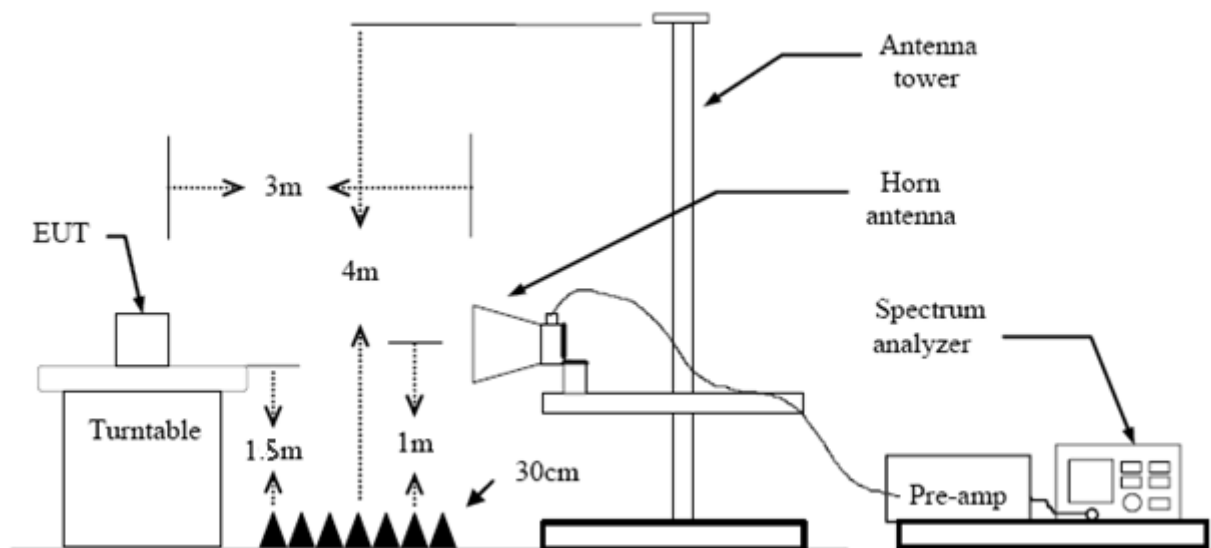

6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to

determine the position of the highest radiation.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with AVG Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.


6.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

(1) Radiation Test


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	Only worse case is reported		

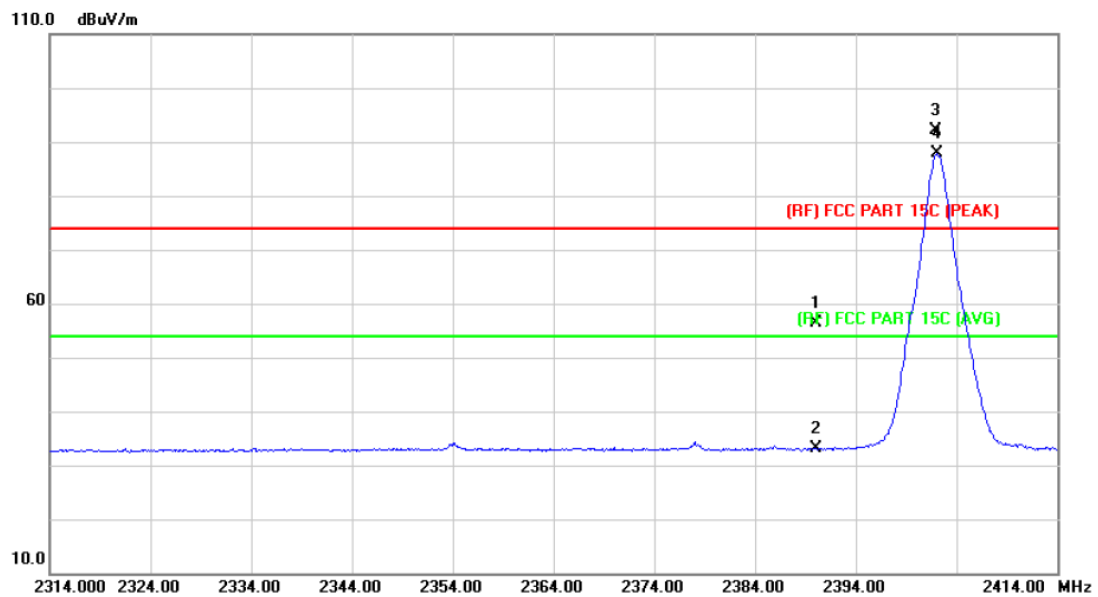

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	55.51	0.77	56.28	74.00	-17.72	peak
2		2390.000	32.35	0.77	33.12	54.00	-20.88	AVG
3	X	2401.900	91.27	0.82	92.09	Fundamental Frequency		peak
4	*	2402.100	87.09	0.82	87.91	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2402MHz		
Remark:	Only worse case is reported		

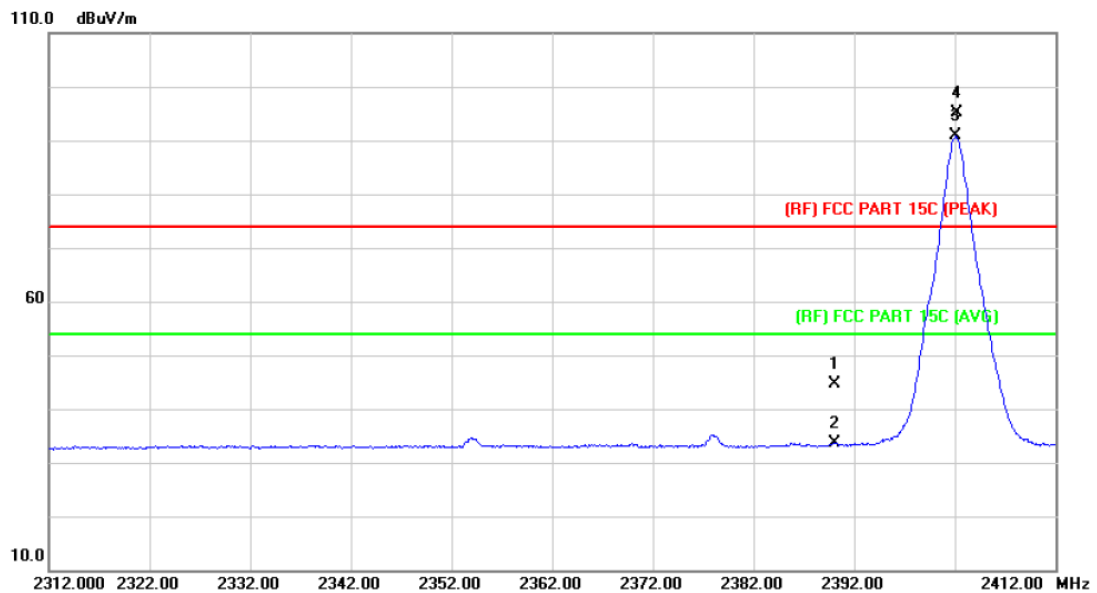

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	43.84	0.77	44.61	74.00	-29.39	peak
2		2390.000	32.95	0.77	33.72	54.00	-20.28	AVG
3	*	2402.100	90.04	0.82	90.86	Fundamental Frequency		AVG
4	X	2402.200	94.32	0.82	95.14	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2480 MHz		
Remark:	Only worse case is reported		

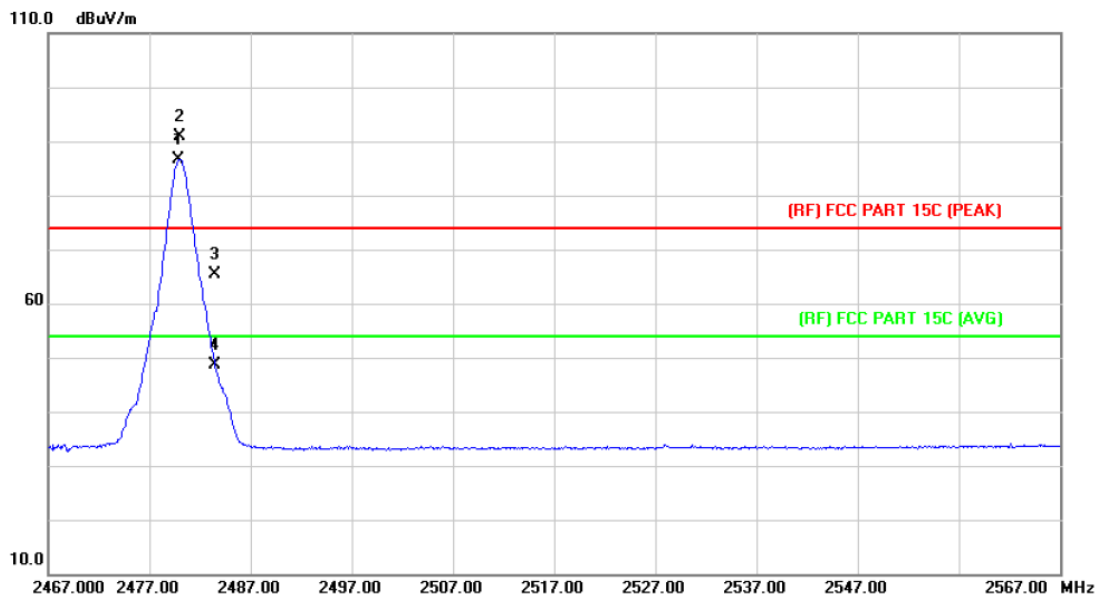

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2479.900	85.56	1.15	86.71	Fundamental Frequency		AVG
2	X	2480.000	89.74	1.15	90.89	Fundamental Frequency		peak
3		2483.500	64.11	1.17	65.28	74.00	-8.72	peak
4		2483.500	47.43	1.17	48.60	54.00	-5.40	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2480 MHz		
Remark:	Only worse case is reported		

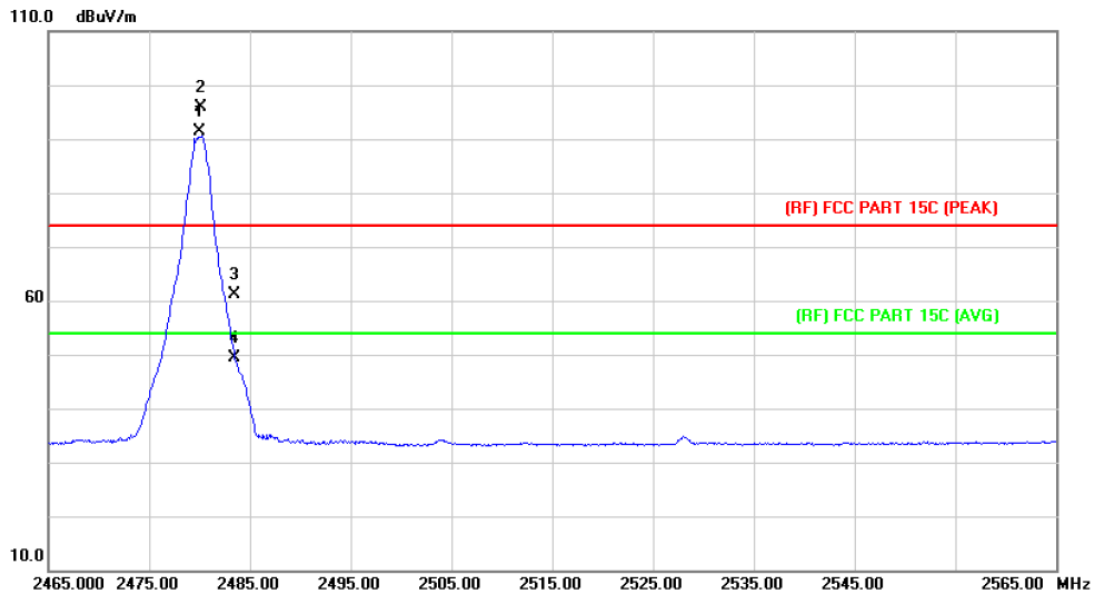

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2480.000	90.26	1.15	91.41	Fundamental Frequency		AVG
2	X	2480.200	94.66	1.15	95.81	Fundamental Frequency		peak
3		2483.500	60.07	1.17	61.24	74.00	-12.76	peak
4		2483.500	48.32	1.17	49.49	54.00	-4.51	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX π /4-DQPSK Mode 2402MHz		
Remark:	Only worse case is reported		

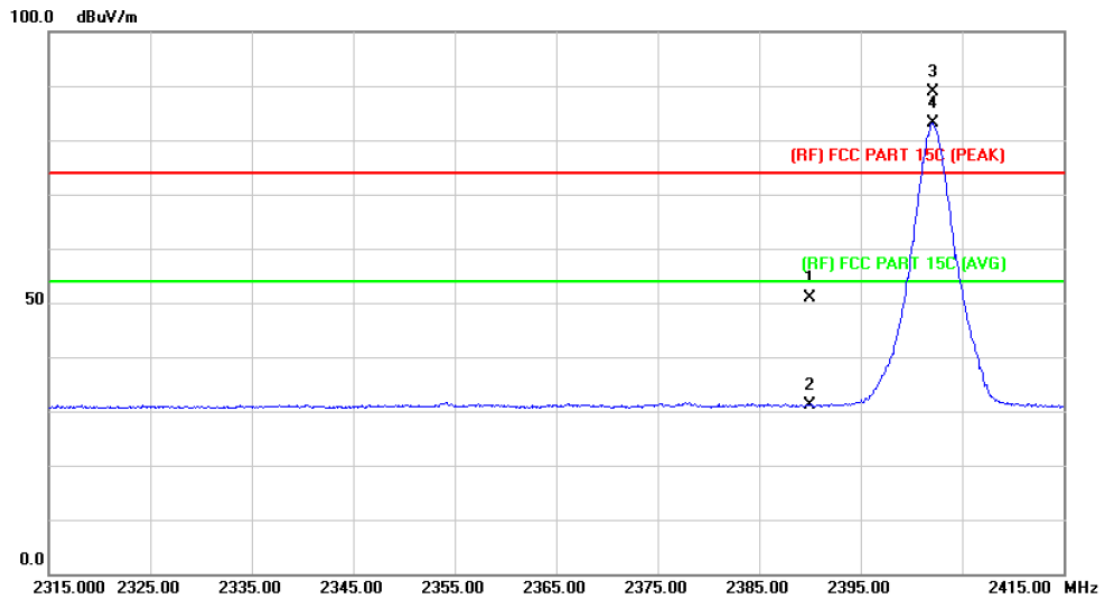

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	50.05	0.77	50.82	74.00	-23.18	peak
2		2390.000	30.45	0.77	31.22	54.00	-22.78	AVG
3	X	2402.100	87.96	0.82	88.78	Fundamental Frequency		peak
4	*	2402.100	82.39	0.82	83.21	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX π /4-DQPSK Mode 2402MHz		
Remark:	Only worse case is reported		

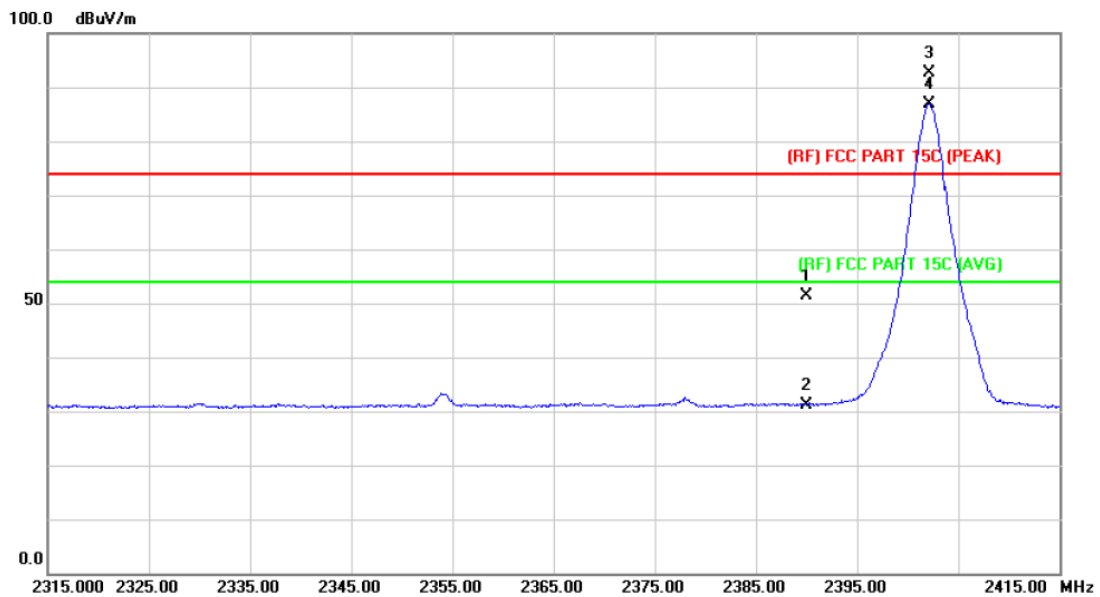

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	50.54	0.77	51.31	74.00	-22.69	peak
2		2390.000	30.45	0.77	31.22	54.00	-22.78	AVG
3	X	2402.200	91.77	0.82	92.59	Fundamental Frequency		peak
4	*	2402.200	86.09	0.82	86.91	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX π /4-DQPSK Mode 2480 MHz		
Remark:	Only worse case is reported		

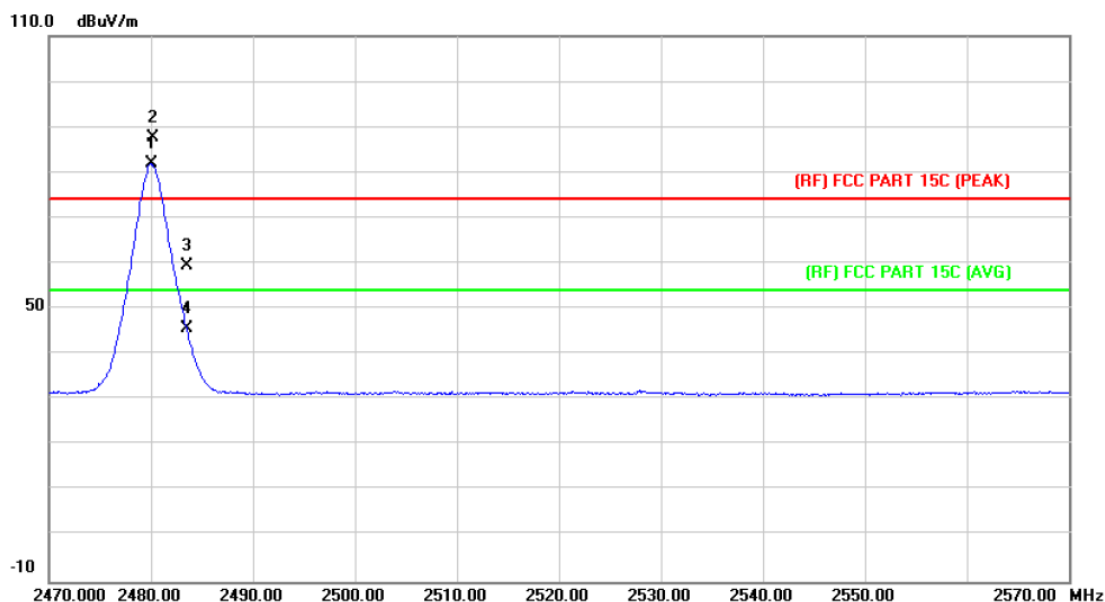

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2480.000	80.88	1.15	82.03	Fundamental Frequency		AVG
2	X	2480.200	86.42	1.15	87.57	Fundamental Frequency		peak
3		2483.500	58.42	1.17	59.59	74.00	-14.41	peak
4		2483.500	44.43	1.17	45.60	54.00	-8.40	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX π /4-DQPSK Mode 2480 MHz		
Remark:	Only worse case is reported		

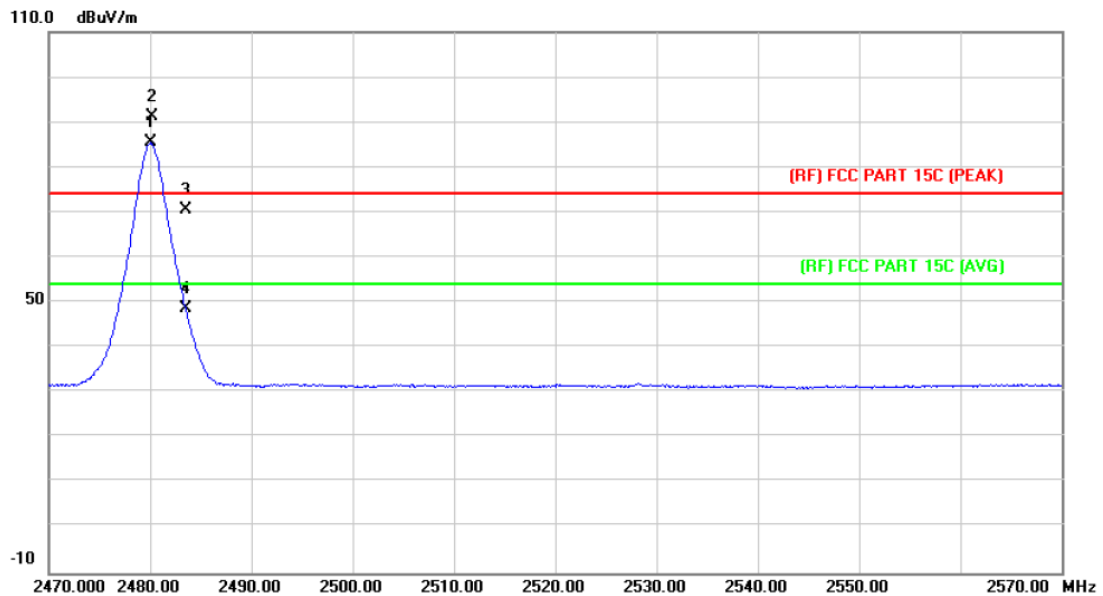

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2480.000	84.28	1.15	85.43	Fundamental Frequency		AVG
2	X	2480.200	90.01	1.15	91.16	Fundamental Frequency		peak
3		2483.500	69.27	1.17	70.44	74.00	-3.56	peak
4		2483.500	47.39	1.17	48.56	54.00	-5.44	AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	Only worse case is reported		

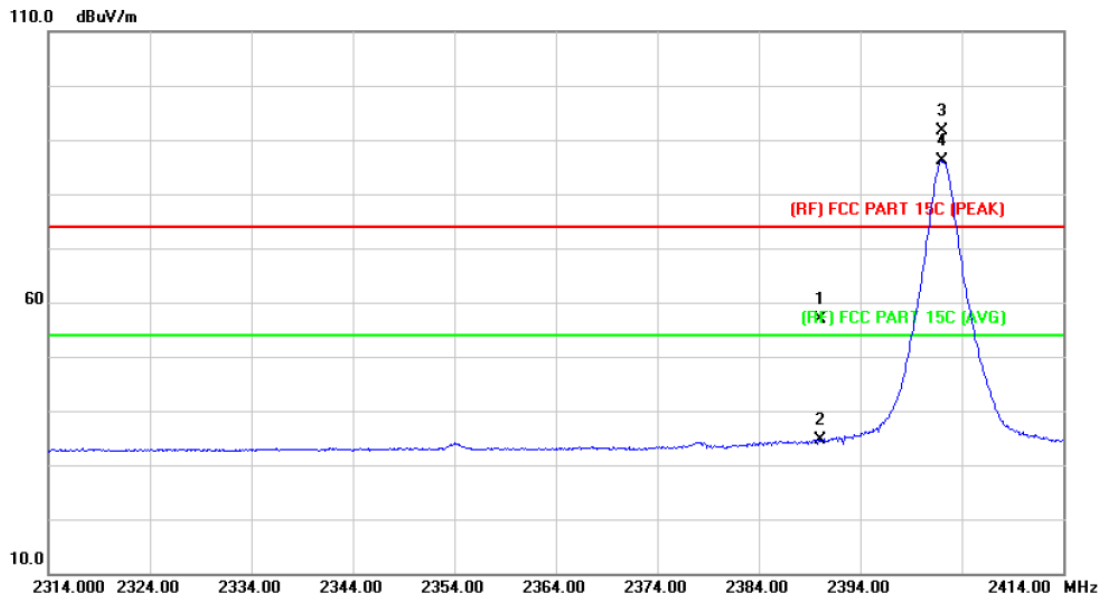

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	56.01	0.77	56.78	74.00	-17.22	peak
2		2390.000	33.84	0.77	34.61	54.00	-19.39	AVG
3	X	2402.000	90.93	0.82	91.75	Fundamental Frequency		peak
4	*	2402.000	85.38	0.82	86.20	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2402MHz		
Remark:	Only worse case is reported		

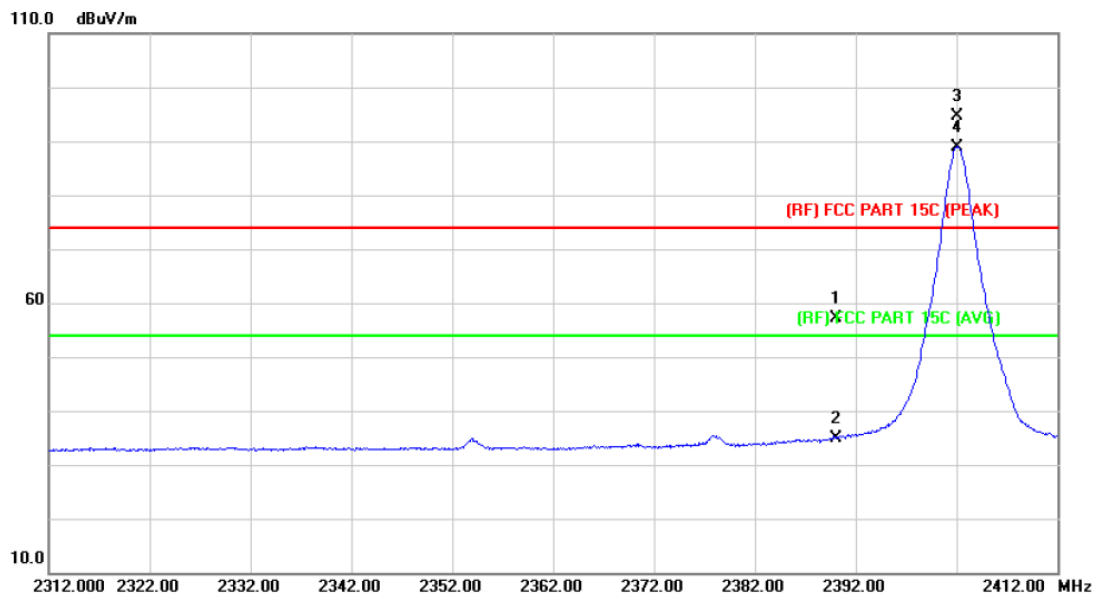

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	56.37	0.77	57.14	74.00	-16.86	peak
2		2390.000	34.20	0.77	34.97	54.00	-19.03	AVG
3	X	2402.100	93.88	0.82	94.70	Fundamental Frequency		peak
4	*	2402.100	88.18	0.82	89.00	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Horizontal		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	Only worse case is reported		

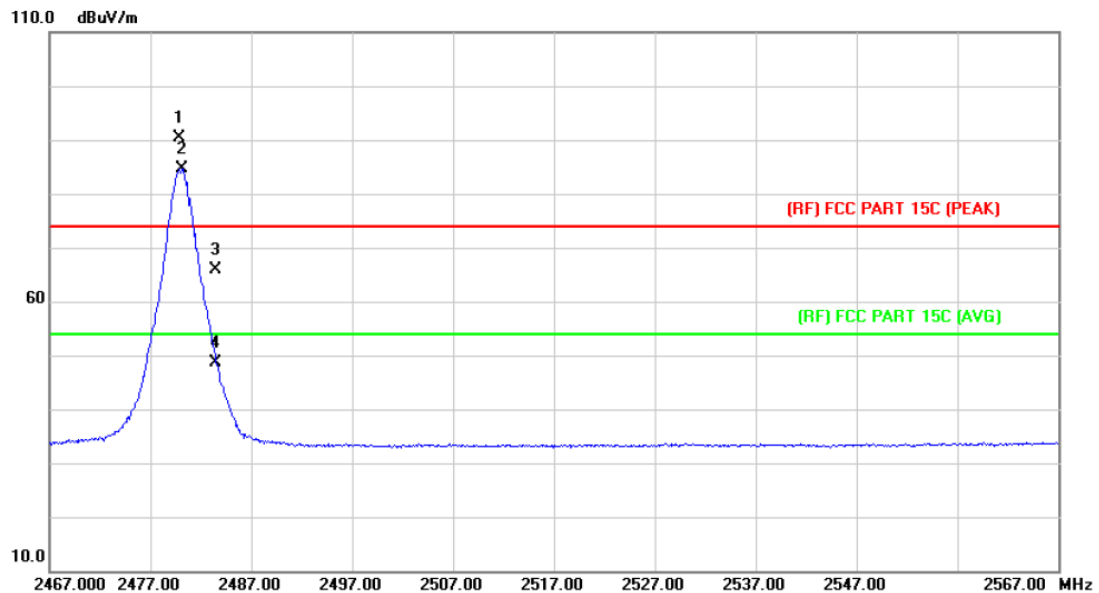

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2479.900	89.35	1.15	90.50	Fundamental Frequency		peak
2	*	2480.100	83.49	1.15	84.64	Fundamental Frequency		AVG
3		2483.500	64.62	1.17	65.79	74.00	-8.21	peak
4		2483.500	47.57	1.17	48.74	54.00	-5.26	AVG

Emission Level= Read Level+ Correct Factor

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Ant. Pol.	Vertical		
Test Mode:	TX 8-DPSK Mode 2480MHz		
Remark:	Only worse case is reported		

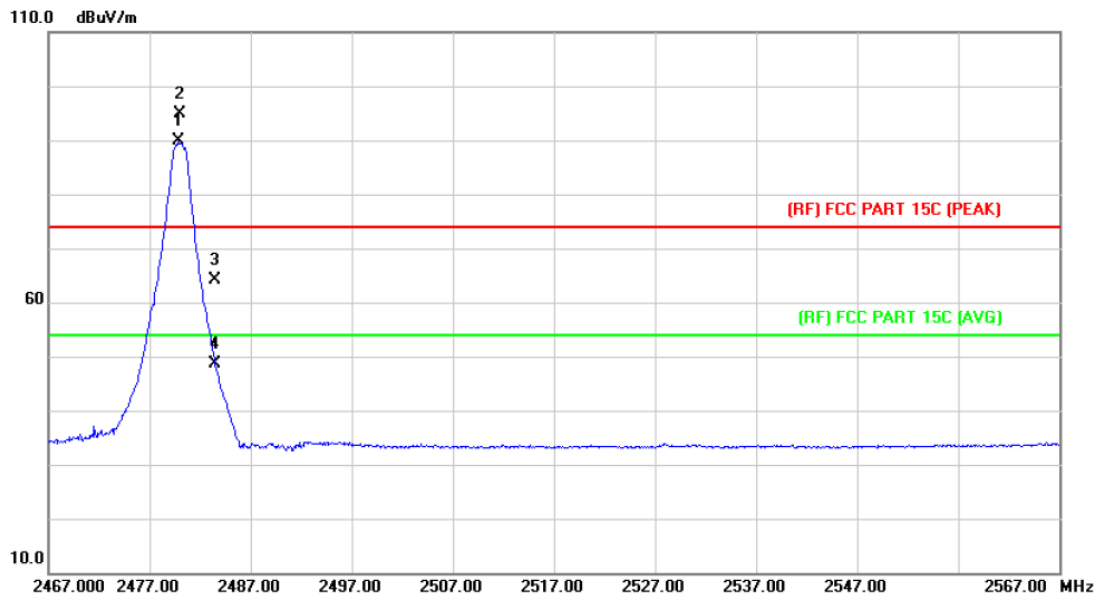


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2479.800	88.65	1.15	89.80	Fundamental Frequency		AVG
2	X	2480.000	93.82	1.15	94.97	Fundamental Frequency		peak
3		2483.500	63.07	1.17	64.24	74.00	-9.76	peak
4		2483.500	47.56	1.17	48.73	54.00	-5.27	AVG


Emission Level= Read Level+ Correct Factor

(2) Conducted Test(Band Edge)

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK	
Temperature:	25°C	Relative Humidity:	55%	
Test Voltage:	DC 3.7V			
Test Mode:	TX GFSK Mode 2402MHz / 2480 MHz			
Channel	Frequency (MHz)	Measured Bandedge (dBm)	Band Edge Limit (dBm)	Result
Low	2400	-26.17	-13.62	PASS
High	2483.5	-31.92	-15.80	

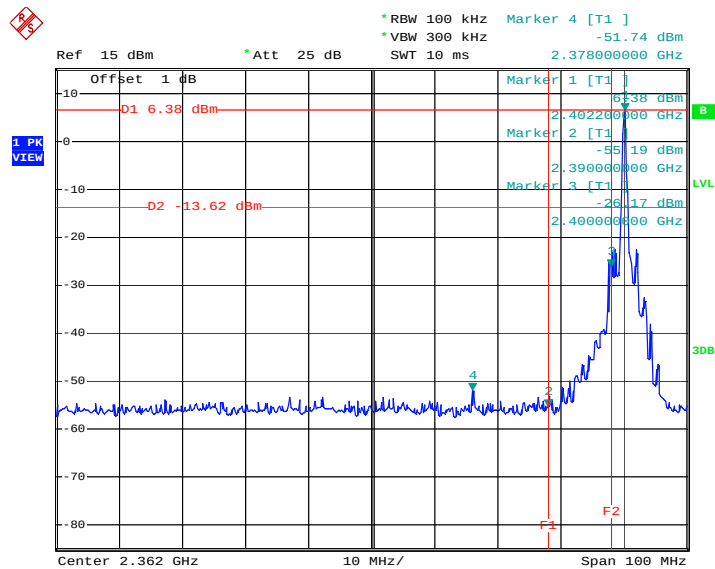


Date: 12.DEC.2016 13:32:20

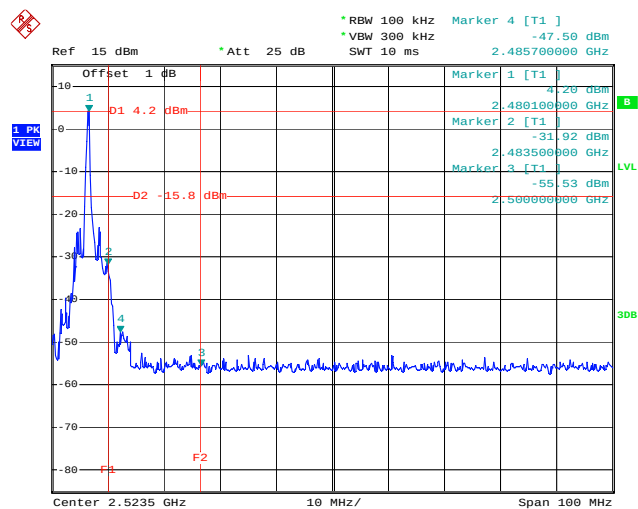


Date: 12.DEC.2016 13:30:36

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK
Temperature:	25°C		Relative Humidity:	55%
Test Voltage:	DC 3.7V			
Test Mode:	GFSK Hopping Mode			
Channel	Frequency (MHz)	Measured Bandedge (dBm)	Band Edge Limit (dBm)	Result
Low	2400	-26.87	-13.62	PASS
High	2483.5	-41.48	-15.06	

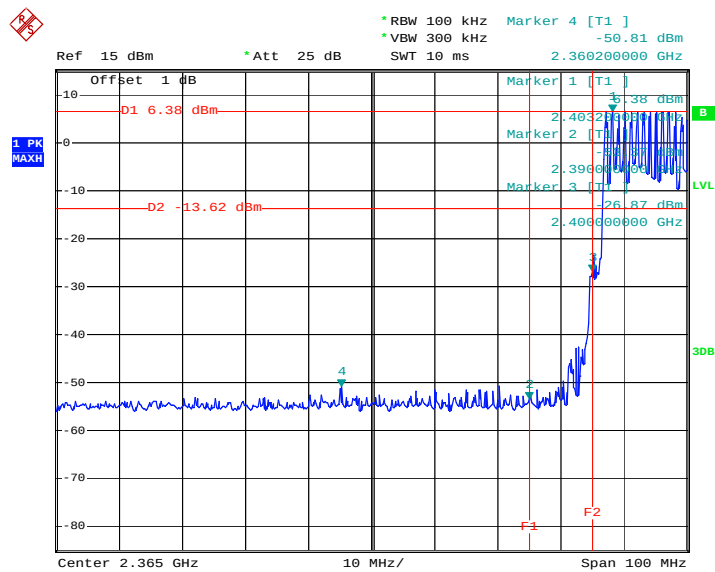


Date: 12.DEC.2016 14:06:21

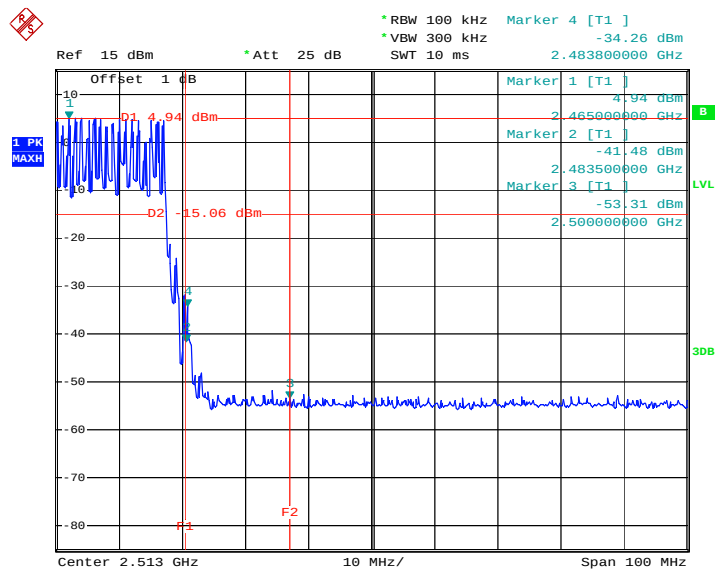


Date: 12.DEC.2016 14:11:14

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK	
Temperature:	25°C	Relative Humidity:	55%	
Test Voltage:	DC 3.7V			
Test Mode:	TX π /4-DQPSK Mode 2402MHz / 2480 MHz			
Channel	Frequency (MHz)	Measured Bandedge (dBm)	Band Edge Limit (dBm)	Result
Low	2400	-26.70	-12.96	PASS
High	2483.5	-33.37	-14.09	

PASS

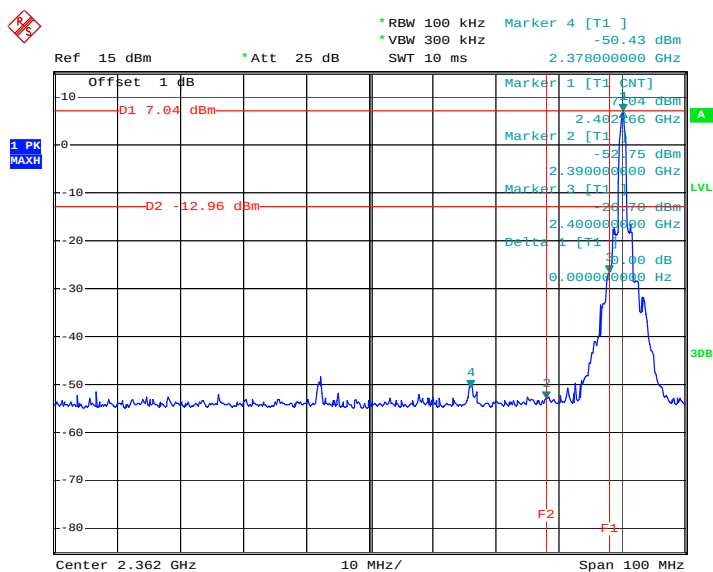


Date: 12.DEC.2016 15:31:33

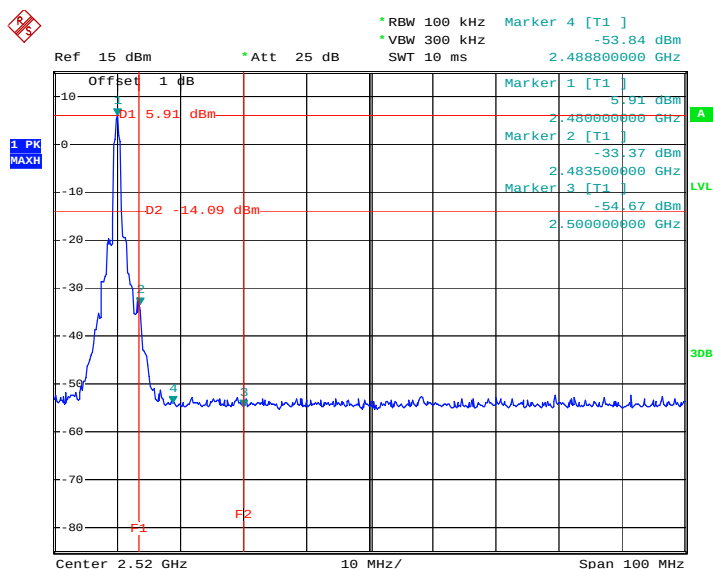


Date: 12.DEC.2016 15:37:18

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK	
Temperature:	25°C	Relative Humidity:	55%	
Test Voltage:	DC 3.7V			
Test Mode:	π /4-DQPSK Hopping Mode			
Channel	Frequency (MHz)	Measured Bandedge (dBm)	Band Edge Limit (dBm)	Result
Low	2400	-26.70	-12.96	PASS
High	2483.5	-33.37	-13.97	

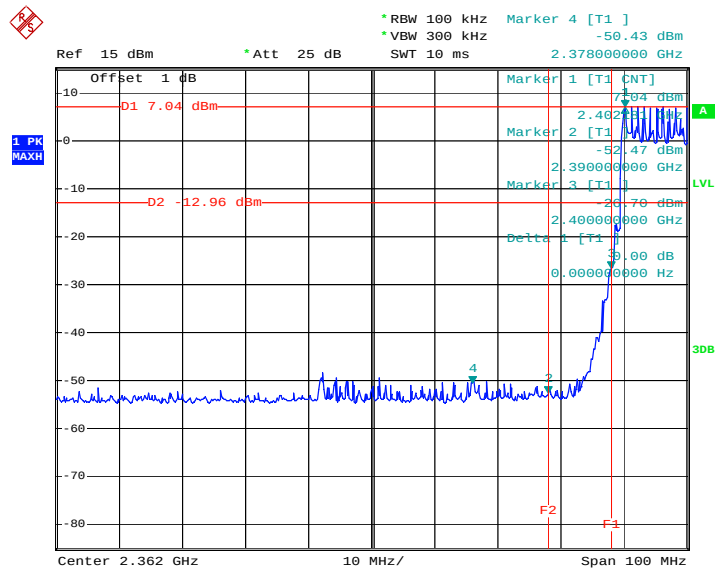


Date: 12.DEC.2016 15:33:04

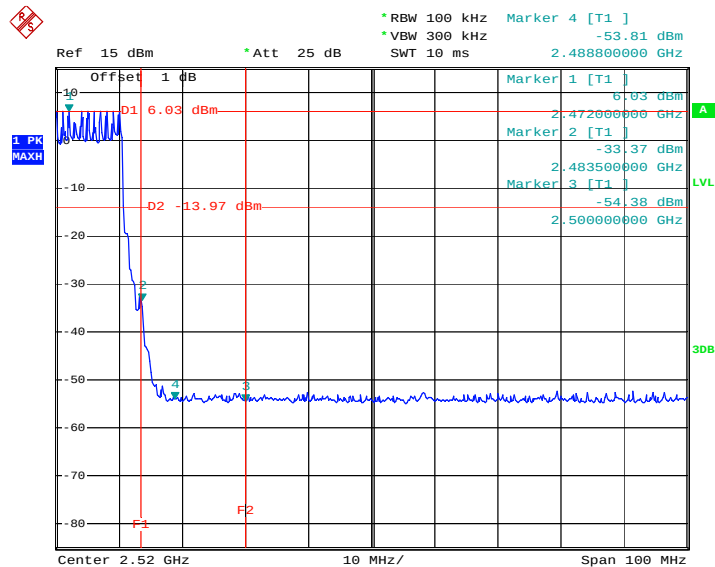


Date: 12.DEC.2016 15:39:42

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK
Temperature:	25°C		Relative Humidity:	55%
Test Voltage:	DC 3.7V			
Test Mode:	TX 8-DPSK Mode 2402MHz / 2480 MHz			
Channel	Frequency (MHz)	Measured Bandedge (dBm)	Band Edge Limit (dBm)	Result
Low	2400	-23.99	-14.19	PASS
High	2483.5	-32.84	-15.80	

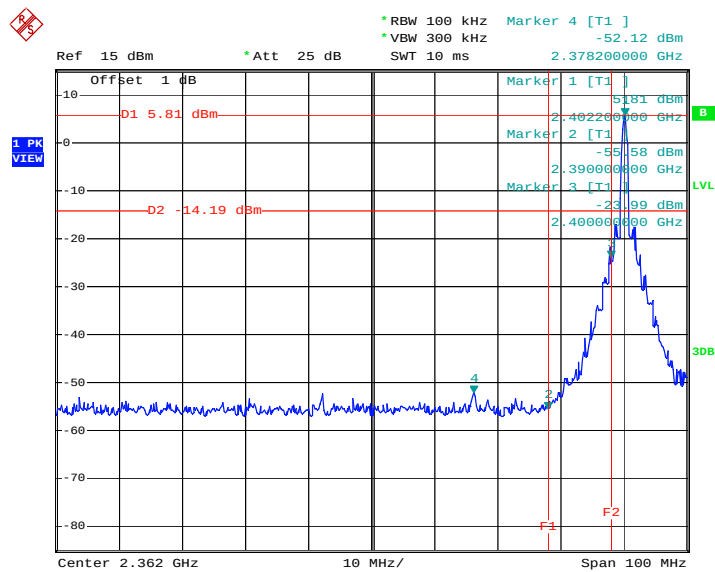


Date: 12.DEC.2016 13:32:59

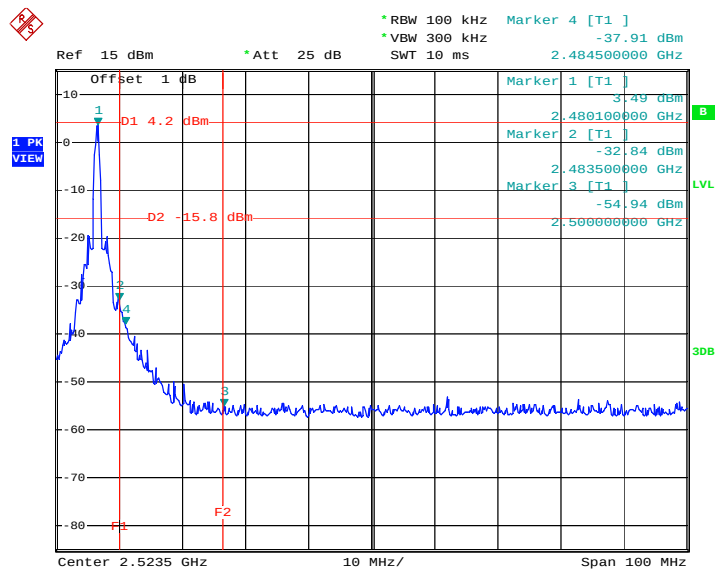


Date: 12.DEC.2016 13:31:12

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK
Temperature:	25°C		Relative Humidity:	55%
Test Voltage:	DC 3.7V			
Test Mode:	8-DPSK Hopping Mode			
Channel	Frequency (MHz)	Measured Bandedge (dBm)	Band Edge Limit (dBm)	Result
Low	2400	-26.60	-14.00	PASS
High	2483.5	-38.54	-15.68	

PASS

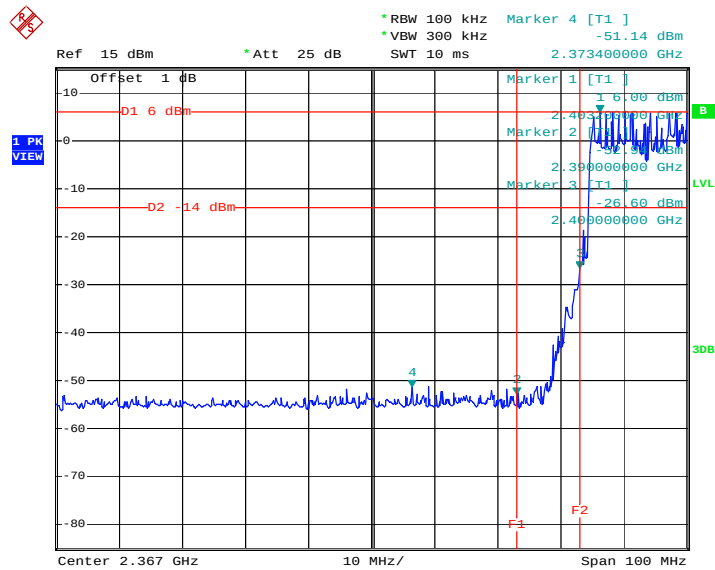

Date: 12.DEC.2016 14:07:53

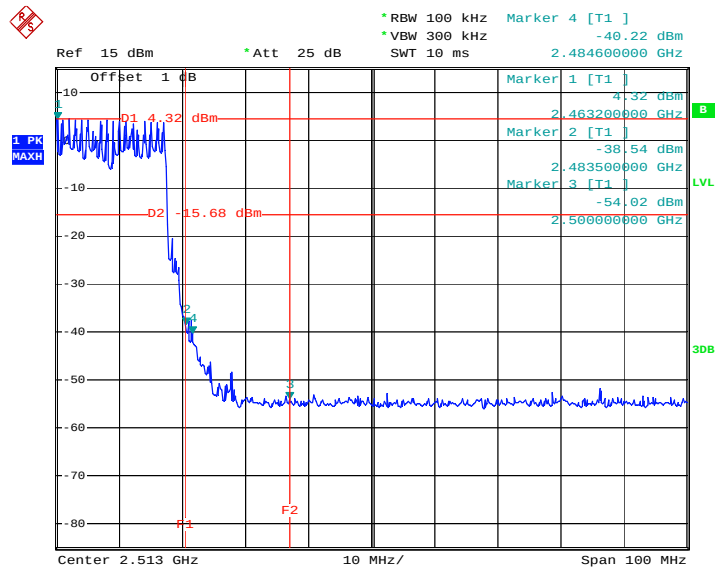

Date: 12.DEC.2016 14:09:25

7. Number of Hopping Channel

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247 (a)(1)

7.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.


7.4 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.


7.5 Test Data

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	Hopping Mode (GFSK/8-DPSK)		
Frequency Range	Quantity of Hopping Channel	Limit	
2402MHz~2480MHz	79	>15	


GFSK Mode

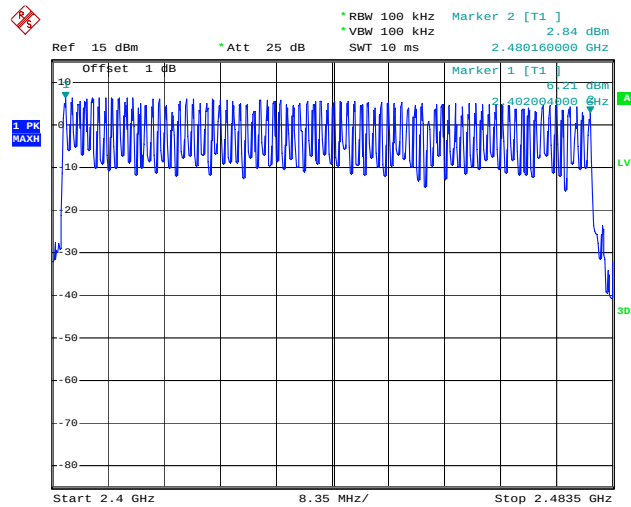

Date: 12.DEC.2016 13:26:32

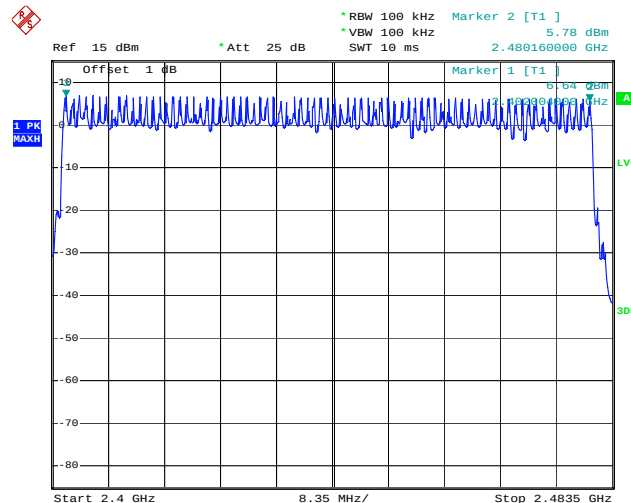 π /4-DQPSK Mode

Date: 12.DEC.2016 11:41:57

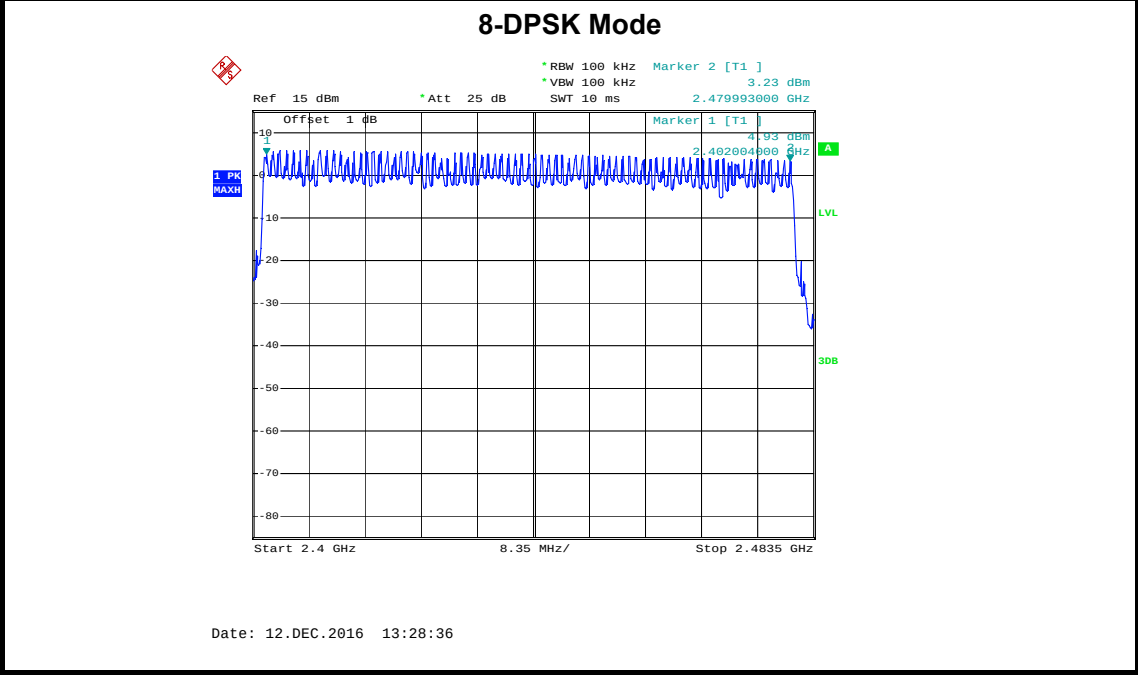


8. Average Time of Occupancy

8.1 Test Standard and Limit

- 8.1.1 Test Standard
FCC Part 15.247 (a)(1)
- 8.1.2 Test Limit

Section	Test Item	Limit
15.247(a)(1)/ RSS-210 Annex 8(A8.1d)	Average Time of Occupancy	0.4 sec

8.2 Test Setup



8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

8.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / X) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

Note: X=2 or 4 or 6 (1DH1=2, 1DH3=4, 1DH5=6. 2DH1=2, 2DH3=4, 2DH5=6. 3DH1=2,3DH3=4, 3DH5=6)

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.


8.5 Test Data

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (GFSK DH1)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	0.456	145.92	31.60	400	PASS
2441	0.456	145.92			
2480	0.456	145.92			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 2 ÷ 79) × 31.6

GFSK Hopping Mode DH1


2402 MHz

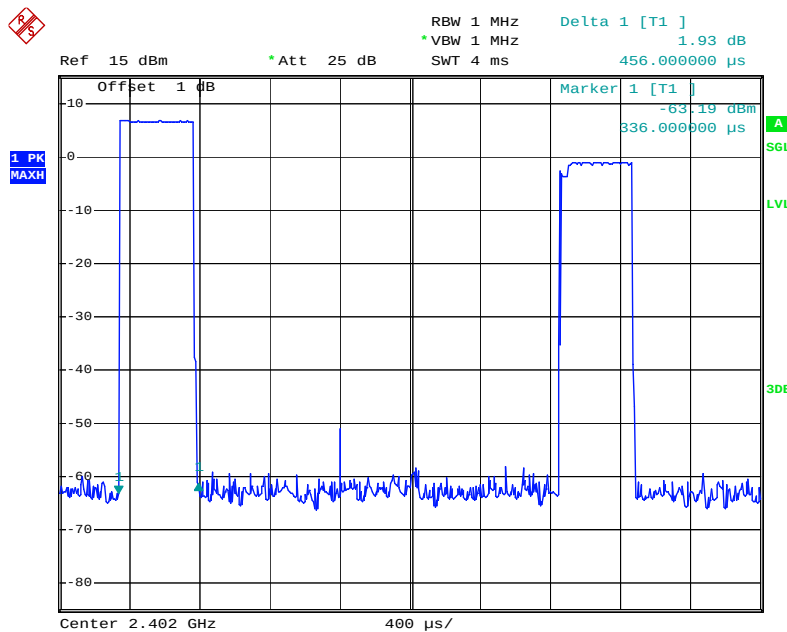

Date: 12.DEC.2016 14:13:48

GFSK Hopping Mode DH1


2441 MHz

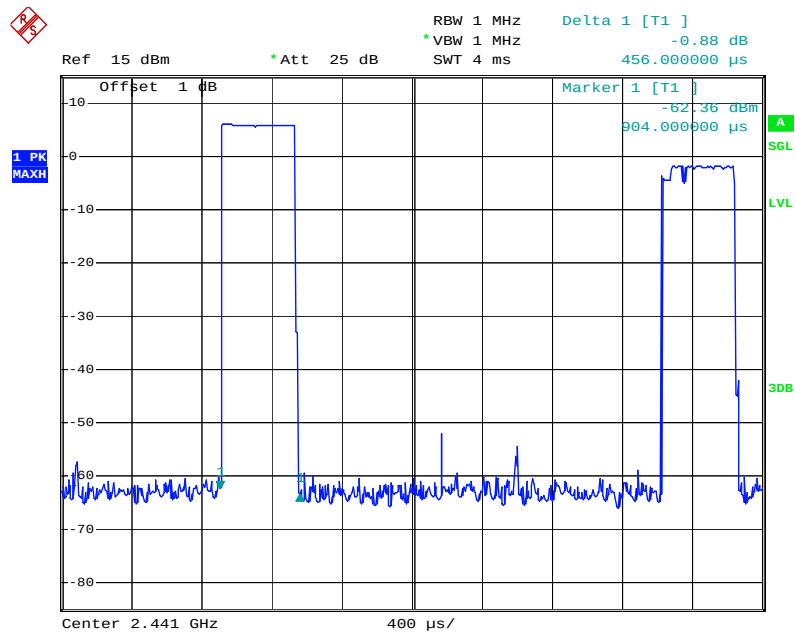

Date: 12.DEC.2016 14:14:08

GFSK Hopping Mode DH1

2480 MHz

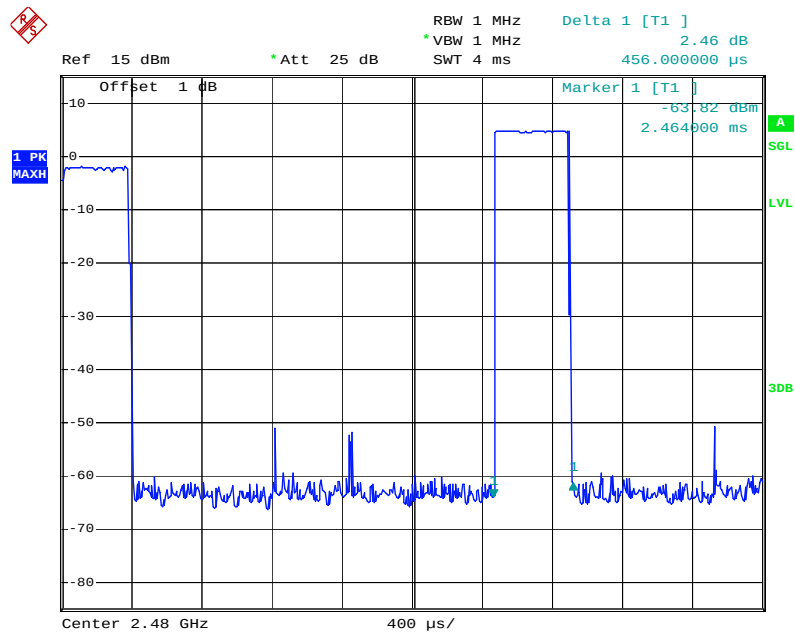


Date: 12.DEC.2016 14:14:39

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (GFSK DH3)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	1.728	276.48	31.60	400	PASS
2441	1.728	276.48			
2480	1.728	276.48			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 4 ÷ 79) × 31.6

GFSK Hopping Mode DH3


2402 MHz

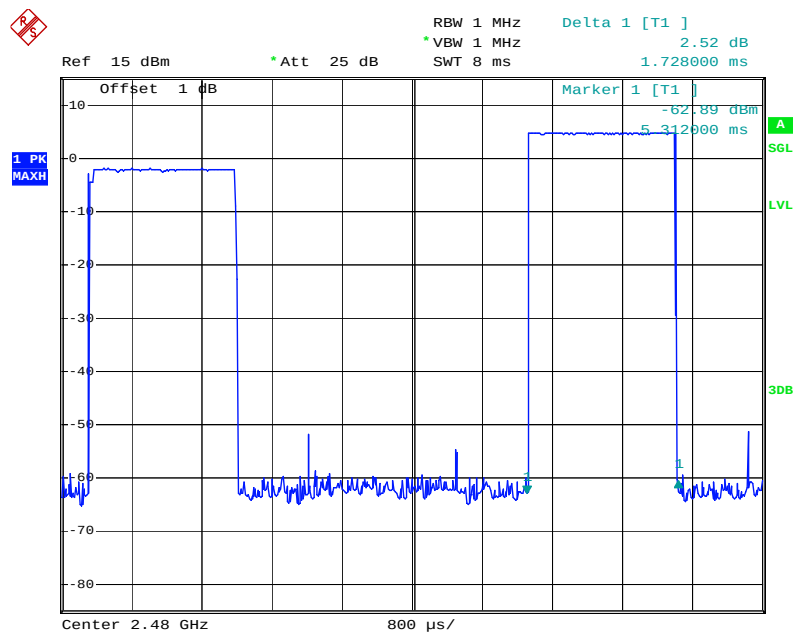

Date: 12.DEC.2016 14:15:09

GFSK Hopping Mode DH3


2441 MHz

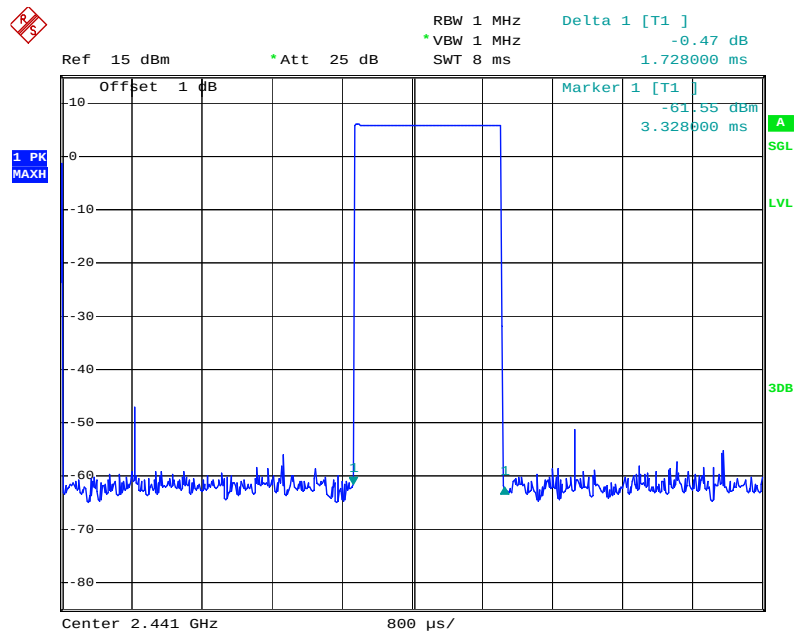

Date: 12.DEC.2016 14:15:40

GFSK Hopping Mode DH3

2480 MHz

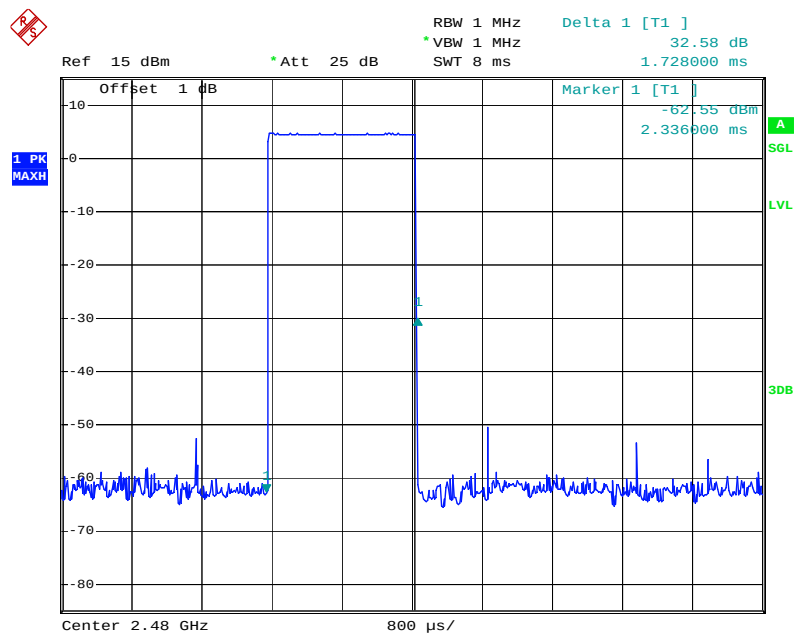


Date: 12.DEC.2016 14:16:04

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK	
Temperature:	25℃		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (GFSK DH5)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	3.000	320.00	31.60	400	PASS
2441	3.000	320.00			
2480	3.000	320.00			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) × 31.6

GFSK Hopping Mode DH5


2402 MHz

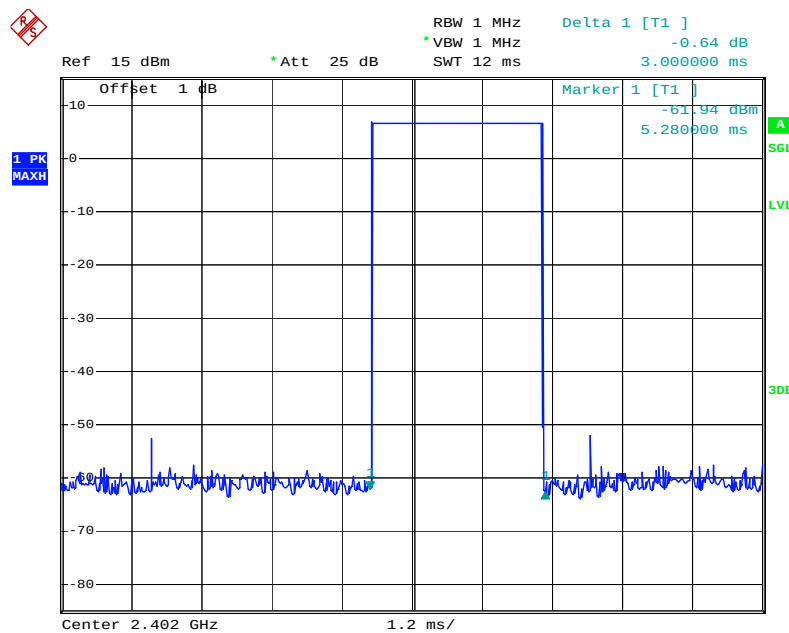

Date: 12.DEC.2016 14:18:06

GFSK Hopping Mode DH5


2441 MHz

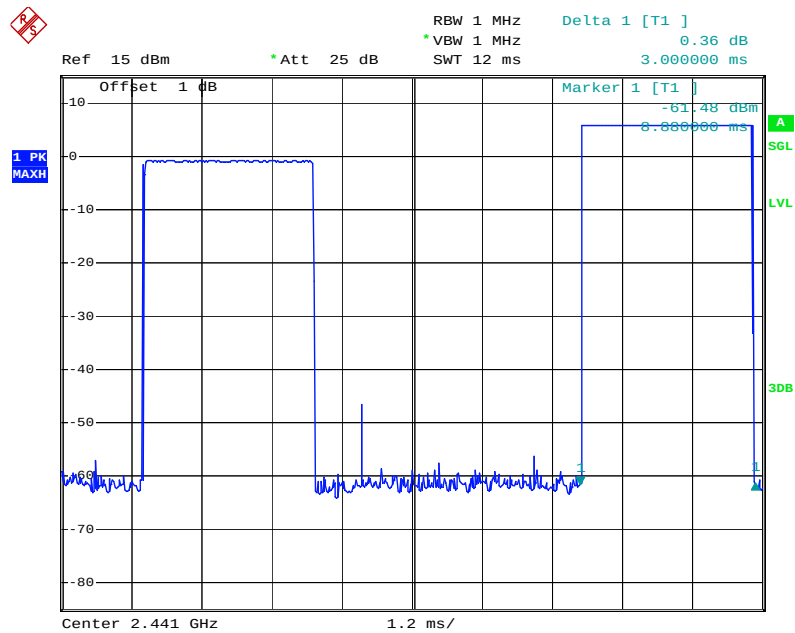

Date: 12.DEC.2016 14:17:35

GFSK Hopping Mode DH5


2480 MHz

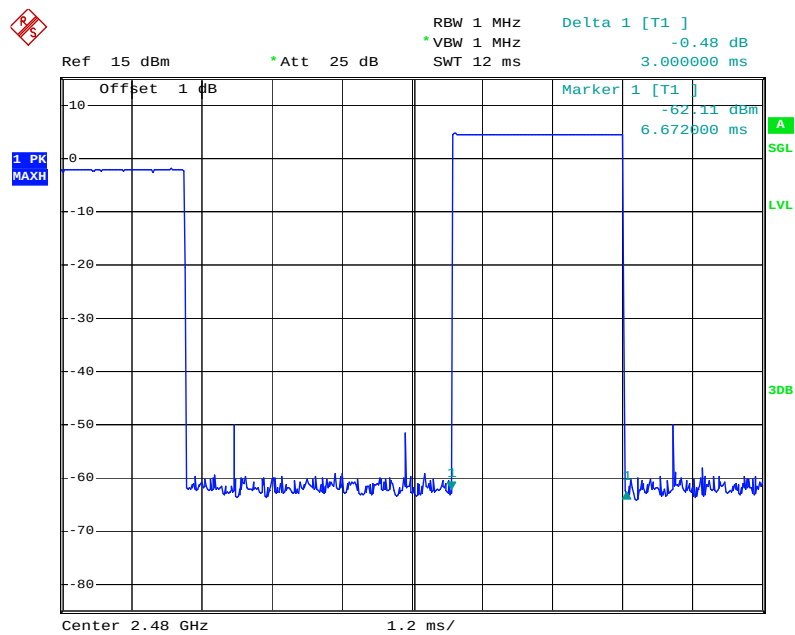

Date: 12.DEC.2016 14:17:02

$\pi/4$ -DQPSK Hopping Mode DH1


2441 MHz

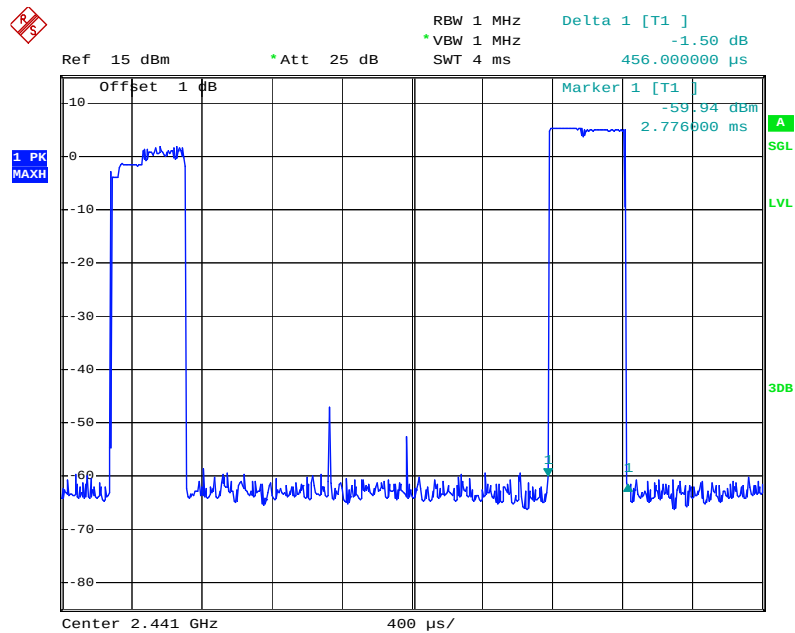

Date: 12.DEC.2016 14:19:06

$\pi/4$ -DQPSK Hopping Mode DH1

2480 MHz

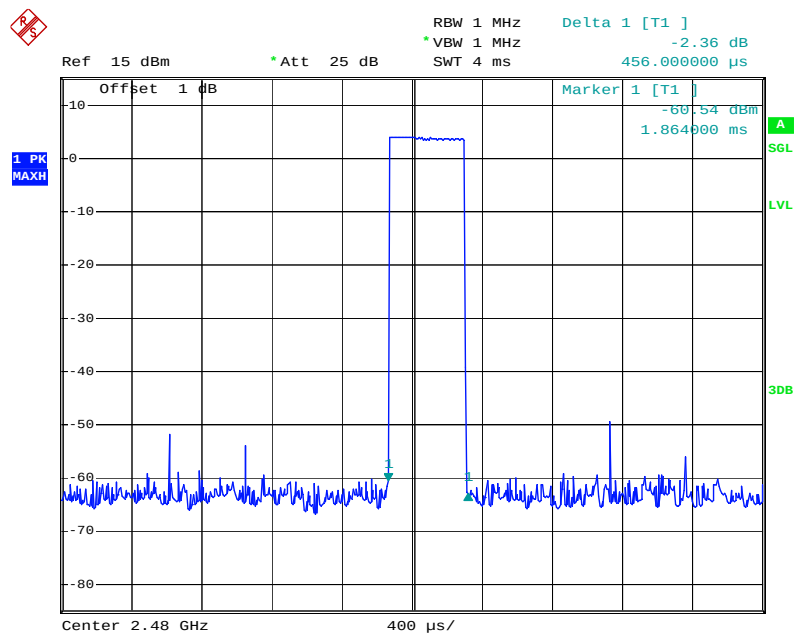


Date: 12.DEC.2016 14:19:50

EUT:		Micro Truwireless Earbuds		Model Name :		7199-99BK	
Temperature:		25°C		Relative Humidity:		55%	
Test Voltage:		DC 3.7V					
Test Mode:		Hopping Mode (π /4-DQPSK DH3)					
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)		Period Time (s)	Limit (ms)	Result	
2402	1.728	276.48		31.60	400	PASS	
2441	1.728	276.48					
2480	1.728	276.48					

Note: Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 4 $\div$ 79) $\times$ 31.6

$\pi/4$ -DQPSK Hopping Mode DH3


2402 MHz

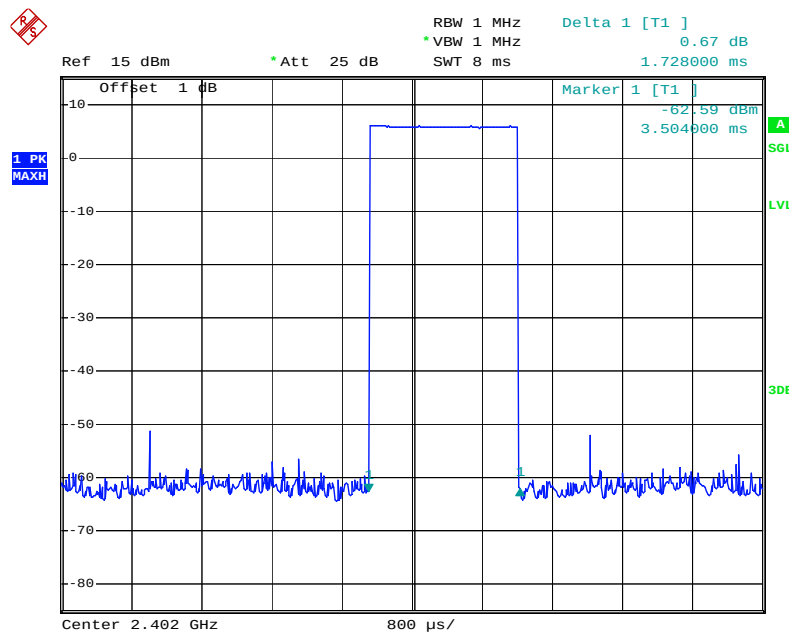

Date: 12.DEC.2016 14:21:21

$\pi/4$ -DQPSK Hopping Mode DH3


2441 MHz

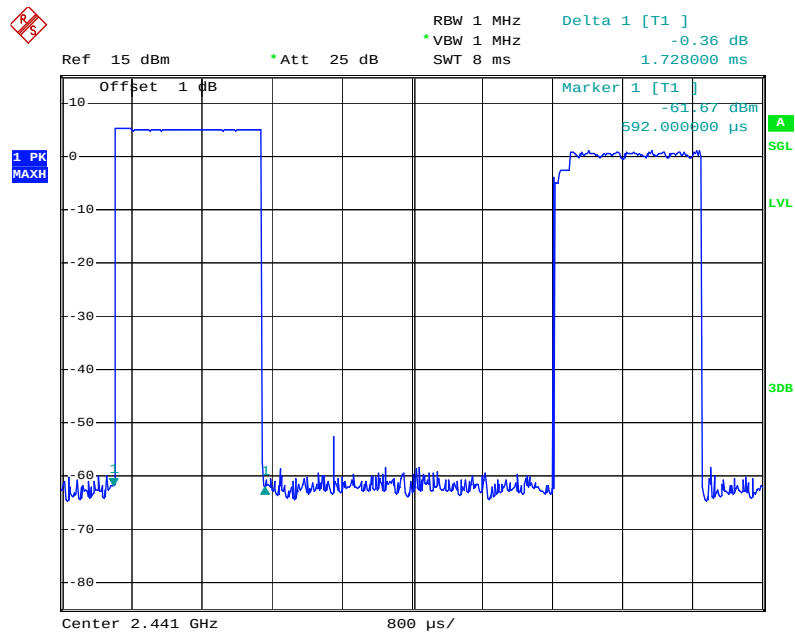

Date: 12.DEC.2016 14:21:00

$\pi/4$ -DQPSK Hopping Mode DH3

2480 MHz

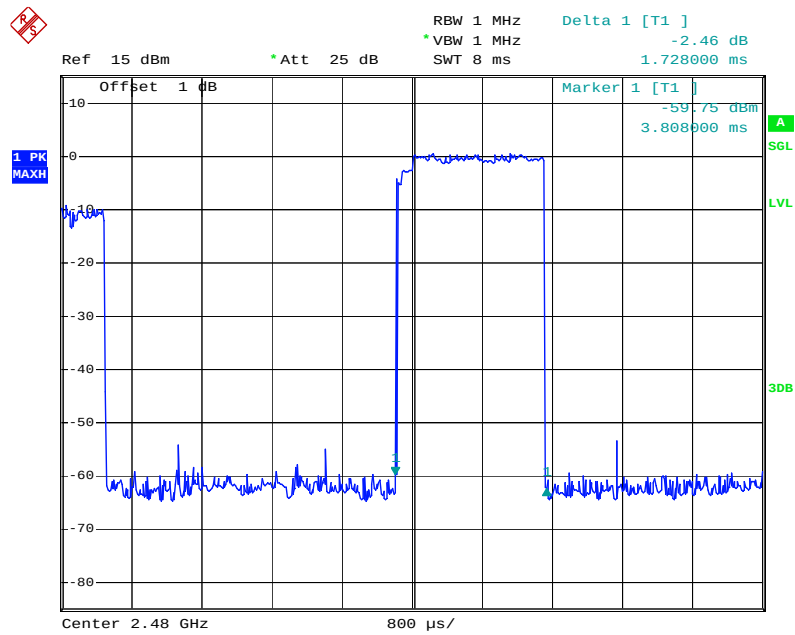


Date: 12.DEC.2016 14:20:24

EUT:	Micro Truwireless Earbuds		Model Name :	7199-99BK	
Temperature:	25°C		Relative Humidity:	55%	
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (π /4-DQPSK DH5)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	3.000	320.00	31.60	400	PASS
2441	3.000	320.00			
2480	3.000	320.00			

Note: Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6

$\pi/4$ -DQPSK Hopping Mode DH5


2402 MHz

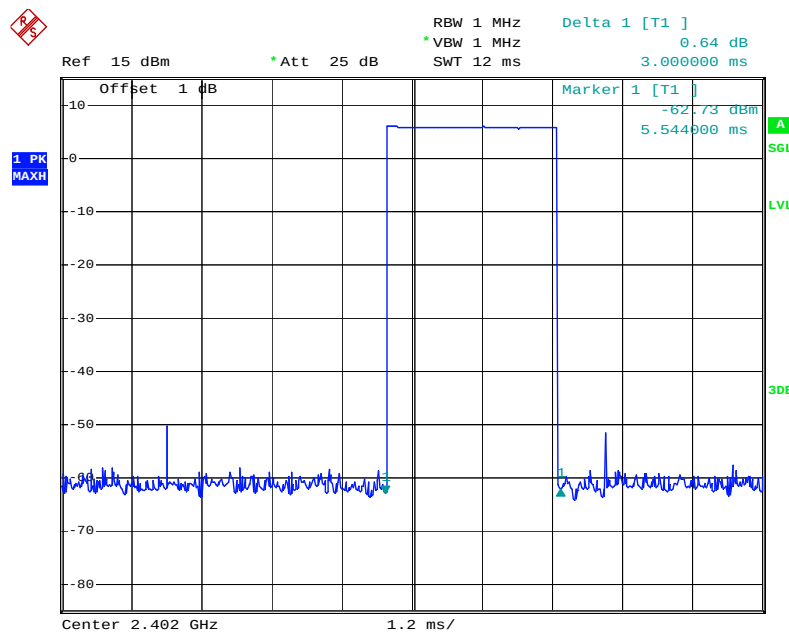

Date: 12.DEC.2016 14:21:51

$\pi/4$ -DQPSK Hopping Mode DH5


2441 MHz

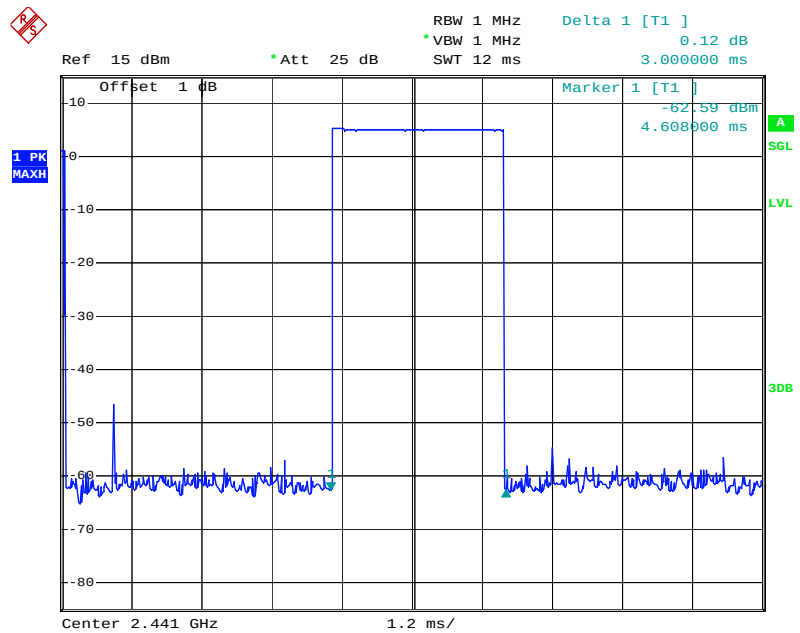

Date: 12.DEC.2016 14:22:28

$\pi/4$ -DQPSK Hopping Mode DH5


2480 MHz

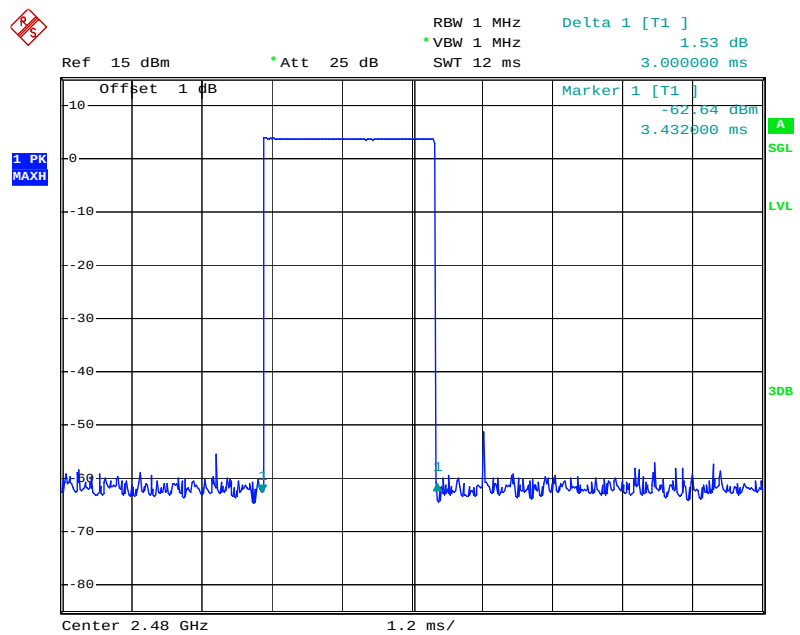

Date: 12.DEC.2016 14:22:58

8-DPSK Hopping Mode DH1


2441 MHz

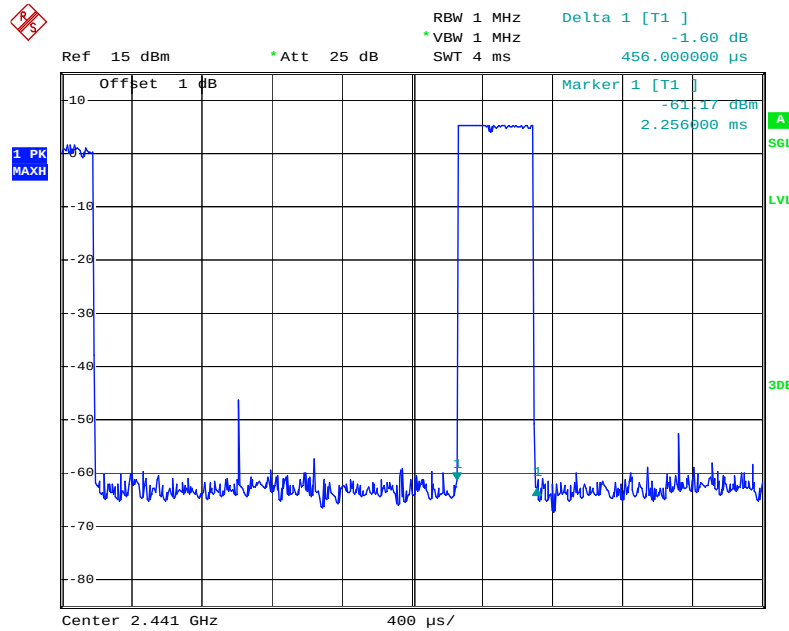

Date: 12.DEC.2016 14:27:25

8-DPSK Hopping Mode DH1

2480 MHz

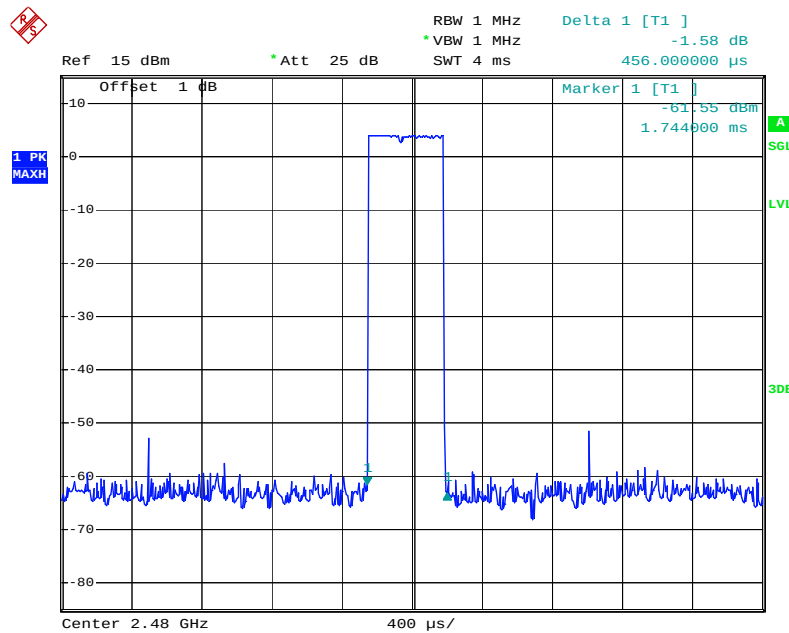


Date: 12.DEC.2016 14:27:04

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK		
Temperature:	25°C	Relative Humidity:	55%		
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (8-DPSK DH3)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	1.728	276.48	31.60	400	PASS
2441	1.728	276.48			
2480	1.728	276.48			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 4 ÷ 79) × 31.6

8-DPSK Hopping Mode DH3


2402 MHz

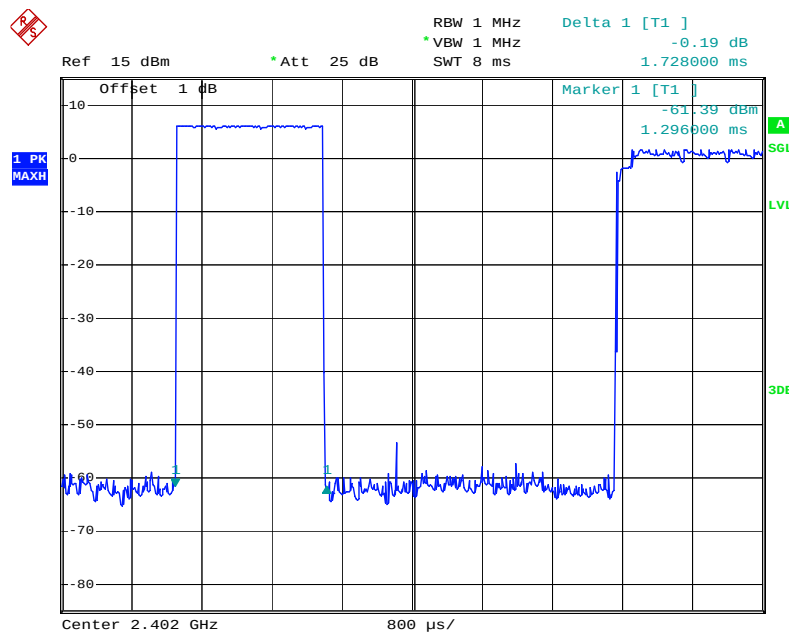

Date: 12.DEC.2016 14:25:08

8-DPSK Hopping Mode DH3


2441 MHz

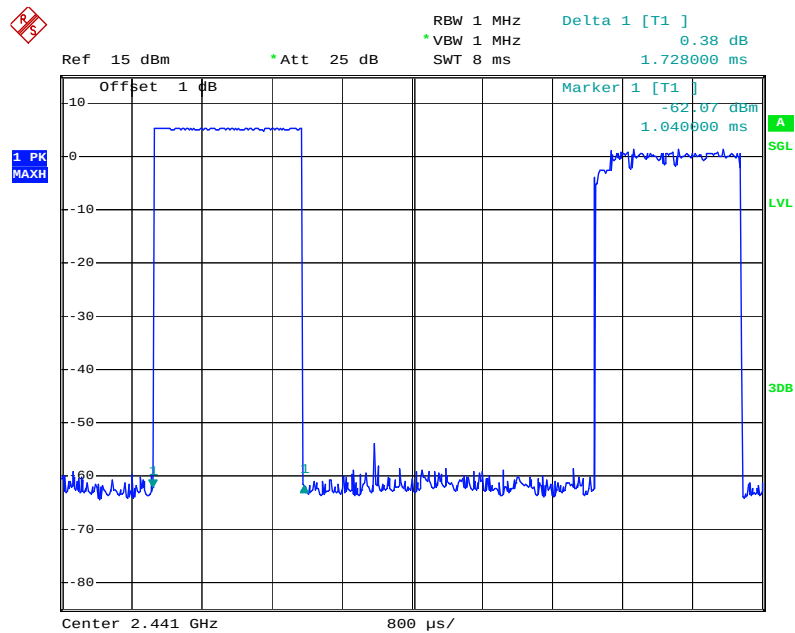

Date: 12.DEC.2016 14:25:35

8-DPSK Hopping Mode DH3

2480 MHz

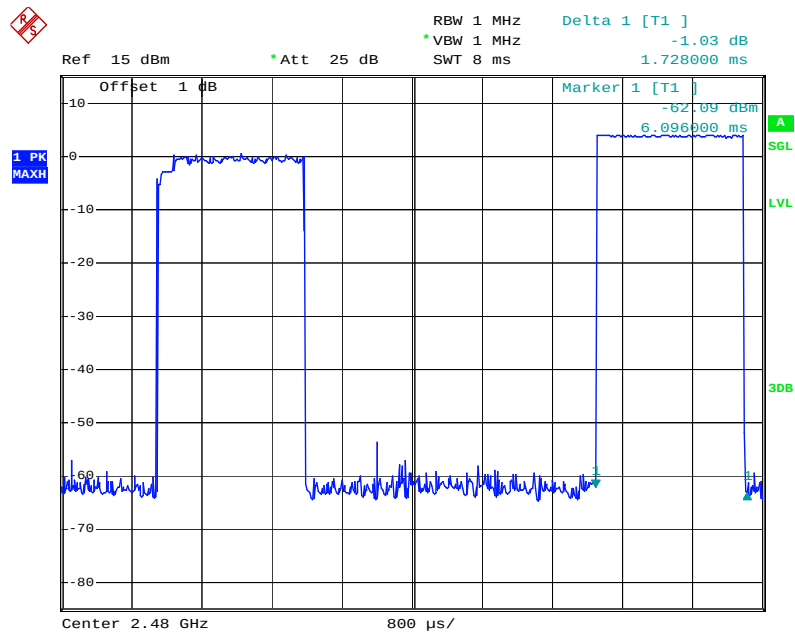


Date: 12.DEC.2016 14:26:10

EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK		
Temperature:	25℃	Relative Humidity:	55%		
Test Voltage:	DC 3.7V				
Test Mode:	Hopping Mode (8-DPSK DH5)				
Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2402	3.000	320.00	31.60	400	PASS
2441	3.000	320.00			
2480	3.000	320.00			

Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6

8-DPSK Hopping Mode DH5


2402 MHz

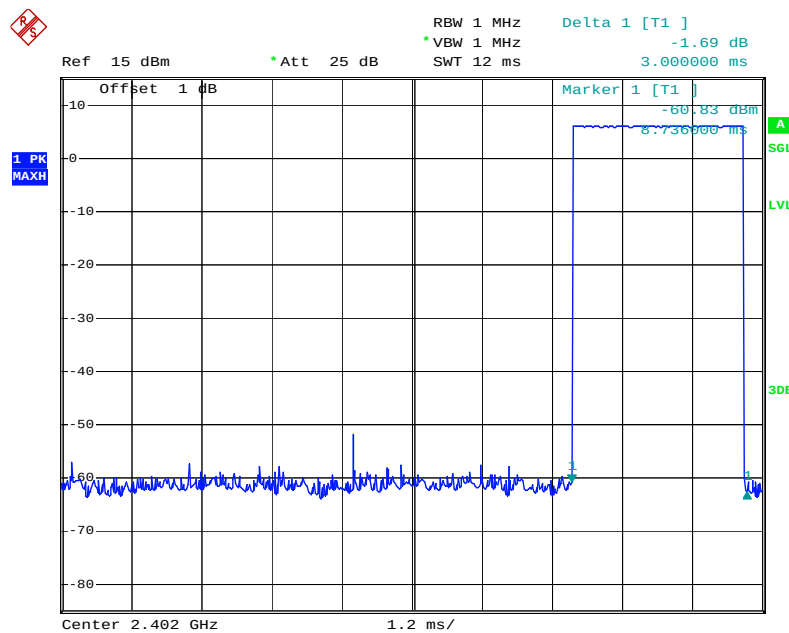

Date: 12.DEC.2016 14:24:35

8-DPSK Hopping Mode DH5


2441 MHz

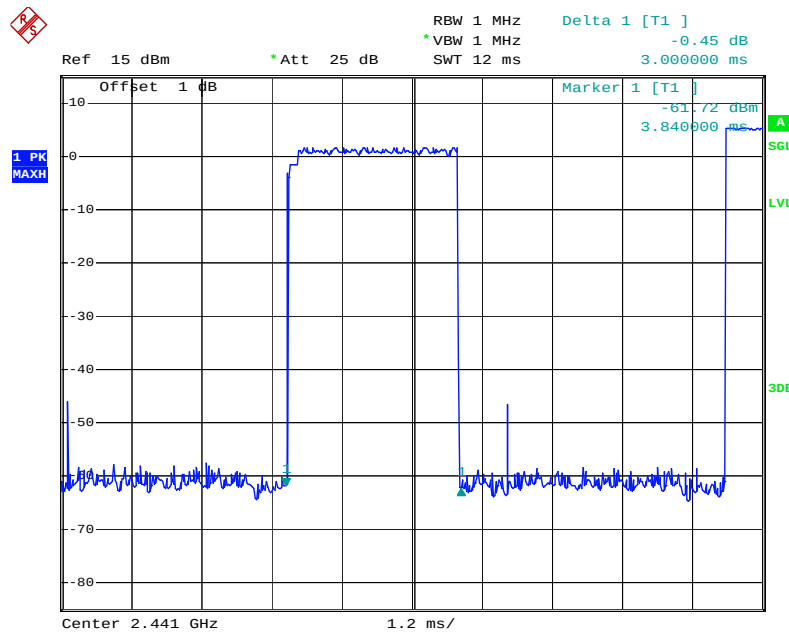

Date: 12.DEC.2016 14:24:13

8-DPSK Hopping Mode DH5

2480 MHz

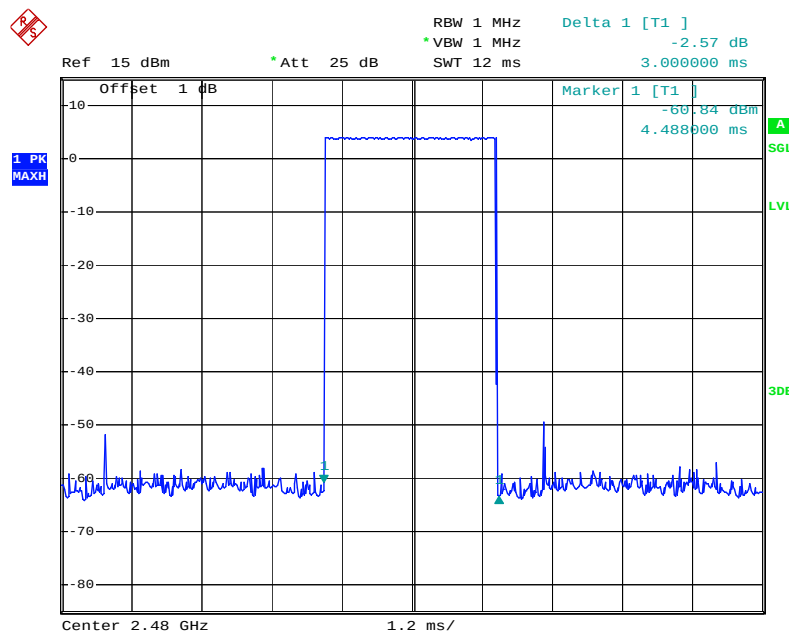

Date: 12.DEC.2016 14:23:27

9. Channel Separation and Bandwidth Test


9.1 Test Standard and Limit

9.1.1 Test Standard
FCC Part 15.247

9.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≤ 1 MHz (20dB bandwidth)	2400~2483.5
Channel Separation	>25 KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

9.2 Test Setup



9.3 Test Procedure


- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Channel Separation: RBW=30 kHz, VBW=100 kHz.
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

9.4 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

9.5 Test Data


EUT:	Micro Truwireless Earbuds	Model Name :	7199-99BK
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2402	882.00	840.00	
2441	882.00	840.00	
2480	894.00	840.00	

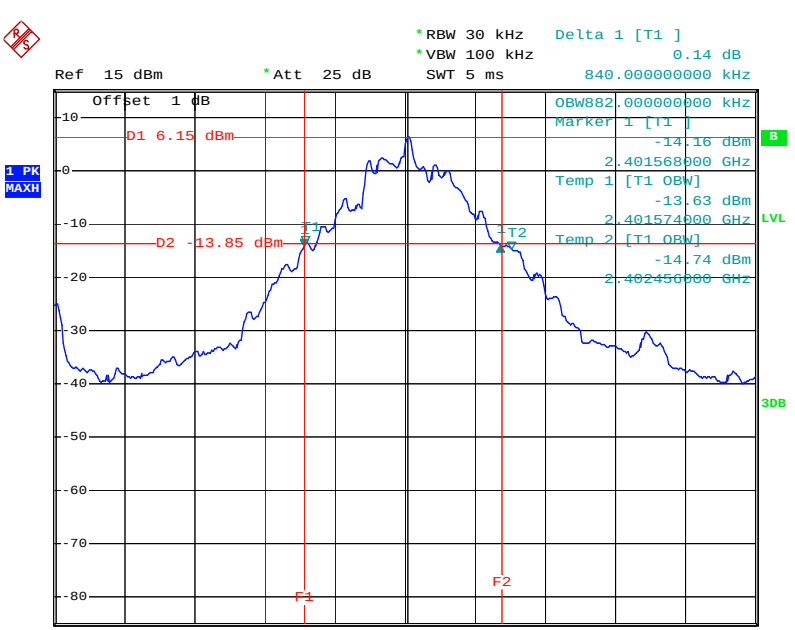GFSK TX Mode			
2402 MHz			
 Ref 15 dBm *Att 25 dB *RBW 30 kHz *VBW 100 kHz SWT 5 ms Delta 1 [T1] 0.14 dB 840.00000000 kHz Offset 1 dB OBW882.00000000 kHz Marker 1 [T1] -14.16 dBm Temp 1 [T1 OBW] -13.63 dBm Temp 2 [T1 OBW] -14.74 dBm Center 2.402 GHz 300 kHz/ Span 3 MHz			

Date: 12.DEC.2016 12:59:55

GFSK TX Mode


2441 MHz

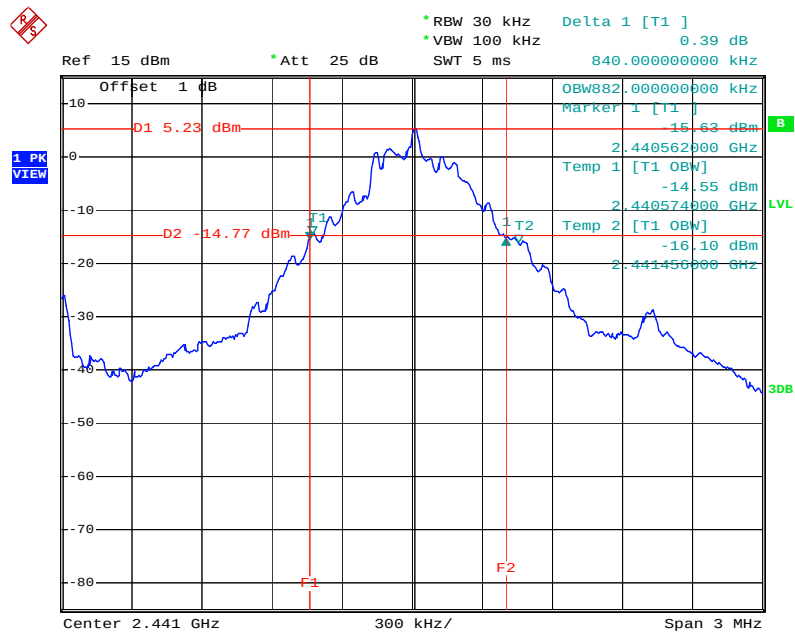


Date: 12.DEC.2016 13:06:03

GFSK TX Mode

2480 MHz

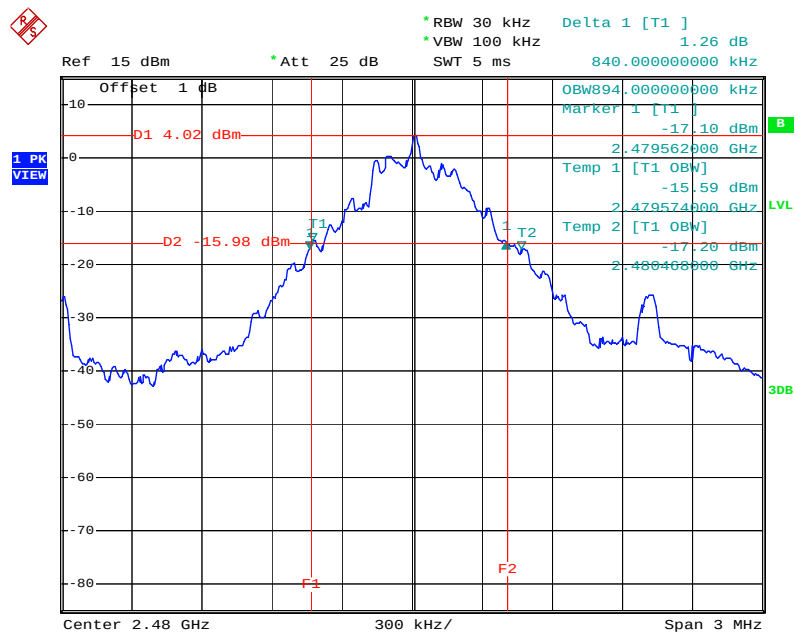


Date: 12.DEC.2016 13:07:04

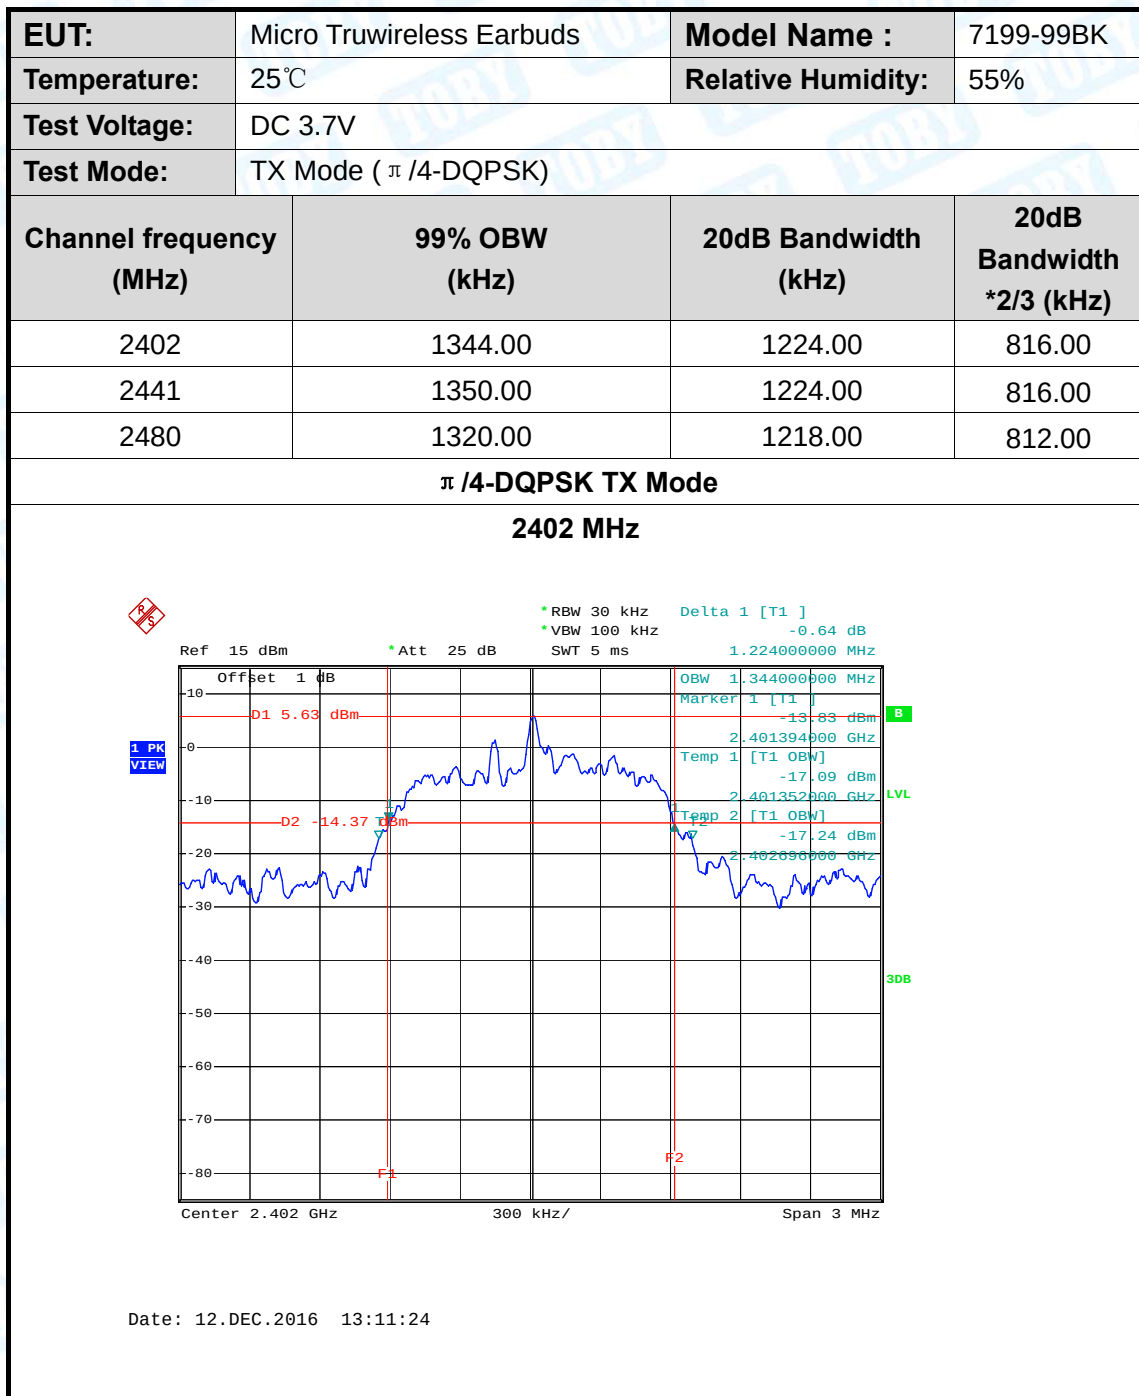

$\pi/4$ -DQPSK TX Mode


2441 MHz

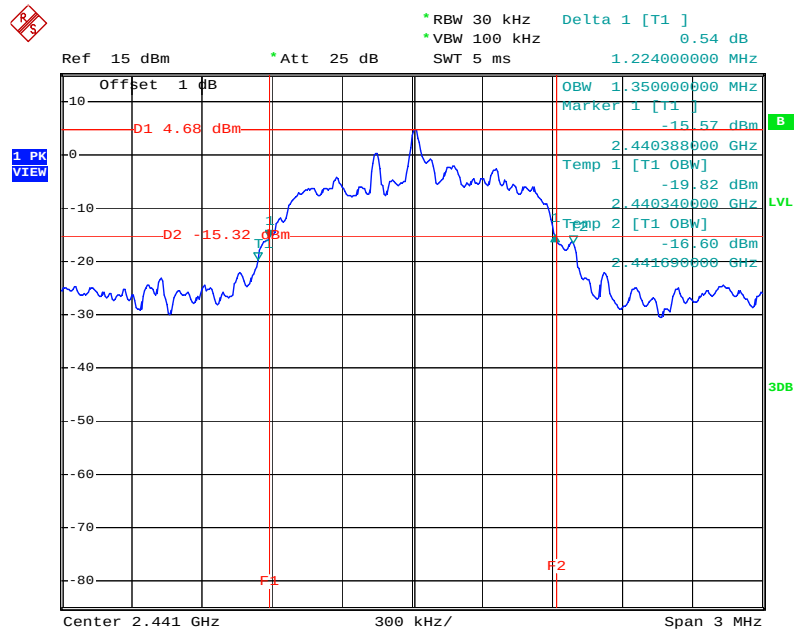


Date: 12.DEC.2016 13:10:36

 $\pi/4$ -DQPSK TX Mode

2480 MHz

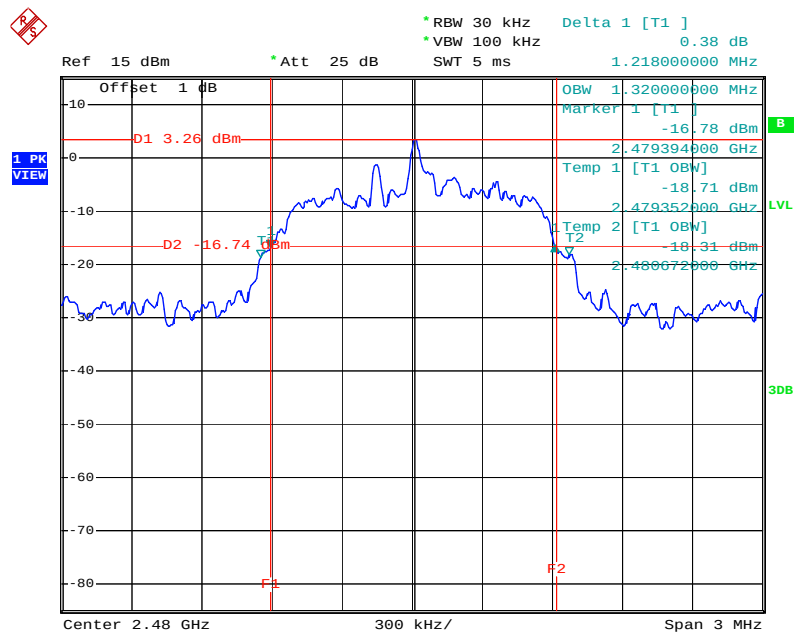


Date: 12.DEC.2016 13:09:00

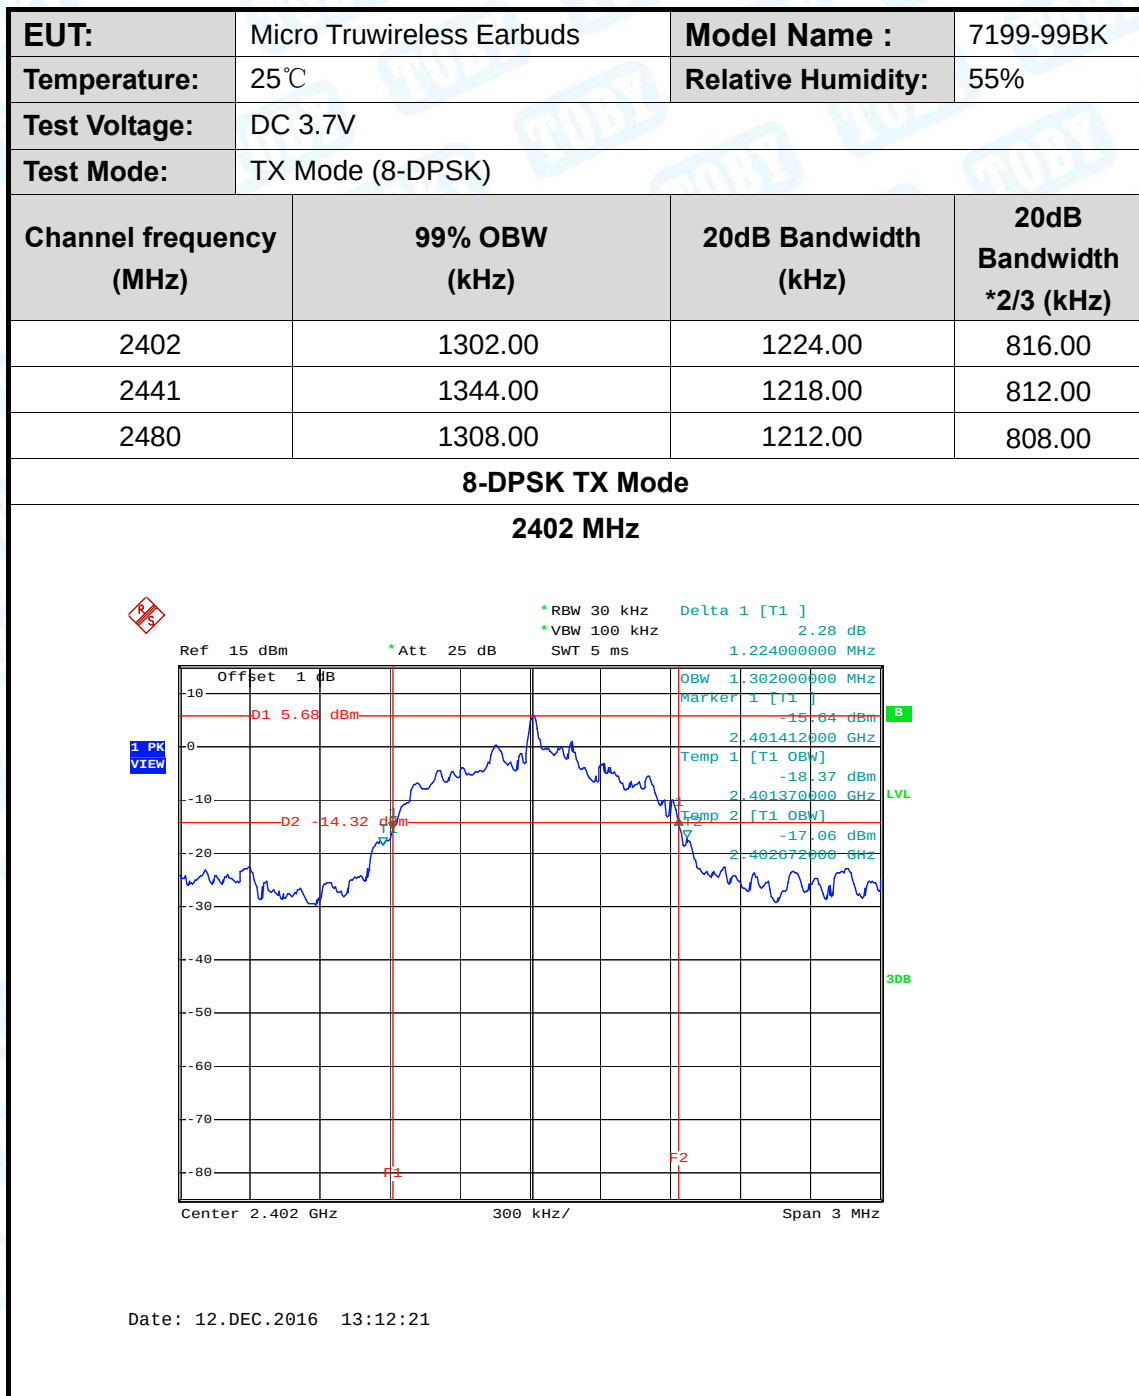

8-DPSK TX Mode


2441 MHz

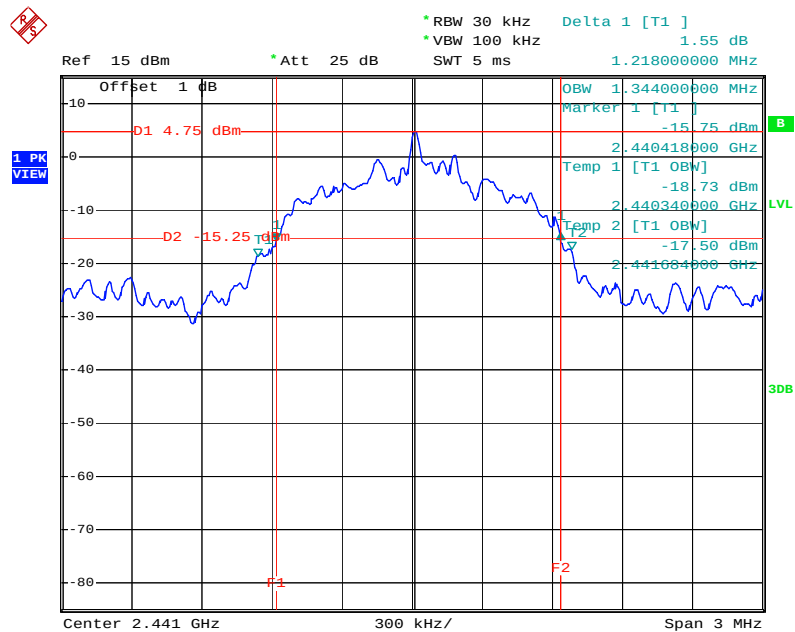


Date: 12.DEC.2016 13:13:45

8-DPSK TX Mode


2480 MHz

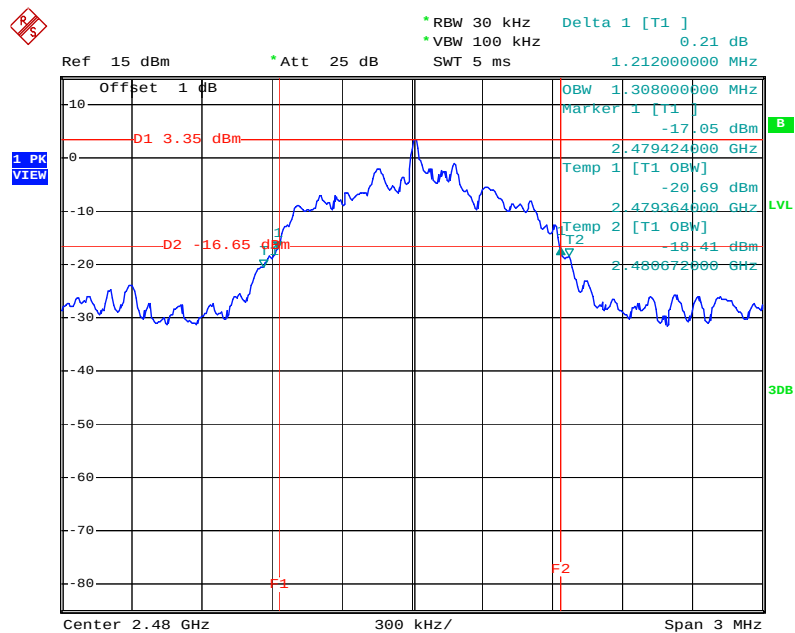

Date: 12.DEC.2016 13:14:40

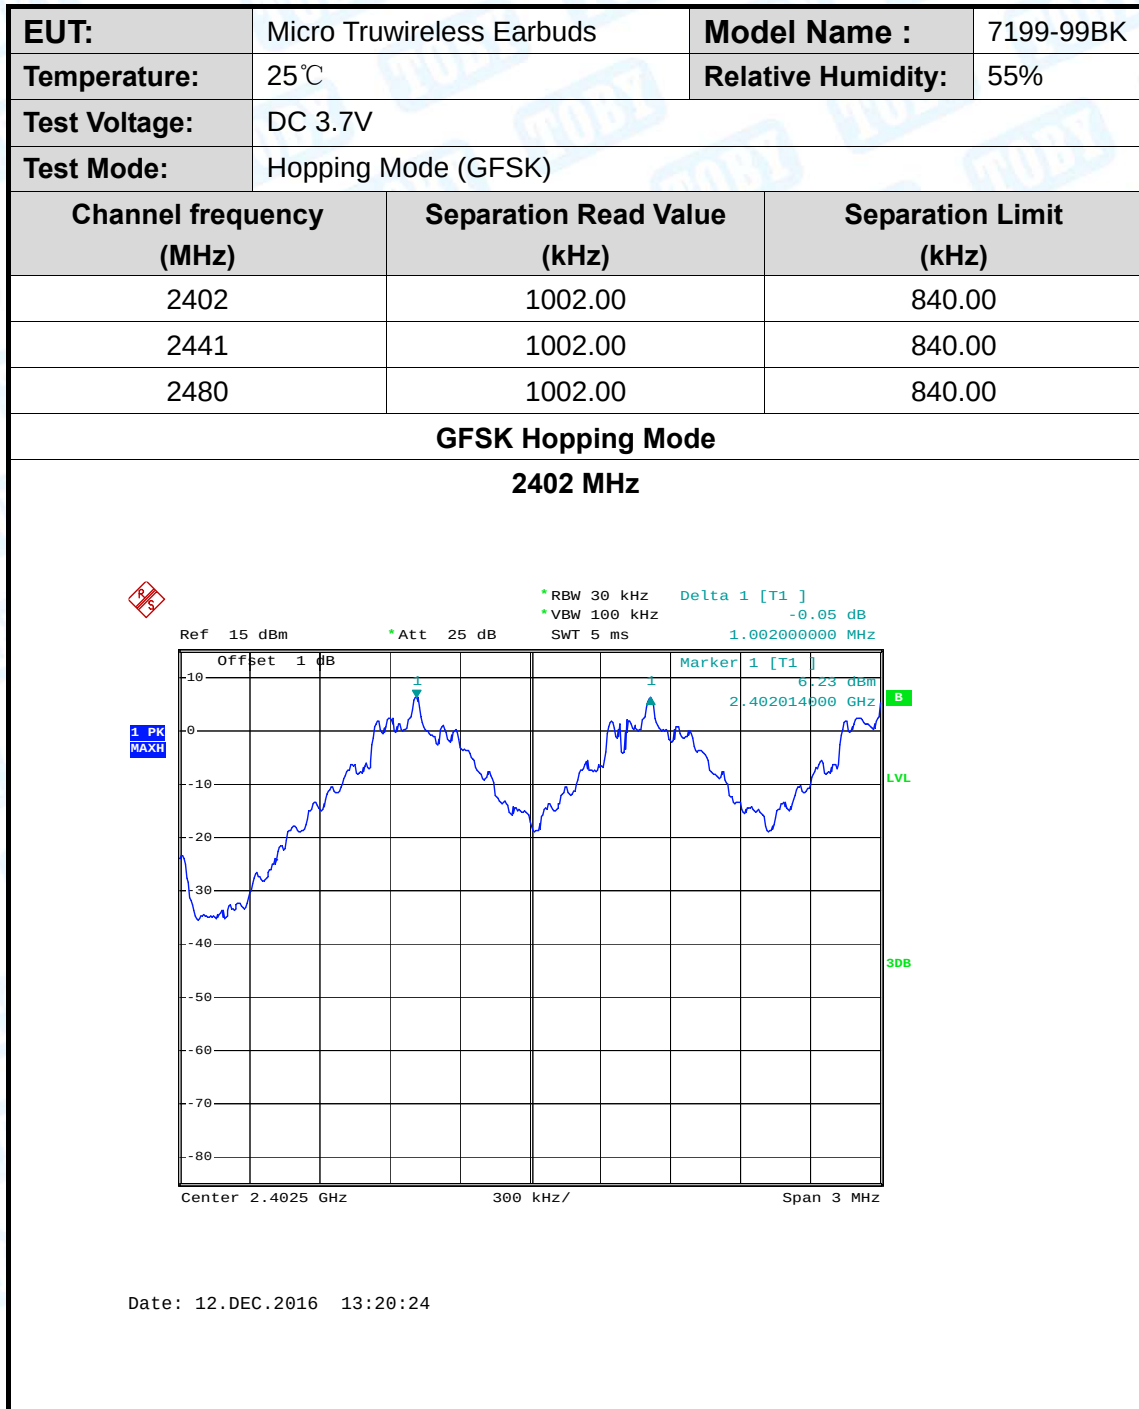


GFSK Hopping Mode
2441 MHz

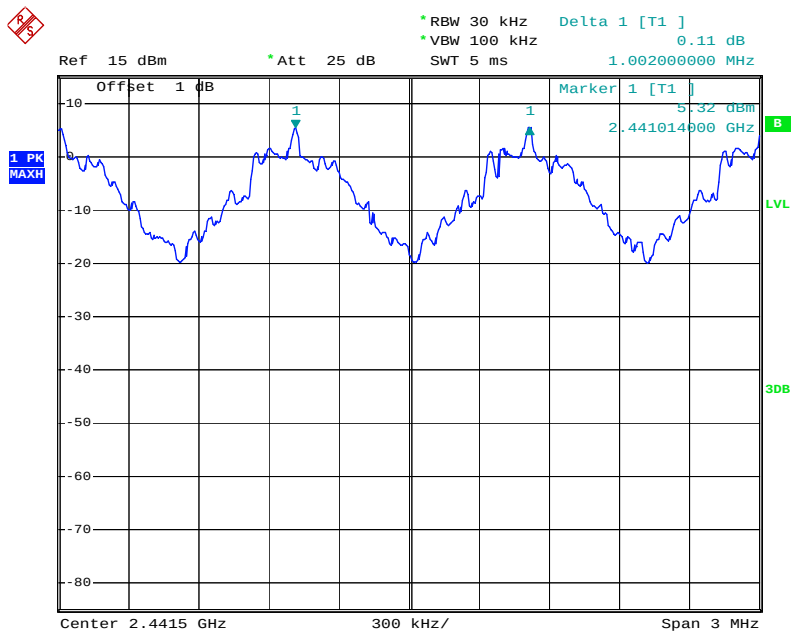


Date: 12.DEC.2016 13:20:59


GFSK Hopping Mode
2480 MHz

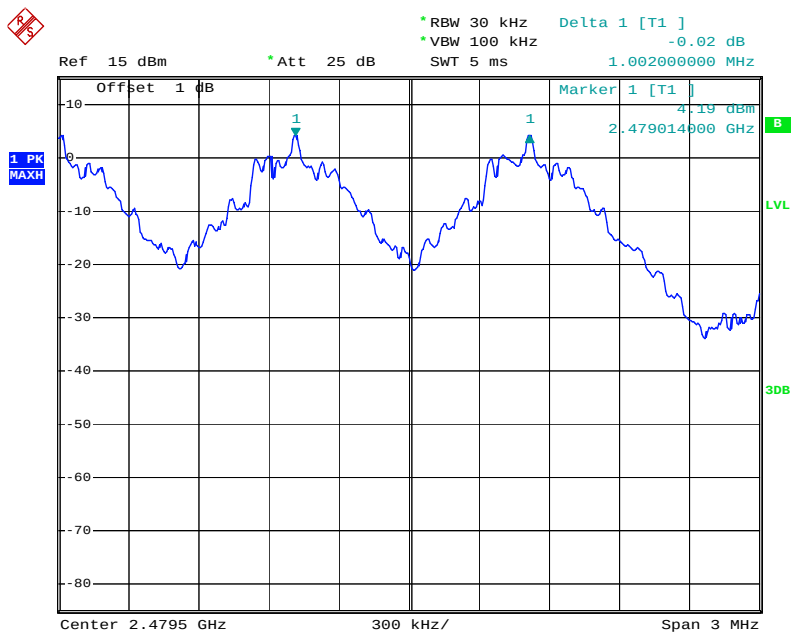

Date: 12.DEC.2016 13:21:36

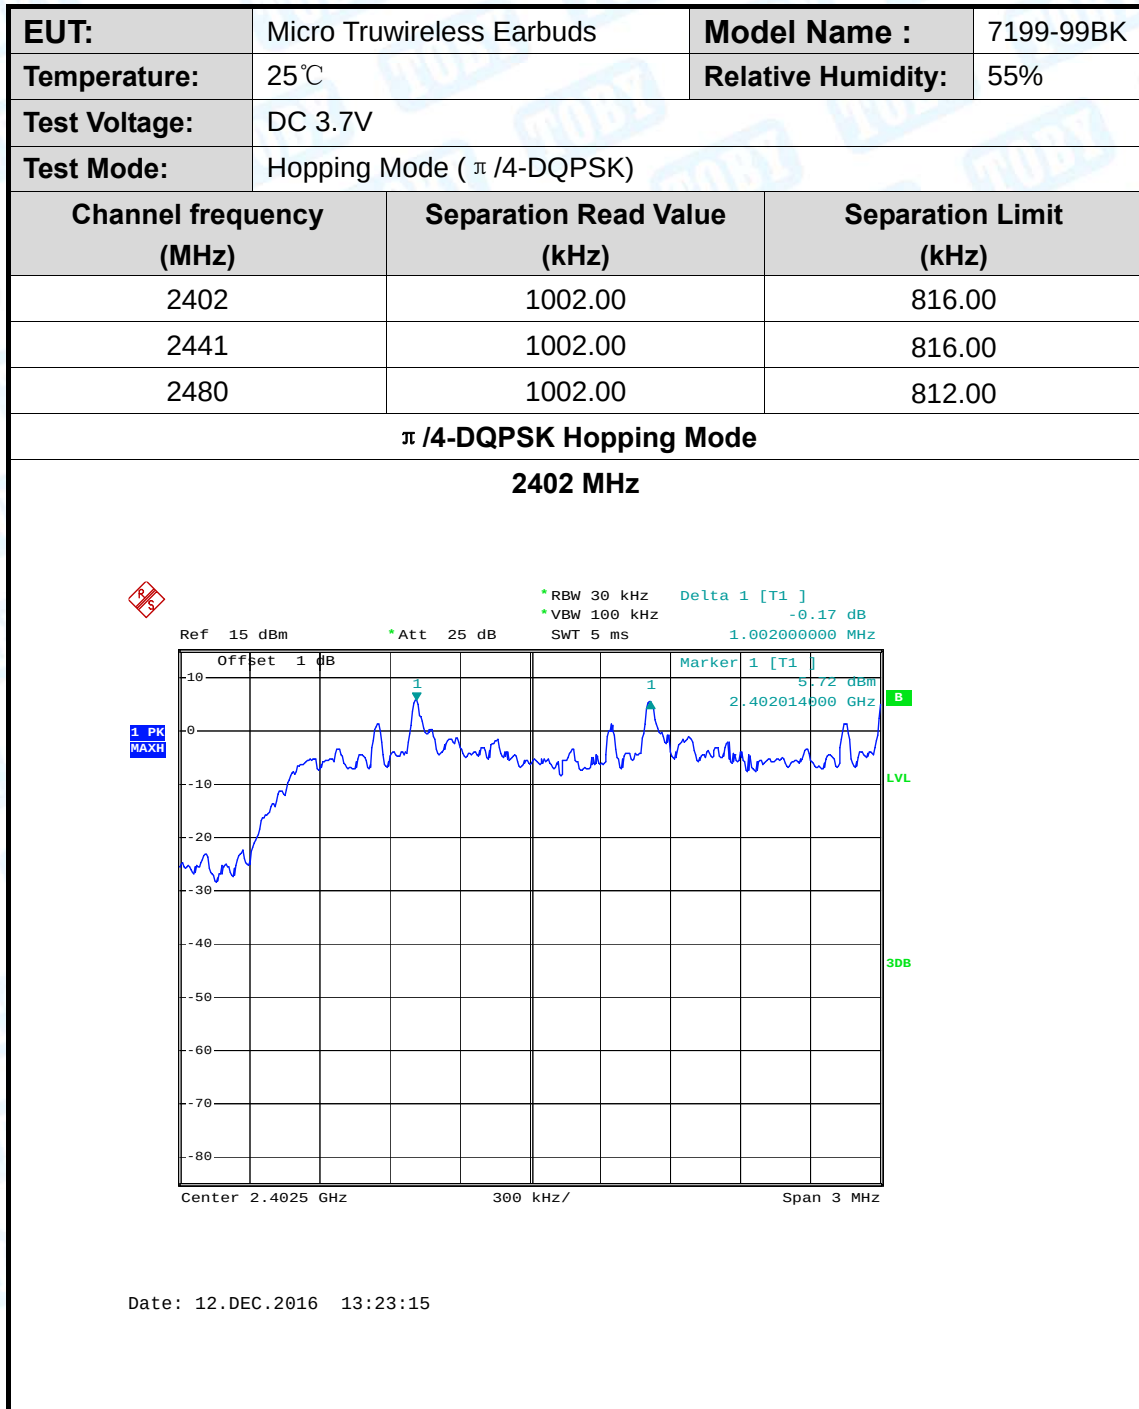


π /4-DQPSK Hopping Mode
 2441 MHz

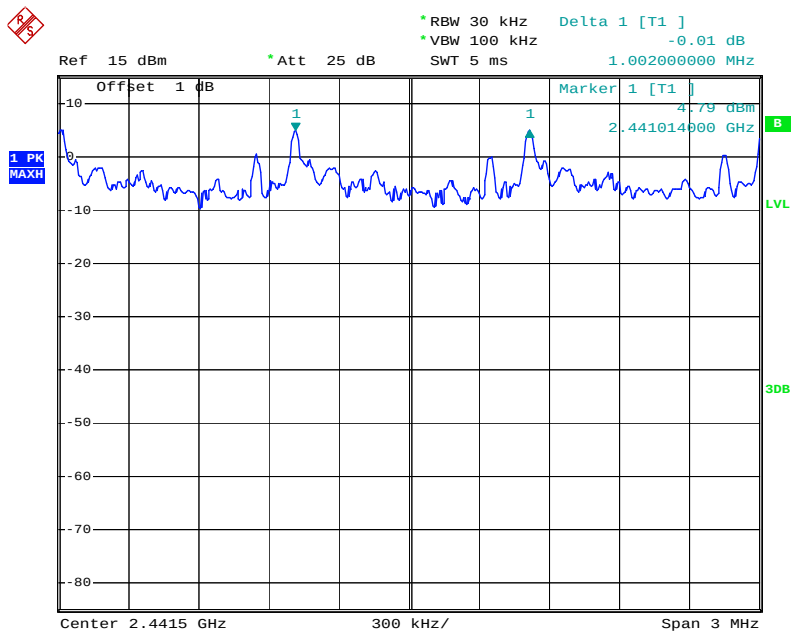


Date: 12.DEC.2016 13:22:39

π /4-DQPSK Hopping Mode
 2480 MHz

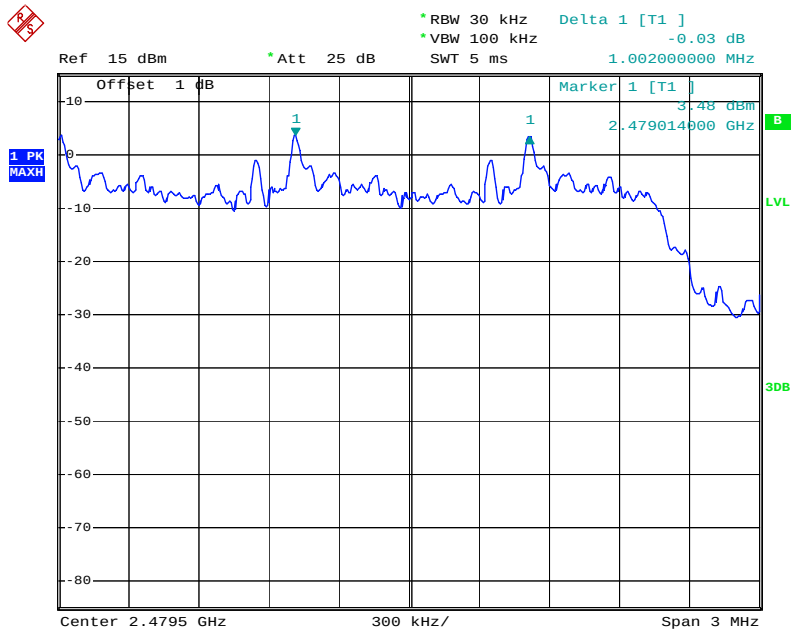


Date: 12.DEC.2016 13:22:02

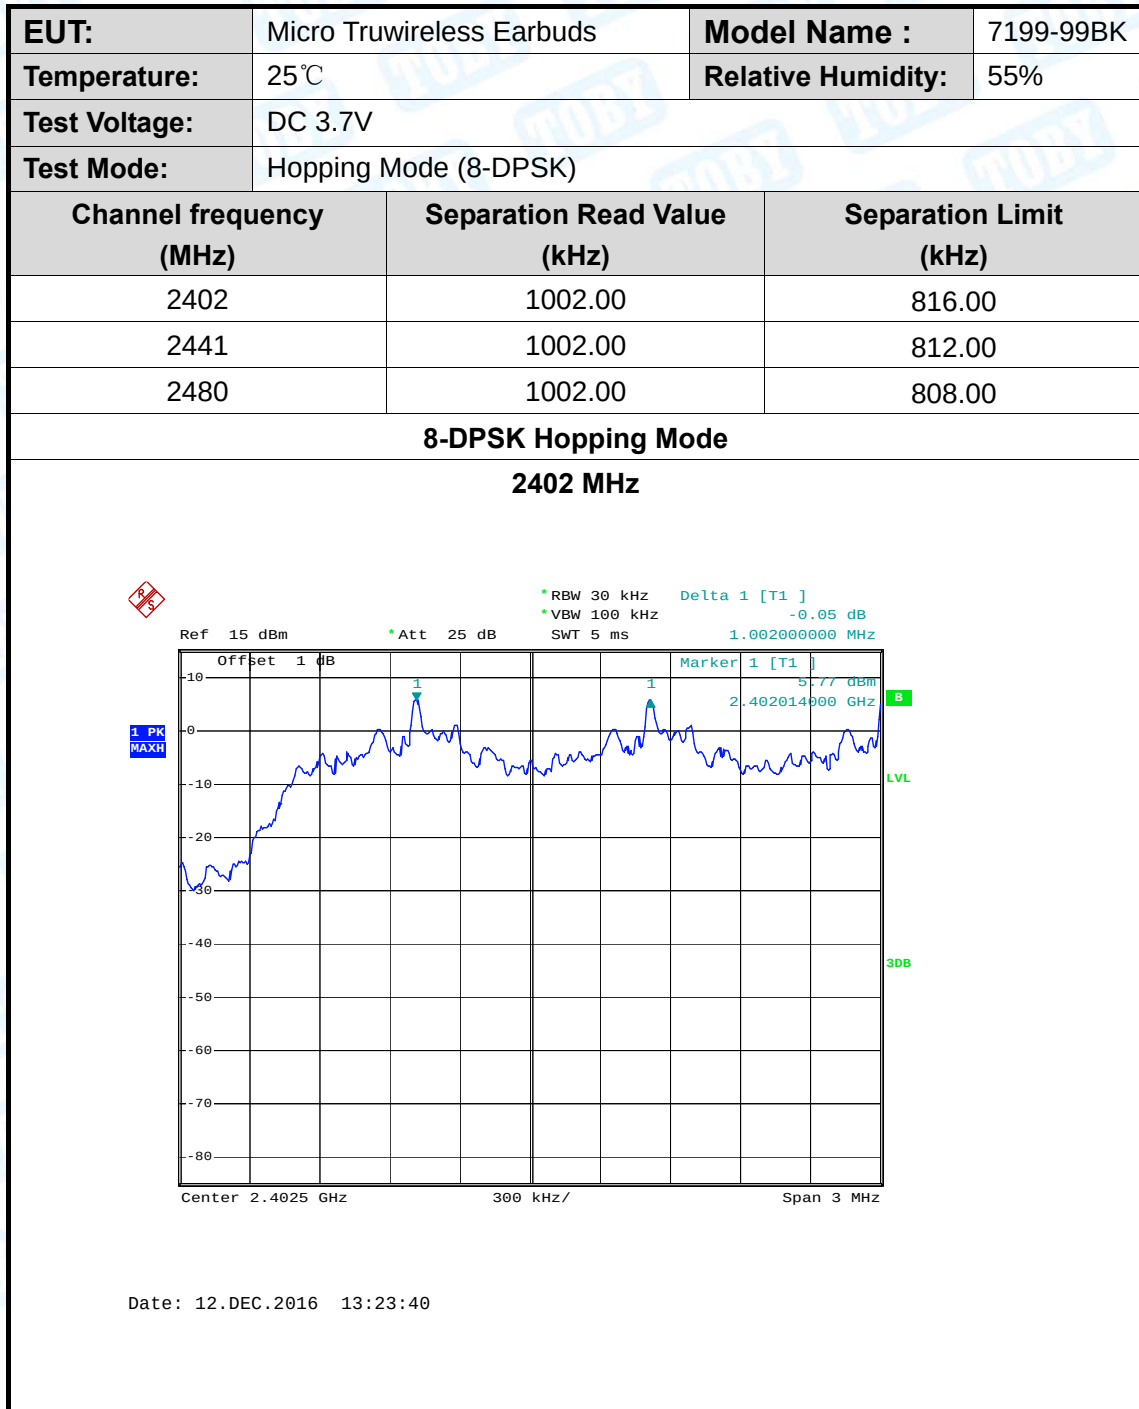

8-DPSK Hopping Mode


2441 MHz

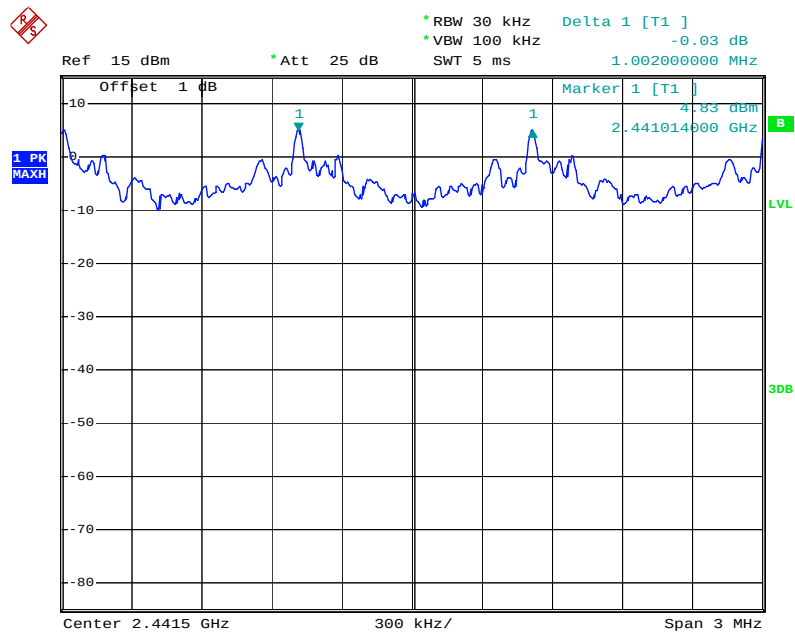

Date: 12.DEC.2016 13:24:19

8-DPSK Hopping Mode

2480 MHz

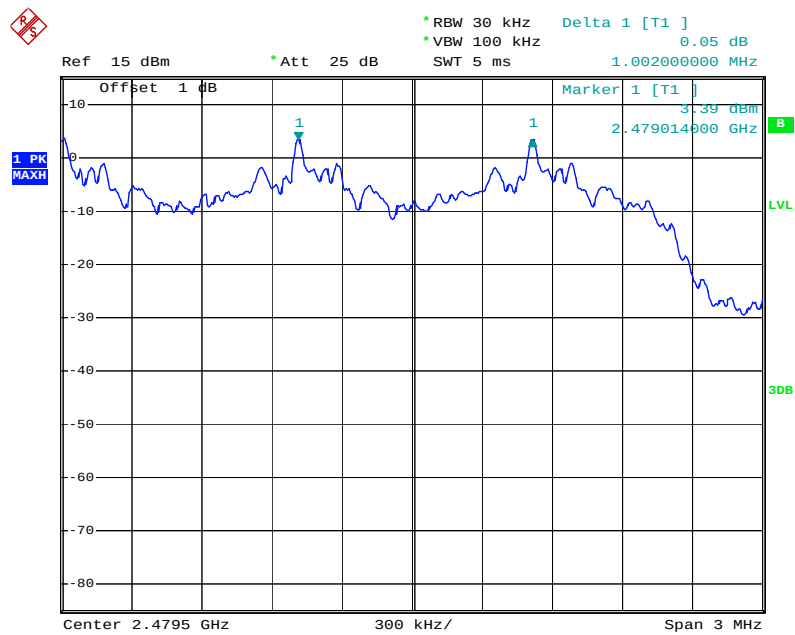

Date: 12.DEC.2016 13:24:57

10. Peak Output Power Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247 (b) (1)

10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

10.2 Test Setup




10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

10.4 EUT Operating Condition


The EUT was set to continuously transmitting in the max power during the test.

10.5 Test Data

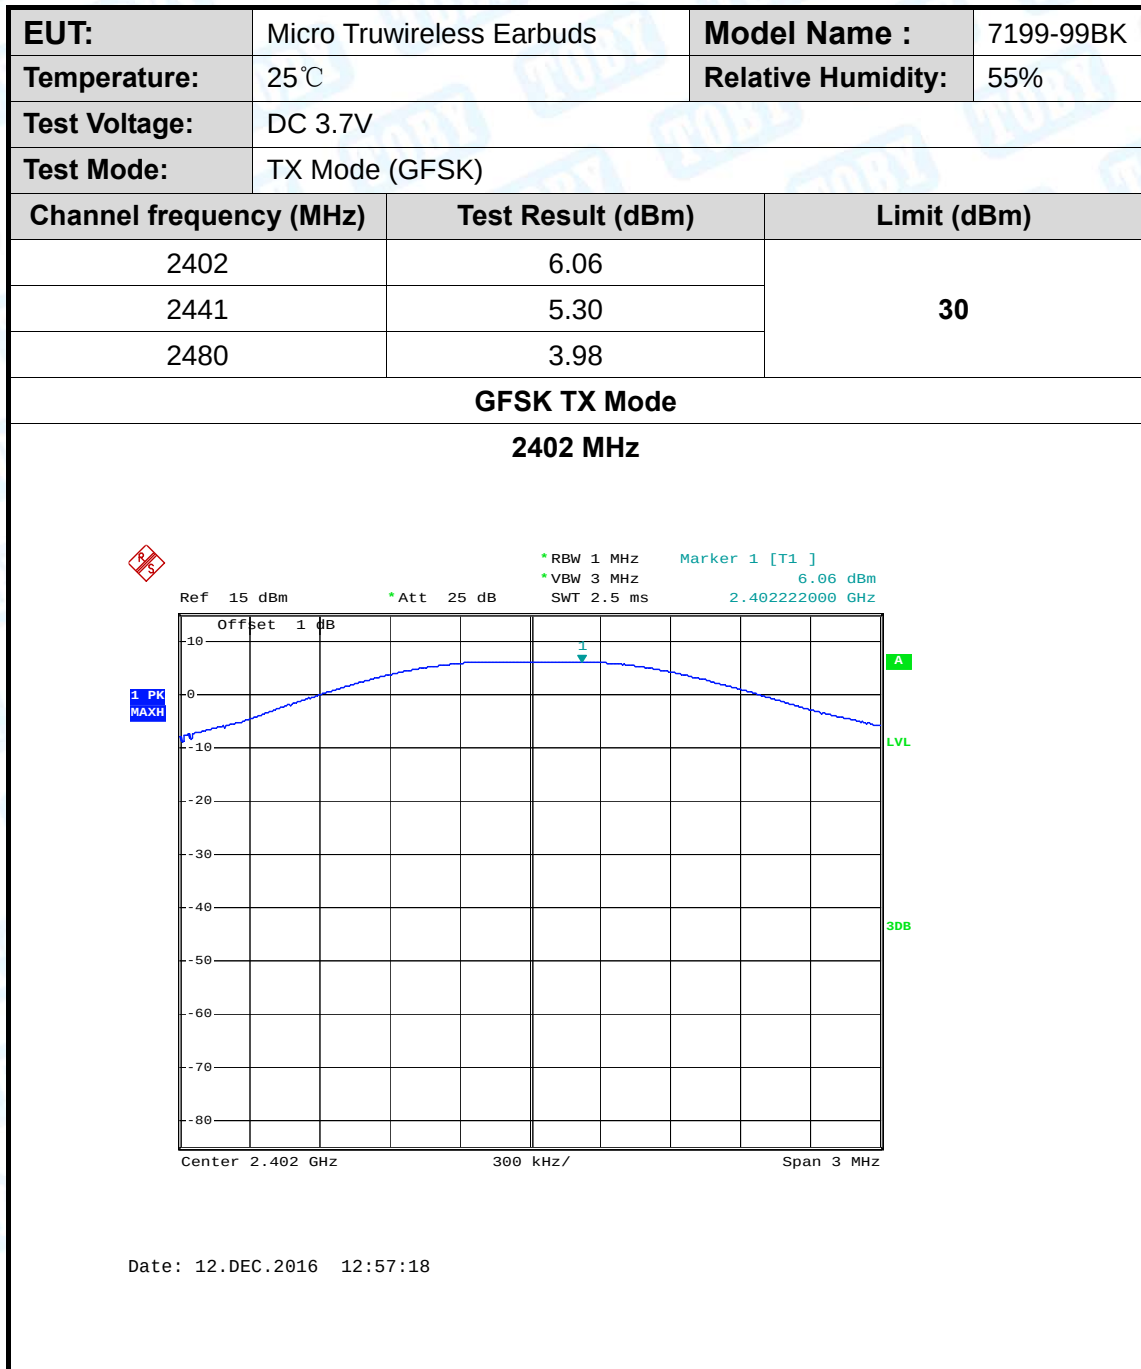

GFSK TX Mode


2441 MHz

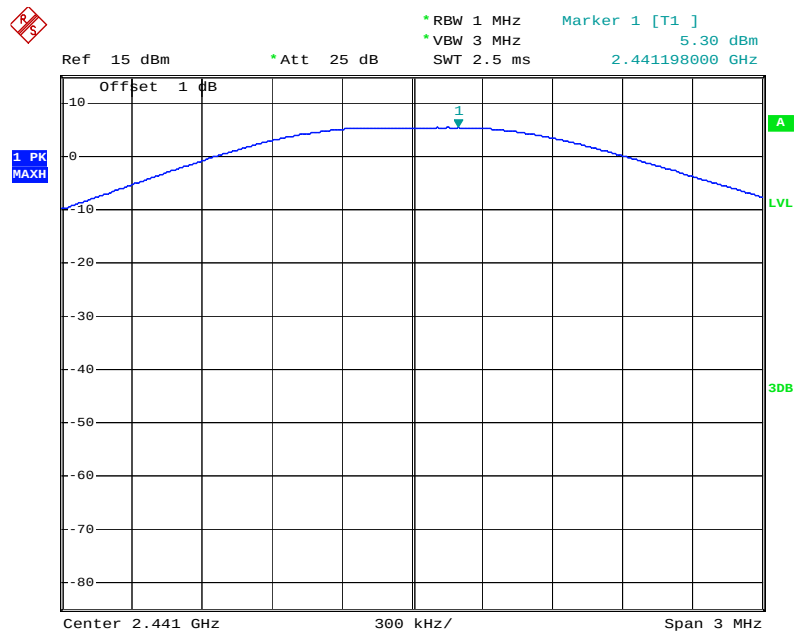


Date: 12.DEC.2016 13:01:58

GFSK TX Mode

2480 MHz

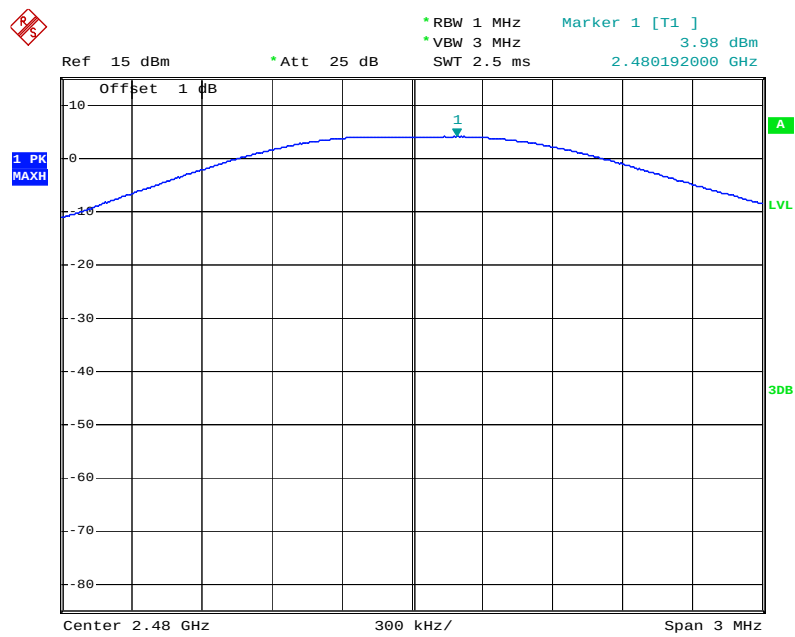


Date: 12.DEC.2016 13:02:21

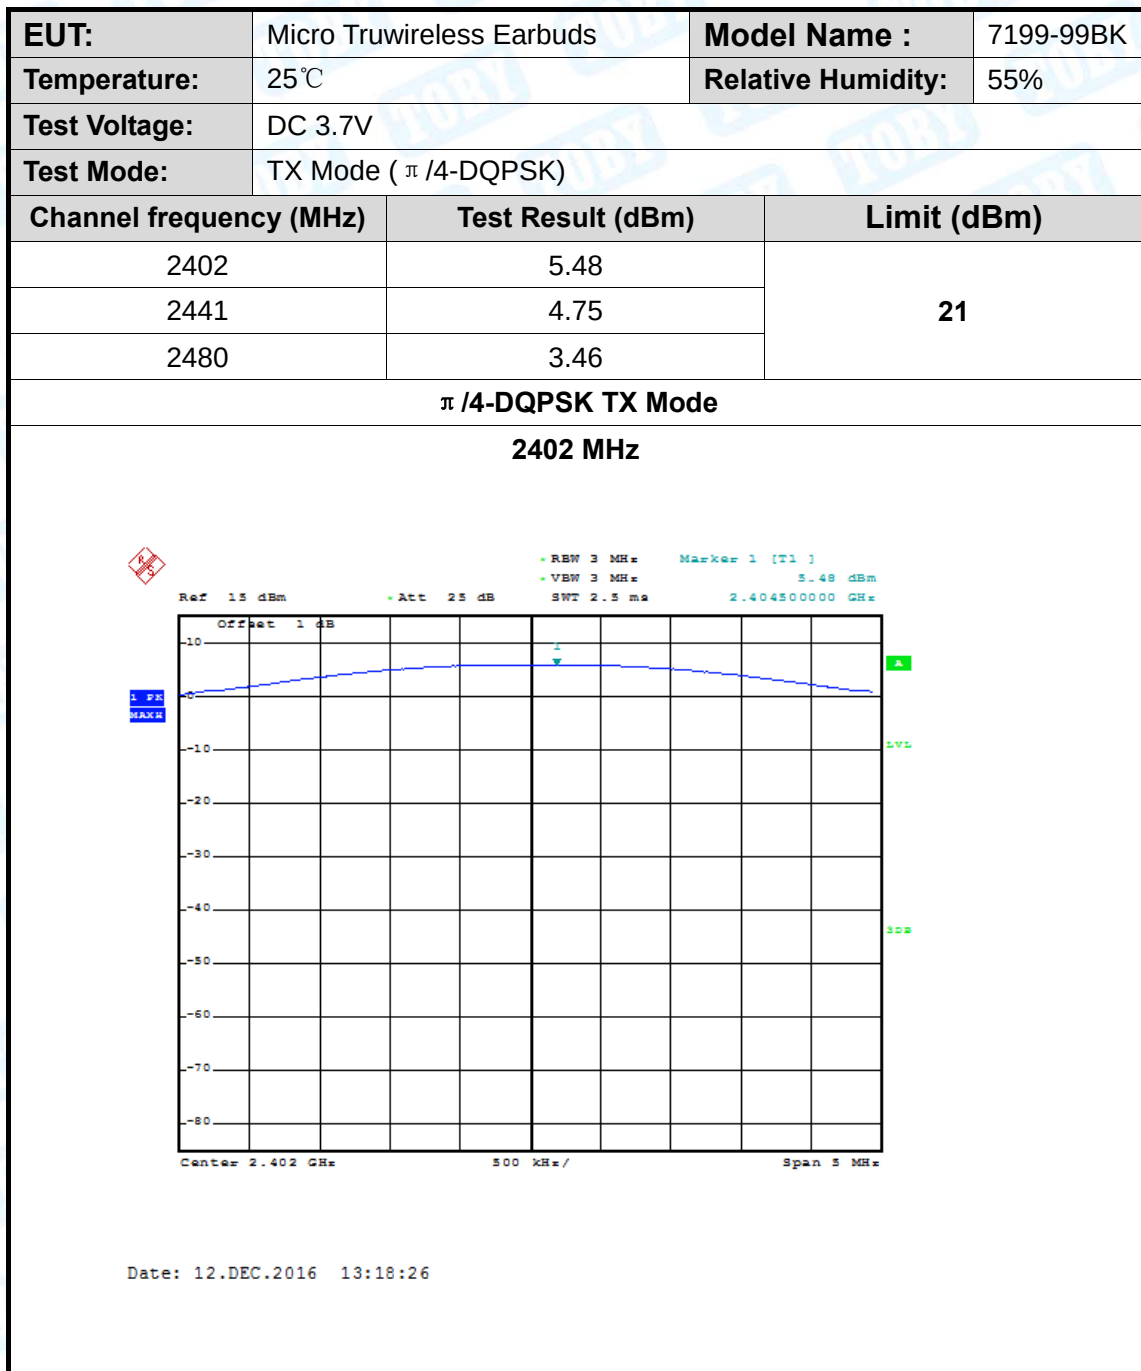

$\pi/4$ -DQPSK TX Mode


2441 MHz

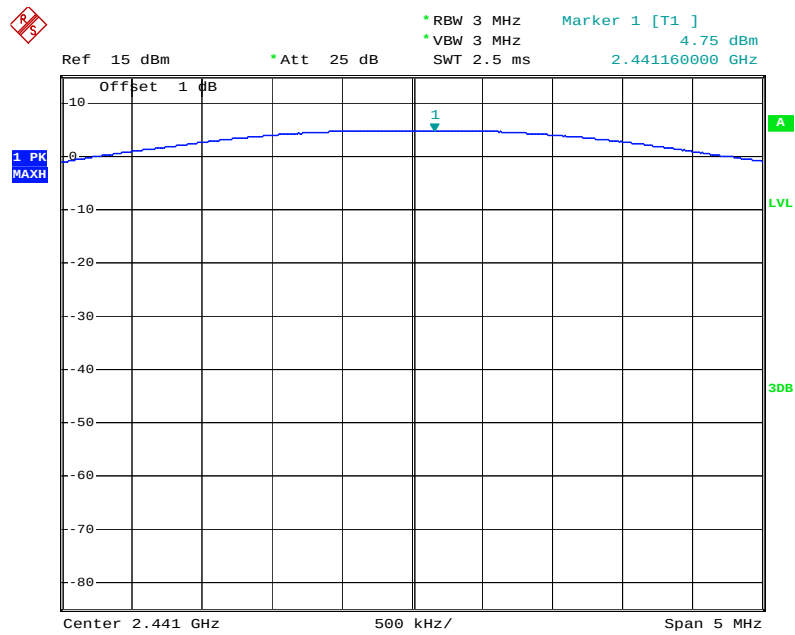


Date: 12.DEC.2016 13:03:12

$\pi/4$ -DQPSK TX Mode


2480 MHz

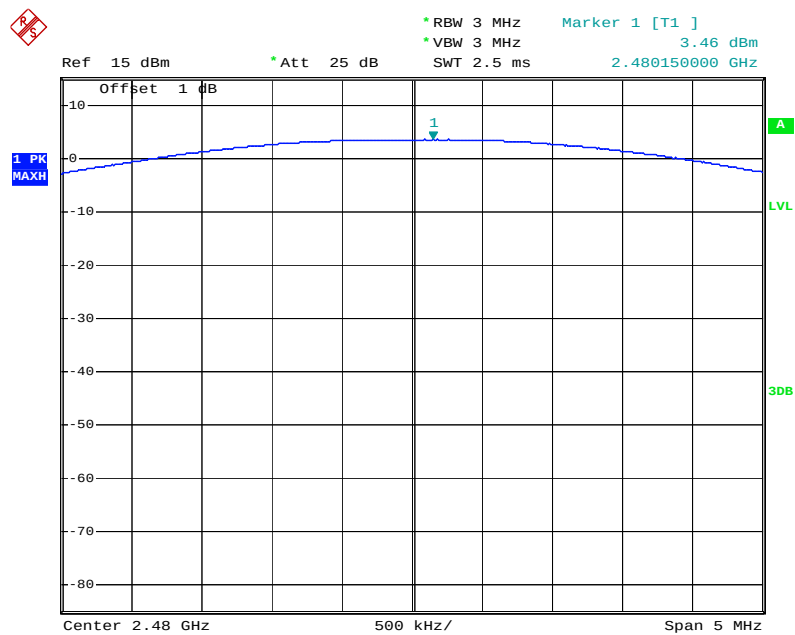

Date: 12.DEC.2016 13:02:50

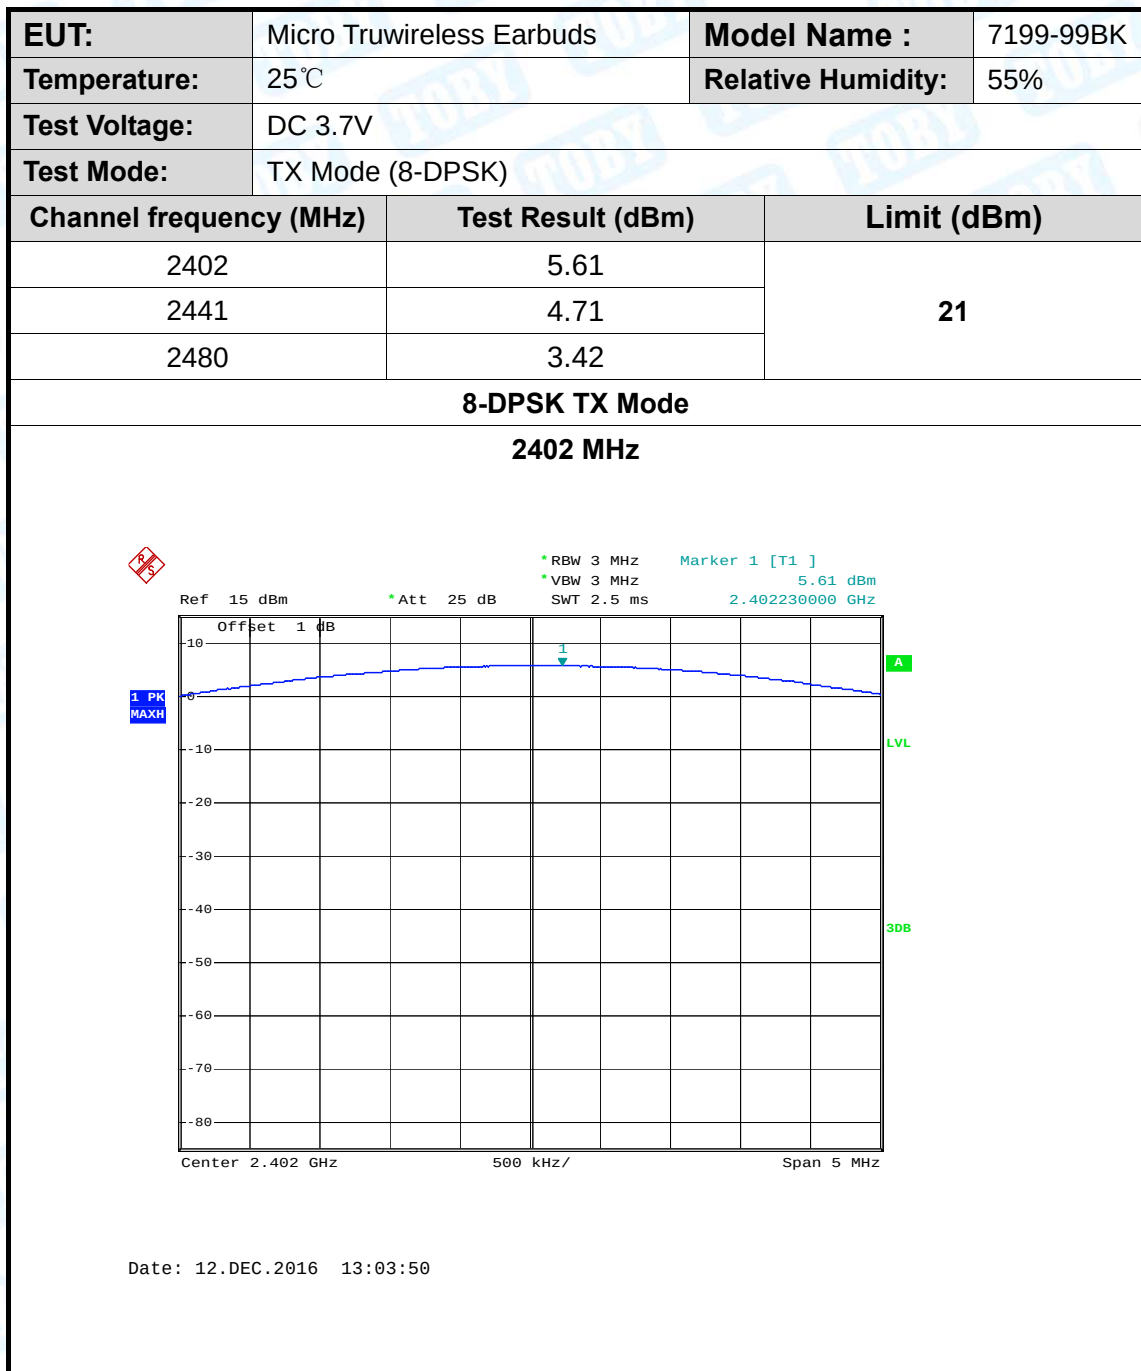


8-DPSK TX Mode
2441 MHz

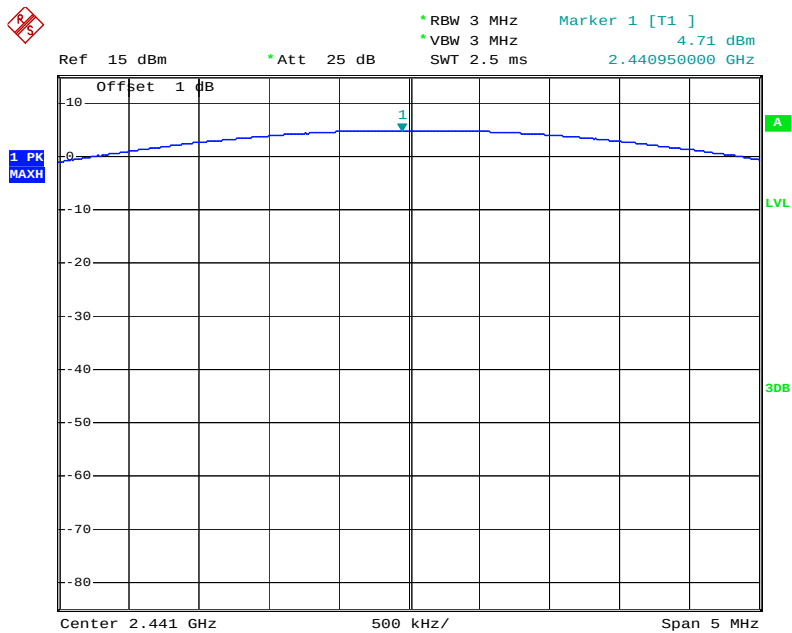

Date: 12.DEC.2016 13:04:06

8-DPSK TX Mode
2480 MHz

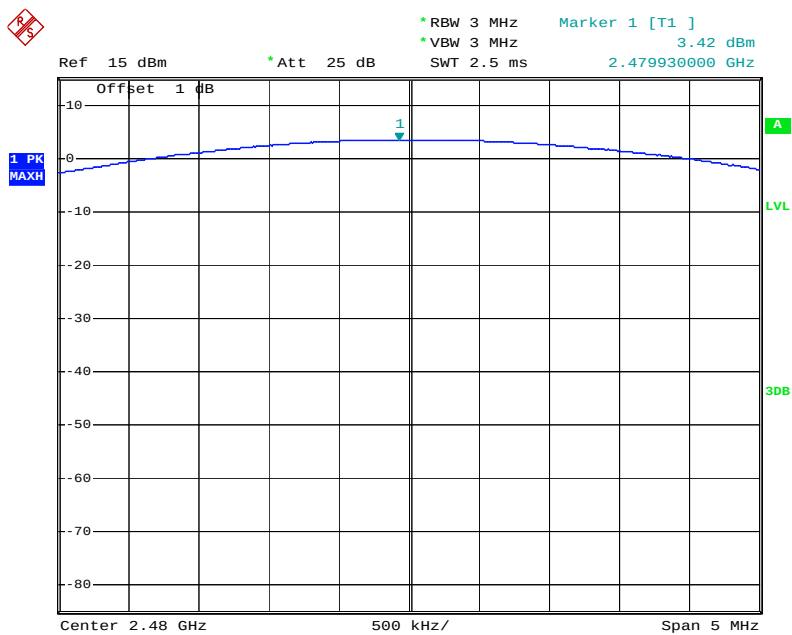

Date: 12.DEC.2016 13:04:26

11. Antenna Requirement

11.1 Standard Requirement

11.1.1 Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

The EUT antenna is a PCB antenna. It complies with the standard requirement.

Antenna Type
☒ Permanent attached antenna
☐ Unique connector antenna
☐ Professional installation antenna

-----END OF REPORT-----