

RF TEST REPORT

FCC ID: 2ABLK-GS2027E

Test Report No.....: RF260414004-01-001

Product(s) Name.....: GigaSpire BLAST

Model(s).....: 7u4 GS2027E

Trade Mark.....: 

Applicant.....: Calix Inc.

Address.....: 1 Santana West 3155 Olsen Drive, Suite 450, San Jose, CA 95117
United States

Receipt Date.....: 2026.04.14

Test Date.....: 2026.04.14~2026.05.07

Issued Date.....: 2026.06.12

Standards.....: 47 CFR FCC Part 15, Subpart C(Section 15.247);
ANSI C63.10:2020

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

History of this test report.....	4
1. General Information	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Basic Description of Equipment Under Test.....	5
1.4 Transmit Operating Mode	6
2. Summary of Test Results	7
2.1 Summary of Test Items	7
2.2 Application of Standard.....	7
2.3 Test Instruments	8
2.4 Test Mode	9
2.5 Test Condition	10
2.6 Duty Cycle of Test Signal	11
2.7 Measurement Uncertainty.....	15
2.8 Test Location.....	15
2.9 Description of Support Units	15
3. Test Procedure And Results	16
3.1 AC Power Line Conducted Emission.....	16
3.1.1 Limit.....	16
3.1.2 Test Procedure	16
3.1.3 Test Setup.....	16
3.1.4 Test Result.....	16
3.2 Radiated Emission and Band Edge	21
3.2.1 Limit.....	21
3.2.2 Test Procedure	21
3.2.3 Test Setup.....	22
3.2.4 Test Result.....	24
3.3 Spurious Emission at Antenna Port	63
3.3.1 Limit.....	63

3.3.2	Test Procedure	63
3.3.3	Test Setup.....	64
3.3.4	The Result.....	65
3.4	6dB Bandwidth.....	134
3.4.1	Limit.....	134
3.4.2	Test Procedure	134
3.4.3	Test Setup.....	134
3.4.4	Test Result.....	135
3.5	Maximum conducted output power.....	173
3.5.1	Limit.....	173
3.5.2	Test Procedure	173
3.5.3	Test Setup.....	173
3.5.4	Table of Parameters of Text Software Setting.....	174
3.5.5	The Result.....	175
3.6	Power Spectral Density.....	178
3.6.1	Limit.....	178
3.6.2	Test Procedure	178
3.6.3	Test Setup.....	178
3.6.4	The Result.....	179

History of this test report

Original Report Issue Date: 2026.06.12

☒ No additional attachment

☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

Calix Inc.

1 Santana West 3155 Olsen Drive, Suite 450, San Jose, CA 95117 United States

1.2 Manufacturer

Calix Inc.

1 Santana West 3155 Olsen Drive, Suite 450, San Jose, CA 95117 United States

1.3 Basic Description of Equipment Under Test

Sample No.	POC260414004-S003, POC260414004-S004	
Product Name	GigaSpire BLAST	
Model Name	7u4 GS2027E	
Model difference	/	
Trade Mark	Calix	
Power Supply	DC 12V from adapter	
Adapter1 Information	AMS200A-1202000FU-3 Input:100-240V~50/60Hz 0.8A Max Output:12V/2.0A	
Adapter2 Information	MS-V2000R120-024Q0-US Input:100-240V~50/60Hz 0.7A Max Output:12V/2.0A	
Operate temperature	0°C-45°C	
EUT Stage	○ Product Unit	● Final-Sample
Operating Band and Conducted Output Power (Max power)	2400MHz ~ 2483.5MHz	●IEEE 802.11G:28.72Bm(0.745W)
Product Type	IEEE 802.11b/g/n/ax/be: WLAN (MIMO)	
Nominal Bandwidth	20MHz / 40MHz	
Modulation	IEEE 802.11b: DSSS IEEE 802.11g/n: OFDM IEEE 802.11ax/be: OFDMA	
Data Rate (Mbps)	IEEE 802.11b mode : 1/2/5.5/11 IEEE 802.11g mode : 6/9/12/18/24/36/48/54 IEEE 802.11n mode : up to 300 IEEE 802.11ax mode: up to 573.52 IEEE 802.11be mode: up to 688.24	
Antenna gain	Ant0: 3.4dBi, Ant1: 3.4dBi	
Directional gain (No beamforming)	5.5dBi(from the antenna report)	
Directional gain (Beamforming)	5.5dBi(from the antenna report)	
Antenna type	PCB antenna	

Eleven channels are provided for 802.11b, 802.11g, 802.11n20, 802.11ax20, 802.11be20:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	01	2412MHz	07	2442MHz
	02	2417MHz	08	2447MHz
	03	2422MHz	09	2452MHz
	04	2427MHz	10	2457MHz
	05	2432MHz	11	2462MHz
	06	2437MHz	/	/

Seven channels are provided for 802.11n40MHz, 802.11ax40, 802.11be40:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400MHz ~ 2483.5 MHz	03	2422 MHz	07	2442MHz
	04	2427MHz	08	2447MHz
	05	2432MHz	09	2452MHz
	06	2437MHz	/	/

Note: For 802.11be support full RU/MRU mode.

1.4 Transmit Operating Mode

Transmit Operating Mode					Transmit Multiple Antennas					
☐	Operating mode 1 (single antenna)				☐	1TX				
☐	Operating mode 2 (multiple antenna, no beam forming)				☐	2TX	☐	3TX	☐	4TX
☒	Operating mode 3 (multiple antenna, with beam forming)				☒	2TX	☐	3TX	☐	4TX
☒	802.11b	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11g	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11n(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11n(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ax(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ax(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11be(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11be(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
Beam forming gain: 5.5dB										

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Test item	FCC Clause	Results	Remarks
AC Power Conducted Emission	15.207	Pass	Meet the requirement of the limit
Radiated Emission and Band Edge Measurement	15.205/15.209 /15.247(d)	Pass	Meet the requirement of the limit
Spurious Emission at Antenna Port	15.247(d)	Pass	Meet the requirement of the limit
6dB Bandwidth	15.247(a)(2)	Pass	Meet the requirement of the limit
Maximum Conducted Power	15.247(b)	Pass	Meet the requirement of the limit
Power Spectral Density	15.247(e)	Pass	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	Note
Note: The EUT has 2 PCB antennas arrangement which was permanently attached.			

2.2 Application of Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2020

2.3 Test Instruments

Radiated Emission							
No.	Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2026/2/27	2027/2/26
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2028/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2026/2/27	2027/2/26
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2026/2/27	2027/2/26
5	Horn Antenna	Schwarzbeck	BBHA 9120 D	02670	JLE028	2025/4/12	2028/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2026/4/8	2027/4/7
7	Horn Antenna	Schwarzbeck	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	Schwarzbeck	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2026/2/27	2027/2/26
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2026/2/27	2027/2/26
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2026/2/27	2027/2/26
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2026/2/27	2027/2/26
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2026/2/27	2027/2/26
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2026/2/27	2027/2/26
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2026/4/8	2027/4/7
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Keysight	N9010A	MY51440158	JLE087	2025/9/15	2026/9/14
2	MXA Signal	Agilent	N9020A	MY522200	JLE090	2026/1/19	2027/1/18

	Analyzer			22			
3	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2026/2/27	2027/2/26
4	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2026/2/27	2027/2/26
5	VXG Signal Generator	Keysight	M9384B	MY61270787	JLE051	2025/6/10	2026/6/9
6	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	JLE052	2026/2/27	2027/2/26
7	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002 K50-11606 4-Dt	JLE054	2026/2/27	2027/2/26
8	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				

2.4 Test Mode

Test Items	Mode	Data Rate	Channel
AC Power Conducted Emission	802.11BE20MIMO	MCS0	06
Radiated Emission and Band Edge Measurement	802.11B-CDD	1Mbps	01/06/11
	802.11G-CDD	6Mbps	01/06/11
	802.11AX20MIMO	MCS0	01/06/11
	802.11AX40MIMO	MCS0	03/06/09
	802.11BE20MIMO	MCS0	01/06/11
	802.11BE40MIMO	MCS0	03/06/09
Spurious Emission at Antenna Port	802.11B-CDD	1Mbps	01/06/11
	802.11G-CDD	6Mbps	01/06/11
	802.11AX20MIMO	MCS0	01/06/11
	802.11AX40MIMO	MCS0	03/06/09
	802.11BE20MIMO	MCS0	01/06/11
	802.11BE40MIMO	MCS0	03/06/09
6dB Bandwidth	802.11B-CDD	1Mbps	01/06/11
	802.11G-CDD	6Mbps	01/06/11
	802.11AX20MIMO	MCS0	01/06/11
	802.11AX40MIMO	MCS0	03/06/09
	802.11BE20MIMO	MCS0	01/06/11
	802.11BE40MIMO	MCS0	03/06/09
Maximum Conducted Power	802.11B-CDD	1Mbps	01/06/11
	802.11G-CDD	6Mbps	01/06/11

	802.11AX20MIMO	MCS0	01/06/11
	802.11AX40MIMO	MCS0	03/06/09
	802.11BE20MIMO	MCS0	01/06/11
	802.11BE40MIMO	MCS0	03/06/09
Power Spectral Density	802.11B-CDD	1Mbps	01/06/11
	802.11G-CDD	6Mbps	01/06/11
	802.11AX20MIMO	MCS0	01/06/11
	802.11AX40MIMO	MCS0	03/06/09
	802.11BE20MIMO	MCS0	01/06/11
	802.11BE40MIMO	MCS0	03/06/09

Note:

1. For AC Power Conducted Emission and Radiated Emission below 1GHz, only worst case was recorded.
2. Due to similar modulation. The power settings of HT20/HT40 mode are the same or lower than HEW20/HEW40/EHT20/EHT40. Evaluated HEW20/HEW40/EHT20/EHT40 mode only.

2.5 Test Condition

Applicable to	Environmental conditions	Input Power	Tested by
AC Power Conducted Emission	23.2°C, 49% RH	AC 120V/60Hz	Keith Huang
Radiated Emission and Band Edge Measurement	23.1°C, 51% RH	AC 120V/60Hz	Keith Huang
Spurious Emission at Antenna Port	23.6°C, 53% RH	DC 12V	Lemon He
6dB Bandwidth	23.6°C, 53% RH	DC 12V	Lemon He
Maximum Conducted Power	23.6°C, 53% RH	DC 12V	Lemon He
Power Spectral Density	23.6°C, 53% RH	DC 12V	Lemon He

Note: Adapter supply voltage AC 120V/60Hz.

The applicant declare the operating environment of EUT as below:

Normal conditions: 12V DC, 0~45°C

2.6 Duty Cycle of Test Signal


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


All the duty factor of other test mode have been considered.

Test Mode	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B-CDD	2412	0.65	0.67	97.01
11G-CDD	2412	1.43	1.45	98.62
11AX20MIMO	2412	5.45	5.46	99.82
11AX40MIMO	2422	5.44	5.46	99.63
11BE20MIMO	2412	5.45	5.47	99.63
11BE40MIMO	2422	5.46	5.48	99.64


11B-CDD_2412

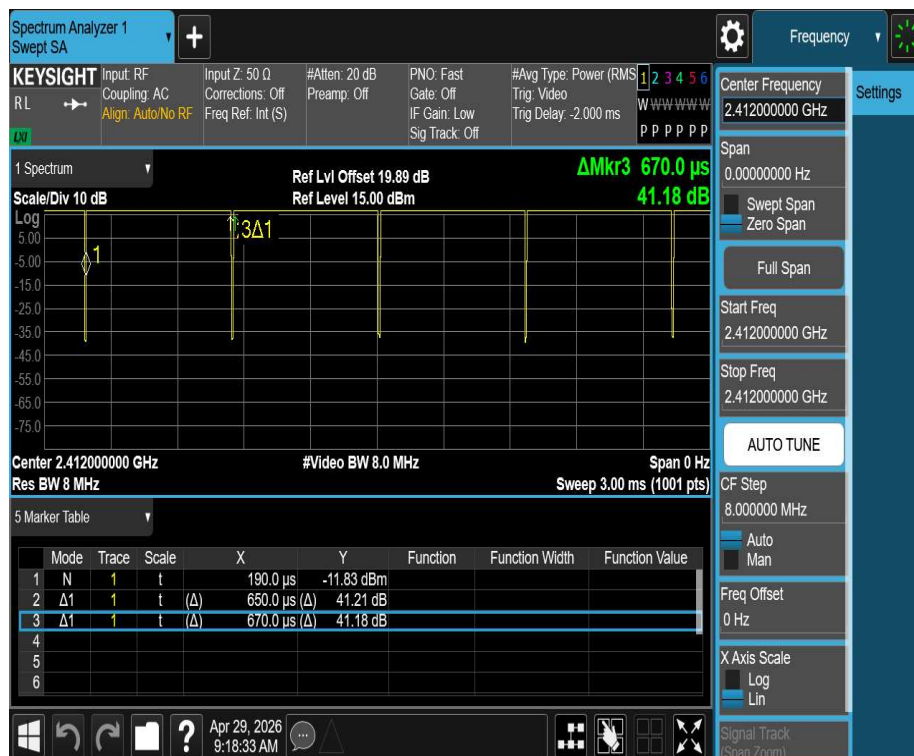


11G-CDD_2412

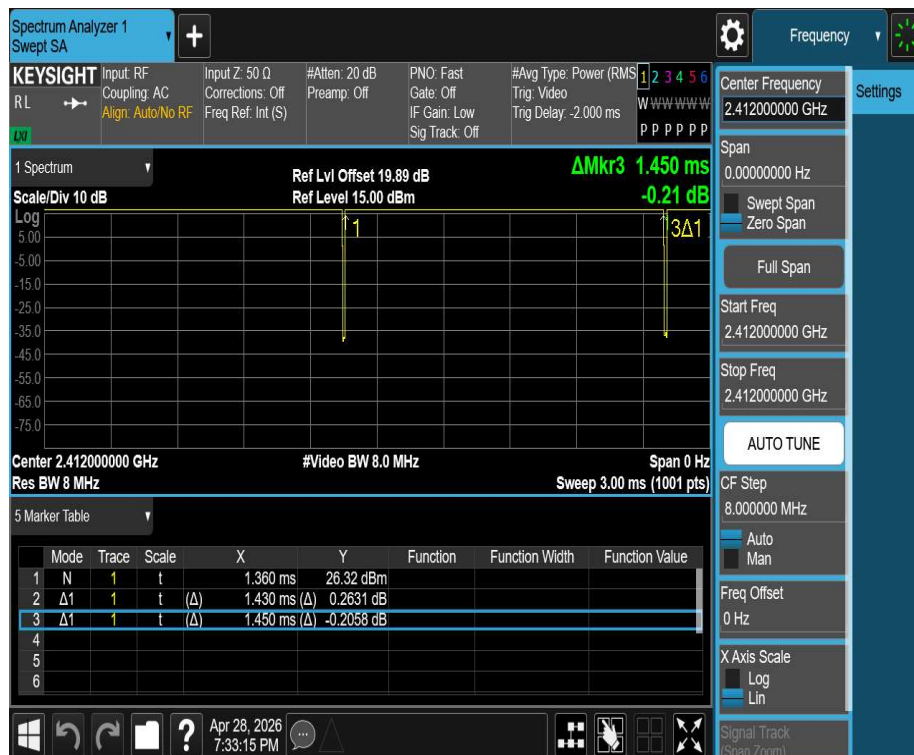


11AX20MIMO_2412

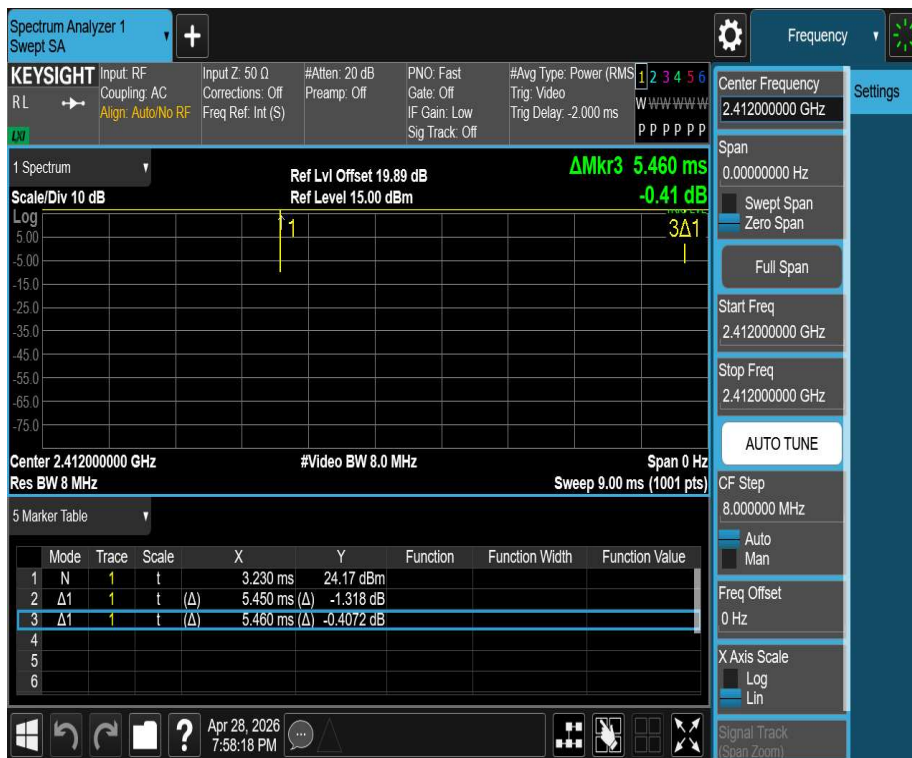


11AX40MIMO_2422

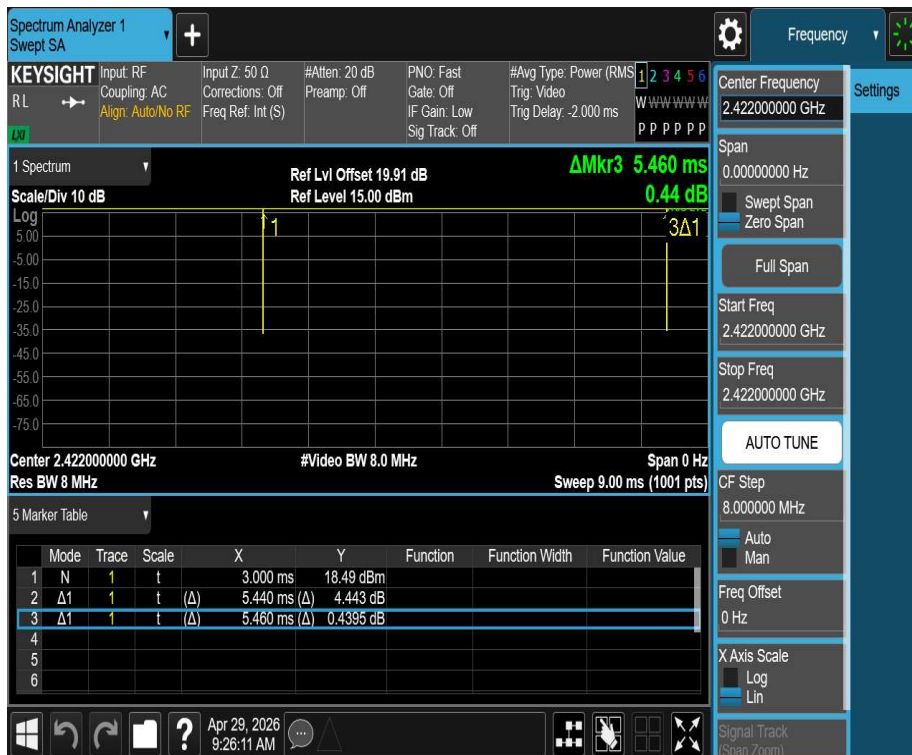

11BE20MIMO_2412

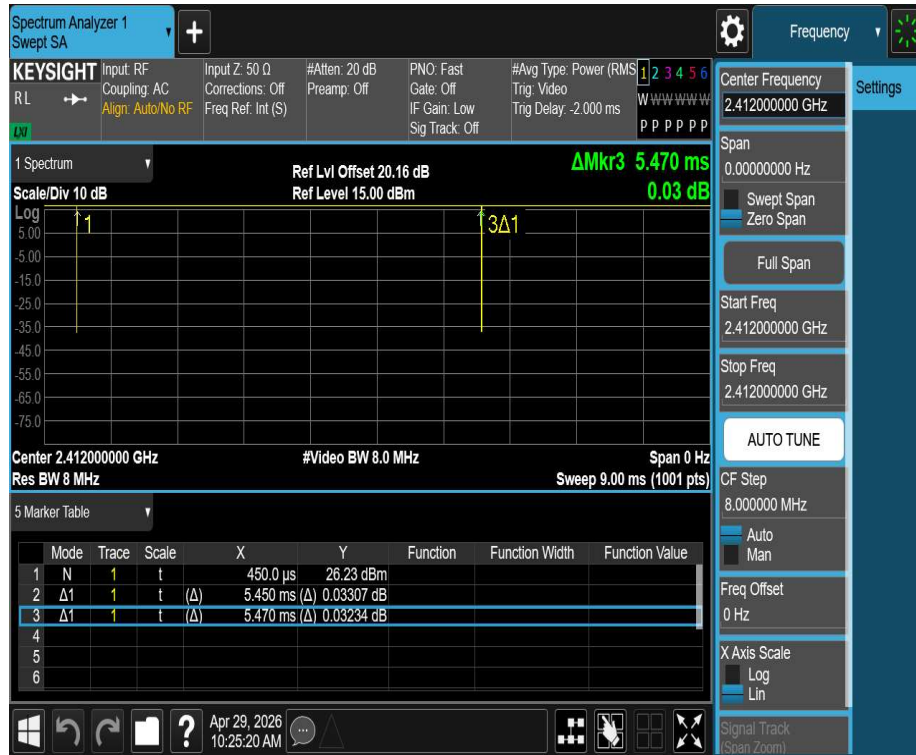

11BE40MIMO_2422

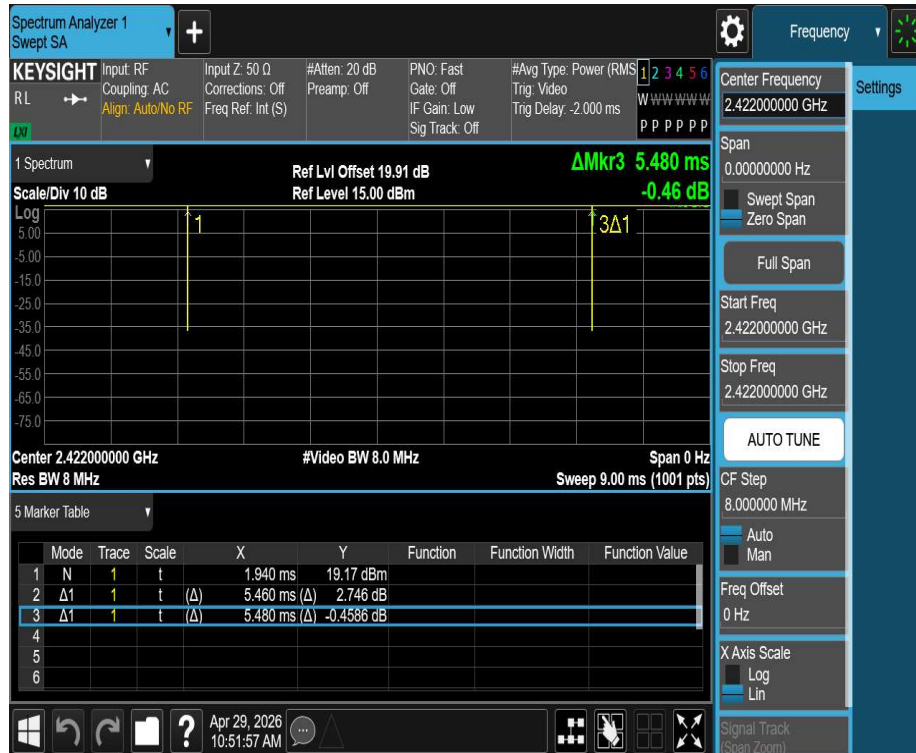

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
RF power conducted	$\pm 0.243\text{dB}$
Power Spectral Density	$\pm 0.743\text{dB}$
Conducted Spurious Emission	$\pm 1.328\text{dB}$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier	CN0145
A2LA Certificate Number	6823.01
Telephone:	0755-26024411

2.9 Description of Support Units

None

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.


2. The lower limit shall apply at the transition frequencies.

3.1.2 Test Procedure

Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☐ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ● : Test ○ : No Test	

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.3 Test Setup

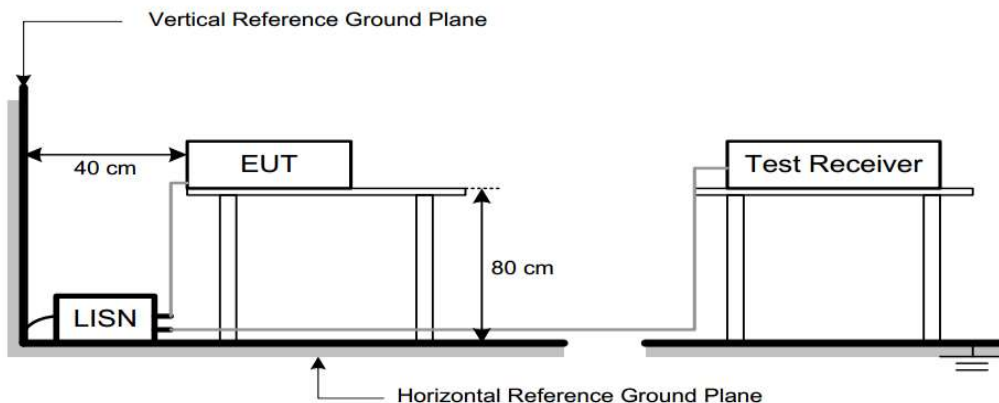

3.1.4 Test Result

Note:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Measurement = Reading + Correct Factor.
3. Over = Measurement – Limit


We only recorded the data of the worst mode. Please see the following:

MS-V2000R120-024Q0-US :

150kHz~30MHz


Worst Case Operating Mode: 11BE20MIMO Channel 6

Line

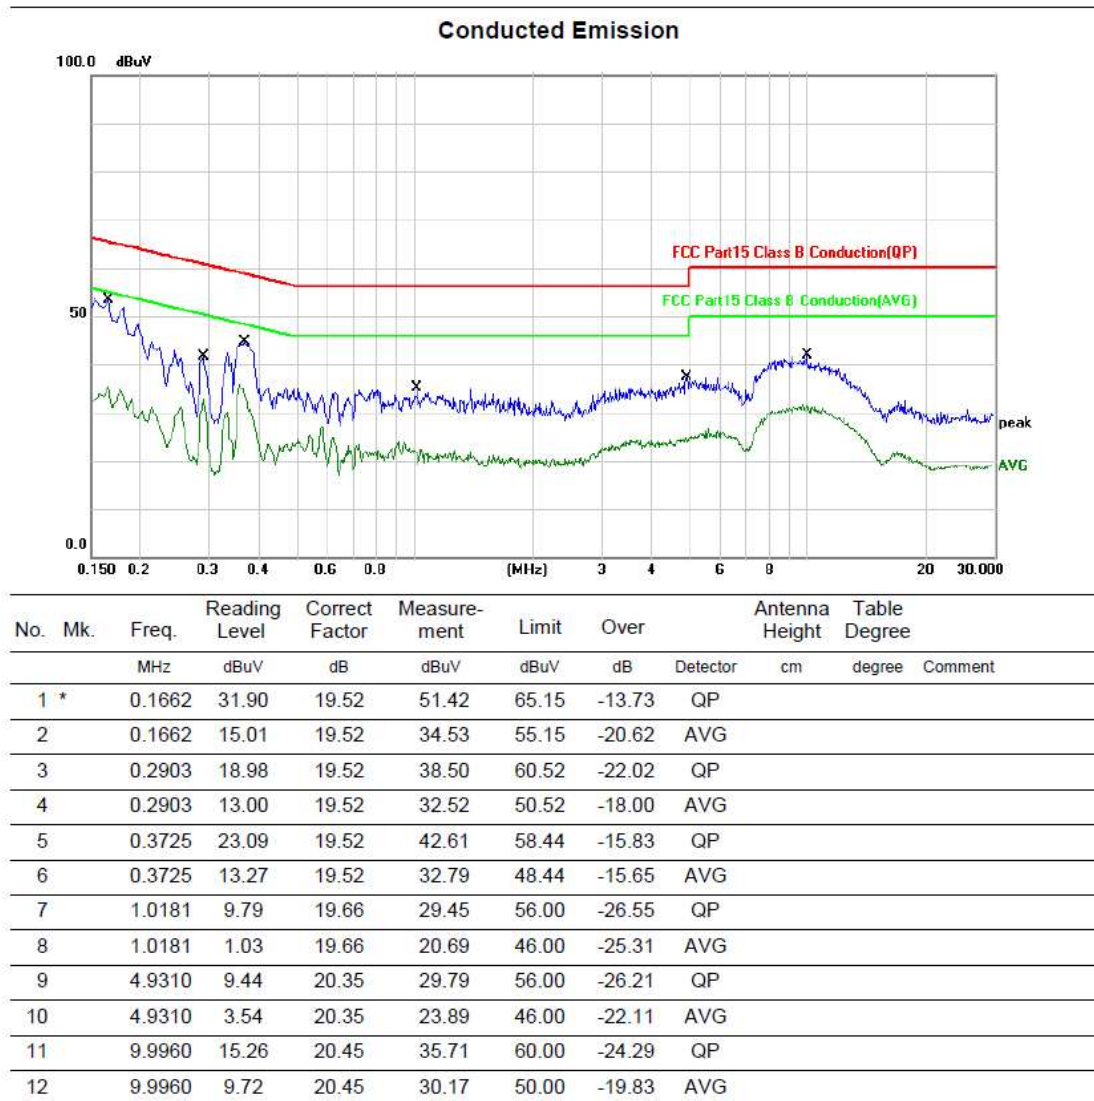

Neutral

Conducted Emission

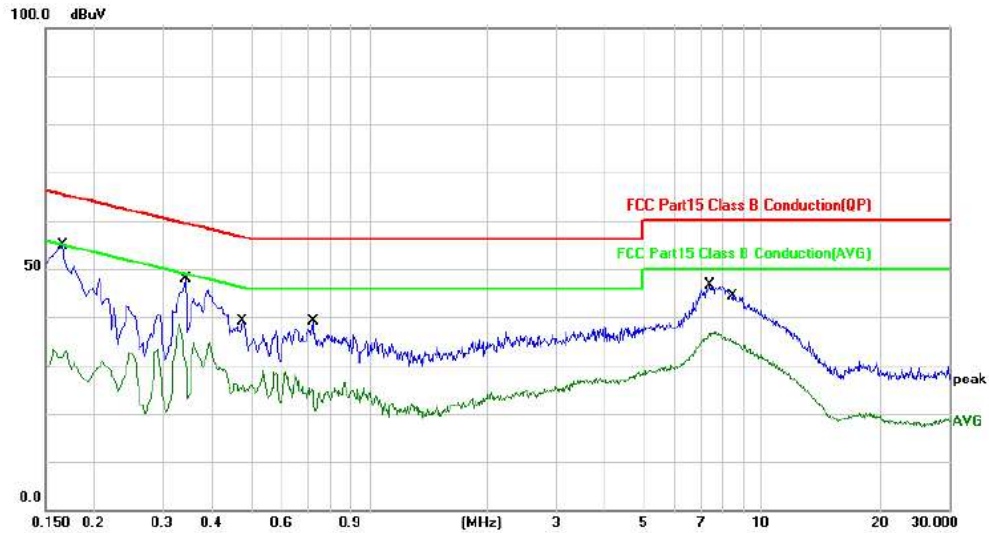


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1643	30.97	19.70	50.67	65.24	-14.57	QP		
2		0.1643	11.58	19.70	31.28	55.24	-23.96	AVG		
3		0.3423	23.07	19.70	42.77	59.15	-16.38	QP		
4		0.3423	8.36	19.70	28.06	49.15	-21.09	AVG		
5		0.4802	16.02	19.74	35.76	56.34	-20.58	QP		
6		0.4802	5.54	19.74	25.28	46.34	-21.06	AVG		
7		0.7228	15.17	19.79	34.96	56.00	-21.04	QP		
8		0.7228	4.23	19.79	24.02	46.00	-21.98	AVG		
9		7.4164	21.47	20.48	41.95	60.00	-18.05	QP		
10	*	7.4164	15.19	20.48	35.67	50.00	-14.33	AVG		
11		8.4594	19.65	20.48	40.13	60.00	-19.87	QP		
12		8.4594	13.94	20.48	34.42	50.00	-15.58	AVG		


150kHz~30MHz

Worst Case Operating Mode: 11BE20MIMO Channel 6

Line

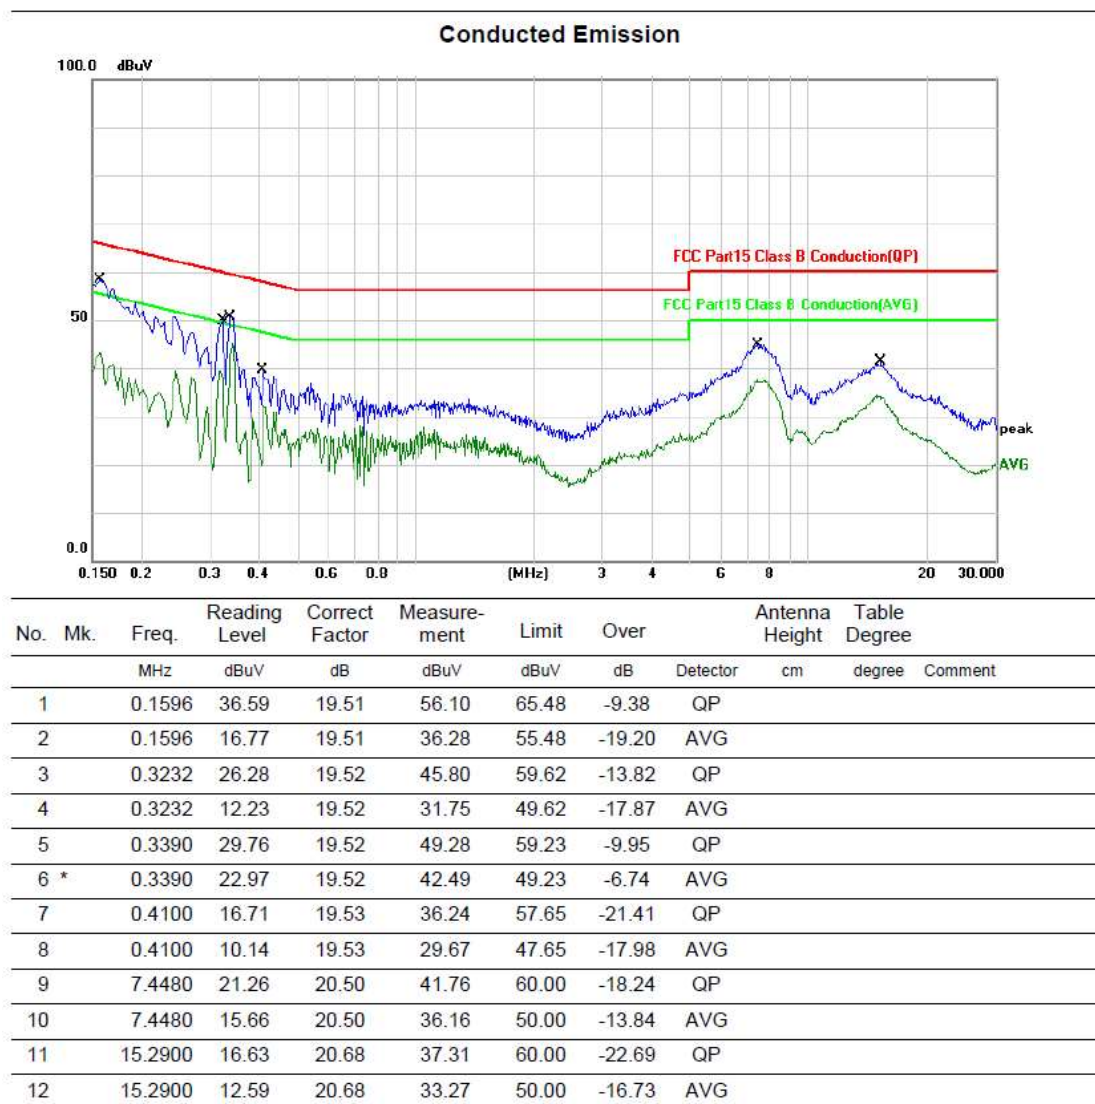

Neutral

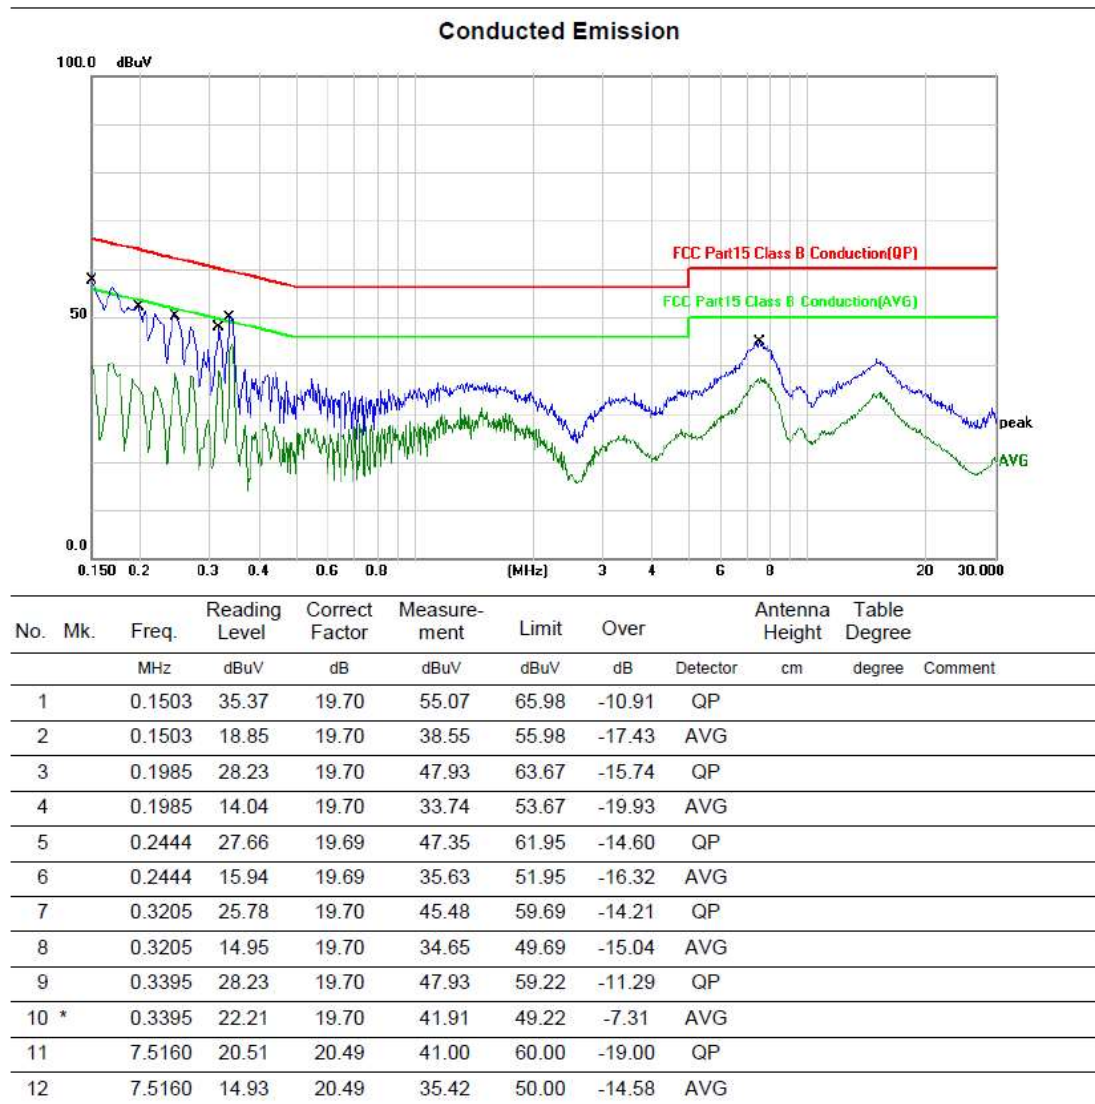

3.2 Radiated Emission and Band Edge

3.2.1 Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 – 0.49	300	$2400/F(\text{kHz})$	-
0.490 – 1.705	30	$24000/F(\text{kHz})$	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Note: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2.2 Test Procedure


Test Method	
☐ Conducted Measurement	☒ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ☒ : Test ☐ : No Test	

- a) The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b) The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c) The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.


- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i) For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.3 Test Setup


(A) Radiated Emission Test Set-Up Frequency Below 30 MHz

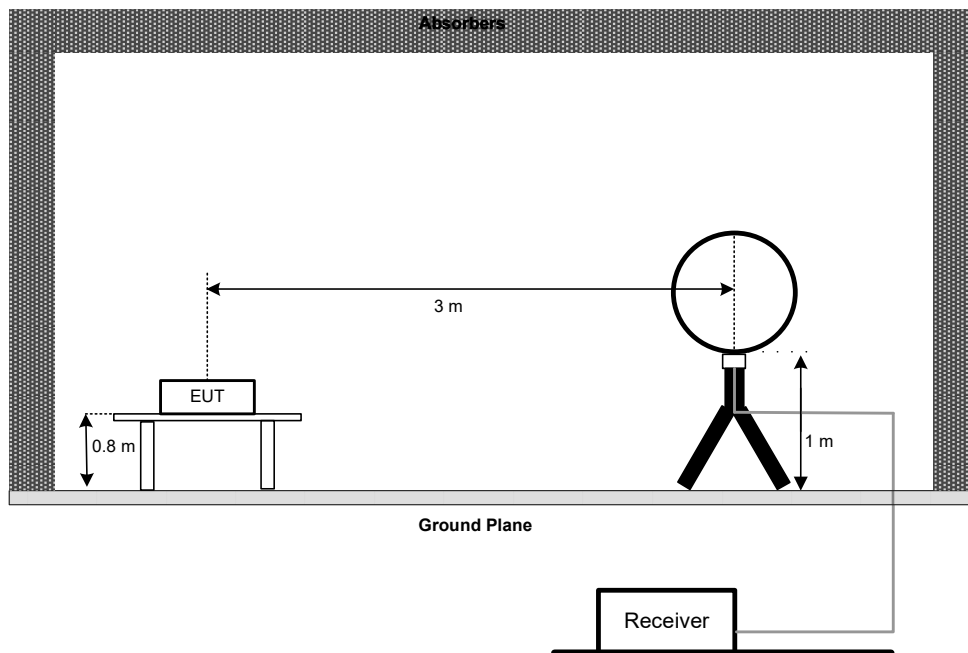

(B) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

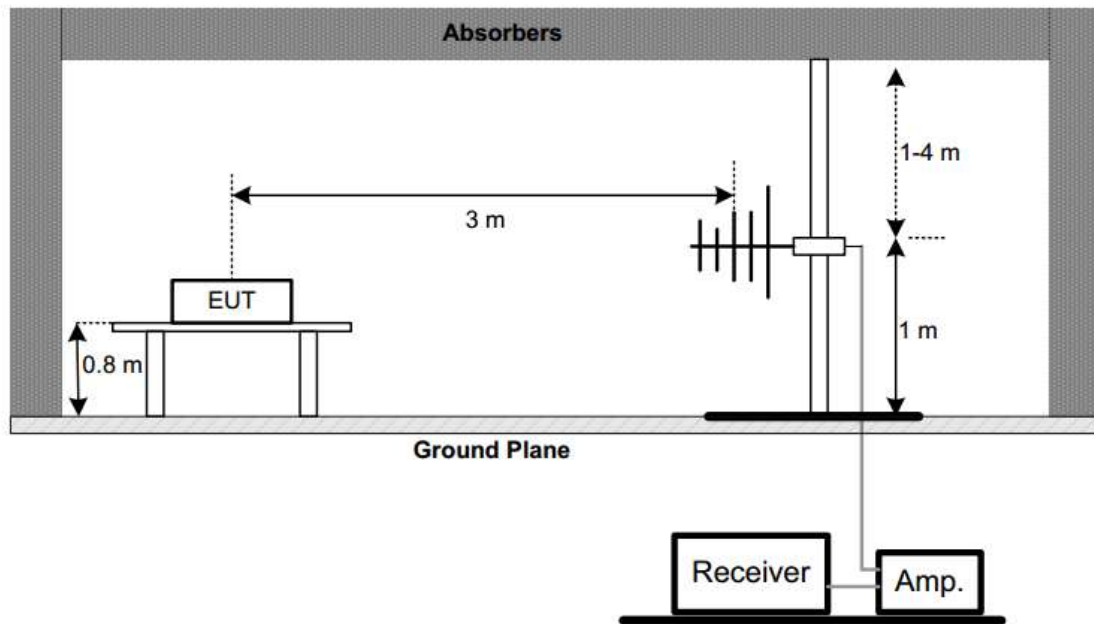

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz

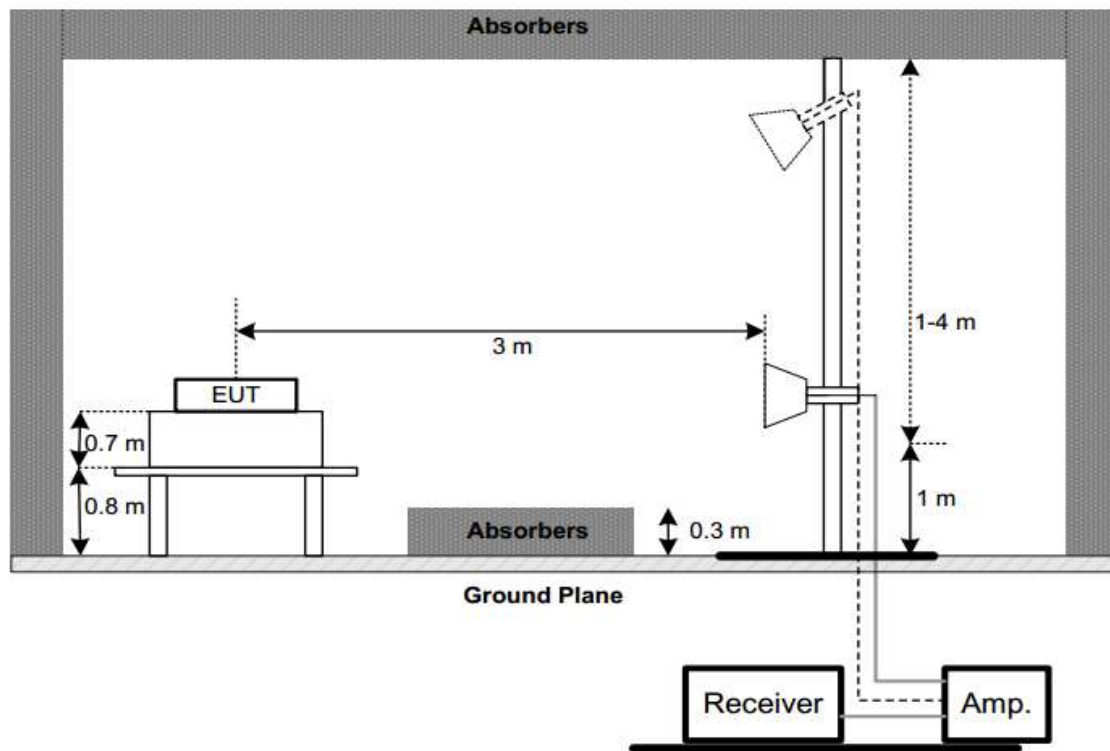

3.2.4 Test Result

1) Radiated emission: 9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

2) Radiated emission: 30MHz-1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit


We only recorded the data of the worst mode. Please see the following:

MS-V2000R120-024Q0-US:


Below 1GHz (30MHz~1GHz)

Worst Case Operating Mode: 11BE20MIMO Channel 6

VERTICAL

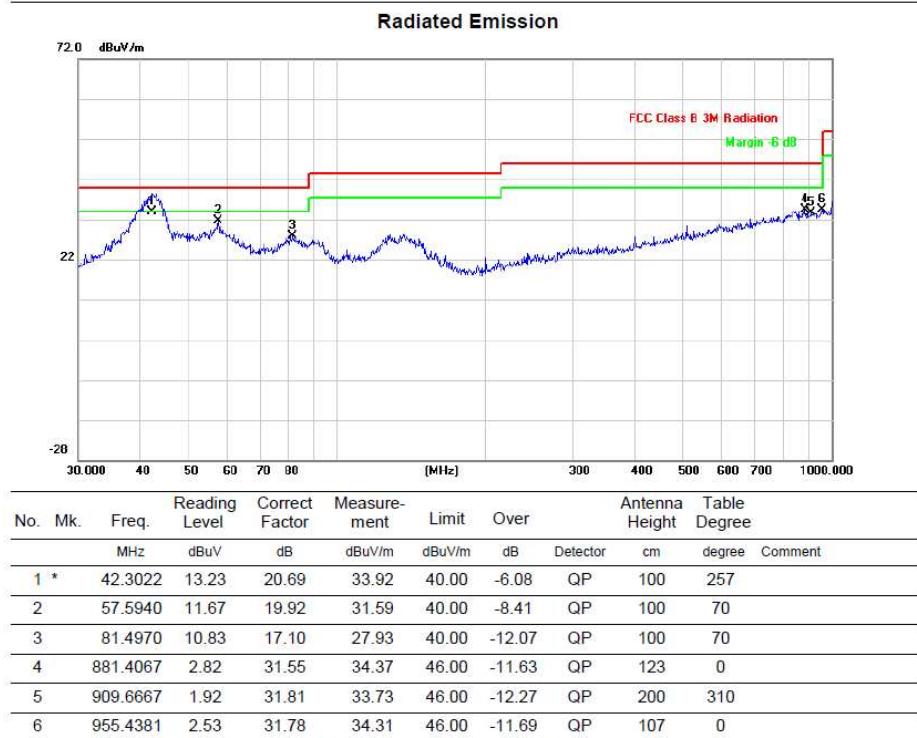


HORIZONTAL

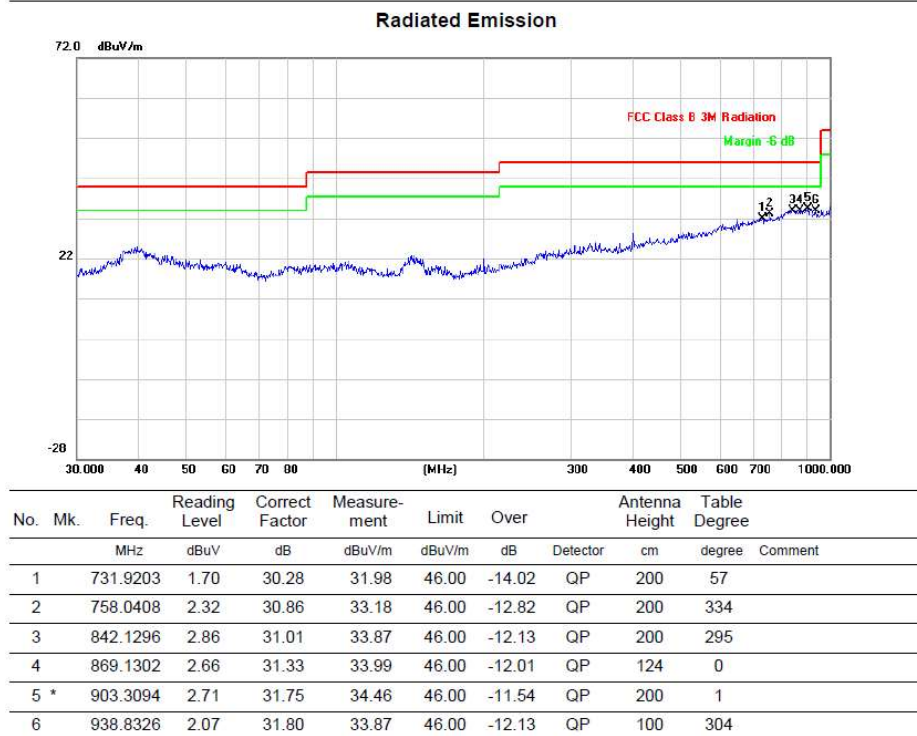


Below 1GHz (30MHz~1GHz)

Worst Case Operating Mode: 11BE20MIMO Channel 6

VERTICAL

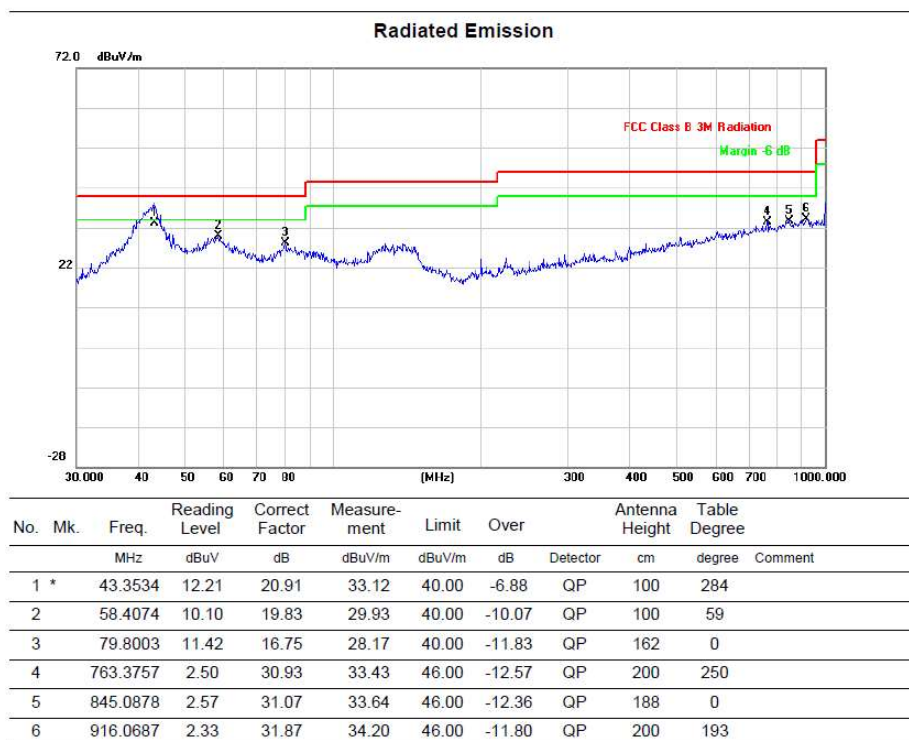

HORIZONTAL

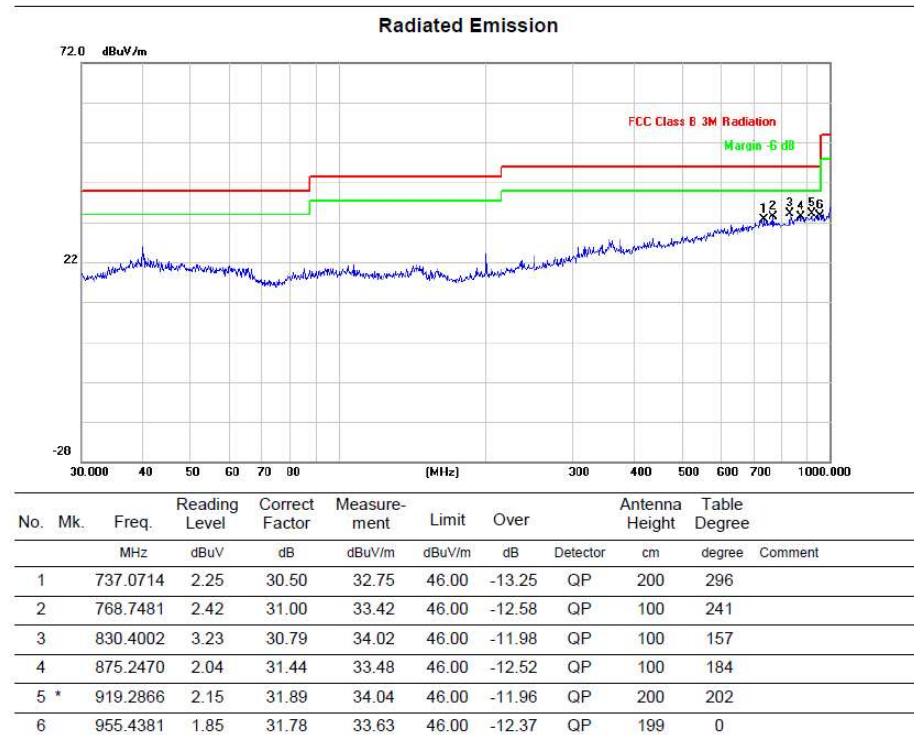



3) Radiated emission: Above 1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit


Above 1GHz (1GHz~18GHz)	Test mode:11B-CDD	Test Channel:1
-------------------------	-------------------	----------------

VERTICAL

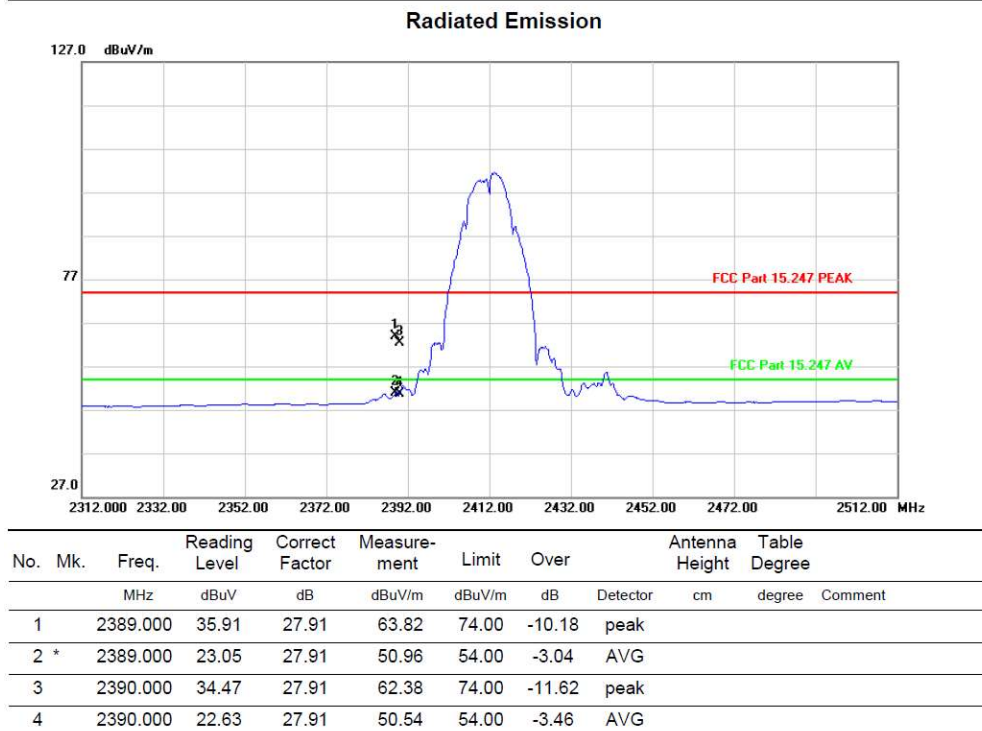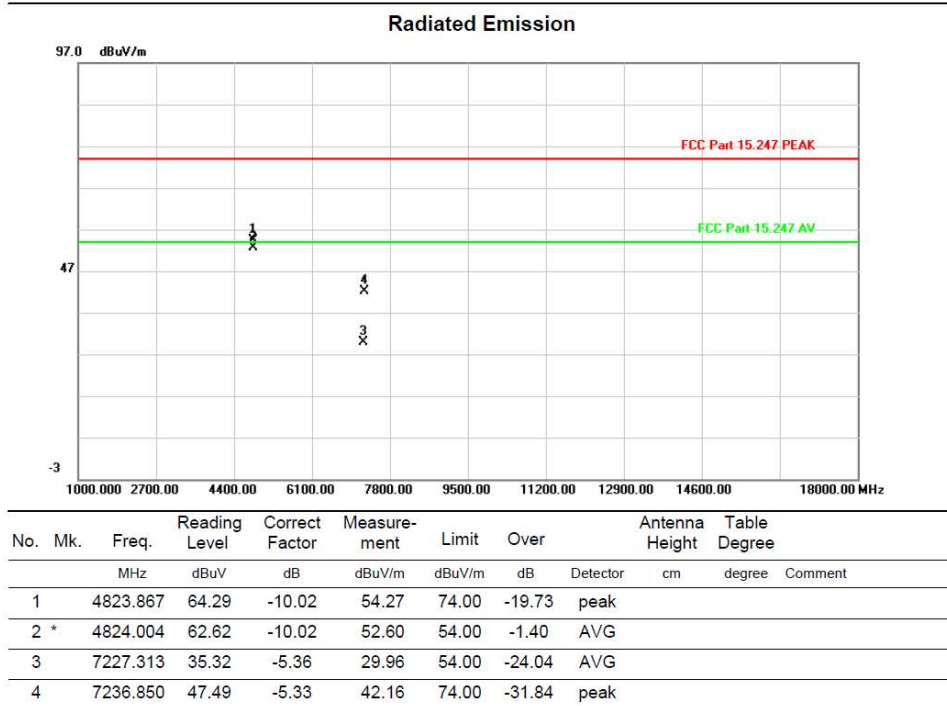


HORIZONTALA

Radiated Emission

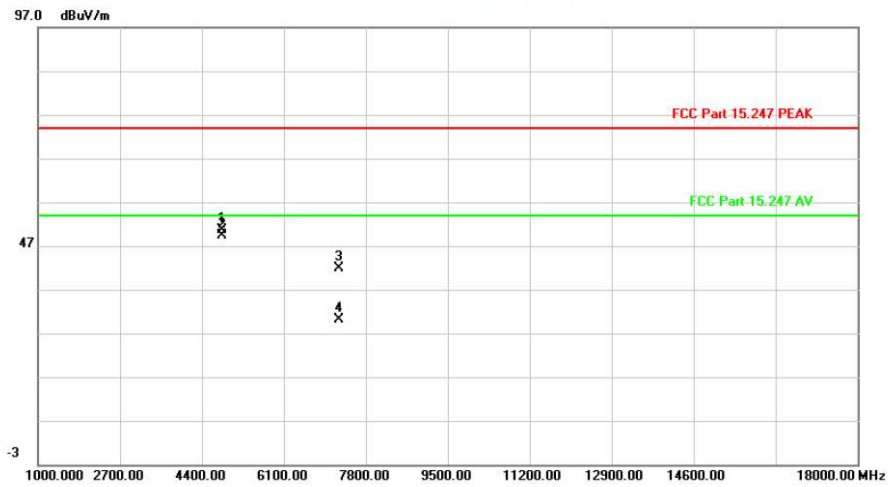

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4823.867	60.72	-10.02	50.70	74.00	-23.30			peak
2 *		4823.923	59.31	-10.02	49.29	54.00	-4.71			AVG
3		7236.850	47.28	-5.33	41.95	74.00	-32.05			peak
4		7245.601	35.33	-5.30	30.03	54.00	-23.97			AVG


Radiated Emission

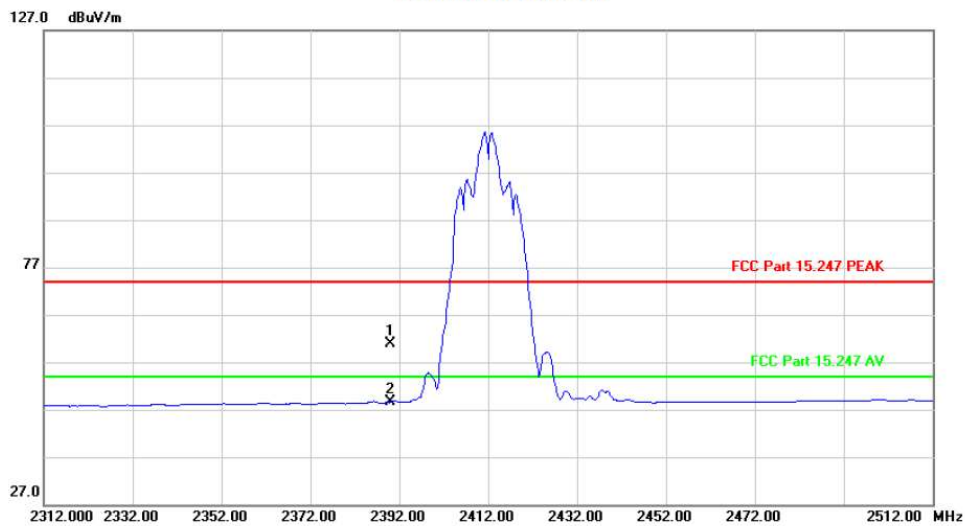

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	32.91	27.91	60.82	74.00	-13.18			peak
2 *		2390.000	20.67	27.91	48.58	54.00	-5.42			AVG


VERTICAL

Radiated Emission

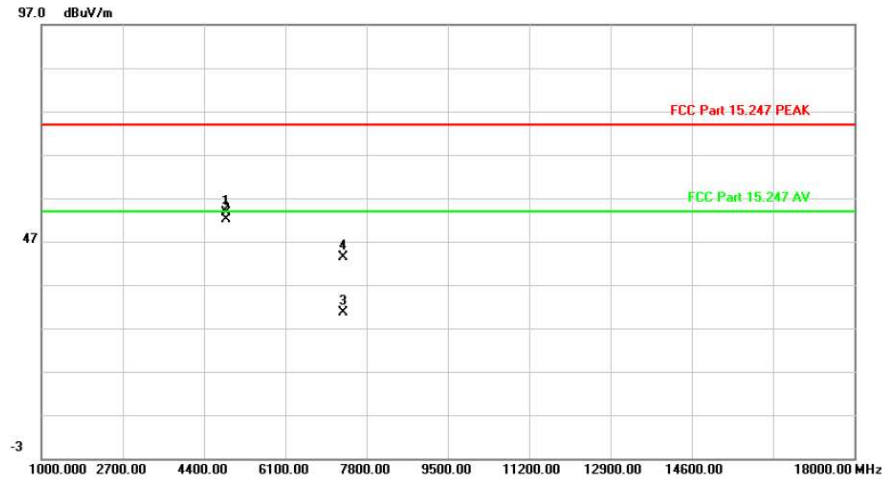

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4873.733	63.41	-9.77	53.64	74.00	-20.36	peak		
2 *		4873.910	61.98	-9.77	52.21	54.00	-1.79	AVG		
3		7311.322	35.64	-5.10	30.54	54.00	-23.46	AVG		
4		7311.467	48.46	-5.10	43.36	74.00	-30.64	peak		


Radiated Emission

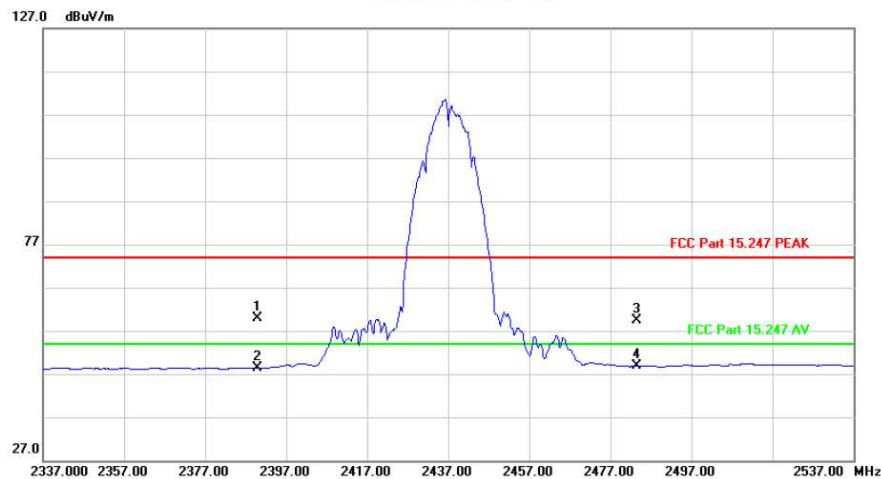

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	32.02	27.91	59.93	74.00	-14.07	peak		
2		2390.000	20.58	27.91	48.49	54.00	-5.51	AVG		
3		2483.500	31.21	28.16	59.37	74.00	-14.63	peak		
4 *		2483.500	20.62	28.16	48.78	54.00	-5.22	AVG		


HORIZONTALA

Radiated Emission

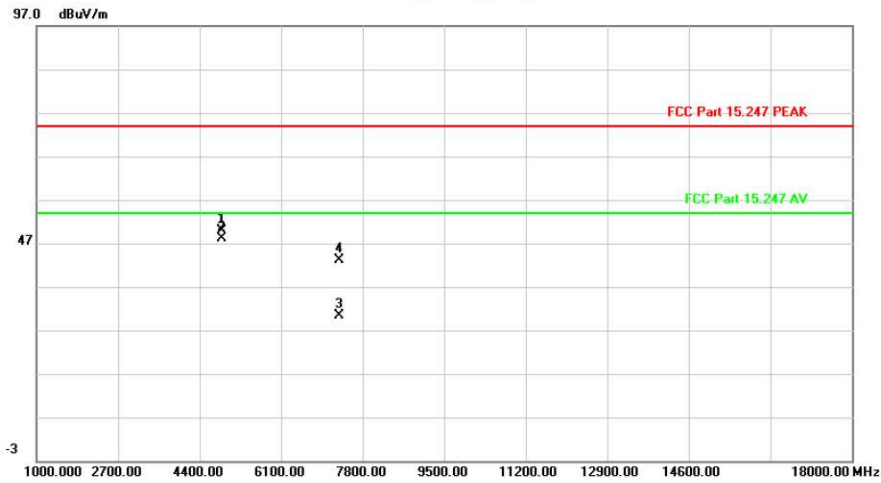

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4873.733	59.55	-9.77	49.78	74.00	-24.22	peak		
2 *		4873.998	58.00	-9.77	48.23	54.00	-5.77	AVG		
3		7306.900	35.61	-5.11	30.50	54.00	-23.50	AVG		
4		7308.133	48.22	-5.11	43.11	74.00	-30.89	peak		


Radiated Emission

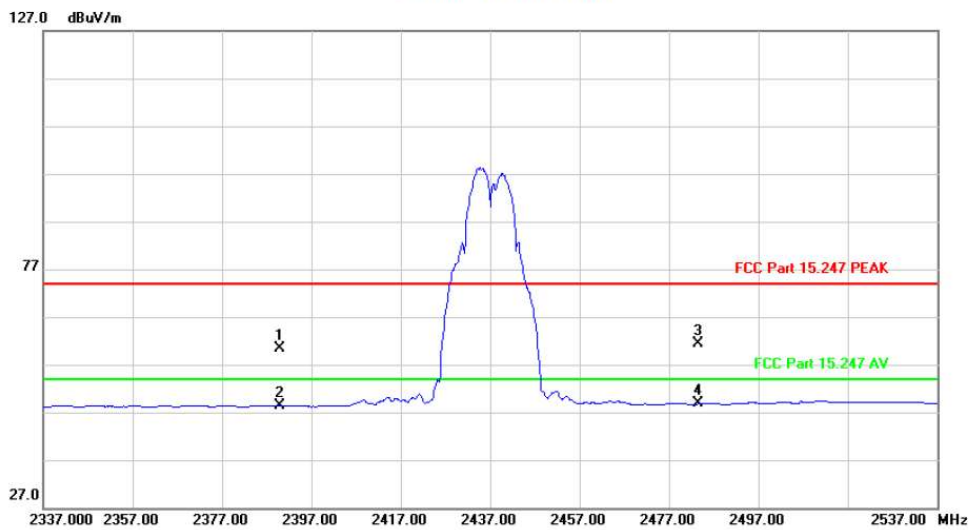

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	32.47	27.91	60.38	74.00	-13.62	peak		
2		2390.000	20.36	27.91	48.27	54.00	-5.73	AVG		
3		2483.500	33.31	28.16	61.47	74.00	-12.53	peak		
4 *		2483.500	20.62	28.16	48.78	54.00	-5.22	AVG		


VERTICAL

Radiated Emission

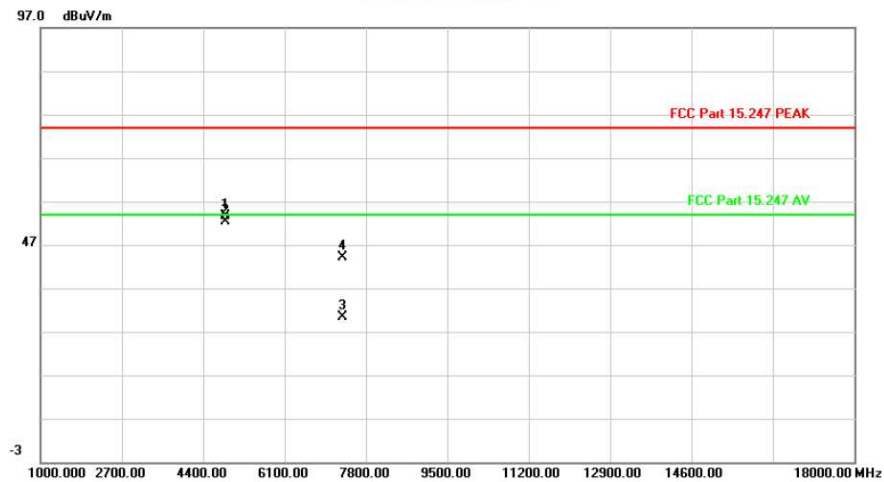

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4873.733	63.41	-9.77	53.64	74.00	-20.36	peak		
2 *		4873.937	62.07	-9.77	52.30	54.00	-1.70	AVG		
3		7304.418	35.59	-5.12	30.47	54.00	-23.53	AVG		
4		7312.300	49.12	-5.10	44.02	74.00	-29.98	peak		


Radiated Emission

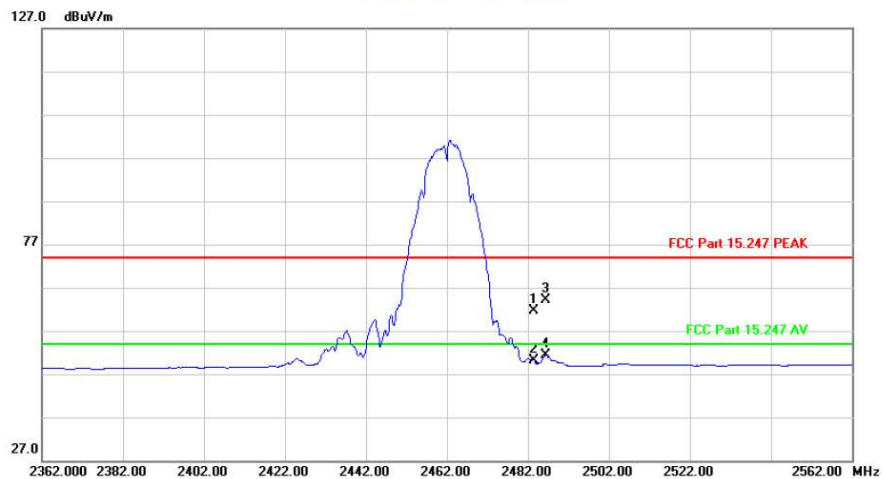

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	33.55	28.16	61.71	74.00	-12.29	peak		
2		2483.500	21.86	28.16	50.02	54.00	-3.98	AVG		
3		2486.400	35.85	28.16	64.01	74.00	-9.99	peak		
4 *		2486.400	23.28	28.16	51.44	54.00	-2.56	AVG		


HORIZONTALA

Radiated Emission

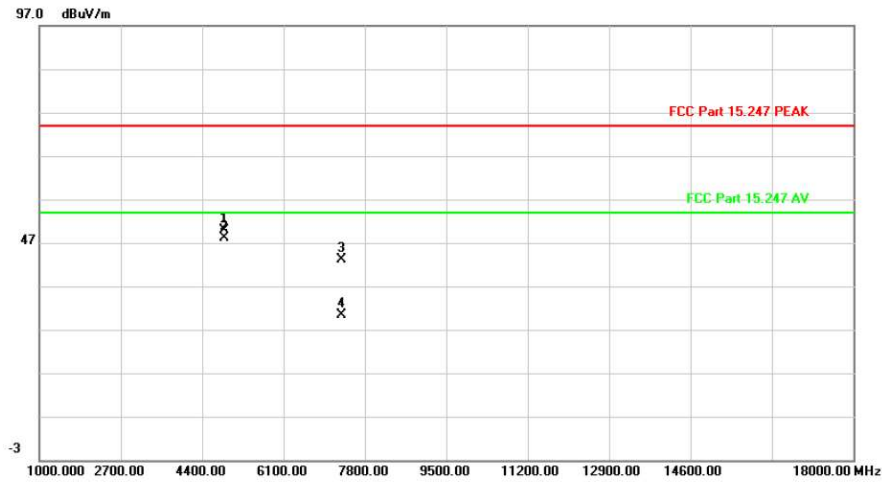

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4873.733	59.58	-9.77	49.81	74.00	-24.19	peak		
2 *		4873.907	57.88	-9.77	48.11	54.00	-5.89	AVG		
3		7311.833	48.21	-5.10	43.11	74.00	-30.89	peak		
4		7313.364	35.54	-5.09	30.45	54.00	-23.55	AVG		


Radiated Emission

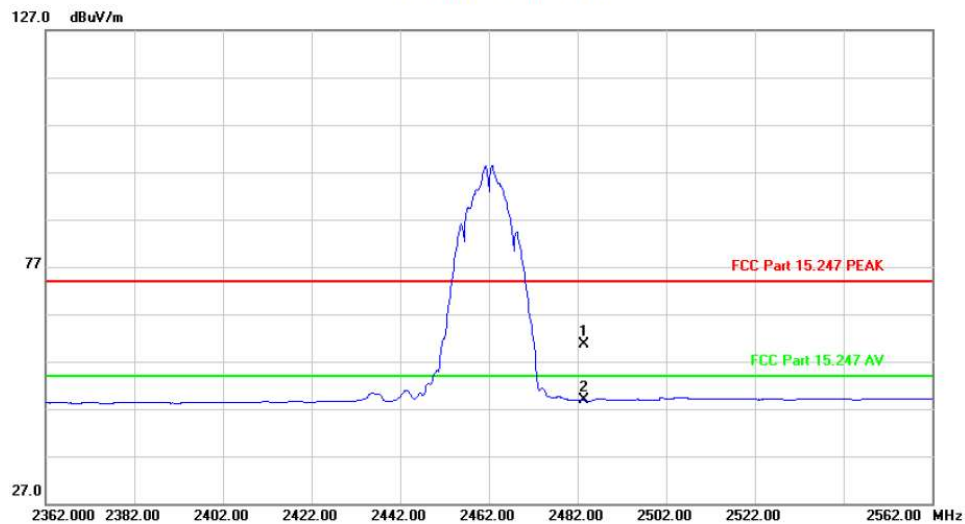

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	32.47	28.16	60.63	74.00	-13.37	peak		
2 *		2483.500	20.62	28.16	48.78	54.00	-5.22	AVG		


VERTICAL

Radiated Emission

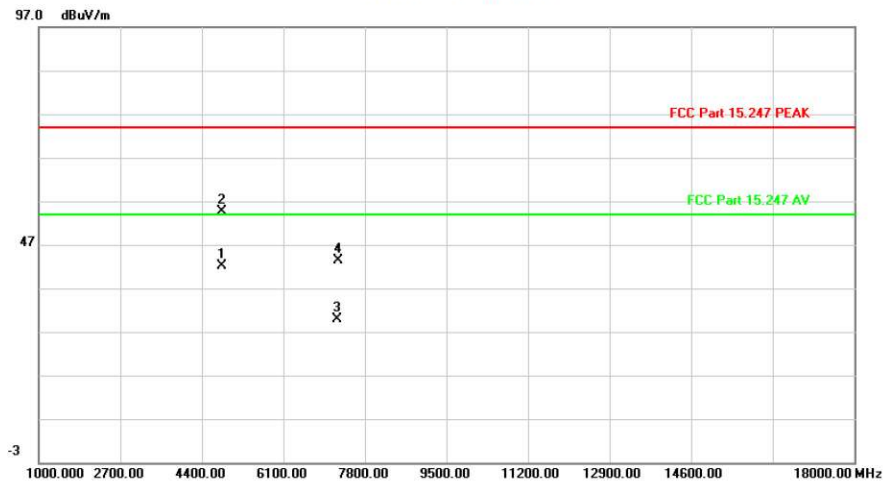

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4824.229	52.21	-10.02	42.19	54.00	-11.81	AVG		
2		4825.000	64.65	-10.02	54.63	74.00	-19.37	peak		
3		7228.329	35.19	-5.36	29.83	54.00	-24.17	AVG		
4		7236.200	48.77	-5.33	43.44	74.00	-30.56	peak		


Radiated Emission

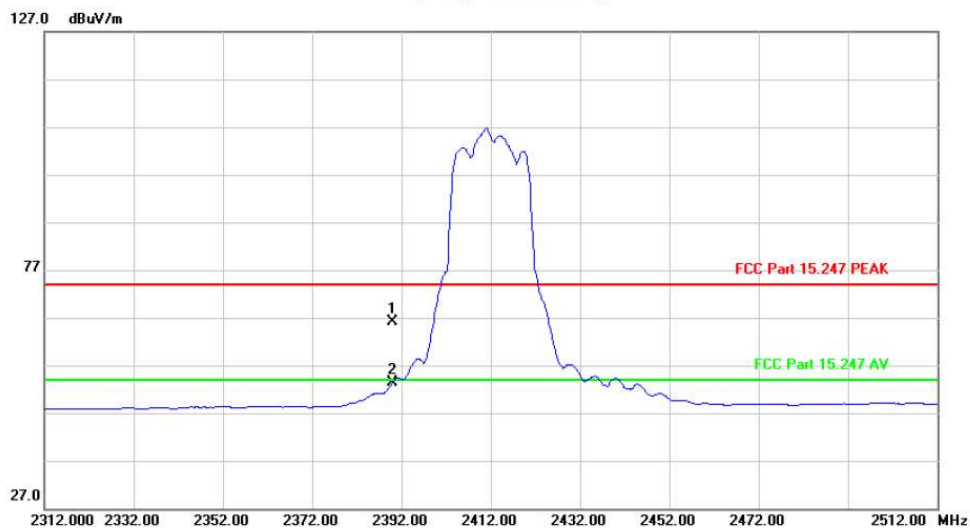

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	38.32	27.91	66.23	74.00	-7.77	peak		
2	*	2390.000	25.53	27.91	53.44	54.00	-0.56	AVG		


HORIZONTALA

Radiated Emission

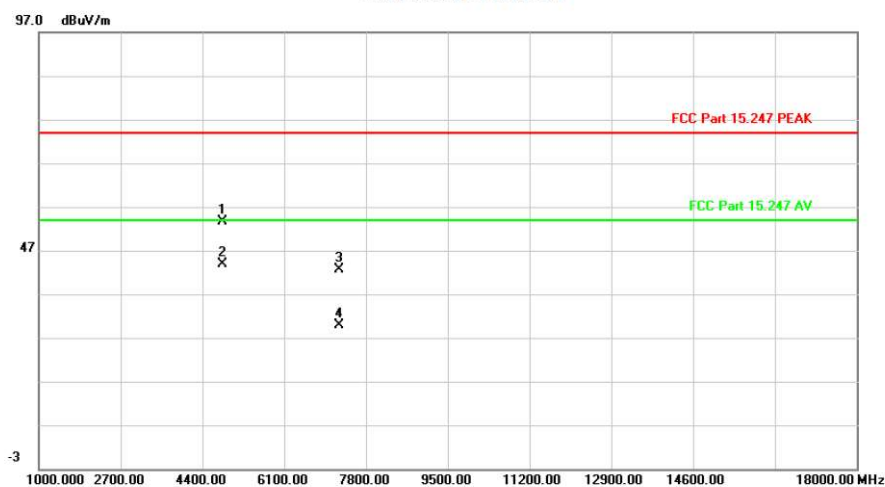

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4816.500	63.72	-10.06	53.66	74.00	-20.34			peak
2	*	4821.821	53.81	-10.03	43.78	54.00	-10.22			AVG
3		7237.867	47.86	-5.33	42.53	74.00	-31.47			peak
4		7238.784	35.15	-5.32	29.83	54.00	-24.17			AVG


Radiated Emission

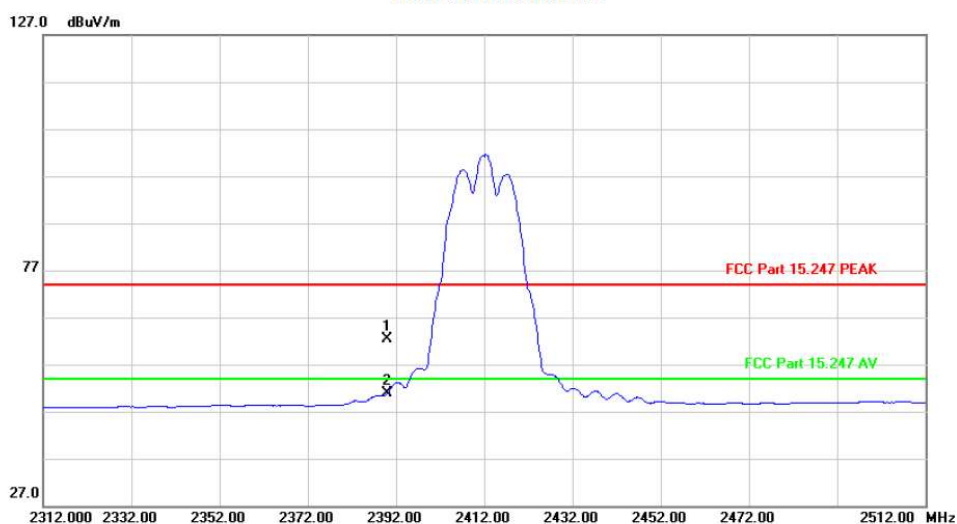

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	34.47	27.91	62.38	74.00	-11.62			peak
2	*	2390.000	22.91	27.91	50.82	54.00	-3.18			AVG


VERTICAL

Radiated Emission

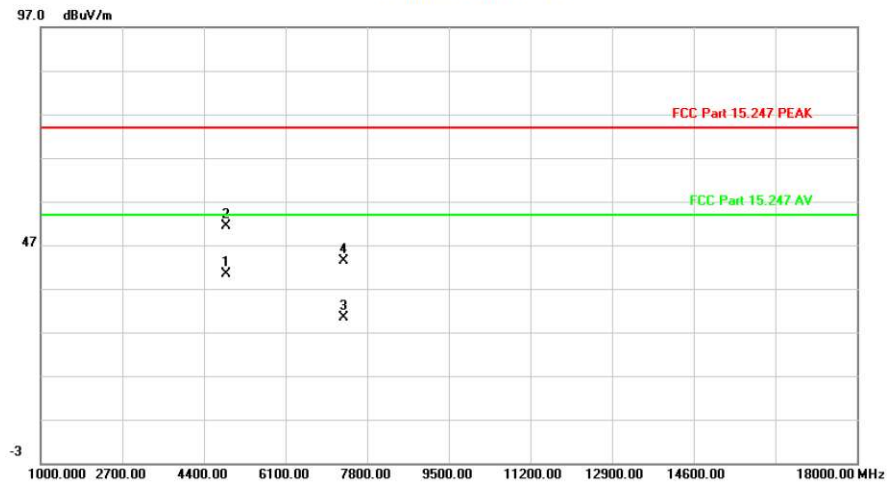

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	4874.003	50.21	-9.77	40.44	54.00	-13.56	AVG		
2		4875.433	61.04	-9.76	51.28	74.00	-22.72	peak		
3		7304.216	35.57	-5.12	30.45	54.00	-23.55	AVG		
4		7311.500	48.53	-5.10	43.43	74.00	-30.57	peak		


Radiated Emission

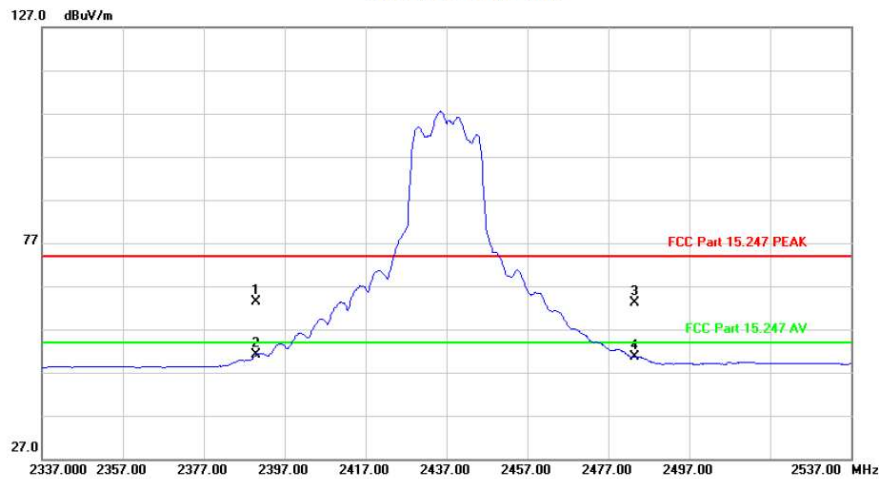

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	35.47	27.91	63.38	74.00	-10.62	peak		
2	*	2390.000	23.25	27.91	51.16	54.00	-2.84	AVG		
3		2483.500	34.86	28.16	63.02	74.00	-10.98	peak		
4		2483.500	22.44	28.16	50.60	54.00	-3.40	AVG		


HORIZONTALA

Radiated Emission

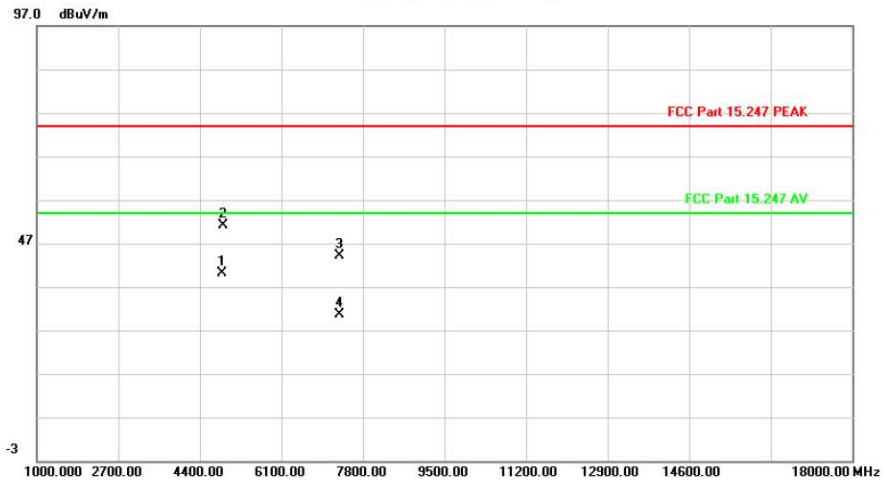

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4871.558	49.84	-9.78	40.06	54.00	-13.94	AVG		
2		4877.133	60.91	-9.75	51.16	74.00	-22.84	peak		
3		7313.233	49.27	-5.10	44.17	74.00	-29.83	peak		
4		7317.277	35.65	-5.08	30.57	54.00	-23.43	AVG		


Radiated Emission

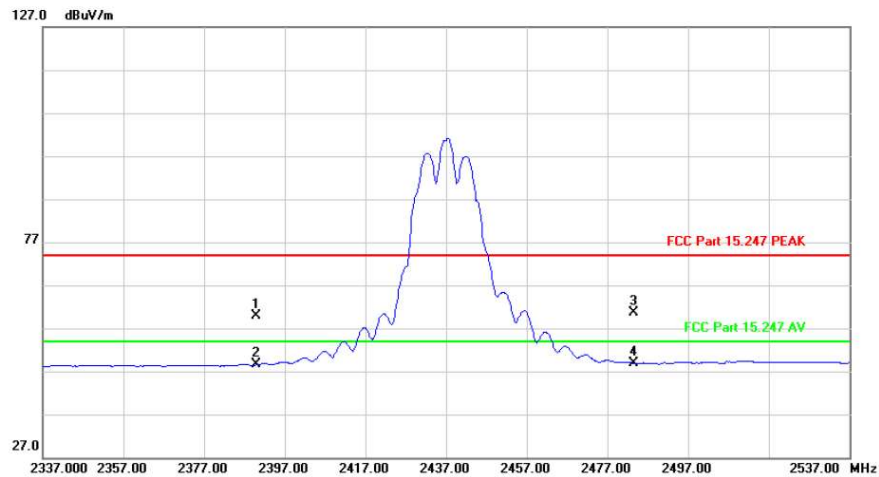

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	31.91	27.91	59.82	74.00	-14.18	peak		
2		2390.000	20.61	27.91	48.52	54.00	-5.48	AVG		
3		2483.500	32.50	28.16	60.66	74.00	-13.34	peak		
4	*	2483.500	20.78	28.16	48.94	54.00	-5.06	AVG		


VERTICAL

Radiated Emission

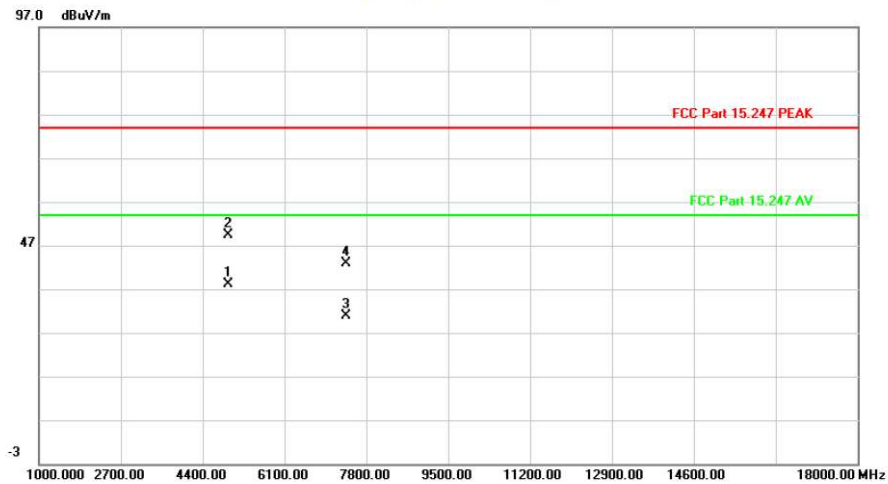

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4924.271	47.75	-9.52	38.23	54.00	-15.77	AVG		
2		4925.300	58.96	-9.51	49.45	74.00	-24.55	peak		
3		7384.984	35.74	-4.87	30.87	54.00	-23.13	AVG		
4		7386.850	47.80	-4.87	42.93	74.00	-31.07	peak		


Radiated Emission

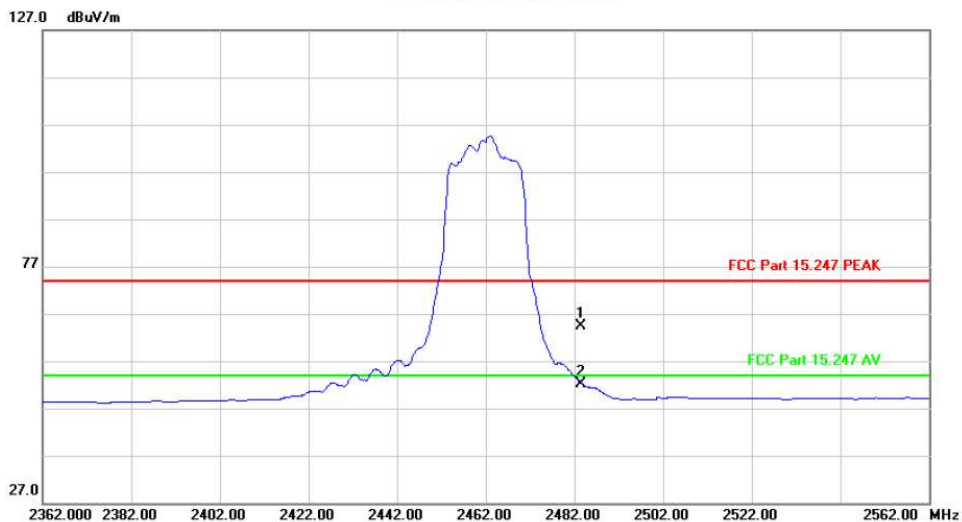

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	36.32	28.16	64.48	74.00	-9.52	peak		
2	*	2483.500	24.01	28.16	52.17	54.00	-1.83	AVG		


HORIZONTALA

Radiated Emission

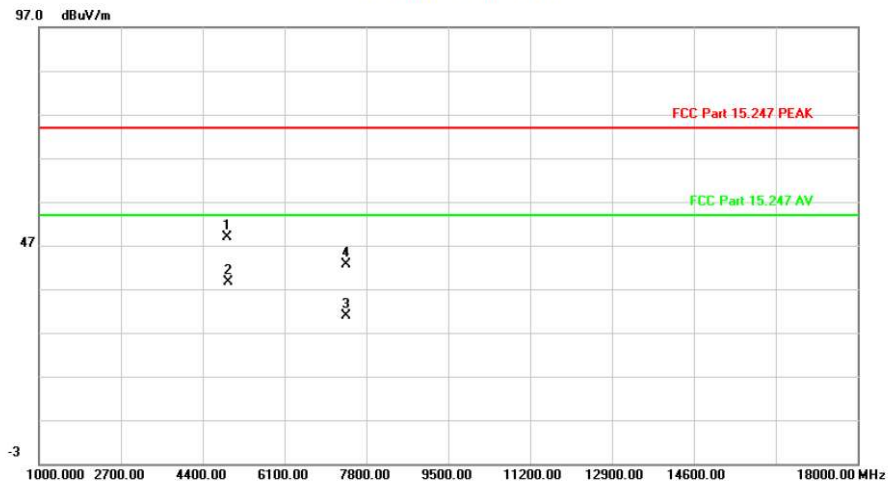

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4916.233	58.48	-9.56	48.92	74.00	-25.08			peak
2	*	4921.770	48.05	-9.53	38.52	54.00	-15.48			AVG
3		7381.977	35.70	-4.88	30.82	54.00	-23.18			AVG
4		7386.800	47.51	-4.87	42.64	74.00	-31.36			peak


Radiated Emission

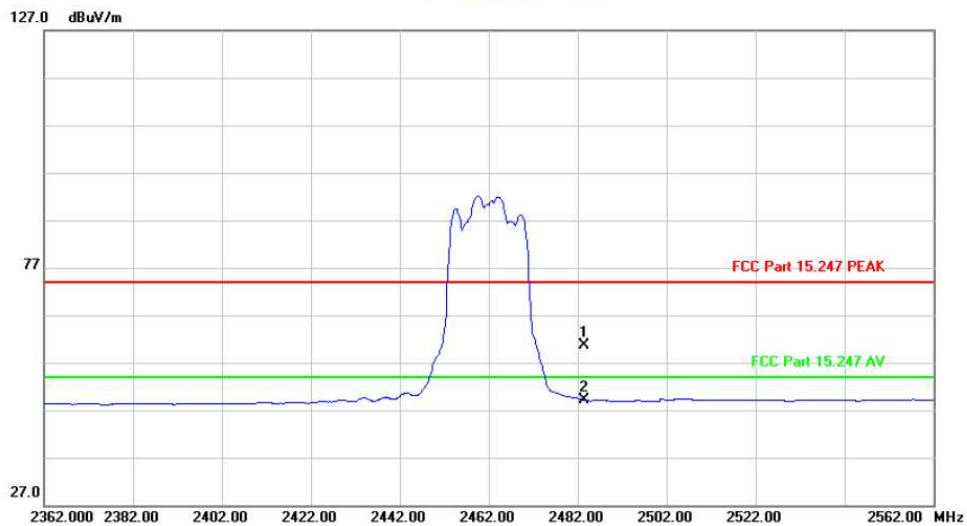

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	32.47	28.16	60.63	74.00	-13.37			peak
2	*	2483.500	20.98	28.16	49.14	54.00	-4.86			AVG


VERTICAL

Radiated Emission

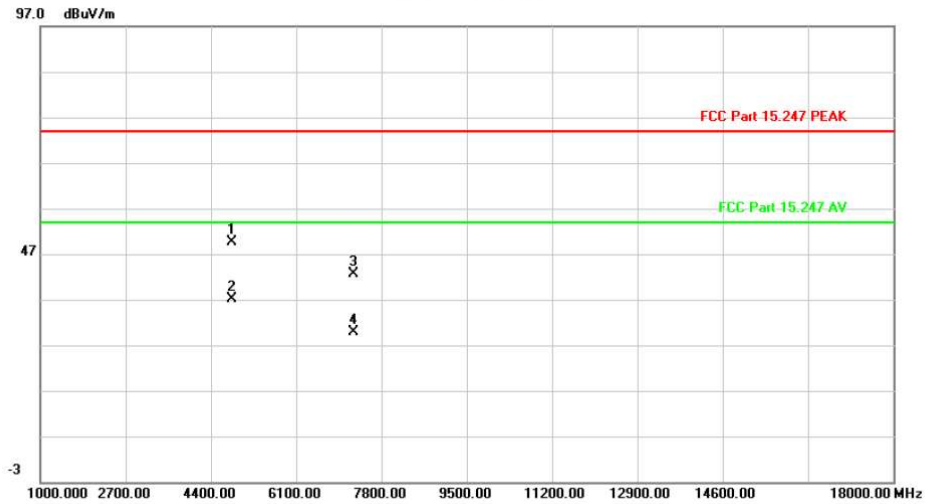

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4819.900	59.58	-10.04	49.54	74.00	-24.46	peak		
2	*	4823.830	47.15	-10.02	37.13	54.00	-16.87	AVG		
3		7236.900	48.03	-5.33	42.70	74.00	-31.30	peak		
4		7238.501	35.30	-5.33	29.97	54.00	-24.03	AVG		


Radiated Emission

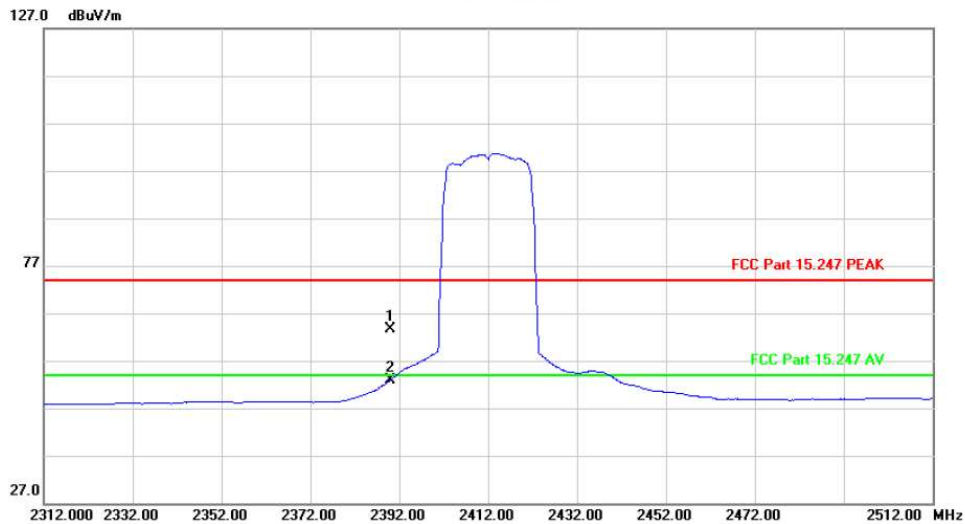

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	35.61	27.91	63.52	74.00	-10.48	peak		
2	*	2390.000	25.09	27.91	53.00	54.00	-1.00	AVG		


HORIZONTALA

Radiated Emission

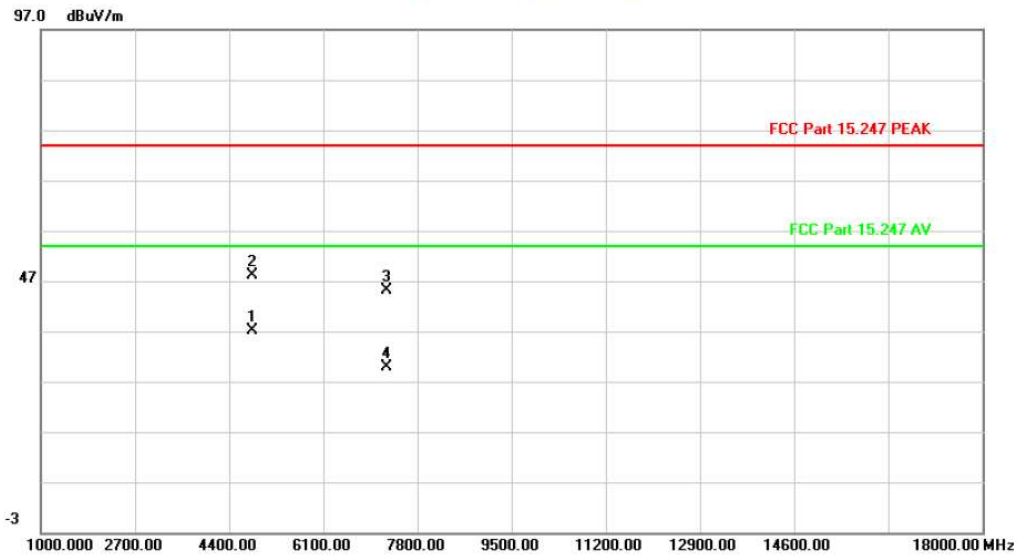

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4816.417	47.08	-10.06	37.02	54.00	-16.98	AVG		
2		4817.067	58.25	-10.05	48.20	74.00	-25.80	peak		
3		7236.167	50.53	-5.33	45.20	74.00	-28.80	peak		
4		7245.943	35.25	-5.30	29.95	54.00	-24.05	AVG		

Radiated Emission

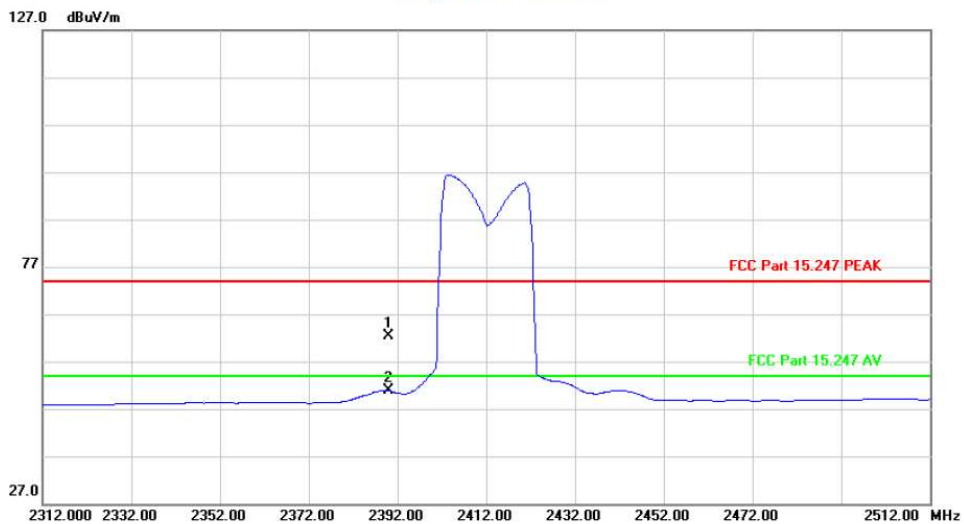

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	34.58	27.91	62.49	74.00	-11.51	peak		
2	*	2390.000	22.90	27.91	50.81	54.00	-3.19	AVG		


VERTICAL

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4874.074	49.72	-9.77	39.95	54.00	-14.05	AVG		
2		4875.433	60.91	-9.76	51.15	74.00	-22.85	peak		
3		7312.967	49.54	-5.10	44.44	74.00	-29.56	peak		
4		7321.813	35.67	-5.07	30.60	54.00	-23.40	AVG		


Radiated Emission

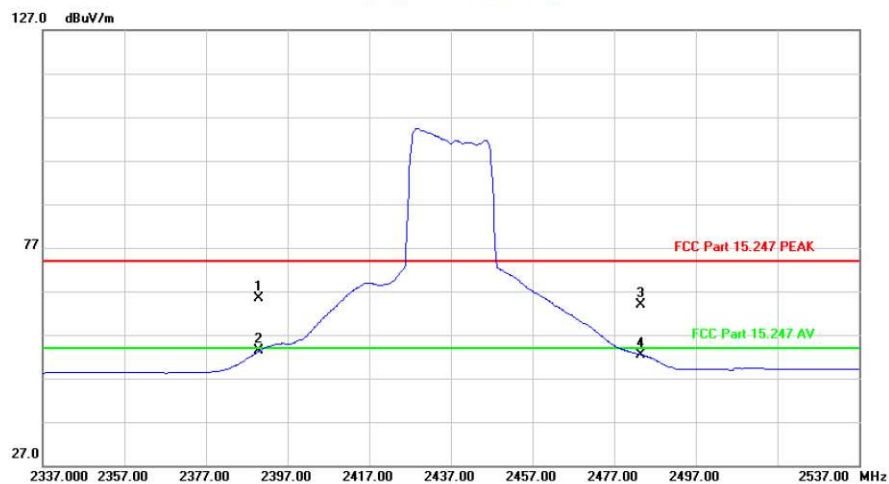

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	37.47	27.91	65.38	74.00	-8.62	peak		
2	*	2390.000	25.38	27.91	53.29	54.00	-0.71	AVG		
3		2483.500	35.66	28.16	63.82	74.00	-10.18	peak		
4		2483.500	24.31	28.16	52.47	54.00	-1.53	AVG		


HORIZONTALA

Radiated Emission

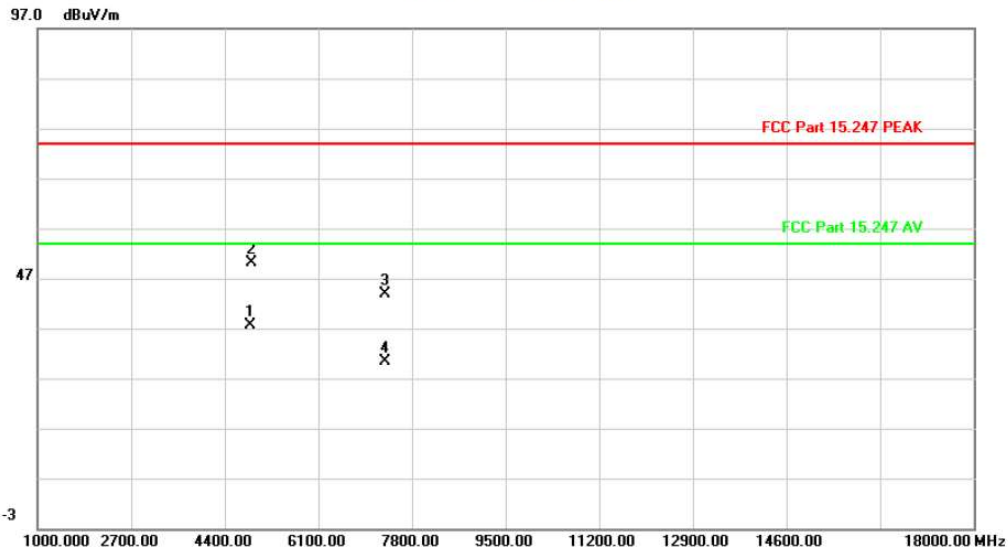

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4866.767	47.47	-9.81	37.66	54.00	-16.34	AVG		
2		4883.933	59.94	-9.72	50.22	74.00	-23.78	peak		
3		7311.600	48.93	-5.10	43.83	74.00	-30.17	peak		
4		7317.970	35.52	-5.08	30.44	54.00	-23.56	AVG		


Radiated Emission

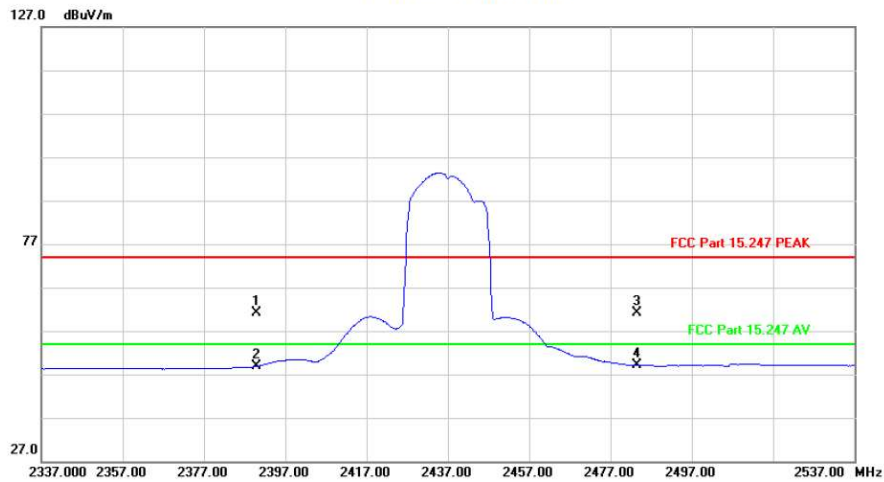

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	33.21	27.91	61.12	74.00	-12.88	peak		
2		2390.000	20.93	27.91	48.84	54.00	-5.16	AVG		
3		2483.500	32.99	28.16	61.15	74.00	-12.85	peak		
4	*	2483.500	21.01	28.16	49.17	54.00	-4.83	AVG		


VERTICAL

Radiated Emission

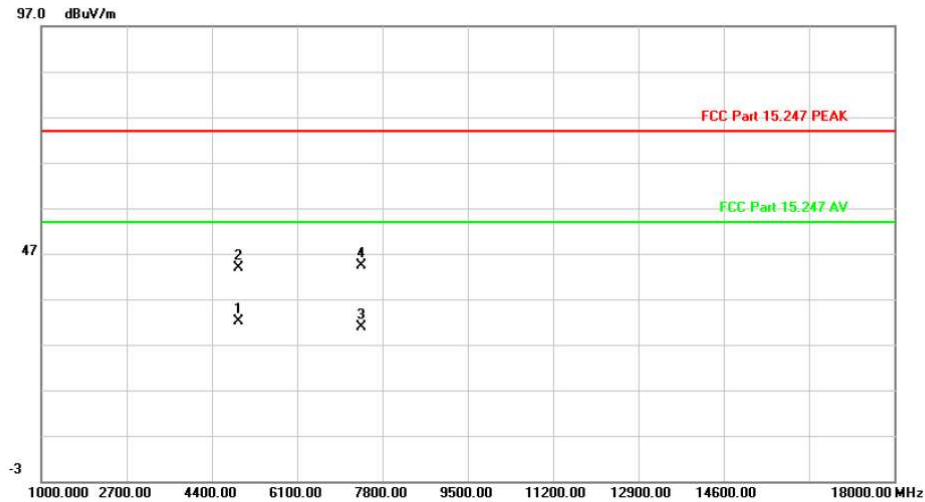

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4925.514	41.52	-9.51	32.01	54.00	-21.99	AVG		
2		4930.400	53.38	-9.49	43.89	74.00	-30.11	peak		
3		7382.066	35.68	-4.88	30.80	54.00	-23.20	AVG		
4		7389.167	49.15	-4.86	44.29	74.00	-29.71	peak		

Radiated Emission

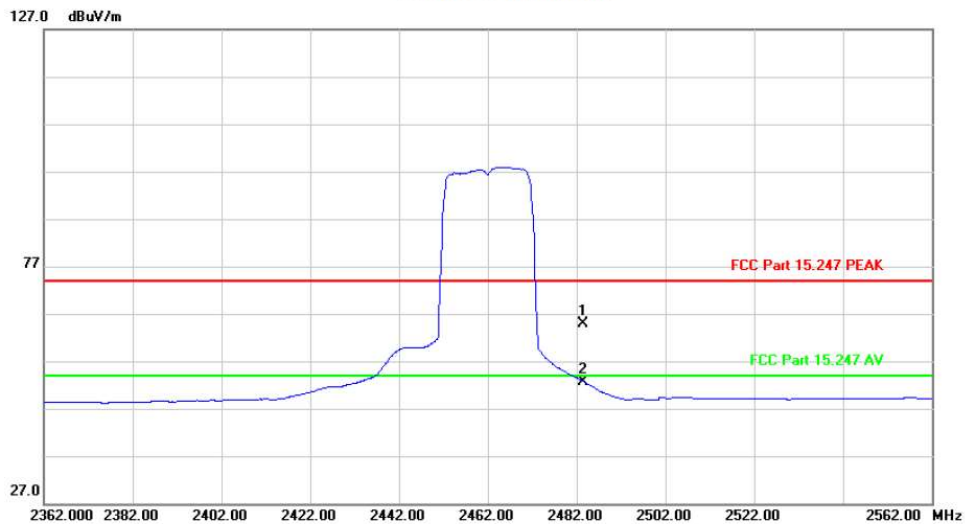

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	36.66	28.16	64.82	74.00	-9.18	peak		
2	*	2483.500	24.51	28.16	52.67	54.00	-1.33	AVG		


HORIZONTALA

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4919.426	40.46	-9.54	30.92	54.00	-23.08	AVG		
2		4920.767	52.35	-9.54	42.81	74.00	-31.19	peak		
3		7378.480	35.77	-4.89	30.88	54.00	-23.12	AVG		
4		7386.500	50.59	-4.87	45.72	74.00	-28.28	peak		


Radiated Emission

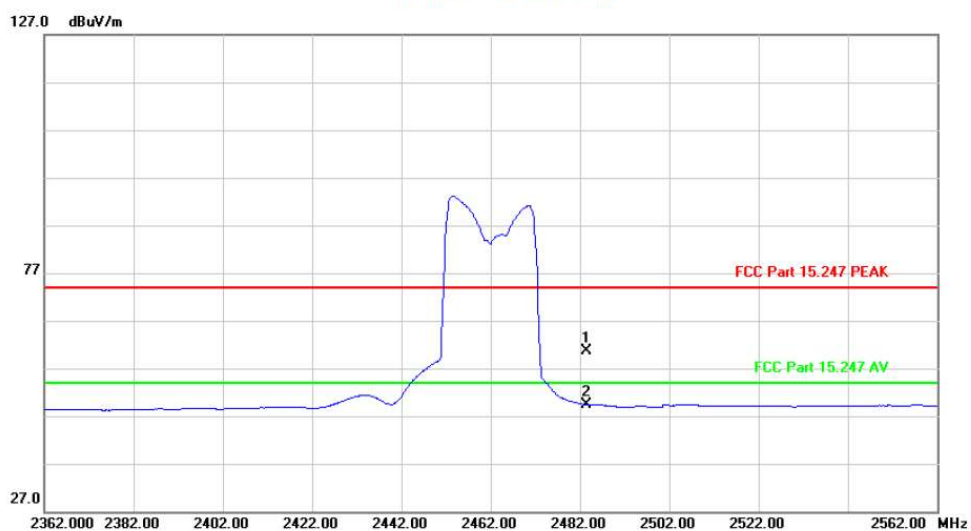

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	32.50	28.16	60.66	74.00	-13.34	peak		
2	*	2483.500	21.22	28.16	49.38	54.00	-4.62	AVG		


VERTICAL

Radiated Emission

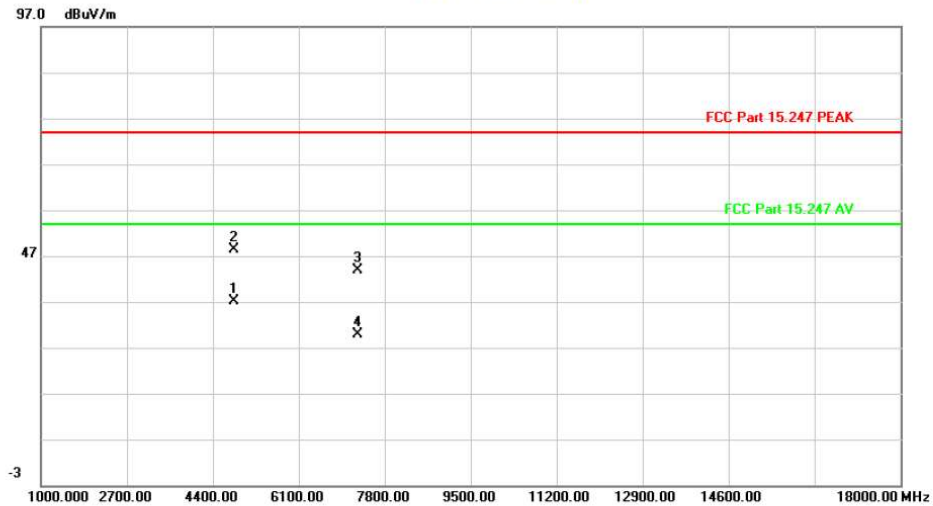

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4823.968	47.10	-10.02	37.08	54.00	-16.92	AVG		
2		4826.700	58.28	-10.01	48.27	74.00	-25.73	peak		
3		7266.850	49.12	-5.24	43.88	74.00	-30.12	peak		
4		7273.128	35.08	-5.22	29.86	54.00	-24.14	AVG		


Radiated Emission

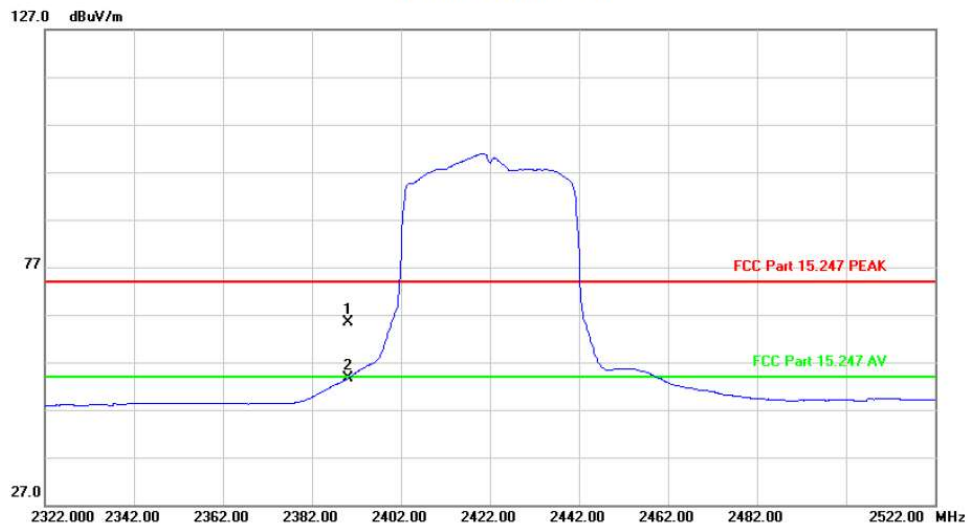

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	37.47	27.91	65.38	74.00	-8.62	peak		
2	*	2390.000	25.65	27.91	53.56	54.00	-0.44	AVG		


HORIZONTALA

Radiated Emission

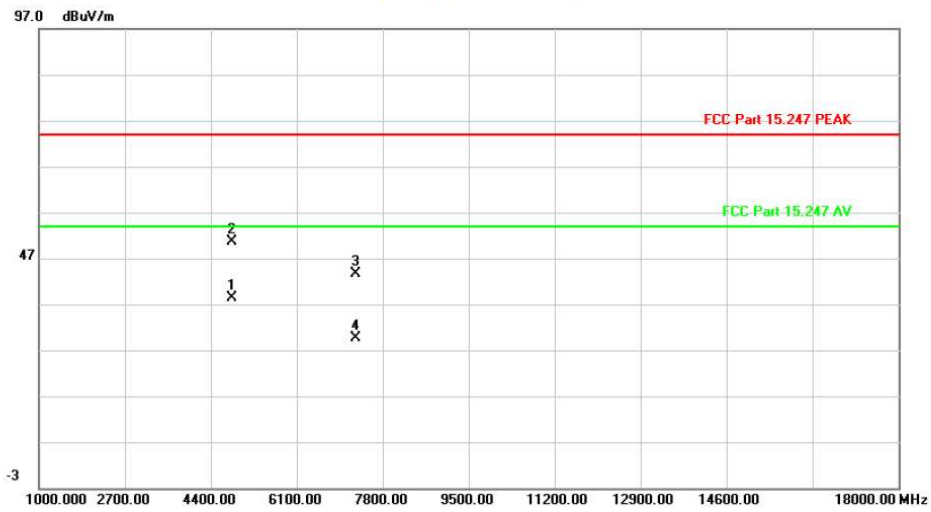

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4814.596	48.34	-10.07	38.27	54.00	-15.73	AVG		
2		4815.367	60.57	-10.06	50.51	74.00	-23.49	peak		
3		7266.500	48.77	-5.24	43.53	74.00	-30.47	peak		
4		7268.063	34.95	-5.23	29.72	54.00	-24.28	AVG		


Radiated Emission

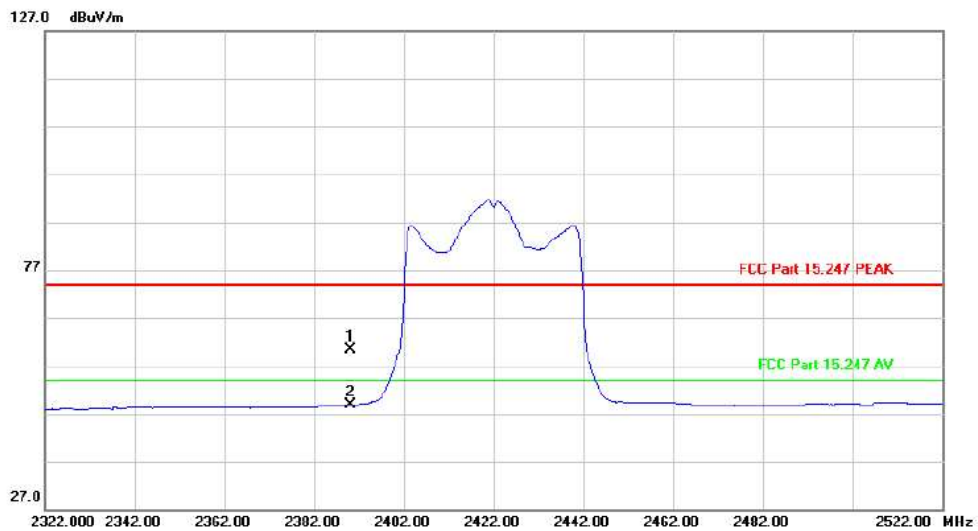

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	32.58	27.91	60.49	74.00	-13.51	peak		
2	*	2390.000	20.91	27.91	48.82	54.00	-5.18	AVG		


VERTICAL

Radiated Emission

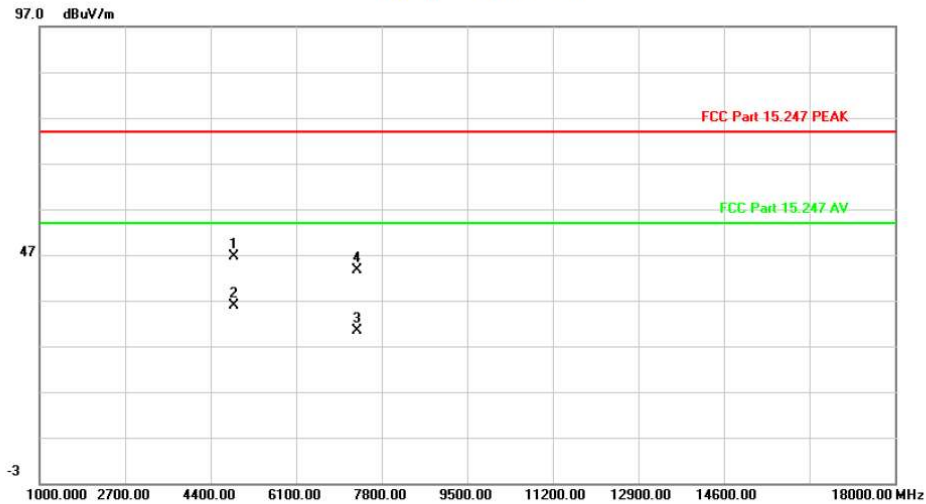

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4871.467	56.52	-9.78	46.74	74.00	-27.26	peak		
2	*	4873.860	45.66	-9.77	35.89	54.00	-18.11	AVG		
3		7310.966	35.44	-5.10	30.34	54.00	-23.66	AVG		
4		7311.500	48.81	-5.10	43.71	74.00	-30.29	peak		


Radiated Emission

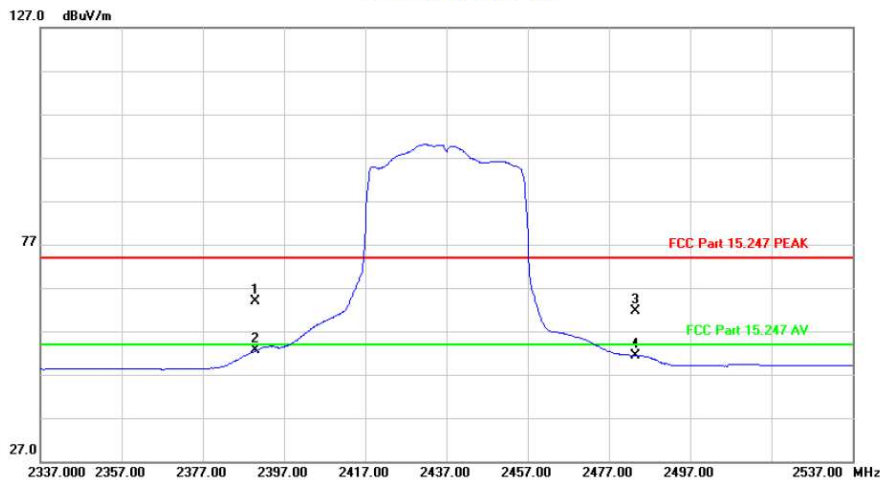

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	35.90	27.91	63.81	74.00	-10.19	peak		
2	*	2390.000	24.64	27.91	52.55	54.00	-1.45	AVG		
3		2483.500	33.55	28.16	61.71	74.00	-12.29	peak		
4		2483.500	23.25	28.16	51.41	54.00	-2.59	AVG		


HORIZONTALA

Radiated Emission

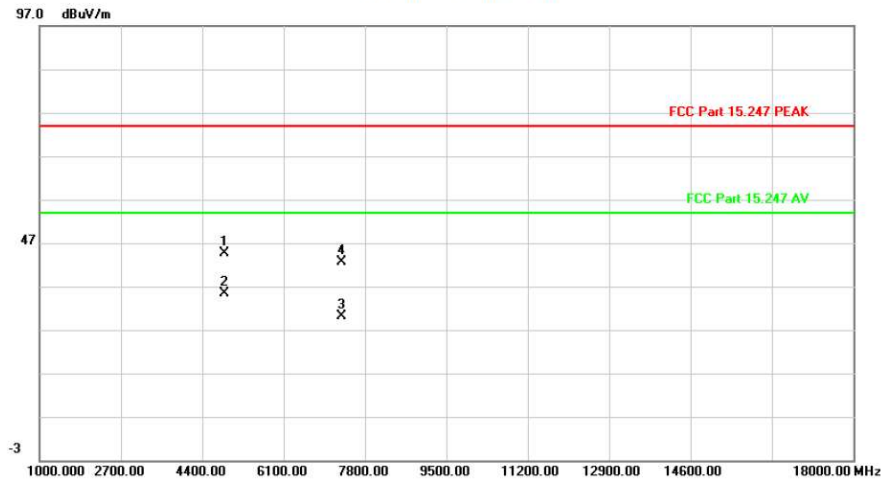

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4862.400	54.42	-9.83	44.59	74.00	-29.41	peak		
2	*	4866.905	45.14	-9.81	35.33	54.00	-18.67	AVG		
3		7311.125	35.27	-5.10	30.17	54.00	-23.83	AVG		
4		7311.500	47.70	-5.10	42.60	74.00	-31.40	peak		

Radiated Emission

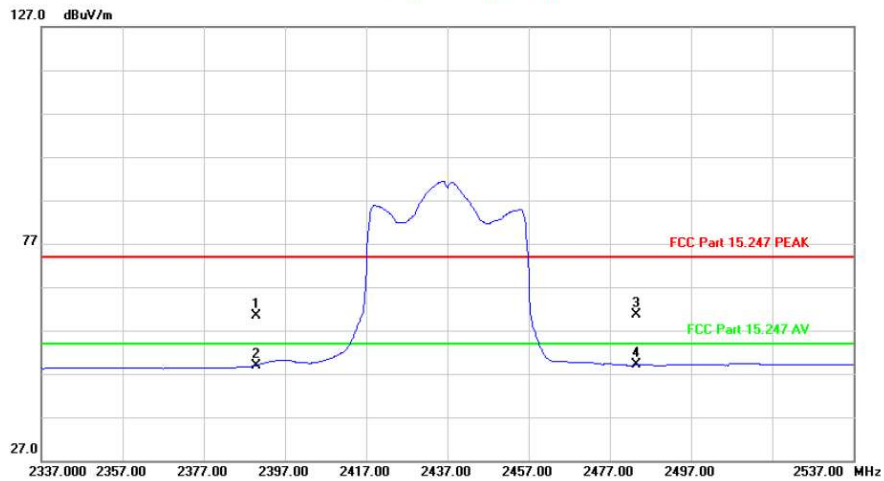

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	32.47	27.91	60.38	74.00	-13.62	peak		
2		2390.000	21.00	27.91	48.91	54.00	-5.09	AVG		
3		2483.500	32.49	28.16	60.65	74.00	-13.35	peak		
4	*	2483.500	20.95	28.16	49.11	54.00	-4.89	AVG		


VERTICAL

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4903.767	54.82	-9.62	45.20	74.00	-28.80	peak		
2	*	4904.733	43.77	-9.62	34.15	54.00	-19.85	AVG		
3		7356.500	48.83	-4.96	43.87	74.00	-30.13	peak		
4		7364.316	35.56	-4.94	30.62	54.00	-23.38	AVG		


Radiated Emission

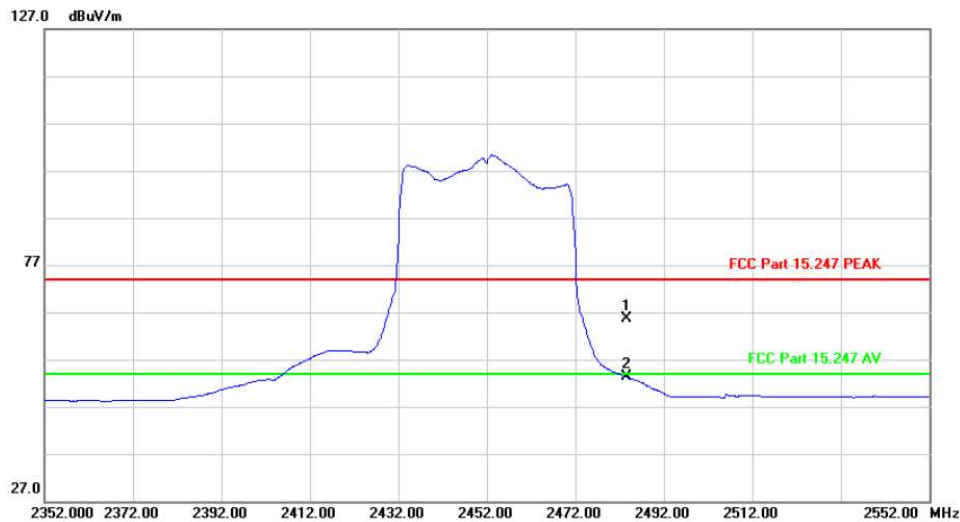

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	37.55	28.16	65.71	74.00	-8.29	peak		
2	*	2483.500	25.11	28.16	53.27	54.00	-0.73	AVG		


HORIZONTALA

Radiated Emission

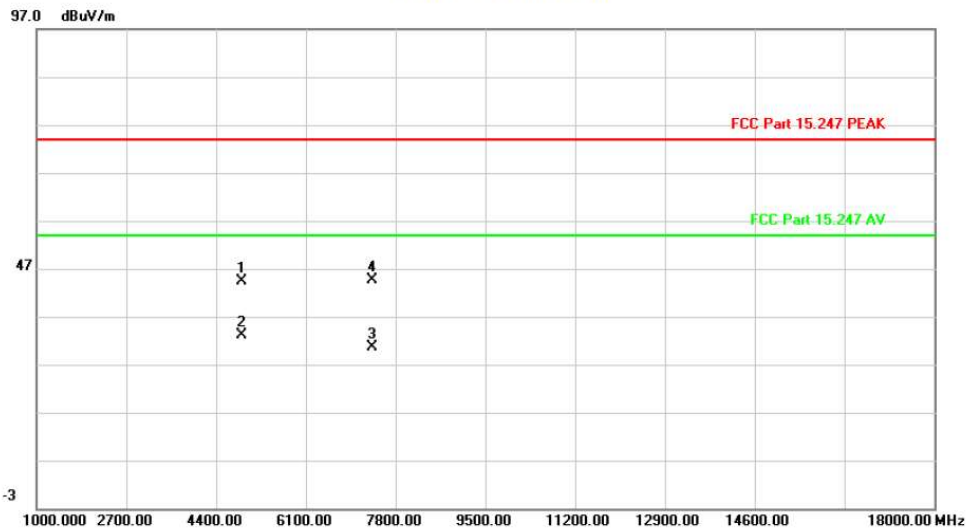

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4893.567	53.98	-9.67	44.31	74.00	-29.69	peak		
2 *		4897.550	42.80	-9.65	33.15	54.00	-20.85	AVG		
3		7356.502	35.56	-4.96	30.60	54.00	-23.40	AVG		
4		7356.867	49.47	-4.96	44.51	74.00	-29.49	peak		

Radiated Emission

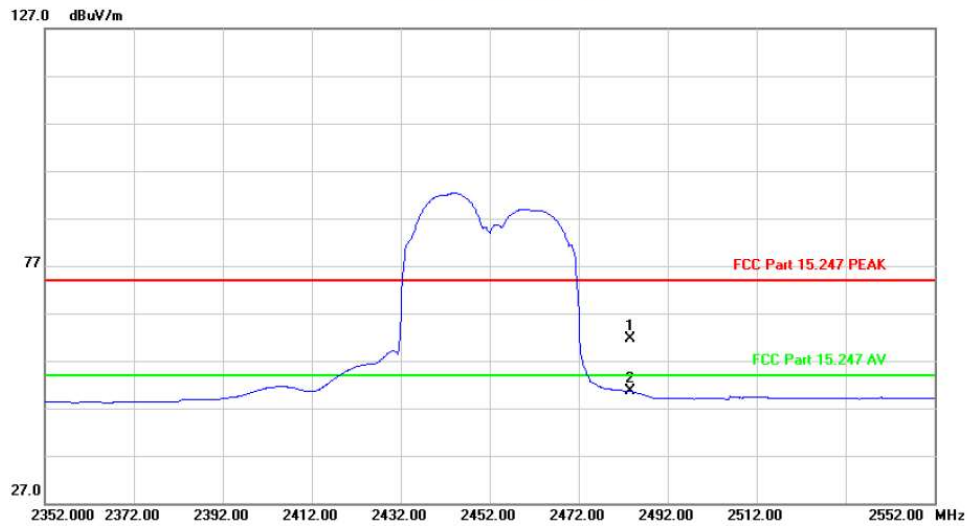

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	33.39	28.16	61.55	74.00	-12.45	peak		
2 *		2483.500	22.43	28.16	50.59	54.00	-3.41	AVG		