








7.4 In-Band Emission Mask

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	----------------	---------------------------	--------------	------------	-----------







802.11be (EHT80) Punctured by 20 MHz

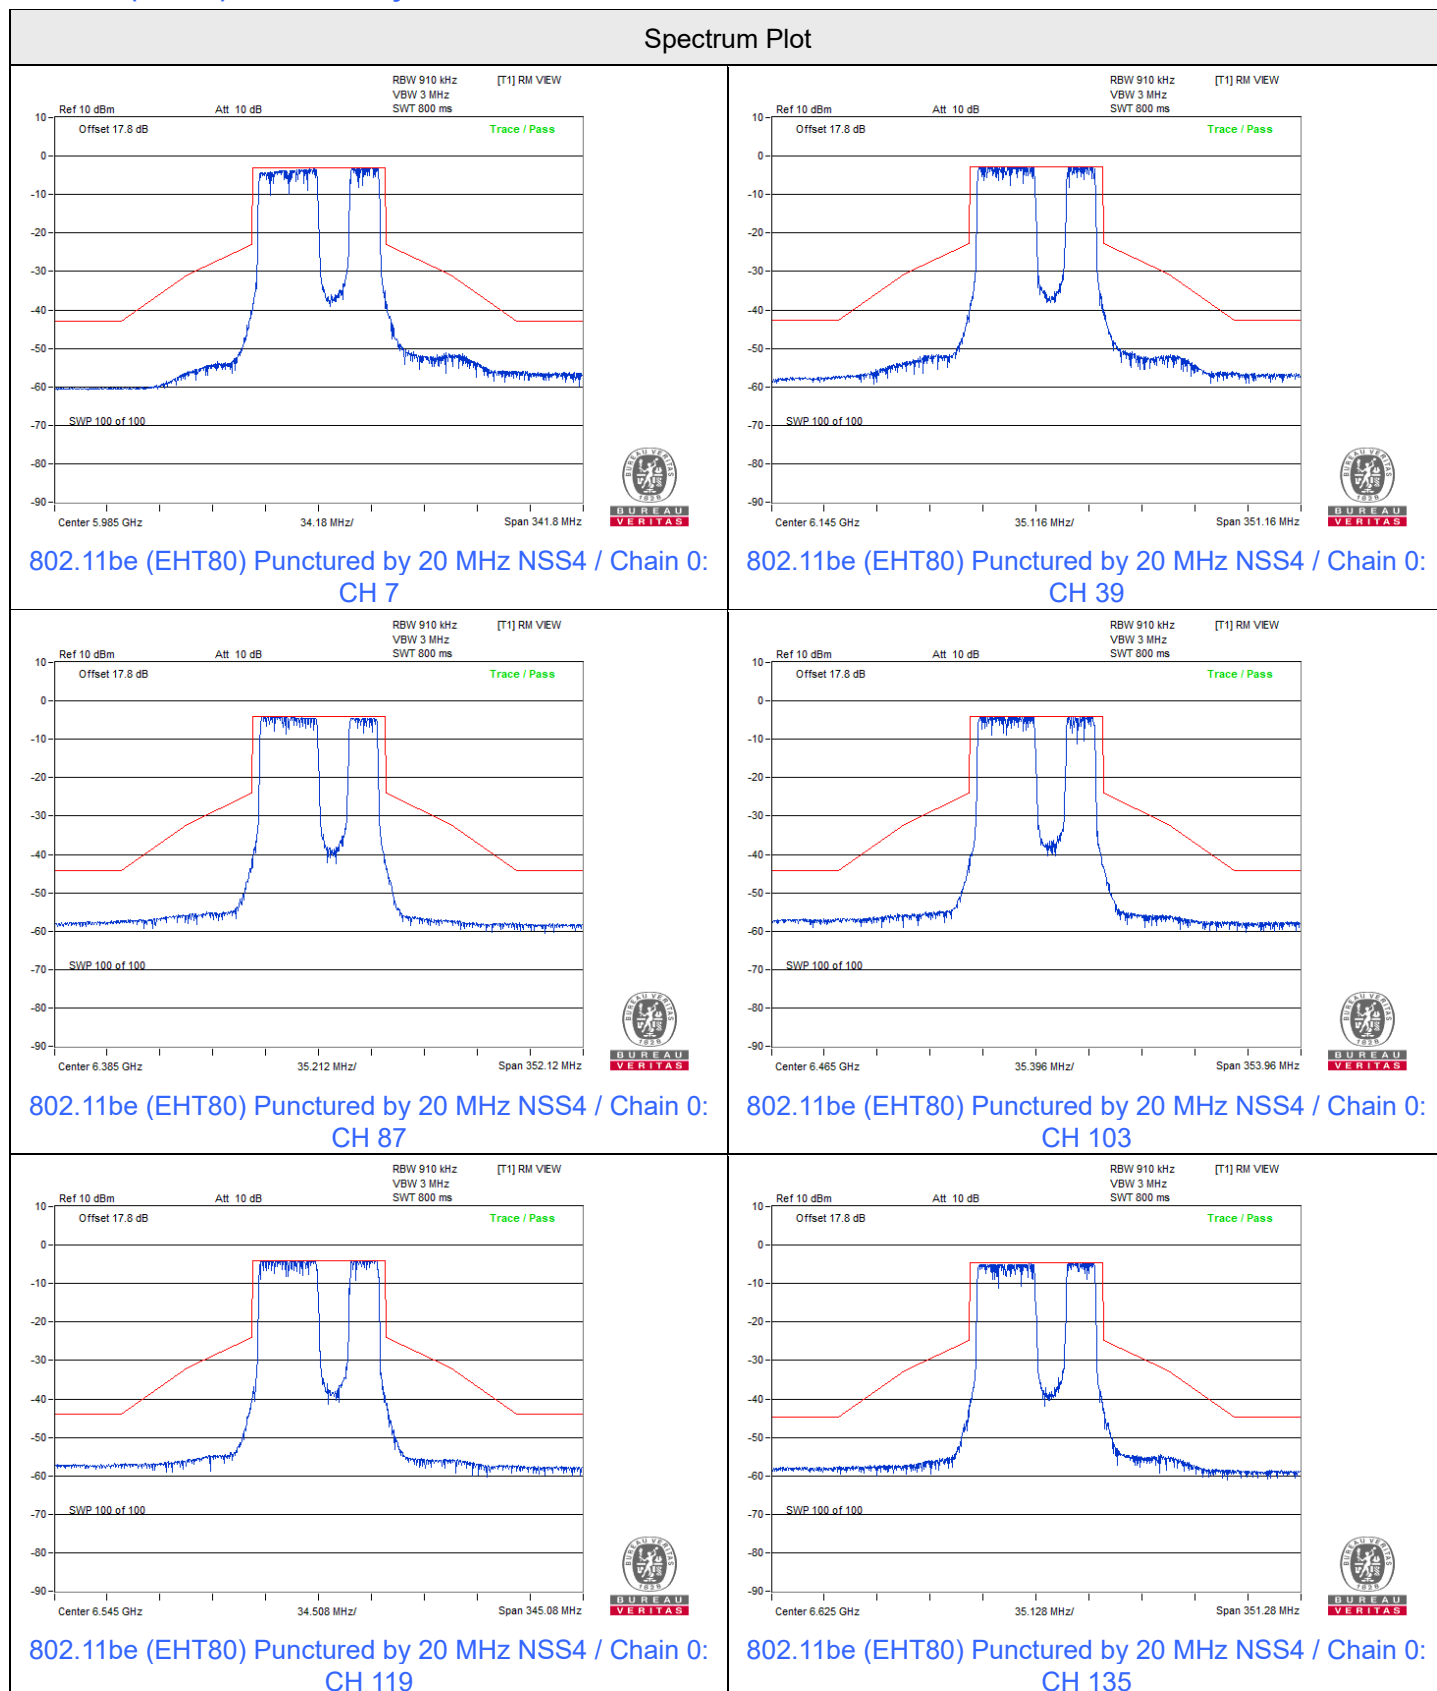







Spectrum Plot

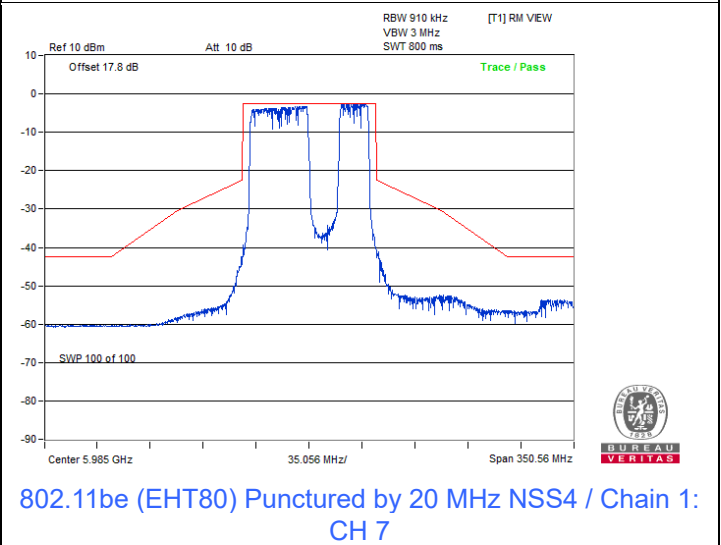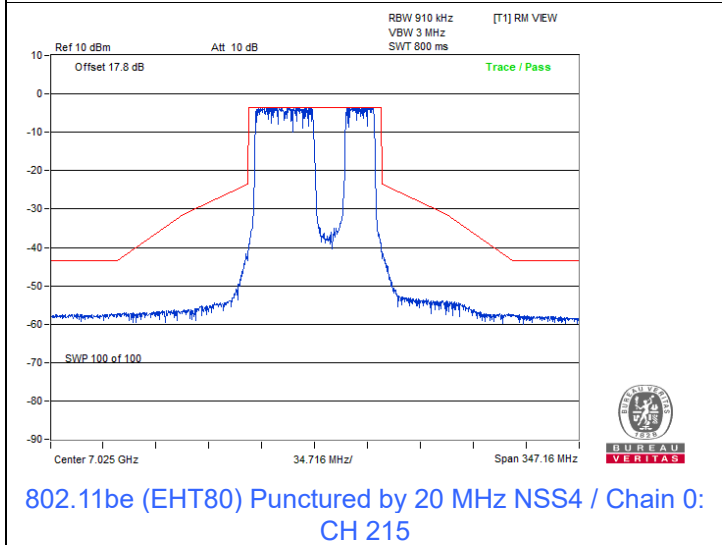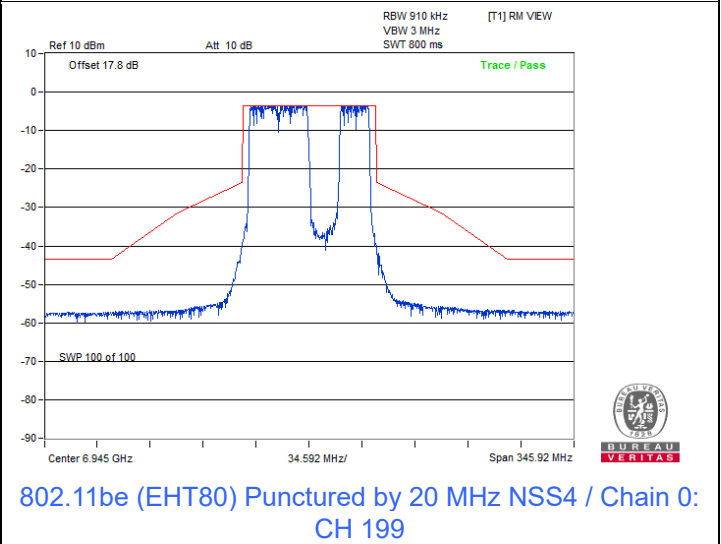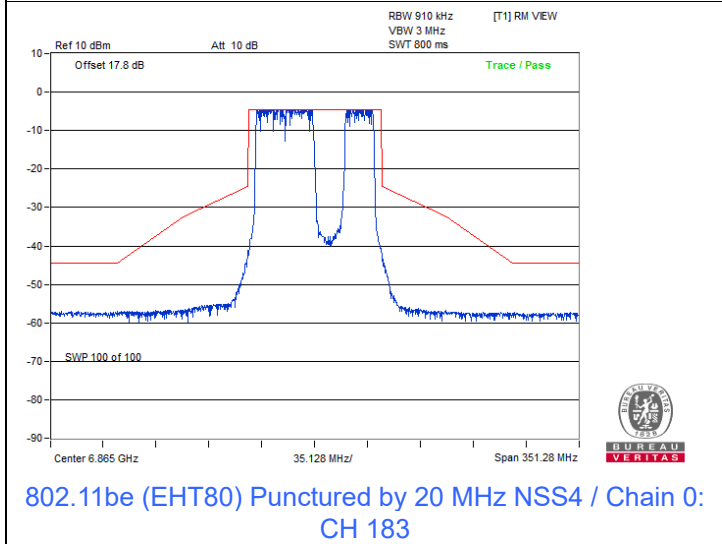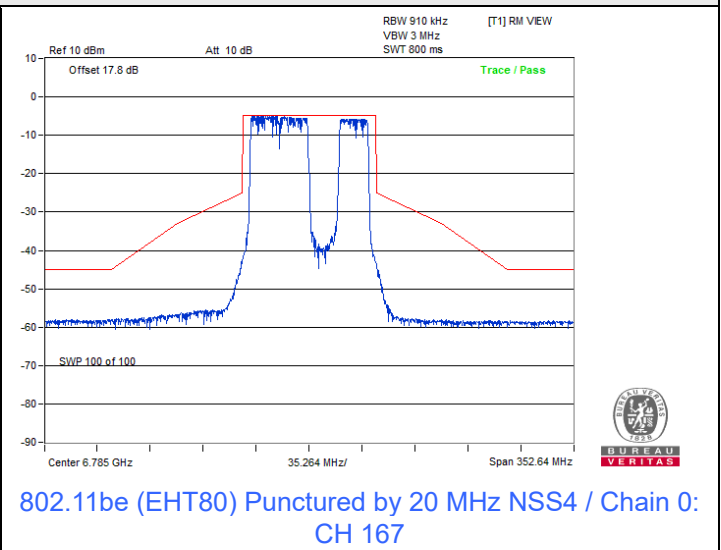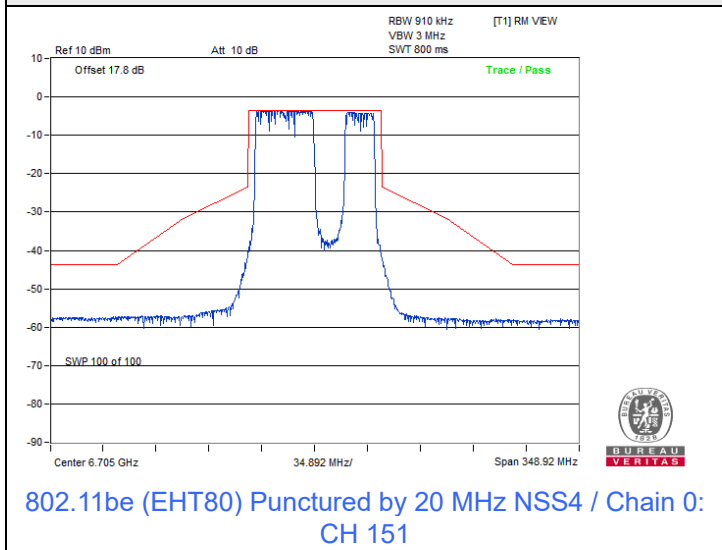







Spectrum Plot

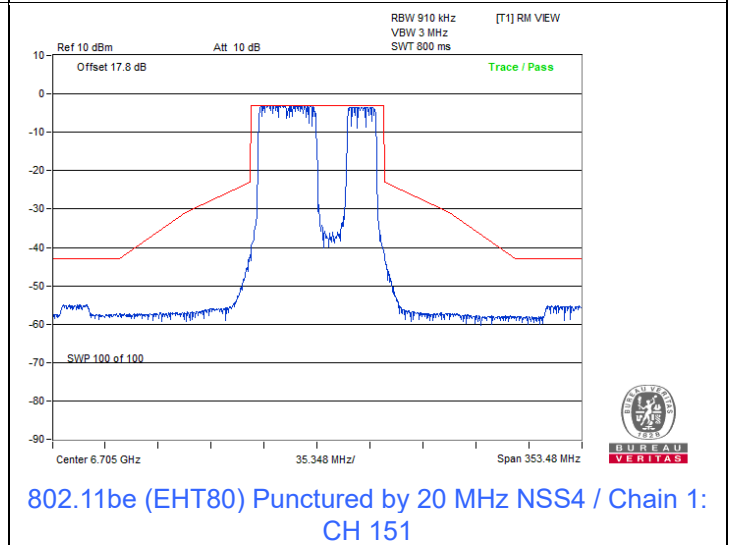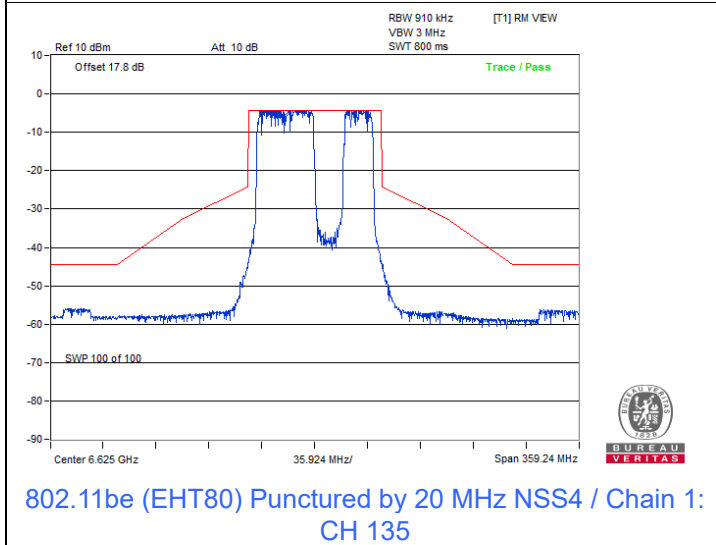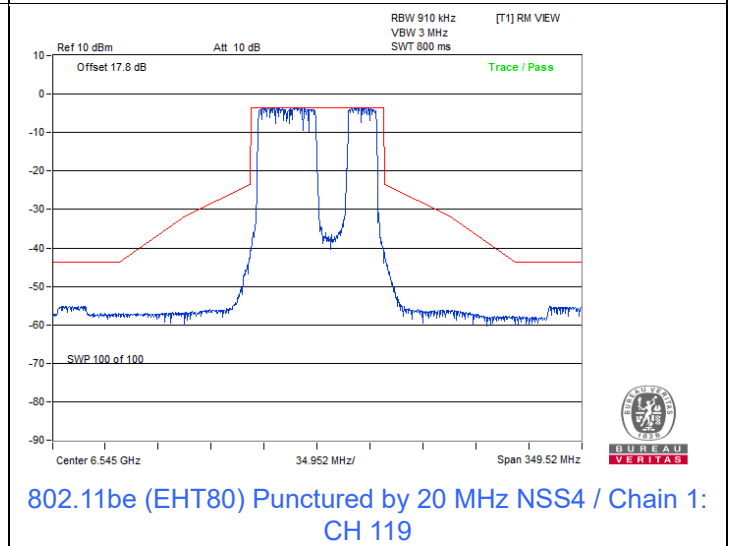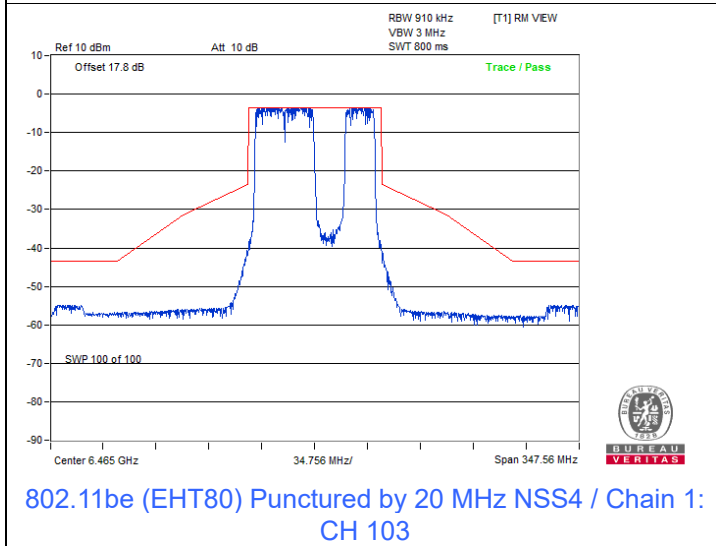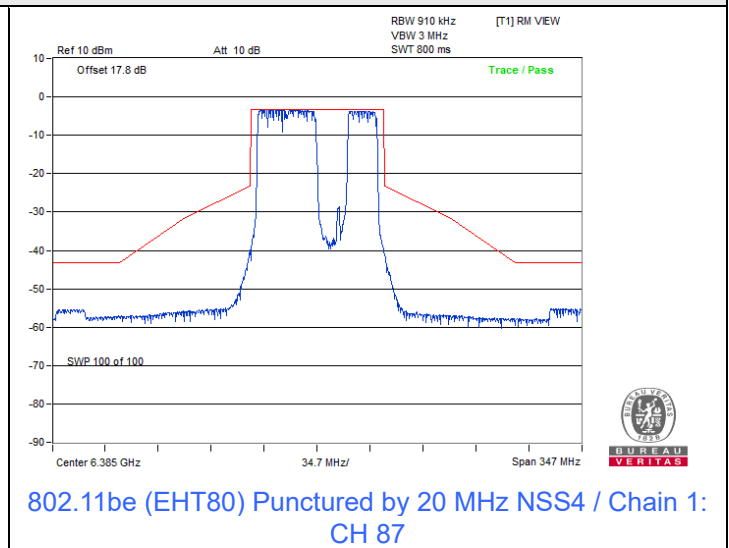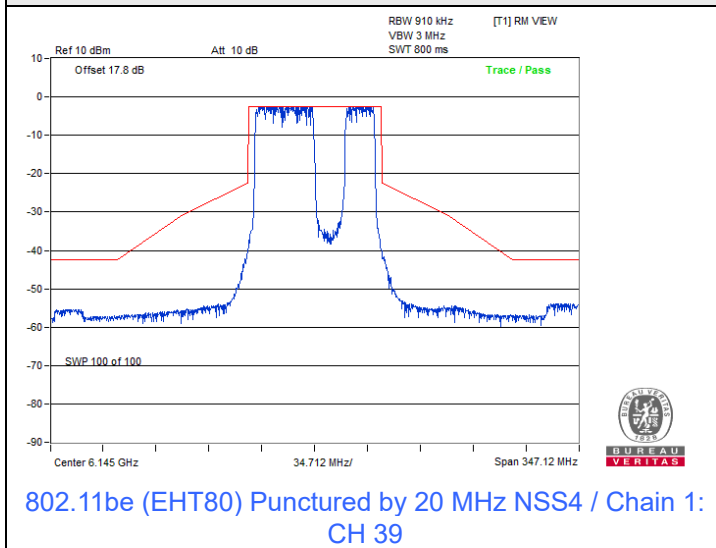







Spectrum Plot

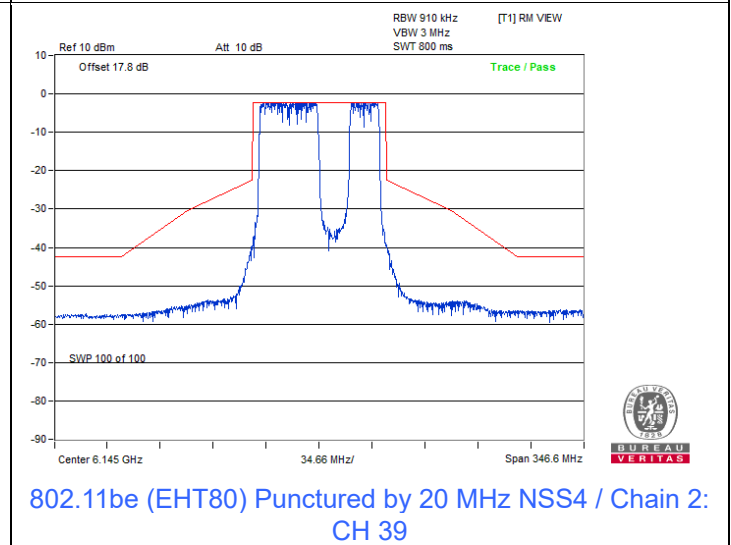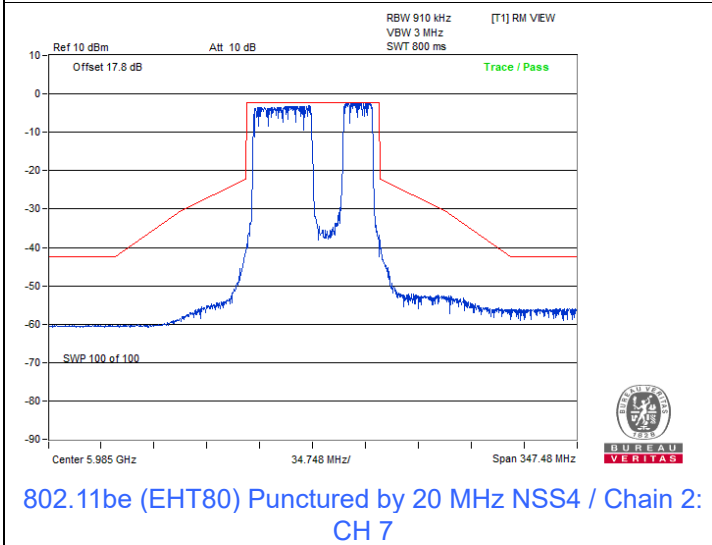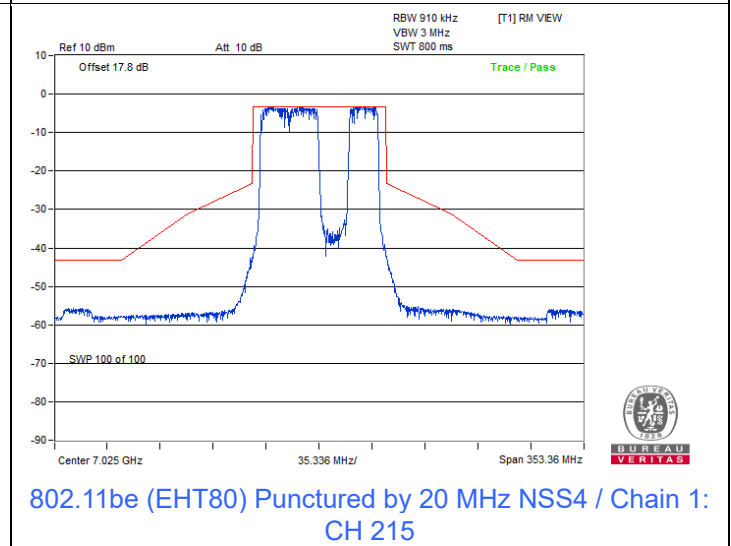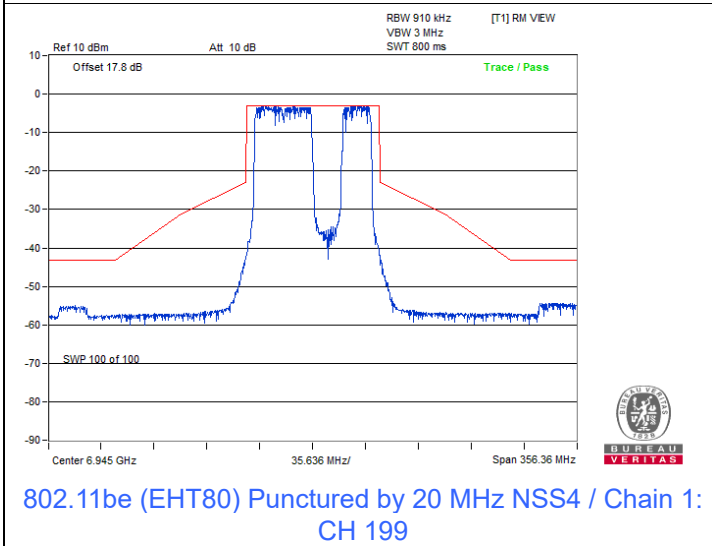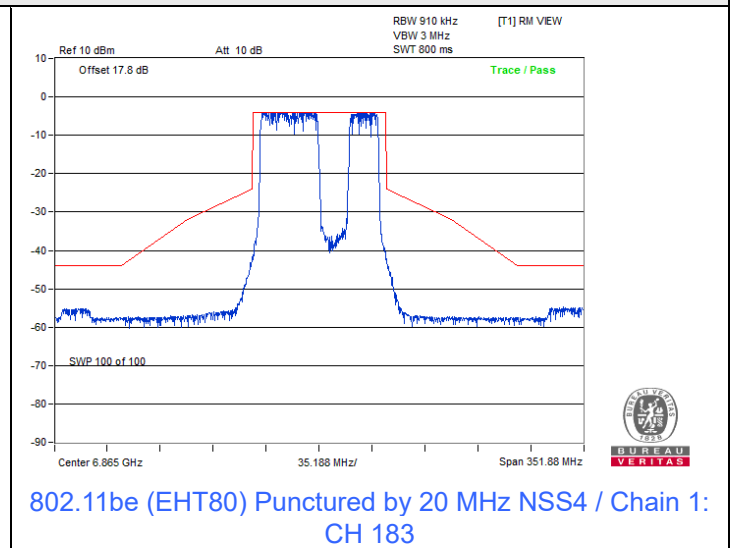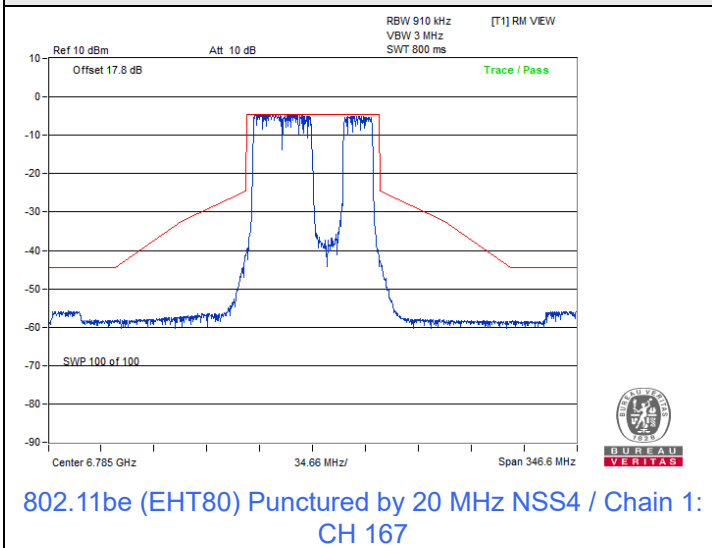







Spectrum Plot

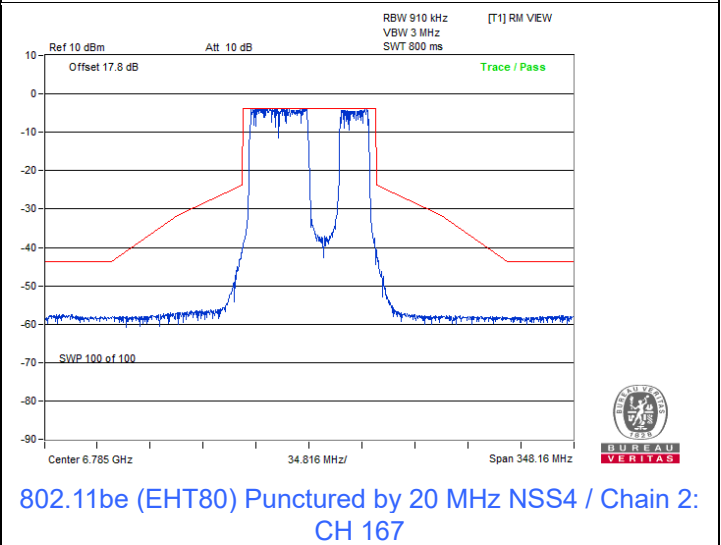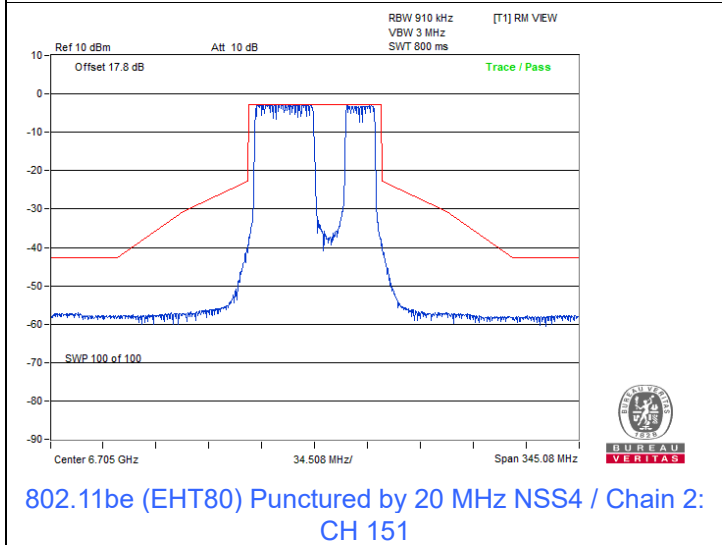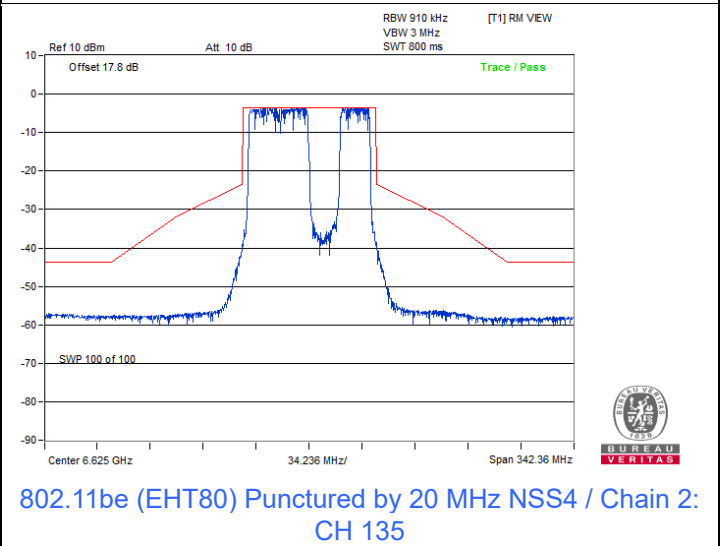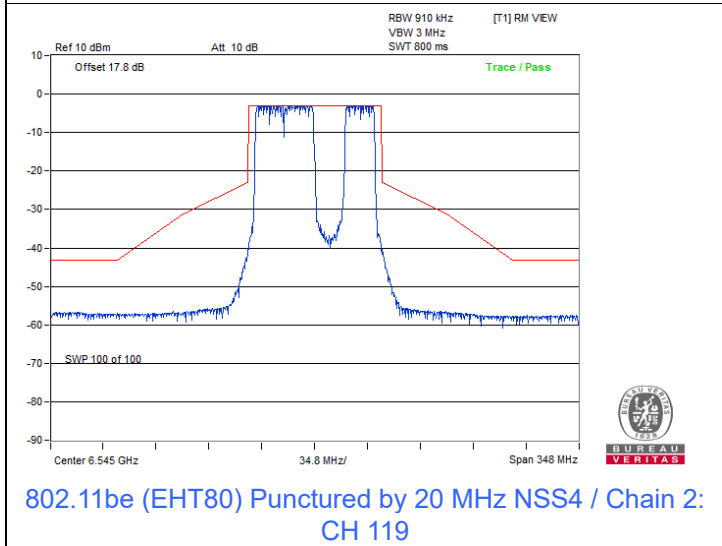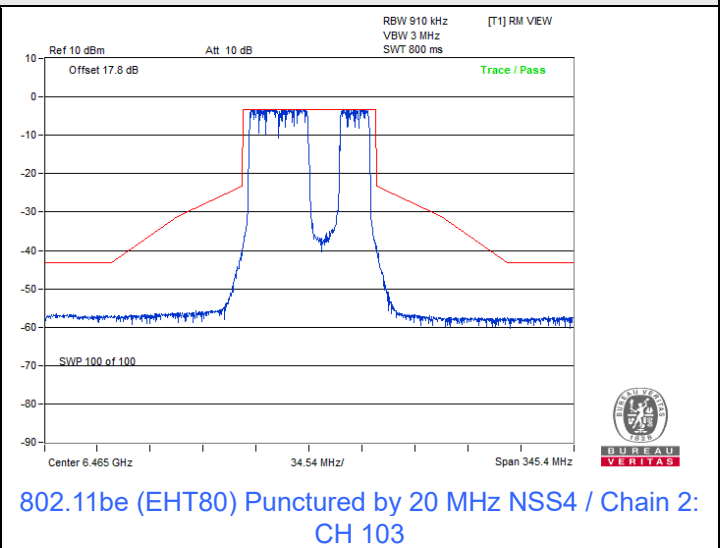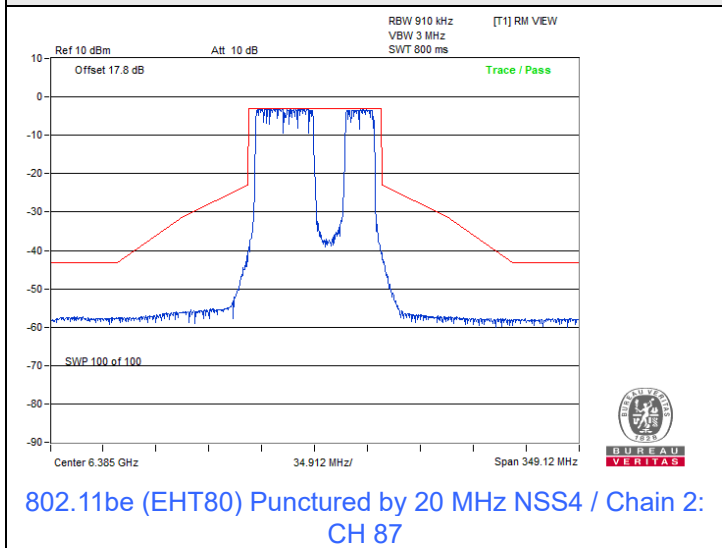



Spectrum Plot

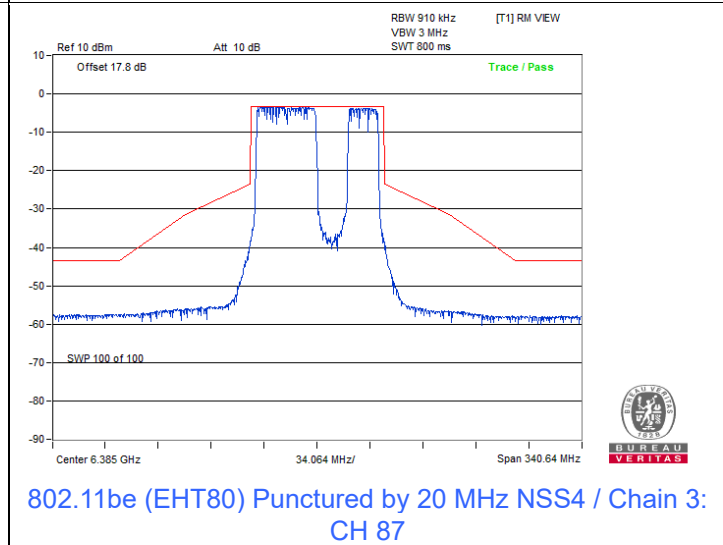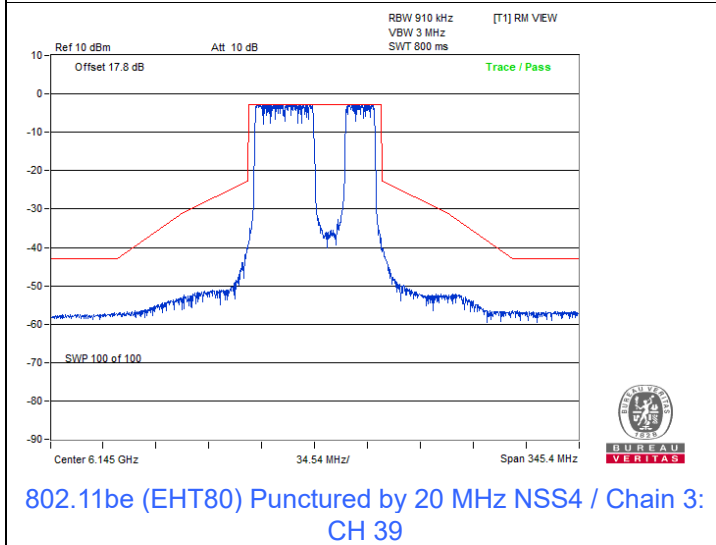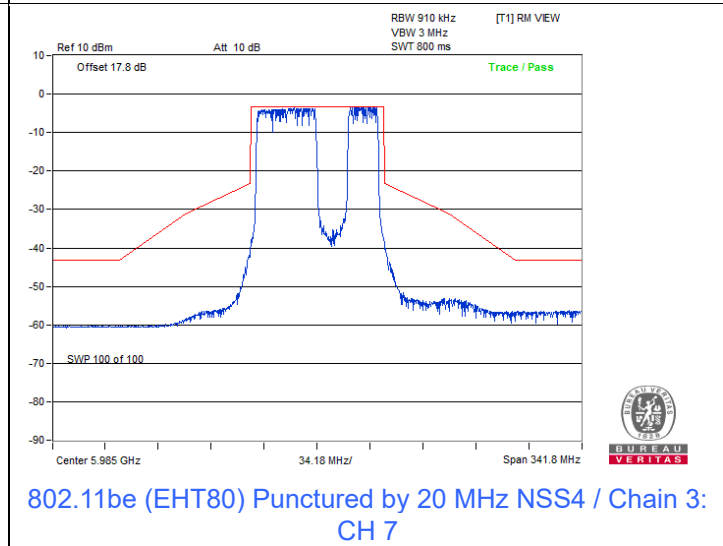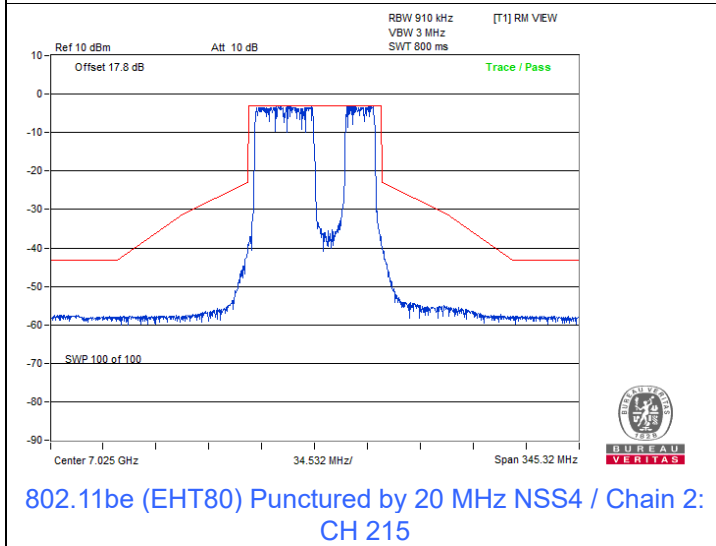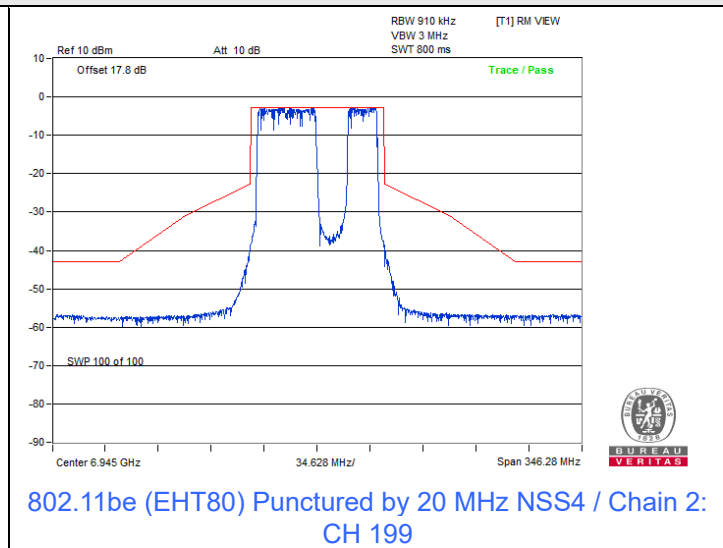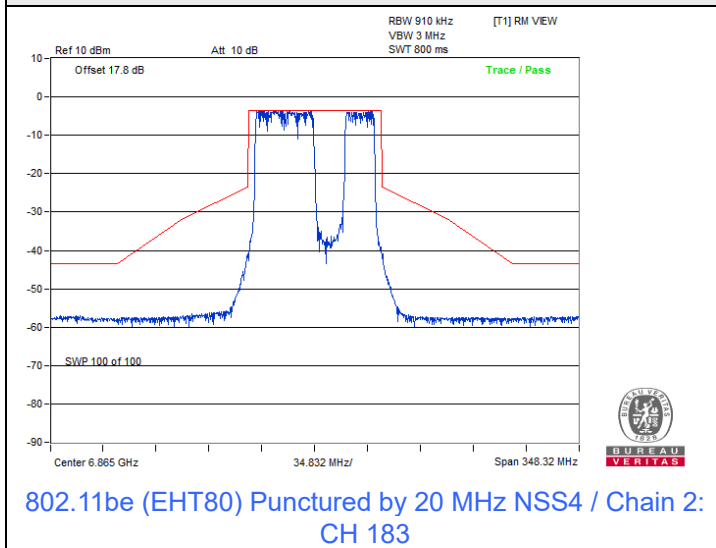

Spectrum Plot

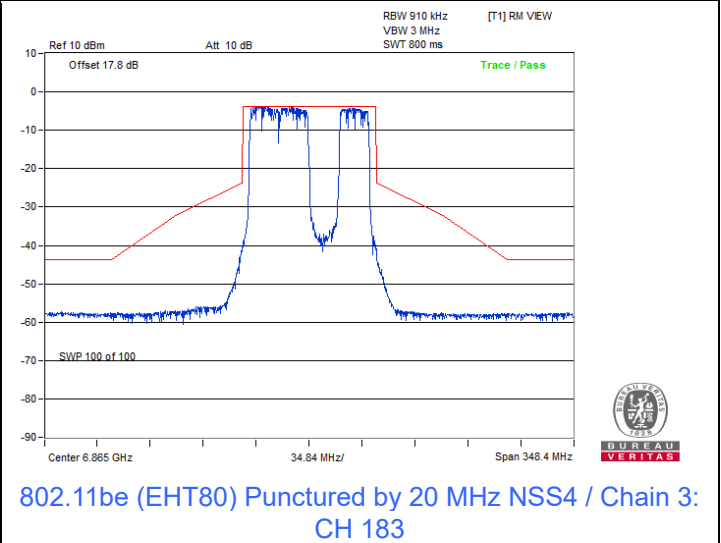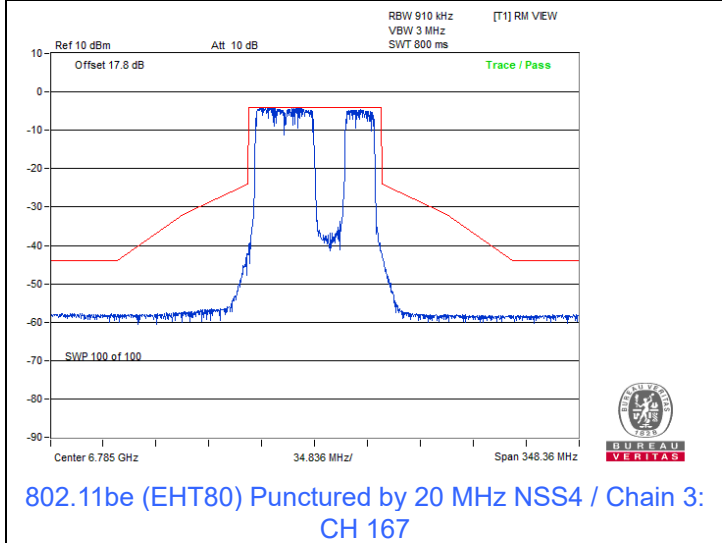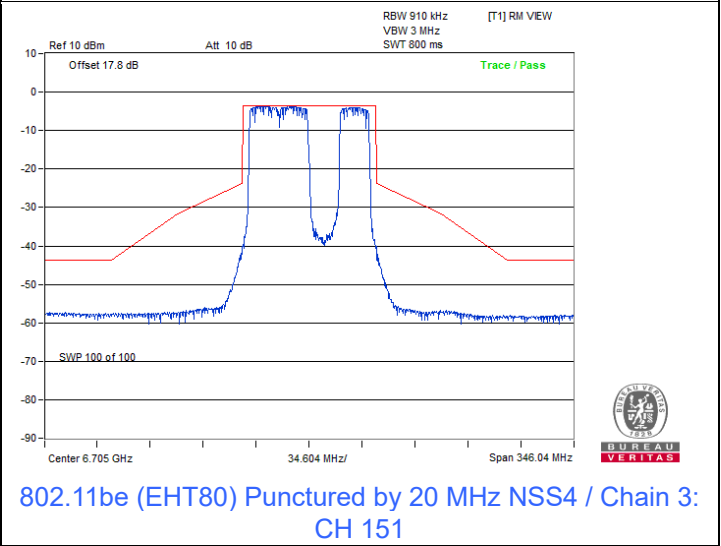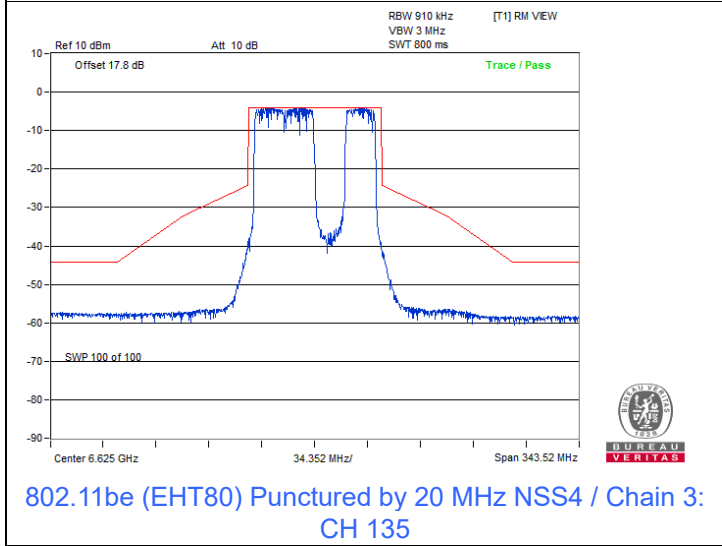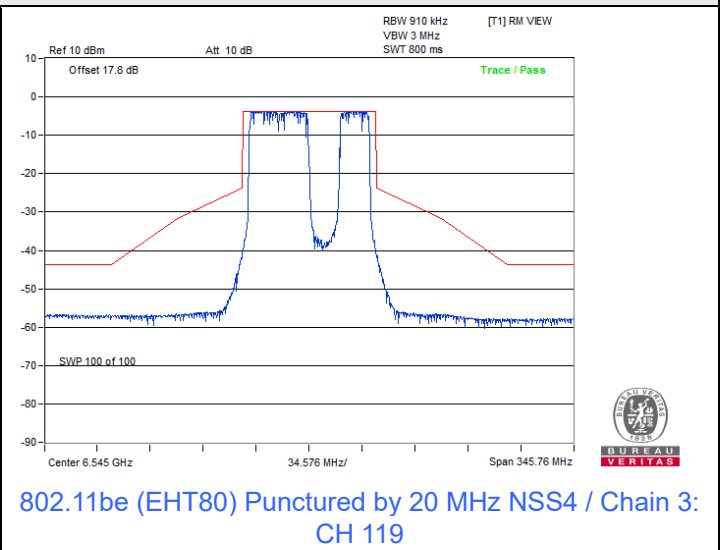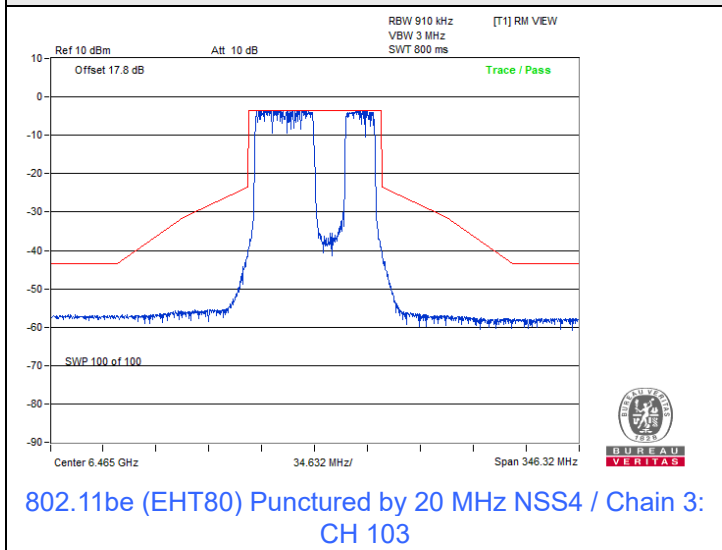


Spectrum Plot

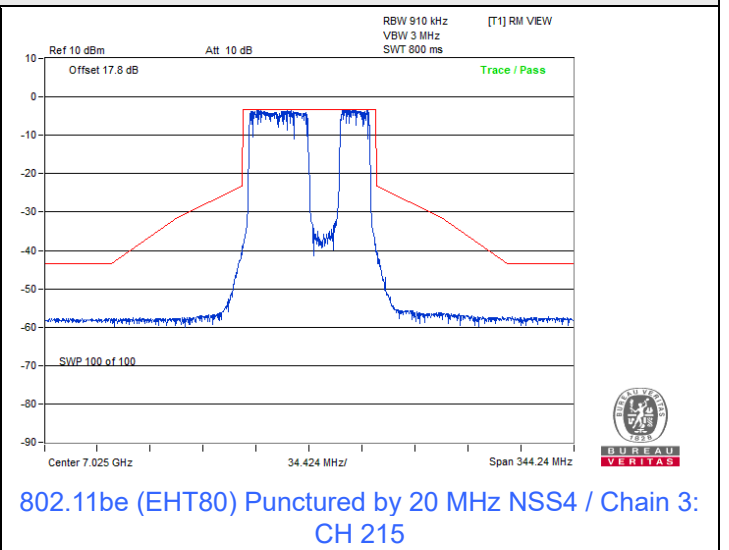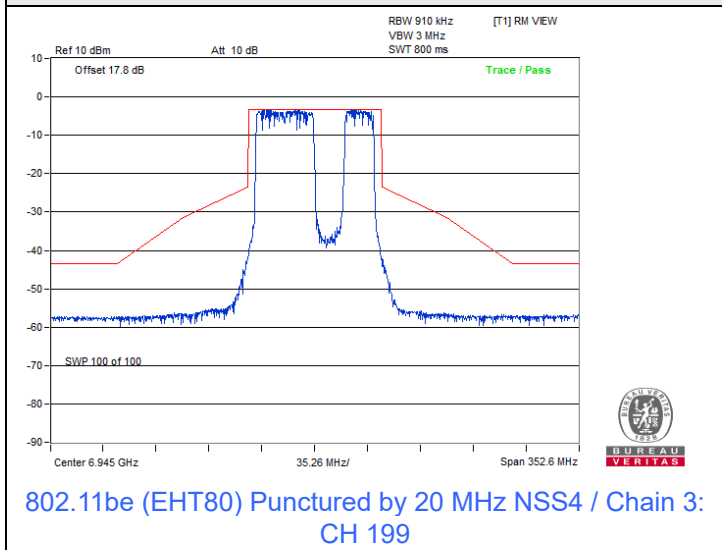


802.11be (EHT80) Punctured by 40 MHz


Spectrum Plot

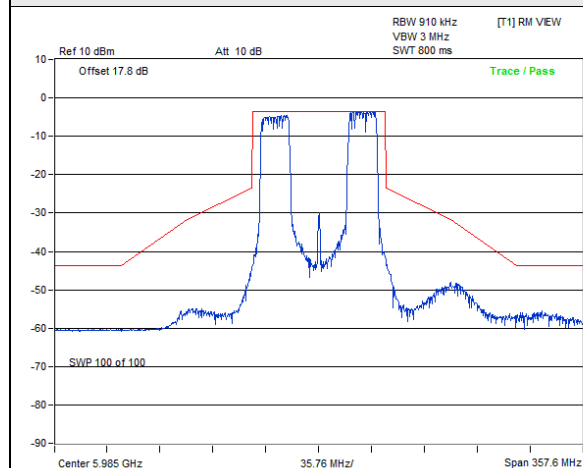


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0:
CH 7

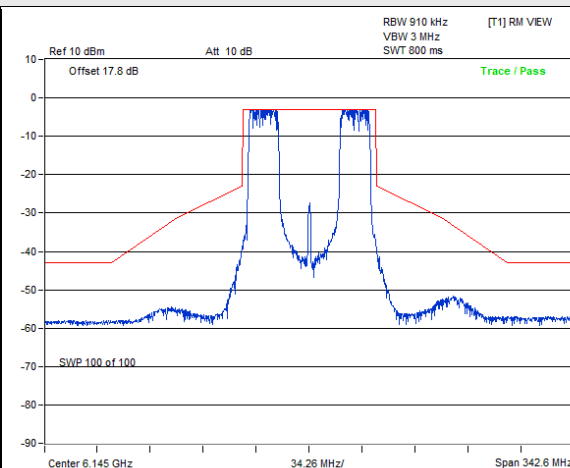


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0:
CH 39

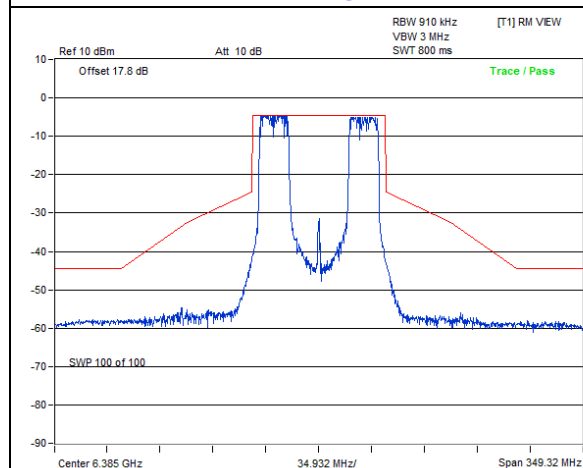


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0:
CH 87

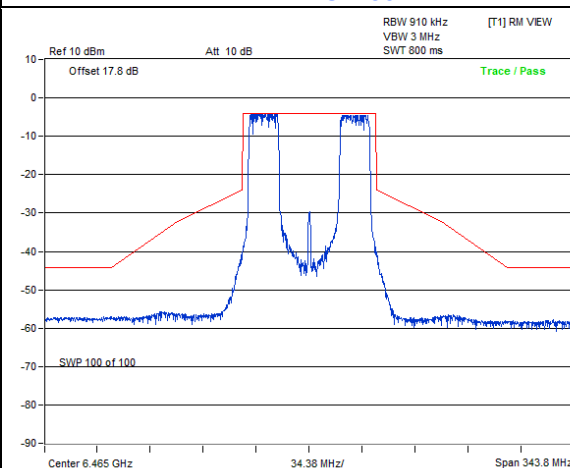

802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0:
CH 103






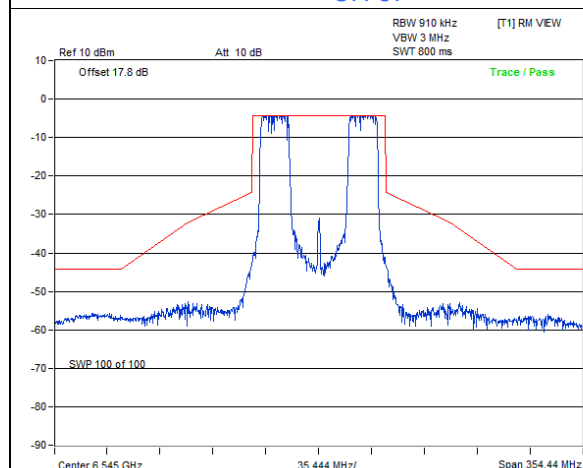


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0:
CH 119






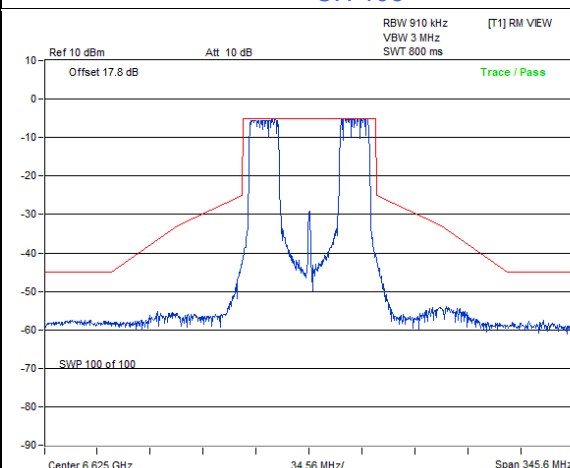


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0:
CH 135


Spectrum Plot

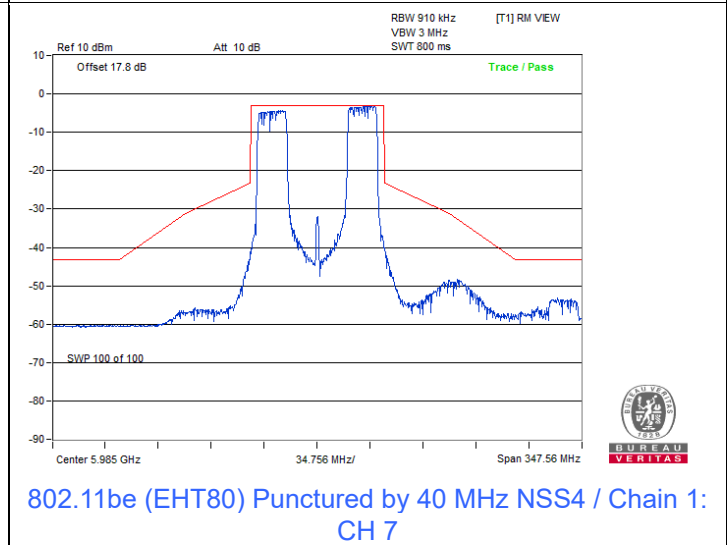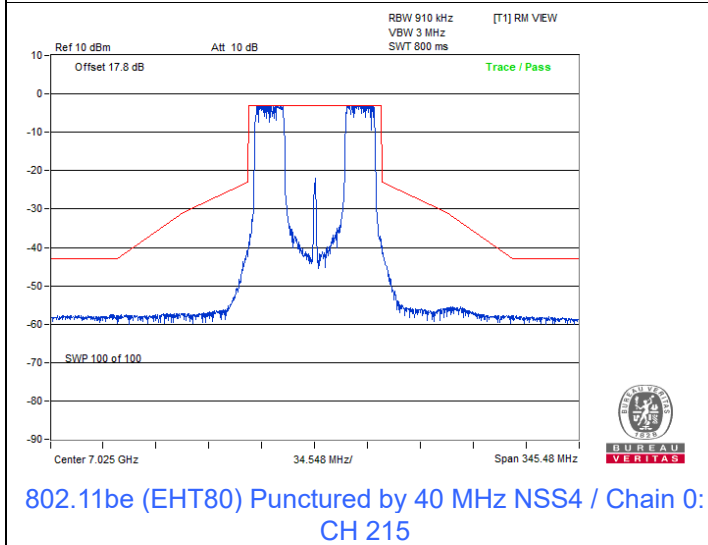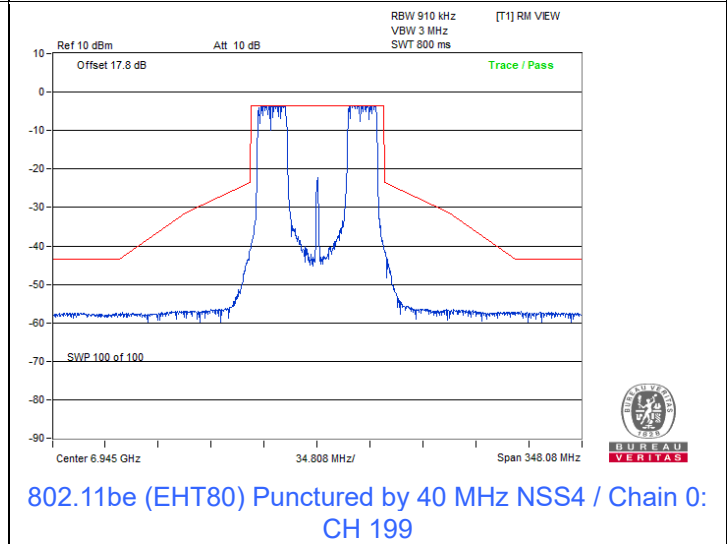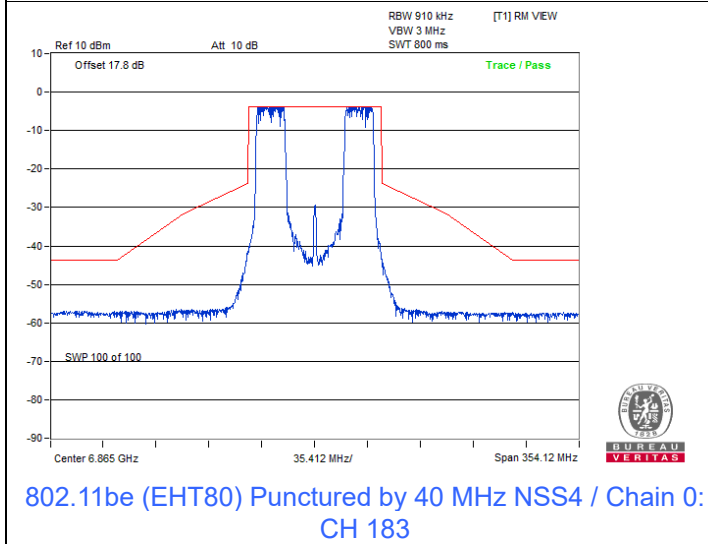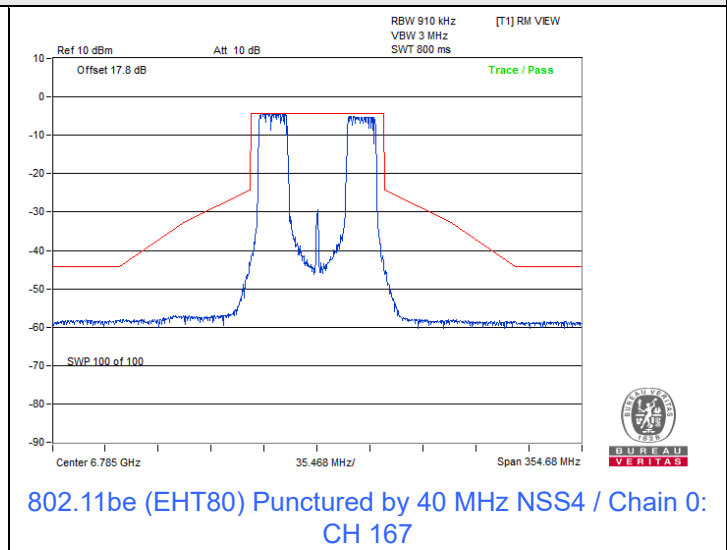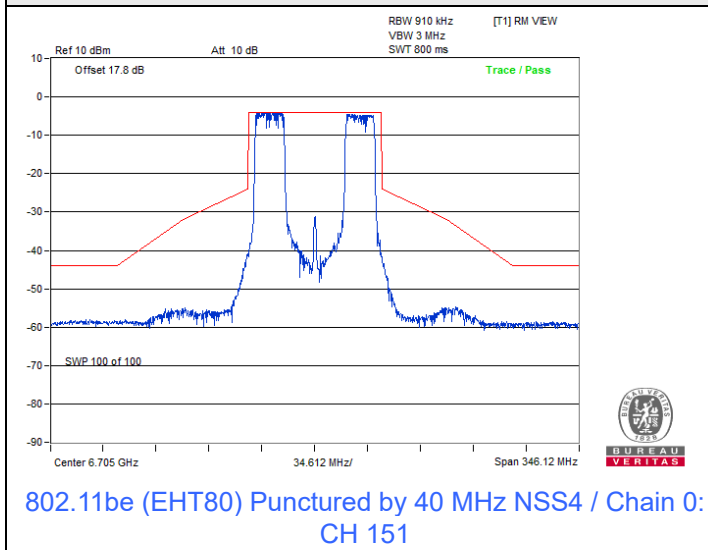


Spectrum Plot

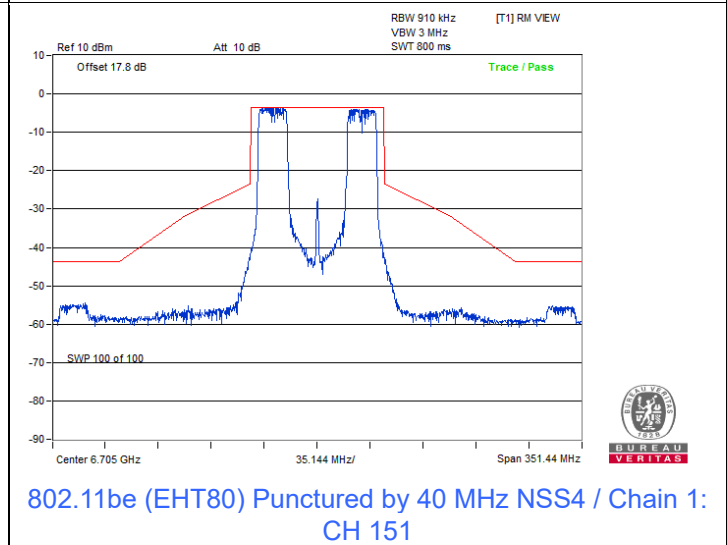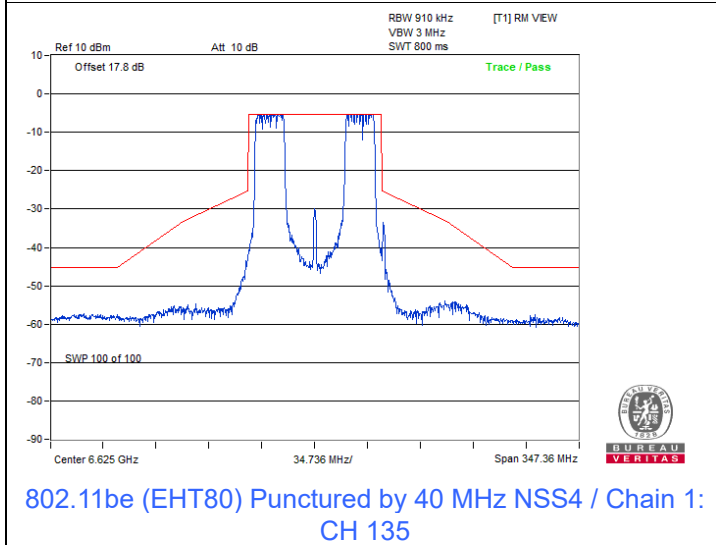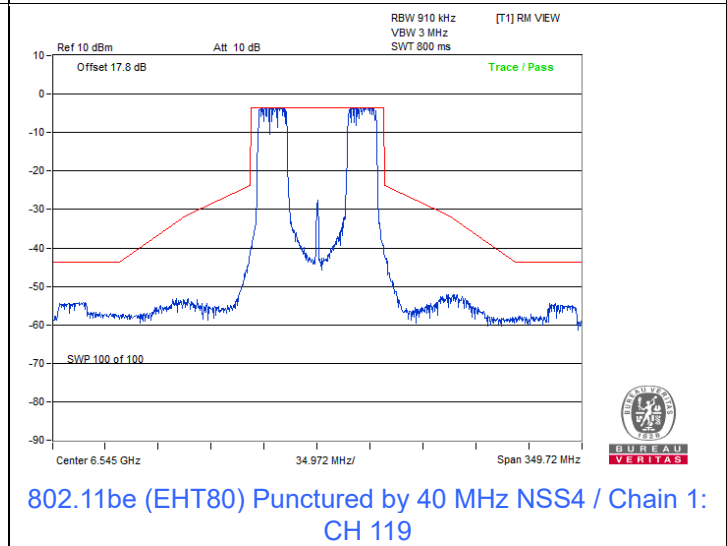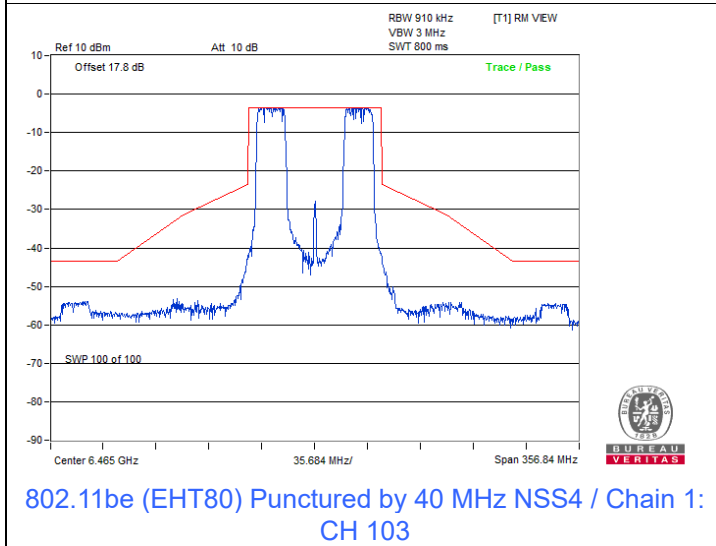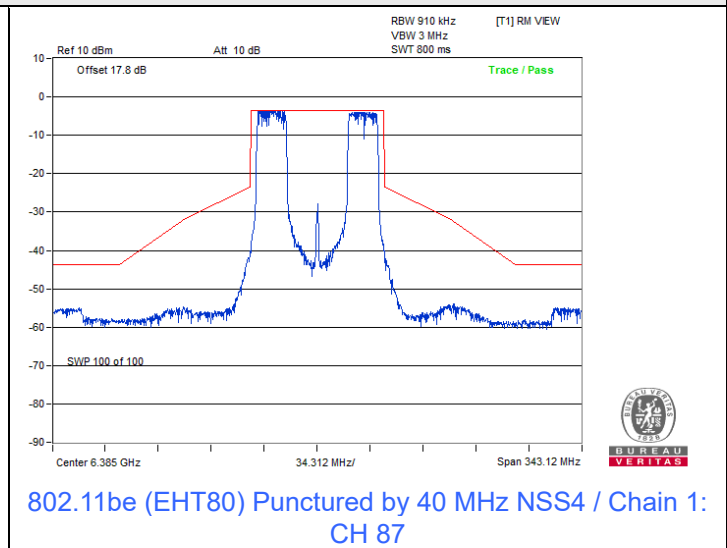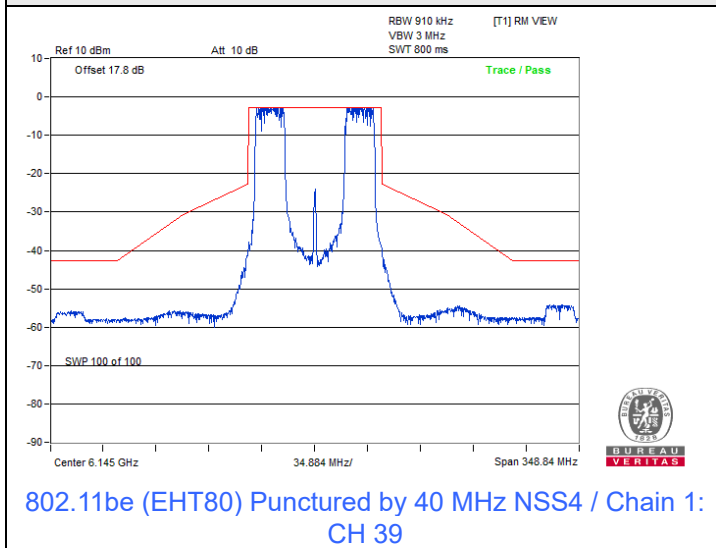


Spectrum Plot

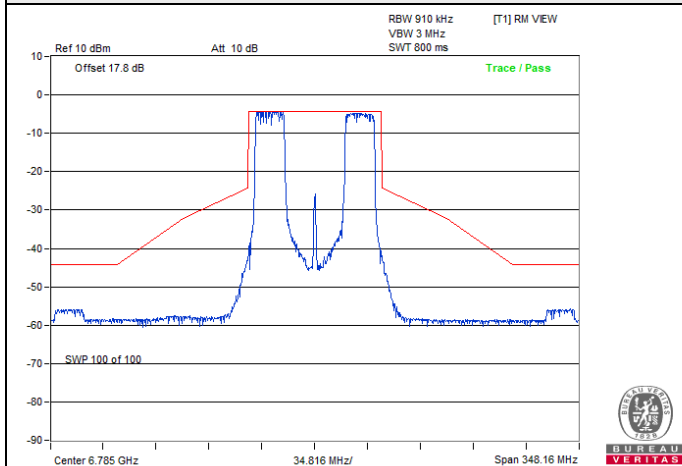


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 1:
CH 167

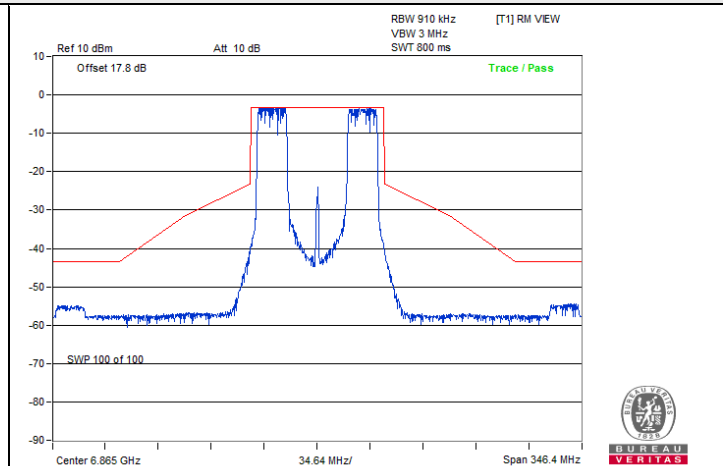


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 1:
CH 183

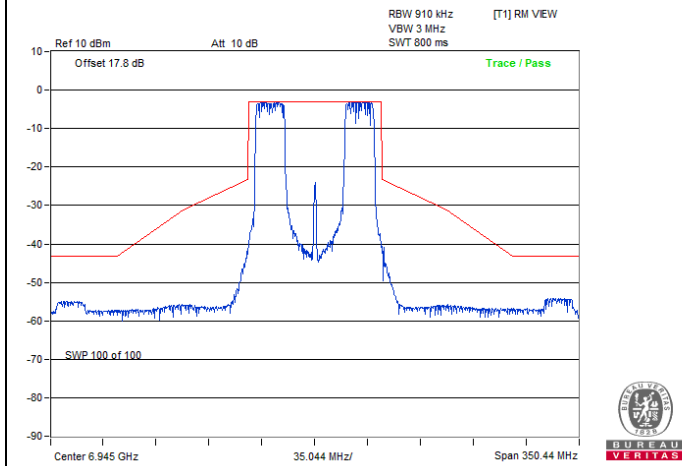


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 1:
CH 199

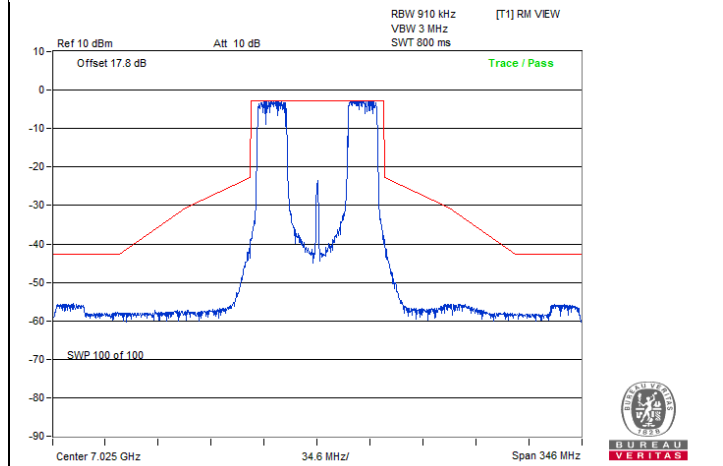

802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 1:
CH 215






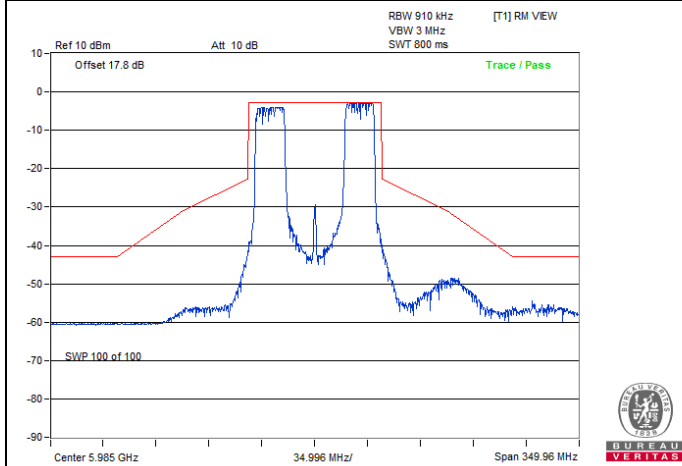


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 2:
CH 7






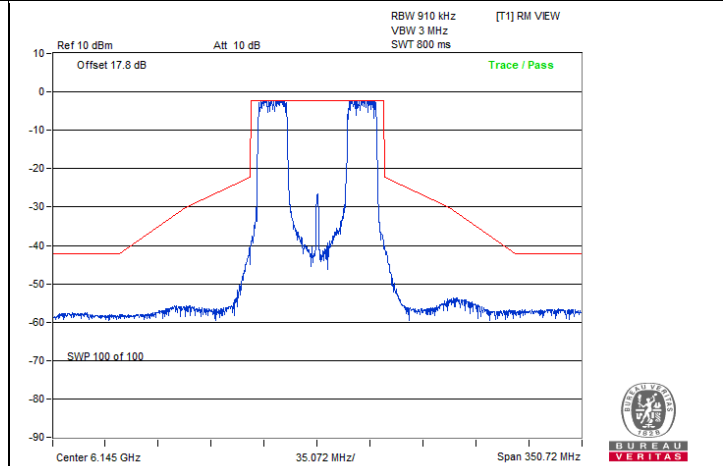


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 2:
CH 39







Spectrum Plot

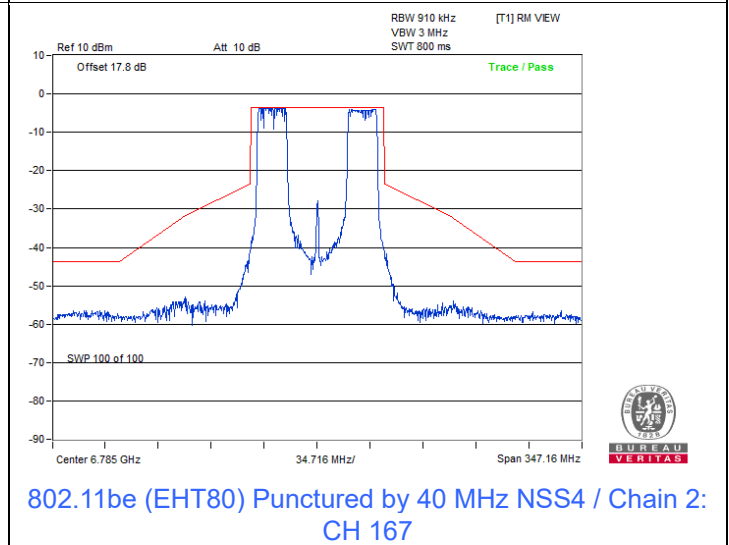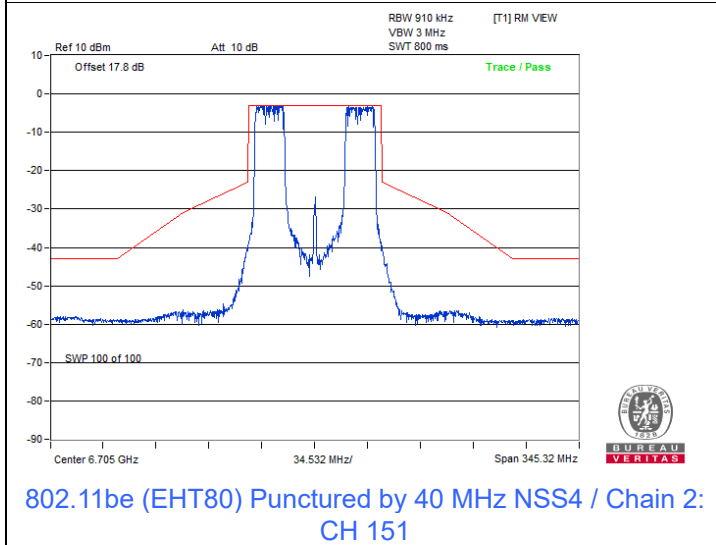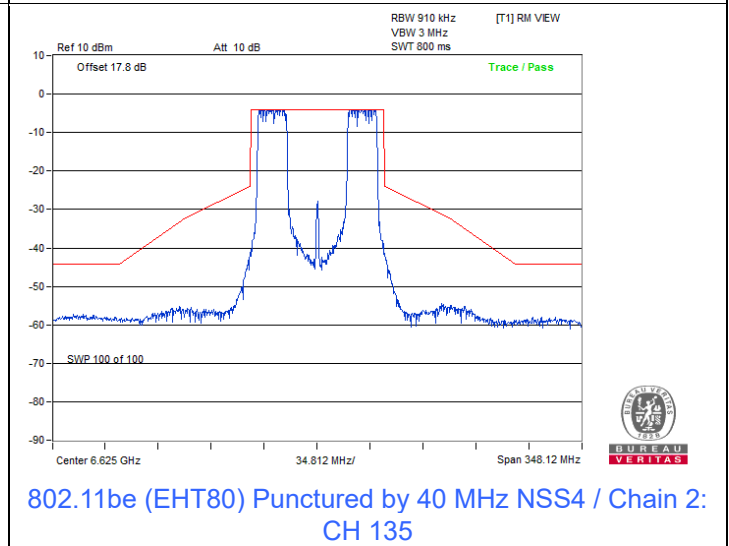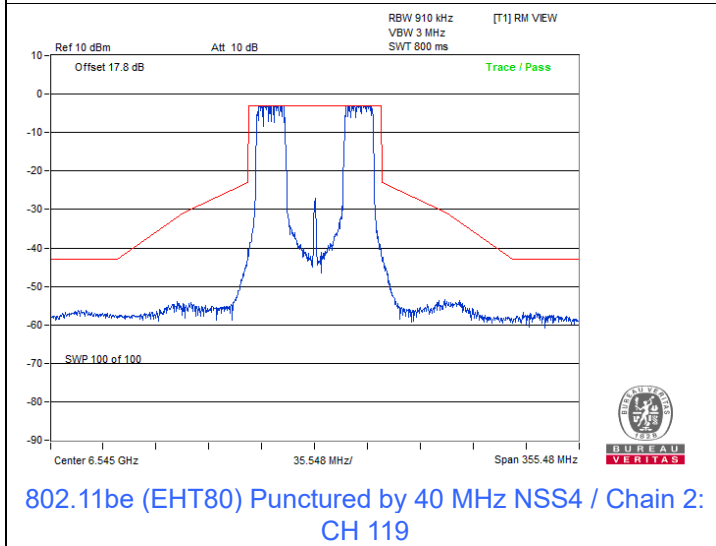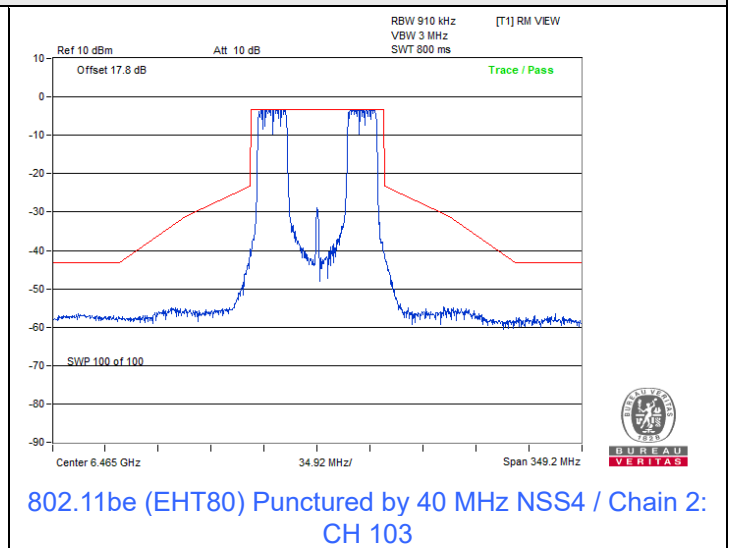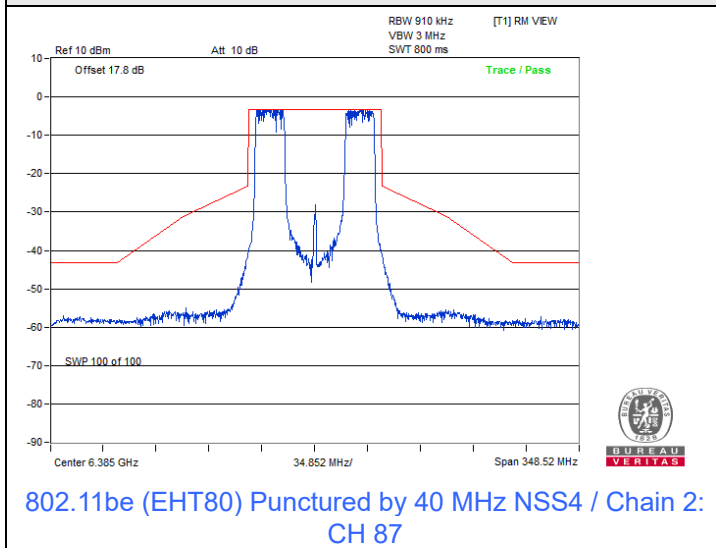



Spectrum Plot

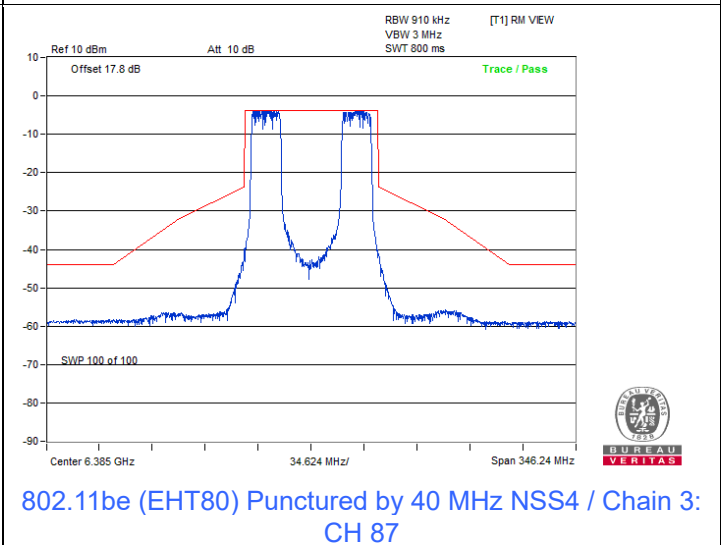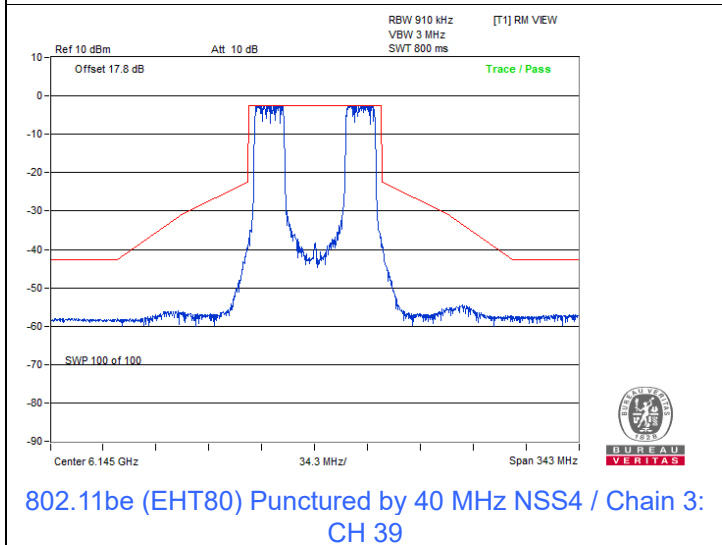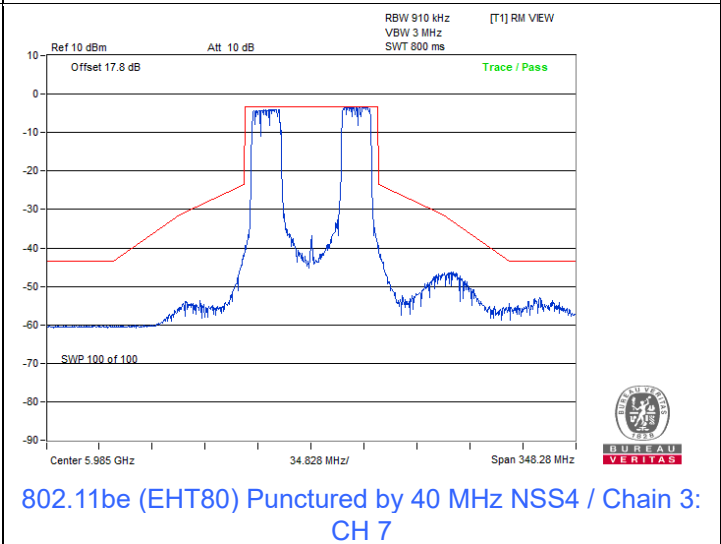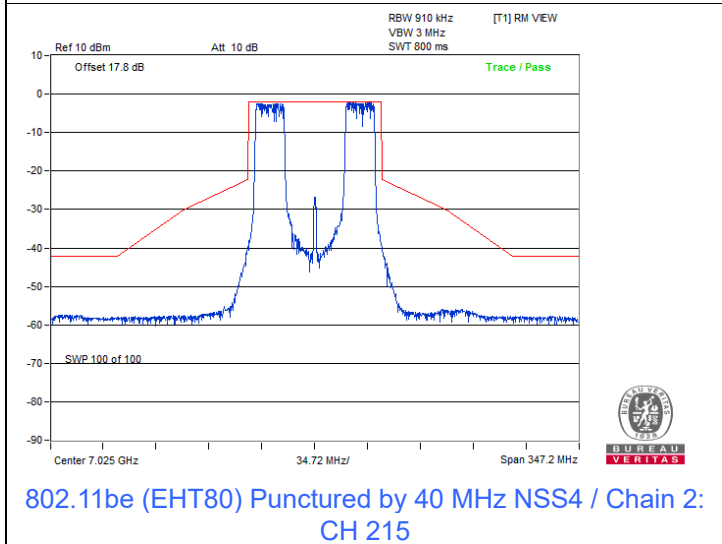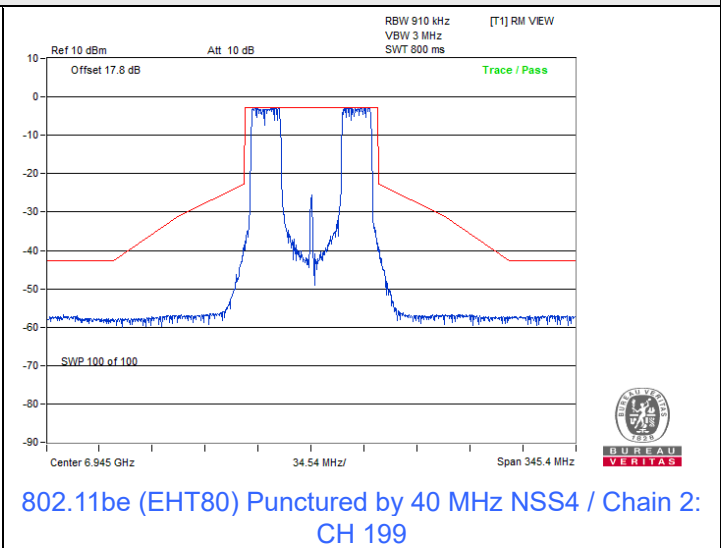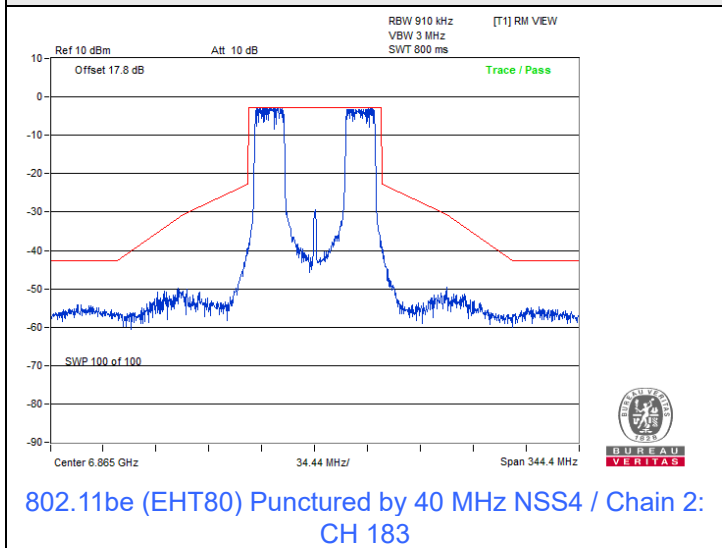

Spectrum Plot

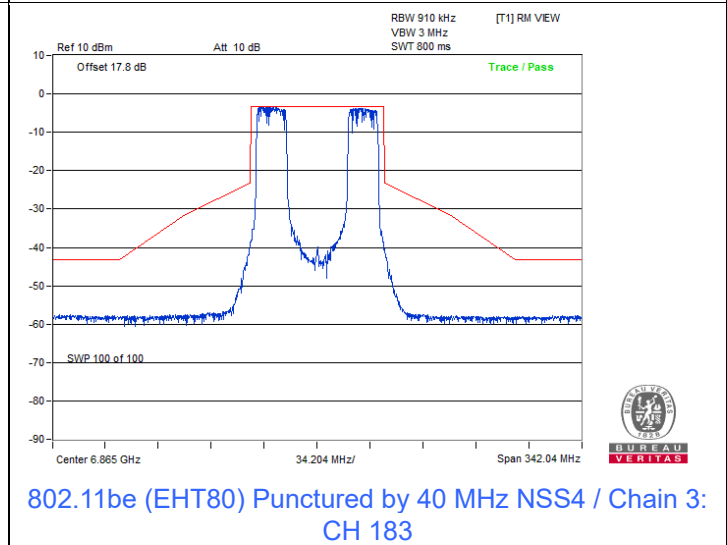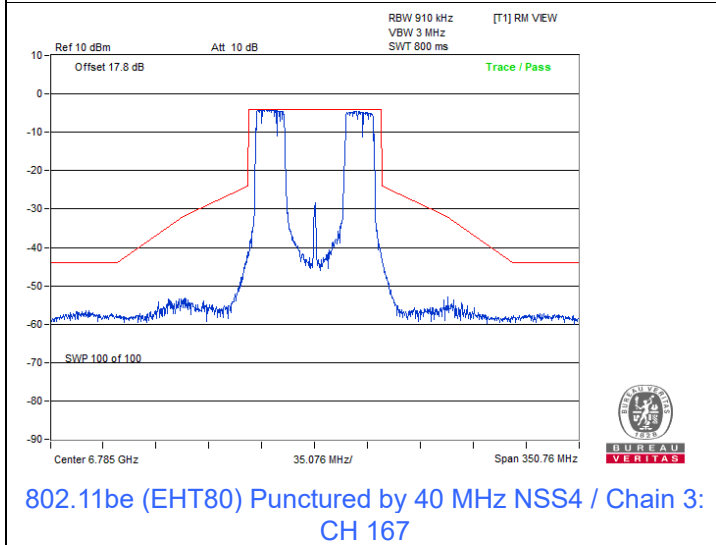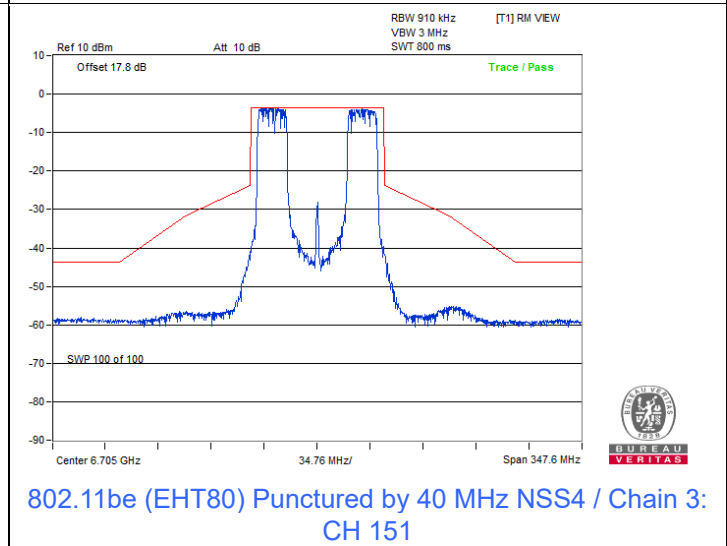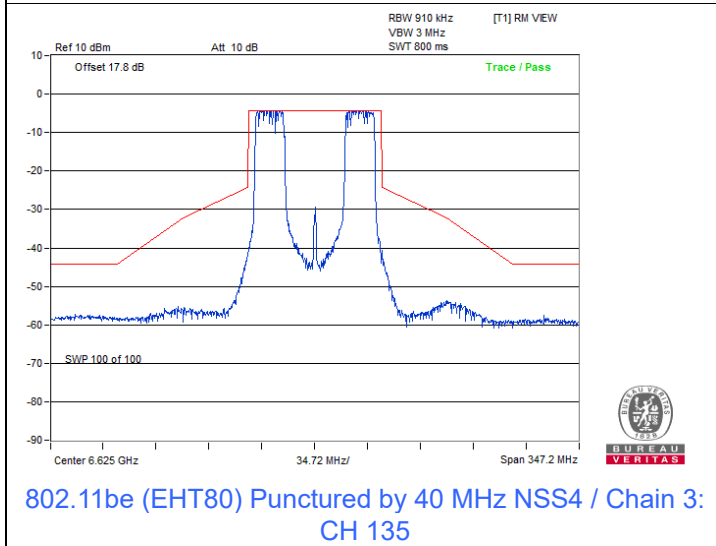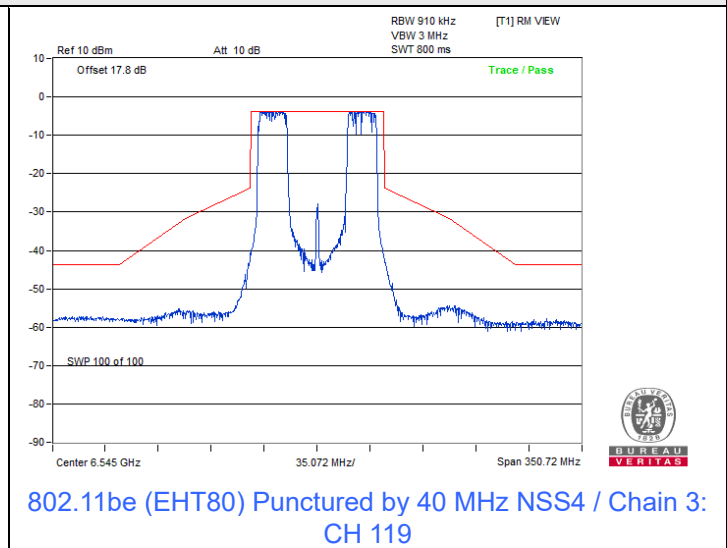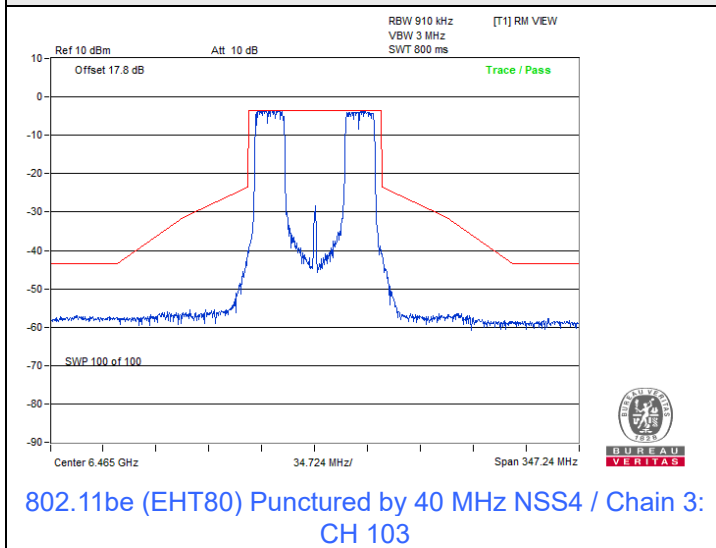


Spectrum Plot

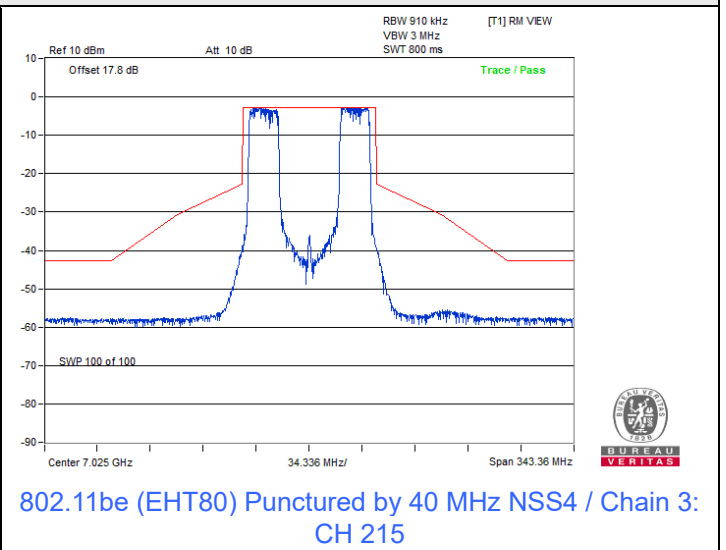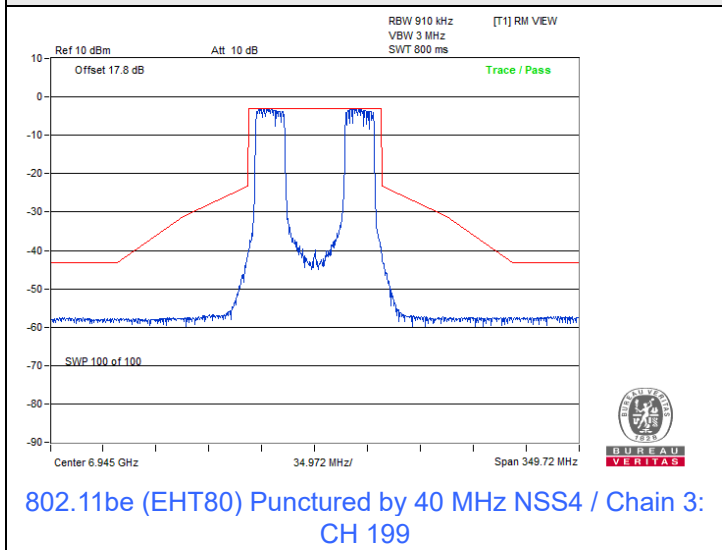


802.11be (EHT160) Punctured by 40 MHz


Spectrum Plot

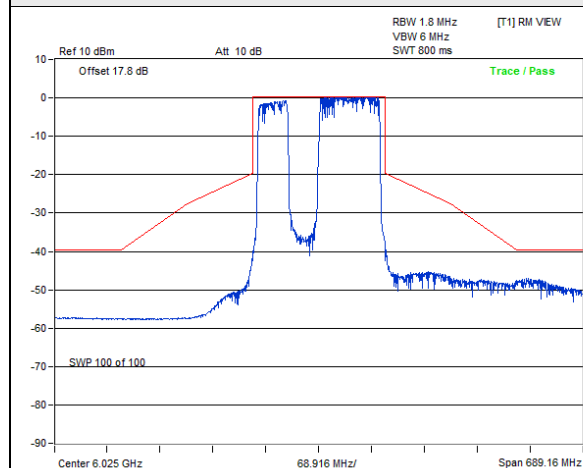


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 15

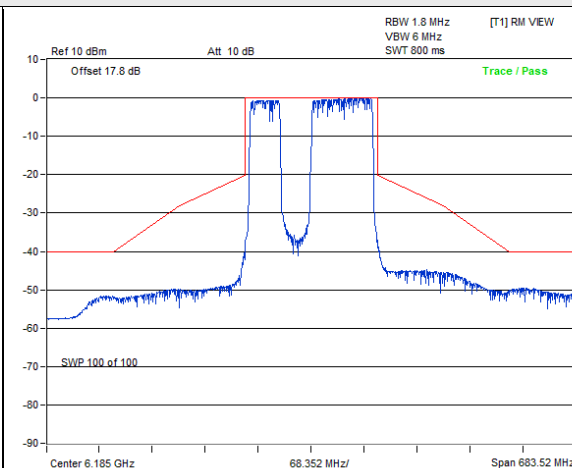


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 47

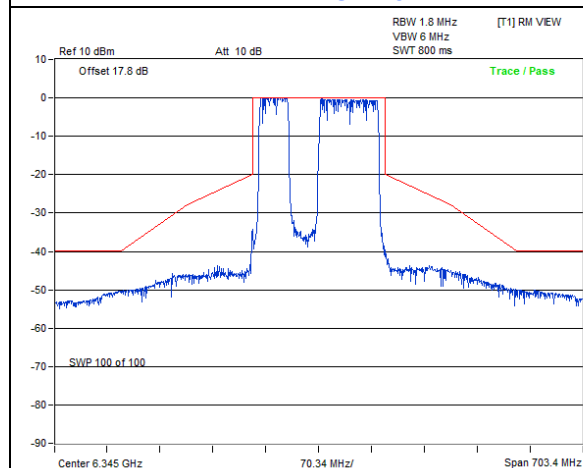


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 79

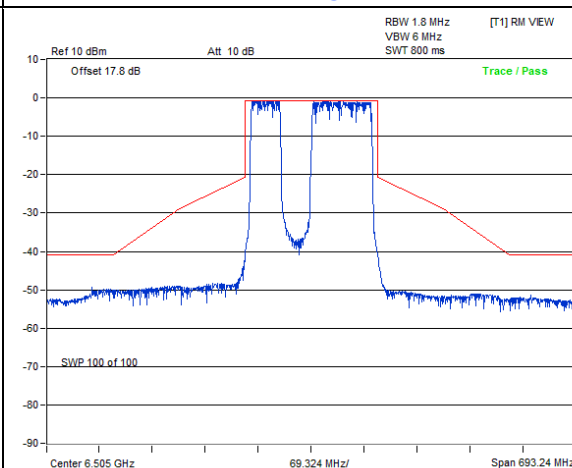

802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 111

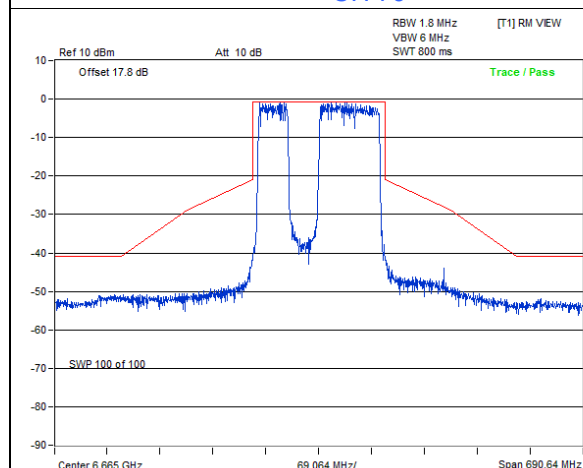


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 143

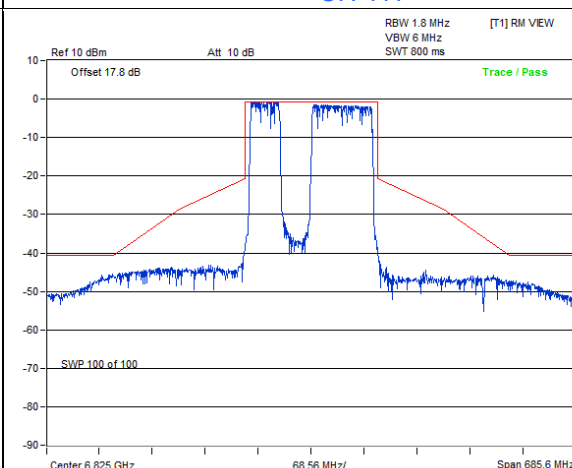


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 175


Spectrum Plot

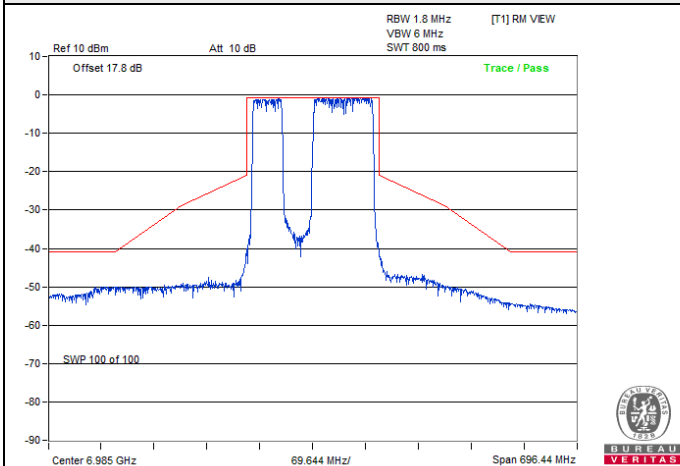


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0:
CH 207

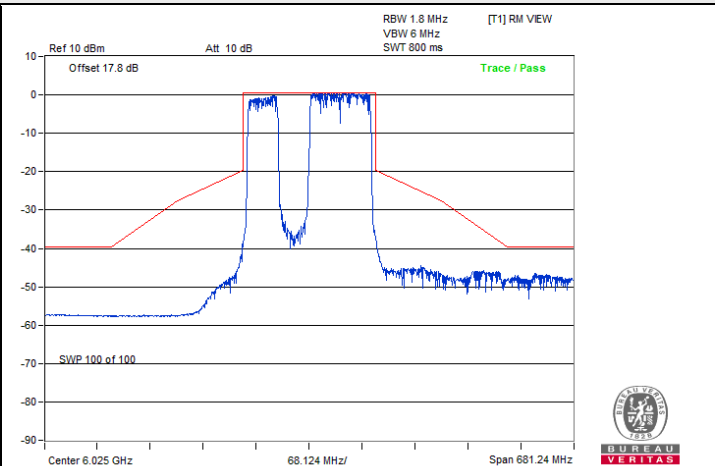


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 15

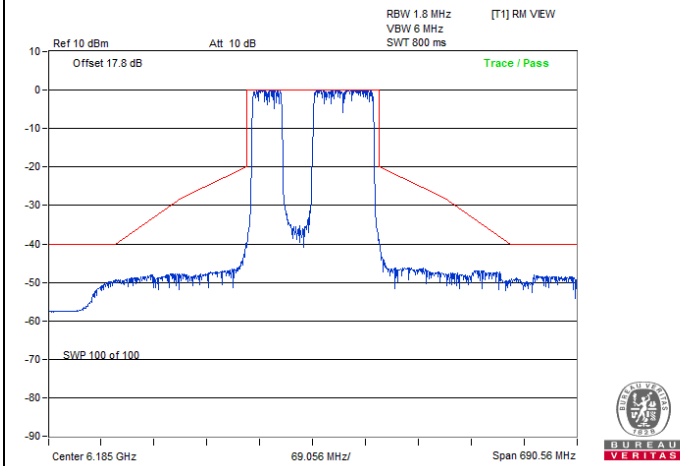


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 47

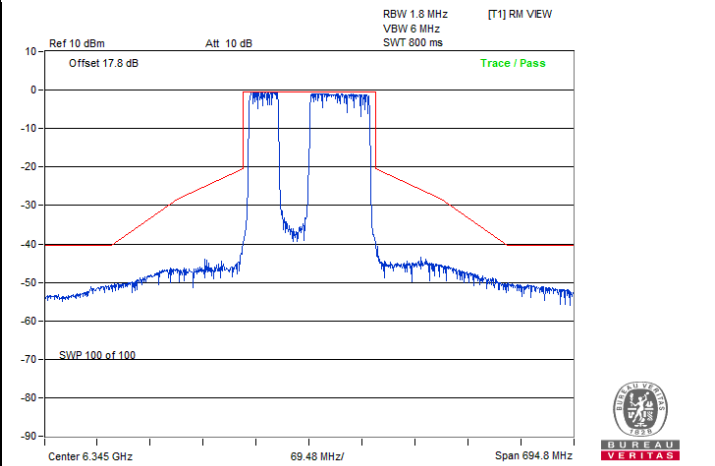

802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 79

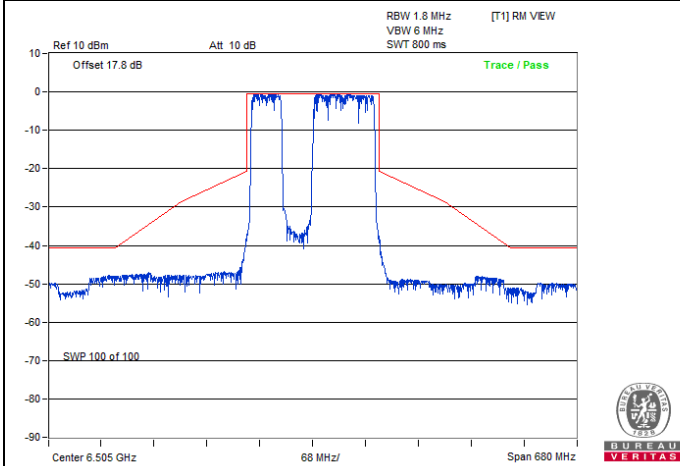


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 111

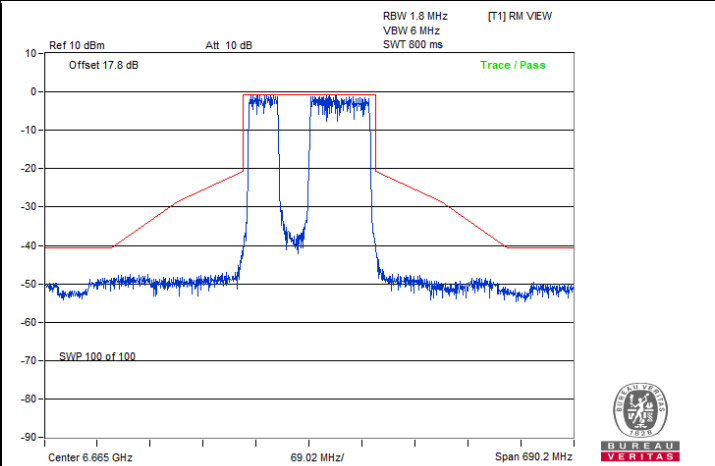


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 143


Spectrum Plot

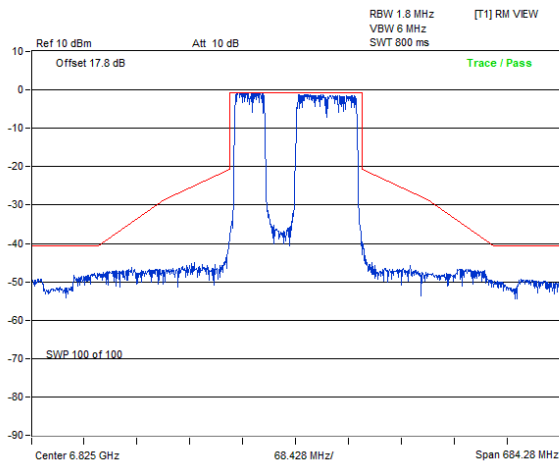


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 175

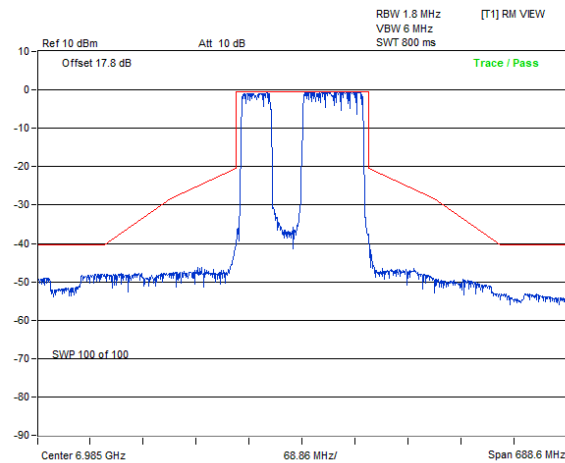


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 1:
CH 207

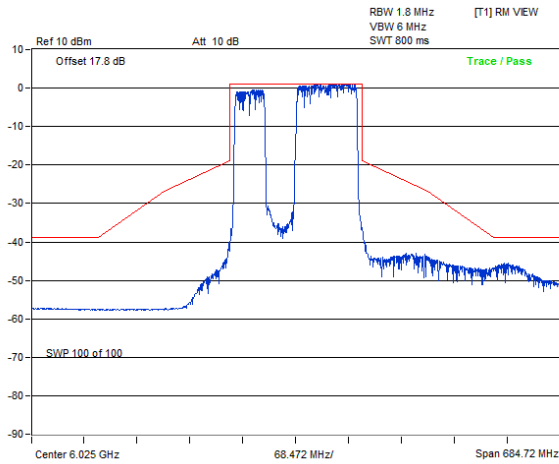


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 15

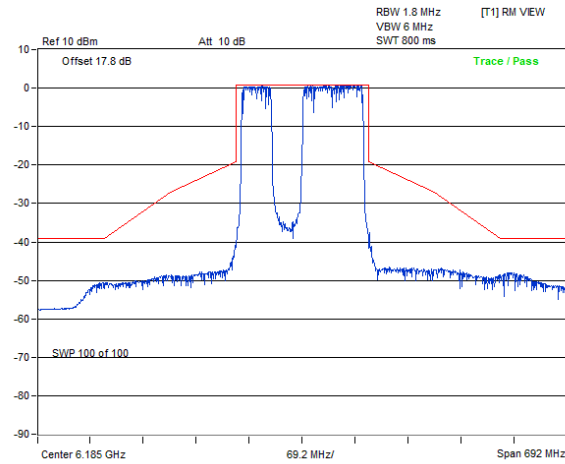

802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 47

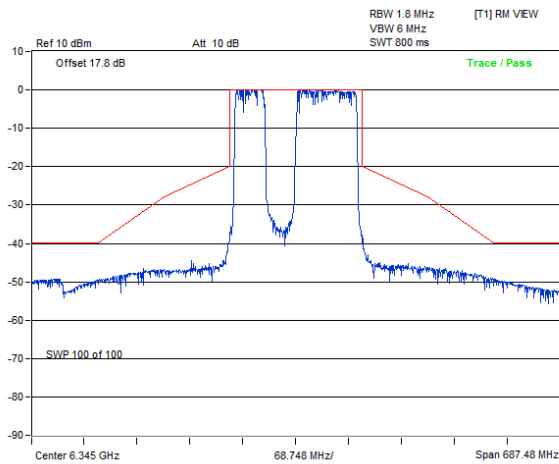


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 79

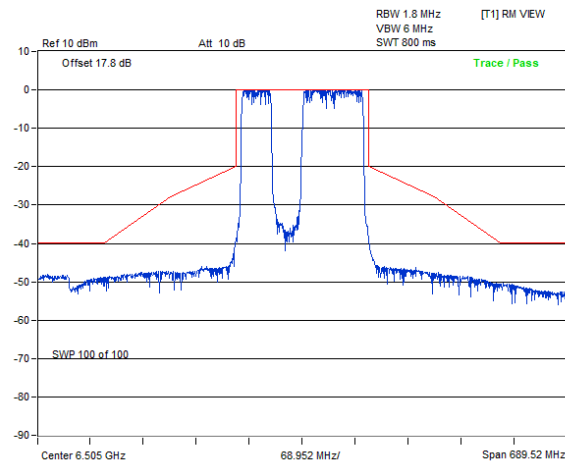


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 111


Spectrum Plot

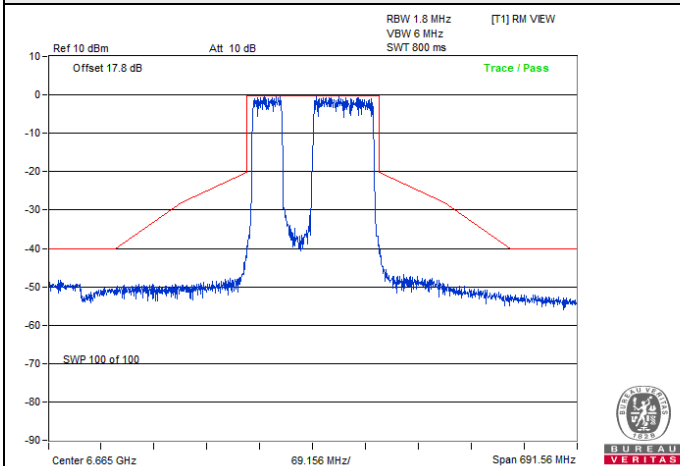


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 143

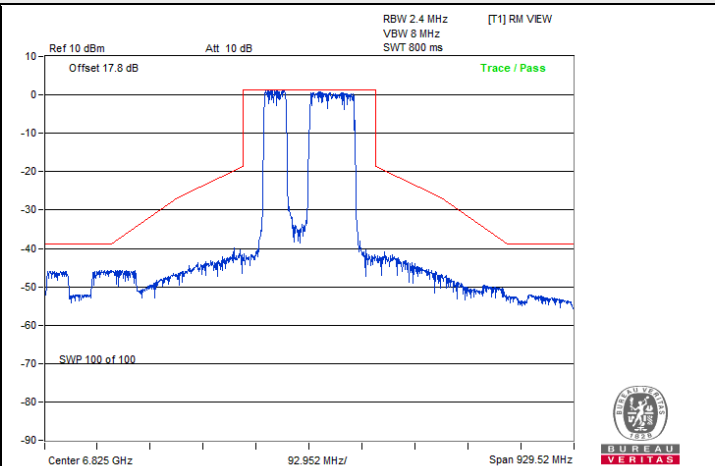


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 175

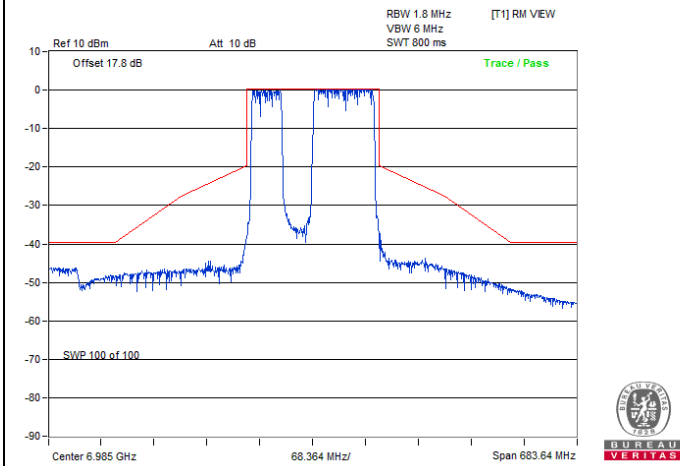


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 2:
CH 207

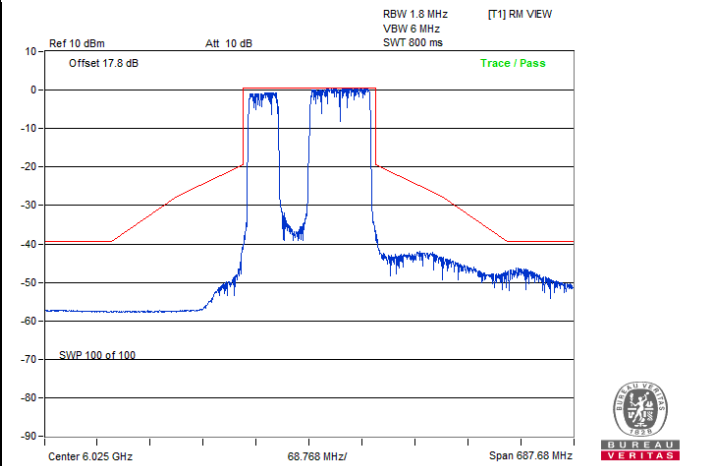

802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 15

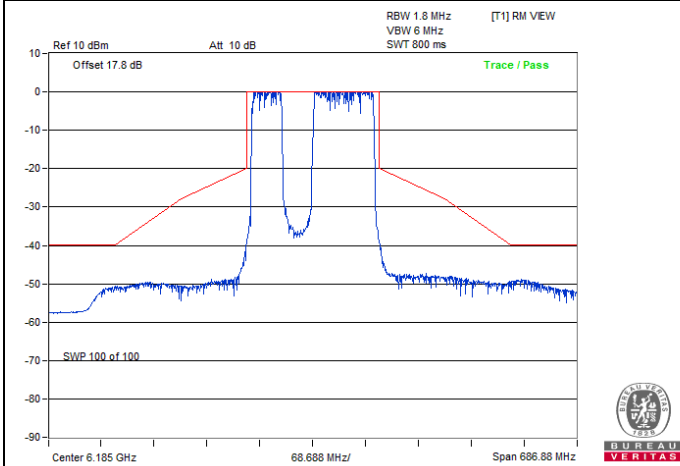


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 47

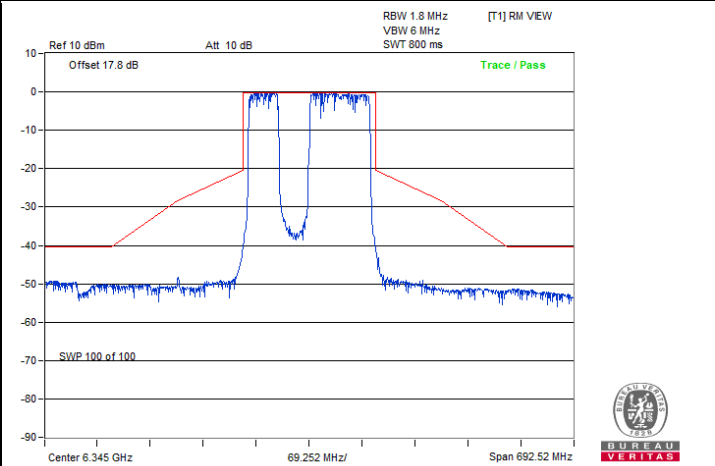


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 79


Spectrum Plot

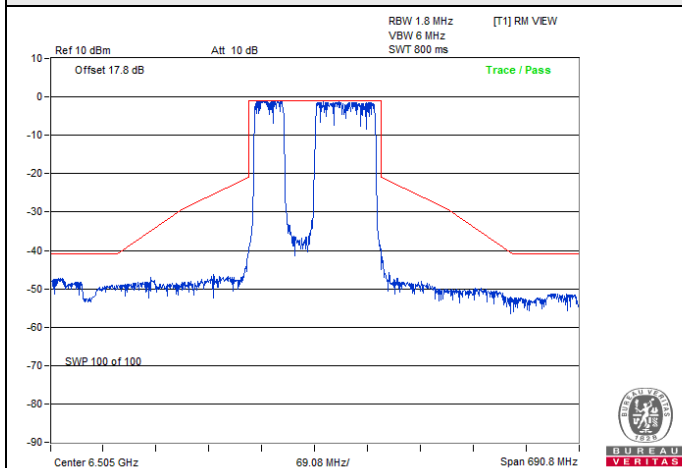


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 111

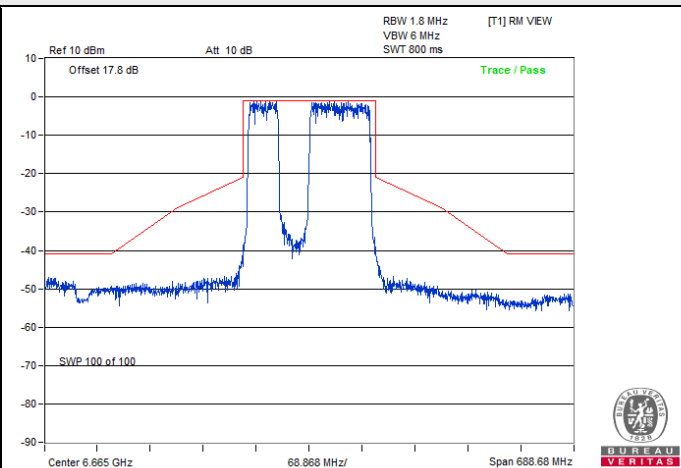

802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 143

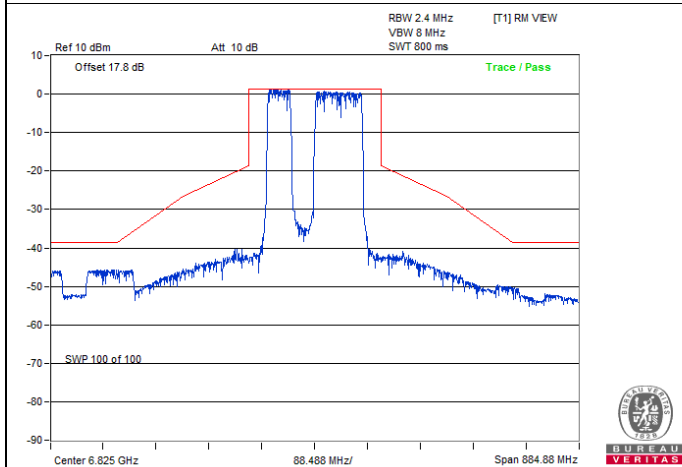


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 175

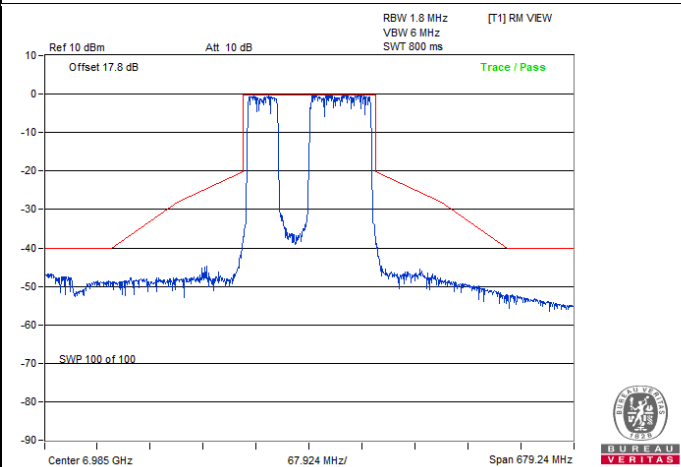


802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 3:
CH 207

802.11be (EHT160) Punctured by 60 MHz NSS4


Spectrum Plot

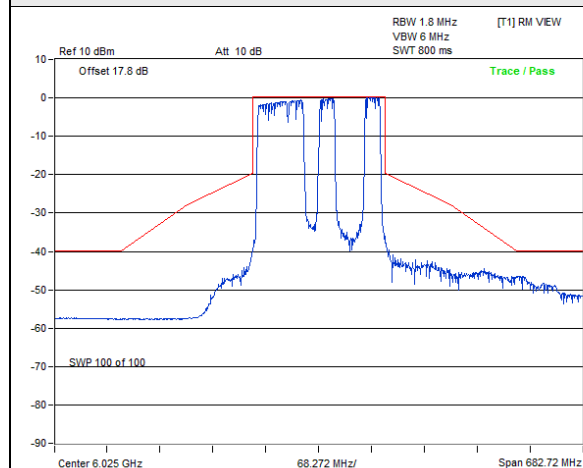


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 15

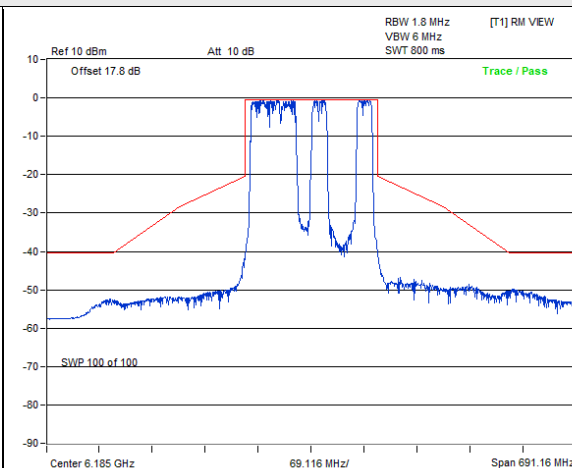


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 47

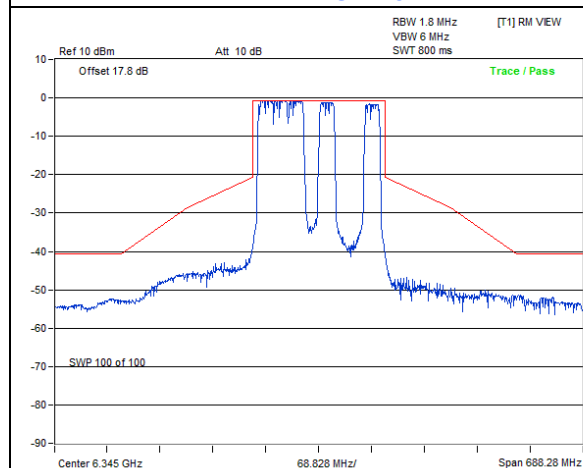


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 79

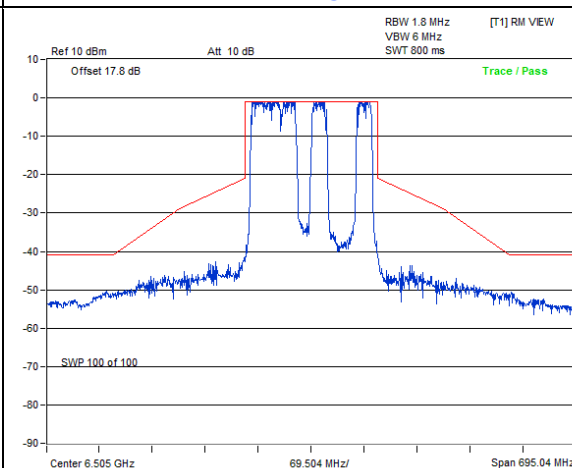

802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 111

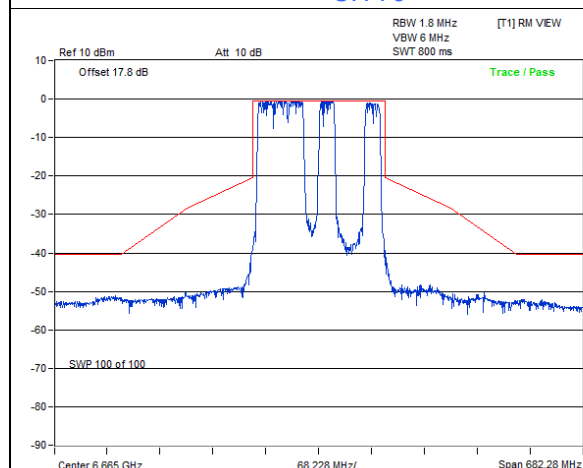


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 143

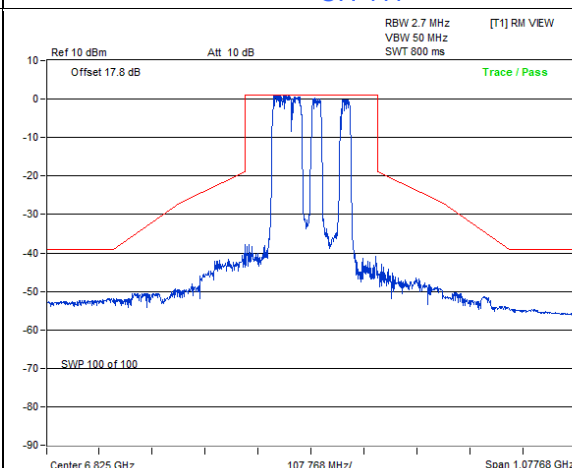


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 175


Spectrum Plot

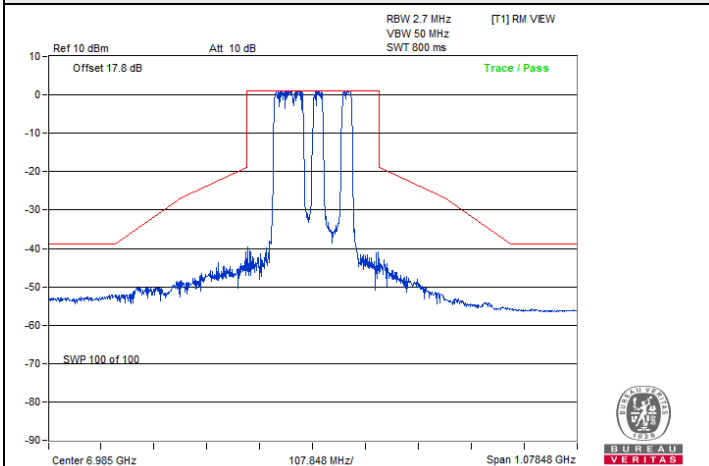


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0:
CH 207

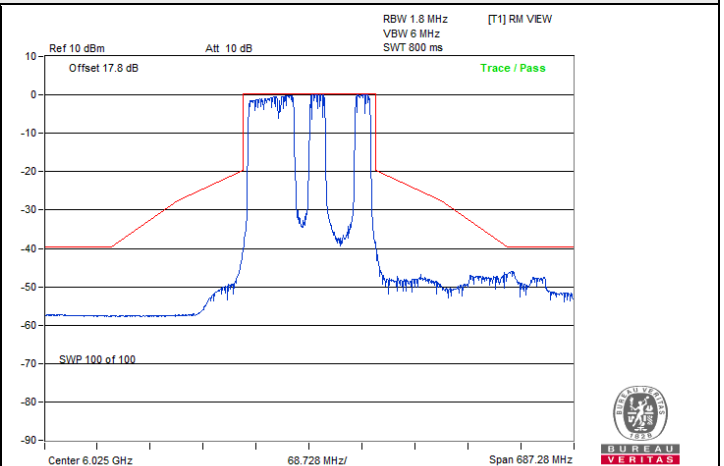


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 15

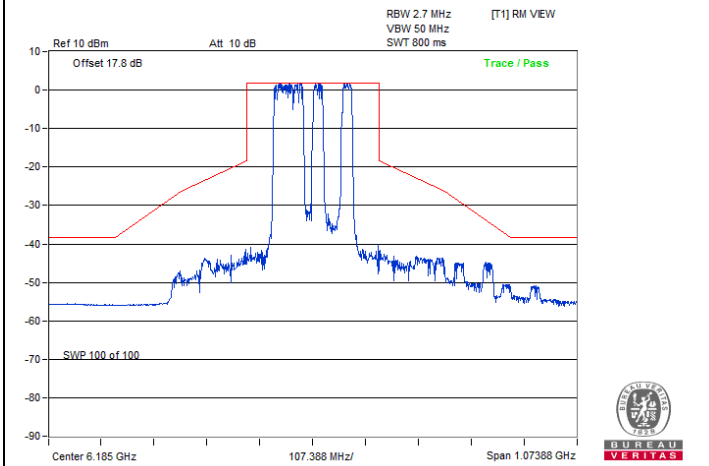


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 47

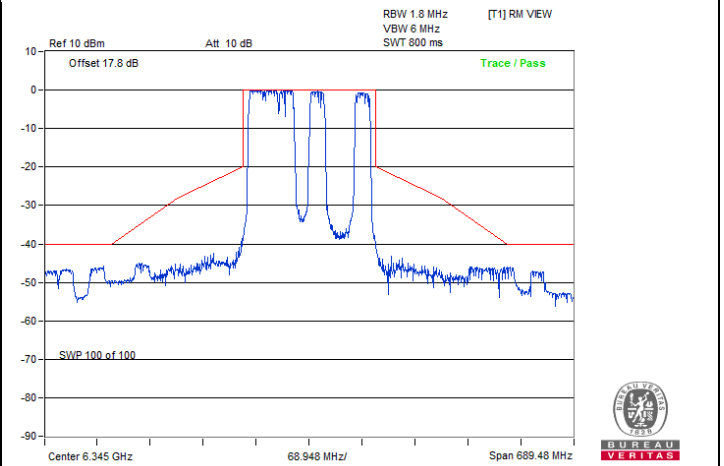

802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 79

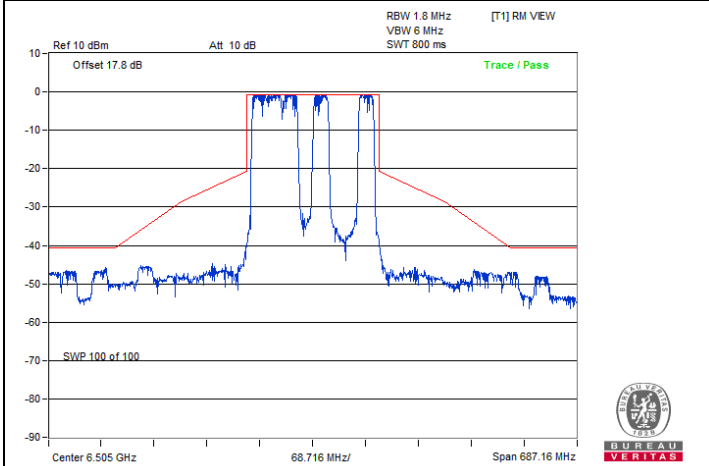


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 111

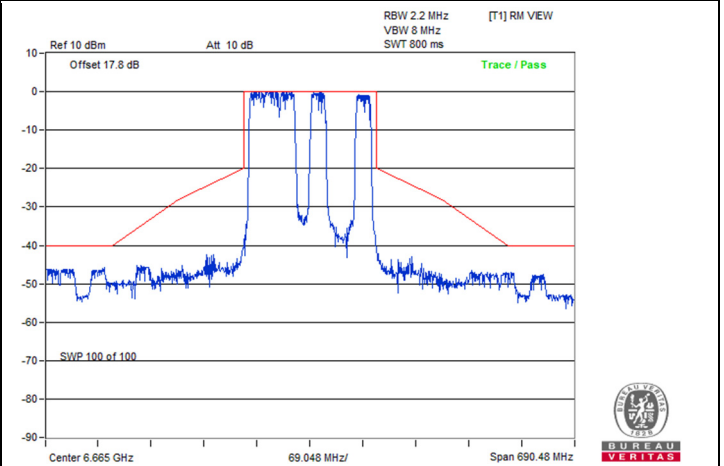


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 143


Spectrum Plot

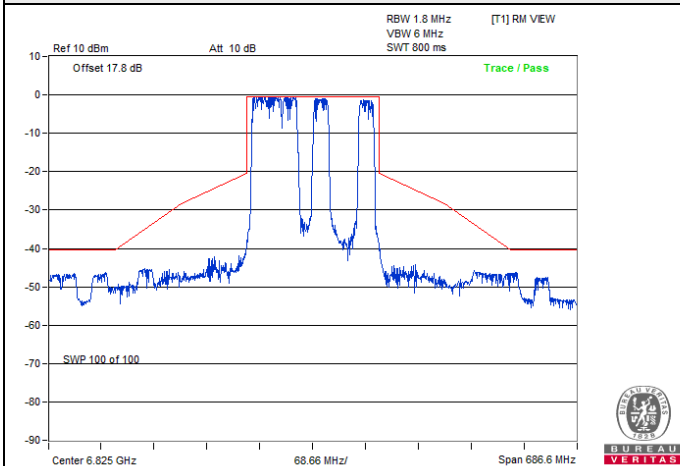


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 175

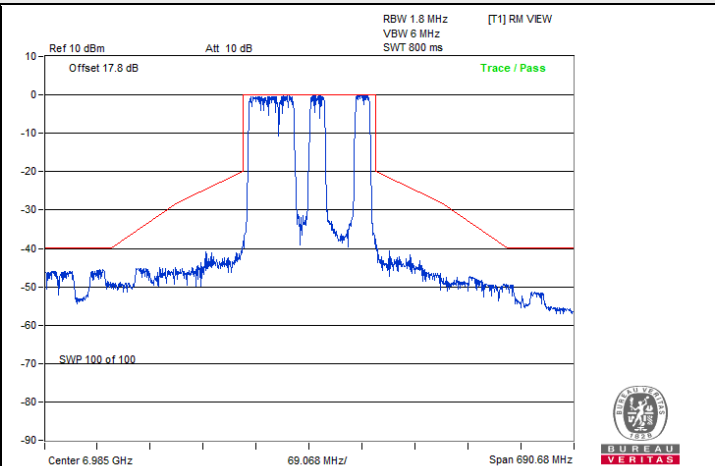


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 1:
CH 207

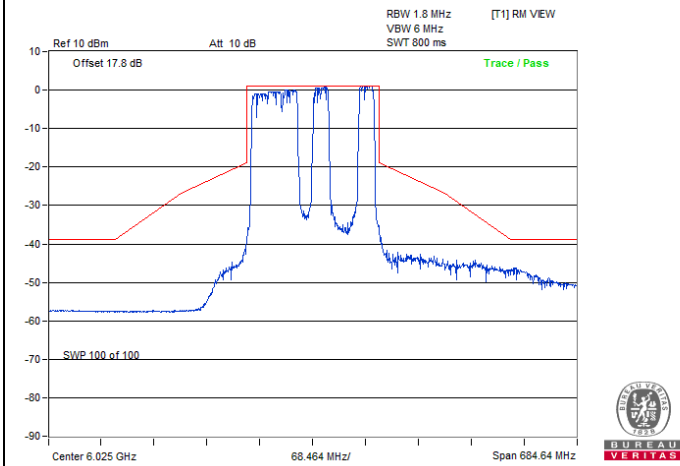


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 15

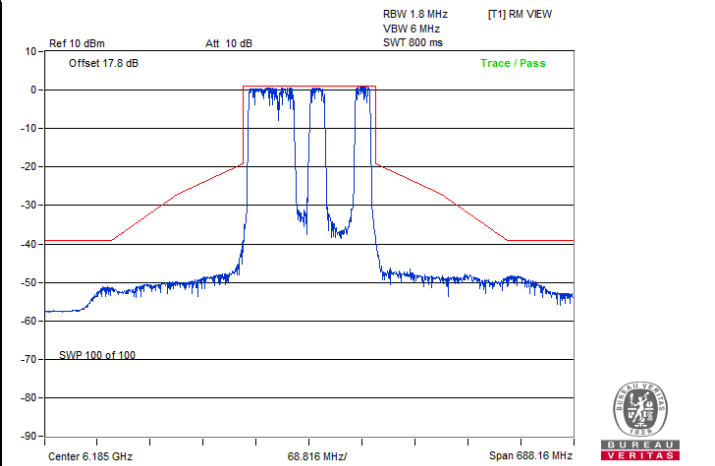

802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 47

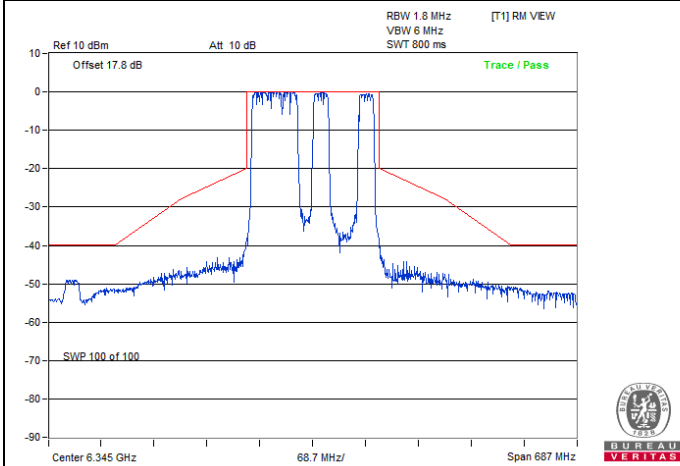


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 79

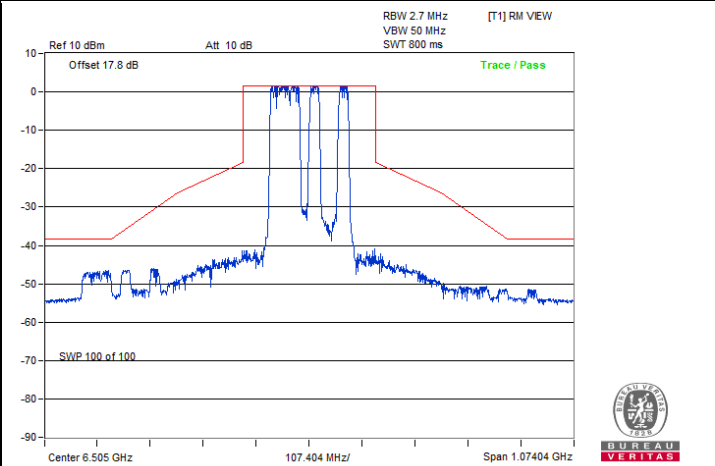


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 111


Spectrum Plot

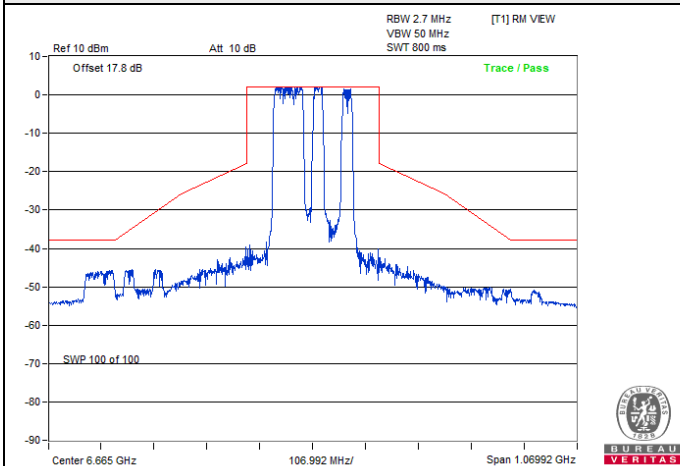


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 143

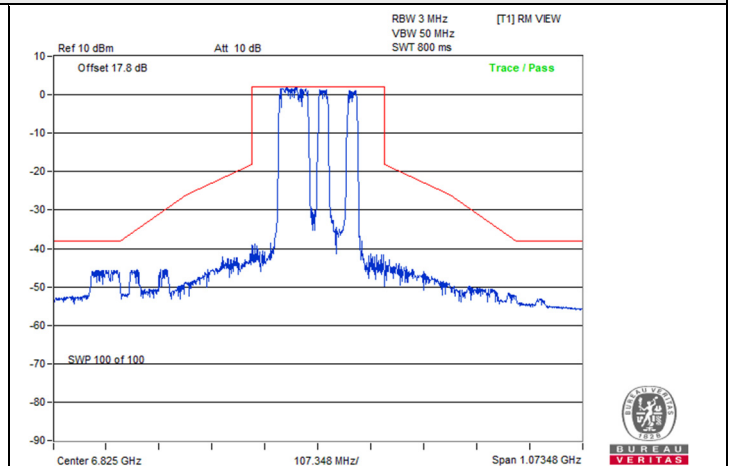


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 175

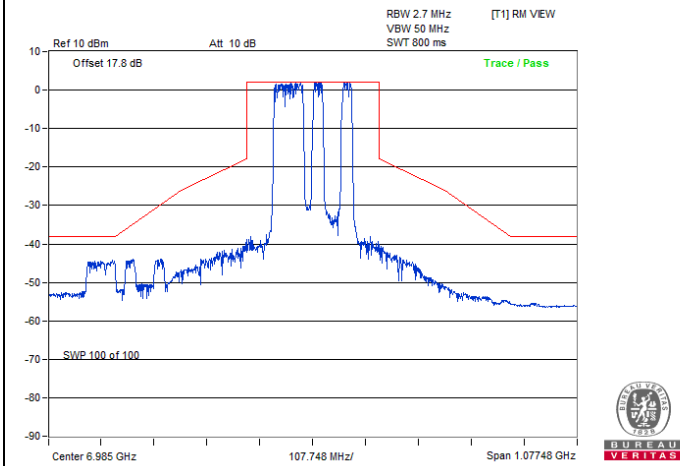


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 2:
CH 207

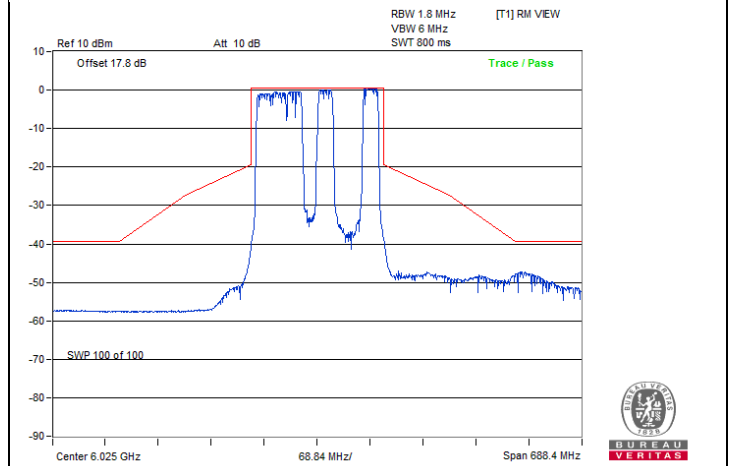

802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 15

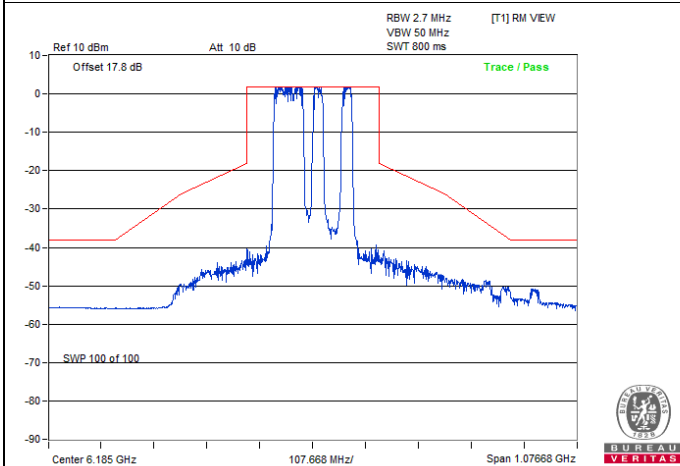


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 47

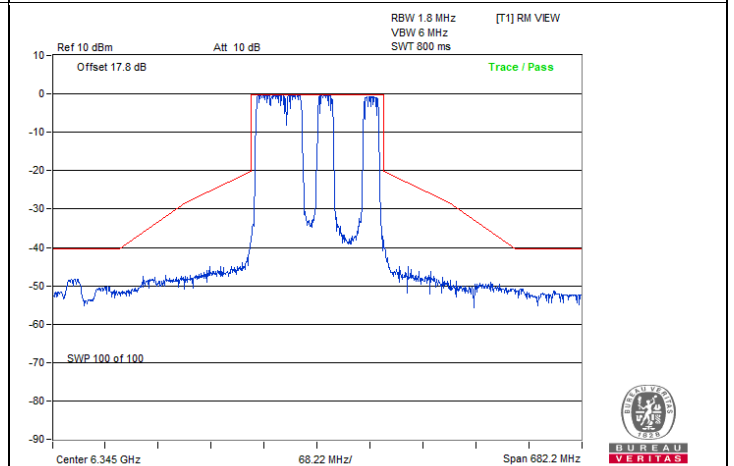


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 79


Spectrum Plot

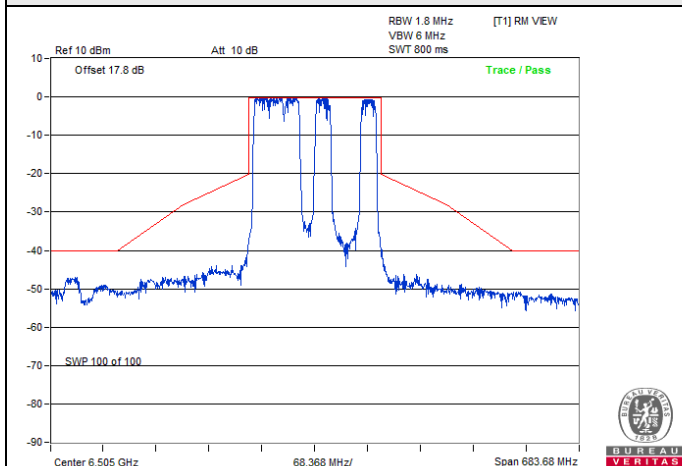


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 111

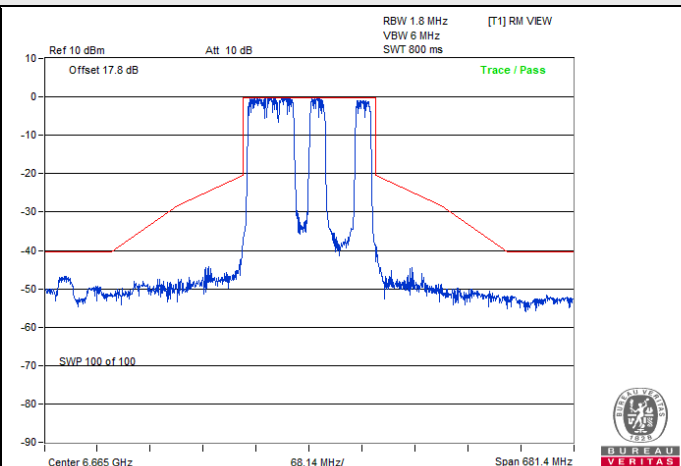

802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 143

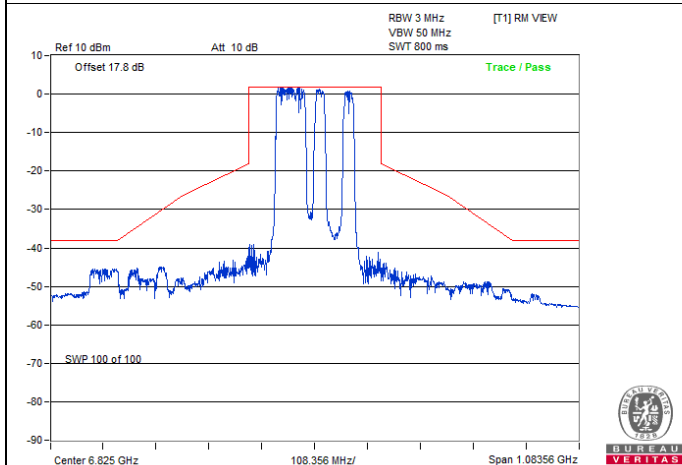


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 175

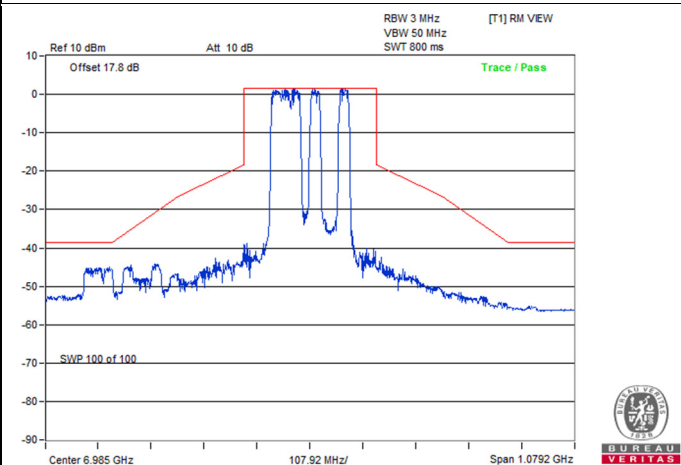


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 3:
CH 207

802.11be (EHT160) Punctured by 80 MHz


Spectrum Plot

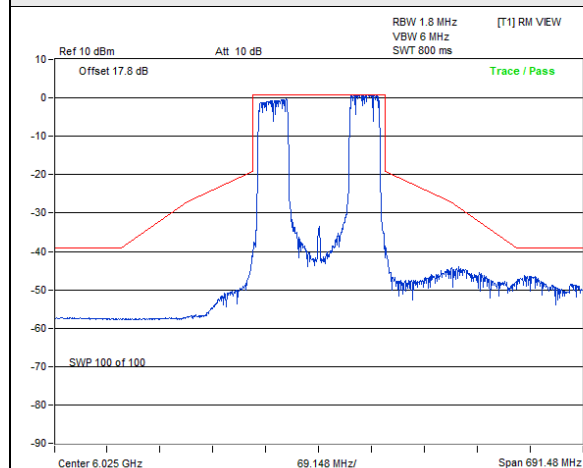


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 15

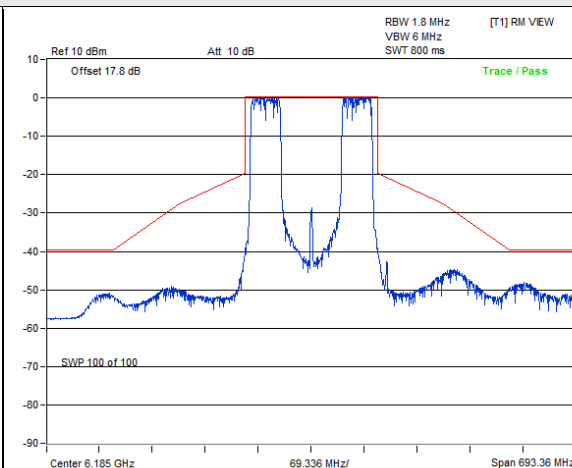


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 47

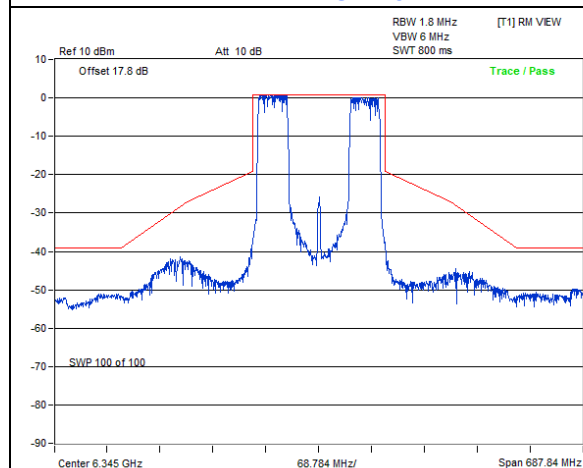


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 79

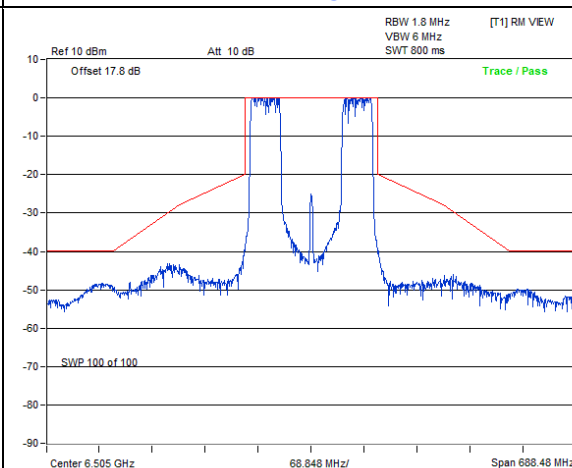

802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 111

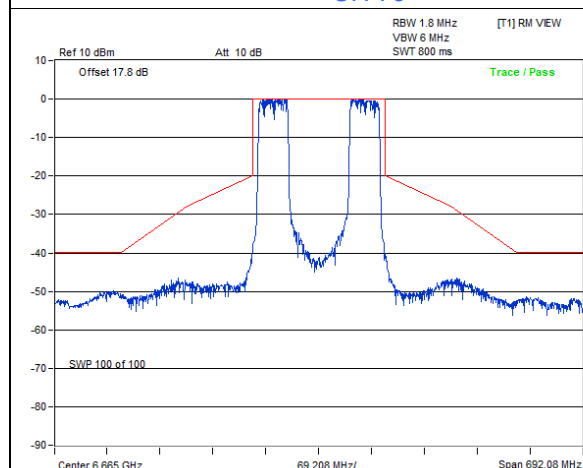


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 143

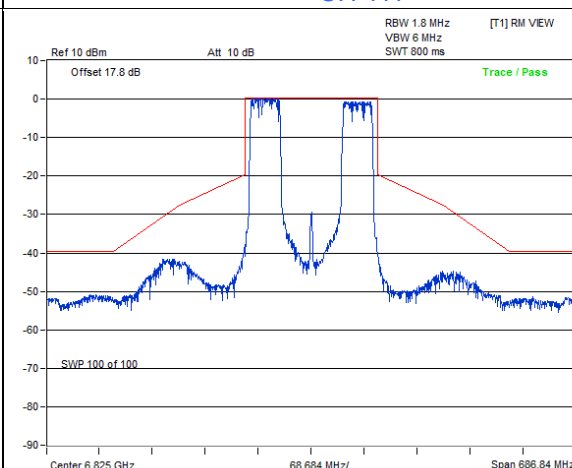


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 175


Spectrum Plot

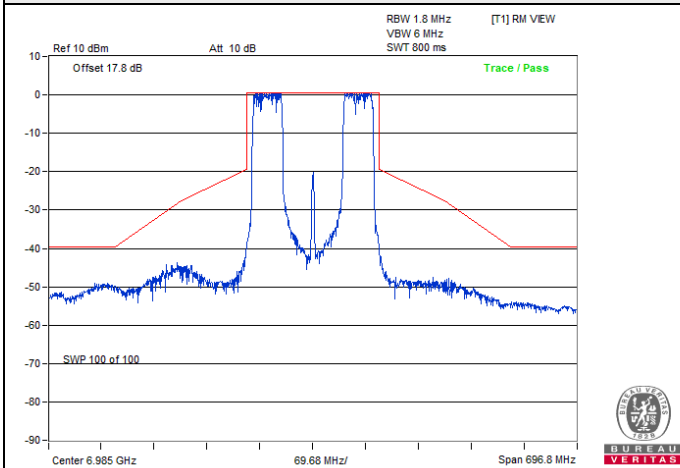


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0:
CH 207

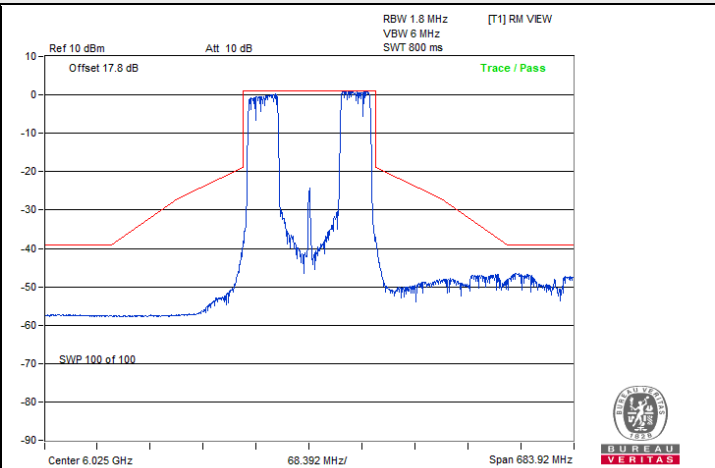


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 15

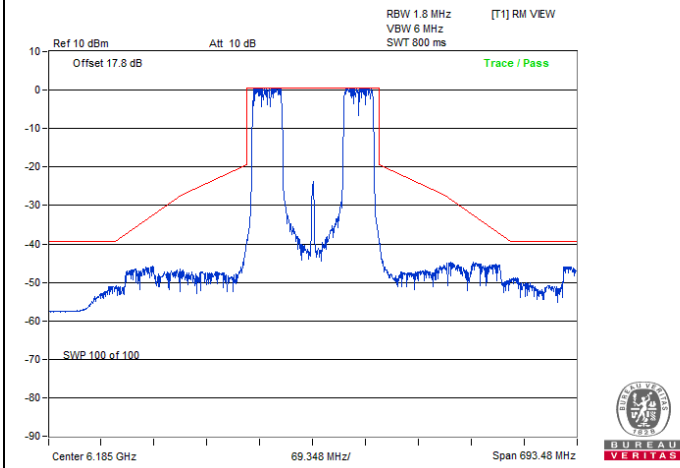


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 47

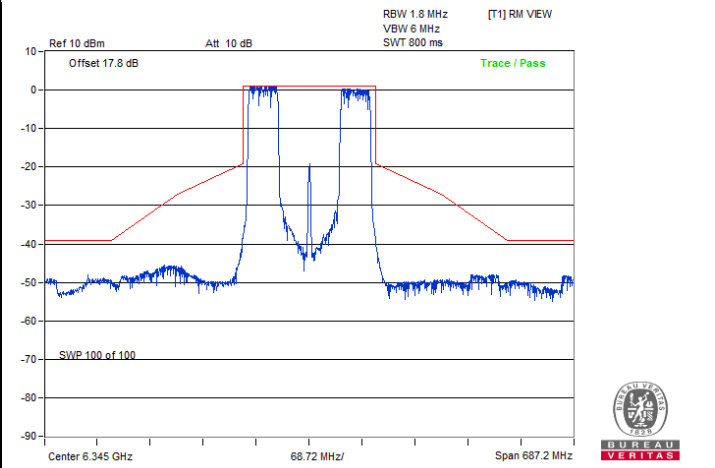

802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 79

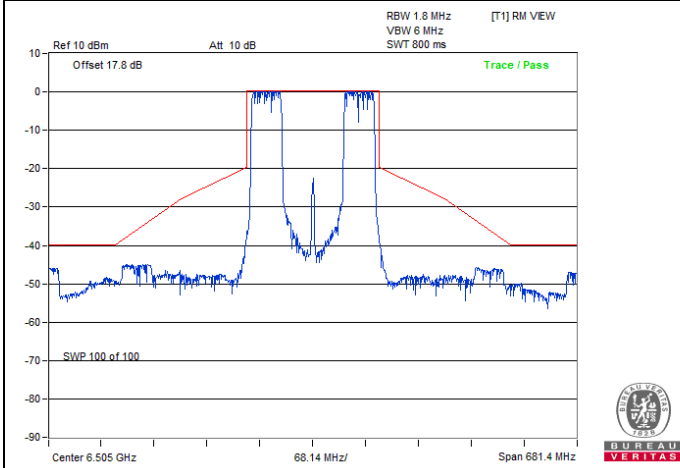


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 111

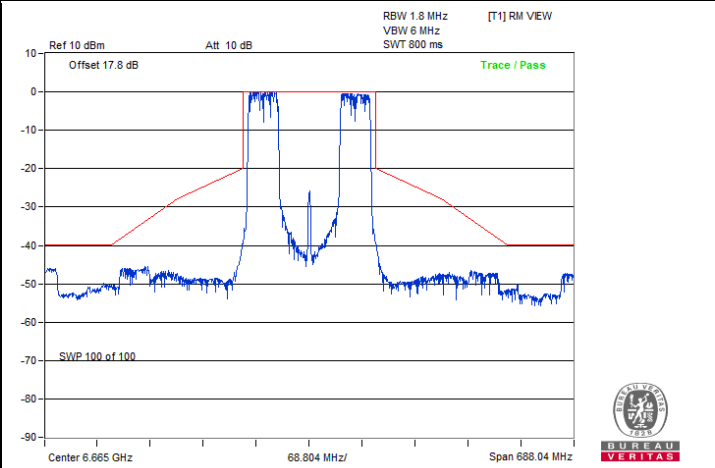


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 143


Spectrum Plot

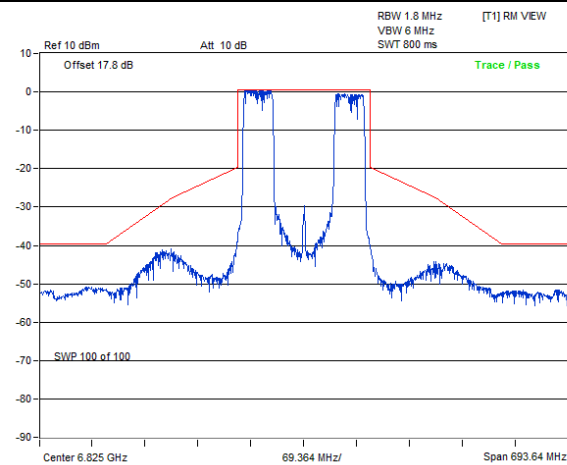


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 175

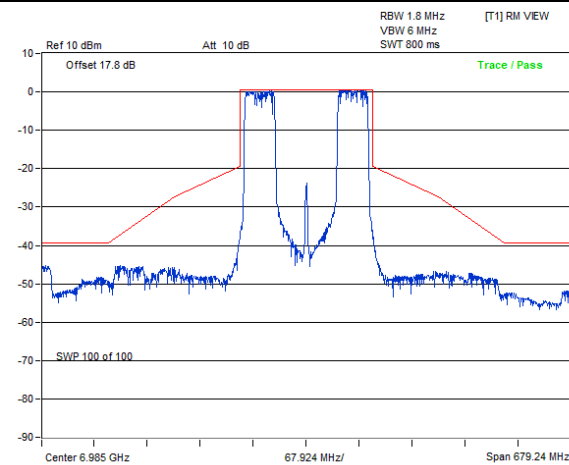


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 1:
CH 207

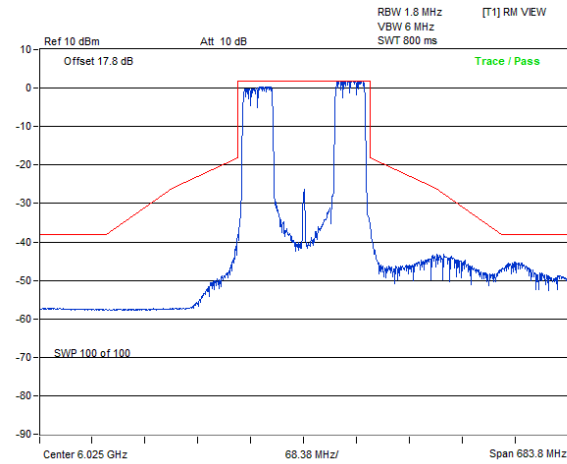


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 15

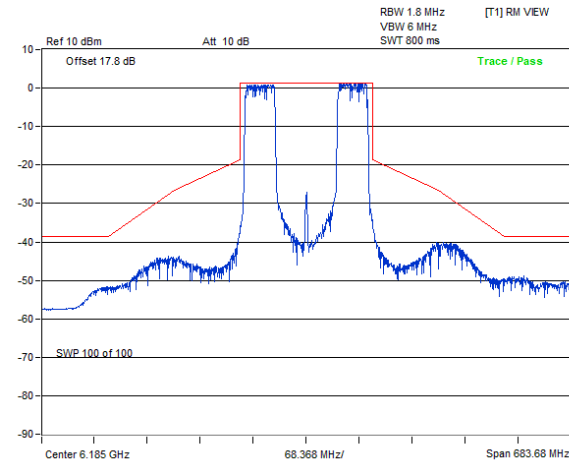

802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 47

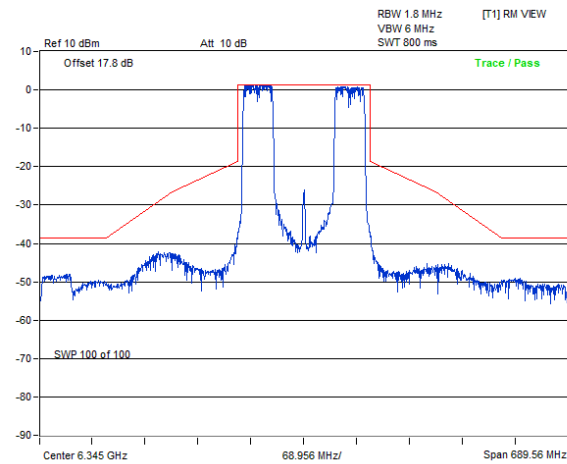


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 79

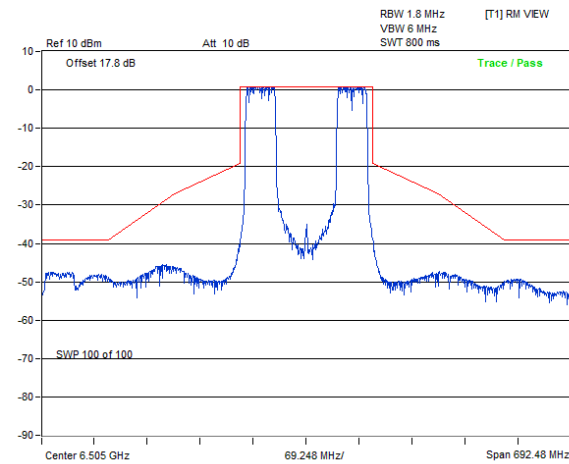


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 111


Spectrum Plot

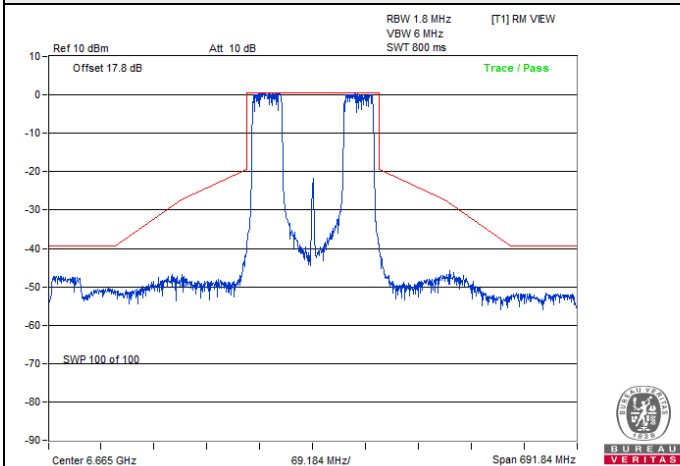


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 143

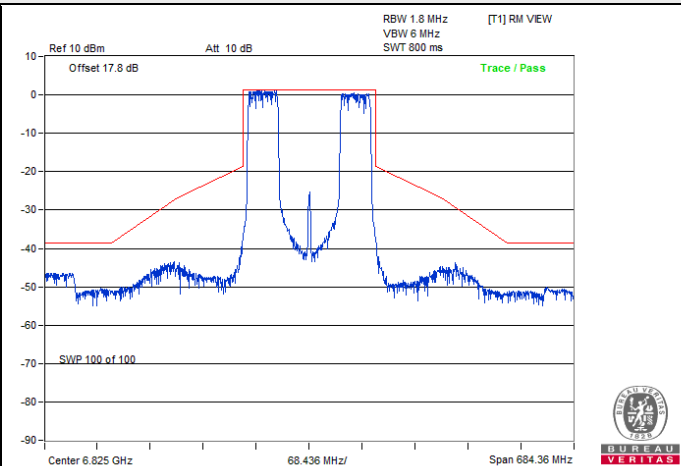


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 175

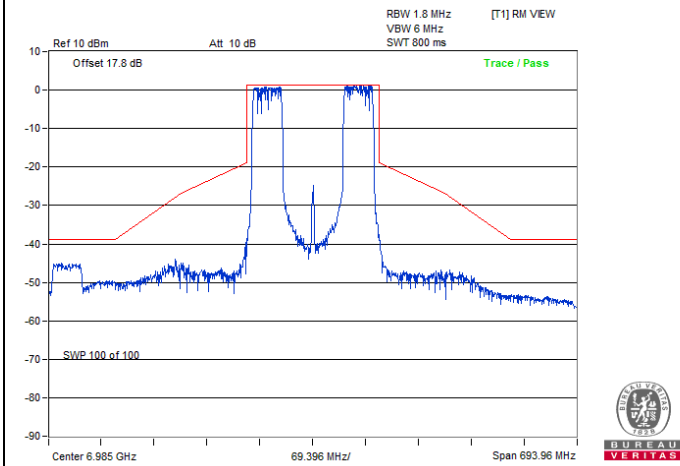


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 2:
CH 207

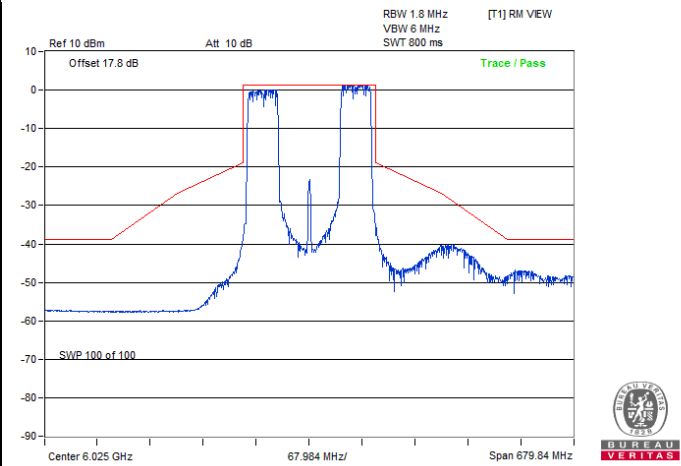

802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 15

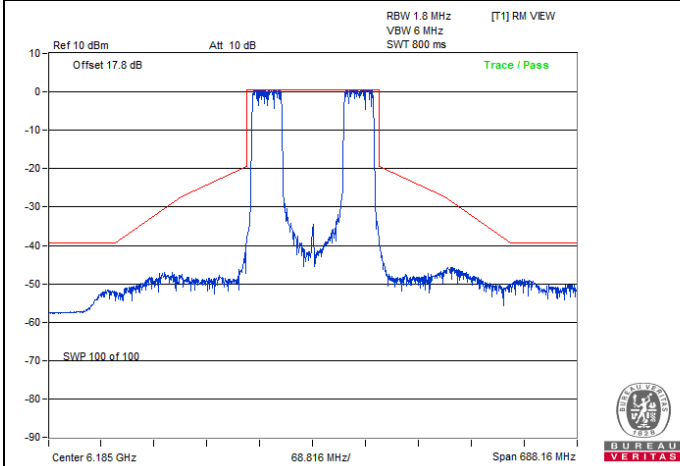


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 47

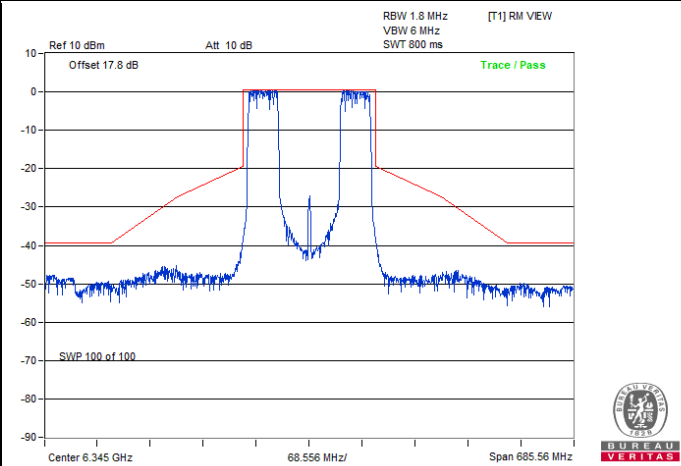


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 79


Spectrum Plot

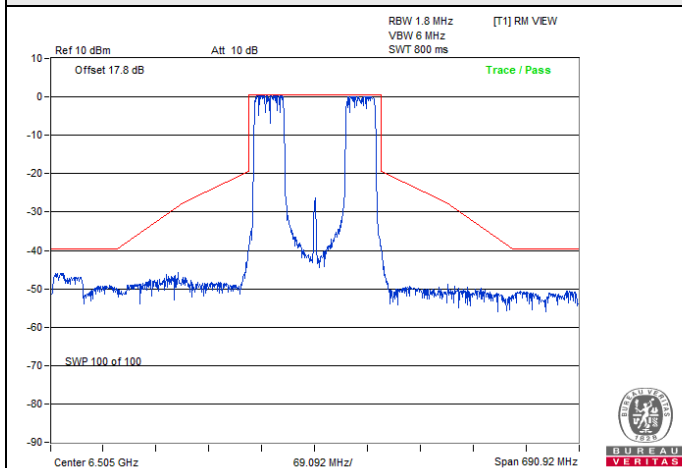


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 111

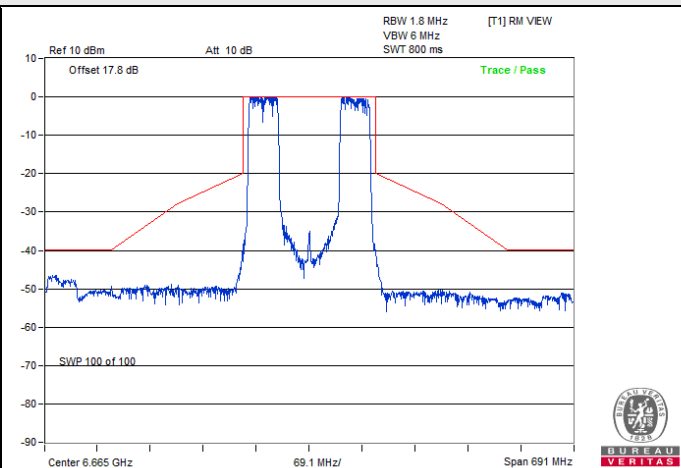

802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 143

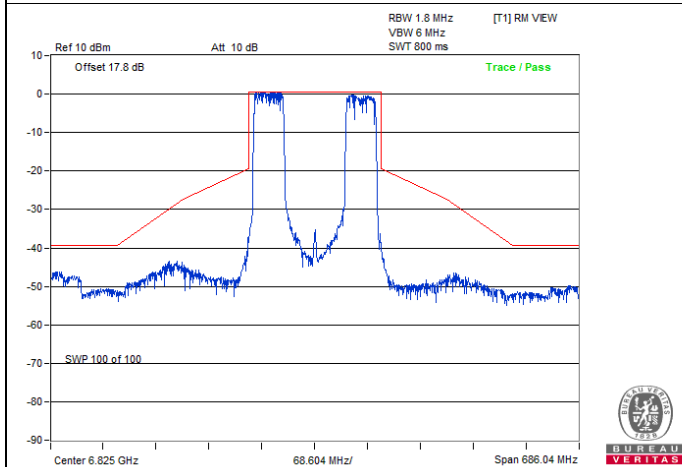


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 175

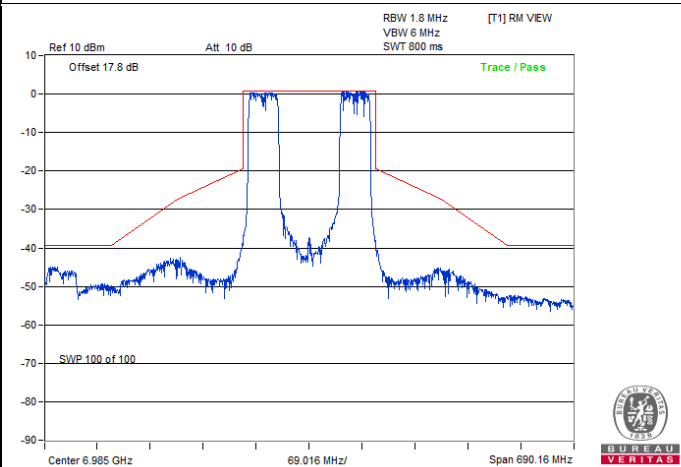


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 3:
CH 207

802.11be (EHT320) Punctured by 80 MHz


Spectrum Plot

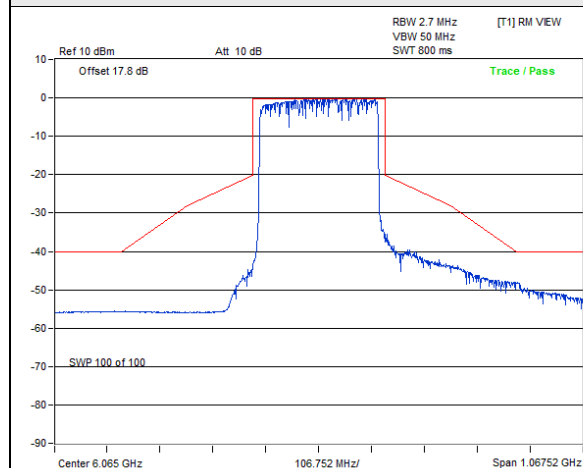


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 0:
CH 31

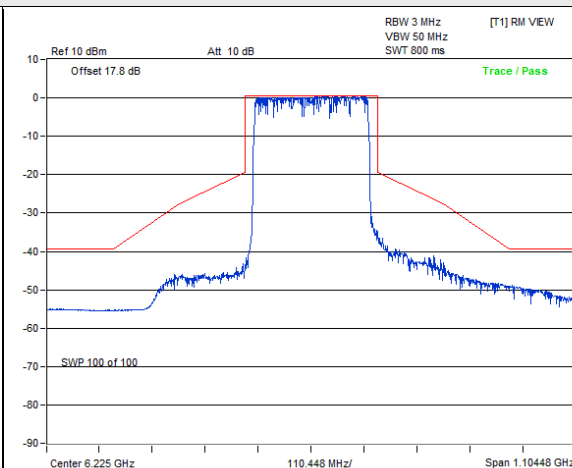


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 0:
CH 63

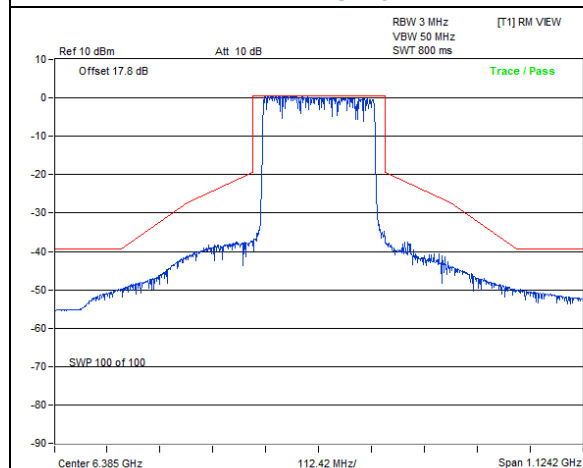


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 0:
CH 95

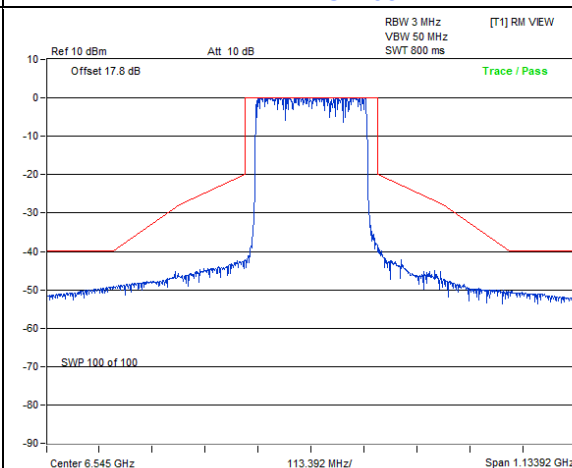

802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 0:
CH 127


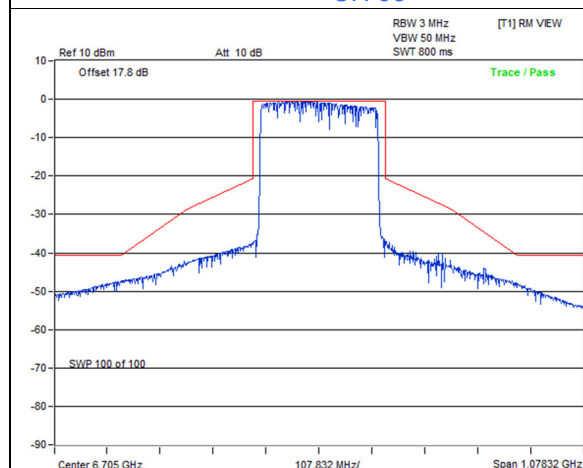


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 0:
CH 159

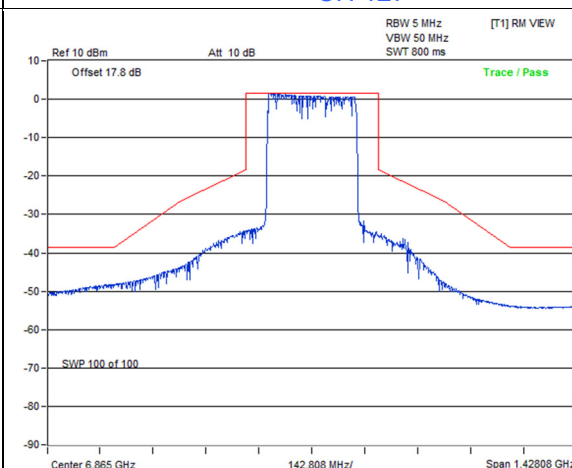



802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 0:
CH 191

Spectrum Plot

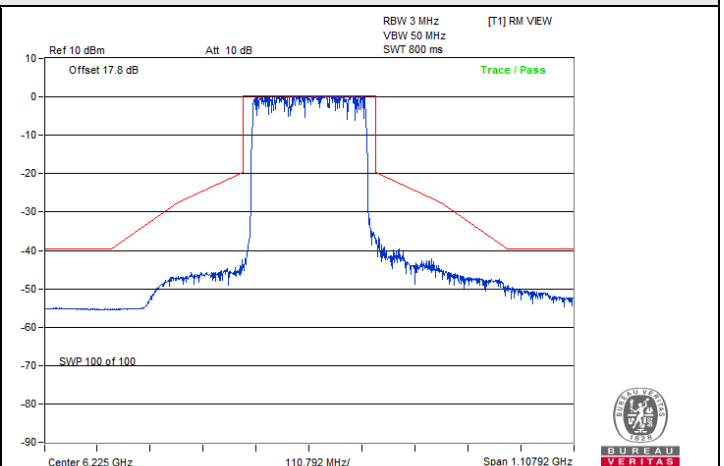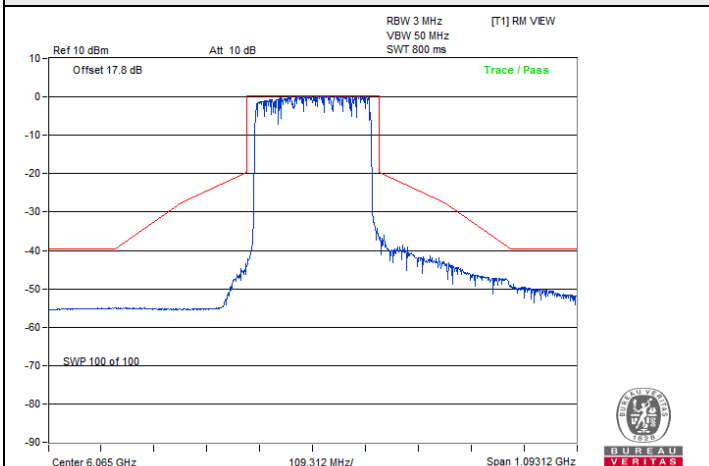



802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 1:
CH 31

802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 1:
CH 63

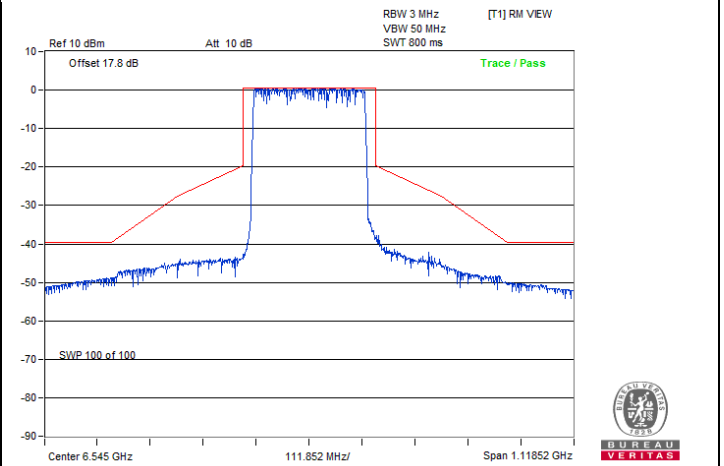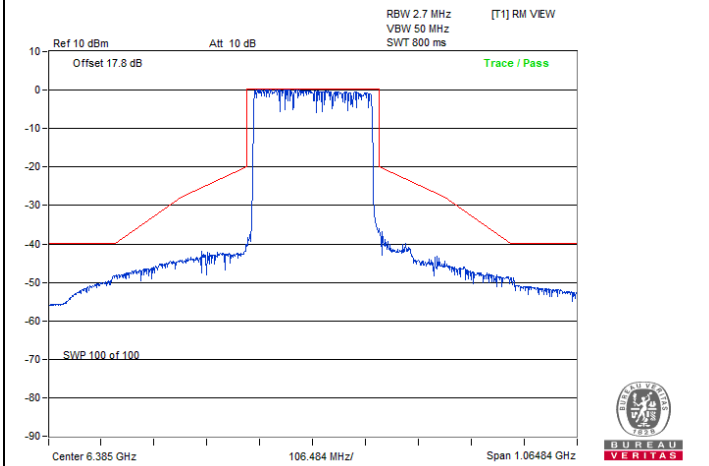

802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 1:
CH 95


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 1:
CH 127

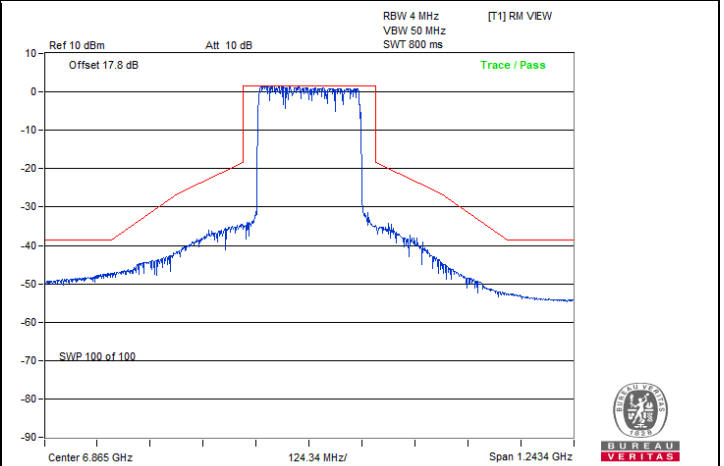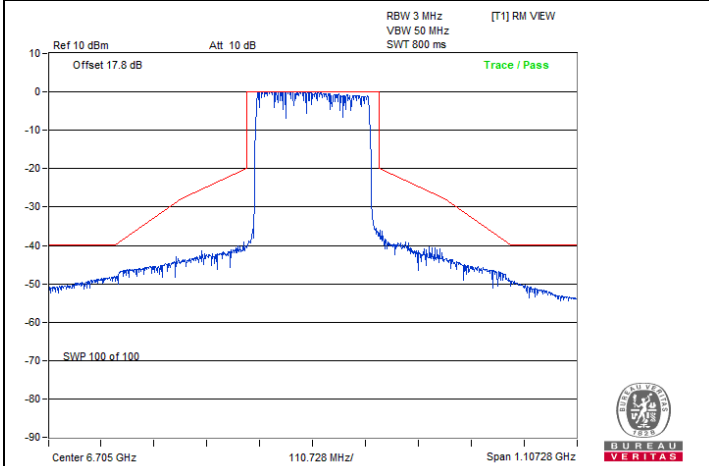


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 1:
CH 159

802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 1:
CH 191


Spectrum Plot

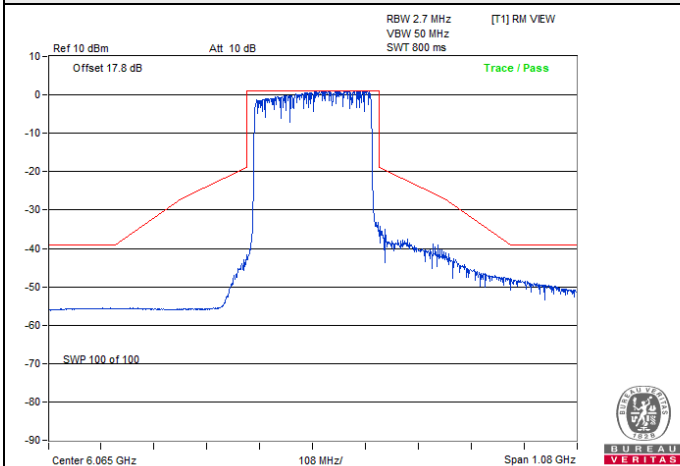


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 2:
CH 31

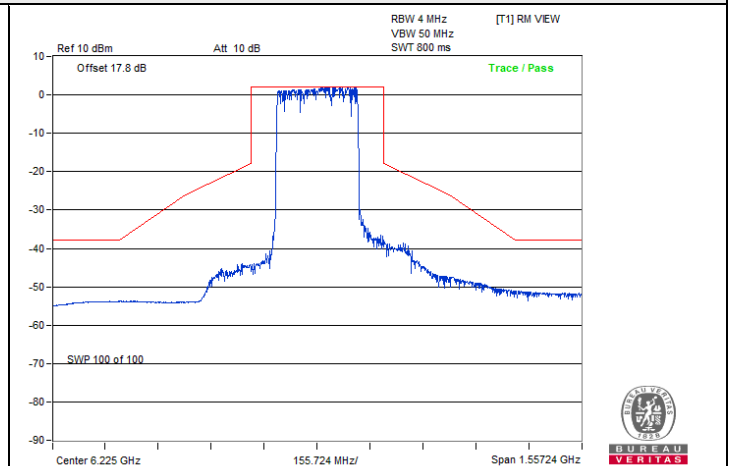


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 2:
CH 63

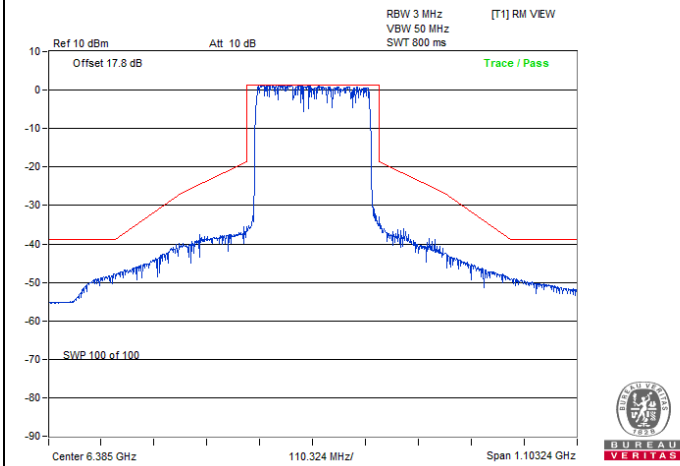


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 2:
CH 95

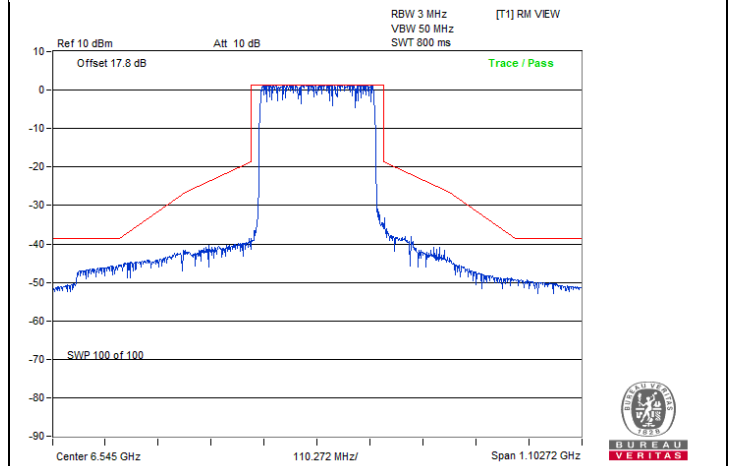

802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 2:
CH 127

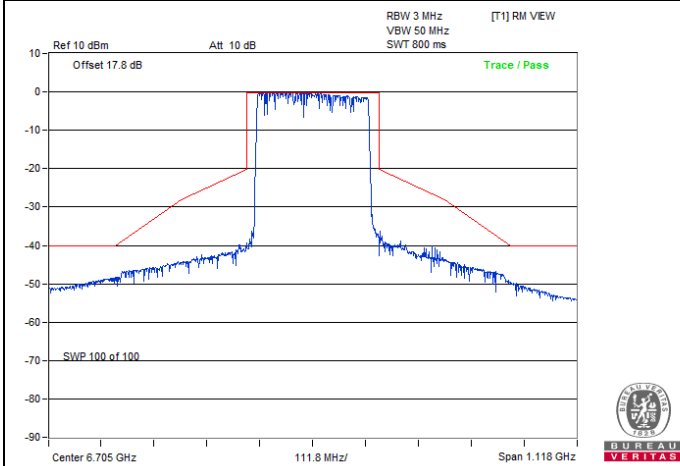


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 2:
CH 159

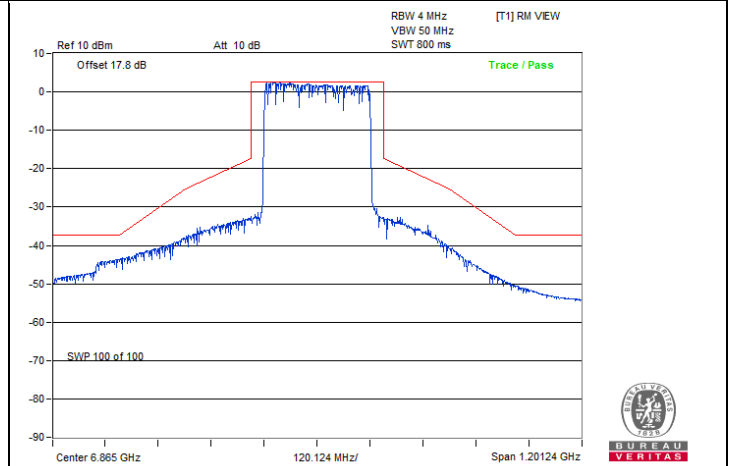


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 2:
CH 191


Spectrum Plot

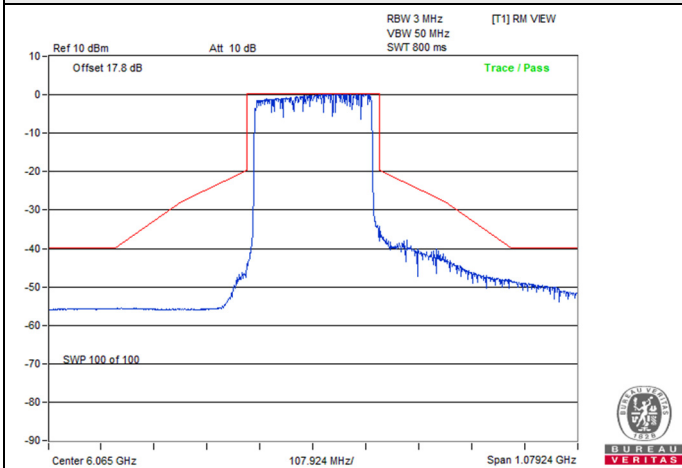


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 3:
CH 31

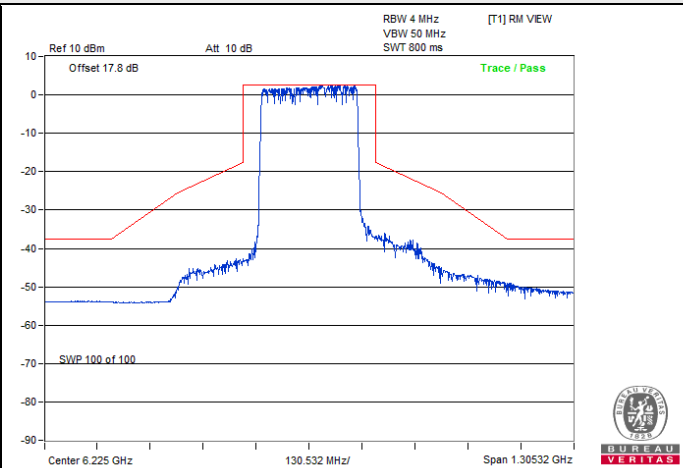


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 3:
CH 63

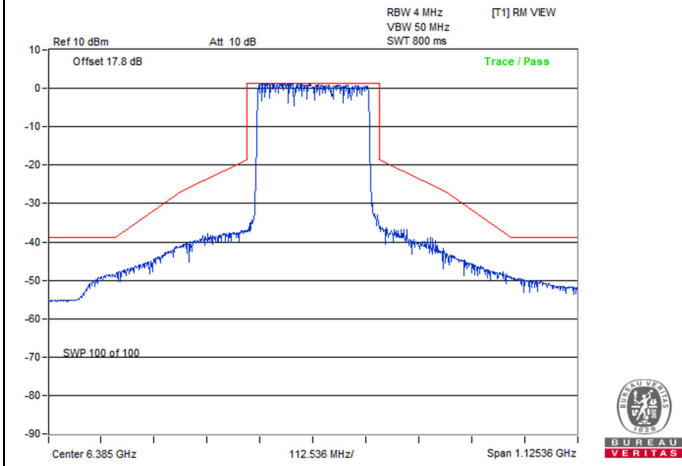


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 3:
CH 95

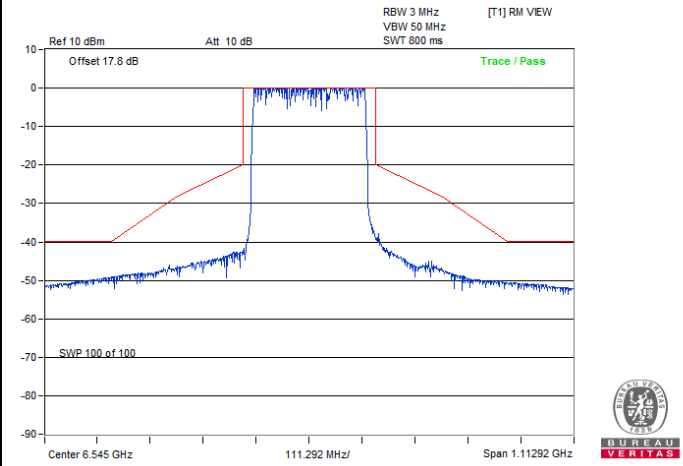

802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 3:
CH 127

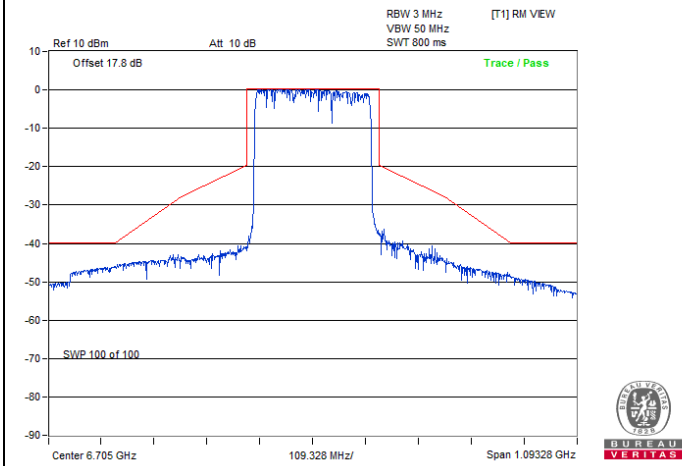


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 3:
CH 159

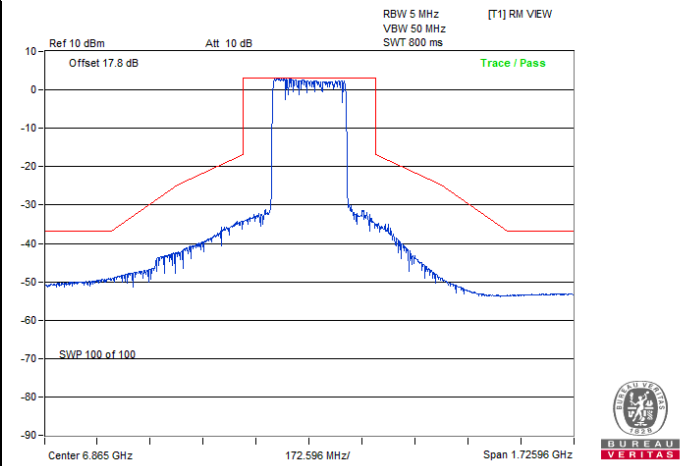


802.11be (EHT320) Punctured by 80 MHz NSS4 / Chain 3:
CH 191

802.11be (EHT320) Punctured by 120 MHz Low


Spectrum Plot

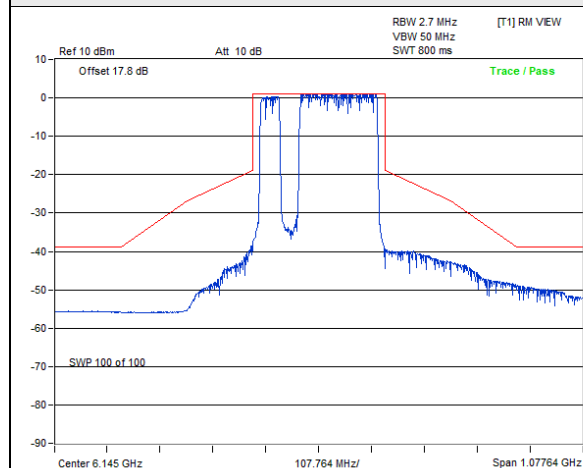


802.11be (EHT320) Punctured by 120 MHz Low NSS4 /
Chain 0: CH 31

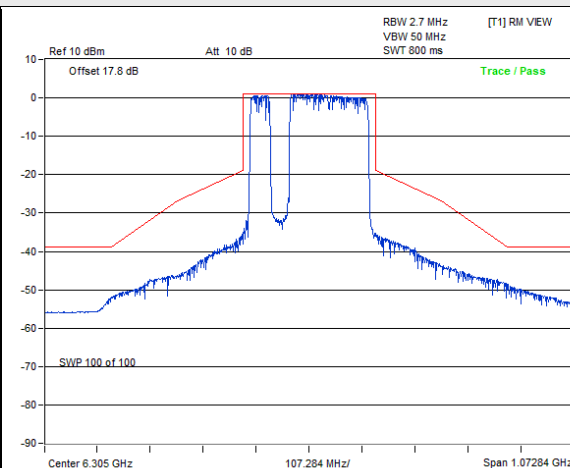


802.11be (EHT320) Punctured by 120 MHz Low NSS4 /
Chain 0: CH 63

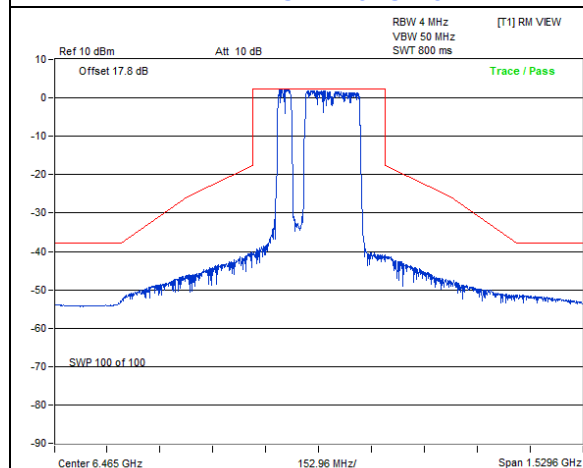


802.11be (EHT320) Punctured by 120 MHz Low NSS4 /
Chain 0: CH 95

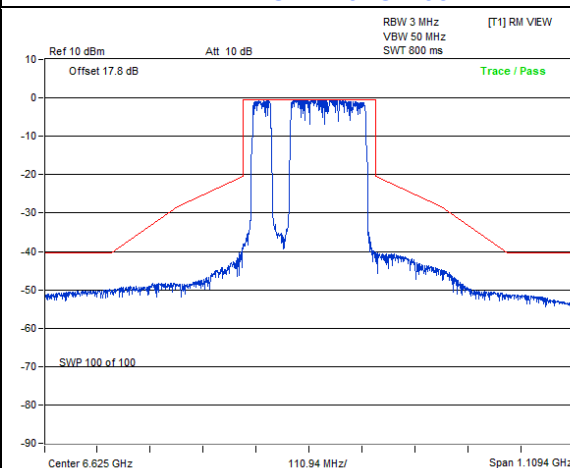

802.11be (EHT320) Punctured by 120 MHz Low NSS4 /
Chain 0: CH 127






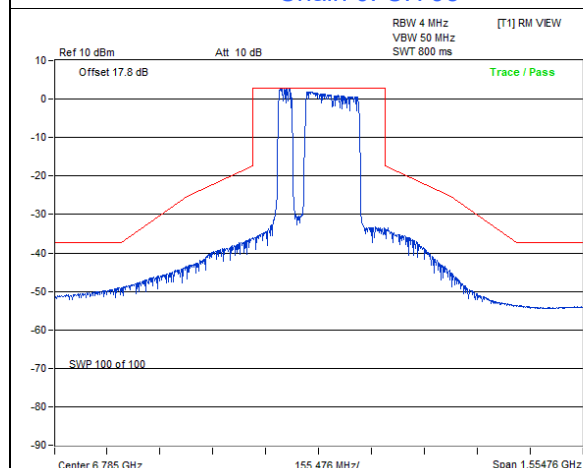


802.11be (EHT320) Punctured by 120 MHz Low NSS4 /
Chain 0: CH 159






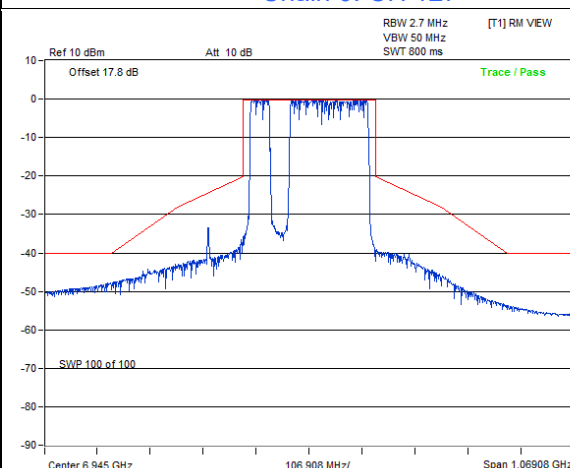


802.11be (EHT320) Punctured by 120 MHz Low NSS4 /
Chain 0: CH 191







Spectrum Plot

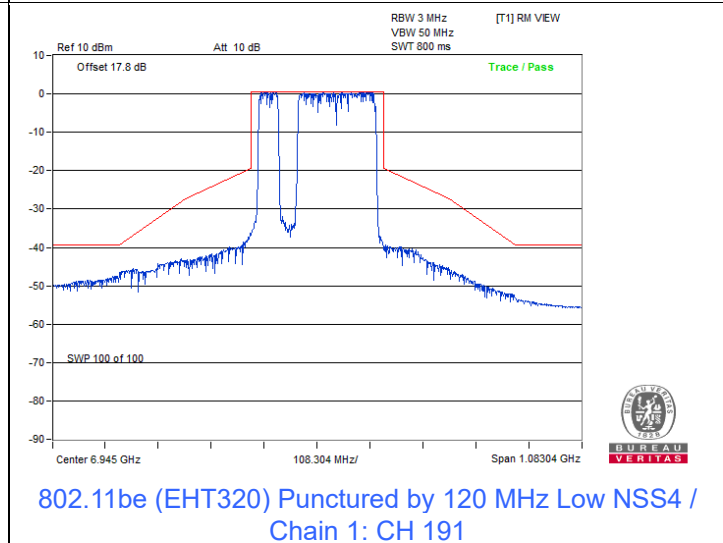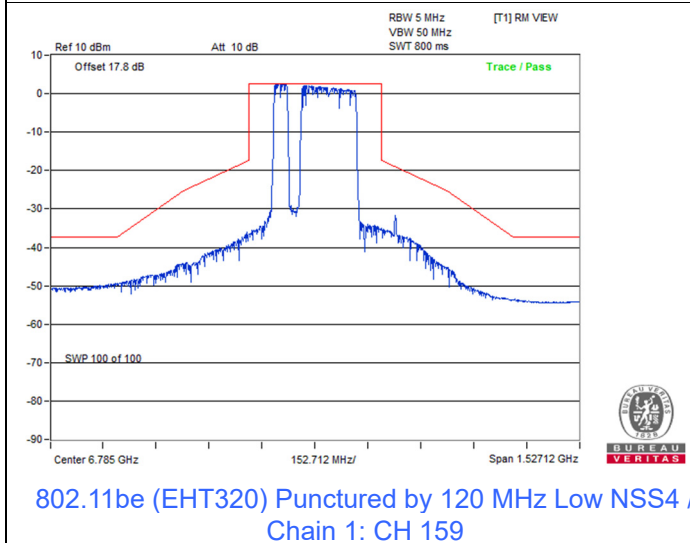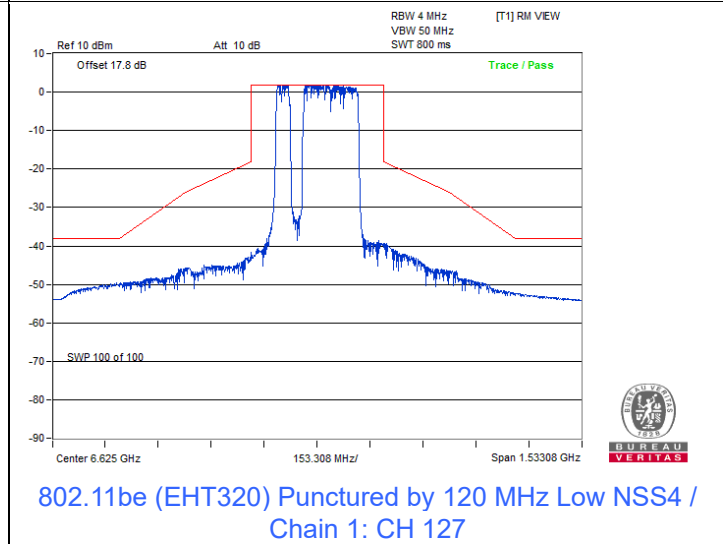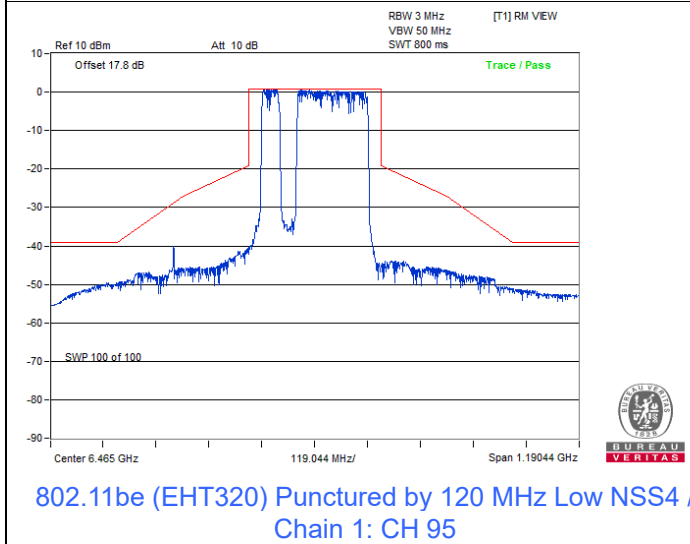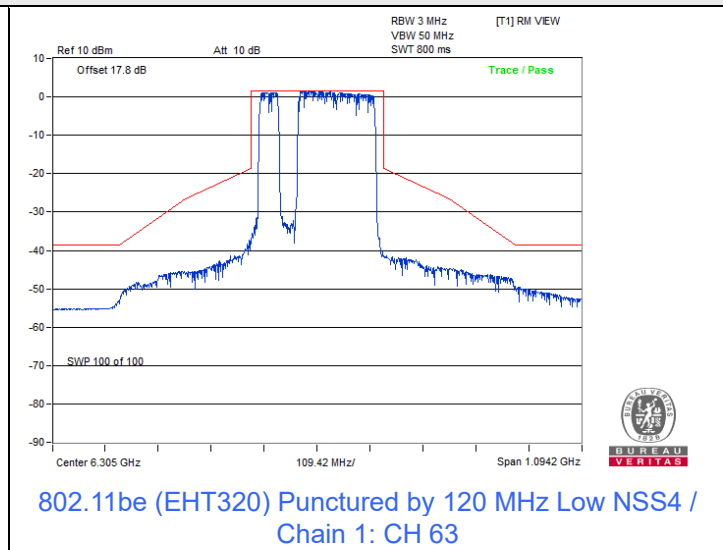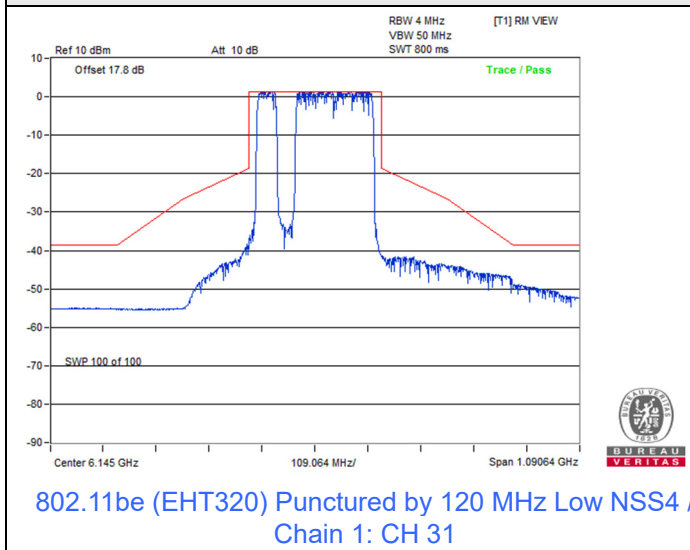

Spectrum Plot

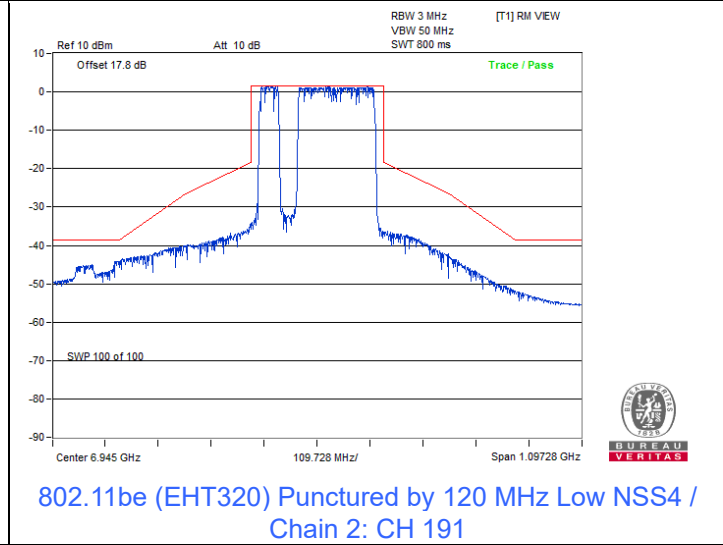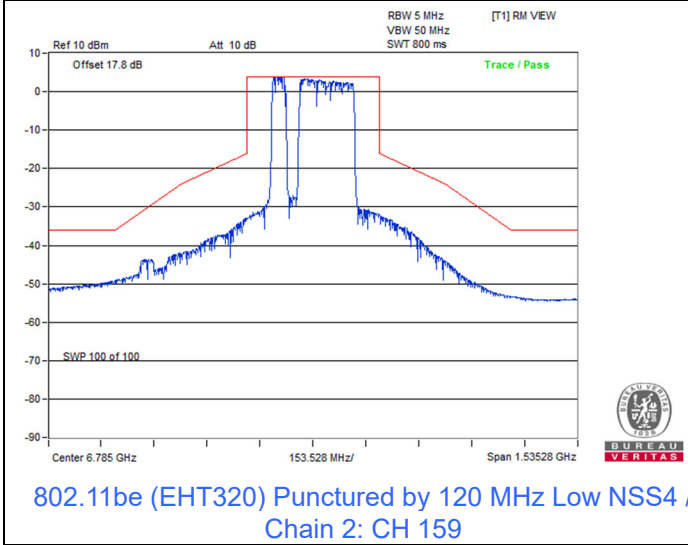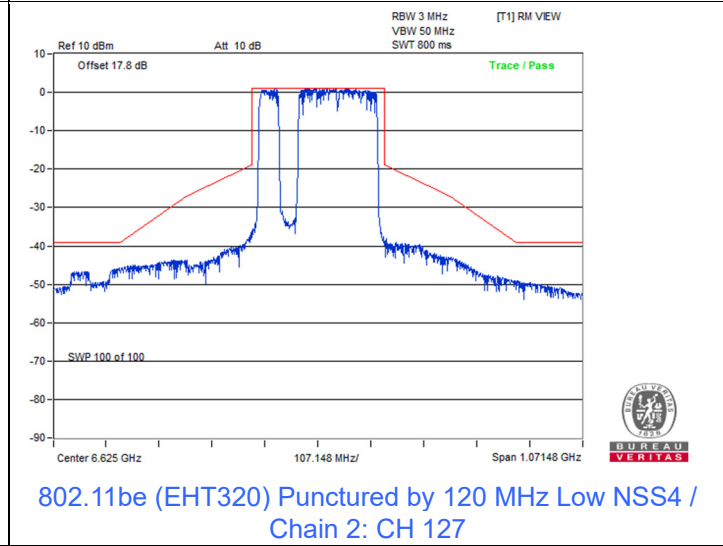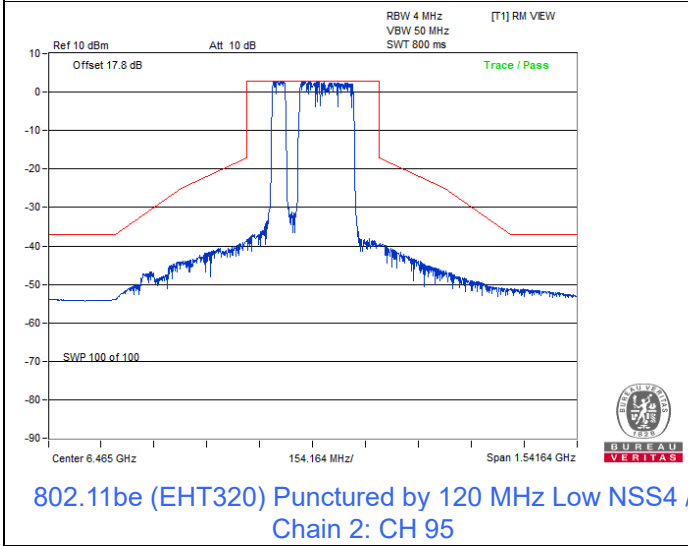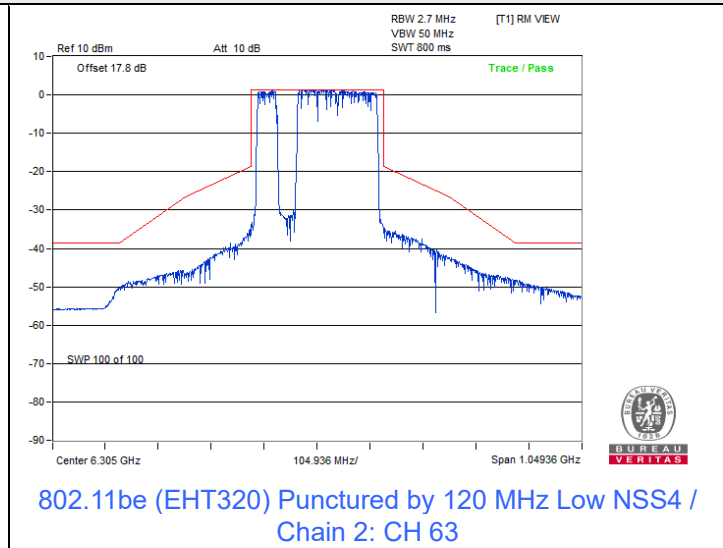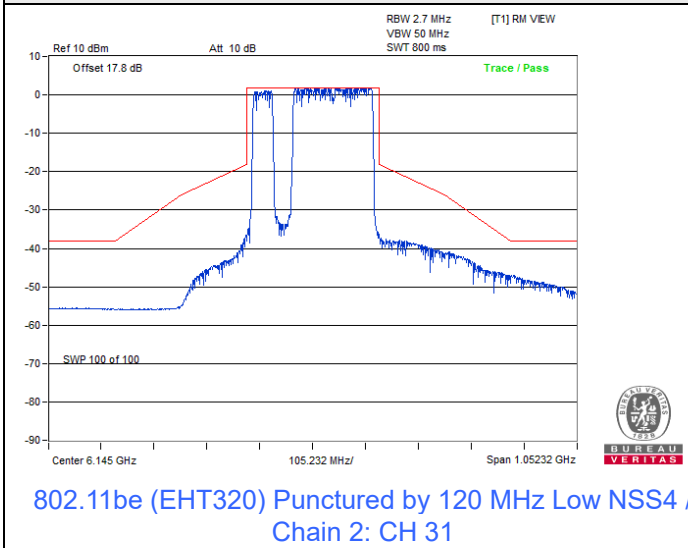


Spectrum Plot

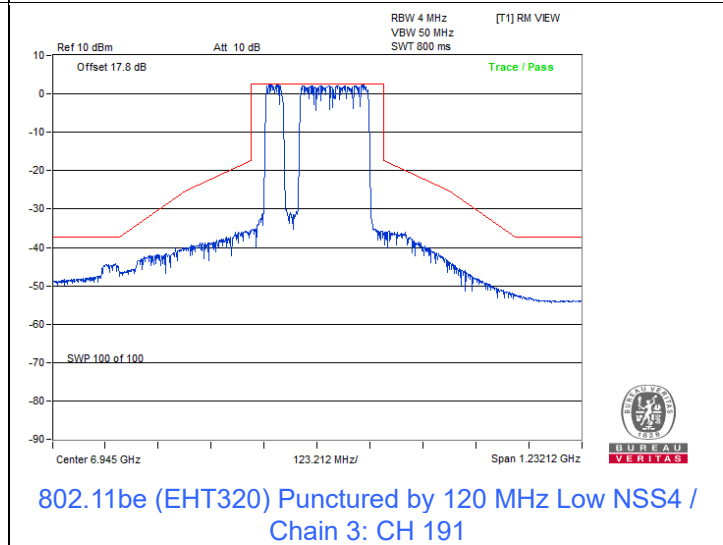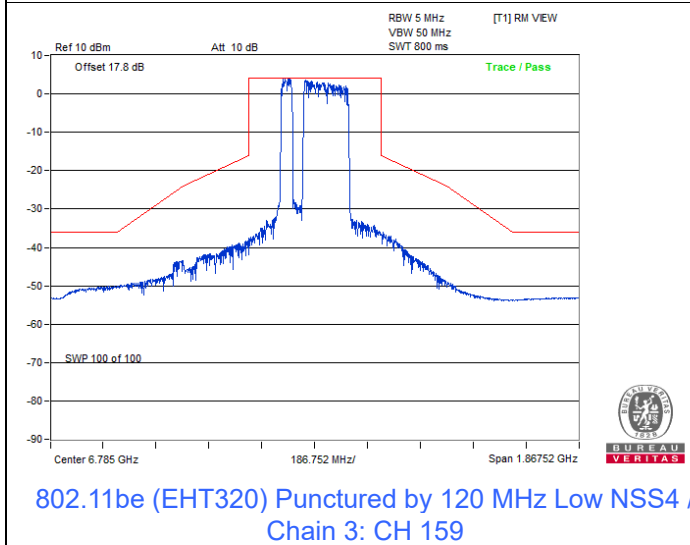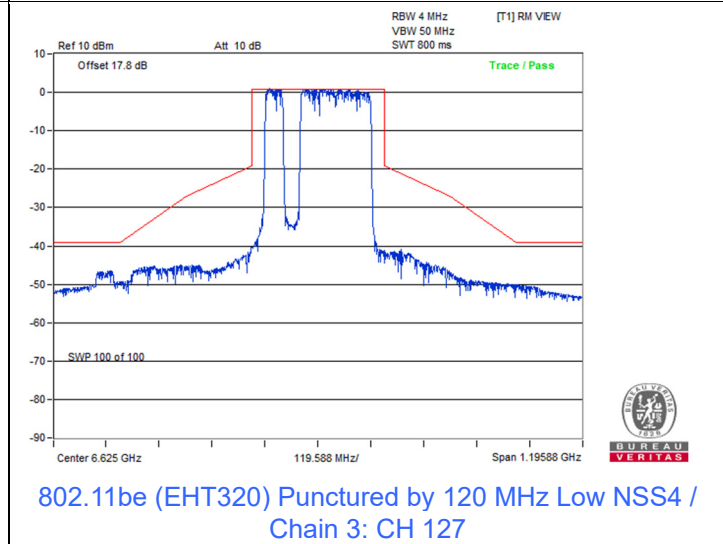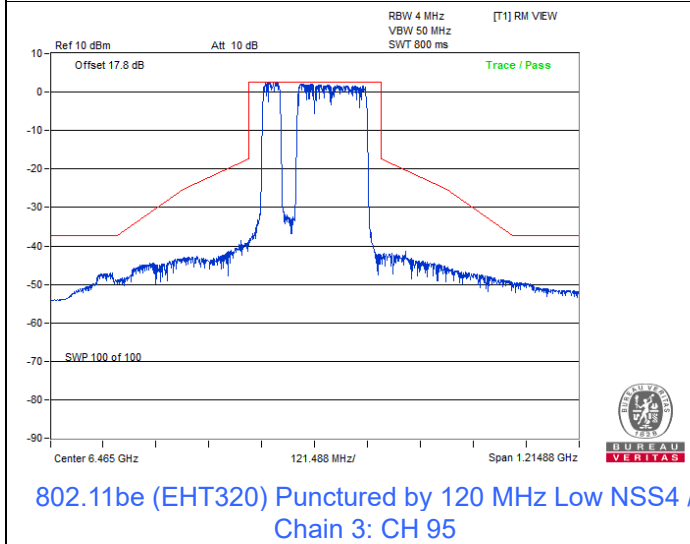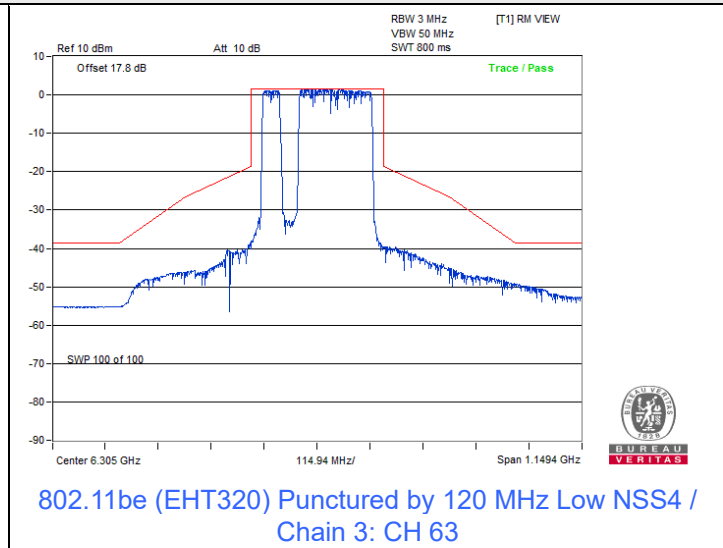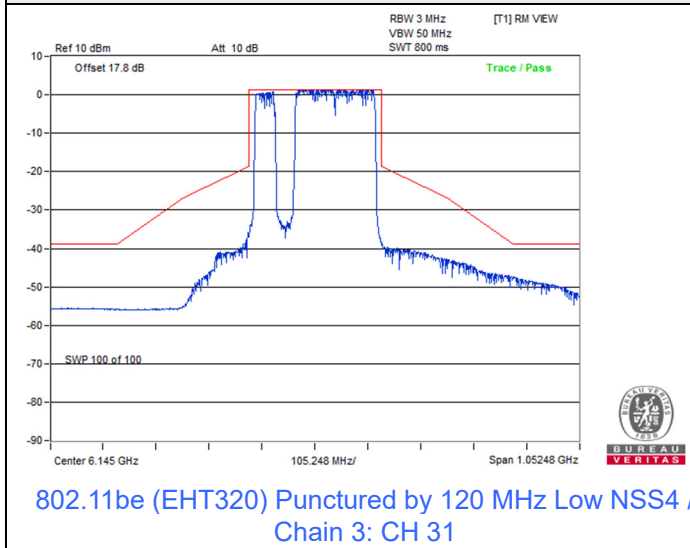


802.11be (EHT320) Punctured by 120 MHz High


Spectrum Plot

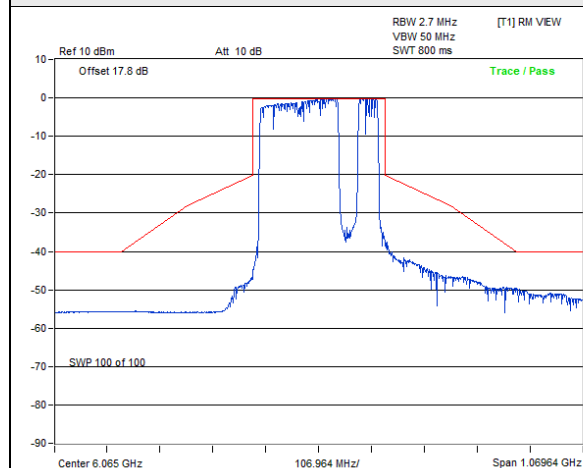


802.11be (EHT320) Punctured by 120 MHz High NSS4 /
Chain 0: CH 31

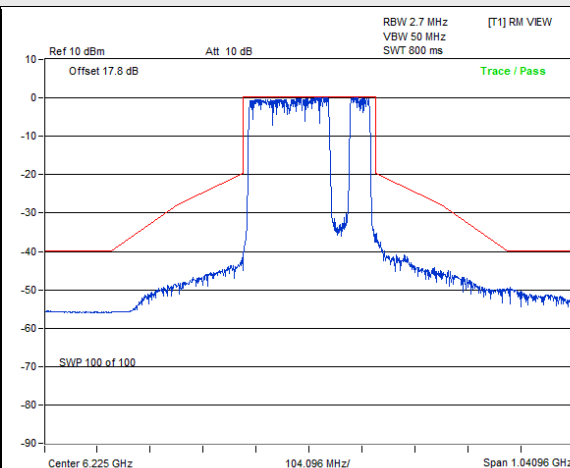


802.11be (EHT320) Punctured by 120 MHz High NSS4 /
Chain 0: CH 63

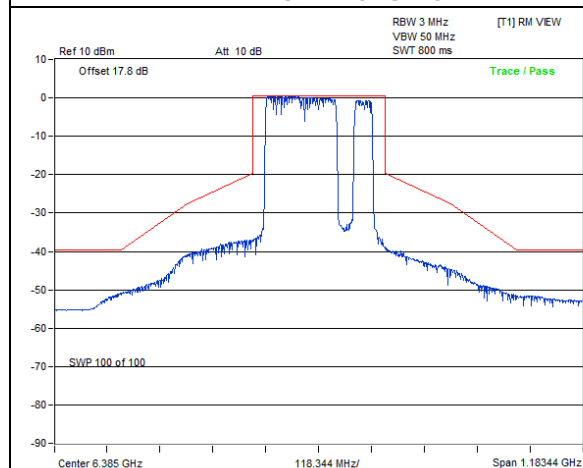


802.11be (EHT320) Punctured by 120 MHz High NSS4 /
Chain 0: CH 95

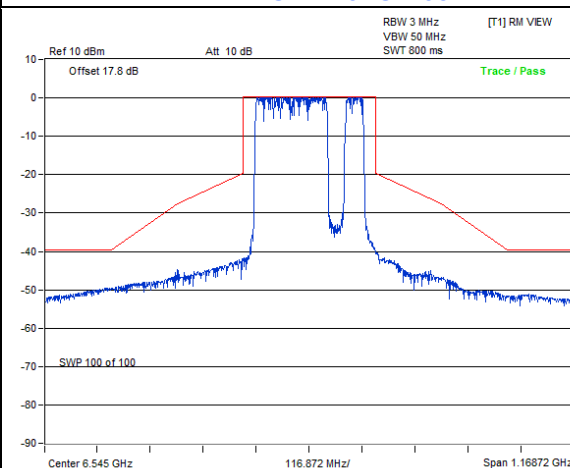

802.11be (EHT320) Punctured by 120 MHz High NSS4 /
Chain 0: CH 127






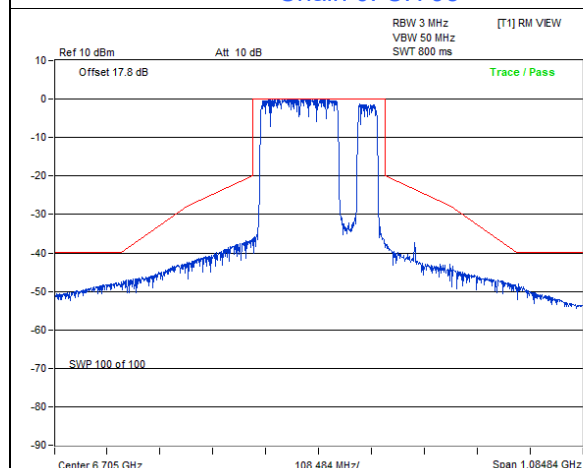


802.11be (EHT320) Punctured by 120 MHz High NSS4 /
Chain 0: CH 159






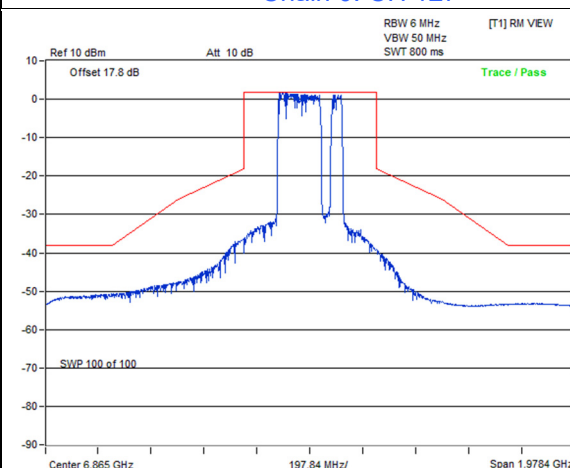


802.11be (EHT320) Punctured by 120 MHz High NSS4 /
Chain 0: CH 191







Spectrum Plot

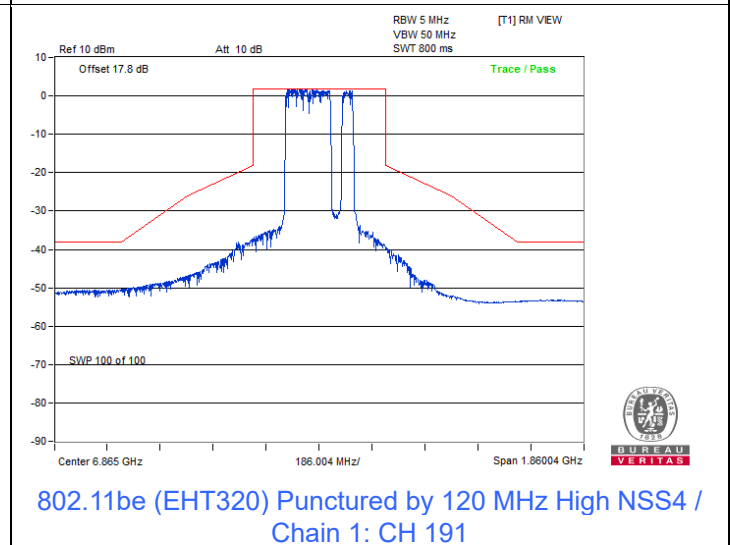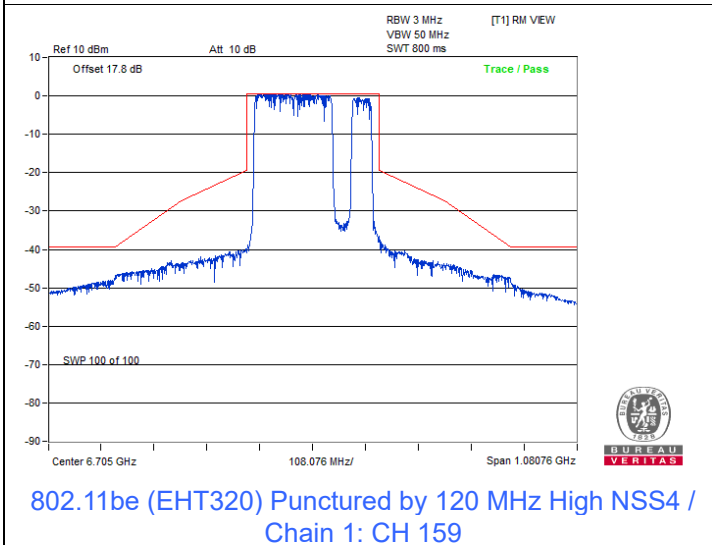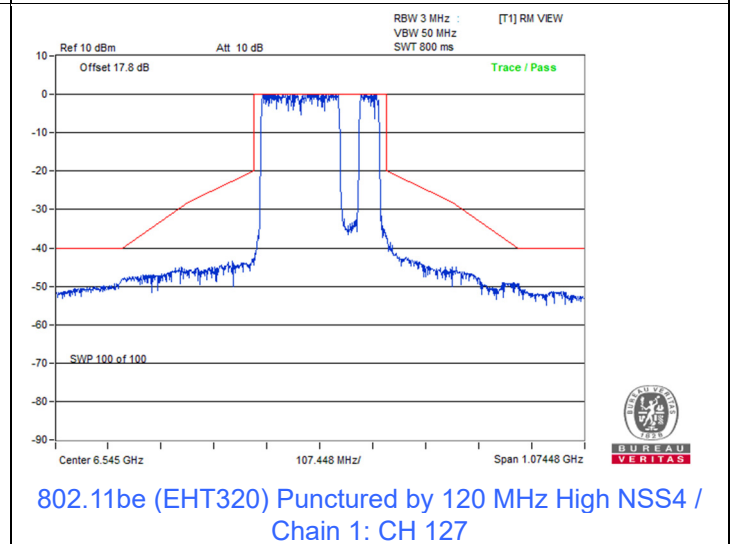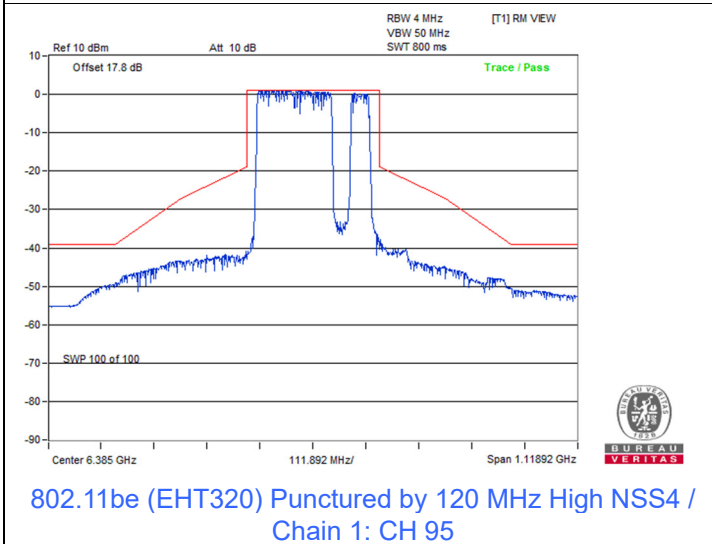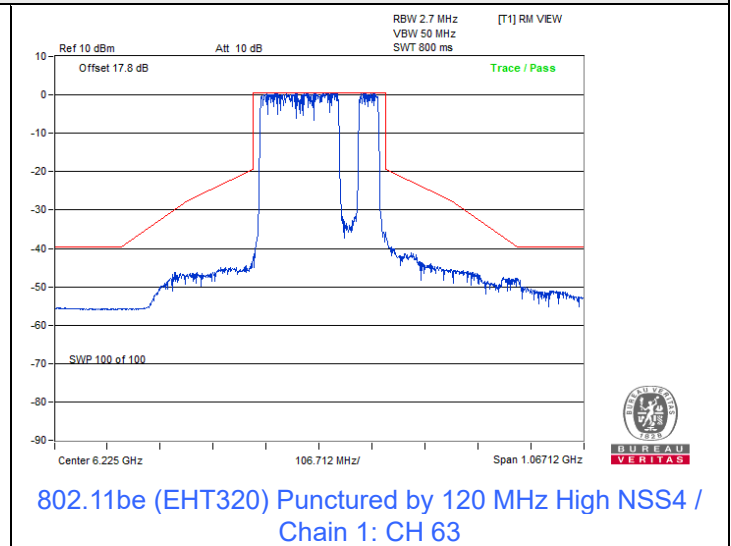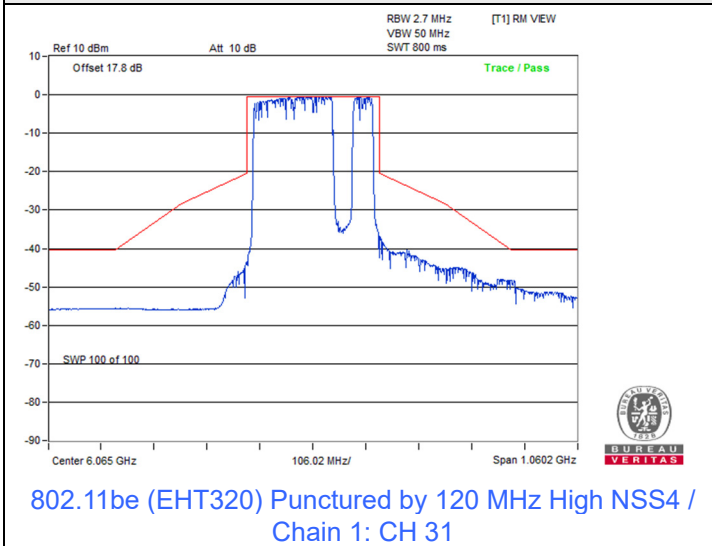

Spectrum Plot

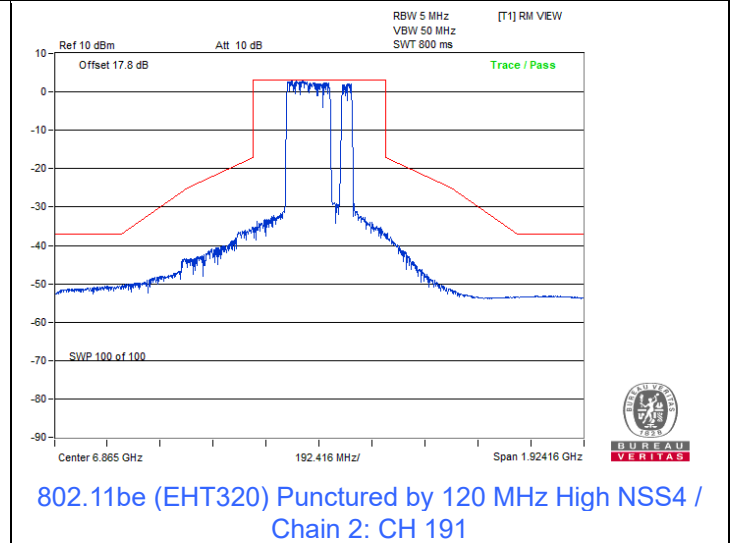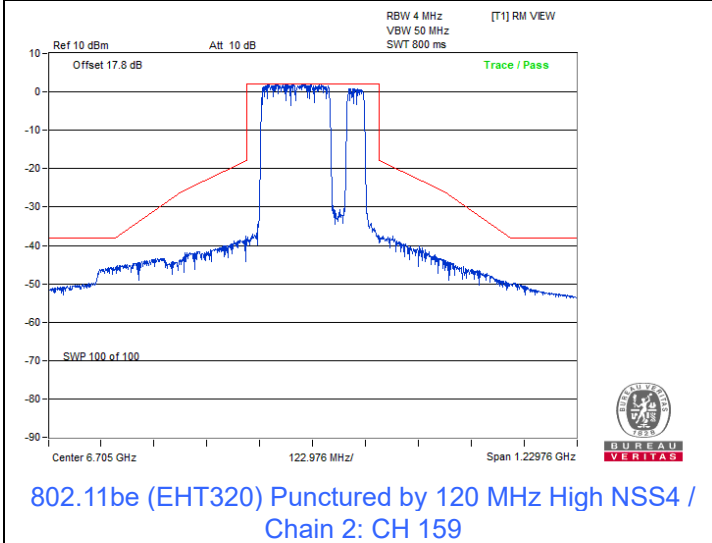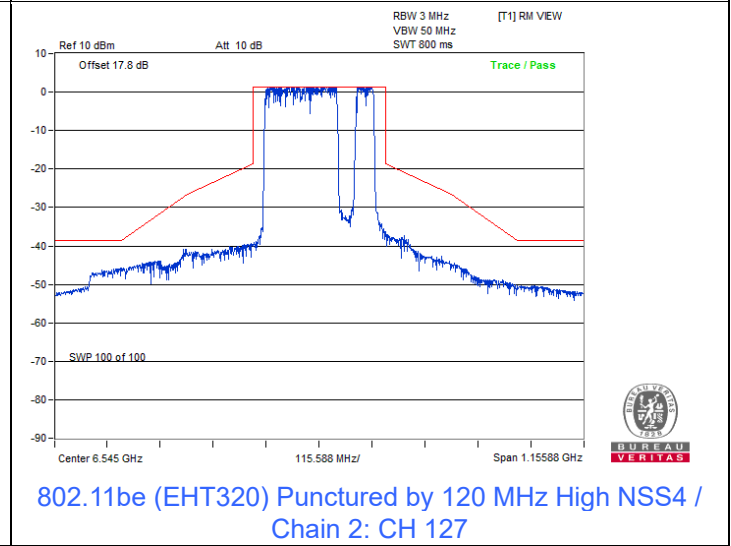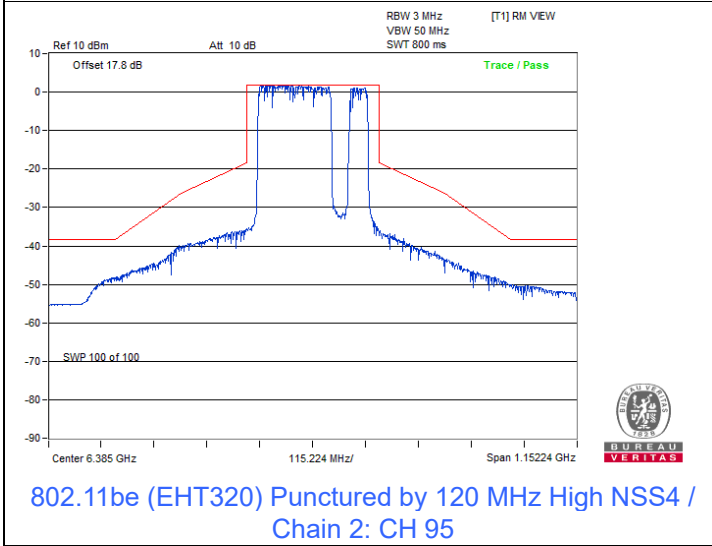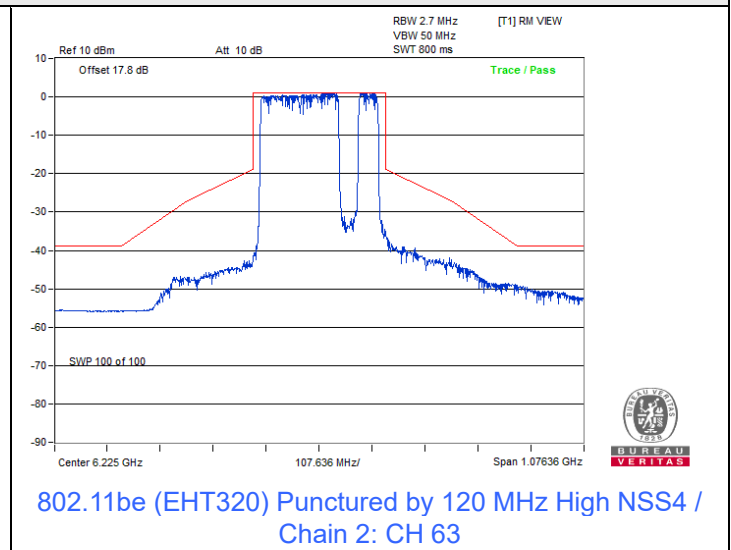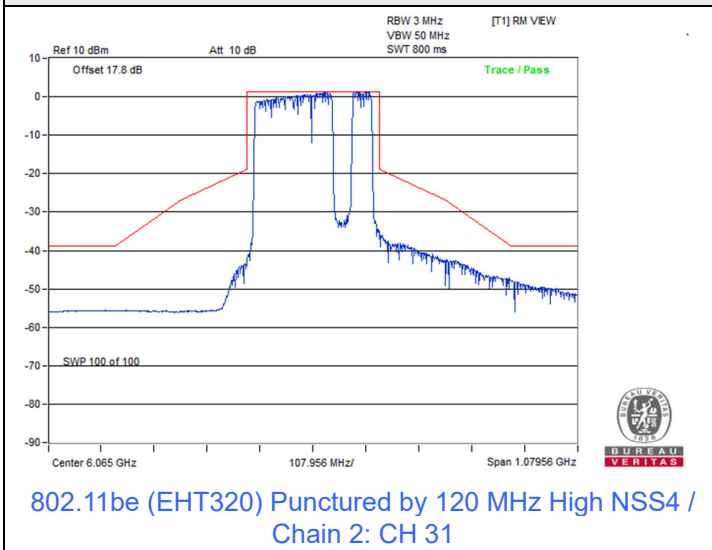


Spectrum Plot

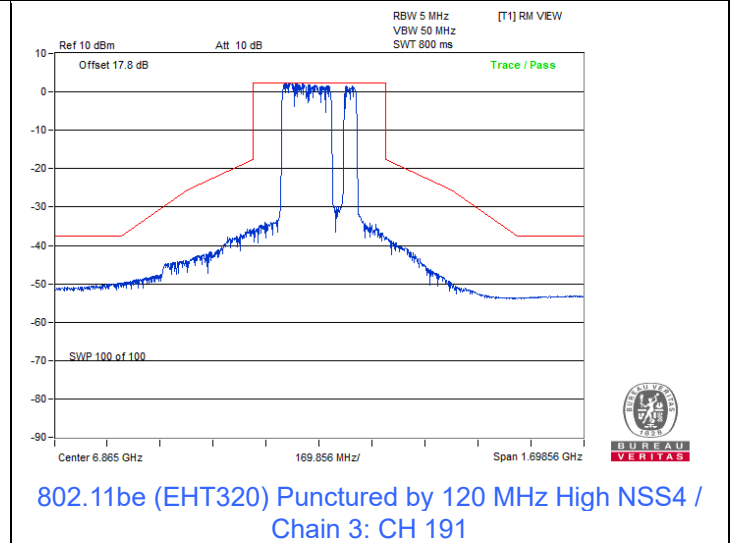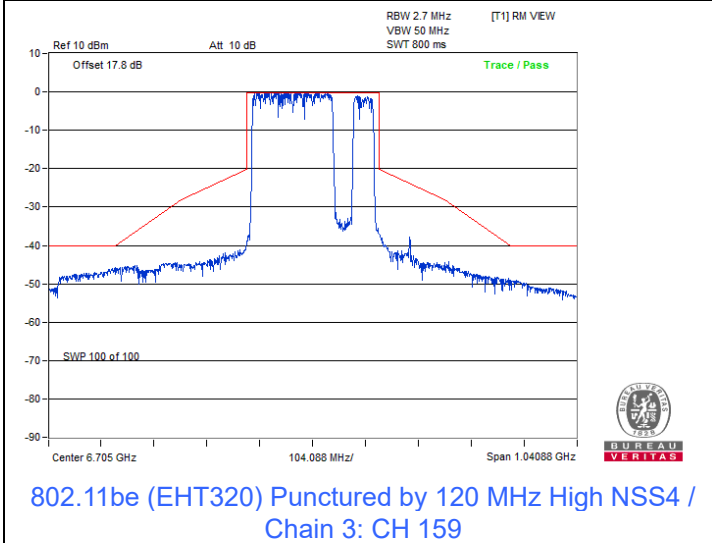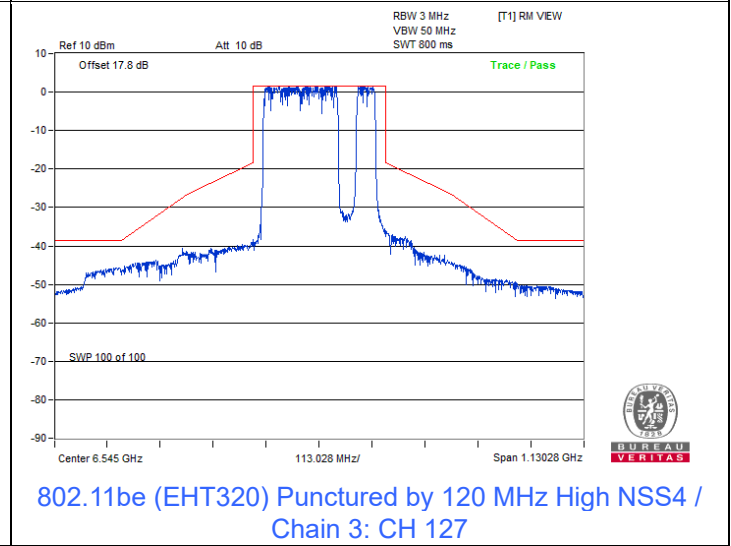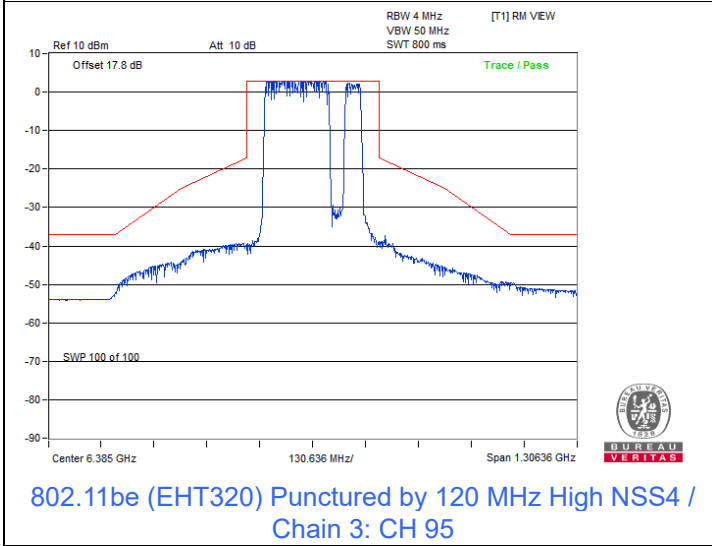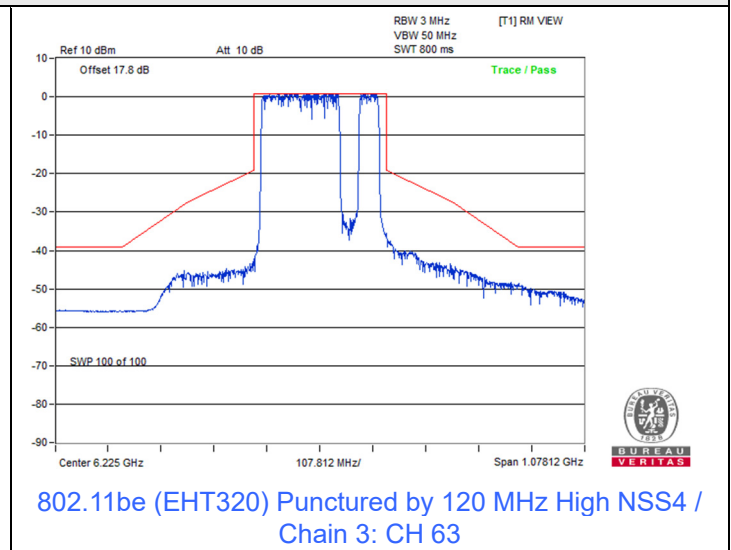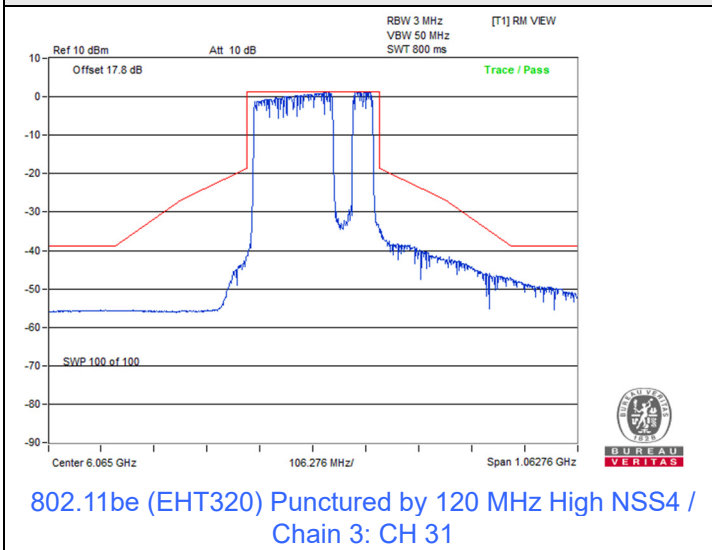


802.11be (EHT320) Punctured by 160 MHz


Spectrum Plot

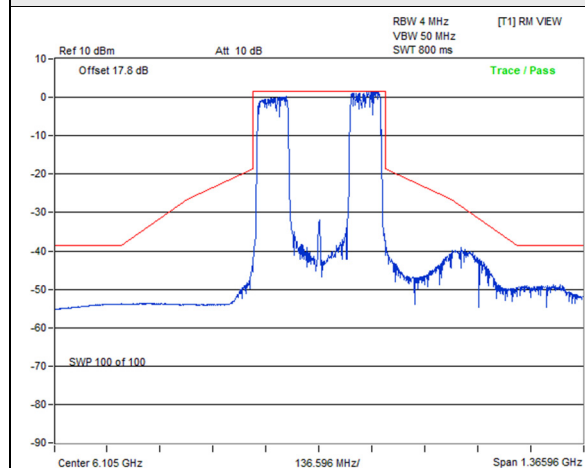


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 0: 802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 0:
CH 31 CH 63

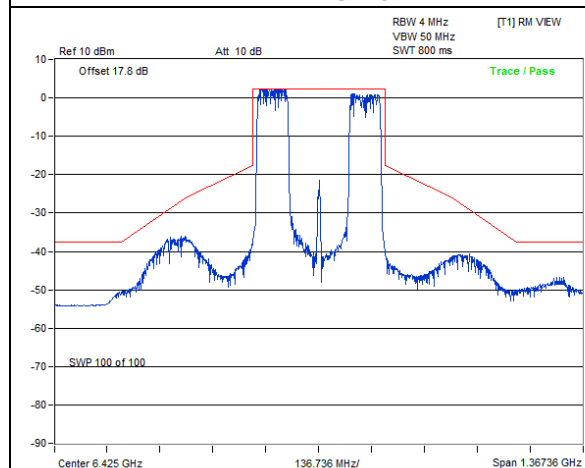


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 0: 802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 0:
CH 95 CH 127

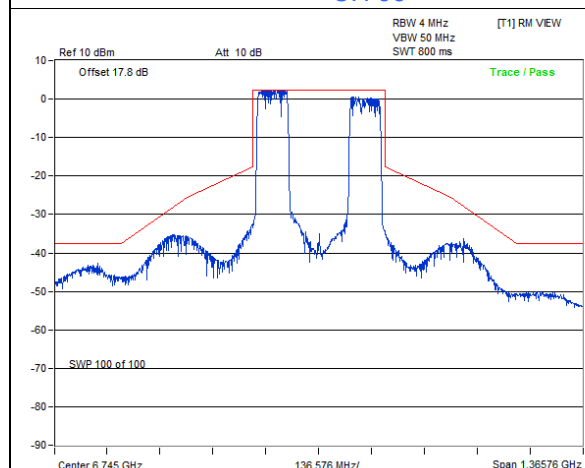


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 0: 802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 0:
CH 159 CH 191




Spectrum Plot

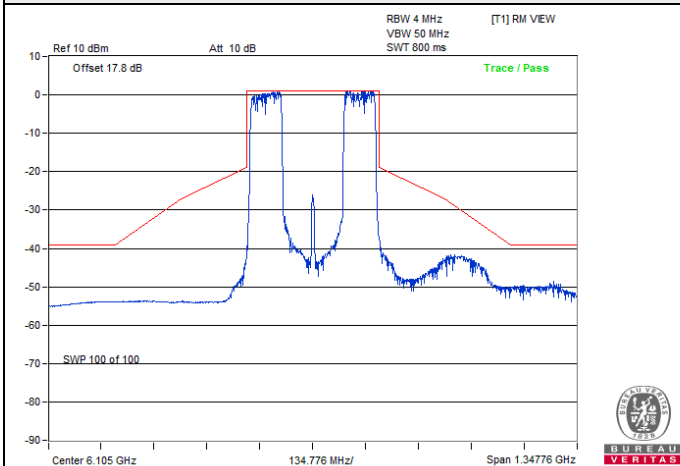


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 1: CH 31

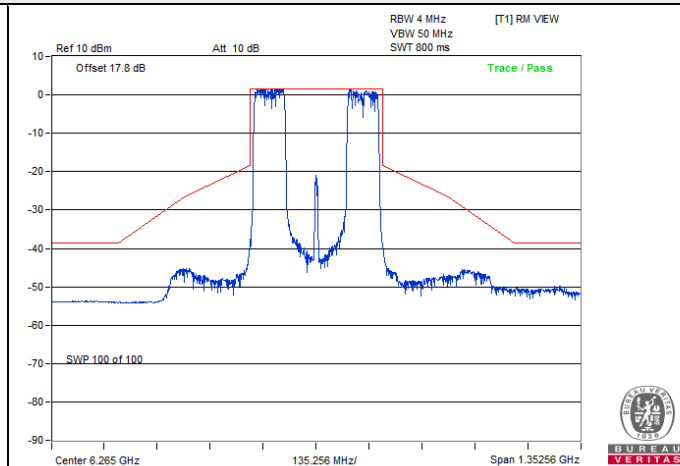


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 1: CH 63

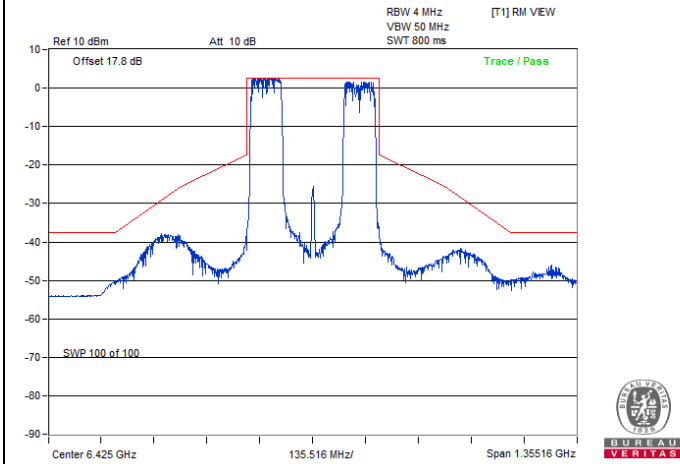


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 1: CH 95

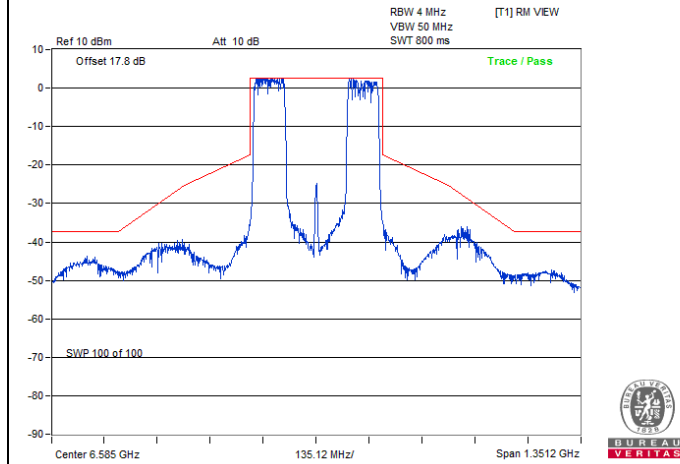

802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 1: CH 127

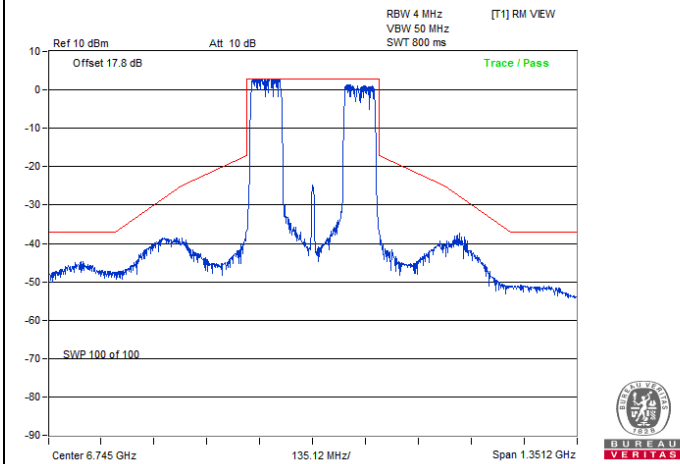


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 1: CH 159

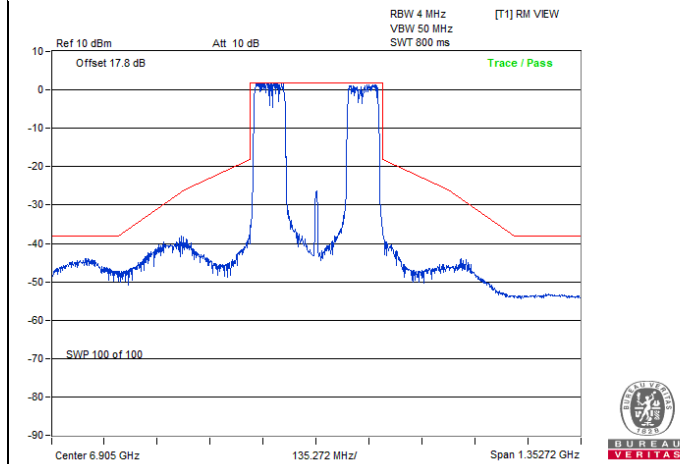


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 1: CH 191


Spectrum Plot

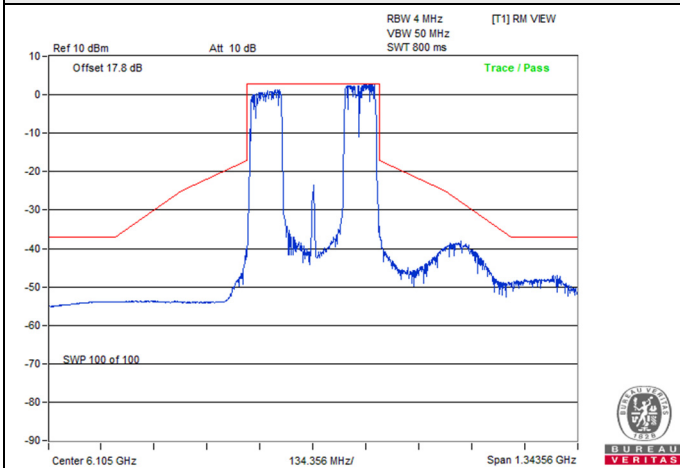


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 2:
CH 31

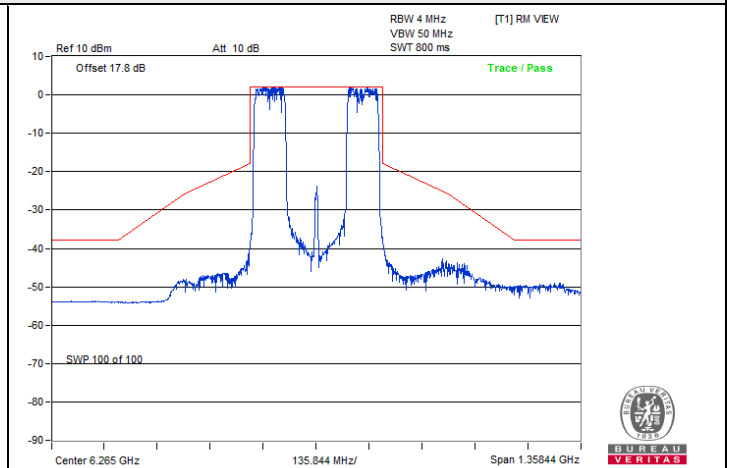


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 2:
CH 63

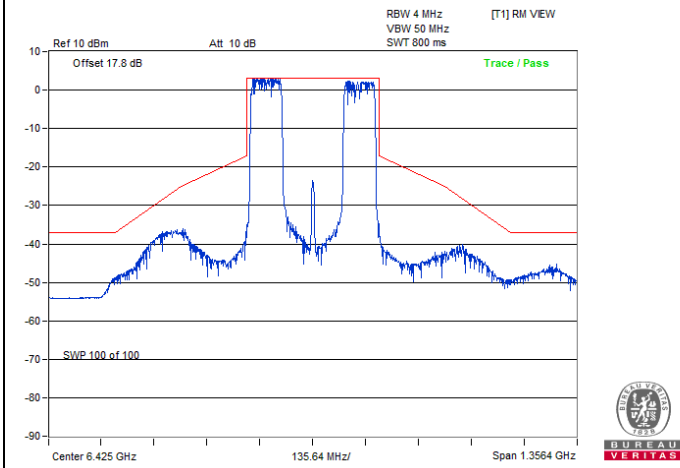


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 2:
CH 95

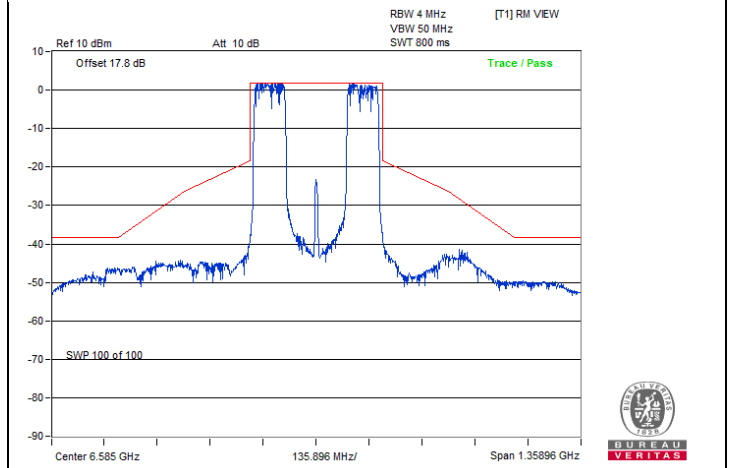

802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 2:
CH 127

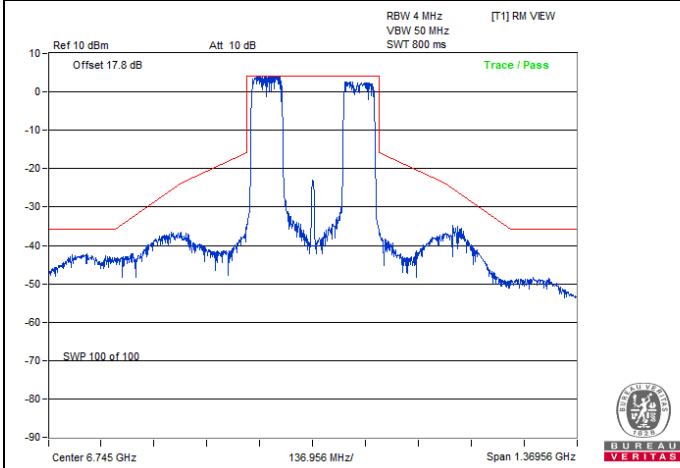


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 2:
CH 159

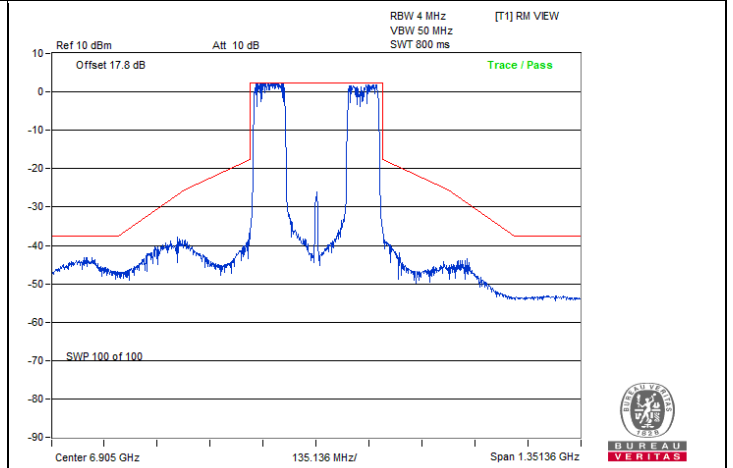


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 2:
CH 191


Spectrum Plot

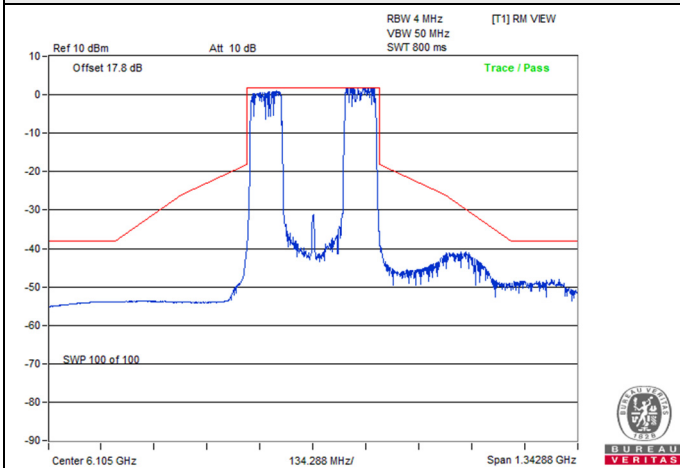


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 3:
CH 31

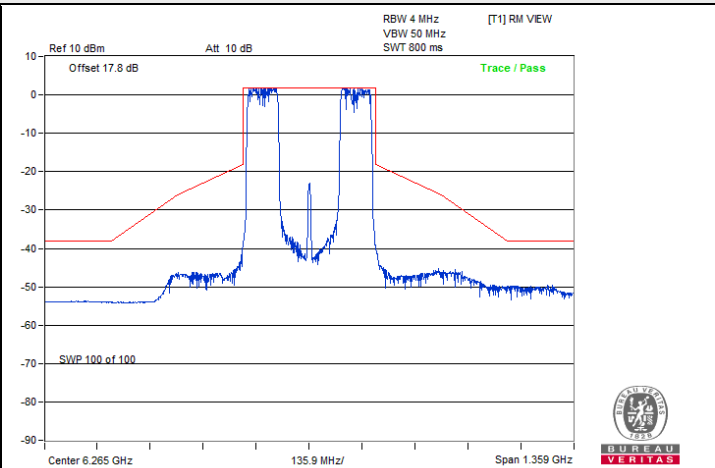


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 3:
CH 63

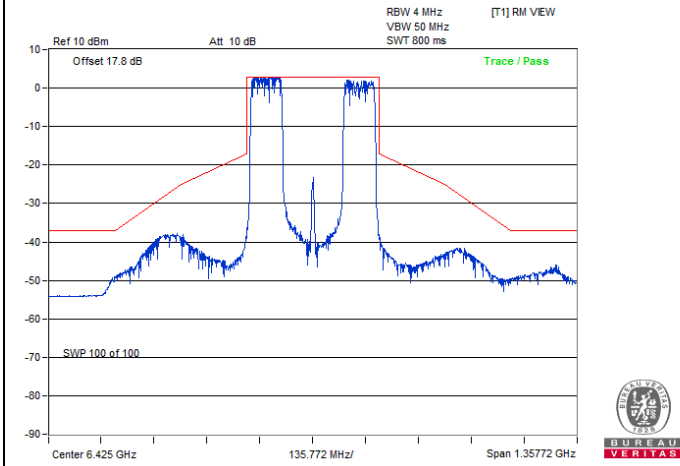


802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 3:
CH 95

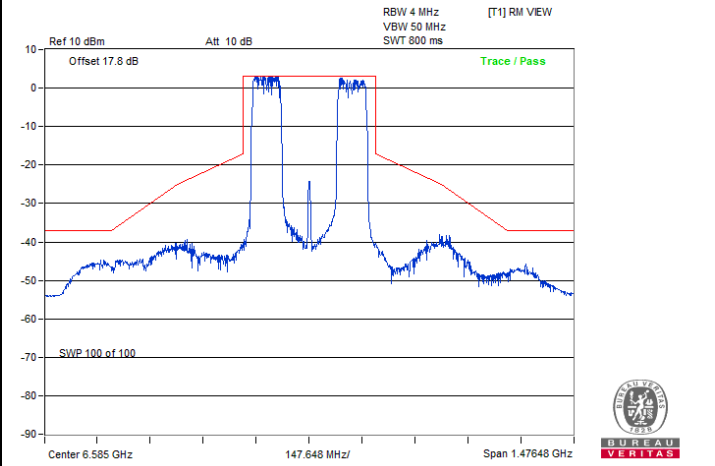

802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 3:
CH 127

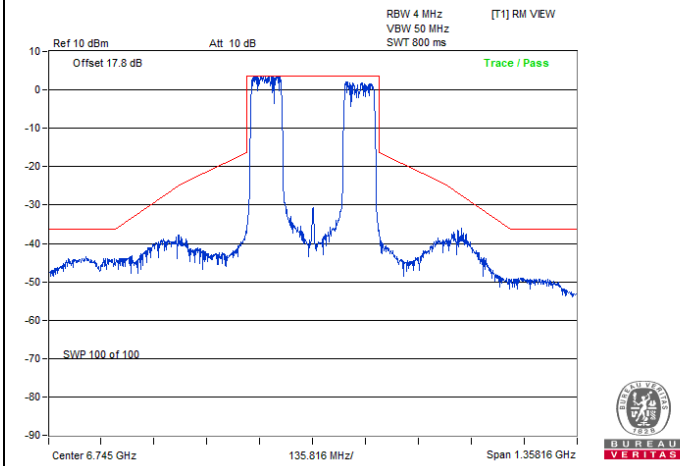

802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 3:
CH 159

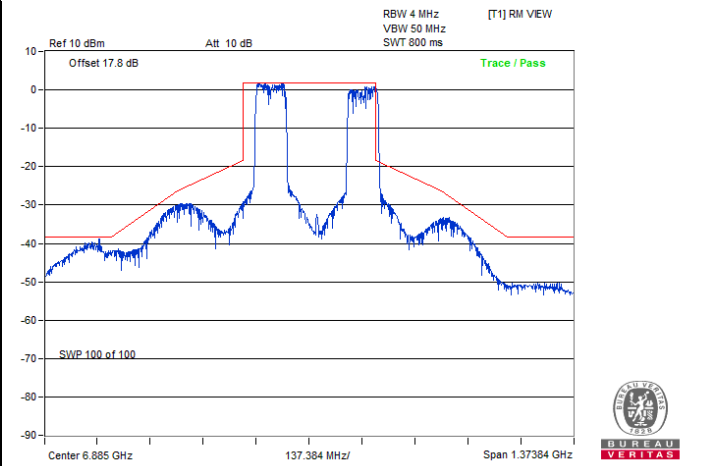

802.11be (EHT320) Punctured by 160 MHz NSS4 / Chain 3:
CH 191

7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Henry Hsu
--------------	----------------	---------------------------	--------------	------------	-----------

802.11be (EHT80) Punctured by 20 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
7	5985	78.00	78.00	78.00	77.76
39	6145	78.00	77.76	78.00	78.00
87	6385	77.76	77.76	77.76	77.76
103	6465	77.76	78.00	78.00	77.76
119	6545	78.00	77.76	78.00	78.00
135	6625	78.00	78.00	78.00	77.76
151	6705	78.00	77.76	78.00	77.76
167	6785	77.76	77.76	78.24	77.76
183	6865	78.00	78.00	78.00	77.76
199	6945	77.76	78.00	77.76	78.00
215	7025	77.76	77.76	77.76	78.00

802.11be (EHT80) Punctured by 40 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
7	5985	78.48	78.00	78.24	78.24
39	6145	78.48	78.00	78.24	78.24
87	6385	78.24	78.48	78.00	78.24
103	6465	78.48	78.72	78.24	78.24
119	6545	78.24	78.24	78.24	78.24
135	6625	78.24	78.24	78.24	78.24
151	6705	78.24	78.24	78.48	78.24
167	6785	78.24	78.24	78.24	78.48
183	6865	78.24	78.72	78.48	78.48
199	6945	78.72	78.24	78.24	78.24
215	7025	78.48	78.24	78.24	78.24

802.11be (EHT160) Punctured by 40 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
15	6025	157.92	157.92	157.92	157.92
47	6185	158.40	157.92	157.92	158.40
79	6345	157.92	157.92	158.40	157.92
111	6505	158.40	158.40	157.92	158.40
143	6665	158.40	158.40	158.40	157.92
175	6825	157.92	158.40	158.40	158.40
207	6985	157.92	158.40	158.40	157.44

802.11be (EHT160) Punctured by 60 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
15	6025	158.88	157.92	158.88	158.40
47	6185	158.88	158.88	158.88	158.88
79	6345	158.40	158.88	158.40	158.40
111	6505	158.40	158.40	158.88	158.40
143	6665	158.40	158.40	158.40	158.40
175	6825	158.88	158.88	158.40	157.92
207	6985	158.88	158.40	158.88	158.40

802.11be (EHT160) Punctured by 80 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
15	6025	159.36	158.88	158.88	158.88
47	6185	158.88	159.36	158.88	158.88
79	6345	158.88	158.88	158.88	159.36
111	6505	159.36	158.40	158.40	158.40
143	6665	158.88	158.88	159.36	158.88
175	6825	159.36	159.36	159.36	159.36
207	6985	158.88	158.88	158.88	158.88

802.11be (EHT320) Punctured by 80 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
31	6105	236.16	236.16	236.80	236.16
63	6265	236.16	236.16	236.16	236.80
95	6425	236.16	236.16	236.16	236.80
127	6585	236.80	236.16	236.80	236.80
159	6745	236.16	236.16	236.16	236.16
191	6905	236.16	236.80	236.16	236.80

802.11be (EHT320) Punctured by 120 MHz Low

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
31	6105	236.80	236.80	237.44	236.80
63	6265	237.44	236.80	236.16	236.80
95	6425	238.08	238.08	237.44	236.80
127	6585	236.16	236.80	236.80	236.16
159	6745	236.80	238.08	237.44	236.80
191	6905	236.80	237.44	236.80	237.44


802.11be (EHT320) Punctured by 120 MHz High

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
31	6105	236.16	236.80	236.80	236.80
63	6265	236.80	236.80	236.80	236.80
95	6425	236.80	236.80	237.44	236.80
127	6585	236.80	237.44	237.44	236.80
159	6745	236.16	236.16	236.16	236.80
191	6905	236.80	237.44	236.80	236.80


802.11be (EHT320) Punctured by 160 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
31	6105	318.08	317.44	318.08	318.08
63	6265	317.44	317.44	318.08	318.08
95	6425	318.08	318.08	318.08	318.08
127	6585	317.44	317.44	317.44	317.44
159	6745	318.08	316.80	317.44	318.08
191	6905	318.08	317.44	317.44	317.76


Spectrum Plot of Maximum Value

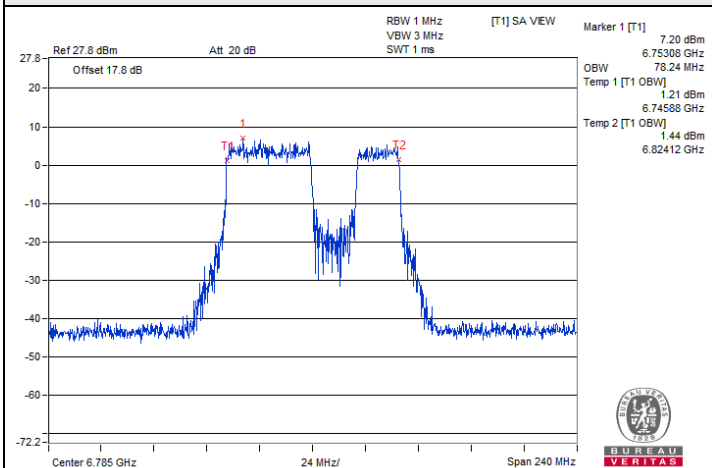


802.11be (EHT80) Punctured by 20 MHz / Chain 2: CH 167

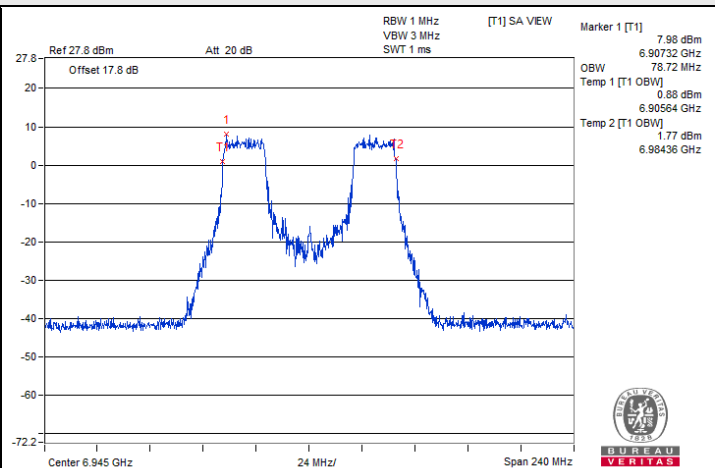


802.11be (EHT80) Punctured by 40 MHz / Chain 0: CH 199

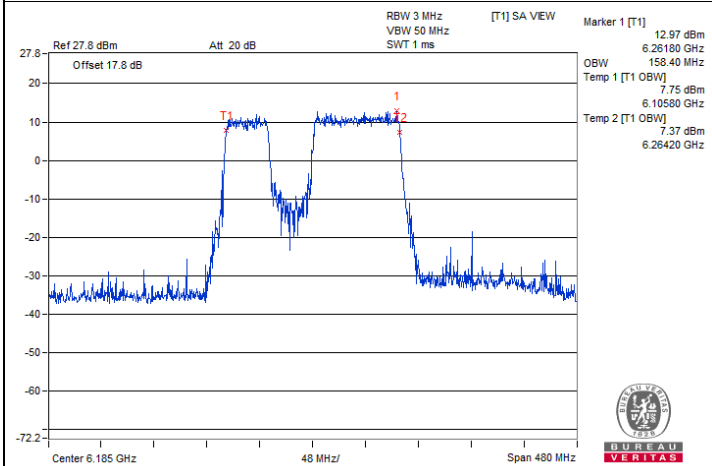


802.11be (EHT160) Punctured by 40 MHz / Chain 0: CH 47

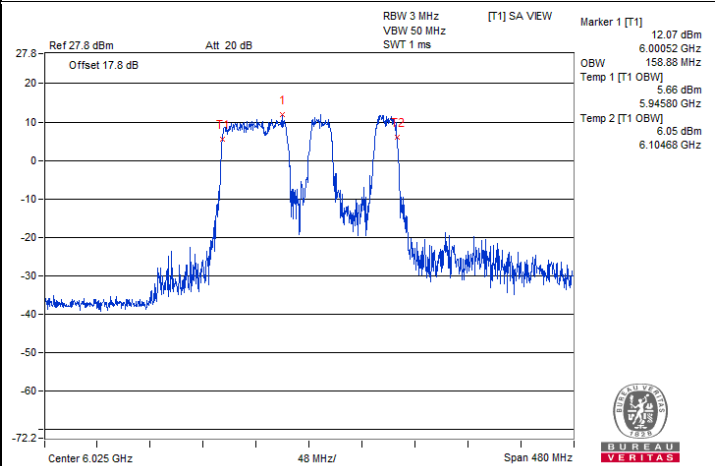

802.11be (EHT160) Punctured by 60 MHz / Chain 0: CH 15

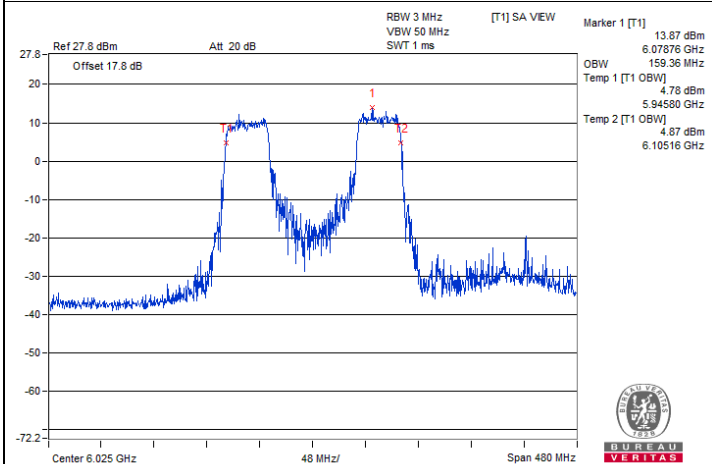


802.11be (EHT160) Punctured by 80 MHz / Chain 0: CH 15

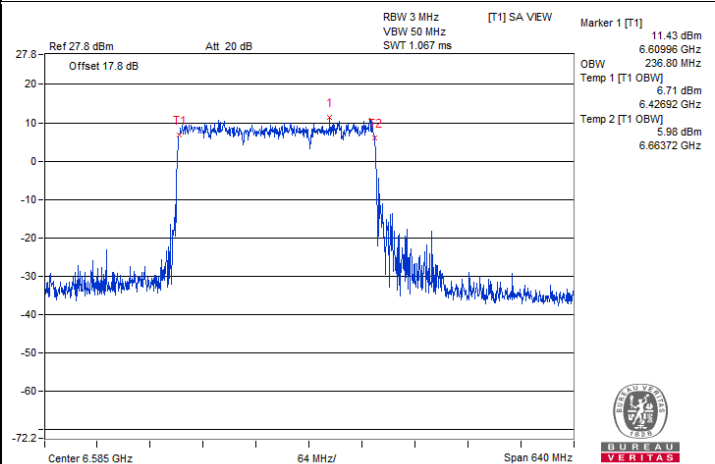


802.11be (EHT320) Punctured by 80 MHz / Chain 0: CH 127


Spectrum Plot of Maximum Value

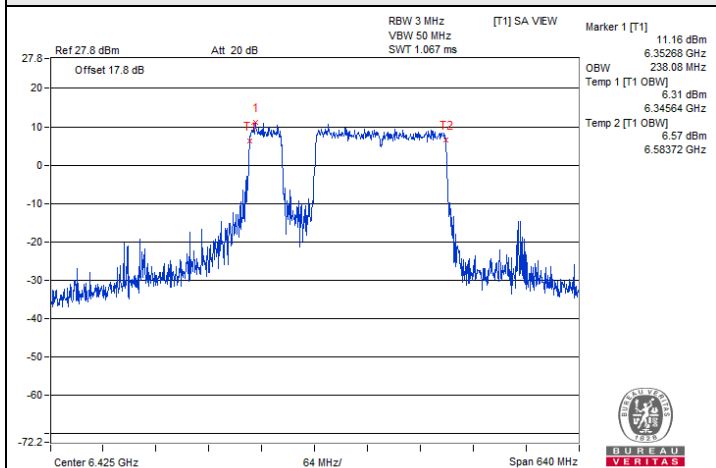

802.11be (EHT320) Punctured by 120 MHz Low / Chain 0: CH 95

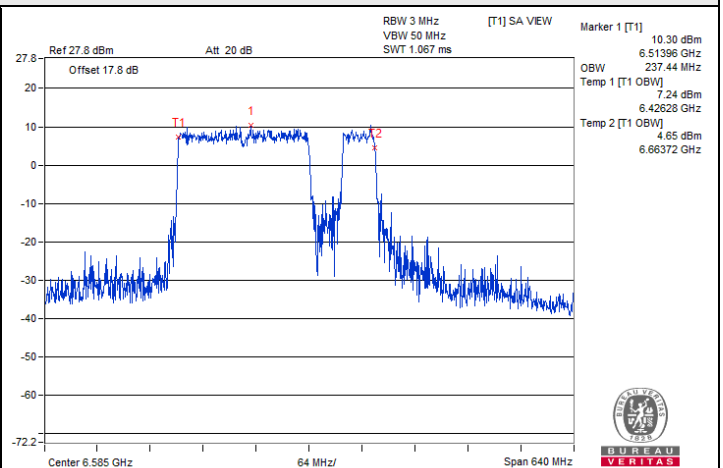

802.11be (EHT320) Punctured by 120 MHz High / Chain 1: CH 127

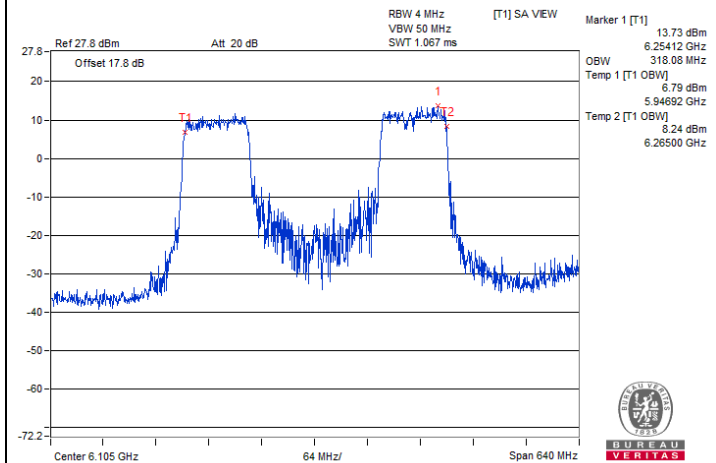

802.11be (EHT320) Punctured by 160 MHz / Chain 0: CH 31

7.6 AC Power Conducted Emissions

Mode A


Non-Beamforming (NSS4)

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.96	35.54	22.74	45.50	32.70	66.00	56.00	-20.50	-23.30
2	0.17734	9.96	30.54	19.20	40.50	29.16	64.61	54.61	-24.11	-25.45
3	0.38638	9.99	37.62	32.47	47.61	42.46	58.14	48.14	-10.53	-5.68
4	0.58359	10.01	18.66	10.95	28.67	20.96	56.00	46.00	-27.33	-25.04
5	0.81406	10.03	16.82	5.80	26.85	15.83	56.00	46.00	-29.15	-30.17
6	11.67684	10.74	18.25	12.94	28.99	23.68	60.00	50.00	-31.01	-26.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

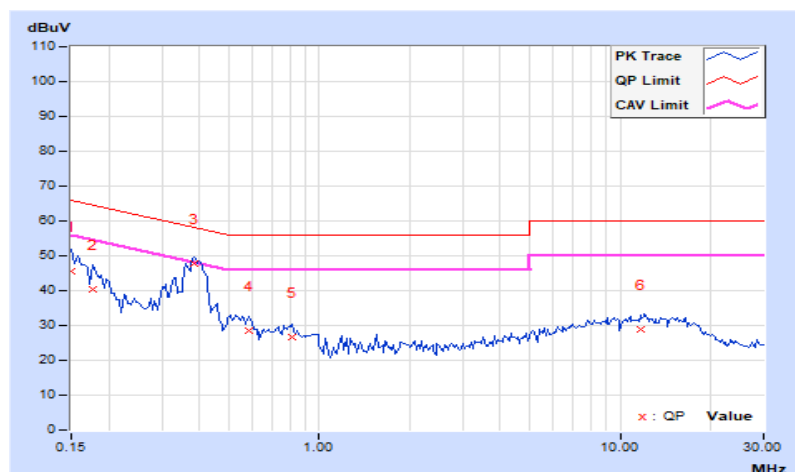


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.98	34.28	21.71	44.26	31.69	66.00	56.00	-21.74	-24.31
2	0.22812	9.96	24.81	17.27	34.77	27.23	62.52	52.52	-27.75	-25.29
3	0.38828	9.93	39.03	32.60	48.96	42.53	58.10	48.10	-9.14	-5.57
4	0.58359	9.95	22.19	15.24	32.14	25.19	56.00	46.00	-23.86	-20.81
5	0.81016	9.97	21.11	11.52	31.08	21.49	56.00	46.00	-24.92	-24.51
6	10.09766	10.46	17.36	12.13	27.82	22.59	60.00	50.00	-32.18	-27.41

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

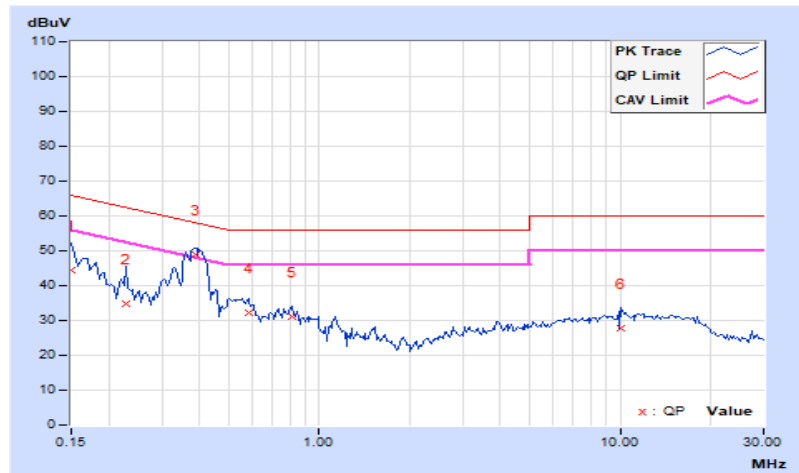

Mode B


Non-Beamforming (NSS4)

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.96	36.54	26.31	46.50	36.27	65.58	55.58	-19.08	-19.31
2	0.38438	9.99	37.89	33.87	47.88	43.86	58.18	48.18	-10.30	-4.32
3	0.58359	10.01	18.78	11.15	28.79	21.16	56.00	46.00	-27.21	-24.84
4	0.80234	10.03	16.78	5.49	26.81	15.52	56.00	46.00	-29.19	-30.48
5	1.18359	10.06	14.73	4.95	24.79	15.01	56.00	46.00	-31.21	-30.99
6	11.07422	10.70	18.41	12.92	29.11	23.62	60.00	50.00	-30.89	-26.38

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

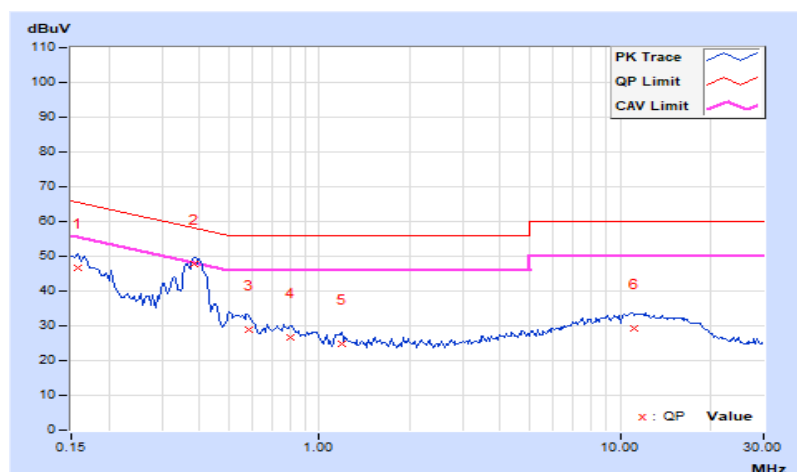


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.00	38.14	25.23	48.14	35.23	65.38	55.38	-17.24	-20.15
2	0.19297	9.99	36.87	26.27	46.86	36.26	63.91	53.91	-17.05	-17.65
3	0.48203	9.96	39.96	33.21	49.92	43.17	56.30	46.30	-6.38	-3.13
4	0.96250	10.01	17.97	11.67	27.98	21.68	56.00	46.00	-28.02	-24.32
5	1.87500	10.08	24.49	17.65	34.57	27.73	56.00	46.00	-21.43	-18.27
6	9.15625	10.55	17.02	11.25	27.57	21.80	60.00	50.00	-32.43	-28.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

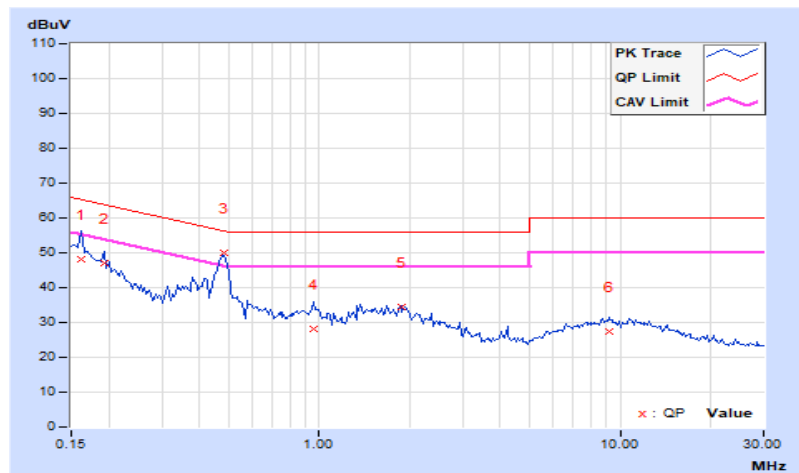

7.7 Unwanted Emissions below 1 GHz

Mode A


Non-Beamforming (NSS4)

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	92.08	28.3 PK	43.5	-15.2	3.00 H	56	46.9	-18.6
2	163.86	22.5 PK	43.5	-21.0	1.00 H	254	35.7	-13.2
3	294.81	20.9 PK	46.0	-25.1	4.00 H	176	33.4	-12.5
4	422.85	22.8 PK	46.0	-23.2	1.00 H	73	31.9	-9.1
5	609.09	27.1 PK	46.0	-18.9	1.00 H	125	32.2	-5.1
6	911.73	31.4 PK	46.0	-14.6	2.00 H	310	31.9	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

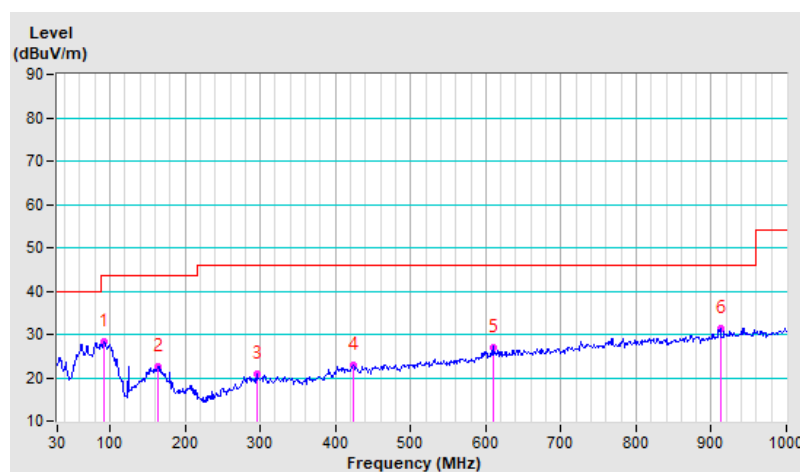


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	36.4 PK	40.0	-3.6	3.00 V	66	50.1	-13.7
2	125.06	32.6 PK	43.5	-10.9	1.00 V	173	47.1	-14.5
3	213.33	24.3 PK	43.5	-19.2	2.00 V	255	40.6	-16.3
4	413.15	24.5 PK	46.0	-21.5	1.00 V	165	33.8	-9.3
5	749.74	29.7 PK	46.0	-16.3	4.00 V	226	32.2	-2.5
6	874.87	37.1 PK	46.0	-8.9	2.00 V	159	38.2	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

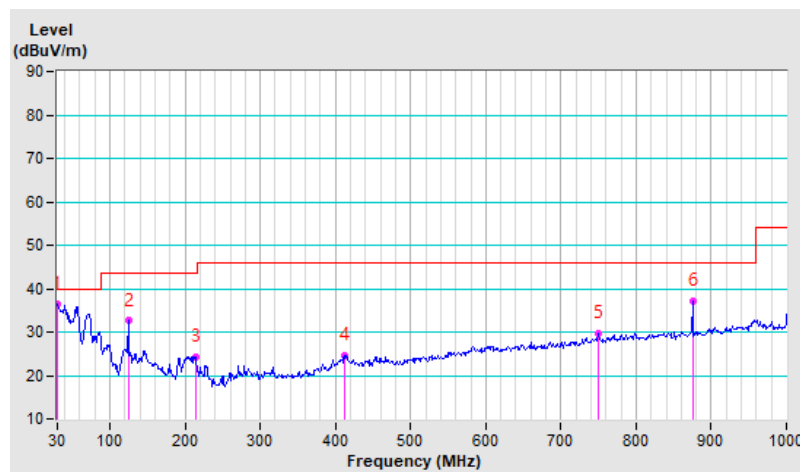

Mode B


Non-Beamforming (NSS4)

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.19	28.6 PK	40.0	-11.4	3.00 H	42	41.9	-13.3
2	161.92	24.3 PK	43.5	-19.2	1.00 H	156	37.3	-13.0
3	412.18	23.7 PK	46.0	-22.3	2.00 H	279	33.0	-9.3
4	644.01	27.3 PK	46.0	-18.7	4.00 H	117	31.5	-4.2
5	749.74	29.5 PK	46.0	-16.5	2.00 H	220	32.0	-2.5
6	874.87	32.3 PK	46.0	-13.7	1.00 H	63	33.4	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

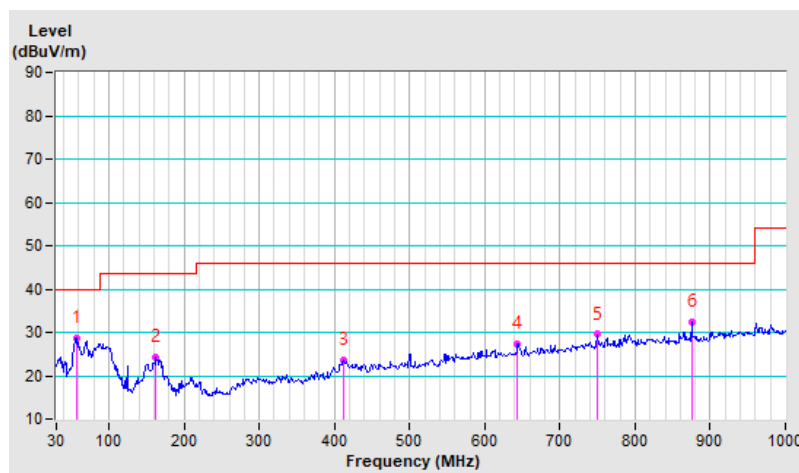


RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	36.6 PK	40.0	-3.4	3.00 V	57	50.3	-13.7
2	125.06	32.5 PK	43.5	-11.0	2.00 V	332	47.0	-14.5
3	214.30	25.7 PK	43.5	-17.8	1.00 V	185	42.0	-16.3
4	411.21	24.1 PK	46.0	-21.9	4.00 V	117	33.5	-9.4
5	640.13	26.9 PK	46.0	-19.1	1.00 V	274	31.2	-4.3
6	874.87	37.5 PK	46.0	-8.5	2.00 V	138	38.6	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

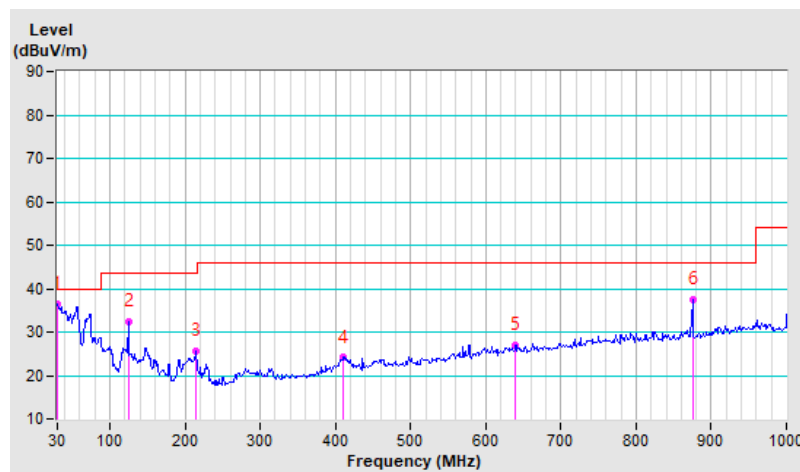

7.8 Unwanted Emissions above 1 GHz

Mode A

Non-Beamforming (NSS4)

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	1.47 H	251	53.3	6.3
2	#5925.00	44.9 AV	68.2	-23.3	1.47 H	251	38.6	6.3
3	*5985.00	106.9 PK			1.47 H	251	100.7	6.2
4	*5985.00	96.3 AV			1.47 H	251	90.1	6.2
5	11970.00	47.5 PK	74.0	-26.5	2.39 H	134	32.0	15.5
6	11970.00	35.8 AV	54.0	-18.2	2.39 H	134	20.3	15.5
7	17955.00	59.3 PK	74.0	-14.7	1.97 H	227	29.3	30.0
8	17955.00	47.6 AV	54.0	-6.4	1.97 H	227	17.6	30.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.8 PK	88.2	-28.4	1.50 V	32	53.5	6.3
2	#5925.00	44.3 AV	68.2	-23.9	1.50 V	32	38.0	6.3
3	*5985.00	107.6 PK			1.50 V	32	101.4	6.2
4	*5985.00	97.5 AV			1.50 V	32	91.3	6.2
5	11970.00	48.5 PK	74.0	-25.5	1.79 V	279	33.0	15.5
6	11970.00	36.5 AV	54.0	-17.5	1.79 V	279	21.0	15.5
7	17955.00	60.8 PK	74.0	-13.2	2.62 V	203	30.8	30.0
8	17955.00	48.3 AV	54.0	-5.7	2.62 V	203	18.3	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	106.6 PK			1.50 H	265	100.1	6.5
2	*6145.00	96.0 AV			1.50 H	265	89.5	6.5
3	12290.00	48.0 PK	74.0	-26.0	2.35 H	142	32.7	15.3
4	12290.00	36.2 AV	54.0	-17.8	2.35 H	142	20.9	15.3
5	18435.00	59.1 PK	74.0	-14.9	2.03 H	243	64.2	-5.1
6	18435.00	47.6 AV	54.0	-6.4	2.03 H	243	52.7	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	107.5 PK			1.47 V	46	101.0	6.5
2	*6145.00	97.2 AV			1.47 V	46	90.7	6.5
3	12290.00	48.2 PK	74.0	-25.8	1.75 V	268	32.9	15.3
4	12290.00	36.3 AV	54.0	-17.7	1.75 V	268	21.0	15.3
5	18435.00	61.3 PK	74.0	-12.7	2.56 V	187	66.4	-5.1
6	18435.00	48.7 AV	54.0	-5.3	2.56 V	187	53.8	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	106.5 PK			1.50 H	272	99.1	7.4
2	*6385.00	95.7 AV			1.50 H	272	88.3	7.4
3	#12770.00	48.0 PK	88.2	-40.2	2.31 H	142	32.6	15.4
4	#12770.00	36.0 AV	68.2	-32.2	2.31 H	142	20.6	15.4
5	19155.00	58.9 PK	74.0	-15.1	2.06 H	259	63.5	-4.6
6	19155.00	48.7 AV	54.0	-5.3	2.06 H	259	53.3	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.1 PK			1.42 V	50	99.7	7.4
2	*6385.00	96.9 AV			1.42 V	50	89.5	7.4
3	#12770.00	48.0 PK	88.2	-40.2	1.74 V	281	32.6	15.4
4	#12770.00	36.2 AV	68.2	-32.0	1.74 V	281	20.8	15.4
5	19155.00	61.6 PK	74.0	-12.4	2.54 V	175	66.2	-4.6
6	19155.00	49.0 AV	54.0	-5.0	2.54 V	175	53.6	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	106.4 PK			1.46 H	287	98.4	8.0
2	*6465.00	95.8 AV			1.46 H	287	87.8	8.0
3	#12930.00	47.7 PK	88.2	-40.5	2.25 H	155	32.1	15.6
4	#12930.00	35.8 AV	68.2	-32.4	2.25 H	155	20.2	15.6
5	19395.00	59.2 PK	74.0	-14.8	2.09 H	245	62.7	-3.5
6	19395.00	47.2 AV	54.0	-6.8	2.09 H	245	50.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.4 PK			1.42 V	58	99.4	8.0
2	*6465.00	97.1 AV			1.42 V	58	89.1	8.0
3	#12930.00	48.5 PK	88.2	-39.7	1.74 V	277	32.9	15.6
4	#12930.00	36.6 AV	68.2	-31.6	1.74 V	277	21.0	15.6
5	19395.00	61.7 PK	74.0	-12.3	2.56 V	175	65.2	-3.5
6	19395.00	48.9 AV	54.0	-5.1	2.56 V	175	52.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	106.3 PK			1.44 H	290	97.8	8.5
2	*6545.00	95.7 AV			1.44 H	290	87.2	8.5
3	#13090.00	47.2 PK	88.2	-41.0	2.43 H	135	31.4	15.8
4	#13090.00	35.6 AV	68.2	-32.6	2.43 H	135	19.8	15.8
5	19635.00	59.7 PK	74.0	-14.3	1.92 H	233	63.5	-3.8
6	19635.00	46.8 AV	54.0	-7.2	1.92 H	233	50.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.4 PK			1.42 V	59	98.9	8.5
2	*6545.00	97.0 AV			1.42 V	59	88.5	8.5
3	#13090.00	48.1 PK	88.2	-40.1	1.75 V	280	32.3	15.8
4	#13090.00	36.4 AV	68.2	-31.8	1.75 V	280	20.6	15.8
5	19635.00	60.2 PK	74.0	-13.8	2.67 V	188	64.0	-3.8
6	19635.00	47.9 AV	54.0	-6.1	2.67 V	188	51.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	106.6 PK			1.47 H	278	97.8	8.8
2	*6625.00	95.8 AV			1.47 H	278	87.0	8.8
3	13250.00	47.2 PK	74.0	-26.8	2.44 H	128	30.4	16.8
4	13250.00	35.4 AV	54.0	-18.6	2.44 H	128	18.6	16.8
5	19875.00	59.7 PK	74.0	-14.3	1.89 H	237	63.5	-3.8
6	19875.00	47.0 AV	54.0	-7.0	1.89 H	237	50.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.3 PK			1.46 V	72	98.5	8.8
2	*6625.00	96.8 AV			1.46 V	72	88.0	8.8
3	13250.00	47.5 PK	74.0	-26.5	1.72 V	281	30.7	16.8
4	13250.00	36.1 AV	54.0	-17.9	1.72 V	281	19.3	16.8
5	19875.00	60.0 PK	74.0	-14.0	2.73 V	182	63.8	-3.8
6	19875.00	47.9 AV	54.0	-6.1	2.73 V	182	51.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	106.3 PK			1.42 H	286	97.5	8.8
2	*6705.00	95.4 AV			1.42 H	286	86.6	8.8
3	#13410.00	47.3 PK	88.2	-40.9	2.38 H	124	29.5	17.8
4	#13410.00	35.6 AV	68.2	-32.6	2.38 H	124	17.8	17.8
5	20115.00	59.4 PK	74.0	-14.6	1.88 H	225	63.1	-3.7
6	20115.00	46.6 AV	54.0	-7.4	1.88 H	225	50.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.43 V	62	98.6	8.8
2	*6705.00	97.2 AV			1.43 V	62	88.4	8.8
3	#13410.00	47.8 PK	88.2	-40.4	1.77 V	269	30.0	17.8
4	#13410.00	36.5 AV	68.2	-31.7	1.77 V	269	18.7	17.8
5	20115.00	59.9 PK	74.0	-14.1	2.69 V	197	63.6	-3.7
6	20115.00	47.5 AV	54.0	-6.5	2.69 V	197	51.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.9 PK			1.48 H	301	97.1	8.8
2	*6785.00	95.2 AV			1.48 H	301	86.4	8.8
3	#13570.00	47.5 PK	88.2	-40.7	2.38 H	112	28.9	18.6
4	#13570.00	35.1 AV	68.2	-33.1	2.38 H	112	16.5	18.6
5	20355.00	59.3 PK	74.0	-14.7	1.93 H	225	62.4	-3.1
6	20355.00	46.7 AV	54.0	-7.3	1.93 H	225	49.8	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.1 PK			1.43 V	78	98.3	8.8
2	*6785.00	96.9 AV			1.43 V	78	88.1	8.8
3	#13570.00	48.3 PK	88.2	-39.9	1.82 V	255	29.7	18.6
4	#13570.00	36.9 AV	68.2	-31.3	1.82 V	255	18.3	18.6
5	20355.00	59.7 PK	74.0	-14.3	2.69 V	213	62.8	-3.1
6	20355.00	47.1 AV	54.0	-6.9	2.69 V	213	50.2	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	105.8 PK			1.52 H	308	96.6	9.2
2	*6865.00	95.0 AV			1.52 H	308	85.8	9.2
3	#13730.00	47.8 PK	88.2	-40.4	2.34 H	125	29.3	18.5
4	#13730.00	35.3 AV	68.2	-32.9	2.34 H	125	16.8	18.5
5	20595.00	58.9 PK	74.0	-15.1	1.91 H	233	62.2	-3.3
6	20595.00	46.5 AV	54.0	-7.5	1.91 H	233	49.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.4 PK			1.43 V	68	98.2	9.2
2	*6865.00	97.2 AV			1.43 V	68	88.0	9.2
3	#13730.00	48.5 PK	88.2	-39.7	1.86 V	256	30.0	18.5
4	#13730.00	36.9 AV	68.2	-31.3	1.86 V	256	18.4	18.5
5	20595.00	59.9 PK	74.0	-14.1	2.73 V	223	63.2	-3.3
6	20595.00	46.9 AV	54.0	-7.1	2.73 V	223	50.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	105.4 PK			1.56 H	317	95.4	10.0
2	*6945.00	94.6 AV			1.56 H	317	84.6	10.0
3	#13890.00	47.9 PK	88.2	-40.3	2.29 H	133	29.3	18.6
4	#13890.00	35.2 AV	68.2	-33.0	2.29 H	133	16.6	18.6
5	20835.00	59.2 PK	74.0	-14.8	1.90 H	236	61.9	-2.7
6	20835.00	46.6 AV	54.0	-7.4	1.90 H	236	49.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.2 PK			1.46 V	53	97.2	10.0
2	*6945.00	97.3 AV			1.46 V	53	87.3	10.0
3	#13890.00	48.4 PK	88.2	-39.8	1.88 V	260	29.8	18.6
4	#13890.00	36.5 AV	68.2	-31.7	1.88 V	260	17.9	18.6
5	20835.00	60.1 PK	74.0	-13.9	2.74 V	230	62.8	-2.7
6	20835.00	46.8 AV	54.0	-7.2	2.74 V	230	49.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.4 PK			1.73 H	350	96.5	9.9
2	*7025.00	94.7 AV			1.73 H	350	84.8	9.9
3	#7125.00	58.5 PK	88.2	-29.7	1.73 H	350	47.6	10.9
4	#7125.00	46.0 AV	68.2	-22.2	1.73 H	350	35.1	10.9
5	7250.00	57.5 PK	74.0	-16.5	1.73 H	350	46.7	10.8
6	7250.00	45.6 AV	54.0	-8.4	1.73 H	350	34.8	10.8
7	#14050.00	48.0 PK	88.2	-40.2	2.28 H	123	29.0	19.0
8	#14050.00	35.6 AV	68.2	-32.6	2.28 H	123	16.6	19.0
9	21075.00	59.3 PK	74.0	-14.7	1.85 H	221	62.3	-3.0
10	21075.00	46.8 AV	54.0	-7.2	1.85 H	221	49.8	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.2 PK			3.09 V	307	98.3	9.9
2	*7025.00	96.4 AV			3.09 V	307	86.5	9.9
3	#7125.00	58.7 PK	88.2	-29.5	3.09 V	307	47.8	10.9
4	#7125.00	46.2 AV	68.2	-22.0	3.09 V	307	35.3	10.9
5	7250.00	58.4 PK	74.0	-15.6	3.09 V	307	47.6	10.8
6	7250.00	46.8 AV	54.0	-7.2	3.09 V	307	36.0	10.8
7	#14050.00	48.7 PK	88.2	-39.5	1.92 V	263	29.7	19.0
8	#14050.00	36.8 AV	68.2	-31.4	1.92 V	263	17.8	19.0
9	21075.00	59.5 PK	74.0	-14.5	2.69 V	244	62.5	-3.0
10	21075.00	46.9 AV	54.0	-7.1	2.69 V	244	49.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.8 PK	88.2	-26.4	1.49 H	255	55.5	6.3
2	#5925.00	42.3 AV	68.2	-25.9	1.49 H	255	36.0	6.3
3	*5985.00	107.8 PK			1.49 H	255	101.6	6.2
4	*5985.00	96.8 AV			1.49 H	255	90.6	6.2
5	11970.00	47.8 PK	74.0	-26.2	2.22 H	125	32.3	15.5
6	11970.00	35.4 AV	54.0	-18.6	2.22 H	125	19.9	15.5
7	17955.00	59.1 PK	74.0	-14.9	1.85 H	205	29.1	30.0
8	17955.00	46.9 AV	54.0	-7.1	1.85 H	205	16.9	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.7 PK	88.2	-34.5	1.47 V	36	47.4	6.3
2	#5925.00	41.5 AV	68.2	-26.7	1.47 V	36	35.2	6.3
3	*5985.00	107.6 PK			1.47 V	36	101.4	6.2
4	*5985.00	97.8 AV			1.47 V	36	91.6	6.2
5	11970.00	48.6 PK	74.0	-25.4	1.95 V	274	33.1	15.5
6	11970.00	36.9 AV	54.0	-17.1	1.95 V	274	21.4	15.5
7	17955.00	59.3 PK	74.0	-14.7	2.71 V	243	29.3	30.0
8	17955.00	47.2 AV	54.0	-6.8	2.71 V	243	17.2	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.0 PK			1.49 H	253	101.5	6.5
2	*6145.00	97.2 AV			1.49 H	253	90.7	6.5
3	12290.00	47.5 PK	74.0	-26.5	2.23 H	119	32.2	15.3
4	12290.00	35.1 AV	54.0	-18.9	2.23 H	119	19.8	15.3
5	18435.00	59.2 PK	74.0	-14.8	1.88 H	204	64.3	-5.1
6	18435.00	46.9 AV	54.0	-7.1	1.88 H	204	52.0	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	107.4 PK			1.41 V	28	100.9	6.5
2	*6145.00	97.5 AV			1.41 V	28	91.0	6.5
3	12290.00	48.2 PK	74.0	-25.8	2.00 V	263	32.9	15.3
4	12290.00	36.5 AV	54.0	-17.5	2.00 V	263	21.2	15.3
5	18435.00	59.2 PK	74.0	-14.8	2.68 V	242	64.3	-5.1
6	18435.00	47.3 AV	54.0	-6.7	2.68 V	242	52.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.8 PK			1.48 H	268	100.4	7.4
2	*6385.00	96.8 AV			1.48 H	268	89.4	7.4
3	#12770.00	47.8 PK	88.2	-40.4	2.22 H	122	32.4	15.4
4	#12770.00	35.3 AV	68.2	-32.9	2.22 H	122	19.9	15.4
5	19155.00	58.5 PK	74.0	-15.5	1.84 H	191	63.1	-4.6
6	19155.00	46.8 AV	54.0	-7.2	1.84 H	191	51.4	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.2 PK			1.42 V	42	99.8	7.4
2	*6385.00	97.4 AV			1.42 V	42	90.0	7.4
3	#12770.00	48.7 PK	88.2	-39.5	2.03 V	266	33.3	15.4
4	#12770.00	36.8 AV	68.2	-31.4	2.03 V	266	21.4	15.4
5	19155.00	59.7 PK	74.0	-14.3	2.72 V	231	64.3	-4.6
6	19155.00	47.1 AV	54.0	-6.9	2.72 V	231	51.7	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.4 PK			1.43 H	260	99.4	8.0
2	*6465.00	96.4 AV			1.43 H	260	88.4	8.0
3	#12930.00	47.6 PK	88.2	-40.6	2.23 H	128	32.0	15.6
4	#12930.00	35.9 AV	68.2	-32.3	2.23 H	128	20.3	15.6
5	19395.00	58.4 PK	74.0	-15.6	2.67 H	244	61.9	-3.5
6	19395.00	47.0 AV	54.0	-7.0	2.67 H	244	50.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.2 PK			1.41 V	37	99.2	8.0
2	*6465.00	97.5 AV			1.41 V	37	89.5	8.0
3	#12930.00	48.5 PK	88.2	-39.7	2.01 V	268	32.9	15.6
4	#12930.00	36.8 AV	68.2	-31.4	2.01 V	268	21.2	15.6
5	19395.00	59.6 PK	74.0	-14.4	1.83 V	207	63.1	-3.5
6	19395.00	47.1 AV	54.0	-6.9	1.83 V	207	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.