

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.4 PK			1.46 H	274	98.9	8.5
2	*6545.00	96.2 AV			1.46 H	274	87.7	8.5
3	#13090.00	47.6 PK	88.2	-40.6	2.20 H	126	31.8	15.8
4	#13090.00	35.8 AV	68.2	-32.4	2.20 H	126	20.0	15.8
5	19635.00	58.6 PK	74.0	-15.4	1.80 H	213	62.4	-3.8
6	19635.00	46.9 AV	54.0	-7.1	1.80 H	213	50.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.5 PK			1.43 V	46	99.0	8.5
2	*6545.00	97.8 AV			1.43 V	46	89.3	8.5
3	#13090.00	48.6 PK	88.2	-39.6	2.00 V	269	32.8	15.8
4	#13090.00	36.7 AV	68.2	-31.5	2.00 V	269	20.9	15.8
5	19635.00	59.6 PK	74.0	-14.4	2.66 V	233	63.4	-3.8
6	19635.00	47.1 AV	54.0	-6.9	2.66 V	233	50.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.1 PK			1.48 H	269	98.3	8.8
2	*6625.00	96.0 AV			1.48 H	269	87.2	8.8
3	13250.00	47.9 PK	74.0	-26.1	2.16 H	112	31.1	16.8
4	13250.00	36.0 AV	54.0	-18.0	2.16 H	112	19.2	16.8
5	19875.00	58.7 PK	74.0	-15.3	1.78 H	199	62.5	-3.8
6	19875.00	46.7 AV	54.0	-7.3	1.78 H	199	50.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.3 PK			1.46 V	39	98.5	8.8
2	*6625.00	97.4 AV			1.46 V	39	88.6	8.8
3	13250.00	48.8 PK	74.0	-25.2	1.99 V	260	32.0	16.8
4	13250.00	37.0 AV	54.0	-17.0	1.99 V	260	20.2	16.8
5	19875.00	59.2 PK	74.0	-14.8	2.68 V	241	63.0	-3.8
6	19875.00	47.3 AV	54.0	-6.7	2.68 V	241	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	106.9 PK			1.46 H	282	98.1	8.8
2	*6705.00	96.2 AV			1.46 H	282	87.4	8.8
3	#13410.00	48.2 PK	88.2	-40.0	2.14 H	114	30.4	17.8
4	#13410.00	35.3 AV	68.2	-32.9	2.14 H	114	17.5	17.8
5	20115.00	58.2 PK	74.0	-15.8	1.74 H	189	61.9	-3.7
6	20115.00	46.8 AV	54.0	-7.2	1.74 H	189	50.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.1 PK			1.51 V	37	98.3	8.8
2	*6705.00	97.1 AV			1.51 V	37	88.3	8.8
3	#13410.00	48.9 PK	88.2	-39.3	1.94 V	273	31.1	17.8
4	#13410.00	36.9 AV	68.2	-31.3	1.94 V	273	19.1	17.8
5	20115.00	59.4 PK	74.0	-14.6	2.68 V	236	63.1	-3.7
6	20115.00	47.1 AV	54.0	-6.9	2.68 V	236	50.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.1 PK			1.48 H	296	98.3	8.8
2	*6785.00	96.3 AV			1.48 H	296	87.5	8.8
3	#13570.00	47.9 PK	88.2	-40.3	2.19 H	105	29.3	18.6
4	#13570.00	36.1 AV	68.2	-32.1	2.19 H	105	17.5	18.6
5	20355.00	58.0 PK	74.0	-16.0	1.80 H	196	61.1	-3.1
6	20355.00	46.3 AV	54.0	-7.7	1.80 H	196	49.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.5 PK			1.47 V	24	98.7	8.8
2	*6785.00	97.5 AV			1.47 V	24	88.7	8.8
3	#13570.00	48.5 PK	88.2	-39.7	1.99 V	267	29.9	18.6
4	#13570.00	36.8 AV	68.2	-31.4	1.99 V	267	18.2	18.6
5	20355.00	59.0 PK	74.0	-15.0	2.65 V	248	62.1	-3.1
6	20355.00	46.7 AV	54.0	-7.3	2.65 V	248	49.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	106.8 PK			1.43 H	294	97.6	9.2
2	*6865.00	95.8 AV			1.43 H	294	86.6	9.2
3	#13730.00	47.8 PK	88.2	-40.4	2.16 H	113	29.3	18.5
4	#13730.00	35.7 AV	68.2	-32.5	2.16 H	113	17.2	18.5
5	20595.00	57.3 PK	74.0	-16.7	1.77 H	185	60.6	-3.3
6	20595.00	46.1 AV	54.0	-7.9	1.77 H	185	49.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.3 PK			1.48 V	17	98.1	9.2
2	*6865.00	97.3 AV			1.48 V	17	88.1	9.2
3	#13730.00	48.5 PK	88.2	-39.7	2.03 V	272	30.0	18.5
4	#13730.00	36.8 AV	68.2	-31.4	2.03 V	272	18.3	18.5
5	20595.00	59.2 PK	74.0	-14.8	2.68 V	258	62.5	-3.3
6	20595.00	46.5 AV	54.0	-7.5	2.68 V	258	49.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	106.5 PK			1.39 H	300	96.5	10.0
2	*6945.00	95.4 AV			1.39 H	300	85.4	10.0
3	#13890.00	47.7 PK	88.2	-40.5	2.15 H	102	29.1	18.6
4	#13890.00	34.9 AV	68.2	-33.3	2.15 H	102	16.3	18.6
5	20835.00	57.6 PK	74.0	-16.4	1.78 H	190	60.3	-2.7
6	20835.00	46.3 AV	54.0	-7.7	1.78 H	190	49.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	106.9 PK			1.52 V	5	96.9	10.0
2	*6945.00	97.0 AV			1.52 V	5	87.0	10.0
3	#13890.00	48.1 PK	88.2	-40.1	2.03 V	283	29.5	18.6
4	#13890.00	36.6 AV	68.2	-31.6	2.03 V	283	18.0	18.6
5	20835.00	59.0 PK	74.0	-15.0	2.73 V	251	61.7	-2.7
6	20835.00	46.5 AV	54.0	-7.5	2.73 V	251	49.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.7 PK			1.40 H	147	96.8	9.9
2	*7025.00	94.6 AV			1.40 H	147	84.7	9.9
3	#7125.00	58.7 PK	88.2	-29.5	1.40 H	147	47.8	10.9
4	#7125.00	46.0 AV	68.2	-22.2	1.40 H	147	35.1	10.9
5	7250.00	57.8 PK	74.0	-16.2	1.40 H	147	47.0	10.8
6	7250.00	45.7 AV	54.0	-8.3	1.40 H	147	34.9	10.8
7	#14050.00	47.6 PK	88.2	-40.6	2.16 H	106	28.6	19.0
8	#14050.00	35.8 AV	68.2	-32.4	2.16 H	106	16.8	19.0
9	21075.00	58.2 PK	74.0	-15.8	1.78 H	174	61.2	-3.0
10	21075.00	46.4 AV	54.0	-7.6	1.78 H	174	49.4	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.4 PK			3.04 V	297	101.5	9.9
2	*7025.00	100.8 AV			3.04 V	297	90.9	9.9
3	#7125.00	65.5 PK	88.2	-22.7	3.04 V	297	54.6	10.9
4	#7125.00	50.2 AV	68.2	-18.0	3.04 V	297	39.3	10.9
5	7250.00	58.1 PK	74.0	-15.9	3.04 V	297	47.3	10.8
6	7250.00	47.4 AV	54.0	-6.6	3.04 V	297	36.6	10.8
7	#14050.00	48.6 PK	88.2	-39.6	2.07 V	296	29.6	19.0
8	#14050.00	37.0 AV	68.2	-31.2	2.07 V	296	18.0	19.0
9	21075.00	59.0 PK	74.0	-15.0	2.77 V	246	62.0	-3.0
10	21075.00	46.9 AV	54.0	-7.1	2.77 V	246	49.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.4 PK	88.2	-22.8	1.52 H	250	59.1	6.3
2	#5925.00	51.8 AV	68.2	-16.4	1.52 H	250	45.5	6.3
3	*6025.00	107.8 PK			1.52 H	250	101.7	6.1
4	*6025.00	96.6 AV			1.52 H	250	90.5	6.1
5	12050.00	47.8 PK	74.0	-26.2	2.21 H	118	32.2	15.6
6	12050.00	35.9 AV	54.0	-18.1	2.21 H	118	20.3	15.6
7	18075.00	58.6 PK	74.0	-15.4	1.79 H	177	63.7	-5.1
8	18075.00	46.8 AV	54.0	-7.2	1.79 H	177	51.9	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.6 PK	88.2	-23.6	2.22 V	30	58.3	6.3
2	#5925.00	46.7 AV	68.2	-21.5	2.22 V	30	40.4	6.3
3	*6025.00	108.0 PK			2.22 V	30	101.9	6.1
4	*6025.00	97.8 AV			2.22 V	30	91.7	6.1
5	12050.00	49.0 PK	74.0	-25.0	2.09 V	292	33.4	15.6
6	12050.00	37.4 AV	54.0	-16.6	2.09 V	292	21.8	15.6
7	18075.00	59.5 PK	74.0	-14.5	2.83 V	242	64.6	-5.1
8	18075.00	47.3 AV	54.0	-6.7	2.83 V	242	52.4	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.5 PK			1.40 H	297	100.7	6.8
2	*6185.00	96.4 AV			1.40 H	297	89.6	6.8
3	12370.00	47.8 PK	74.0	-26.2	2.21 H	129	32.8	15.0
4	12370.00	36.2 AV	54.0	-17.8	2.21 H	129	21.2	15.0
5	18555.00	59.0 PK	74.0	-15.0	1.74 H	164	63.9	-4.9
6	18555.00	46.9 AV	54.0	-7.1	1.74 H	164	51.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.8 PK			1.53 V	12	101.0	6.8
2	*6185.00	97.7 AV			1.53 V	12	90.9	6.8
3	12370.00	49.3 PK	74.0	-24.7	2.03 V	279	34.3	15.0
4	12370.00	37.7 AV	54.0	-16.3	2.03 V	279	22.7	15.0
5	18555.00	59.8 PK	74.0	-14.2	2.86 V	236	64.7	-4.9
6	18555.00	47.8 AV	54.0	-6.2	2.86 V	236	52.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.1 PK			1.45 H	294	99.7	7.4
2	*6345.00	96.0 AV			1.45 H	294	88.6	7.4
3	12690.00	47.9 PK	74.0	-26.1	2.24 H	125	33.0	14.9
4	12690.00	36.6 AV	54.0	-17.4	2.24 H	125	21.7	14.9
5	19035.00	59.3 PK	74.0	-14.7	1.71 H	175	64.0	-4.7
6	19035.00	46.8 AV	54.0	-7.2	1.71 H	175	51.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.6 PK			1.48 V	8	100.2	7.4
2	*6345.00	97.5 AV			1.48 V	8	90.1	7.4
3	12690.00	49.5 PK	74.0	-24.5	2.07 V	264	34.6	14.9
4	12690.00	37.8 AV	54.0	-16.2	2.07 V	264	22.9	14.9
5	19035.00	59.8 PK	74.0	-14.2	2.88 V	235	64.5	-4.7
6	19035.00	47.8 AV	54.0	-6.2	2.88 V	235	52.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.3 PK			1.43 H	279	99.1	8.2
2	*6505.00	96.4 AV			1.43 H	279	88.2	8.2
3	#13010.00	48.1 PK	88.2	-40.1	2.25 H	131	32.6	15.5
4	#13010.00	36.3 AV	68.2	-31.9	2.25 H	131	20.8	15.5
5	19515.00	59.2 PK	74.0	-14.8	1.77 H	176	62.4	-3.2
6	19515.00	47.2 AV	54.0	-6.8	1.77 H	176	50.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.5 PK			1.42 V	0	99.3	8.2
2	*6505.00	97.3 AV			1.42 V	0	89.1	8.2
3	#13010.00	49.0 PK	88.2	-39.2	2.06 V	272	33.5	15.5
4	#13010.00	37.4 AV	68.2	-30.8	2.06 V	272	21.9	15.5
5	19515.00	60.0 PK	74.0	-14.0	2.93 V	232	63.2	-3.2
6	19515.00	47.7 AV	54.0	-6.3	2.93 V	232	50.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.1 PK			1.38 H	264	98.2	8.9
2	*6665.00	96.2 AV			1.38 H	264	87.3	8.9
3	13330.00	48.5 PK	74.0	-25.5	2.28 H	123	31.1	17.4
4	13330.00	36.8 AV	54.0	-17.2	2.28 H	123	19.4	17.4
5	19995.00	59.1 PK	74.0	-14.9	1.73 H	161	63.2	-4.1
6	19995.00	47.6 AV	54.0	-6.4	1.73 H	161	51.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.0 PK			1.47 V	1	98.1	8.9
2	*6665.00	96.9 AV			1.47 V	1	88.0	8.9
3	13330.00	49.3 PK	74.0	-24.7	2.08 V	284	31.9	17.4
4	13330.00	37.4 AV	54.0	-16.6	2.08 V	284	20.0	17.4
5	19995.00	60.3 PK	74.0	-13.7	2.88 V	218	64.4	-4.1
6	19995.00	47.5 AV	54.0	-6.5	2.88 V	218	51.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.6 PK			1.40 H	276	98.6	9.0
2	*6825.00	96.6 AV			1.40 H	276	87.6	9.0
3	#13650.00	48.2 PK	88.2	-40.0	2.25 H	130	29.6	18.6
4	#13650.00	36.5 AV	68.2	-31.7	2.25 H	130	17.9	18.6
5	20475.00	59.3 PK	74.0	-14.7	1.70 H	164	62.3	-3.0
6	20475.00	47.3 AV	54.0	-6.7	1.70 H	164	50.3	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.2 PK			1.51 V	0	98.2	9.0
2	*6825.00	97.1 AV			1.51 V	0	88.1	9.0
3	#13650.00	49.4 PK	88.2	-38.8	2.11 V	270	30.8	18.6
4	#13650.00	37.4 AV	68.2	-30.8	2.11 V	270	18.8	18.6
5	20475.00	60.2 PK	74.0	-13.8	2.83 V	228	63.2	-3.0
6	20475.00	47.6 AV	54.0	-6.4	2.83 V	228	50.6	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.1 PK			1.46 H	148	96.1	10.0
2	*6985.00	94.5 AV			1.46 H	148	84.5	10.0
3	#7125.00	68.5 PK	88.2	-19.7	1.46 H	148	57.6	10.9
4	#7125.00	50.7 AV	68.2	-17.5	1.46 H	148	39.8	10.9
5	7250.00	57.5 PK	74.0	-16.5	1.46 H	148	46.7	10.8
6	7250.00	45.9 AV	54.0	-8.1	1.46 H	148	35.1	10.8
7	#13970.00	48.3 PK	88.2	-39.9	2.25 H	124	29.3	19.0
8	#13970.00	36.2 AV	68.2	-32.0	2.25 H	124	17.2	19.0
9	20955.00	59.2 PK	74.0	-14.8	1.69 H	173	61.9	-2.7
10	20955.00	47.5 AV	54.0	-6.5	1.69 H	173	50.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.8 PK			1.88 V	192	97.8	10.0
2	*6985.00	97.0 AV			1.88 V	192	87.0	10.0
3	#7125.00	68.2 PK	88.2	-20.0	1.88 V	192	57.3	10.9
4	#7125.00	52.5 AV	68.2	-15.7	1.88 V	192	41.6	10.9
5	7250.00	58.9 PK	74.0	-15.1	1.88 V	192	48.1	10.8
6	7250.00	46.8 AV	54.0	-7.2	1.88 V	192	36.0	10.8
7	#13970.00	49.8 PK	88.2	-38.4	2.13 V	272	30.8	19.0
8	#13970.00	37.5 AV	68.2	-30.7	2.13 V	272	18.5	19.0
9	20955.00	60.7 PK	74.0	-13.3	2.82 V	222	63.4	-2.7
10	20955.00	47.7 AV	54.0	-6.3	2.82 V	222	50.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.6 PK	88.2	-27.6	1.47 H	244	54.3	6.3
2	#5925.00	49.9 AV	68.2	-18.3	1.47 H	244	43.6	6.3
3	*6025.00	107.7 PK			1.47 H	244	101.6	6.1
4	*6025.00	96.4 AV			1.47 H	244	90.3	6.1
5	12050.00	47.9 PK	74.0	-26.1	2.27 H	125	32.3	15.6
6	12050.00	36.4 AV	54.0	-17.6	2.27 H	125	20.8	15.6
7	18075.00	59.1 PK	74.0	-14.9	1.65 H	177	64.2	-5.1
8	18075.00	47.2 AV	54.0	-6.8	1.65 H	177	52.3	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.4 PK	88.2	-24.8	2.08 V	55	57.1	6.3
2	#5925.00	46.3 AV	68.2	-21.9	2.08 V	55	40.0	6.3
3	*6025.00	108.1 PK			2.08 V	55	102.0	6.1
4	*6025.00	97.8 AV			2.08 V	55	91.7	6.1
5	12050.00	49.9 PK	74.0	-24.1	2.11 V	260	34.3	15.6
6	12050.00	37.7 AV	54.0	-16.3	2.11 V	260	22.1	15.6
7	18075.00	61.3 PK	74.0	-12.7	2.81 V	234	66.4	-5.1
8	18075.00	48.2 AV	54.0	-5.8	2.81 V	234	53.3	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.6 PK			1.45 H	230	100.8	6.8
2	*6185.00	96.2 AV			1.45 H	230	89.4	6.8
3	12370.00	48.5 PK	74.0	-25.5	2.24 H	125	33.5	15.0
4	12370.00	36.6 AV	54.0	-17.4	2.24 H	125	21.6	15.0
5	18555.00	58.7 PK	74.0	-15.3	1.65 H	171	63.6	-4.9
6	18555.00	46.8 AV	54.0	-7.2	1.65 H	171	51.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.8 PK			2.08 V	68	101.0	6.8
2	*6185.00	97.4 AV			2.08 V	68	90.6	6.8
3	12370.00	49.8 PK	74.0	-24.2	2.12 V	261	34.8	15.0
4	12370.00	37.8 AV	54.0	-16.2	2.12 V	261	22.8	15.0
5	18555.00	61.3 PK	74.0	-12.7	2.84 V	220	66.2	-4.9
6	18555.00	48.1 AV	54.0	-5.9	2.84 V	220	53.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.4 PK			1.47 H	236	100.0	7.4
2	*6345.00	95.8 AV			1.47 H	236	88.4	7.4
3	12690.00	48.9 PK	74.0	-25.1	2.21 H	114	34.0	14.9
4	12690.00	36.7 AV	54.0	-17.3	2.21 H	114	21.8	14.9
5	19035.00	59.0 PK	74.0	-15.0	1.63 H	158	63.7	-4.7
6	19035.00	47.3 AV	54.0	-6.7	1.63 H	158	52.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.0 PK			2.10 V	79	100.6	7.4
2	*6345.00	97.7 AV			2.10 V	79	90.3	7.4
3	12690.00	49.9 PK	74.0	-24.1	2.16 V	261	35.0	14.9
4	12690.00	37.7 AV	54.0	-16.3	2.16 V	261	22.8	14.9
5	19035.00	61.5 PK	74.0	-12.5	2.84 V	223	66.2	-4.7
6	19035.00	48.5 AV	54.0	-5.5	2.84 V	223	53.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.3 PK			1.47 H	221	99.1	8.2
2	*6505.00	95.6 AV			1.47 H	221	87.4	8.2
3	#13010.00	48.6 PK	88.2	-39.6	2.15 H	128	33.1	15.5
4	#13010.00	36.7 AV	68.2	-31.5	2.15 H	128	21.2	15.5
5	19515.00	59.2 PK	74.0	-14.8	1.60 H	170	62.4	-3.2
6	19515.00	47.4 AV	54.0	-6.6	1.60 H	170	50.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.9 PK			2.07 V	80	99.7	8.2
2	*6505.00	97.9 AV			2.07 V	80	89.7	8.2
3	#13010.00	49.7 PK	88.2	-38.5	2.22 V	276	34.2	15.5
4	#13010.00	37.4 AV	68.2	-30.8	2.22 V	276	21.9	15.5
5	19515.00	61.2 PK	74.0	-12.8	2.88 V	224	64.4	-3.2
6	19515.00	48.3 AV	54.0	-5.7	2.88 V	224	51.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.5 PK			1.47 H	234	98.6	8.9
2	*6665.00	95.9 AV			1.47 H	234	87.0	8.9
3	13330.00	48.8 PK	74.0	-25.2	2.16 H	136	31.4	17.4
4	13330.00	36.5 AV	54.0	-17.5	2.16 H	136	19.1	17.4
5	19995.00	58.7 PK	74.0	-15.3	1.59 H	156	62.8	-4.1
6	19995.00	47.2 AV	54.0	-6.8	1.59 H	156	51.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.1 PK			2.04 V	84	99.2	8.9
2	*6665.00	98.2 AV			2.04 V	84	89.3	8.9
3	13330.00	49.6 PK	74.0	-24.4	2.18 V	281	32.2	17.4
4	13330.00	37.2 AV	54.0	-16.8	2.18 V	281	19.8	17.4
5	19995.00	60.9 PK	74.0	-13.1	2.87 V	232	65.0	-4.1
6	19995.00	48.1 AV	54.0	-5.9	2.87 V	232	52.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.2 PK			1.44 H	232	98.2	9.0
2	*6825.00	95.7 AV			1.44 H	232	86.7	9.0
3	#13650.00	49.0 PK	88.2	-39.2	2.11 H	127	30.4	18.6
4	#13650.00	36.1 AV	68.2	-32.1	2.11 H	127	17.5	18.6
5	20475.00	58.9 PK	74.0	-15.1	1.60 H	158	61.9	-3.0
6	20475.00	47.4 AV	54.0	-6.6	1.60 H	158	50.4	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.8 PK			2.05 V	79	98.8	9.0
2	*6825.00	97.8 AV			2.05 V	79	88.8	9.0
3	#13650.00	49.9 PK	88.2	-38.3	2.16 V	275	31.3	18.6
4	#13650.00	37.2 AV	68.2	-31.0	2.16 V	275	18.6	18.6
5	20475.00	60.8 PK	74.0	-13.2	2.90 V	219	63.8	-3.0
6	20475.00	47.7 AV	54.0	-6.3	2.90 V	219	50.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.2 PK			1.51 H	142	96.2	10.0
2	*6985.00	94.2 AV			1.51 H	142	84.2	10.0
3	#7125.00	69.8 PK	88.2	-18.4	1.51 H	142	58.9	10.9
4	#7125.00	49.3 AV	68.2	-18.9	1.51 H	142	38.4	10.9
5	7250.00	58.7 PK	74.0	-15.3	1.51 H	142	47.9	10.8
6	7250.00	45.8 AV	54.0	-8.2	1.51 H	142	35.0	10.8
7	#13970.00	48.6 PK	88.2	-39.6	2.16 H	107	29.6	19.0
8	#13970.00	35.8 AV	68.2	-32.4	2.16 H	107	16.8	19.0
9	20955.00	59.0 PK	74.0	-15.0	1.56 H	148	61.7	-2.7
10	20955.00	47.3 AV	54.0	-6.7	1.56 H	148	50.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.2 PK			1.97 V	202	99.2	10.0
2	*6985.00	98.0 AV			1.97 V	202	88.0	10.0
3	#7125.00	75.4 PK	88.2	-12.8	1.97 V	202	64.5	10.9
4	#7125.00	50.3 AV	68.2	-17.9	1.97 V	202	39.4	10.9
5	7250.00	60.7 PK	74.0	-13.3	1.97 V	202	49.9	10.8
6	7250.00	47.6 AV	54.0	-6.4	1.97 V	202	36.8	10.8
7	#13970.00	49.4 PK	88.2	-38.8	2.17 V	268	30.4	19.0
8	#13970.00	37.0 AV	68.2	-31.2	2.17 V	268	18.0	19.0
9	20955.00	61.0 PK	74.0	-13.0	2.95 V	230	63.7	-2.7
10	20955.00	47.7 AV	54.0	-6.3	2.95 V	230	50.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.6 PK	88.2	-28.6	1.56 H	261	53.3	6.3
2	#5925.00	48.0 AV	68.2	-20.2	1.56 H	261	41.7	6.3
3	*6025.00	106.4 PK			1.56 H	261	100.3	6.1
4	*6025.00	96.6 AV			1.56 H	261	90.5	6.1
5	12050.00	48.7 PK	74.0	-25.3	2.16 H	111	33.1	15.6
6	12050.00	35.9 AV	54.0	-18.1	2.16 H	111	20.3	15.6
7	18075.00	59.5 PK	74.0	-14.5	1.56 H	148	64.6	-5.1
8	18075.00	47.5 AV	54.0	-6.5	1.56 H	148	52.6	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.9 PK	88.2	-34.3	1.96 V	47	47.6	6.3
2	#5925.00	43.4 AV	68.2	-24.8	1.96 V	47	37.1	6.3
3	*6025.00	107.4 PK			1.96 V	47	101.3	6.1
4	*6025.00	98.1 AV			1.96 V	47	92.0	6.1
5	12050.00	49.3 PK	74.0	-24.7	2.13 V	277	33.7	15.6
6	12050.00	36.7 AV	54.0	-17.3	2.13 V	277	21.1	15.6
7	18075.00	61.1 PK	74.0	-12.9	2.90 V	216	66.2	-5.1
8	18075.00	47.9 AV	54.0	-6.1	2.90 V	216	53.0	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.6 PK			1.60 H	247	99.8	6.8
2	*6185.00	96.8 AV			1.60 H	247	90.0	6.8
3	12370.00	49.2 PK	74.0	-24.8	2.11 H	123	34.2	15.0
4	12370.00	36.1 AV	54.0	-17.9	2.11 H	123	21.1	15.0
5	18555.00	59.2 PK	74.0	-14.8	1.61 H	156	64.1	-4.9
6	18555.00	47.3 AV	54.0	-6.7	1.61 H	156	52.2	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.3 PK			1.93 V	60	100.5	6.8
2	*6185.00	97.9 AV			1.93 V	60	91.1	6.8
3	12370.00	49.9 PK	74.0	-24.1	2.12 V	269	34.9	15.0
4	12370.00	37.1 AV	54.0	-16.9	2.12 V	269	22.1	15.0
5	18555.00	61.1 PK	74.0	-12.9	2.84 V	218	66.0	-4.9
6	18555.00	48.0 AV	54.0	-6.0	2.84 V	218	52.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.8 PK			1.56 H	263	99.4	7.4
2	*6345.00	96.8 AV			1.56 H	263	89.4	7.4
3	12690.00	48.7 PK	74.0	-25.3	2.06 H	117	33.8	14.9
4	12690.00	35.8 AV	54.0	-18.2	2.06 H	117	20.9	14.9
5	19035.00	59.6 PK	74.0	-14.4	1.67 H	164	64.3	-4.7
6	19035.00	47.6 AV	54.0	-6.4	1.67 H	164	52.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.2 PK			1.90 V	44	99.8	7.4
2	*6345.00	97.6 AV			1.90 V	44	90.2	7.4
3	12690.00	49.4 PK	74.0	-24.6	2.18 V	270	34.5	14.9
4	12690.00	36.9 AV	54.0	-17.1	2.18 V	270	22.0	14.9
5	19035.00	61.5 PK	74.0	-12.5	2.80 V	226	66.2	-4.7
6	19035.00	48.2 AV	54.0	-5.8	2.80 V	226	52.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.9 PK			1.56 H	261	98.7	8.2
2	*6505.00	96.9 AV			1.56 H	261	88.7	8.2
3	#13010.00	48.8 PK	88.2	-39.4	2.11 H	101	33.3	15.5
4	#13010.00	35.5 AV	68.2	-32.7	2.11 H	101	20.0	15.5
5	19515.00	59.7 PK	74.0	-14.3	1.62 H	164	62.9	-3.2
6	19515.00	47.6 AV	54.0	-6.4	1.62 H	164	50.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.0 PK			1.95 V	47	98.8	8.2
2	*6505.00	97.4 AV			1.95 V	47	89.2	8.2
3	#13010.00	49.3 PK	88.2	-38.9	2.15 V	254	33.8	15.5
4	#13010.00	36.5 AV	68.2	-31.7	2.15 V	254	21.0	15.5
5	19515.00	61.1 PK	74.0	-12.9	2.83 V	241	64.3	-3.2
6	19515.00	47.7 AV	54.0	-6.3	2.83 V	241	50.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.8 PK			1.55 H	269	97.9	8.9
2	*6665.00	96.7 AV			1.55 H	269	87.8	8.9
3	13330.00	48.6 PK	74.0	-25.4	2.08 H	115	31.2	17.4
4	13330.00	35.7 AV	54.0	-18.3	2.08 H	115	18.3	17.4
5	19995.00	60.0 PK	74.0	-14.0	1.63 H	153	64.1	-4.1
6	19995.00	47.5 AV	54.0	-6.5	1.63 H	153	51.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.1 PK			1.96 V	59	98.2	8.9
2	*6665.00	97.3 AV			1.96 V	59	88.4	8.9
3	13330.00	49.7 PK	74.0	-24.3	2.16 V	258	32.3	17.4
4	13330.00	36.7 AV	54.0	-17.3	2.16 V	258	19.3	17.4
5	19995.00	60.8 PK	74.0	-13.2	2.88 V	250	64.9	-4.1
6	19995.00	47.7 AV	54.0	-6.3	2.88 V	250	51.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.6 PK			1.49 H	281	97.6	9.0
2	*6825.00	96.4 AV			1.49 H	281	87.4	9.0
3	#13650.00	49.0 PK	88.2	-39.2	2.12 H	106	30.4	18.6
4	#13650.00	36.2 AV	68.2	-32.0	2.12 H	106	17.6	18.6
5	20475.00	61.0 PK	74.0	-13.0	1.69 H	161	64.0	-3.0
6	20475.00	47.8 AV	54.0	-6.2	1.69 H	161	50.8	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.3 PK			1.99 V	47	98.3	9.0
2	*6825.00	97.7 AV			1.99 V	47	88.7	9.0
3	#13650.00	49.8 PK	88.2	-38.4	2.14 V	269	31.2	18.6
4	#13650.00	37.1 AV	68.2	-31.1	2.14 V	269	18.5	18.6
5	20475.00	61.0 PK	74.0	-13.0	2.89 V	243	64.0	-3.0
6	20475.00	47.9 AV	54.0	-6.1	2.89 V	243	50.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.8 PK			1.48 H	151	95.8	10.0
2	*6985.00	95.1 AV			1.48 H	151	85.1	10.0
3	#7125.00	65.7 PK	88.2	-22.5	1.48 H	151	54.8	10.9
4	#7125.00	50.9 AV	68.2	-17.3	1.48 H	151	40.0	10.9
5	7250.00	56.9 PK	74.0	-17.1	1.48 H	151	46.1	10.8
6	7250.00	46.1 AV	54.0	-7.9	1.48 H	151	35.3	10.8
7	#13970.00	48.5 PK	88.2	-39.7	2.17 H	121	29.5	19.0
8	#13970.00	35.8 AV	68.2	-32.4	2.17 H	121	16.8	19.0
9	20955.00	60.0 PK	74.0	-14.0	1.73 H	170	62.7	-2.7
10	20955.00	47.4 AV	54.0	-6.6	1.73 H	170	50.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.4 PK			1.94 V	188	98.4	10.0
2	*6985.00	97.7 AV			1.94 V	188	87.7	10.0
3	#7125.00	71.6 PK	88.2	-16.6	1.94 V	188	60.7	10.9
4	#7125.00	53.7 AV	68.2	-14.5	1.94 V	188	42.8	10.9
5	7250.00	59.7 PK	74.0	-14.3	1.94 V	188	48.9	10.8
6	7250.00	47.8 AV	54.0	-6.2	1.94 V	188	37.0	10.8
7	#13970.00	49.3 PK	88.2	-38.9	2.18 V	264	30.3	19.0
8	#13970.00	36.6 AV	68.2	-31.6	2.18 V	264	17.6	19.0
9	20955.00	60.4 PK	74.0	-13.6	2.91 V	234	63.1	-2.7
10	20955.00	48.0 AV	54.0	-6.0	2.91 V	234	50.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.0 PK	88.2	-14.2	1.44 H	252	67.7	6.3
2	#5925.00	54.3 AV	68.2	-13.9	1.44 H	252	48.0	6.3
3	*6105.00	105.3 PK			1.44 H	252	99.0	6.3
4	*6105.00	94.3 AV			1.44 H	252	88.0	6.3
5	12210.00	48.2 PK	74.0	-25.8	2.16 H	123	32.7	15.5
6	12210.00	35.4 AV	54.0	-18.6	2.16 H	123	19.9	15.5
7	18315.00	60.6 PK	74.0	-13.4	1.74 H	168	65.8	-5.2
8	18315.00	47.6 AV	54.0	-6.4	1.74 H	168	52.8	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.5 PK	88.2	-17.7	2.32 V	259	64.2	6.3
2	#5925.00	52.3 AV	68.2	-15.9	2.32 V	259	46.0	6.3
3	*6105.00	106.0 PK			2.32 V	259	99.7	6.3
4	*6105.00	95.3 AV			2.32 V	259	89.0	6.3
5	12210.00	48.8 PK	74.0	-25.2	2.19 V	263	33.3	15.5
6	12210.00	36.2 AV	54.0	-17.8	2.19 V	263	20.7	15.5
7	18315.00	60.8 PK	74.0	-13.2	2.94 V	244	66.0	-5.2
8	18315.00	48.4 AV	54.0	-5.6	2.94 V	244	53.6	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.0 PK			1.40 H	242	97.9	7.1
2	*6265.00	94.2 AV			1.40 H	242	87.1	7.1
3	12530.00	48.3 PK	74.0	-25.7	2.17 H	118	33.6	14.7
4	12530.00	35.8 AV	54.0	-18.2	2.17 H	118	21.1	14.7
5	18795.00	60.8 PK	74.0	-13.2	1.72 H	183	65.6	-4.8
6	18795.00	47.9 AV	54.0	-6.1	1.72 H	183	52.7	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.8 PK			2.38 V	263	98.7	7.1
2	*6265.00	95.1 AV			2.38 V	263	88.0	7.1
3	12530.00	48.7 PK	74.0	-25.3	2.25 V	256	34.0	14.7
4	12530.00	36.0 AV	54.0	-18.0	2.25 V	256	21.3	14.7
5	18795.00	61.1 PK	74.0	-12.9	2.97 V	247	65.9	-4.8
6	18795.00	48.6 AV	54.0	-5.4	2.97 V	247	53.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.2 PK			1.37 H	250	97.5	7.7
2	*6425.00	94.5 AV			1.37 H	250	86.8	7.7
3	#12850.00	47.7 PK	88.2	-40.5	2.21 H	121	32.1	15.6
4	#12850.00	35.1 AV	68.2	-33.1	2.21 H	121	19.5	15.6
5	19275.00	61.0 PK	74.0	-13.0	1.68 H	175	65.2	-4.2
6	19275.00	47.9 AV	54.0	-6.1	1.68 H	175	52.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.5 PK			2.37 V	269	97.8	7.7
2	*6425.00	94.8 AV			2.37 V	269	87.1	7.7
3	#12850.00	48.9 PK	88.2	-39.3	2.21 V	269	33.3	15.6
4	#12850.00	36.1 AV	68.2	-32.1	2.21 V	269	20.5	15.6
5	19275.00	61.2 PK	74.0	-12.8	2.99 V	244	65.4	-4.2
6	19275.00	48.7 AV	54.0	-5.3	2.99 V	244	52.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	104.9 PK			1.37 H	244	96.2	8.7
2	*6585.00	94.3 AV			1.37 H	244	85.6	8.7
3	#13170.00	47.4 PK	88.2	-40.8	2.15 H	111	31.3	16.1
4	#13170.00	34.8 AV	68.2	-33.4	2.15 H	111	18.7	16.1
5	19755.00	60.8 PK	74.0	-13.2	1.65 H	159	64.8	-4.0
6	19755.00	48.0 AV	54.0	-6.0	1.65 H	159	52.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.3 PK			2.36 V	257	96.6	8.7
2	*6585.00	94.4 AV			2.36 V	257	85.7	8.7
3	#13170.00	48.7 PK	88.2	-39.5	2.21 V	257	32.6	16.1
4	#13170.00	35.9 AV	68.2	-32.3	2.21 V	257	19.8	16.1
5	19755.00	61.3 PK	74.0	-12.7	2.96 V	257	65.3	-4.0
6	19755.00	49.1 AV	54.0	-4.9	2.96 V	257	53.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.5 PK			1.36 H	248	96.7	8.8
2	*6745.00	94.7 AV			1.36 H	248	85.9	8.8
3	#13490.00	47.6 PK	88.2	-40.6	2.11 H	105	29.3	18.3
4	#13490.00	36.8 AV	68.2	-31.4	2.11 H	105	18.5	18.3
5	20235.00	61.0 PK	74.0	-13.0	1.70 H	147	64.3	-3.3
6	20235.00	48.4 AV	54.0	-5.6	1.70 H	147	51.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.8 PK			2.40 V	272	96.0	8.8
2	*6745.00	94.0 AV			2.40 V	272	85.2	8.8
3	#13490.00	48.5 PK	88.2	-39.7	2.23 V	242	30.2	18.3
4	#13490.00	35.6 AV	68.2	-32.6	2.23 V	242	17.3	18.3
5	20235.00	61.7 PK	74.0	-12.3	2.98 V	241	65.0	-3.3
6	20235.00	49.2 AV	54.0	-4.8	2.98 V	241	52.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	104.2 PK			1.17 H	26	94.9	9.3
2	*6905.00	94.4 AV			1.17 H	26	85.1	9.3
3	#7125.00	71.3 PK	88.2	-16.9	1.17 H	26	60.4	10.9
4	#7125.00	49.3 AV	68.2	-18.9	1.17 H	26	38.4	10.9
5	7250.00	58.5 PK	74.0	-15.5	1.17 H	26	47.7	10.8
6	7250.00	46.0 AV	54.0	-8.0	1.17 H	26	35.2	10.8
7	#13810.00	47.7 PK	88.2	-40.5	2.17 H	120	29.3	18.4
8	#13810.00	34.5 AV	68.2	-33.7	2.17 H	120	16.1	18.4
9	20715.00	60.6 PK	74.0	-13.4	1.69 H	163	63.5	-2.9
10	20715.00	48.1 AV	54.0	-5.9	1.69 H	163	51.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.1 PK			1.63 V	192	96.8	9.3
2	*6905.00	97.0 AV			1.63 V	192	87.7	9.3
3	#7125.00	74.3 PK	88.2	-13.9	1.63 V	192	63.4	10.9
4	#7125.00	53.0 AV	68.2	-15.2	1.63 V	192	42.1	10.9
5	7250.00	58.3 PK	74.0	-15.7	1.63 V	192	47.5	10.8
6	7250.00	47.5 AV	54.0	-6.5	1.63 V	192	36.7	10.8
7	#13810.00	48.4 PK	88.2	-39.8	2.29 V	237	30.0	18.4
8	#13810.00	35.2 AV	68.2	-33.0	2.29 V	237	16.8	18.4
9	20715.00	62.1 PK	74.0	-11.9	3.01 V	253	65.0	-2.9
10	20715.00	49.5 AV	54.0	-4.5	3.01 V	253	52.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.1 PK	88.2	-22.1	1.40 H	246	59.8	6.3
2	#5925.00	49.5 AV	68.2	-18.7	1.40 H	246	43.2	6.3
3	*6105.00	105.2 PK			1.40 H	246	98.9	6.3
4	*6105.00	94.7 AV			1.40 H	246	88.4	6.3
5	12210.00	46.9 PK	74.0	-27.1	2.13 H	116	31.4	15.5
6	12210.00	33.4 AV	54.0	-20.6	2.13 H	116	17.9	15.5
7	18315.00	60.3 PK	74.0	-13.7	1.70 H	164	65.5	-5.2
8	18315.00	47.7 AV	54.0	-6.3	1.70 H	164	52.9	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.9 PK	88.2	-21.3	2.19 V	267	60.6	6.3
2	#5925.00	49.4 AV	68.2	-18.8	2.19 V	267	43.1	6.3
3	*6105.00	105.9 PK			2.19 V	267	99.6	6.3
4	*6105.00	96.1 AV			2.19 V	267	89.8	6.3
5	12210.00	47.7 PK	74.0	-26.3	2.34 V	236	32.2	15.5
6	12210.00	34.7 AV	54.0	-19.3	2.34 V	236	19.2	15.5
7	18315.00	62.0 PK	74.0	-12.0	3.04 V	262	67.2	-5.2
8	18315.00	49.7 AV	54.0	-4.3	3.04 V	262	54.9	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.1 PK			1.38 H	234	98.0	7.1
2	*6265.00	94.7 AV			1.38 H	234	87.6	7.1
3	12530.00	47.4 PK	74.0	-26.6	2.17 H	122	32.7	14.7
4	12530.00	33.7 AV	54.0	-20.3	2.17 H	122	19.0	14.7
5	18795.00	60.1 PK	74.0	-13.9	1.68 H	162	64.9	-4.8
6	18795.00	47.6 AV	54.0	-6.4	1.68 H	162	52.4	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	106.2 PK			2.17 V	262	99.1	7.1
2	*6265.00	96.4 AV			2.17 V	262	89.3	7.1
3	12530.00	48.1 PK	74.0	-25.9	2.33 V	230	33.4	14.7
4	12530.00	34.9 AV	54.0	-19.1	2.33 V	230	20.2	14.7
5	18795.00	61.6 PK	74.0	-12.4	3.01 V	253	66.4	-4.8
6	18795.00	49.4 AV	54.0	-4.6	3.01 V	253	54.2	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.7 PK			1.33 H	241	98.0	7.7
2	*6425.00	95.1 AV			1.33 H	241	87.4	7.7
3	#12850.00	46.8 PK	88.2	-41.4	2.18 H	134	31.2	15.6
4	#12850.00	33.5 AV	68.2	-34.7	2.18 H	134	17.9	15.6
5	19275.00	59.8 PK	74.0	-14.2	1.69 H	173	64.0	-4.2
6	19275.00	47.6 AV	54.0	-6.4	1.69 H	173	51.8	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.3 PK			2.18 V	250	98.6	7.7
2	*6425.00	96.5 AV			2.18 V	250	88.8	7.7
3	#12850.00	47.7 PK	88.2	-40.5	2.28 V	228	32.1	15.6
4	#12850.00	34.7 AV	68.2	-33.5	2.28 V	228	19.1	15.6
5	19275.00	61.7 PK	74.0	-12.3	2.96 V	245	65.9	-4.2
6	19275.00	49.7 AV	54.0	-4.3	2.96 V	245	53.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.8 PK			1.27 H	244	97.1	8.7
2	*6585.00	95.5 AV			1.27 H	244	86.8	8.7
3	#13170.00	47.2 PK	88.2	-41.0	2.15 H	135	31.1	16.1
4	#13170.00	34.2 AV	68.2	-34.0	2.15 H	135	18.1	16.1
5	19755.00	60.0 PK	74.0	-14.0	1.66 H	180	64.0	-4.0
6	19755.00	48.0 AV	54.0	-6.0	1.66 H	180	52.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.7 PK			2.22 V	261	97.0	8.7
2	*6585.00	96.1 AV			2.22 V	261	87.4	8.7
3	#13170.00	48.0 PK	88.2	-40.2	2.28 V	235	31.9	16.1
4	#13170.00	35.0 AV	68.2	-33.2	2.28 V	235	18.9	16.1
5	19755.00	61.4 PK	74.0	-12.6	2.98 V	258	65.4	-4.0
6	19755.00	49.5 AV	54.0	-4.5	2.98 V	258	53.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.5 PK			1.29 H	232	97.7	8.8
2	*6745.00	95.9 AV			1.29 H	232	87.1	8.8
3	#13490.00	46.8 PK	88.2	-41.4	2.15 H	119	28.5	18.3
4	#13490.00	34.1 AV	68.2	-34.1	2.15 H	119	15.8	18.3
5	20235.00	60.3 PK	74.0	-13.7	1.64 H	185	63.6	-3.3
6	20235.00	48.5 AV	54.0	-5.5	1.64 H	185	51.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.4 PK			2.17 V	262	97.6	8.8
2	*6745.00	96.5 AV			2.17 V	262	87.7	8.8
3	#13490.00	47.9 PK	88.2	-40.3	2.23 V	238	29.6	18.3
4	#13490.00	34.8 AV	68.2	-33.4	2.23 V	238	16.5	18.3
5	20235.00	61.6 PK	74.0	-12.4	3.04 V	266	64.9	-3.3
6	20235.00	49.5 AV	54.0	-4.5	3.04 V	266	52.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	104.1 PK			1.20 H	35	94.8	9.3
2	*6905.00	93.1 AV			1.20 H	35	83.8	9.3
3	#7125.00	71.5 PK	88.2	-16.7	1.20 H	35	60.6	10.9
4	#7125.00	52.6 AV	68.2	-15.6	1.20 H	35	41.7	10.9
5	7250.00	58.7 PK	74.0	-15.3	1.20 H	35	47.9	10.8
6	7250.00	47.4 AV	54.0	-6.6	1.20 H	35	36.6	10.8
7	#13810.00	46.9 PK	88.2	-41.3	2.18 H	126	28.5	18.4
8	#13810.00	34.2 AV	68.2	-34.0	2.18 H	126	15.8	18.4
9	20715.00	60.3 PK	74.0	-13.7	1.69 H	179	63.2	-2.9
10	20715.00	48.5 AV	54.0	-5.5	1.69 H	179	51.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.9 PK			1.58 V	201	98.6	9.3
2	*6905.00	95.8 AV			1.58 V	201	86.5	9.3
3	#7125.00	77.7 PK	88.2	-10.5	1.58 V	201	66.8	10.9
4	#7125.00	56.4 AV	68.2	-11.8	1.58 V	201	45.5	10.9
5	7250.00	66.6 PK	74.0	-7.4	1.58 V	201	55.8	10.8
6	7250.00	51.3 AV	54.0	-2.7	1.58 V	201	40.5	10.8
7	#13810.00	48.1 PK	88.2	-40.1	2.22 V	237	29.7	18.4
8	#13810.00	34.9 AV	68.2	-33.3	2.22 V	237	16.5	18.4
9	20715.00	61.3 PK	74.0	-12.7	3.06 V	280	64.2	-2.9
10	20715.00	49.4 AV	54.0	-4.6	3.06 V	280	52.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.4 PK	88.2	-19.8	1.37 H	239	62.1	6.3
2	#5925.00	55.0 AV	68.2	-13.2	1.37 H	239	48.7	6.3
3	*6105.00	105.4 PK			1.37 H	239	99.1	6.3
4	*6105.00	95.2 AV			1.37 H	239	88.9	6.3
5	12210.00	47.4 PK	74.0	-26.6	2.16 H	117	31.9	15.5
6	12210.00	34.5 AV	54.0	-19.5	2.16 H	117	19.0	15.5
7	18315.00	60.5 PK	74.0	-13.5	1.74 H	194	65.7	-5.2
8	18315.00	48.6 AV	54.0	-5.4	1.74 H	194	53.8	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.4 PK	88.2	-19.8	2.24 V	249	62.1	6.3
2	#5925.00	53.4 AV	68.2	-14.8	2.24 V	249	47.1	6.3
3	*6105.00	107.1 PK			2.24 V	249	100.8	6.3
4	*6105.00	96.3 AV			2.24 V	249	90.0	6.3
5	12210.00	48.3 PK	74.0	-25.7	2.25 V	230	32.8	15.5
6	12210.00	35.0 AV	54.0	-19.0	2.25 V	230	19.5	15.5
7	18315.00	61.4 PK	74.0	-12.6	3.02 V	267	66.6	-5.2
8	18315.00	49.3 AV	54.0	-4.7	3.02 V	267	54.5	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.9 PK			1.37 H	254	98.8	7.1
2	*6265.00	95.7 AV			1.37 H	254	88.6	7.1
3	12530.00	47.8 PK	74.0	-26.2	2.15 H	125	33.1	14.7
4	12530.00	34.2 AV	54.0	-19.8	2.15 H	125	19.5	14.7
5	18795.00	60.0 PK	74.0	-14.0	1.77 H	196	64.8	-4.8
6	18795.00	48.3 AV	54.0	-5.7	1.77 H	196	53.1	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	107.3 PK			2.19 V	235	100.2	7.1
2	*6265.00	96.7 AV			2.19 V	235	89.6	7.1
3	12530.00	48.5 PK	74.0	-25.5	2.28 V	237	33.8	14.7
4	12530.00	35.0 AV	54.0	-19.0	2.28 V	237	20.3	14.7
5	18795.00	61.8 PK	74.0	-12.2	2.98 V	271	66.6	-4.8
6	18795.00	49.5 AV	54.0	-4.5	2.98 V	271	54.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.8 PK			1.36 H	267	98.1	7.7
2	*6425.00	95.7 AV			1.36 H	267	88.0	7.7
3	#12850.00	47.5 PK	88.2	-40.7	2.11 H	132	31.9	15.6
4	#12850.00	33.9 AV	68.2	-34.3	2.11 H	132	18.3	15.6
5	19275.00	60.5 PK	74.0	-13.5	1.80 H	187	64.7	-4.2
6	19275.00	48.6 AV	54.0	-5.4	1.80 H	187	52.8	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.9 PK			2.20 V	238	100.2	7.7
2	*6425.00	97.0 AV			2.20 V	238	89.3	7.7
3	#12850.00	48.0 PK	88.2	-40.2	2.22 V	241	32.4	15.6
4	#12850.00	34.5 AV	68.2	-33.7	2.22 V	241	18.9	15.6
5	19275.00	62.2 PK	74.0	-11.8	2.96 V	273	66.4	-4.2
6	19275.00	49.9 AV	54.0	-4.1	2.96 V	273	54.1	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.4 PK			1.37 H	259	96.7	8.7
2	*6585.00	95.3 AV			1.37 H	259	86.6	8.7
3	#13170.00	47.8 PK	88.2	-40.4	2.05 H	113	31.7	16.1
4	#13170.00	34.1 AV	68.2	-34.1	2.05 H	113	18.0	16.1
5	19755.00	60.3 PK	74.0	-13.7	1.79 H	190	64.3	-4.0
6	19755.00	48.5 AV	54.0	-5.5	1.79 H	190	52.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.4 PK			2.17 V	230	99.7	8.7
2	*6585.00	97.5 AV			2.17 V	230	88.8	8.7
3	#13170.00	48.5 PK	88.2	-39.7	2.22 V	234	32.4	16.1
4	#13170.00	34.8 AV	68.2	-33.4	2.22 V	234	18.7	16.1
5	19755.00	62.1 PK	74.0	-11.9	2.95 V	288	66.1	-4.0
6	19755.00	49.8 AV	54.0	-4.2	2.95 V	288	53.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.9 PK			1.35 H	254	96.1	8.8
2	*6745.00	94.9 AV			1.35 H	254	86.1	8.8
3	#13490.00	47.7 PK	88.2	-40.5	2.07 H	126	29.4	18.3
4	#13490.00	33.5 AV	68.2	-34.7	2.07 H	126	15.2	18.3
5	20235.00	60.0 PK	74.0	-14.0	1.80 H	182	63.3	-3.3
6	20235.00	48.3 AV	54.0	-5.7	1.80 H	182	51.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.3 PK			2.22 V	246	99.5	8.8
2	*6745.00	97.7 AV			2.22 V	246	88.9	8.8
3	#13490.00	48.2 PK	88.2	-40.0	2.18 V	220	29.9	18.3
4	#13490.00	34.4 AV	68.2	-33.8	2.18 V	220	16.1	18.3
5	20235.00	61.6 PK	74.0	-12.4	2.95 V	299	64.9	-3.3
6	20235.00	49.6 AV	54.0	-4.4	2.95 V	299	52.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	104.4 PK			1.14 H	29	95.1	9.3
2	*6905.00	95.3 AV			1.14 H	29	86.0	9.3
3	#7125.00	67.4 PK	88.2	-20.8	1.14 H	29	56.5	10.9
4	#7125.00	49.5 AV	68.2	-18.7	1.14 H	29	38.6	10.9
5	7250.00	58.7 PK	74.0	-15.3	1.14 H	29	47.9	10.8
6	7250.00	46.1 AV	54.0	-7.9	1.14 H	29	35.3	10.8
7	#13810.00	46.7 PK	88.2	-41.5	2.04 H	111	28.3	18.4
8	#13810.00	33.1 AV	68.2	-35.1	2.04 H	111	14.7	18.4
9	20715.00	60.1 PK	74.0	-13.9	1.78 H	191	63.0	-2.9
10	20715.00	48.1 AV	54.0	-5.9	1.78 H	191	51.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.7 PK			1.66 V	189	97.4	9.3
2	*6905.00	97.7 AV			1.66 V	189	88.4	9.3
3	#7125.00	69.8 PK	88.2	-18.4	1.66 V	189	58.9	10.9
4	#7125.00	52.7 AV	68.2	-15.5	1.66 V	189	41.8	10.9
5	7250.00	62.2 PK	74.0	-11.8	1.66 V	189	51.4	10.8
6	7250.00	47.5 AV	54.0	-6.5	1.66 V	189	36.7	10.8
7	#13810.00	48.0 PK	88.2	-40.2	2.14 V	223	29.6	18.4
8	#13810.00	34.1 AV	68.2	-34.1	2.14 V	223	15.7	18.4
9	20715.00	61.7 PK	74.0	-12.3	2.96 V	301	64.6	-2.9
10	20715.00	49.7 AV	54.0	-4.3	2.96 V	301	52.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.9 PK	88.2	-20.3	1.42 H	240	61.6	6.3
2	#5925.00	52.4 AV	68.2	-15.8	1.42 H	240	46.1	6.3
3	*6105.00	105.1 PK			1.42 H	240	98.8	6.3
4	*6105.00	95.8 AV			1.42 H	240	89.5	6.3
5	12210.00	46.3 PK	74.0	-27.7	2.02 H	107	30.8	15.5
6	12210.00	33.2 AV	54.0	-20.8	2.02 H	107	17.7	15.5
7	18315.00	60.3 PK	74.0	-13.7	1.82 H	206	65.5	-5.2
8	18315.00	48.4 AV	54.0	-5.6	1.82 H	206	53.6	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.9 PK	88.2	-23.3	2.38 V	251	58.6	6.3
2	#5925.00	51.1 AV	68.2	-17.1	2.38 V	251	44.8	6.3
3	*6105.00	106.0 PK			2.38 V	251	99.7	6.3
4	*6105.00	96.7 AV			2.38 V	251	90.4	6.3
5	12210.00	47.6 PK	74.0	-26.4	2.15 V	230	32.1	15.5
6	12210.00	34.0 AV	54.0	-20.0	2.15 V	230	18.5	15.5
7	18315.00	62.3 PK	74.0	-11.7	2.93 V	313	67.5	-5.2
8	18315.00	50.1 AV	54.0	-3.9	2.93 V	313	55.3	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.4 PK			1.41 H	231	98.3	7.1
2	*6265.00	95.8 AV			1.41 H	231	88.7	7.1
3	12530.00	46.9 PK	74.0	-27.1	2.02 H	122	32.2	14.7
4	12530.00	33.5 AV	54.0	-20.5	2.02 H	122	18.8	14.7
5	18795.00	60.4 PK	74.0	-13.6	1.86 H	198	65.2	-4.8
6	18795.00	48.4 AV	54.0	-5.6	1.86 H	198	53.2	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.5 PK			2.36 V	250	98.4	7.1
2	*6265.00	96.4 AV			2.36 V	250	89.3	7.1
3	12530.00	47.7 PK	74.0	-26.3	2.12 V	244	33.0	14.7
4	12530.00	34.0 AV	54.0	-20.0	2.12 V	244	19.3	14.7
5	18795.00	62.3 PK	74.0	-11.7	2.90 V	312	67.1	-4.8
6	18795.00	49.9 AV	54.0	-4.1	2.90 V	312	54.7	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.3 PK			1.40 H	229	97.6	7.7
2	*6425.00	95.7 AV			1.40 H	229	88.0	7.7
3	#12850.00	47.2 PK	88.2	-41.0	2.03 H	115	31.6	15.6
4	#12850.00	33.2 AV	68.2	-35.0	2.03 H	115	17.6	15.6
5	19275.00	60.3 PK	74.0	-13.7	1.83 H	188	64.5	-4.2
6	19275.00	48.6 AV	54.0	-5.4	1.83 H	188	52.8	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.0 PK			2.33 V	245	98.3	7.7
2	*6425.00	96.8 AV			2.33 V	245	89.1	7.7
3	#12850.00	48.1 PK	88.2	-40.1	2.06 V	237	32.5	15.6
4	#12850.00	34.2 AV	68.2	-34.0	2.06 V	237	18.6	15.6
5	19275.00	62.3 PK	74.0	-11.7	2.93 V	325	66.5	-4.2
6	19275.00	49.6 AV	54.0	-4.4	2.93 V	325	53.8	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.7 PK			1.37 H	227	97.0	8.7
2	*6585.00	96.0 AV			1.37 H	227	87.3	8.7
3	#13170.00	46.6 PK	88.2	-41.6	1.98 H	127	30.5	16.1
4	#13170.00	33.8 AV	68.2	-34.4	1.98 H	127	17.7	16.1
5	19755.00	60.1 PK	74.0	-13.9	1.84 H	194	64.1	-4.0
6	19755.00	48.6 AV	54.0	-5.4	1.84 H	194	52.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	105.7 PK			2.38 V	258	97.0	8.7
2	*6585.00	96.4 AV			2.38 V	258	87.7	8.7
3	#13170.00	47.8 PK	88.2	-40.4	2.08 V	234	31.7	16.1
4	#13170.00	34.0 AV	68.2	-34.2	2.08 V	234	17.9	16.1
5	19755.00	62.5 PK	74.0	-11.5	2.91 V	326	66.5	-4.0
6	19755.00	49.8 AV	54.0	-4.2	2.91 V	326	53.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.6 PK			1.41 H	226	96.8	8.8
2	*6745.00	96.2 AV			1.41 H	226	87.4	8.8
3	#13490.00	47.6 PK	88.2	-40.6	1.94 H	116	29.3	18.3
4	#13490.00	33.8 AV	68.2	-34.4	1.94 H	116	15.5	18.3
5	20235.00	60.1 PK	74.0	-13.9	1.86 H	193	63.4	-3.3
6	20235.00	48.5 AV	54.0	-5.5	1.86 H	193	51.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.8 PK			2.41 V	254	97.0	8.8
2	*6745.00	96.4 AV			2.41 V	254	87.6	8.8
3	#13490.00	48.4 PK	88.2	-39.8	2.07 V	225	30.1	18.3
4	#13490.00	34.4 AV	68.2	-33.8	2.07 V	225	16.1	18.3
5	20235.00	62.8 PK	74.0	-11.2	2.94 V	319	66.1	-3.3
6	20235.00	50.1 AV	54.0	-3.9	2.94 V	319	53.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.9 PK			1.15 H	20	96.6	9.3
2	*6905.00	96.1 AV			1.15 H	20	86.8	9.3
3	#7125.00	68.7 PK	88.2	-19.5	1.15 H	20	57.8	10.9
4	#7125.00	51.1 AV	68.2	-17.1	1.15 H	20	40.2	10.9
5	7250.00	69.8 PK	74.0	-4.2	1.15 H	20	59.0	10.8
6	7250.00	51.7 AV	54.0	-2.3	1.15 H	20	40.9	10.8
7	#13810.00	47.4 PK	88.2	-40.8	1.89 H	124	29.0	18.4
8	#13810.00	33.3 AV	68.2	-34.9	1.89 H	124	14.9	18.4
9	20715.00	60.6 PK	74.0	-13.4	1.82 H	198	63.5	-2.9
10	20715.00	48.9 AV	54.0	-5.1	1.82 H	198	51.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.4 PK			1.55 V	199	98.1	9.3
2	*6905.00	97.7 AV			1.55 V	199	88.4	9.3
3	#7125.00	71.6 PK	88.2	-16.6	1.55 V	199	60.7	10.9
4	#7125.00	51.6 AV	68.2	-16.6	1.55 V	199	40.7	10.9
5	7250.00	72.7 PK	74.0	-1.3	1.55 V	199	61.9	10.8
6	7250.00	52.1 AV	54.0	-1.9	1.55 V	199	41.3	10.8
7	#13810.00	48.5 PK	88.2	-39.7	2.09 V	216	30.1	18.4
8	#13810.00	34.4 AV	68.2	-33.8	2.09 V	216	16.0	18.4
9	20715.00	63.0 PK	74.0	-11.0	2.89 V	327	65.9	-2.9
10	20715.00	50.1 AV	54.0	-3.9	2.89 V	327	53.0	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Punctured by 20 MHz Channel 7

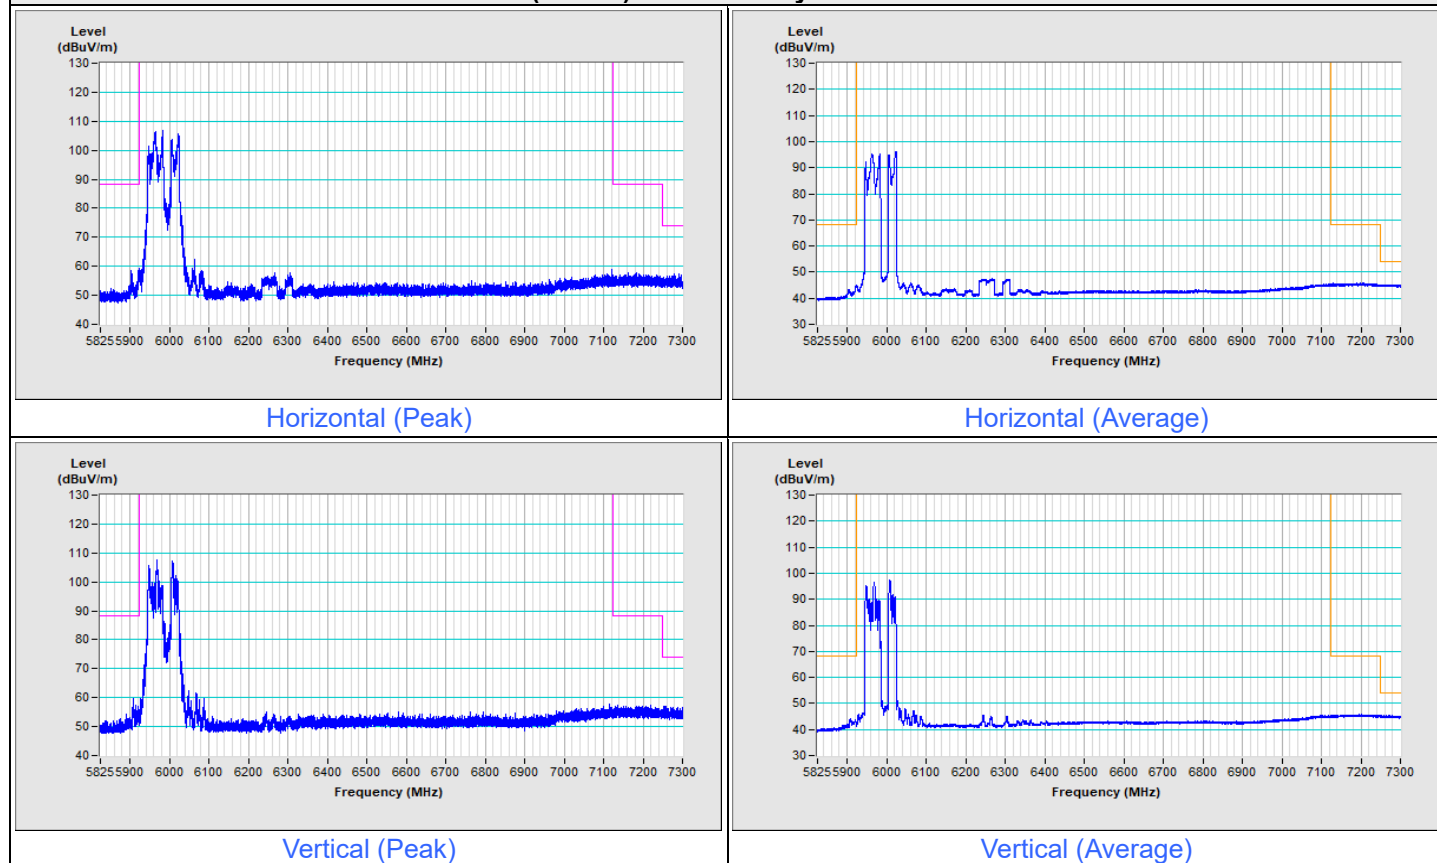


802.11be (EHT80) Punctured by 20 MHz Channel 215

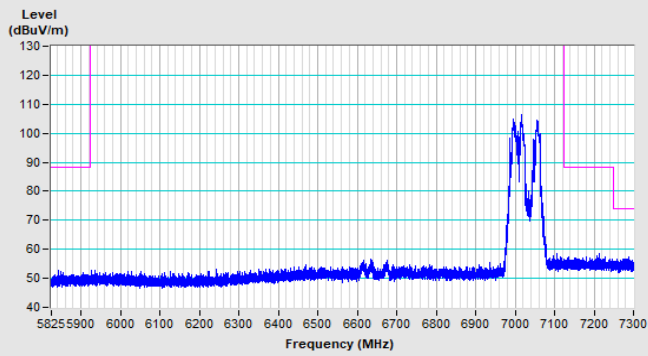


Horizontal (Peak)

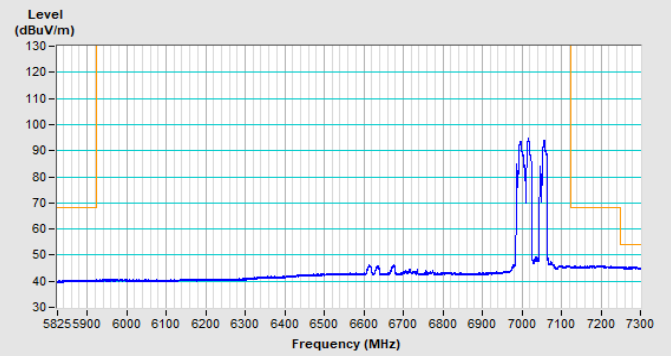

Horizontal (Average)

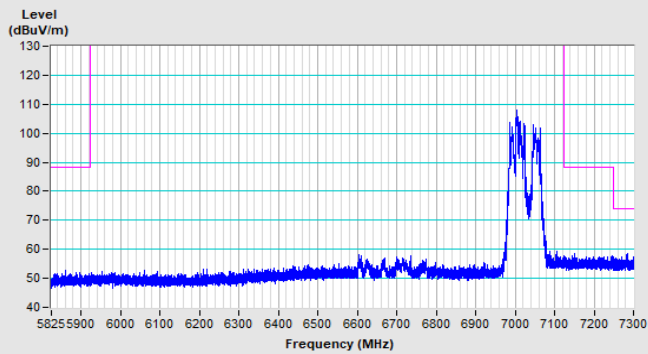


Vertical (Peak)

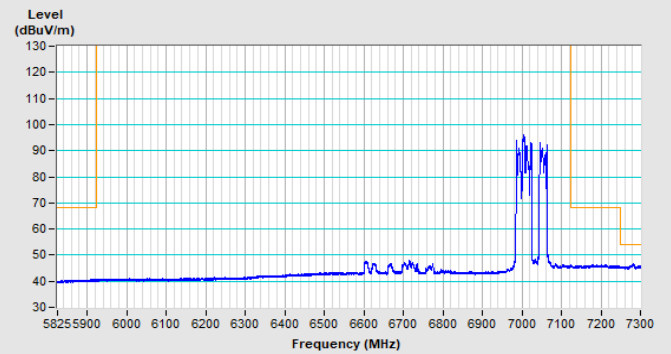


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT80) Punctured by 40 MHz Channel 7

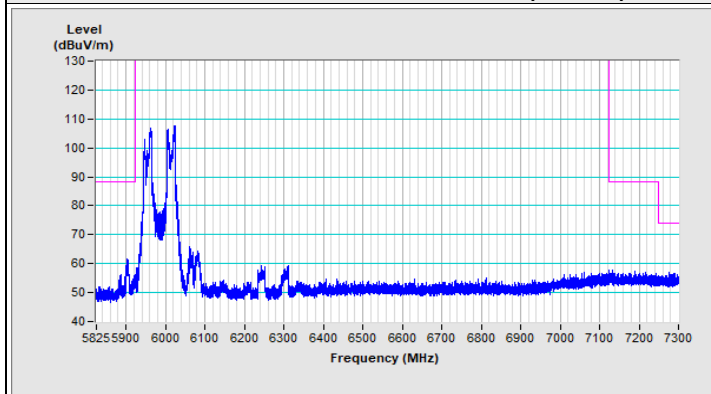


Horizontal (Peak)

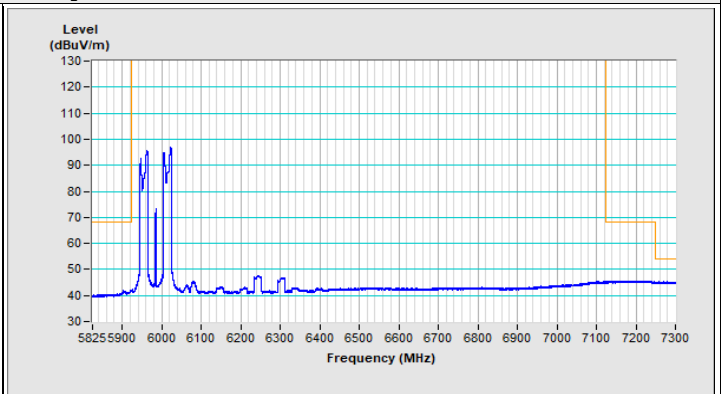

Horizontal (Average)

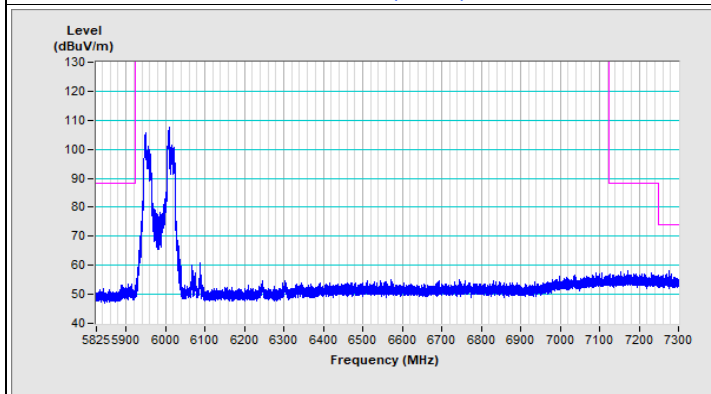


Vertical (Peak)

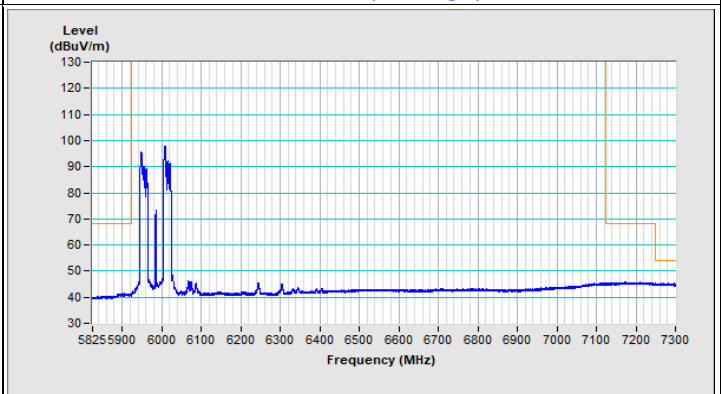


Vertical (Average)


802.11be (EHT80) Punctured by 40 MHz Channel 215

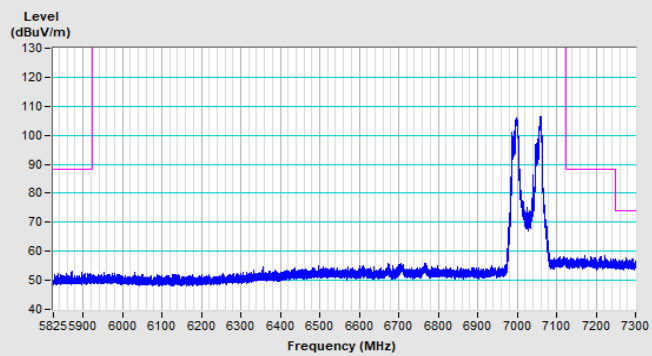


Horizontal (Peak)

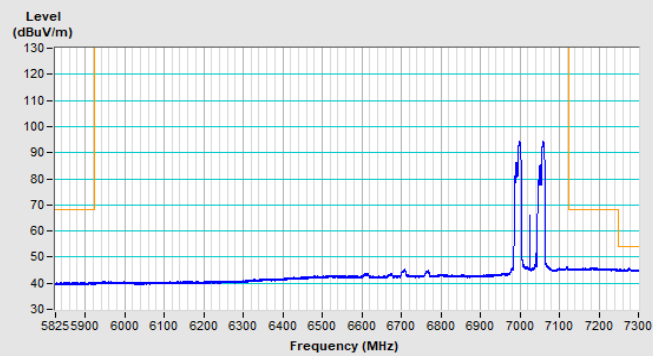

Horizontal (Average)

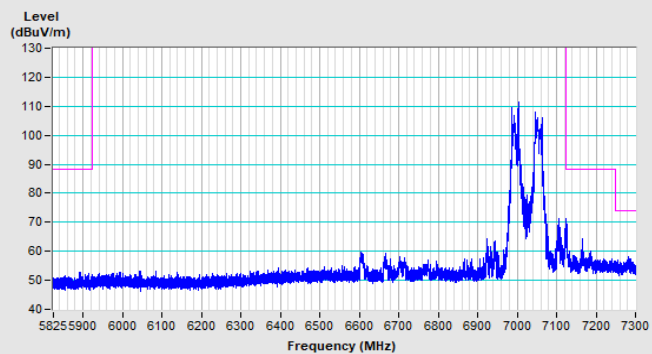


Vertical (Peak)

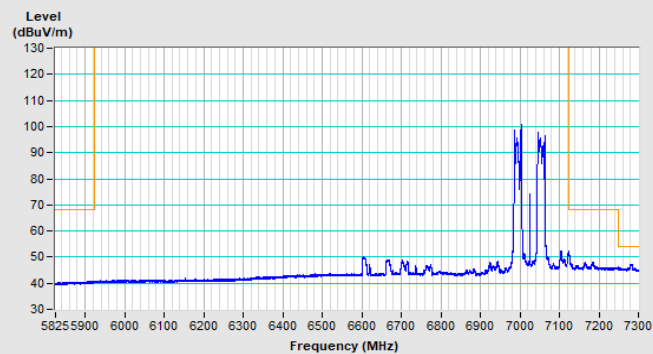


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Punctured by 40 MHz Channel 15

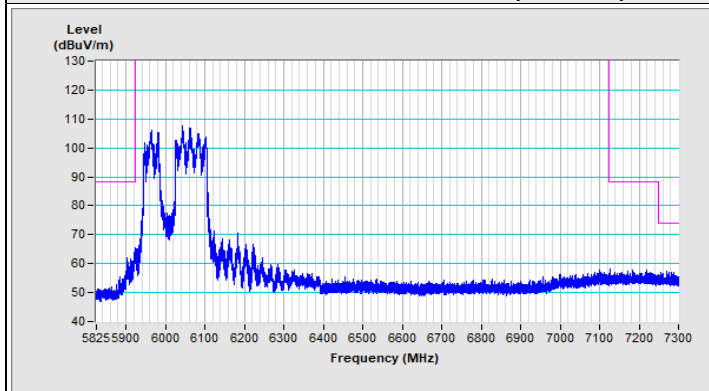


Horizontal (Peak)

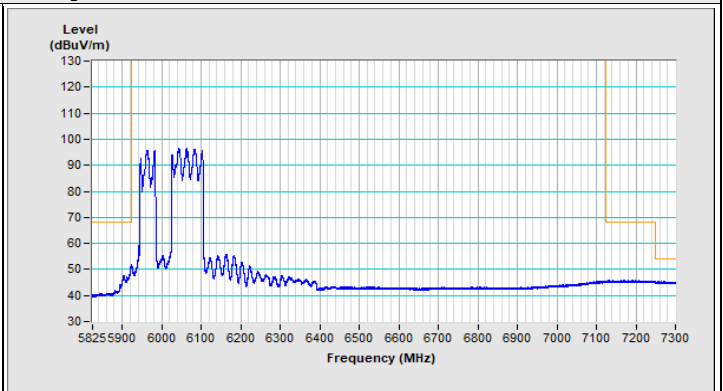

Horizontal (Average)

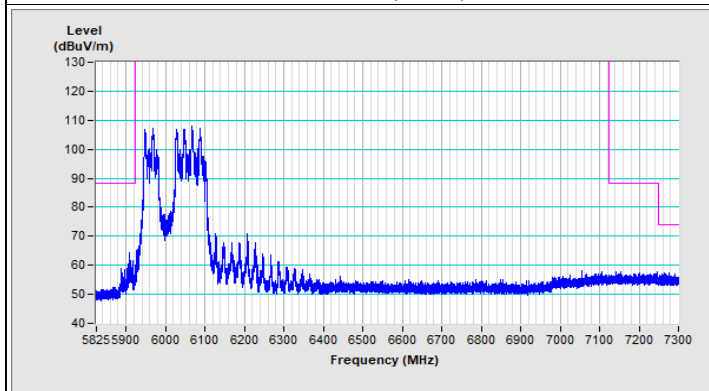


Vertical (Peak)

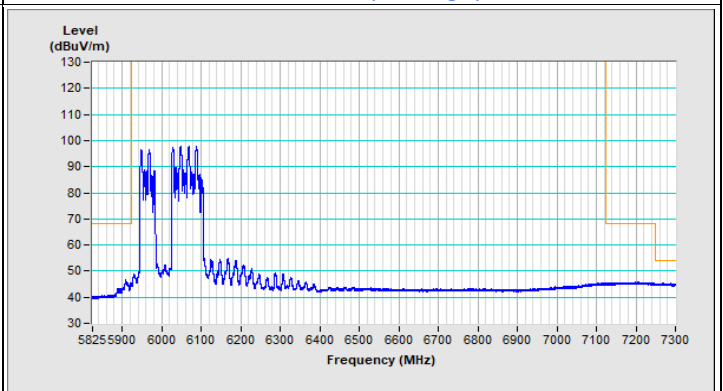


Vertical (Average)


802.11be (EHT160) Punctured by 40 MHz Channel 207

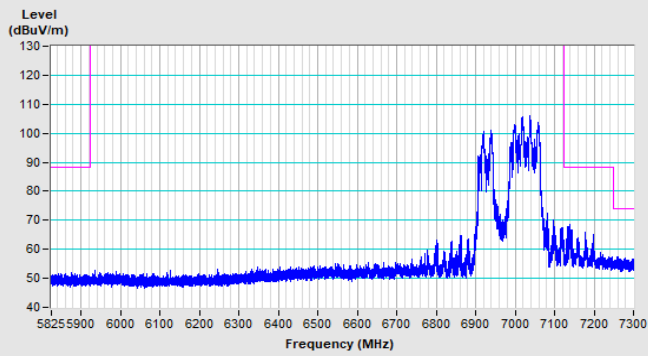


Horizontal (Peak)

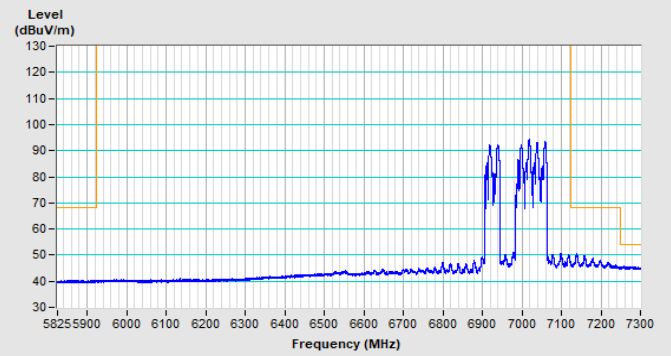

Horizontal (Average)

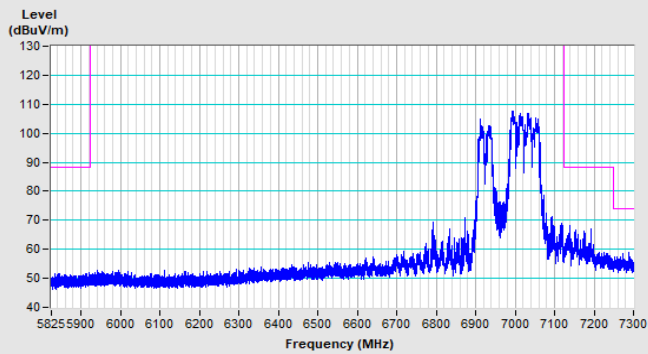


Vertical (Peak)

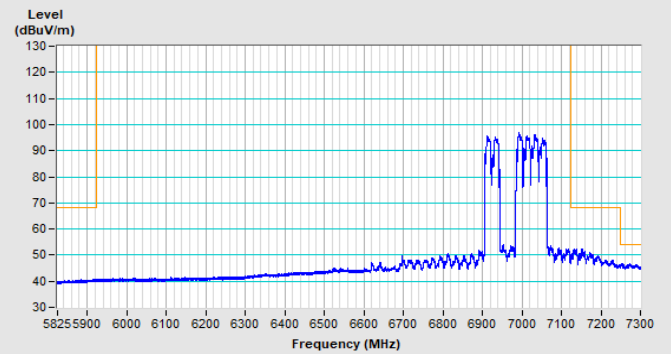


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT160) Punctured by 60 MHz Channel 15

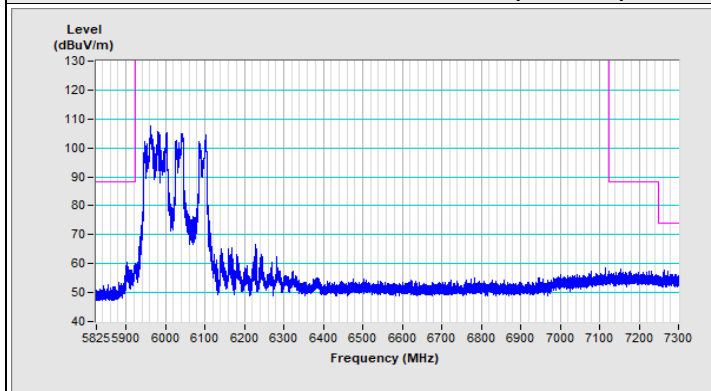


Horizontal (Peak)

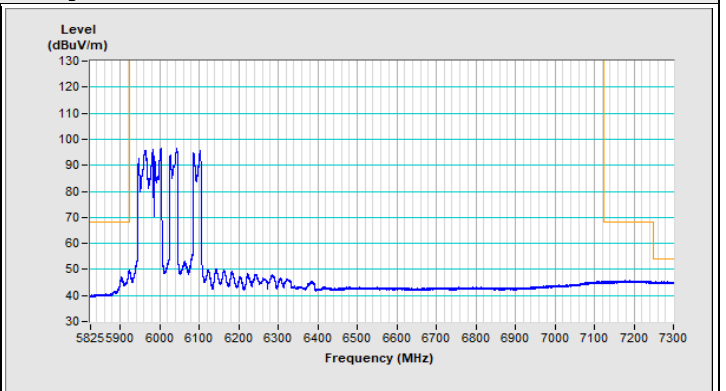

Horizontal (Average)

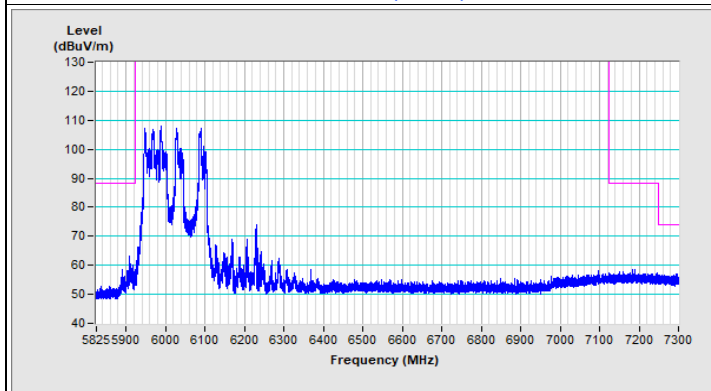


Vertical (Peak)

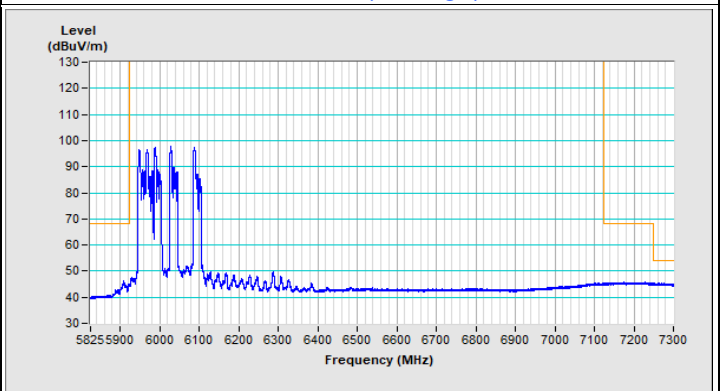


Vertical (Average)


802.11be (EHT160) Punctured by 60 MHz Channel 207

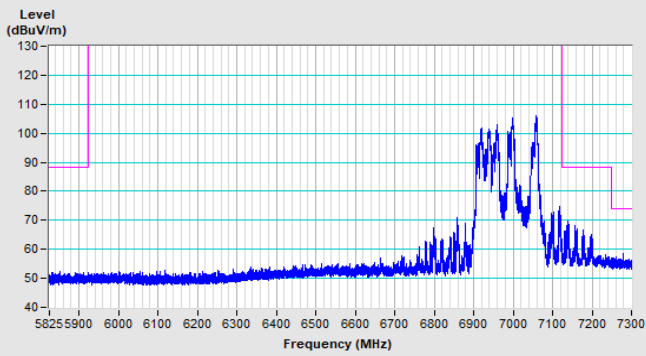


Horizontal (Peak)

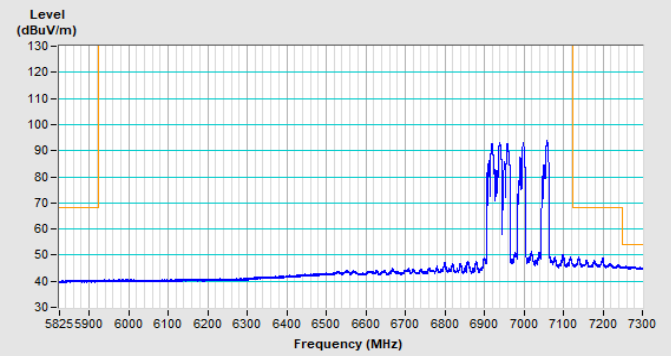

Horizontal (Average)

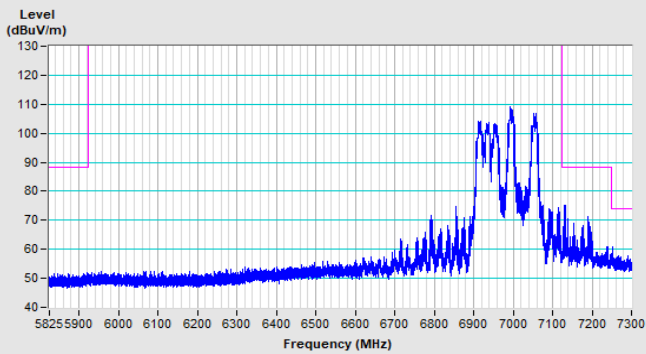


Vertical (Peak)

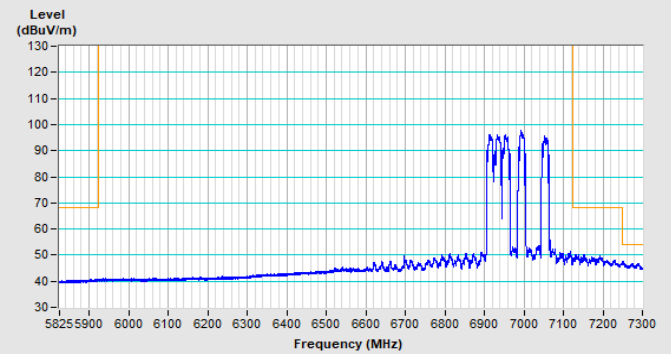


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT160) Punctured by 80 MHz Channel 15

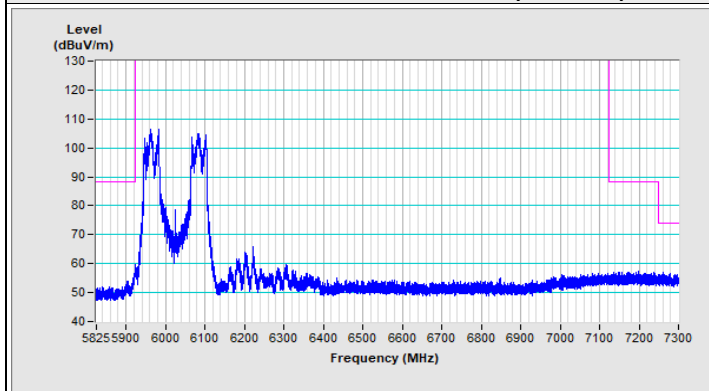


Horizontal (Peak)

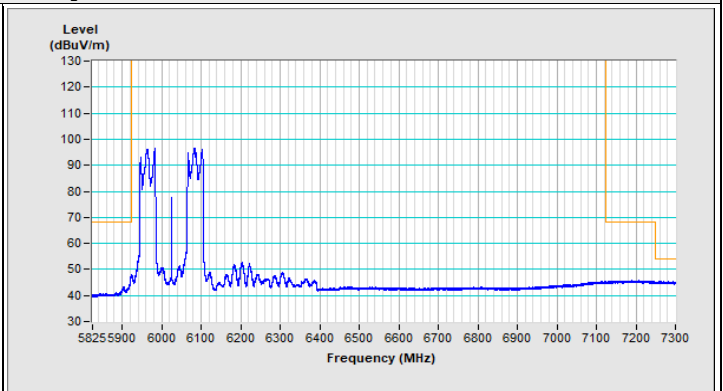

Horizontal (Average)

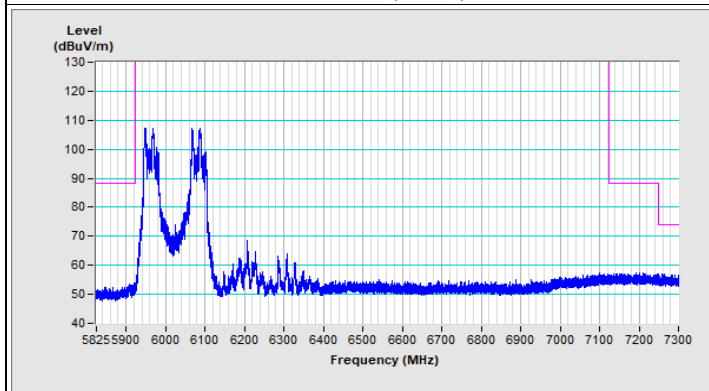


Vertical (Peak)

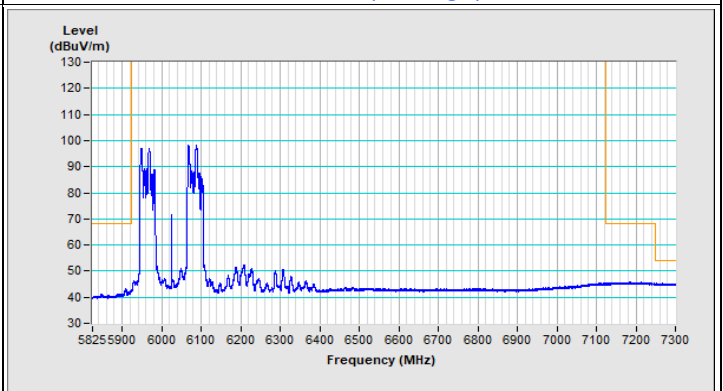


Vertical (Average)


802.11be (EHT160) Punctured by 80 MHz Channel 207

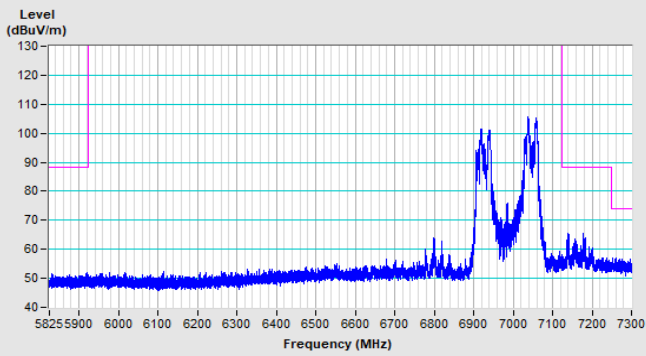


Horizontal (Peak)

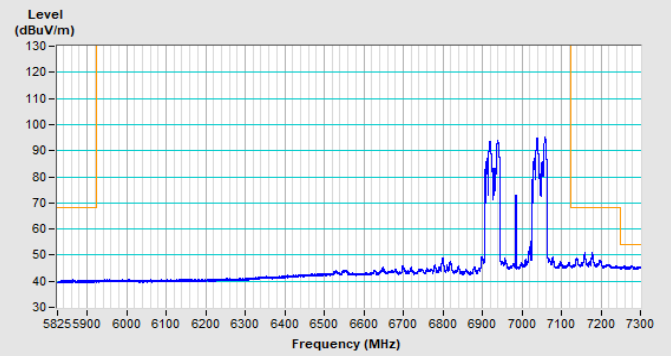

Horizontal (Average)

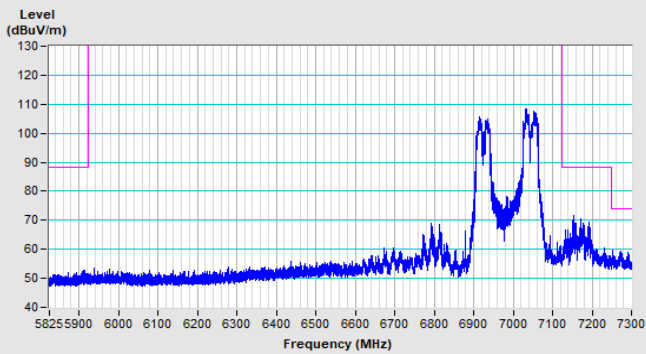


Vertical (Peak)

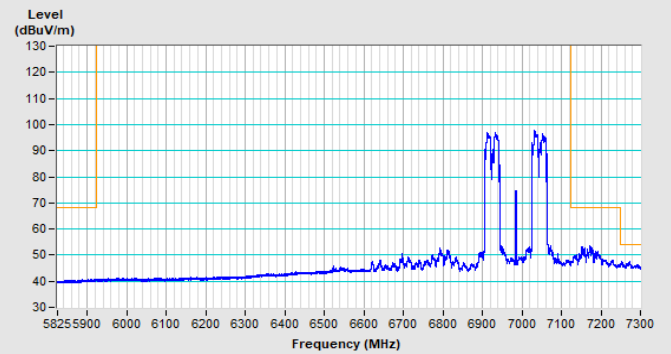


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 80 MHz Channel 31

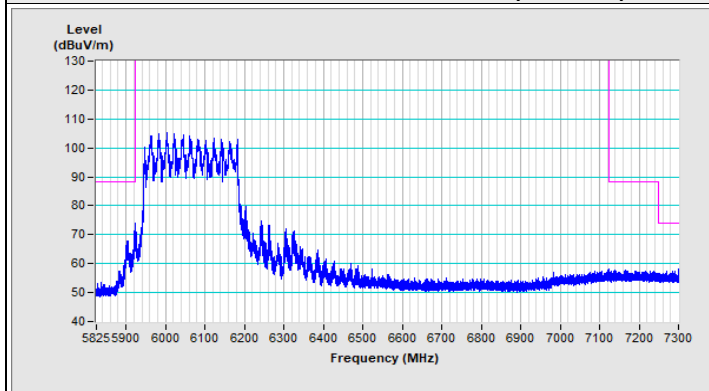


Horizontal (Peak)

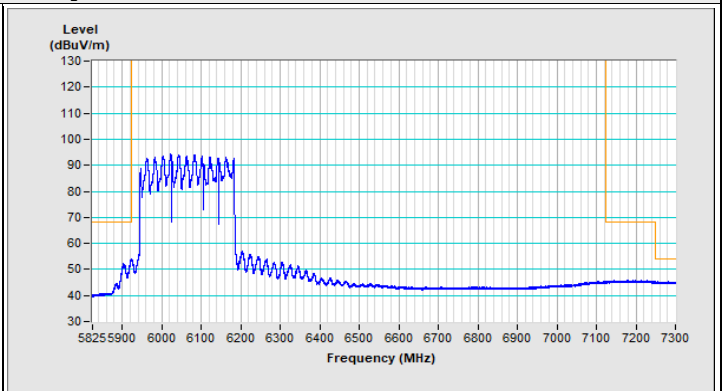

Horizontal (Average)

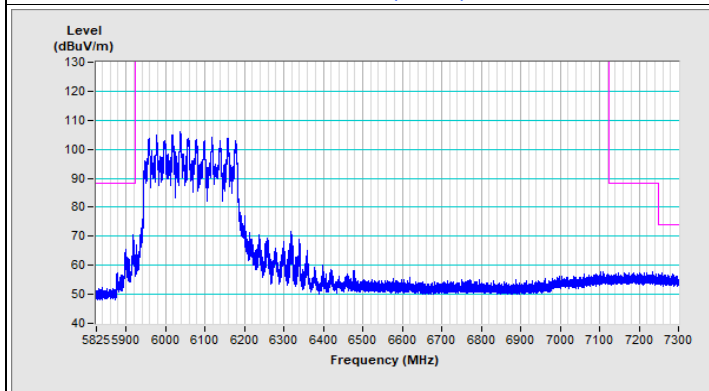


Vertical (Peak)

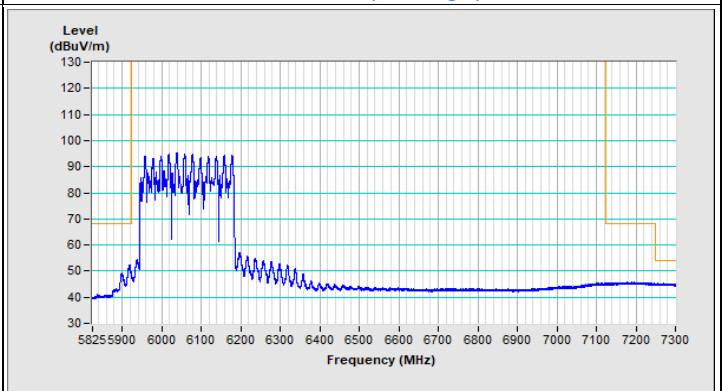


Vertical (Average)


802.11be (EHT320) Punctured by 80 MHz Channel 191

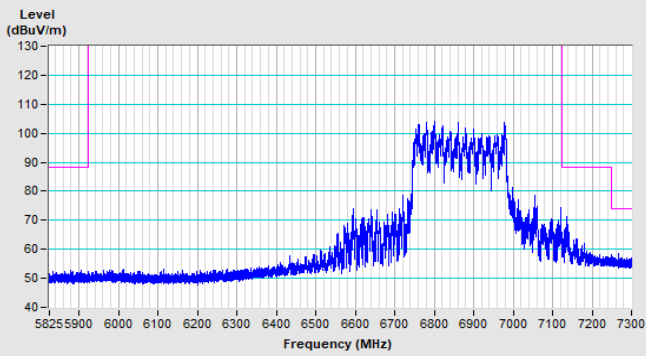


Horizontal (Peak)

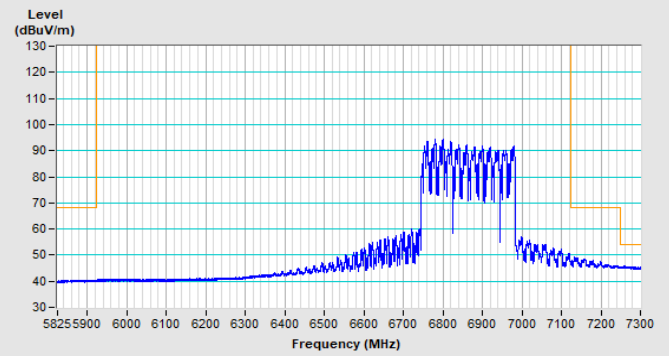

Horizontal (Average)

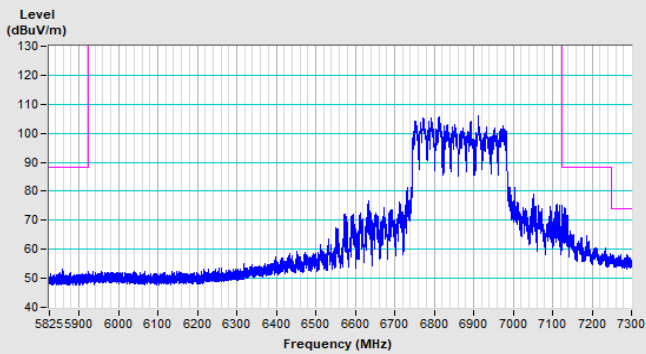


Vertical (Peak)

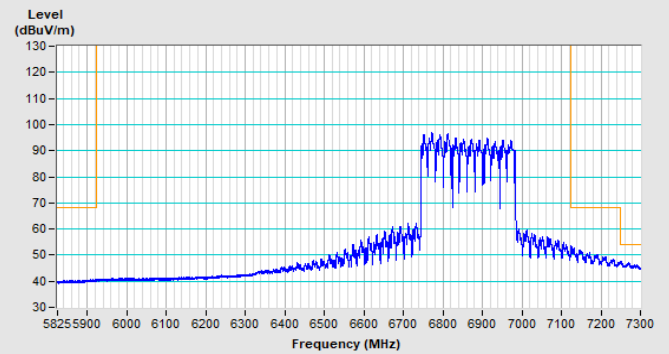


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 120 MHz Low Channel 31

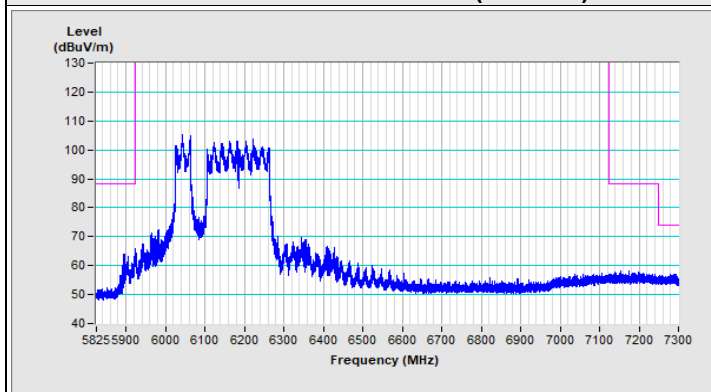


Horizontal (Peak)

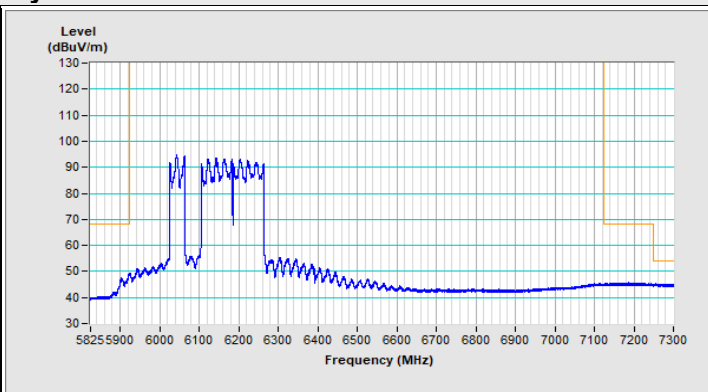

Horizontal (Average)

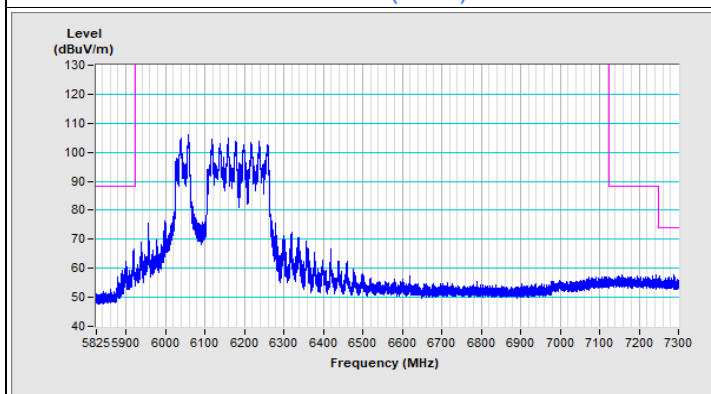


Vertical (Peak)

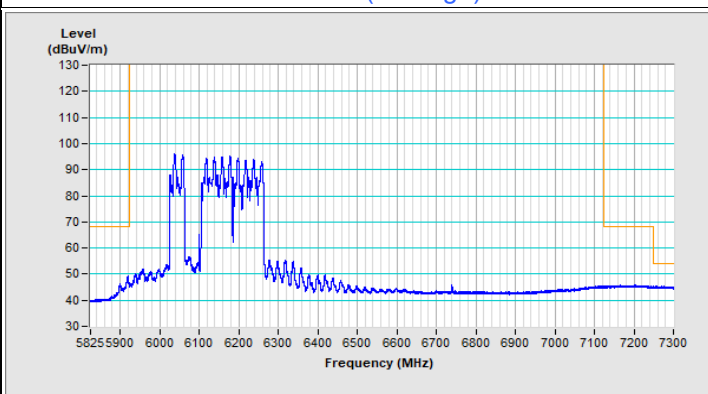


Vertical (Average)


802.11be (EHT320) Punctured by 120 MHz Low Channel 191

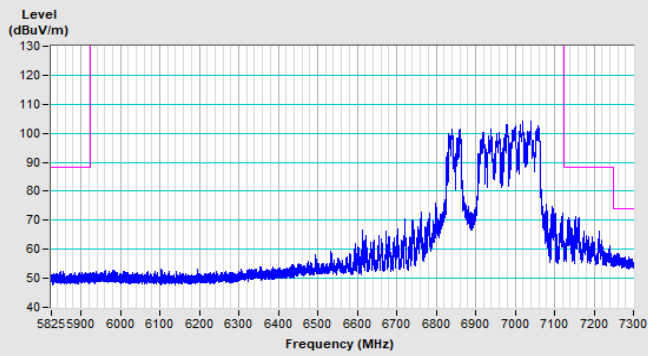


Horizontal (Peak)

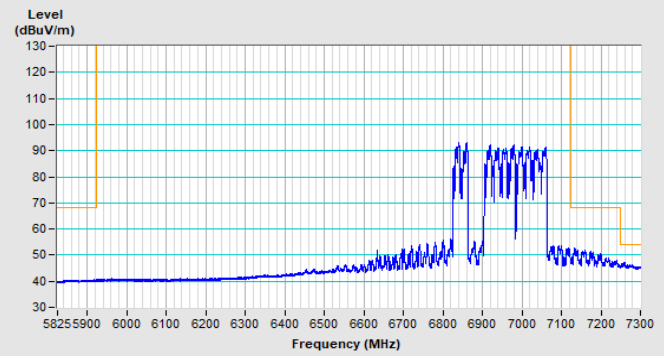

Horizontal (Average)

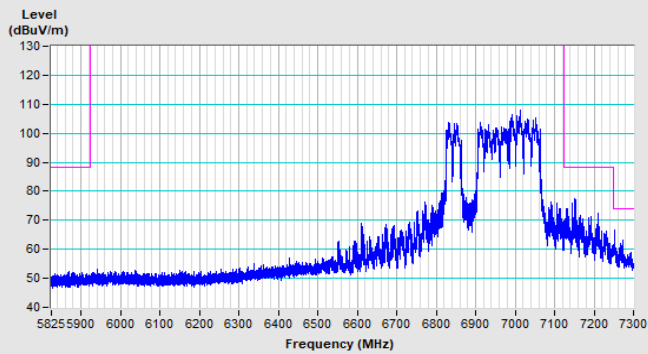


Vertical (Peak)

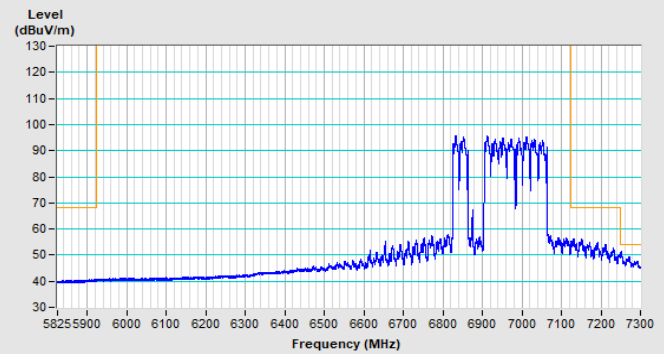


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 120 MHz High Channel 31

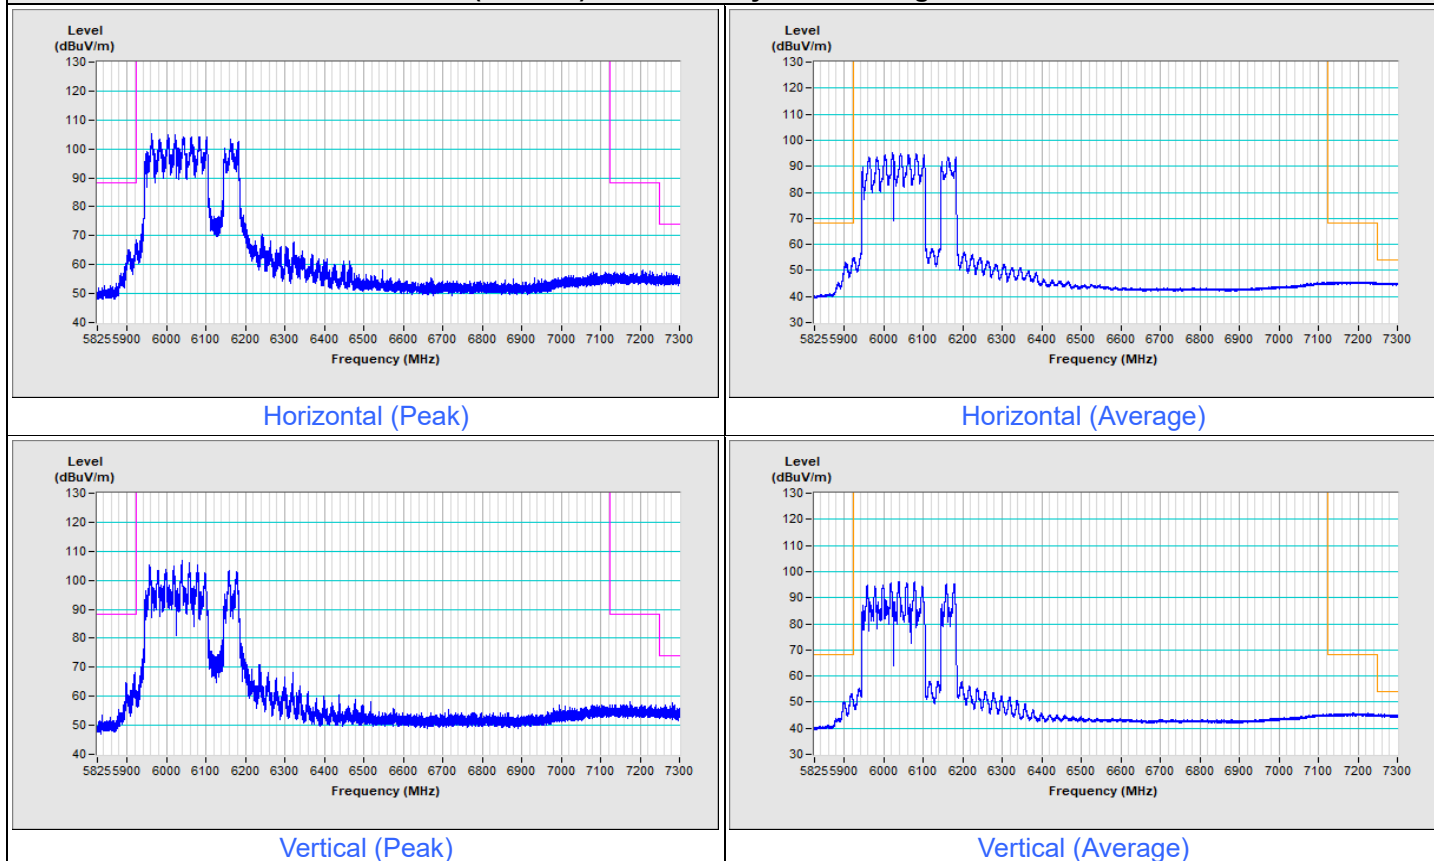


802.11be (EHT320) Punctured by 120 MHz High Channel 191

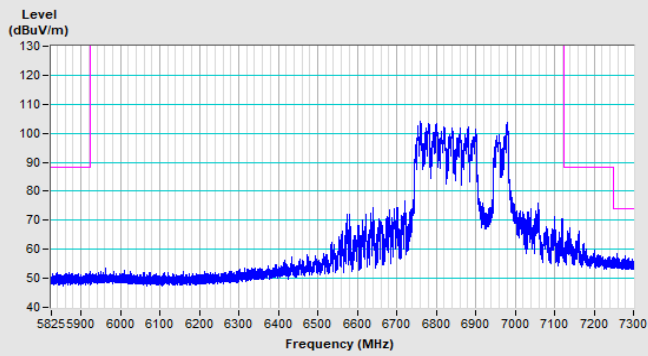


Horizontal (Peak)

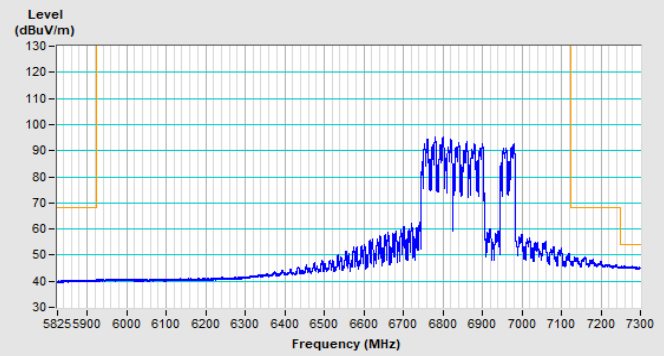

Horizontal (Average)

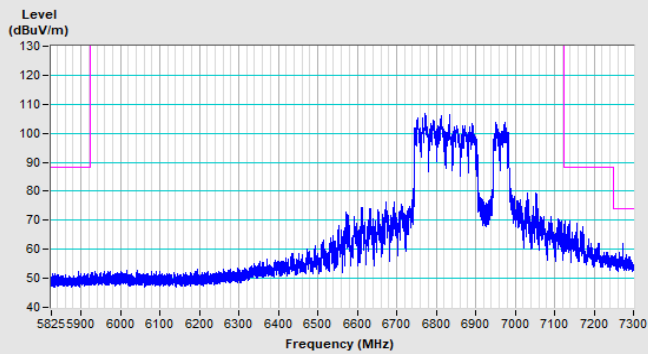


Vertical (Peak)

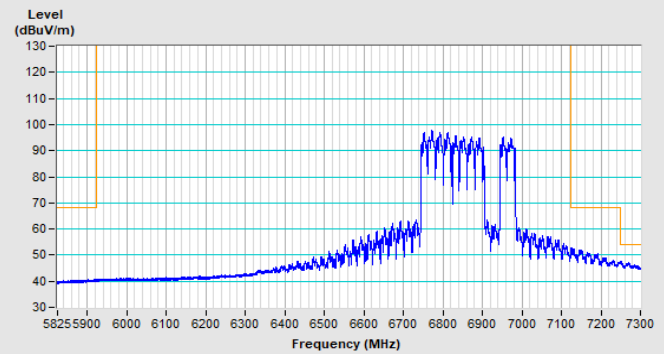


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 160 MHz Channel 31

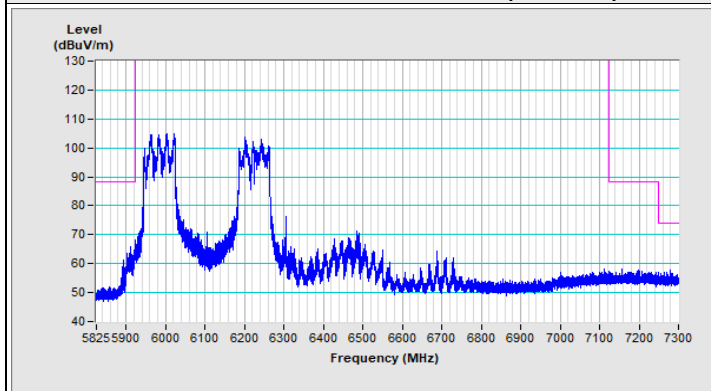


Horizontal (Peak)

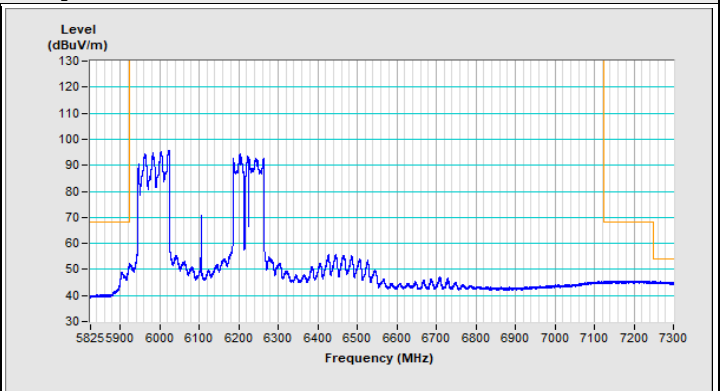

Horizontal (Average)

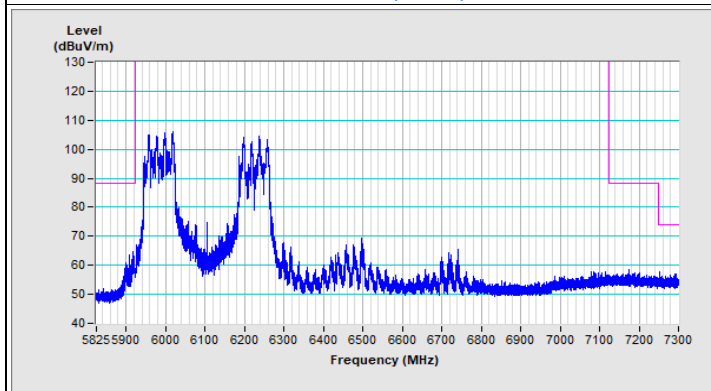


Vertical (Peak)

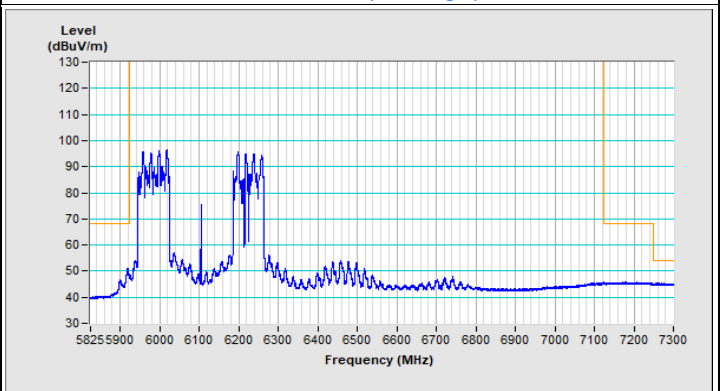


Vertical (Average)


802.11be (EHT320) Punctured by 160 MHz Channel 191

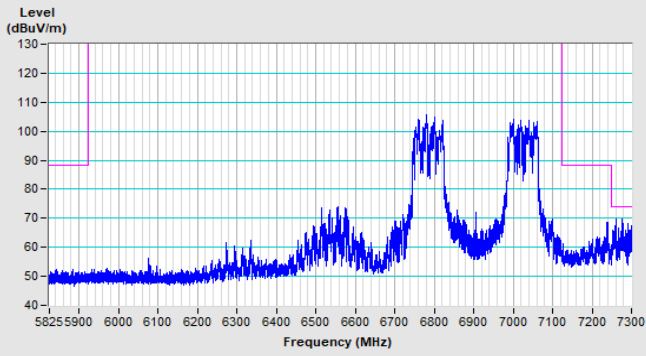


Horizontal (Peak)

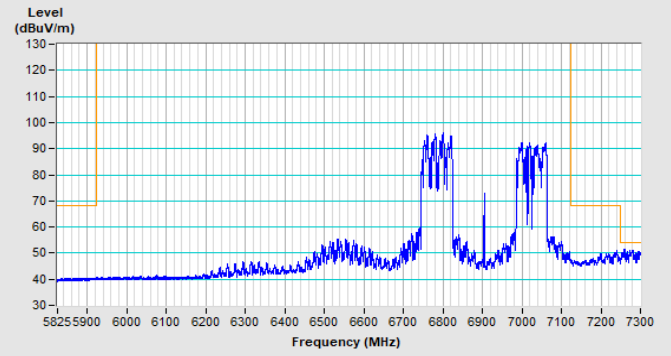

Horizontal (Average)

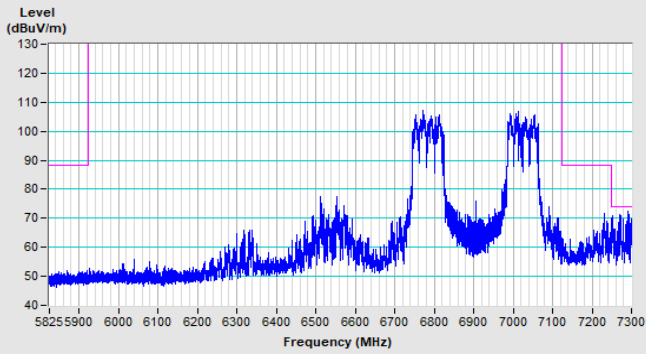

Vertical (Peak)

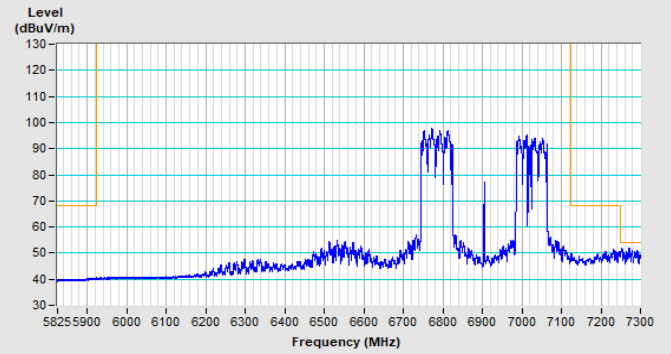

Vertical (Average)

Beamforming (NSS1)

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.0 PK	88.2	-22.2	1.50 H	253	59.7	6.3
2	#5925.00	48.7 AV	68.2	-19.5	1.50 H	253	42.4	6.3
3	*5985.00	107.6 PK			1.50 H	253	101.4	6.2
4	*5985.00	97.2 AV			1.50 H	253	91.0	6.2
5	11970.00	47.4 PK	74.0	-26.6	2.33 H	136	31.9	15.5
6	11970.00	35.7 AV	54.0	-18.3	2.33 H	136	20.2	15.5
7	17955.00	59.3 PK	74.0	-14.7	1.93 H	219	29.3	30.0
8	17955.00	47.5 AV	54.0	-6.5	1.93 H	219	17.5	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.3 PK	88.2	-22.9	1.63 V	32	59.0	6.3
2	#5925.00	48.5 AV	68.2	-19.7	1.63 V	32	42.2	6.3
3	*5985.00	110.6 PK			1.63 V	32	104.4	6.2
4	*5985.00	99.7 AV			1.63 V	32	93.5	6.2
5	11970.00	47.9 PK	74.0	-26.1	1.83 V	295	32.4	15.5
6	11970.00	36.1 AV	54.0	-17.9	1.83 V	295	20.6	15.5
7	17955.00	61.1 PK	74.0	-12.9	2.61 V	201	31.1	30.0
8	17955.00	48.7 AV	54.0	-5.3	2.61 V	201	18.7	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	107.5 PK			1.54 H	261	101.0	6.5
2	*6145.00	97.3 AV			1.54 H	261	90.8	6.5
3	12290.00	47.1 PK	74.0	-26.9	2.34 H	139	31.8	15.3
4	12290.00	35.4 AV	54.0	-18.6	2.34 H	139	20.1	15.3
5	18435.00	59.4 PK	74.0	-14.6	1.93 H	232	64.5	-5.1
6	18435.00	47.3 AV	54.0	-6.7	1.93 H	232	52.4	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	110.8 PK			1.61 V	44	104.3	6.5
2	*6145.00	100.2 AV			1.61 V	44	93.7	6.5
3	12290.00	48.1 PK	74.0	-25.9	1.80 V	292	32.8	15.3
4	12290.00	36.6 AV	54.0	-17.4	1.80 V	292	21.3	15.3
5	18435.00	61.2 PK	74.0	-12.8	2.61 V	209	66.3	-5.1
6	18435.00	48.7 AV	54.0	-5.3	2.61 V	209	53.8	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.8 PK			1.55 H	268	100.4	7.4
2	*6385.00	97.4 AV			1.55 H	268	90.0	7.4
3	#12770.00	47.1 PK	88.2	-41.1	2.32 H	146	31.7	15.4
4	#12770.00	35.5 AV	68.2	-32.7	2.32 H	146	20.1	15.4
5	19155.00	58.7 PK	74.0	-15.3	1.98 H	230	63.3	-4.6
6	19155.00	47.8 AV	54.0	-6.2	1.98 H	230	52.4	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.3 PK			1.65 V	30	102.9	7.4
2	*6385.00	99.8 AV			1.65 V	30	92.4	7.4
3	#12770.00	48.0 PK	88.2	-40.2	1.84 V	305	32.6	15.4
4	#12770.00	36.7 AV	68.2	-31.5	1.84 V	305	21.3	15.4
5	19155.00	60.9 PK	74.0	-13.1	2.65 V	223	65.5	-4.6
6	19155.00	49.2 AV	54.0	-4.8	2.65 V	223	53.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.7 PK			1.58 H	252	99.7	8.0
2	*6465.00	97.4 AV			1.58 H	252	89.4	8.0
3	#12930.00	46.7 PK	88.2	-41.5	2.35 H	136	31.1	15.6
4	#12930.00	35.3 AV	68.2	-32.9	2.35 H	136	19.7	15.6
5	19395.00	58.5 PK	74.0	-15.5	1.98 H	222	62.0	-3.5
6	19395.00	48.3 AV	54.0	-5.7	1.98 H	222	51.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.6 PK			1.67 V	42	102.6	8.0
2	*6465.00	100.1 AV			1.67 V	42	92.1	8.0
3	#12930.00	47.7 PK	88.2	-40.5	1.85 V	317	32.1	15.6
4	#12930.00	36.6 AV	68.2	-31.6	1.85 V	317	21.0	15.6
5	19395.00	60.8 PK	74.0	-13.2	2.71 V	231	64.3	-3.5
6	19395.00	49.1 AV	54.0	-4.9	2.71 V	231	52.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.9 PK			1.55 H	261	99.4	8.5
2	*6545.00	97.8 AV			1.55 H	261	89.3	8.5
3	#13090.00	47.2 PK	88.2	-41.0	2.40 H	143	31.4	15.8
4	#13090.00	35.6 AV	68.2	-32.6	2.40 H	143	19.8	15.8
5	19635.00	58.8 PK	74.0	-15.2	1.95 H	218	62.6	-3.8
6	19635.00	47.5 AV	54.0	-6.5	1.95 H	218	51.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.6 PK			1.72 V	31	102.1	8.5
2	*6545.00	100.0 AV			1.72 V	31	91.5	8.5
3	#13090.00	48.1 PK	88.2	-40.1	1.91 V	323	32.3	15.8
4	#13090.00	36.9 AV	68.2	-31.3	1.91 V	323	21.1	15.8
5	19635.00	60.7 PK	74.0	-13.3	2.65 V	232	64.5	-3.8
6	19635.00	48.6 AV	54.0	-5.4	2.65 V	232	52.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.8 PK			1.55 H	248	99.0	8.8
2	*6625.00	97.5 AV			1.55 H	248	88.7	8.8
3	13250.00	46.9 PK	74.0	-27.1	2.38 H	136	30.1	16.8
4	13250.00	35.8 AV	54.0	-18.2	2.38 H	136	19.0	16.8
5	19875.00	58.7 PK	74.0	-15.3	1.92 H	234	62.5	-3.8
6	19875.00	47.0 AV	54.0	-7.0	1.92 H	234	50.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.8 PK			1.76 V	19	102.0	8.8
2	*6625.00	100.3 AV			1.76 V	19	91.5	8.8
3	13250.00	47.8 PK	74.0	-26.2	1.93 V	337	31.0	16.8
4	13250.00	36.6 AV	54.0	-17.4	1.93 V	337	19.8	16.8
5	19875.00	60.8 PK	74.0	-13.2	2.67 V	219	64.6	-3.8
6	19875.00	48.3 AV	54.0	-5.7	2.67 V	219	52.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.7 PK			1.60 H	258	98.9	8.8
2	*6705.00	97.6 AV			1.60 H	258	88.8	8.8
3	#13410.00	46.8 PK	88.2	-41.4	2.36 H	127	29.0	17.8
4	#13410.00	35.7 AV	68.2	-32.5	2.36 H	127	17.9	17.8
5	20115.00	58.2 PK	74.0	-15.8	1.97 H	243	61.9	-3.7
6	20115.00	47.8 AV	54.0	-6.2	1.97 H	243	51.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.0 PK			1.71 V	8	102.2	8.8
2	*6705.00	100.3 AV			1.71 V	8	91.5	8.8
3	#13410.00	48.1 PK	88.2	-40.1	1.96 V	336	30.3	17.8
4	#13410.00	36.9 AV	68.2	-31.3	1.96 V	336	19.1	17.8
5	20115.00	60.3 PK	74.0	-13.7	2.67 V	226	64.0	-3.7
6	20115.00	48.8 AV	54.0	-5.2	2.67 V	226	52.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.1 PK			1.56 H	271	99.3	8.8
2	*6785.00	98.0 AV			1.56 H	271	89.2	8.8
3	#13570.00	47.1 PK	88.2	-41.1	2.40 H	120	28.5	18.6
4	#13570.00	36.1 AV	68.2	-32.1	2.40 H	120	17.5	18.6
5	20355.00	58.3 PK	74.0	-15.7	2.02 H	228	61.4	-3.1
6	20355.00	47.5 AV	54.0	-6.5	2.02 H	228	50.6	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	111.1 PK			1.73 V	0	102.3	8.8
2	*6785.00	100.2 AV			1.73 V	0	91.4	8.8
3	#13570.00	48.5 PK	88.2	-39.7	1.98 V	328	29.9	18.6
4	#13570.00	37.0 AV	68.2	-31.2	1.98 V	328	18.4	18.6
5	20355.00	60.9 PK	74.0	-13.1	2.68 V	212	64.0	-3.1
6	20355.00	48.7 AV	54.0	-5.3	2.68 V	212	51.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.6 PK			1.61 H	255	98.4	9.2
2	*6865.00	97.5 AV			1.61 H	255	88.3	9.2
3	#13730.00	47.2 PK	88.2	-41.0	2.38 H	107	28.7	18.5
4	#13730.00	36.4 AV	68.2	-31.8	2.38 H	107	17.9	18.5
5	20595.00	58.7 PK	74.0	-15.3	1.99 H	229	62.0	-3.3
6	20595.00	47.6 AV	54.0	-6.4	1.99 H	229	50.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.9 PK			1.69 V	0	101.7	9.2
2	*6865.00	100.0 AV			1.69 V	0	90.8	9.2
3	#13730.00	48.4 PK	88.2	-39.8	1.95 V	316	29.9	18.5
4	#13730.00	37.4 AV	68.2	-30.8	1.95 V	316	18.9	18.5
5	20595.00	60.8 PK	74.0	-13.2	2.68 V	200	64.1	-3.3
6	20595.00	48.9 AV	54.0	-5.1	2.68 V	200	52.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.7 PK			1.62 H	249	97.7	10.0
2	*6945.00	97.8 AV			1.62 H	249	87.8	10.0
3	#13890.00	47.6 PK	88.2	-40.6	2.33 H	101	29.0	18.6
4	#13890.00	36.3 AV	68.2	-31.9	2.33 H	101	17.7	18.6
5	20835.00	58.9 PK	74.0	-15.1	2.04 H	240	61.6	-2.7
6	20835.00	47.2 AV	54.0	-6.8	2.04 H	240	49.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.5 PK			1.66 V	0	100.5	10.0
2	*6945.00	99.5 AV			1.66 V	0	89.5	10.0
3	#13890.00	48.6 PK	88.2	-39.6	1.98 V	318	30.0	18.6
4	#13890.00	37.0 AV	68.2	-31.2	1.98 V	318	18.4	18.6
5	20835.00	60.6 PK	74.0	-13.4	2.69 V	214	63.3	-2.7
6	20835.00	48.8 AV	54.0	-5.2	2.69 V	214	51.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.5 PK			1.50 H	353	97.6	9.9
2	*7025.00	95.7 AV			1.50 H	353	85.8	9.9
3	#7125.00	62.0 PK	88.2	-26.2	1.50 H	353	51.1	10.9
4	#7125.00	46.2 AV	68.2	-22.0	1.50 H	353	35.3	10.9
5	7250.00	57.5 PK	74.0	-16.5	1.50 H	353	46.7	10.8
6	7250.00	45.9 AV	54.0	-8.1	1.50 H	353	35.1	10.8
7	#14050.00	47.1 PK	88.2	-41.1	2.33 H	90	28.1	19.0
8	#14050.00	35.8 AV	68.2	-32.4	2.33 H	90	16.8	19.0
9	21075.00	58.8 PK	74.0	-15.2	2.05 H	239	61.8	-3.0
10	21075.00	47.9 AV	54.0	-6.1	2.05 H	239	50.9	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.9 PK			2.01 V	189	101.0	9.9
2	*7025.00	98.7 AV			2.01 V	189	88.8	9.9
3	#7125.00	61.2 PK	88.2	-27.0	2.01 V	189	50.3	10.9
4	#7125.00	46.8 AV	68.2	-21.4	2.01 V	189	35.9	10.9
5	7250.00	60.2 PK	74.0	-13.8	2.01 V	189	49.4	10.8
6	7250.00	48.6 AV	54.0	-5.4	2.01 V	189	37.8	10.8
7	#14050.00	48.0 PK	88.2	-40.2	2.02 V	308	29.0	19.0
8	#14050.00	36.6 AV	68.2	-31.6	2.02 V	308	17.6	19.0
9	21075.00	60.9 PK	74.0	-13.1	2.72 V	215	63.9	-3.0
10	21075.00	48.7 AV	54.0	-5.3	2.72 V	215	51.7	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.3 PK	88.2	-29.9	1.50 H	253	52.0	6.3
2	#5925.00	43.2 AV	68.2	-25.0	1.50 H	253	36.9	6.3
3	*5985.00	108.0 PK			1.50 H	253	101.8	6.2
4	*5985.00	97.8 AV			1.50 H	253	91.6	6.2
5	11970.00	46.2 PK	74.0	-27.8	2.29 H	83	30.7	15.5
6	11970.00	36.0 AV	54.0	-18.0	2.29 H	83	20.5	15.5
7	17955.00	58.4 PK	74.0	-15.6	2.06 H	248	28.4	30.0
8	17955.00	47.7 AV	54.0	-6.3	2.06 H	248	17.7	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.4 PK	88.2	-26.8	1.62 V	34	55.1	6.3
2	#5925.00	43.1 AV	68.2	-25.1	1.62 V	34	36.8	6.3
3	*5985.00	110.0 PK			1.62 V	34	103.8	6.2
4	*5985.00	99.9 AV			1.62 V	34	93.7	6.2
5	11970.00	47.9 PK	74.0	-26.1	1.99 V	306	32.4	15.5
6	11970.00	36.6 AV	54.0	-17.4	1.99 V	306	21.1	15.5
7	17955.00	60.7 PK	74.0	-13.3	2.71 V	213	30.7	30.0
8	17955.00	48.6 AV	54.0	-5.4	2.71 V	213	18.6	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	107.7 PK			1.54 H	238	101.2	6.5
2	*6145.00	97.8 AV			1.54 H	238	91.3	6.5
3	12290.00	46.6 PK	74.0	-27.4	2.23 H	69	31.3	15.3
4	12290.00	35.8 AV	54.0	-18.2	2.23 H	69	20.5	15.3
5	18435.00	58.7 PK	74.0	-15.3	2.04 H	256	63.8	-5.1
6	18435.00	47.8 AV	54.0	-6.2	2.04 H	256	52.9	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	110.4 PK			1.68 V	18	103.9	6.5
2	*6145.00	100.0 AV			1.68 V	18	93.5	6.5
3	12290.00	47.3 PK	74.0	-26.7	1.99 V	293	32.0	15.3
4	12290.00	36.8 AV	54.0	-17.2	1.99 V	293	21.5	15.3
5	18435.00	60.3 PK	74.0	-13.7	2.73 V	226	65.4	-5.1
6	18435.00	48.8 AV	54.0	-5.2	2.73 V	226	53.9	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.0 PK			1.48 H	226	99.6	7.4
2	*6385.00	97.4 AV			1.48 H	226	90.0	7.4
3	#12770.00	46.8 PK	88.2	-41.4	2.20 H	65	31.4	15.4
4	#12770.00	36.6 AV	68.2	-31.6	2.20 H	65	21.2	15.4
5	19155.00	58.9 PK	74.0	-15.1	2.09 H	261	63.5	-4.6
6	19155.00	48.1 AV	54.0	-5.9	2.09 H	261	52.7	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.2 PK			1.71 V	12	102.8	7.4
2	*6385.00	100.1 AV			1.71 V	12	92.7	7.4
3	#12770.00	47.7 PK	88.2	-40.5	2.03 V	306	32.3	15.4
4	#12770.00	37.2 AV	68.2	-31.0	2.03 V	306	21.8	15.4
5	19155.00	60.1 PK	74.0	-13.9	2.73 V	229	64.7	-4.6
6	19155.00	49.2 AV	54.0	-4.8	2.73 V	229	53.8	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.6 PK			1.49 H	234	99.6	8.0
2	*6465.00	97.9 AV			1.49 H	234	89.9	8.0
3	#12930.00	46.7 PK	88.2	-41.5	2.20 H	61	31.1	15.6
4	#12930.00	36.4 AV	68.2	-31.8	2.20 H	61	20.8	15.6
5	19395.00	58.2 PK	74.0	-15.8	2.07 H	268	61.7	-3.5
6	19395.00	48.0 AV	54.0	-6.0	2.07 H	268	51.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.9 PK			1.67 V	12	101.9	8.0
2	*6465.00	99.7 AV			1.67 V	12	91.7	8.0
3	#12930.00	47.8 PK	88.2	-40.4	2.06 V	290	32.2	15.6
4	#12930.00	37.4 AV	68.2	-30.8	2.06 V	290	21.8	15.6
5	19395.00	60.2 PK	74.0	-13.8	2.71 V	221	63.7	-3.5
6	19395.00	49.8 AV	54.0	-4.2	2.71 V	221	53.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	106.8 PK			1.48 H	222	98.3	8.5
2	*6545.00	97.1 AV			1.48 H	222	88.6	8.5
3	#13090.00	46.9 PK	88.2	-41.3	2.21 H	54	31.1	15.8
4	#13090.00	36.6 AV	68.2	-31.6	2.21 H	54	20.8	15.8
5	19635.00	58.8 PK	74.0	-15.2	2.13 H	258	62.6	-3.8
6	19635.00	48.6 AV	54.0	-5.4	2.13 H	258	52.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.4 PK			1.72 V	10	101.9	8.5
2	*6545.00	100.3 AV			1.72 V	10	91.8	8.5
3	#13090.00	47.6 PK	88.2	-40.6	2.01 V	305	31.8	15.8
4	#13090.00	37.1 AV	68.2	-31.1	2.01 V	305	21.3	15.8
5	19635.00	60.3 PK	74.0	-13.7	2.76 V	210	64.1	-3.8
6	19635.00	49.1 AV	54.0	-4.9	2.76 V	210	52.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.8 PK			1.43 H	228	99.0	8.8
2	*6625.00	96.8 AV			1.43 H	228	88.0	8.8
3	13250.00	46.5 PK	74.0	-27.5	2.24 H	47	29.7	16.8
4	13250.00	36.2 AV	54.0	-17.8	2.24 H	47	19.4	16.8
5	19875.00	58.7 PK	74.0	-15.3	2.10 H	253	62.5	-3.8
6	19875.00	48.7 AV	54.0	-5.3	2.10 H	253	52.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.2 PK			1.72 V	15	101.4	8.8
2	*6625.00	100.1 AV			1.72 V	15	91.3	8.8
3	13250.00	47.1 PK	74.0	-26.9	1.98 V	295	30.3	16.8
4	13250.00	37.5 AV	54.0	-16.5	1.98 V	295	20.7	16.8
5	19875.00	59.9 PK	74.0	-14.1	2.80 V	212	63.7	-3.8
6	19875.00	49.5 AV	54.0	-4.5	2.80 V	212	53.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.1 PK			1.37 H	238	99.3	8.8
2	*6705.00	97.0 AV			1.37 H	238	88.2	8.8
3	#13410.00	46.8 PK	88.2	-41.4	2.19 H	58	29.0	17.8
4	#13410.00	36.5 AV	68.2	-31.7	2.19 H	58	18.7	17.8
5	20115.00	58.9 PK	74.0	-15.1	2.15 H	251	62.6	-3.7
6	20115.00	48.4 AV	54.0	-5.6	2.15 H	251	52.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.9 PK			1.72 V	25	101.1	8.8
2	*6705.00	99.7 AV			1.72 V	25	90.9	8.8
3	#13410.00	47.2 PK	88.2	-41.0	1.93 V	282	29.4	17.8
4	#13410.00	37.8 AV	68.2	-30.4	1.93 V	282	20.0	17.8
5	20115.00	60.1 PK	74.0	-13.9	2.85 V	203	63.8	-3.7
6	20115.00	49.1 AV	54.0	-4.9	2.85 V	203	52.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.3 PK			1.38 H	240	99.5	8.8
2	*6785.00	97.2 AV			1.38 H	240	88.4	8.8
3	#13570.00	46.9 PK	88.2	-41.3	2.22 H	54	28.3	18.6
4	#13570.00	36.4 AV	68.2	-31.8	2.22 H	54	17.8	18.6
5	20355.00	58.7 PK	74.0	-15.3	2.19 H	264	61.8	-3.1
6	20355.00	48.5 AV	54.0	-5.5	2.19 H	264	51.6	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.5 PK			1.70 V	16	100.7	8.8
2	*6785.00	99.5 AV			1.70 V	16	90.7	8.8
3	#13570.00	47.8 PK	88.2	-40.4	1.94 V	282	29.2	18.6
4	#13570.00	37.2 AV	68.2	-31.0	1.94 V	282	18.6	18.6
5	20355.00	60.0 PK	74.0	-14.0	2.90 V	188	63.1	-3.1
6	20355.00	49.3 AV	54.0	-4.7	2.90 V	188	52.4	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.7 PK			1.38 H	215	98.5	9.2
2	*6865.00	96.9 AV			1.38 H	215	87.7	9.2
3	#13730.00	47.4 PK	88.2	-40.8	2.22 H	39	28.9	18.5
4	#13730.00	36.8 AV	68.2	-31.4	2.22 H	39	18.3	18.5
5	20595.00	58.6 PK	74.0	-15.4	2.16 H	268	61.9	-3.3
6	20595.00	48.3 AV	54.0	-5.7	2.16 H	268	51.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.3 PK			1.67 V	29	101.1	9.2
2	*6865.00	100.5 AV			1.67 V	29	91.3	9.2
3	#13730.00	47.5 PK	88.2	-40.7	1.97 V	272	29.0	18.5
4	#13730.00	37.7 AV	68.2	-30.5	1.97 V	272	19.2	18.5
5	20595.00	59.6 PK	74.0	-14.4	2.85 V	192	62.9	-3.3
6	20595.00	49.4 AV	54.0	-4.6	2.85 V	192	52.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.7 PK			1.40 H	226	97.7	10.0
2	*6945.00	96.8 AV			1.40 H	226	86.8	10.0
3	#13890.00	47.3 PK	88.2	-40.9	2.16 H	52	28.7	18.6
4	#13890.00	36.5 AV	68.2	-31.7	2.16 H	52	17.9	18.6
5	20835.00	58.2 PK	74.0	-15.8	2.22 H	279	60.9	-2.7
6	20835.00	48.0 AV	54.0	-6.0	2.22 H	279	50.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.7 PK			1.61 V	43	99.7	10.0
2	*6945.00	100.0 AV			1.61 V	43	90.0	10.0
3	#13890.00	48.1 PK	88.2	-40.1	1.97 V	271	29.5	18.6
4	#13890.00	37.2 AV	68.2	-31.0	1.97 V	271	18.6	18.6
5	20835.00	59.2 PK	74.0	-14.8	2.83 V	207	61.9	-2.7
6	20835.00	49.2 AV	54.0	-4.8	2.83 V	207	51.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.9 PK			2.15 H	352	97.0	9.9
2	*7025.00	95.9 AV			2.15 H	352	86.0	9.9
3	#7125.00	58.8 PK	88.2	-29.4	2.15 H	352	47.9	10.9
4	#7125.00	46.3 AV	68.2	-21.9	2.15 H	352	35.4	10.9
5	7250.00	58.7 PK	74.0	-15.3	2.15 H	352	47.9	10.8
6	7250.00	46.0 AV	54.0	-8.0	2.15 H	352	35.2	10.8
7	#14050.00	47.9 PK	88.2	-40.3	2.18 H	45	28.9	19.0
8	#14050.00	36.6 AV	68.2	-31.6	2.18 H	45	17.6	19.0
9	21075.00	58.7 PK	74.0	-15.3	2.20 H	275	61.7	-3.0
10	21075.00	48.4 AV	54.0	-5.6	2.20 H	275	51.4	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.3 PK			1.60 V	189	101.4	9.9
2	*7025.00	98.6 AV			1.60 V	189	88.7	9.9
3	#7125.00	59.3 PK	88.2	-28.9	1.60 V	189	48.4	10.9
4	#7125.00	47.1 AV	68.2	-21.1	1.60 V	189	36.2	10.9
5	7250.00	59.5 PK	74.0	-14.5	1.60 V	189	48.7	10.8
6	7250.00	48.0 AV	54.0	-6.0	1.60 V	189	37.2	10.8
7	#14050.00	48.9 PK	88.2	-39.3	1.96 V	256	29.9	19.0
8	#14050.00	37.3 AV	68.2	-30.9	1.96 V	256	18.3	19.0
9	21075.00	59.3 PK	74.0	-14.7	2.78 V	196	62.3	-3.0
10	21075.00	49.4 AV	54.0	-4.6	2.78 V	196	52.4	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.5 PK	88.2	-17.7	1.54 H	249	64.2	6.3
2	#5925.00	50.2 AV	68.2	-18.0	1.54 H	249	43.9	6.3
3	*6025.00	108.1 PK			1.54 H	249	102.0	6.1
4	*6025.00	97.0 AV			1.54 H	249	90.9	6.1
5	12050.00	48.2 PK	74.0	-25.8	2.18 H	59	32.6	15.6
6	12050.00	36.2 AV	54.0	-17.8	2.18 H	59	20.6	15.6
7	18075.00	58.5 PK	74.0	-15.5	2.19 H	276	63.6	-5.1
8	18075.00	48.2 AV	54.0	-5.8	2.19 H	276	53.3	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.98 V	32	57.5	6.3
2	#5925.00	47.1 AV	68.2	-21.1	1.98 V	32	40.8	6.3
3	*6025.00	108.6 PK			1.98 V	32	102.5	6.1
4	*6025.00	99.0 AV			1.98 V	32	92.9	6.1
5	12050.00	48.5 PK	74.0	-25.5	1.94 V	270	32.9	15.6
6	12050.00	37.0 AV	54.0	-17.0	1.94 V	270	21.4	15.6
7	18075.00	59.4 PK	74.0	-14.6	2.83 V	210	64.5	-5.1
8	18075.00	49.1 AV	54.0	-4.9	2.83 V	210	54.2	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.5 PK			1.56 H	263	100.7	6.8
2	*6185.00	96.6 AV			1.56 H	263	89.8	6.8
3	12370.00	48.3 PK	74.0	-25.7	2.13 H	68	33.3	15.0
4	12370.00	36.8 AV	54.0	-17.2	2.13 H	68	21.8	15.0
5	18555.00	58.3 PK	74.0	-15.7	2.22 H	268	63.2	-4.9
6	18555.00	48.5 AV	54.0	-5.5	2.22 H	268	53.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.2 PK			2.02 V	39	101.4	6.8
2	*6185.00	98.7 AV			2.02 V	39	91.9	6.8
3	12370.00	49.0 PK	74.0	-25.0	1.97 V	280	34.0	15.0
4	12370.00	37.7 AV	54.0	-16.3	1.97 V	280	22.7	15.0
5	18555.00	59.9 PK	74.0	-14.1	2.88 V	207	64.8	-4.9
6	18555.00	49.5 AV	54.0	-4.5	2.88 V	207	54.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.9 PK			1.55 H	239	100.5	7.4
2	*6345.00	97.1 AV			1.55 H	239	89.7	7.4
3	12690.00	48.1 PK	74.0	-25.9	2.09 H	60	33.2	14.9
4	12690.00	36.7 AV	54.0	-17.3	2.09 H	60	21.8	14.9
5	19035.00	58.1 PK	74.0	-15.9	2.25 H	258	62.8	-4.7
6	19035.00	48.8 AV	54.0	-5.2	2.25 H	258	53.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.5 PK			1.95 V	20	101.1	7.4
2	*6345.00	99.1 AV			1.95 V	20	91.7	7.4
3	12690.00	48.9 PK	74.0	-25.1	2.00 V	293	34.0	14.9
4	12690.00	37.6 AV	54.0	-16.4	2.00 V	293	22.7	14.9
5	19035.00	59.7 PK	74.0	-14.3	2.91 V	207	64.4	-4.7
6	19035.00	49.7 AV	54.0	-4.3	2.91 V	207	54.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.8 PK			1.60 H	260	99.6	8.2
2	*6505.00	96.8 AV			1.60 H	260	88.6	8.2
3	#13010.00	48.8 PK	88.2	-39.4	2.04 H	60	33.3	15.5
4	#13010.00	36.6 AV	68.2	-31.6	2.04 H	60	21.1	15.5
5	19515.00	58.2 PK	74.0	-15.8	2.19 H	254	61.4	-3.2
6	19515.00	48.7 AV	54.0	-5.3	2.19 H	254	51.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.5 PK			1.99 V	31	100.3	8.2
2	*6505.00	99.1 AV			1.99 V	31	90.9	8.2
3	#13010.00	49.5 PK	88.2	-38.7	1.95 V	295	34.0	15.5
4	#13010.00	37.2 AV	68.2	-31.0	1.95 V	295	21.7	15.5
5	19515.00	59.3 PK	74.0	-14.7	2.92 V	217	62.5	-3.2
6	19515.00	50.7 AV	54.0	-3.3	2.92 V	217	53.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.9 PK			1.57 H	251	99.0	8.9
2	*6665.00	96.9 AV			1.57 H	251	88.0	8.9
3	13330.00	48.7 PK	74.0	-25.3	2.06 H	68	31.3	17.4
4	13330.00	36.3 AV	54.0	-17.7	2.06 H	68	18.9	17.4
5	19995.00	58.4 PK	74.0	-15.6	2.20 H	247	62.5	-4.1
6	19995.00	48.3 AV	54.0	-5.7	2.20 H	247	52.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.6 PK			1.98 V	39	99.7	8.9
2	*6665.00	99.3 AV			1.98 V	39	90.4	8.9
3	13330.00	49.4 PK	74.0	-24.6	2.00 V	299	32.0	17.4
4	13330.00	37.4 AV	54.0	-16.6	2.00 V	299	20.0	17.4
5	19995.00	59.8 PK	74.0	-14.2	2.88 V	205	63.9	-4.1
6	19995.00	50.2 AV	54.0	-3.8	2.88 V	205	54.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.2 PK			1.55 H	263	99.2	9.0
2	*6825.00	97.2 AV			1.55 H	263	88.2	9.0
3	#13650.00	48.8 PK	88.2	-39.4	2.11 H	71	30.2	18.6
4	#13650.00	36.5 AV	68.2	-31.7	2.11 H	71	17.9	18.6
5	20475.00	58.5 PK	74.0	-15.5	2.26 H	258	61.5	-3.0
6	20475.00	48.5 AV	54.0	-5.5	2.26 H	258	51.5	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.4 PK			2.00 V	34	99.4	9.0
2	*6825.00	99.4 AV			2.00 V	34	90.4	9.0
3	#13650.00	49.1 PK	88.2	-39.1	2.04 V	286	30.5	18.6
4	#13650.00	37.8 AV	68.2	-30.4	2.04 V	286	19.2	18.6
5	20475.00	59.9 PK	74.0	-14.1	2.82 V	220	62.9	-3.0
6	20475.00	49.9 AV	54.0	-4.1	2.82 V	220	52.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.8 PK			1.68 H	353	97.8	10.0
2	*6985.00	95.6 AV			1.68 H	353	85.6	10.0
3	#7125.00	72.1 PK	88.2	-16.1	1.68 H	353	61.2	10.9
4	#7125.00	51.5 AV	68.2	-16.7	1.68 H	353	40.6	10.9
5	7250.00	57.6 PK	74.0	-16.4	1.68 H	353	46.8	10.8
6	7250.00	45.8 AV	54.0	-8.2	1.68 H	353	35.0	10.8
7	#13970.00	48.9 PK	88.2	-39.3	2.11 H	67	29.9	19.0
8	#13970.00	36.2 AV	68.2	-32.0	2.11 H	67	17.2	19.0
9	20955.00	58.7 PK	74.0	-15.3	2.31 H	269	61.4	-2.7
10	20955.00	48.6 AV	54.0	-5.4	2.31 H	269	51.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.7 PK			1.01 V	190	98.7	10.0
2	*6985.00	97.6 AV			1.01 V	190	87.6	10.0
3	#7125.00	74.7 PK	88.2	-13.5	1.01 V	190	63.8	10.9
4	#7125.00	53.1 AV	68.2	-15.1	1.01 V	190	42.2	10.9
5	7250.00	57.7 PK	74.0	-16.3	1.01 V	190	46.9	10.8
6	7250.00	47.0 AV	54.0	-7.0	1.01 V	190	36.2	10.8
7	#13970.00	49.5 PK	88.2	-38.7	2.05 V	271	30.5	19.0
8	#13970.00	37.5 AV	68.2	-30.7	2.05 V	271	18.5	19.0
9	20955.00	59.6 PK	74.0	-14.4	2.80 V	210	62.3	-2.7
10	20955.00	50.1 AV	54.0	-3.9	2.80 V	210	52.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.3 PK	88.2	-19.9	1.52 H	249	62.0	6.3
2	#5925.00	51.6 AV	68.2	-16.6	1.52 H	249	45.3	6.3
3	*6025.00	107.9 PK			1.52 H	249	101.8	6.1
4	*6025.00	98.2 AV			1.52 H	249	92.1	6.1
5	12050.00	48.6 PK	74.0	-25.4	2.13 H	71	33.0	15.6
6	12050.00	36.3 AV	54.0	-17.7	2.13 H	71	20.7	15.6
7	18075.00	58.2 PK	74.0	-15.8	2.34 H	283	63.3	-5.1
8	18075.00	48.7 AV	54.0	-5.3	2.34 H	283	53.8	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.8 PK	88.2	-17.4	2.18 V	32	64.5	6.3
2	#5925.00	48.2 AV	68.2	-20.0	2.18 V	32	41.9	6.3
3	*6025.00	110.8 PK			2.18 V	32	104.7	6.1
4	*6025.00	99.7 AV			2.18 V	32	93.6	6.1
5	12050.00	49.2 PK	74.0	-24.8	2.09 V	274	33.6	15.6
6	12050.00	37.4 AV	54.0	-16.6	2.09 V	274	21.8	15.6
7	18075.00	59.8 PK	74.0	-14.2	2.82 V	209	64.9	-5.1
8	18075.00	50.8 AV	54.0	-3.2	2.82 V	209	55.9	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.2 PK			1.58 H	264	101.4	6.8
2	*6185.00	98.6 AV			1.58 H	264	91.8	6.8
3	12370.00	48.7 PK	74.0	-25.3	2.17 H	74	33.7	15.0
4	12370.00	37.2 AV	54.0	-16.8	2.17 H	74	22.2	15.0
5	18555.00	58.5 PK	74.0	-15.5	2.33 H	277	63.4	-4.9
6	18555.00	48.4 AV	54.0	-5.6	2.33 H	277	53.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.2 PK			2.13 V	27	104.4	6.8
2	*6185.00	100.0 AV			2.13 V	27	93.2	6.8
3	12370.00	49.1 PK	74.0	-24.9	2.09 V	268	34.1	15.0
4	12370.00	37.9 AV	54.0	-16.1	2.09 V	268	22.9	15.0
5	18555.00	59.6 PK	74.0	-14.4	2.83 V	219	64.5	-4.9
6	18555.00	50.6 AV	54.0	-3.4	2.83 V	219	55.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.7 PK			1.54 H	233	100.3	7.4
2	*6345.00	98.1 AV			1.54 H	233	90.7	7.4
3	12690.00	48.2 PK	74.0	-25.8	2.17 H	59	33.3	14.9
4	12690.00	36.9 AV	54.0	-17.1	2.17 H	59	22.0	14.9
5	19035.00	58.8 PK	74.0	-15.2	2.29 H	275	63.5	-4.7
6	19035.00	48.7 AV	54.0	-5.3	2.29 H	275	53.4	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.1 PK			2.23 V	36	103.7	7.4
2	*6345.00	100.1 AV			2.23 V	36	92.7	7.4
3	12690.00	49.4 PK	74.0	-24.6	2.10 V	275	34.5	14.9
4	12690.00	37.7 AV	54.0	-16.3	2.10 V	275	22.8	14.9
5	19035.00	59.7 PK	74.0	-14.3	2.86 V	219	64.4	-4.7
6	19035.00	50.7 AV	54.0	-3.3	2.86 V	219	55.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.3 PK			1.55 H	239	100.1	8.2
2	*6505.00	98.6 AV			1.55 H	239	90.4	8.2
3	#13010.00	48.4 PK	88.2	-39.8	2.21 H	57	32.9	15.5
4	#13010.00	36.4 AV	68.2	-31.8	2.21 H	57	20.9	15.5
5	19515.00	58.0 PK	74.0	-16.0	2.27 H	279	61.2	-3.2
6	19515.00	48.1 AV	54.0	-5.9	2.27 H	279	51.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.6 PK			2.21 V	43	102.4	8.2
2	*6505.00	99.7 AV			2.21 V	43	91.5	8.2
3	#13010.00	49.6 PK	88.2	-38.6	2.12 V	279	34.1	15.5
4	#13010.00	37.9 AV	68.2	-30.3	2.12 V	279	22.4	15.5
5	19515.00	59.5 PK	74.0	-14.5	2.87 V	207	62.7	-3.2
6	19515.00	50.6 AV	54.0	-3.4	2.87 V	207	53.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.3 PK			1.57 H	239	99.4	8.9
2	*6665.00	98.4 AV			1.57 H	239	89.5	8.9
3	13330.00	48.3 PK	74.0	-25.7	2.16 H	56	30.9	17.4
4	13330.00	36.8 AV	54.0	-17.2	2.16 H	56	19.4	17.4
5	19995.00	58.3 PK	74.0	-15.7	2.29 H	268	62.4	-4.1
6	19995.00	48.2 AV	54.0	-5.8	2.29 H	268	52.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	111.3 PK			2.25 V	22	102.4	8.9
2	*6665.00	100.1 AV			2.25 V	22	91.2	8.9
3	13330.00	49.4 PK	74.0	-24.6	2.14 V	268	32.0	17.4
4	13330.00	37.8 AV	54.0	-16.2	2.14 V	268	20.4	17.4
5	19995.00	59.2 PK	74.0	-14.8	2.85 V	214	63.3	-4.1
6	19995.00	50.5 AV	54.0	-3.5	2.85 V	214	54.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.3 PK			1.56 H	244	99.3	9.0
2	*6825.00	98.4 AV			1.56 H	244	89.4	9.0
3	#13650.00	48.7 PK	88.2	-39.5	2.18 H	60	30.1	18.6
4	#13650.00	36.6 AV	68.2	-31.6	2.18 H	60	18.0	18.6
5	20475.00	58.0 PK	74.0	-16.0	2.32 H	258	61.0	-3.0
6	20475.00	48.8 AV	54.0	-5.2	2.32 H	258	51.8	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.5 PK			2.16 V	49	101.5	9.0
2	*6825.00	99.8 AV			2.16 V	49	90.8	9.0
3	#13650.00	49.3 PK	88.2	-38.9	2.09 V	272	30.7	18.6
4	#13650.00	37.3 AV	68.2	-30.9	2.09 V	272	18.7	18.6
5	20475.00	59.8 PK	74.0	-14.2	2.85 V	212	62.8	-3.0
6	20475.00	50.3 AV	54.0	-3.7	2.85 V	212	53.3	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.0 PK			1.50 H	360	98.0	10.0
2	*6985.00	95.3 AV			1.50 H	360	85.3	10.0
3	#7125.00	72.2 PK	88.2	-16.0	1.50 H	360	61.3	10.9
4	#7125.00	50.9 AV	68.2	-17.3	1.50 H	360	40.0	10.9
5	7250.00	57.7 PK	74.0	-16.3	1.50 H	360	46.9	10.8
6	7250.00	46.4 AV	54.0	-7.6	1.50 H	360	35.6	10.8
7	#13970.00	48.2 PK	88.2	-40.0	2.16 H	47	29.2	19.0
8	#13970.00	36.7 AV	68.2	-31.5	2.16 H	47	17.7	19.0
9	20955.00	58.5 PK	74.0	-15.5	2.30 H	272	61.2	-2.7
10	20955.00	48.4 AV	54.0	-5.6	2.30 H	272	51.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.3 PK			1.93 V	191	99.3	10.0
2	*6985.00	98.6 AV			1.93 V	191	88.6	10.0
3	#7125.00	69.9 PK	88.2	-18.3	1.93 V	191	59.0	10.9
4	#7125.00	52.0 AV	68.2	-16.2	1.93 V	191	41.1	10.9
5	7250.00	59.0 PK	74.0	-15.0	1.93 V	191	48.2	10.8
6	7250.00	48.3 AV	54.0	-5.7	1.93 V	191	37.5	10.8
7	#13970.00	49.8 PK	88.2	-38.4	2.04 V	287	30.8	19.0
8	#13970.00	37.9 AV	68.2	-30.3	2.04 V	287	18.9	19.0
9	20955.00	59.4 PK	74.0	-14.6	2.89 V	200	62.1	-2.7
10	20955.00	50.4 AV	54.0	-3.6	2.89 V	200	53.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.3 PK	88.2	-29.9	1.50 H	252	52.0	6.3
2	#5925.00	47.5 AV	68.2	-20.7	1.50 H	252	41.2	6.3
3	*6025.00	107.2 PK			1.50 H	252	101.1	6.1
4	*6025.00	97.2 AV			1.50 H	252	91.1	6.1
5	12050.00	48.9 PK	74.0	-25.1	2.13 H	34	33.3	15.6
6	12050.00	36.4 AV	54.0	-17.6	2.13 H	34	20.8	15.6
7	18075.00	58.7 PK	74.0	-15.3	2.34 H	269	63.8	-5.1
8	18075.00	48.2 AV	54.0	-5.8	2.34 H	269	53.3	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.5 PK	88.2	-32.7	2.22 V	34	49.2	6.3
2	#5925.00	43.9 AV	68.2	-24.3	2.22 V	34	37.6	6.3
3	*6025.00	108.6 PK			2.22 V	34	102.5	6.1
4	*6025.00	99.0 AV			2.22 V	34	92.9	6.1
5	12050.00	49.1 PK	74.0	-24.9	2.08 V	303	33.5	15.6
6	12050.00	37.5 AV	54.0	-16.5	2.08 V	303	21.9	15.6
7	18075.00	59.6 PK	74.0	-14.4	2.87 V	190	64.7	-5.1
8	18075.00	50.1 AV	54.0	-3.9	2.87 V	190	55.2	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.7 PK			1.49 H	247	100.9	6.8
2	*6185.00	97.6 AV			1.49 H	247	90.8	6.8
3	12370.00	48.8 PK	74.0	-25.2	2.16 H	31	33.8	15.0
4	12370.00	36.2 AV	54.0	-17.8	2.16 H	31	21.2	15.0
5	18555.00	58.3 PK	74.0	-15.7	2.28 H	280	63.2	-4.9
6	18555.00	48.5 AV	54.0	-5.5	2.28 H	280	53.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.9 PK			2.20 V	49	102.1	6.8
2	*6185.00	99.2 AV			2.20 V	49	92.4	6.8
3	12370.00	49.3 PK	74.0	-24.7	2.03 V	299	34.3	15.0
4	12370.00	37.3 AV	54.0	-16.7	2.03 V	299	22.3	15.0
5	18555.00	59.3 PK	74.0	-14.7	2.87 V	186	64.2	-4.9
6	18555.00	50.9 AV	54.0	-3.1	2.87 V	186	55.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.3 PK			1.53 H	236	99.9	7.4
2	*6345.00	97.1 AV			1.53 H	236	89.7	7.4
3	12690.00	48.7 PK	74.0	-25.3	2.15 H	40	33.8	14.9
4	12690.00	36.8 AV	54.0	-17.2	2.15 H	40	21.9	14.9
5	19035.00	58.8 PK	74.0	-15.2	2.23 H	270	63.5	-4.7
6	19035.00	48.1 AV	54.0	-5.9	2.23 H	270	52.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.1 PK			2.14 V	59	101.7	7.4
2	*6345.00	99.4 AV			2.14 V	59	92.0	7.4
3	12690.00	49.8 PK	74.0	-24.2	2.03 V	298	34.9	14.9
4	12690.00	37.6 AV	54.0	-16.4	2.03 V	298	22.7	14.9
5	19035.00	59.4 PK	74.0	-14.6	2.87 V	193	64.1	-4.7
6	19035.00	50.8 AV	54.0	-3.2	2.87 V	193	55.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.2 PK			1.51 H	226	99.0	8.2
2	*6505.00	96.8 AV			1.51 H	226	88.6	8.2
3	#13010.00	48.5 PK	88.2	-39.7	2.14 H	51	33.0	15.5
4	#13010.00	36.4 AV	68.2	-31.8	2.14 H	51	20.9	15.5
5	19515.00	58.5 PK	74.0	-15.5	2.25 H	276	61.7	-3.2
6	19515.00	48.5 AV	54.0	-5.5	2.25 H	276	51.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.9 PK			2.13 V	72	100.7	8.2
2	*6505.00	99.1 AV			2.13 V	72	90.9	8.2
3	#13010.00	49.6 PK	88.2	-38.6	2.00 V	302	34.1	15.5
4	#13010.00	37.5 AV	68.2	-30.7	2.00 V	302	22.0	15.5
5	19515.00	59.1 PK	74.0	-14.9	2.87 V	180	62.3	-3.2
6	19515.00	50.3 AV	54.0	-3.7	2.87 V	180	53.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.4 PK			1.57 H	234	98.5	8.9
2	*6665.00	97.2 AV			1.57 H	234	88.3	8.9
3	13330.00	48.4 PK	74.0	-25.6	2.11 H	45	31.0	17.4
4	13330.00	36.1 AV	54.0	-17.9	2.11 H	45	18.7	17.4
5	19995.00	58.1 PK	74.0	-15.9	2.24 H	266	62.2	-4.1
6	19995.00	48.9 AV	54.0	-5.1	2.24 H	266	53.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.9 PK			2.14 V	77	100.0	8.9
2	*6665.00	99.2 AV			2.14 V	77	90.3	8.9
3	13330.00	49.0 PK	74.0	-25.0	1.94 V	287	31.6	17.4
4	13330.00	37.6 AV	54.0	-16.4	1.94 V	287	20.2	17.4
5	19995.00	59.2 PK	74.0	-14.8	2.92 V	183	63.3	-4.1
6	19995.00	50.2 AV	54.0	-3.8	2.92 V	183	54.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.3 PK			1.55 H	231	98.3	9.0
2	*6825.00	96.8 AV			1.55 H	231	87.8	9.0
3	#13650.00	48.7 PK	88.2	-39.5	2.09 H	48	30.1	18.6
4	#13650.00	36.7 AV	68.2	-31.5	2.09 H	48	18.1	18.6
5	20475.00	58.9 PK	74.0	-15.1	2.18 H	258	61.9	-3.0
6	20475.00	48.6 AV	54.0	-5.4	2.18 H	258	51.6	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.4 PK			2.11 V	85	100.4	9.0
2	*6825.00	99.5 AV			2.11 V	85	90.5	9.0
3	#13650.00	49.5 PK	88.2	-38.7	1.98 V	273	30.9	18.6
4	#13650.00	37.9 AV	68.2	-30.3	1.98 V	273	19.3	18.6
5	20475.00	59.6 PK	74.0	-14.4	2.92 V	183	62.6	-3.0
6	20475.00	50.6 AV	54.0	-3.4	2.92 V	183	53.6	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.6 PK			1.50 H	147	96.6	10.0
2	*6985.00	95.4 AV			1.50 H	147	85.4	10.0
3	#7125.00	66.0 PK	88.2	-22.2	1.50 H	147	55.1	10.9
4	#7125.00	52.3 AV	68.2	-15.9	1.50 H	147	41.4	10.9
5	7250.00	57.8 PK	74.0	-16.2	1.50 H	147	47.0	10.8
6	7250.00	46.1 AV	54.0	-7.9	1.50 H	147	35.3	10.8
7	#13970.00	48.6 PK	88.2	-39.6	2.14 H	49	29.6	19.0
8	#13970.00	36.7 AV	68.2	-31.5	2.14 H	49	17.7	19.0
9	20955.00	58.1 PK	74.0	-15.9	2.13 H	262	60.8	-2.7
10	20955.00	48.8 AV	54.0	-5.2	2.13 H	262	51.5	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.6 PK			2.48 V	190	100.6	10.0
2	*6985.00	97.9 AV			2.48 V	190	87.9	10.0
3	#7125.00	68.3 PK	88.2	-19.9	2.48 V	190	57.4	10.9
4	#7125.00	53.3 AV	68.2	-14.9	2.48 V	190	42.4	10.9
5	7250.00	58.8 PK	74.0	-15.2	2.48 V	190	48.0	10.8
6	7250.00	47.1 AV	54.0	-6.9	2.48 V	190	36.3	10.8
7	#13970.00	49.9 PK	88.2	-38.3	1.99 V	276	30.9	19.0
8	#13970.00	37.1 AV	68.2	-31.1	1.99 V	276	18.1	19.0
9	20955.00	59.7 PK	74.0	-14.3	2.94 V	180	62.4	-2.7
10	20955.00	50.2 AV	54.0	-3.8	2.94 V	180	52.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.9 PK	88.2	-18.3	1.50 H	249	63.6	6.3
2	#5925.00	53.5 AV	68.2	-14.7	1.50 H	249	47.2	6.3
3	*6105.00	105.3 PK			1.50 H	249	99.0	6.3
4	*6105.00	94.4 AV			1.50 H	249	88.1	6.3
5	12210.00	48.4 PK	74.0	-25.6	2.12 H	46	32.9	15.5
6	12210.00	36.5 AV	54.0	-17.5	2.12 H	46	21.0	15.5
7	18315.00	58.5 PK	74.0	-15.5	2.13 H	256	63.7	-5.2
8	18315.00	48.7 AV	54.0	-5.3	2.13 H	256	53.9	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.4 PK	88.2	-20.8	2.08 V	29	61.1	6.3
2	#5925.00	50.7 AV	68.2	-17.5	2.08 V	29	44.4	6.3
3	*6105.00	107.4 PK			2.08 V	29	101.1	6.3
4	*6105.00	96.6 AV			2.08 V	29	90.3	6.3
5	12210.00	49.2 PK	74.0	-24.8	1.98 V	271	33.7	15.5
6	12210.00	37.5 AV	54.0	-16.5	1.98 V	271	22.0	15.5
7	18315.00	59.1 PK	74.0	-14.9	2.99 V	182	64.3	-5.2
8	18315.00	50.4 AV	54.0	-3.6	2.99 V	182	55.6	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	104.9 PK			1.53 H	251	97.8	7.1
2	*6265.00	94.1 AV			1.53 H	251	87.0	7.1
3	12530.00	48.8 PK	74.0	-25.2	2.14 H	45	34.1	14.7
4	12530.00	36.5 AV	54.0	-17.5	2.14 H	45	21.8	14.7
5	18795.00	58.6 PK	74.0	-15.4	2.12 H	252	63.4	-4.8
6	18795.00	48.6 AV	54.0	-5.4	2.12 H	252	53.4	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	107.7 PK			2.08 V	42	100.6	7.1
2	*6265.00	97.1 AV			2.08 V	42	90.0	7.1
3	12530.00	49.9 PK	74.0	-24.1	1.95 V	255	35.2	14.7
4	12530.00	37.9 AV	54.0	-16.1	1.95 V	255	23.2	14.7
5	18795.00	59.4 PK	74.0	-14.6	2.94 V	167	64.2	-4.8
6	18795.00	50.5 AV	54.0	-3.5	2.94 V	167	55.3	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	104.8 PK			1.54 H	253	97.1	7.7
2	*6425.00	94.3 AV			1.54 H	253	86.6	7.7
3	#12850.00	48.1 PK	88.2	-40.1	2.11 H	43	32.5	15.6
4	#12850.00	36.6 AV	68.2	-31.6	2.11 H	43	21.0	15.6
5	19275.00	58.4 PK	74.0	-15.6	2.16 H	238	62.6	-4.2
6	19275.00	48.9 AV	54.0	-5.1	2.16 H	238	53.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.8 PK			2.08 V	29	100.1	7.7
2	*6425.00	96.9 AV			2.08 V	29	89.2	7.7
3	#12850.00	49.2 PK	88.2	-39.0	1.97 V	261	33.6	15.6
4	#12850.00	37.4 AV	68.2	-30.8	1.97 V	261	21.8	15.6
5	19275.00	59.6 PK	74.0	-14.4	2.98 V	171	63.8	-4.2
6	19275.00	50.2 AV	54.0	-3.8	2.98 V	171	54.4	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	104.6 PK			1.59 H	262	95.9	8.7
2	*6585.00	94.2 AV			1.59 H	262	85.5	8.7
3	#13170.00	48.6 PK	88.2	-39.6	2.14 H	44	32.5	16.1
4	#13170.00	35.9 AV	68.2	-32.3	2.14 H	44	19.8	16.1
5	19755.00	58.3 PK	74.0	-15.7	2.14 H	238	62.3	-4.0
6	19755.00	48.1 AV	54.0	-5.9	2.14 H	238	52.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.0 PK			2.11 V	31	99.3	8.7
2	*6585.00	96.9 AV			2.11 V	31	88.2	8.7
3	#13170.00	49.9 PK	88.2	-38.3	2.03 V	250	33.8	16.1
4	#13170.00	37.1 AV	68.2	-31.1	2.03 V	250	21.0	16.1
5	19755.00	59.1 PK	74.0	-14.9	2.92 V	187	63.1	-4.0
6	19755.00	50.9 AV	54.0	-3.1	2.92 V	187	54.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.7 PK			1.55 H	260	95.9	8.8
2	*6745.00	94.2 AV			1.55 H	260	85.4	8.8
3	#13490.00	49.0 PK	88.2	-39.2	2.12 H	44	30.7	18.3
4	#13490.00	36.4 AV	68.2	-31.8	2.12 H	44	18.1	18.3
5	20235.00	58.6 PK	74.0	-15.4	2.17 H	234	61.9	-3.3
6	20235.00	48.2 AV	54.0	-5.8	2.17 H	234	51.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.3 PK			2.13 V	26	98.5	8.8
2	*6745.00	96.4 AV			2.13 V	26	87.6	8.8
3	#13490.00	49.4 PK	88.2	-38.8	2.08 V	250	31.1	18.3
4	#13490.00	37.3 AV	68.2	-30.9	2.08 V	250	19.0	18.3
5	20235.00	59.2 PK	74.0	-14.8	2.95 V	176	62.5	-3.3
6	20235.00	50.2 AV	54.0	-3.8	2.95 V	176	53.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.6 PK			1.88 H	22	96.3	9.3
2	*6905.00	94.6 AV			1.88 H	22	85.3	9.3
3	#7125.00	70.7 PK	88.2	-17.5	1.88 H	22	59.8	10.9
4	#7125.00	51.3 AV	68.2	-16.9	1.88 H	22	40.4	10.9
5	7250.00	57.7 PK	74.0	-16.3	1.88 H	22	46.9	10.8
6	7250.00	45.8 AV	54.0	-8.2	1.88 H	22	35.0	10.8
7	#13810.00	48.7 PK	88.2	-39.5	2.17 H	36	30.3	18.4
8	#13810.00	36.3 AV	68.2	-31.9	2.17 H	36	17.9	18.4
9	20715.00	58.3 PK	74.0	-15.7	2.21 H	228	61.2	-2.9
10	20715.00	48.8 AV	54.0	-5.2	2.21 H	228	51.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.4 PK			1.50 V	72	97.1	9.3
2	*6905.00	96.2 AV			1.50 V	72	86.9	9.3
3	#7125.00	76.5 PK	88.2	-11.7	1.50 V	72	65.6	10.9
4	#7125.00	52.3 AV	68.2	-15.9	1.50 V	72	41.4	10.9
5	7250.00	58.8 PK	74.0	-15.2	1.50 V	72	48.0	10.8
6	7250.00	46.6 AV	54.0	-7.4	1.50 V	72	35.8	10.8
7	#13810.00	49.6 PK	88.2	-38.6	2.08 V	240	31.2	18.4
8	#13810.00	37.2 AV	68.2	-31.0	2.08 V	240	18.8	18.4
9	20715.00	59.5 PK	74.0	-14.5	2.92 V	187	62.4	-2.9
10	20715.00	50.5 AV	54.0	-3.5	2.92 V	187	53.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	1.59 H	252	63.8	6.3
2	#5925.00	49.4 AV	68.2	-18.8	1.59 H	252	43.1	6.3
3	*6105.00	105.3 PK			1.59 H	252	99.0	6.3
4	*6105.00	94.8 AV			1.59 H	252	88.5	6.3
5	12210.00	48.3 PK	74.0	-25.7	2.20 H	40	32.8	15.5
6	12210.00	36.5 AV	54.0	-17.5	2.20 H	40	21.0	15.5
7	18315.00	58.1 PK	74.0	-15.9	2.17 H	241	63.3	-5.2
8	18315.00	48.6 AV	54.0	-5.4	2.17 H	241	53.8	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.3 PK	88.2	-21.9	2.03 V	32	60.0	6.3
2	#5925.00	47.7 AV	68.2	-20.5	2.03 V	32	41.4	6.3
3	*6105.00	107.3 PK			2.03 V	32	101.0	6.3
4	*6105.00	97.7 AV			2.03 V	32	91.4	6.3
5	12210.00	49.3 PK	74.0	-24.7	2.07 V	233	33.8	15.5
6	12210.00	37.5 AV	54.0	-16.5	2.07 V	233	22.0	15.5
7	18315.00	59.1 PK	74.0	-14.9	2.90 V	189	64.3	-5.2
8	18315.00	50.2 AV	54.0	-3.8	2.90 V	189	55.4	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.6 PK			1.64 H	262	98.5	7.1
2	*6265.00	95.2 AV			1.64 H	262	88.1	7.1
3	12530.00	48.5 PK	74.0	-25.5	2.24 H	41	33.8	14.7
4	12530.00	36.4 AV	54.0	-17.6	2.24 H	41	21.7	14.7
5	18795.00	58.2 PK	74.0	-15.8	2.13 H	256	63.0	-4.8
6	18795.00	48.5 AV	54.0	-5.5	2.13 H	256	53.3	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	107.7 PK			2.01 V	24	100.6	7.1
2	*6265.00	98.0 AV			2.01 V	24	90.9	7.1
3	12530.00	49.4 PK	74.0	-24.6	2.02 V	235	34.7	14.7
4	12530.00	37.8 AV	54.0	-16.2	2.02 V	235	23.1	14.7
5	18795.00	59.8 PK	74.0	-14.2	2.84 V	176	64.6	-4.8
6	18795.00	50.7 AV	54.0	-3.3	2.84 V	176	55.5	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.9 PK			1.63 H	254	98.2	7.7
2	*6425.00	95.4 AV			1.63 H	254	87.7	7.7
3	#12850.00	48.3 PK	88.2	-39.9	2.27 H	44	32.7	15.6
4	#12850.00	36.4 AV	68.2	-31.8	2.27 H	44	20.8	15.6
5	19275.00	58.5 PK	74.0	-15.5	2.15 H	240	62.7	-4.2
6	19275.00	48.4 AV	54.0	-5.6	2.15 H	240	52.6	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.8 PK			1.97 V	24	100.1	7.7
2	*6425.00	98.3 AV			1.97 V	24	90.6	7.7
3	#12850.00	49.9 PK	88.2	-38.3	2.07 V	240	34.3	15.6
4	#12850.00	37.4 AV	68.2	-30.8	2.07 V	240	21.8	15.6
5	19275.00	59.1 PK	74.0	-14.9	2.86 V	163	63.3	-4.2
6	19275.00	50.2 AV	54.0	-3.8	2.86 V	163	54.4	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	104.9 PK			1.57 H	264	96.2	8.7
2	*6585.00	94.5 AV			1.57 H	264	85.8	8.7
3	#13170.00	48.8 PK	88.2	-39.4	2.24 H	58	32.7	16.1
4	#13170.00	36.6 AV	68.2	-31.6	2.24 H	58	20.5	16.1
5	19755.00	58.8 PK	74.0	-15.2	2.13 H	239	62.8	-4.0
6	19755.00	48.6 AV	54.0	-5.4	2.13 H	239	52.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.2 PK			2.03 V	20	98.5	8.7
2	*6585.00	97.8 AV			2.03 V	20	89.1	8.7
3	#13170.00	50.2 PK	88.2	-38.0	2.06 V	252	34.1	16.1
4	#13170.00	37.6 AV	68.2	-30.6	2.06 V	252	21.5	16.1
5	19755.00	59.7 PK	74.0	-14.3	2.85 V	157	63.7	-4.0
6	19755.00	50.5 AV	54.0	-3.5	2.85 V	157	54.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	104.7 PK			1.58 H	249	95.9	8.8
2	*6745.00	94.1 AV			1.58 H	249	85.3	8.8
3	#13490.00	48.6 PK	88.2	-39.6	2.20 H	70	30.3	18.3
4	#13490.00	36.9 AV	68.2	-31.3	2.20 H	70	18.6	18.3
5	20235.00	58.7 PK	74.0	-15.3	2.17 H	231	62.0	-3.3
6	20235.00	48.4 AV	54.0	-5.6	2.17 H	231	51.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.3 PK			2.00 V	26	98.5	8.8
2	*6745.00	98.0 AV			2.00 V	26	89.2	8.8
3	#13490.00	50.4 PK	88.2	-37.8	2.04 V	256	32.1	18.3
4	#13490.00	37.5 AV	68.2	-30.7	2.04 V	256	19.2	18.3
5	20235.00	59.8 PK	74.0	-14.2	2.83 V	171	63.1	-3.3
6	20235.00	50.1 AV	54.0	-3.9	2.83 V	171	53.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz Low	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.4 PK			2.34 H	22	96.1	9.3
2	*6905.00	94.1 AV			2.34 H	22	84.8	9.3
3	#7125.00	72.4 PK	88.2	-15.8	2.34 H	22	61.5	10.9
4	#7125.00	53.3 AV	68.2	-14.9	2.34 H	22	42.4	10.9
5	7250.00	60.3 PK	74.0	-13.7	2.34 H	22	49.5	10.8
6	7250.00	47.5 AV	54.0	-6.5	2.34 H	22	36.7	10.8
7	#13810.00	48.8 PK	88.2	-39.4	2.25 H	76	30.4	18.4
8	#13810.00	36.5 AV	68.2	-31.7	2.25 H	76	18.1	18.4
9	20715.00	58.4 PK	74.0	-15.6	2.13 H	216	61.3	-2.9
10	20715.00	48.5 AV	54.0	-5.5	2.13 H	216	51.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.8 PK			1.50 V	71	97.5	9.3
2	*6905.00	96.3 AV			1.50 V	71	87.0	9.3
3	#7125.00	74.8 PK	88.2	-13.4	1.50 V	71	63.9	10.9
4	#7125.00	56.6 AV	68.2	-11.6	1.50 V	71	45.7	10.9
5	7250.00	62.2 PK	74.0	-11.8	1.50 V	71	51.4	10.8
6	7250.00	49.6 AV	54.0	-4.4	1.50 V	71	38.8	10.8
7	#13810.00	50.0 PK	88.2	-38.2	1.99 V	251	31.6	18.4
8	#13810.00	37.3 AV	68.2	-30.9	1.99 V	251	18.9	18.4
9	20715.00	59.9 PK	74.0	-14.1	2.88 V	161	62.8	-2.9
10	20715.00	50.9 AV	54.0	-3.1	2.88 V	161	53.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.7 PK	88.2	-18.5	1.51 H	251	63.4	6.3
2	#5925.00	55.3 AV	68.2	-12.9	1.51 H	251	49.0	6.3
3	*6105.00	106.2 PK			1.51 H	251	99.9	6.3
4	*6105.00	95.7 AV			1.51 H	251	89.4	6.3
5	12210.00	48.9 PK	74.0	-25.1	2.28 H	84	33.4	15.5
6	12210.00	36.2 AV	54.0	-17.8	2.28 H	84	20.7	15.5
7	18315.00	58.6 PK	74.0	-15.4	2.17 H	204	63.8	-5.2
8	18315.00	48.1 AV	54.0	-5.9	2.17 H	204	53.3	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	2.09 V	33	64.8	6.3
2	#5925.00	51.8 AV	68.2	-16.4	2.09 V	33	45.5	6.3
3	*6105.00	107.4 PK			2.09 V	33	101.1	6.3
4	*6105.00	97.5 AV			2.09 V	33	91.2	6.3
5	12210.00	49.8 PK	74.0	-24.2	1.99 V	250	34.3	15.5
6	12210.00	37.4 AV	54.0	-16.6	1.99 V	250	21.9	15.5
7	18315.00	59.4 PK	74.0	-14.6	2.86 V	148	64.6	-5.2
8	18315.00	50.4 AV	54.0	-3.6	2.86 V	148	55.6	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.8 PK			1.48 H	247	98.7	7.1
2	*6265.00	95.4 AV			1.48 H	247	88.3	7.1
3	12530.00	48.6 PK	74.0	-25.4	2.24 H	96	33.9	14.7
4	12530.00	36.1 AV	54.0	-17.9	2.24 H	96	21.4	14.7
5	18795.00	58.8 PK	74.0	-15.2	2.16 H	213	63.6	-4.8
6	18795.00	48.3 AV	54.0	-5.7	2.16 H	213	53.1	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	107.8 PK			2.05 V	27	100.7	7.1
2	*6265.00	97.8 AV			2.05 V	27	90.7	7.1
3	12530.00	49.7 PK	74.0	-24.3	2.01 V	263	35.0	14.7
4	12530.00	37.7 AV	54.0	-16.3	2.01 V	263	23.0	14.7
5	18795.00	59.6 PK	74.0	-14.4	2.88 V	133	64.4	-4.8
6	18795.00	50.2 AV	54.0	-3.8	2.88 V	133	55.0	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.0 PK			1.47 H	233	98.3	7.7
2	*6425.00	95.7 AV			1.47 H	233	88.0	7.7
3	#12850.00	48.4 PK	88.2	-39.8	2.24 H	105	32.8	15.6
4	#12850.00	36.3 AV	68.2	-31.9	2.24 H	105	20.7	15.6
5	19275.00	58.7 PK	74.0	-15.3	2.22 H	201	62.9	-4.2
6	19275.00	48.5 AV	54.0	-5.5	2.22 H	201	52.7	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.4 PK			2.07 V	33	99.7	7.7
2	*6425.00	97.7 AV			2.07 V	33	90.0	7.7
3	#12850.00	49.4 PK	88.2	-38.8	1.96 V	250	33.8	15.6
4	#12850.00	37.7 AV	68.2	-30.5	1.96 V	250	22.1	15.6
5	19275.00	59.6 PK	74.0	-14.4	2.88 V	126	63.8	-4.2
6	19275.00	49.9 AV	54.0	-4.1	2.88 V	126	54.1	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.1 PK			1.51 H	245	97.4	8.7
2	*6585.00	95.8 AV			1.51 H	245	87.1	8.7
3	#13170.00	48.2 PK	88.2	-40.0	2.19 H	96	32.1	16.1
4	#13170.00	36.1 AV	68.2	-32.1	2.19 H	96	20.0	16.1
5	19755.00	58.6 PK	74.0	-15.4	2.27 H	195	62.6	-4.0
6	19755.00	48.4 AV	54.0	-5.6	2.27 H	195	52.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.0 PK			2.08 V	18	98.3	8.7
2	*6585.00	97.4 AV			2.08 V	18	88.7	8.7
3	#13170.00	49.1 PK	88.2	-39.1	1.99 V	239	33.0	16.1
4	#13170.00	37.3 AV	68.2	-30.9	1.99 V	239	21.2	16.1
5	19755.00	59.8 PK	74.0	-14.2	2.88 V	139	63.8	-4.0
6	19755.00	49.8 AV	54.0	-4.2	2.88 V	139	53.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.4 PK			1.53 H	260	97.6	8.8
2	*6745.00	95.8 AV			1.53 H	260	87.0	8.8
3	#13490.00	48.3 PK	88.2	-39.9	2.23 H	92	30.0	18.3
4	#13490.00	36.3 AV	68.2	-31.9	2.23 H	92	18.0	18.3
5	20235.00	58.2 PK	74.0	-15.8	2.23 H	204	61.5	-3.3
6	20235.00	48.7 AV	54.0	-5.3	2.23 H	204	52.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.3 PK			2.03 V	19	98.5	8.8
2	*6745.00	97.4 AV			2.03 V	19	88.6	8.8
3	#13490.00	49.7 PK	88.2	-38.5	1.94 V	237	31.4	18.3
4	#13490.00	37.2 AV	68.2	-31.0	1.94 V	237	18.9	18.3
5	20235.00	59.4 PK	74.0	-14.6	2.89 V	146	62.7	-3.3
6	20235.00	49.6 AV	54.0	-4.4	2.89 V	146	52.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 120 MHz High	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.1 PK			1.80 H	26	96.8	9.3
2	*6905.00	95.4 AV			1.80 H	26	86.1	9.3
3	#7125.00	68.5 PK	88.2	-19.7	1.80 H	26	57.6	10.9
4	#7125.00	50.9 AV	68.2	-17.3	1.80 H	26	40.0	10.9
5	7250.00	57.5 PK	74.0	-16.5	1.80 H	26	46.7	10.8
6	7250.00	45.9 AV	54.0	-8.1	1.80 H	26	35.1	10.8
7	#13810.00	48.1 PK	88.2	-40.1	2.22 H	84	29.7	18.4
8	#13810.00	36.2 AV	68.2	-32.0	2.22 H	84	17.8	18.4
9	20715.00	58.8 PK	74.0	-15.2	2.19 H	220	61.7	-2.9
10	20715.00	48.1 AV	54.0	-5.9	2.19 H	220	51.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.0 PK			1.50 V	71	97.7	9.3
2	*6905.00	97.3 AV			1.50 V	71	88.0	9.3
3	#7125.00	71.8 PK	88.2	-16.4	1.50 V	71	60.9	10.9
4	#7125.00	53.6 AV	68.2	-14.6	1.50 V	71	42.7	10.9
5	7250.00	58.2 PK	74.0	-15.8	1.50 V	71	47.4	10.8
6	7250.00	46.7 AV	54.0	-7.3	1.50 V	71	35.9	10.8
7	#13810.00	49.5 PK	88.2	-38.7	1.93 V	235	31.1	18.4
8	#13810.00	37.5 AV	68.2	-30.7	1.93 V	235	19.1	18.4
9	20715.00	59.5 PK	74.0	-14.5	2.90 V	130	62.4	-2.9
10	20715.00	49.9 AV	54.0	-4.1	2.90 V	130	52.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.8 PK	88.2	-19.4	1.50 H	255	62.5	6.3
2	#5925.00	52.8 AV	68.2	-15.4	1.50 H	255	46.5	6.3
3	*6105.00	107.2 PK			1.50 H	255	100.9	6.3
4	*6105.00	96.1 AV			1.50 H	255	89.8	6.3
5	12210.00	48.2 PK	74.0	-25.8	2.24 H	84	32.7	15.5
6	12210.00	36.3 AV	54.0	-17.7	2.24 H	84	20.8	15.5
7	18315.00	58.6 PK	74.0	-15.4	2.14 H	234	63.8	-5.2
8	18315.00	48.5 AV	54.0	-5.5	2.14 H	234	53.7	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.7 PK	88.2	-21.5	1.92 V	32	60.4	6.3
2	#5925.00	50.7 AV	68.2	-17.5	1.92 V	32	44.4	6.3
3	*6105.00	108.3 PK			1.92 V	32	102.0	6.3
4	*6105.00	98.5 AV			1.92 V	32	92.2	6.3
5	12210.00	50.0 PK	74.0	-24.0	1.97 V	229	34.5	15.5
6	12210.00	37.2 AV	54.0	-16.8	1.97 V	229	21.7	15.5
7	18315.00	59.7 PK	74.0	-14.3	2.86 V	128	64.9	-5.2
8	18315.00	49.4 AV	54.0	-4.6	2.86 V	128	54.6	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	107.4 PK			1.51 H	259	100.3	7.1
2	*6265.00	96.1 AV			1.51 H	259	89.0	7.1
3	12530.00	48.3 PK	74.0	-25.7	2.26 H	71	33.6	14.7
4	12530.00	36.2 AV	54.0	-17.8	2.26 H	71	21.5	14.7
5	18795.00	58.7 PK	74.0	-15.3	2.17 H	244	63.5	-4.8
6	18795.00	48.2 AV	54.0	-5.8	2.17 H	244	53.0	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	108.4 PK			1.88 V	23	101.3	7.1
2	*6265.00	98.9 AV			1.88 V	23	91.8	7.1
3	12530.00	50.2 PK	74.0	-23.8	1.98 V	235	35.5	14.7
4	12530.00	37.1 AV	54.0	-16.9	1.98 V	235	22.4	14.7
5	18795.00	59.4 PK	74.0	-14.6	2.89 V	138	64.2	-4.8
6	18795.00	49.1 AV	54.0	-4.9	2.89 V	138	53.9	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.7 PK			1.48 H	247	100.0	7.7
2	*6425.00	96.3 AV			1.48 H	247	88.6	7.7
3	#12850.00	48.1 PK	88.2	-40.1	2.31 H	73	32.5	15.6
4	#12850.00	36.0 AV	68.2	-32.2	2.31 H	73	20.4	15.6
5	19275.00	58.2 PK	74.0	-15.8	2.11 H	246	62.4	-4.2
6	19275.00	48.1 AV	54.0	-5.9	2.11 H	246	52.3	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.6 PK			1.87 V	22	100.9	7.7
2	*6425.00	99.0 AV			1.87 V	22	91.3	7.7
3	#12850.00	49.7 PK	88.2	-38.5	2.04 V	224	34.1	15.6
4	#12850.00	37.2 AV	68.2	-31.0	2.04 V	224	21.6	15.6
5	19275.00	59.3 PK	74.0	-14.7	2.94 V	123	63.5	-4.2
6	19275.00	49.4 AV	54.0	-4.6	2.94 V	123	53.6	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.8 PK			1.51 H	232	99.1	8.7
2	*6585.00	96.2 AV			1.51 H	232	87.5	8.7
3	#13170.00	48.6 PK	88.2	-39.6	2.29 H	67	32.5	16.1
4	#13170.00	36.6 AV	68.2	-31.6	2.29 H	67	20.5	16.1
5	19755.00	58.7 PK	74.0	-15.3	2.07 H	253	62.7	-4.0
6	19755.00	48.8 AV	54.0	-5.2	2.07 H	253	52.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.2 PK			1.84 V	24	99.5	8.7
2	*6585.00	98.7 AV			1.84 V	24	90.0	8.7
3	#13170.00	49.7 PK	88.2	-38.5	2.06 V	219	33.6	16.1
4	#13170.00	37.1 AV	68.2	-31.1	2.06 V	219	21.0	16.1
5	19755.00	59.1 PK	74.0	-14.9	2.95 V	132	63.1	-4.0
6	19755.00	49.8 AV	54.0	-4.2	2.95 V	132	53.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.3 PK			1.55 H	229	98.5	8.8
2	*6745.00	95.9 AV			1.55 H	229	87.1	8.8
3	#13490.00	48.0 PK	88.2	-40.2	2.28 H	60	29.7	18.3
4	#13490.00	36.1 AV	68.2	-32.1	2.28 H	60	17.8	18.3
5	20235.00	58.6 PK	74.0	-15.4	2.07 H	257	61.9	-3.3
6	20235.00	48.5 AV	54.0	-5.5	2.07 H	257	51.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.4 PK			1.86 V	23	99.6	8.8
2	*6745.00	98.9 AV			1.86 V	23	90.1	8.8
3	#13490.00	49.1 PK	88.2	-39.1	2.12 V	219	30.8	18.3
4	#13490.00	37.4 AV	68.2	-30.8	2.12 V	219	19.1	18.3
5	20235.00	59.2 PK	74.0	-14.8	3.01 V	117	62.5	-3.3
6	20235.00	49.9 AV	54.0	-4.1	3.01 V	117	53.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 160 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.9 PK			1.83 H	26	96.6	9.3
2	*6905.00	95.9 AV			1.83 H	26	86.6	9.3
3	#7125.00	65.6 PK	88.2	-22.6	1.83 H	26	54.7	10.9
4	#7125.00	51.4 AV	68.2	-16.8	1.83 H	26	40.5	10.9
5	7250.00	71.4 PK	74.0	-2.6	1.83 H	26	60.6	10.8
6	7250.00	51.4 AV	54.0	-2.6	1.83 H	26	40.6	10.8
7	#13810.00	48.7 PK	88.2	-39.5	2.32 H	61	30.3	18.4
8	#13810.00	36.7 AV	68.2	-31.5	2.32 H	61	18.3	18.4
9	20715.00	58.7 PK	74.0	-15.3	2.03 H	270	61.6	-2.9
10	20715.00	48.9 AV	54.0	-5.1	2.03 H	270	51.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.2 PK			1.50 V	71	97.9	9.3
2	*6905.00	97.8 AV			1.50 V	71	88.5	9.3
3	#7125.00	71.3 PK	88.2	-16.9	1.50 V	71	60.4	10.9
4	#7125.00	52.9 AV	68.2	-15.3	1.50 V	71	42.0	10.9
5	7250.00	71.8 PK	74.0	-2.2	1.50 V	71	61.0	10.8
6	7250.00	53.1 AV	54.0	-0.9	1.50 V	71	42.3	10.8
7	#13810.00	49.6 PK	88.2	-38.6	2.13 V	222	31.2	18.4
8	#13810.00	37.0 AV	68.2	-31.2	2.13 V	222	18.6	18.4
9	20715.00	59.6 PK	74.0	-14.4	3.01 V	103	62.5	-2.9
10	20715.00	49.6 AV	54.0	-4.4	3.01 V	103	52.5	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Punctured by 20 MHz Channel 7

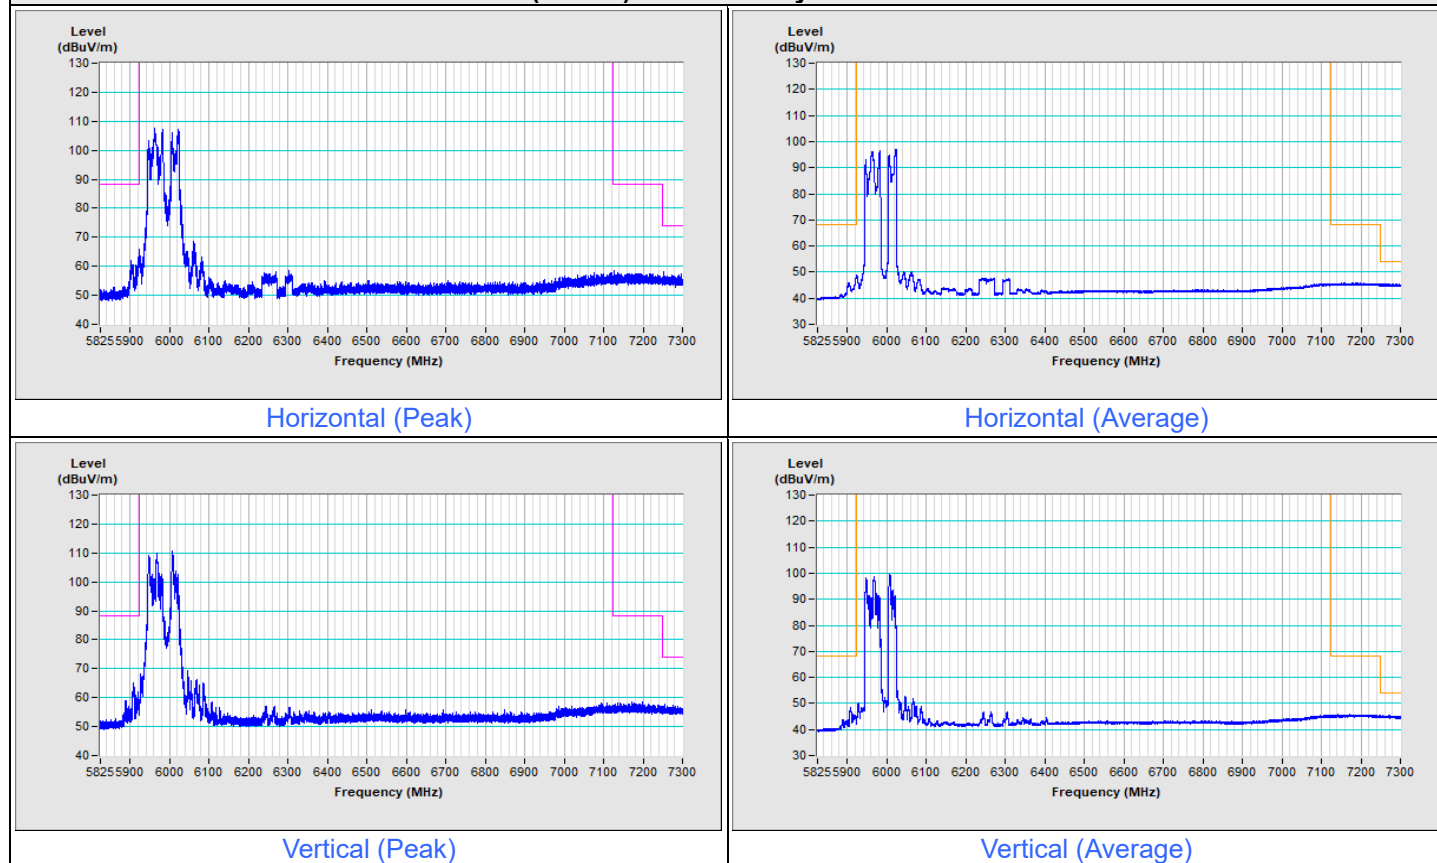


802.11be (EHT80) Punctured by 20 MHz Channel 215

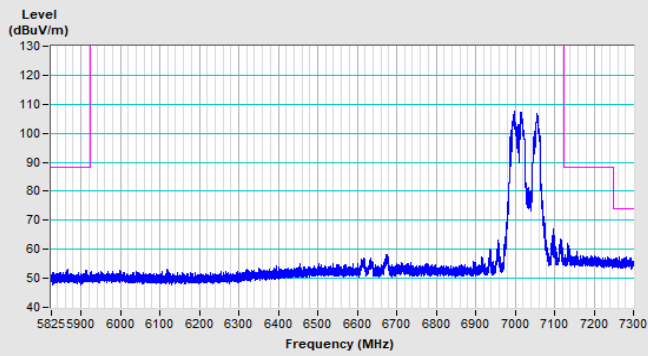


Horizontal (Peak)

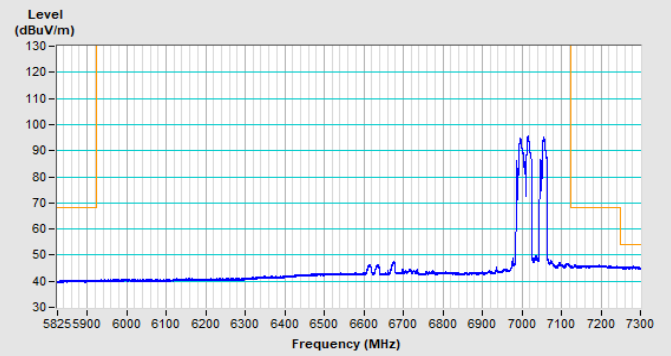

Horizontal (Average)

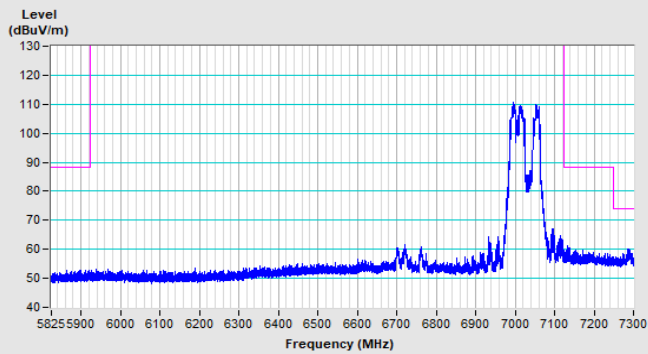


Vertical (Peak)

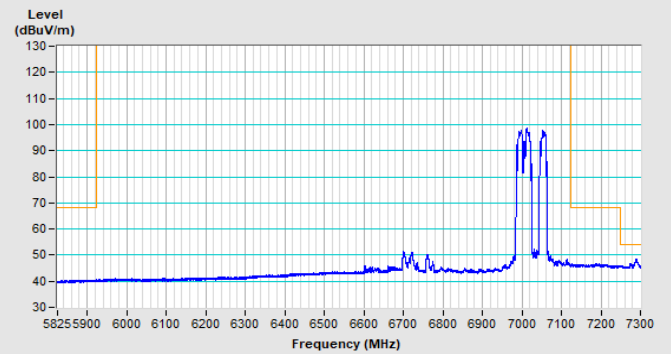


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT80) Punctured by 40 MHz Channel 7

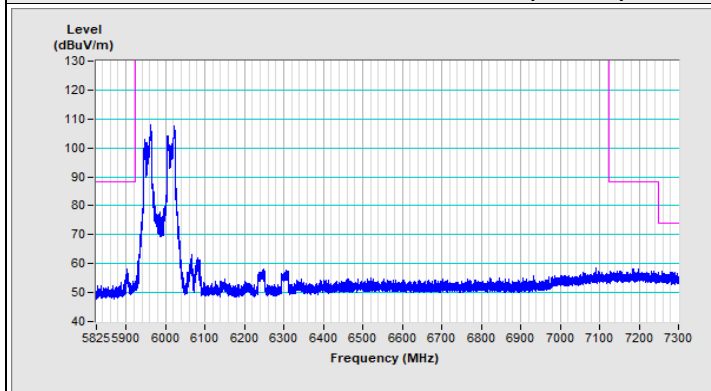


Horizontal (Peak)

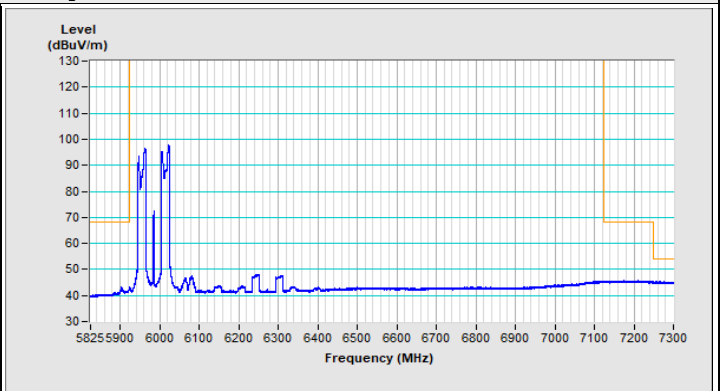

Horizontal (Average)

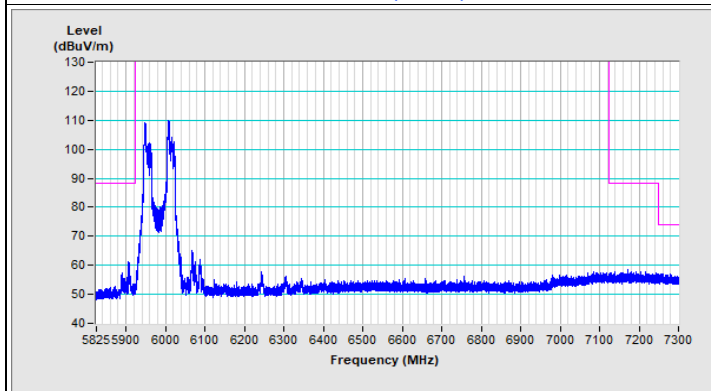


Vertical (Peak)

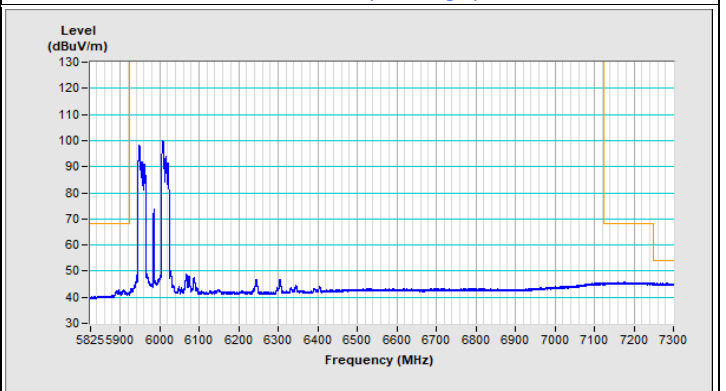


Vertical (Average)


802.11be (EHT80) Punctured by 40 MHz Channel 215

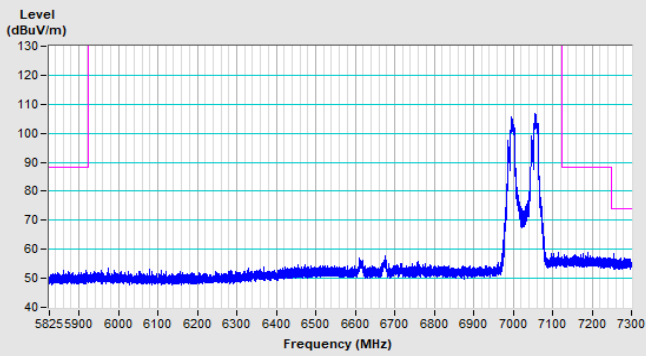


Horizontal (Peak)

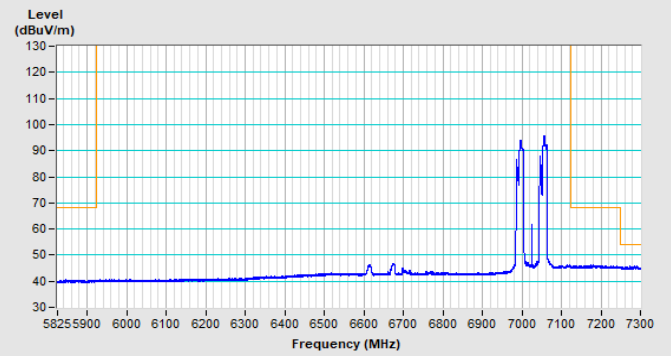

Horizontal (Average)

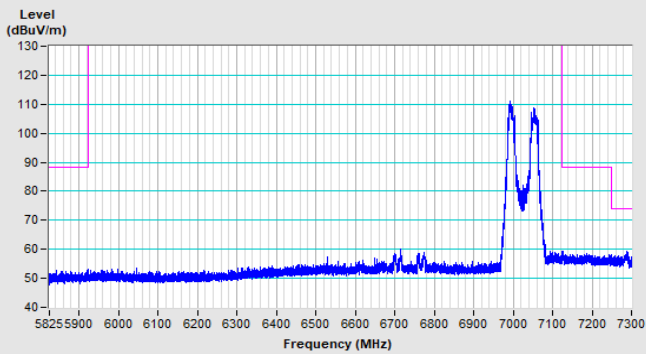


Vertical (Peak)

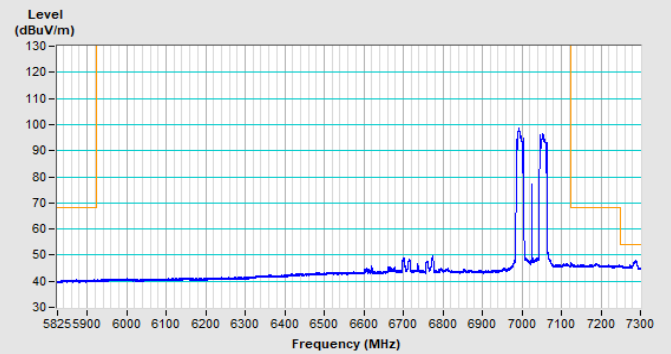


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Punctured by 40 MHz Channel 15

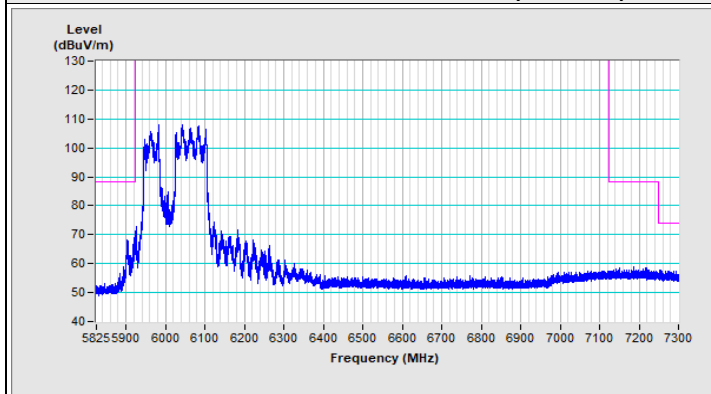


Horizontal (Peak)

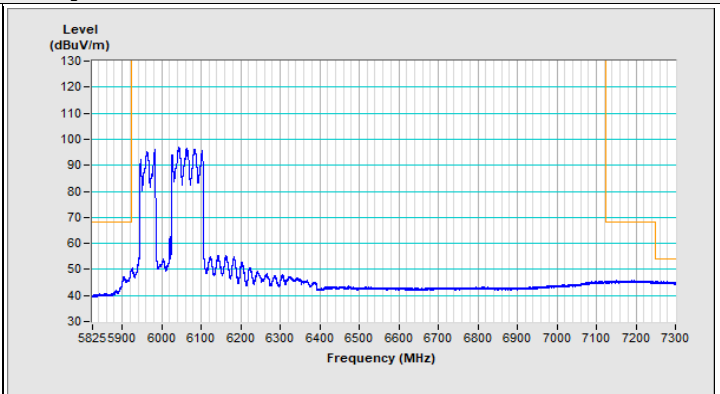

Horizontal (Average)

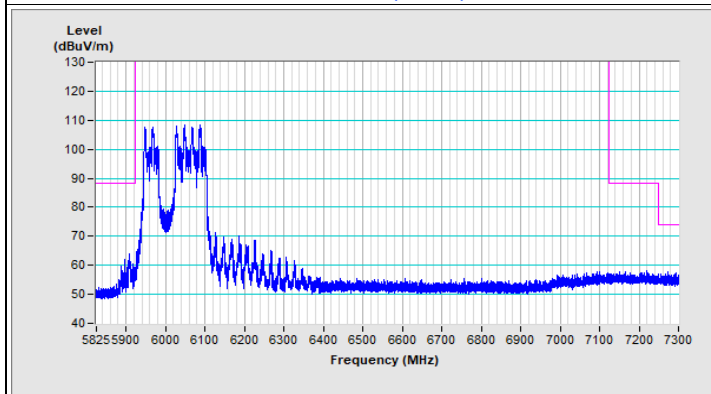


Vertical (Peak)

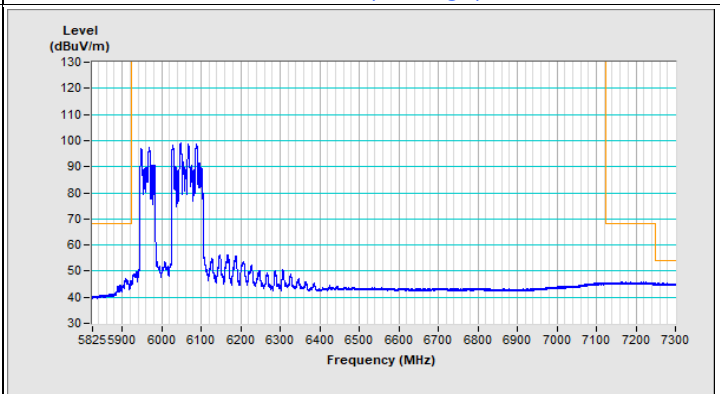


Vertical (Average)


802.11be (EHT160) Punctured by 40 MHz Channel 207

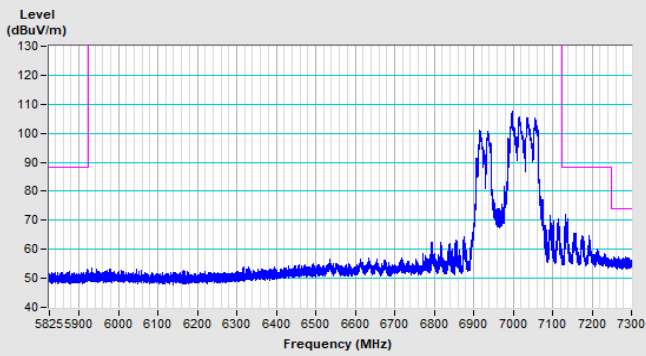


Horizontal (Peak)

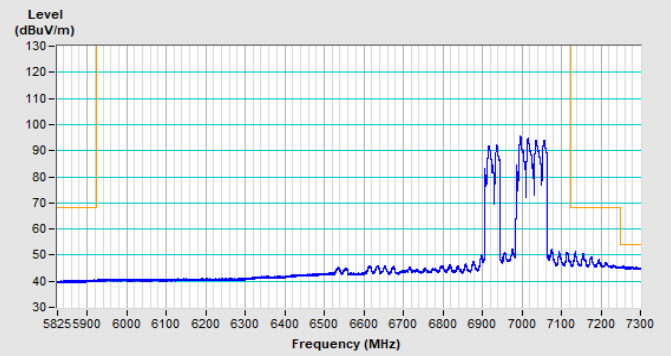

Horizontal (Average)

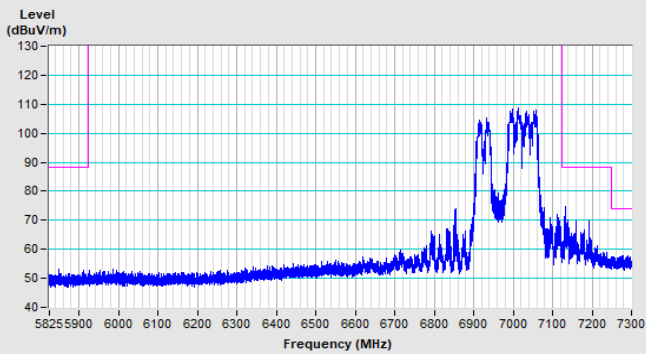


Vertical (Peak)

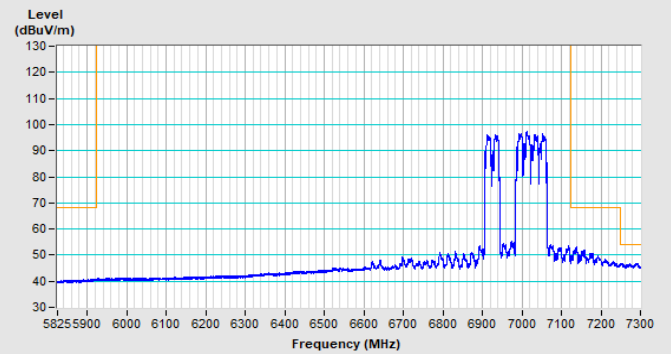


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT160) Punctured by 60 MHz Channel 15

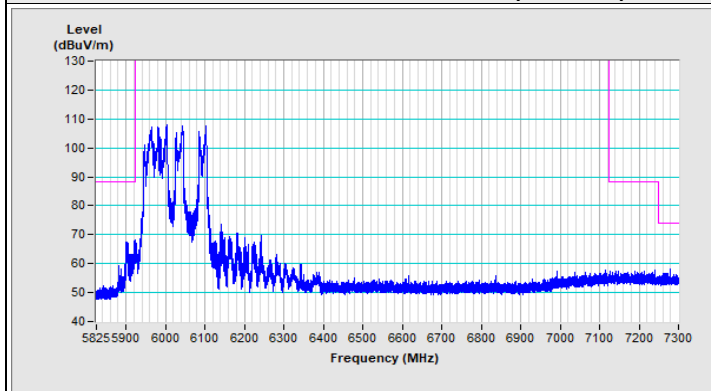


Horizontal (Peak)

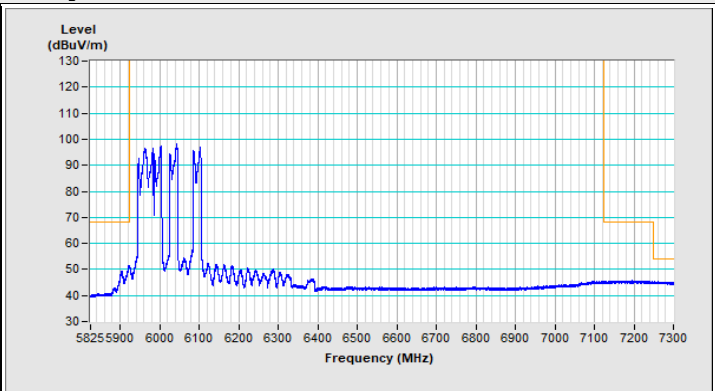

Horizontal (Average)

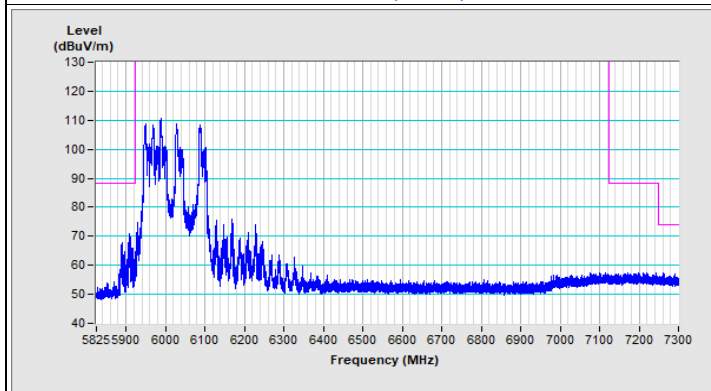


Vertical (Peak)

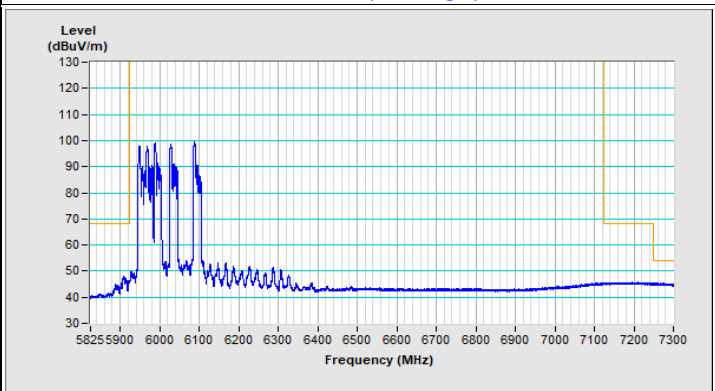


Vertical (Average)


802.11be (EHT160) Punctured by 60 MHz Channel 207

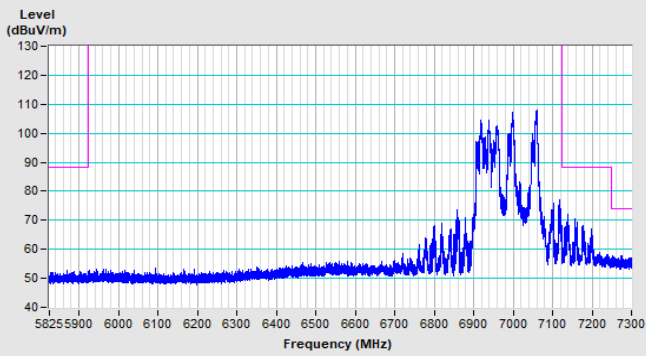


Horizontal (Peak)

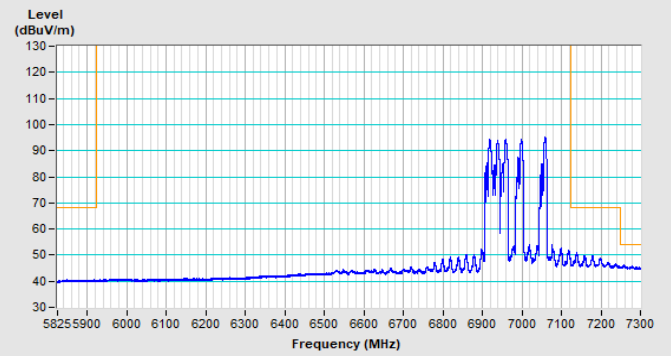

Horizontal (Average)

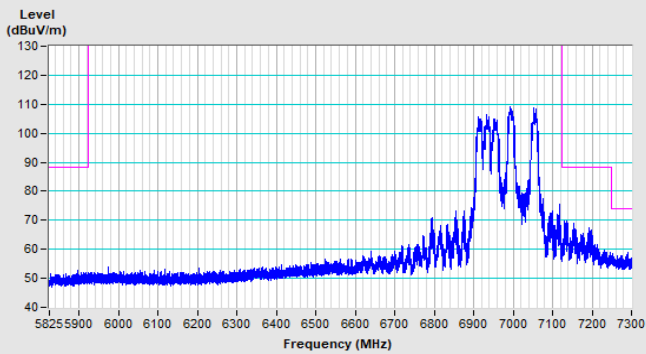


Vertical (Peak)

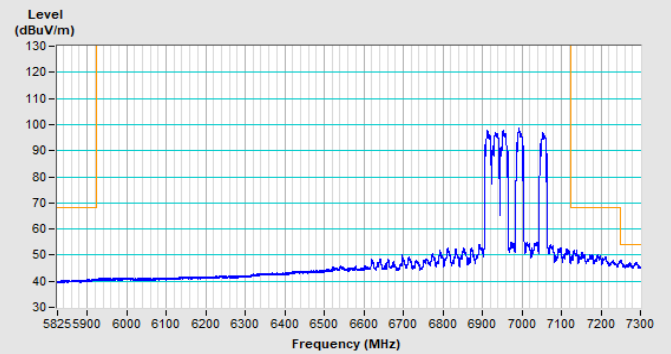


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT160) Punctured by 80 MHz Channel 15

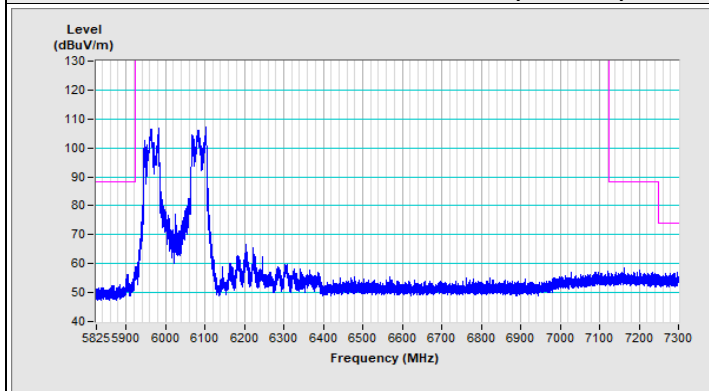


Horizontal (Peak)

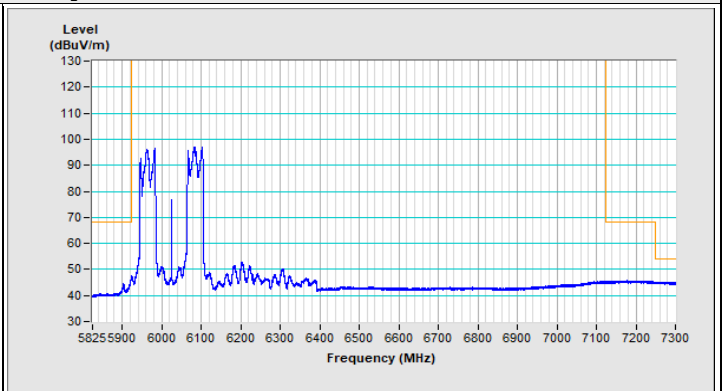

Horizontal (Average)

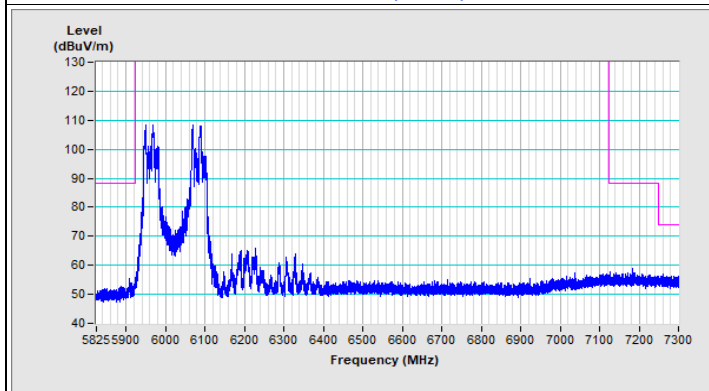


Vertical (Peak)

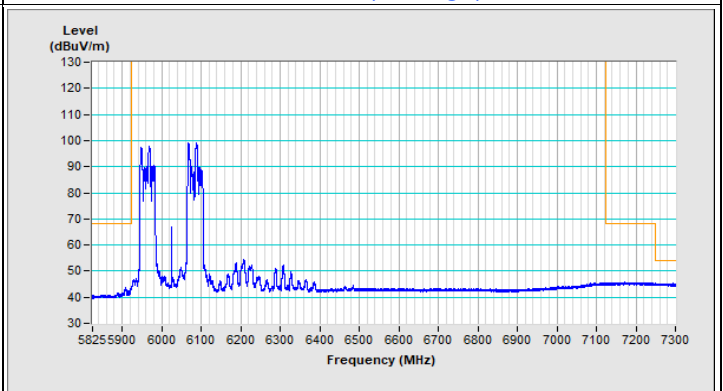


Vertical (Average)


802.11be (EHT160) Punctured by 80 MHz Channel 207

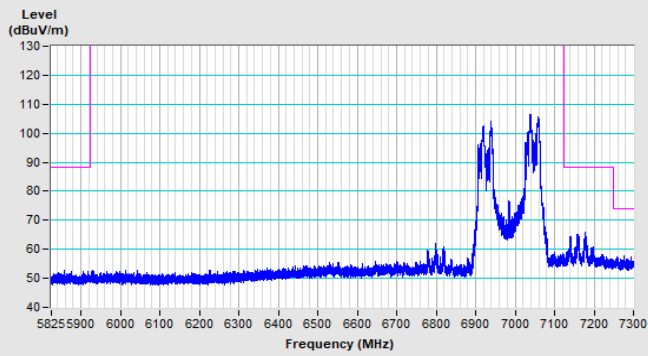


Horizontal (Peak)

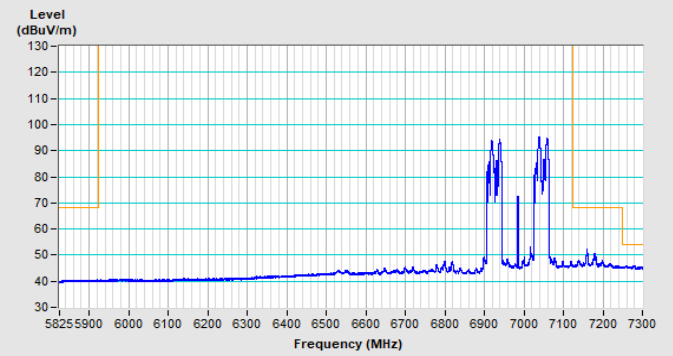

Horizontal (Average)

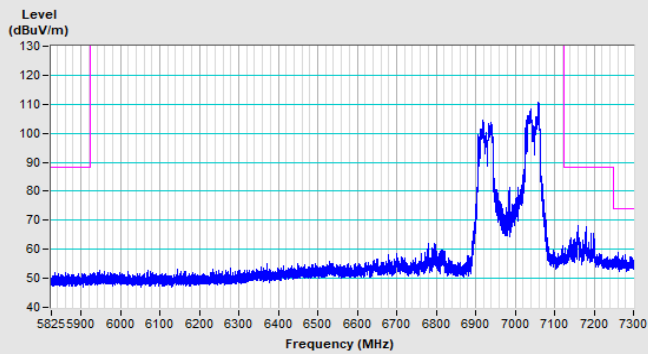


Vertical (Peak)

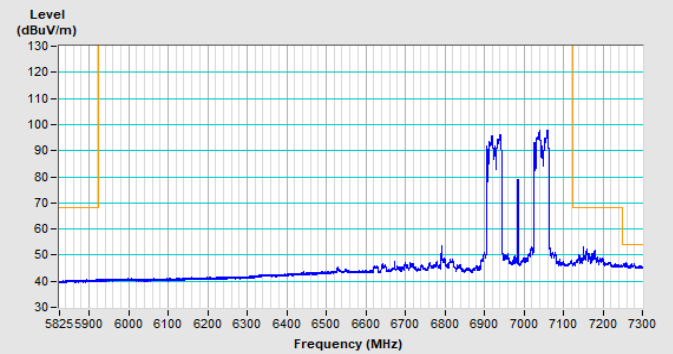


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 80 MHz Channel 31

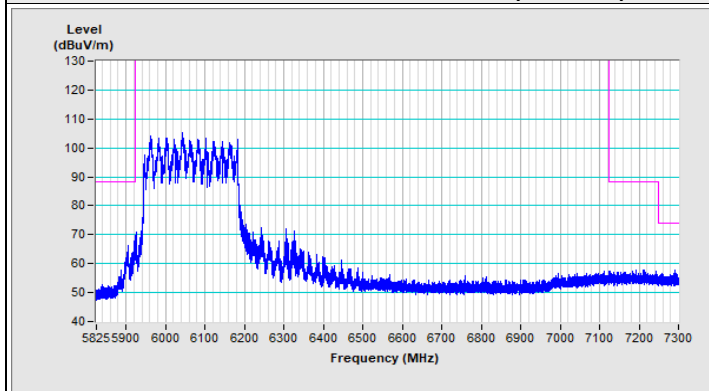


Horizontal (Peak)

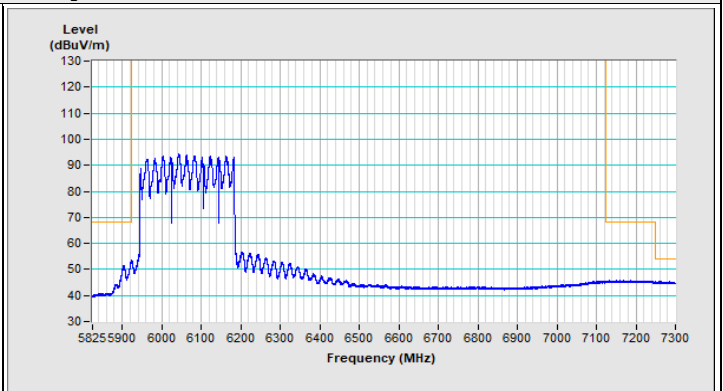

Horizontal (Average)

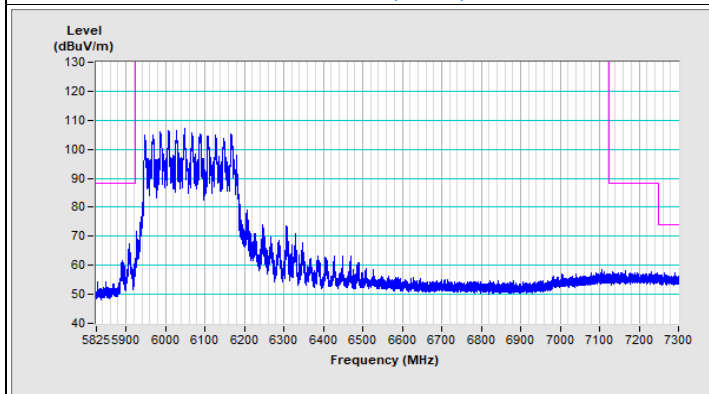


Vertical (Peak)

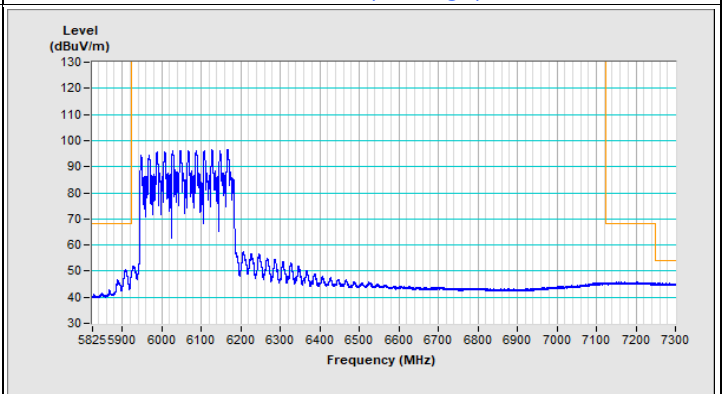


Vertical (Average)


802.11be (EHT320) Punctured by 80 MHz Channel 191

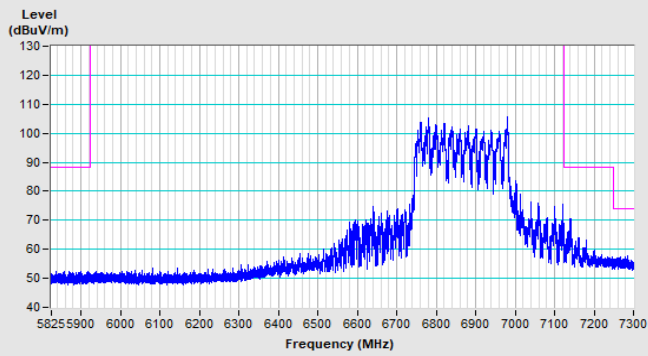


Horizontal (Peak)

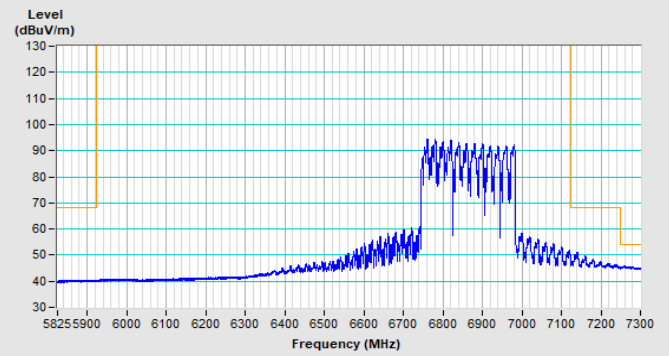

Horizontal (Average)

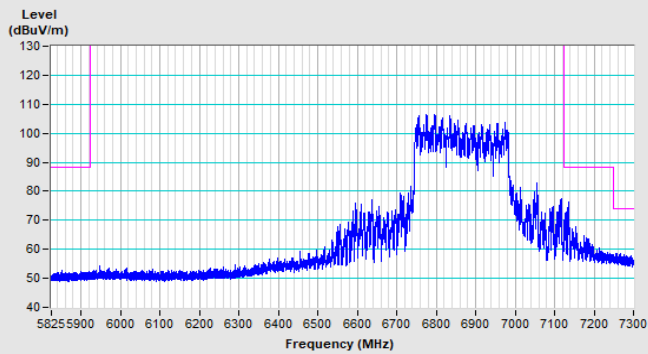


Vertical (Peak)

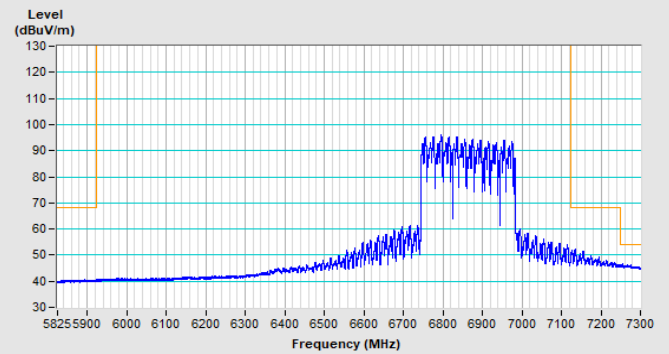


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 120 MHz Low Channel 31

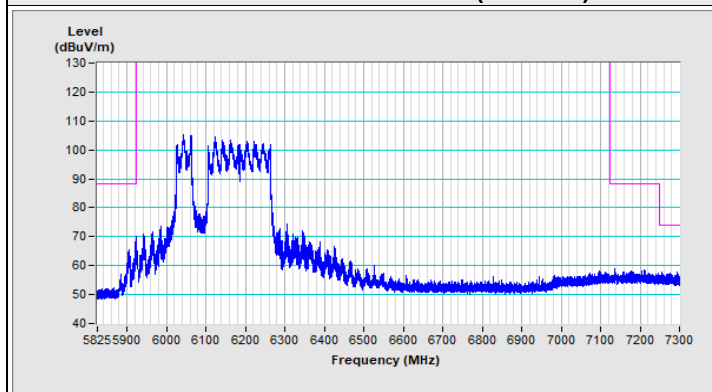


Horizontal (Peak)

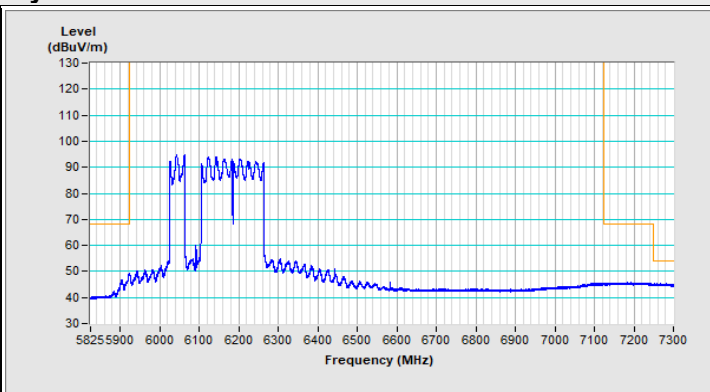

Horizontal (Average)

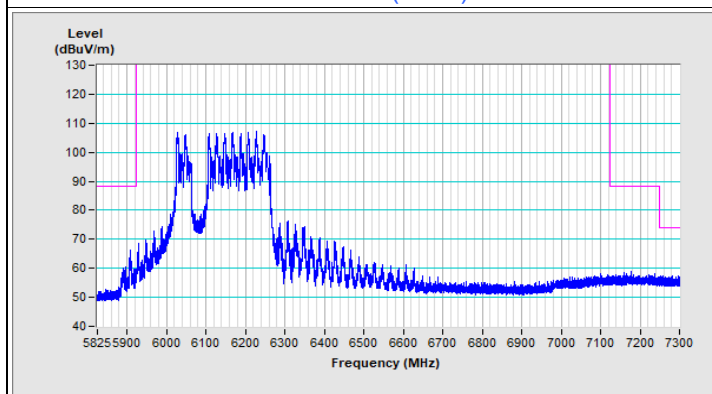


Vertical (Peak)

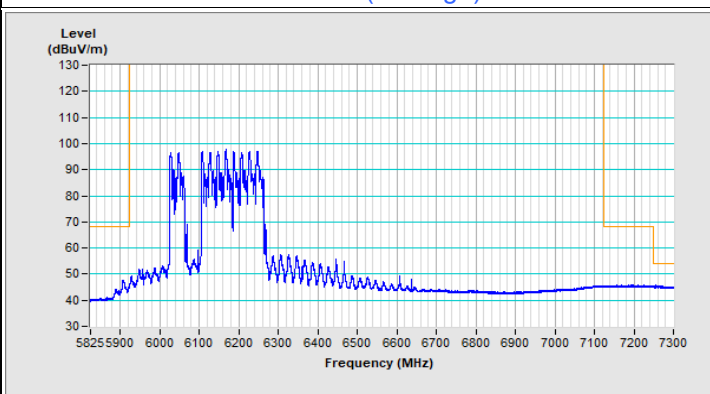


Vertical (Average)


802.11be (EHT320) Punctured by 120 MHz Low Channel 191

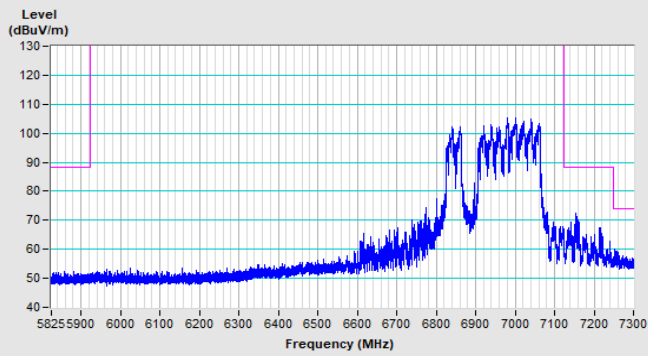


Horizontal (Peak)

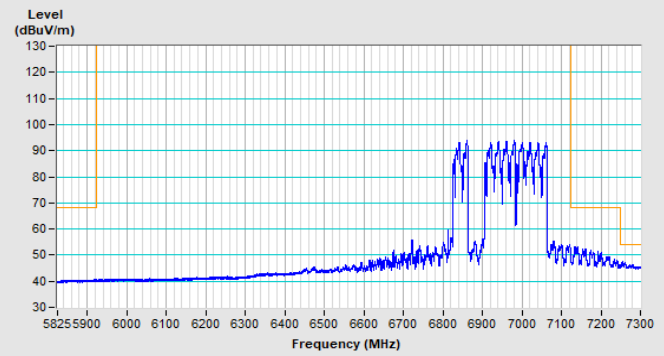

Horizontal (Average)

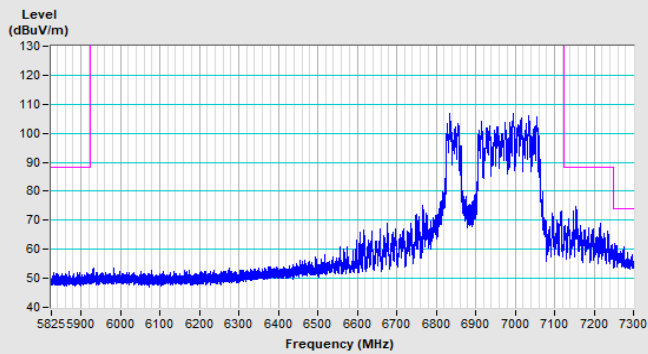


Vertical (Peak)

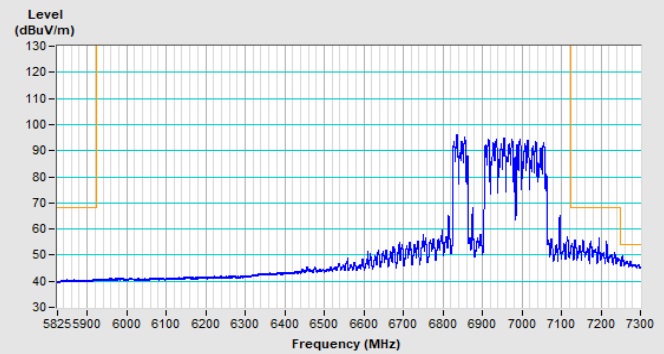


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 120 MHz High Channel 31

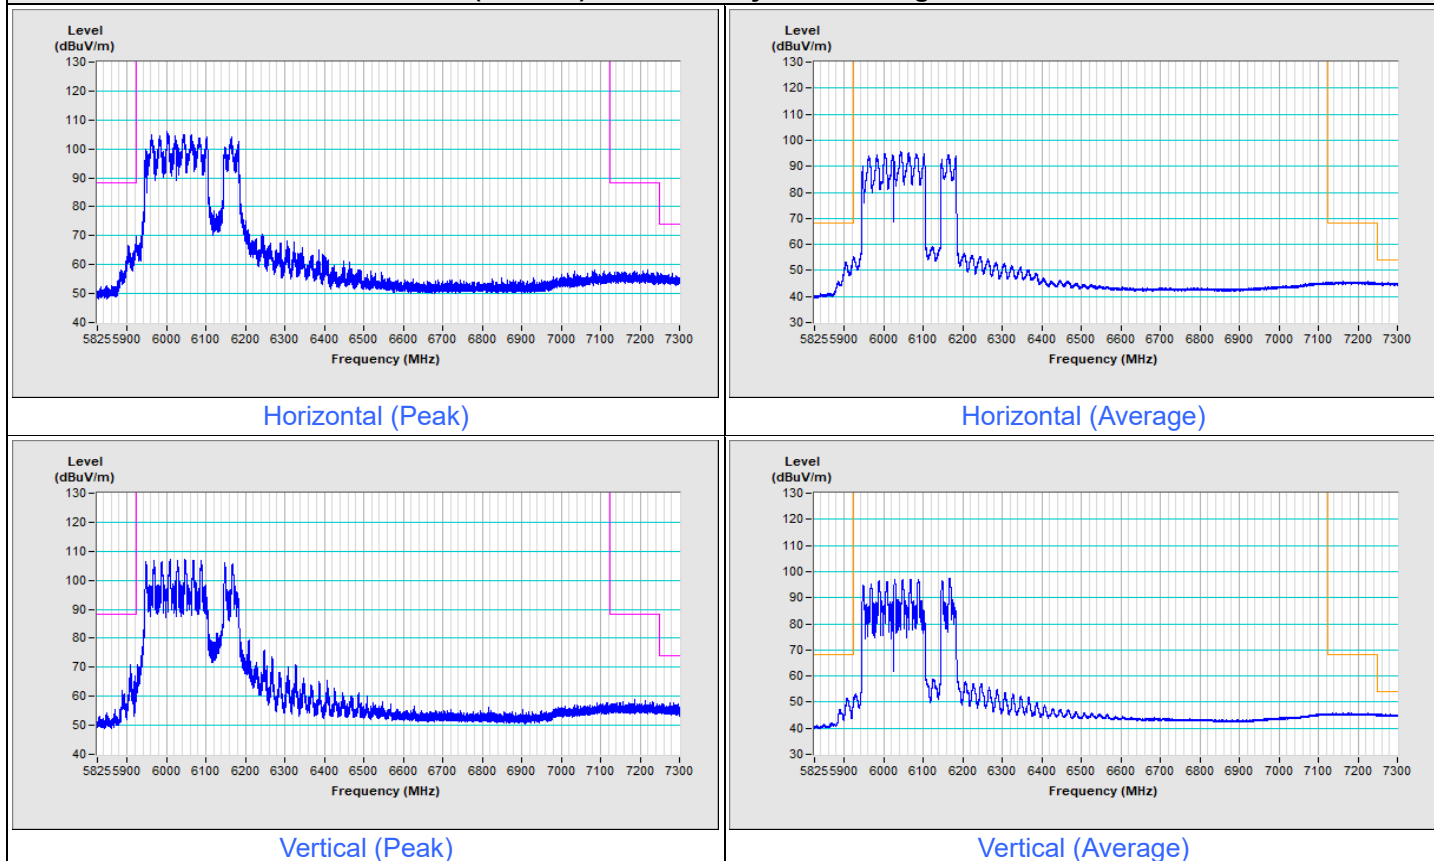


802.11be (EHT320) Punctured by 120 MHz High Channel 191

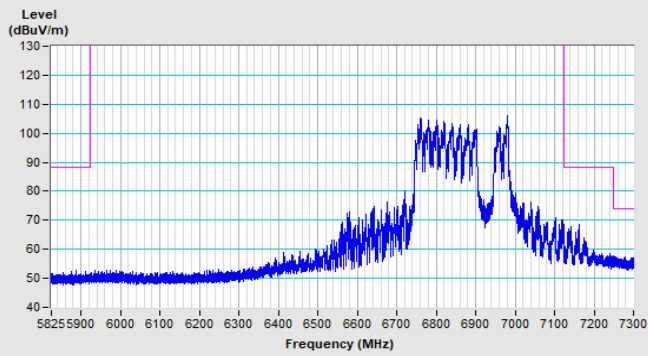


Horizontal (Peak)

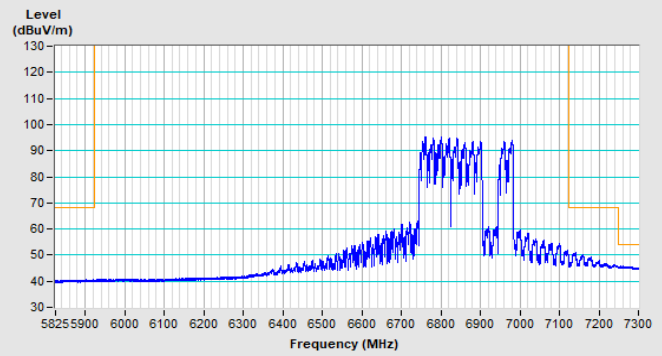

Horizontal (Average)

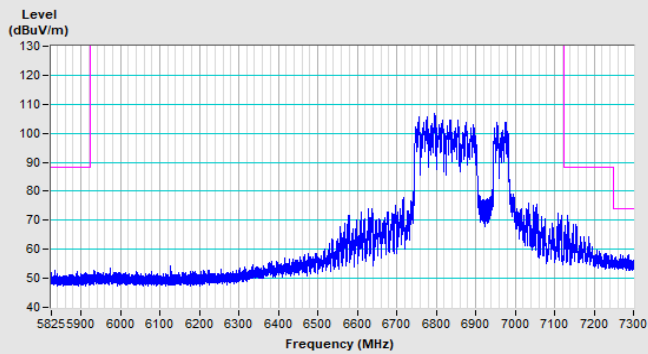


Vertical (Peak)

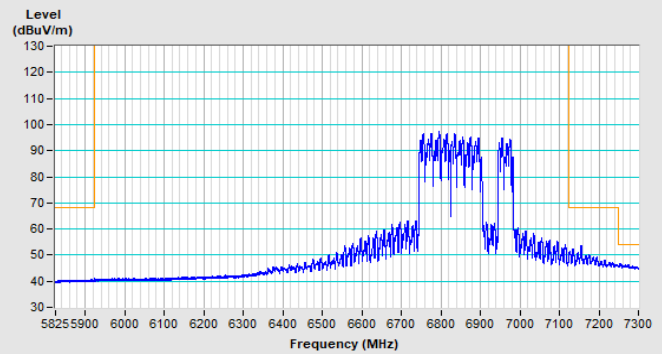


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT320) Punctured by 160 MHz Channel 31

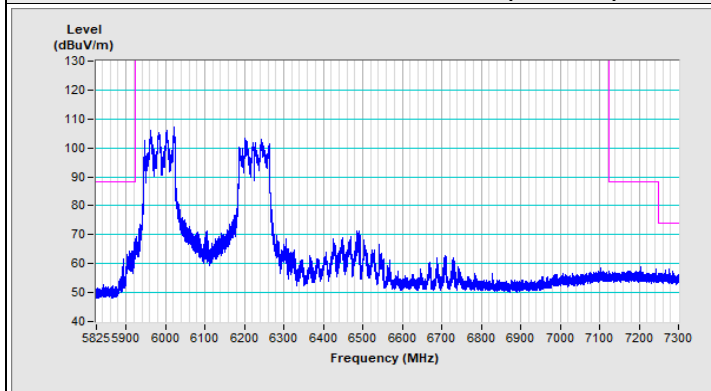


Horizontal (Peak)

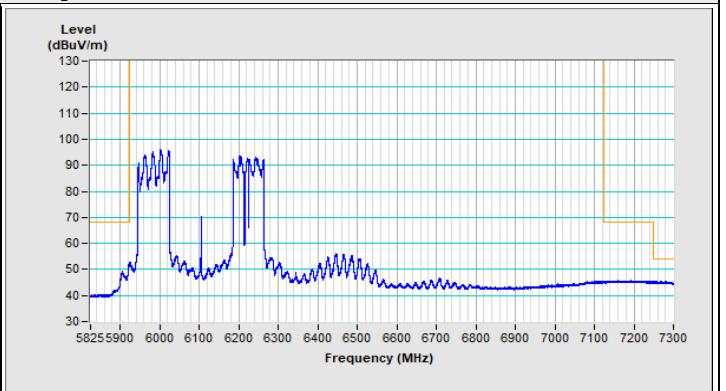

Horizontal (Average)

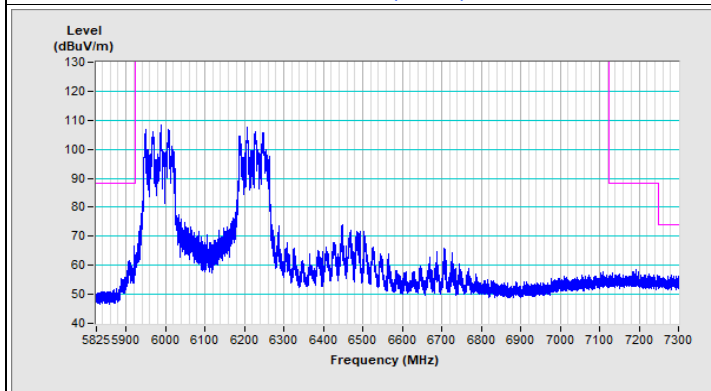


Vertical (Peak)

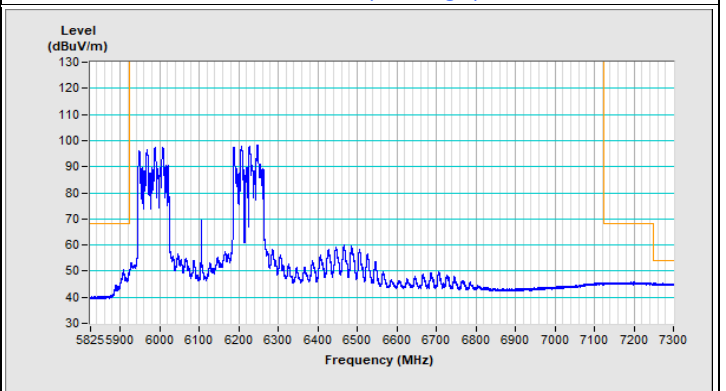


Vertical (Average)


802.11be (EHT320) Punctured by 160 MHz Channel 191

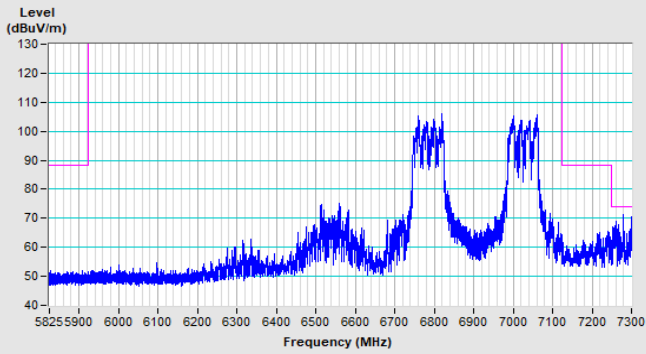


Horizontal (Peak)

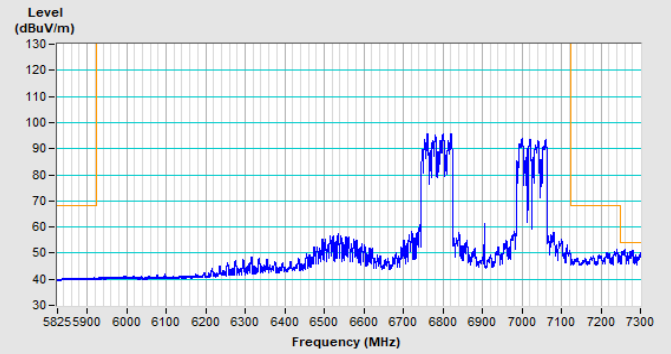

Horizontal (Average)

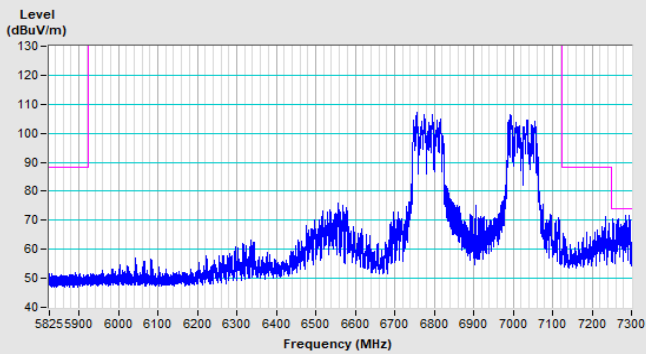


Vertical (Peak)

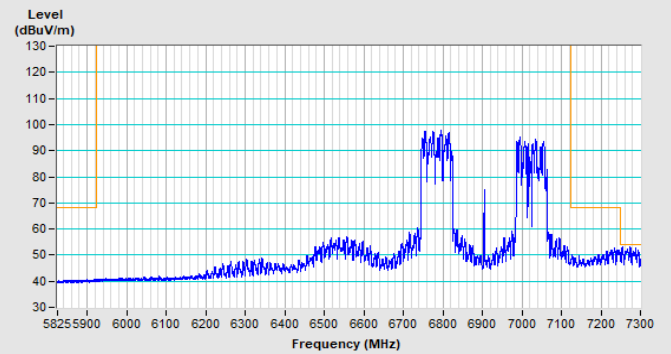

Vertical (Average)

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

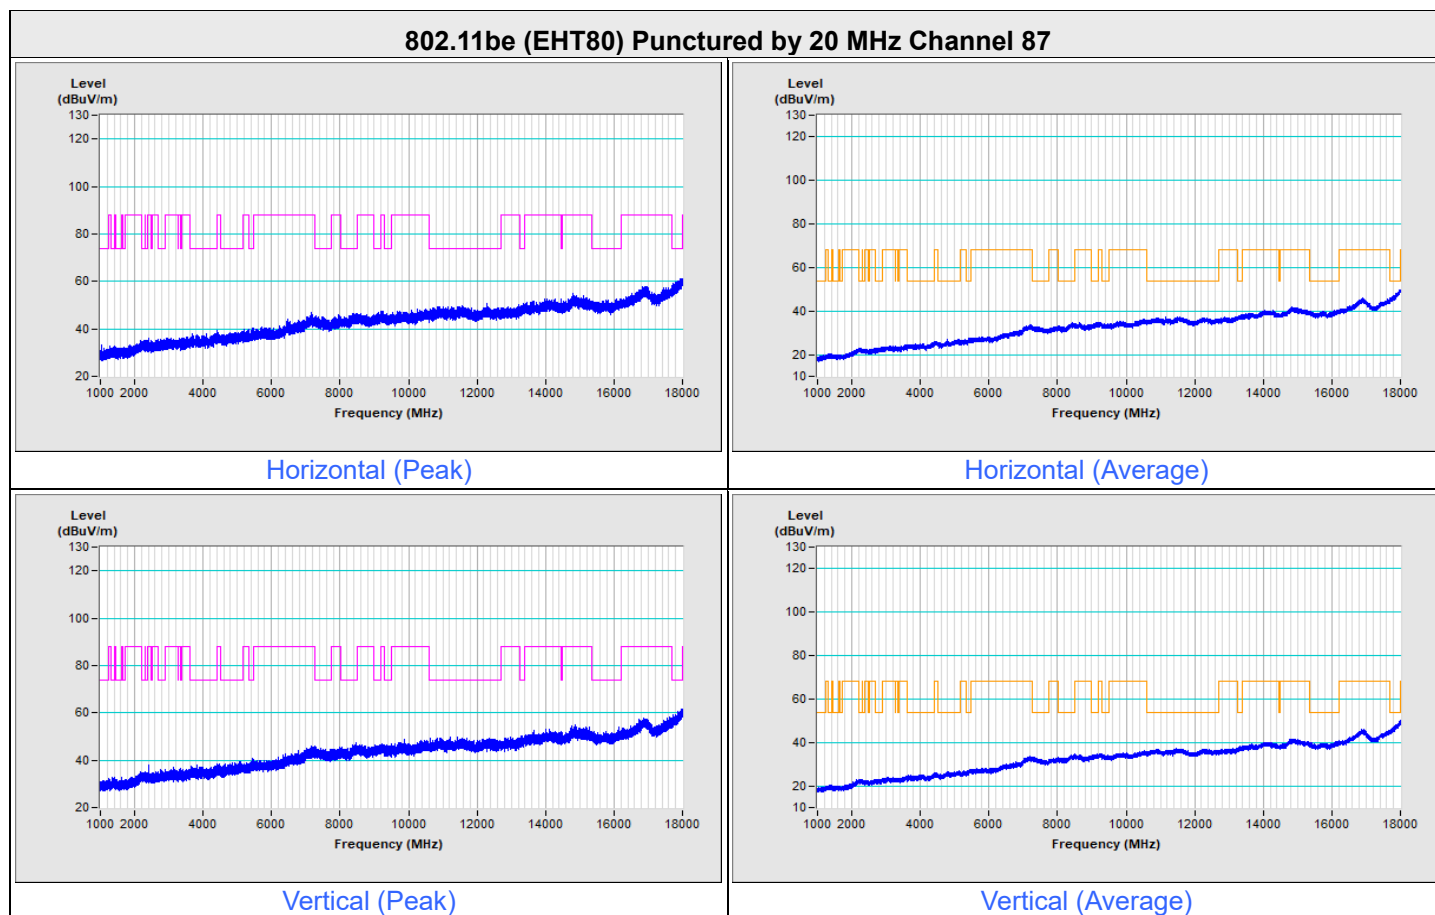


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT160) Punctured by 60 MHz Channel 79

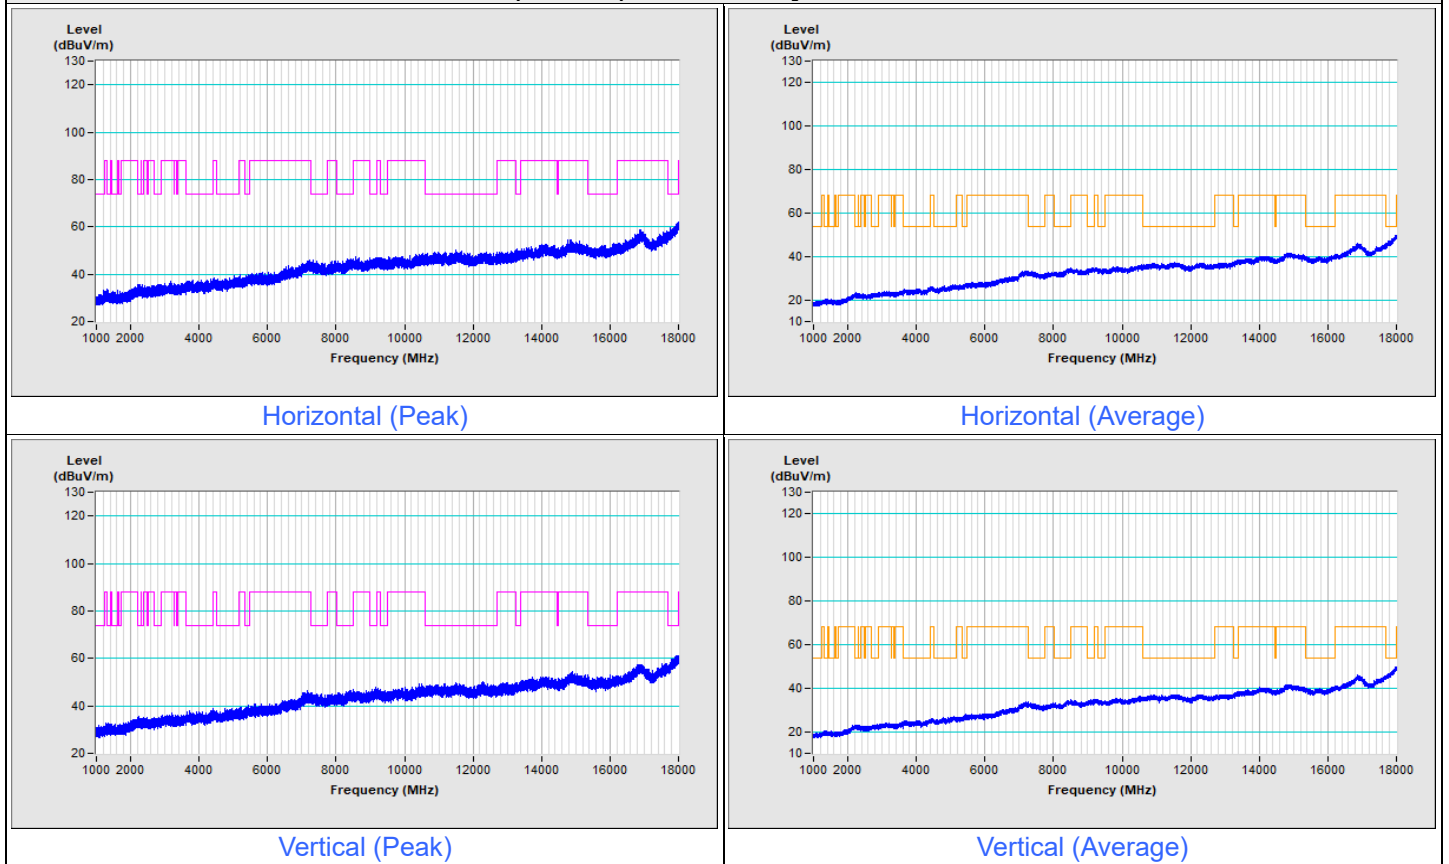


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT320) Punctured by 160 MHz Channel 31

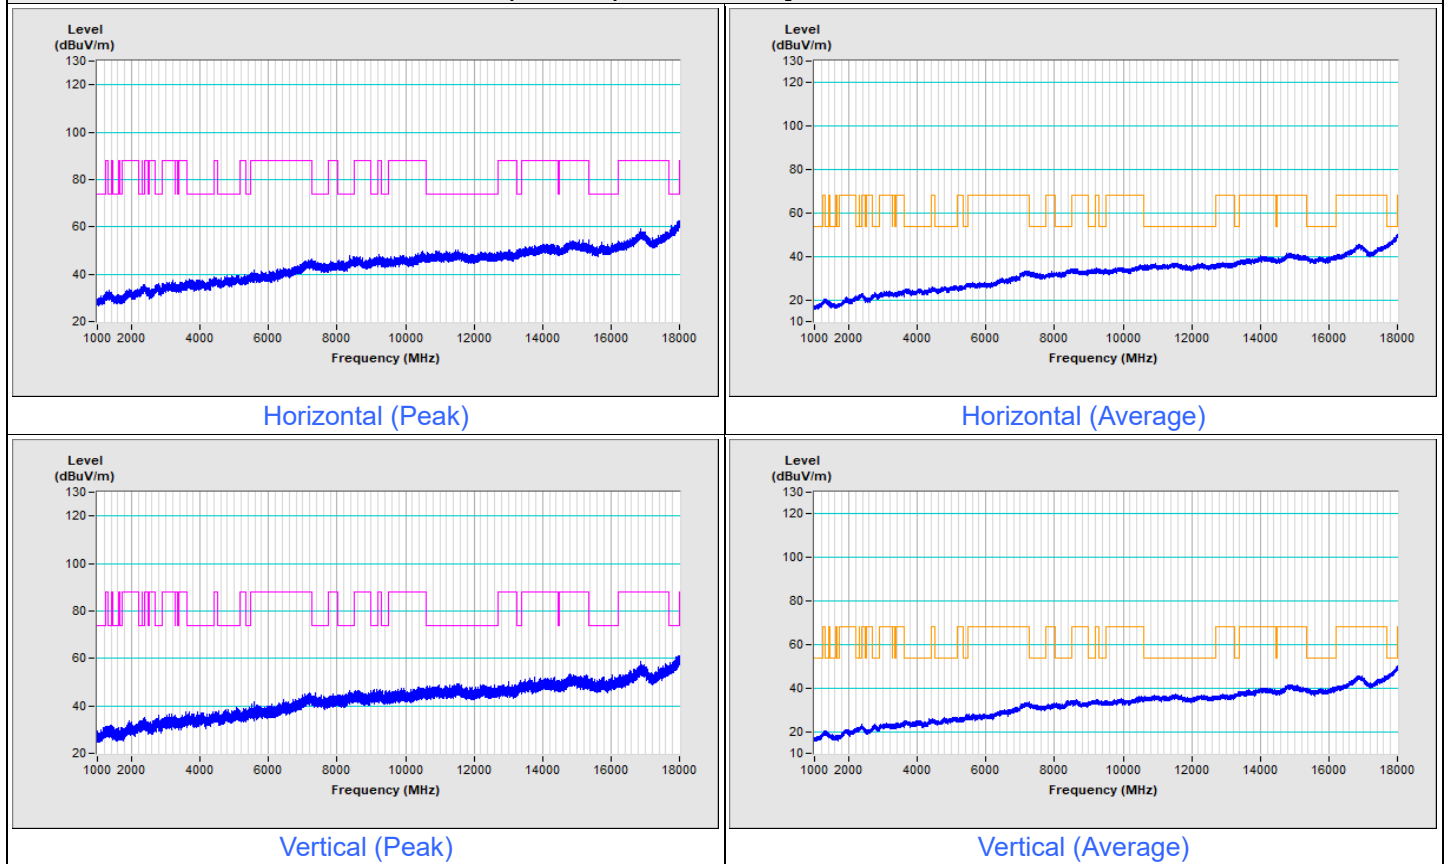

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---