

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.1 PK			2.32 H	92	102.3	7.8
2	*6435.00	98.4 AV			2.32 H	92	90.6	7.8
3	#12870.00	48.3 PK	88.2	-39.9	3.00 H	248	32.6	15.7
4	#12870.00	36.0 AV	68.2	-32.2	3.00 H	248	20.3	15.7
5	19305.00	61.5 PK	74.0	-12.5	3.01 H	302	65.5	-4.0
6	19305.00	48.8 AV	54.0	-5.2	3.01 H	302	52.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.2 PK			1.36 V	177	100.4	7.8
2	*6435.00	97.3 AV			1.36 V	177	89.5	7.8
3	#12870.00	49.2 PK	88.2	-39.0	1.68 V	294	33.5	15.7
4	#12870.00	37.1 AV	68.2	-31.1	1.68 V	294	21.4	15.7
5	19305.00	60.9 PK	74.0	-13.1	2.94 V	302	64.9	-4.0
6	19305.00	48.6 AV	54.0	-5.4	2.94 V	302	52.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.4 PK			2.30 H	93	100.3	8.1
2	*6475.00	98.1 AV			2.30 H	93	90.0	8.1
3	#12950.00	48.2 PK	88.2	-40.0	3.05 H	247	32.7	15.5
4	#12950.00	35.9 AV	68.2	-32.3	3.05 H	247	20.4	15.5
5	19425.00	61.0 PK	74.0	-13.0	3.05 H	318	64.5	-3.5
6	19425.00	48.4 AV	54.0	-5.6	3.05 H	318	51.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.1 PK			1.51 V	177	100.0	8.1
2	*6475.00	97.2 AV			1.51 V	177	89.1	8.1
3	#12950.00	49.1 PK	88.2	-39.1	1.64 V	286	33.6	15.5
4	#12950.00	36.8 AV	68.2	-31.4	1.64 V	286	21.3	15.5
5	19425.00	61.2 PK	74.0	-12.8	2.93 V	316	64.7	-3.5
6	19425.00	48.6 AV	54.0	-5.4	2.93 V	316	52.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.8 PK			2.28 H	91	101.4	8.4
2	*6515.00	98.1 AV			2.28 H	91	89.7	8.4
3	#13030.00	47.8 PK	88.2	-40.4	3.06 H	238	32.2	15.6
4	#13030.00	35.7 AV	68.2	-32.5	3.06 H	238	20.1	15.6
5	19545.00	60.6 PK	74.0	-13.4	3.02 H	333	64.0	-3.4
6	19545.00	48.0 AV	54.0	-6.0	3.02 H	333	51.4	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.2 PK			1.35 V	178	99.8	8.4
2	*6515.00	97.7 AV			1.35 V	178	89.3	8.4
3	#13030.00	49.1 PK	88.2	-39.1	1.58 V	274	33.5	15.6
4	#13030.00	36.7 AV	68.2	-31.5	1.58 V	274	21.1	15.6
5	19545.00	60.6 PK	74.0	-13.4	2.97 V	316	64.0	-3.4
6	19545.00	48.1 AV	54.0	-5.9	2.97 V	316	51.5	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.4 PK			1.37 H	92	101.9	8.5
2	*6535.00	98.3 AV			1.37 H	92	89.8	8.5
3	#13070.00	47.9 PK	88.2	-40.3	3.11 H	244	32.2	15.7
4	#13070.00	35.8 AV	68.2	-32.4	3.11 H	244	20.1	15.7
5	19605.00	60.8 PK	74.0	-13.2	2.98 H	319	64.5	-3.7
6	19605.00	48.3 AV	54.0	-5.7	2.98 H	319	52.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.4 PK			1.30 V	176	99.9	8.5
2	*6535.00	97.6 AV			1.30 V	176	89.1	8.5
3	#13070.00	48.6 PK	88.2	-39.6	1.54 V	272	32.9	15.7
4	#13070.00	36.2 AV	68.2	-32.0	1.54 V	272	20.5	15.7
5	19605.00	60.8 PK	74.0	-13.2	2.96 V	311	64.5	-3.7
6	19605.00	48.3 AV	54.0	-5.7	2.96 V	311	52.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.6 PK			1.19 H	96	100.8	8.8
2	*6695.00	98.1 AV			1.19 H	96	89.3	8.8
3	13390.00	47.6 PK	74.0	-26.4	3.16 H	255	29.9	17.7
4	13390.00	35.5 AV	54.0	-18.5	3.16 H	255	17.8	17.7
5	20085.00	61.5 PK	74.0	-12.5	3.02 H	311	65.3	-3.8
6	20085.00	48.8 AV	54.0	-5.2	3.02 H	311	52.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.7 PK			1.29 V	177	99.9	8.8
2	*6695.00	97.2 AV			1.29 V	177	88.4	8.8
3	13390.00	48.3 PK	74.0	-25.7	1.58 V	275	30.6	17.7
4	13390.00	36.2 AV	54.0	-17.8	1.58 V	275	18.5	17.7
5	20085.00	60.8 PK	74.0	-13.2	2.93 V	313	64.6	-3.8
6	20085.00	48.4 AV	54.0	-5.6	2.93 V	313	52.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.7 PK			2.24 H	318	99.4	9.3
2	*6855.00	98.3 AV			2.24 H	318	89.0	9.3
3	#13710.00	47.7 PK	88.2	-40.5	3.11 H	244	29.2	18.5
4	#13710.00	35.9 AV	68.2	-32.3	3.11 H	244	17.4	18.5
5	20565.00	61.6 PK	74.0	-12.4	3.03 H	316	64.8	-3.2
6	20565.00	48.7 AV	54.0	-5.3	3.03 H	316	51.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.2 PK			1.30 V	169	98.9	9.3
2	*6855.00	97.8 AV			1.30 V	169	88.5	9.3
3	#13710.00	48.3 PK	88.2	-39.9	1.57 V	289	29.8	18.5
4	#13710.00	36.4 AV	68.2	-31.8	1.57 V	289	17.9	18.5
5	20565.00	61.2 PK	74.0	-12.8	2.92 V	310	64.4	-3.2
6	20565.00	48.5 AV	54.0	-5.5	2.92 V	310	51.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.7 PK			2.23 H	325	100.6	9.1
2	*6875.00	98.5 AV			2.23 H	325	89.4	9.1
3	#13750.00	47.3 PK	88.2	-40.9	3.07 H	232	28.9	18.4
4	#13750.00	35.6 AV	68.2	-32.6	3.07 H	232	17.2	18.4
5	20625.00	61.0 PK	74.0	-13.0	3.04 H	309	64.2	-3.2
6	20625.00	48.4 AV	54.0	-5.6	3.04 H	309	51.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.6 PK			1.31 V	163	99.5	9.1
2	*6875.00	97.9 AV			1.31 V	163	88.8	9.1
3	#13750.00	48.4 PK	88.2	-39.8	1.60 V	276	30.0	18.4
4	#13750.00	36.7 AV	68.2	-31.5	1.60 V	276	18.3	18.4
5	20625.00	61.0 PK	74.0	-13.0	2.96 V	318	64.2	-3.2
6	20625.00	48.3 AV	54.0	-5.7	2.96 V	318	51.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.9 PK			2.80 H	327	99.0	9.9
2	*6995.00	98.2 AV			2.80 H	327	88.3	9.9
3	#13990.00	47.8 PK	88.2	-40.4	3.12 H	223	28.7	19.1
4	#13990.00	36.0 AV	68.2	-32.2	3.12 H	223	16.9	19.1
5	20985.00	61.3 PK	74.0	-12.7	3.01 H	323	64.2	-2.9
6	20985.00	48.7 AV	54.0	-5.3	3.01 H	323	51.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.3 PK			1.43 V	170	98.4	9.9
2	*6995.00	97.6 AV			1.43 V	170	87.7	9.9
3	#13990.00	48.3 PK	88.2	-39.9	1.63 V	288	29.2	19.1
4	#13990.00	36.7 AV	68.2	-31.5	1.63 V	288	17.6	19.1
5	20985.00	60.9 PK	74.0	-13.1	3.00 V	316	63.8	-2.9
6	20985.00	48.3 AV	54.0	-5.7	3.00 V	316	51.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			1.34 H	80	90.5	10.8
2	*7115.00	90.6 AV			1.34 H	80	79.8	10.8
3	#7125.00	87.8 PK	88.2	-0.4	1.34 H	80	76.9	10.9
4	#7125.00	64.2 AV	68.2	-4.0	1.34 H	80	53.3	10.9
5	7250.00	54.2 PK	74.0	-19.8	1.34 H	80	43.4	10.8
6	7250.00	42.6 AV	54.0	-11.4	1.34 H	80	31.8	10.8
7	#14230.00	47.3 PK	88.2	-40.9	3.02 H	231	27.5	19.8
8	#14230.00	35.6 AV	68.2	-32.6	3.02 H	231	15.8	19.8
9	21345.00	61.6 PK	74.0	-12.4	2.95 H	331	64.1	-2.5
10	21345.00	48.8 AV	54.0	-5.2	2.95 H	331	51.3	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			1.18 V	169	89.6	10.8
2	*7115.00	89.5 AV			1.18 V	169	78.7	10.8
3	#7125.00	87.6 PK	88.2	-0.6	1.18 V	169	76.7	10.9
4	#7125.00	64.1 AV	68.2	-4.1	1.18 V	169	53.2	10.9
5	7250.00	54.6 PK	74.0	-19.4	1.18 V	169	43.8	10.8
6	7250.00	42.7 AV	54.0	-11.3	1.18 V	169	31.9	10.8
7	#14230.00	47.8 PK	88.2	-40.4	1.63 V	302	28.0	19.8
8	#14230.00	36.3 AV	68.2	-31.9	1.63 V	302	16.5	19.8
9	21345.00	60.9 PK	74.0	-13.1	2.97 V	308	63.4	-2.5
10	21345.00	48.4 AV	54.0	-5.6	2.97 V	308	50.9	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.4 PK	88.2	-32.8	2.17 H	88	49.1	6.3
2	#5925.00	42.6 AV	68.2	-25.6	2.17 H	88	36.3	6.3
3	*5965.00	107.9 PK			2.17 H	88	101.7	6.2
4	*5965.00	98.4 AV			2.17 H	88	92.2	6.2
5	11930.00	47.6 PK	74.0	-26.4	3.06 H	233	32.2	15.4
6	11930.00	35.7 AV	54.0	-18.3	3.06 H	233	20.3	15.4
7	17895.00	61.3 PK	74.0	-12.7	3.01 H	336	32.8	28.5
8	17895.00	48.5 AV	54.0	-5.5	3.01 H	336	20.0	28.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.4 PK	88.2	-35.8	2.31 V	329	46.1	6.3
2	#5925.00	40.5 AV	68.2	-27.7	2.31 V	329	34.2	6.3
3	*5965.00	106.8 PK			2.31 V	329	100.6	6.2
4	*5965.00	97.7 AV			2.31 V	329	91.5	6.2
5	11930.00	47.7 PK	74.0	-26.3	1.59 V	283	32.3	15.4
6	11930.00	36.2 AV	54.0	-17.8	1.59 V	283	20.8	15.4
7	17895.00	60.8 PK	74.0	-13.2	2.96 V	315	32.3	28.5
8	17895.00	48.4 AV	54.0	-5.6	2.96 V	315	19.9	28.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	108.3 PK			2.09 H	90	101.7	6.6
2	*6165.00	98.3 AV			2.09 H	90	91.7	6.6
3	12330.00	46.9 PK	74.0	-27.1	3.00 H	232	31.7	15.2
4	12330.00	35.3 AV	54.0	-18.7	3.00 H	232	20.1	15.2
5	18495.00	61.7 PK	74.0	-12.3	3.03 H	332	66.6	-4.9
6	18495.00	48.9 AV	54.0	-5.1	3.03 H	332	53.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	107.6 PK			1.30 V	44	101.0	6.6
2	*6165.00	97.3 AV			1.30 V	44	90.7	6.6
3	12330.00	47.9 PK	74.0	-26.1	1.62 V	295	32.7	15.2
4	12330.00	36.1 AV	54.0	-17.9	1.62 V	295	20.9	15.2
5	18495.00	60.7 PK	74.0	-13.3	2.95 V	315	65.6	-4.9
6	18495.00	48.1 AV	54.0	-5.9	2.95 V	315	53.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.9 PK			2.06 H	93	101.3	7.6
2	*6405.00	98.5 AV			2.06 H	93	90.9	7.6
3	#12810.00	46.9 PK	88.2	-41.3	2.99 H	245	31.3	15.6
4	#12810.00	35.1 AV	68.2	-33.1	2.99 H	245	19.5	15.6
5	19215.00	61.2 PK	74.0	-12.8	2.98 H	345	65.6	-4.4
6	19215.00	48.4 AV	54.0	-5.6	2.98 H	345	52.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.9 PK			1.35 V	90	100.3	7.6
2	*6405.00	97.6 AV			1.35 V	90	90.0	7.6
3	#12810.00	47.7 PK	88.2	-40.5	1.66 V	305	32.1	15.6
4	#12810.00	36.0 AV	68.2	-32.2	1.66 V	305	20.4	15.6
5	19215.00	60.6 PK	74.0	-13.4	2.99 V	303	65.0	-4.4
6	19215.00	48.2 AV	54.0	-5.8	2.99 V	303	52.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.3 PK			2.05 H	92	101.5	7.8
2	*6445.00	98.5 AV			2.05 H	92	90.7	7.8
3	#12890.00	46.8 PK	88.2	-41.4	3.03 H	232	31.1	15.7
4	#12890.00	35.0 AV	68.2	-33.2	3.03 H	232	19.3	15.7
5	19335.00	61.7 PK	74.0	-12.3	2.99 H	353	65.5	-3.8
6	19335.00	48.7 AV	54.0	-5.3	2.99 H	353	52.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.4 PK			2.16 V	80	100.6	7.8
2	*6445.00	97.7 AV			2.16 V	80	89.9	7.8
3	#12890.00	47.9 PK	88.2	-40.3	1.67 V	300	32.2	15.7
4	#12890.00	36.1 AV	68.2	-32.1	1.67 V	300	20.4	15.7
5	19335.00	60.2 PK	74.0	-13.8	2.95 V	309	64.0	-3.8
6	19335.00	47.9 AV	54.0	-6.1	2.95 V	309	51.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.6 PK			1.26 H	93	101.5	8.1
2	*6485.00	98.6 AV			1.26 H	93	90.5	8.1
3	#12970.00	47.3 PK	88.2	-40.9	2.98 H	217	31.8	15.5
4	#12970.00	35.4 AV	68.2	-32.8	2.98 H	217	19.9	15.5
5	19455.00	61.2 PK	74.0	-12.8	2.93 H	342	64.5	-3.3
6	19455.00	48.4 AV	54.0	-5.6	2.93 H	342	51.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.2 PK			2.11 V	79	100.1	8.1
2	*6485.00	97.6 AV			2.11 V	79	89.5	8.1
3	#12970.00	48.0 PK	88.2	-40.2	1.71 V	303	32.5	15.5
4	#12970.00	36.0 AV	68.2	-32.2	1.71 V	303	20.5	15.5
5	19455.00	60.4 PK	74.0	-13.6	3.00 V	323	63.7	-3.3
6	19455.00	48.0 AV	54.0	-6.0	3.00 V	323	51.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	109.4 PK			2.12 H	92	101.0	8.4
2	*6525.00	98.2 AV			2.12 H	92	89.8	8.4
3	#13050.00	47.3 PK	88.2	-40.9	2.95 H	208	31.6	15.7
4	#13050.00	35.5 AV	68.2	-32.7	2.95 H	208	19.8	15.7
5	19575.00	61.4 PK	74.0	-12.6	2.87 H	348	65.0	-3.6
6	19575.00	48.7 AV	54.0	-5.3	2.87 H	348	52.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.1 PK			2.17 V	83	99.7	8.4
2	*6525.00	97.4 AV			2.17 V	83	89.0	8.4
3	#13050.00	48.5 PK	88.2	-39.7	1.69 V	288	32.8	15.7
4	#13050.00	36.5 AV	68.2	-31.7	1.69 V	288	20.8	15.7
5	19575.00	59.9 PK	74.0	-14.1	2.97 V	333	63.5	-3.6
6	19575.00	47.7 AV	54.0	-6.3	2.97 V	333	51.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.9 PK			1.30 H	94	100.2	8.7
2	*6565.00	98.4 AV			1.30 H	94	89.7	8.7
3	#13130.00	47.0 PK	88.2	-41.2	3.00 H	218	31.0	16.0
4	#13130.00	35.0 AV	68.2	-33.2	3.00 H	218	19.0	16.0
5	19695.00	61.3 PK	74.0	-12.7	2.82 H	351	65.2	-3.9
6	19695.00	48.9 AV	54.0	-5.1	2.82 H	351	52.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.3 PK			2.08 V	81	99.6	8.7
2	*6565.00	97.9 AV			2.08 V	81	89.2	8.7
3	#13130.00	48.6 PK	88.2	-39.6	1.67 V	279	32.6	16.0
4	#13130.00	36.8 AV	68.2	-31.4	1.67 V	279	20.8	16.0
5	19695.00	59.9 PK	74.0	-14.1	3.01 V	328	63.8	-3.9
6	19695.00	47.9 AV	54.0	-6.1	3.01 V	328	51.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.8 PK			1.21 H	90	101.0	8.8
2	*6725.00	98.6 AV			1.21 H	90	89.8	8.8
3	#13450.00	46.9 PK	88.2	-41.3	2.98 H	209	28.9	18.0
4	#13450.00	35.1 AV	68.2	-33.1	2.98 H	209	17.1	18.0
5	20175.00	61.3 PK	74.0	-12.7	2.83 H	347	64.9	-3.6
6	20175.00	49.1 AV	54.0	-4.9	2.83 H	347	52.7	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.3 PK			2.14 V	87	100.5	8.8
2	*6725.00	98.1 AV			2.14 V	87	89.3	8.8
3	#13450.00	48.4 PK	88.2	-39.8	1.68 V	281	30.4	18.0
4	#13450.00	36.6 AV	68.2	-31.6	1.68 V	281	18.6	18.0
5	20175.00	59.7 PK	74.0	-14.3	3.02 V	331	63.3	-3.6
6	20175.00	47.6 AV	54.0	-6.4	3.02 V	331	51.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	109.4 PK			2.33 H	319	100.2	9.2
2	*6845.00	98.4 AV			2.33 H	319	89.2	9.2
3	#13690.00	47.4 PK	88.2	-40.8	3.01 H	214	28.8	18.6
4	#13690.00	35.5 AV	68.2	-32.7	3.01 H	214	16.9	18.6
5	20535.00	60.9 PK	74.0	-13.1	2.80 H	15	64.1	-3.2
6	20535.00	48.7 AV	54.0	-5.3	2.80 H	15	51.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.9 PK			1.32 V	37	98.7	9.2
2	*6845.00	97.5 AV			1.32 V	37	88.3	9.2
3	#13690.00	48.7 PK	88.2	-39.5	1.68 V	267	30.1	18.6
4	#13690.00	36.9 AV	68.2	-31.3	1.68 V	267	18.3	18.6
5	20535.00	59.3 PK	74.0	-14.7	3.01 V	342	62.5	-3.2
6	20535.00	47.4 AV	54.0	-6.6	3.01 V	342	50.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.8 PK			2.37 H	322	100.6	9.2
2	*6885.00	98.4 AV			2.37 H	322	89.2	9.2
3	#13770.00	47.3 PK	88.2	-40.9	3.03 H	218	28.7	18.6
4	#13770.00	35.3 AV	68.2	-32.9	3.03 H	218	16.7	18.6
5	20655.00	60.8 PK	74.0	-13.2	2.80 H	21	63.9	-3.1
6	20655.00	48.6 AV	54.0	-5.4	2.80 H	21	51.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.6 PK			3.30 V	226	99.4	9.2
2	*6885.00	98.1 AV			3.30 V	226	88.9	9.2
3	#13770.00	48.4 PK	88.2	-39.8	1.63 V	279	29.8	18.6
4	#13770.00	36.6 AV	68.2	-31.6	1.63 V	279	18.0	18.6
5	20655.00	59.5 PK	74.0	-14.5	3.04 V	349	62.6	-3.1
6	20655.00	47.8 AV	54.0	-6.2	3.04 V	349	50.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.9 PK			1.24 H	95	99.0	9.9
2	*7005.00	98.4 AV			1.24 H	95	88.5	9.9
3	#14010.00	47.2 PK	88.2	-41.0	3.02 H	234	28.2	19.0
4	#14010.00	35.2 AV	68.2	-33.0	3.02 H	234	16.2	19.0
5	21015.00	61.1 PK	74.0	-12.9	2.79 H	49	64.0	-2.9
6	21015.00	48.9 AV	54.0	-5.1	2.79 H	49	51.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.7 PK			1.86 V	189	98.8	9.9
2	*7005.00	98.3 AV			1.86 V	189	88.4	9.9
3	#14010.00	48.6 PK	88.2	-39.6	1.69 V	273	29.6	19.0
4	#14010.00	36.6 AV	68.2	-31.6	1.69 V	273	17.6	19.0
5	21015.00	59.6 PK	74.0	-14.4	3.03 V	338	62.5	-2.9
6	21015.00	48.0 AV	54.0	-6.0	3.03 V	338	50.9	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.9 PK			2.62 H	86	98.2	10.7
2	*7085.00	98.5 AV			2.62 H	86	87.8	10.7
3	#7125.00	55.2 PK	88.2	-33.0	2.62 H	86	44.3	10.9
4	#7125.00	44.1 AV	68.2	-24.1	2.62 H	86	33.2	10.9
5	7250.00	54.8 PK	74.0	-19.2	2.62 H	86	44.0	10.8
6	7250.00	43.3 AV	54.0	-10.7	2.62 H	86	32.5	10.8
7	#14170.00	46.7 PK	88.2	-41.5	2.98 H	249	27.2	19.5
8	#14170.00	34.9 AV	68.2	-33.3	2.98 H	249	15.4	19.5
9	21255.00	60.7 PK	74.0	-13.3	2.83 H	34	63.5	-2.8
10	21255.00	48.8 AV	54.0	-5.2	2.83 H	34	51.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.9 PK			2.03 V	184	99.2	10.7
2	*7085.00	98.9 AV			2.03 V	184	88.2	10.7
3	#7125.00	56.1 PK	88.2	-32.1	2.03 V	184	45.2	10.9
4	#7125.00	44.3 AV	68.2	-23.9	2.03 V	184	33.4	10.9
5	7250.00	54.4 PK	74.0	-19.6	2.03 V	184	43.6	10.8
6	7250.00	43.1 AV	54.0	-10.9	2.03 V	184	32.3	10.8
7	#14170.00	48.3 PK	88.2	-39.9	1.66 V	278	28.8	19.5
8	#14170.00	36.4 AV	68.2	-31.8	1.66 V	278	16.9	19.5
9	21255.00	59.4 PK	74.0	-14.6	3.05 V	325	62.2	-2.8
10	21255.00	47.8 AV	54.0	-6.2	3.05 V	325	50.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.6 PK	88.2	-29.6	2.13 H	87	52.3	6.3
2	#5925.00	46.4 AV	68.2	-21.8	2.13 H	87	40.1	6.3
3	*5985.00	108.7 PK			2.13 H	87	102.5	6.2
4	*5985.00	98.4 AV			2.13 H	87	92.2	6.2
5	11970.00	47.2 PK	74.0	-26.8	2.97 H	253	31.7	15.5
6	11970.00	35.4 AV	54.0	-18.6	2.97 H	253	19.9	15.5
7	17955.00	61.1 PK	74.0	-12.9	2.82 H	19	31.1	30.0
8	17955.00	49.1 AV	54.0	-4.9	2.82 H	19	19.1	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.3 PK	88.2	-34.9	2.14 V	27	47.0	6.3
2	#5925.00	41.6 AV	68.2	-26.6	2.14 V	27	35.3	6.3
3	*5985.00	108.4 PK			2.14 V	27	102.2	6.2
4	*5985.00	97.8 AV			2.14 V	27	91.6	6.2
5	11970.00	47.6 PK	74.0	-26.4	1.72 V	271	32.1	15.5
6	11970.00	36.0 AV	54.0	-18.0	1.72 V	271	20.5	15.5
7	17955.00	58.7 PK	74.0	-15.3	3.08 V	316	28.7	30.0
8	17955.00	47.3 AV	54.0	-6.7	3.08 V	316	17.3	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.9 PK			2.20 H	89	102.4	6.5
2	*6145.00	98.6 AV			2.20 H	89	92.1	6.5
3	12290.00	47.4 PK	74.0	-26.6	3.01 H	258	32.1	15.3
4	12290.00	35.5 AV	54.0	-18.5	3.01 H	258	20.2	15.3
5	18435.00	60.8 PK	74.0	-13.2	2.82 H	27	65.9	-5.1
6	18435.00	48.7 AV	54.0	-5.3	2.82 H	27	53.8	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.3 PK			2.13 V	32	101.8	6.5
2	*6145.00	98.0 AV			2.13 V	32	91.5	6.5
3	12290.00	47.5 PK	74.0	-26.5	1.75 V	269	32.2	15.3
4	12290.00	36.2 AV	54.0	-17.8	1.75 V	269	20.9	15.3
5	18435.00	58.7 PK	74.0	-15.3	3.13 V	305	63.8	-5.1
6	18435.00	47.4 AV	54.0	-6.6	3.13 V	305	52.5	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.5 PK			1.26 H	93	101.1	7.4
2	*6385.00	98.3 AV			1.26 H	93	90.9	7.4
3	#12770.00	47.6 PK	88.2	-40.6	2.98 H	268	32.2	15.4
4	#12770.00	35.7 AV	68.2	-32.5	2.98 H	268	20.3	15.4
5	19155.00	60.3 PK	74.0	-13.7	2.86 H	21	64.9	-4.6
6	19155.00	48.2 AV	54.0	-5.8	2.86 H	21	52.8	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.3 PK			2.10 V	187	100.9	7.4
2	*6385.00	98.1 AV			2.10 V	187	90.7	7.4
3	#12770.00	47.1 PK	88.2	-41.1	1.80 V	269	31.7	15.4
4	#12770.00	35.7 AV	68.2	-32.5	1.80 V	269	20.3	15.4
5	19155.00	58.0 PK	74.0	-16.0	3.09 V	315	62.6	-4.6
6	19155.00	46.9 AV	54.0	-7.1	3.09 V	315	51.5	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.5 PK			1.32 H	93	102.5	8.0
2	*6465.00	98.6 AV			1.32 H	93	90.6	8.0
3	#12930.00	47.9 PK	88.2	-40.3	3.01 H	275	32.3	15.6
4	#12930.00	36.1 AV	68.2	-32.1	3.01 H	275	20.5	15.6
5	19395.00	60.1 PK	74.0	-13.9	2.85 H	35	63.6	-3.5
6	19395.00	48.2 AV	54.0	-5.8	2.85 H	35	51.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.7 PK			1.66 V	197	100.7	8.0
2	*6465.00	97.9 AV			1.66 V	197	89.9	8.0
3	#12930.00	47.1 PK	88.2	-41.1	1.77 V	272	31.5	15.6
4	#12930.00	35.7 AV	68.2	-32.5	1.77 V	272	20.1	15.6
5	19395.00	57.4 PK	74.0	-16.6	3.15 V	324	60.9	-3.5
6	19395.00	46.5 AV	54.0	-7.5	3.15 V	324	50.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.1 PK			2.11 H	91	100.6	8.5
2	*6545.00	98.4 AV			2.11 H	91	89.9	8.5
3	#13090.00	47.8 PK	88.2	-40.4	3.01 H	276	32.0	15.8
4	#13090.00	36.0 AV	68.2	-32.2	3.01 H	276	20.2	15.8
5	19635.00	60.5 PK	74.0	-13.5	2.87 H	25	64.3	-3.8
6	19635.00	48.6 AV	54.0	-5.4	2.87 H	25	52.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.3 PK			2.57 V	247	99.8	8.5
2	*6545.00	97.8 AV			2.57 V	247	89.3	8.5
3	#13090.00	47.2 PK	88.2	-41.0	1.75 V	287	31.4	15.8
4	#13090.00	35.9 AV	68.2	-32.3	1.75 V	287	20.1	15.8
5	19635.00	57.0 PK	74.0	-17.0	3.18 V	323	60.8	-3.8
6	19635.00	46.3 AV	54.0	-7.7	3.18 V	323	50.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	108.6 PK			1.32 H	95	99.8	8.8
2	*6625.00	98.4 AV			1.32 H	95	89.6	8.8
3	13250.00	47.6 PK	74.0	-26.4	3.03 H	268	30.8	16.8
4	13250.00	35.8 AV	54.0	-18.2	3.03 H	268	19.0	16.8
5	19875.00	60.9 PK	74.0	-13.1	2.85 H	39	64.7	-3.8
6	19875.00	48.8 AV	54.0	-5.2	2.85 H	39	52.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	108.1 PK			1.60 V	194	99.3	8.8
2	*6625.00	98.2 AV			1.60 V	194	89.4	8.8
3	13250.00	47.2 PK	74.0	-26.8	1.78 V	294	30.4	16.8
4	13250.00	35.6 AV	54.0	-18.4	1.78 V	294	18.8	16.8
5	19875.00	57.5 PK	74.0	-16.5	3.23 V	323	61.3	-3.8
6	19875.00	46.7 AV	54.0	-7.3	3.23 V	323	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.8 PK			1.21 H	95	101.0	8.8
2	*6705.00	98.6 AV			1.21 H	95	89.8	8.8
3	#13410.00	47.7 PK	88.2	-40.5	3.00 H	258	29.9	17.8
4	#13410.00	35.7 AV	68.2	-32.5	3.00 H	258	17.9	17.8
5	20115.00	60.2 PK	74.0	-13.8	2.85 H	48	63.9	-3.7
6	20115.00	48.4 AV	54.0	-5.6	2.85 H	48	52.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.3 PK			1.73 V	193	101.5	8.8
2	*6705.00	99.0 AV			1.73 V	193	90.2	8.8
3	#13410.00	47.7 PK	88.2	-40.5	1.78 V	293	29.9	17.8
4	#13410.00	35.9 AV	68.2	-32.3	1.78 V	293	18.1	17.8
5	20115.00	57.0 PK	74.0	-17.0	3.28 V	321	60.7	-3.7
6	20115.00	46.4 AV	54.0	-7.6	3.28 V	321	50.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.6 PK			2.19 H	316	100.8	8.8
2	*6785.00	98.3 AV			2.19 H	316	89.5	8.8
3	#13570.00	48.0 PK	88.2	-40.2	2.99 H	265	29.4	18.6
4	#13570.00	36.2 AV	68.2	-32.0	2.99 H	265	17.6	18.6
5	20355.00	59.8 PK	74.0	-14.2	2.81 H	41	62.9	-3.1
6	20355.00	48.1 AV	54.0	-5.9	2.81 H	41	51.2	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.5 PK			1.67 V	194	101.7	8.8
2	*6785.00	99.6 AV			1.67 V	194	90.8	8.8
3	#13570.00	47.9 PK	88.2	-40.3	1.78 V	294	29.3	18.6
4	#13570.00	36.2 AV	68.2	-32.0	1.78 V	294	17.6	18.6
5	20355.00	57.2 PK	74.0	-16.8	3.27 V	331	60.3	-3.1
6	20355.00	46.4 AV	54.0	-7.6	3.27 V	331	49.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.8 PK			2.29 H	321	100.6	9.2
2	*6865.00	98.5 AV			2.29 H	321	89.3	9.2
3	#13730.00	48.7 PK	88.2	-39.5	2.93 H	261	30.2	18.5
4	#13730.00	36.7 AV	68.2	-31.5	2.93 H	261	18.2	18.5
5	20595.00	59.8 PK	74.0	-14.2	2.77 H	39	63.1	-3.3
6	20595.00	48.0 AV	54.0	-6.0	2.77 H	39	51.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.2 PK			1.65 V	191	101.0	9.2
2	*6865.00	99.0 AV			1.65 V	191	89.8	9.2
3	#13730.00	47.8 PK	88.2	-40.4	1.79 V	310	29.3	18.5
4	#13730.00	36.1 AV	68.2	-32.1	1.79 V	310	17.6	18.5
5	20595.00	56.9 PK	74.0	-17.1	3.25 V	340	60.2	-3.3
6	20595.00	46.2 AV	54.0	-7.8	3.25 V	340	49.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.3 PK			2.22 H	323	99.3	10.0
2	*6945.00	98.3 AV			2.22 H	323	88.3	10.0
3	#13890.00	48.3 PK	88.2	-39.9	2.94 H	269	29.7	18.6
4	#13890.00	36.4 AV	68.2	-31.8	2.94 H	269	17.8	18.6
5	20835.00	60.1 PK	74.0	-13.9	2.73 H	47	62.8	-2.7
6	20835.00	48.2 AV	54.0	-5.8	2.73 H	47	50.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.9 PK			1.65 V	194	98.9	10.0
2	*6945.00	98.2 AV			1.65 V	194	88.2	10.0
3	#13890.00	48.3 PK	88.2	-39.9	1.79 V	310	29.7	18.6
4	#13890.00	36.5 AV	68.2	-31.7	1.79 V	310	17.9	18.6
5	20835.00	57.0 PK	74.0	-17.0	3.20 V	347	59.7	-2.7
6	20835.00	46.3 AV	54.0	-7.7	3.20 V	347	49.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.2 PK			1.19 H	96	100.3	9.9
2	*7025.00	98.4 AV			1.19 H	96	88.5	9.9
3	#7125.00	55.9 PK	88.2	-32.3	1.19 H	96	45.0	10.9
4	#7125.00	44.1 AV	68.2	-24.1	1.19 H	96	33.2	10.9
5	7250.00	56.4 PK	74.0	-17.6	1.19 H	96	45.6	10.8
6	7250.00	45.5 AV	54.0	-8.5	1.19 H	96	34.7	10.8
7	#14050.00	48.7 PK	88.2	-39.5	2.93 H	257	29.7	19.0
8	#14050.00	36.5 AV	68.2	-31.7	2.93 H	257	17.5	19.0
9	21075.00	60.3 PK	74.0	-13.7	2.69 H	42	63.3	-3.0
10	21075.00	48.3 AV	54.0	-5.7	2.69 H	42	51.3	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.4 PK			1.60 V	196	99.5	9.9
2	*7025.00	97.9 AV			1.60 V	196	88.0	9.9
3	#7125.00	56.1 PK	88.2	-32.1	1.60 V	196	45.2	10.9
4	#7125.00	45.1 AV	68.2	-23.1	1.60 V	196	34.2	10.9
5	7250.00	56.9 PK	74.0	-17.1	1.60 V	196	46.1	10.8
6	7250.00	46.1 AV	54.0	-7.9	1.60 V	196	35.3	10.8
7	#14050.00	48.5 PK	88.2	-39.7	1.76 V	297	29.5	19.0
8	#14050.00	36.5 AV	68.2	-31.7	1.76 V	297	17.5	19.0
9	21075.00	56.3 PK	74.0	-17.7	3.19 V	355	59.3	-3.0
10	21075.00	45.8 AV	54.0	-8.2	3.19 V	355	48.8	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	2.12 H	87	55.8	6.3
2	#5925.00	51.1 AV	68.2	-17.1	2.12 H	87	44.8	6.3
3	*6025.00	109.6 PK			2.12 H	87	103.5	6.1
4	*6025.00	98.6 AV			2.12 H	87	92.5	6.1
5	12050.00	48.4 PK	74.0	-25.6	2.98 H	255	32.8	15.6
6	12050.00	36.0 AV	54.0	-18.0	2.98 H	255	20.4	15.6
7	18075.00	60.5 PK	74.0	-13.5	2.74 H	45	65.6	-5.1
8	18075.00	48.7 AV	54.0	-5.3	2.74 H	45	53.8	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	55.2 PK	88.2	-33.0	2.12 V	28	48.9	6.3
2	#5925.00	45.1 AV	68.2	-23.1	2.12 V	28	38.8	6.3
3	*6025.00	108.8 PK			2.12 V	28	102.7	6.1
4	*6025.00	97.5 AV			2.12 V	28	91.4	6.1
5	12050.00	48.7 PK	74.0	-25.3	1.81 V	289	33.1	15.6
6	12050.00	36.7 AV	54.0	-17.3	1.81 V	289	21.1	15.6
7	18075.00	56.0 PK	74.0	-18.0	3.16 V	347	61.1	-5.1
8	18075.00	45.5 AV	54.0	-8.5	3.16 V	347	50.6	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.6 PK			2.13 H	92	103.8	6.8
2	*6185.00	98.8 AV			2.13 H	92	92.0	6.8
3	12370.00	48.8 PK	74.0	-25.2	2.92 H	247	33.8	15.0
4	12370.00	36.2 AV	54.0	-17.8	2.92 H	247	21.2	15.0
5	18555.00	60.1 PK	74.0	-13.9	2.68 H	33	65.0	-4.9
6	18555.00	48.6 AV	54.0	-5.4	2.68 H	33	53.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.8 PK			1.80 V	29	101.0	6.8
2	*6185.00	96.7 AV			1.80 V	29	89.9	6.8
3	12370.00	48.7 PK	74.0	-25.3	1.82 V	284	33.7	15.0
4	12370.00	37.0 AV	54.0	-17.0	1.82 V	284	22.0	15.0
5	18555.00	56.1 PK	74.0	-17.9	3.14 V	332	61.0	-4.9
6	18555.00	45.5 AV	54.0	-8.5	3.14 V	332	50.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.1 PK			2.11 H	91	101.7	7.4
2	*6345.00	98.6 AV			2.11 H	91	91.2	7.4
3	12690.00	48.8 PK	74.0	-25.2	2.88 H	254	33.9	14.9
4	12690.00	36.5 AV	54.0	-17.5	2.88 H	254	21.6	14.9
5	19035.00	59.5 PK	74.0	-14.5	2.73 H	40	64.2	-4.7
6	19035.00	48.2 AV	54.0	-5.8	2.73 H	40	52.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.8 PK			2.41 V	31	100.4	7.4
2	*6345.00	96.6 AV			2.41 V	31	89.2	7.4
3	12690.00	48.6 PK	74.0	-25.4	1.87 V	283	33.7	14.9
4	12690.00	37.0 AV	54.0	-17.0	1.87 V	283	22.1	14.9
5	19035.00	55.4 PK	74.0	-18.6	3.15 V	337	60.1	-4.7
6	19035.00	45.1 AV	54.0	-8.9	3.15 V	337	49.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.9 PK			2.05 H	91	101.7	8.2
2	*6505.00	98.5 AV			2.05 H	91	90.3	8.2
3	#13010.00	49.1 PK	88.2	-39.1	2.90 H	251	33.6	15.5
4	#13010.00	36.9 AV	68.2	-31.3	2.90 H	251	21.4	15.5
5	19515.00	59.8 PK	74.0	-14.2	2.67 H	42	63.0	-3.2
6	19515.00	48.4 AV	54.0	-5.6	2.67 H	42	51.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.9 PK			1.73 V	193	100.7	8.2
2	*6505.00	98.1 AV			1.73 V	193	89.9	8.2
3	#13010.00	49.0 PK	88.2	-39.2	1.81 V	296	33.5	15.5
4	#13010.00	37.3 AV	68.2	-30.9	1.81 V	296	21.8	15.5
5	19515.00	55.2 PK	74.0	-18.8	3.15 V	353	58.4	-3.2
6	19515.00	44.7 AV	54.0	-9.3	3.15 V	353	47.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.3 PK			1.31 H	95	100.4	8.9
2	*6665.00	98.7 AV			1.31 H	95	89.8	8.9
3	13330.00	49.4 PK	74.0	-24.6	2.92 H	251	32.0	17.4
4	13330.00	37.3 AV	54.0	-16.7	2.92 H	251	19.9	17.4
5	19995.00	59.7 PK	74.0	-14.3	2.67 H	47	63.8	-4.1
6	19995.00	48.4 AV	54.0	-5.6	2.67 H	47	52.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.0 PK			1.74 V	192	101.1	8.9
2	*6665.00	99.2 AV			1.74 V	192	90.3	8.9
3	13330.00	48.9 PK	74.0	-25.1	1.78 V	294	31.5	17.4
4	13330.00	37.4 AV	54.0	-16.6	1.78 V	294	20.0	17.4
5	19995.00	55.8 PK	74.0	-18.2	3.10 V	343	59.9	-4.1
6	19995.00	45.0 AV	54.0	-9.0	3.10 V	343	49.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.1 PK			1.28 H	91	101.1	9.0
2	*6825.00	98.9 AV			1.28 H	91	89.9	9.0
3	#13650.00	49.4 PK	88.2	-38.8	2.88 H	243	30.8	18.6
4	#13650.00	37.1 AV	68.2	-31.1	2.88 H	243	18.5	18.6
5	20475.00	60.4 PK	74.0	-13.6	2.72 H	50	63.4	-3.0
6	20475.00	48.9 AV	54.0	-5.1	2.72 H	50	51.9	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.3 PK			1.77 V	194	101.3	9.0
2	*6825.00	99.2 AV			1.77 V	194	90.2	9.0
3	#13650.00	48.9 PK	88.2	-39.3	1.80 V	300	30.3	18.6
4	#13650.00	37.6 AV	68.2	-30.6	1.80 V	300	19.0	18.6
5	20475.00	56.0 PK	74.0	-18.0	3.06 V	349	59.0	-3.0
6	20475.00	45.0 AV	54.0	-9.0	3.06 V	349	48.0	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.5 PK			1.27 H	95	99.5	10.0
2	*6985.00	98.4 AV			1.27 H	95	88.4	10.0
3	#7125.00	63.9 PK	88.2	-24.3	1.27 H	95	53.0	10.9
4	#7125.00	51.8 AV	68.2	-16.4	1.27 H	95	40.9	10.9
5	7250.00	57.9 PK	74.0	-16.1	1.27 H	95	47.1	10.8
6	7250.00	47.1 AV	54.0	-6.9	1.27 H	95	36.3	10.8
7	#13970.00	48.7 PK	88.2	-39.5	2.86 H	230	29.7	19.0
8	#13970.00	36.6 AV	68.2	-31.6	2.86 H	230	17.6	19.0
9	20955.00	60.7 PK	74.0	-13.3	2.75 H	58	63.4	-2.7
10	20955.00	49.0 AV	54.0	-5.0	2.75 H	58	51.7	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.2 PK			1.78 V	192	98.2	10.0
2	*6985.00	97.7 AV			1.78 V	192	87.7	10.0
3	#7125.00	65.7 PK	88.2	-22.5	1.78 V	192	54.8	10.9
4	#7125.00	52.4 AV	68.2	-15.8	1.78 V	192	41.5	10.9
5	7250.00	56.8 PK	74.0	-17.2	1.78 V	192	46.0	10.8
6	7250.00	46.3 AV	54.0	-7.7	1.78 V	192	35.5	10.8
7	#13970.00	48.6 PK	88.2	-39.6	1.86 V	292	29.6	19.0
8	#13970.00	37.3 AV	68.2	-30.9	1.86 V	292	18.3	19.0
9	20955.00	55.5 PK	74.0	-18.5	3.09 V	351	58.2	-2.7
10	20955.00	44.6 AV	54.0	-9.4	3.09 V	351	47.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.5 PK	88.2	-18.7	2.07 H	90	63.2	6.3
2	#5925.00	57.1 AV	68.2	-11.1	2.07 H	90	50.8	6.3
3	*6105.00	107.3 PK			2.07 H	90	101.0	6.3
4	*6105.00	98.6 AV			2.07 H	90	92.3	6.3
5	12210.00	48.4 PK	74.0	-25.6	2.88 H	225	32.9	15.5
6	12210.00	36.3 AV	54.0	-17.7	2.88 H	225	20.8	15.5
7	18315.00	60.2 PK	74.0	-13.8	2.73 H	46	65.4	-5.2
8	18315.00	48.6 AV	54.0	-5.4	2.73 H	46	53.8	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.2 PK	88.2	-20.0	2.14 V	32	61.9	6.3
2	#5925.00	57.0 AV	68.2	-11.2	2.14 V	32	50.7	6.3
3	*6105.00	107.0 PK			2.14 V	32	100.7	6.3
4	*6105.00	97.6 AV			2.14 V	32	91.3	6.3
5	12210.00	49.3 PK	74.0	-24.7	1.83 V	307	33.8	15.5
6	12210.00	37.8 AV	54.0	-16.2	1.83 V	307	22.3	15.5
7	18315.00	55.3 PK	74.0	-18.7	3.15 V	344	60.5	-5.2
8	18315.00	44.3 AV	54.0	-9.7	3.15 V	344	49.5	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	108.1 PK			1.41 H	92	101.0	7.1
2	*6265.00	98.4 AV			1.41 H	92	91.3	7.1
3	12530.00	48.7 PK	74.0	-25.3	2.90 H	228	34.0	14.7
4	12530.00	36.5 AV	54.0	-17.5	2.90 H	228	21.8	14.7
5	18795.00	60.4 PK	74.0	-13.6	2.71 H	31	65.2	-4.8
6	18795.00	48.8 AV	54.0	-5.2	2.71 H	31	53.6	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	107.4 PK			3.03 V	318	100.3	7.1
2	*6265.00	97.7 AV			3.03 V	318	90.6	7.1
3	12530.00	49.3 PK	74.0	-24.7	1.80 V	308	34.6	14.7
4	12530.00	37.6 AV	54.0	-16.4	1.80 V	308	22.9	14.7
5	18795.00	55.6 PK	74.0	-18.4	3.12 V	348	60.4	-4.8
6	18795.00	44.6 AV	54.0	-9.4	3.12 V	348	49.4	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.8 PK			1.27 H	93	101.1	7.7
2	*6425.00	98.8 AV			1.27 H	93	91.1	7.7
3	#12850.00	48.3 PK	88.2	-39.9	2.90 H	217	32.7	15.6
4	#12850.00	36.0 AV	68.2	-32.2	2.90 H	217	20.4	15.6
5	19275.00	59.8 PK	74.0	-14.2	2.74 H	47	64.0	-4.2
6	19275.00	48.4 AV	54.0	-5.6	2.74 H	47	52.6	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.5 PK			2.10 V	184	99.8	7.7
2	*6425.00	97.3 AV			2.10 V	184	89.6	7.7
3	#12850.00	48.8 PK	88.2	-39.4	1.80 V	296	33.2	15.6
4	#12850.00	37.2 AV	68.2	-31.0	1.80 V	296	21.6	15.6
5	19275.00	55.1 PK	74.0	-18.9	3.09 V	350	59.3	-4.2
6	19275.00	44.3 AV	54.0	-9.7	3.09 V	350	48.5	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.9 PK			2.06 H	92	100.2	8.7
2	*6585.00	98.5 AV			2.06 H	92	89.8	8.7
3	#13170.00	48.6 PK	88.2	-39.6	2.91 H	220	32.5	16.1
4	#13170.00	36.5 AV	68.2	-31.7	2.91 H	220	20.4	16.1
5	19755.00	60.1 PK	74.0	-13.9	2.74 H	57	64.1	-4.0
6	19755.00	48.5 AV	54.0	-5.5	2.74 H	57	52.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	108.4 PK			1.73 V	192	99.7	8.7
2	*6585.00	98.3 AV			1.73 V	192	89.6	8.7
3	#13170.00	48.8 PK	88.2	-39.4	1.78 V	282	32.7	16.1
4	#13170.00	37.2 AV	68.2	-31.0	1.78 V	282	21.1	16.1
5	19755.00	55.2 PK	74.0	-18.8	3.12 V	339	59.2	-4.0
6	19755.00	44.7 AV	54.0	-9.3	3.12 V	339	48.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	109.8 PK			1.39 H	168	101.0	8.8
2	*6745.00	98.6 AV			1.39 H	168	89.8	8.8
3	#7125.00	70.9 PK	88.2	-17.3	1.39 H	165	60.0	10.9
4	#7125.00	57.5 AV	68.2	-10.7	1.39 H	165	46.6	10.9
5	7250.00	65.3 PK	74.0	-8.7	1.39 H	165	54.5	10.8
6	7250.00	53.1 AV	54.0	-0.9	1.39 H	165	42.3	10.8
7	#13490.00	48.9 PK	88.2	-39.3	2.95 H	231	30.6	18.3
8	#13490.00	36.7 AV	68.2	-31.5	2.95 H	231	18.4	18.3
9	20235.00	60.5 PK	74.0	-13.5	2.78 H	67	63.8	-3.3
10	20235.00	48.7 AV	54.0	-5.3	2.78 H	67	52.0	-3.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.0 PK			1.63 V	191	99.2	8.8
2	*6745.00	96.8 AV			1.63 V	191	88.0	8.8
3	#7125.00	67.7 PK	88.2	-20.5	1.63 V	191	56.8	10.9
4	#7125.00	54.4 AV	68.2	-13.8	1.63 V	191	43.5	10.9
5	7250.00	63.8 PK	74.0	-10.2	1.63 V	191	53.0	10.8
6	7250.00	51.2 AV	54.0	-2.8	1.63 V	191	40.4	10.8
7	#13490.00	48.7 PK	88.2	-39.5	1.77 V	268	30.4	18.3
8	#13490.00	37.3 AV	68.2	-30.9	1.77 V	268	19.0	18.3
9	20235.00	55.1 PK	74.0	-18.9	3.15 V	353	58.4	-3.3
10	20235.00	44.5 AV	54.0	-9.5	3.15 V	353	47.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.8 PK			2.26 H	86	97.5	9.3
2	*6905.00	96.4 AV			2.26 H	86	87.1	9.3
3	#7125.00	70.4 PK	88.2	-17.8	2.26 H	86	59.5	10.9
4	#7125.00	57.1 AV	68.2	-11.1	2.26 H	86	46.2	10.9
5	7250.00	68.4 PK	74.0	-5.6	2.26 H	86	57.6	10.8
6	7250.00	53.2 AV	54.0	-0.8	2.26 H	86	42.4	10.8
7	#13810.00	48.4 PK	88.2	-39.8	2.90 H	219	30.0	18.4
8	#13810.00	36.2 AV	68.2	-32.0	2.90 H	219	17.8	18.4
9	20715.00	60.1 PK	74.0	-13.9	2.78 H	57	63.0	-2.9
10	20715.00	48.4 AV	54.0	-5.6	2.78 H	57	51.3	-2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.5 PK			1.69 V	192	97.2	9.3
2	*6905.00	96.3 AV			1.69 V	192	87.0	9.3
3	#7125.00	68.4 PK	88.2	-19.8	1.69 V	192	57.5	10.9
4	#7125.00	56.2 AV	68.2	-12.0	1.69 V	192	45.3	10.9
5	7250.00	66.4 PK	74.0	-7.6	1.69 V	192	55.6	10.8
6	7250.00	50.7 AV	54.0	-3.3	1.69 V	192	39.9	10.8
7	#13810.00	48.7 PK	88.2	-39.5	1.72 V	259	30.3	18.4
8	#13810.00	37.3 AV	68.2	-30.9	1.72 V	259	18.9	18.4
9	20715.00	55.4 PK	74.0	-18.6	3.19 V	349	58.3	-2.9
10	20715.00	44.9 AV	54.0	-9.1	3.19 V	349	47.8	-2.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.



Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 1


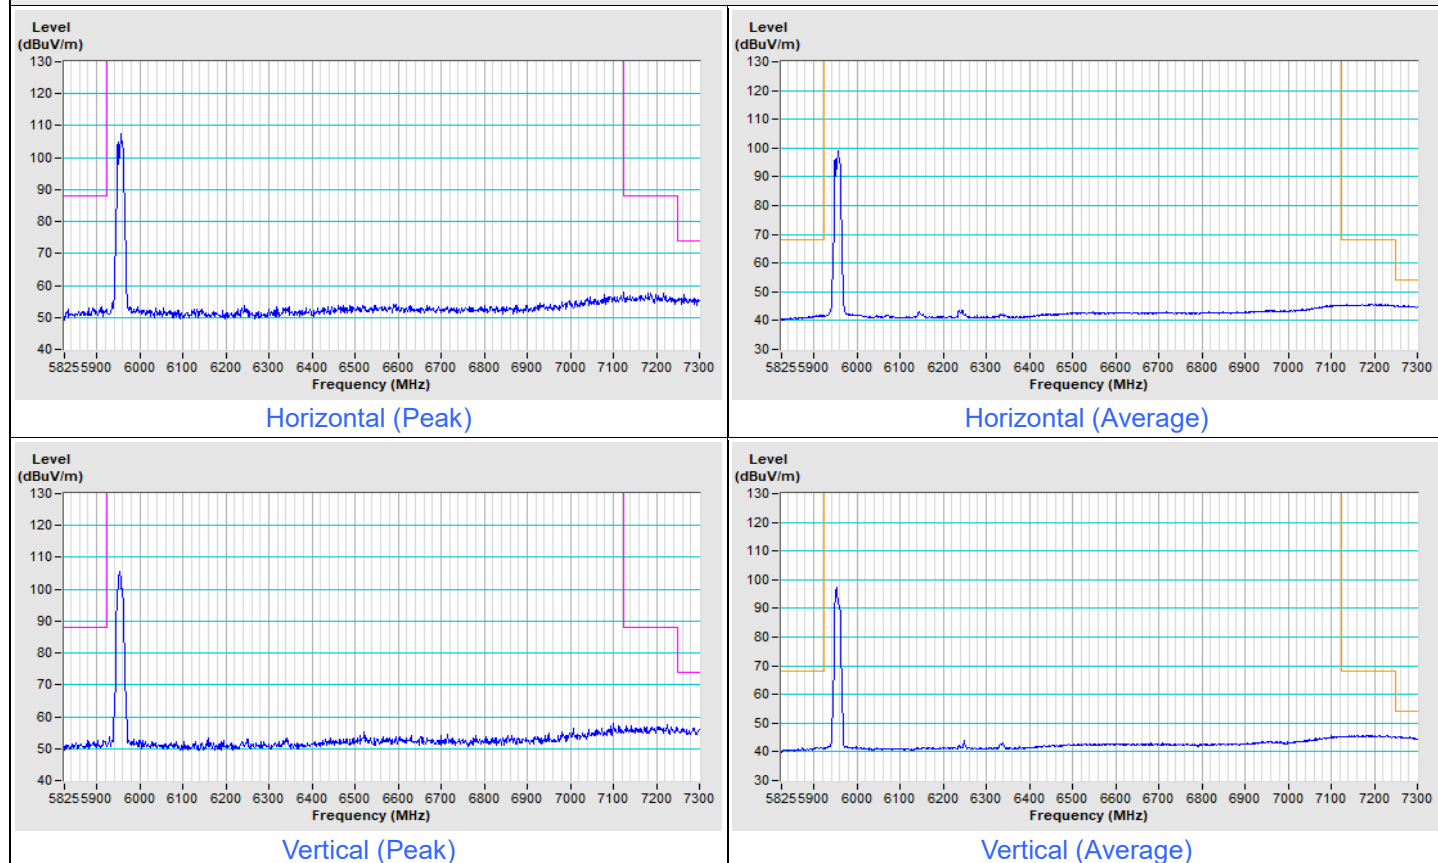


802.11a Channel 233

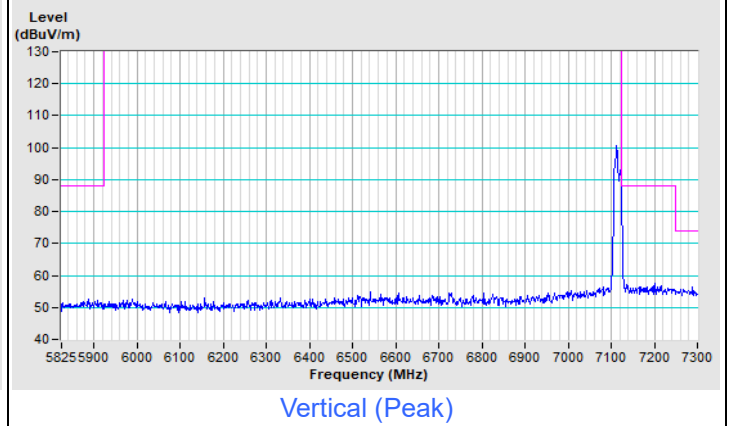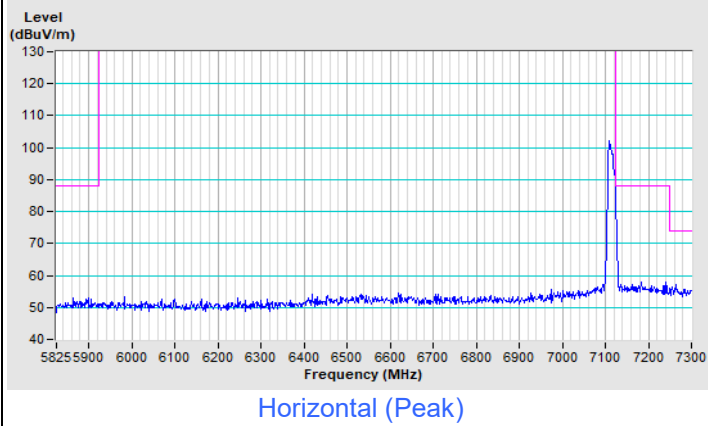


For Integration method:

802.11a Channel 233

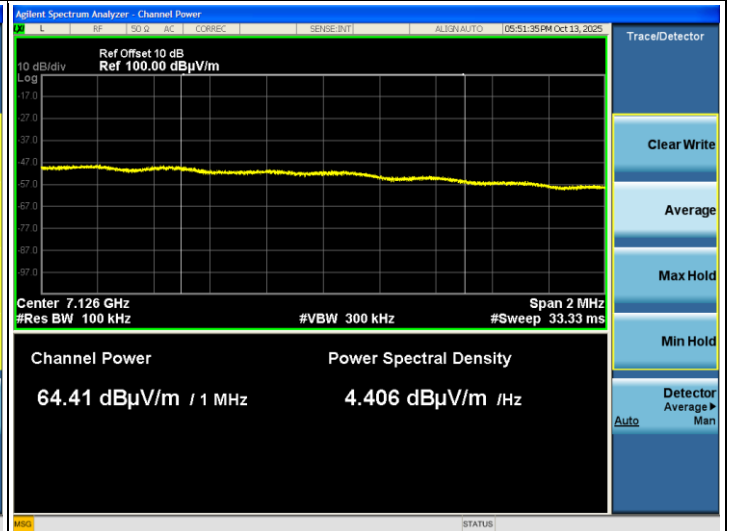
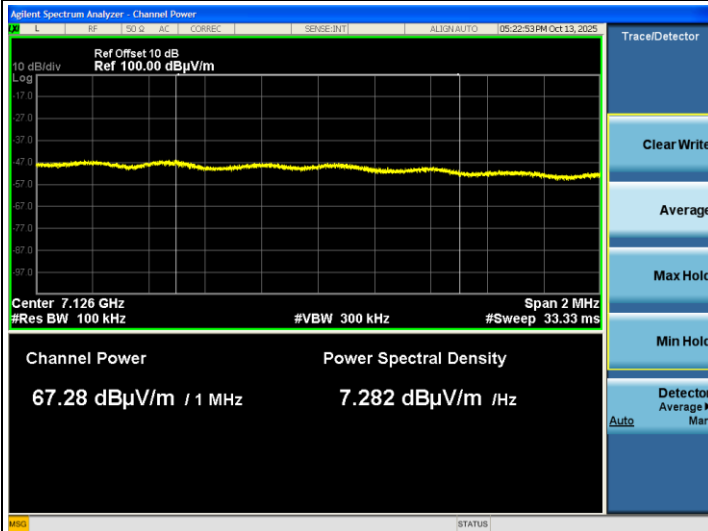


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 1

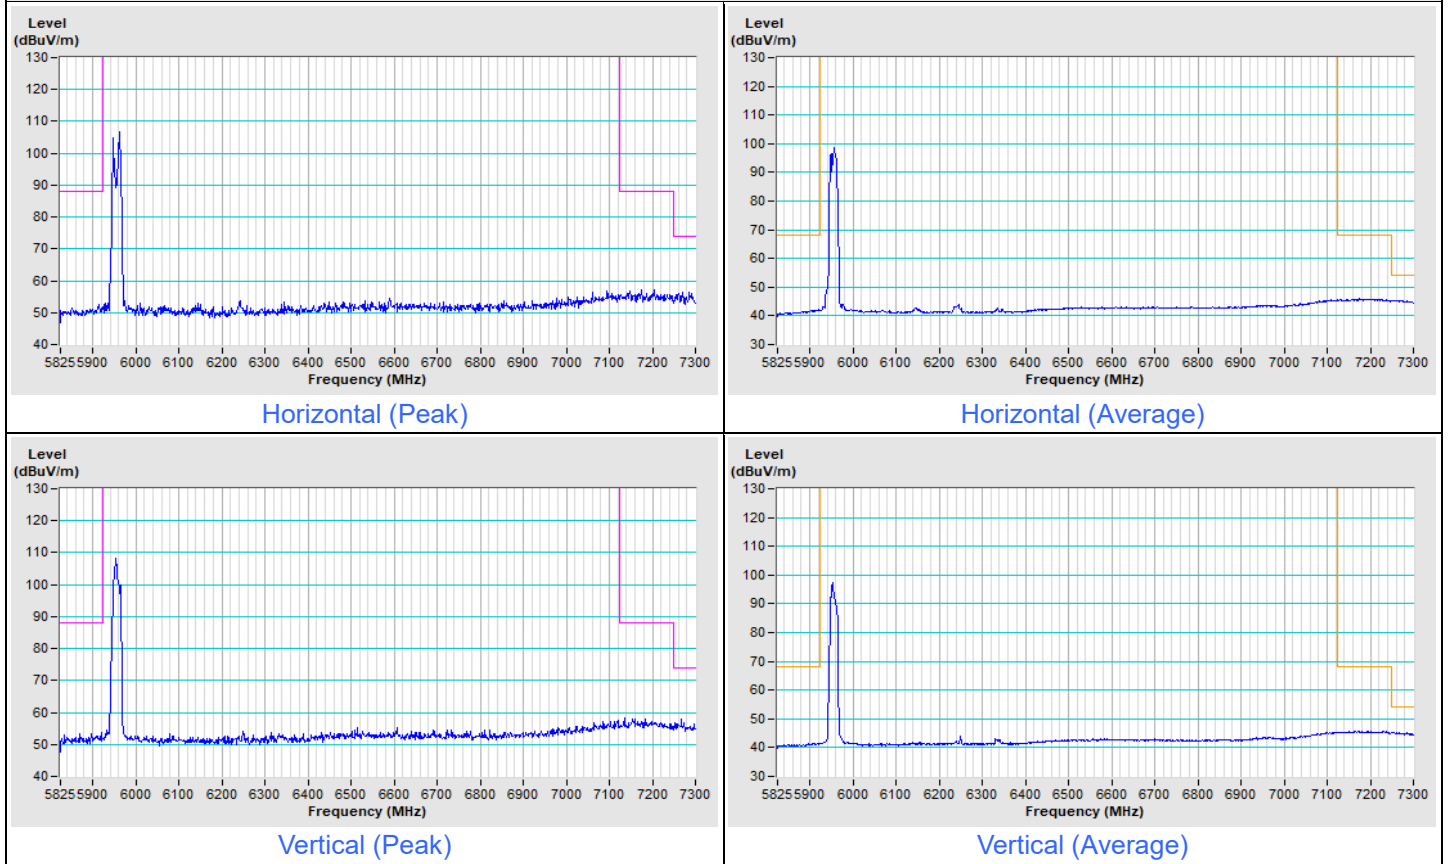


802.11be (EHT20) Channel 233

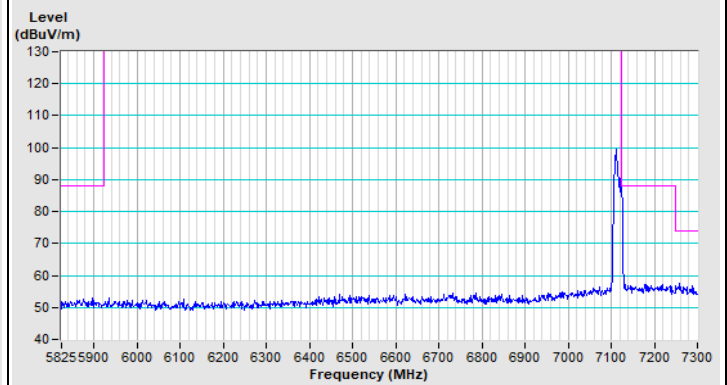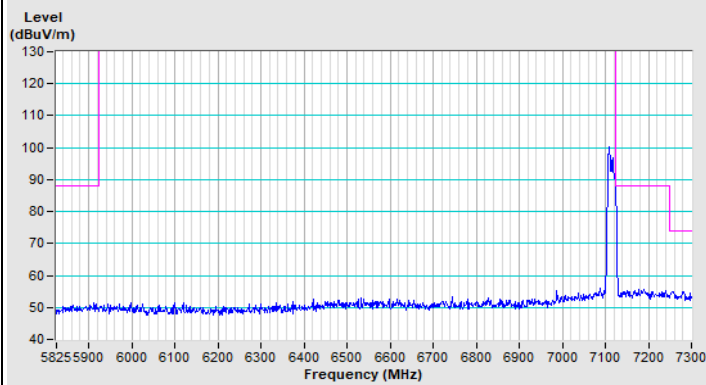


For Integration method:

802.11be (EHT20) Channel 233

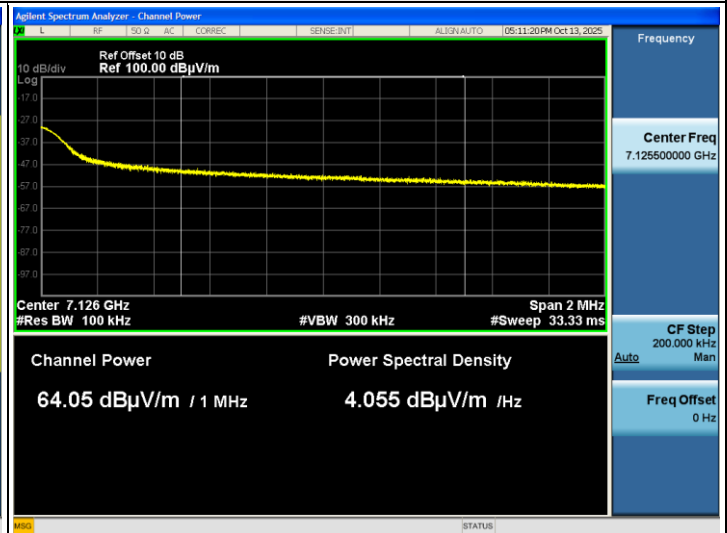


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

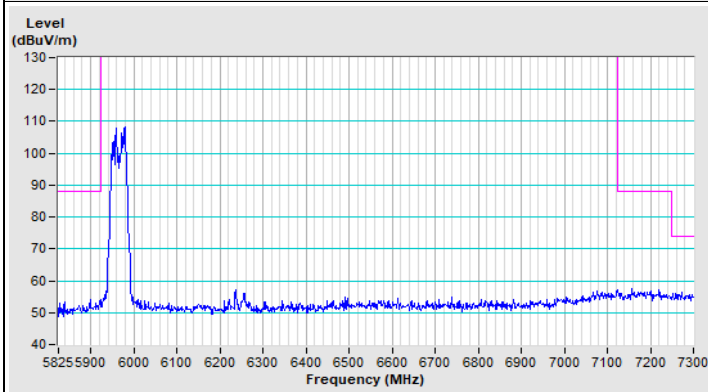


Horizontal (Peak)

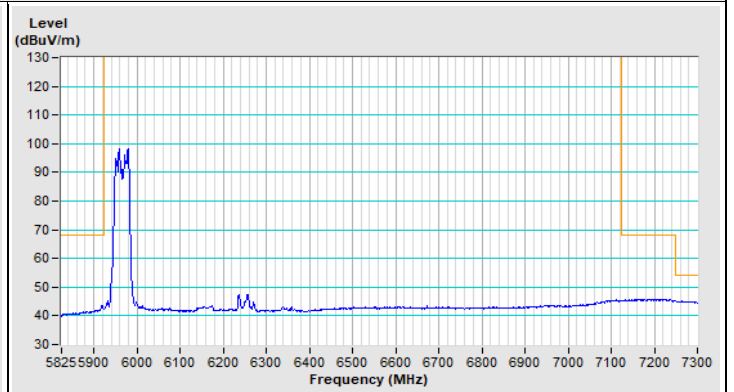


Horizontal (Average)

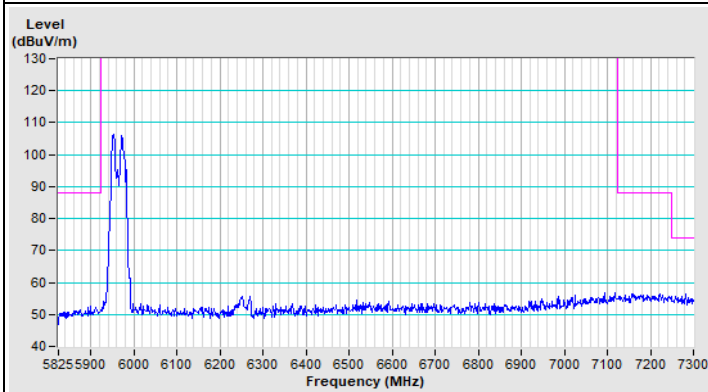


Vertical (Peak)

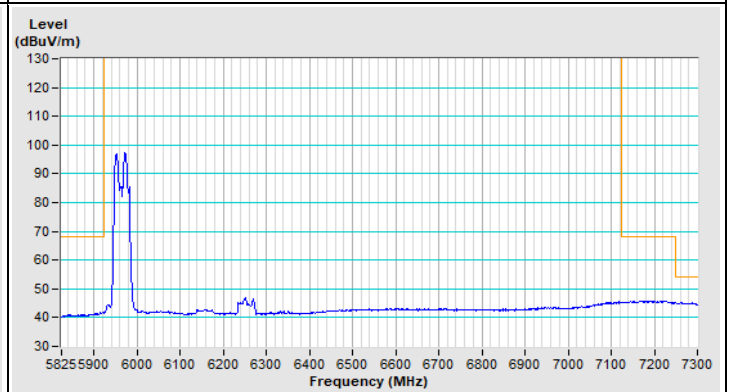


Vertical (Average)

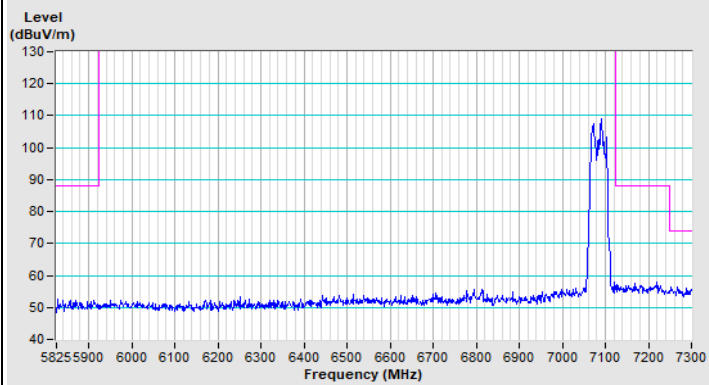802.11be (EHT40) Channel 227


Horizontal (Peak)

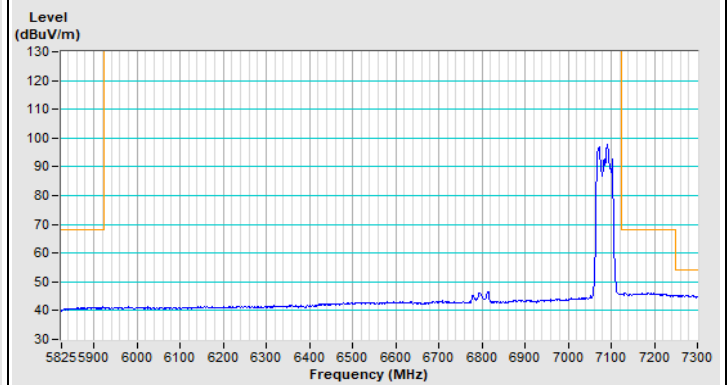

Horizontal (Average)

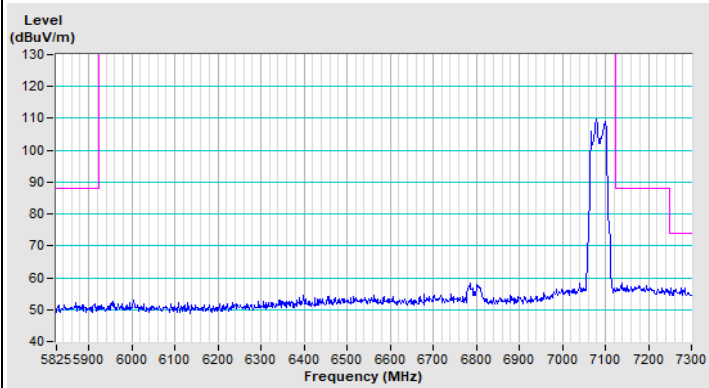


Vertical (Peak)

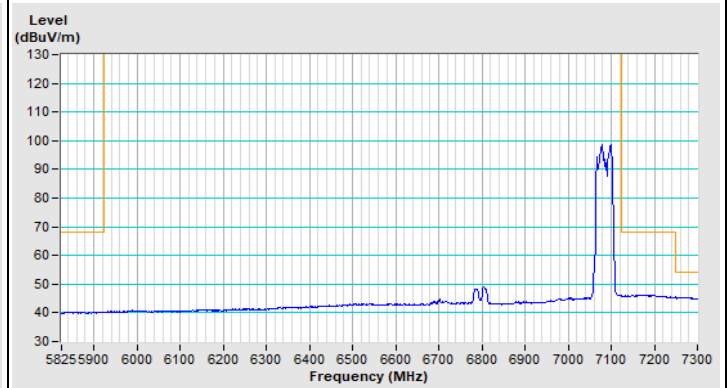


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT80) Channel 7

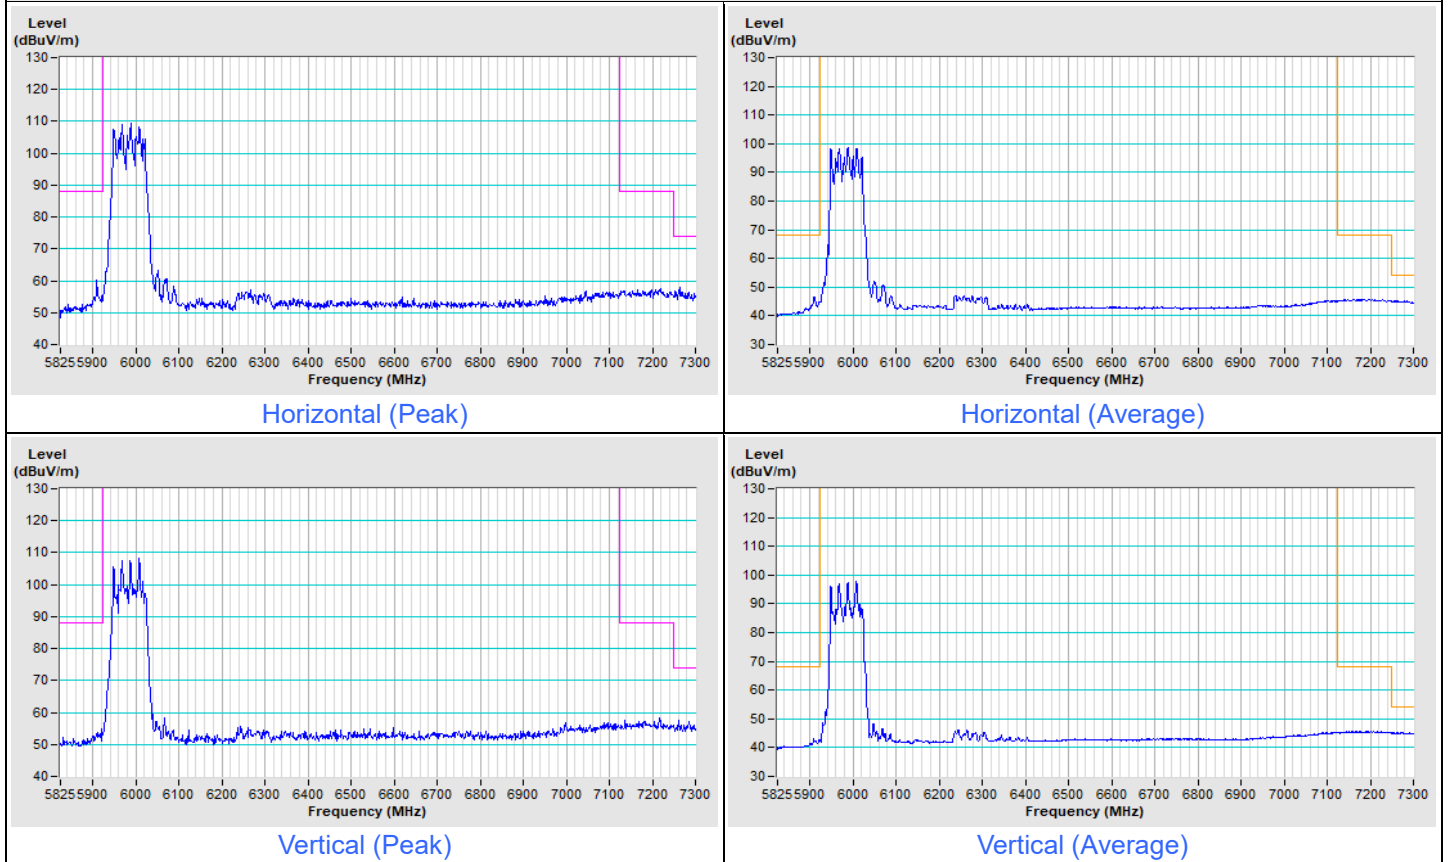


802.11be (EHT80) Channel 215

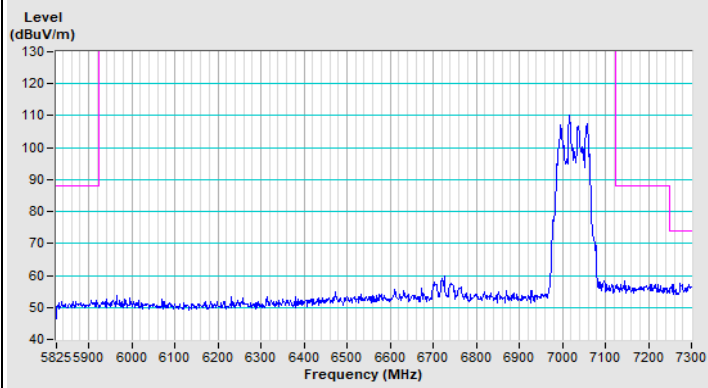


Horizontal (Peak)

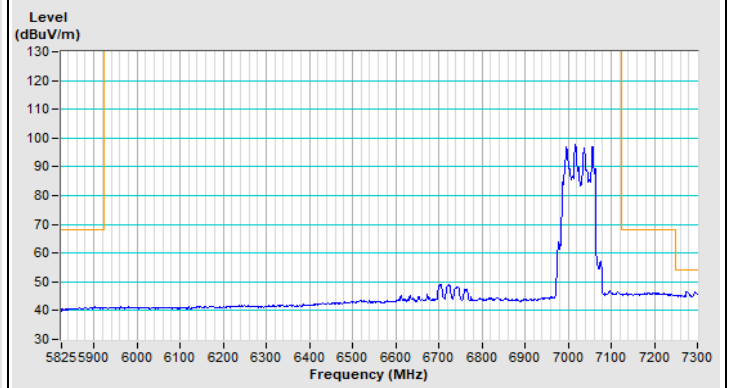

Horizontal (Average)

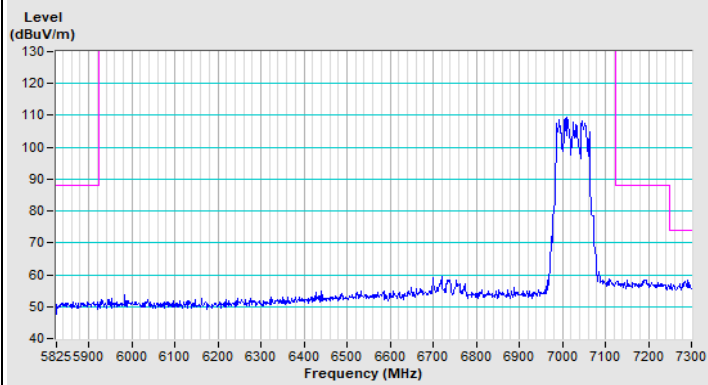


Vertical (Peak)

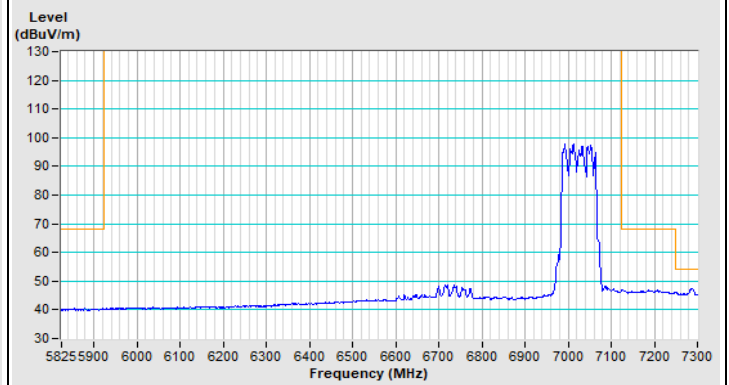


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---

802.11be (EHT160) Channel 15

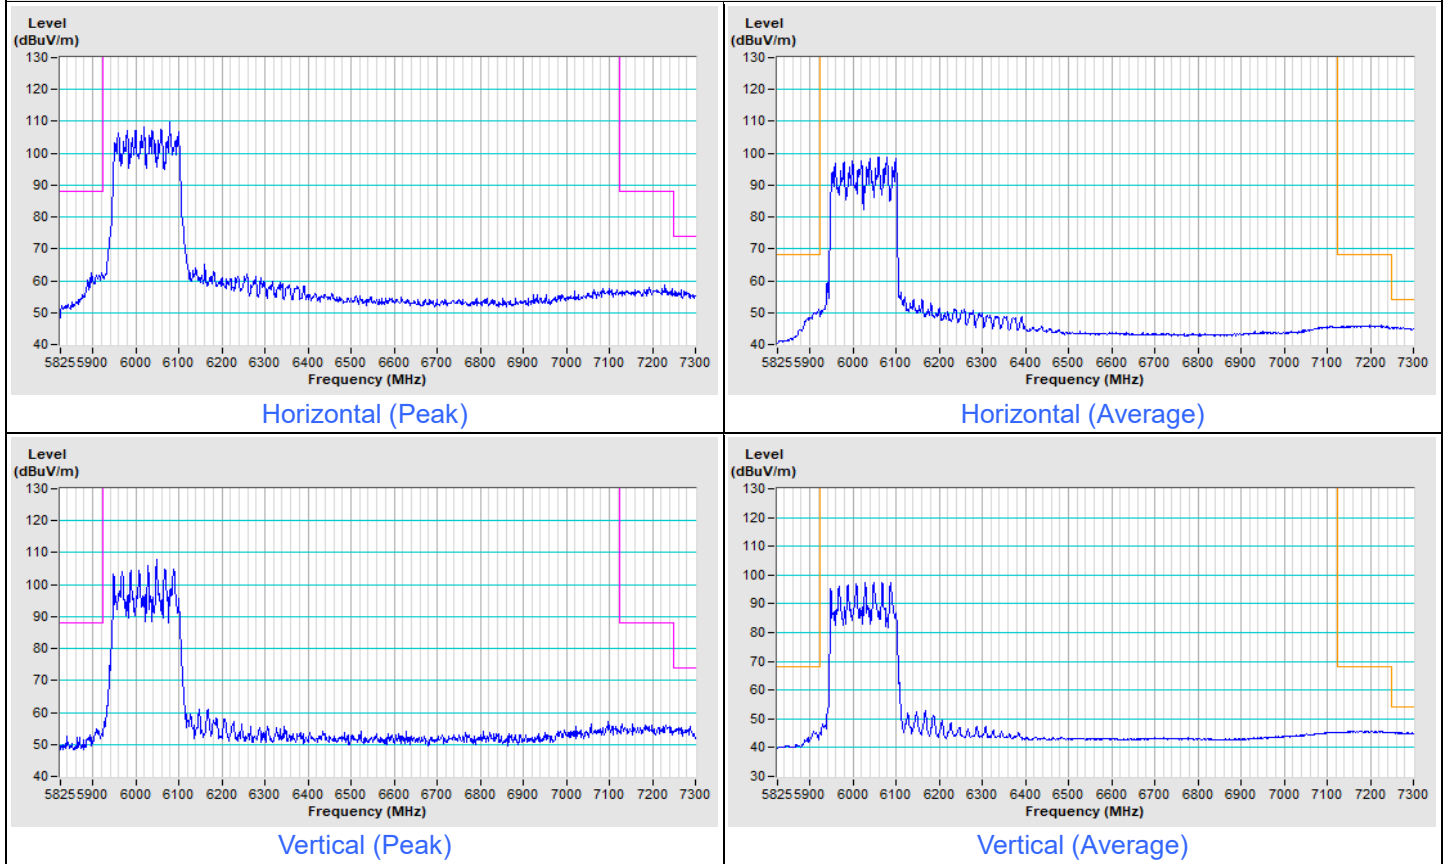


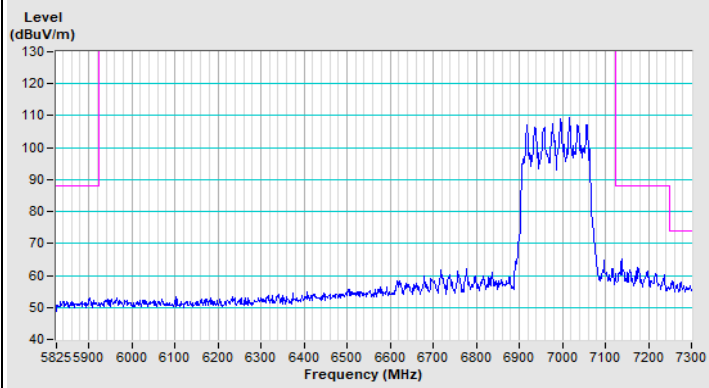802.11be (EHT160) Channel 207


Horizontal (Peak)

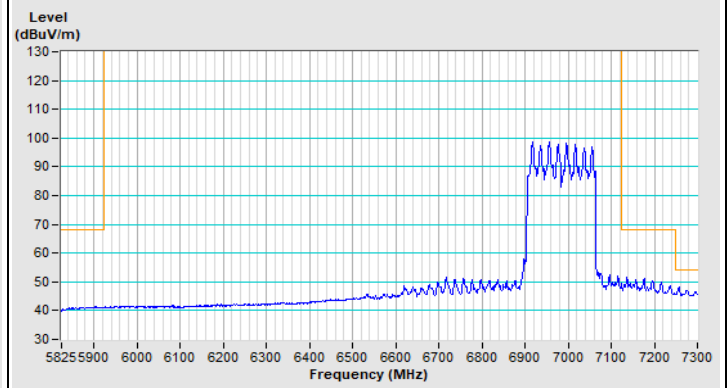

Horizontal (Average)

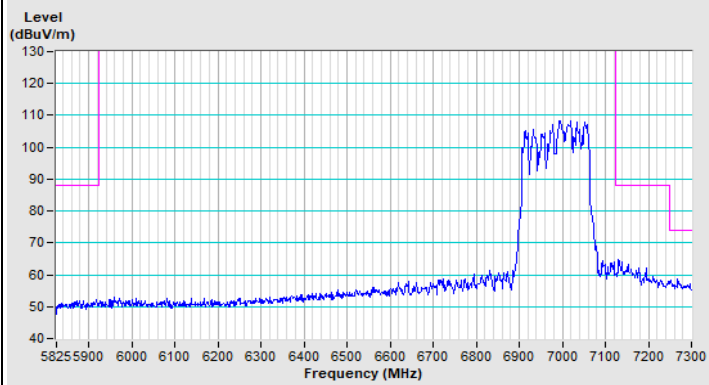


Vertical (Peak)

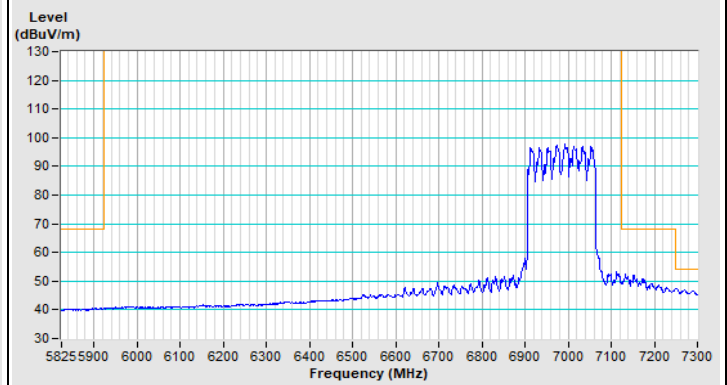


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---

802.11be (EHT320) Channel 31

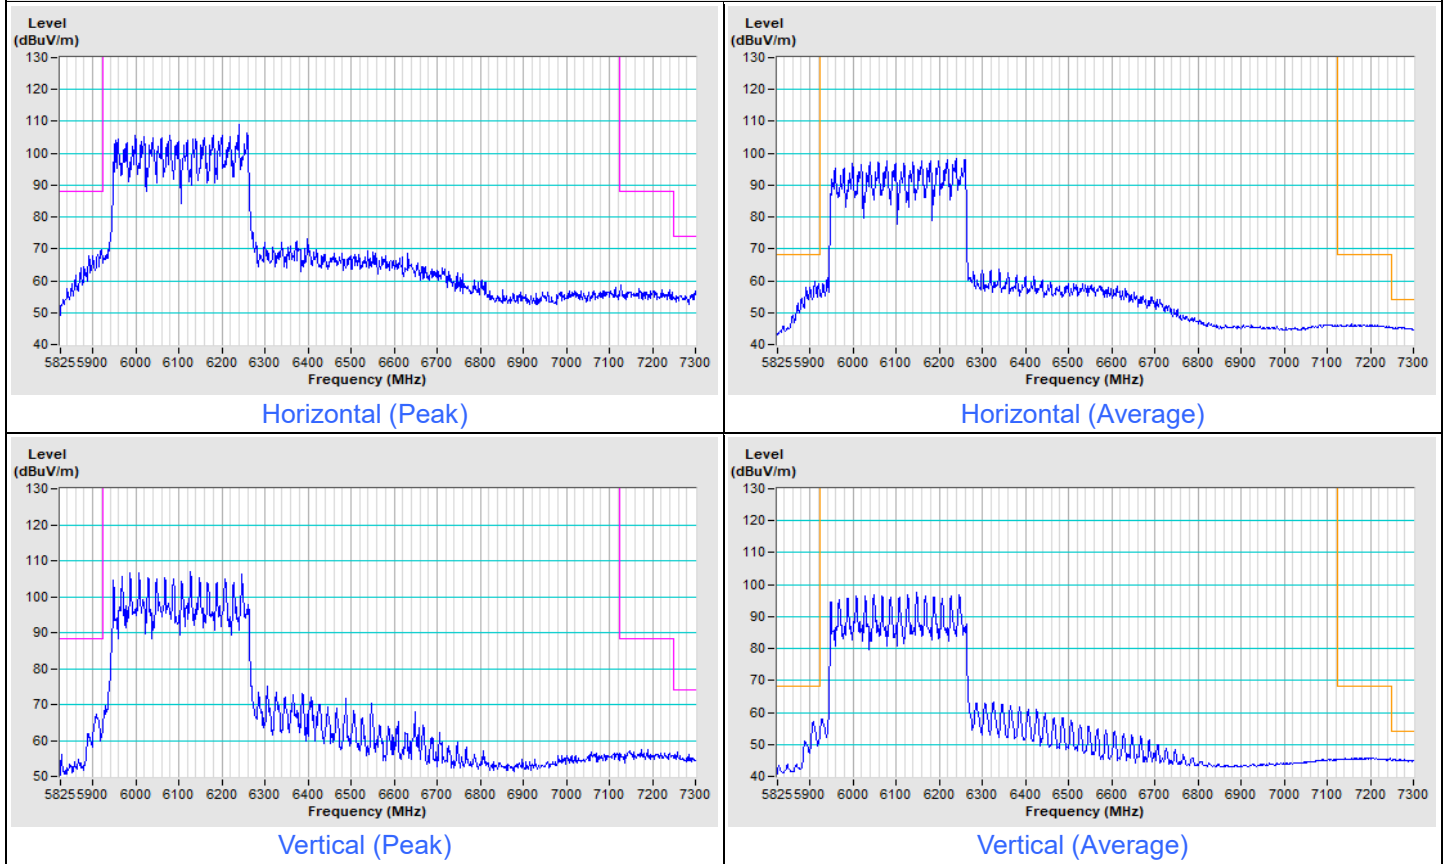


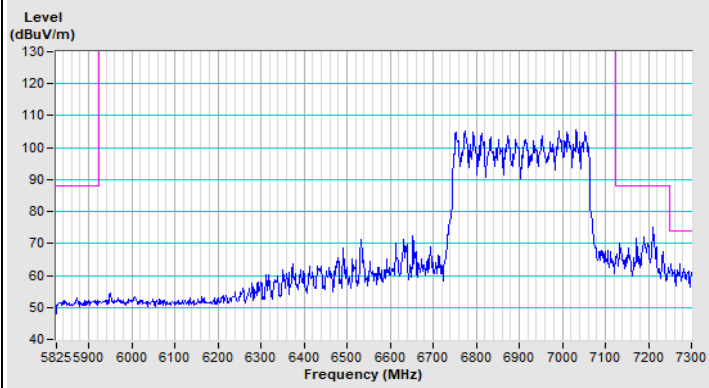802.11be (EHT320) Channel 191


Horizontal (Peak)

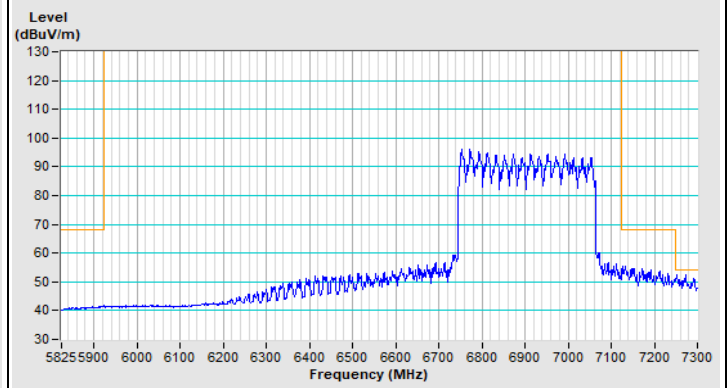

Horizontal (Average)

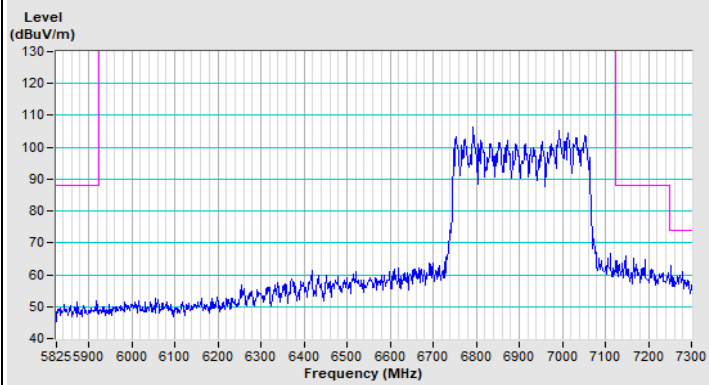

Vertical (Peak)

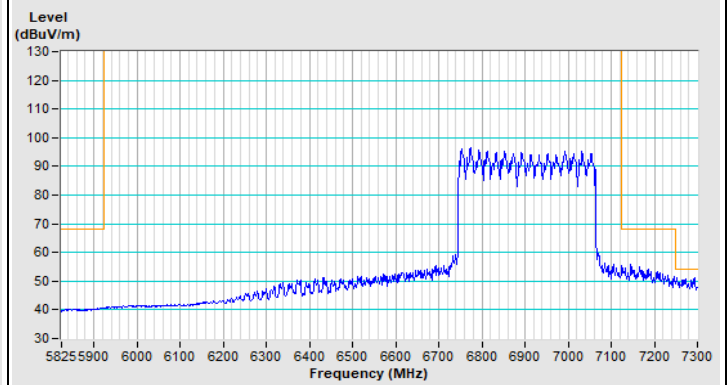

Vertical (Average)

Beamforming Mode

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	2.55 H	325	45.8	6.3
2	#5925.00	40.9 AV	68.2	-27.3	2.55 H	325	34.6	6.3
3	*5955.00	110.9 PK			2.55 H	325	104.7	6.2
4	*5955.00	98.3 AV			2.55 H	325	92.1	6.2
5	11910.00	49.5 PK	74.0	-24.5	1.41 H	296	34.1	15.4
6	11910.00	37.6 AV	54.0	-16.4	1.41 H	296	22.2	15.4
7	17865.00	62.5 PK	74.0	-11.5	1.96 H	277	34.7	27.8
8	17865.00	50.4 AV	54.0	-3.6	1.96 H	277	22.6	27.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	1.15 V	262	45.2	6.3
2	#5925.00	39.1 AV	68.2	-29.1	1.15 V	262	32.8	6.3
3	*5955.00	109.6 PK			1.15 V	262	103.4	6.2
4	*5955.00	97.5 AV			1.15 V	262	91.3	6.2
5	11910.00	50.5 PK	74.0	-23.5	1.72 V	297	35.1	15.4
6	11910.00	38.1 AV	54.0	-15.9	1.72 V	297	22.7	15.4
7	17865.00	63.3 PK	74.0	-10.7	3.21 V	314	35.5	27.8
8	17865.00	51.2 AV	54.0	-2.8	3.21 V	314	23.4	27.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	110.2 PK			2.55 H	327	103.6	6.6
2	*6175.00	98.7 AV			2.55 H	327	92.1	6.6
3	12350.00	49.4 PK	74.0	-24.6	1.39 H	299	34.3	15.1
4	12350.00	37.8 AV	54.0	-16.2	1.39 H	299	22.7	15.1
5	18525.00	62.9 PK	74.0	-11.1	1.92 H	280	67.8	-4.9
6	18525.00	50.8 AV	54.0	-3.2	1.92 H	280	55.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	109.4 PK			1.19 V	271	102.8	6.6
2	*6175.00	97.4 AV			1.19 V	271	90.8	6.6
3	12350.00	50.6 PK	74.0	-23.4	1.68 V	291	35.5	15.1
4	12350.00	37.9 AV	54.0	-16.1	1.68 V	291	22.8	15.1
5	18525.00	63.3 PK	74.0	-10.7	3.21 V	315	68.2	-4.9
6	18525.00	51.3 AV	54.0	-2.7	3.21 V	315	56.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.6 PK			2.46 H	342	102.0	7.6
2	*6415.00	98.1 AV			2.46 H	342	90.5	7.6
3	#12830.00	49.7 PK	88.2	-38.5	1.37 H	291	34.1	15.6
4	#12830.00	37.7 AV	68.2	-30.5	1.37 H	291	22.1	15.6
5	19245.00	62.2 PK	74.0	-11.8	2.00 H	261	66.5	-4.3
6	19245.00	50.2 AV	54.0	-3.8	2.00 H	261	54.5	-4.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.2 PK			1.24 V	285	101.6	7.6
2	*6415.00	97.2 AV			1.24 V	285	89.6	7.6
3	#12830.00	50.9 PK	88.2	-37.3	1.75 V	304	35.3	15.6
4	#12830.00	38.3 AV	68.2	-29.9	1.75 V	304	22.7	15.6
5	19245.00	63.9 PK	74.0	-10.1	3.21 V	311	68.2	-4.3
6	19245.00	51.5 AV	54.0	-2.5	3.21 V	311	55.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.8 PK			2.51 H	337	102.0	7.8
2	*6435.00	98.3 AV			2.51 H	337	90.5	7.8
3	#12870.00	49.6 PK	88.2	-38.6	1.44 H	289	33.9	15.7
4	#12870.00	37.4 AV	68.2	-30.8	1.44 H	289	21.7	15.7
5	19305.00	62.8 PK	74.0	-11.2	1.96 H	262	66.8	-4.0
6	19305.00	50.8 AV	54.0	-3.2	1.96 H	262	54.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.5 PK			1.19 V	271	101.7	7.8
2	*6435.00	97.7 AV			1.19 V	271	89.9	7.8
3	#12870.00	50.2 PK	88.2	-38.0	1.75 V	312	34.5	15.7
4	#12870.00	37.9 AV	68.2	-30.3	1.75 V	312	22.2	15.7
5	19305.00	63.3 PK	74.0	-10.7	3.20 V	317	67.3	-4.0
6	19305.00	51.1 AV	54.0	-2.9	3.20 V	317	55.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.1 PK			2.38 H	317	101.0	8.1
2	*6475.00	98.6 AV			2.38 H	317	90.5	8.1
3	#12950.00	49.2 PK	88.2	-39.0	1.47 H	310	33.7	15.5
4	#12950.00	37.4 AV	68.2	-30.8	1.47 H	310	21.9	15.5
5	19425.00	62.7 PK	74.0	-11.3	2.01 H	293	66.2	-3.5
6	19425.00	50.9 AV	54.0	-3.1	2.01 H	293	54.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.5 PK			1.21 V	275	100.4	8.1
2	*6475.00	97.8 AV			1.21 V	275	89.7	8.1
3	#12950.00	49.7 PK	88.2	-38.5	1.80 V	313	34.2	15.5
4	#12950.00	37.9 AV	68.2	-30.3	1.80 V	313	22.4	15.5
5	19425.00	63.8 PK	74.0	-10.2	3.21 V	308	67.3	-3.5
6	19425.00	51.5 AV	54.0	-2.5	3.21 V	308	55.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	109.8 PK			1.01 H	243	101.4	8.4
2	*6515.00	98.7 AV			1.01 H	243	90.3	8.4
3	#13030.00	49.9 PK	88.2	-38.3	1.49 H	296	34.3	15.6
4	#13030.00	37.5 AV	68.2	-30.7	1.49 H	296	21.9	15.6
5	19545.00	62.4 PK	74.0	-11.6	1.92 H	275	65.8	-3.4
6	19545.00	50.5 AV	54.0	-3.5	1.92 H	275	53.9	-3.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.6 PK			1.33 V	271	100.2	8.4
2	*6515.00	97.8 AV			1.33 V	271	89.4	8.4
3	#13030.00	49.8 PK	88.2	-38.4	1.81 V	305	34.2	15.6
4	#13030.00	37.8 AV	68.2	-30.4	1.81 V	305	22.2	15.6
5	19545.00	64.1 PK	74.0	-9.9	3.22 V	319	67.5	-3.4
6	19545.00	51.6 AV	54.0	-2.4	3.22 V	319	55.0	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.