

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.7 PK			1.05 H	243	101.2	8.5
2	*6535.00	98.1 AV			1.05 H	243	89.6	8.5
3	#13070.00	49.8 PK	88.2	-38.4	1.51 H	283	34.1	15.7
4	#13070.00	37.5 AV	68.2	-30.7	1.51 H	283	21.8	15.7
5	19605.00	61.8 PK	74.0	-12.2	1.95 H	290	65.5	-3.7
6	19605.00	50.2 AV	54.0	-3.8	1.95 H	290	53.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.2 PK			1.28 V	274	99.7	8.5
2	*6535.00	97.3 AV			1.28 V	274	88.8	8.5
3	#13070.00	49.9 PK	88.2	-38.3	1.85 V	320	34.2	15.7
4	#13070.00	37.8 AV	68.2	-30.4	1.85 V	320	22.1	15.7
5	19605.00	63.6 PK	74.0	-10.4	3.17 V	312	67.3	-3.7
6	19605.00	51.2 AV	54.0	-2.8	3.17 V	312	54.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.4 PK			1.01 H	253	100.6	8.8
2	*6695.00	98.2 AV			1.01 H	253	89.4	8.8
3	13390.00	49.4 PK	74.0	-24.6	1.48 H	274	31.7	17.7
4	13390.00	37.1 AV	54.0	-16.9	1.48 H	274	19.4	17.7
5	20085.00	61.9 PK	74.0	-12.1	1.95 H	298	65.7	-3.8
6	20085.00	50.1 AV	54.0	-3.9	1.95 H	298	53.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.2 PK			1.38 V	270	99.4	8.8
2	*6695.00	97.5 AV			1.38 V	270	88.7	8.8
3	13390.00	49.7 PK	74.0	-24.3	1.85 V	299	32.0	17.7
4	13390.00	38.1 AV	54.0	-15.9	1.85 V	299	20.4	17.7
5	20085.00	63.5 PK	74.0	-10.5	3.17 V	317	67.3	-3.8
6	20085.00	51.3 AV	54.0	-2.7	3.17 V	317	55.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.6 PK			1.02 H	324	100.3	9.3
2	*6855.00	98.4 AV			1.02 H	324	89.1	9.3
3	#13710.00	49.4 PK	88.2	-38.8	1.47 H	277	30.9	18.5
4	#13710.00	37.2 AV	68.2	-31.0	1.47 H	277	18.7	18.5
5	20565.00	61.7 PK	74.0	-12.3	1.94 H	286	64.9	-3.2
6	20565.00	50.1 AV	54.0	-3.9	1.94 H	286	53.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.7 PK			1.25 V	276	99.4	9.3
2	*6855.00	97.6 AV			1.25 V	276	88.3	9.3
3	#13710.00	50.5 PK	88.2	-37.7	1.83 V	320	32.0	18.5
4	#13710.00	38.2 AV	68.2	-30.0	1.83 V	320	19.7	18.5
5	20565.00	63.4 PK	74.0	-10.6	3.15 V	306	66.6	-3.2
6	20565.00	51.3 AV	54.0	-2.7	3.15 V	306	54.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.3 PK			1.04 H	243	100.2	9.1
2	*6875.00	98.1 AV			1.04 H	243	89.0	9.1
3	#13750.00	49.2 PK	88.2	-39.0	1.46 H	263	30.8	18.4
4	#13750.00	37.1 AV	68.2	-31.1	1.46 H	263	18.7	18.4
5	20625.00	62.2 PK	74.0	-11.8	1.91 H	293	65.4	-3.2
6	20625.00	50.6 AV	54.0	-3.4	1.91 H	293	53.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.6 PK			1.29 V	284	99.5	9.1
2	*6875.00	97.4 AV			1.29 V	284	88.3	9.1
3	#13750.00	50.5 PK	88.2	-37.7	1.79 V	335	32.1	18.4
4	#13750.00	38.3 AV	68.2	-29.9	1.79 V	335	19.9	18.4
5	20625.00	63.5 PK	74.0	-10.5	3.16 V	291	66.7	-3.2
6	20625.00	51.3 AV	54.0	-2.7	3.16 V	291	54.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.4 PK			1.00 H	96	99.5	9.9
2	*6995.00	98.3 AV			1.00 H	96	88.4	9.9
3	#13990.00	49.5 PK	88.2	-38.7	1.45 H	268	30.4	19.1
4	#13990.00	37.3 AV	68.2	-30.9	1.45 H	268	18.2	19.1
5	20985.00	61.2 PK	74.0	-12.8	1.89 H	307	64.1	-2.9
6	20985.00	49.6 AV	54.0	-4.4	1.89 H	307	52.5	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.0 PK			1.24 V	274	99.1	9.9
2	*6995.00	97.8 AV			1.24 V	274	87.9	9.9
3	#13990.00	50.9 PK	88.2	-37.3	1.83 V	324	31.8	19.1
4	#13990.00	38.3 AV	68.2	-29.9	1.83 V	324	19.2	19.1
5	20985.00	63.6 PK	74.0	-10.4	3.11 V	296	66.5	-2.9
6	20985.00	51.5 AV	54.0	-2.5	3.11 V	296	54.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.9 PK			1.97 H	96	87.1	10.8
2	*7115.00	86.2 AV			1.97 H	96	75.4	10.8
3	#7125.00	87.9 PK	88.2	-0.3	1.97 H	96	77.0	10.9
4	#7125.00	64.0 AV	68.2	-4.2	1.97 H	96	53.1	10.9
5	7250.00	54.7 PK	74.0	-19.3	1.97 H	96	43.9	10.8
6	7250.00	42.5 AV	54.0	-11.5	1.97 H	96	31.7	10.8
7	#14230.00	49.3 PK	88.2	-38.9	1.51 H	256	29.5	19.8
8	#14230.00	37.1 AV	68.2	-31.1	1.51 H	256	17.3	19.8
9	21345.00	61.7 PK	74.0	-12.3	1.94 H	281	64.2	-2.5
10	21345.00	50.3 AV	54.0	-3.7	1.94 H	281	52.8	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.2 PK			1.15 V	256	86.4	10.8
2	*7115.00	85.9 AV			1.15 V	256	75.1	10.8
3	#7125.00	84.8 PK	88.2	-3.4	1.15 V	256	73.9	10.9
4	#7125.00	62.5 AV	68.2	-5.7	1.15 V	256	51.6	10.9
5	7250.00	54.2 PK	74.0	-19.8	1.15 V	256	43.4	10.8
6	7250.00	42.4 AV	54.0	-11.6	1.15 V	256	31.6	10.8
7	#14230.00	50.5 PK	88.2	-37.7	1.79 V	327	30.7	19.8
8	#14230.00	38.4 AV	68.2	-29.8	1.79 V	327	18.6	19.8
9	21345.00	63.4 PK	74.0	-10.6	3.13 V	286	65.9	-2.5
10	21345.00	51.3 AV	54.0	-2.7	3.13 V	286	53.8	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.5 PK	88.2	-34.7	1.00 H	286	47.2	6.3
2	#5925.00	40.6 AV	68.2	-27.6	1.00 H	286	34.3	6.3
3	*5965.00	110.5 PK			1.00 H	286	104.3	6.2
4	*5965.00	98.4 AV			1.00 H	286	92.2	6.2
5	11930.00	48.7 PK	74.0	-25.3	1.54 H	253	33.3	15.4
6	11930.00	36.6 AV	54.0	-17.4	1.54 H	253	21.2	15.4
7	17895.00	61.9 PK	74.0	-12.1	1.93 H	293	33.4	28.5
8	17895.00	50.7 AV	54.0	-3.3	1.93 H	293	22.2	28.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.1 PK	88.2	-36.1	1.37 V	286	45.8	6.3
2	#5925.00	40.4 AV	68.2	-27.8	1.37 V	286	34.1	6.3
3	*5965.00	108.8 PK			1.37 V	286	102.6	6.2
4	*5965.00	97.5 AV			1.37 V	286	91.3	6.2
5	11930.00	50.7 PK	74.0	-23.3	1.77 V	331	35.3	15.4
6	11930.00	37.9 AV	54.0	-16.1	1.77 V	331	22.5	15.4
7	17895.00	62.9 PK	74.0	-11.1	3.06 V	291	34.4	28.5
8	17895.00	51.1 AV	54.0	-2.9	3.06 V	291	22.6	28.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	109.2 PK			1.00 H	353	102.6	6.6
2	*6165.00	98.2 AV			1.00 H	353	91.6	6.6
3	12330.00	48.5 PK	74.0	-25.5	1.53 H	240	33.3	15.2
4	12330.00	36.6 AV	54.0	-17.4	1.53 H	240	21.4	15.2
5	18495.00	61.7 PK	74.0	-12.3	1.97 H	306	66.6	-4.9
6	18495.00	50.5 AV	54.0	-3.5	1.97 H	306	55.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	108.8 PK			1.41 V	272	102.2	6.6
2	*6165.00	97.7 AV			1.41 V	272	91.1	6.6
3	12330.00	50.9 PK	74.0	-23.1	1.79 V	338	35.7	15.2
4	12330.00	38.5 AV	54.0	-15.5	1.79 V	338	23.3	15.2
5	18495.00	63.8 PK	74.0	-10.2	3.15 V	307	68.7	-4.9
6	18495.00	51.6 AV	54.0	-2.4	3.15 V	307	56.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.2 PK			1.01 H	58	101.6	7.6
2	*6405.00	98.3 AV			1.01 H	58	90.7	7.6
3	#12810.00	49.2 PK	88.2	-39.0	1.53 H	241	33.6	15.6
4	#12810.00	37.1 AV	68.2	-31.1	1.53 H	241	21.5	15.6
5	19215.00	61.2 PK	74.0	-12.8	1.99 H	308	65.6	-4.4
6	19215.00	50.2 AV	54.0	-3.8	1.99 H	308	54.6	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.7 PK			1.36 V	285	101.1	7.6
2	*6405.00	97.4 AV			1.36 V	285	89.8	7.6
3	#12810.00	51.4 PK	88.2	-36.8	1.82 V	346	35.8	15.6
4	#12810.00	39.0 AV	68.2	-29.2	1.82 V	346	23.4	15.6
5	19215.00	63.4 PK	74.0	-10.6	3.19 V	305	67.8	-4.4
6	19215.00	51.3 AV	54.0	-2.7	3.19 V	305	55.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.1 PK			1.01 H	10	102.3	7.8
2	*6445.00	98.6 AV			1.01 H	10	90.8	7.8
3	#12890.00	49.0 PK	88.2	-39.2	1.58 H	237	33.3	15.7
4	#12890.00	37.0 AV	68.2	-31.2	1.58 H	237	21.3	15.7
5	19335.00	61.4 PK	74.0	-12.6	1.92 H	314	65.2	-3.8
6	19335.00	50.1 AV	54.0	-3.9	1.92 H	314	53.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.5 PK			1.36 V	277	101.7	7.8
2	*6445.00	97.9 AV			1.36 V	277	90.1	7.8
3	#12890.00	51.1 PK	88.2	-37.1	1.75 V	334	35.4	15.7
4	#12890.00	38.3 AV	68.2	-29.9	1.75 V	334	22.6	15.7
5	19335.00	63.4 PK	74.0	-10.6	3.02 V	296	67.2	-3.8
6	19335.00	51.4 AV	54.0	-2.6	3.02 V	296	55.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.5 PK			1.00 H	257	101.4	8.1
2	*6485.00	98.5 AV			1.00 H	257	90.4	8.1
3	#12970.00	49.4 PK	88.2	-38.8	1.51 H	232	33.9	15.5
4	#12970.00	37.5 AV	68.2	-30.7	1.51 H	232	22.0	15.5
5	19455.00	61.8 PK	74.0	-12.2	1.95 H	317	65.1	-3.3
6	19455.00	50.5 AV	54.0	-3.5	1.95 H	317	53.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.6 PK			1.35 V	280	100.5	8.1
2	*6485.00	97.2 AV			1.35 V	280	89.1	8.1
3	#12970.00	51.3 PK	88.2	-36.9	1.77 V	338	35.8	15.5
4	#12970.00	39.1 AV	68.2	-29.1	1.77 V	338	23.6	15.5
5	19455.00	63.8 PK	74.0	-10.2	3.15 V	294	67.1	-3.3
6	19455.00	51.6 AV	54.0	-2.4	3.15 V	294	54.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	109.2 PK			1.13 H	49	100.8	8.4
2	*6525.00	98.1 AV			1.13 H	49	89.7	8.4
3	#13050.00	49.1 PK	88.2	-39.1	1.59 H	225	33.4	15.7
4	#13050.00	37.3 AV	68.2	-30.9	1.59 H	225	21.6	15.7
5	19575.00	60.9 PK	74.0	-13.1	1.97 H	304	64.5	-3.6
6	19575.00	49.9 AV	54.0	-4.1	1.97 H	304	53.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.9 PK			1.42 V	278	100.5	8.4
2	*6525.00	97.4 AV			1.42 V	278	89.0	8.4
3	#13050.00	51.4 PK	88.2	-36.8	1.80 V	330	35.7	15.7
4	#13050.00	38.6 AV	68.2	-29.6	1.80 V	330	22.9	15.7
5	19575.00	63.9 PK	74.0	-10.1	3.06 V	282	67.5	-3.6
6	19575.00	51.7 AV	54.0	-2.3	3.06 V	282	55.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.2 PK			1.03 H	352	101.5	8.7
2	*6565.00	98.2 AV			1.03 H	352	89.5	8.7
3	#13130.00	49.6 PK	88.2	-38.6	1.61 H	219	33.6	16.0
4	#13130.00	37.7 AV	68.2	-30.5	1.61 H	219	21.7	16.0
5	19695.00	60.4 PK	74.0	-13.6	1.97 H	319	64.3	-3.9
6	19695.00	49.6 AV	54.0	-4.4	1.97 H	319	53.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.1 PK			1.72 V	238	99.4	8.7
2	*6565.00	97.2 AV			1.72 V	238	88.5	8.7
3	#13130.00	50.7 PK	88.2	-37.5	1.77 V	335	34.7	16.0
4	#13130.00	38.2 AV	68.2	-30.0	1.77 V	335	22.2	16.0
5	19695.00	63.4 PK	74.0	-10.6	3.04 V	272	67.3	-3.9
6	19695.00	51.3 AV	54.0	-2.7	3.04 V	272	55.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.1 PK			1.01 H	240	101.3	8.8
2	*6725.00	98.5 AV			1.01 H	240	89.7	8.8
3	#13450.00	49.4 PK	88.2	-38.8	1.50 H	238	31.4	18.0
4	#13450.00	37.4 AV	68.2	-30.8	1.50 H	238	19.4	18.0
5	20175.00	61.5 PK	74.0	-12.5	1.89 H	326	65.1	-3.6
6	20175.00	50.4 AV	54.0	-3.6	1.89 H	326	54.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	108.7 PK			2.05 V	238	99.9	8.8
2	*6725.00	97.9 AV			2.05 V	238	89.1	8.8
3	#13450.00	50.9 PK	88.2	-37.3	1.86 V	341	32.9	18.0
4	#13450.00	38.3 AV	68.2	-29.9	1.86 V	341	20.3	18.0
5	20175.00	63.8 PK	74.0	-10.2	3.10 V	279	67.4	-3.6
6	20175.00	51.6 AV	54.0	-2.4	3.10 V	279	55.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.8 PK			1.04 H	325	101.6	9.2
2	*6845.00	98.6 AV			1.04 H	325	89.4	9.2
3	#13690.00	49.6 PK	88.2	-38.6	1.67 H	218	31.0	18.6
4	#13690.00	37.5 AV	68.2	-30.7	1.67 H	218	18.9	18.6
5	20535.00	60.8 PK	74.0	-13.2	1.92 H	307	64.0	-3.2
6	20535.00	49.9 AV	54.0	-4.1	1.92 H	307	53.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.8 PK			2.07 V	250	99.6	9.2
2	*6845.00	97.9 AV			2.07 V	250	88.7	9.2
3	#13690.00	51.6 PK	88.2	-36.6	1.80 V	319	33.0	18.6
4	#13690.00	38.8 AV	68.2	-29.4	1.80 V	319	20.2	18.6
5	20535.00	63.4 PK	74.0	-10.6	3.01 V	288	66.6	-3.2
6	20535.00	51.2 AV	54.0	-2.8	3.01 V	288	54.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.2 PK			1.01 H	237	100.0	9.2
2	*6885.00	98.1 AV			1.01 H	237	88.9	9.2
3	#13770.00	49.2 PK	88.2	-39.0	1.56 H	224	30.6	18.6
4	#13770.00	37.4 AV	68.2	-30.8	1.56 H	224	18.8	18.6
5	20655.00	60.4 PK	74.0	-13.6	1.95 H	329	63.5	-3.1
6	20655.00	49.3 AV	54.0	-4.7	1.95 H	329	52.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.1 PK			1.74 V	236	98.9	9.2
2	*6885.00	97.3 AV			1.74 V	236	88.1	9.2
3	#13770.00	51.5 PK	88.2	-36.7	1.76 V	326	32.9	18.6
4	#13770.00	38.5 AV	68.2	-29.7	1.76 V	326	19.9	18.6
5	20655.00	63.2 PK	74.0	-10.8	2.97 V	274	66.3	-3.1
6	20655.00	50.7 AV	54.0	-3.3	2.97 V	274	53.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.3 PK			1.02 H	336	98.4	9.9
2	*7005.00	98.1 AV			1.02 H	336	88.2	9.9
3	#14010.00	49.4 PK	88.2	-38.8	1.67 H	229	30.4	19.0
4	#14010.00	37.4 AV	68.2	-30.8	1.67 H	229	18.4	19.0
5	21015.00	61.2 PK	74.0	-12.8	1.94 H	303	64.1	-2.9
6	21015.00	50.3 AV	54.0	-3.7	1.94 H	303	53.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.4 PK			2.02 V	243	98.5	9.9
2	*7005.00	97.5 AV			2.02 V	243	87.6	9.9
3	#14010.00	51.1 PK	88.2	-37.1	1.84 V	349	32.1	19.0
4	#14010.00	38.3 AV	68.2	-29.9	1.84 V	349	19.3	19.0
5	21015.00	63.4 PK	74.0	-10.6	3.16 V	291	66.3	-2.9
6	21015.00	51.3 AV	54.0	-2.7	3.16 V	291	54.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.4 PK			1.16 H	83	98.7	10.7
2	*7085.00	98.7 AV			1.16 H	83	88.0	10.7
3	#7125.00	56.1 PK	88.2	-32.1	1.16 H	83	45.2	10.9
4	#7125.00	45.2 AV	68.2	-23.0	1.16 H	83	34.3	10.9
5	7250.00	55.1 PK	74.0	-18.9	1.16 H	83	44.3	10.8
6	7250.00	42.9 AV	54.0	-11.1	1.16 H	83	32.1	10.8
7	#14170.00	49.9 PK	88.2	-38.3	1.72 H	237	30.4	19.5
8	#14170.00	37.7 AV	68.2	-30.5	1.72 H	237	18.2	19.5
9	21255.00	61.5 PK	74.0	-12.5	1.89 H	313	64.3	-2.8
10	21255.00	50.5 AV	54.0	-3.5	1.89 H	313	53.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.9 PK			2.07 V	264	98.2	10.7
2	*7085.00	98.2 AV			2.07 V	264	87.5	10.7
3	#7125.00	55.9 PK	88.2	-32.3	2.07 V	264	45.0	10.9
4	#7125.00	43.8 AV	68.2	-24.4	2.07 V	264	32.9	10.9
5	7250.00	54.2 PK	74.0	-19.8	2.07 V	264	43.4	10.8
6	7250.00	42.8 AV	54.0	-11.2	2.07 V	264	32.0	10.8
7	#14170.00	51.5 PK	88.2	-36.7	1.82 V	321	32.0	19.5
8	#14170.00	38.5 AV	68.2	-29.7	1.82 V	321	19.0	19.5
9	21255.00	63.9 PK	74.0	-10.1	2.92 V	289	66.7	-2.8
10	21255.00	51.2 AV	54.0	-2.8	2.92 V	289	54.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.9 PK	88.2	-30.3	1.07 H	342	51.6	6.3
2	#5925.00	44.5 AV	68.2	-23.7	1.07 H	342	38.2	6.3
3	*5985.00	110.1 PK			1.07 H	342	103.9	6.2
4	*5985.00	98.2 AV			1.07 H	342	92.0	6.2
5	11970.00	49.5 PK	74.0	-24.5	1.66 H	228	34.0	15.5
6	11970.00	37.7 AV	54.0	-16.3	1.66 H	228	22.2	15.5
7	17955.00	61.3 PK	74.0	-12.7	1.97 H	299	31.3	30.0
8	17955.00	50.7 AV	54.0	-3.3	1.97 H	299	20.7	30.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.3 PK	88.2	-34.9	1.01 V	277	47.0	6.3
2	#5925.00	41.3 AV	68.2	-26.9	1.01 V	277	35.0	6.3
3	*5985.00	108.5 PK			1.01 V	277	102.3	6.2
4	*5985.00	97.5 AV			1.01 V	277	91.3	6.2
5	11970.00	51.1 PK	74.0	-22.9	1.82 V	329	35.6	15.5
6	11970.00	38.1 AV	54.0	-15.9	1.82 V	329	22.6	15.5
7	17955.00	63.5 PK	74.0	-10.5	2.93 V	292	33.5	30.0
8	17955.00	50.8 AV	54.0	-3.2	2.93 V	292	20.8	30.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	109.6 PK			1.36 H	44	103.1	6.5
2	*6145.00	98.1 AV			1.36 H	44	91.6	6.5
3	12290.00	49.6 PK	74.0	-24.4	1.60 H	226	34.3	15.3
4	12290.00	37.8 AV	54.0	-16.2	1.60 H	226	22.5	15.3
5	18435.00	60.5 PK	74.0	-13.5	1.93 H	323	65.6	-5.1
6	18435.00	49.2 AV	54.0	-4.8	1.93 H	323	54.3	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.4 PK			1.02 V	277	101.9	6.5
2	*6145.00	97.8 AV			1.02 V	277	91.3	6.5
3	12290.00	51.3 PK	74.0	-22.7	1.77 V	323	36.0	15.3
4	12290.00	38.2 AV	54.0	-15.8	1.77 V	323	22.9	15.3
5	18435.00	63.3 PK	74.0	-10.7	2.90 V	303	68.4	-5.1
6	18435.00	50.4 AV	54.0	-3.6	2.90 V	303	55.5	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.8 PK			1.05 H	343	102.4	7.4
2	*6385.00	98.2 AV			1.05 H	343	90.8	7.4
3	#12770.00	49.3 PK	88.2	-38.9	1.58 H	242	33.9	15.4
4	#12770.00	37.7 AV	68.2	-30.5	1.58 H	242	22.3	15.4
5	19155.00	60.5 PK	74.0	-13.5	1.90 H	333	65.1	-4.6
6	19155.00	49.3 AV	54.0	-4.7	1.90 H	333	53.9	-4.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.3 PK			1.09 V	280	100.9	7.4
2	*6385.00	97.7 AV			1.09 V	280	90.3	7.4
3	#12770.00	51.4 PK	88.2	-36.8	1.80 V	311	36.0	15.4
4	#12770.00	38.4 AV	68.2	-29.8	1.80 V	311	23.0	15.4
5	19155.00	63.6 PK	74.0	-10.4	2.96 V	297	68.2	-4.6
6	19155.00	50.8 AV	54.0	-3.2	2.96 V	297	55.4	-4.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.6 PK			1.00 H	353	100.6	8.0
2	*6465.00	97.6 AV			1.00 H	353	89.6	8.0
3	#12930.00	50.3 PK	88.2	-37.9	1.75 H	231	34.7	15.6
4	#12930.00	37.9 AV	68.2	-30.3	1.75 H	231	22.3	15.6
5	19395.00	60.9 PK	74.0	-13.1	1.86 H	307	64.4	-3.5
6	19395.00	50.1 AV	54.0	-3.9	1.86 H	307	53.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.2 PK			1.00 V	289	100.2	8.0
2	*6465.00	97.2 AV			1.00 V	289	89.2	8.0
3	#12930.00	50.9 PK	88.2	-37.3	1.87 V	341	35.3	15.6
4	#12930.00	38.1 AV	68.2	-30.1	1.87 V	341	22.5	15.6
5	19395.00	63.5 PK	74.0	-10.5	3.13 V	295	67.0	-3.5
6	19395.00	51.6 AV	54.0	-2.4	3.13 V	295	55.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.2 PK			1.30 H	39	100.7	8.5
2	*6545.00	98.2 AV			1.30 H	39	89.7	8.5
3	#13090.00	49.8 PK	88.2	-38.4	1.71 H	230	34.0	15.8
4	#13090.00	37.5 AV	68.2	-30.7	1.71 H	230	21.7	15.8
5	19635.00	60.5 PK	74.0	-13.5	1.88 H	307	64.3	-3.8
6	19635.00	49.9 AV	54.0	-4.1	1.88 H	307	53.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.1 PK			1.06 V	266	99.6	8.5
2	*6545.00	97.4 AV			1.06 V	266	88.9	8.5
3	#13090.00	50.8 PK	88.2	-37.4	1.86 V	336	35.0	15.8
4	#13090.00	37.9 AV	68.2	-30.3	1.86 V	336	22.1	15.8
5	19635.00	63.1 PK	74.0	-10.9	3.12 V	295	66.9	-3.8
6	19635.00	51.2 AV	54.0	-2.8	3.12 V	295	55.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.1 PK			1.12 H	237	100.3	8.8
2	*6625.00	98.5 AV			1.12 H	237	89.7	8.8
3	13250.00	49.4 PK	74.0	-24.6	1.69 H	249	32.6	16.8
4	13250.00	37.3 AV	54.0	-16.7	1.69 H	249	20.5	16.8
5	19875.00	61.2 PK	74.0	-12.8	1.89 H	318	65.0	-3.8
6	19875.00	50.1 AV	54.0	-3.9	1.89 H	318	53.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	108.3 PK			1.07 V	274	99.5	8.8
2	*6625.00	97.7 AV			1.07 V	274	88.9	8.8
3	13250.00	50.4 PK	74.0	-23.6	1.83 V	337	33.6	16.8
4	13250.00	37.7 AV	54.0	-16.3	1.83 V	337	20.9	16.8
5	19875.00	63.1 PK	74.0	-10.9	3.17 V	303	66.9	-3.8
6	19875.00	51.1 AV	54.0	-2.9	3.17 V	303	54.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.3 PK			1.09 H	242	101.5	8.8
2	*6705.00	97.9 AV			1.09 H	242	89.1	8.8
3	#13410.00	49.7 PK	88.2	-38.5	1.65 H	244	31.9	17.8
4	#13410.00	37.4 AV	68.2	-30.8	1.65 H	244	19.6	17.8
5	20115.00	61.4 PK	74.0	-12.6	1.93 H	323	65.1	-3.7
6	20115.00	50.6 AV	54.0	-3.4	1.93 H	323	54.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.7 PK			1.03 V	270	98.9	8.8
2	*6705.00	97.5 AV			1.03 V	270	88.7	8.8
3	#13410.00	51.5 PK	88.2	-36.7	1.76 V	308	33.7	17.8
4	#13410.00	38.3 AV	68.2	-29.9	1.76 V	308	20.5	17.8
5	20115.00	63.6 PK	74.0	-10.4	2.93 V	295	67.3	-3.7
6	20115.00	51.1 AV	54.0	-2.9	2.93 V	295	54.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.3 PK			1.01 H	2	100.5	8.8
2	*6785.00	98.1 AV			1.01 H	2	89.3	8.8
3	#13570.00	49.5 PK	88.2	-38.7	1.68 H	244	30.9	18.6
4	#13570.00	37.6 AV	68.2	-30.6	1.68 H	244	19.0	18.6
5	20355.00	61.2 PK	74.0	-12.8	1.88 H	315	64.3	-3.1
6	20355.00	49.9 AV	54.0	-4.1	1.88 H	315	53.0	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.0 PK			1.00 V	267	99.2	8.8
2	*6785.00	97.5 AV			1.00 V	267	88.7	8.8
3	#13570.00	51.8 PK	88.2	-36.4	1.73 V	312	33.2	18.6
4	#13570.00	38.6 AV	68.2	-29.6	1.73 V	312	20.0	18.6
5	20355.00	63.6 PK	74.0	-10.4	2.92 V	279	66.7	-3.1
6	20355.00	50.9 AV	54.0	-3.1	2.92 V	279	54.0	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.7 PK			1.02 H	323	101.5	9.2
2	*6865.00	98.2 AV			1.02 H	323	89.0	9.2
3	#13730.00	49.1 PK	88.2	-39.1	1.68 H	255	30.6	18.5
4	#13730.00	37.2 AV	68.2	-31.0	1.68 H	255	18.7	18.5
5	20595.00	60.9 PK	74.0	-13.1	1.92 H	302	64.2	-3.3
6	20595.00	49.7 AV	54.0	-4.3	1.92 H	302	53.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.3 PK			1.01 V	249	98.1	9.2
2	*6865.00	97.3 AV			1.01 V	249	88.1	9.2
3	#13730.00	50.8 PK	88.2	-37.4	1.88 V	325	32.3	18.5
4	#13730.00	37.8 AV	68.2	-30.4	1.88 V	325	19.3	18.5
5	20595.00	63.2 PK	74.0	-10.8	3.10 V	288	66.5	-3.3
6	20595.00	51.6 AV	54.0	-2.4	3.10 V	288	54.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.2 PK			1.11 H	265	98.2	10.0
2	*6945.00	98.1 AV			1.11 H	265	88.1	10.0
3	#13890.00	48.6 PK	88.2	-39.6	1.73 H	244	30.0	18.6
4	#13890.00	36.9 AV	68.2	-31.3	1.73 H	244	18.3	18.6
5	20835.00	60.7 PK	74.0	-13.3	1.88 H	293	63.4	-2.7
6	20835.00	49.4 AV	54.0	-4.6	1.88 H	293	52.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.3 PK			1.02 V	259	97.3	10.0
2	*6945.00	97.2 AV			1.02 V	259	87.2	10.0
3	#13890.00	50.7 PK	88.2	-37.5	1.84 V	324	32.1	18.6
4	#13890.00	37.5 AV	68.2	-30.7	1.84 V	324	18.9	18.6
5	20835.00	62.9 PK	74.0	-11.1	3.08 V	295	65.6	-2.7
6	20835.00	51.4 AV	54.0	-2.6	3.08 V	295	54.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.2 PK			1.02 H	268	99.3	9.9
2	*7025.00	97.8 AV			1.02 H	268	87.9	9.9
3	#7125.00	56.5 PK	88.2	-31.7	1.02 H	268	45.6	10.9
4	#7125.00	43.6 AV	68.2	-24.6	1.02 H	268	32.7	10.9
5	7250.00	55.1 PK	74.0	-18.9	1.02 H	268	44.3	10.8
6	7250.00	43.1 AV	54.0	-10.9	1.02 H	268	32.3	10.8
7	#14050.00	49.2 PK	88.2	-39.0	1.67 H	239	30.2	19.0
8	#14050.00	37.3 AV	68.2	-30.9	1.67 H	239	18.3	19.0
9	21075.00	61.5 PK	74.0	-12.5	1.84 H	300	64.5	-3.0
10	21075.00	50.4 AV	54.0	-3.6	1.84 H	300	53.4	-3.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.6 PK			1.21 V	250	98.7	9.9
2	*7025.00	97.4 AV			1.21 V	250	87.5	9.9
3	#7125.00	55.9 PK	88.2	-32.3	1.21 V	250	45.0	10.9
4	#7125.00	43.4 AV	68.2	-24.8	1.21 V	250	32.5	10.9
5	7250.00	54.8 PK	74.0	-19.2	1.21 V	250	44.0	10.8
6	7250.00	42.9 AV	54.0	-11.1	1.21 V	250	32.1	10.8
7	#14050.00	51.3 PK	88.2	-36.9	1.90 V	324	32.3	19.0
8	#14050.00	38.1 AV	68.2	-30.1	1.90 V	324	19.1	19.0
9	21075.00	63.5 PK	74.0	-10.5	3.13 V	293	66.5	-3.0
10	21075.00	51.9 AV	54.0	-2.1	3.13 V	293	54.9	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.3 PK	88.2	-31.9	1.12 H	343	50.0	6.3
2	#5925.00	46.8 AV	68.2	-21.4	1.12 H	343	40.5	6.3
3	*6025.00	109.4 PK			1.12 H	343	103.3	6.1
4	*6025.00	98.4 AV			1.12 H	343	92.3	6.1
5	12050.00	48.8 PK	74.0	-25.2	1.65 H	255	33.2	15.6
6	12050.00	36.9 AV	54.0	-17.1	1.65 H	255	21.3	15.6
7	18075.00	60.7 PK	74.0	-13.3	1.96 H	316	65.8	-5.1
8	18075.00	49.6 AV	54.0	-4.4	1.96 H	316	54.7	-5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.9 PK	88.2	-27.3	1.14 V	255	54.6	6.3
2	#5925.00	50.2 AV	68.2	-18.0	1.14 V	255	43.9	6.3
3	*6025.00	109.1 PK			1.14 V	255	103.0	6.1
4	*6025.00	97.6 AV			1.14 V	255	91.5	6.1
5	12050.00	50.8 PK	74.0	-23.2	1.91 V	322	35.2	15.6
6	12050.00	37.9 AV	54.0	-16.1	1.91 V	322	22.3	15.6
7	18075.00	63.3 PK	74.0	-10.7	3.15 V	303	68.4	-5.1
8	18075.00	51.7 AV	54.0	-2.3	3.15 V	303	56.8	-5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.8 PK			1.00 H	341	102.0	6.8
2	*6185.00	98.8 AV			1.00 H	341	92.0	6.8
3	12370.00	49.4 PK	74.0	-24.6	1.72 H	246	34.4	15.0
4	12370.00	37.2 AV	54.0	-16.8	1.72 H	246	22.2	15.0
5	18555.00	61.6 PK	74.0	-12.4	1.89 H	314	66.5	-4.9
6	18555.00	50.3 AV	54.0	-3.7	1.89 H	314	55.2	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.7 PK			1.14 V	243	102.9	6.8
2	*6185.00	98.1 AV			1.14 V	243	91.3	6.8
3	12370.00	50.8 PK	74.0	-23.2	1.83 V	325	35.8	15.0
4	12370.00	38.2 AV	54.0	-15.8	1.83 V	325	23.2	15.0
5	18555.00	63.3 PK	74.0	-10.7	3.19 V	305	68.2	-4.9
6	18555.00	51.5 AV	54.0	-2.5	3.19 V	305	56.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.8 PK			1.08 H	350	102.4	7.4
2	*6345.00	98.7 AV			1.08 H	350	91.3	7.4
3	12690.00	49.0 PK	74.0	-25.0	1.77 H	256	34.1	14.9
4	12690.00	36.9 AV	54.0	-17.1	1.77 H	256	22.0	14.9
5	19035.00	61.7 PK	74.0	-12.3	1.86 H	310	66.4	-4.7
6	19035.00	50.3 AV	54.0	-3.7	1.86 H	310	55.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.4 PK			1.10 V	242	102.0	7.4
2	*6345.00	97.9 AV			1.10 V	242	90.5	7.4
3	12690.00	51.1 PK	74.0	-22.9	1.84 V	315	36.2	14.9
4	12690.00	38.6 AV	54.0	-15.4	1.84 V	315	23.7	14.9
5	19035.00	63.3 PK	74.0	-10.7	3.18 V	318	68.0	-4.7
6	19035.00	51.5 AV	54.0	-2.5	3.18 V	318	56.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.8 PK			1.00 H	348	101.6	8.2
2	*6505.00	98.8 AV			1.00 H	348	90.6	8.2
3	#13010.00	48.9 PK	88.2	-39.3	1.72 H	265	33.4	15.5
4	#13010.00	36.8 AV	68.2	-31.4	1.72 H	265	21.3	15.5
5	19515.00	61.8 PK	74.0	-12.2	1.80 H	321	65.0	-3.2
6	19515.00	50.4 AV	54.0	-3.6	1.80 H	321	53.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.9 PK			1.08 V	240	100.7	8.2
2	*6505.00	97.7 AV			1.08 V	240	89.5	8.2
3	#13010.00	50.7 PK	88.2	-37.5	1.87 V	325	35.2	15.5
4	#13010.00	38.4 AV	68.2	-29.8	1.87 V	325	22.9	15.5
5	19515.00	63.5 PK	74.0	-10.5	3.21 V	313	66.7	-3.2
6	19515.00	51.6 AV	54.0	-2.4	3.21 V	313	54.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.5 PK			1.02 H	353	100.6	8.9
2	*6665.00	98.7 AV			1.02 H	353	89.8	8.9
3	13330.00	48.9 PK	74.0	-25.1	1.67 H	267	31.5	17.4
4	13330.00	36.9 AV	54.0	-17.1	1.67 H	267	19.5	17.4
5	19995.00	62.3 PK	74.0	-11.7	1.77 H	318	66.4	-4.1
6	19995.00	50.7 AV	54.0	-3.3	1.77 H	318	54.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.9 PK			1.07 V	264	100.0	8.9
2	*6665.00	97.6 AV			1.07 V	264	88.7	8.9
3	13330.00	50.6 PK	74.0	-23.4	1.85 V	328	33.2	17.4
4	13330.00	38.1 AV	54.0	-15.9	1.85 V	328	20.7	17.4
5	19995.00	63.8 PK	74.0	-10.2	3.27 V	307	67.9	-4.1
6	19995.00	51.7 AV	54.0	-2.3	3.27 V	307	55.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.3 PK			1.01 H	241	100.3	9.0
2	*6825.00	98.5 AV			1.01 H	241	89.5	9.0
3	#13650.00	48.5 PK	88.2	-39.7	1.76 H	256	29.9	18.6
4	#13650.00	36.4 AV	68.2	-31.8	1.76 H	256	17.8	18.6
5	20475.00	61.5 PK	74.0	-12.5	1.84 H	323	64.5	-3.0
6	20475.00	50.3 AV	54.0	-3.7	1.84 H	323	53.3	-3.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.0 PK			1.10 V	250	100.0	9.0
2	*6825.00	97.7 AV			1.10 V	250	88.7	9.0
3	#13650.00	50.5 PK	88.2	-37.7	1.86 V	316	31.9	18.6
4	#13650.00	37.9 AV	68.2	-30.3	1.86 V	316	19.3	18.6
5	20475.00	63.2 PK	74.0	-10.8	3.26 V	307	66.2	-3.0
6	20475.00	51.5 AV	54.0	-2.5	3.26 V	307	54.5	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.8 PK			1.11 H	262	98.8	10.0
2	*6985.00	98.1 AV			1.11 H	262	88.1	10.0
3	#7125.00	67.1 PK	88.2	-21.1	1.11 H	262	56.2	10.9
4	#7125.00	53.5 AV	68.2	-14.7	1.11 H	262	42.6	10.9
5	7250.00	54.9 PK	74.0	-19.1	1.11 H	262	44.1	10.8
6	7250.00	43.7 AV	54.0	-10.3	1.11 H	262	32.9	10.8
7	#13970.00	49.5 PK	88.2	-38.7	1.73 H	255	30.5	19.0
8	#13970.00	37.3 AV	68.2	-30.9	1.73 H	255	18.3	19.0
9	20955.00	61.5 PK	74.0	-12.5	1.87 H	317	64.2	-2.7
10	20955.00	50.1 AV	54.0	-3.9	1.87 H	317	52.8	-2.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.4 PK			1.04 V	249	98.4	10.0
2	*6985.00	97.3 AV			1.04 V	249	87.3	10.0
3	#7125.00	59.4 PK	88.2	-28.8	1.04 V	249	48.5	10.9
4	#7125.00	47.1 AV	68.2	-21.1	1.04 V	249	36.2	10.9
5	7250.00	55.1 PK	74.0	-18.9	1.04 V	249	44.3	10.8
6	7250.00	43.4 AV	54.0	-10.6	1.04 V	249	32.6	10.8
7	#13970.00	50.5 PK	88.2	-37.7	1.88 V	328	31.5	19.0
8	#13970.00	38.2 AV	68.2	-30.0	1.88 V	328	19.2	19.0
9	20955.00	63.1 PK	74.0	-10.9	3.15 V	318	65.8	-2.7
10	20955.00	51.4 AV	54.0	-2.6	3.15 V	318	54.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.3 PK	88.2	-22.9	1.07 H	348	59.0	6.3
2	#5925.00	51.1 AV	68.2	-17.1	1.07 H	348	44.8	6.3
3	*6105.00	107.8 PK			1.07 H	348	101.5	6.3
4	*6105.00	97.2 AV			1.07 H	348	90.9	6.3
5	12210.00	49.3 PK	74.0	-24.7	1.77 H	261	33.8	15.5
6	12210.00	37.4 AV	54.0	-16.6	1.77 H	261	21.9	15.5
7	18315.00	61.8 PK	74.0	-12.2	1.82 H	325	67.0	-5.2
8	18315.00	50.3 AV	54.0	-3.7	1.82 H	325	55.5	-5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.2 PK	88.2	-27.0	1.04 V	275	54.9	6.3
2	#5925.00	48.7 AV	68.2	-19.5	1.04 V	275	42.4	6.3
3	*6105.00	106.3 PK			1.04 V	275	100.0	6.3
4	*6105.00	96.5 AV			1.04 V	275	90.2	6.3
5	12210.00	50.0 PK	74.0	-24.0	1.83 V	330	34.5	15.5
6	12210.00	37.8 AV	54.0	-16.2	1.83 V	330	22.3	15.5
7	18315.00	62.8 PK	74.0	-11.2	3.20 V	327	68.0	-5.2
8	18315.00	51.0 AV	54.0	-3.0	3.20 V	327	56.2	-5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	106.9 PK			1.06 H	344	99.8	7.1
2	*6265.00	96.8 AV			1.06 H	344	89.7	7.1
3	12530.00	49.2 PK	74.0	-24.8	1.74 H	264	34.5	14.7
4	12530.00	37.2 AV	54.0	-16.8	1.74 H	264	22.5	14.7
5	18795.00	61.2 PK	74.0	-12.8	1.90 H	331	66.0	-4.8
6	18795.00	49.7 AV	54.0	-4.3	1.90 H	331	54.5	-4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.9 PK			1.01 V	277	98.8	7.1
2	*6265.00	96.4 AV			1.01 V	277	89.3	7.1
3	12530.00	50.6 PK	74.0	-23.4	1.89 V	317	35.9	14.7
4	12530.00	37.9 AV	54.0	-16.1	1.89 V	317	23.2	14.7
5	18795.00	62.9 PK	74.0	-11.1	3.26 V	318	67.7	-4.8
6	18795.00	51.3 AV	54.0	-2.7	3.26 V	318	56.1	-4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.8 PK			1.01 H	243	101.1	7.7
2	*6425.00	97.2 AV			1.01 H	243	89.5	7.7
3	#12850.00	49.4 PK	88.2	-38.8	1.69 H	271	33.8	15.6
4	#12850.00	37.2 AV	68.2	-31.0	1.69 H	271	21.6	15.6
5	19275.00	61.6 PK	74.0	-12.4	1.87 H	320	65.8	-4.2
6	19275.00	50.1 AV	54.0	-3.9	1.87 H	320	54.3	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.5 PK			1.02 V	286	98.8	7.7
2	*6425.00	96.7 AV			1.02 V	286	89.0	7.7
3	#12850.00	50.4 PK	88.2	-37.8	1.84 V	317	34.8	15.6
4	#12850.00	38.1 AV	68.2	-30.1	1.84 V	317	22.5	15.6
5	19275.00	62.9 PK	74.0	-11.1	3.19 V	336	67.1	-4.2
6	19275.00	51.2 AV	54.0	-2.8	3.19 V	336	55.4	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	109.4 PK			1.12 H	351	100.7	8.7
2	*6585.00	97.6 AV			1.12 H	351	88.9	8.7
3	#13170.00	49.9 PK	88.2	-38.3	1.67 H	282	33.8	16.1
4	#13170.00	37.5 AV	68.2	-30.7	1.67 H	282	21.4	16.1
5	19755.00	61.5 PK	74.0	-12.5	1.91 H	314	65.5	-4.0
6	19755.00	49.9 AV	54.0	-4.1	1.91 H	314	53.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.6 PK			1.07 V	272	97.9	8.7
2	*6585.00	96.8 AV			1.07 V	272	88.1	8.7
3	#13170.00	50.4 PK	88.2	-37.8	1.80 V	322	34.3	16.1
4	#13170.00	38.2 AV	68.2	-30.0	1.80 V	322	22.1	16.1
5	19755.00	62.6 PK	74.0	-11.4	3.22 V	338	66.6	-4.0
6	19755.00	50.8 AV	54.0	-3.2	3.22 V	338	54.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.4 PK			1.06 H	239	98.6	8.8
2	*6745.00	97.4 AV			1.06 H	239	88.6	8.8
3	#13490.00	49.4 PK	88.2	-38.8	1.68 H	294	31.1	18.3
4	#13490.00	37.2 AV	68.2	-31.0	1.68 H	294	18.9	18.3
5	20235.00	61.6 PK	74.0	-12.4	1.93 H	323	64.9	-3.3
6	20235.00	50.2 AV	54.0	-3.8	1.93 H	323	53.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.1 PK			1.09 V	280	97.3	8.8
2	*6745.00	96.4 AV			1.09 V	280	87.6	8.8
3	#13490.00	49.9 PK	88.2	-38.3	1.85 V	329	31.6	18.3
4	#13490.00	37.7 AV	68.2	-30.5	1.85 V	329	19.4	18.3
5	20235.00	63.1 PK	74.0	-10.9	3.23 V	332	66.4	-3.3
6	20235.00	51.4 AV	54.0	-2.6	3.23 V	332	54.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	108.2 PK			1.00 H	358	98.9	9.3
2	*6905.00	97.2 AV			1.00 H	358	87.9	9.3
3	#7125.00	64.3 PK	88.2	-23.9	1.00 H	358	53.4	10.9
4	#7125.00	48.6 AV	68.2	-19.6	1.00 H	358	37.7	10.9
5	7250.00	59.6 PK	74.0	-14.4	1.00 H	358	48.8	10.8
6	7250.00	45.8 AV	54.0	-8.2	1.00 H	358	35.0	10.8
7	#13810.00	49.7 PK	88.2	-38.5	1.73 H	286	31.3	18.4
8	#13810.00	37.3 AV	68.2	-30.9	1.73 H	286	18.9	18.4
9	20715.00	61.1 PK	74.0	-12.9	1.98 H	311	64.0	-2.9
10	20715.00	49.9 AV	54.0	-4.1	1.98 H	311	52.8	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.5 PK			1.03 V	257	98.2	9.3
2	*6905.00	96.6 AV			1.03 V	257	87.3	9.3
3	#7125.00	63.5 PK	88.2	-24.7	1.03 V	257	52.6	10.9
4	#7125.00	48.5 AV	68.2	-19.7	1.03 V	257	37.6	10.9
5	7250.00	57.3 PK	74.0	-16.7	1.03 V	257	46.5	10.8
6	7250.00	45.1 AV	54.0	-8.9	1.03 V	257	34.3	10.8
7	#13810.00	50.4 PK	88.2	-37.8	1.79 V	306	32.0	18.4
8	#13810.00	38.4 AV	68.2	-29.8	1.79 V	306	20.0	18.4
9	20715.00	62.5 PK	74.0	-11.5	3.20 V	324	65.4	-2.9
10	20715.00	50.9 AV	54.0	-3.1	3.20 V	324	53.8	-2.9

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

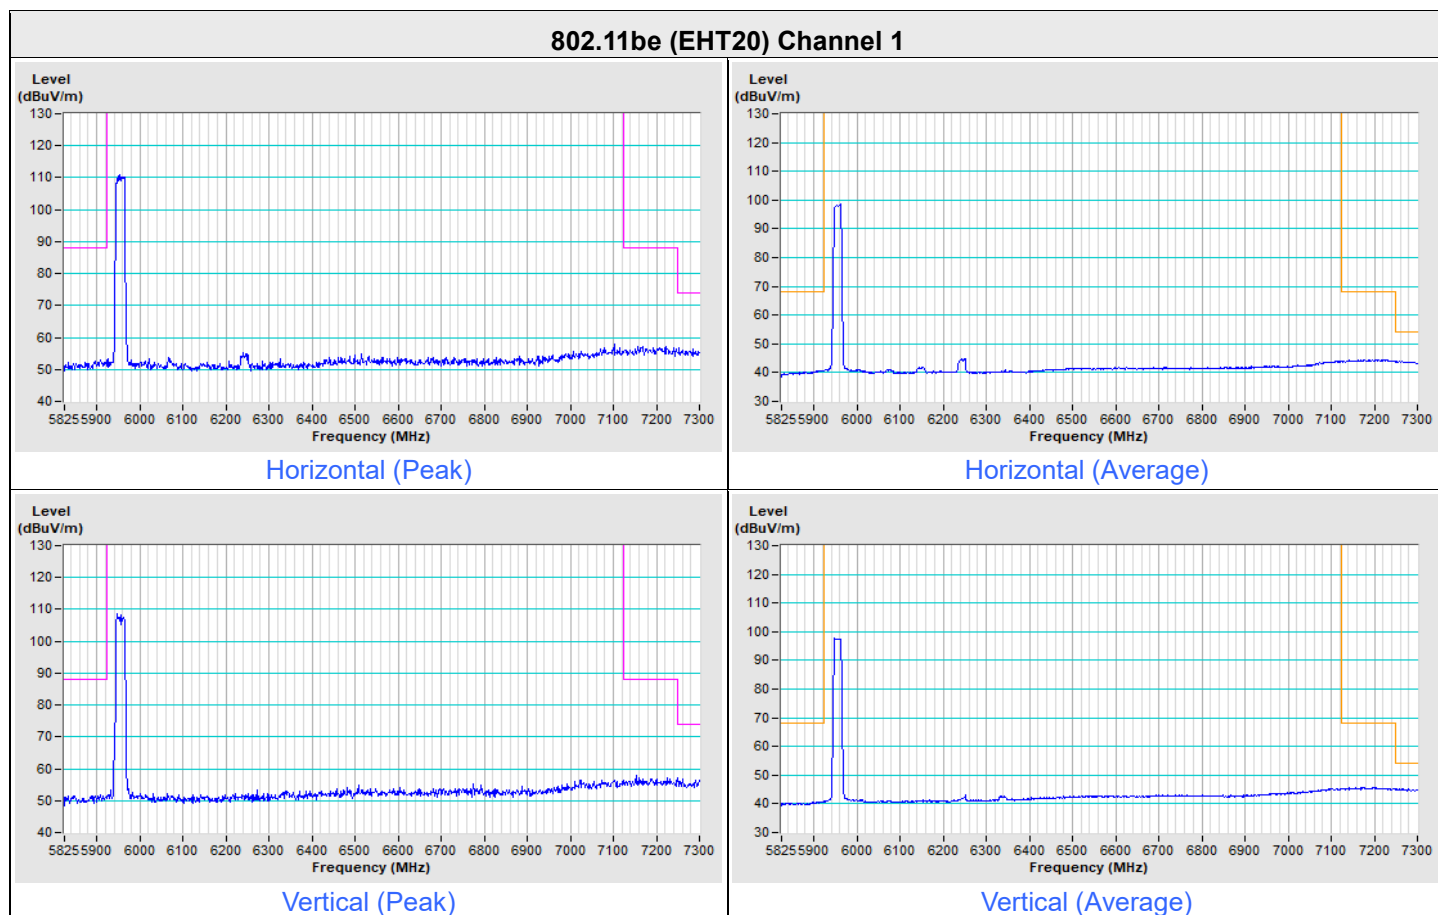

802.11be (EHT20) Channel 233

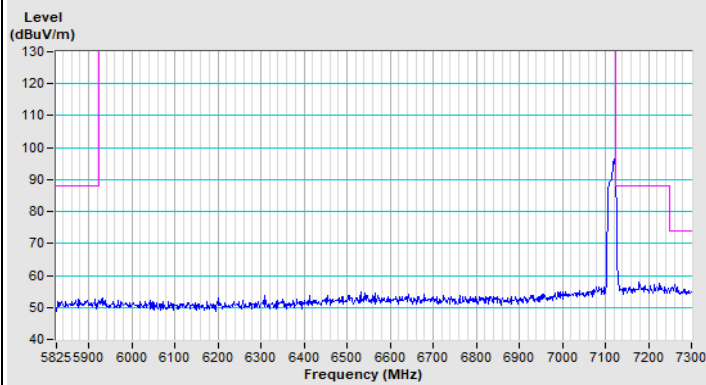


Horizontal (Peak)

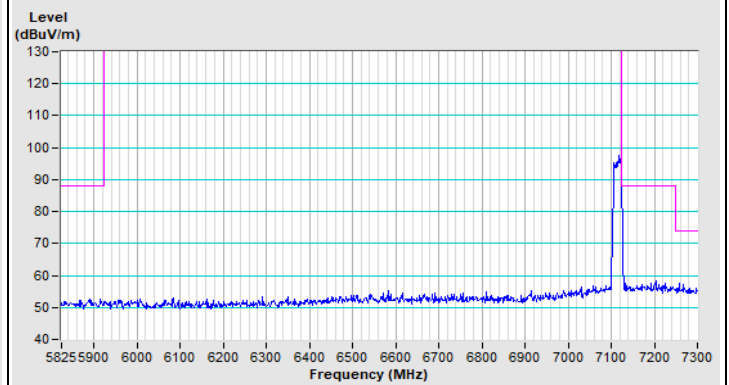


Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233

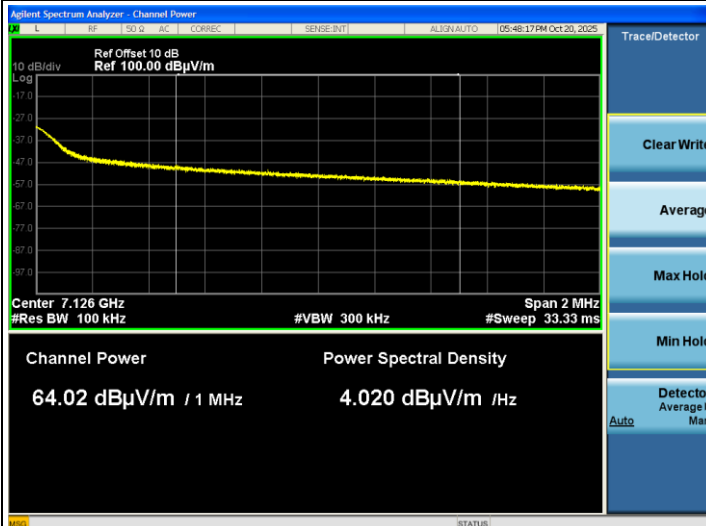


Horizontal (Average)

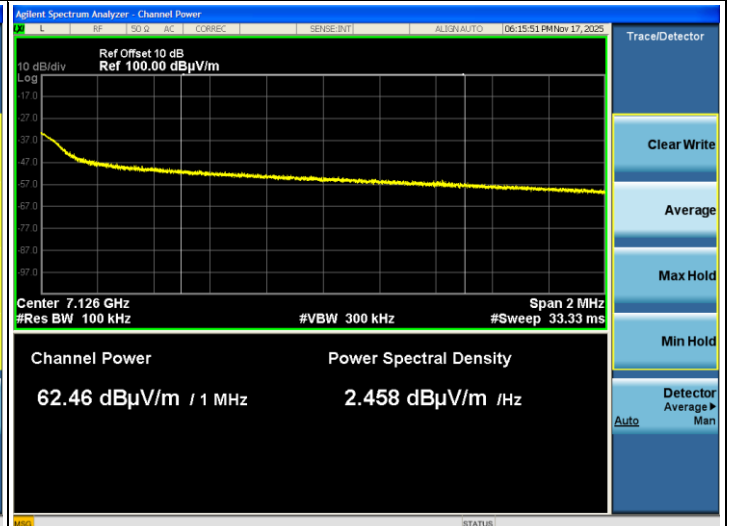


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

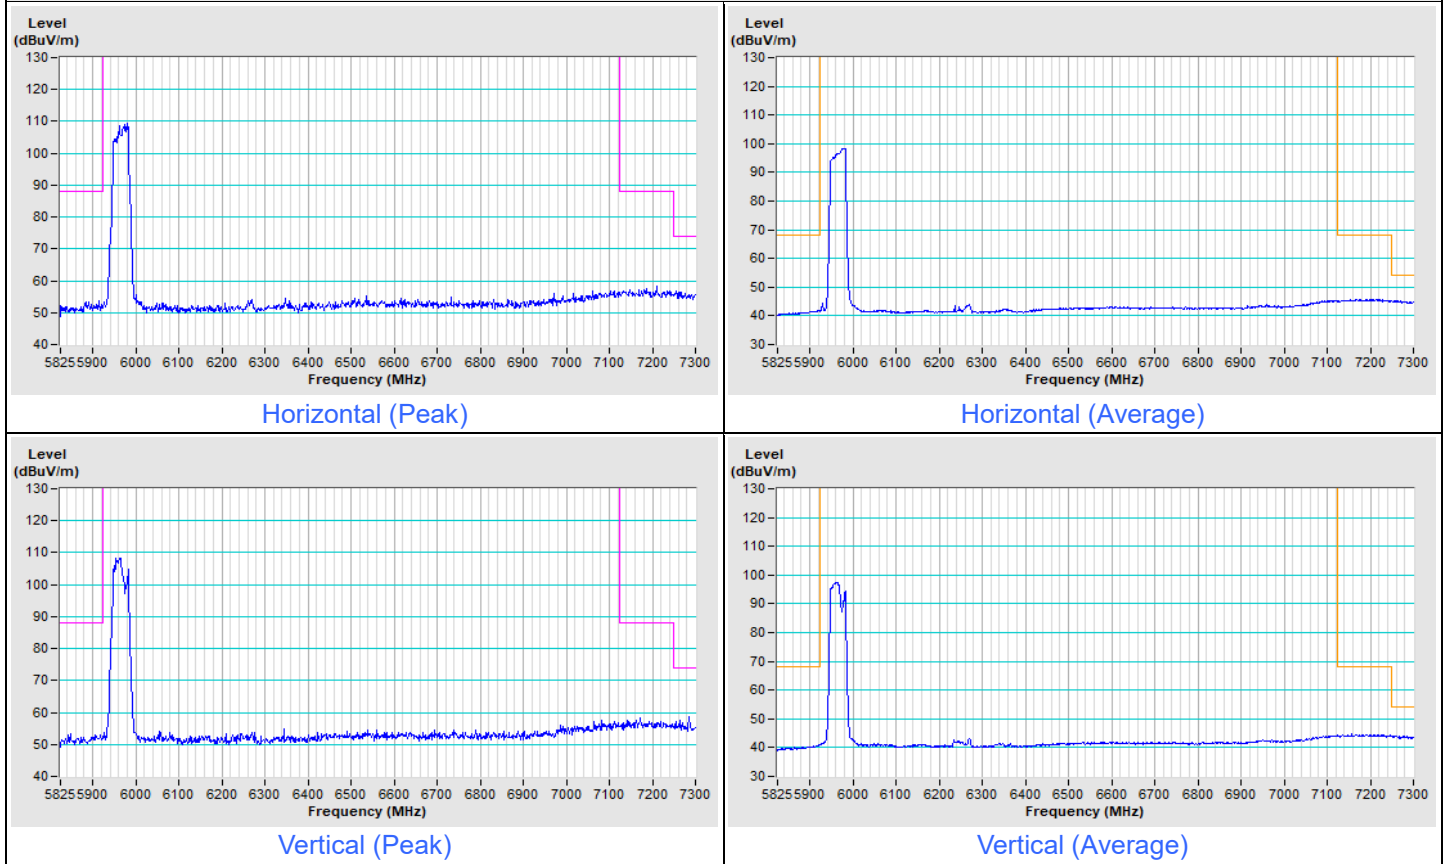


802.11be (EHT40) Channel 227

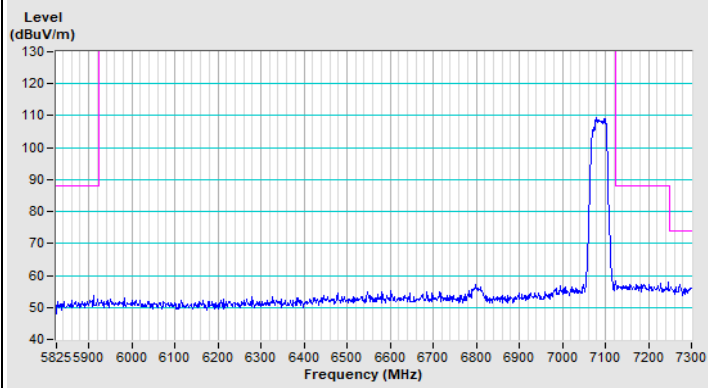


Horizontal (Peak)

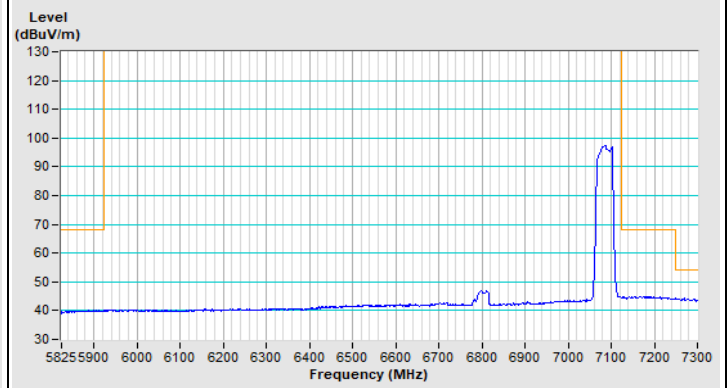

Horizontal (Average)

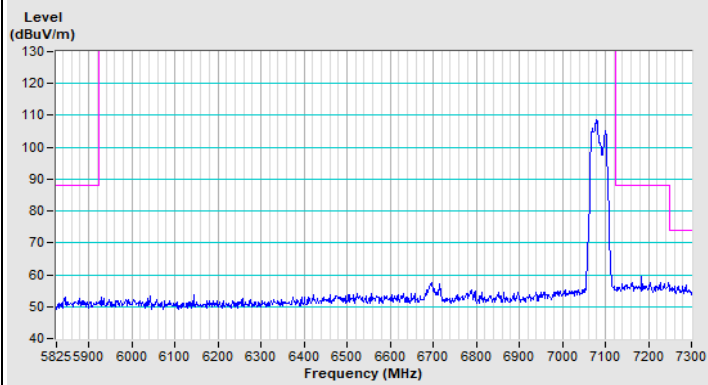


Vertical (Peak)

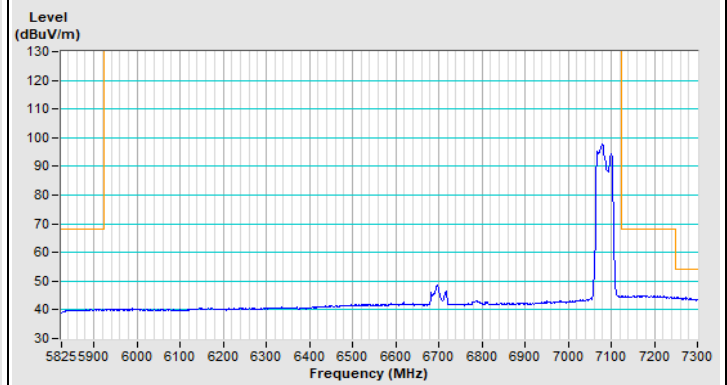


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT80) Channel 7

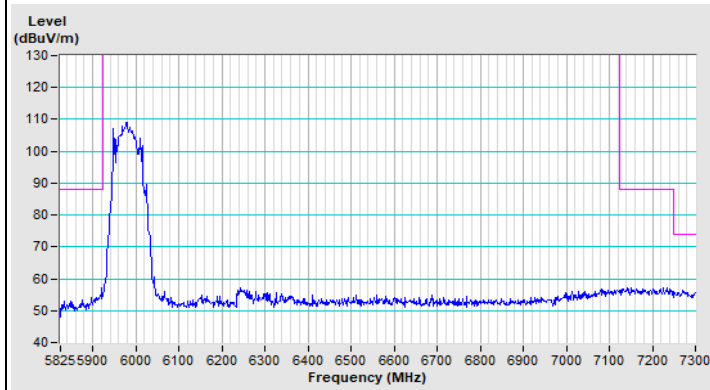


Horizontal (Peak)

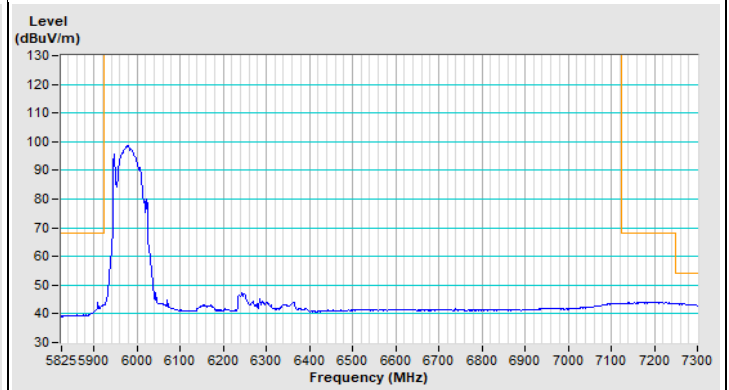


Horizontal (Average)

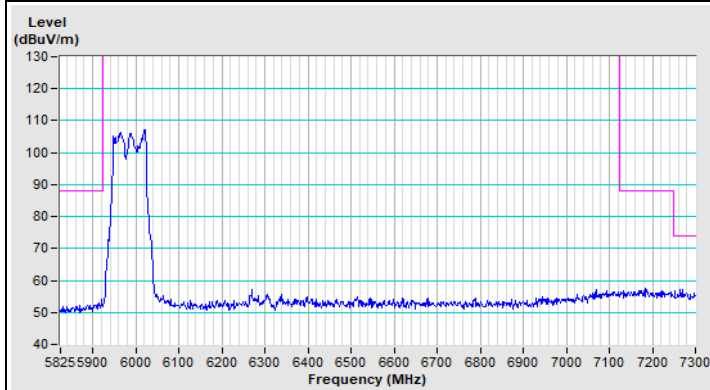


Vertical (Peak)

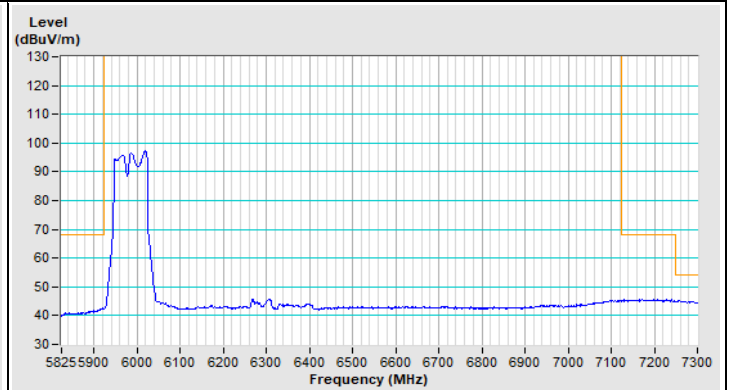


Vertical (Average)

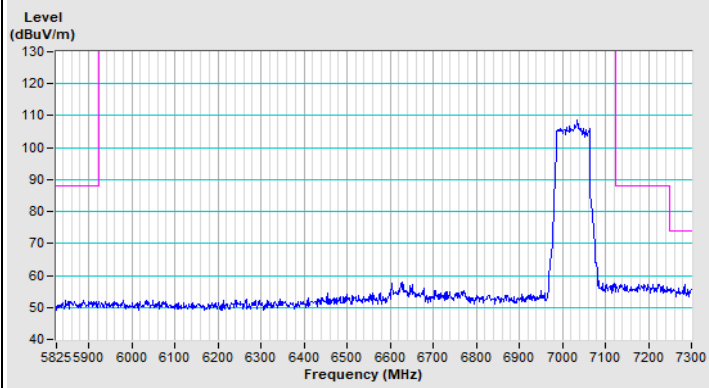802.11be (EHT80) Channel 215


Horizontal (Peak)

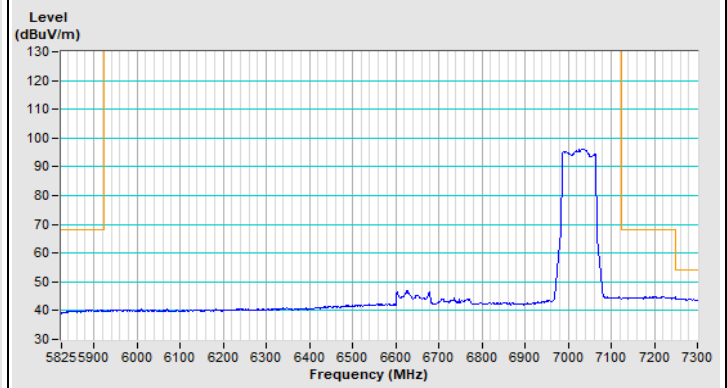

Horizontal (Average)

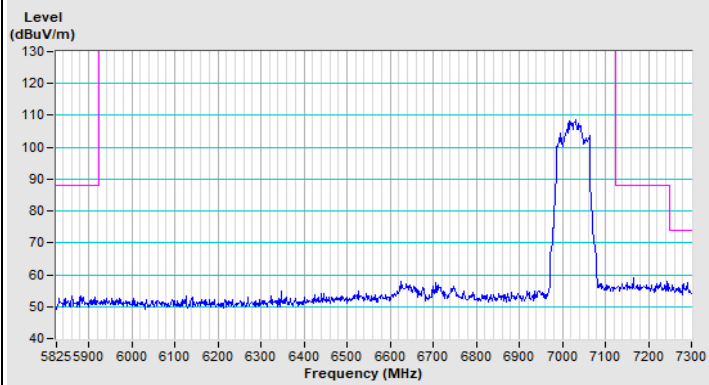


Vertical (Peak)

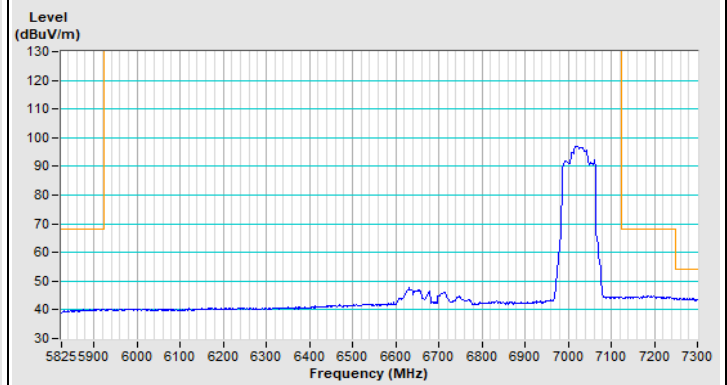


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11be (EHT160) Channel 15

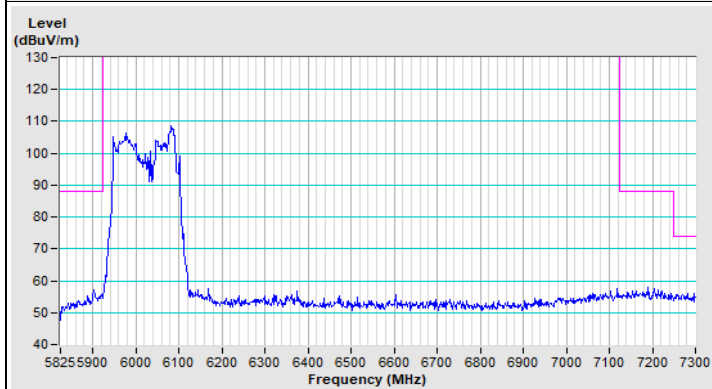


Horizontal (Peak)

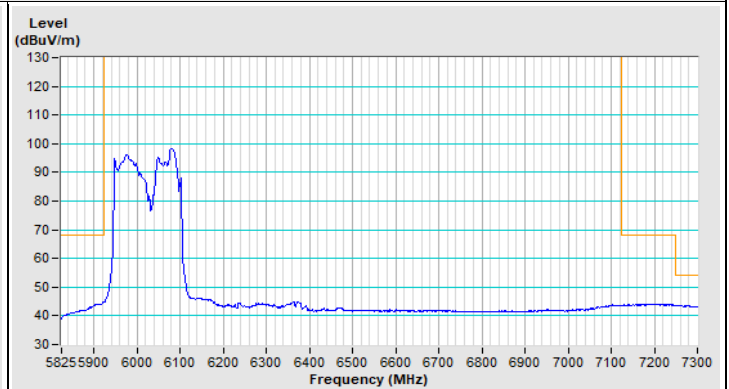

Horizontal (Average)

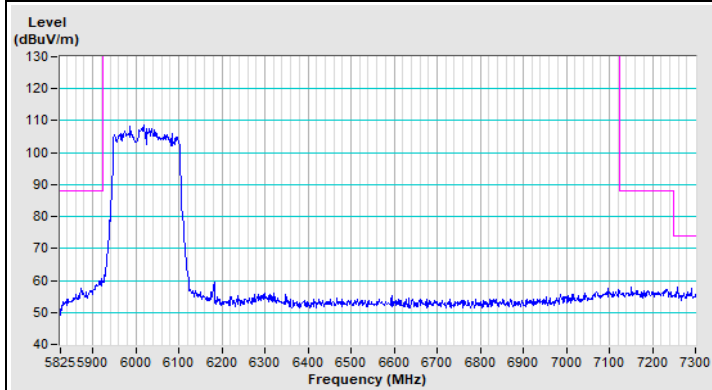


Vertical (Peak)

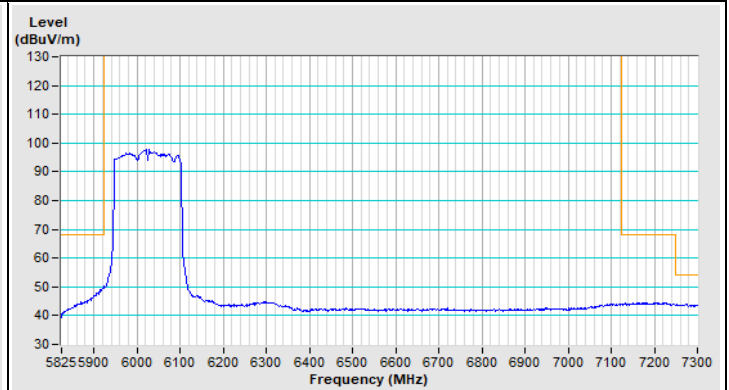


Vertical (Average)


802.11be (EHT160) Channel 207

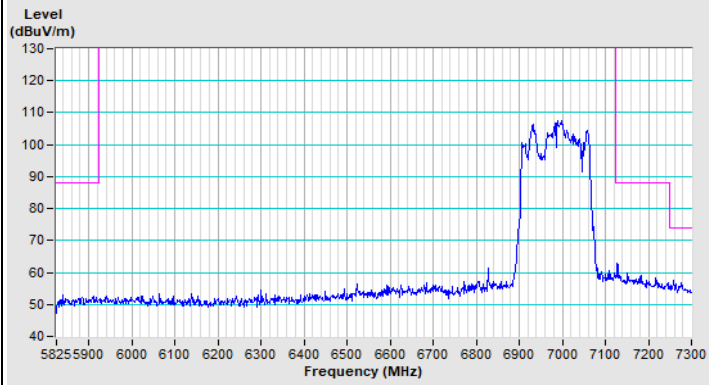


Horizontal (Peak)

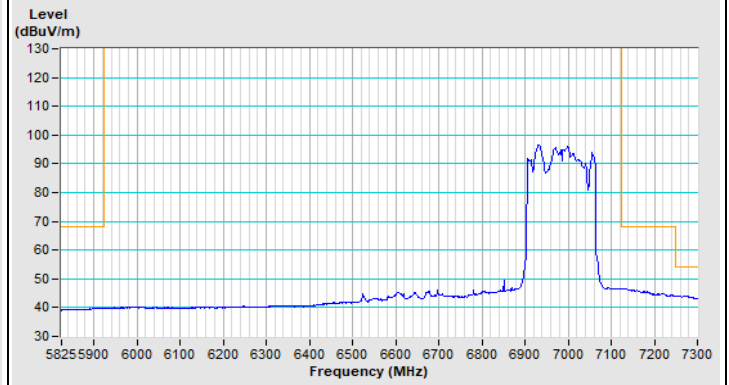

Horizontal (Average)

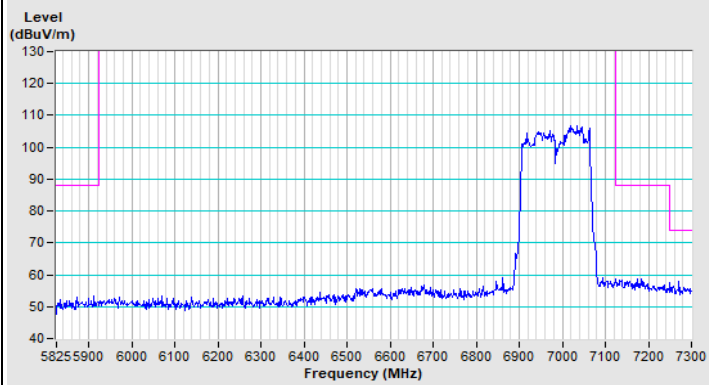


Vertical (Peak)

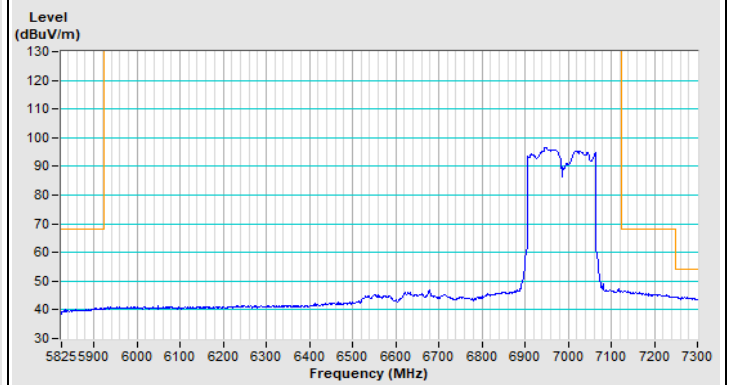


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---

802.11be (EHT320) Channel 31

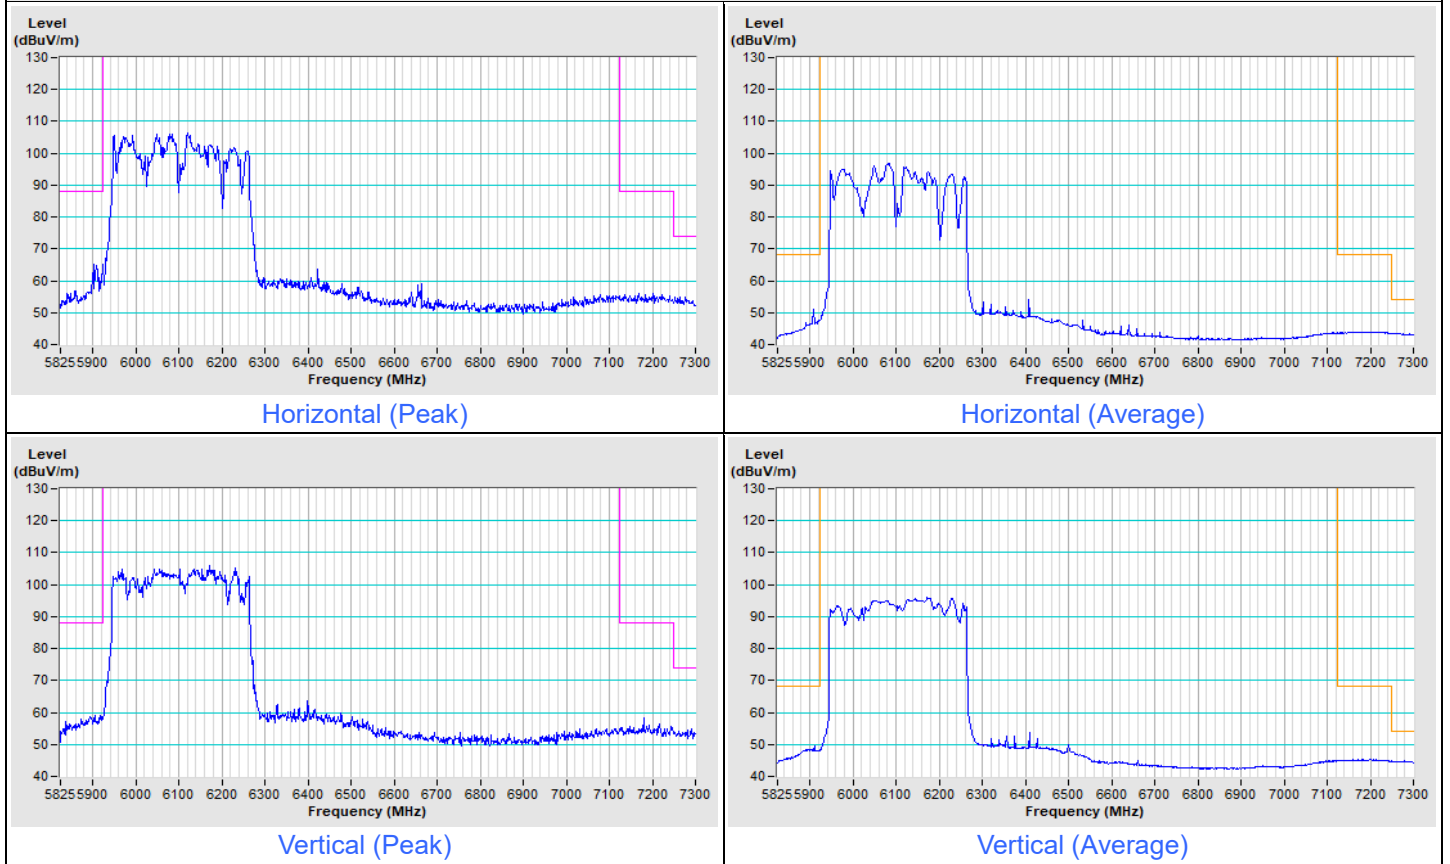


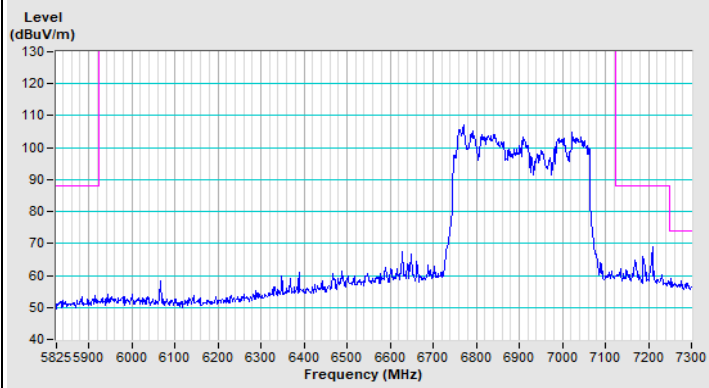802.11be (EHT320) Channel 191


Horizontal (Peak)

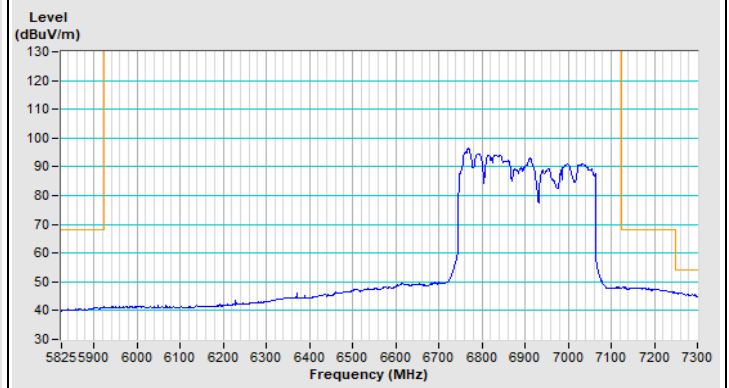

Horizontal (Average)

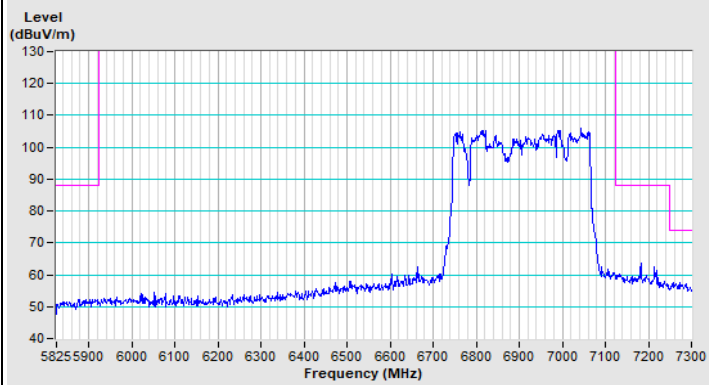

Vertical (Peak)

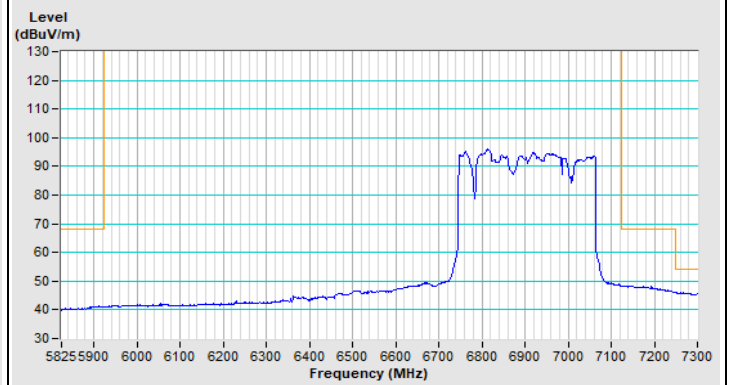

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---