

802.11be (EHT80) Punctured by 40 MHz NSS4

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
42	5210	78.72	78.24	78.24	78.24
58	5290	78.48	78.24	78.48	78.24
106	5530	78.72	78.24	78.24	78.24
122	5610	78.24	78.48	78.24	78.24
138 (U-NII-2C)	5690	74.12	74.12	74.12	74.12
138 (U-NII-3)	5690	4.12	4.12	4.12	4.12
155	5775	78.24	78.24	78.24	78.48

802.11be (EHT160) Punctured by 40 MHz NSS4

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	79.20	79.20	79.20	78.72
50 (U-NII-2A)	5250	78.72	78.72	79.20	78.72
114	5570	157.92	157.92	157.92	157.92


802.11be (EHT160) Punctured by 60 MHz NSS4

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	79.20	79.68	79.20	79.20
50 (U-NII-2A)	5250	79.20	79.20	79.20	79.20
114	5570	158.40	158.40	157.92	158.40


802.11be (EHT160) Punctured by 80 MHz NSS4

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	79.68	79.68	79.20	79.68
50 (U-NII-2A)	5250	79.68	79.68	79.20	79.68
114	5570	158.88	158.88	158.88	158.40


Spectrum Plot of Maximum Value

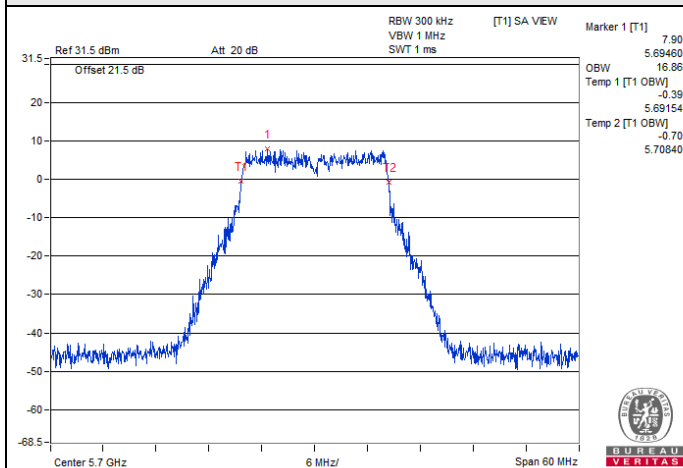


802.11a CDD / Chain 0 : CH 140

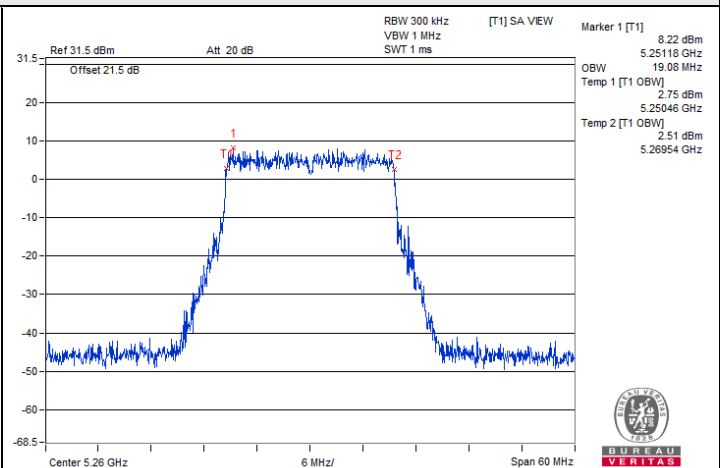


802.11be (EHT20) CDD / Chain 0 : CH 52

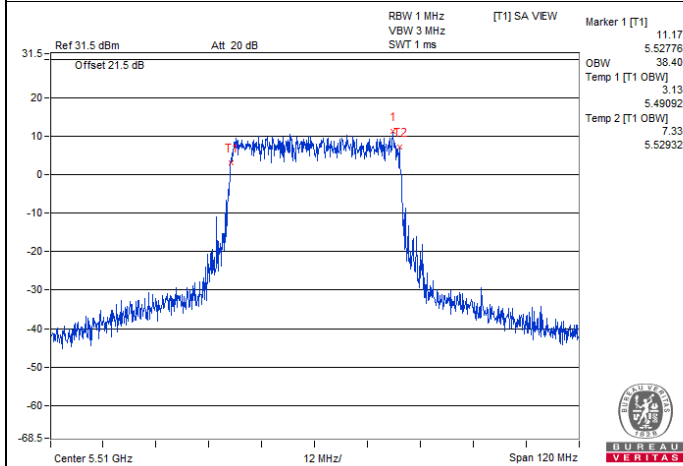


802.11be (EHT40) CDD / Chain 0 : CH 102

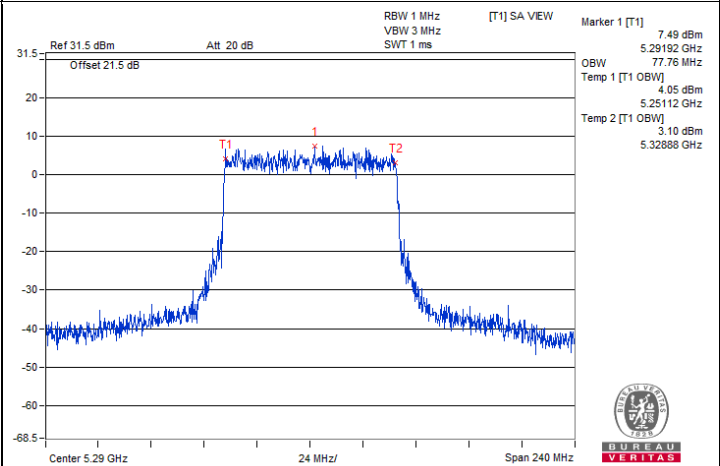

802.11be (EHT80) CDD / Chain 0 : CH 58

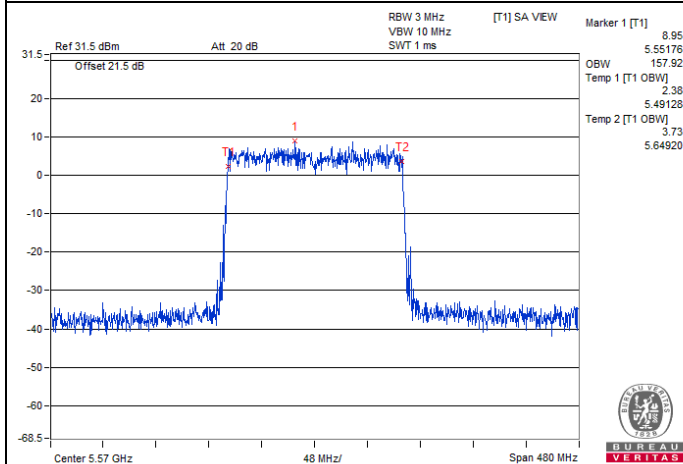


802.11be (EHT160) CDD / Chain 2 : CH 114

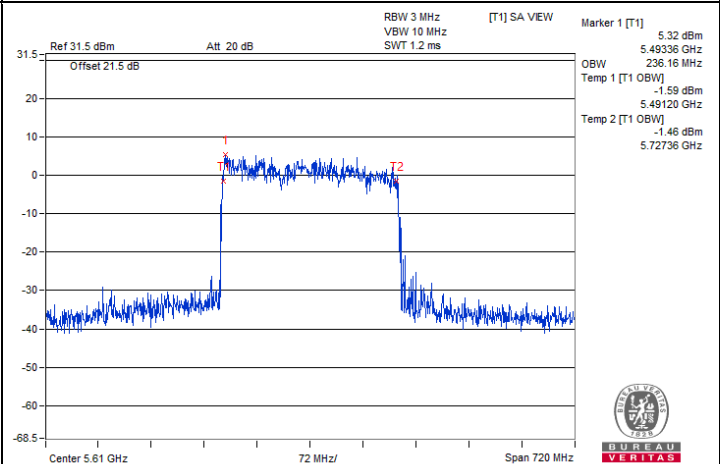


802.11be (EHT240) CDD / Chain 3 : CH 114+138 (U-NII-2C)


Spectrum Plot of Maximum Value

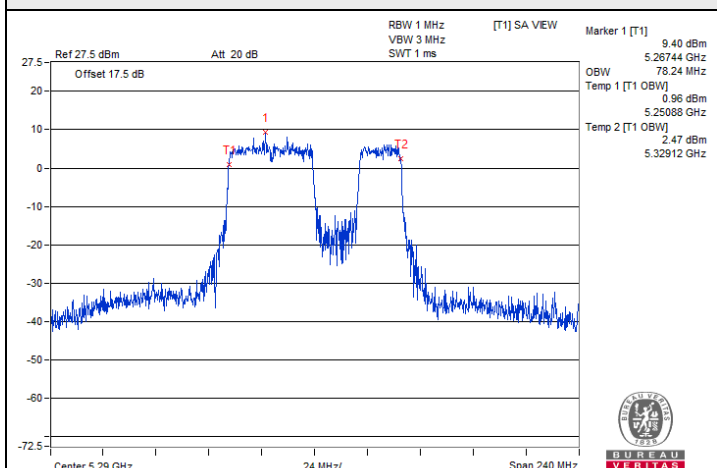


802.11be (EHT80) Punctured by 20 MHz NSS4 / Chain 3 :
CH 58

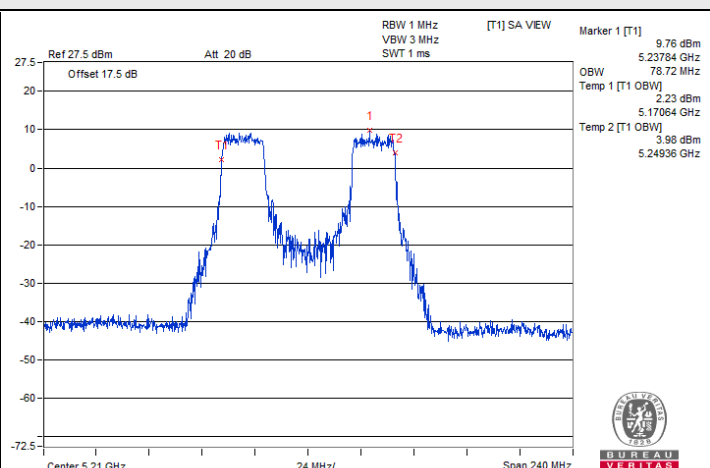


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0 :
CH 42

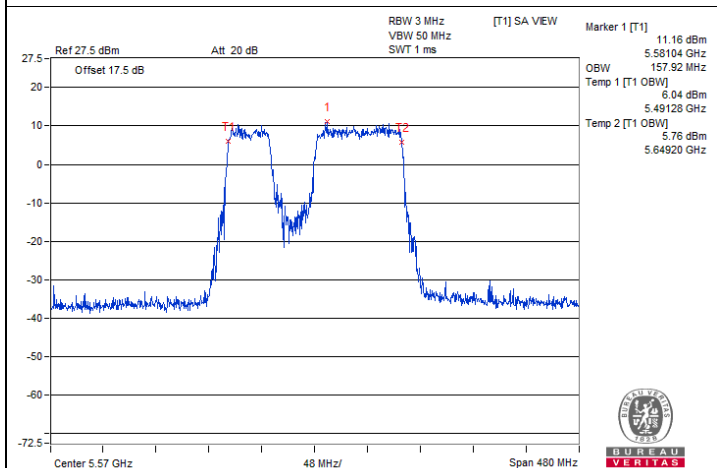

802.11be (EHT160) Punctured by 40 MHz NSS4 / Chain 0 :
CH 114

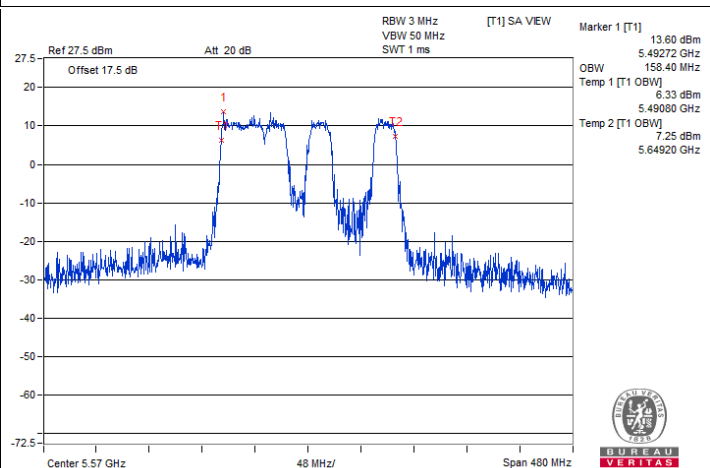


802.11be (EHT160) Punctured by 60 MHz NSS4 / Chain 0 :
CH 114

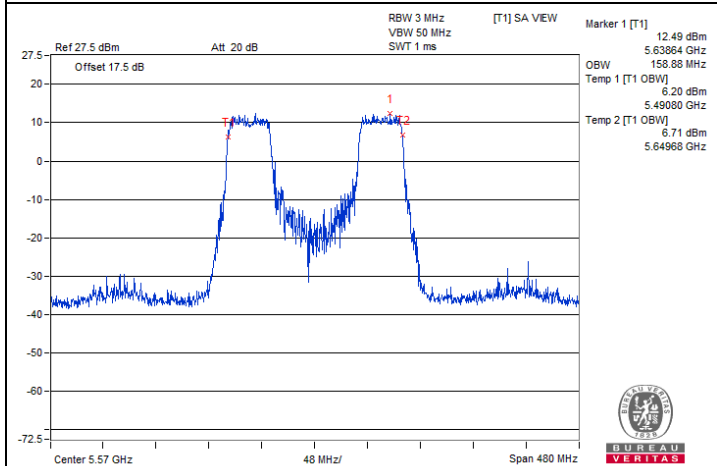


802.11be (EHT160) Punctured by 80 MHz NSS4 / Chain 0 :
CH 114


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

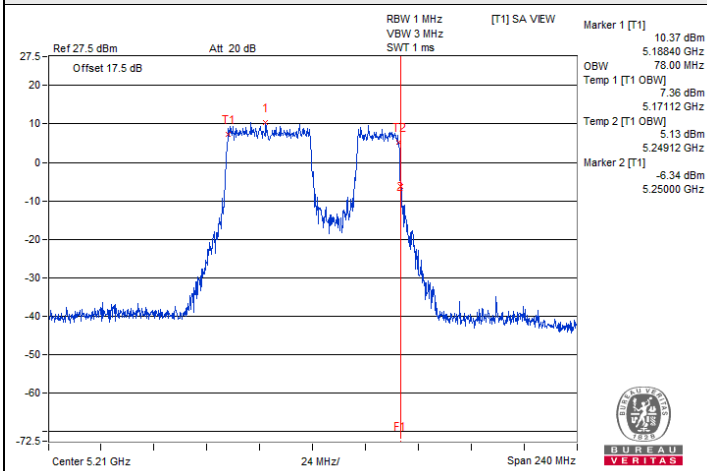


802.11be (EHT80) Punctured by 20 MHz NSS4 / Chain 0 :
CH 42

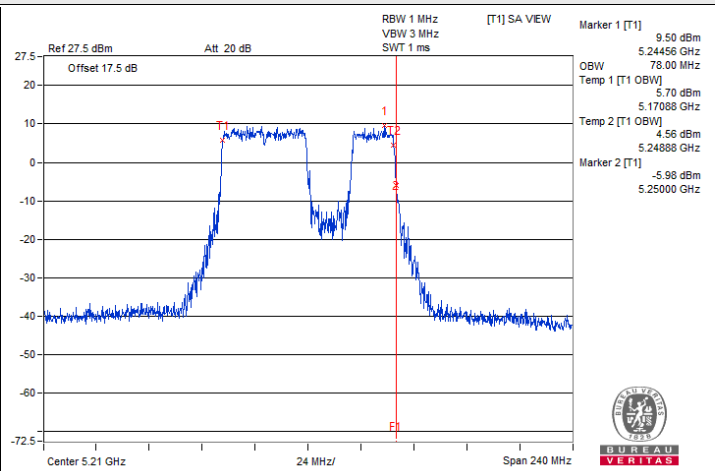


802.11be (EHT80) Punctured by 20 MHz NSS4 / Chain 1 :
CH 42

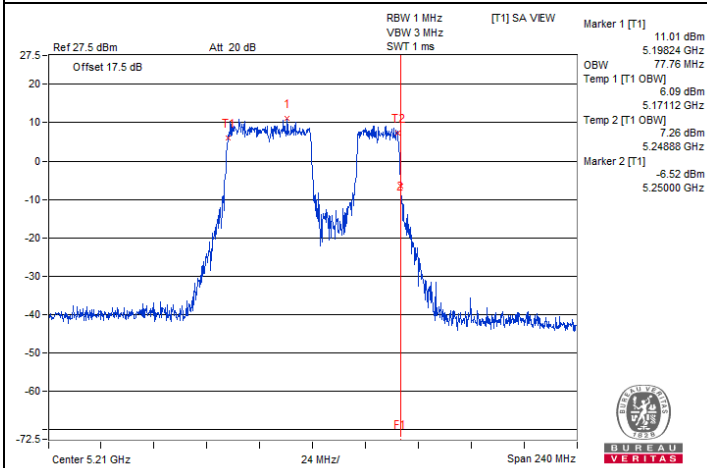


802.11be (EHT80) Punctured by 20 MHz NSS4 / Chain 2 :
CH 42

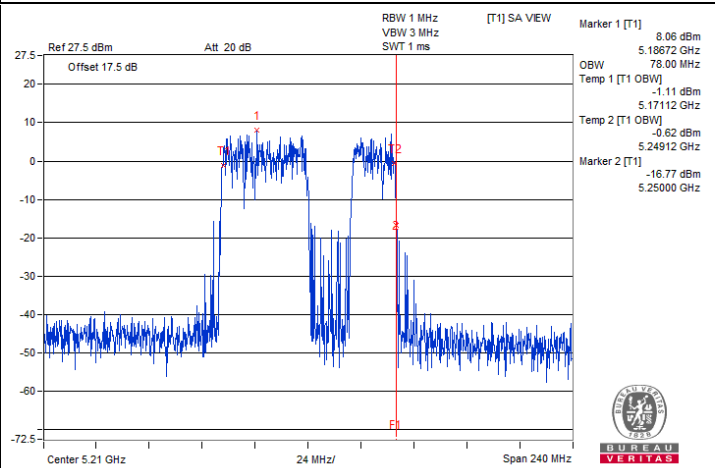

802.11be (EHT80) Punctured by 20 MHz NSS4 / Chain 3 :
CH 42


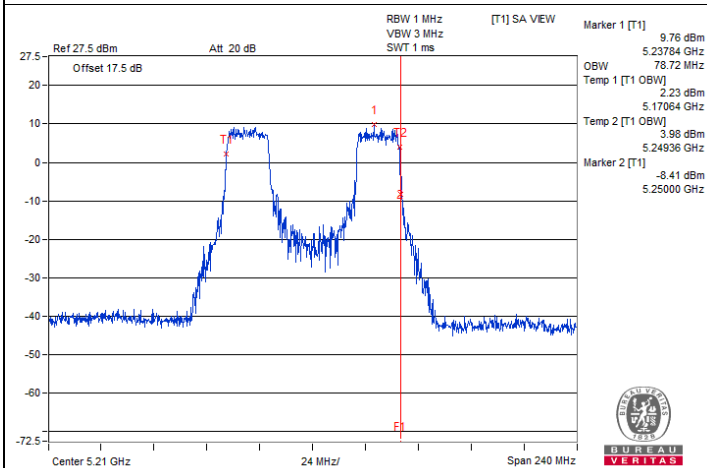


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0 :
CH 42




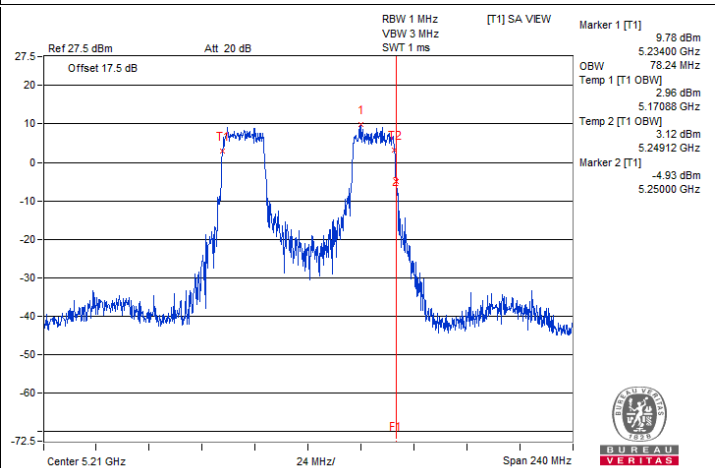


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 1 :
CH 42


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

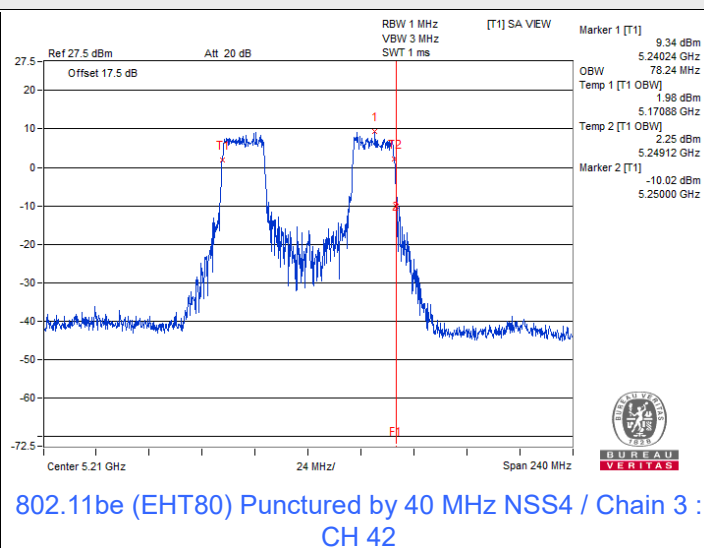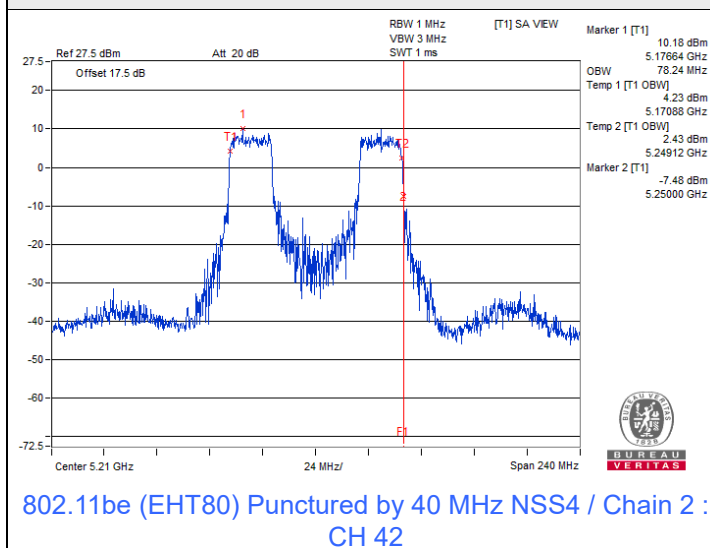


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

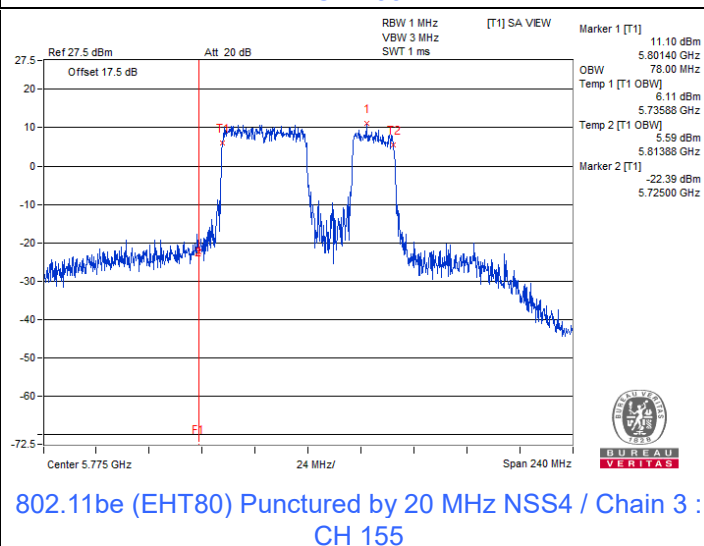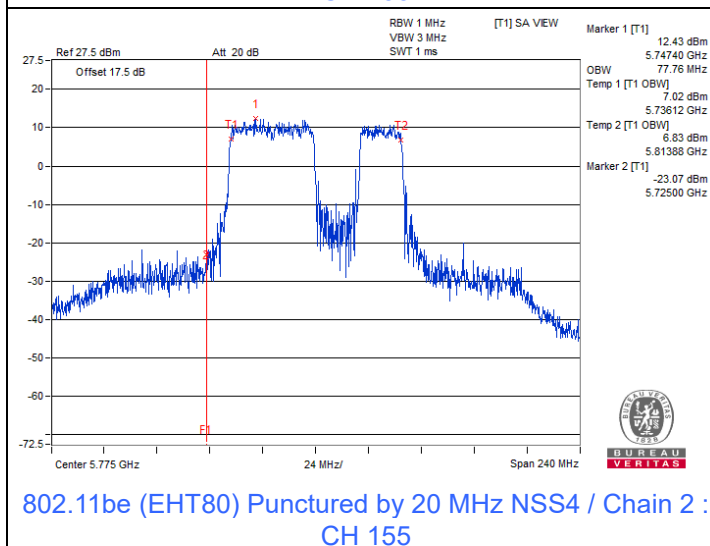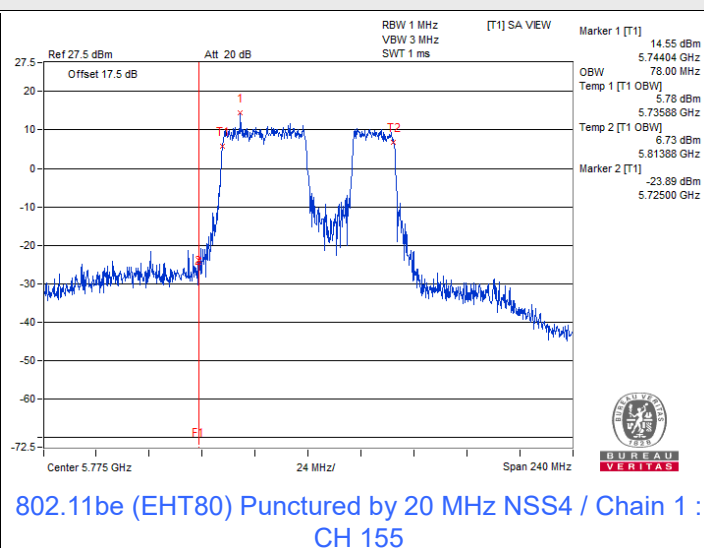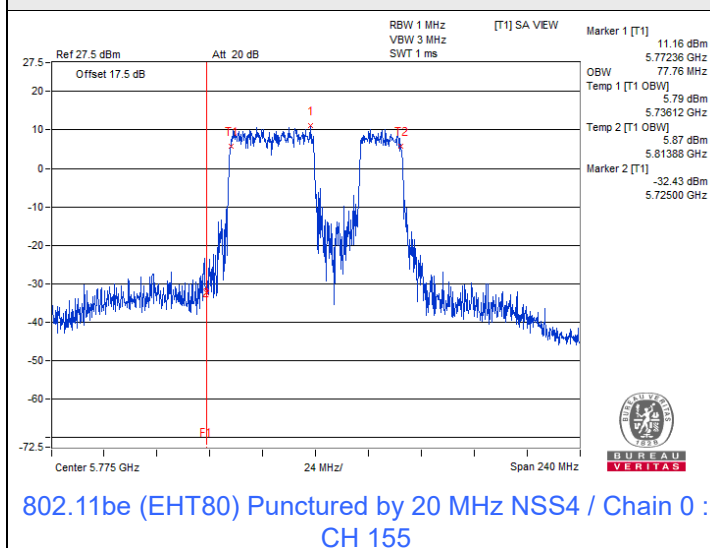


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C)

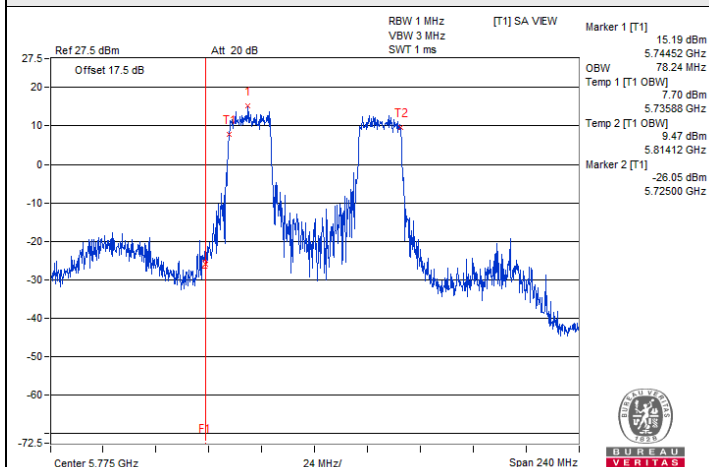


802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 0 :
CH 155

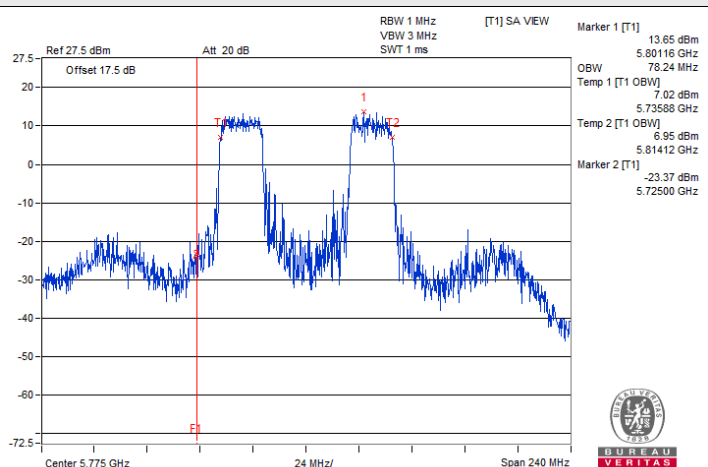

802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 1 :
CH 155

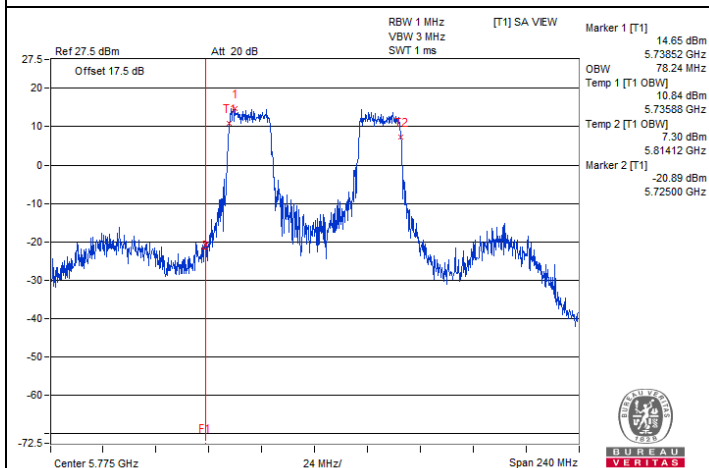

802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 2 :
CH 155

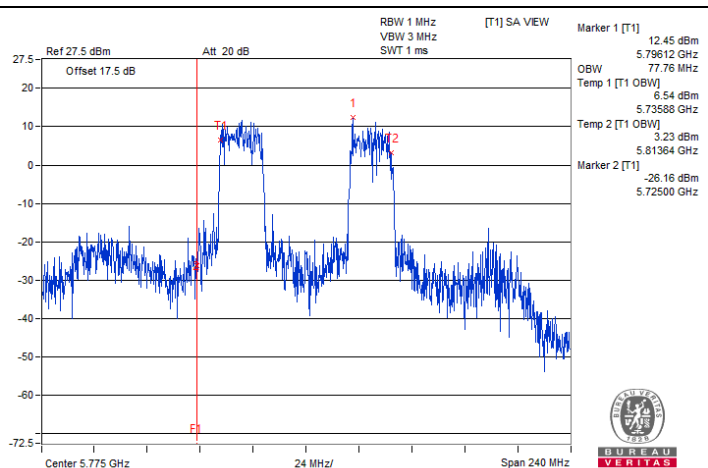

802.11be (EHT80) Punctured by 40 MHz NSS4 / Chain 3 :
CH 155

7.6 AC Power Conducted Emissions


Mode A

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.99	36.87	23.99	46.86	33.98	65.79	55.79	-18.93	-21.81
2	0.21641	10.01	26.76	19.11	36.77	29.12	62.96	52.96	-26.19	-23.84
3	0.47422	10.11	38.46	33.29	48.57	43.40	56.44	46.44	-7.87	-3.04
4	0.99375	10.22	20.88	13.75	31.10	23.97	56.00	46.00	-24.90	-22.03
5	1.93359	10.29	22.22	16.40	32.51	26.69	56.00	46.00	-23.49	-19.31
6	9.95703	10.94	15.47	10.14	26.41	21.08	60.00	50.00	-33.59	-28.92

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

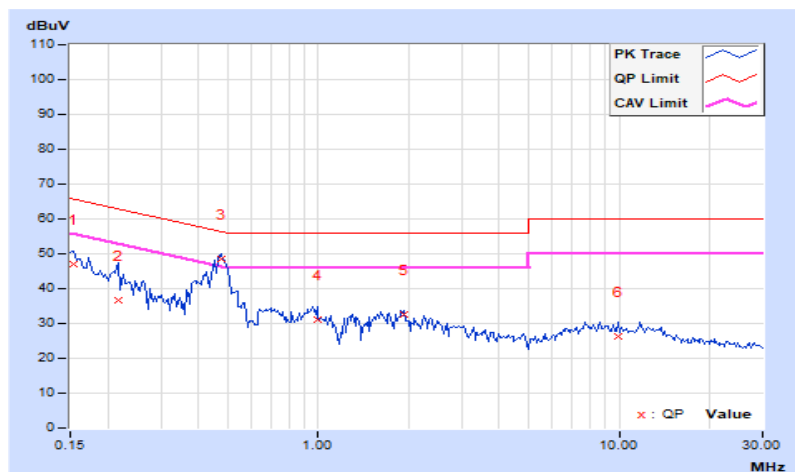


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.98	35.44	23.11	45.42	33.09	65.58	55.58	-20.16	-22.49
2	0.39219	9.93	38.23	31.80	48.16	41.73	58.02	48.02	-9.86	-6.29
3	0.80234	9.97	18.95	5.53	28.92	15.50	56.00	46.00	-27.08	-30.50
4	1.60547	10.04	12.07	2.72	22.11	12.76	56.00	46.00	-33.89	-33.24
5	5.48438	10.22	14.64	8.09	24.86	18.31	60.00	50.00	-35.14	-31.69
6	11.73828	10.54	20.16	14.64	30.70	25.18	60.00	50.00	-29.30	-24.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

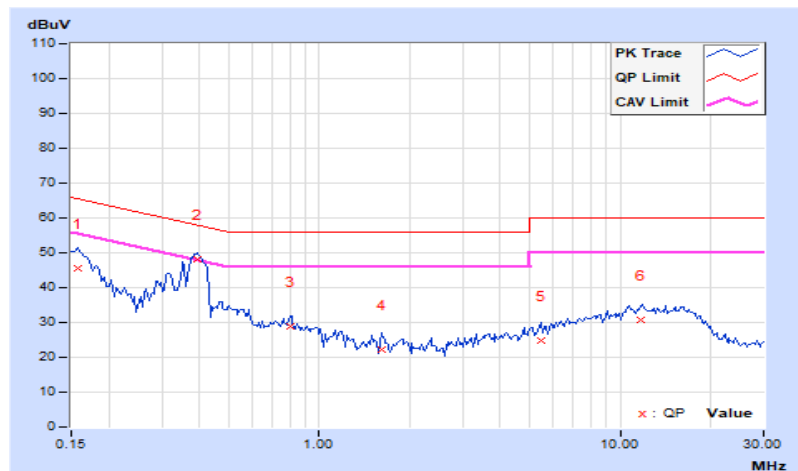


Mode B

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23594	9.97	26.90	17.11	36.87	27.08	62.24	52.24	-25.37	-25.16
2	0.40000	9.99	39.54	33.62	49.53	43.61	57.85	47.85	-8.32	-4.24
3	0.80625	10.03	21.92	9.73	31.95	19.76	56.00	46.00	-24.05	-26.24
4	4.81250	10.29	15.06	9.29	25.35	19.58	56.00	46.00	-30.65	-26.42
5	8.96094	10.56	18.05	12.32	28.61	22.88	60.00	50.00	-31.39	-27.12
6	16.18359	11.03	19.81	14.75	30.84	25.78	60.00	50.00	-29.16	-24.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

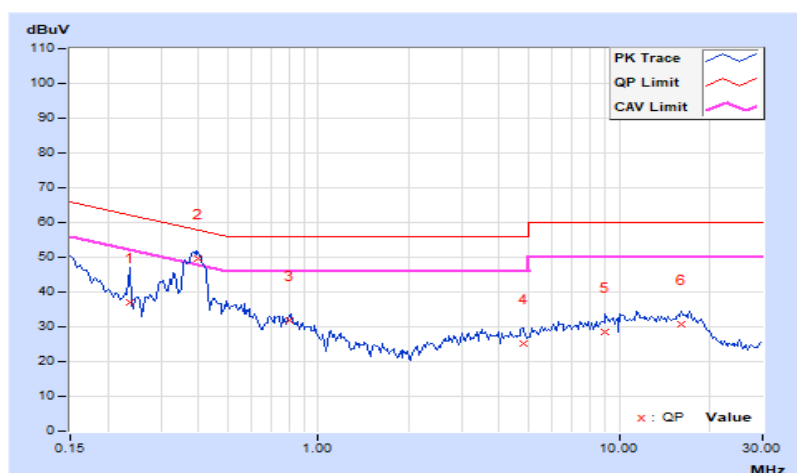


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.98	35.62	24.24	45.60	34.22	65.58	55.58	-19.98	-21.36
2	0.38828	9.93	37.64	28.12	47.57	38.05	58.10	48.10	-10.53	-10.05
3	0.80625	9.97	18.88	5.49	28.85	15.46	56.00	46.00	-27.15	-30.54
4	2.07422	10.07	11.20	4.92	21.27	14.99	56.00	46.00	-34.73	-31.01
5	4.62500	10.18	13.35	7.05	23.53	17.23	56.00	46.00	-32.47	-28.77
6	12.70703	10.59	20.04	14.50	30.63	25.09	60.00	50.00	-29.37	-24.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

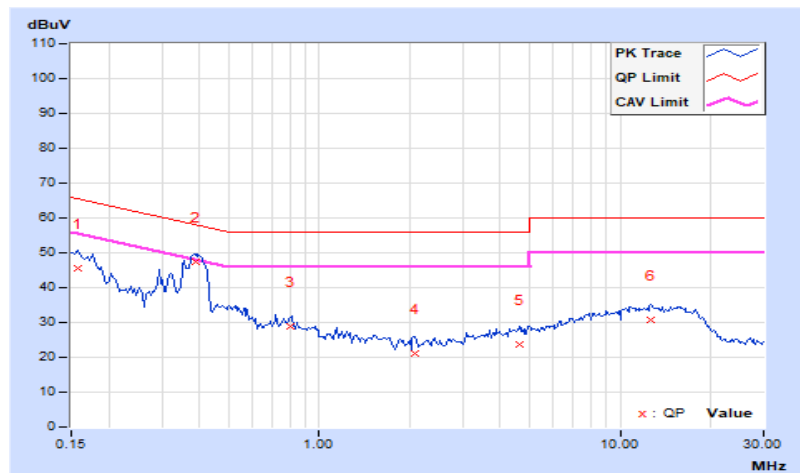

7.7 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 63% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.59	31.4 PK	40.0	-8.6	2.00 H	248	45.4	-14.0
2	86.74	30.1 PK	40.0	-9.9	2.00 H	104	49.0	-18.9
3	157.72	28.6 PK	43.5	-14.9	1.00 H	92	41.5	-12.9
4	202.56	26.2 PK	43.5	-17.3	2.00 H	282	42.4	-16.2
5	471.74	24.0 PK	46.0	-22.0	1.00 H	134	31.9	-7.9
6	840.68	29.5 PK	46.0	-16.5	2.00 H	360	31.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

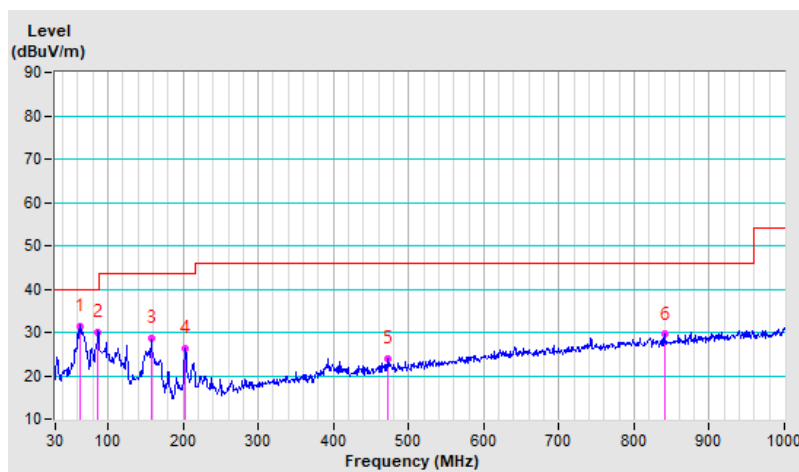


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 63% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.38	36.0 PK	40.0	-4.0	1.00 V	291	49.2	-13.2
2	67.93	34.8 PK	40.0	-5.2	1.00 V	277	49.7	-14.9
3	125.09	30.1 PK	43.5	-13.4	2.00 V	220	44.6	-14.5
4	202.66	28.1 PK	43.5	-15.4	2.00 V	316	44.3	-16.2
5	584.67	25.7 PK	46.0	-20.3	2.00 V	272	31.3	-5.6
6	875.04	30.1 PK	46.0	-15.9	2.00 V	205	31.2	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

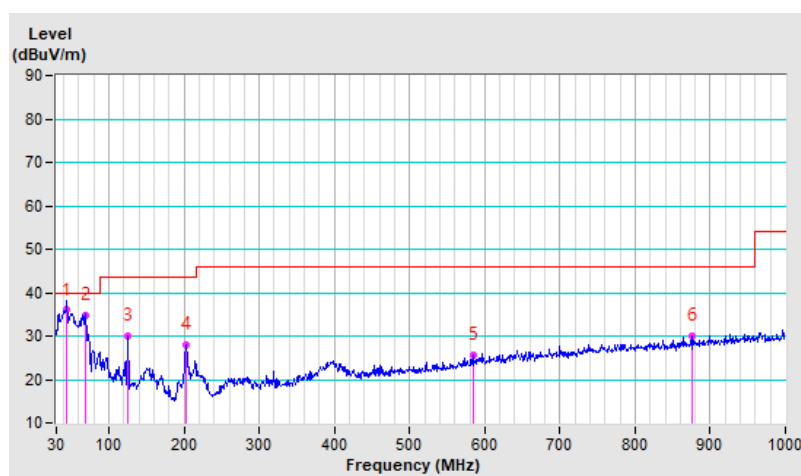


Mode B

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 63% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.41	30.6 PK	40.0	-9.4	2.00 H	37	44.6	-14.0
2	87.21	29.5 PK	40.0	-10.5	2.00 H	97	48.3	-18.8
3	124.95	27.2 PK	43.5	-16.3	2.00 H	300	41.7	-14.5
4	202.74	27.5 PK	43.5	-16.0	2.00 H	276	43.7	-16.2
5	480.98	24.1 PK	46.0	-21.9	2.00 H	37	31.9	-7.8
6	915.63	30.1 PK	46.0	-15.9	2.00 H	242	30.4	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

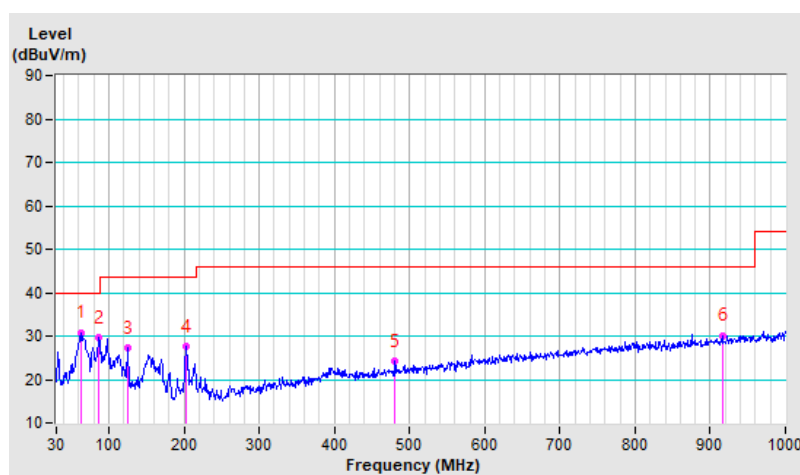


RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 63% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.02	36.8 PK	40.0	-3.2	1.00 V	315	50.0	-13.2
2	67.48	34.6 PK	40.0	-5.4	1.00 V	279	49.2	-14.6
3	125.13	28.6 PK	43.5	-14.9	2.00 V	230	43.1	-14.5
4	202.76	28.0 PK	43.5	-15.5	2.00 V	208	44.2	-16.2
5	394.53	24.6 PK	46.0	-21.4	1.00 V	52	34.5	-9.9
6	875.02	30.7 PK	46.0	-15.3	2.00 V	206	31.8	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

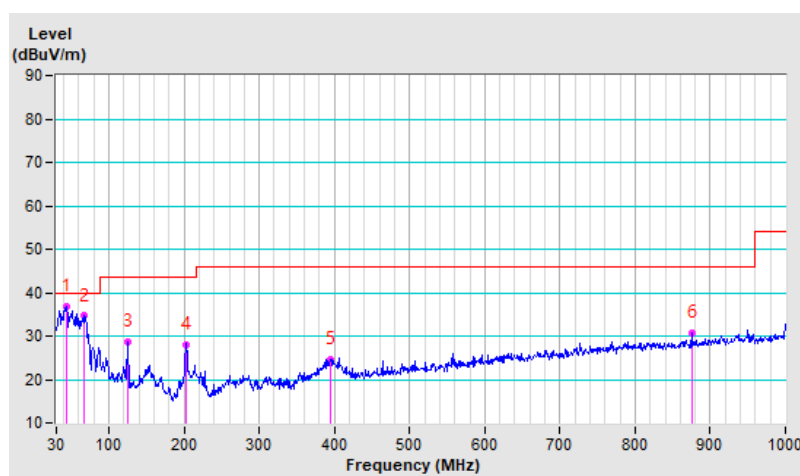

7.8 Unwanted Emissions above 1 GHz

Mode A

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.5 PK	74.0	-17.5	2.51 H	285	51.3	5.2
2	5150.00	46.7 AV	54.0	-7.3	2.51 H	285	41.5	5.2
3	*5260.00	119.4 PK			2.51 H	285	114.5	4.9
4	*5260.00	111.4 AV			2.51 H	285	106.5	4.9
5	5350.00	57.6 PK	74.0	-16.4	2.51 H	236	52.4	5.2
6	5350.00	46.5 AV	54.0	-7.5	2.51 H	236	41.3	5.2
7	#10520.00	47.5 PK	68.2	-20.7	2.78 H	250	33.1	14.4
8	15780.00	52.1 PK	74.0	-21.9	2.19 H	230	34.7	17.4
9	15780.00	39.2 AV	54.0	-14.8	2.19 H	230	21.8	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	1.47 V	210	49.7	5.2
2	5150.00	44.1 AV	54.0	-9.9	1.47 V	210	38.9	5.2
3	*5260.00	121.1 PK			1.47 V	210	116.2	4.9
4	*5260.00	112.2 AV			1.47 V	210	107.3	4.9
5	5350.00	59.5 PK	74.0	-14.5	2.09 V	219	54.3	5.2
6	5350.00	47.8 AV	54.0	-6.2	2.09 V	219	42.6	5.2
7	#10520.00	49.5 PK	68.2	-18.7	1.42 V	65	35.1	14.4
8	15780.00	52.9 PK	74.0	-21.1	3.58 V	101	35.5	17.4
9	15780.00	40.8 AV	54.0	-13.2	3.58 V	101	23.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.9 PK			2.05 H	232	114.8	5.1
2	*5300.00	111.9 AV			2.05 H	232	106.8	5.1
3	5350.00	59.4 PK	74.0	-14.6	2.05 H	232	54.2	5.2
4	5350.00	48.1 AV	54.0	-5.9	2.05 H	232	42.9	5.2
5	10600.00	49.3 PK	74.0	-24.7	3.17 H	307	34.8	14.5
6	10600.00	37.6 AV	54.0	-16.4	3.17 H	307	23.1	14.5
7	15900.00	51.2 PK	74.0	-22.8	2.31 H	217	33.8	17.4
8	15900.00	39.1 AV	54.0	-14.9	2.31 H	217	21.7	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.5 PK			1.58 V	21	116.4	5.1
2	*5300.00	112.8 AV			1.58 V	21	107.7	5.1
3	5350.00	61.1 PK	74.0	-12.9	1.58 V	21	55.9	5.2
4	5350.00	49.6 AV	54.0	-4.4	1.58 V	21	44.4	5.2
5	10600.00	50.2 PK	74.0	-23.8	1.45 V	63	35.7	14.5
6	10600.00	38.9 AV	54.0	-15.1	1.45 V	63	24.4	14.5
7	15900.00	52.4 PK	74.0	-21.6	3.23 V	94	35.0	17.4
8	15900.00	40.8 AV	54.0	-13.2	3.23 V	94	23.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.6 PK			2.06 H	228	114.5	5.1
2	*5320.00	111.6 AV			2.06 H	228	106.5	5.1
3	5350.00	65.8 PK	74.0	-8.2	2.06 H	228	60.6	5.2
4	5350.00	51.2 AV	54.0	-2.8	2.06 H	228	46.0	5.2
5	10640.00	48.9 PK	74.0	-25.1	3.17 H	315	34.2	14.7
6	10640.00	37.5 AV	54.0	-16.5	3.17 H	315	22.8	14.7
7	15960.00	50.8 PK	74.0	-23.2	2.27 H	224	33.6	17.2
8	15960.00	38.9 AV	54.0	-15.1	2.27 H	224	21.7	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.2 PK			1.93 V	26	115.1	5.1
2	*5320.00	112.1 AV			1.93 V	26	107.0	5.1
3	5350.00	67.5 PK	74.0	-6.5	1.93 V	26	62.3	5.2
4	5350.00	52.8 AV	54.0	-1.2	1.93 V	26	47.6	5.2
5	10640.00	50.7 PK	74.0	-23.3	1.43 V	55	36.0	14.7
6	10640.00	39.2 AV	54.0	-14.8	1.43 V	55	24.5	14.7
7	15960.00	52.3 PK	74.0	-21.7	3.21 V	85	35.1	17.2
8	15960.00	40.8 AV	54.0	-13.2	3.21 V	85	23.6	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.7 PK	74.0	-13.3	2.03 H	231	55.3	5.4
2	5460.00	48.9 AV	54.0	-5.1	2.03 H	231	43.5	5.4
3	#5470.00	65.6 PK	68.2	-2.6	2.03 H	231	60.2	5.4
4	*5500.00	119.4 PK			2.03 H	231	114.0	5.4
5	*5500.00	110.8 AV			2.03 H	231	105.4	5.4
6	11000.00	49.9 PK	74.0	-24.1	2.97 H	263	34.4	15.5
7	11000.00	37.7 AV	54.0	-16.3	2.97 H	263	22.2	15.5
8	#16500.00	58.8 PK	68.2	-9.4	3.12 H	325	38.7	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.9 PK	74.0	-13.1	1.59 V	162	55.5	5.4
2	5460.00	50.1 AV	54.0	-3.9	1.59 V	162	44.7	5.4
3	#5470.00	66.4 PK	68.2	-1.8	1.59 V	162	61.0	5.4
4	*5500.00	119.5 PK			1.59 V	162	114.1	5.4
5	*5500.00	111.2 AV			1.59 V	162	105.8	5.4
6	11000.00	49.8 PK	74.0	-24.2	1.62 V	249	34.3	15.5
7	11000.00	38.4 AV	54.0	-15.6	1.62 V	249	22.9	15.5
8	#16500.00	59.7 PK	68.2	-8.5	3.06 V	291	39.6	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.3 PK	74.0	-17.7	2.04 H	286	50.9	5.4
2	5460.00	44.3 AV	54.0	-9.7	2.04 H	286	38.9	5.4
3	#5470.00	61.9 PK	68.2	-6.3	2.04 H	286	56.5	5.4
4	*5580.00	120.3 PK			2.04 H	286	114.9	5.4
5	*5580.00	112.1 AV			2.04 H	286	106.7	5.4
6	11160.00	50.0 PK	74.0	-24.0	2.94 H	278	34.6	15.4
7	11160.00	37.9 AV	54.0	-16.1	2.94 H	278	22.5	15.4
8	#16740.00	58.8 PK	68.2	-9.4	3.16 H	323	37.3	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.7 PK	74.0	-19.3	3.60 V	169	49.3	5.4
2	5460.00	43.8 AV	54.0	-10.2	3.60 V	169	38.4	5.4
3	#5470.00	59.2 PK	68.2	-9.0	3.60 V	169	53.8	5.4
4	*5580.00	120.8 PK			3.60 V	169	115.4	5.4
5	*5580.00	112.7 AV			3.60 V	169	107.3	5.4
6	11160.00	50.6 PK	74.0	-23.4	1.67 V	266	35.2	15.4
7	11160.00	39.0 AV	54.0	-15.0	1.67 V	266	23.6	15.4
8	#16740.00	60.3 PK	68.2	-7.9	3.04 V	306	38.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.6 PK			2.83 H	235	113.1	5.5
2	*5700.00	110.7 AV			2.83 H	235	105.2	5.5
3	#5725.00	65.1 PK	68.2	-3.1	2.83 H	235	59.6	5.5
4	11400.00	49.5 PK	74.0	-24.5	2.91 H	262	34.1	15.4
5	11400.00	37.5 AV	54.0	-16.5	2.91 H	262	22.1	15.4
6	#17100.00	59.2 PK	68.2	-9.0	3.11 H	327	37.8	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.1 PK			2.79 V	129	113.6	5.5
2	*5700.00	111.3 AV			2.79 V	129	105.8	5.5
3	#5725.00	66.8 PK	68.2	-1.4	2.79 V	129	61.3	5.5
4	11400.00	50.3 PK	74.0	-23.7	1.63 V	285	34.9	15.4
5	11400.00	38.5 AV	54.0	-15.5	1.63 V	285	23.1	15.4
6	#17100.00	59.6 PK	68.2	-8.6	2.99 V	303	38.2	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	2.71 H	234	48.9	5.4
2	5460.00	43.7 AV	54.0	-10.3	2.71 H	234	38.3	5.4
3	#5470.00	54.4 PK	68.2	-13.8	2.71 H	234	49.0	5.4
4	*5720.00	120.3 PK			2.71 H	234	114.8	5.5
5	*5720.00	111.9 AV			2.71 H	234	106.4	5.5
6	#5850.00	54.1 PK	68.2	-14.1	2.71 H	234	48.4	5.7
7	11440.00	49.6 PK	74.0	-24.4	2.93 H	262	34.3	15.3
8	11440.00	37.6 AV	54.0	-16.4	2.93 H	262	22.3	15.3
9	#17160.00	59.2 PK	68.2	-9.0	3.13 H	329	37.8	21.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.7 PK	74.0	-21.3	2.83 V	132	47.3	5.4
2	5460.00	42.4 AV	54.0	-11.6	2.83 V	132	37.0	5.4
3	#5470.00	53.1 PK	68.2	-15.1	2.83 V	132	47.7	5.4
4	*5720.00	120.4 PK			2.83 V	132	114.9	5.5
5	*5720.00	112.7 AV			2.83 V	132	107.2	5.5
6	#5850.00	54.9 PK	68.2	-13.3	2.83 V	132	49.2	5.7
7	11440.00	50.0 PK	74.0	-24.0	1.65 V	259	34.7	15.3
8	11440.00	38.7 AV	54.0	-15.3	1.65 V	259	23.4	15.3
9	#17160.00	60.1 PK	68.2	-8.1	3.00 V	296	38.7	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.3 PK	74.0	-19.7	2.23 H	224	49.1	5.2
2	5150.00	43.8 AV	54.0	-10.2	2.23 H	224	38.6	5.2
3	*5260.00	122.4 PK			2.23 H	224	117.5	4.9
4	*5260.00	111.2 AV			2.23 H	224	106.3	4.9
5	5350.00	57.8 PK	74.0	-16.2	2.23 H	224	52.6	5.2
6	5350.00	45.7 AV	54.0	-8.3	2.23 H	224	40.5	5.2
7	#10520.00	48.0 PK	68.2	-20.2	2.73 H	254	33.6	14.4
8	15780.00	51.9 PK	74.0	-22.1	2.16 H	215	34.5	17.4
9	15780.00	39.2 AV	54.0	-14.8	2.16 H	215	21.8	17.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	1.49 V	209	50.9	5.2
2	5150.00	45.1 AV	54.0	-8.9	1.49 V	209	39.9	5.2
3	*5260.00	125.1 PK			1.49 V	209	120.2	4.9
4	*5260.00	113.5 AV			1.49 V	209	108.6	4.9
5	5350.00	59.6 PK	74.0	-14.4	1.49 V	209	54.4	5.2
6	5350.00	47.7 AV	54.0	-6.3	1.49 V	209	42.5	5.2
7	#10520.00	49.6 PK	68.2	-18.6	1.38 V	50	35.2	14.4
8	15780.00	52.9 PK	74.0	-21.1	3.61 V	115	35.5	17.4
9	15780.00	41.0 AV	54.0	-13.0	3.61 V	115	23.6	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.3 PK			2.75 H	232	116.2	5.1
2	*5300.00	111.8 AV			2.75 H	232	106.7	5.1
3	5350.00	61.5 PK	74.0	-12.5	2.44 H	283	56.3	5.2
4	5350.00	48.3 AV	54.0	-5.7	2.44 H	283	43.1	5.2
5	10600.00	49.8 PK	74.0	-24.2	3.19 H	315	35.3	14.5
6	10600.00	38.0 AV	54.0	-16.0	3.19 H	315	23.5	14.5
7	15900.00	50.9 PK	74.0	-23.1	2.31 H	232	33.5	17.4
8	15900.00	38.7 AV	54.0	-15.3	2.31 H	232	21.3	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.8 PK			1.54 V	211	118.7	5.1
2	*5300.00	112.3 AV			1.54 V	211	107.2	5.1
3	5350.00	61.6 PK	74.0	-12.4	1.54 V	211	56.4	5.2
4	5350.00	51.2 AV	54.0	-2.8	1.54 V	211	46.0	5.2
5	10600.00	50.3 PK	74.0	-23.7	1.44 V	70	35.8	14.5
6	10600.00	38.7 AV	54.0	-15.3	1.44 V	70	24.2	14.5
7	15900.00	52.3 PK	74.0	-21.7	3.25 V	89	34.9	17.4
8	15900.00	40.6 AV	54.0	-13.4	3.25 V	89	23.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.4 PK			2.75 H	235	116.3	5.1
2	*5320.00	110.5 AV			2.75 H	235	105.4	5.1
3	5350.00	66.1 PK	74.0	-7.9	2.75 H	235	60.9	5.2
4	5350.00	52.4 AV	54.0	-1.6	2.75 H	235	47.2	5.2
5	10640.00	48.8 PK	74.0	-25.2	3.12 H	319	34.1	14.7
6	10640.00	37.5 AV	54.0	-16.5	3.12 H	319	22.8	14.7
7	15960.00	50.8 PK	74.0	-23.2	2.28 H	233	33.6	17.2
8	15960.00	39.1 AV	54.0	-14.9	2.28 H	233	21.9	17.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.3 PK			1.57 V	207	118.2	5.1
2	*5320.00	112.8 AV			1.57 V	207	107.7	5.1
3	5350.00	65.4 PK	74.0	-8.6	1.57 V	207	60.2	5.2
4	5350.00	53.1 AV	54.0	-0.9	1.57 V	207	47.9	5.2
5	10640.00	50.5 PK	74.0	-23.5	1.41 V	54	35.8	14.7
6	10640.00	39.5 AV	54.0	-14.5	1.41 V	54	24.8	14.7
7	15960.00	52.7 PK	74.0	-21.3	3.26 V	76	35.5	17.2
8	15960.00	41.0 AV	54.0	-13.0	3.26 V	76	23.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.1 PK	74.0	-9.9	2.52 H	237	58.7	5.4
2	5460.00	48.9 AV	54.0	-5.1	2.52 H	237	43.5	5.4
3	#5470.00	67.1 PK	68.2	-1.1	2.52 H	237	61.7	5.4
4	*5500.00	121.5 PK			2.52 H	237	116.1	5.4
5	*5500.00	110.2 AV			2.52 H	237	104.8	5.4
6	11000.00	49.9 PK	74.0	-24.1	2.92 H	257	34.4	15.5
7	11000.00	37.5 AV	54.0	-16.5	2.92 H	257	22.0	15.5
8	#16500.00	58.7 PK	68.2	-9.5	3.13 H	330	38.6	20.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.2 PK	74.0	-11.8	2.07 V	247	56.8	5.4
2	5460.00	50.6 AV	54.0	-3.4	2.07 V	247	45.2	5.4
3	#5470.00	67.3 PK	68.2	-0.9	2.07 V	247	61.9	5.4
4	*5500.00	121.3 PK			2.07 V	247	115.9	5.4
5	*5500.00	110.6 AV			2.07 V	247	105.2	5.4
6	11000.00	50.6 PK	74.0	-23.4	1.64 V	262	35.1	15.5
7	11000.00	38.4 AV	54.0	-15.6	1.64 V	262	22.9	15.5
8	#16500.00	60.2 PK	68.2	-8.0	3.12 V	281	40.1	20.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 116 : 5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.8 PK	74.0	-17.2	2.40 H	238	51.4	5.4
2	5460.00	44.2 AV	54.0	-9.8	2.40 H	238	38.8	5.4
3	#5470.00	63.8 PK	68.2	-4.4	2.40 H	238	58.4	5.4
4	*5580.00	123.2 PK			2.40 H	238	117.8	5.4
5	*5580.00	112.1 AV			2.40 H	238	106.7	5.4
6	11160.00	49.9 PK	74.0	-24.1	2.98 H	284	34.5	15.4
7	11160.00	38.1 AV	54.0	-15.9	2.98 H	284	22.7	15.4
8	#16740.00	58.6 PK	68.2	-9.6	3.20 H	328	37.1	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.1 PK	74.0	-18.9	3.66 V	163	49.7	5.4
2	5460.00	43.6 AV	54.0	-10.4	3.66 V	163	38.2	5.4
3	#5470.00	64.6 PK	68.2	-3.6	3.66 V	163	59.2	5.4
4	*5580.00	123.8 PK			3.66 V	163	118.4	5.4
5	*5580.00	112.6 AV			3.66 V	163	107.2	5.4
6	11160.00	50.9 PK	74.0	-23.1	1.65 V	281	35.5	15.4
7	11160.00	39.2 AV	54.0	-14.8	1.65 V	281	23.8	15.4
8	#16740.00	60.6 PK	68.2	-7.6	3.05 V	300	39.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.1 PK			3.18 H	88	114.6	5.5
2	*5700.00	109.8 AV			3.18 H	88	104.3	5.5
3	#5725.00	67.1 PK	68.2	-1.1	3.18 H	88	61.6	5.5
4	11400.00	49.7 PK	74.0	-24.3	2.96 H	278	34.3	15.4
5	11400.00	37.7 AV	54.0	-16.3	2.96 H	278	22.3	15.4
6	#17100.00	59.1 PK	68.2	-9.1	3.10 H	318	37.7	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.7 PK			1.53 V	161	116.2	5.5
2	*5700.00	110.1 AV			1.53 V	161	104.6	5.5
3	#5725.00	67.7 PK	68.2	-0.5	1.53 V	161	62.2	5.5
4	11400.00	50.1 PK	74.0	-23.9	1.59 V	295	34.7	15.4
5	11400.00	38.1 AV	54.0	-15.9	1.59 V	295	22.7	15.4
6	#17100.00	59.8 PK	68.2	-8.4	2.96 V	315	38.4	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.1 PK	74.0	-17.9	2.78 H	99	50.7	5.4
2	5460.00	44.1 AV	54.0	-9.9	2.78 H	99	38.7	5.4
3	#5470.00	56.3 PK	68.2	-11.9	2.78 H	99	50.9	5.4
4	*5720.00	121.1 PK			2.78 H	99	115.6	5.5
5	*5720.00	111.3 AV			2.78 H	99	105.8	5.5
6	#5850.00	55.6 PK	68.2	-12.6	2.78 H	99	49.9	5.7
7	11440.00	49.6 PK	74.0	-24.4	2.90 H	271	34.3	15.3
8	11440.00	37.6 AV	54.0	-16.4	2.90 H	271	22.3	15.3
9	#17160.00	58.6 PK	68.2	-9.6	3.20 H	310	37.2	21.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.7 PK	74.0	-19.3	2.22 V	10	49.3	5.4
2	5460.00	43.2 AV	54.0	-10.8	2.22 V	10	37.8	5.4
3	#5470.00	53.7 PK	68.2	-14.5	2.22 V	10	48.3	5.4
4	*5720.00	122.3 PK			2.22 V	10	116.8	5.5
5	*5720.00	112.2 AV			2.22 V	10	106.7	5.5
6	#5850.00	54.7 PK	68.2	-13.5	2.22 V	10	49.0	5.7
7	11440.00	50.4 PK	74.0	-23.6	1.55 V	287	35.1	15.3
8	11440.00	38.5 AV	54.0	-15.5	1.55 V	287	23.2	15.3
9	#17160.00	59.8 PK	68.2	-8.4	2.99 V	297	38.4	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.8 PK	74.0	-16.2	2.48 H	283	52.6	5.2
2	5150.00	49.1 AV	54.0	-4.9	2.48 H	283	43.9	5.2
3	*5270.00	119.3 PK			2.48 H	283	114.3	5.0
4	*5270.00	108.3 AV			2.48 H	283	103.3	5.0
5	5350.00	66.2 PK	74.0	-7.8	2.48 H	283	61.0	5.2
6	5350.00	51.1 AV	54.0	-2.9	2.48 H	283	45.9	5.2
7	#10540.00	48.2 PK	68.2	-20.0	2.74 H	278	33.8	14.4
8	15810.00	51.9 PK	74.0	-22.1	2.09 H	220	34.6	17.3
9	15810.00	38.5 AV	54.0	-15.5	2.09 H	220	21.2	17.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.7 PK	74.0	-17.3	1.48 V	207	51.5	5.2
2	5150.00	48.4 AV	54.0	-5.6	1.48 V	207	43.2	5.2
3	*5270.00	120.5 PK			1.48 V	207	115.5	5.0
4	*5270.00	110.5 AV			1.48 V	207	105.5	5.0
5	5350.00	66.7 PK	74.0	-7.3	1.48 V	207	61.5	5.2
6	5350.00	51.2 AV	54.0	-2.8	1.48 V	207	46.0	5.2
7	#10540.00	50.2 PK	68.2	-18.0	1.57 V	38	35.8	14.4
8	15810.00	53.1 PK	74.0	-20.9	3.54 V	125	35.8	17.3
9	15810.00	40.8 AV	54.0	-13.2	3.54 V	125	23.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	114.9 PK			2.40 H	283	109.8	5.1
2	*5310.00	104.3 AV			2.40 H	283	99.2	5.1
3	5350.00	63.3 PK	74.0	-10.7	2.40 H	283	58.1	5.2
4	5350.00	49.1 AV	54.0	-4.9	2.40 H	283	43.9	5.2
5	10620.00	48.9 PK	74.0	-25.1	3.15 H	312	34.3	14.6
6	10620.00	37.8 AV	54.0	-16.2	3.15 H	312	23.2	14.6
7	15930.00	51.1 PK	74.0	-22.9	2.24 H	226	33.7	17.4
8	15930.00	39.2 AV	54.0	-14.8	2.24 H	226	21.8	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	118.1 PK			1.46 V	207	113.0	5.1
2	*5310.00	106.1 AV			1.46 V	207	101.0	5.1
3	5350.00	66.4 PK	74.0	-7.6	1.46 V	207	61.2	5.2
4	5350.00	53.2 AV	54.0	-0.8	1.46 V	207	48.0	5.2
5	10620.00	49.9 PK	74.0	-24.1	1.49 V	77	35.3	14.6
6	10620.00	38.5 AV	54.0	-15.5	1.49 V	77	23.9	14.6
7	15930.00	52.5 PK	74.0	-21.5	3.21 V	78	35.1	17.4
8	15930.00	40.9 AV	54.0	-13.1	3.21 V	78	23.5	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.6 PK	74.0	-15.4	1.99 H	109	53.2	5.4
2	5460.00	47.2 AV	54.0	-6.8	1.99 H	109	41.8	5.4
3	#5470.00	64.6 PK	68.2	-3.6	1.99 H	109	59.2	5.4
4	*5510.00	114.8 PK			1.99 H	109	109.4	5.4
5	*5510.00	104.3 AV			1.99 H	109	98.9	5.4
6	11020.00	49.7 PK	74.0	-24.3	3.04 H	273	34.1	15.6
7	11020.00	38.3 AV	54.0	-15.7	3.04 H	273	22.7	15.6
8	#16530.00	58.4 PK	68.2	-9.8	3.19 H	252	37.8	20.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.6 PK	74.0	-12.4	2.07 V	247	56.2	5.4
2	5460.00	47.3 AV	54.0	-6.7	2.07 V	247	41.9	5.4
3	#5470.00	67.5 PK	68.2	-0.7	2.07 V	247	62.1	5.4
4	*5510.00	117.5 PK			2.07 V	247	112.1	5.4
5	*5510.00	106.4 AV			2.07 V	247	101.0	5.4
6	11020.00	51.4 PK	74.0	-22.6	1.65 V	305	35.8	15.6
7	11020.00	39.4 AV	54.0	-14.6	1.65 V	305	23.8	15.6
8	#16530.00	60.4 PK	68.2	-7.8	2.94 V	293	39.8	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 110 : 5550 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.2 PK	74.0	-6.8	2.76 H	234	61.8	5.4
2	5460.00	52.6 AV	54.0	-1.4	2.76 H	234	47.2	5.4
3	#5470.00	67.8 PK	68.2	-0.4	2.76 H	234	62.4	5.4
4	*5550.00	118.2 PK			2.76 H	234	112.9	5.3
5	*5550.00	107.3 AV			2.76 H	234	102.0	5.3
6	11100.00	49.3 PK	74.0	-24.7	2.99 H	264	33.6	15.7
7	11100.00	38.0 AV	54.0	-16.0	2.99 H	264	22.3	15.7
8	#16650.00	57.9 PK	68.2	-10.3	3.17 H	266	36.1	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.6 PK	74.0	-9.4	1.48 V	164	59.2	5.4
2	5460.00	50.8 AV	54.0	-3.2	1.48 V	164	45.4	5.4
3	#5470.00	67.7 PK	68.2	-0.5	1.48 V	164	62.3	5.4
4	*5550.00	118.7 PK			1.48 V	164	113.4	5.3
5	*5550.00	107.7 AV			1.48 V	164	102.4	5.3
6	11100.00	51.3 PK	74.0	-22.7	1.67 V	293	35.6	15.7
7	11100.00	39.2 AV	54.0	-14.8	1.67 V	293	23.5	15.7
8	#16650.00	60.7 PK	68.2	-7.5	2.97 V	281	38.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	115.2 PK			2.79 H	238	109.8	5.4
2	*5670.00	105.1 AV			2.79 H	238	99.7	5.4
3	#5725.00	67.1 PK	68.2	-1.1	2.79 H	238	61.6	5.5
4	11340.00	49.1 PK	74.0	-24.9	3.05 H	274	33.7	15.4
5	11340.00	37.5 AV	54.0	-16.5	3.05 H	274	22.1	15.4
6	#17010.00	57.8 PK	68.2	-10.4	2.98 H	258	36.3	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.3 PK			3.71 V	160	110.9	5.4
2	*5670.00	105.7 AV			3.71 V	160	100.3	5.4
3	#5725.00	66.5 PK	68.2	-1.7	3.71 V	160	61.0	5.5
4	11340.00	50.9 PK	74.0	-23.1	1.59 V	318	35.5	15.4
5	11340.00	38.9 AV	54.0	-15.1	1.59 V	318	23.5	15.4
6	#17010.00	60.2 PK	68.2	-8.0	2.97 V	304	38.7	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	2.74 H	235	51.1	5.4
2	5460.00	44.5 AV	54.0	-9.5	2.74 H	235	39.1	5.4
3	#5470.00	56.1 PK	68.2	-12.1	2.74 H	235	50.7	5.4
4	*5710.00	119.1 PK			2.74 H	235	113.6	5.5
5	*5710.00	108.7 AV			2.74 H	235	103.2	5.5
6	#5850.00	64.2 PK	68.2	-4.0	2.74 H	235	58.5	5.7
7	11420.00	49.3 PK	74.0	-24.7	2.87 H	283	33.9	15.4
8	11420.00	37.8 AV	54.0	-16.2	2.87 H	283	22.4	15.4
9	#17130.00	58.0 PK	68.2	-10.2	3.18 H	285	36.5	21.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.1 PK	74.0	-17.9	3.17 V	139	50.7	5.4
2	5460.00	43.5 AV	54.0	-10.5	3.17 V	139	38.1	5.4
3	#5470.00	54.9 PK	68.2	-13.3	3.17 V	139	49.5	5.4
4	*5710.00	119.6 PK			3.17 V	139	114.1	5.5
5	*5710.00	109.6 AV			3.17 V	139	104.1	5.5
6	#5850.00	66.7 PK	68.2	-1.5	3.17 V	139	61.0	5.7
7	11420.00	50.8 PK	74.0	-23.2	1.65 V	292	35.4	15.4
8	11420.00	38.9 AV	54.0	-15.1	1.65 V	292	23.5	15.4
9	#17130.00	60.4 PK	68.2	-7.8	2.98 V	305	38.9	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.6 PK	74.0	-20.4	2.48 H	239	48.4	5.2
2	5150.00	42.8 AV	54.0	-11.2	2.48 H	239	37.6	5.2
3	*5290.00	111.1 PK			2.48 H	239	106.0	5.1
4	*5290.00	100.3 AV			2.48 H	239	95.2	5.1
5	5350.00	63.1 PK	74.0	-10.9	2.48 H	239	57.9	5.2
6	5350.00	52.1 AV	54.0	-1.9	2.48 H	239	46.9	5.2
7	#10580.00	49.4 PK	68.2	-18.8	2.78 H	283	34.9	14.5
8	15870.00	51.4 PK	74.0	-22.6	2.16 H	232	34.0	17.4
9	15870.00	38.0 AV	54.0	-16.0	2.16 H	232	20.6	17.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.9 PK	74.0	-18.1	1.57 V	210	50.7	5.2
2	5150.00	45.5 AV	54.0	-8.5	1.57 V	210	40.3	5.2
3	*5290.00	112.6 PK			1.57 V	210	107.5	5.1
4	*5290.00	102.1 AV			1.57 V	210	97.0	5.1
5	5350.00	65.3 PK	74.0	-8.7	1.57 V	210	60.1	5.2
6	5350.00	53.4 AV	54.0	-0.6	1.57 V	210	48.2	5.2
7	#10580.00	49.7 PK	68.2	-18.5	1.50 V	79	35.2	14.5
8	15870.00	53.1 PK	74.0	-20.9	3.47 V	86	35.7	17.4
9	15870.00	40.6 AV	54.0	-13.4	3.47 V	86	23.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.7 PK	74.0	-12.3	2.83 H	236	56.3	5.4
2	5460.00	51.1 AV	54.0	-2.9	2.83 H	236	45.7	5.4
3	#5470.00	65.6 PK	68.2	-2.6	2.83 H	236	60.2	5.4
4	*5530.00	111.7 PK			2.83 H	236	106.4	5.3
5	*5530.00	101.3 AV			2.83 H	236	96.0	5.3
6	11060.00	50.2 PK	74.0	-23.8	3.05 H	259	34.5	15.7
7	11060.00	38.5 AV	54.0	-15.5	3.05 H	259	22.8	15.7
8	#16590.00	58.8 PK	68.2	-9.4	3.16 H	247	37.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.1 PK	74.0	-8.9	1.59 V	162	59.7	5.4
2	5460.00	53.6 AV	54.0	-0.4	1.59 V	162	48.2	5.4
3	#5470.00	67.4 PK	68.2	-0.8	1.59 V	162	62.0	5.4
4	*5530.00	113.1 PK			1.59 V	162	107.8	5.3
5	*5530.00	102.3 AV			1.59 V	162	97.0	5.3
6	11060.00	51.2 PK	74.0	-22.8	1.64 V	326	35.5	15.7
7	11060.00	39.0 AV	54.0	-15.0	1.64 V	326	23.3	15.7
8	#16590.00	59.6 PK	68.2	-8.6	2.94 V	298	37.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.7 PK	74.0	-10.3	2.84 H	235	58.3	5.4
2	5460.00	51.6 AV	54.0	-2.4	2.84 H	235	46.2	5.4
3	#5470.00	64.2 PK	68.2	-4.0	2.84 H	235	58.8	5.4
4	*5610.00	113.3 PK			2.84 H	235	107.9	5.4
5	*5610.00	103.6 AV			2.84 H	235	98.2	5.4
6	#5725.00	64.6 PK	68.2	-3.6	2.84 H	235	59.1	5.5
7	11220.00	50.3 PK	74.0	-23.7	3.09 H	268	35.2	15.1
8	11220.00	38.7 AV	54.0	-15.3	3.09 H	268	23.6	15.1
9	#16830.00	59.3 PK	68.2	-8.9	3.11 H	244	37.9	21.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.3 PK	74.0	-10.7	2.06 V	13	57.9	5.4
2	5460.00	50.4 AV	54.0	-3.6	2.06 V	13	45.0	5.4
3	#5470.00	65.3 PK	68.2	-2.9	2.06 V	13	59.9	5.4
4	*5610.00	115.7 PK			2.06 V	13	110.3	5.4
5	*5610.00	104.1 AV			2.06 V	13	98.7	5.4
6	#5725.00	66.7 PK	68.2	-1.5	2.06 V	13	61.2	5.5
7	11220.00	51.0 PK	74.0	-23.0	1.62 V	336	35.9	15.1
8	11220.00	38.9 AV	54.0	-15.1	1.62 V	336	23.8	15.1
9	#16830.00	60.1 PK	68.2	-8.1	2.89 V	304	38.7	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.5 PK	74.0	-10.5	2.79 H	236	58.1	5.4
2	5460.00	50.6 AV	54.0	-3.4	2.79 H	236	45.2	5.4
3	#5470.00	62.1 PK	68.2	-6.1	2.79 H	236	56.7	5.4
4	*5690.00	115.3 PK			2.79 H	236	109.8	5.5
5	*5690.00	104.6 AV			2.79 H	236	99.1	5.5
6	#5850.00	59.2 PK	68.2	-9.0	2.79 H	236	53.5	5.7
7	11380.00	50.2 PK	74.0	-23.8	3.04 H	273	34.8	15.4
8	11380.00	38.2 AV	54.0	-15.8	3.04 H	273	22.8	15.4
9	#17070.00	59.2 PK	68.2	-9.0	3.08 H	243	37.7	21.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.4 PK	74.0	-8.6	2.20 V	17	60.0	5.4
2	5460.00	52.4 AV	54.0	-1.6	2.20 V	17	47.0	5.4
3	#5470.00	67.1 PK	68.2	-1.1	2.20 V	17	61.7	5.4
4	*5690.00	115.9 PK			2.20 V	17	110.4	5.5
5	*5690.00	105.1 AV			2.20 V	17	99.6	5.5
6	#5850.00	64.5 PK	68.2	-3.7	2.20 V	17	58.8	5.7
7	11380.00	50.9 PK	74.0	-23.1	1.58 V	352	35.5	15.4
8	11380.00	38.7 AV	54.0	-15.3	1.58 V	352	23.3	15.4
9	#17070.00	59.6 PK	68.2	-8.6	2.89 V	291	38.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.3 PK	74.0	-12.7	2.32 H	226	56.1	5.2
2	5150.00	50.8 AV	54.0	-3.2	2.32 H	226	45.6	5.2
3	*5250.00	106.5 PK			2.32 H	226	101.6	4.9
4	*5250.00	96.1 AV			2.32 H	226	91.2	4.9
5	5350.00	60.9 PK	74.0	-13.1	2.32 H	226	55.7	5.2
6	5350.00	48.2 AV	54.0	-5.8	2.32 H	226	43.0	5.2
7	#10500.00	49.5 PK	68.2	-18.7	2.73 H	282	35.3	14.2
8	15750.00	51.8 PK	74.0	-22.2	2.19 H	246	34.3	17.5
9	15750.00	38.2 AV	54.0	-15.8	2.19 H	246	20.7	17.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.8 PK	74.0	-9.2	1.76 V	206	59.6	5.2
2	5150.00	53.4 AV	54.0	-0.6	1.76 V	206	48.2	5.2
3	*5250.00	107.9 PK			1.76 V	206	103.0	4.9
4	*5250.00	98.1 AV			1.76 V	206	93.2	4.9
5	5350.00	61.9 PK	74.0	-12.1	1.76 V	206	56.7	5.2
6	5350.00	50.1 AV	54.0	-3.9	1.76 V	206	44.9	5.2
7	#10500.00	50.2 PK	68.2	-18.0	1.55 V	65	36.0	14.2
8	15750.00	53.1 PK	74.0	-20.9	3.48 V	87	35.6	17.5
9	15750.00	40.7 AV	54.0	-13.3	3.48 V	87	23.2	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.3 PK	74.0	-8.7	2.42 H	239	59.9	5.4
2	5460.00	52.6 AV	54.0	-1.4	2.42 H	239	47.2	5.4
3	#5470.00	61.6 PK	68.2	-6.6	2.42 H	239	56.2	5.4
4	*5570.00	108.6 PK			2.42 H	239	103.2	5.4
5	*5570.00	98.1 AV			2.42 H	239	92.7	5.4
6	#5725.00	60.2 PK	68.2	-8.0	2.42 H	239	54.7	5.5
7	11140.00	49.6 PK	74.0	-24.4	3.00 H	265	34.2	15.4
8	11140.00	37.8 AV	54.0	-16.2	3.00 H	265	22.4	15.4
9	#16710.00	59.6 PK	68.2	-8.6	3.07 H	228	37.9	21.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.7 PK	74.0	-10.3	2.17 V	249	58.3	5.4
2	5460.00	52.9 AV	54.0	-1.1	2.17 V	249	47.5	5.4
3	#5470.00	64.8 PK	68.2	-3.4	2.17 V	249	59.4	5.4
4	*5570.00	109.7 PK			2.17 V	249	104.3	5.4
5	*5570.00	98.7 AV			2.17 V	249	93.3	5.4
6	#5725.00	60.8 PK	68.2	-7.4	2.17 V	249	55.3	5.5
7	11140.00	50.8 PK	74.0	-23.2	1.71 V	308	35.4	15.4
8	11140.00	39.1 AV	54.0	-14.9	1.71 V	308	23.7	15.4
9	#16710.00	60.2 PK	68.2	-8.0	2.94 V	275	38.5	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT240)	Channel	CH 114 + CH 138 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=200 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Tank Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.2 PK	74.0	-9.8	1.91 H	104	58.8	5.4
2	5460.00	51.2 AV	54.0	-2.8	1.91 H	104	45.8	5.4
3	#5470.00	63.8 PK	68.2	-4.4	1.91 H	104	58.4	5.4
4	*5610.00	105.9 PK			2.55 H	232	100.5	5.4
5	*5610.00	94.9 AV			2.55 H	232	89.5	5.4
6	#5850.00	60.3 PK	68.2	-7.9	1.91 H	104	54.6	5.7
7	11220.00	50.2 PK	74.0	-23.8	3.05 H	266	35.1	15.1
8	11220.00	38.1 AV	54.0	-15.9	3.05 H	266	23.0	15.1
9	#16830.00	59.4 PK	68.2	-8.8	3.10 H	237	38.0	21.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.5 PK	74.0	-4.5	2.24 V	11	64.1	5.4
2	5460.00	50.6 AV	54.0	-3.4	2.24 V	11	45.2	5.4
3	#5470.00	66.7 PK	68.2	-1.5	2.24 V	11	61.3	5.4
4	*5610.00	106.4 PK			2.24 V	11	101.0	5.4
5	*5610.00	95.5 AV			2.24 V	11	90.1	5.4
6	#5850.00	65.5 PK	68.2	-2.7	2.24 V	11	59.8	5.7
7	11220.00	51.0 PK	74.0	-23.0	1.57 V	346	35.9	15.1
8	11220.00	38.7 AV	54.0	-15.3	1.57 V	346	23.6	15.1
9	#16830.00	59.6 PK	68.2	-8.6	2.93 V	312	38.2	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.7 PK	74.0	-10.3	2.42 H	224	58.5	5.2
2	5150.00	53.5 AV	54.0	-0.5	2.42 H	224	48.3	5.2
3	*5210.00	109.4 PK			2.42 H	224	104.3	5.1
4	*5210.00	99.8 AV			2.42 H	224	94.7	5.1
5	#10420.00	48.8 PK	68.2	-19.4	2.73 H	268	34.6	14.2
6	15630.00	51.4 PK	74.0	-22.6	2.16 H	230	33.6	17.8
7	15630.00	38.3 AV	54.0	-15.7	2.16 H	230	20.5	17.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.75 V	208	60.6	5.2
2	5150.00	53.5 AV	54.0	-0.5	1.75 V	208	48.3	5.2
3	*5210.00	111.5 PK			1.75 V	208	106.4	5.1
4	*5210.00	102.1 AV			1.75 V	208	97.0	5.1
5	#10420.00	49.0 PK	68.2	-19.2	2.67 V	259	34.8	14.2
6	15630.00	51.7 PK	74.0	-22.3	2.17 V	230	33.9	17.8
7	15630.00	38.4 AV	54.0	-15.6	2.17 V	230	20.6	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.7 PK	74.0	-20.3	3.45 H	223	48.5	5.2
2	5150.00	43.4 AV	54.0	-10.6	3.45 H	223	38.2	5.2
3	*5290.00	110.0 PK			3.45 H	223	104.9	5.1
4	*5290.00	100.5 AV			3.45 H	223	95.4	5.1
5	5350.00	65.1 PK	74.0	-8.9	3.45 H	223	59.9	5.2
6	5350.00	51.5 AV	54.0	-2.5	3.45 H	223	46.3	5.2
7	#10580.00	48.3 PK	68.2	-19.9	2.77 H	259	33.8	14.5
8	15870.00	51.5 PK	74.0	-22.5	2.14 H	242	34.1	17.4
9	15870.00	38.8 AV	54.0	-15.2	2.14 H	242	21.4	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.1 PK	74.0	-18.9	1.87 V	213	49.9	5.2
2	5150.00	44.8 AV	54.0	-9.2	1.87 V	213	39.6	5.2
3	*5290.00	111.7 PK			1.87 V	213	106.6	5.1
4	*5290.00	102.1 AV			1.87 V	213	97.0	5.1
5	5350.00	67.4 PK	74.0	-6.6	1.87 V	213	62.2	5.2
6	5350.00	52.5 AV	54.0	-1.5	1.87 V	213	47.3	5.2
7	#10580.00	49.2 PK	68.2	-19.0	2.66 V	270	34.7	14.5
8	15870.00	52.0 PK	74.0	-22.0	2.20 V	219	34.6	17.4
9	15870.00	38.4 AV	54.0	-15.6	2.20 V	219	21.0	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.9 PK	74.0	-10.1	2.73 H	225	58.5	5.4
2	5460.00	50.2 AV	54.0	-3.8	2.73 H	225	44.8	5.4
3	#5470.00	64.8 PK	68.2	-3.4	2.73 H	225	59.4	5.4
4	*5530.00	111.8 PK			2.73 H	225	106.5	5.3
5	*5530.00	100.9 AV			2.73 H	225	95.6	5.3
6	11060.00	50.3 PK	74.0	-23.7	3.05 H	258	34.6	15.7
7	11060.00	38.4 AV	54.0	-15.6	3.05 H	258	22.7	15.7
8	#16590.00	58.8 PK	68.2	-9.4	3.12 H	250	37.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	68.5 PK	74.0	-5.5	2.76 V	213	63.1	5.4
2	5460.00	53.7 AV	54.0	-0.3	2.76 V	213	48.3	5.4
3	#5470.00	67.1 PK	68.2	-1.1	2.76 V	213	61.7	5.4
4	*5530.00	112.3 PK			2.76 V	213	107.0	5.3
5	*5530.00	101.3 AV			2.76 V	213	96.0	5.3
6	11060.00	50.4 PK	74.0	-23.6	3.04 V	282	34.7	15.7
7	11060.00	38.5 AV	54.0	-15.5	3.04 V	282	22.8	15.7
8	#16590.00	59.4 PK	68.2	-8.8	3.08 V	249	37.6	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	2.60 H	226	52.8	5.4
2	5460.00	44.3 AV	54.0	-9.7	2.60 H	226	38.9	5.4
3	#5470.00	59.0 PK	68.2	-9.2	2.60 H	226	53.6	5.4
4	*5610.00	111.7 PK			2.60 H	226	106.3	5.4
5	*5610.00	101.8 AV			2.60 H	226	96.4	5.4
6	#5725.00	59.3 PK	68.2	-8.9	2.60 H	226	53.8	5.5
7	11220.00	49.6 PK	74.0	-24.4	3.04 H	242	34.5	15.1
8	11220.00	38.2 AV	54.0	-15.8	3.04 H	242	23.1	15.1
9	#16830.00	58.5 PK	68.2	-9.7	3.13 H	266	37.1	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.53 V	165	51.8	5.4
2	5460.00	43.4 AV	54.0	-10.6	1.53 V	165	38.0	5.4
3	#5470.00	58.0 PK	68.2	-10.2	1.53 V	165	52.6	5.4
4	*5610.00	110.1 PK			1.53 V	165	104.7	5.4
5	*5610.00	100.9 AV			1.53 V	165	95.5	5.4
6	#5725.00	57.3 PK	68.2	-10.9	1.53 V	165	51.8	5.5
7	11220.00	50.1 PK	74.0	-23.9	3.05 V	268	35.0	15.1
8	11220.00	38.3 AV	54.0	-15.7	3.05 V	268	23.2	15.1
9	#16830.00	58.9 PK	68.2	-9.3	3.10 V	237	37.5	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	2.90 H	230	50.0	5.4
2	5460.00	44.2 AV	54.0	-9.8	2.90 H	230	38.8	5.4
3	#5470.00	55.0 PK	68.2	-13.2	2.90 H	230	49.6	5.4
4	*5690.00	110.8 PK			2.90 H	230	105.3	5.5
5	*5690.00	102.0 AV			2.90 H	230	96.5	5.5
6	#5850.00	53.4 PK	68.2	-14.8	2.90 H	230	47.7	5.7
7	11380.00	49.5 PK	74.0	-24.5	3.09 H	247	34.1	15.4
8	11380.00	38.1 AV	54.0	-15.9	3.09 H	247	22.7	15.4
9	#17070.00	58.4 PK	68.2	-9.8	3.12 H	278	36.9	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.6 PK	74.0	-19.4	3.57 V	161	49.2	5.4
2	5460.00	43.2 AV	54.0	-10.8	3.57 V	161	37.8	5.4
3	#5470.00	53.8 PK	68.2	-14.4	3.57 V	161	48.4	5.4
4	*5690.00	112.8 PK			3.57 V	161	107.3	5.5
5	*5690.00	102.0 AV			3.57 V	161	96.5	5.5
6	#5850.00	53.9 PK	68.2	-14.3	3.57 V	161	48.2	5.7
7	11380.00	50.0 PK	74.0	-24.0	3.11 V	271	34.6	15.4
8	11380.00	38.2 AV	54.0	-15.8	3.11 V	271	22.8	15.4
9	#17070.00	58.7 PK	68.2	-9.5	3.14 V	227	37.2	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.11	66.4 PK	68.2	-1.8	2.82 H	230	60.9	5.5
2	*5775.00	112.2 PK			2.82 H	230	106.7	5.5
3	*5775.00	101.8 AV			2.82 H	230	96.3	5.5
4	#6010.48	53.3 PK	68.2	-14.9	2.82 H	230	47.6	5.7
5	11550.00	49.8 PK	74.0	-24.2	3.09 H	249	34.6	15.2
6	11550.00	38.2 AV	54.0	-15.8	3.09 H	249	23.0	15.2
7	#17325.00	58.7 PK	68.2	-9.5	3.17 H	285	37.1	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.25	67.0 PK	68.2	-1.2	3.86 V	345	61.5	5.5
2	*5775.00	113.8 PK			3.86 V	345	108.3	5.5
3	*5775.00	102.8 AV			3.86 V	345	97.3	5.5
4	#5977.78	52.3 PK	68.2	-15.9	3.86 V	345	46.6	5.7
5	11550.00	50.2 PK	74.0	-23.8	3.08 V	277	35.0	15.2
6	11550.00	38.5 AV	54.0	-15.5	3.08 V	277	23.3	15.2
7	#17325.00	59.3 PK	68.2	-8.9	3.15 V	218	37.7	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.9 PK	74.0	-11.1	2.61 H	224	57.7	5.2
2	5150.00	49.8 AV	54.0	-4.2	2.61 H	224	44.6	5.2
3	*5210.00	110.2 PK			2.61 H	224	105.1	5.1
4	*5210.00	100.2 AV			2.61 H	224	95.1	5.1
5	#10420.00	49.0 PK	68.2	-19.2	2.79 H	261	34.8	14.2
6	15630.00	51.3 PK	74.0	-22.7	2.16 H	235	33.5	17.8
7	15630.00	38.1 AV	54.0	-15.9	2.16 H	235	20.3	17.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.82 V	211	60.5	5.2
2	5150.00	51.2 AV	54.0	-2.8	1.82 V	211	46.0	5.2
3	*5210.00	110.4 PK			1.82 V	211	105.3	5.1
4	*5210.00	101.7 AV			1.82 V	211	96.6	5.1
5	#10420.00	49.1 PK	68.2	-19.1	2.73 V	258	34.9	14.2
6	15630.00	52.1 PK	74.0	-21.9	2.12 V	216	34.3	17.8
7	15630.00	38.9 AV	54.0	-15.1	2.12 V	216	21.1	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	3.45 H	223	48.9	5.2
2	5150.00	44.6 AV	54.0	-9.4	3.45 H	223	39.4	5.2
3	*5290.00	110.6 PK			3.45 H	223	105.5	5.1
4	*5290.00	101.7 AV			3.45 H	223	96.6	5.1
5	5350.00	65.7 PK	74.0	-8.3	3.45 H	223	60.5	5.2
6	5350.00	52.7 AV	54.0	-1.3	3.45 H	223	47.5	5.2
7	#10580.00	48.5 PK	68.2	-19.7	2.74 H	270	34.0	14.5
8	15870.00	51.6 PK	74.0	-22.4	2.20 H	226	34.2	17.4
9	15870.00	38.7 AV	54.0	-15.3	2.20 H	226	21.3	17.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.7 PK	74.0	-15.3	1.86 V	212	53.5	5.2
2	5150.00	46.0 AV	54.0	-8.0	1.86 V	212	40.8	5.2
3	*5290.00	113.3 PK			1.86 V	212	108.2	5.1
4	*5290.00	102.8 AV			1.86 V	212	97.7	5.1
5	5350.00	66.5 PK	74.0	-7.5	1.86 V	212	61.3	5.2
6	5350.00	53.8 AV	54.0	-0.2	1.86 V	212	48.6	5.2
7	#10580.00	49.2 PK	68.2	-19.0	2.69 V	264	34.7	14.5
8	15870.00	51.9 PK	74.0	-22.1	2.18 V	210	34.5	17.4
9	15870.00	38.3 AV	54.0	-15.7	2.18 V	210	20.9	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.6 PK	74.0	-4.4	2.86 H	224	64.2	5.4
2	5460.00	53.2 AV	54.0	-0.8	2.86 H	224	47.8	5.4
3	#5470.00	60.0 PK	68.2	-8.2	2.86 H	224	54.6	5.4
4	*5530.00	112.6 PK			2.86 H	224	107.3	5.3
5	*5530.00	102.2 AV			2.86 H	224	96.9	5.3
6	11060.00	49.9 PK	74.0	-24.1	3.03 H	249	34.2	15.7
7	11060.00	38.2 AV	54.0	-15.8	3.03 H	249	22.5	15.7
8	#16590.00	58.9 PK	68.2	-9.3	3.12 H	242	37.1	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.7 PK	74.0	-6.3	2.53 V	212	62.3	5.4
2	5460.00	53.6 AV	54.0	-0.4	2.53 V	212	48.2	5.4
3	#5470.00	62.0 PK	68.2	-6.2	2.53 V	212	56.6	5.4
4	*5530.00	112.4 PK			2.53 V	212	107.1	5.3
5	*5530.00	102.6 AV			2.53 V	212	97.3	5.3
6	11060.00	50.3 PK	74.0	-23.7	3.10 V	266	34.6	15.7
7	11060.00	38.2 AV	54.0	-15.8	3.10 V	266	22.5	15.7
8	#16590.00	59.6 PK	68.2	-8.6	3.09 V	239	37.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.2 PK	74.0	-8.8	2.81 H	233	59.8	5.4
2	5460.00	46.1 AV	54.0	-7.9	2.81 H	233	40.7	5.4
3	#5470.00	59.1 PK	68.2	-9.1	2.81 H	233	53.7	5.4
4	*5610.00	113.6 PK			2.81 H	233	108.2	5.4
5	*5610.00	103.9 AV			2.81 H	233	98.5	5.4
6	#5725.00	61.7 PK	68.2	-6.5	2.81 H	233	56.2	5.5
7	11220.00	49.5 PK	74.0	-24.5	3.10 H	242	34.4	15.1
8	11220.00	37.9 AV	54.0	-16.1	3.10 H	242	22.8	15.1
9	#16830.00	58.5 PK	68.2	-9.7	3.07 H	255	37.1	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	1.54 V	165	52.8	5.4
2	5460.00	44.4 AV	54.0	-9.6	1.54 V	165	39.0	5.4
3	#5470.00	58.3 PK	68.2	-9.9	1.54 V	165	52.9	5.4
4	*5610.00	112.1 PK			1.54 V	165	106.7	5.4
5	*5610.00	102.3 AV			1.54 V	165	96.9	5.4
6	#5725.00	58.7 PK	68.2	-9.5	1.54 V	165	53.2	5.5
7	11220.00	49.9 PK	74.0	-24.1	3.08 V	282	34.8	15.1
8	11220.00	37.9 AV	54.0	-16.1	3.08 V	282	22.8	15.1
9	#16830.00	59.3 PK	68.2	-8.9	3.05 V	224	37.9	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.5 PK	74.0	-19.5	1.94 H	230	49.1	5.4
2	5460.00	43.0 AV	54.0	-11.0	1.94 H	230	37.6	5.4
3	#5470.00	53.1 PK	68.2	-15.1	1.94 H	230	47.7	5.4
4	*5690.00	111.9 PK			1.94 H	230	106.4	5.5
5	*5690.00	102.6 AV			1.94 H	230	97.1	5.5
6	#5850.00	52.6 PK	68.2	-15.6	1.94 H	230	46.9	5.7
7	11380.00	49.5 PK	74.0	-24.5	3.10 H	263	34.1	15.4
8	11380.00	37.9 AV	54.0	-16.1	3.10 H	263	22.5	15.4
9	#17070.00	58.2 PK	68.2	-10.0	3.10 H	272	36.7	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.2 PK	74.0	-18.8	1.75 V	338	49.8	5.4
2	5460.00	43.9 AV	54.0	-10.1	1.75 V	338	38.5	5.4
3	#5470.00	54.2 PK	68.2	-14.0	1.75 V	338	48.8	5.4
4	*5690.00	111.8 PK			1.75 V	338	106.3	5.5
5	*5690.00	102.2 AV			1.75 V	338	96.7	5.5
6	#5850.00	54.9 PK	68.2	-13.3	1.75 V	338	49.2	5.7
7	11380.00	50.1 PK	74.0	-23.9	3.16 V	255	34.7	15.4
8	11380.00	38.6 AV	54.0	-15.4	3.16 V	255	23.2	15.4
9	#17070.00	58.4 PK	68.2	-9.8	3.19 V	227	36.9	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 40 MHz	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.89	66.5 PK	68.2	-1.7	2.82 H	230	61.0	5.5
2	*5775.00	114.0 PK			2.82 H	230	108.5	5.5
3	*5775.00	102.2 AV			2.82 H	230	96.7	5.5
4	#5938.59	52.1 PK	68.2	-16.1	2.82 H	230	46.6	5.5
5	11550.00	49.8 PK	74.0	-24.2	3.08 H	262	34.6	15.2
6	11550.00	38.5 AV	54.0	-15.5	3.08 H	262	23.3	15.2
7	#17325.00	58.3 PK	68.2	-9.9	3.18 H	272	36.7	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.47	68.0 PK	68.2	-0.2	1.60 V	339	62.5	5.5
2	*5775.00	112.3 PK			1.60 V	339	106.8	5.5
3	*5775.00	102.5 AV			1.60 V	339	97.0	5.5
4	#6002.84	52.8 PK	68.2	-15.4	1.60 V	339	47.1	5.7
5	11550.00	50.4 PK	74.0	-23.6	3.10 V	268	35.2	15.2
6	11550.00	38.7 AV	54.0	-15.3	3.10 V	268	23.5	15.2
7	#17325.00	59.6 PK	68.2	-8.6	3.17 V	215	38.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	2.38 H	225	60.3	5.2
2	5150.00	51.2 AV	54.0	-2.8	2.38 H	225	46.0	5.2
3	*5250.00	107.5 PK			2.38 H	225	102.6	4.9
4	*5250.00	96.9 AV			2.38 H	225	92.0	4.9
5	5350.00	66.4 PK	74.0	-7.6	2.38 H	225	61.2	5.2
6	5350.00	51.8 AV	54.0	-2.2	2.38 H	225	46.6	5.2
7	#10500.00	49.4 PK	68.2	-18.8	2.78 H	271	35.2	14.2
8	15750.00	51.4 PK	74.0	-22.6	2.15 H	219	33.9	17.5
9	15750.00	38.5 AV	54.0	-15.5	2.15 H	219	21.0	17.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.73 V	206	62.1	5.2
2	5150.00	53.0 AV	54.0	-1.0	1.73 V	206	47.8	5.2
3	*5250.00	108.8 PK			1.73 V	206	103.9	4.9
4	*5250.00	99.4 AV			1.73 V	206	94.5	4.9
5	5350.00	69.5 PK	74.0	-4.5	1.73 V	206	64.3	5.2
6	5350.00	53.5 AV	54.0	-0.5	1.73 V	206	48.3	5.2
7	#10500.00	49.5 PK	68.2	-18.7	2.77 V	252	35.3	14.2
8	15750.00	52.0 PK	74.0	-22.0	2.07 V	203	34.5	17.5
9	15750.00	38.9 AV	54.0	-15.1	2.07 V	203	21.4	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.7 PK	74.0	-7.3	3.03 H	223	61.3	5.4
2	5460.00	52.2 AV	54.0	-1.8	3.03 H	223	46.8	5.4
3	#5470.00	62.9 PK	68.2	-5.3	3.03 H	223	57.5	5.4
4	*5570.00	108.3 PK			3.03 H	223	102.9	5.4
5	*5570.00	97.9 AV			3.03 H	223	92.5	5.4
6	#5725.00	61.0 PK	68.2	-7.2	3.03 H	223	55.5	5.5
7	11140.00	50.0 PK	74.0	-24.0	3.11 H	255	34.6	15.4
8	11140.00	39.0 AV	54.0	-15.0	3.11 H	255	23.6	15.4
9	#16710.00	58.5 PK	68.2	-9.7	3.20 H	286	36.8	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.0 PK	74.0	-7.0	3.85 V	163	61.6	5.4
2	5460.00	53.7 AV	54.0	-0.3	3.85 V	163	48.3	5.4
3	#5470.00	62.6 PK	68.2	-5.6	3.85 V	163	57.2	5.4
4	*5570.00	108.1 PK			3.85 V	163	102.7	5.4
5	*5570.00	98.4 AV			3.85 V	163	93.0	5.4
6	#5725.00	64.6 PK	68.2	-3.6	3.85 V	163	59.1	5.5
7	11140.00	50.6 PK	74.0	-23.4	3.15 V	259	35.2	15.4
8	11140.00	39.3 AV	54.0	-14.7	3.15 V	259	23.9	15.4
9	#16710.00	59.6 PK	68.2	-8.6	3.11 V	226	37.9	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.2 PK	74.0	-6.8	2.43 H	221	62.0	5.2
2	5150.00	51.9 AV	54.0	-2.1	2.43 H	221	46.7	5.2
3	*5250.00	107.3 PK			2.43 H	221	102.4	4.9
4	*5250.00	96.6 AV			2.43 H	221	91.7	4.9
5	5350.00	65.7 PK	74.0	-8.3	2.43 H	221	60.5	5.2
6	5350.00	47.1 AV	54.0	-6.9	2.43 H	221	41.9	5.2
7	#10500.00	49.2 PK	68.2	-19.0	2.79 H	272	35.0	14.2
8	15750.00	51.2 PK	74.0	-22.8	2.20 H	225	33.7	17.5
9	15750.00	38.3 AV	54.0	-15.7	2.20 H	225	20.8	17.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	1.79 V	209	62.9	5.2
2	5150.00	53.4 AV	54.0	-0.6	1.79 V	209	48.2	5.2
3	*5250.00	110.1 PK			1.79 V	209	105.2	4.9
4	*5250.00	98.7 AV			1.79 V	209	93.8	4.9
5	5350.00	67.1 PK	74.0	-6.9	1.79 V	209	61.9	5.2
6	5350.00	49.4 AV	54.0	-4.6	1.79 V	209	44.2	5.2
7	#10500.00	49.6 PK	68.2	-18.6	2.76 V	262	35.4	14.2
8	15750.00	52.3 PK	74.0	-21.7	2.09 V	201	34.8	17.5
9	15750.00	39.2 AV	54.0	-14.8	2.09 V	201	21.7	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 60 MHz	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	69.9 PK	74.0	-4.1	2.90 H	229	64.5	5.4
2	5460.00	52.5 AV	54.0	-1.5	2.90 H	229	47.1	5.4
3	#5470.00	66.0 PK	68.2	-2.2	2.90 H	229	60.6	5.4
4	*5570.00	108.6 PK			2.90 H	229	103.2	5.4
5	*5570.00	98.1 AV			2.90 H	229	92.7	5.4
6	#5725.00	64.8 PK	68.2	-3.4	2.90 H	229	59.3	5.5
7	11140.00	50.1 PK	74.0	-23.9	3.07 H	241	34.7	15.4
8	11140.00	39.2 AV	54.0	-14.8	3.07 H	241	23.8	15.4
9	#16710.00	58.5 PK	68.2	-9.7	3.21 H	281	36.8	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	70.3 PK	74.0	-3.7	3.95 V	165	64.9	5.4
2	5460.00	52.7 AV	54.0	-1.3	3.95 V	165	47.3	5.4
3	#5470.00	67.4 PK	68.2	-0.8	3.95 V	165	62.0	5.4
4	*5570.00	110.0 PK			3.95 V	165	104.6	5.4
5	*5570.00	98.5 AV			3.95 V	165	93.1	5.4
6	#5725.00	67.9 PK	68.2	-0.3	3.95 V	165	62.4	5.5
7	11140.00	50.7 PK	74.0	-23.3	3.16 V	249	35.3	15.4
8	11140.00	39.4 AV	54.0	-14.6	3.16 V	249	24.0	15.4
9	#16710.00	60.0 PK	68.2	-8.2	3.12 V	223	38.3	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	2.42 H	222	55.2	5.2
2	5150.00	49.8 AV	54.0	-4.2	2.42 H	222	44.6	5.2
3	*5250.00	108.1 PK			2.42 H	222	103.2	4.9
4	*5250.00	98.5 AV			2.42 H	222	93.6	4.9
5	5350.00	68.1 PK	74.0	-5.9	2.42 H	222	62.9	5.2
6	5350.00	52.0 AV	54.0	-2.0	2.42 H	222	46.8	5.2
7	#10500.00	48.9 PK	68.2	-19.3	2.77 H	281	34.7	14.2
8	15750.00	51.4 PK	74.0	-22.6	2.18 H	225	33.9	17.5
9	15750.00	38.7 AV	54.0	-15.3	2.18 H	225	21.2	17.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.93 V	211	60.1	5.2
2	5150.00	51.9 AV	54.0	-2.1	1.93 V	211	46.7	5.2
3	*5250.00	109.9 PK			1.93 V	211	105.0	4.9
4	*5250.00	100.4 AV			1.93 V	211	95.5	4.9
5	5350.00	67.0 PK	74.0	-7.0	1.93 V	211	61.8	5.2
6	5350.00	52.0 AV	54.0	-2.0	1.93 V	211	46.8	5.2
7	#10500.00	49.3 PK	68.2	-18.9	2.81 V	263	35.1	14.2
8	15750.00	52.6 PK	74.0	-21.4	2.05 V	201	35.1	17.5
9	15750.00	39.5 AV	54.0	-14.5	2.05 V	201	22.0	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 80 MHz	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Wayne Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.2 PK	74.0	-8.8	1.50 H	225	59.8	5.4
2	5460.00	53.1 AV	54.0	-0.9	1.50 H	225	47.7	5.4
3	#5470.00	55.2 PK	68.2	-13.0	1.50 H	225	49.8	5.4
4	*5570.00	109.5 PK			1.50 H	225	104.1	5.4
5	*5570.00	98.3 AV			1.50 H	225	92.9	5.4
6	#5725.00	62.6 PK	68.2	-5.6	1.50 H	225	57.1	5.5
7	11140.00	49.6 PK	74.0	-24.4	3.06 H	238	34.2	15.4
8	11140.00	38.8 AV	54.0	-15.2	3.06 H	238	23.4	15.4
9	#16710.00	58.4 PK	68.2	-9.8	3.16 H	276	36.7	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	68.0 PK	74.0	-6.0	3.66 V	168	62.6	5.4
2	5460.00	53.6 AV	54.0	-0.4	3.66 V	168	48.2	5.4
3	#5470.00	61.3 PK	68.2	-6.9	3.66 V	168	55.9	5.4
4	*5570.00	110.5 PK			3.66 V	168	105.1	5.4
5	*5570.00	99.3 AV			3.66 V	168	93.9	5.4
6	#5725.00	63.2 PK	68.2	-5.0	3.66 V	168	57.7	5.5
7	11140.00	50.3 PK	74.0	-23.7	3.21 V	250	34.9	15.4
8	11140.00	39.3 AV	54.0	-14.7	3.21 V	250	23.9	15.4
9	#16710.00	59.8 PK	68.2	-8.4	3.15 V	234	38.1	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.