

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Bluetooth portable speaker

MODEL No.: NB11

FCC ID: 2ABLQ-NOGOBT

Trademark: 

REPORT NO.: ES140725307E

ISSUE DATE: August 12, 2014

Prepared for

NOGO INTERNATIONAL CO., LTD

**The 4th F. of Bldg. 1, Huangtian industrial zone, Xixiang town,
Bao'an district, Shenzhen, China**

Prepared by

SHENZHEN EMTEK CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	NOGO INTERNATIONAL CO., LTD The 4th F.of Bldg.1, Huangtian industrial zone, Xixiang town, Bao'an district, Shenzhen, China
Manufacturer:	Shenzhen Xin Feng Long Industrial CO., LTD The 4th F.of Bldg.1, Huangtian industrial zone, Xixiang town, Bao'an district, Shenzhen, China
Product Description:	Bluetooth portable speaker
Model Number:	NB11
File Number:	ES140725307E
Date of Test:	July 25, 2014 to August 12, 2014

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.


Date of Test :	July 25, 2014 to August 12, 2014
Prepared by :	 Yaping Shen/Editor
Reviewer :	 Joe Xia/Supervisor
Approve & Authorized Signer :	 Lisa Wang/Manager

Table of Contents

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3	TEST METHODOLOGY	5
1.4	SPECIAL ACCESSORIES	5
1.5	EQUIPMENT MODIFICATIONS	5
1.6	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	LIMITATION	7
2.5	CONFIGURATION OF TESTED SYSTEM	11
2.6	DESCRIPTION OF TEST MODES	11
3.	SUMMARY OF TEST RESULTS	12
4.	CONDUCTED EMISSIONS TEST	13
4.1	MEASUREMENT PROCEDURE:	13
4.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
4.3	MEASUREMENT EQUIPMENT USED:	13
4.4	CONDUCTED EMISSION LIMIT	13
4.5	MEASUREMENT RESULT:	14
5.	RADIATED EMISSION TEST	16
5.1	MEASUREMENT PROCEDURE	16
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
5.3	MEASUREMENT EQUIPMENT USED:	18
5.4	MEASUREMENT RESULT	18
6.	CHANNEL SEPARATION TEST	28
6.1	MEASUREMENT PROCEDURE	28
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28
6.3	MEASUREMENT EQUIPMENT USED:	28
6.4	MEASUREMENT RESULTS:	28
7.	20DB BANDWIDTH TEST	35
7.1	MEASUREMENT PROCEDURE	35
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	35
7.3	MEASUREMENT EQUIPMENT USED:	35
7.4	MEASUREMENT RESULTS:	35
8.	QUANTITY OF HOPPING CHANNEL TEST	42

8.1	MEASUREMENT PROCEDURE.....	42
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	42
8.3	MEASUREMENT EQUIPMENT USED:	42
8.4	MEASUREMENT RESULTS:	42
9.	TIME OF OCCUPANCY (DWELL TIME) TEST	43
9.1	MEASUREMENT PROCEDURE.....	43
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	43
9.3	MEASUREMENT EQUIPMENT USED:	43
9.4	MEASUREMENT RESULTS:	43
10.	MAXIMUM PEAK OUTPUT POWER TEST	46
10.1	MEASUREMENT PROCEDURE.....	46
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	46
10.3	MEASUREMENT EQUIPMENT USED:	46
10.4	MEASUREMENT RESULTS:	46
11.	BAND EDGE TEST.....	48
11.1	MEASUREMENT PROCEDURE.....	48
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	48
11.3	MEASUREMENT EQUIPMENT USED:	48
11.4	MEASUREMENT RESULTS:	49
12.	ANTENNA PORT EMISSION.....	52
12.1	TEST EQUIPMENT.....	52
12.2	MEASURING INSTRUMENTS AND SETTING.....	52
12.3	TEST PROCEDURES	52
12.4	BLOCK DIAGRAM OF TEST SETUP.....	52
12.5	TEST RESULT	52
13.	ANTENNA APPLICATION.....	56
13.1	ANTENNA REQUIREMENT	56
13.2	RESULT	56

1 GENERAL INFORMATION

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz;
- B). Modulation: GFSK, 1/4 Π -DQPSK, 8DPSK;
- C). Number of Channel: 79 channels;
- D). Maximum peak Output Power: 4.916dBm;
- E). Antenna Type: Integral antenna
- F). Antenna GAIN: 1.2 dBi
- G). Power Supply: DC 3.7V(Internal rechargeable lithium battery) or DC 5V supplied by external power

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2ABLQ-NOGOBT filing to comply with Section 15.247 of the FCC Part 15 Subpart C Rules. The composite system is compliance with Subpart B is authorized under a DOC procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009) and FCC Public Notice DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010
The Certificate Registration Number is 4480A-2.

Name of Firm

: SHENZHEN EMTEK CO., LTD

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
	902-928	<250	>250	NA	NA
	2400-2483.5	NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250 kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()”is all channel’s average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
0.009~0.490	2400/F(KHz)	300	
0.490~1.705	2400/F(KHz)	30	See the remark
1.705~30.0	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\mu\text{V/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Distance extrapolation factor $=40\log(\text{Specific distance/ test distance})(\text{dB})$;
 Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

AC Adapter

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Bluetooth portable speaker		NB11	2ABLQ-N OGBT	N/A	EUT
2.	Adapter	Chicony	W12-010N3A	N/A	N/A	Support equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

2.6 Description of test modes

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes GFSK, 1/4II-DQPSK, 8DPSK have been tested and the result was reported. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
0	2402
39	2441
78	2480

3. Summary of Test Results


FCC Rule	Description Of Test	Result
15.247(a)(1)	Channel Separation test	Pass
15.247(a)(1)	20dB Bandwidth	Pass
15.247(a)(1)	Quantity of Hopping Channel	Pass
15.247(a)(1)	Time of Occupancy (Dwell Time)	Pass
15.247(b)(1)	Max Peak output Power test	Pass
15.247(d)	Band edge test	Pass
15.207	AC Power Conducted Emission	Pass
15.247(d)	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
15.203&15.247(b)	Antenna Application	Pass

4. Conducted Emissions Test

4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

4.2 Test SET-UP (Block Diagram of Configuration)

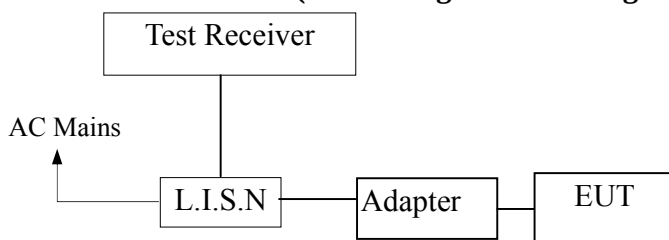

4.3 Measurement Equipment Used:

4.4

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/17/2014	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/17/2014	05/16/2015

4.4 Conducted Emission Limit


(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.5 Measurement Result:

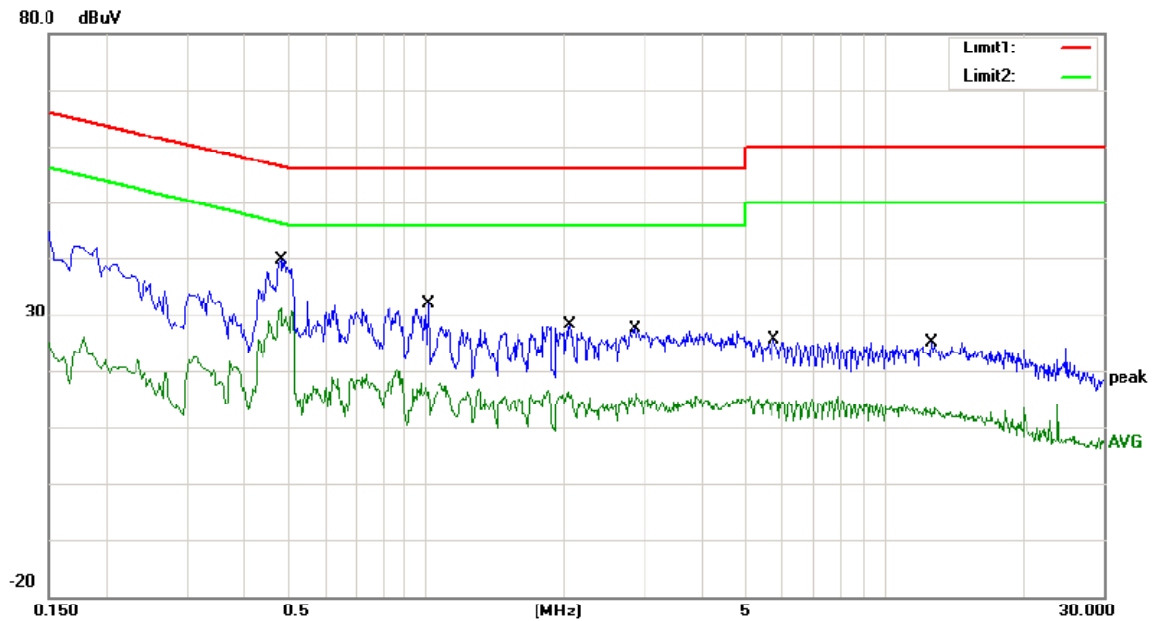

Site Conduction #1

Phase: **L1**

Temperature: 26

Limit: (CE)FCC PART 15 C

Power: AC 120V/60Hz


Humidity: 60 %

Mode: Bluetooth ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.4820	39.71	0.00	39.71	56.30	-16.59	QP	
2		1.0060	32.01	0.00	32.01	56.00	-23.99	QP	
3		2.0580	28.05	0.00	28.05	56.00	-27.95	QP	
4		2.8540	27.26	0.00	27.26	56.00	-28.74	QP	
5		5.7340	25.47	0.00	25.47	60.00	-34.53	QP	
6		12.7260	24.97	0.00	24.97	60.00	-35.03	QP	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: SYP

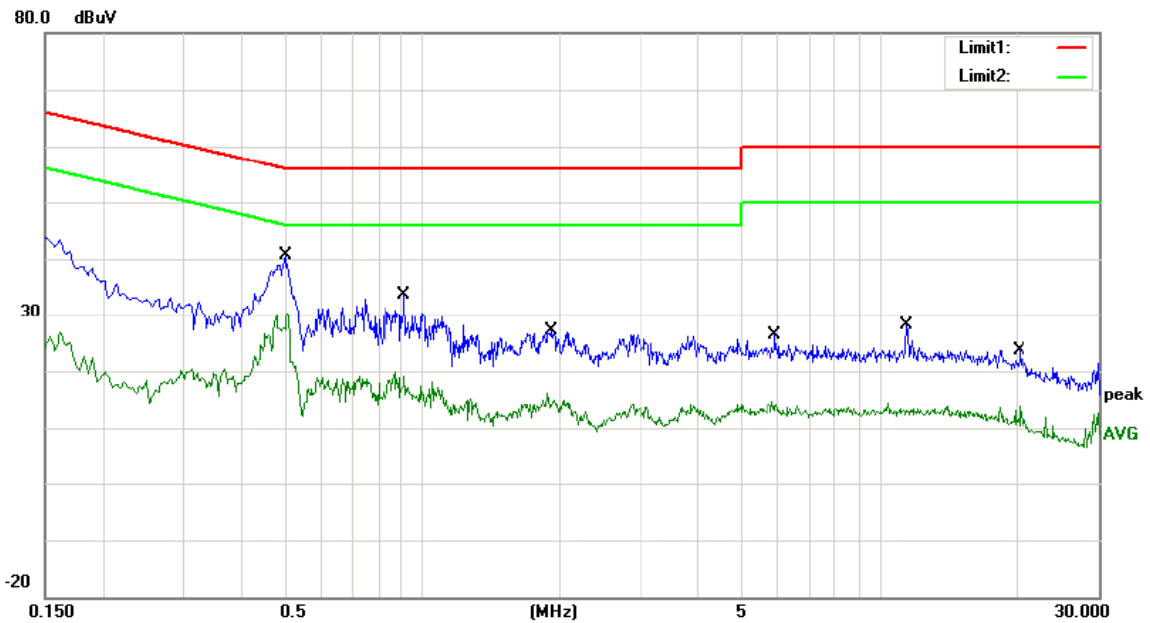

Site Conduction #1

Phase: **N**

Temperature: 26

Limit: (CE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 60 %

Mode: Bluetooth ON

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.5020	40.62	0.00	40.62	56.00	-15.38	QP	
2		0.9140	33.70	0.00	33.70	56.00	-22.30	QP	
3		1.9220	27.14	0.00	27.14	56.00	-28.86	QP	
4		5.9180	26.48	0.00	26.48	60.00	-33.52	QP	
5		11.4780	28.05	0.00	28.05	60.00	-31.95	QP	
6		20.2620	23.67	0.00	23.67	60.00	-36.33	QP	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: SYP

5. Radiated Emission Test

5.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30 MHz to 1GHz setting resolution bandwidth 120 kHz and video bandwidth 300kHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	120kHz
VB	300kHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	AVG
Trace	Max hold

5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

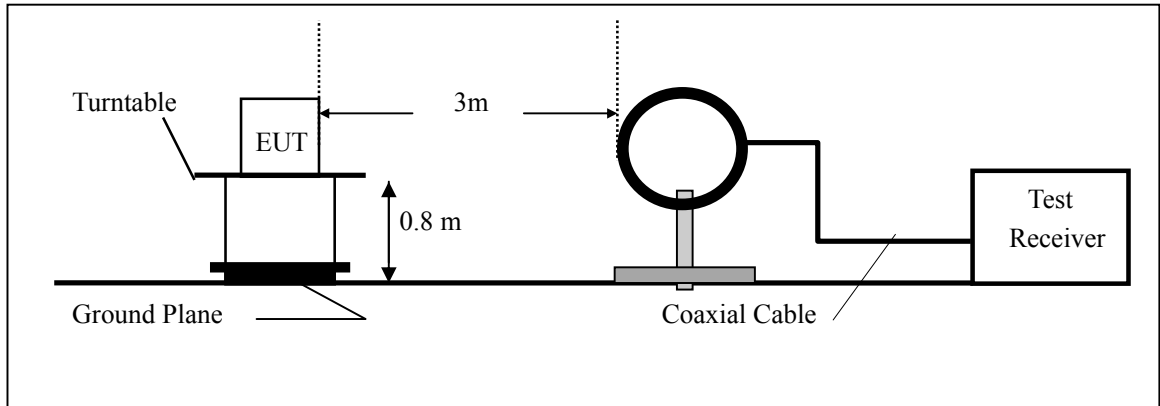

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

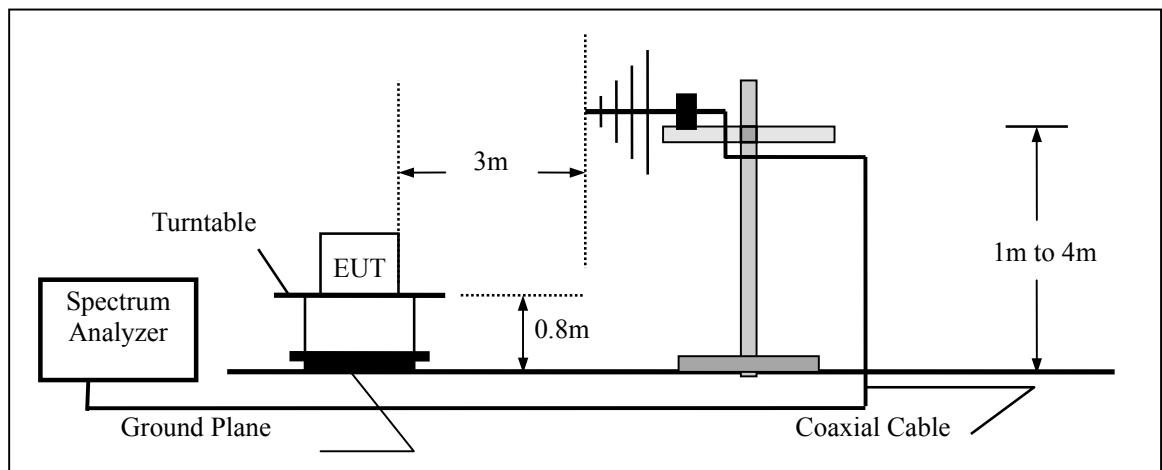

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

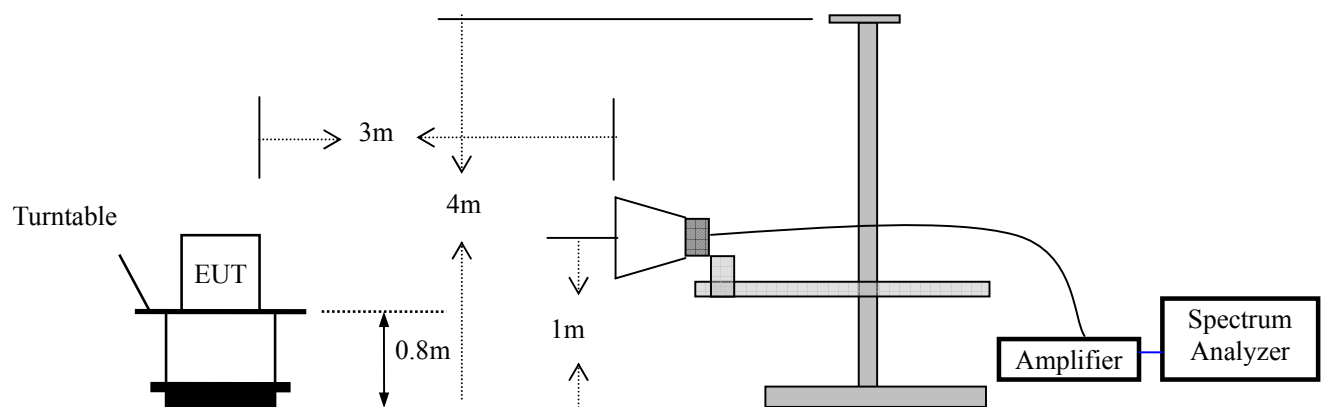

5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/17/2014	05/16/2015
Spectrum Analyzer	HP	E4407B	839840481	05/17/2014	05/16/2015
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015

5.4 Measurement Result

All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and all modulation methods do not exceed the limits.


Operation Mode: Bluetooth Mode Test Date : August 05, 2014
Frequency Range: 9KHz-30MHz Temperature : 24°C
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: KK

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Operation Mode: 2402MHz
Frequency Range: 30~1000MHz
Test Result: PASS
Measured Distance: 3m
Test mode: GFSK

Test Date : August 05, 2014
Temperature : 24°C
Humidity : 53 %
Test By: KK

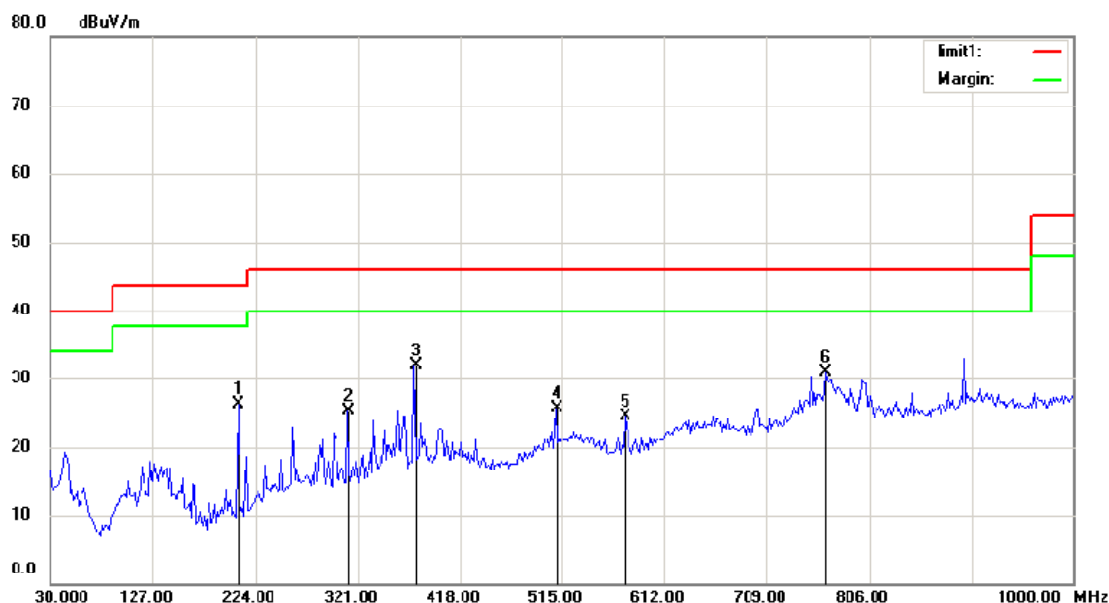

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: DC 3.7V by battery

Humidity: 53 %


Mode: TX 2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		207.2114	15.86	10.38	26.24	43.50	-17.26	QP		
2		311.3622	11.17	14.19	25.36	46.00	-20.64	QP		
3	*	375.0962	14.52	17.35	31.87	46.00	-14.13	QP		
4		508.7821	4.64	20.99	25.63	46.00	-20.37	QP		
5		575.6250	4.54	19.96	24.50	46.00	-21.50	QP		
6		765.2723	6.27	24.68	30.95	46.00	-15.05	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

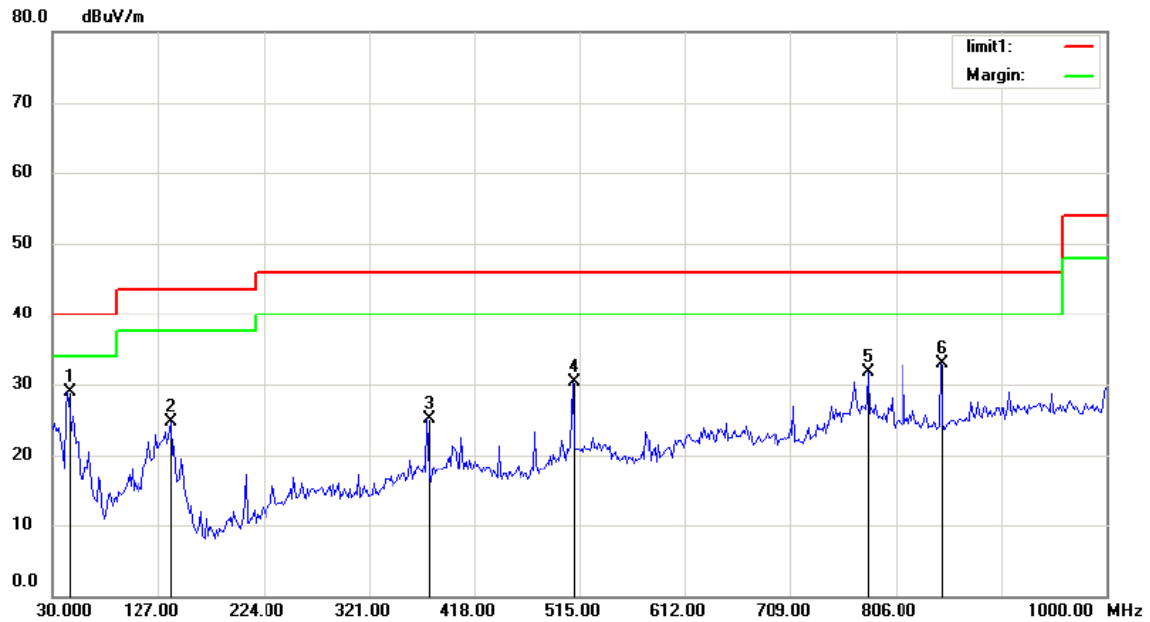

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: DC 3.7V by battery

Humidity: 53 %

Mode:TX 2402

Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	43.9904	10.68	18.17	28.85	40.00	-11.15	QP		
2		138.8141	15.57	9.22	24.79	43.50	-18.71	QP		
3		375.0962	7.68	17.35	25.03	46.00	-20.97	QP		
4		508.7821	9.22	20.99	30.21	46.00	-15.79	QP		
5		780.8173	6.47	25.29	31.76	46.00	-14.24	QP		
6		847.6603	8.42	24.48	32.90	46.00	-13.10	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

Operation Mode: 2441MHz
Frequency Range: 30~1000MHz
Test Result: PASS
Measured Distance: 3m
Test mode: GFSK

Test Date : August 05, 2014
Temperature : 24℃
Humidity : 53 %
Test By: KK

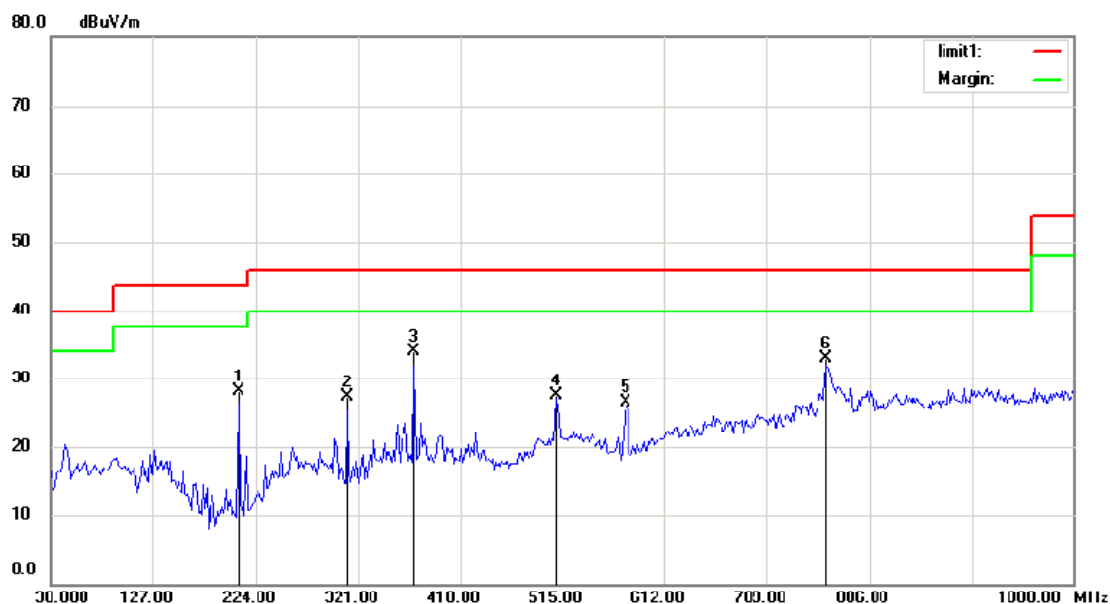

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: DC 3.7V by battery

Humidity: 53 %


Mode:TX 2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		206.1700	17.81	10.37	28.18	43.50	-15.32	QP		
2		310.3200	13.14	14.16	27.30	46.00	-18.70	QP		
3	*	374.0600	16.51	17.30	33.81	46.00	-12.19	QP		
4		507.7400	6.69	20.88	27.57	46.00	-18.43	QP		
5		574.5900	6.49	19.95	26.44	46.00	-19.56	QP		
6		764.2300	8.25	24.64	32.89	46.00	-13.11	QP		

*:Maximum data x:Over limit l:over margin

Operator: KK

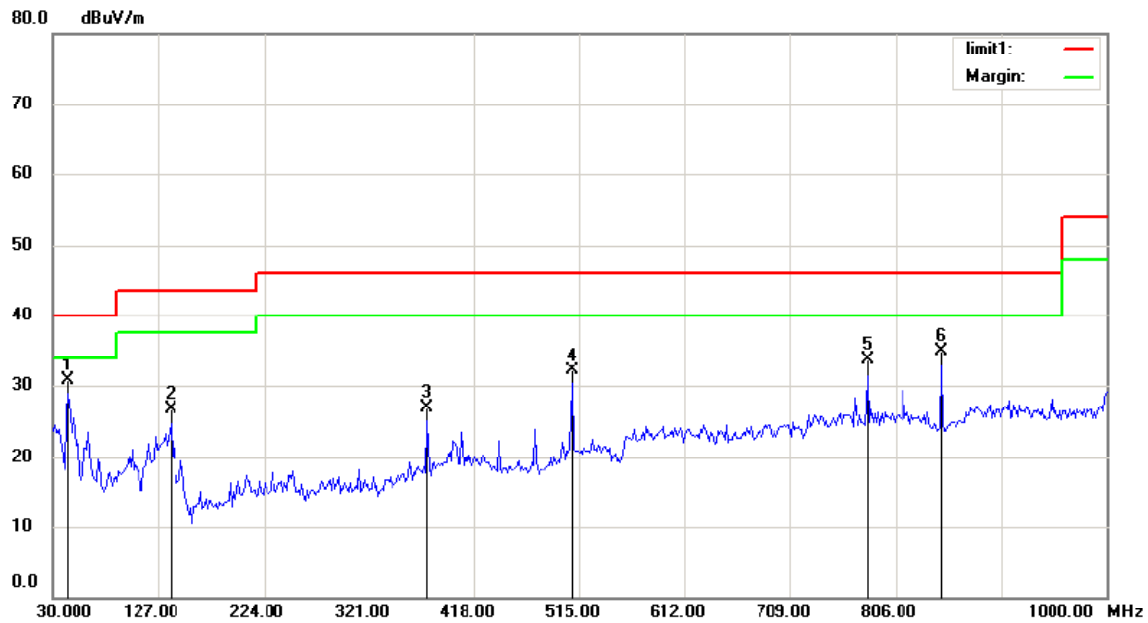

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: DC 3.7V by battery

Humidity: 53 %

Mode: TX 2441

Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	42.9500	13.30	17.49	30.79	40.00	-9.21	QP		
2		137.7700	17.41	9.32	26.73	43.50	-16.77	QP		
3		374.0600	9.67	17.30	26.97	46.00	-19.03	QP		
4		507.7400	11.27	20.88	32.15	46.00	-13.85	QP		
5		779.7800	8.40	25.30	33.70	46.00	-12.30	QP		
6		846.6200	10.39	24.45	34.84	46.00	-11.16	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

Operation Mode: 2480MHz
Frequency Range: 30~1000MHz
Test Result: PASS
Measured Distance: 3m
Test mode: GFSK

Test Date : August 05, 2014
Temperature : 24℃
Humidity : 53 %
Test By: KK

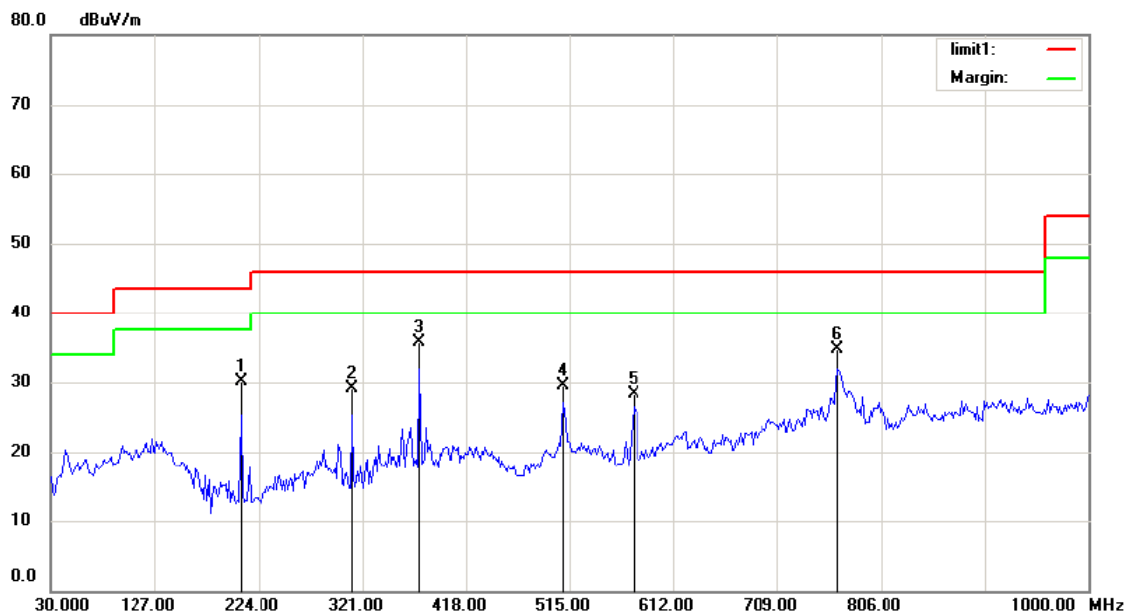

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: DC 3.7V by battery

Humidity: 53 %


Mode: TX 2480

Note:

No	Mk	Freq	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		206.1700	19.65	10.37	30.02	43.50	-13.48	QP		
2		310.3200	14.98	14.16	29.14	46.00	-16.86	QP		
3	*	374.0600	18.35	17.30	35.65	46.00	-10.35	QP		
4		507.7400	8.53	20.88	29.41	46.00	-16.59	QP		
5		574.5900	8.33	19.95	28.28	46.00	-17.72	QP		
6		764.2300	10.09	24.64	34.73	46.00	11.27	QP		

*:Maximum data x:Over limit l:over margin

Operator: KK

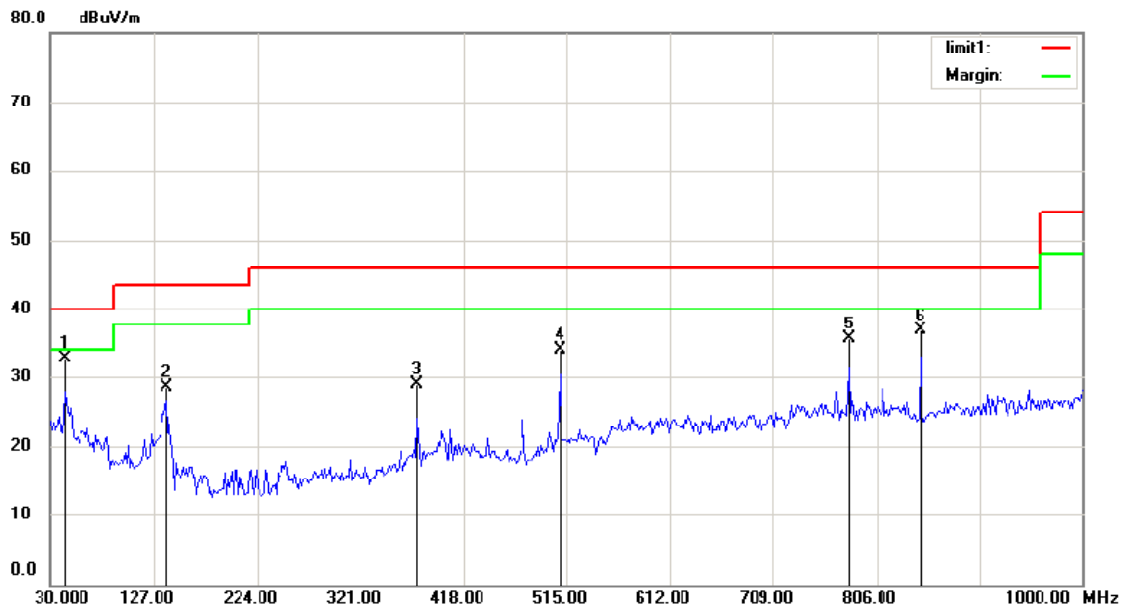

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 24

Limit: (RE)FCC PART 15 C

Power: DC 3.7V by battery

Humidity: 53 %

Mode:TX 2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.9500	15.19	17.49	32.68	40.00	-7.32	QP		
2		137.7800	19.25	9.32	28.57	43.50	-14.93	QP		
3		374.0610	11.51	17.30	28.81	46.00	-17.19	QP		
4		507.7110	13.11	20.88	33.99	46.00	-12.01	QP		
5		779.7880	10.24	25.30	35.54	46.00	-10.46	QP		
6		846.6300	12.23	24.45	36.68	46.00	-9.32	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

Operation Mode: 2402MHz Test Date : August 05, 2014
Frequency Range: 1-25GHz Temperature : 24℃
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: SYP
Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1735.58	V	64.29	45.88	74.00	54.00	-9.71	-8.12
1980.77	V	51.88	33.47	74.00	54.00	-22.12	-20.53
2389.42	V	55.61	37.20	74.00	54.00	-18.39	-16.80
3206.73	V	54.45	36.04	74.00	54.00	-19.55	-17.96
4804.00	V	64.91	46.50	74.00	54.00	-9.09	-7.50
7211.54	V	58.91	40.50	74.00	54.00	-15.09	-13.50
1599.36	H	53.61	35.20	74.00	54.00	-20.39	-18.80
2389.42	H	62.91	44.50	74.00	54.00	-11.09	-9.50
2852.56	H	51.82	33.41	74.00	54.00	-22.18	-20.59
2988.78	H	52.04	33.63	74.00	54.00	-21.96	-20.37
3206.73	H	51.72	33.31	74.00	54.00	-22.28	-20.69
4804.00	H	60.35	46.94	74.00	54.00	-8.65	-12.06

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 2441MHz Test Date : August 05, 2014
Frequency Range: 1-25GHz Temperature : 24°C
Test Result: PASS Humidity : 53 %
Measured Distance: 3m Test By: SYP
Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2061.52	V	67.78	47.52	74.00	54.00	-6.22	-6.48
2306.71	V	55.37	35.11	74.00	54.00	-18.63	-18.89
2715.36	V	59.10	38.84	74.00	54.00	-14.90	-15.16
3532.67	V	57.94	37.68	74.00	54.00	-16.06	-16.32
4882.00	V	68.40	48.14	74.00	54.00	-5.60	-5.86
7537.48	V	62.40	42.14	74.00	54.00	-11.60	-11.86
1925.30	H	57.10	36.84	74.00	54.00	-16.90	-17.16
2715.36	H	66.40	46.14	74.00	54.00	-7.60	-7.86
3178.50	H	55.31	35.05	74.00	54.00	-18.69	-18.95
3314.72	H	55.53	35.27	74.00	54.00	-18.47	-18.73
3532.67	H	55.21	34.95	74.00	54.00	-18.79	-19.05
4882.00	H	63.84	43.58	74.00	54.00	-10.16	-10.42

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 2480MHz Test Date : August 05, 2014
 Frequency Range: 1-25GHz Temperature : 24°C
 Test Result: PASS Humidity : 53 %
 Measured Distance: 3m Test By: SYP
 Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1697.24	V	62.19	46.30	74.00	54.00	-11.81	-7.70
1942.43	V	49.78	37.19	74.00	54.00	-24.22	-16.81
2351.08	V	53.51	40.92	74.00	54.00	-20.49	-13.08
3168.39	V	52.35	39.76	74.00	54.00	-21.65	-14.24
4960.00	V	62.81	44.61	74.00	54.00	-11.19	-9.39
7173.20	V	56.81	44.22	74.00	54.00	-17.19	-9.78
1561.02	H	51.51	38.92	74.00	54.00	-22.49	-15.08
2351.08	H	60.81	48.22	74.00	54.00	-13.19	-5.78
2814.22	H	49.72	37.13	74.00	54.00	-24.28	-16.87
2950.44	H	49.94	37.35	74.00	54.00	-24.06	-16.65
3168.39	H	49.62	37.03	74.00	54.00	-24.38	-16.97
4960.00	H	58.25	45.66	74.00	54.00	-15.75	-8.34

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6. Channel Separation test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

6.4 Measurement Results:


The following table is the setting of spectrum analyzer.



EMI Test Receiver	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

All the modes GFSK, 1/4Π-DQPSK,8DPSK have been tested and the result recorded refer to attached data chart.

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test Result: PASS Humidity : 53 %
Modulation: GFSK


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 20dB Down BW(kHz)
0	2402	1000.00	>824.714
39	2441	1000.00	>824.028
78	2480	1000.00	>909.310


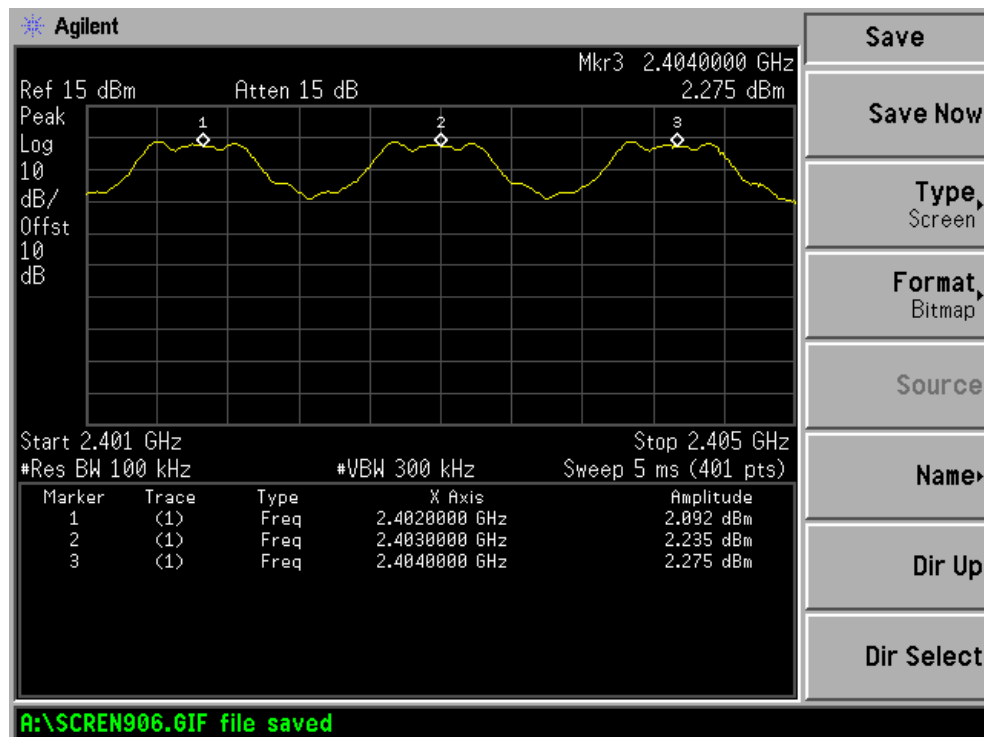


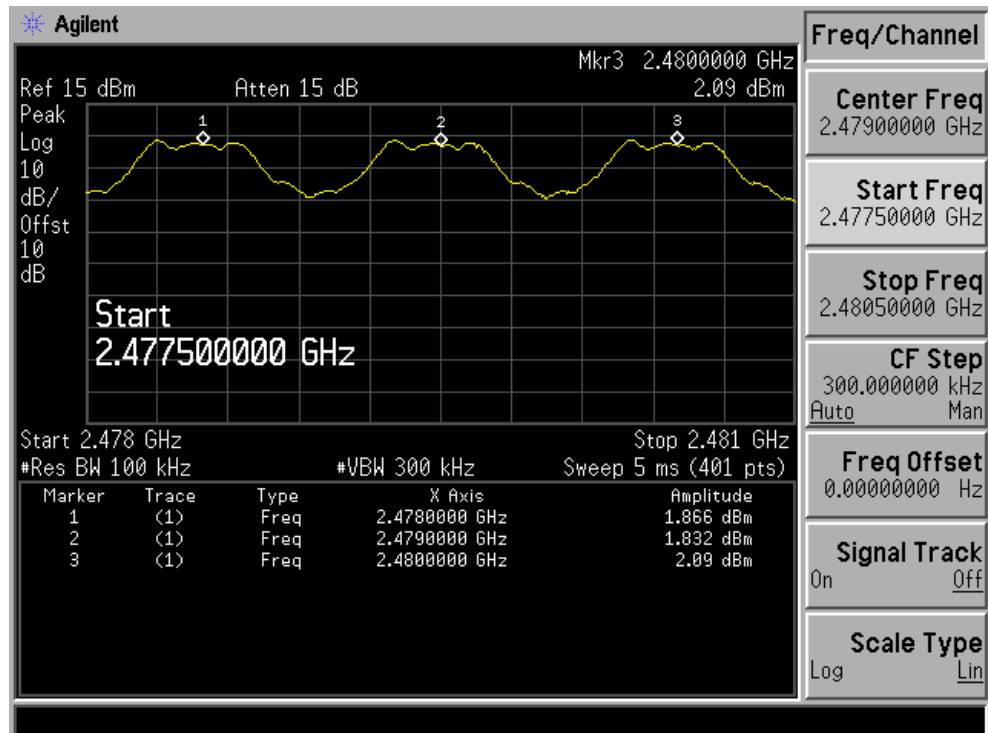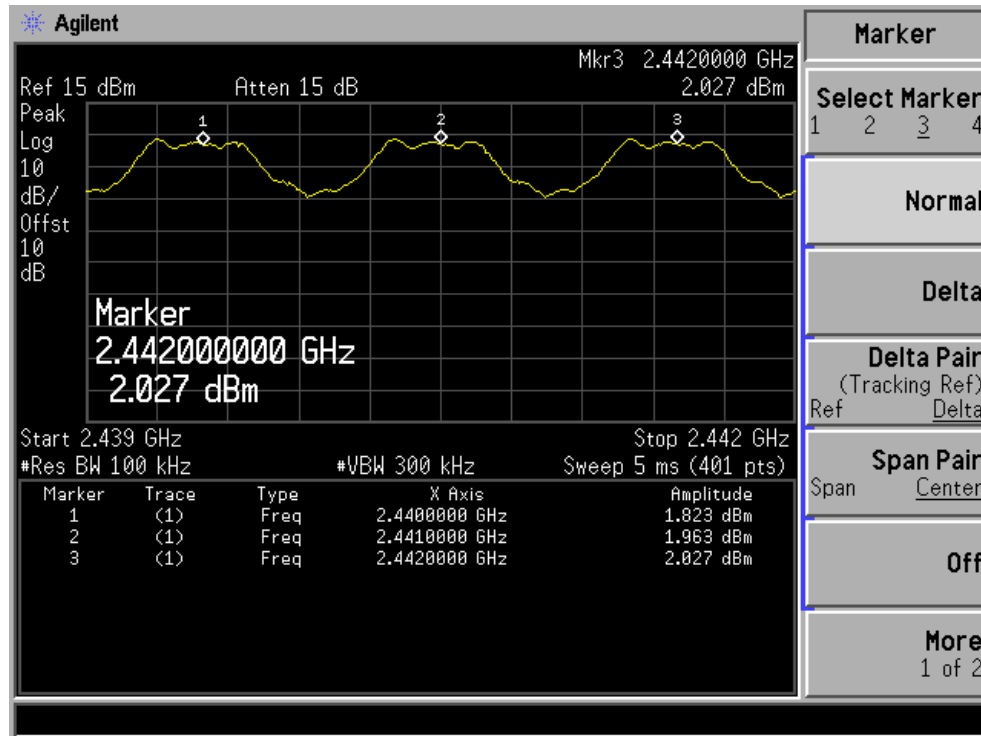

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test Result: PASS Humidity : 53 %
Modulation: 1/4 π DQPSK


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
0	2402	1000.00	>753
39	2441	1000.00	>747
78	2480	1000.00	>754


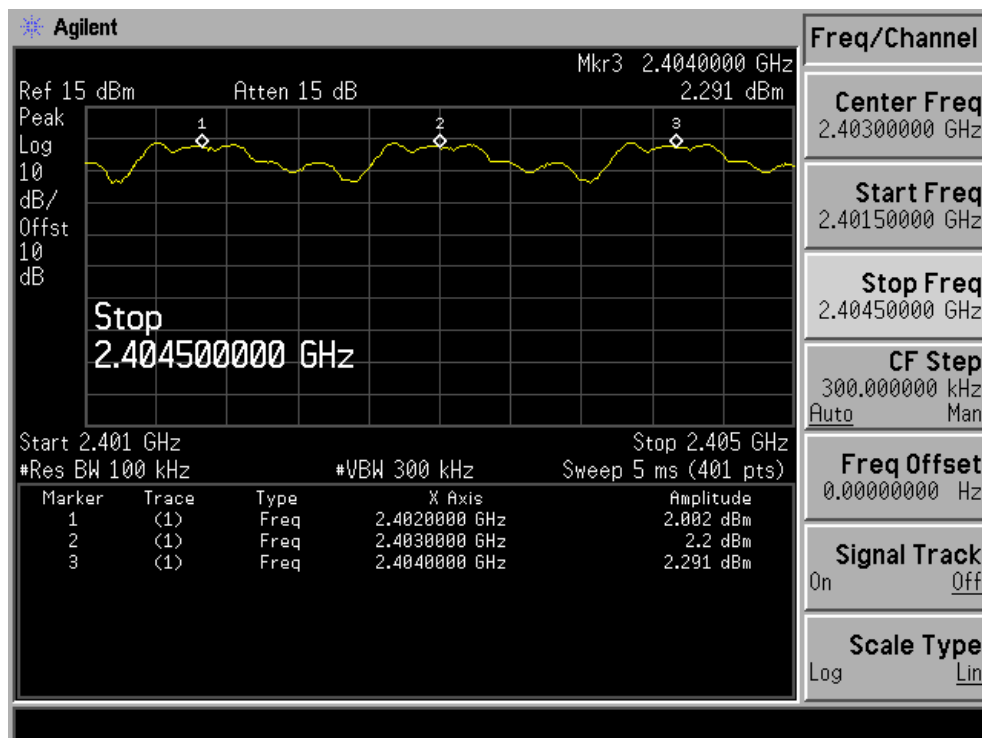


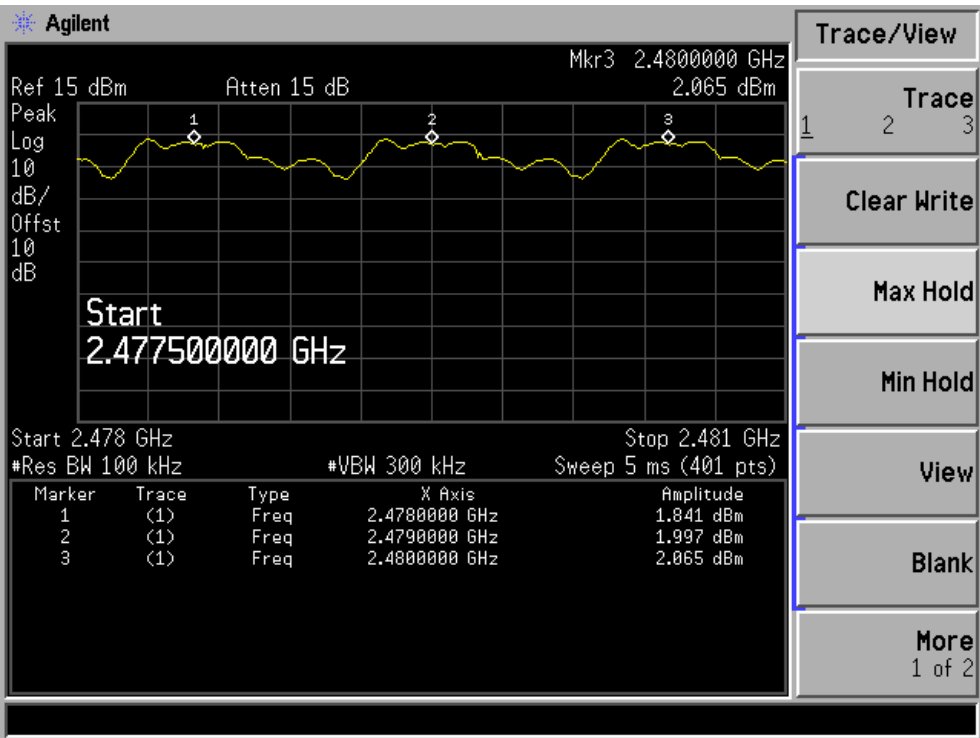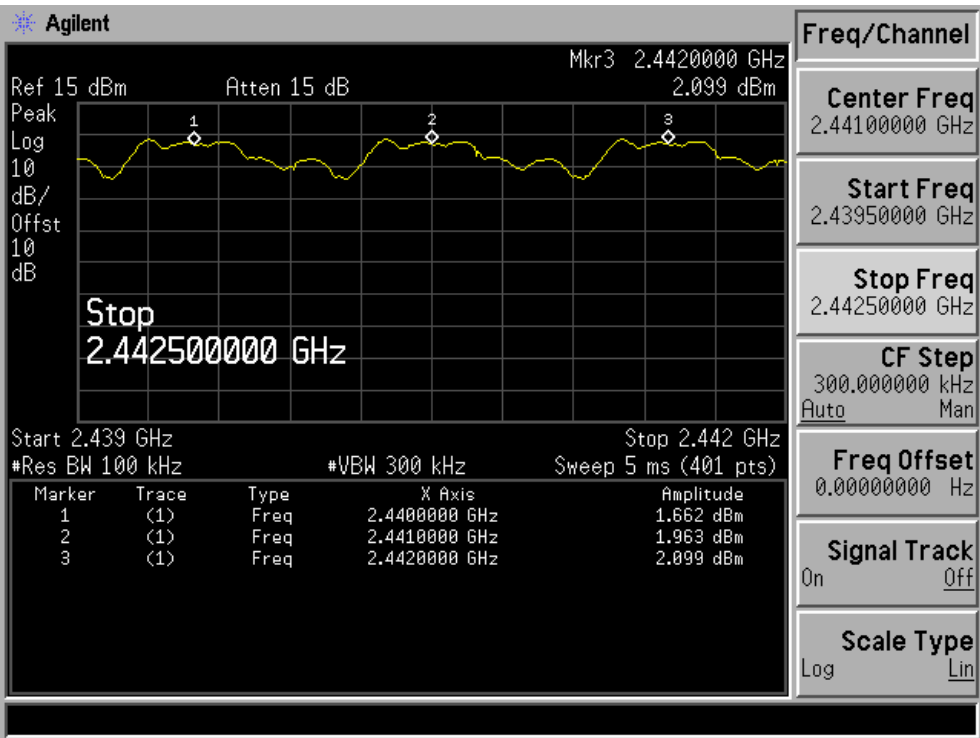

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test Result: PASS Humidity : 53 %
Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
0	2402	1000.00	>763
39	2441	1000.00	>757
78	2480	1000.00	>760

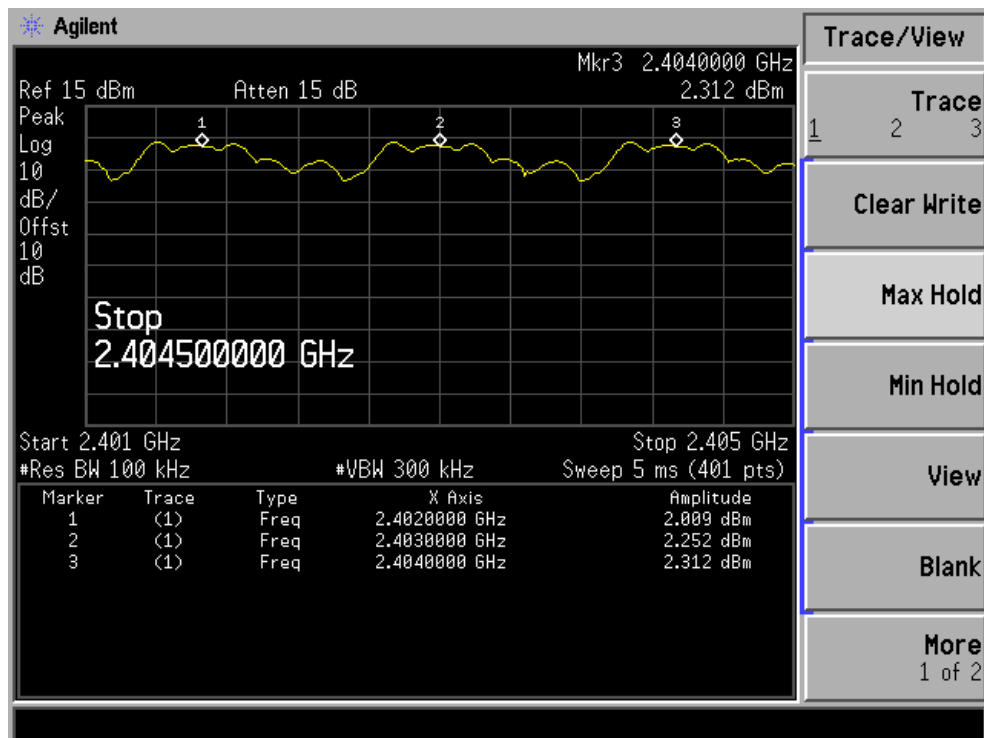

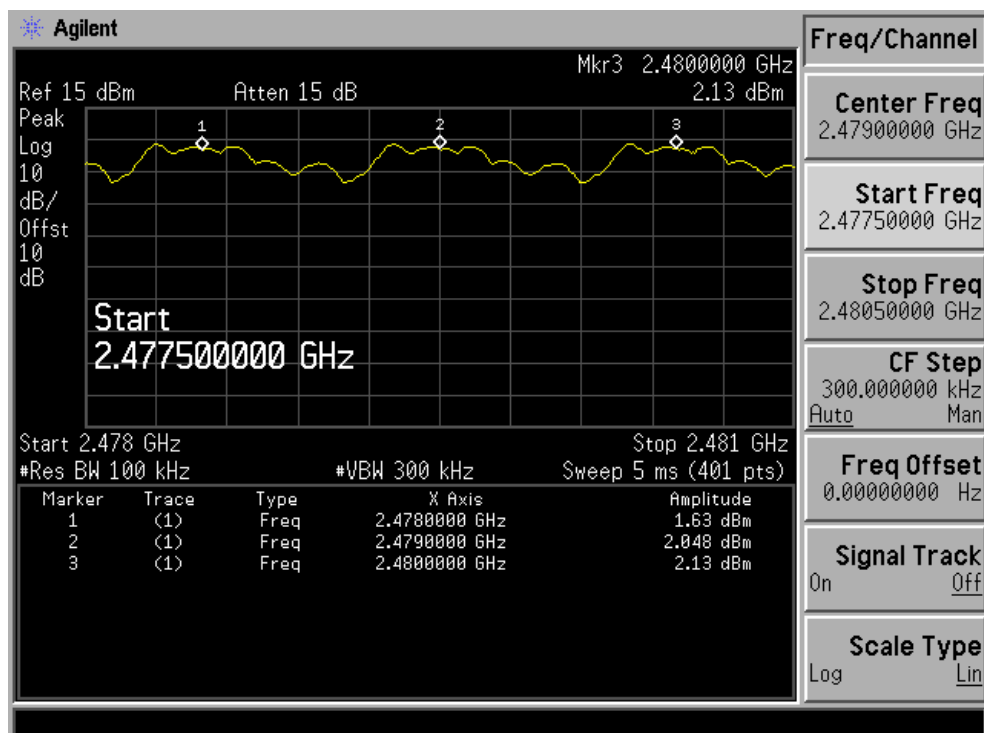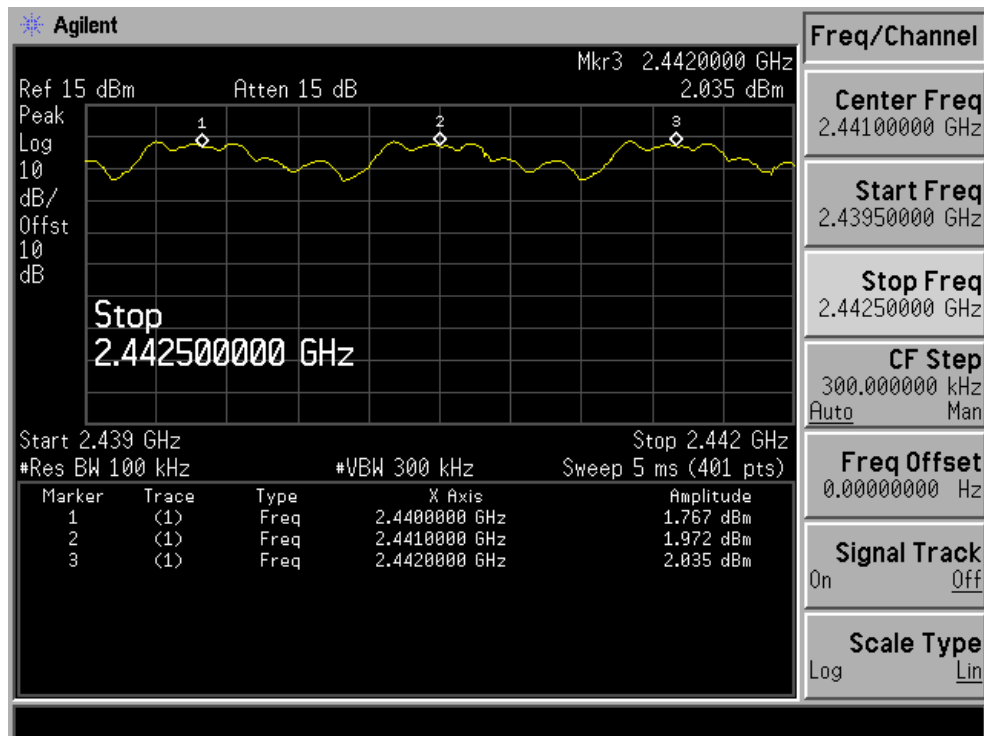


7. 20dB Bandwidth test

7.1 Measurement Procedure

1. The testing follows FCC KDB Publication No. 558074 DTS 001 Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously
4. Make the measurement with the spectrum analyzer 's resolution bandwidth (RBW) = 100 kHz.Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement The 6dB bandwidth must be greater than 500 kHz
5. Measure and record the results in the test report.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

7.4 Measurement Results:

The following table is the setting of spectrum analyzer.

EMI Test Receiver	Setting
Attenuation	Auto
Span	3MHz
RB	30kHz
VB	300kHz
Detector	Peak
Trace	Max hold


All the modes GFSK, 1/4Π-DQPSK,8DPSK have been tested and the result recorded in the following pages.



7.4.1. 20dB Bandwidth test data Chart:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	August 05, 2014
Test By:	SYP	Temperature :	24℃
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
0	2402	824.714
39	2441	824.028
78	2480	909.310


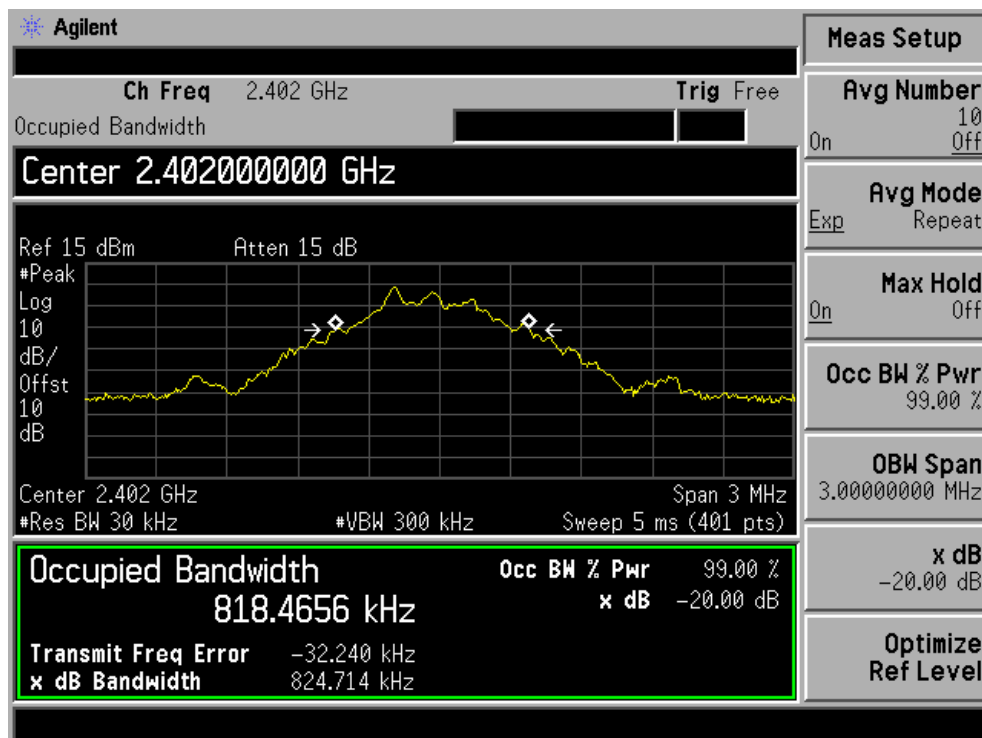


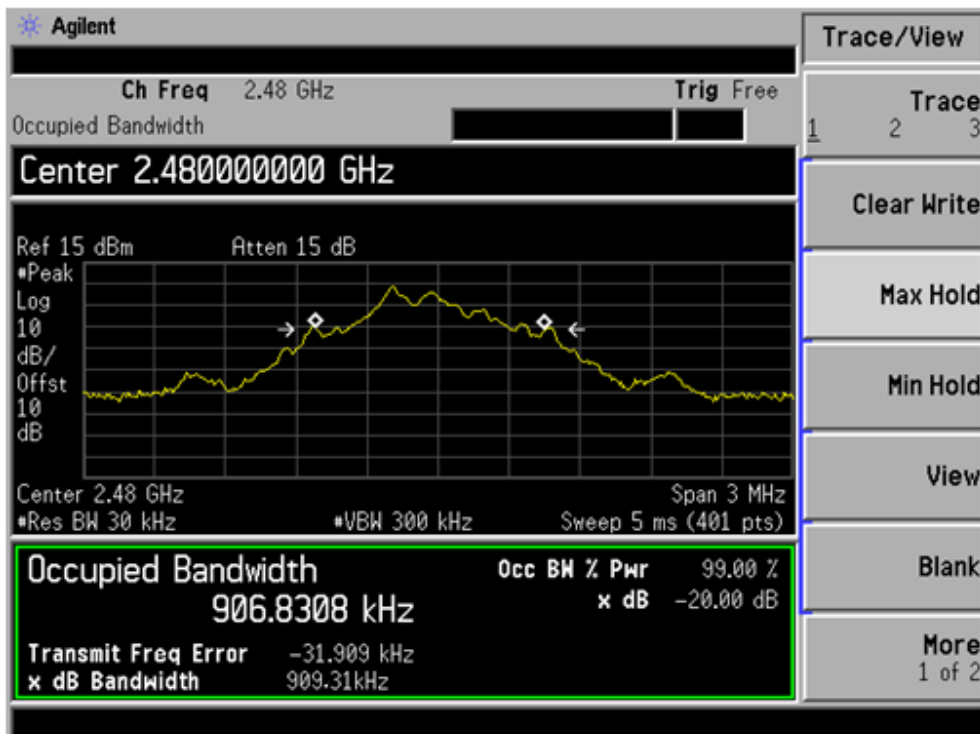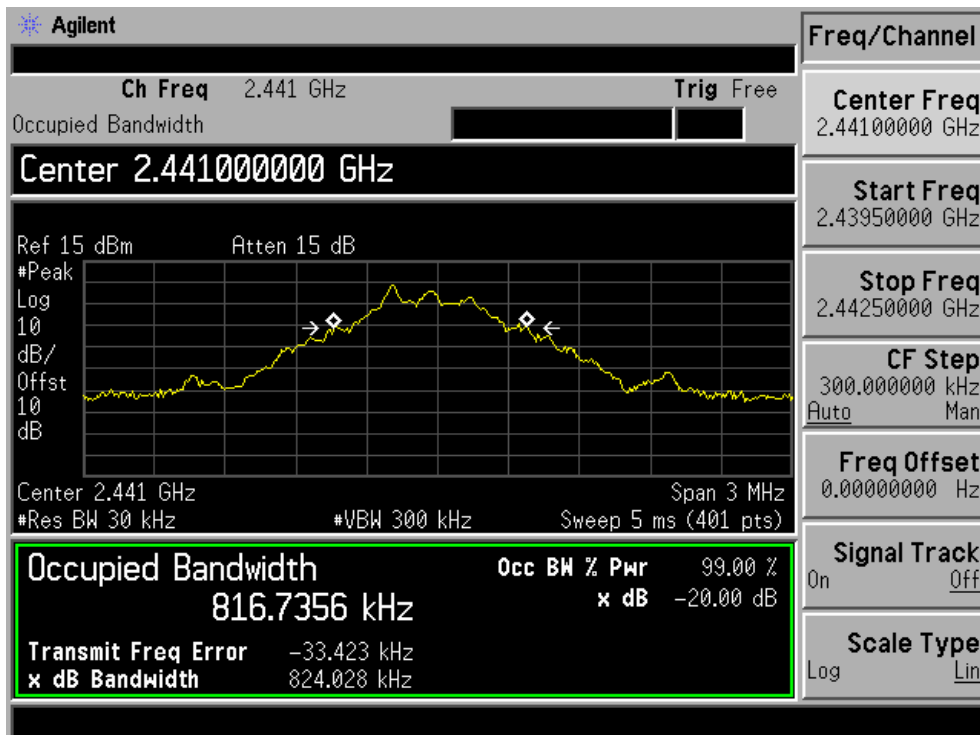

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test Result: PASS Humidity : 53 %
Modulation: 1/4 Π -DQPSK


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
0	2402	1.129
39	2441	1.120
78	2480	1.131


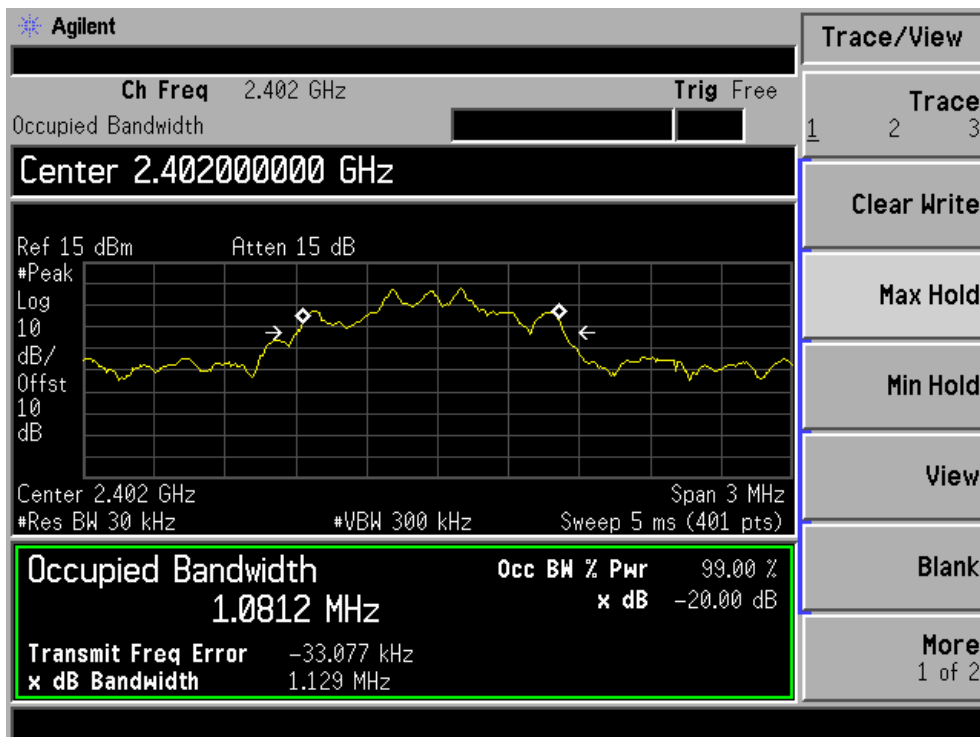


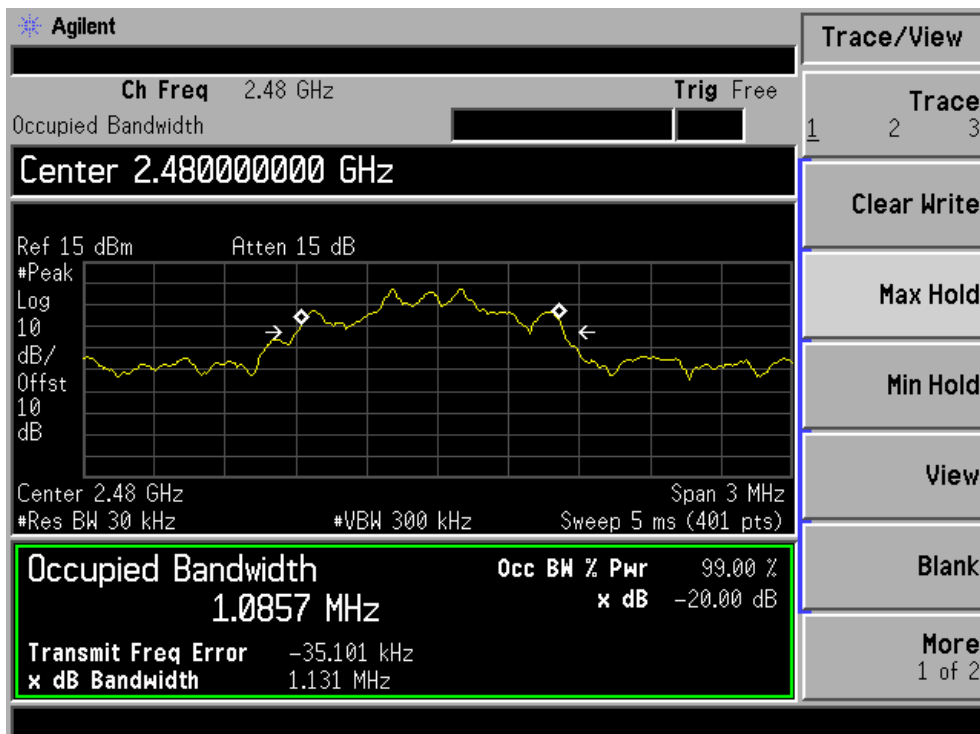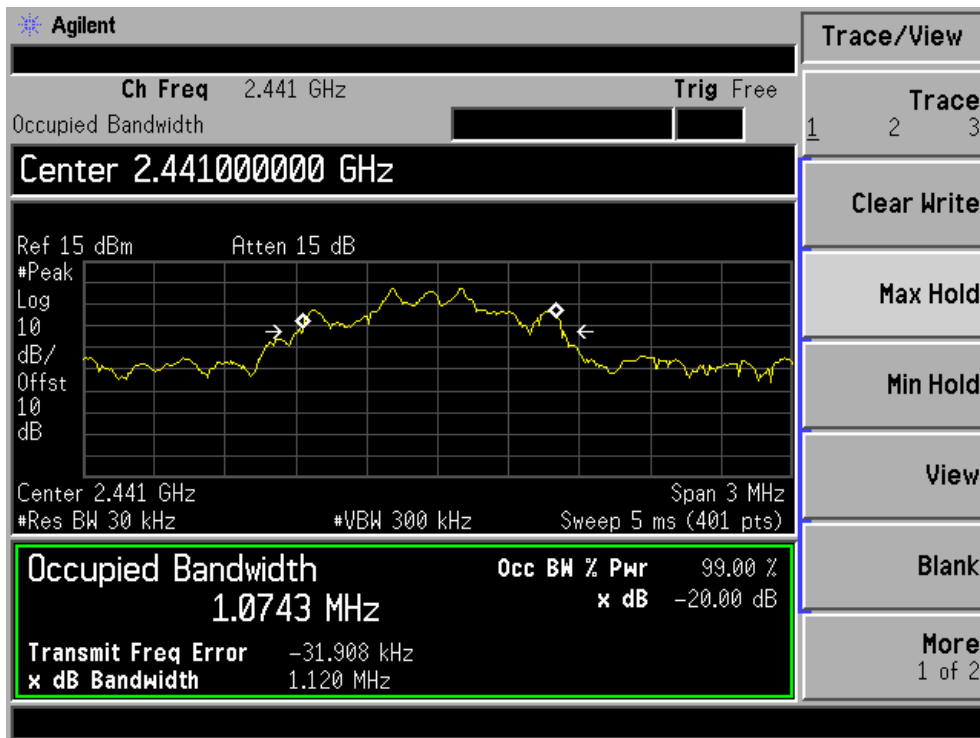

Spectrum Detector:	PK	Test Date :	August 05, 2014
Test By:	SYP	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
0	2402	1.144
39	2441	1.135
78	2480	1.141

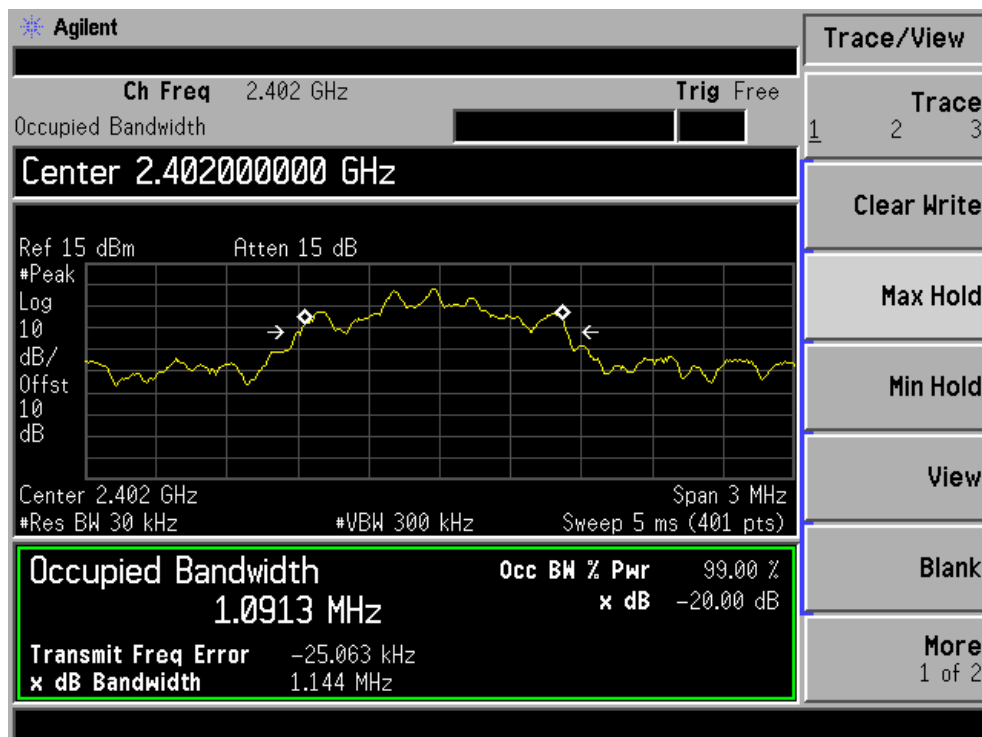

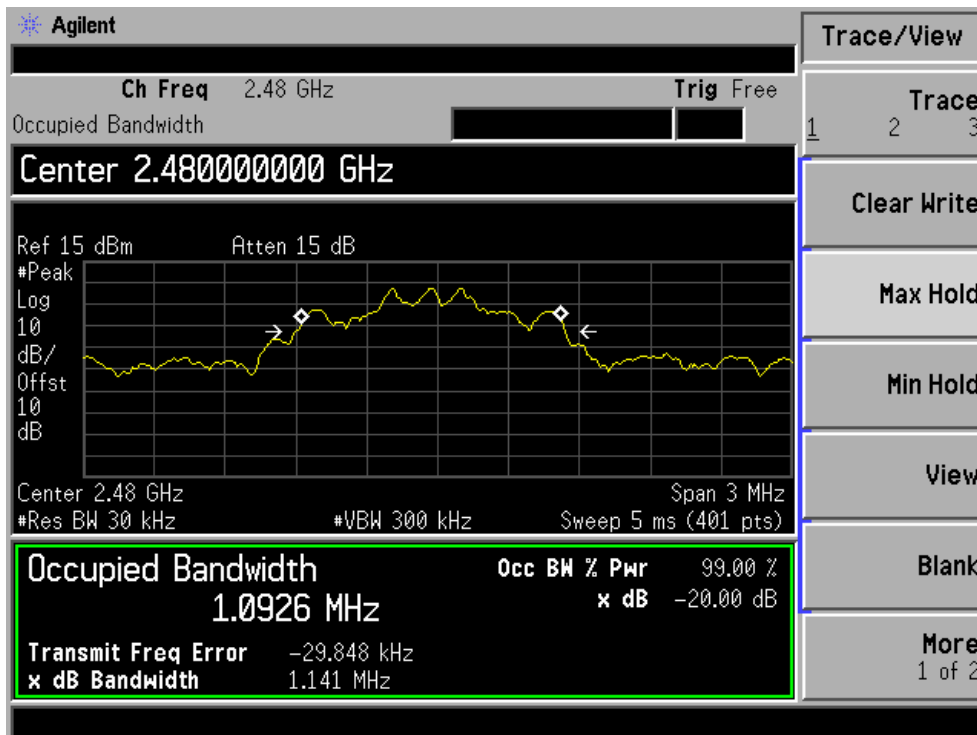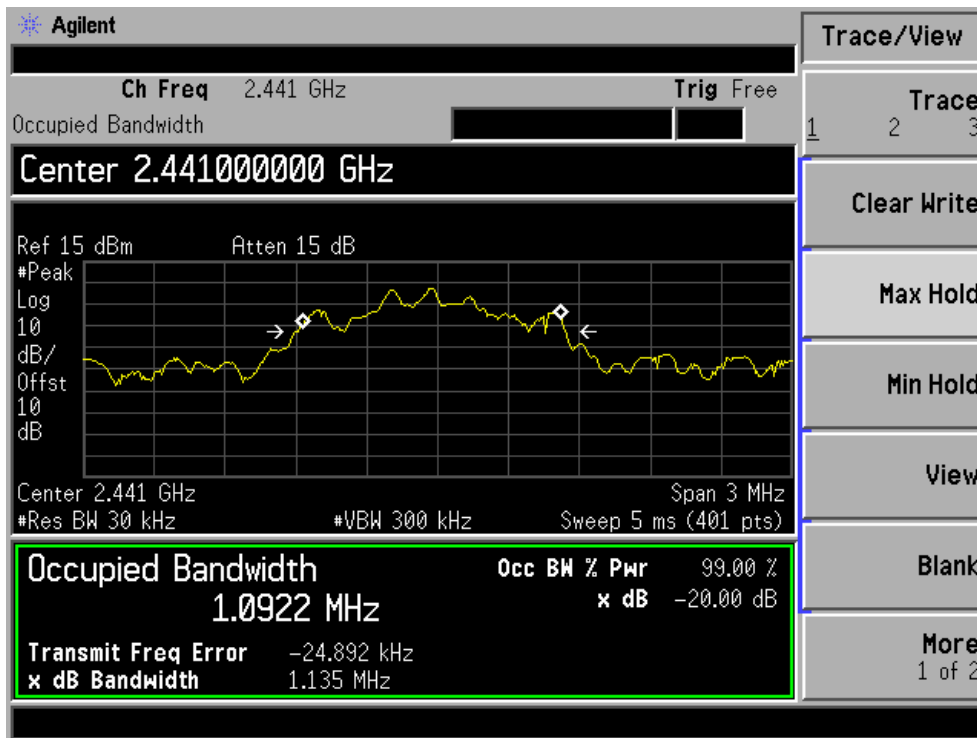

8. Quantity of Hopping Channel Test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)

EUT

Spectrum Analyzer


8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

8.4 Measurement Results:

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test Result: PASS Humidity : 53 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480	79	> 15

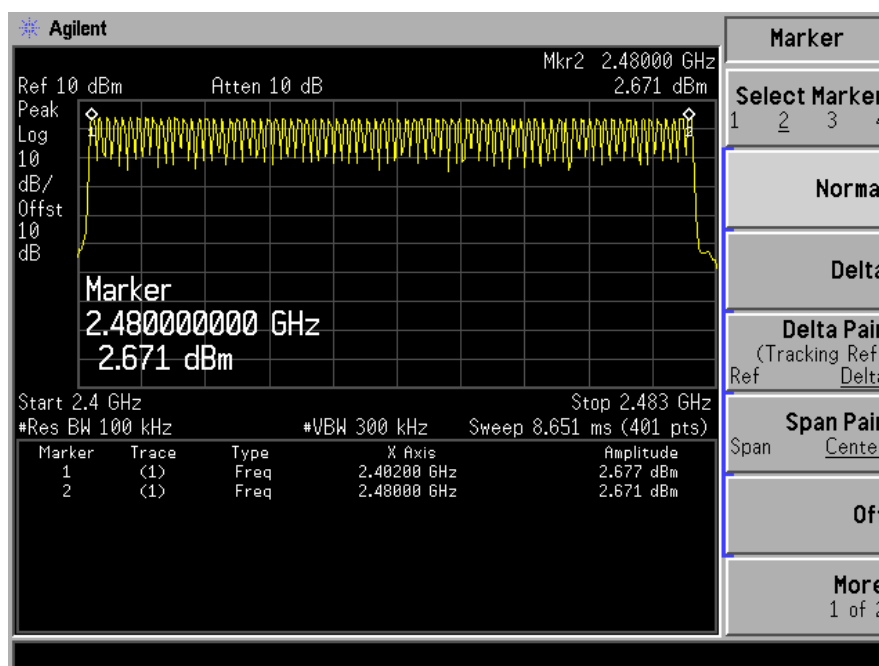


9. Time of Occupancy (Dwell Time) test

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015


9.4 Measurement Results:

All the modulation modes were tested and the data of the GFSK mode are recorded in the following pages. Low, Middle and Highest channels have been tested, the worst test data channel 2402 was recorded in this report.


Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test Result: PASS Humidity : 53 %

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.4000	128.00	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.6875	270.00	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.9375	313.34	400


DH1

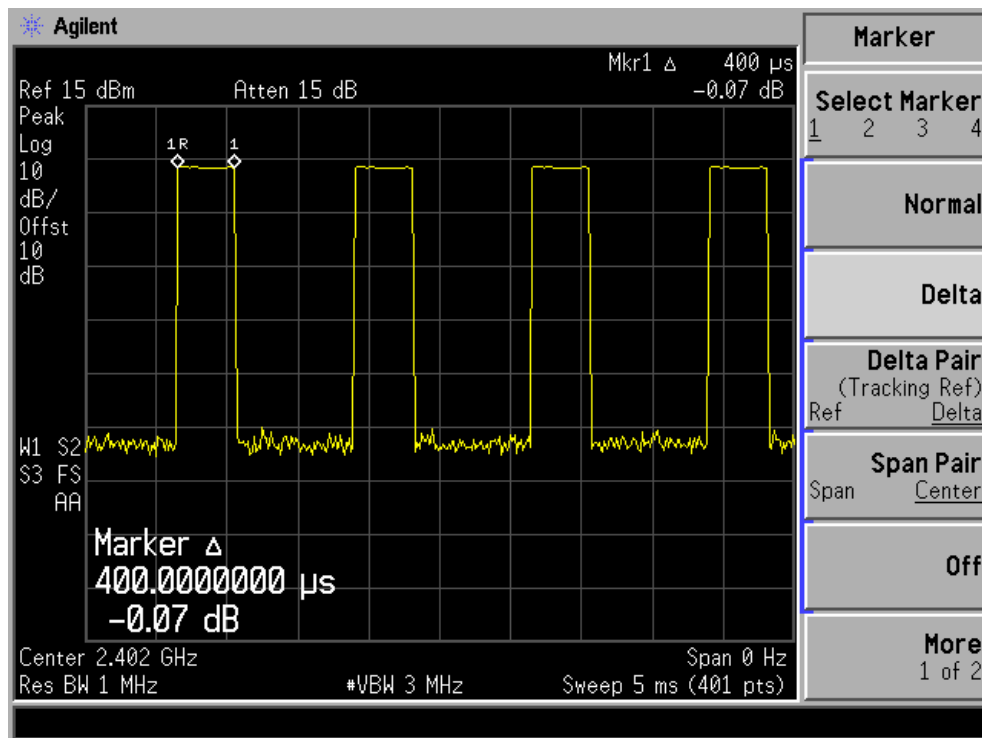

DH3

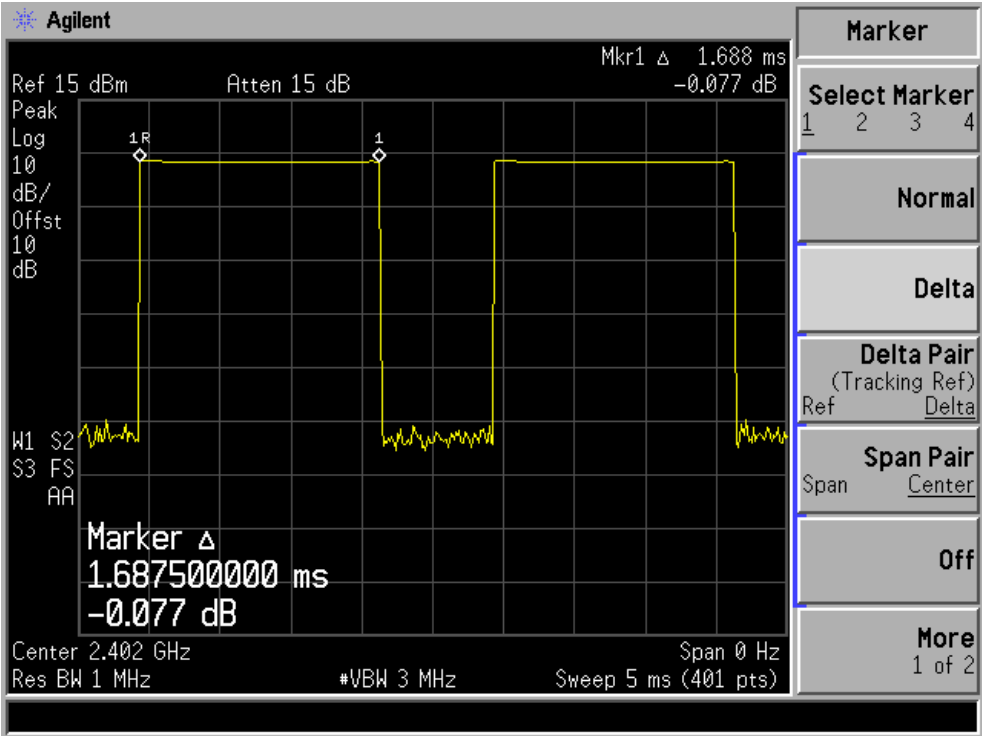

DH5

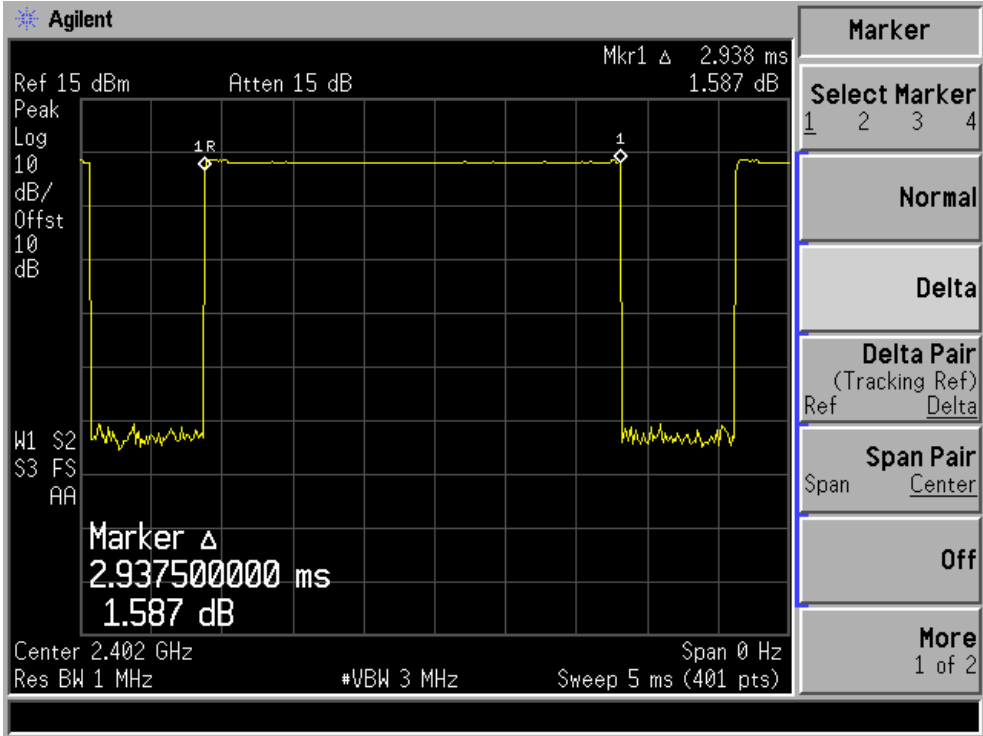


10. MAXIMUM PEAK OUTPUT POWER TEST

10.1 Measurement Procedure

- Check the calibration of the measuring instrument(Power meter) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	Boonton	4232A	29001	05/17/2014	05/16/2015
Power sensor	Boonton	51011-EMC	31184	05/17/2014	05/16/2015

10.4 Measurement Results:

All the modes GFSK, 1/4Π-DQPSK,8DPSK have been tested and the result recorded in the following pages and the others modulation methods do not exceed the limits.

Spectrum Detector: PK Test Date : August 05, 2014
 Test By: SYP Temperature : 24℃
 Test Result: PASS Humidity : 53 %
 Modulation: GFSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
0	2402.00	4.885	30	PASS
39	2441.00	4.900	30	PASS
78	2480.00	4.916	30	PASS

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test Result: PASS Humidity : 53 %
Modulation: 1/4 Π -DQPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
0	2402.00	4.647	30	PASS
39	2441.00	4.656	30	PASS
78	2480.00	4.656	30	PASS

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test Result: PASS Humidity : 53 %
Modulation: 8DPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
0	2402.00	4.670	30	PASS
39	2441.00	4.672	30	PASS
78	2480.00	4.673	30	PASS

11.Band EDGE test

11.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	AVG
Trace	Max hold

11.2 Test SET-UP (Block Diagram of Configuration)

As 5.2 Test set up (B) and (C)

11.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

11.4 Measurement Results:

All the modes GFSK, 1/4Π-DQPSK,8DPSK and hopping mode have been tested and the result recorded in the following pages and the others modulation methods do not exceed the limits.

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test channel: 0 Humidity : 53 %
Modulation: GFSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2356.44	H	55.64	42.82	74	54
2369.71	V	55.94	42.38	74	54

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test channel: 78 Humidity : 53 %
Modulation: GFSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2488.35	H	58.34	43.60	74	54
2492.99	V	57.16	41.81	74	54

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24℃
Test channel: 0 Humidity : 53 %
Modulation: 1/4Π-DQPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2337.45	H	56.41	40.37	74	54
2344.61	V	55.88	41.09	74	54

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test channel: 78 Humidity : 53 %
Modulation: 1/4 Π -DQPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2485.47	H	56.49	41.75	74	54
2491.47	V	57.65	40.58	74	54

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test channel: 0 Humidity : 53 %
Modulation: 8DPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2338.14	H	59.94	44.35	74	54
2347.45	V	57.68	42.04	74	54

Spectrum Detector: PK Test Date : August 05, 2014
Test By: SYP Temperature : 24°C
Test channel: 78 Humidity : 53 %
Modulation: 8DPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2489.56	H	56.94	41.57	74	54
2491.47	V	57.22	44.32	74	54

Spectrum Detector: PK Test Date : August 05, 2014
 Test By: SYP Temperature : 24℃
 Mode: Hopping mode Humidity : 53 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2390.0	H	56.16	41.14	74	54
2390.0	V	56.84	42.48	74	54
2483.5	H	56.34	44.62	74	54
2483.5	V	54.36	43.70	74	54

12. Antenna Port Emission

12.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

12.2 Measuring Instruments and setting

All the modulation modes were tested and the data of the GFSK mode are recorded in the following pages and the others modulation methods do not exceed the limits.


The following table is the setting of spectrum analyzer.

EMI Test Receiver	Setting
Attenuation	Auto
Detector	Peak
RB	100KHz
VB	300KHz
Trace	Max hold

12.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, the limit was determined by attenuation 20dB of the RF peak power output.

12.4 Block Diagram of Test setup





12.5 Test Result



PASS.

All the modes GFSK, 1/4Π-DQPSK, 8DPSK have been tested and the worst result recorded in the following pages



TX 2402MHz

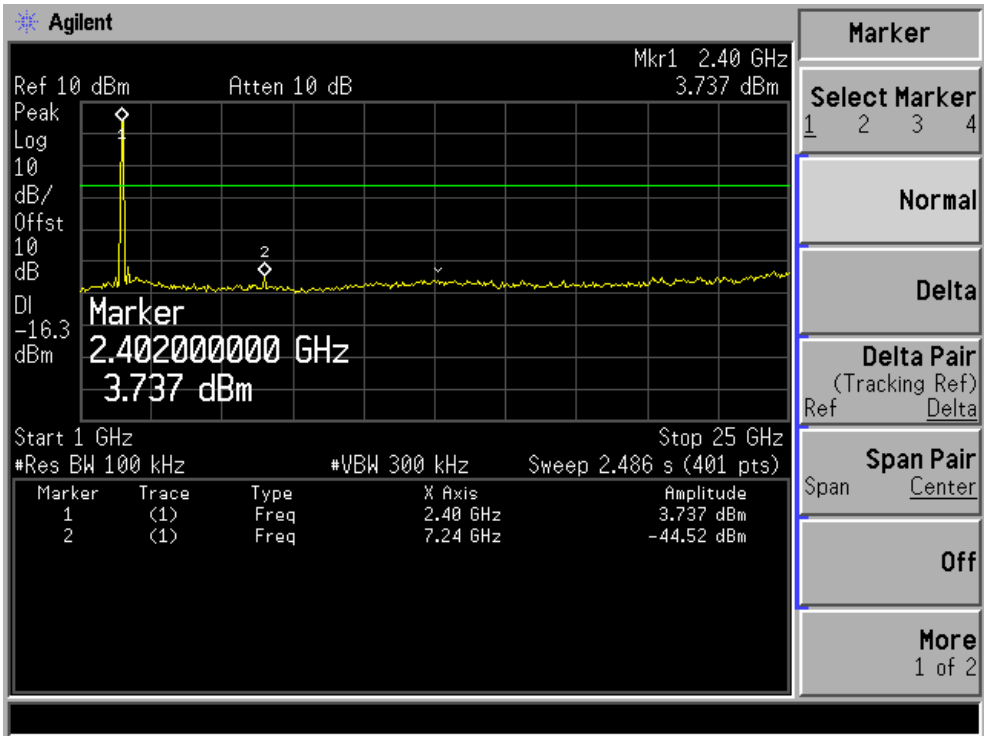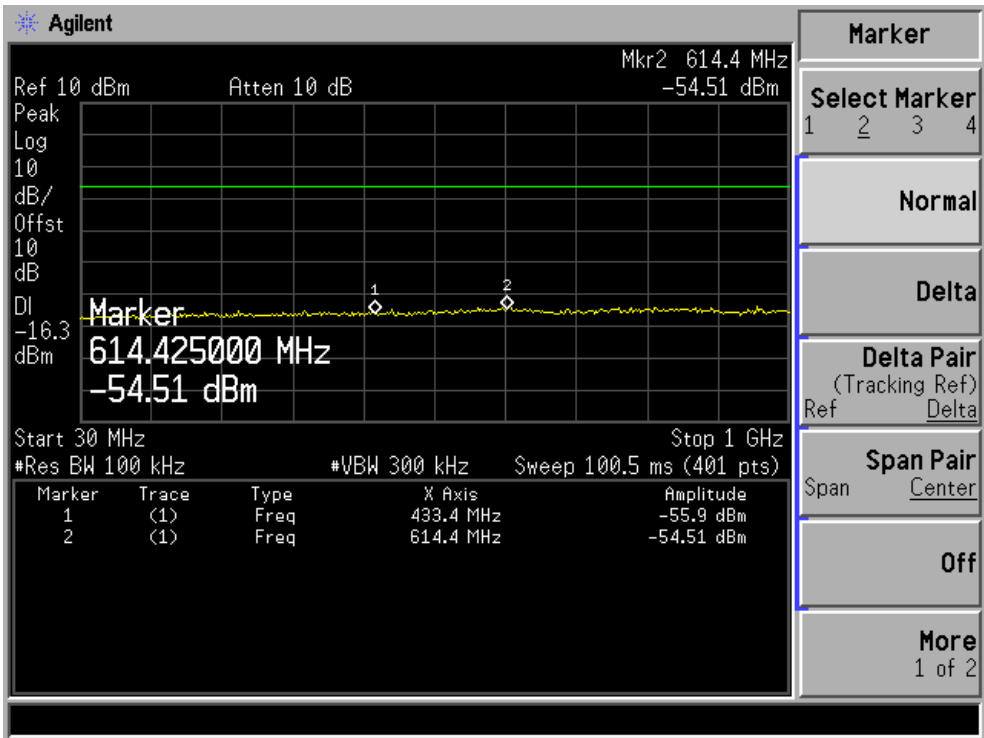

TX 2441MHz

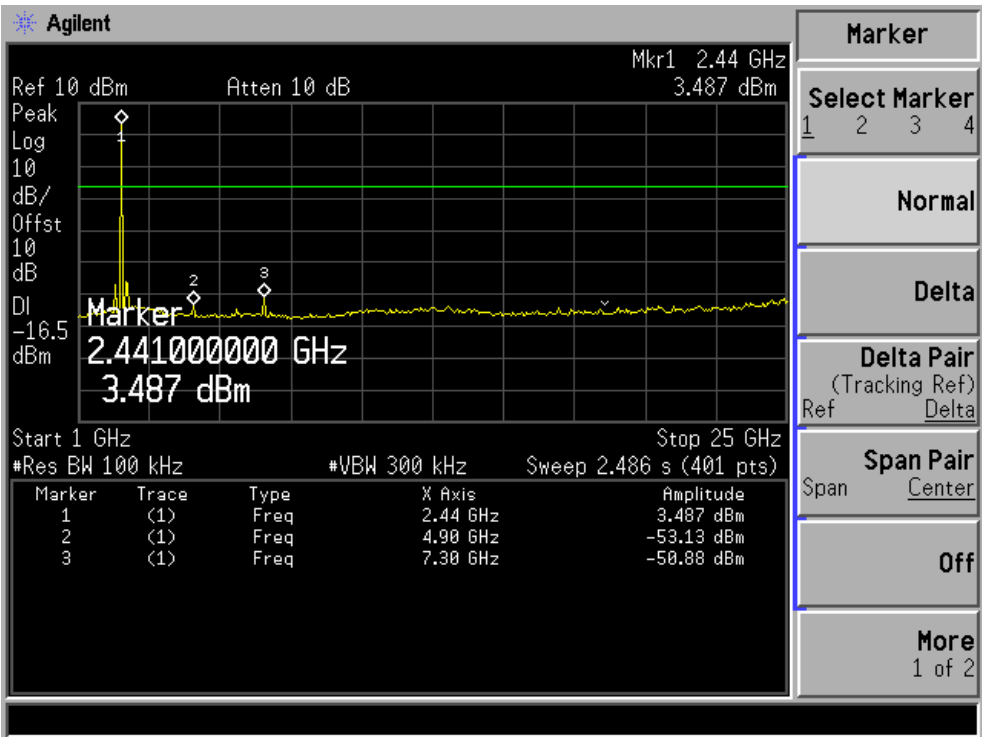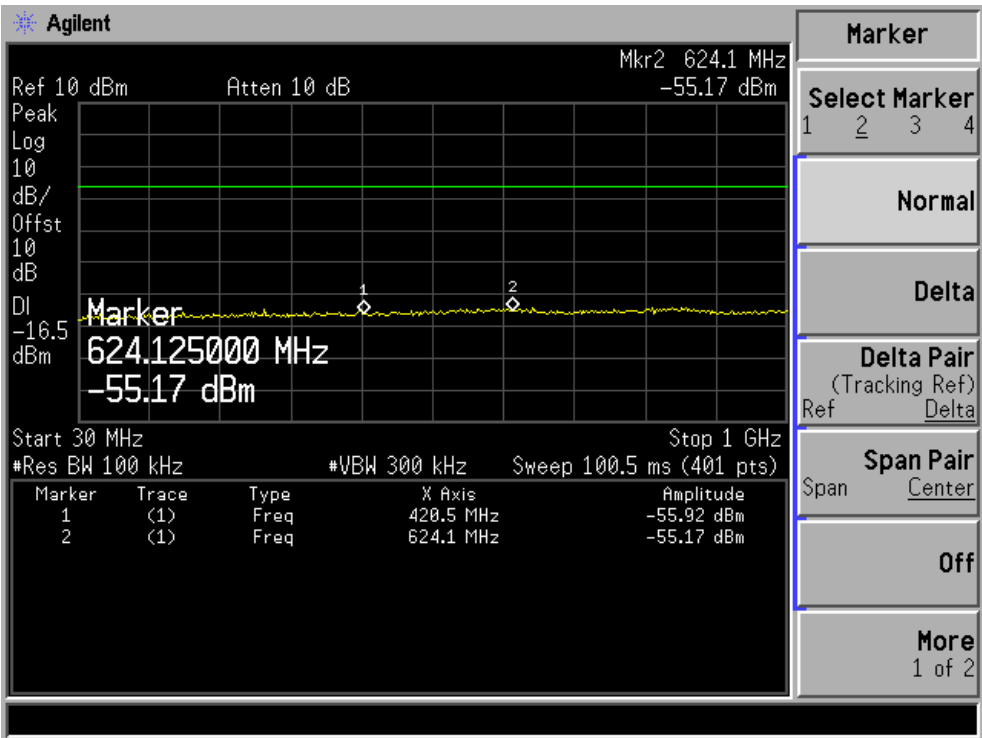

TX 2480MHz

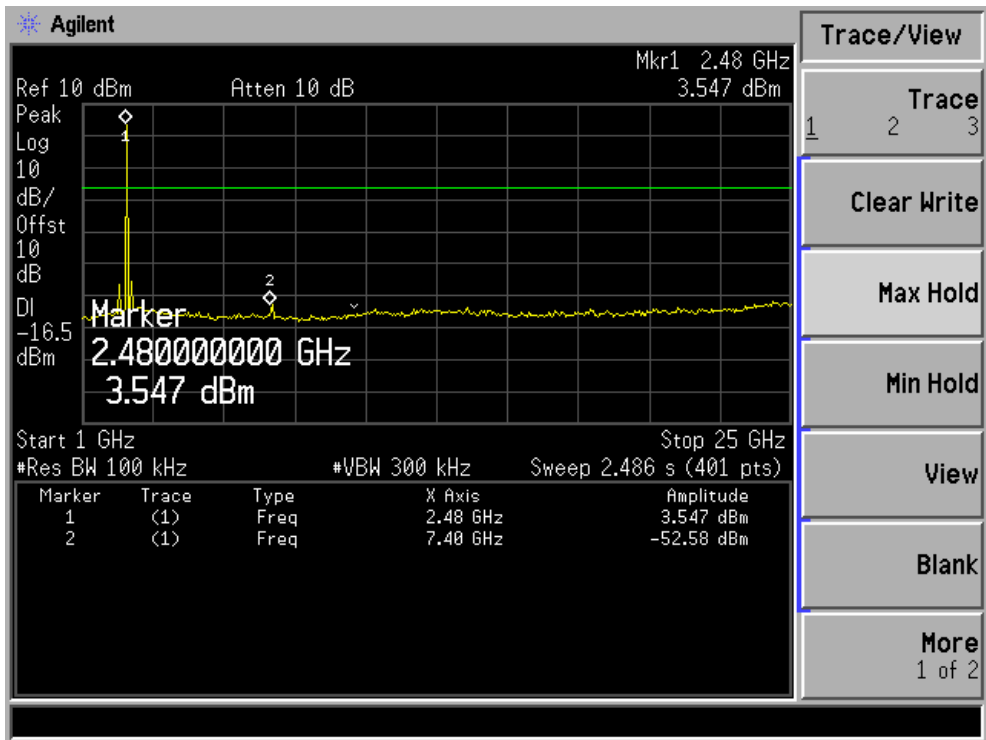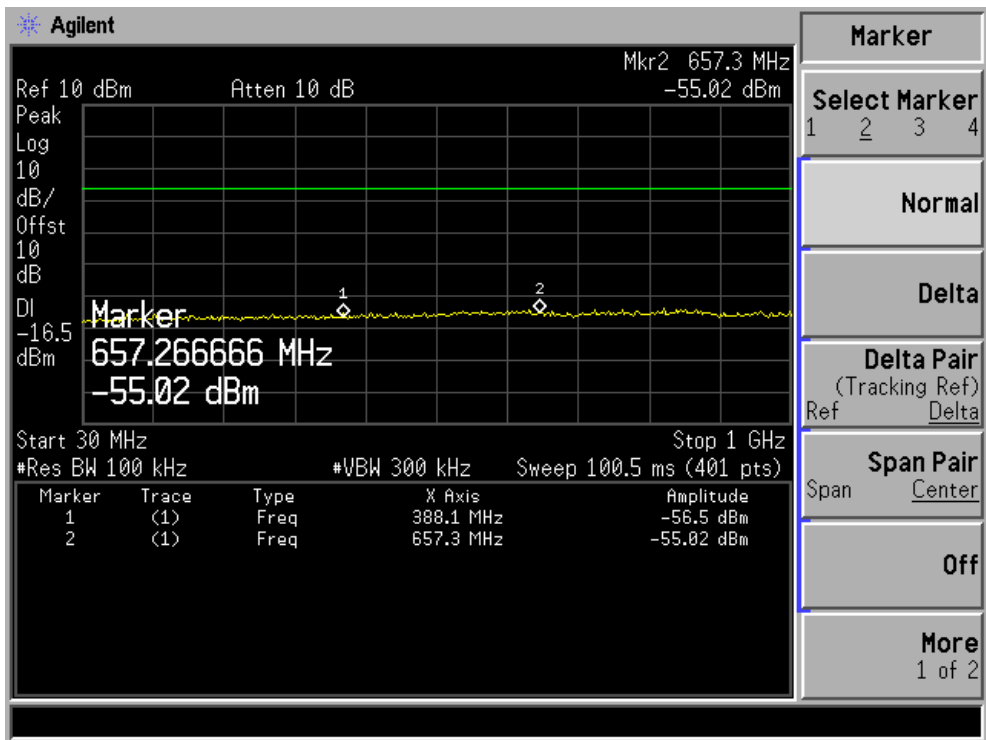

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The EUT'S antenna is integral antenna. The antenna's gain is 1.2dBi and meets the requirement.