



FCC&IC TEST REPORT

FCC ID: 2ABNA-P9IV

IC: 11648A-P9IV

On Behalf of

Guangzhou Geoelectron Science & Technology Company Ltd.

P9IV Handheld

Model No.: P9IV

Prepared for : Guangzhou Geoelectron Science & Technology Company Ltd.
No.704/702, No.7, Cai Pin Road, Science City, Guangzhou High-
Address : Tech Industrial Development Zone, Guangzhou, Guangdong
Province, China.

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2208232-C01-R27
Date of Receipt : August 19, 2022
Date of Test : August 19, 2022- September 20, 2022
Date of Report : September 23, 2022
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA.....	9
4.1	ANTENNA REQUIREMENT:	9
4.2	CONDUCTED EMISSIONS	10
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	13
4.4	PEAK TRANSMIT POWER	62
4.5	POWER SPECTRAL DENSITY	64
4.6	BAND EDGE.....	67
4.7	RADIATED EMISSION	73
4.8	FREQUENCY STABILITY	81

TEST REPORT DECLARATION

Applicant : Guangzhou Geoelectron Science & Technology Company Ltd.

Address : No.704/702, No.7, Cai Pin Road, Science City, Guangzhou High-Tech Industrial Development Zone, Guangzhou, Guangdong Province, China.

Manufacturer : Guangzhou Geoelectron Science & Technology Company Ltd.

Address : No.704/702, No.7, Cai Pin Road, Science City, Guangzhou High-Tech Industrial Development Zone, Guangzhou, Guangdong Province, China.

EUT Description : P9IV Handheld

(A) Model No. : P9IV

(B) Trademark :  Geoelectron

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.


After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Reak Yang

Project Engineer



Approved by (name + signature).....:

Jack Xu

Project Manager



Date of issue.....

September 23, 2022

Revision History

Revision	Issue Date	Revisions	Revised By
V0	September 23, 2022	Initial released Issue	Reak Yang

1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
Peak Transmit Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: H)
	3.80dB(Polarize: V)
Uncertainty for radio frequency	5.06×10^{-8}
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2 General Information

2.1 General Description of EUT

Description/PMN : P9IV Handheld

Model
Number/HVIN(s) : P9IV

Diff. : N/A

Trademark :  Geelectron

Power supply : DC 9V from adapter with AC 120V/60Hz, DC 3.85V from battery

Radio Technology : 5G WIFI

Operation Frequency : 802.11a/n(HT20)/ac(HT20): 5180~5240MHz; 5260-5320MHz;
5745~5825MHz
802.11n(HT40)/ac(HT40): 5190~5230MHz; 5260-5320MHz;
5755~5795MHz

802.11ac(HT80): 5210MHz, 5290MHz, 5775MHz

Channel separation : 20MHz for 802.11a/ 802.11ac20/ 802.11n(HT20)
40MHz for 802.11ac40/ 802.11n(HT40)
80MHz for 802.11ac80

Modulation technology: : IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (64QAM, 16QAM, QPSK, BPSK)

Antenna Type : FPC antenna, Maximum Gain is 1.68dBi
(Antenna information is provided by applicant.)

Software version : V1.0
Hardware version/FVIN : P9IV-V1.2

Intend use
environment : Residential, commercial and light industrial environment

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 25, 2017 Certificated by IC
Registration Number: CN0085

2.4 Description of Support Units

Accessories : Switching Adapter
Manufacturer : DEE VAN ENTERPRISE CO., LTD.
Model : DSA-45PDH
Ratings : Input: 100~240V 50/60Hz 1.5A
 Output: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=2.25A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

3 Test Instruments list

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2022.08.22	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2022.08.22	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2022.08.22	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2022.08.22	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	N/A	VULB 9168#627	2021.08.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	N/A	2106	2021.08.30	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	N/A	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	N/A	RE1	2022.08.22	1Year
RF Cable	Resenberger	Cable 2	N/A	RE2	2022.08.22	1Year
RF Cable	Resenberger	Cable 3	N/A	CE1	2022.08.22	1Year
Pre-amplifier	HP	HP8347A	N/A	2834A00455	2022.08.22	1Year
Pre-amplifier	Agilent	8449B	N/A	3008A02664	2022.08.22	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	N/A	8126-466	2022.08.22	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	N/A	101043	2022.08.22	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	N/A	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	N/A	SK2018101801	2022.08.22	1 Year
Power Meter	Agilent	E9300A	N/A	MY41496628	2022.08.22	1 Year
Power Sensor	DARE	RPR3006W	N/A	15100041SNO91	2022.08.22	1 Year
Temp. & Humid. Chamber	Wei Huang	WHTH-1000-40-880	N/A	100631	2022.04.22	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	N/A	20140927-6	2022.08.22	1 Year
Adjustable attenuator	MWRFTest	N/A	N/A	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	N/A	N/A	N/A	N/A


Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203 & GSS-Gen
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is internal antenna. The best case gain of the antenna is 1.68dBi for 5.15~5.25GHz, 5.25~5.35GHz , 5.725~5.85GHz	
WiFi Antenna  A photograph of the internal components of a device, likely a laptop or tablet. The image shows a black printed circuit board (PCB) with various electronic components. A white rectangular antenna module is prominently displayed in the center. To the left of the antenna, there is a black component labeled 'WiFi Antenna' with a red arrow pointing to it. Other components include a large orange battery, various capacitors, and connectors. The device is housed in a light-colored plastic casing.	


4.2 Conducted Emissions

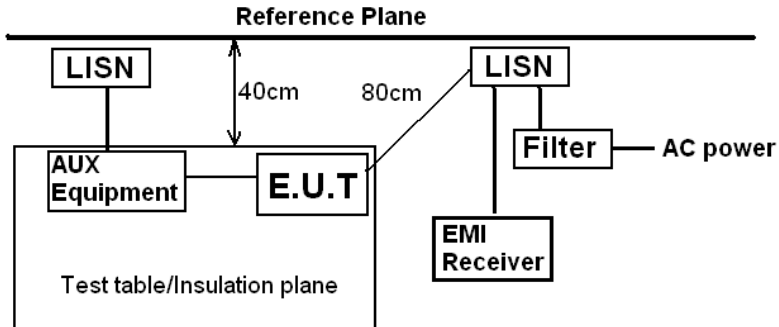Test Requirement:	FCC Part15 C Section 15.207 & RSS-Gen		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class Severity:	Class B		
Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.10 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

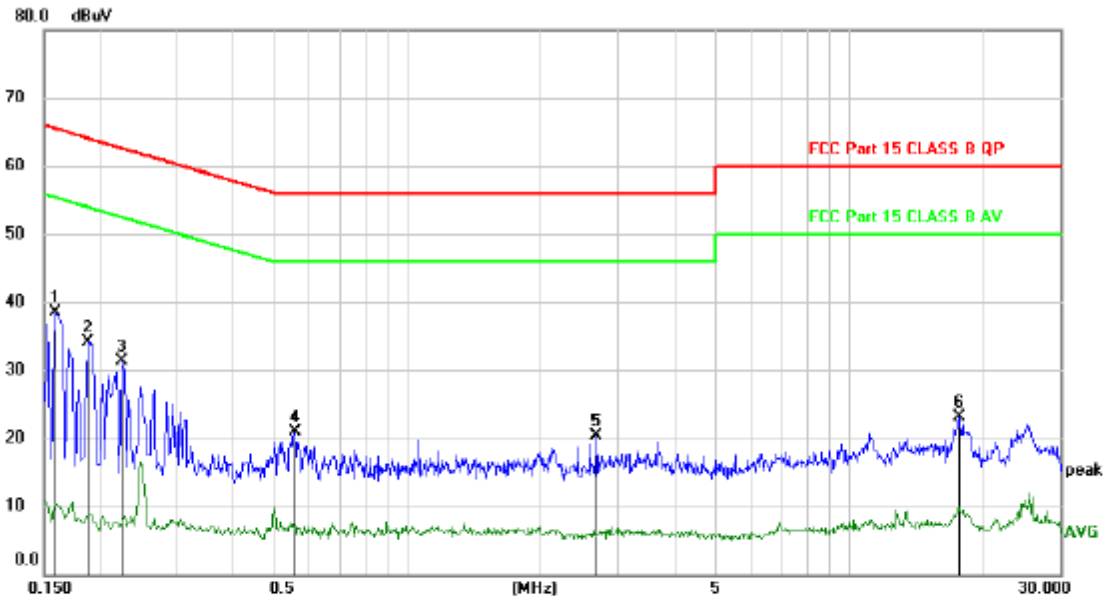


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1590	28.49	9.94	38.43	65.52	-27.09	peak	
2		0.1890	24.25	9.92	34.17	64.08	-29.91	peak	
3		0.2250	21.46	9.94	31.40	62.63	-31.23	peak	
4		0.5580	11.02	9.94	20.96	56.00	-35.04	peak	
5		2.6700	10.37	9.92	20.29	56.00	-35.71	peak	
6		17.7420	12.72	10.41	23.13	60.00	-36.87	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

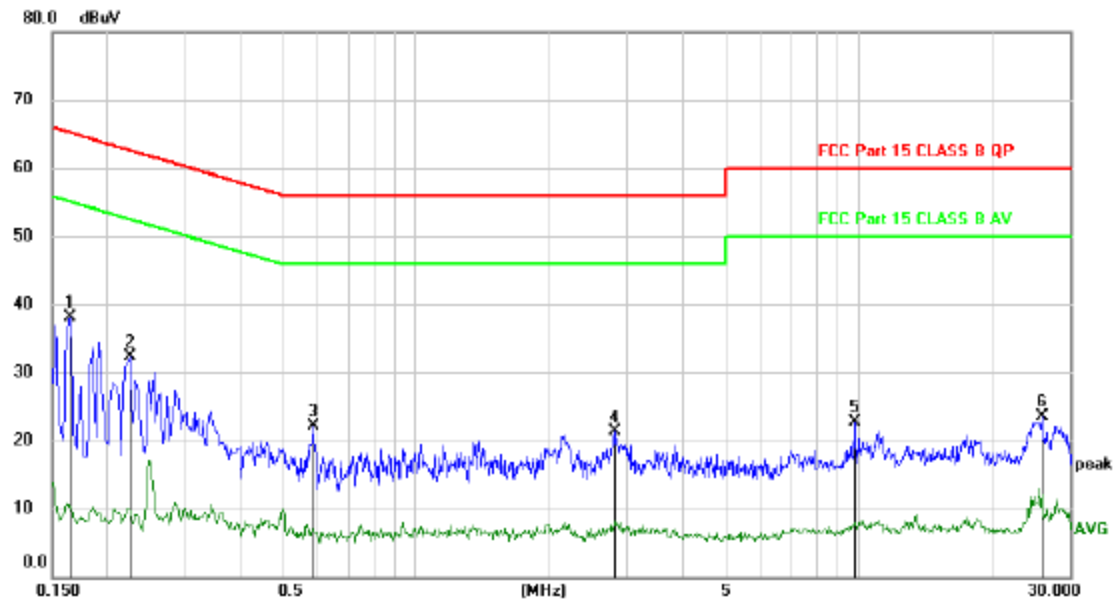Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1650	28.26	9.93	38.19	65.21	-27.02	peak	
2		0.2250	22.33	9.94	32.27	62.63	-30.36	peak	
3		0.5850	12.15	9.93	22.08	56.00	-33.92	peak	
4		2.7960	11.28	9.94	21.22	56.00	-34.78	peak	
5		9.7950	12.42	10.20	22.62	60.00	-37.38	peak	
6		25.8779	13.00	10.48	23.48	60.00	-36.52	peak	


*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.


4.3 Emission Bandwidth and 99% Occupied Bandwidth

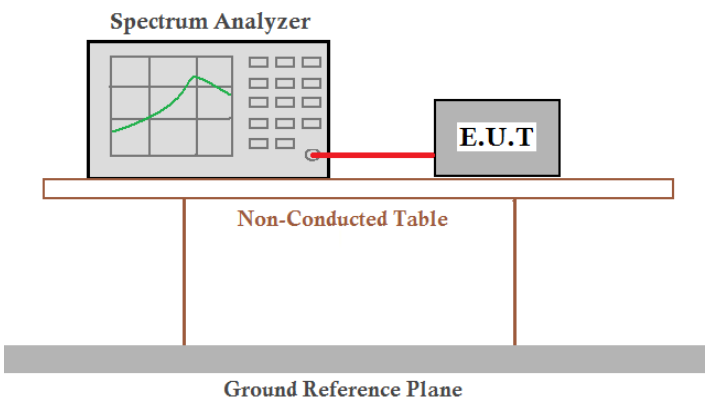Test Requirement:	FCC Part15 E Section 15.407 & RSS-Gen
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green trace, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass



Measurement Data:


**Band 1 (5150-5250 MHz):
-26dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	19.53	0.5	Pass
NVNT	a	5200	Ant1	20.01	0.5	Pass
NVNT	a	5240	Ant1	19.92	0.5	Pass
NVNT	ac20	5180	Ant1	20.19	0.5	Pass
NVNT	ac20	5200	Ant1	20.16	0.5	Pass
NVNT	ac20	5240	Ant1	19.86	0.5	Pass
NVNT	ac40	5190	Ant1	39.48	0.5	Pass
NVNT	ac40	5230	Ant1	39.48	0.5	Pass
NVNT	ac80	5210	Ant1	78.72	0.5	Pass
NVNT	n20	5180	Ant1	20.1	0.5	Pass
NVNT	n20	5200	Ant1	20.31	0.5	Pass
NVNT	n20	5240	Ant1	20.07	0.5	Pass
NVNT	n40	5190	Ant1	39.72	0.5	Pass
NVNT	n40	5230	Ant1	39.84	0.5	Pass

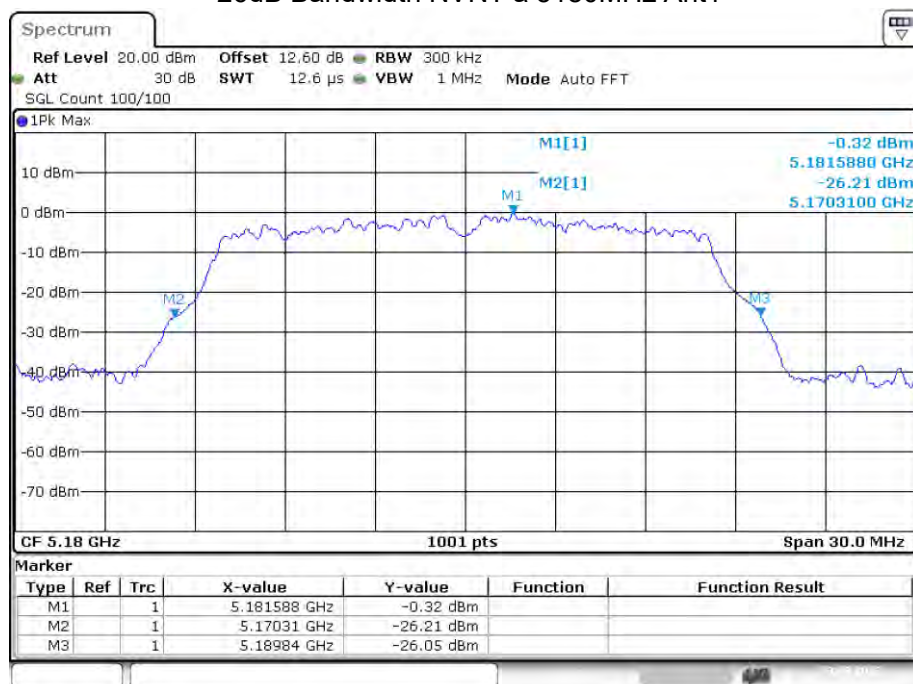
-26dB Bandwidth NVNT a 5180MHz Ant1


Date: 23.AUG.2022 11:18:19

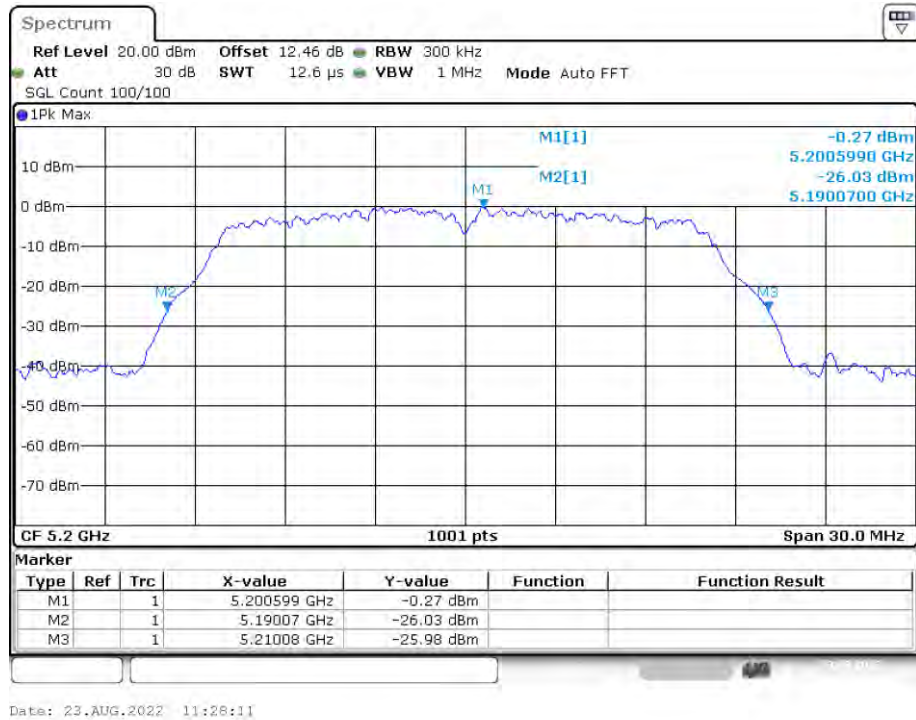
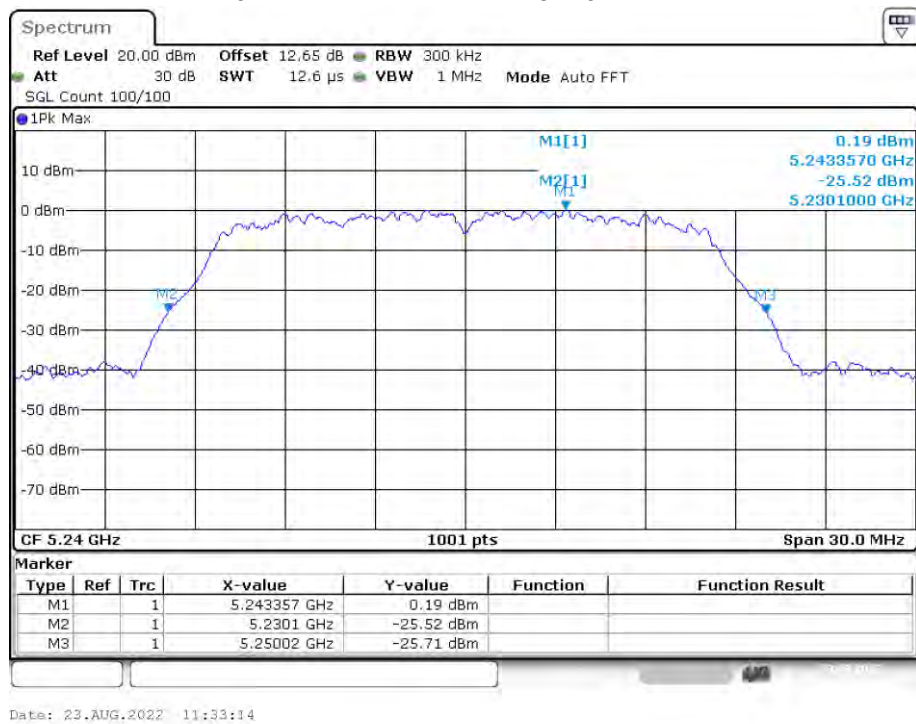
-26dB Bandwidth NVNT a 5200MHz Ant1**-26dB Bandwidth NVNT a 5240MHz Ant1**

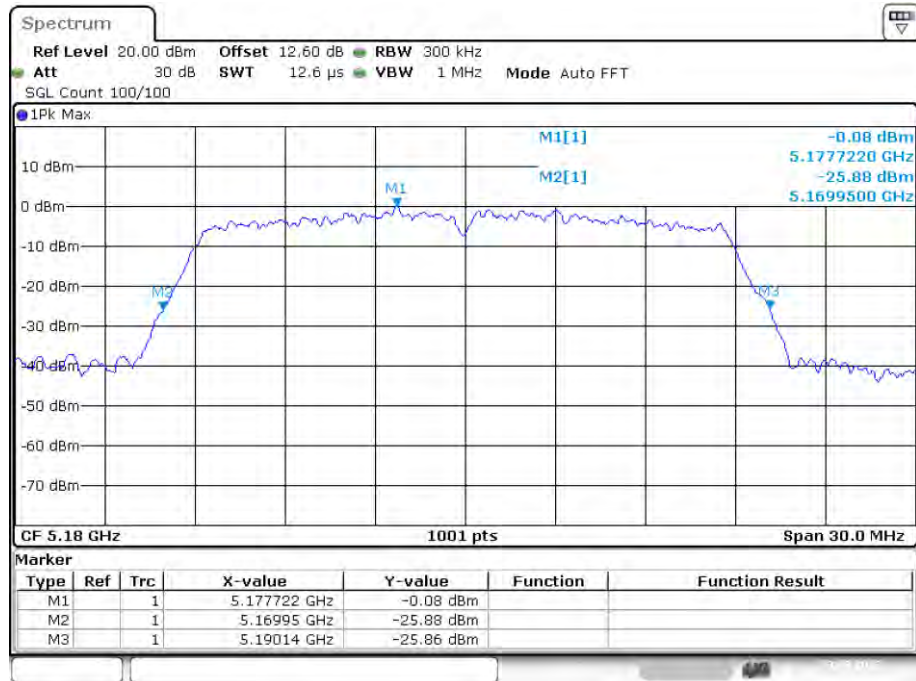-26dB Bandwidth NVNT ac20 5180MHz Ant1


Date: 23.AUG.2022 12:24:23

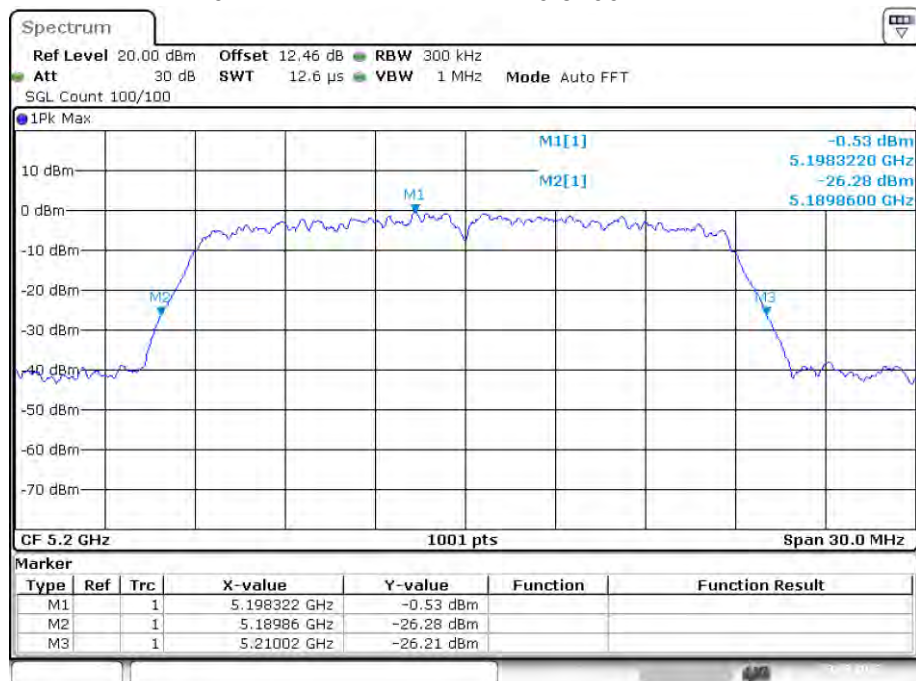-26dB Bandwidth NVNT ac20 5200MHz Ant1

Date: 23.AUG.2022 12:31:13

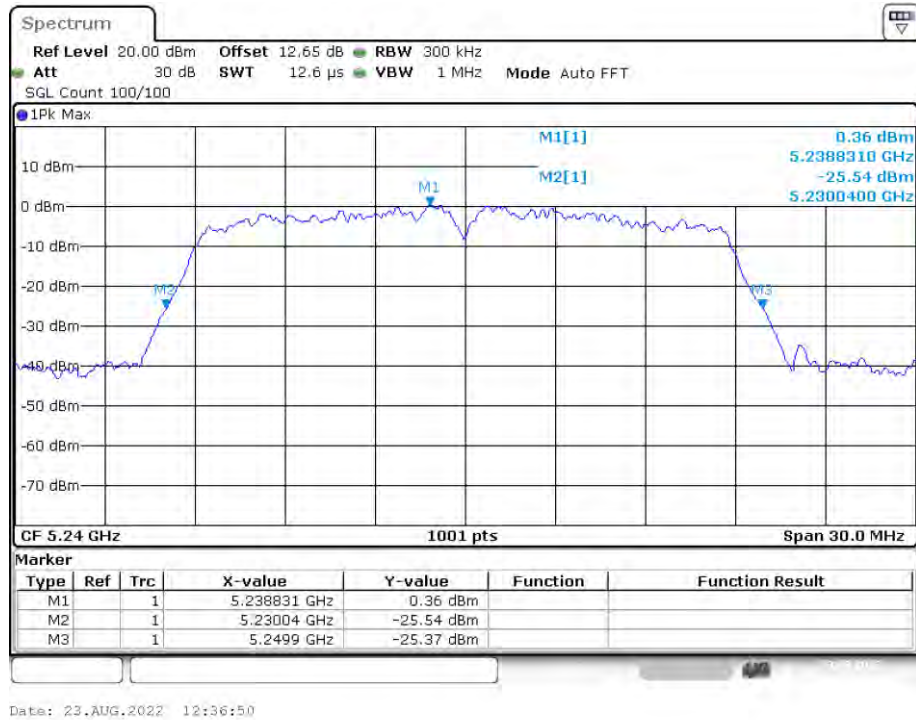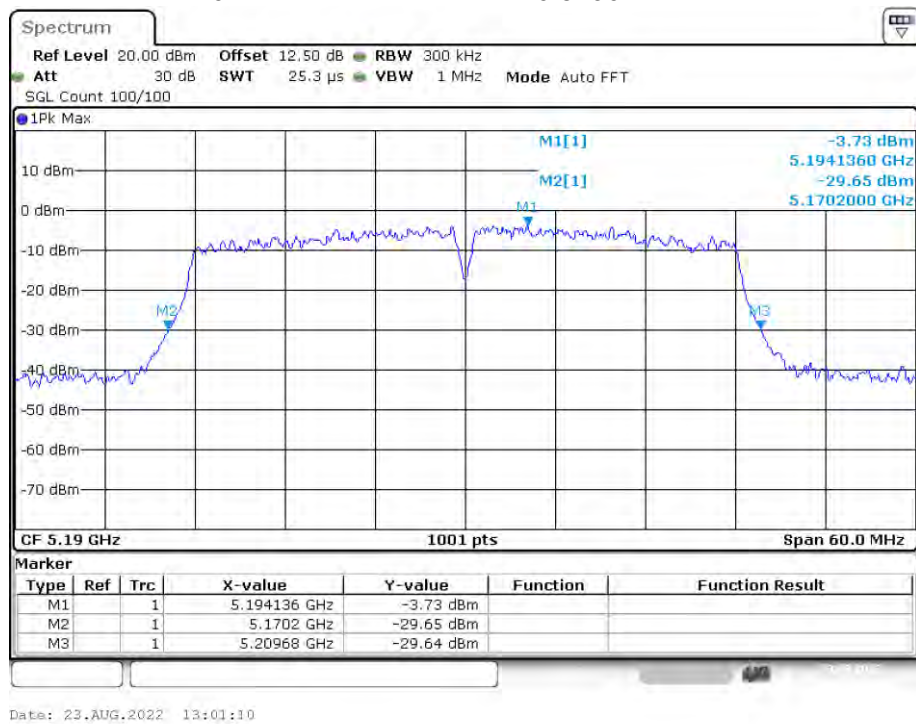
-26dB Bandwidth NVNT ac20 5240MHz Ant1**-26dB Bandwidth NVNT ac40 5190MHz Ant1**

-26dB Bandwidth NVNT ac40 5230MHz Ant1


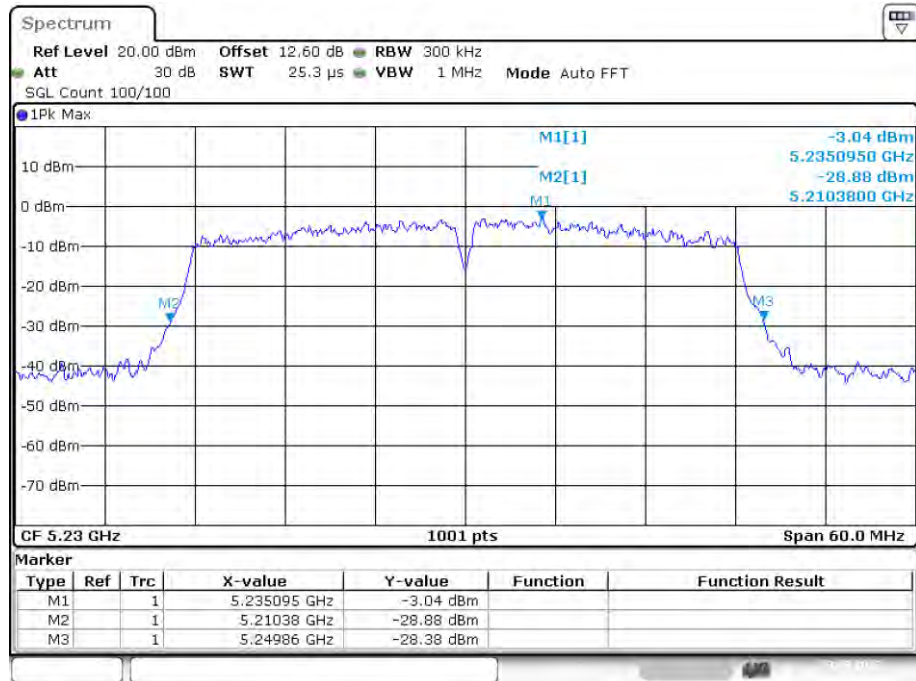




Date: 23.AUG.2022 13:12:47


-26dB Bandwidth NVNT ac80 5210MHz Ant1

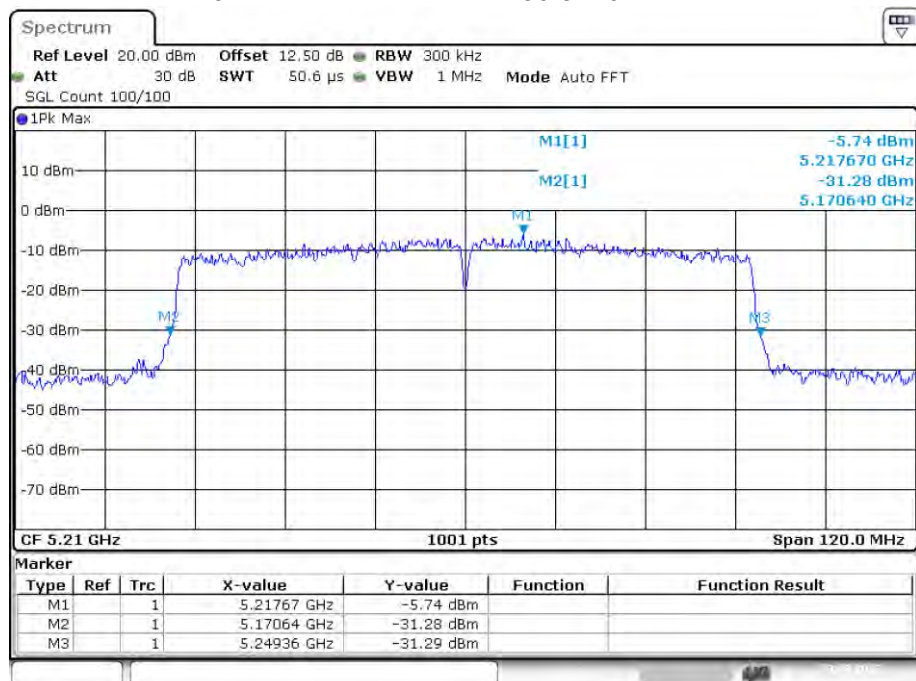

Date: 23.AUG.2022 13:24:52

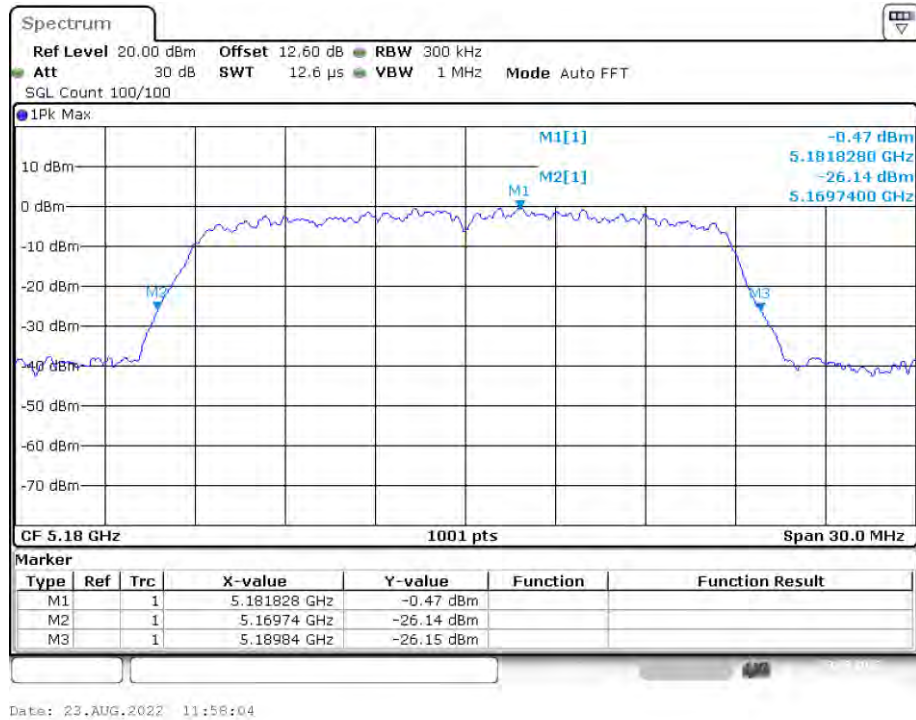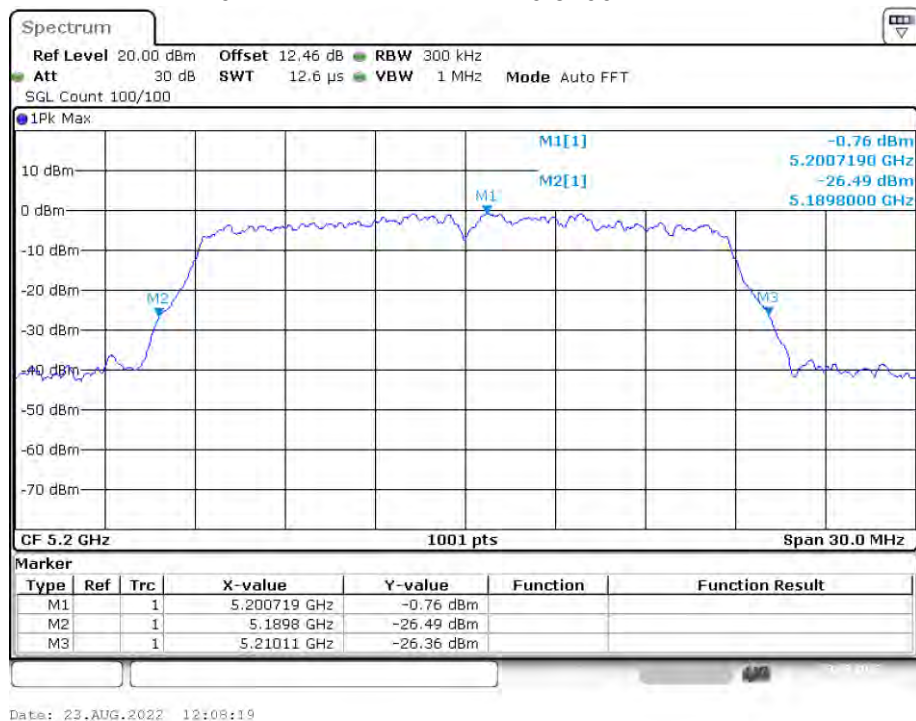-26dB Bandwidth NVNT n20 5180MHz Ant1**-26dB Bandwidth NVNT n20 5200MHz Ant1**

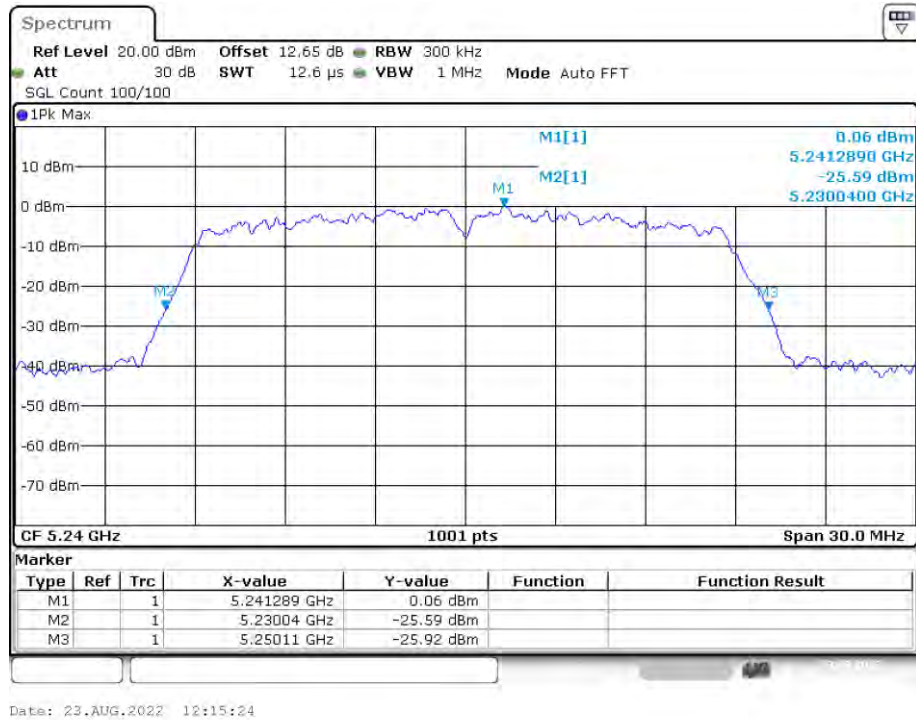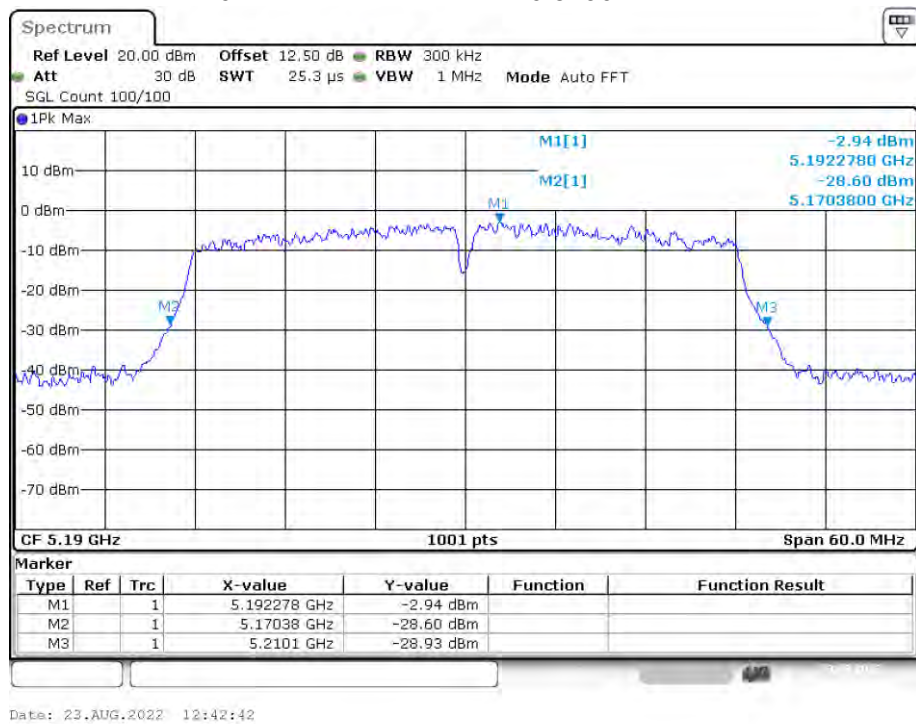-26dB Bandwidth NVNT n20 5240MHz Ant1**-26dB Bandwidth NVNT n40 5190MHz Ant1**

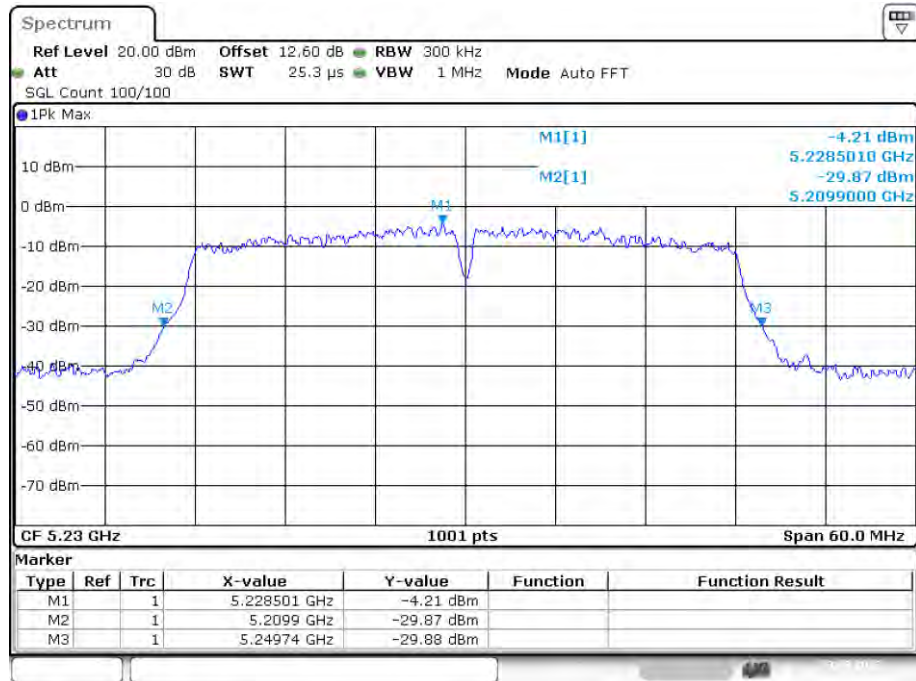
-26dB Bandwidth NVNT n40 5230MHz Ant1

Date: 23.AUG.2022 12:55:12

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.334
NVNT	a	5200	Ant1	16.543
NVNT	a	5240	Ant1	16.394
NVNT	ac20	5180	Ant1	17.532
NVNT	ac20	5200	Ant1	17.532
NVNT	ac20	5240	Ant1	17.532
NVNT	ac40	5190	Ant1	35.964
NVNT	ac40	5230	Ant1	35.904
NVNT	ac80	5210	Ant1	75.405
NVNT	n20	5180	Ant1	17.443
NVNT	n20	5200	Ant1	17.592
NVNT	n20	5240	Ant1	17.502
NVNT	n40	5190	Ant1	35.904
NVNT	n40	5230	Ant1	36.024

OBW NVNT a 5180MHz Ant1

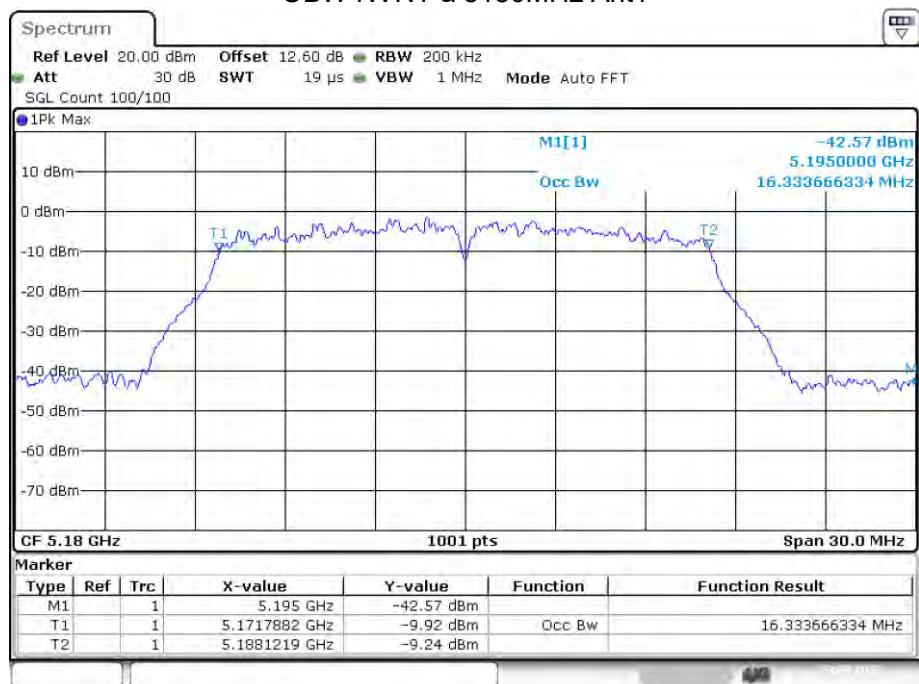


Date: 23.AUG.2022 11:18:10


OBW NVNT a 5200MHz Ant1

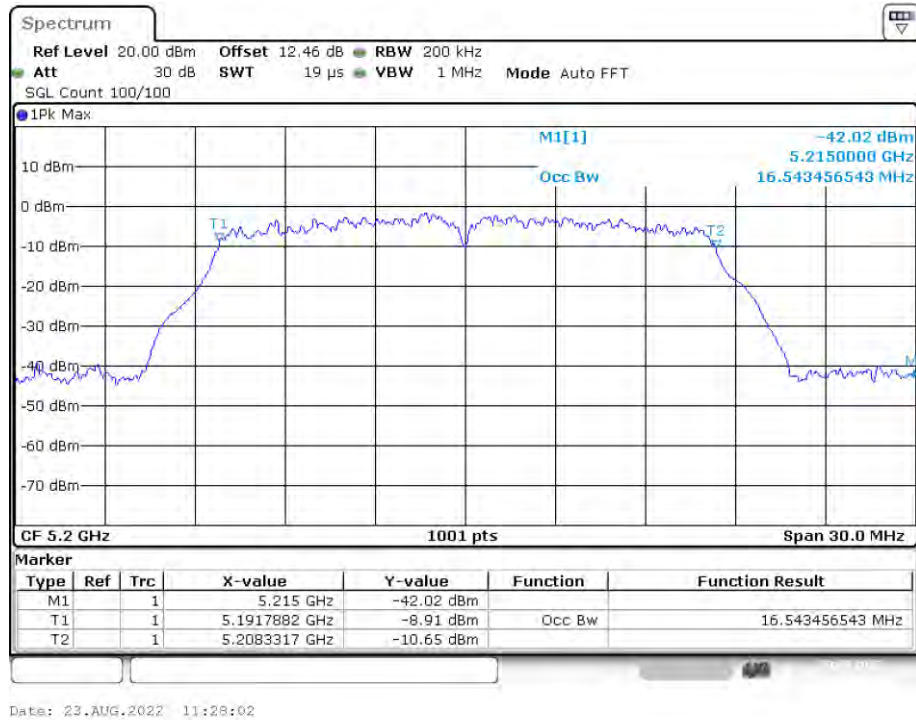


OBW NVNT a 5240MHz Ant1

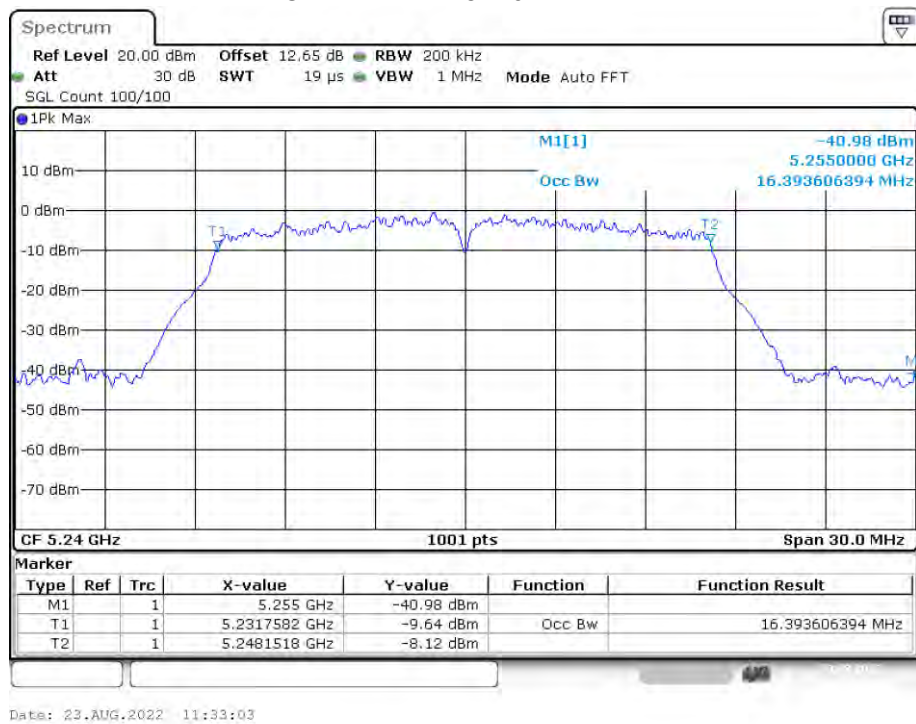


OBW NVNT ac20 5180MHz Ant1

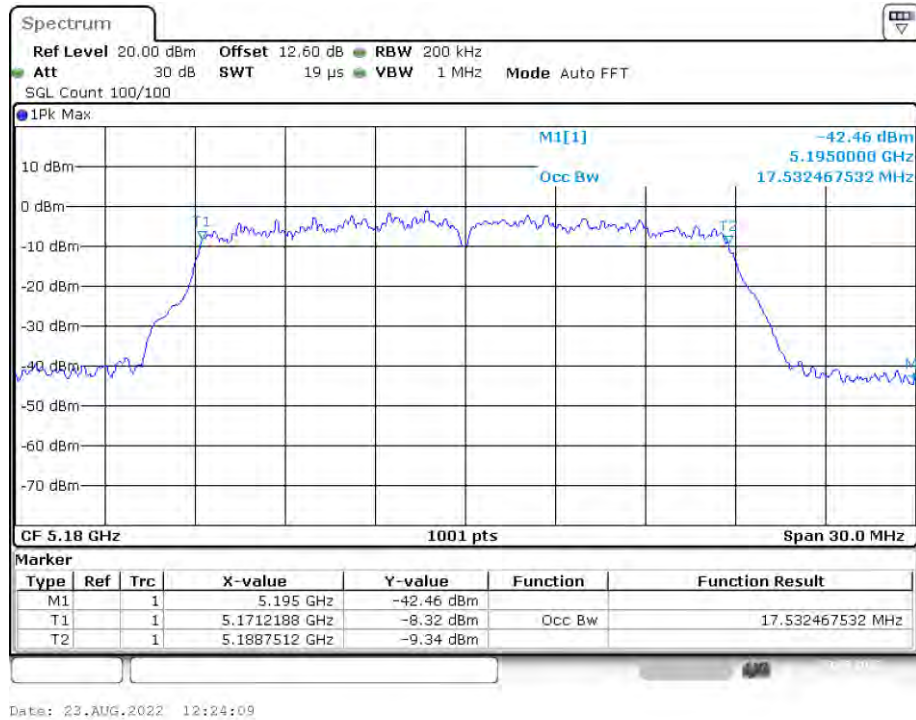


OBW NVNT ac20 5200MHz Ant1

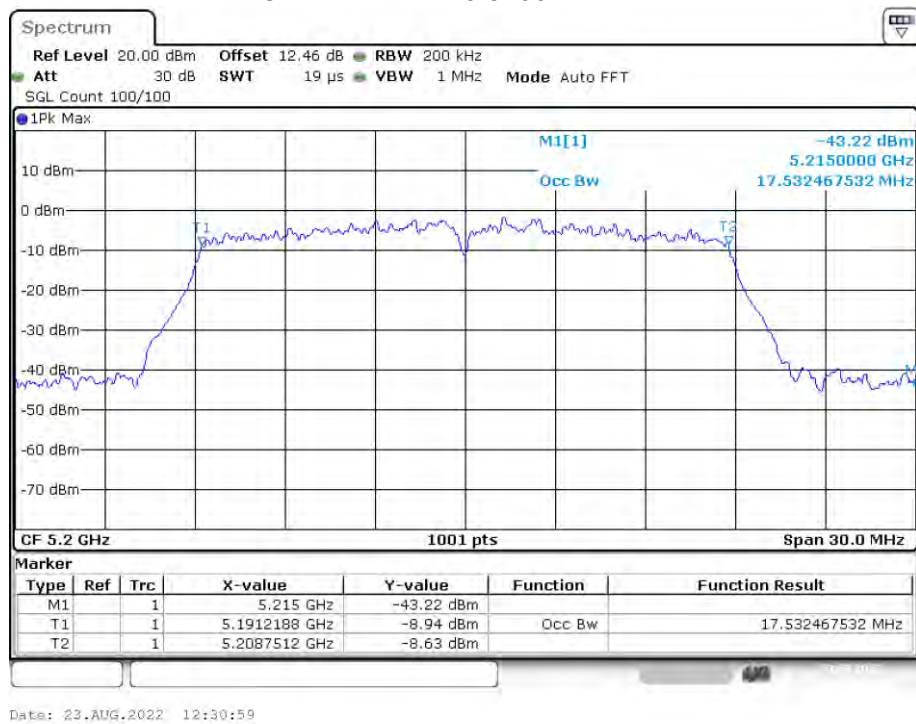


OBW NVNT ac20 5240MHz Ant1

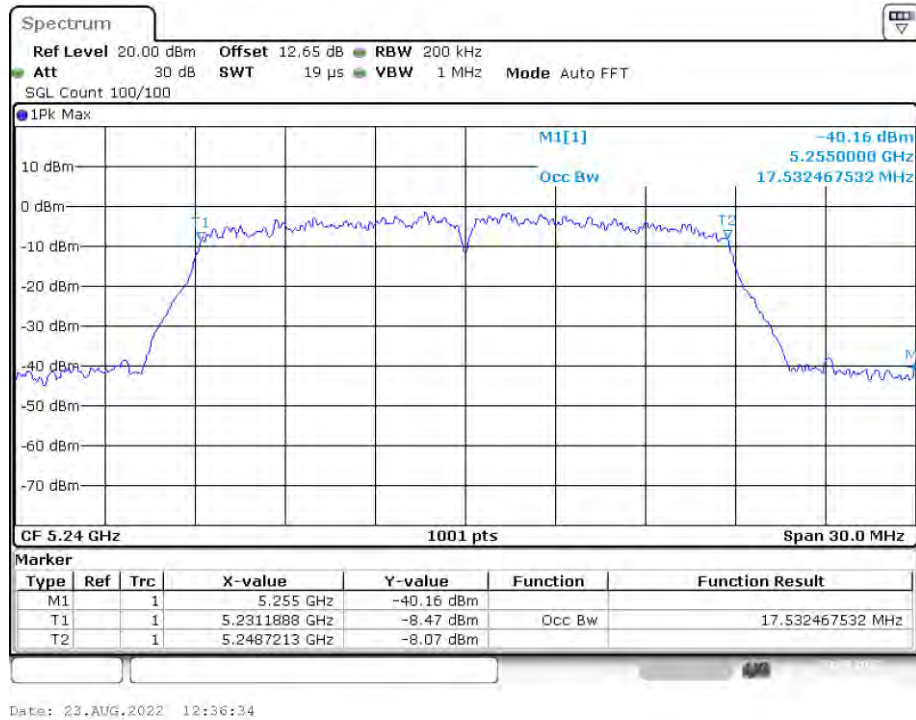

OBW NVNT ac40 5190MHz Ant1

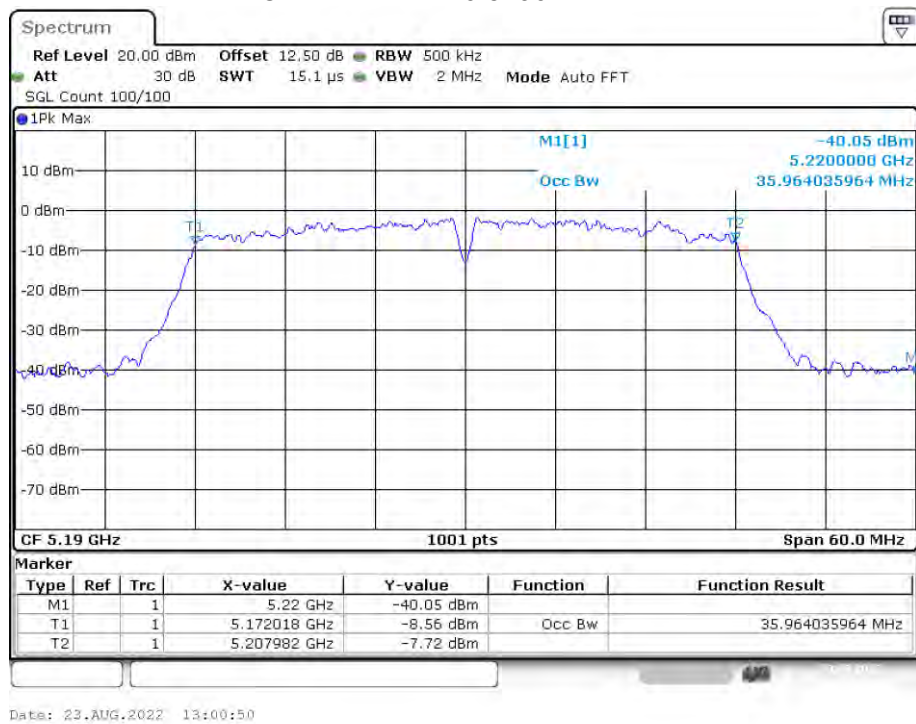


OBW NVNT ac40 5230MHz Ant1

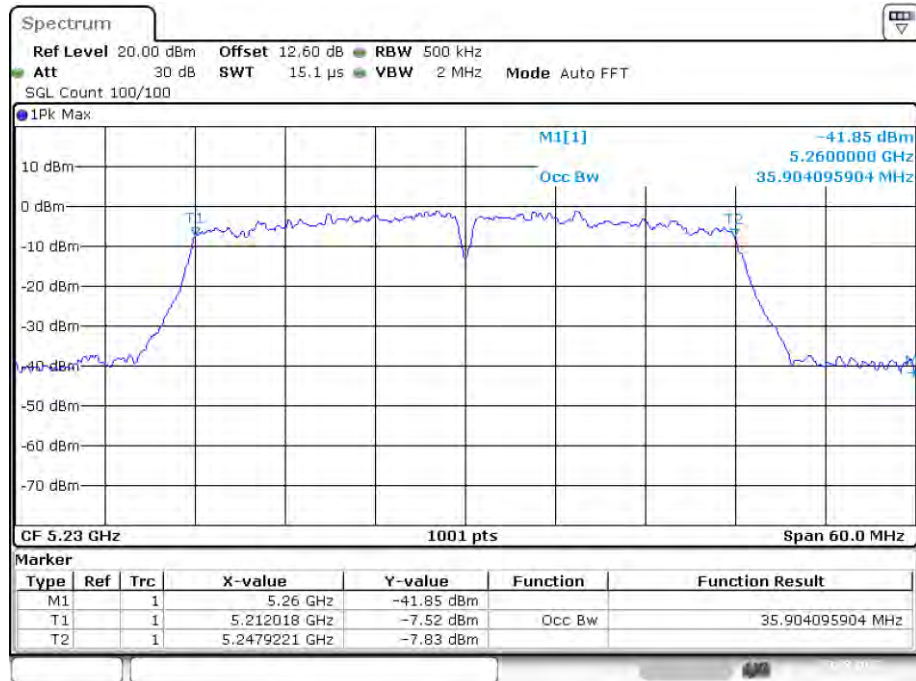


Date: 23.AUG.2022 13:12:26

OBW NVNT ac80 5210MHz Ant1

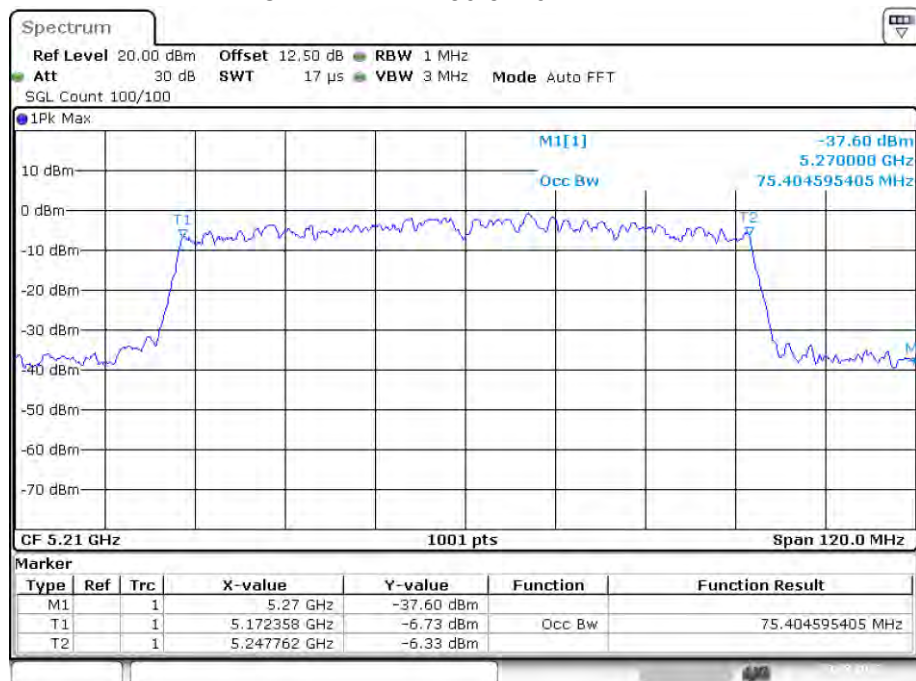


Date: 23.AUG.2022 13:24:40


OBW NVNT n20 5180MHz Ant1

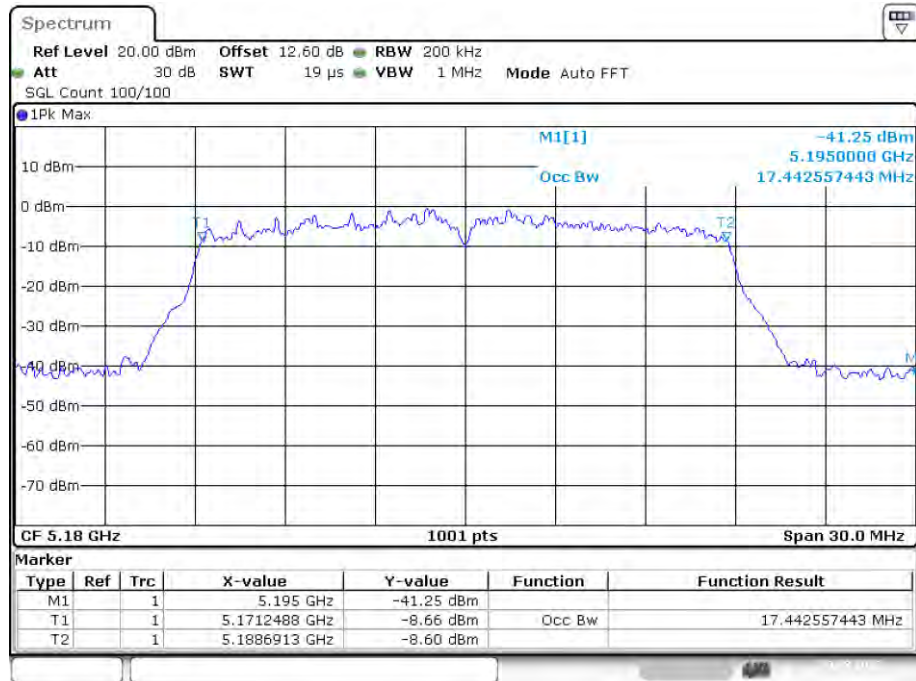


OBW NVNT n20 5200MHz Ant1

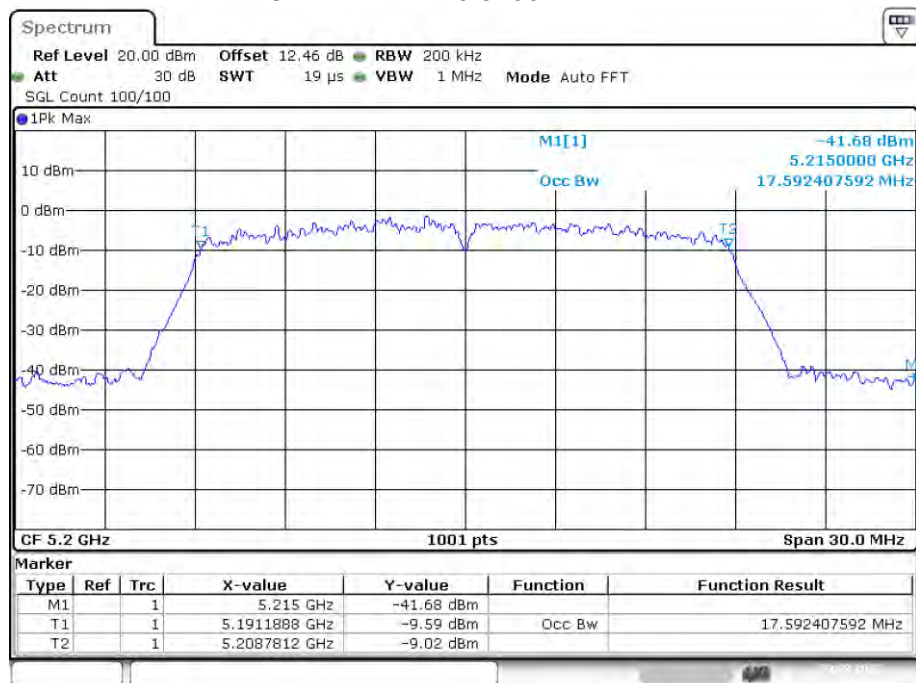


OBW NVNT n20 5240MHz Ant1

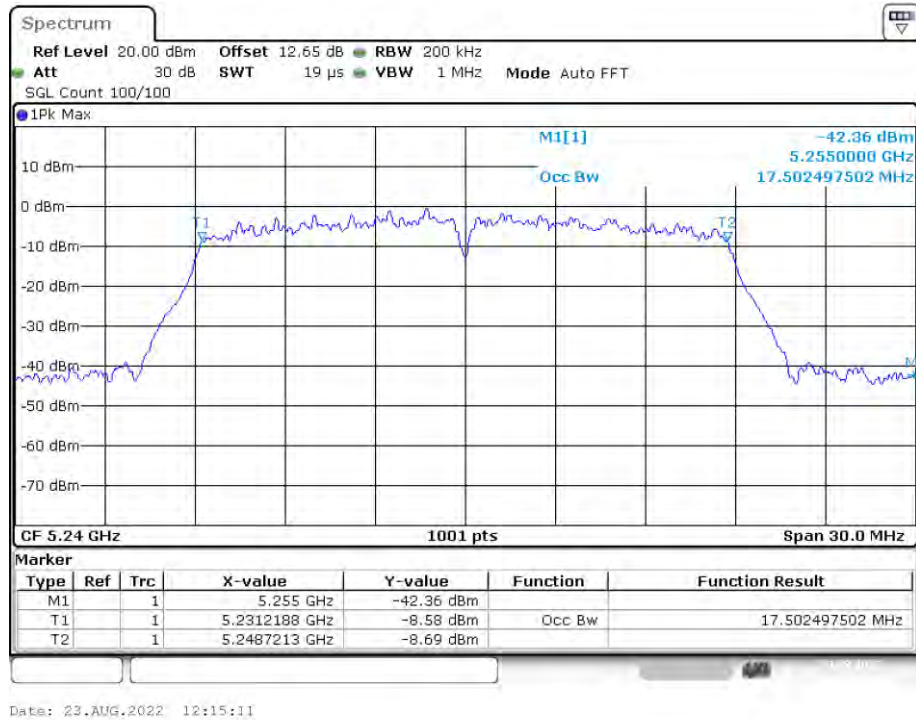

OBW NVNT n40 5190MHz Ant1

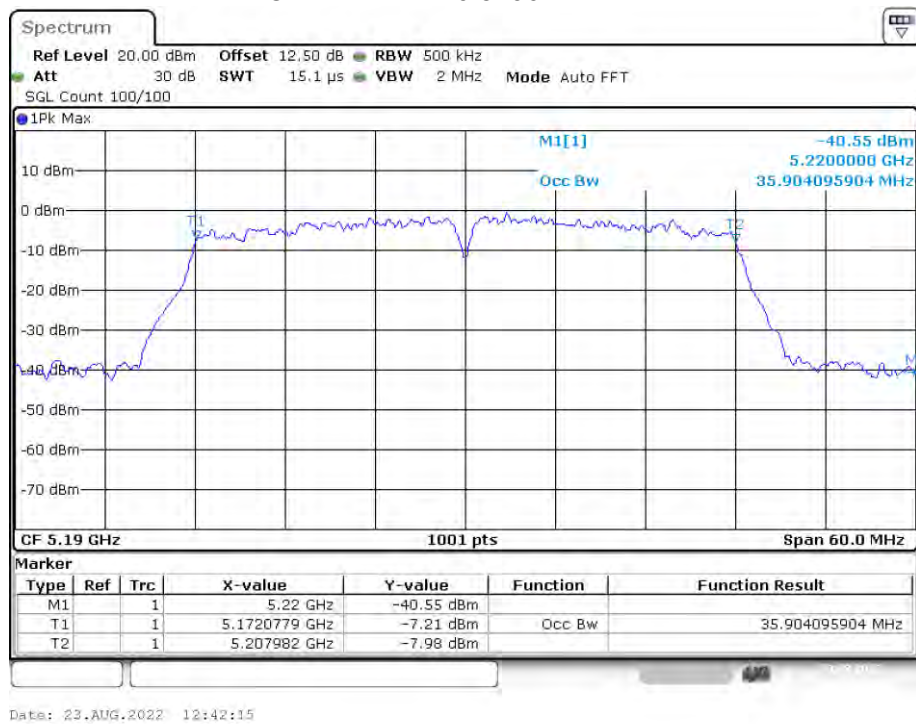

OBW NVNT n40 5230MHz Ant1

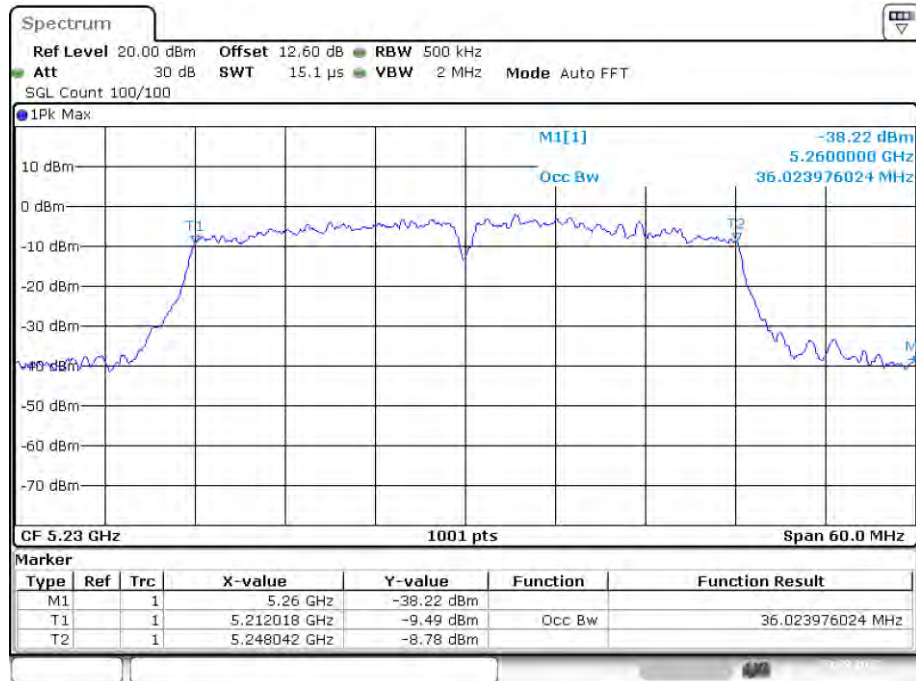


Date: 23.AUG.2022 12:54:53



**Band 2 (5250-5350 MHz):
-26dB Bandwidth**



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	19.77	0.5	Pass
NVNT	a	5280	Ant1	19.86	0.5	Pass
NVNT	a	5320	Ant1	19.89	0.5	Pass
NVNT	ac20	5260	Ant1	20.19	0.5	Pass
NVNT	ac20	5280	Ant1	20.31	0.5	Pass
NVNT	ac20	5320	Ant1	20.22	0.5	Pass
NVNT	ac40	5270	Ant1	39.36	0.5	Pass
NVNT	ac40	5310	Ant1	39.9	0.5	Pass
NVNT	ac80	5290	Ant1	79.56	0.5	Pass
NVNT	n20	5260	Ant1	20.07	0.5	Pass
NVNT	n20	5280	Ant1	20.19	0.5	Pass
NVNT	n20	5320	Ant1	20.01	0.5	Pass
NVNT	n40	5270	Ant1	39.72	0.5	Pass
NVNT	n40	5310	Ant1	39.24	0.5	Pass



-26dB Bandwidth NVNT a 5260MHz Ant1

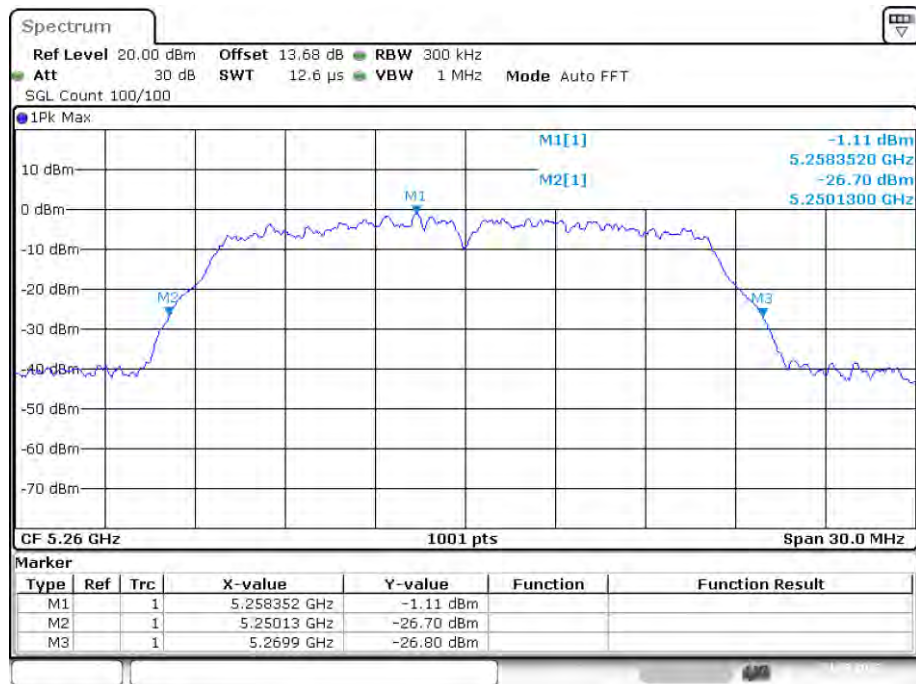


Date: 24.AUG.2022 09:25:19

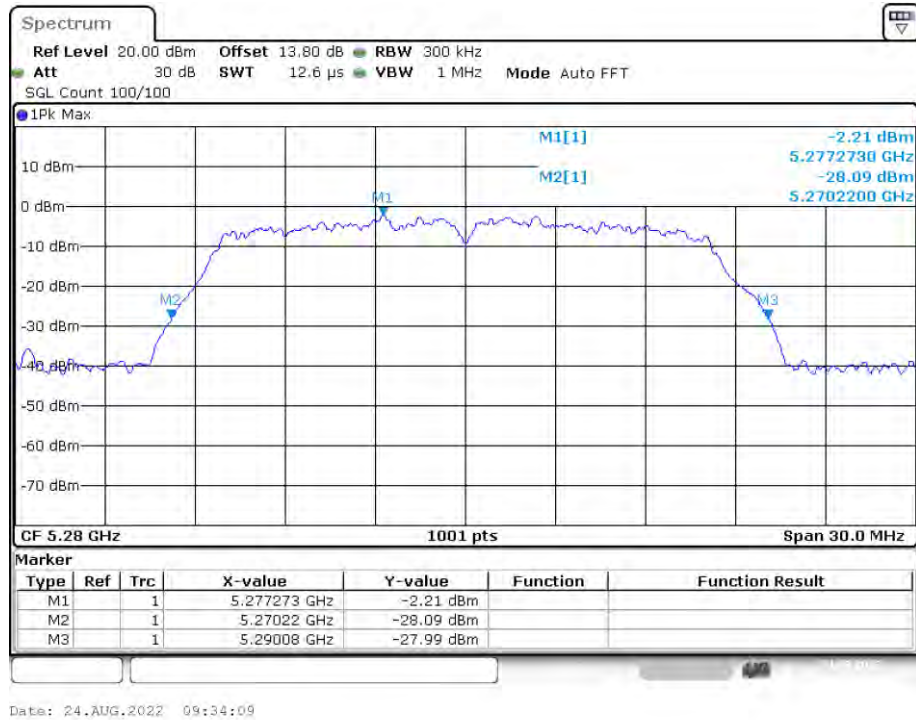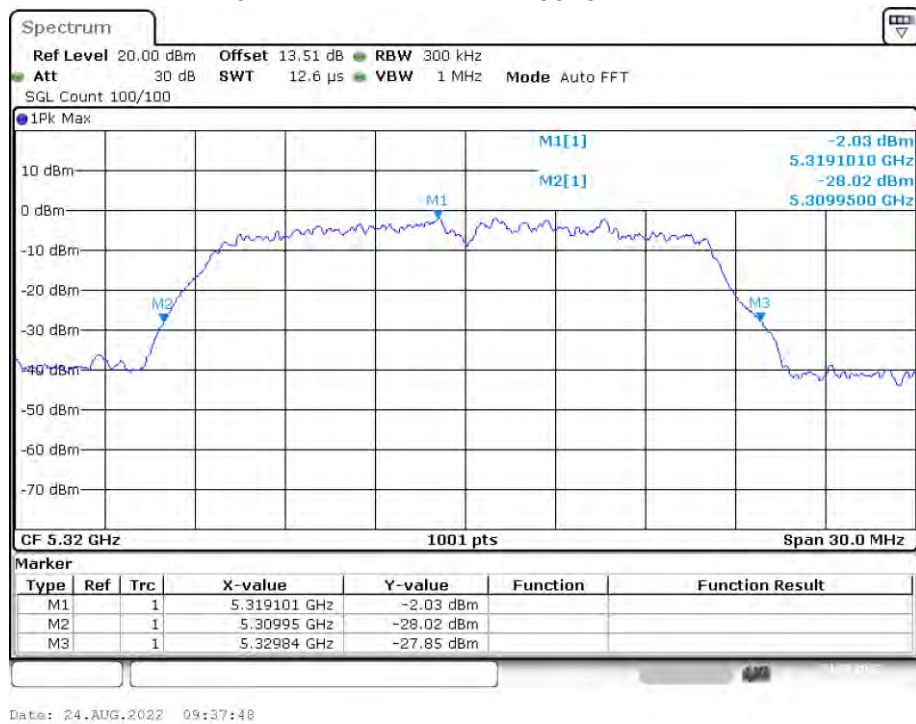
-26dB Bandwidth NVNT a 5280MHz Ant1**-26dB Bandwidth NVNT a 5320MHz Ant1**

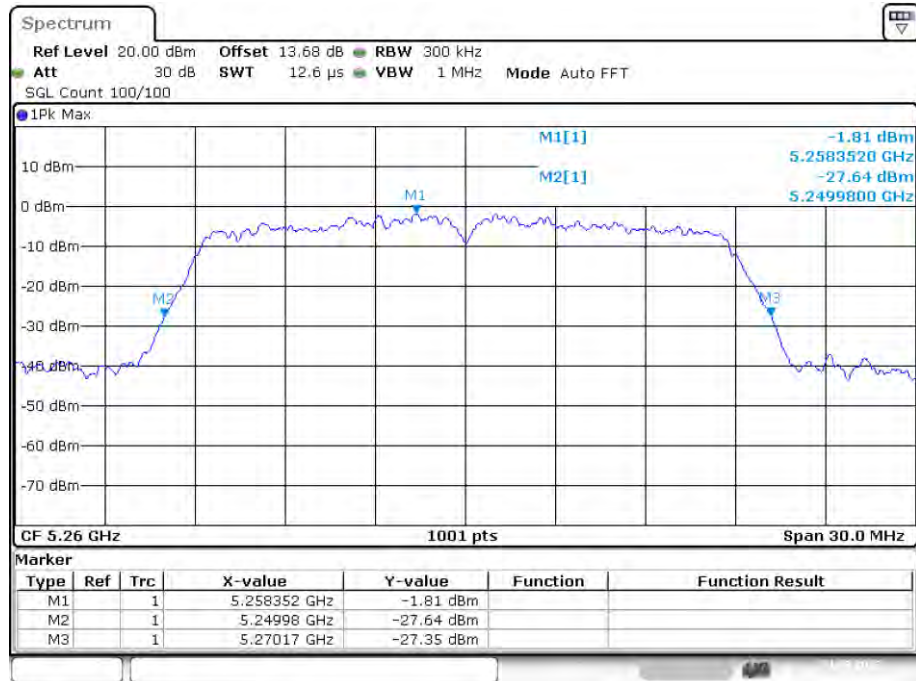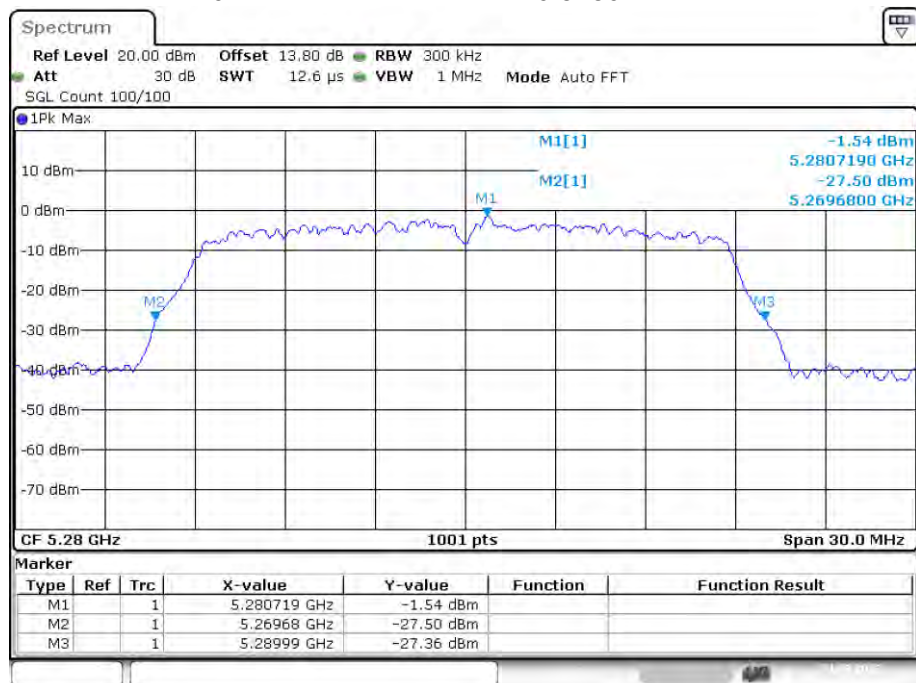-26dB Bandwidth NVNT ac20 5260MHz Ant1**-26dB Bandwidth NVNT ac20 5280MHz Ant1**

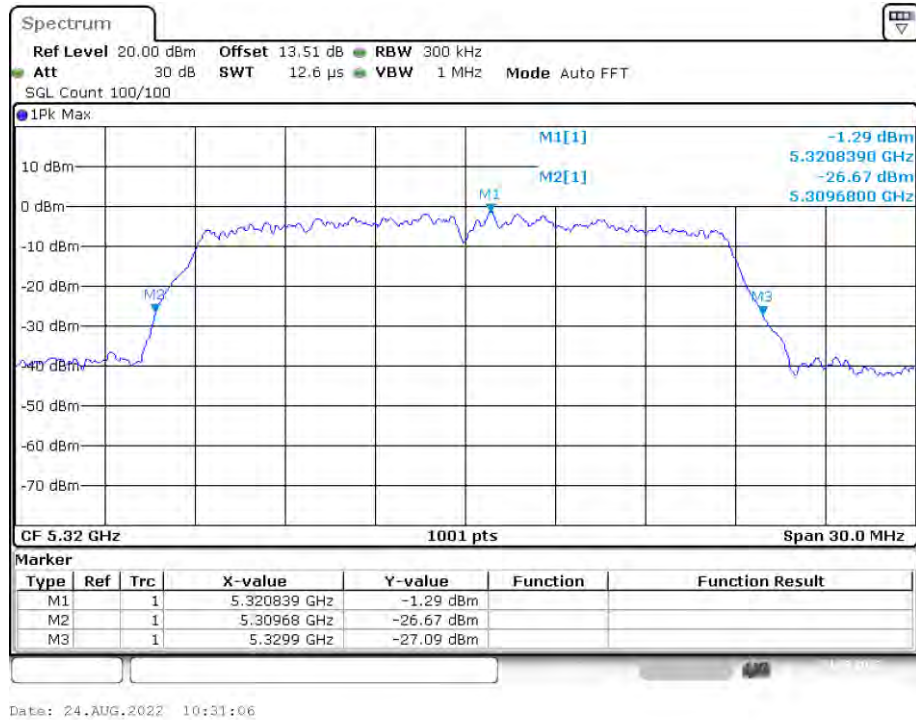
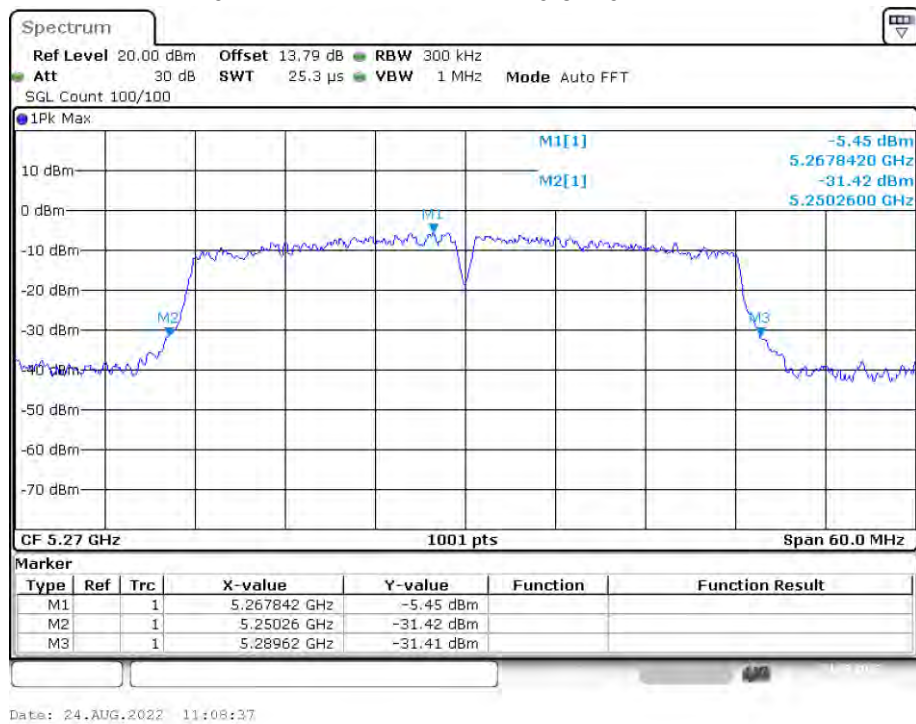
-26dB Bandwidth NVNT ac20 5320MHz Ant1**-26dB Bandwidth NVNT ac40 5270MHz Ant1**


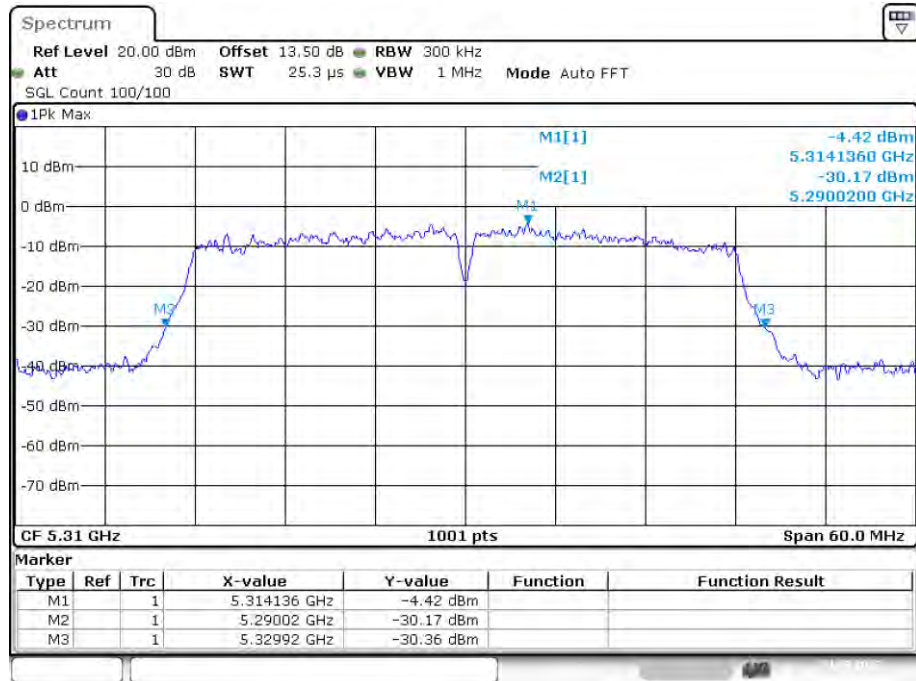
-26dB Bandwidth NVNT ac40 5310MHz Ant1

Date: 24.AUG.2022 11:14:47

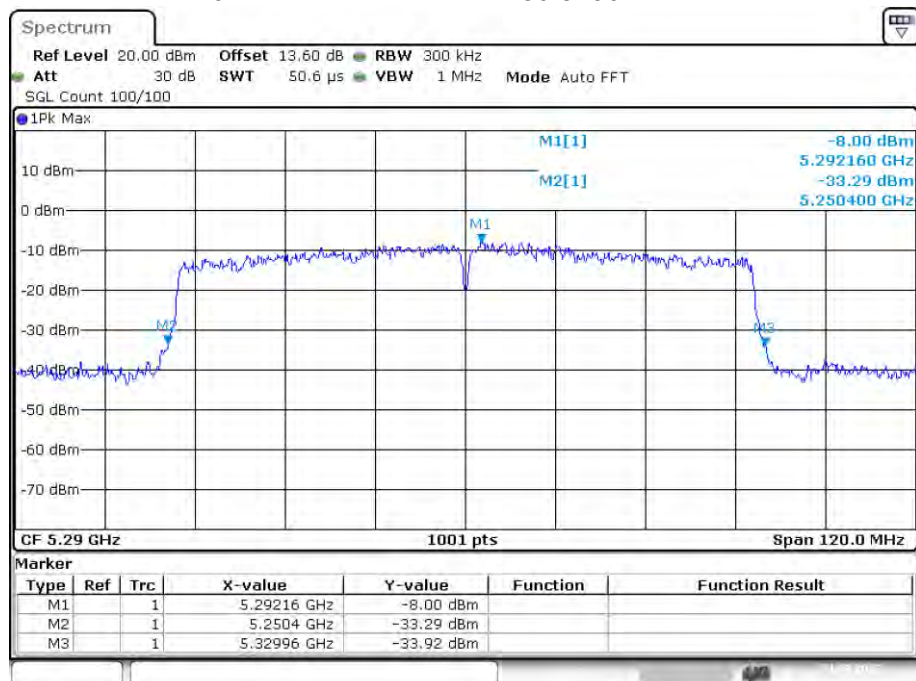
-26dB Bandwidth NVNT ac80 5290MHz Ant1

Date: 24.AUG.2022 11:25:24

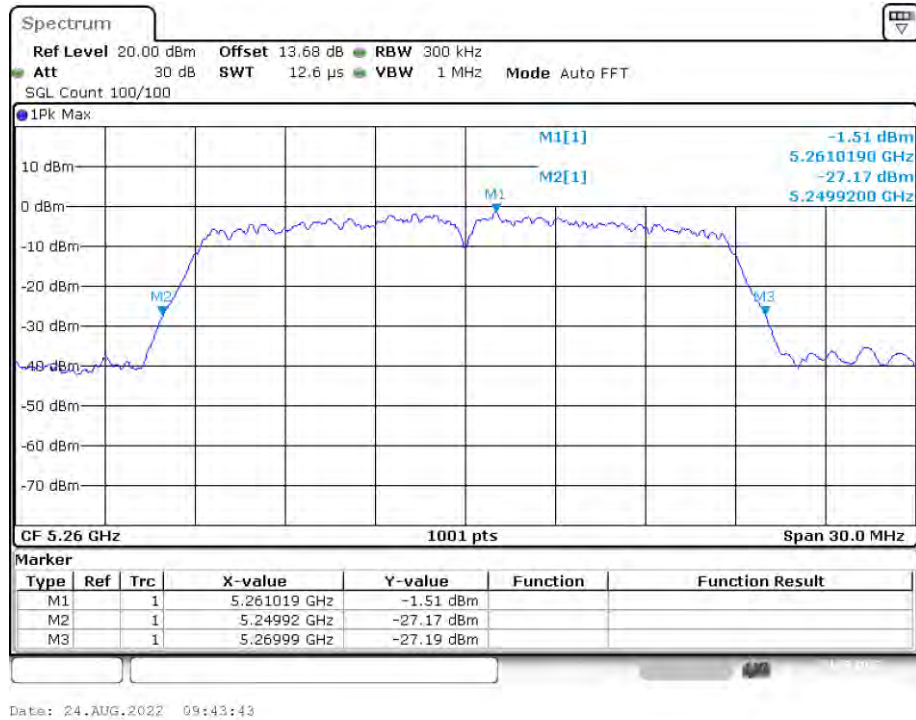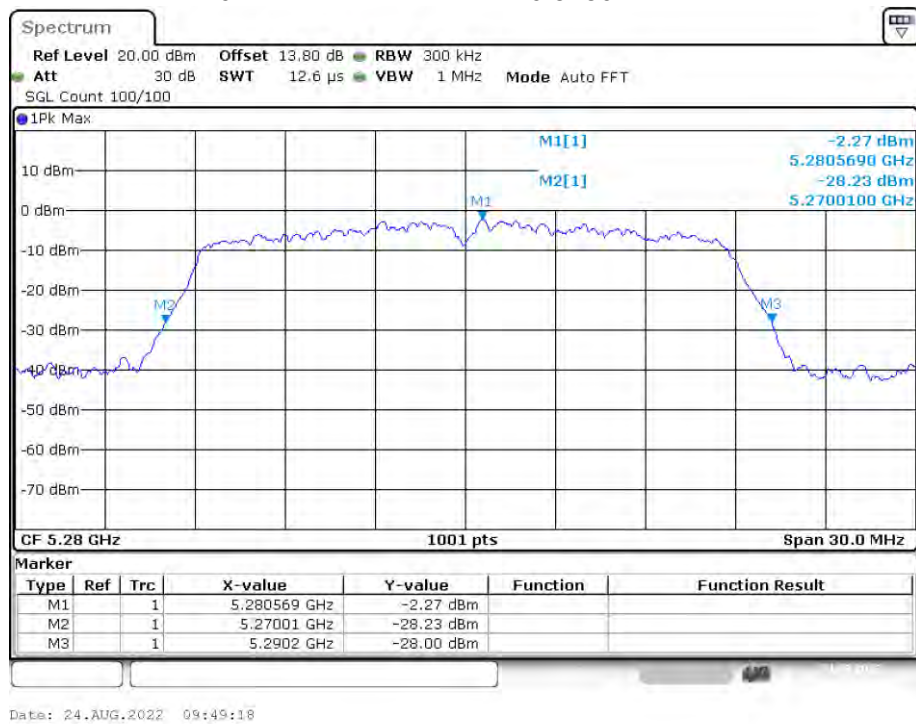-26dB Bandwidth NVNT n20 5260MHz Ant1**-26dB Bandwidth NVNT n20 5280MHz Ant1**

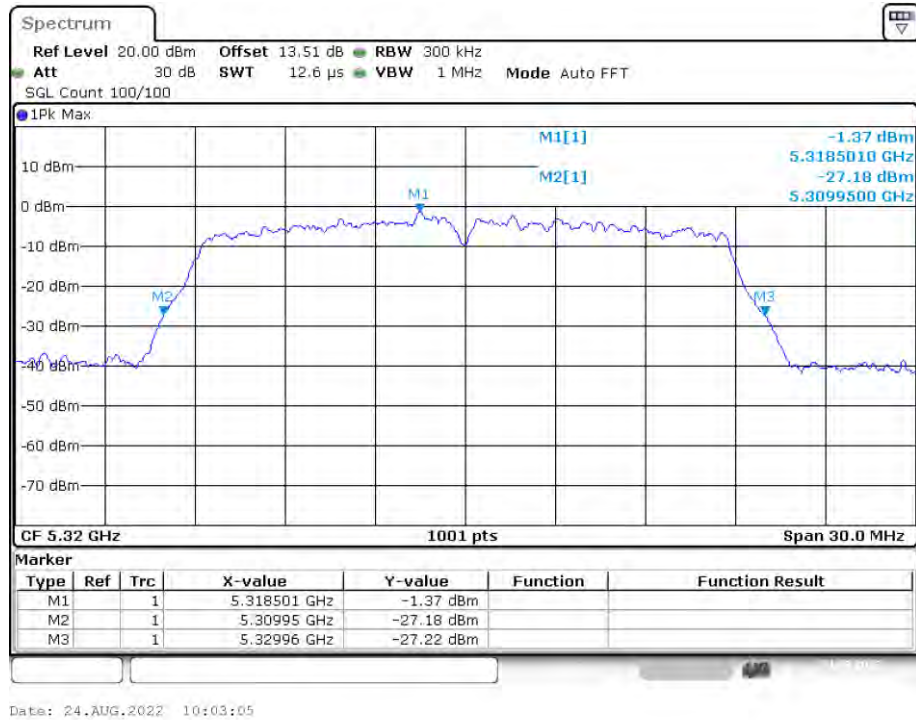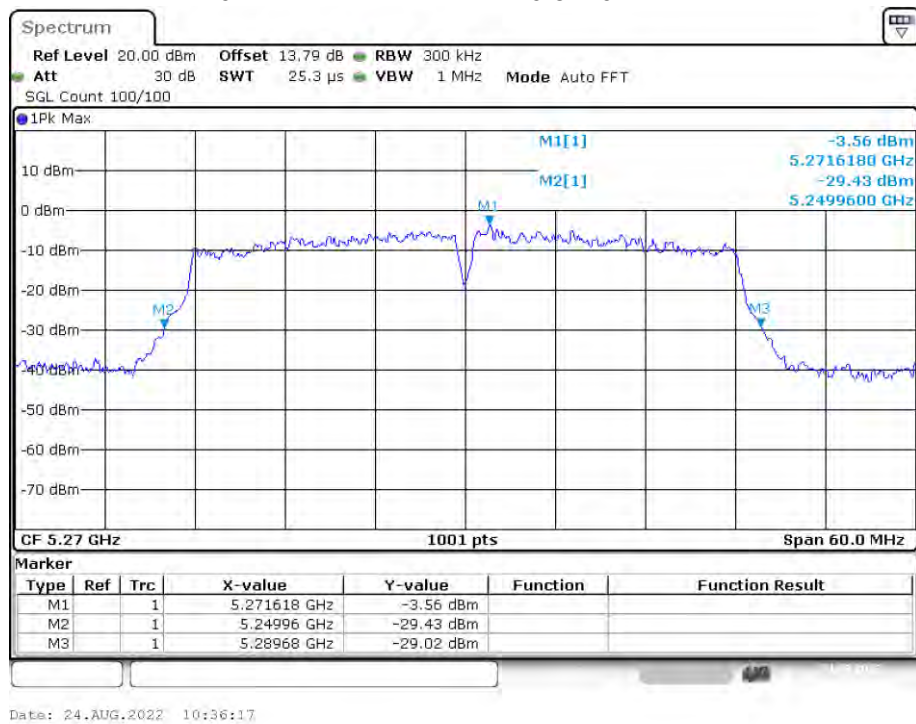-26dB Bandwidth NVNT n20 5320MHz Ant1**-26dB Bandwidth NVNT n40 5270MHz Ant1**

-26dB Bandwidth NVNT n40 5310MHz Ant1

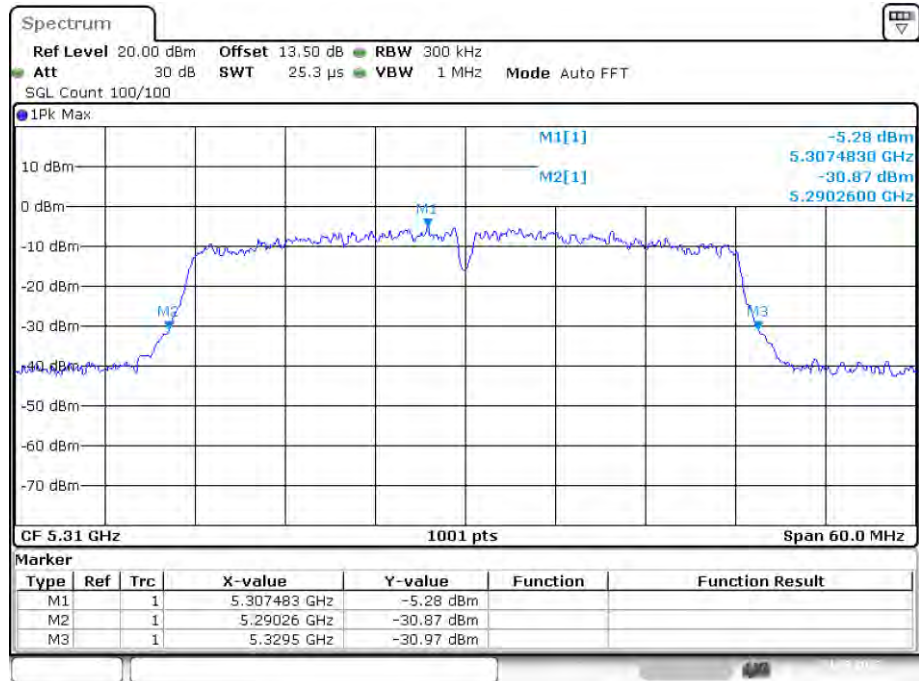


Date: 24.AUG.2022 11:02:16

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5260	Ant1	16.394
NVNT	a	5280	Ant1	16.364
NVNT	a	5320	Ant1	16.484
NVNT	ac20	5260	Ant1	17.682
NVNT	ac20	5280	Ant1	17.473
NVNT	ac20	5320	Ant1	17.532
NVNT	ac40	5270	Ant1	36.024
NVNT	ac40	5310	Ant1	36.084
NVNT	ac80	5290	Ant1	75.524
NVNT	n20	5260	Ant1	17.502
NVNT	n20	5280	Ant1	17.532
NVNT	n20	5320	Ant1	17.532
NVNT	n40	5270	Ant1	36.024
NVNT	n40	5310	Ant1	35.964

OBW NVNT a 5260MHz Ant1

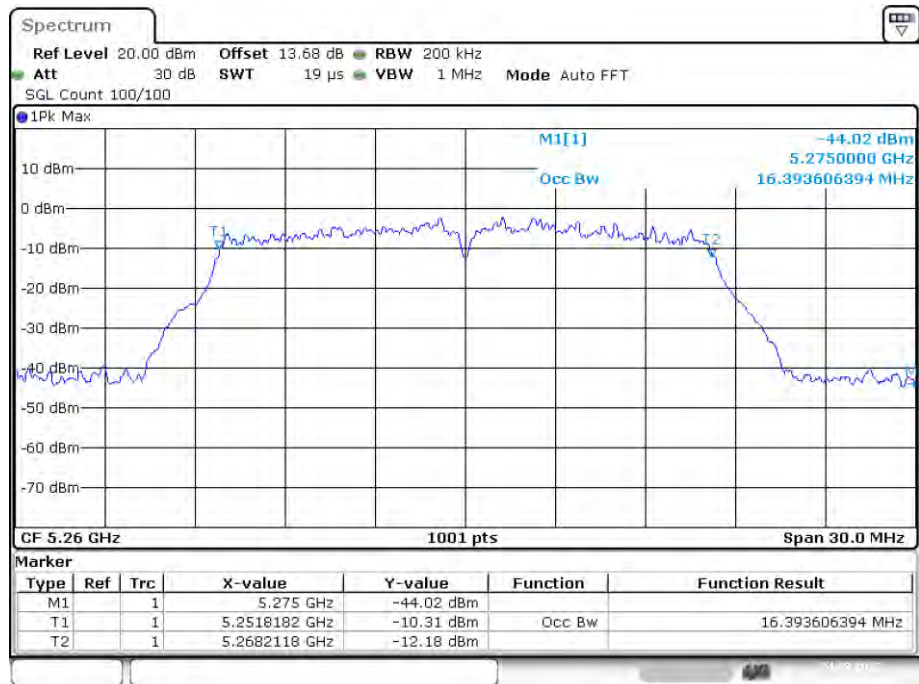


Date: 24.AUG.2022 09:25:11


OBW NVNT a 5280MHz Ant1

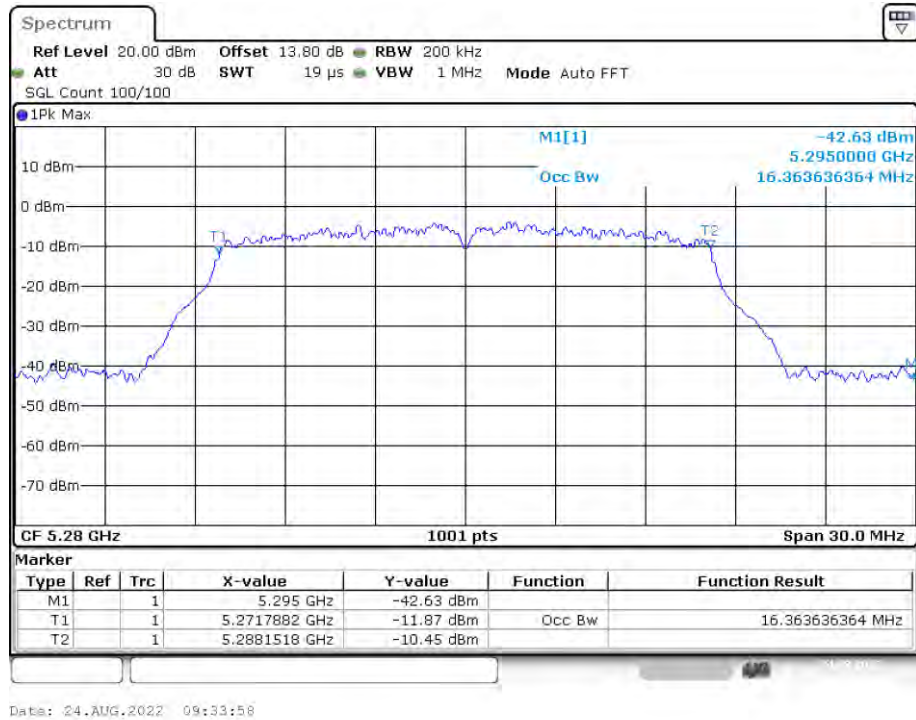


OBW NVNT a 5320MHz Ant1

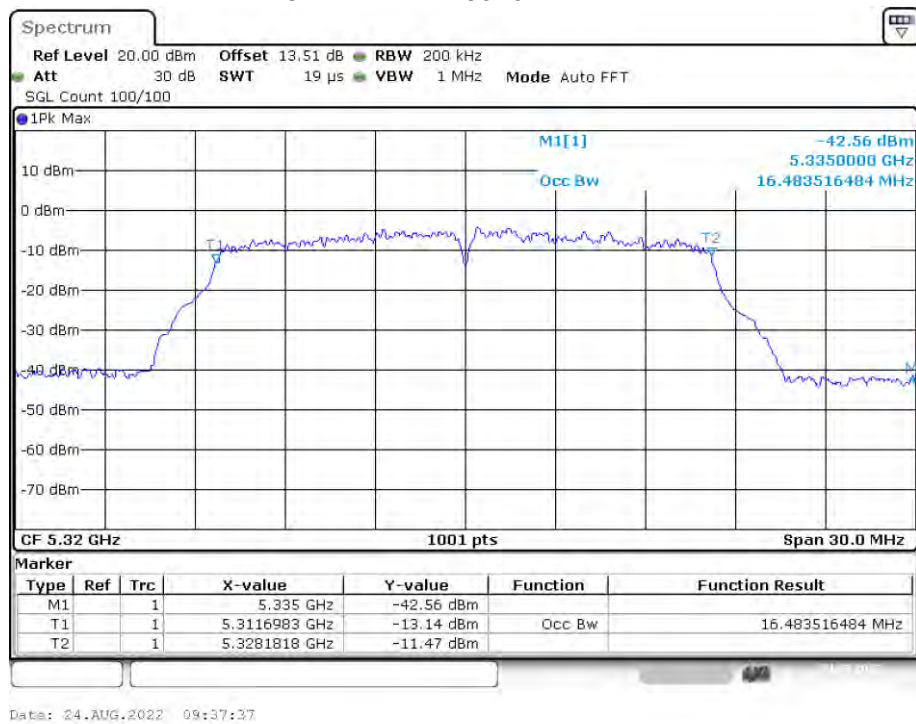


OBW NVNT ac20 5260MHz Ant1

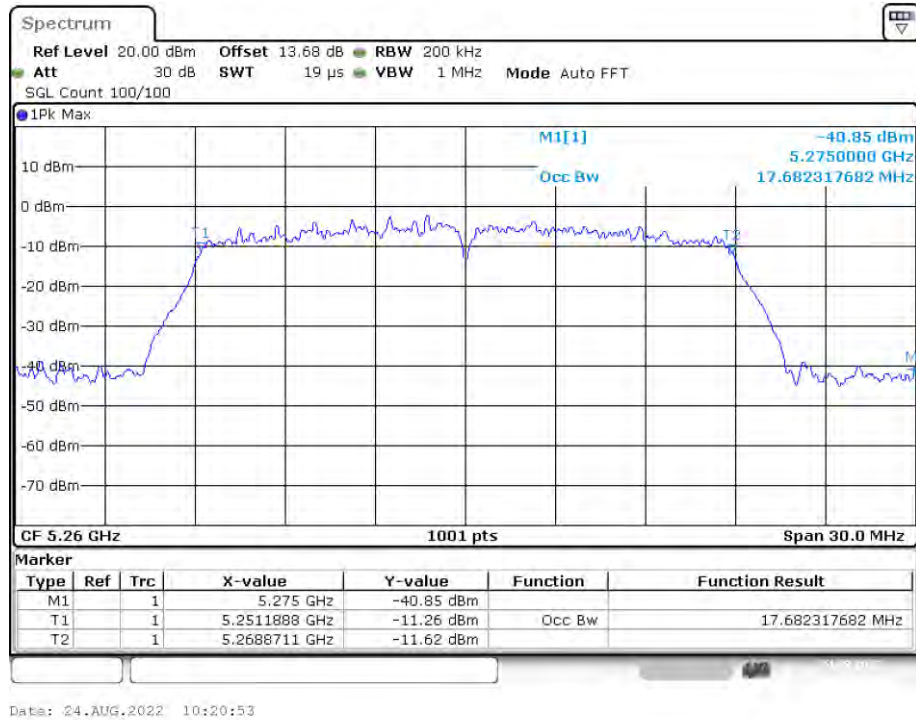


OBW NVNT ac20 5280MHz Ant1

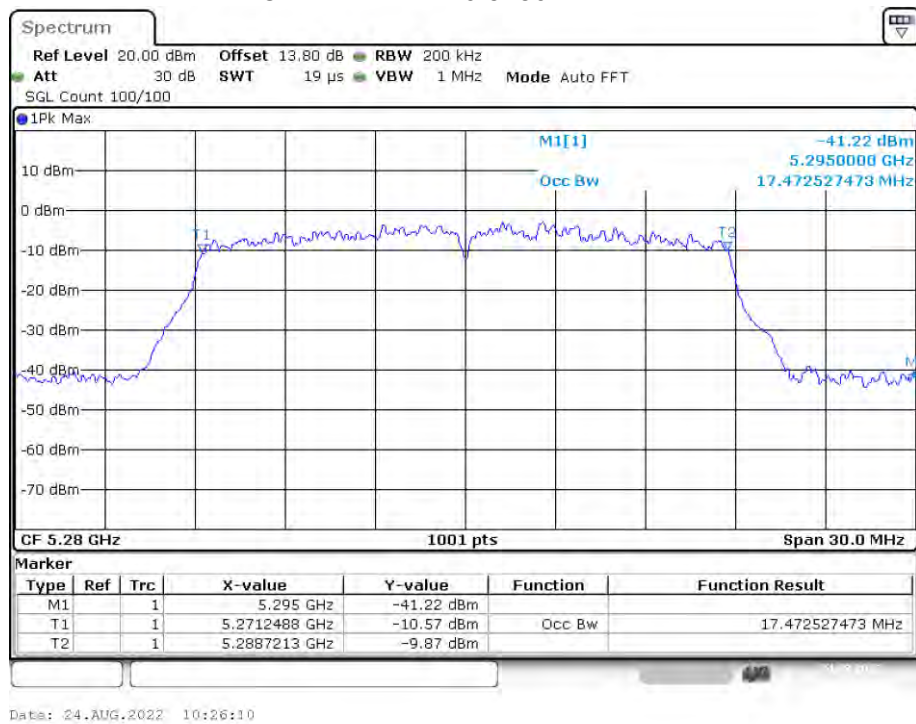


OBW NVNT ac20 5320MHz Ant1

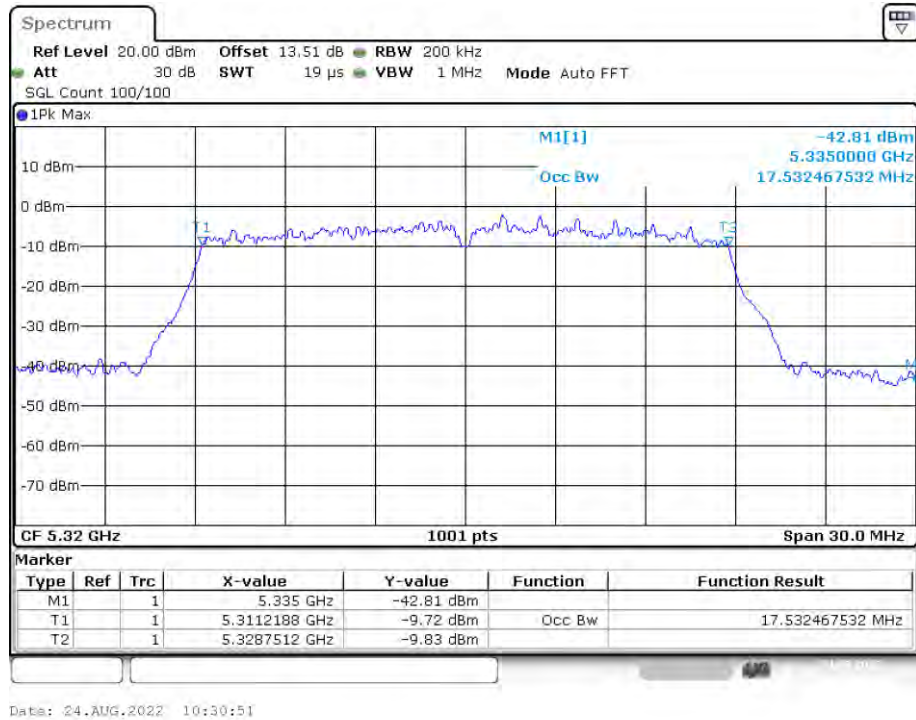

OBW NVNT ac40 5270MHz Ant1

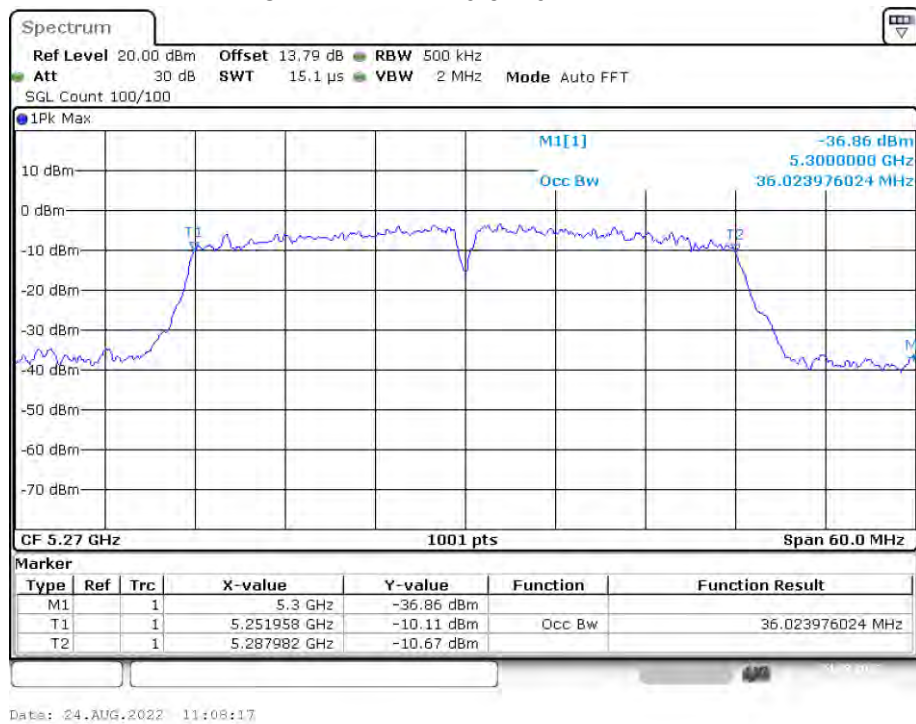


OBW NVNT ac40 5310MHz Ant1

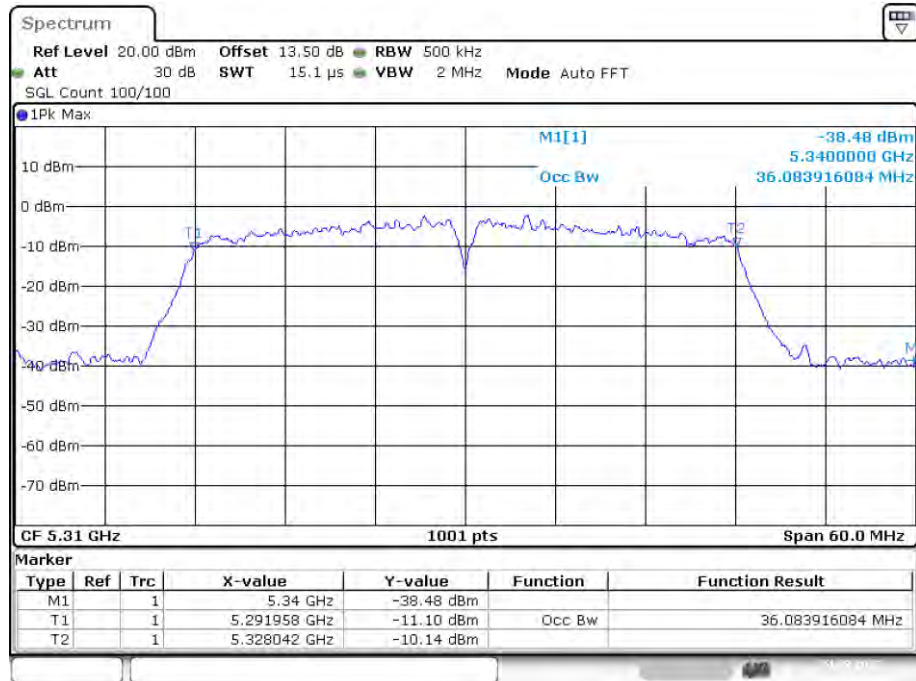


Date: 24.AUG.2022 11:14:26

OBW NVNT ac80 5290MHz Ant1

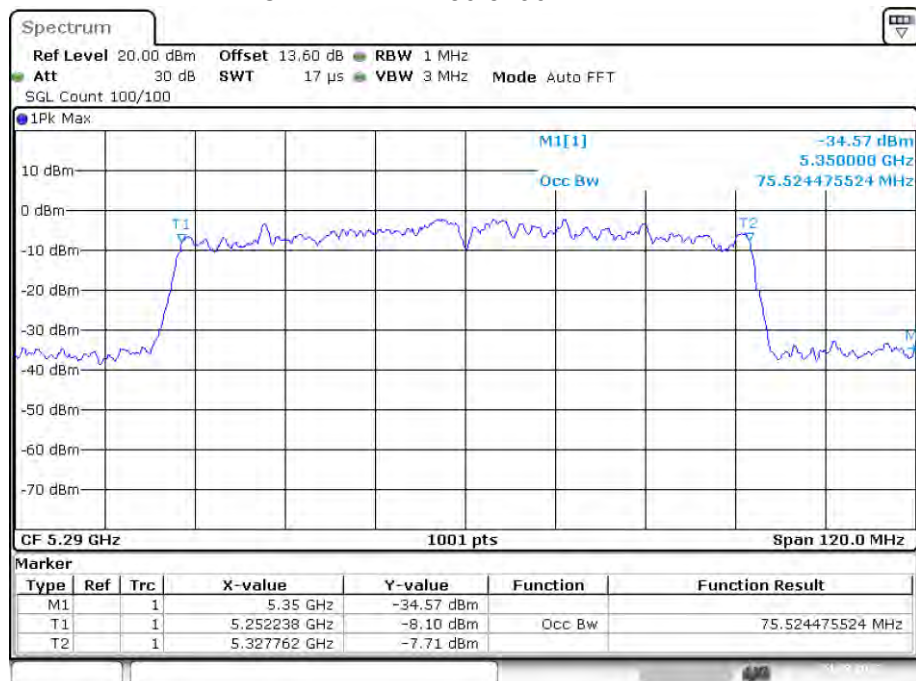


Date: 24.AUG.2022 11:25:12


OBW NVNT n20 5260MHz Ant1

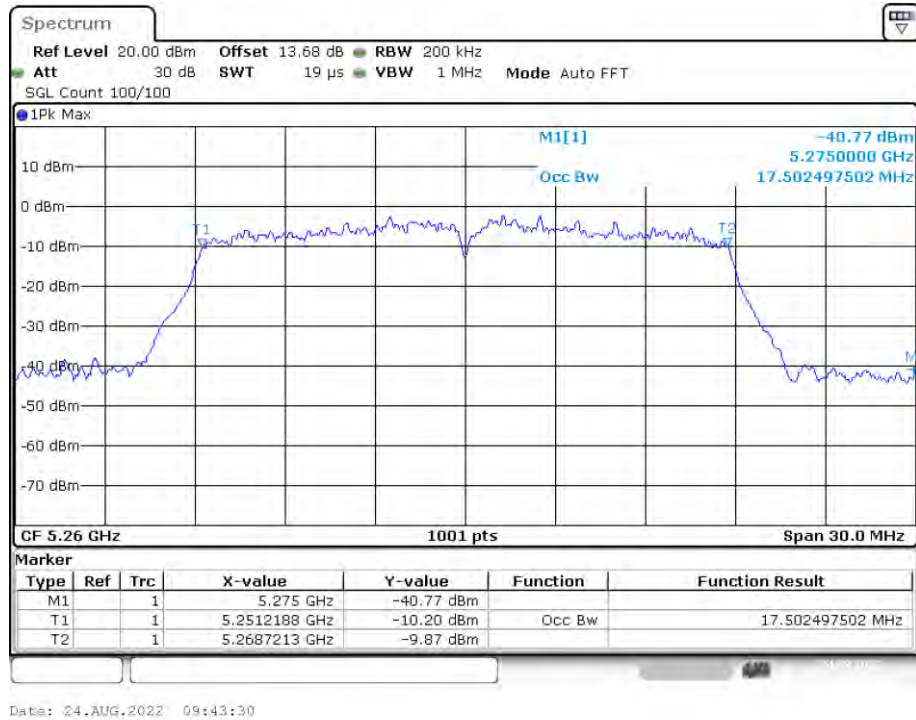


OBW NVNT n20 5280MHz Ant1

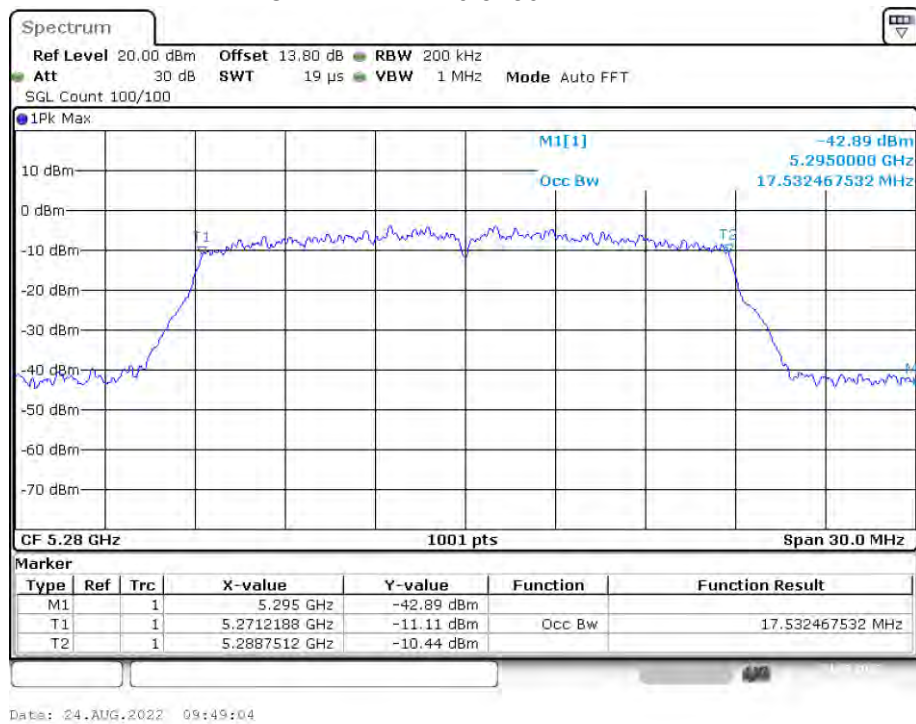


OBW NVNT n20 5320MHz Ant1

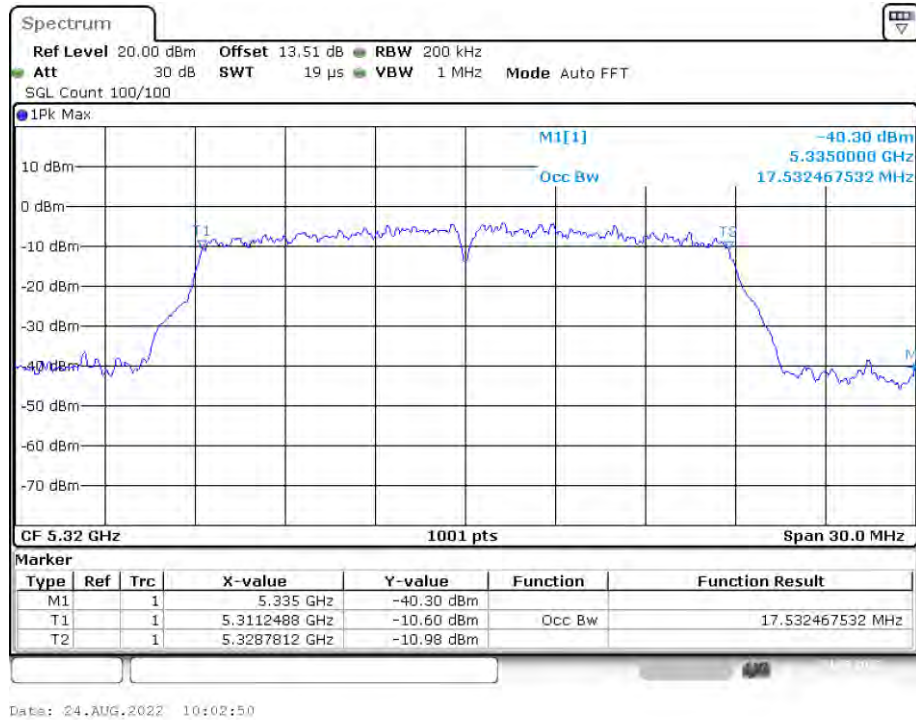

OBW NVNT n40 5270MHz Ant1

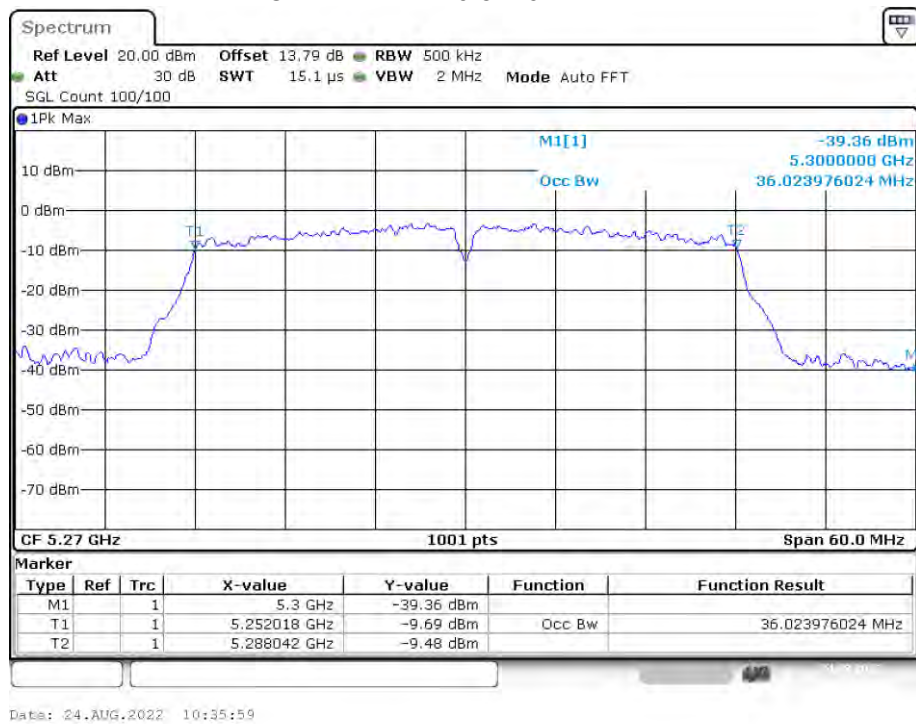

OBW NVNT n40 5310MHz Ant1

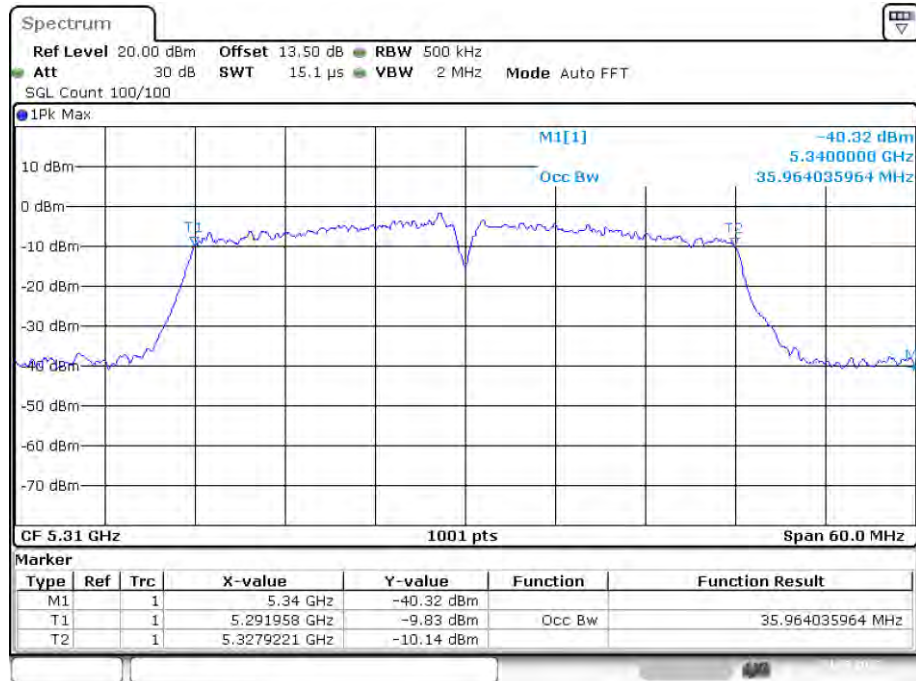


Date: 24.AUG.2022 11:01:57

**Band 4 (5725-5850 MHz):
-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.06	0.5	Pass
NVNT	a	5785	Ant1	15.42	0.5	Pass
NVNT	a	5825	Ant1	16.35	0.5	Pass
NVNT	ac20	5745	Ant1	15.42	0.5	Pass
NVNT	ac20	5785	Ant1	17.55	0.5	Pass
NVNT	ac20	5825	Ant1	13.2	0.5	Pass
NVNT	ac40	5755	Ant1	35.7	0.5	Pass
NVNT	ac40	5795	Ant1	35.7	0.5	Pass
NVNT	ac80	5775	Ant1	75.12	0.5	Pass
NVNT	n20	5745	Ant1	17.16	0.5	Pass
NVNT	n20	5785	Ant1	15.12	0.5	Pass
NVNT	n20	5825	Ant1	17.58	0.5	Pass
NVNT	n40	5755	Ant1	32.58	0.5	Pass
NVNT	n40	5795	Ant1	36.06	0.5	Pass

-6dB Bandwidth NVNT a 5745MHz Ant1

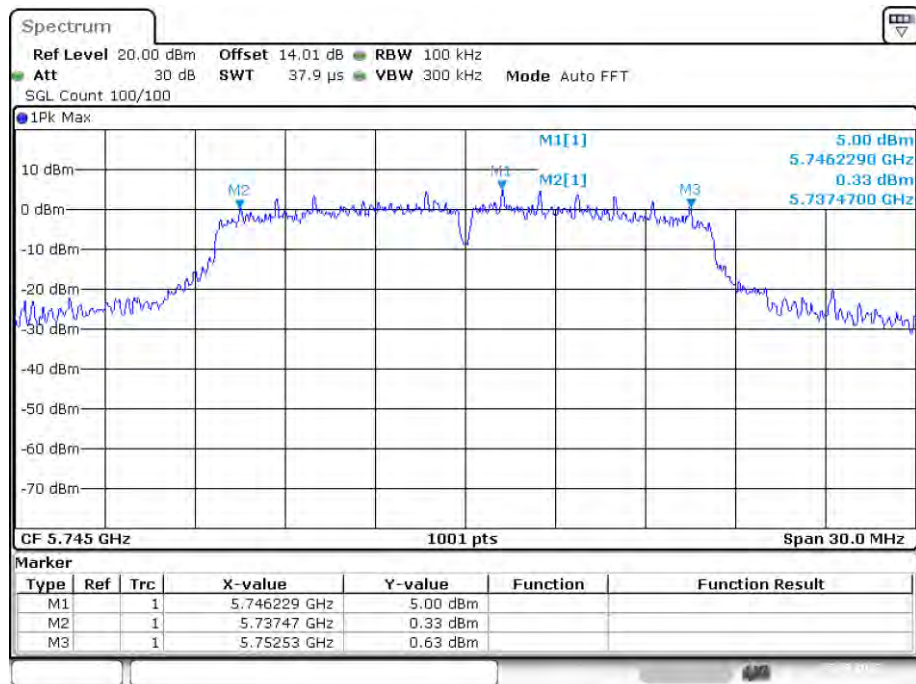


Date: 25.AUG.2022 13:15:46


-6dB Bandwidth NVNT a 5785MHz Ant1

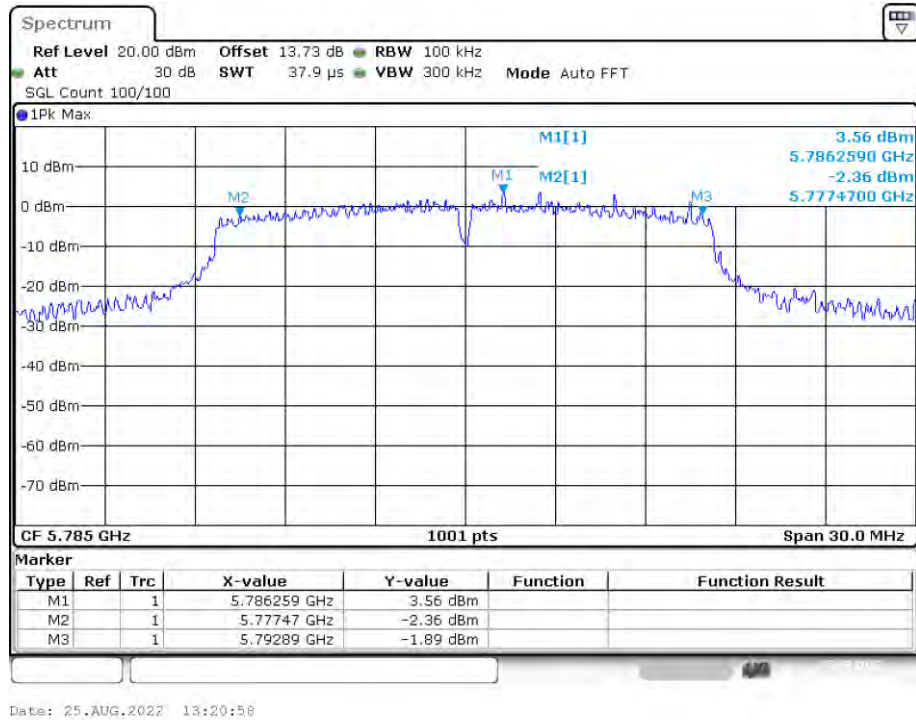


-6dB Bandwidth NVNT a 5825MHz Ant1


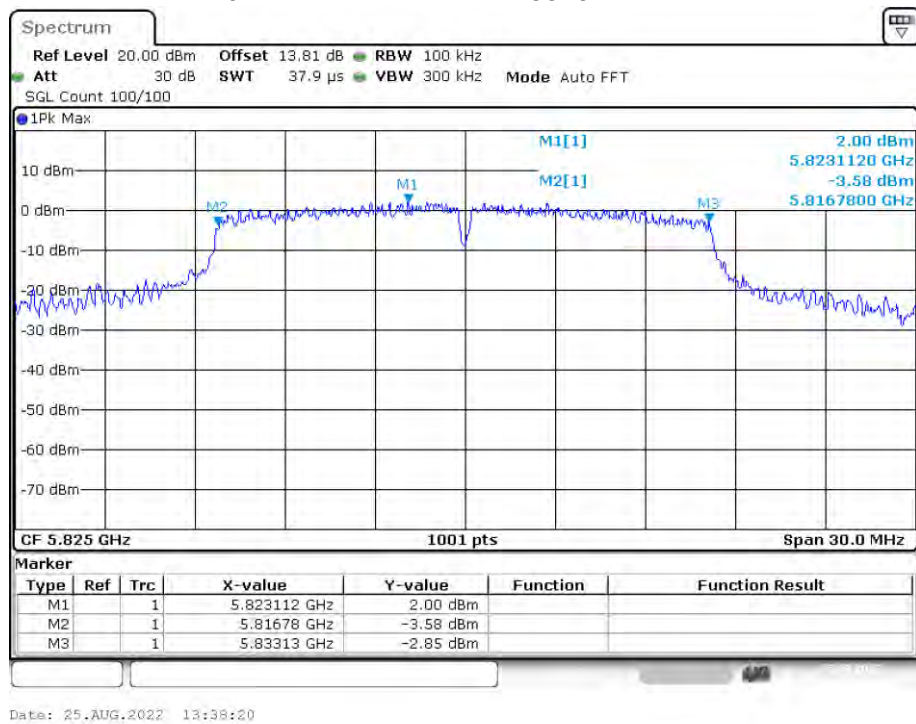


-6dB Bandwidth NVNT ac20 5745MHz Ant1

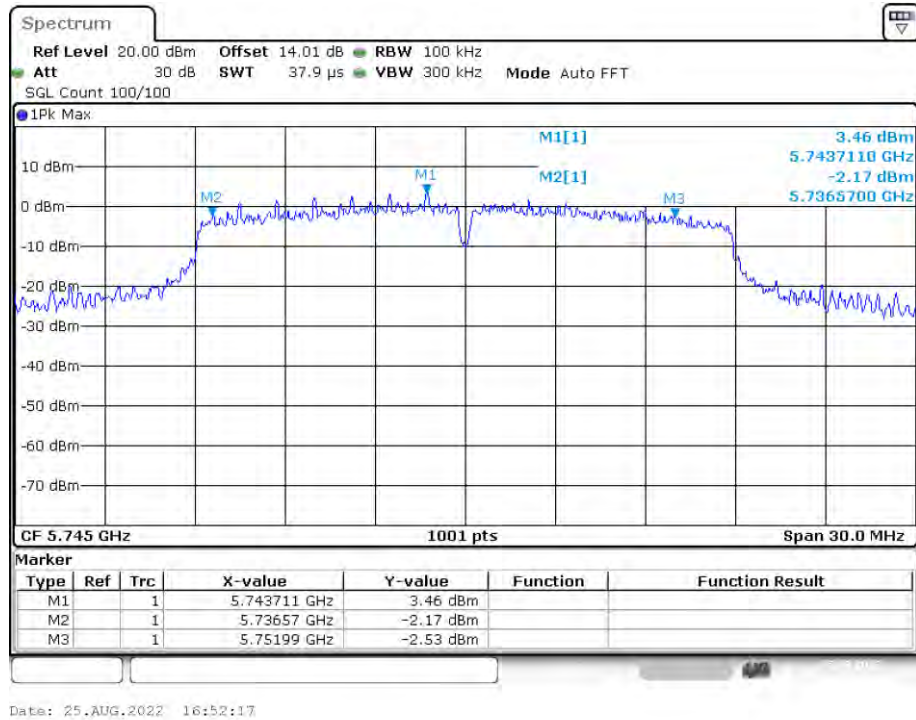


-6dB Bandwidth NVNT ac20 5785MHz Ant1

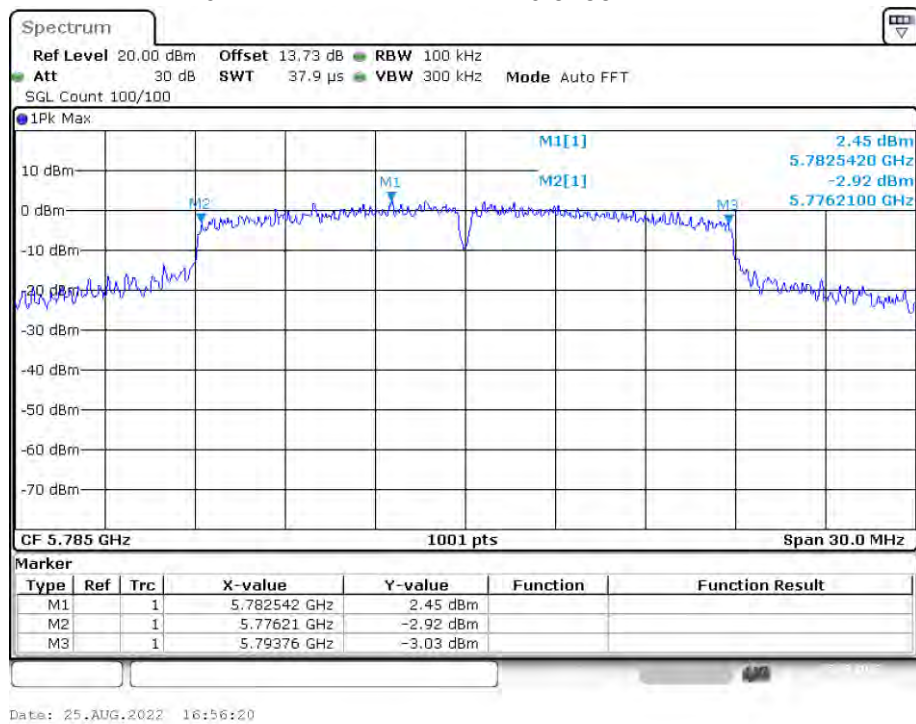


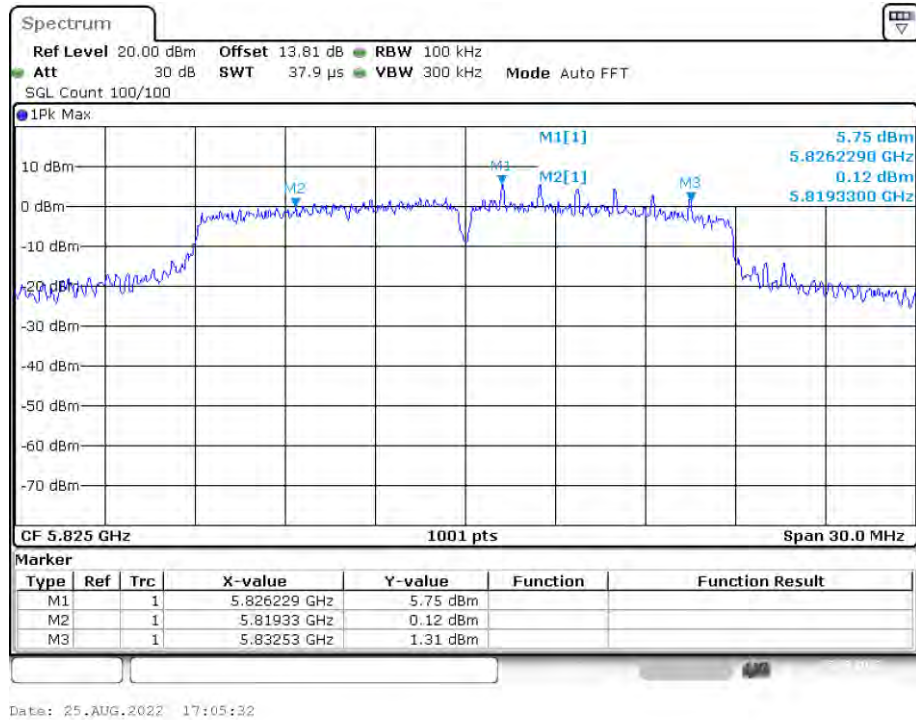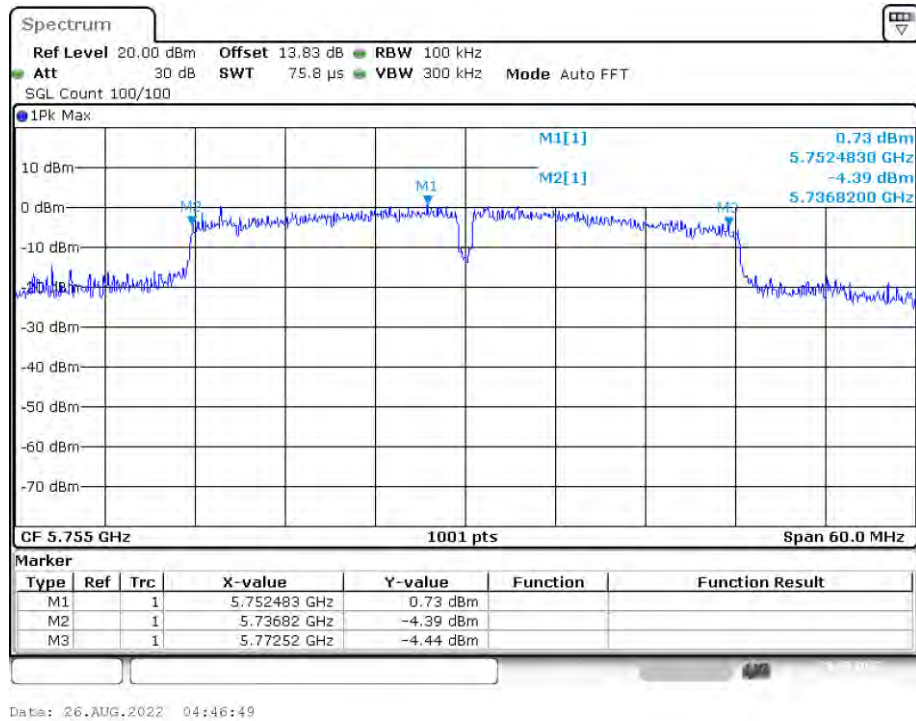-6dB Bandwidth NVNT ac20 5825MHz Ant1**-6dB Bandwidth NVNT ac40 5755MHz Ant1**


-6dB Bandwidth NVNT ac40 5795MHz Ant1

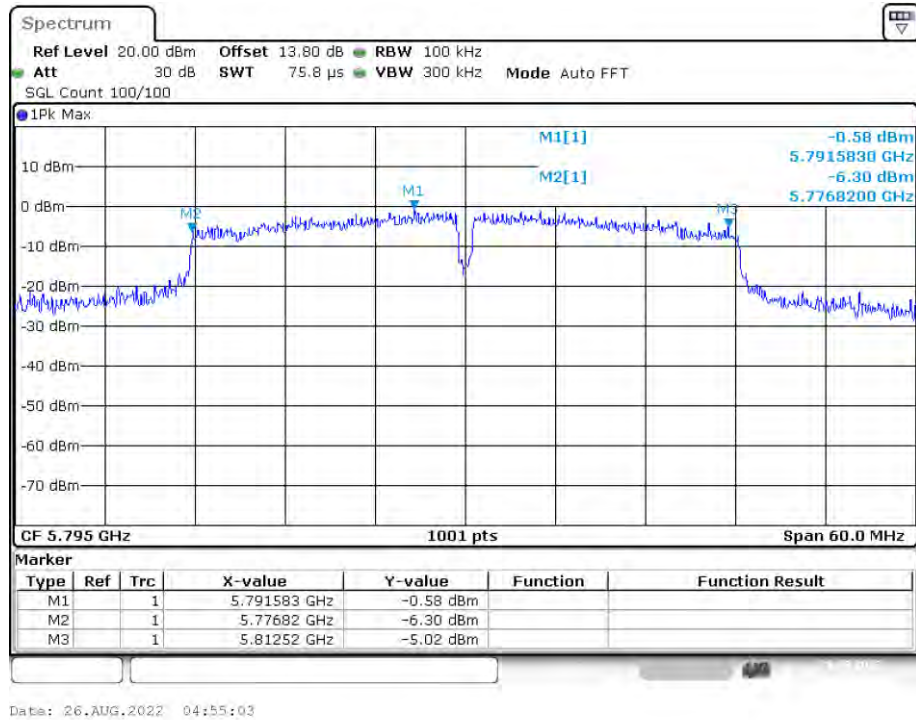

-6dB Bandwidth NVNT ac80 5775MHz Ant1

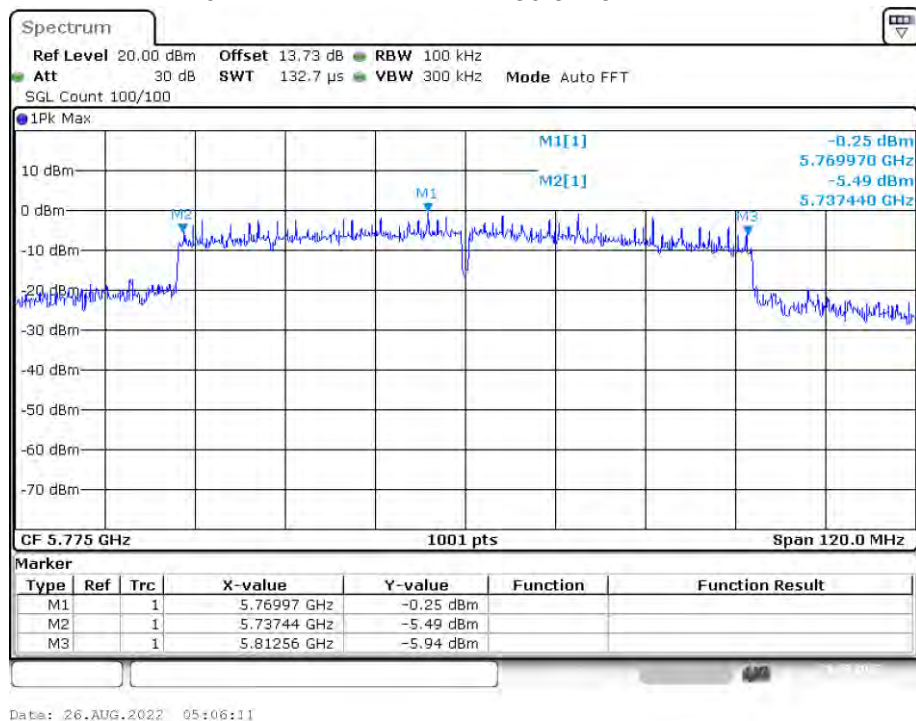


-6dB Bandwidth NVNT n20 5745MHz Ant1

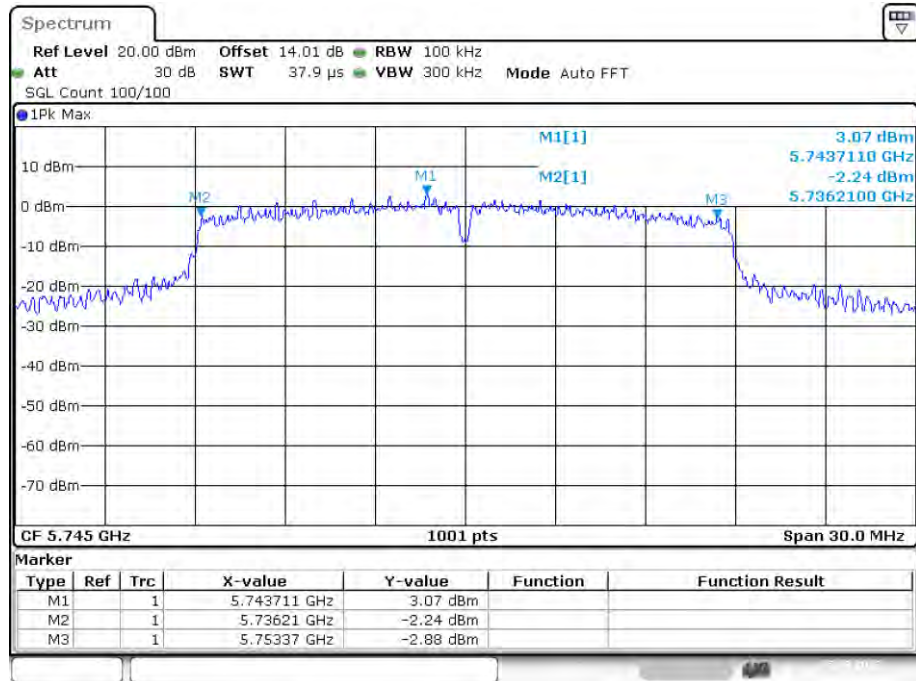


Date: 25.AUG.2022 14:21:32

-6dB Bandwidth NVNT n20 5785MHz Ant1

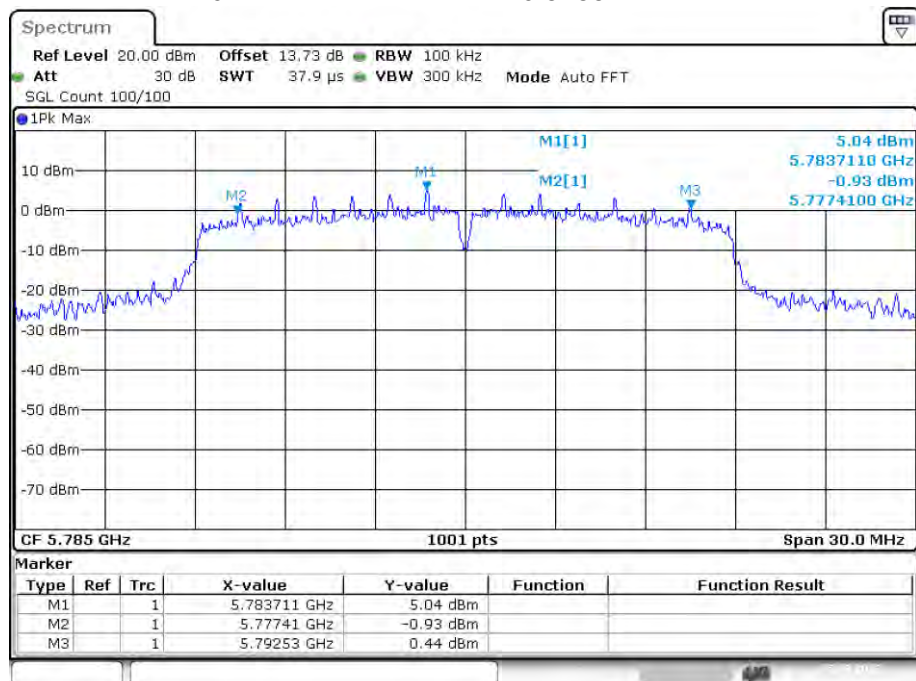


Date: 25.AUG.2022 16:26:20

-6dB Bandwidth NVNT n20 5825MHz Ant1

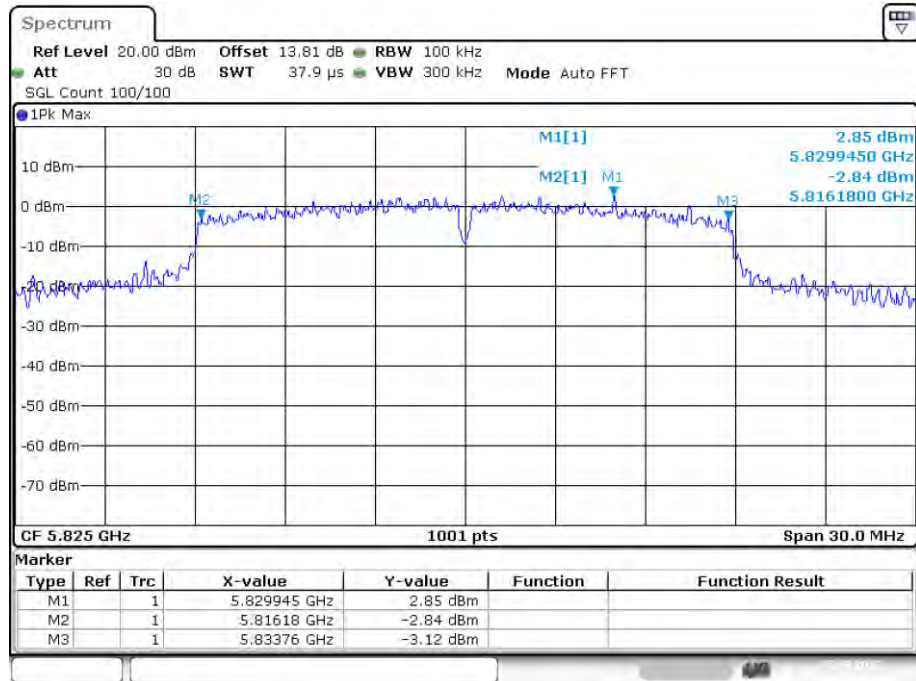


Date: 25.AUG.2022 16:40:23

-6dB Bandwidth NVNT n40 5755MHz Ant1

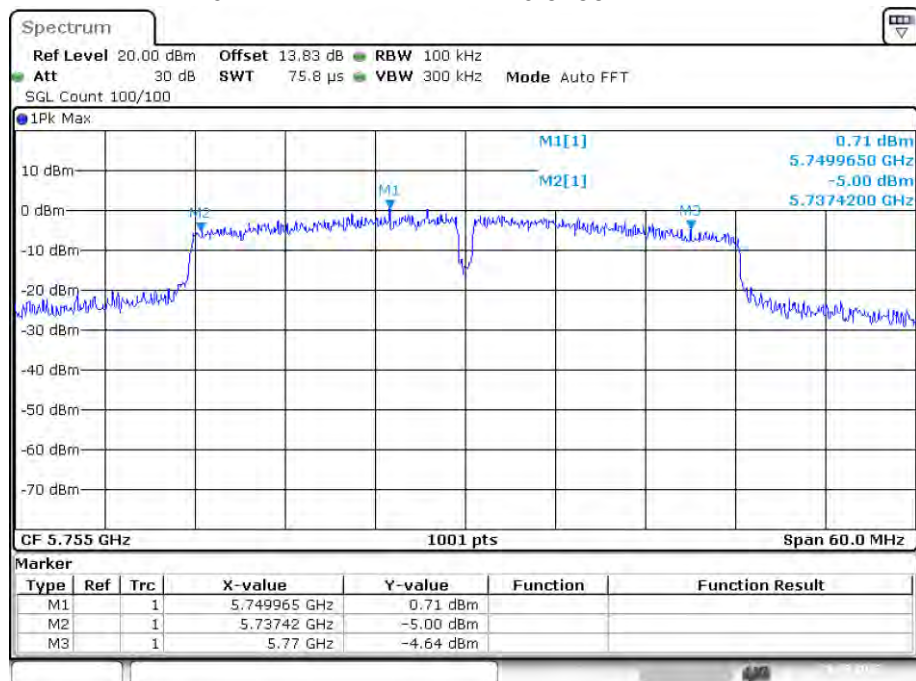

Date: 26.AUG.2022 04:25:14

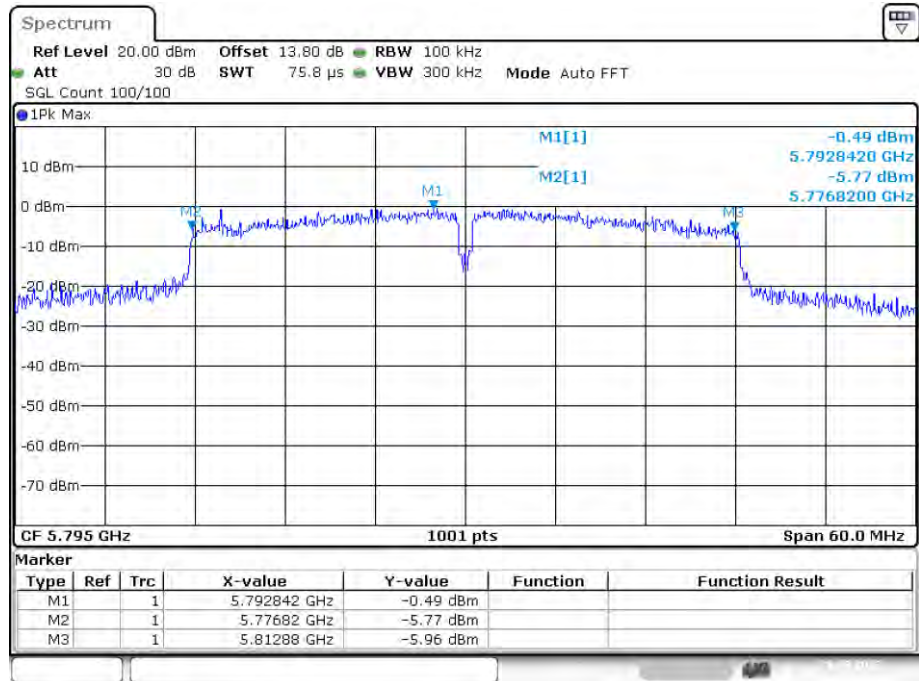
-6dB Bandwidth NVNT n40 5795MHz Ant1

Date: 26.AUG.2022 04:37:49

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.813
NVNT	a	5785	Ant1	16.543
NVNT	a	5825	Ant1	17.173
NVNT	ac20	5745	Ant1	17.922
NVNT	ac20	5785	Ant1	18.252
NVNT	ac20	5825	Ant1	18.551
NVNT	ac40	5755	Ant1	39.201
NVNT	ac40	5795	Ant1	37.043
NVNT	ac80	5775	Ant1	83.437
NVNT	n20	5745	Ant1	17.832
NVNT	n20	5785	Ant1	17.832
NVNT	n20	5825	Ant1	18.282
NVNT	n40	5755	Ant1	36.863
NVNT	n40	5795	Ant1	36.923

OBW NVNT a 5745MHz Ant1

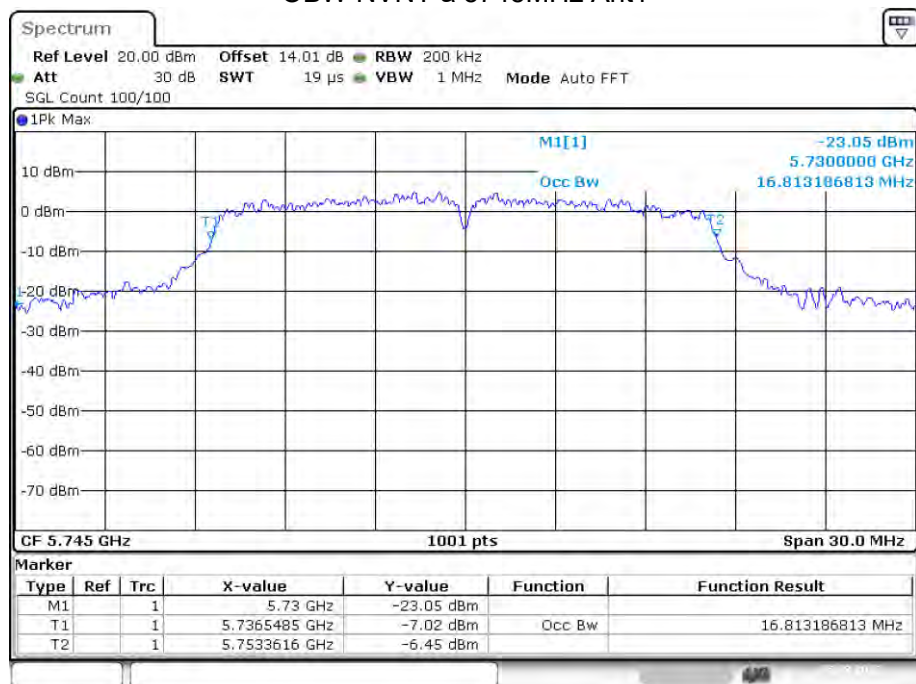


Date: 25.AUG.2022 13:15:37


OBW NVNT a 5785MHz Ant1

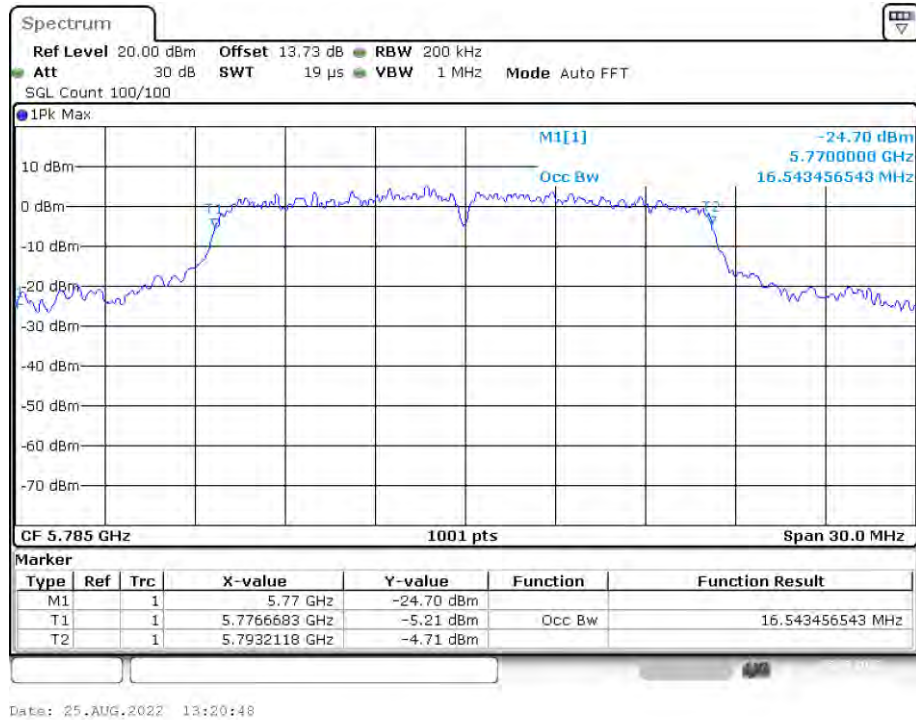


OBW NVNT a 5825MHz Ant1

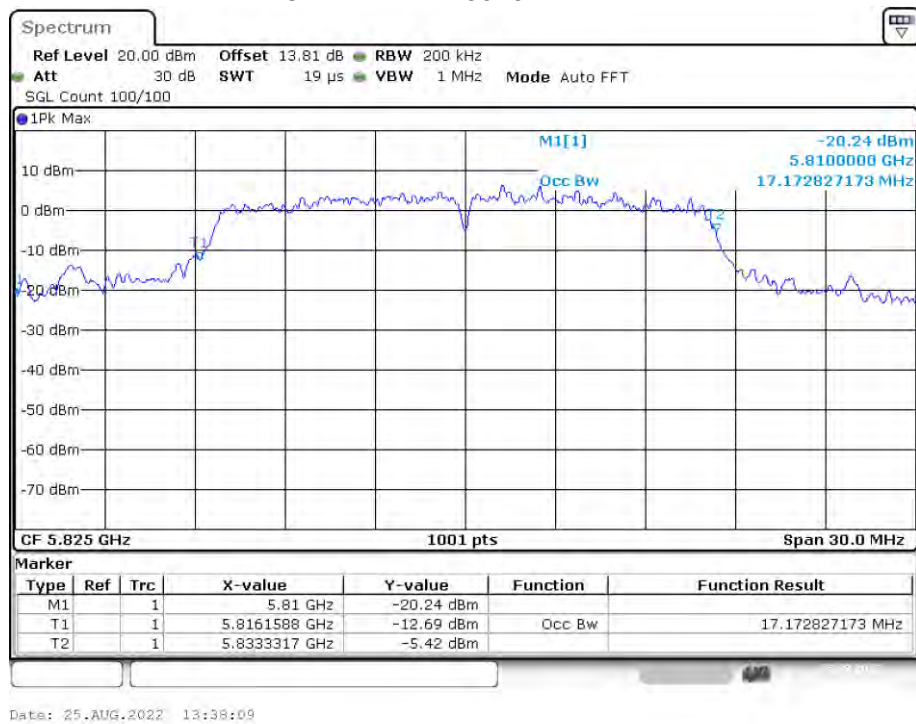


OBW NVNT ac20 5745MHz Ant1

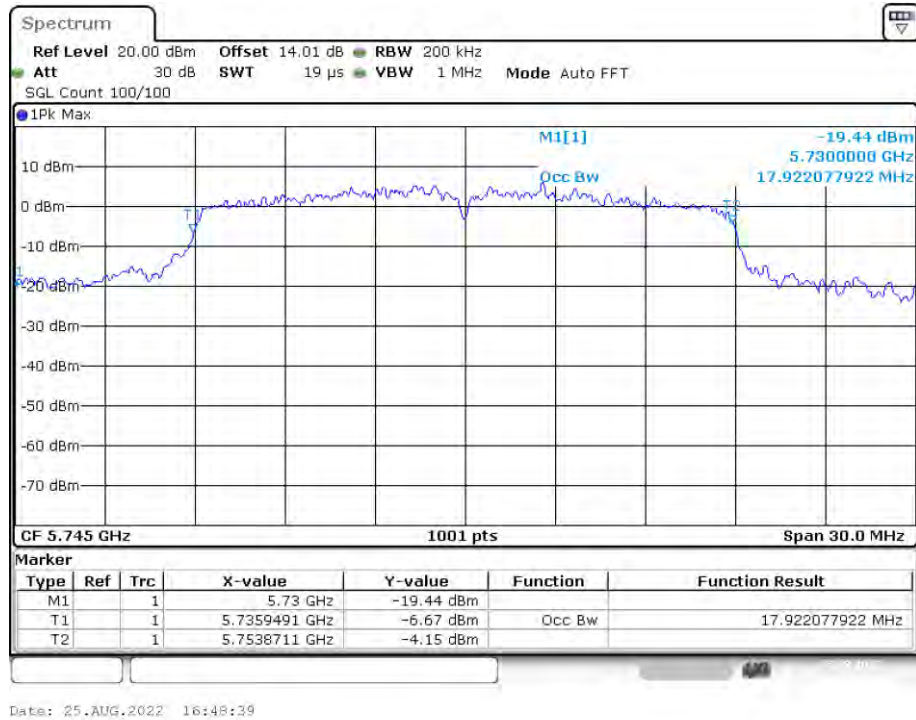

OBW NVNT ac20 5785MHz Ant1

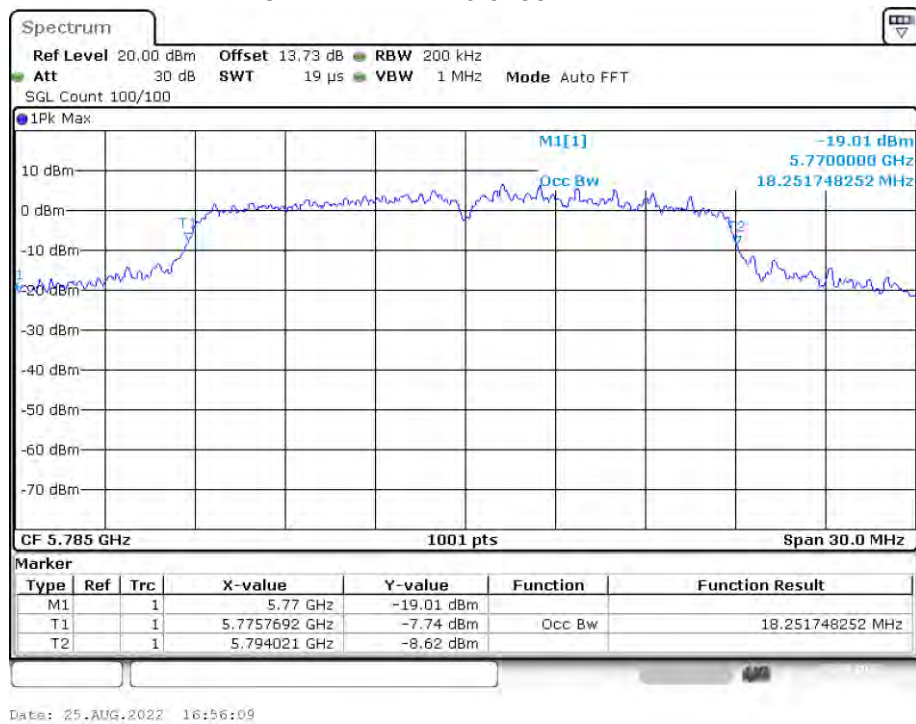


OBW NVNT ac20 5825MHz Ant1

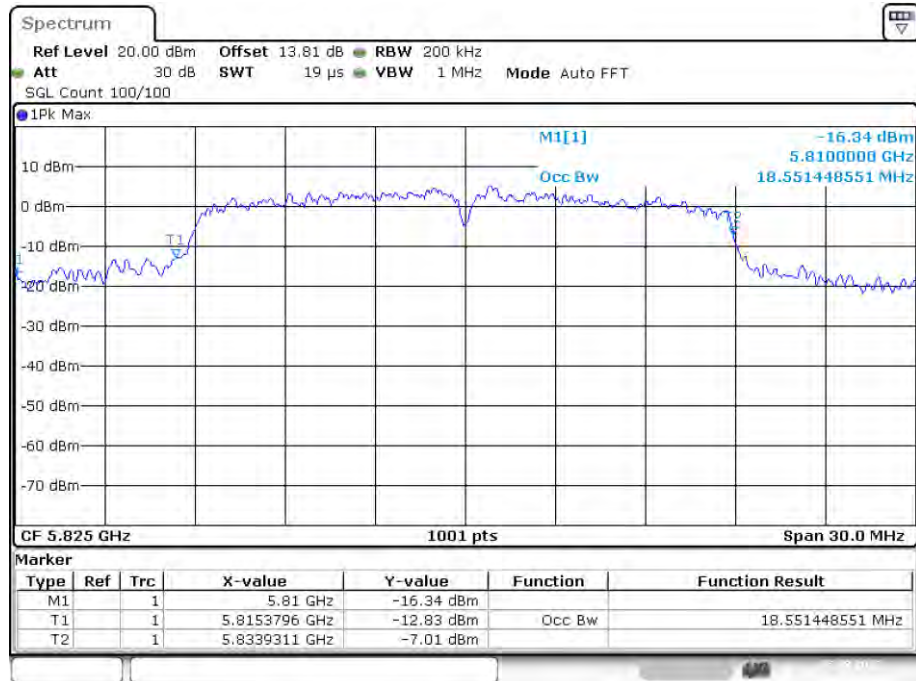


Date: 25.AUG.2022 17:01:39

OBW NVNT ac40 5755MHz Ant1

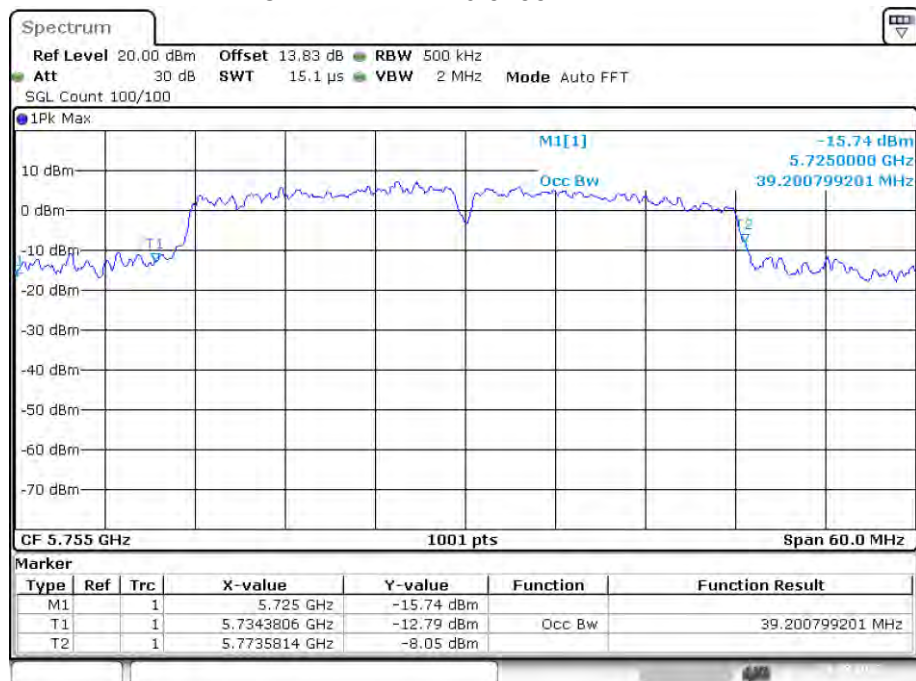


Date: 26.AUG.2022 04:46:37


OBW NVNT ac40 5795MHz Ant1

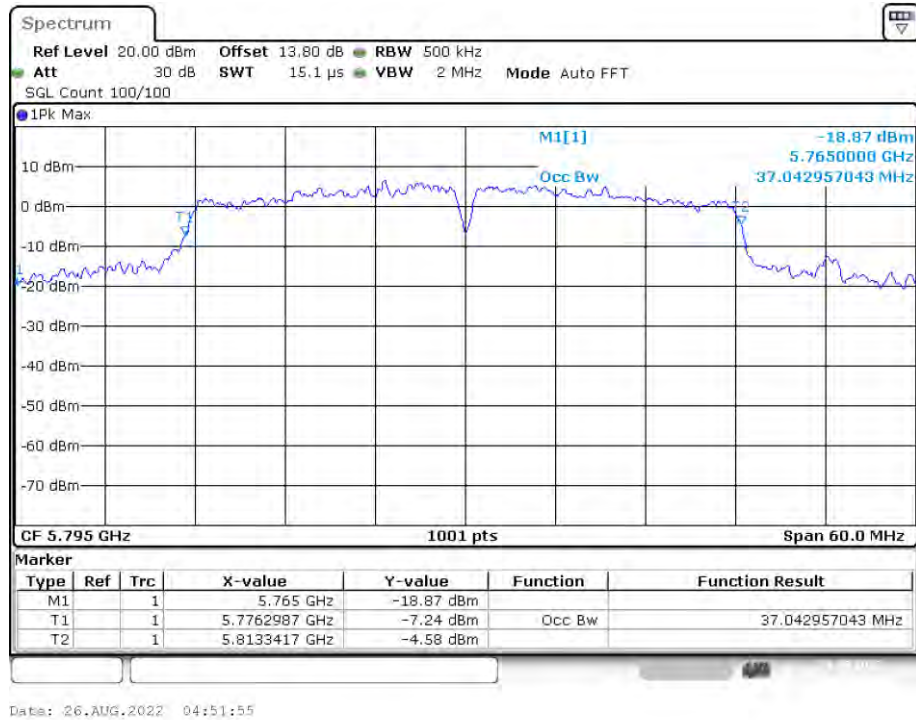


OBW NVNT ac80 5775MHz Ant1

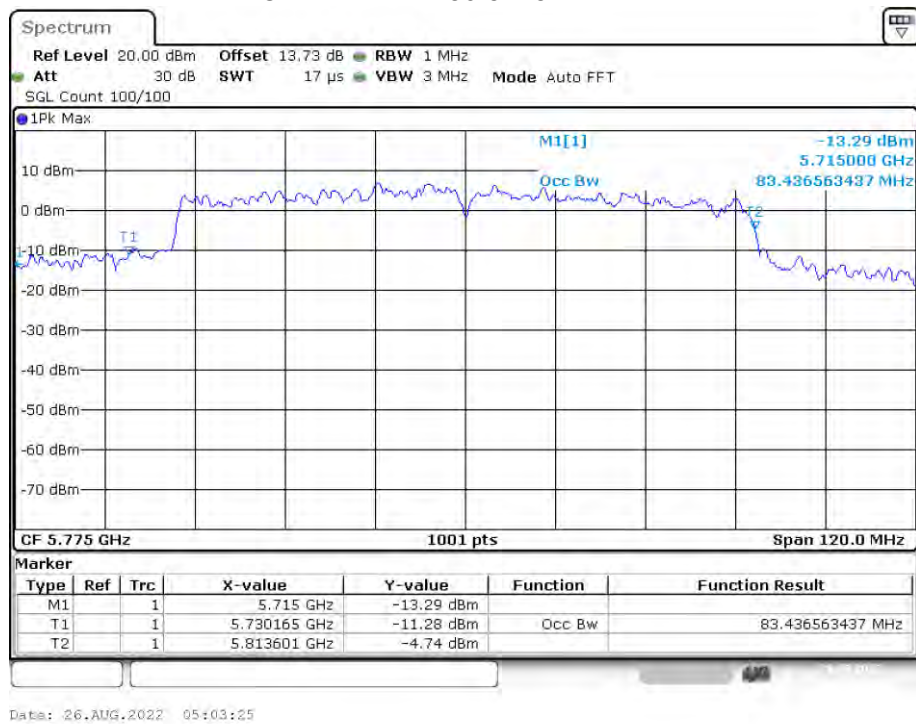


OBW NVNT n20 5745MHz Ant1

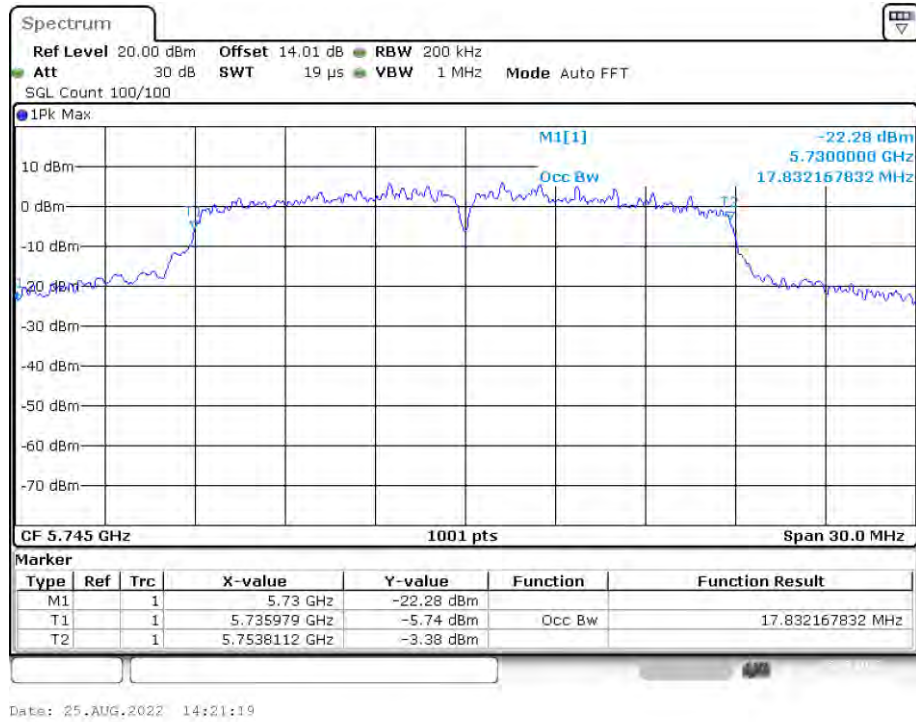


OBW NVNT n20 5785MHz Ant1

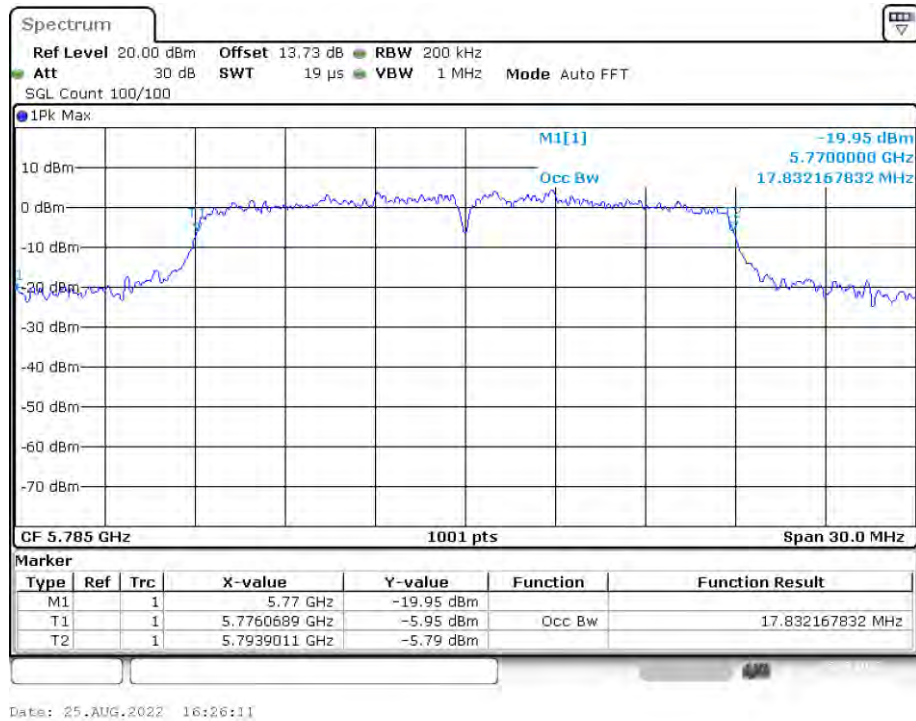


OBW NVNT n20 5825MHz Ant1

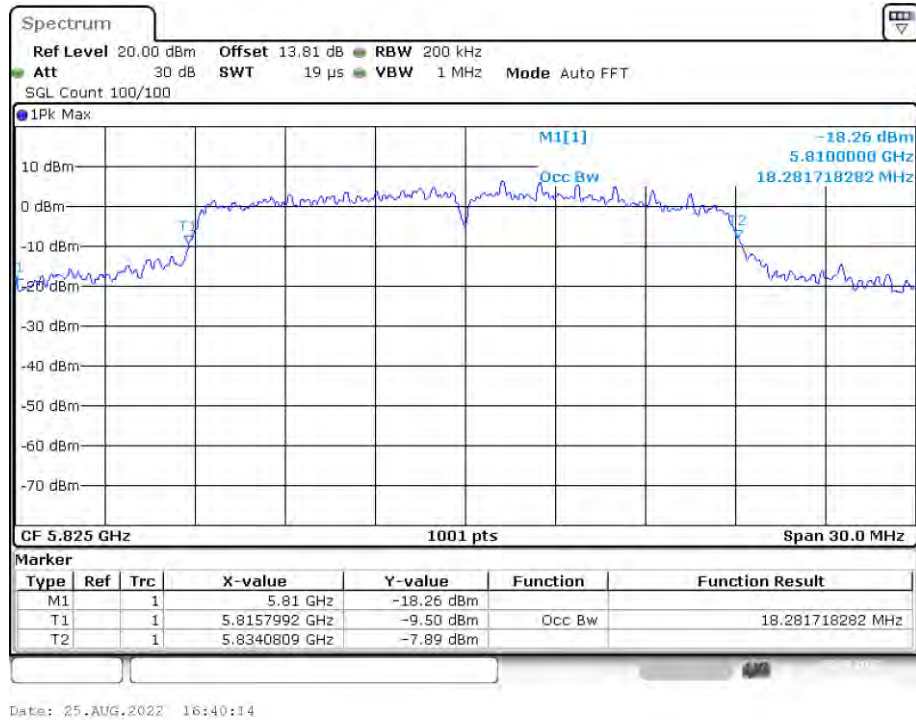

OBW NVNT n40 5755MHz Ant1

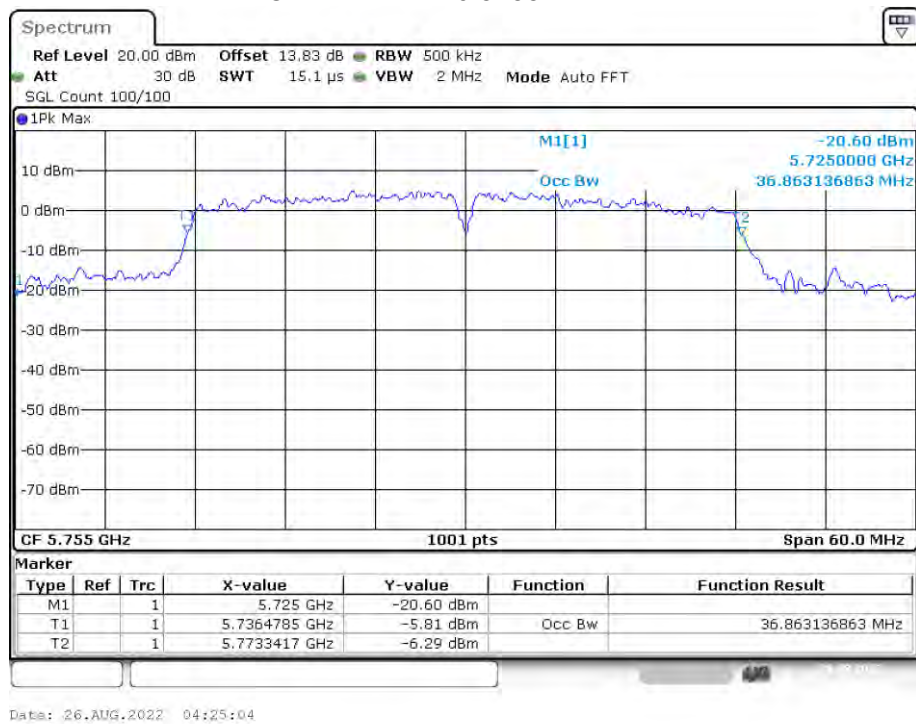


OBW NVNT n40 5795MHz Ant1

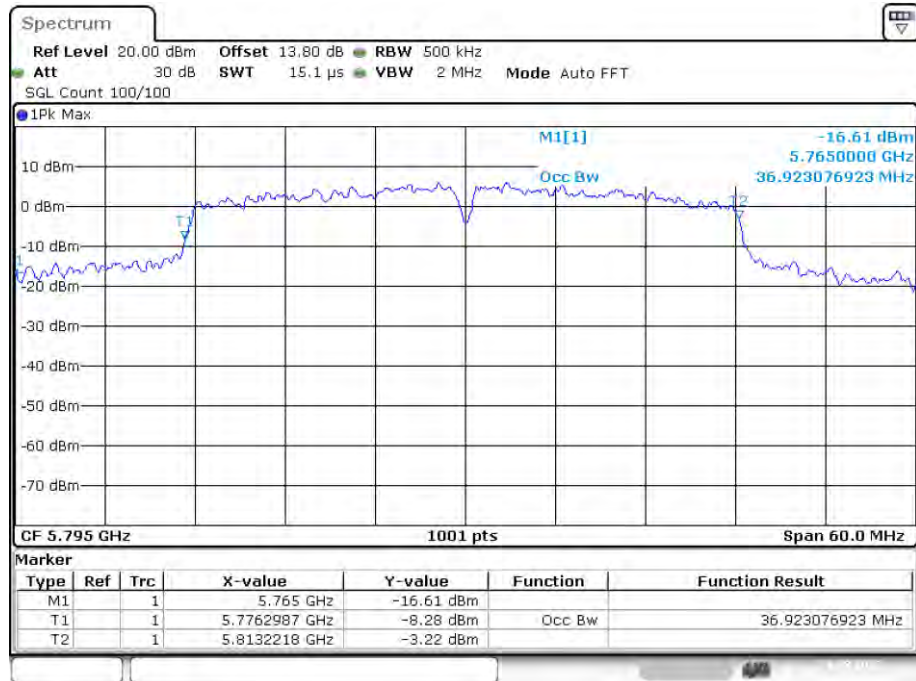

Date: 26.AUG.2022 04:37:37

4.4 Peak Transmit Power

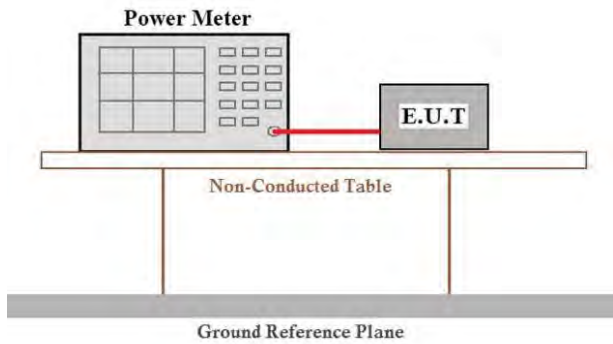Test Requirement:	FCC Part15 E Section 15.407 & RSS-247
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T' (Equipment Under Test) by a red cable. Both components are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs. Below the table, a 'Ground Reference Plane' is indicated.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	17.024	0	17.024	24	Pass
NVNT	a	5200	Ant1	17.746	0	17.746	24	Pass
NVNT	a	5240	Ant1	18.004	0	18.004	24	Pass
NVNT	ac20	5180	Ant1	17.274	0	17.274	24	Pass
NVNT	ac20	5200	Ant1	17.334	0	17.334	24	Pass
NVNT	ac20	5240	Ant1	17.856	0	17.856	24	Pass
NVNT	ac40	5190	Ant1	17.138	0	17.138	24	Pass
NVNT	ac40	5230	Ant1	17.793	0	17.793	24	Pass
NVNT	ac80	5210	Ant1	17.085	0	17.085	24	Pass
NVNT	n20	5180	Ant1	17.4	0	17.4	24	Pass
NVNT	n20	5200	Ant1	17.202	0	17.202	24	Pass
NVNT	n20	5240	Ant1	17.005	0	17.005	24	Pass
NVNT	n40	5190	Ant1	17.718	0	17.718	24	Pass
NVNT	n40	5230	Ant1	15.82	0	15.82	24	Pass


Band 2 (5250 -5350 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	16.677	0	16.677	24	Pass
NVNT	a	5280	Ant1	16.199	0	16.199	24	Pass
NVNT	a	5320	Ant1	16.404	0	16.404	24	Pass
NVNT	ac20	5260	Ant1	16.64	0	16.64	24	Pass
NVNT	ac20	5280	Ant1	16.718	0	16.718	24	Pass
NVNT	ac20	5320	Ant1	16.806	0	16.806	24	Pass
NVNT	ac40	5270	Ant1	16.13	0	16.13	24	Pass
NVNT	ac40	5310	Ant1	16.531	0	16.531	24	Pass
NVNT	ac80	5290	Ant1	16.228	0	16.228	24	Pass
NVNT	n20	5260	Ant1	16.723	0	16.723	24	Pass
NVNT	n20	5280	Ant1	16.256	0	16.256	24	Pass
NVNT	n20	5320	Ant1	16.42	0	16.42	24	Pass
NVNT	n40	5270	Ant1	16.589	0	16.589	24	Pass
NVNT	n40	5310	Ant1	16.241	0	16.241	24	Pass

Band 4 (5725 – 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	16.509	0	16.509	30	Pass
NVNT	a	5785	Ant1	15.917	0	15.917	30	Pass
NVNT	a	5825	Ant1	16.419	0	16.419	30	Pass
NVNT	ac20	5745	Ant1	16.867	0	16.867	30	Pass
NVNT	ac20	5785	Ant1	16.53	0	16.53	30	Pass
NVNT	ac20	5825	Ant1	16.52	0	16.52	30	Pass
NVNT	ac40	5755	Ant1	17.059	0	17.059	30	Pass
NVNT	ac40	5795	Ant1	16.445	0	16.445	30	Pass
NVNT	ac80	5775	Ant1	16.743	0	16.743	30	Pass
NVNT	n20	5745	Ant1	16.354	0	16.354	30	Pass
NVNT	n20	5785	Ant1	16.134	0	16.134	30	Pass
NVNT	n20	5825	Ant1	16.585	0	16.585	30	Pass
NVNT	n40	5755	Ant1	16.495	0	16.495	30	Pass
NVNT	n40	5795	Ant1	16.492	0	16.492	30	Pass

4.5 Power Spectral Density

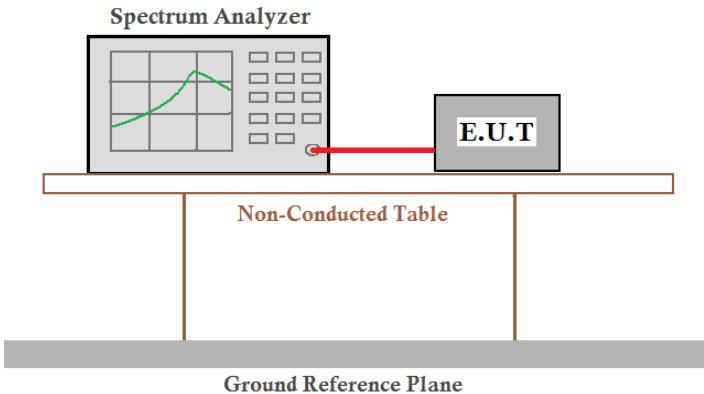Test Requirement:	FCC Part15 E Section 15.407 & RSS-247
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	$\leq 11.00\text{dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz $\leq 30.00\text{dBm/500KHz}$ for 5725MHz-5850MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data**Band 1 (5150 - 5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	7.261	11	Pass
NVNT	a	5200	Ant1	7.925	11	Pass
NVNT	a	5240	Ant1	8.133	11	Pass
NVNT	ac20	5180	Ant1	7.922	11	Pass
NVNT	ac20	5200	Ant1	7.569	11	Pass
NVNT	ac20	5240	Ant1	7.819	11	Pass
NVNT	ac40	5190	Ant1	4.794	11	Pass
NVNT	ac40	5230	Ant1	4.684	11	Pass
NVNT	ac80	5210	Ant1	0.876	11	Pass
NVNT	n20	5180	Ant1	7.715	11	Pass
NVNT	n20	5200	Ant1	7.248	11	Pass
NVNT	n20	5240	Ant1	7.201	11	Pass
NVNT	n40	5190	Ant1	4.826	11	Pass
NVNT	n40	5230	Ant1	3.54	11	Pass

Band 2 (5250 -5350 MHz)


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	7.378	11	Pass
NVNT	a	5280	Ant1	6.521	11	Pass
NVNT	a	5320	Ant1	6.21	11	Pass
NVNT	ac20	5260	Ant1	6.119	11	Pass
NVNT	ac20	5280	Ant1	6.829	11	Pass
NVNT	ac20	5320	Ant1	7.459	11	Pass
NVNT	ac40	5270	Ant1	3.113	11	Pass
NVNT	ac40	5310	Ant1	3.427	11	Pass
NVNT	ac80	5290	Ant1	0.666	11	Pass
NVNT	n20	5260	Ant1	6.996	11	Pass
NVNT	n20	5280	Ant1	6.621	11	Pass
NVNT	n20	5320	Ant1	6.599	11	Pass
NVNT	n40	5270	Ant1	3.74	11	Pass
NVNT	n40	5310	Ant1	3.154	11	Pass

Band 4 (5725 - 5850 MHz)

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	3.976	30	Pass
NVNT	a	5785	Ant1	3.599	30	Pass
NVNT	a	5825	Ant1	4.264	30	Pass
NVNT	ac20	5745	Ant1	4.347	30	Pass
NVNT	ac20	5785	Ant1	3.761	30	Pass
NVNT	ac20	5825	Ant1	3.625	30	Pass
NVNT	ac40	5755	Ant1	1.519	30	Pass
NVNT	ac40	5795	Ant1	0.936	30	Pass
NVNT	ac80	5775	Ant1	-1.798	30	Pass
NVNT	n20	5745	Ant1	3.897	30	Pass
NVNT	n20	5785	Ant1	3.44	30	Pass
NVNT	n20	5825	Ant1	4.106	30	Pass
NVNT	n40	5755	Ant1	0.807	30	Pass
NVNT	n40	5795	Ant1	0.802	30	Pass

4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205, RSS-247, RSS-Gen																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								
Test setup:	Above 1GHz																								

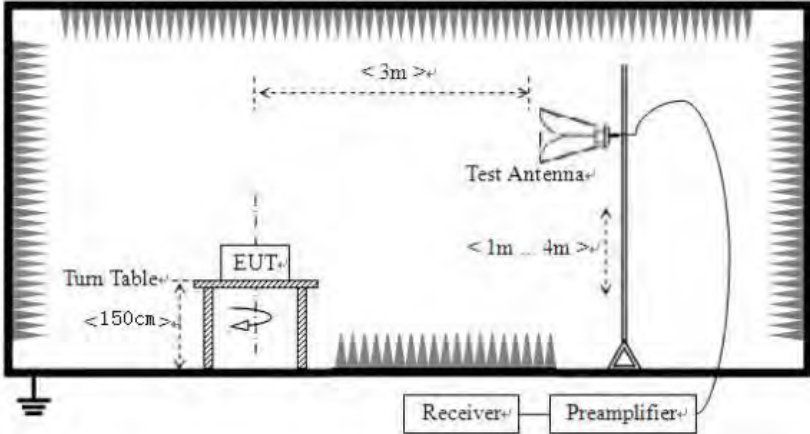	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:


$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm


$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

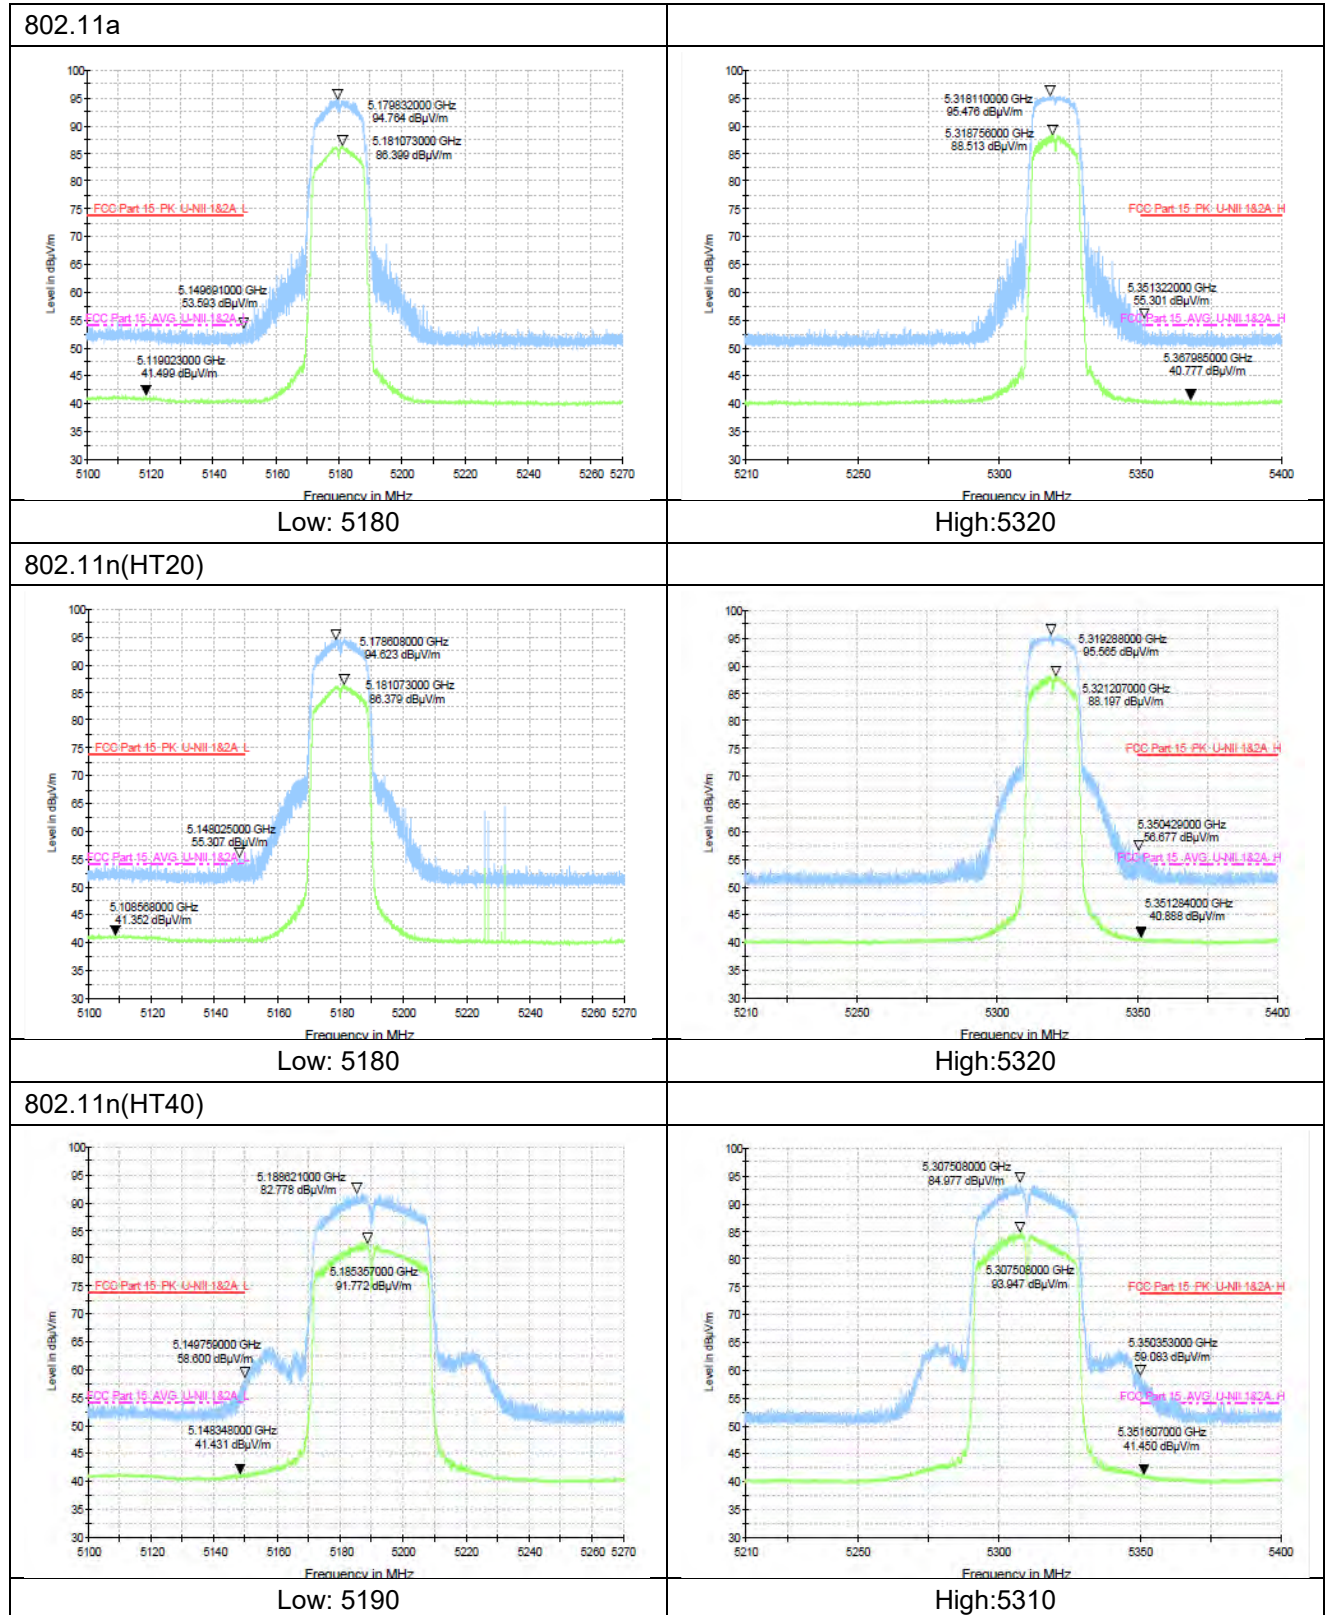Measurement Data:
Band1&Band2


802.11ac(HT20)

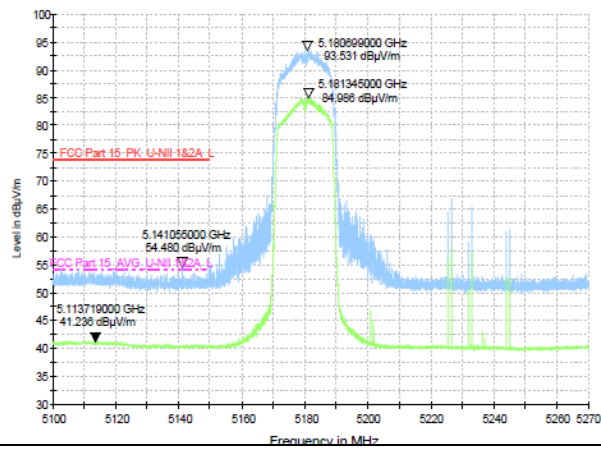


Low: 5180

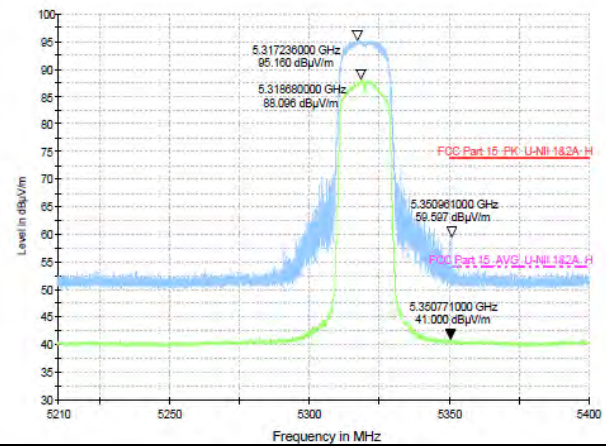


High:5320

802.11 ac(HT40)

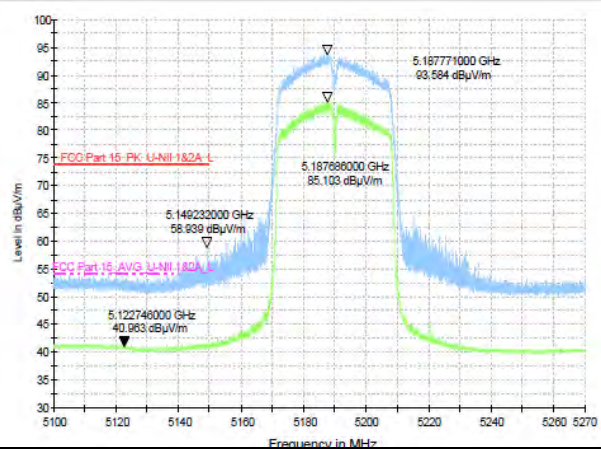


Low: 5190

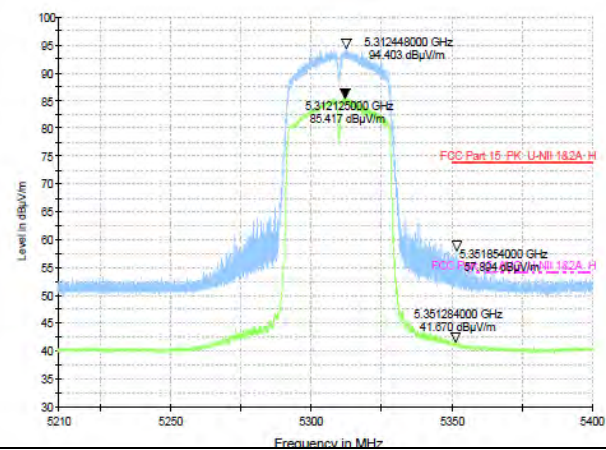


High:5310

802.11 ac(HT80)

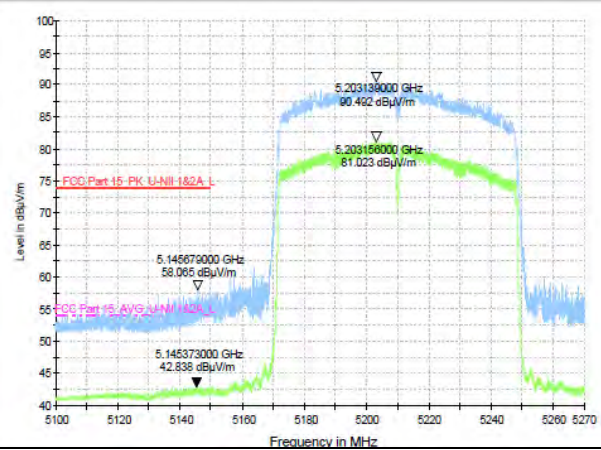


Low: 5210

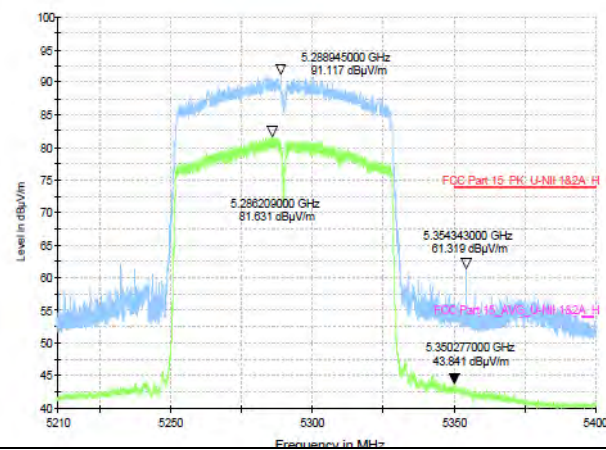


High:5290

Band4

802.11a

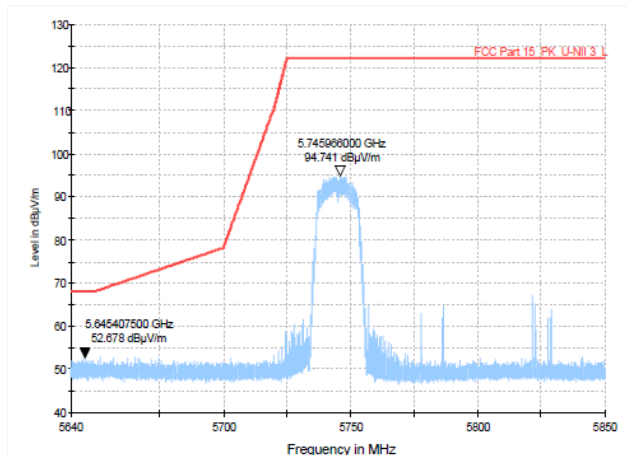


Low: 5745MHz

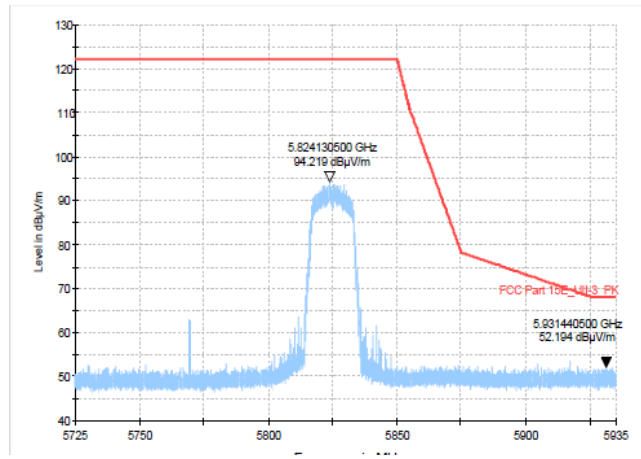


High: 5825MHz

802.11n(HT20)

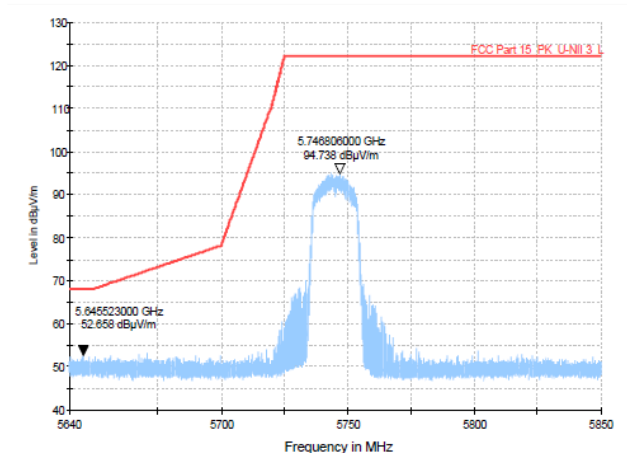


Low: 5745MHz

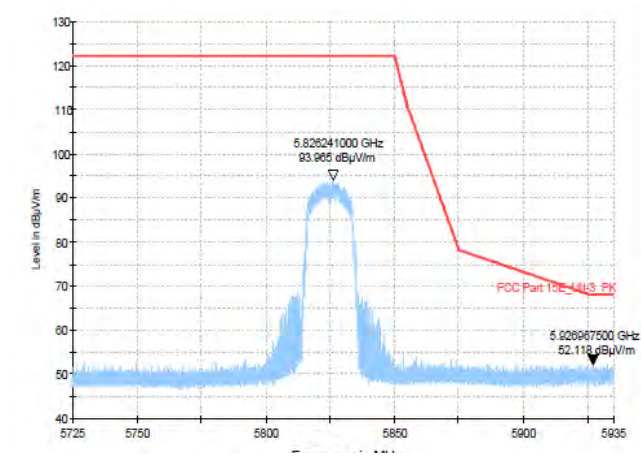


High: 5825MHz

802.11n(HT40)

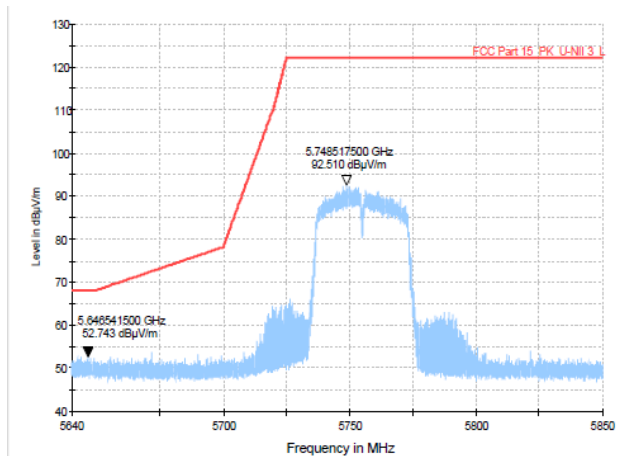


Low: 5745MHz

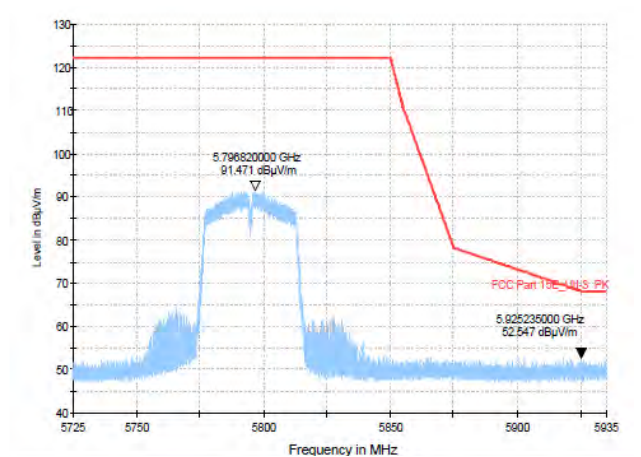


High: 5825MHz

802.11ac(HT20)

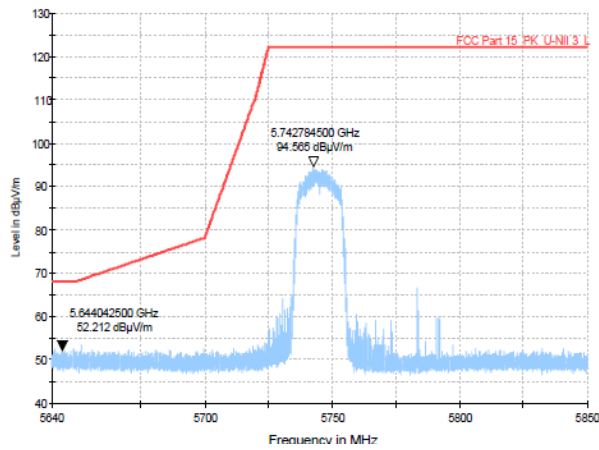


Low: 5755MHz

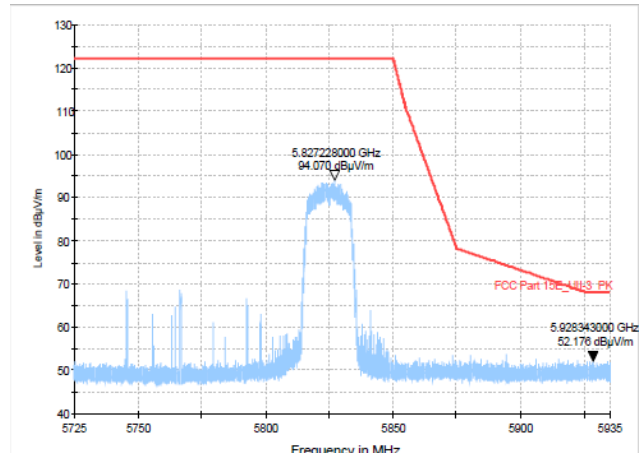


High: 5795MHz

802.11ac(HT40)

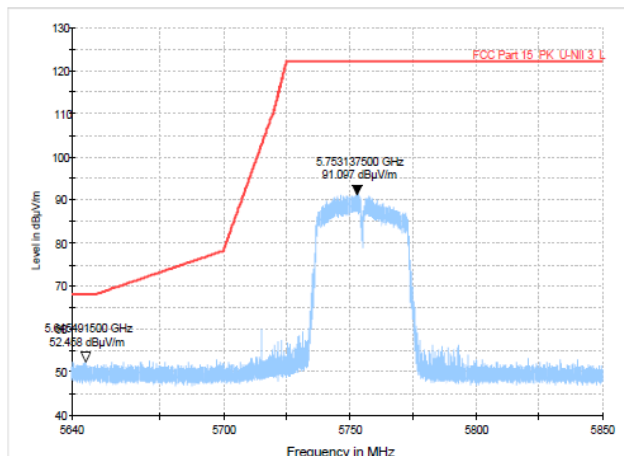


Low: 5755MHz

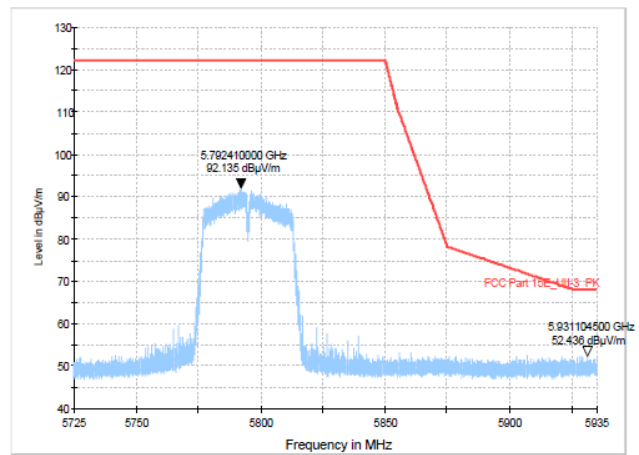

High: 5795MHz


802.11ac(HT80)

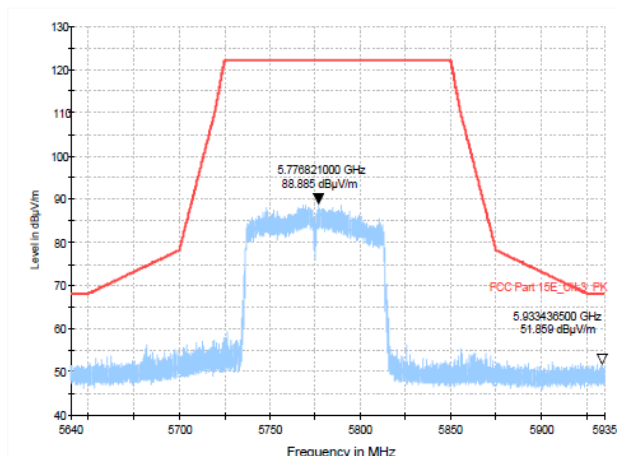



5775MHz

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205 & RSS-247				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.				

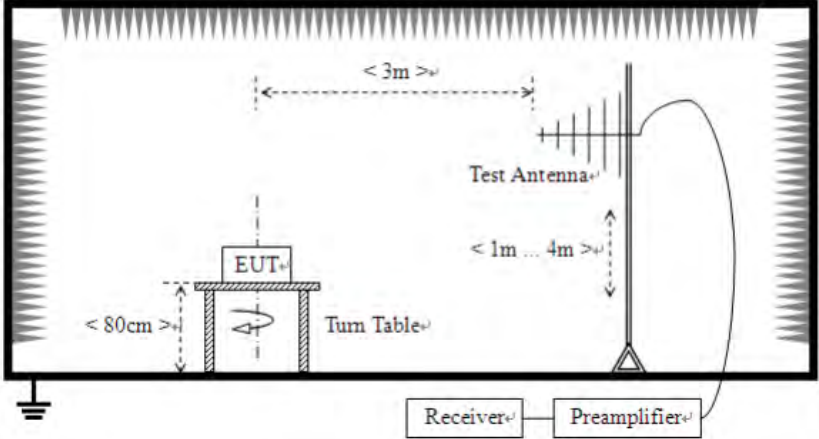
	4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

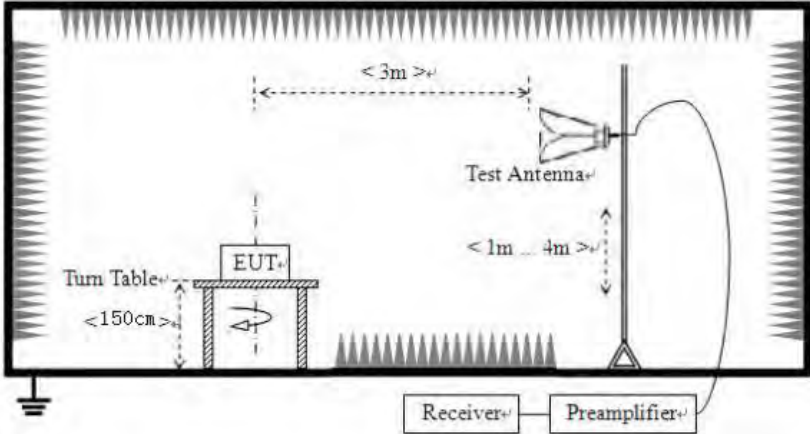	
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

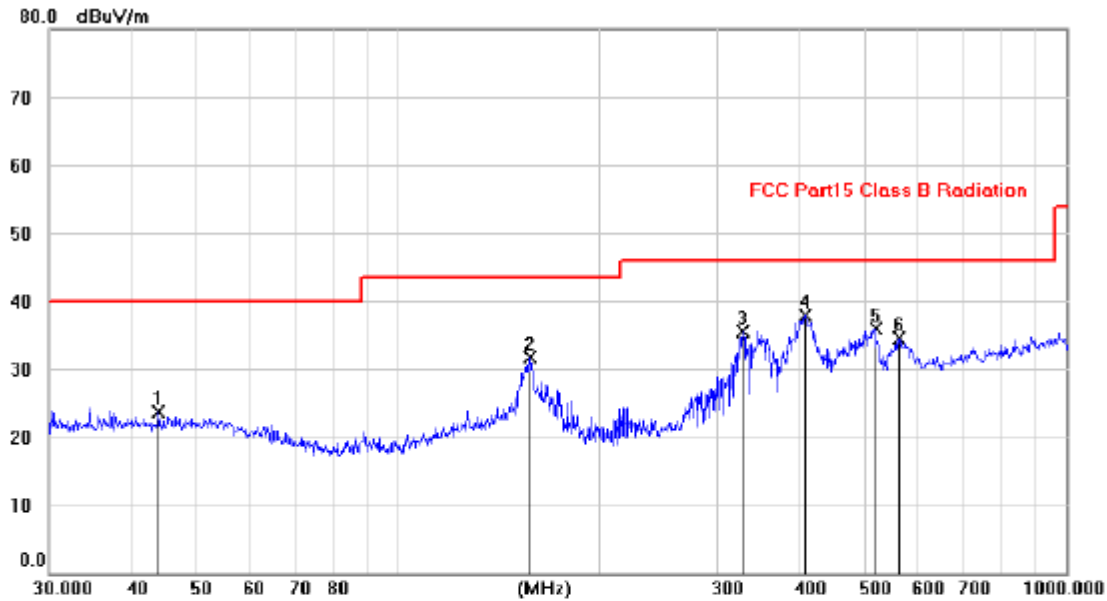Measurement Data:**Below 1GHz****Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		43.7914	9.40	14.23	23.63	40.00	-16.37	peak		
2		158.0569	16.75	15.04	31.79	43.50	-11.71	peak		
3		328.2324	20.75	14.79	35.54	46.00	-10.46	peak		
4	*	407.2764	21.43	16.42	37.85	46.00	-8.15	peak		
5		518.1556	17.30	18.55	35.85	46.00	-10.15	peak		
6		560.8239	15.14	19.38	34.52	46.00	-11.48	peak		

Vertical

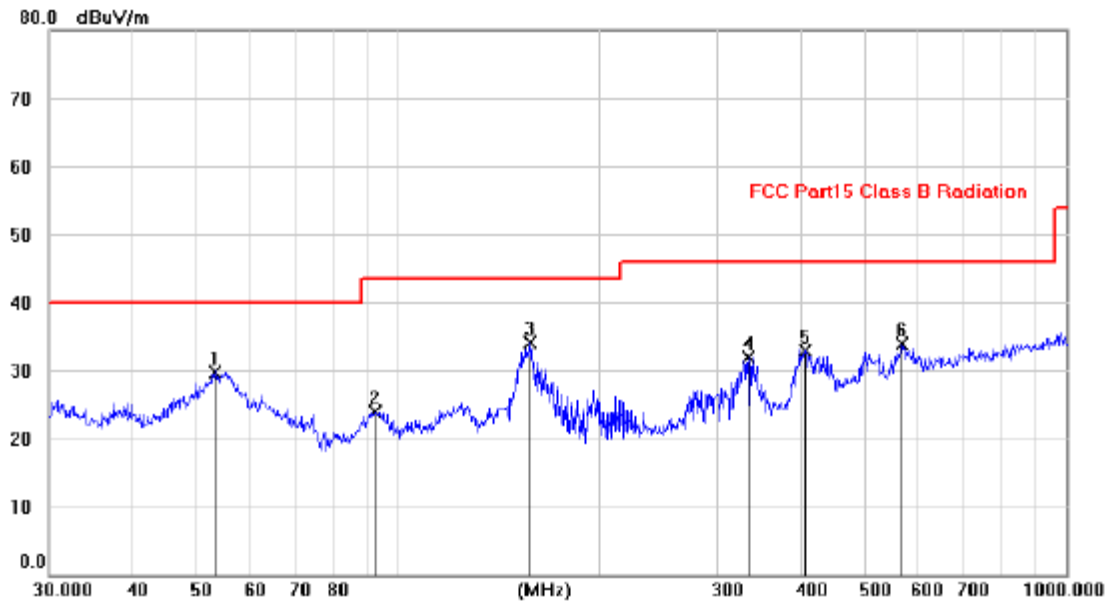

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		53.2992	16.08	13.72	29.80	40.00	-10.20	peak		
2		92.5598	13.59	10.29	23.88	43.50	-19.62	peak		
3	*	158.0384	19.03	15.04	34.07	43.50	-9.43	peak		
4		334.2722	16.98	14.93	31.91	46.00	-14.09	peak		
5		407.2288	16.51	16.42	32.93	46.00	-13.07	peak		
6		568.3469	14.40	19.51	33.91	46.00	-12.09	peak		

Remark: All modes have been tested, and only worst data of 802.11 ac mode, Channel 5180MHz was listed in this report.

Above 1GHz:**802.11a(HT20) 5180MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.36	49.84	11.25	14.62	32.65	43.06	74	-30.94	Vertical
15540.37	55.83	11.93	17.66	34.46	50.96	74	-23.04	Vertical
10360.75	51.57	9.4	14.62	32.65	42.94	74	-31.06	Horizontal
15540.33	60.57	8.5	17.66	34.46	52.27	74	-21.73	Horizontal

802.11a(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.66	49.21	11.25	14.62	32.65	42.43	74	-31.57	Vertical
15540.28	55.85	11.93	17.66	34.46	50.98	74	-23.02	Vertical
10360.05	51.49	9.4	14.62	32.65	42.86	74	-31.14	Horizontal
15540.34	60.73	8.5	17.66	34.46	52.43	74	-21.57	Horizontal

802.11a(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.41	49.89	11.25	14.62	32.65	43.11	74	-30.89	Vertical
15540.62	55.90	11.93	17.66	34.46	51.03	74	-22.97	Vertical
10360.97	51.80	9.4	14.62	32.65	43.17	74	-30.83	Horizontal
15540.22	60.20	8.5	17.66	34.46	51.90	74	-22.10	Horizontal

802.11n(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.14	49.49	11.25	14.62	32.65	42.71	74	-31.29	Vertical
15540.18	56.00	11.93	17.66	34.46	51.13	74	-22.87	Vertical
10360.14	51.51	9.4	14.62	32.65	42.88	74	-31.12	Horizontal
15540.77	60.88	8.5	17.66	34.46	52.58	74	-21.42	Horizontal

802.11n(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.06	49.38	11.25	14.62	32.65	42.60	74	-31.40	Vertical
15540.13	55.90	11.93	17.66	34.46	51.03	74	-22.97	Vertical
10360.77	51.07	9.4	14.62	32.65	42.44	74	-31.56	Horizontal
15540.73	60.14	8.5	17.66	34.46	51.84	74	-22.16	Horizontal

802.11n(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.21	49.20	11.25	14.62	32.65	42.42	74	-31.58	Vertical
15540.39	56.17	11.93	17.66	34.46	51.30	74	-22.70	Vertical
10360.91	51.63	9.4	14.62	32.65	43.00	74	-31.00	Horizontal
15540.11	60.69	8.5	17.66	34.46	52.39	74	-21.61	Horizontal

802.11ac(HT20) 5180MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.78	49.62	11.25	14.62	32.65	42.84	74	-31.16	Vertical
15540.46	56.20	11.93	17.66	34.46	51.33	74	-22.67	Vertical
10360.23	51.22	9.4	14.62	32.65	42.59	74	-31.41	Horizontal
15540.18	60.59	8.5	17.66	34.46	52.29	74	-21.71	Horizontal

802.11ac(HT20) 5200MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.11	49.52	11.25	14.62	32.65	42.74	74	-31.26	Vertical
15540.32	56.16	11.93	17.66	34.46	51.29	74	-22.71	Vertical
10360.13	51.71	9.4	14.62	32.65	43.08	74	-30.92	Horizontal
15540.09	61.01	8.5	17.66	34.46	52.71	74	-21.29	Horizontal

802.11ac(HT20) 5240MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.25	49.78	11.25	14.62	32.65	43.00	74	-31.00	Vertical
15540.21	56.16	11.93	17.66	34.46	51.29	74	-22.71	Vertical
10360.26	51.33	9.4	14.62	32.65	42.70	74	-31.30	Horizontal
15540.27	60.29	8.5	17.66	34.46	51.99	74	-22.01	Horizontal

802.11n(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.83	49.84	11.25	14.62	32.65	43.06	74	-30.94	Vertical
15540.23	56.45	11.93	17.66	34.46	51.58	74	-22.42	Vertical
10360.50	51.80	9.4	14.62	32.65	43.17	74	-30.83	Horizontal
15540.51	60.93	8.5	17.66	34.46	52.63	74	-21.37	Horizontal

802.11n(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.67	49.80	11.25	14.62	32.65	43.02	74	-30.98	Vertical
15540.62	56.37	11.93	17.66	34.46	51.50	74	-22.50	Vertical
10360.91	51.16	9.4	14.62	32.65	42.53	74	-31.47	Horizontal
15540.95	60.36	8.5	17.66	34.46	52.06	74	-21.94	Horizontal

802.11ac(HT40) 5190MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.50	49.86	11.25	14.62	32.65	43.08	74	-30.92	Vertical
15540.85	56.36	11.93	17.66	34.46	51.49	74	-22.51	Vertical
10360.45	51.05	9.4	14.62	32.65	42.42	74	-31.58	Horizontal
15540.78	60.85	8.5	17.66	34.46	52.55	74	-21.45	Horizontal

802.11ac(HT40) 5230MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.20	49.59	11.25	14.62	32.65	42.81	74	-31.19	Vertical
15540.05	55.55	11.93	17.66	34.46	50.68	74	-23.32	Vertical
10360.19	51.65	9.4	14.62	32.65	43.02	74	-30.98	Horizontal
15540.68	60.82	8.5	17.66	34.46	52.52	74	-21.48	Horizontal

802.11ac(HT80) 5210MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.62	49.32	11.25	14.62	32.65	42.54	74	-31.46	Vertical
15540.55	55.88	11.93	17.66	34.46	51.01	74	-22.99	Vertical
10360.10	51.50	9.4	14.62	32.65	42.87	74	-31.13	Horizontal
15540.68	60.10	8.5	17.66	34.46	51.80	74	-22.20	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamplifier Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case (U-NII-1).

4.8 Frequency stability

Test limit	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test results:	Pass

Measurement Data:

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	DC 3.6V	5179.992	8	5239.992	8
	DC 3.85V	5179.994	6	5239.991	9
	DC 4.2V	5179.986	14	5239.984	16
Mode	Voltage (V)	FHL (5260MHz)	Deviation (KHz)	FHH (5320MHz)	Deviation (KHz)
Band 2 (5250-5350 MHz)	DC 3.6V	5259.984	16	5319.988	12
	DC 3.85V	5259.990	10	5319.988	12
	DC 4.2V	5259.988	12	5319.985	15
Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	DC 3.6V	5744.994	6	5824.982	18
	DC 3.85V	5744.996	4	5824.990	10
	DC 4.2V	5744.990	12	5824.992	8

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
Band 1 (5150-5250 MHz)	-20°C	5179.997	3	5239.990	10
	-10°C	5179.999	1	5239.984	16
	0°C	5179.986	14	5239.991	9
	+10°C	5179.986	14	5239.988	12
	+20°C	5179.999	1	5239.996	4
	+30°C	5179.991	9	5239.986	14
	+40°C	5179.986	14	5239.988	12
	+50°C	5179.993	7	5239.997	3
	+60°C	5179.990	10	5239.993	7
Mode	Temperature (°C)	FHL (5260MHz)	Deviation (KHz)	FHH (5320MHz)	Deviation (KHz)
Band 2 (5250-5350 MHz)	-20°C	5259.983	17	5319.997	3
	-10°C	5259.988	12	5319.981	19
	0°C	5259.991	9	5319.986	14
	+10°C	5259.995	5	5320.000	0
	+20°C	5259.992	8	5319.992	8
	+30°C	5259.980	10	5319.987	13
	+40°C	5259.992	8	5319.991	9
	+50°C	5259.990	10	5319.995	5
	+60°C	5259.986	14	5319.996	4
Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
Band 4 (5725-5850 MHz)	-20°C	5744.996	4	5824.994	6
	-10°C	5744.993	7	5824.997	3
	0°C	5744.981	19	5824.986	14
	+10°C	5744.997	3	5824.992	8
	+20°C	5744.980	20	5824.998	2
	+30°C	5744.997	3	5824.986	14
	+40°C	5744.986	14	5824.997	3
	+50°C	5744.996	4	5824.981	19
	+60°C	5744.984	16	5824.990	10

-----END OF REPORT-----