

FCC Test Report

Product Name	OMBEA Response System
Model No.	ResponsePad
FCC ID	2ABQQRP-01

Applicant	OMBEA AB
Address	Torbjorn Klockares Gata 14 0tr, Stockholm 11330, Sweden

Date of Receipt	Jan. 16, 2014
Issued Date	Mar. 06, 2014
Report No.	1410368R-RFUSP15V00-A
Report Version	V1.0



The test results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Test Report Certification

Issued Date: Mar. 06, 2014

Report No.: 1410368R-RFUSP15V00-A



Product Name	OMBEA Response System
Applicant	OMBEA AB
Address	Torbjorn Klockares Gata 14 0tr, Stockholm 11330, Sweden
Manufacturer	OMBEA AB
Model No.	ResponsePad
EUT Rated Voltage	DC 3V (Power by Battery)
EUT Test Voltage	DC 3V (Power by Battery)
Trade Name	OMBEA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.10: 2009
Test Result	Complied

Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuietTek Corporation.

This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Documented By : Anita Chou
(Senior Engineering Adm. Specialist /
Anita Chou)

Tested By : Benjamin Pan
(Assistant Engineer / Benjamin Pan)

Approved By : [Signature]
(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operational Description	5
1.3. Tested System Details.....	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software	6
1.6. Test Facility	7
2. Conducted Emission.....	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits	9
2.4. Test Procedure	9
2.5. Uncertainty	9
2.6. Test Result of Conducted Emission.....	10
3. Radiated Emission.....	11
3.1. Test Equipment.....	11
3.2. Test Setup	12
3.3. Limits	13
3.4. Test Procedure	14
3.5. Uncertainty	14
3.6. Test Result of Radiated Emission.....	15
4. Band Edge	28
4.1. Test Equipment.....	28
4.2. Test Setup	28
4.3. Limits	29
4.4. Test Procedure	29
4.5. Uncertainty	29
4.6. Test Result of Band Edge	30
5. Duty Cycle.....	38
5.1. Test Equipment.....	38
5.2. Test Setup	38
5.3. Uncertainty	38
5.4. Test Result of Duty Cycle.....	39
6. EMI Reduction Method During Compliance Testing	40

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	OMBEA Response System
Trade Name	OMBEA
Model No.	ResponsePad
FCC ID	2ABQQR-01
Frequency Range	2405~2480MHz
Channel Control	Auto
Channel Separation	5MHz
Antenna Type	PIFA (Printed on PCB)
Channel Number	16
Type of Modulation	O-PQSK

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	Freescale	AN2731	2.2dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2405 MHz	Channel 02:	2410 MHz	Channel 03:	2415 MHz	Channel 04:	2420 MHz
Channel 05:	2425 MHz	Channel 06:	2430 MHz	Channel 07:	2435MHz	Channel 08:	2440 MHz
Channel 09:	2445 MHz	Channel 10:	2450 MHz	Channel 11:	2455MHz	Channel 12:	2460 MHz
Channel 13:	2465 MHz	Channel 14:	2470 MHz	Channel 15:	2475 MHz	Channel 16:	2480 MHz

Note:

1. The EUT is an OMBEA Response System with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249 for spread spectrum devices.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	ResponseLink	OMBEA	N/A	N/A	N/A
2	Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m

	Signal Cable Type	Signal cable Description
A	USB Cable	Shielded, 0.5m

1.4. Configuration of Test System

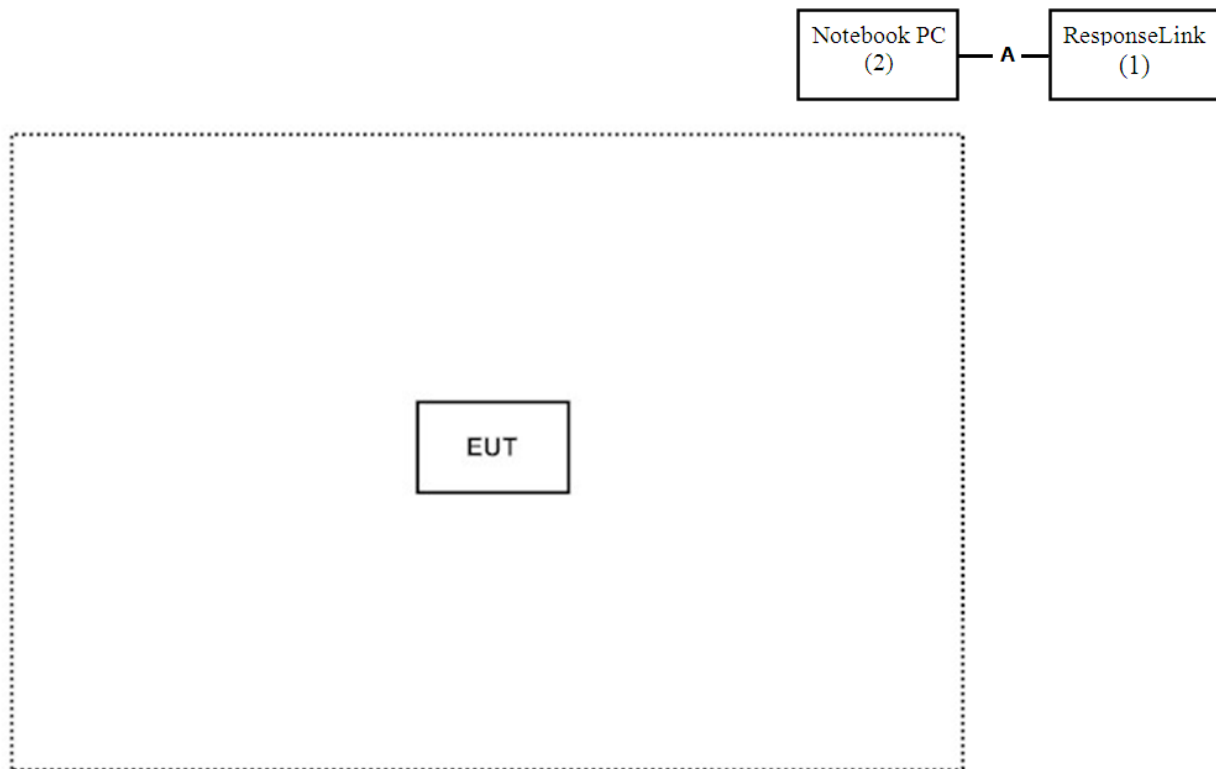

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute “OmbeaResponse.exe V.11”on Notebook PC.
- (3) Connect the EUT and the ResponseLink.
- (4) Configure the test mode and the test channel.
- (5) Start the continuous Transmit.
- (6) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng, Linkou Dist.,
New Taipei City 24451,
Taiwan, R.O.C
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

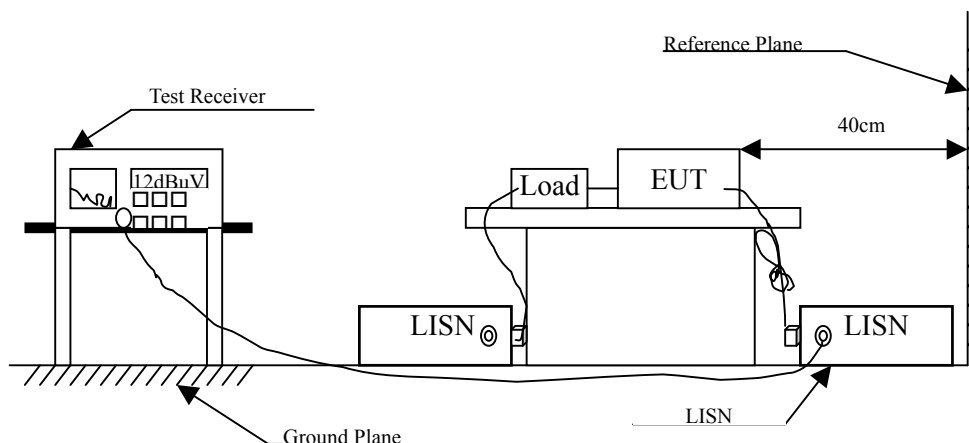

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

The EUT powered by battery, this test item is not performed.

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM 0906076	Sep., 2013
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	QuietTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuietTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Radiated Emission Below 1GHz

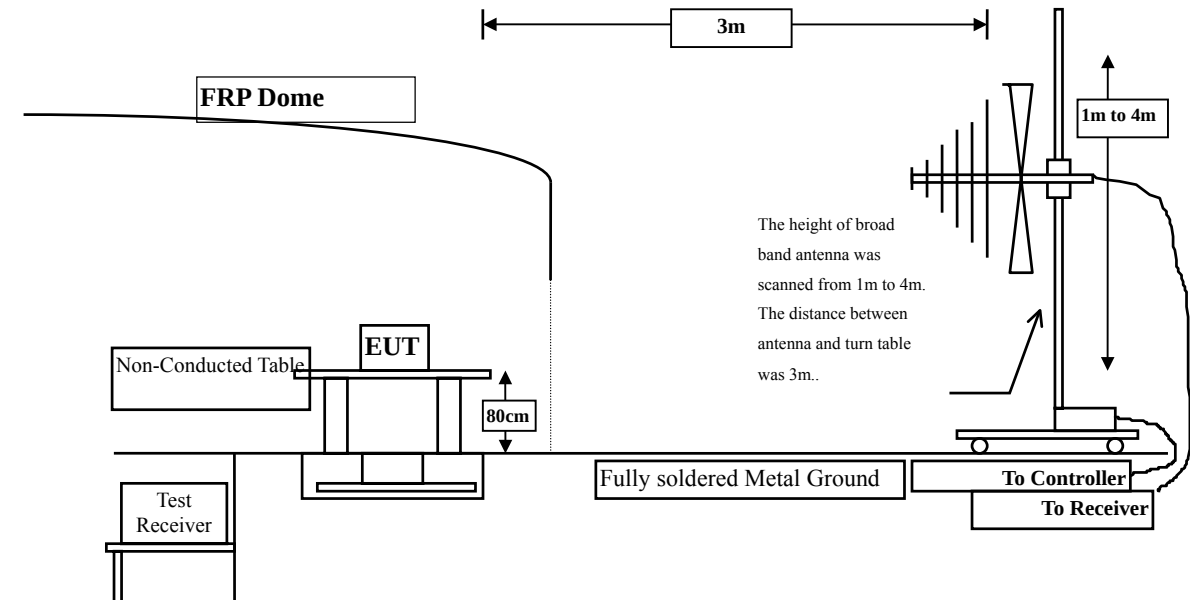

Radiated Emission Above 1GHz

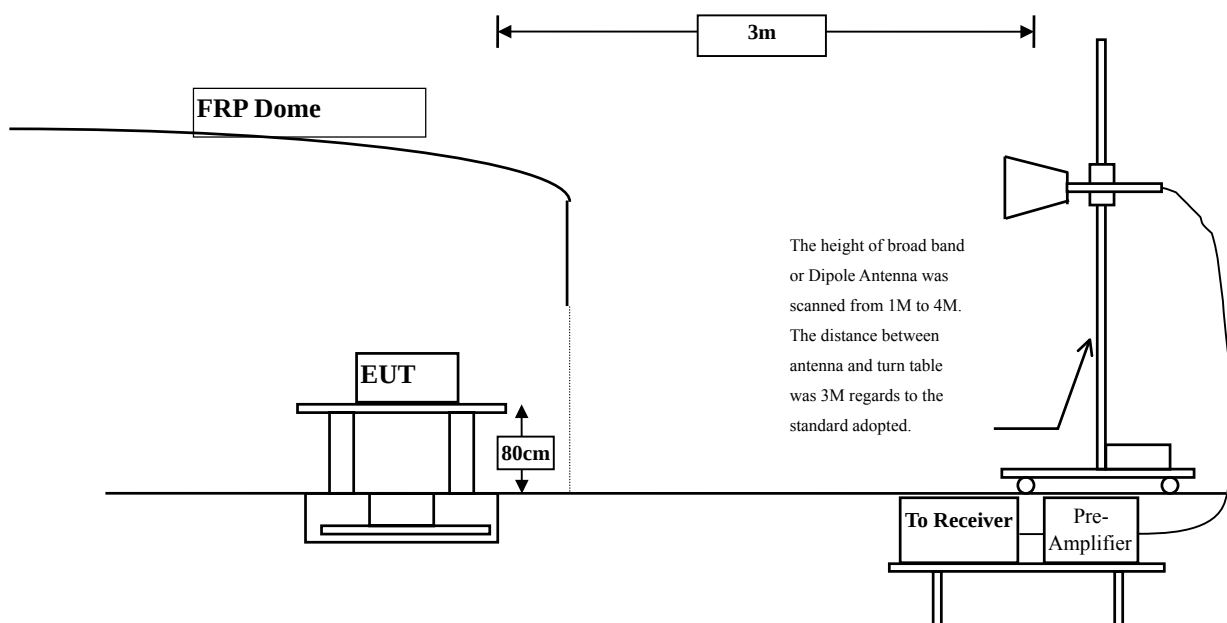

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

Remarks : 1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

3.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested compliance to FCC 47CFR 15.249 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : OMBEA Response System
Test Item : Fundamental Radiated Emission
Test Site : No.3OATS
Test Mode : Mode 1: Transmit (X-Axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
2405.000	33.759	66.659	100.418	-13.582	114.000
2440.000	33.838	67.490	101.328	-12.672	114.000
2480.000	33.941	66.780	100.721	-13.279	114.000
Vertical					
Peak Detector:					
2405.000	32.242	54.790	87.032	-26.968	114.000
2440.000	32.375	55.950	88.326	-25.674	114.000
2480.000	32.568	53.320	85.888	-28.112	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit
MHz	Measurement	Correct Factor	Level		
	dBuV/m	dB	dBuV/m	dB	dBuV/m

Horizontal
Average Detector:

2405.000	100.418	-40.915	59.503	-34.497	94.000
2440.000	101.328	-40.915	60.413	-33.587	94.000
2480.000	100.721	-40.915	59.806	-34.194	94.000

Vertical
Average Detector:

2405.000	87.032	-40.915	46.117	-47.883	94.000
2440.000	88.326	-40.915	47.411	-46.589	94.000
2480.000	85.888	-40.915	44.973	-49.027	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
Test Item : Fundamental Radiated Emission
Test Site : No.3OATS
Test Mode : Mode 1: Transmit (Y-Axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
2405.000	33.759	63.200	96.959	-17.041	114.000
2440.000	33.838	64.710	98.548	-15.452	114.000
2480.000	33.941	62.800	96.741	-17.259	114.000
Vertical					
Peak Detector:					
2405.000	32.242	65.230	97.472	-16.528	114.000
2440.000	32.375	63.220	95.596	-18.404	114.000
2480.000	32.568	63.760	96.328	-17.672	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dBuV/m	dB	dBuV/m	dB	dBuV/m

Horizontal
Average Detector:

2405.000	96.959	-40.915	56.044	-37.956	94.000
2440.000	98.548	-40.915	57.633	-36.367	94.000
2480.000	96.741	-40.915	55.826	-38.174	94.000

Vertical
Average Detector:

2405.000	97.472	-40.915	56.557	-37.443	94.000
2440.000	95.596	-40.915	54.681	-39.319	94.000
2480.000	96.328	-40.915	55.413	-38.587	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Z-Axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
2405.000	33.759	61.620	95.379	-18.621	114.000
2440.000	33.838	61.060	94.898	-19.102	114.000
2480.000	33.941	61.380	95.321	-18.679	114.000
Vertical					
Peak Detector:					
2405.000	32.242	66.230	98.472	-15.528	114.000
2440.000	32.375	64.520	96.896	-17.104	114.000
2480.000	32.568	63.810	96.378	-17.622	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Correct Factor	Measurement Level	Margin	Limit
MHz	dBuV/m	dB	dBuV/m	dB	dBuV/m

Horizontal
Average Detector:

2405.000	95.379	-40.915	54.464	-39.536	94.000
2440.000	94.898	-40.915	53.983	-40.017	94.000
2480.000	95.321	-40.915	54.406	-39.594	94.000


Vertical
Average Detector:

2405.000	98.472	-40.915	57.557	-36.443	94.000
2440.000	96.896	-40.915	55.981	-38.019	94.000
2480.000	96.378	-40.915	55.463	-38.537	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405MHz)

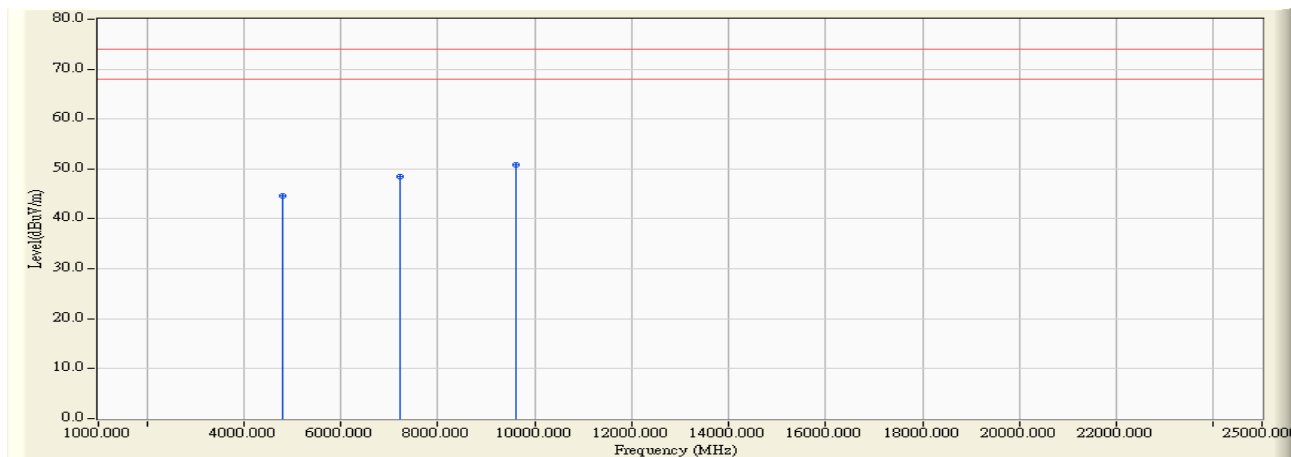


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4810.000	2.532	42.110	44.642	-29.358	74.000
7215.000	9.411	39.130	48.541	-25.459	74.000
9620.000	10.282	40.500	50.782	-23.218	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405MHz)

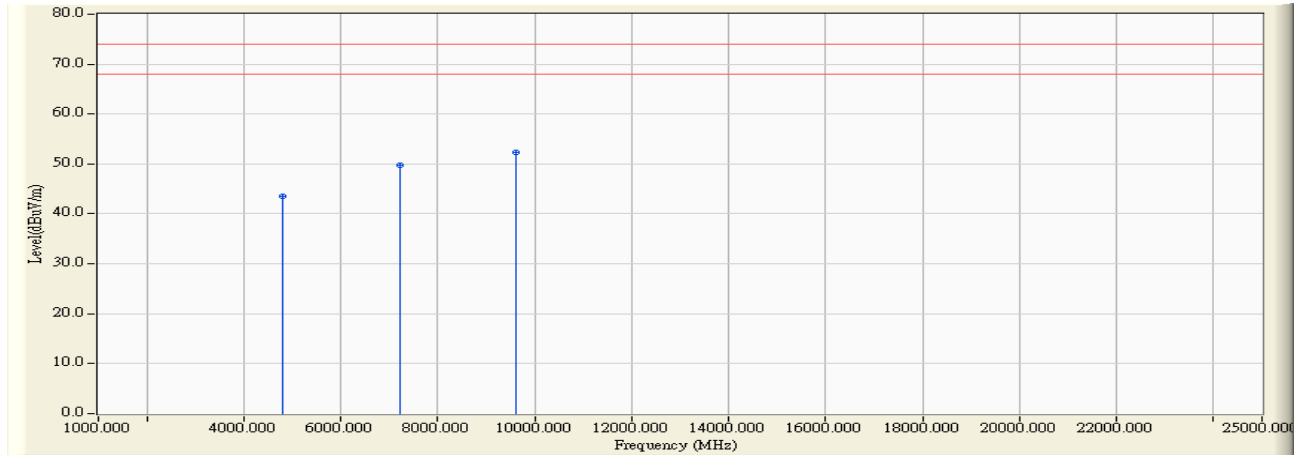


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Vertical					
Peak Detector:					
4810.000	2.927	40.520	43.447	-30.553	74.000
7215.000	9.895	39.830	49.725	-24.275	74.000
9620.000	10.760	41.600	52.360	-21.640	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440 MHz)

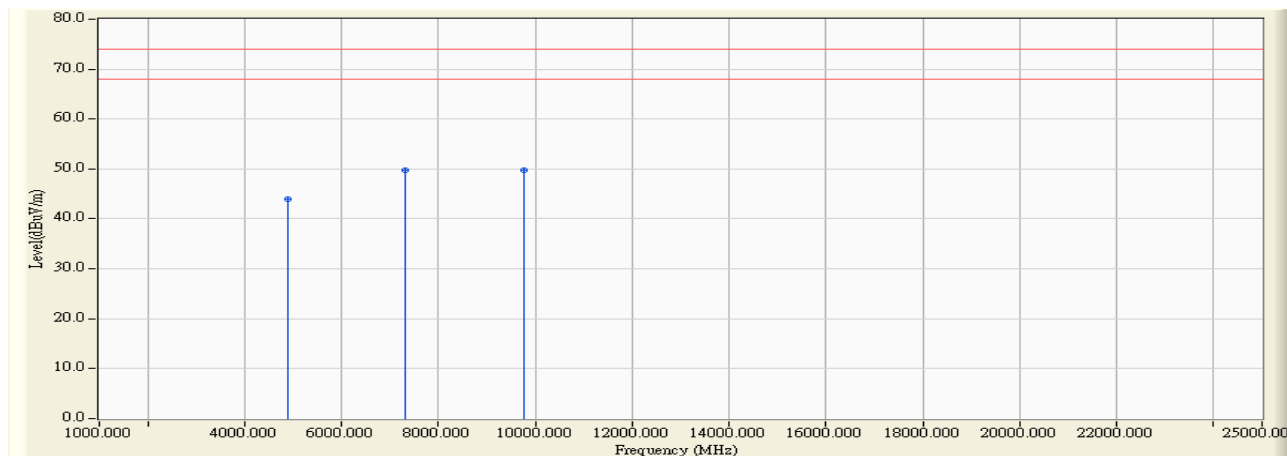


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	Db	dBuV/m
	Db	dBuV	dBuV/m		
Horizontal					
Peak Detector:					
4880.000	2.038	41.870	43.908	-30.092	74.000
7320.000	9.699	40.120	49.819	-24.181	74.000
9760.000	9.665	40.130	49.795	-24.205	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440MHz)

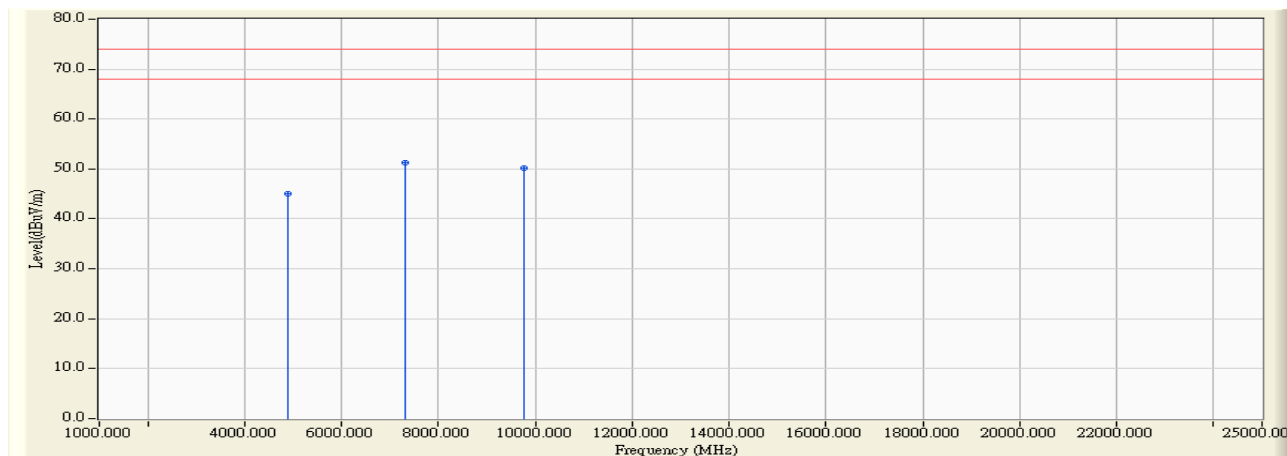


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	Db	dBuV/m
	Db	dBuV	dBuV/m		
Vertical					
Peak Detector:					
4880.000	2.499	42.630	45.129	-28.871	74.000
7320.000	10.303	40.950	51.253	-22.747	74.000
9760.000	10.299	39.880	50.180	-23.820	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

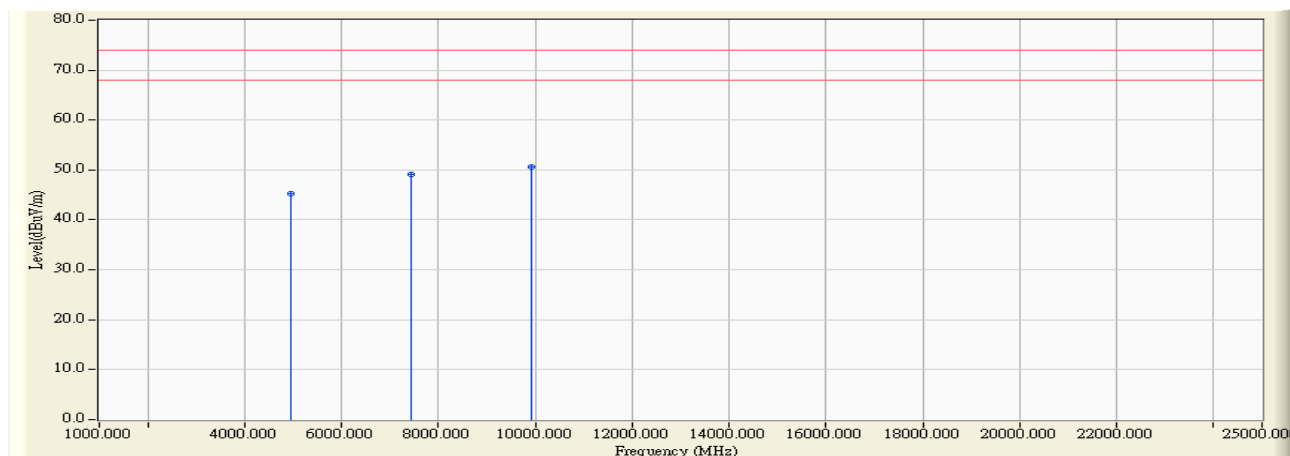


Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4960.000	2.582	42.580	45.162	-28.838	74.000
7440.000	10.555	38.650	49.205	-24.795	74.000
9920.000	10.206	40.420	50.626	-23.374	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

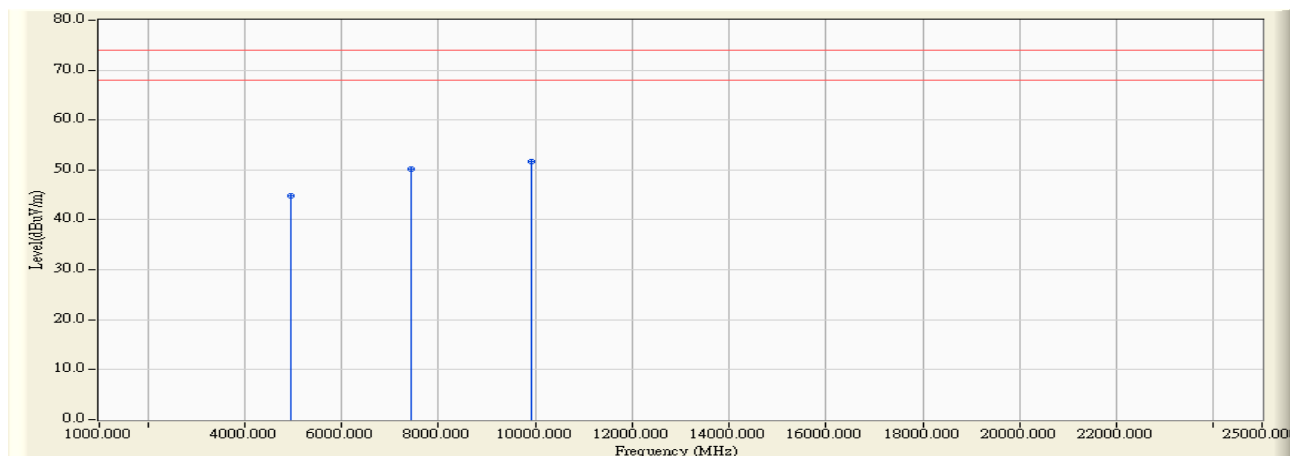

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Vertical					
Peak Detector:					
4960.000	3.398	41.480	44.879	-29.121	74.000
7440.000	11.214	38.950	50.164	-23.836	74.000
9920.000	11.245	40.540	51.785	-22.215	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : OMBEA Response System
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
121.180	-7.289	23.788	16.499	-27.001	43.500
309.360	-4.463	24.160	19.697	-26.303	46.000
503.360	1.994	24.183	26.177	-19.823	46.000
670.200	1.872	23.434	25.306	-20.694	46.000
825.400	7.346	23.470	30.816	-15.184	46.000
970.900	7.347	23.739	31.086	-22.914	54.000
Vertical					
103.720	-5.090	24.833	19.742	-23.758	43.500
260.860	-4.870	26.919	22.049	-23.951	46.000
458.740	-2.562	23.518	20.956	-25.044	46.000
619.760	0.474	30.075	30.549	-15.451	46.000
804.060	3.371	23.145	26.516	-19.484	46.000
970.900	2.967	23.739	26.706	-27.294	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Equipment


The following test equipments are used during the band edge tests:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by “X” are used to measure the final test results.

4.2. Test Setup

RF Radiated Measurement:

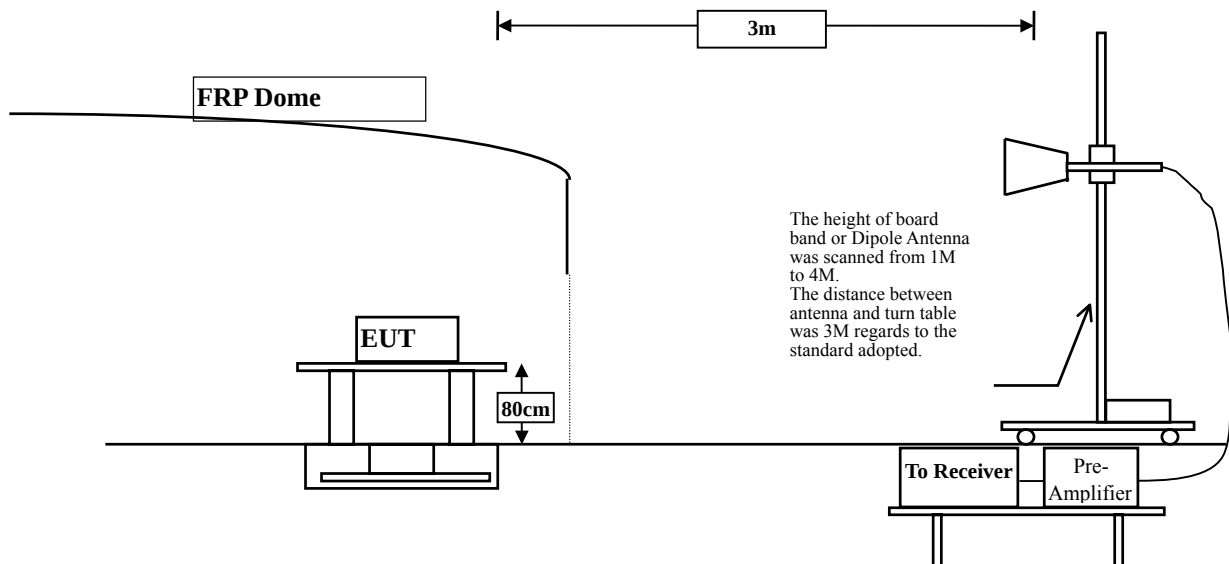

4.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.5. Uncertainty

Conducted is ± 1.27 dB

Radiated is ± 3.9 dB

4.6. Test Result of Band Edge


Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	26.484	60.223	74.00	54.00	Pass
01 (Peak)	2399.200	33.751	36.458	70.208	74.00	54.00	Pass
01 (Peak)	2400.000	33.752	26.914	60.665	74.00	54.00	Pass
01 (Peak)	2405.600	33.760	67.436	101.196	--	--	--

Figure Channel 01:

Horizontal (Peak)

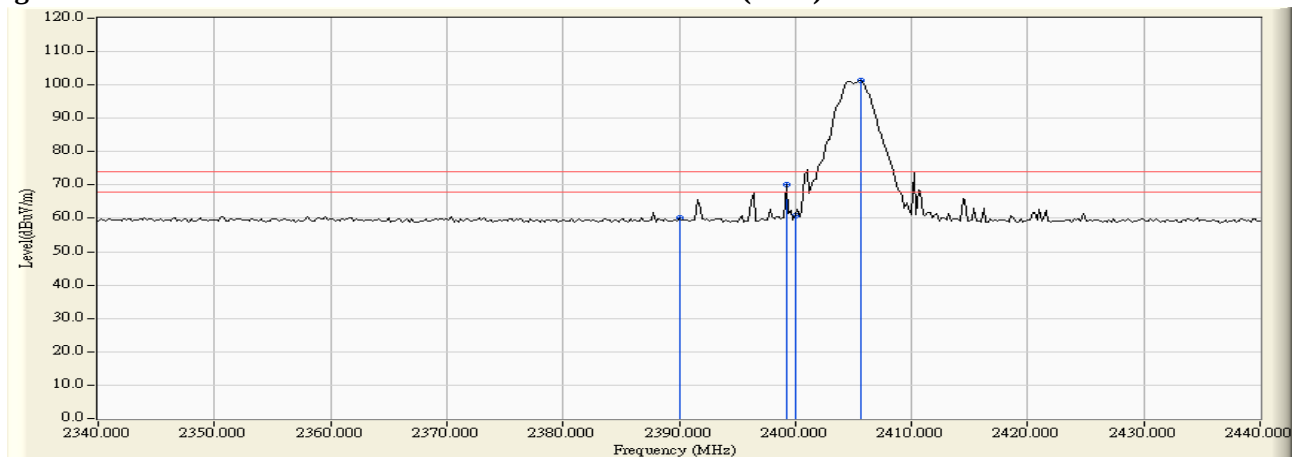

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Factor	Measurement Level	Margin	Limit	Result
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m	Pass

Horizontal
Average Detector:

2390.000	60.223	-40.915	19.308	-34.692	54.000	Pass
2399.200	70.208	-40.915	29.293	-24.707	54.000	Pass
2400.000	60.665	-40.915	19.750	-34.250	54.000	Pass

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.


Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2379.400	32.341	25.958	58.299	74.00	54.00	Pass
01 (Peak)	2390.000	32.267	25.187	57.454	74.00	54.00	Pass
01 (Peak)	2400.000	32.241	24.771	57.012	74.00	54.00	Pass
01 (Peak)	2404.600	32.242	55.149	87.391	--	--	--

Figure Channel 01:

Vertical (Peak)

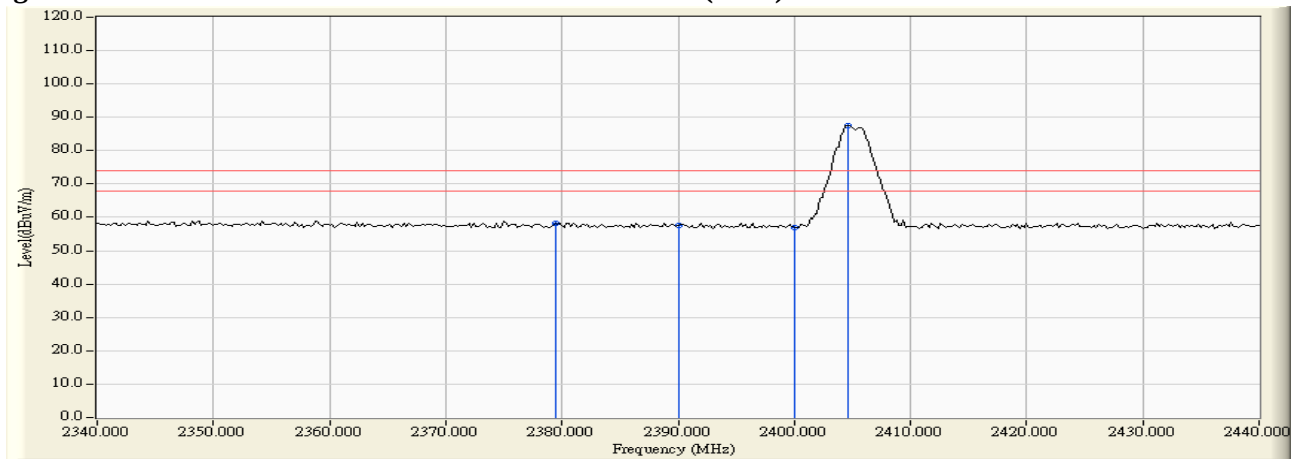

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Factor	Measurement Level	Margin	Limit	Result
MHz	dBμV/m	dB	dBμV/m	dB	dBμV/m	Pass

Vertical
Average Detector:

2379.400	58.299	-40.915	17.384	-36.616	54.000	Pass
2390.000	57.454	-40.915	16.539	-37.461	54.000	Pass
2400.000	57.012	-40.915	16.097	-37.903	54.000	Pass

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
16 (Peak)	2480.500	33.943	65.150	99.092	--	--	--
16 (Peak)	2483.500	33.951	37.292	71.242	74.00	54.00	Pass

Figure Channel 16: Horizontal (Peak)

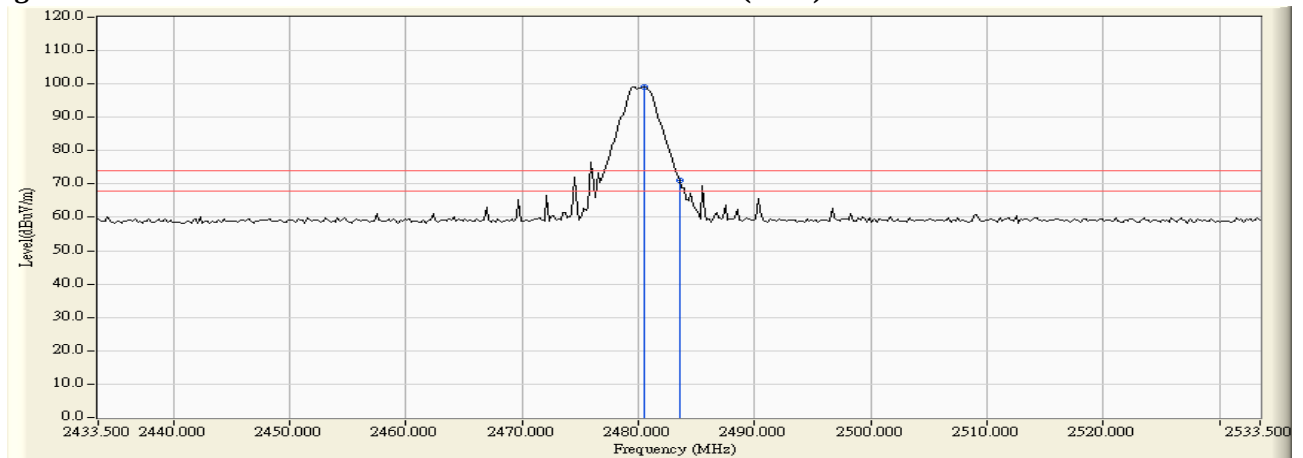

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Factor	Measurement Level	Margin	Limit	Result
MHz	dB μ V/m	dB	dB μ V/m	dB	dB μ V/m	Pass

Horizontal
Average Detector:

2483.500	71.242	-40.915	30.327	-23.673	54.000	Pass
----------	--------	---------	--------	---------	--------	------

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : OMBEA Response System
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2480 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
16 (Peak)	2479.700	32.567	56.962	89.529	--	--	--
16 (Peak)	2483.500	32.586	28.924	61.509	74.00	54.00	Pass

Figure Channel 16: Vertical (Peak)

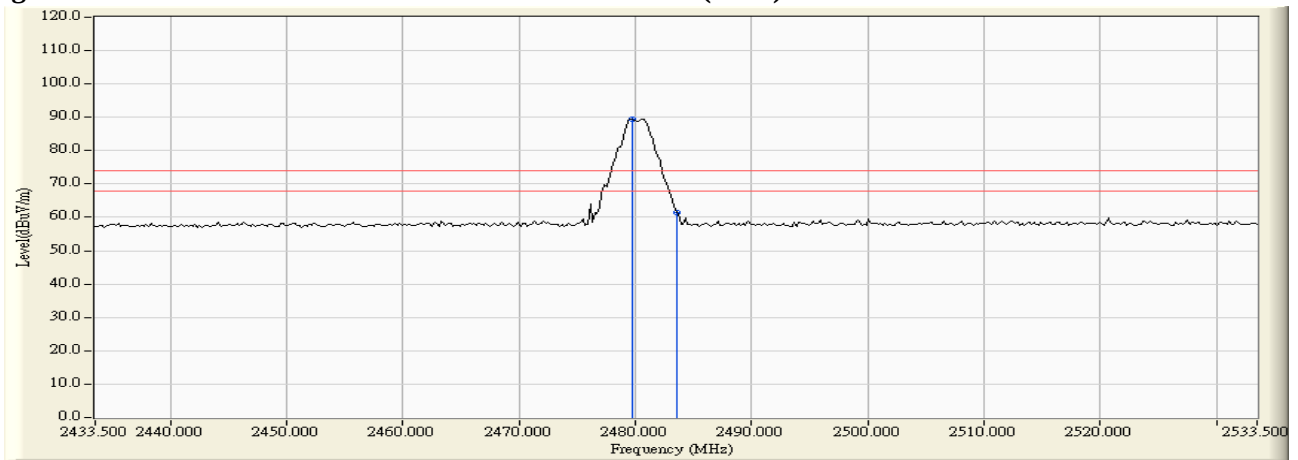

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit	Result
MHz	Measurement	Factor	Level			Pass
	dBμV/m	dB	dBμV/m	dB	dBμV/m	

Vertical
Average Detector:

2483.500	61.509	-40.915	20.594	-33.406	54.000	Pass
----------	--------	---------	--------	---------	--------	------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

5. Duty Cycle


5.1. Test Equipment

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.
2. The test equipments marked by "X" are used to measure the final test results.

5.2. Test Setup

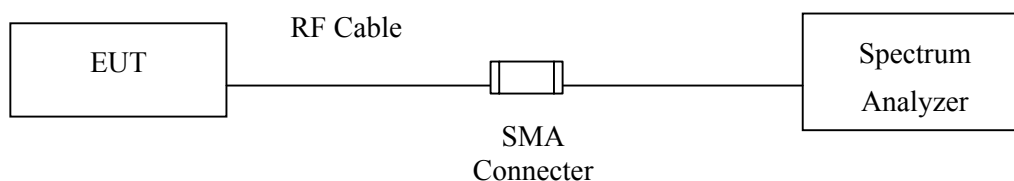


5.3. Uncertainty

$\pm 150\text{Hz}$

5.4. Test Result of Duty Cycle

Product : OMBEA Response System
 Test Item : Duty Cycle Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

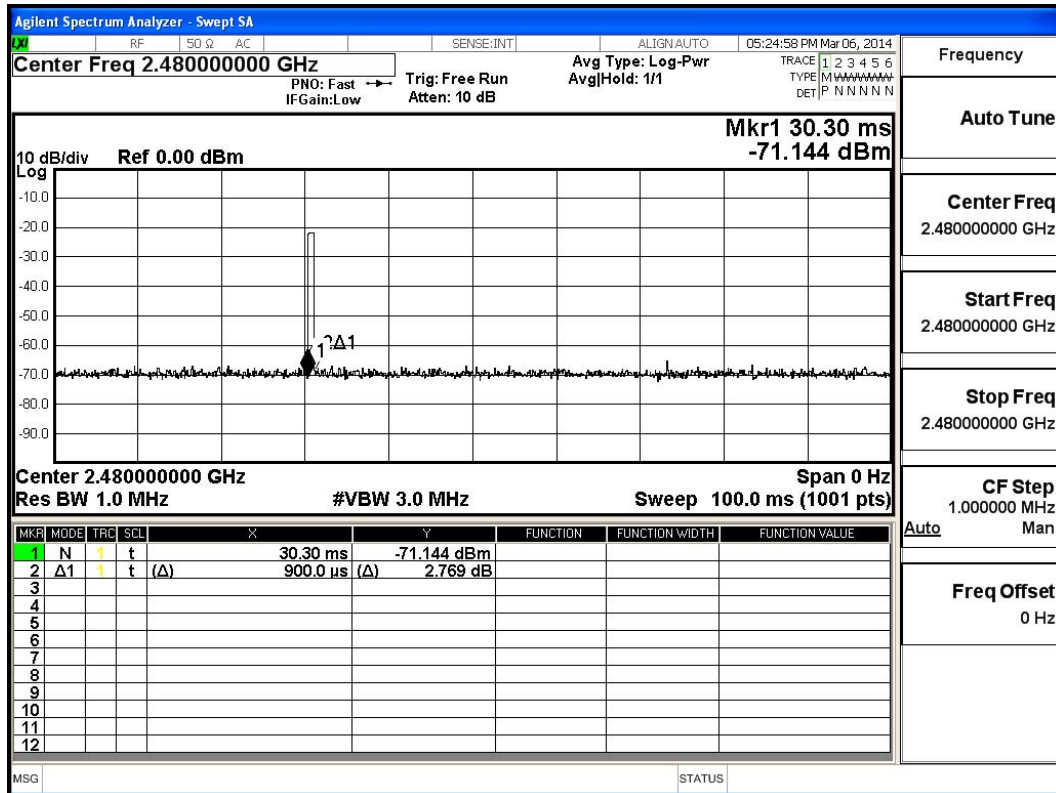

Time on of 100ms= 0.9ms

Duty Cycle= 0.9ms / 100ms= 0.009

Duty Cycle correction factor= 20 LOG 0.009= -40.915 dB

Duty Cycle correction factor	-40.915	dB
------------------------------	---------	----

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.