Total Quality. Assured.
Intertek
731 Enterprise Drive
Lexington, KY 40510

Tel 859 226 1000
Fax 859 226 1040

www.intertek.com

Veridt Inc.
SAR EXEMPTION REPORT

SCOPE OF WORK
SAR EXEMPTION CALCULATION
ON THE STEALTH SERIES READER

REPORT NUMBER
105986266LEX-003

ISSUE DATE
1/23/2025

PAGES
14

DOCUMENT CONTROL NUMBER
Non-Specific EMC Report Shell Rev. December 2017
© 2017 INTERTEK

intertek
Total Quality. Assured.

SAR EXEMPTION TEST REPORT

Report Number: 105986266LEX-003
Project Number: G105986266

Report Issue Date: 1/23/2025

Product Name: Stealth Series Reader
Model 900W2031

Standards: FCC Title 47 CFR Part 2.1093

Tested by:
Intertek Testing Services NA, Inc.
731 Enterprise Drive
Lexington, KY 40510
USA

Client:
Veridt Inc.
7182 US Highway 14 Ste 401
Middleton, WI 53562-4264
USA

Report prepared by

Michael Carlson,
EMC Team Leader

Report reviewed by

Brian Lackey,
Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Table of Contents

1 Introduction and Conclusion 4
2 Test Summary 4
3 Client Information 5
4 Description of Equipment under Test and Variant Models 6
4.1 Variant Models: 6
4.2 Antenna Separation 7
4.3 Maximum Output Power 8
5 FCC SAR Exemption Criteria 12
6 Revision History 14

1 Introduction and Conclusion

SAR exemption calculations were performed on the product constructed as described in section 4. Information provided by the client including maximum output power, antenna gain(s), and minimum separation distance(s) was used to determine if the product under evaluation was exempt from SAR. Any change in these stated values may invalidate these results. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product under evaluation is **exempt** from SAR requirements for each of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) evaluated. Intertek does not make any claims of compliance for samples or variants which were not evaluated.

2 Test Summary

Section	Requirement	Result
5	FCC SAR Exemption Criteria (FCC Title 47 CFR Part 1.1307, 2.1093)	Exempt from SAR

3 Client Information

This product was tested at the request of the following:

Client Information	
Client Name:	Veridt Inc.
Address:	7182 US Highway 14 Ste 401 Middleton, WI 53562-4264 USA
Contact:	Mark Depp
Telephone:	N/A
Email:	mdepp@veridt.com
Manufacturer Information	
Manufacturer Name:	Veridt Inc.
Manufacturer Address:	7182 US Highway 14 Ste 401 Middleton, WI 53562-4264 USA

4 Description of Equipment under Test and Variant Models

Equipment Under Test	
Product Name	Stealth Series Reader
Model Number	900W2031
Type of Transmission	RFID 13.56MHz
Rated RF Output Power	-2.08dBm
Frequency Range	13.56MHz
Type of Modulation / Data Rate	424kbps
Number of Channel(s)	1
Description of Equipment Under Test (provided by client)	
The Stealth Series Reader is a mountable card reader that provides secure communications.	

4.1 Variant Models:

There were no variant models covered by this evaluation.

4.2 Antenna Separation

No antenna separation information is needed. Exemption based on output power only.

4.3 Maximum Output Power

The following information was provided by direct measurement.

4.4 Method:

The test sample was mounted to an insulating support structure 150cm high on a turntable capable of rotating from 0 to 360 degrees about the vertical axis. For smaller test samples which could be used in multiple orientations, the support structure used was capable of rotating the test sample about the horizontal axis in order to fully optimize the direction of the spurious emission.

A connection was established to a base station simulator which was used to set the test sample to the middle channel at maximum output power. This connection was made "over the air".

Measurements were performed using a pre-calibrated substitution method with the receiving antenna polarized vertically as well as horizontally. For frequencies above 1GHz, RF absorber was in place in order to create a free space environment, and the receive antenna was fixed at 150cm in height. For frequencies below 1GHz, no RF absorber was present, and the receive antenna was scanned from 1m to 4m in height in order to maximize the spurious emission. The device was tested in normal as well as extreme voltage conditions (NV, LV, HV) as dictated by the standard test method. No significant change was found when testing at Low Voltage and High Voltage; therefore all reported data is from testing at Normal Voltage.

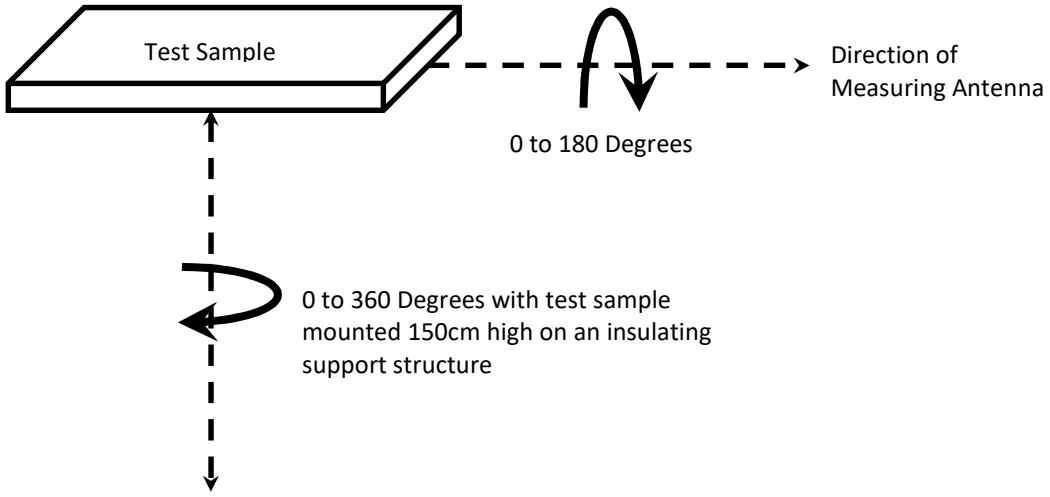

Figure 1: Illustration of the Rotation of the Test Sample

4.5 Sample Calculation:

The radiated spurious emission power measurement is calculated using the Pre-Substitution method described in ETSI TS 103 052 V1.1.1. The final radiated power measurement is calculated by taking the spectrum analyzer reading in dBμV and adding a correction factor that includes, cable loss, preamp gain, over the air path loss, and a subtraction of 107 to convert from dBμV to dBm. The basic process with a sample calculation is shown below.

RP = SA + Corr	SA = Spectrum Analyzer Reading (dBμV) RP = Radiated Power (dBm) Corr = Correction Factor (dB)
Corr = rxCF + rxPG + PL – 107	rxCF = Receive Cable Factor (dB) rxPG = Receive Preamp Gain (dB) PL = Path Loss (dB)

The path loss is measured prior to testing using the substitution method. This method can be done with a signal generator and a separate spectrum analyzer, or simply a network analyzer. In this method, the device is substituted with a transmitting antenna with known correction factors. First the cables for the transmit and receive antennas are connected directly to establish a baseline. After this, the cables are disconnected and both antennas are re-attached and set in their measurement positions. The path loss factor used for the final measurement can then be obtained using the following equation.

PL = SG – txCF – txAG	PL = Path Loss (dB) SG = Signal Generator Level (dBm) txCF = Transmit Cable Factor (dB) txAG = Transmit Antenna Gain (dBi)

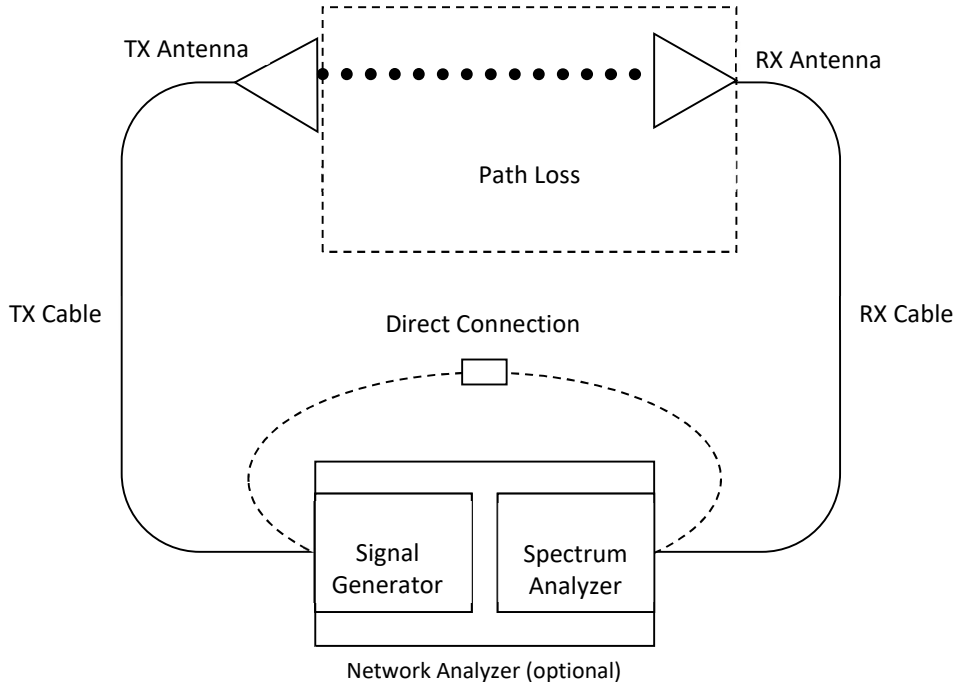

Figure 2: Illustration of the Substitution Calculation for the Path Loss

Assuming we measure 39.59dBμV at the spectrum analyzer. Subtract 107 to arrive at a value in dBm, then add in our correction factors of cable loss 6.2dB, preamplifier gain -34dB, and the pre-calculated path loss of 44.7dB.

Example:
RP = SA – 107 + rxCF + rxPG + PL = 39.59 – 107 + 6.2 – 34 + 44.7 = -50.51dBm

Output Power = -2.08 dBm

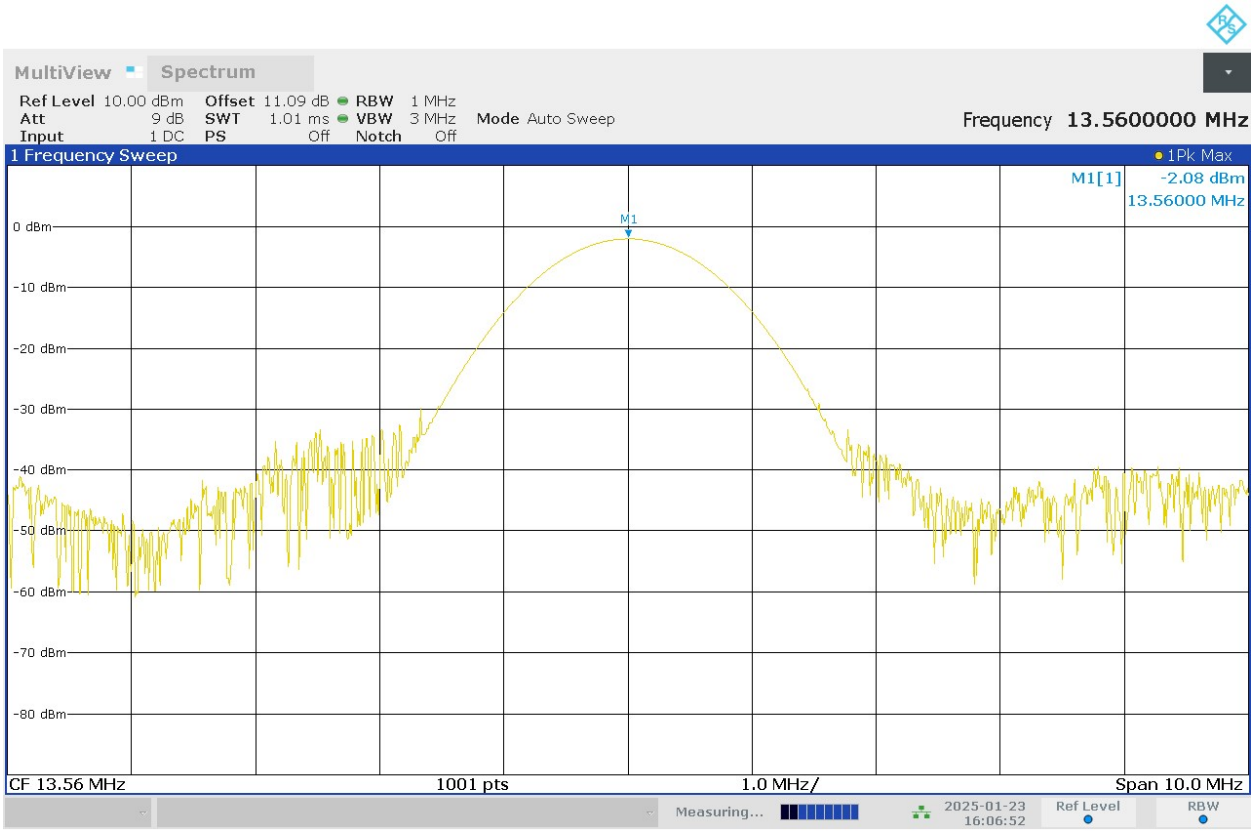

04:06:53 PM 01/23/2025

4.6 Test Equipment Used:

Description	Asset	Manufacturer	Model	Cal Date	Cal Due
EMI Test Receiver	8258	Rohde & Schwarz	ESW44	10/10/2024	10/10/2025
30M-1G 3m Signal Path without Preamplifier	8311 2593 8188 8185	-	-	11/26/2024	11/26/2025
Magnetic Loop Antenna	2366	ETS	6502	9/16/2024	9/16/2025

4.7 Software Utilized:

Name	Manufacturer	Version
RS Commander	Rohde & Schwarz	Version 10.60.20

5 FCC SAR Exemption Criteria

FCC Title 47 CFR Part 1.1307(3)(i):

For single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold Pth (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). Pth is given by:

$$P_{th}\ (\text{mW}) = \begin{cases} ERP_{20\ cm}(d/20\ \text{cm})^x & d \leq 20\ \text{cm} \\ ERP_{20\ cm} & 20\ \text{cm} < d \leq 40\ \text{cm} \end{cases}$$

Where

$$x = -\log_{10}\left(\frac{60}{ERP_{20\ cm}\sqrt{f}}\right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20\ cm}\ (\text{mW}) = \begin{cases} 2040f & 0.3\ \text{GHz} \leq f < 1.5\ \text{GHz} \\ 3060 & 1.5\ \text{GHz} \leq f \leq 6\ \text{GHz} \end{cases}$$

d = the separation distance (cm);

RF Source	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Exempt from SAR?
RFID	13.56	-2.08	0.619	Exempt

The output power is not more than 1mW. The device is exempt per FCC Title 47 CFR Part 1.1307(3)(i)(A).

6 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	1/23/2025	105986266LEX-003	MC	BL	Original Issue