

**SGS Germany GmbH**  
**Test Report No.: G2BK0004**  
**FCC ID: 2ABRZ-TIPTTEL3110**

|                        |                  |                             |
|------------------------|------------------|-----------------------------|
| <b>Order No.:</b> G2BK | <b>Pages:</b> 33 | <b>Munich, Jul 21, 2014</b> |
|------------------------|------------------|-----------------------------|

|                                                      |                                                                                                          |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Client:                                              | Tiptel.com GmbH Business Solutions                                                                       |
| Equipment Under Test:                                | Premium IP-Phone TIPTTEL 3110<br>with Extension Module TIPTTEL KM 27                                     |
| Manufacturer / Importer:                             | Tiptel.com GmbH                                                                                          |
| Task:                                                | Compliance with the requirements of the test specifications<br>mentioned below:                          |
| Test Specification(s):<br>[covered by accreditation] | <ul style="list-style-type: none"> <li>• FCC 47 CFR Part 15</li> <li>§15.107</li> <li>§15.109</li> </ul> |
| Result:                                              | The EUTs comply with the requirements of the test specifications.                                        |

The results relate only to the items tested as described in this test report.  
It is the responsibility of the manufacturer to ensure that all serial production models meet the intent of the requirements detailed within this report.

**edited by:**

**Date**

**Signature**

Nakpane  
Qualification Engineer

Jul 21, 2014



**approved by:**

**Date**

**Signature**

Bauer  
Lab Manager EMC

Jul 21, 2014



This document was signed electronically.

## CONTENTS

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>1 Result Summary .....</b>                        | <b>4</b>  |
| <b>2 References .....</b>                            | <b>5</b>  |
| 2.1 Specification(s).....                            | 5         |
| 2.2 Glossary .....                                   | 5         |
| <b>3 General Information .....</b>                   | <b>6</b>  |
| 3.1 Identification of Client.....                    | 6         |
| 3.2 Test Laboratory .....                            | 6         |
| 3.3 Time Schedule .....                              | 6         |
| 3.4 Participants .....                               | 6         |
| <b>4 Equipment Under Test .....</b>                  | <b>7</b>  |
| 4.1 Description of EUT .....                         | 7         |
| 4.1.1 Test Configuration .....                       | 7         |
| 4.1.2 Operational conditions .....                   | 8         |
| 4.2 Environmental conditions .....                   | 9         |
| 4.3 Compliance Criteria.....                         | 9         |
| <b>5 General Description of Tests.....</b>           | <b>10</b> |
| 5.1 Test Facility .....                              | 10        |
| 5.2 Calibration of the Test Equipment.....           | 10        |
| 5.3 Measurement Uncertainty .....                    | 11        |
| 5.4 Modifications during the test .....              | 11        |
| 5.5 Deviations from Standard.....                    | 11        |
| <b>6 Test Results .....</b>                          | <b>12</b> |
| 6.1 Test No. 1: Conducted Emissions (§ 15.107) ..... | 12        |
| 6.1.1 Purpose .....                                  | 12        |
| 6.1.2 Limits .....                                   | 12        |
| 6.1.3 EUT Operating Condition .....                  | 12        |
| 6.1.4 Test Configuration .....                       | 12        |
| 6.1.5 Test Procedure and Results .....               | 13        |
| 6.2 Test No. 2: Radiated Emissions (§ 15.109a) ..... | 15        |
| 6.2.1 Purpose .....                                  | 15        |
| 6.2.2 Limits .....                                   | 15        |
| 6.2.3 EUT Operating Condition .....                  | 15        |
| 6.2.4 Test Configuration .....                       | 15        |
| 6.2.5 Test Procedure and Results .....               | 16        |
| 6.2.5.1 Radiated Emissions – 30 MHz to 1 GHz .....   | 16        |

|                                                                                           |           |
|-------------------------------------------------------------------------------------------|-----------|
| 6.2.5.1.1 Radiated Emissions – 30 MHz to 1 GHz; Operation mode 1 with POE switch .....    | 17        |
| 6.2.5.1.2 Radiated Emissions – 30 MHz to 1 GHz; Operation mode 2 with AC/DC adapter ..... | 18        |
| 6.2.5.2 Radiated Emissions – 1 GHz to 2 GHz.....                                          | 19        |
| 6.2.5.2.1 Radiated Emissions – 1 GHz to 2 GHz; Operation mode 1 with POE switch .....     | 20        |
| 6.2.5.2.2 Radiated Emissions – 1 GHz to 2 GHz; Operation mode 1 with AC/DC Adapter .....  | 21        |
| <b>7 Test Data and Screenshots .....</b>                                                  | <b>22</b> |
| 7.1 Part List of the Test Equipment.....                                                  | 22        |
| 7.2 Spectral Plots .....                                                                  | 23        |
| 7.2.1 Test No. 1: Conducted Emissions (§ 15.107) .....                                    | 23        |
| 7.2.2 Test No. 2: Radiated Emissions (§ 15.109a) .....                                    | 24        |
| 7.3 Test Setups .....                                                                     | 27        |
| 7.3.1 Test No. 1: Conducted Emissions (§ 15.107) .....                                    | 27        |
| 7.3.2 Test No. 2: Radiated Emissions (§ 15.109a) .....                                    | 28        |
| 7.4 Photographs of EUT and accessories.....                                               | 30        |
| 7.4.1 Auxiliary Equipment of the EUTs .....                                               | 31        |
| <b>8 Disclaimer .....</b>                                                                 | <b>33</b> |

## 1 Result Summary

The measurements described in this report were conducted pursuant to 47 CFR § 2.947 and § 2.1041. All applicable paragraphs of the 47 CFR parts 2 and 15 of the most current version of the rules were considered.

The following test program was performed according to the FCC rules to assess the ability of the tested sample(s) to successfully satisfy the FCC requirements listed in section 2.1 Specification(s) of this test report:

| Test No. | Measurement         | FCC Rule | Page Number of this Report | Result    |
|----------|---------------------|----------|----------------------------|-----------|
| 1        | Conducted Emissions | § 15.107 | 12                         | compliant |
| 2        | Radiated Emissions  | § 15.109 | 15                         | compliant |

Table 1-1: Results – Summary

In accordance with the FCC Rule §15.3 (z) the equipment was tested with the limits that are valid for an *unintentional radiator*.

## 2 References

### 2.1 Specification(s)

| No. | Standard           | Title                                                                                                                                                                       | Date    |
|-----|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| [1] | FCC 47 CFR Part 15 | Code of Federal Regulations,<br>Title 47: Telecommunication<br>Part 15: Radio Frequency Devices                                                                             | 2013-10 |
| [2] | ANSI C63.4-2003    | American National Standard for<br>Methods of Measurement of RadioNoise Emissions from<br>Low-Voltage Electrical and Electronic Equipment in the<br>Range of 9 kHz to 40 GHz | 2004-01 |
| [3] | ANSI C63.4-2009    | American National Standard for<br>Methods of Measurement of RadioNoise Emissions from<br>Low-Voltage Electrical and Electronic Equipment in the<br>Range of 9 kHz to 40 GHz | 2009-09 |

### 2.2 Glossary

|       |                                                                                                                            |
|-------|----------------------------------------------------------------------------------------------------------------------------|
| AC    | Alternating Current                                                                                                        |
| AMN   | Artificial Mains Network                                                                                                   |
| ANSI  | American National Standards Institute                                                                                      |
| AV    | Average Detector                                                                                                           |
| CFR   | Code of Federal Regulations                                                                                                |
| CISPR | Comité International Spécial des Perturbations Radioélectriques (Special International<br>Committee on Radio Interference) |
| DC    | Direct Current                                                                                                             |
| EMC   | Electromagnetic Compatibility                                                                                              |
| EUT   | Equipment Under Test                                                                                                       |
| FCC   | Federal Communication Commission                                                                                           |
| GUM   | Guide to the Expression of Uncertainty in Measurement                                                                      |
| HW    | Hardware                                                                                                                   |
| IEC   | International Electrotechnical Commission                                                                                  |
| ISO   | International Organization for Standardization                                                                             |
| LISN  | Line Impedance Stabilization Network                                                                                       |
| POE   | Power Over Ethernet                                                                                                        |
| QP    | Quasi Peak Detector                                                                                                        |

The test report shall not be reproduced except in full without the written approval of the testing laboratory

### 3 General Information

#### 3.1 Identification of Client

Tiptel.com GmbH Business Solutions  
Halskestraße 1  
40880 Ratingen  
Anna Gäng

#### 3.2 Test Laboratory

SGS Germany GmbH  
Hofmannstraße 50  
81379 München

#### 3.3 Time Schedule

| Test No.:      | 1            | 2            |
|----------------|--------------|--------------|
| Start of Test: | Mai 26, 2014 | Oct 30, 2013 |
| End of Test:   | Mai 26, 2014 | Nov 29, 2013 |

#### 3.4 Participants

| Name                                         | Function           |
|----------------------------------------------|--------------------|
| Afrim Peci (SGS; EMC department)             | Accredited testing |
| Daniel Tomruk (SGS; EMC department)          | Testing            |
| André Stéphane Nakpane (SGS; EMC department) | Testing Editor     |

The test report shall not be reproduced except in full without the written approval of the testing laboratory

## 4 Equipment Under Test

The tested equipment is representative for serial production.

### 4.1 Description of EUT

**Test item description ..:** Premium IP-Phone TIPTTEL 3110  
**Manufacturer / Importer .:** Tiptel.com GmbH  
**Model/Type .....** Premium IP-Phone TIPTTEL 3110  
 with Extension Module TIPTTEL KM 27  
**Number of tested samples** 1 TIPTTEL 3110 combined with 3 x TIPTTEL KM27  
**Serial Number(s) .....** 54831087959; 54831087958 (TIPTTEL 3110 x 2)  
 001618; 001621; 001653 (KM 27 x 3)  
**Ratings .....** POE IEEE-802.3af Class 0 (48 VDC / 250 mA) or  
 adapter 5 V / 2 A DC

#### 4.1.1 Test Configuration

If not stated otherwise, the following test configurations were used to perform all measurements (see figures below).


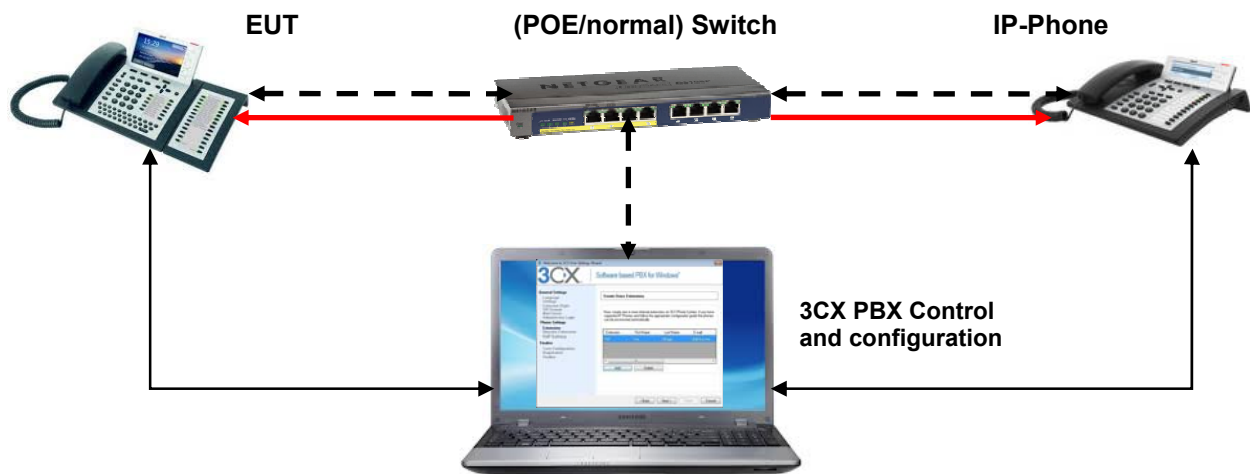


Figure 4-1: Test configuration with EUT powered over Ethernet (operation mode 1)

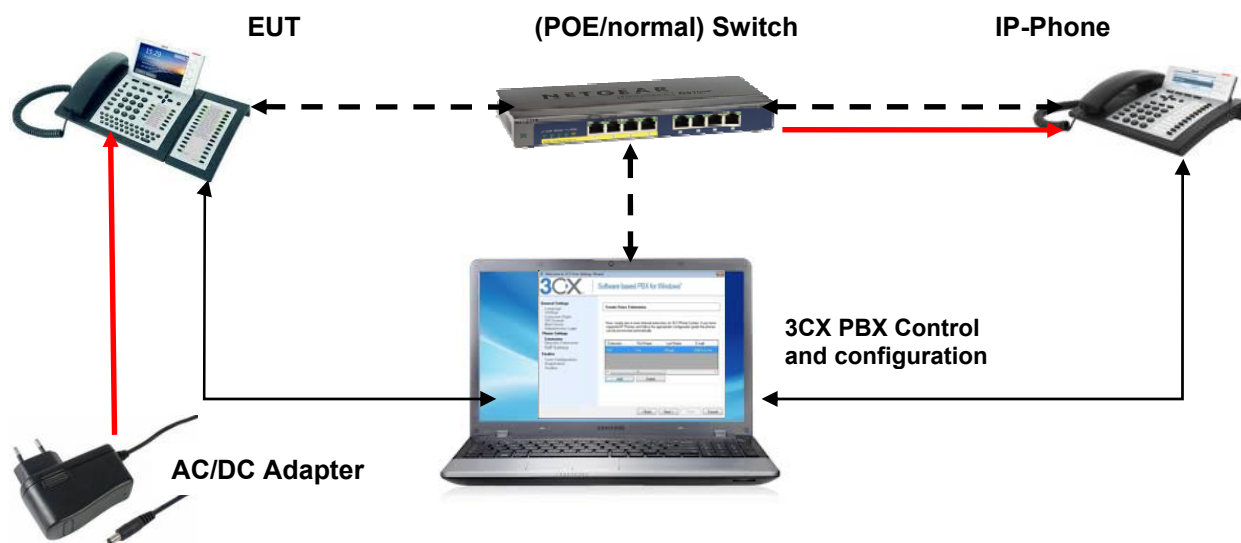

**Figure 4-2: Test configuration with EUT powered by AC/DC adapter (Operation mode 2)**

In the operation mode 1, the POE Switch provides ethernet connection (dashed lines) and power supply (red line) to the 2 peers IP-Phones, while in the operation mode 2 the EUT was powered by an AC/DC adapter. The IP-Phones were configured and controlled (thin black line) using the laptop-based simulation software 3CX Phone System for Windows which served as PBX system simultaneously. All calls from or to the EUT were directed through the PBX. During all tests a full communication were running between the two phones to simulate normal user operation.

#### 4.1.2 Operational conditions

☐ Normal operation

☒ Other operation:

Operation mode 1 .....: POE IECC-802.3af Class 0 (48 VDC / 250 mA)

Operation mode 2 .....: adapter 5 V / 2 A DC

During all tests, a connection was established between the Equipment under test located inside the Semi-Anechoic chamber and another phone outside of the chamber using Ethernet switches with Power over Ethernet capability and the laptop-based simulation software 3CX Phone System for Windows.

During the measurements, the Premium IP-Phone was operated with the maximum configuration of 3 extension key modules KM 27; all LEDs illuminated.

## 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 20 - 26 °C

Relative humidity: 30 - 60 %

## 4.3 Compliance Criteria

The EUT must fulfil the requirements (described in the specifications mentioned in chapter 2.1, Specifications) for the selected test cases.

## 5 General Description of Tests

### 5.1 Test Facility

The EMC-tests are carried out in the EMC-Lab of SGS CTS Technik in Munich, Hofmannstraße 50, 81379 München, Germany.

| Chamber                | 1                                                                                                                                                                                                                                                                                                                      | 2                                                                                                                                                                                                                                                                                                                     | 3                                                                                                                                                                                                                                                                                                                     | 4 / 5                 | 6                                                        |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------|
| Dimensions (net)       | 17.7 * 10.8 * 6.8m                                                                                                                                                                                                                                                                                                     | 9.6 * 8.5 * 5.3m                                                                                                                                                                                                                                                                                                      | 7.4 * 6.6 * 5.2m                                                                                                                                                                                                                                                                                                      | 4.1 * 3.5 * 3.5m      | 6.4 * 4.3 * 4.3m                                         |
| Max. Door Exit (w x h) | 2.9 * 3.86m                                                                                                                                                                                                                                                                                                            | 3.9 * 4.0m                                                                                                                                                                                                                                                                                                            | 2.0 * 2.7m                                                                                                                                                                                                                                                                                                            | 0.9 * 2.25m           | 1.8 * 3.0m                                               |
| Shielding material     | Sheet steel (Thickness: 1.5mm on floor, 1.0mm on walls and ceiling)                                                                                                                                                                                                                                                    | Sheet steel                                                                                                                                                                                                                                                                                                           | Sheet steel                                                                                                                                                                                                                                                                                                           | Sheet steel           | Sheet steel                                              |
| Absorbers              | Hybrid absorbers on walls and ceiling (TDK), length 1m                                                                                                                                                                                                                                                                 | Hybrid absorbers on walls and ceiling (E+C), length 0.5m                                                                                                                                                                                                                                                              | Hybrid absorbers on walls and ceiling (E+C), length 0.3m                                                                                                                                                                                                                                                              | Without absorbers     | Without absorbers                                        |
| Floor                  | Metallic ground plane floor load: 12 t/m <sup>2</sup>                                                                                                                                                                                                                                                                  | Metallic ground plane floor load: 1.5 t/m <sup>2</sup>                                                                                                                                                                                                                                                                | Metallic ground plane floor load: 1 t/m <sup>2</sup>                                                                                                                                                                                                                                                                  | Metallic ground plane | Metallic ground plane                                    |
| Turntable              | Ø 4m / 6t                                                                                                                                                                                                                                                                                                              | Ø 3.2m / 1.5t                                                                                                                                                                                                                                                                                                         | Ø 2.0m / 1t                                                                                                                                                                                                                                                                                                           |                       |                                                          |
| Listings               | FCC-listed until Dec. 2014, Reg. No.: 90932<br><br>Industry Canada listed until June 2015<br>Reg. No. 9058A-1                                                                                                                                                                                                          | FCC-listed until Dec. 2014, Reg. No.: 97242<br><br>Industry Canada listed until June 2015<br>Reg. No. 9058A-2<br><br>VCCI-listed until Oct. 2016, Reg. No. R-2623, G-266                                                                                                                                              | FCC-listed until Dec. 2014, Reg. No.: 299569<br><br>Industry Canada listed until June 2015<br>Reg. No. 9058A-3                                                                                                                                                                                                        |                       | VCCI-listed until Oct. 2016, Reg. No. C-2866 & No. T-326 |
| Specials               | <b>Emission:</b><br><b>30 – 1000 MHz (d = 10 m)</b><br>- NSA acc. to:<br>• EN 55022 / 2010<br>• CISPR 16-1-4 / 2008<br>• ANSI C63.4 / 2003<br><br><b>1 – 18 GHz (d = 3 m)</b><br>- Site VSWR 1 – 18GHz acc. to CISPR 16-1-4 / 2008<br><br><b>Immunity:</b><br>Field uniformity<br>27 – 3000 MHz acc. EN 61000-4-3:2006 | <b>Emission:</b><br><b>30 – 1000 MHz (d = 3 m)</b><br>- NSA acc. to:<br>• EN 55022 / 2010<br>• CISPR 16-1-4 / 2008<br>• ANSI C63.4 / 2003<br><br><b>1 – 18 GHz (d = 3 m)</b><br>- Site VSWR 1 – 18GHz acc. to CISPR 16-1-4 / 2008<br><br><b>Immunity:</b><br>Field uniformity<br>80 – 3000 MHz acc. EN 61000-4-3:2006 | <b>Emission:</b><br><b>30 – 1000 MHz (d = 3 m)</b><br>- NSA acc. to:<br>• EN 55022 / 2010<br>• CISPR 16-1-4 / 2008<br>• ANSI C63.4 / 2003<br><br><b>1 – 18 GHz (d = 3 m)</b><br>- Site VSWR 1 – 18GHz acc. to CISPR 16-1-4 / 2008<br><br><b>Immunity:</b><br>Field uniformity<br>80 – 3000 MHz acc. EN 61000-4-3:2006 |                       |                                                          |

The test report shall not be reproduced except in full without the written approval of the testing laboratory

### 5.2 Calibration of the Test Equipment

All relevant test equipment has a valid calibration. Additionally the used signal analyzers have a built-in self-calibration procedure. This calibration procedure was activated prior to the measurements so that the analyzer is deemed to be accurate. High quality cables were used to connect the measurement equipment. The actual loss of the attenuators and the cables was measured with a high precision network analyzer and taken into account for all measurements.

### 5.3 Measurement Uncertainty

As far as the underlying standards include requirements concerning the uncertainty of measuring instruments or measuring methods, they are met.

The expanded measurement uncertainty of the measuring chain was calculated for all tests according to the "ISO Guide to the expression of uncertainty in measurement (GUM)". The results are documented in an "internal controlled document" at "SGS Germany GmbH, CTS Technik München" archives.

The measuring accuracy for all measuring devices is given in their technical description. The measuring instruments, including any accessories, are calibrated respectively verified to ensure the necessary accuracy. Depending on the kind of measuring equipment it is checked within regular intervals or directly before the measurement is performed. Adjustments are made and correction factors applied to measured data in accordance with the specifications of the specific instrument.

The expanded measurement instrumentation uncertainty of our Test Laboratory meets the requirements of IEC CISPR 16-4-2 (2003-11) "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements" for all listed Tests.

### 5.4 Modifications during the test

None

### 5.5 Deviations from Standard

None

## 6 Test Results

### 6.1 Test No. 1: Conducted Emissions (§ 15.107)

#### 6.1.1 Purpose

The AC power-line conducted emissions caused by the EUT via the power lines were measured pursuant to [3] ANSI 63.4 Clause 13.3 in the frequency range from 150kHz to 30MHz.

#### 6.1.2 Limits

Following conducted emission limits are specified by [1] § 15.107:

| Frequency of Emission [MHz] | Conducted Limit [dBµV] |          |
|-----------------------------|------------------------|----------|
|                             | Quasi-peak             | Average  |
| 0.15-0.5                    | 66 to 56               | 56 to 46 |
| 0.5-5.0                     | 56                     | 46       |
| 5.0-30.0                    | 60                     | 50       |

Table 6-1: Limits – Conducted Emissions

#### 6.1.3 EUT Operating Condition

The standard setup procedure as described in section 5 of this report was used. The EUT was additionally operated with an AC/DC network adapter with nominal voltage of 120V AC/60Hz.

#### 6.1.4 Test Configuration

The power supply used for the conducted emission test had following specifications:

**Original designation**

Manufacturer: PHIHONG.

Model No.: PSAC10R-050

AC Input: AC 100-240 V, 0.3 A, 50-60Hz; 23 – 32 VA

DC Output: DC 5 V, 2.0A

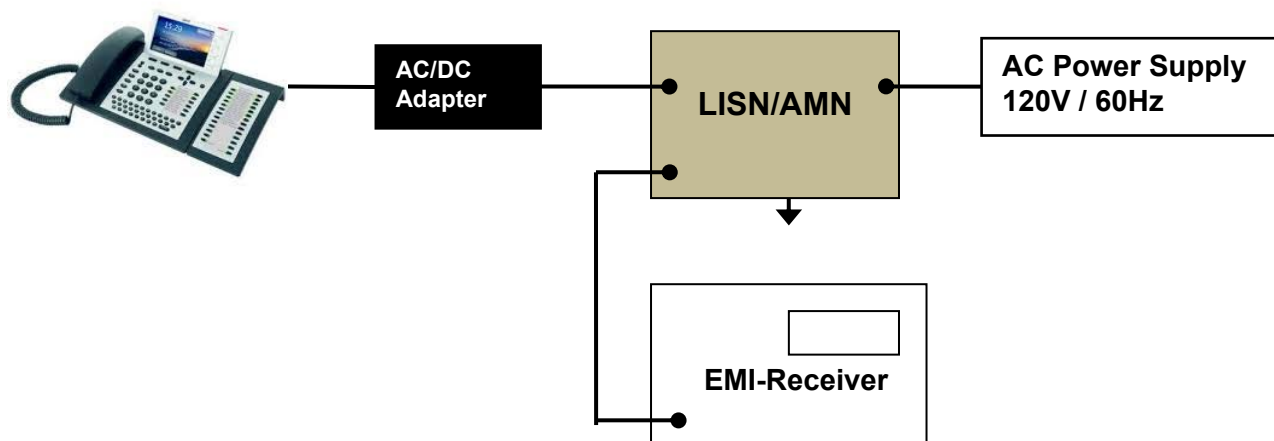


Figure 6-1: Test Configuration – Conducted Emissions (150 kHz – 30 MHz)

Photographs of the EUT setup for conducted emission measurement are shown on page 27 of this report.

#### 6.1.5 Test Procedure and Results

The conducted emission on AC power leads is measured according to FCC 47 CFR Part 15 with an AMN and a receiver with peak and average detector. The voltage is measured separately on each power lead (Phase and Neutral). Only if the measured peak value is near or above the quasi-peak limit the detector function is changed to quasi-peak.

The following table shows the measured conducted emissions. Plots of the measurements are included on pages 23 of this report.

#### Final result (QuasiPeak):

| Frequency (MHz)          | QuasiPeak (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Bandwidth (kHz) | Line | PE                | Corr. (dB) |
|--------------------------|------------------|--------------|-------------|------------|-----------------|------|-------------------|------------|
| 0.154000                 | 48.15            | 65.78        | 17.63       | 1000.0     | 9.000           | N    | GND               | 10.1       |
| 10.498000                | 46.53            | 60.00        | 13.47       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 10.570000                | 47.46            | 60.00        | 12.54       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 10.594000                | 48.02            | 60.00        | 11.98       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 10.622000                | 47.90            | 60.00        | 12.10       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 10.638000                | 48.16            | 60.00        | 11.84       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 10.650000                | 47.74            | 60.00        | 12.26       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 10.706000                | 46.93            | 60.00        | 13.07       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 11.218000                | 46.49            | 60.00        | 13.51       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 11.282000                | 46.55            | 60.00        | 13.45       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| Measurement Uncertainty: |                  |              |             |            |                 |      | +2.2 dB / -2.5 dB |            |

Table 6-2: Results – Conducted Emissions – Quasi Peak

### Final result (Average):

| Frequency (MHz)          | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Bandwidth (kHz) | Line | PE                | Corr. (dB) |
|--------------------------|----------------|--------------|-------------|------------|-----------------|------|-------------------|------------|
| 10.594000                | 36.18          | 50.00        | 13.82       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 10.610000                | 34.25          | 50.00        | 15.75       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 10.638000                | 34.49          | 50.00        | 15.51       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 10.662000                | 36.48          | 50.00        | 13.52       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 10.690000                | 36.46          | 50.00        | 13.54       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 10.706000                | 34.66          | 50.00        | 15.34       | 1000.0     | 9.000           | L1   | GND               | 10.5       |
| 10.730000                | 36.14          | 50.00        | 13.86       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 11.266000                | 40.19          | 50.00        | 9.81        | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 11.282000                | 39.87          | 50.00        | 10.13       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| 11.334000                | 39.57          | 50.00        | 10.43       | 1000.0     | 9.000           | N    | GND               | 10.5       |
| Measurement Uncertainty: |                |              |             |            |                 |      | +2.2 dB / -2.5 dB |            |

Table 6-3: Results – Conducted Emissions – Average

The measured emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

### Test Equipment (see chapter 7.1):

1, 2, 3, 4, 5, 6, 7, 8, 9

## 6.2 Test No. 2: Radiated Emissions (§ 15.109a)

### 6.2.1 Purpose

The radiated emissions of the EUT were measured pursuant to [3] ANSI 63.4 Clause 13.4. The measurement was performed to verify that emissions radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements are attenuated below the specified limits.

### 6.2.2 Limits

According to § 15.109a, the radiated emissions of an intentional radiator must not exceed following field strength levels:

| Frequency of Emission [MHz] | Field strength [ $\mu\text{V/m}$ ] | Meas. Distance [m] |
|-----------------------------|------------------------------------|--------------------|
| 30–88                       | 100                                | 3                  |
| 88–216                      | 150                                | 3                  |
| 216–960                     | 200                                | 3                  |
| Above 960                   | 500                                | 3                  |

Table 6-4: Limits – Radiated Emissions

### 6.2.3 EUT Operating Condition

The standard setup procedure as described in section 5 of this report was used.

### 6.2.4 Test Configuration

The measurements were performed in an anechoic chamber. The radiated test site complies with the site attenuation requirements listed in ANSI C63.4 and is listed with the FCC.

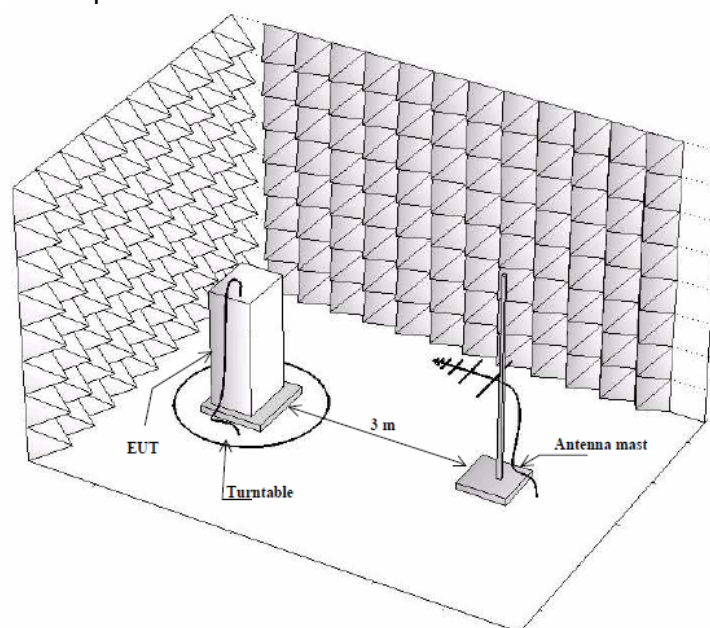


Figure 6-2: Test Configuration – Radiated Emissions

Photographs of the EUT in the anechoic chamber are shown on page 28 of this report.

## 6.2.5 Test Procedure and Results

### 6.2.5.1 Radiated Emissions – 30 MHz to 1 GHz

| Phenomena                             | Reference                     | Test Specification             | Criteria | Verdict <sup>1</sup> |
|---------------------------------------|-------------------------------|--------------------------------|----------|----------------------|
| Radio Disturbance Elec-<br>tric Field | FCC 47 CFR Part 15<br>§15.109 | 30 MHz - 1 GHz<br>Distance 3 m | Class B  | P                    |

#### **Test procedure:**

Radiated measurements are performed in a semi-anechoic chamber meeting the normalized site attenuation of ANSI C63.4 and listed with the FCC. The applicable frequency spectrum is scanned with a calibrated RF measuring system using an appropriate broadband antenna and an EMI-receiver/spectrum analyzer and compared to the required limits. The measuring instrument performs the field strength calculations automatically. The measuring software provides resident AF and CF figures for individual antennas and cables. The receiver/analyzer is set to "peak" mode from 30 MHz to 1 GHz. On any emission of concern, the receiver is set to quasi-peak mode.

"Maximization" of each suspect frequency is accomplished by a combination of a 360° azimuth search using a turntable and varying the antenna to ground plane height from 1 m to 4 m. Also, both the vertical and horizontal polarization is scanned in the required frequency range per ANSI C63.4.

Maximization of emission results starts at 0° of the turn table with antenna in horizontal polarization set to a height of 1 m. While the turntable slowly moves to 360°, the spectrum analyzer is sweeping from 30 to 1000 MHz and maximum data is recorded. Antenna is set to 2 m and turntable slowly moves back to 0° while the spectrum analyzer is sweeping again. This is repeated until the antenna height of 4 m is reached.

The antenna polarization is set to vertical and the procedure described above is repeated.

For each frequency the measuring software stores the maximum level as well as the corresponding settings of turntable and antenna. An azimuth resolution of about 3° is realized using this method.

At least the six highest frequencies are selected automatically by the software for performing the final measurements.

At each of these frequencies the turntable as well as the antenna is set to the corresponding settings. Then the antenna is slowly moved 50 cm down/up related to initial position while the receiver is measuring at this frequency. The highest emission level and the corresponding height are recorded. At this final position, the measurement is performed with quasi-peak detector.

<sup>1</sup> P (Pass): test object meets the requirement; F (Fail): test object does not meet the requirement;  
N/A: test case does not apply to the test object; NR: test case is not requested by the client.

### 6.2.5.1.1 Radiated Emissions – 30 MHz to 1 GHz; Operation mode 1 with POE switch

The following table shows the measured radiated emissions. Plots of the measurements are included on pages 24 of this report.

#### Final result (QuasiPeak):

| Frequency (MHz)          | QuasiPeak (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Height (cm) | Pol               | Azimuth (deg) | Type |
|--------------------------|------------------|--------------|-------------|------------|-------------|-------------------|---------------|------|
| 36.827000                | 35.64            | 40.00        | 4.36        | 1000.0     | 100.0       | V                 | 337.0         | SB   |
| 375.029000               | 41.71            | 46.00        | 4.29        | 1000.0     | 100.0       | H                 | 146.0         | SB   |
| 299.999000               | 42.72            | 46.00        | 3.28        | 1000.0     | 100.0       | H                 | 359.0         | SB   |
| 500.014000               | 39.68            | 46.00        | 6.32        | 1000.0     | 166.0       | H                 | 184.0         | SB   |
| 875.015000               | 39.72            | 46.00        | 6.28        | 1000.0     | 100.0       | H                 | 0.0           | SB   |
| 70.449000                | 27.30            | 40.00        | 12.70       | 1000.0     | 134.0       | V                 | 247.0         | BB   |
| 45.751000                | 27.39            | 40.00        | 12.61       | 1000.0     | 100.0       | v                 | 63.0          | BB   |
| Measurement Uncertainty: |                  |              |             |            |             | +3.1 dB / -3.9 dB |               |      |

Table 6-5: Results – Radiated Emissions 30 MHz to 1 GHz – Quasi Peak

#### Final result (Average):

| Frequency (MHz)          | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Height (cm) | Pol               | Azimuth (deg) | Type |
|--------------------------|----------------|--------------|-------------|------------|-------------|-------------------|---------------|------|
| 36.827000                | 30.34          | 40.00        | 9.66        | 1000.0     | 100.0       | V                 | 337.0         | SB   |
| 375.029000               | 39.79          | 46.00        | 6.21        | 1000.0     | 100.0       | H                 | 146.0         | SB   |
| 299.999000               | 41.31          | 46.00        | 4.69        | 1000.0     | 100.0       | H                 | 359.0         | SB   |
| 500.014000               | 35.60          | 46.00        | 10.40       | 1000.0     | 166.0       | H                 | 184.0         | SB   |
| 875.015000               | 37.62          | 46.00        | 8.38        | 1000.0     | 100.0       | H                 | 0.0           | SB   |
| 70.449000                | 20.39          | 40.00        | 19.61       | 1000.0     | 134.0       | V                 | 247.0         | BB   |
| 45.751000                | 20.57          | 40.00        | 19.43       | 1000.0     | 100.0       | v                 | 63.0          | BB   |
| Measurement Uncertainty: |                |              |             |            |             | +3.1 dB / -3.9 dB |               |      |

Table 6-6: Results – Radiated Emissions 30 MHz to 1 GHz – Average

The measured emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

#### Test Equipment (see chapter 7.1):

10, 11, 12, 13, 14, 15, 16, 17, 18

### 6.2.5.1.2 Radiated Emissions – 30 MHz to 1 GHz; Operation mode 2 with AC/DC adapter

The following table shows the measured radiated emissions. Plots of the measurements are included on pages 24 of this report.

#### Final result (QuasiPeak):

| Frequency (MHz)          | QuasiPeak (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Height (cm) | Pol               | Azimuth (deg) | Type |
|--------------------------|------------------|--------------|-------------|------------|-------------|-------------------|---------------|------|
| 375.029000               | 44.66            | 46.00        | 1.34        | 1000.0     | 100.0       | H                 | 144.0         | SB   |
| 299.999000               | 43.06            | 46.00        | 2.94        | 1000.0     | 100.0       | H                 | 4.0           | SB   |
| 500.014000               | 41.63            | 46.00        | 4.37        | 1000.0     | 166.0       | H                 | 154.0         | SB   |
| 875.015000               | 39.42            | 46.00        | 6.58        | 1000.0     | 100.0       | H                 | 0.0           | SB   |
| 39.652000                | 27.74            | 40.00        | 12.26       | 1000.0     | 100.0       | V                 | 154.0         | BB   |
| 625.047000               | 34.58            | 46.00        | 11.42       | 1000.0     | 100.0       | V                 | 336.0         | SB   |
| 69.624000                | 27.13            | 40.00        | 12.87       | 1000.0     | 150.0       | V                 | 328.0         | BB   |
| Measurement Uncertainty: |                  |              |             |            |             | +3.1 dB / -3.9 dB |               |      |

Table 6-7: Results – Radiated Emissions 30 MHz to 1 GHz – Quasi Peak

#### Final result (Average):

| Frequency (MHz)          | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time | Height (cm) | Pol               | Azimuth (deg) | Type |
|--------------------------|----------------|--------------|-------------|------------|-------------|-------------------|---------------|------|
| 375.029000               | 42.78          | 46.00        | 3.22        | 1000.0     | 100.0       | H                 | 144.0         | SB   |
| 299.999000               | 41.61          | 46.00        | 4.39        | 1000.0     | 100.0       | H                 | 4.0           | SB   |
| 500.014000               | 37.85          | 46.00        | 8.15        | 1000.0     | 166.0       | H                 | 154.0         | SB   |
| 875.015000               | 37.61          | 46.00        | 8.39        | 1000.0     | 100.0       | H                 | 0.0           | SB   |
| 39.652000                | 20.88          | 40.00        | 19.12       | 1000.0     | 100.0       | V                 | 154.0         | BB   |
| 625.047000               | 30.21          | 46.00        | 15.79       | 1000.0     | 100.0       | V                 | 336.0         | SB   |
| 69.624000                | 20.26          | 40.00        | 19.74       | 1000.0     | 150.0       | V                 | 328.0         | BB   |
| Measurement Uncertainty: |                |              |             |            |             | +3.1 dB / -3.9 dB |               |      |

Table 6-8: Results – Radiated Emissions 30 MHz to 1 GHz – Average

The measured emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

#### Test Equipment (see chapter 7.1):

10, 11, 12, 13, 14, 15, 16, 17, 18

### 6.2.5.2 Radiated Emissions – 1 GHz to 2 GHz

| Phenomena                             | Reference                     | Test Specification            | Criteria | Verdict <sup>2</sup> |
|---------------------------------------|-------------------------------|-------------------------------|----------|----------------------|
| Radio Disturbance Elec-<br>tric Field | FCC 47 CFR Part 15<br>§15.109 | 1 GHz - 2 GHz<br>Distance 3 m | Class B  | P                    |

#### **Test procedure:**

Radiated measurements are performed in a semi-anechoic chamber meeting the normalized site attenuation of ANSI C63.4 as well as the Site VSWR requirements of CISPR16 and listed with the FCC. The applicable frequency spectrum is scanned with a calibrated RF measuring system using an appropriate broadband antenna and an EMI-receiver/spectrum analyzer and compared to the required limits. The measuring instrument performs the field strength calculations automatically. The measuring software provides resident AF and CF figures for individual antennas and cables. The receiver/analyzer is set to "peak" mode from 1 GHz to 6 GHz. On any emission of concern, the receiver is set to average mode.

For EUTs having a size larger than the beamwidth of the antenna, appropriate countermeasures shall be taken, e.g. increasing the measuring distance or different antenna positions (lateral) to scan the complete surface of EUT.

"Maximization" of each suspect frequency is accomplished by a combination of a 360° azimuth search using a turntable and varying the antenna to ground plane height from 1 m to 4 m. Also, both the vertical and horizontal polarization is scanned in the required frequency range per ANSI C63.4.

Maximization of emission results starts at 0° of the turn table with antenna in horizontal polarization set to a height of 1 m. While the turntable slowly moves to 360°, the spectrum analyzer is sweeping from 1 to 2 GHz and maximum data is recorded. Antenna is set to 1.5 m and turntable slowly moves back to 0° while the spectrum analyzer is sweeping again. This is repeated until the antenna height of 4 m is reached (step: 0.5m).

The antenna polarization is set to vertical and the procedure described above is repeated.

For each frequency the measuring software stores the maximum level as well as the corresponding settings of turntable and antenna. An azimuth resolution of about 3° is realized using this method.

At least the six highest frequencies are selected automatically by the software for performing the final measurements.

At each of these frequencies the turntable as well as the antenna is set to the corresponding settings. Then the antenna is slowly moved 25 cm down/up related to initial position while the receiver is measuring at this frequency. The highest emission level and the corresponding height are recorded. At this final position, the measurement is performed with average detector.

<sup>2</sup> P (Pass): test object meets the requirement; F (Fail): test object does not meet the requirement;

N/A: test case does not apply to the test object; NR: test case is not requested by the client. FCC requires radiated emission testing up to the 5<sup>th</sup> harmonic of the highest clock rate of the tested system.

### 6.2.5.2.1 Radiated Emissions – 1 GHz to 2 GHz; Operation mode 1 with POE switch

The following table shows the measured radiated emissions. Plots of the measurements are included on pages 25 of this report.

#### Final result (MaxPeak)

| Frequency (MHz)          | MaxPeak (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg)     | Corr. (dB) |
|--------------------------|----------------|--------------|-------------|-----------------|-----------------|-------------|-----|-------------------|------------|
| 1034.3333                | 34.0           | 54.0         | 20.0        | 1000.0          | 1000.0          | 100.0       | H   | 113.0             | -7.8       |
| 1049.5666                | 40.3           | 54.0         | 13.7        | 1000.0          | 1000.0          | 107.0       | V   | 322.0             | -7.8       |
| 1049.9000                | 39.8           | 54.0         | 14.2        | 1000.0          | 1000.0          | 141.0       | H   | 111.0             | -7.8       |
| 1050.2333                | 42.9           | 54.0         | 11.1        | 1000.0          | 1000.0          | 137.0       | H   | 141.0             | -7.8       |
| 1057.0333                | 37.4           | 54.0         | 16.6        | 1000.0          | 1000.0          | 100.0       | V   | 306.0             | -7.7       |
| 1124.8333                | 38.5           | 54.0         | 15.5        | 1000.0          | 1000.0          | 100.0       | V   | 5.0               | -7.1       |
| 1350.2000                | 41.7           | 54.0         | 12.3        | 1000.0          | 1000.0          | 132.0       | V   | 80.0              | -5.2       |
| 1350.7000                | 37.0           | 54.0         | 17.0        | 1000.0          | 1000.0          | 100.0       | H   | 27.0              | -5.2       |
| 1374.9000                | 38.1           | 54.0         | 15.9        | 1000.0          | 1000.0          | 100.0       | V   | 169.0             | -4.8       |
| 1874.8333                | 38.9           | 54.0         | 15.1        | 1000.0          | 1000.0          | 100.0       | H   | 336.0             | -1.9       |
| Measurement Uncertainty: |                |              |             |                 |                 |             |     | +4.4 dB / -5.8 dB |            |

Table 6-9: Results – Radiated Emissions 1 GHz to 2 GHz – Max Peak

#### Final result (Average):

| Frequency (MHz)          | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg)     | Corr. (dB) |
|--------------------------|----------------|--------------|-------------|-----------------|-----------------|-------------|-----|-------------------|------------|
| 1000.0000                | 30.7           | 54.0         | 23.3        | 1000.0          | 1000.0          | 100.0       | H   | 119.0             | -8.4       |
| 1050.1333                | 22.4           | 54.0         | 31.6        | 1000.0          | 1000.0          | 137.0       | H   | 146.0             | -7.8       |
| 1124.8666                | 33.9           | 54.0         | 20.1        | 1000.0          | 1000.0          | 100.0       | V   | 5.0               | -7.1       |
| 1374.9000                | 32.5           | 54.0         | 21.5        | 1000.0          | 1000.0          | 100.0       | V   | 169.0             | -4.8       |
| 1500.2000                | 26.2           | 54.0         | 27.8        | 1000.0          | 1000.0          | 100.0       | H   | 65.0              | -4.0       |
| 1625.1666                | 31.1           | 54.0         | 22.9        | 1000.0          | 1000.0          | 100.0       | H   | 97.0              | -3.0       |
| 1750.1333                | 26.8           | 54.0         | 27.2        | 1000.0          | 1000.0          | 100.0       | V   | 89.0              | -2.3       |
| 1800.1666                | 32.0           | 54.0         | 22.0        | 1000.0          | 1000.0          | 100.0       | V   | 89.0              | -2.1       |
| 1875.2333                | 31.8           | 54.0         | 22.2        | 1000.0          | 1000.0          | 100.0       | H   | 336.0             | -1.9       |
| 1950.2000                | 24.7           | 54.0         | 29.3        | 1000.0          | 1000.0          | 100.0       | H   | 43.0              | -1.1       |
| Measurement Uncertainty: |                |              |             |                 |                 |             |     | +4.4 dB / -5.8 dB |            |

Table 6-10: Results – Radiated Emissions 1 GHz to 2 GHz – Average

The measured emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

Test Equipment (see chapter 7.1):

10, 11, 12, 13, 14, 15, 16, 17, 19

### 6.2.5.2.2 Radiated Emissions – 1 GHz to 2 GHz; Operation mode 1 with AC/DC Adapter

The following table shows the measured radiated emissions. Plots of the measurements are included on pages 26 of this report.

#### Final result (MaxPeak)

| Frequency (MHz)          | MaxPeak (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg)     | Corr (dB) |
|--------------------------|----------------|--------------|-------------|-----------------|-----------------|-------------|-----|-------------------|-----------|
| 1049.5333                | 40.5           | 54.0         | 13.5        | 1000.0          | 1000.0          | 100.0       | H   | 134.0             | -7.8      |
| 1050.3000                | 42.1           | 54.0         | 11.9        | 1000.0          | 1000.0          | 100.0       | H   | 145.0             | -7.8      |
| 1124.8666                | 39.1           | 54.0         | 14.9        | 1000.0          | 1000.0          | 100.0       | V   | 21.0              | -7.1      |
| 1350.0333                | 36.4           | 54.0         | 17.6        | 1000.0          | 1000.0          | 118.0       | V   | 90.0              | -5.2      |
| 1350.4333                | 39.9           | 54.0         | 14.1        | 1000.0          | 1000.0          | 125.0       | V   | 70.0              | -5.2      |
| 1374.9000                | 38.1           | 54.0         | 15.9        | 1000.0          | 1000.0          | 100.0       | V   | 158.0             | -4.8      |
| 1625.0000                | 39.6           | 54.0         | 14.4        | 1000.0          | 1000.0          | 125.0       | H   | 80.0              | -3.0      |
| 1799.8333                | 39.2           | 54.0         | 14.8        | 1000.0          | 1000.0          | 100.0       | V   | 90.0              | -2.1      |
| 1875.0666                | 38.9           | 54.0         | 15.1        | 1000.0          | 1000.0          | 112.0       | H   | 0.0               | -1.9      |
| 1950.1000                | 37.9           | 54.0         | 16.1        | 1000.0          | 1000.0          | 100.0       | H   | 337.0             | -1.1      |
| Measurement Uncertainty: |                |              |             |                 |                 |             |     | +4.4 dB / -5.8 dB |           |

Table 6-11: Results – Radiated Emissions 1 GHz to 2 GHz – Max Peak

#### Final result (Average):

| Frequency (MHz)          | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg)     | Corr (dB) |
|--------------------------|----------------|--------------|-------------|-----------------|-----------------|-------------|-----|-------------------|-----------|
| 1000.0000                | 30.7           | 54.0         | 23.3        | 1000.0          | 1000.0          | 100.0       | H   | 124.0             | -8.4      |
| 1049.6333                | 21.5           | 54.0         | 32.5        | 1000.0          | 1000.0          | 151.0       | H   | 134.0             | -7.8      |
| 1049.7666                | 22.7           | 54.0         | 32.3        | 1000.0          | 1000.0          | 151.0       | H   | 134.0             | -7.8      |
| 1050.3333                | 22.0           | 54.0         | 32.0        | 1000.0          | 1000.0          | 151.0       | H   | 134.0             | -7.8      |
| 1124.8333                | 35.0           | 54.0         | 19.0        | 1000.0          | 1000.0          | 100.0       | V   | 21.0              | -7.1      |
| 1375.1666                | 32.6           | 54.0         | 21.4        | 1000.0          | 1000.0          | 100.0       | V   | 164.0             | -4.8      |
| 1499.8333                | 24.5           | 54.0         | 29.5        | 1000.0          | 1000.0          | 201.0       | H   | 67.0              | -4.0      |
| 1625.1000                | 33.8           | 54.0         | 20.2        | 1000.0          | 1000.0          | 125.0       | H   | 75.0              | -3.0      |
| 1800.2000                | 30.0           | 54.0         | 24.0        | 1000.0          | 1000.0          | 100.0       | V   | 107.0             | -2.1      |
| 1875.2333                | 31.7           | 54.0         | 22.3        | 1000.0          | 1000.0          | 100.0       | H   | 0.0               | -1.9      |
| Measurement Uncertainty: |                |              |             |                 |                 |             |     | +4.4 dB / -5.8 dB |           |

Table 6-12: Results – Radiated Emissions 1 GHz to 2 GHz – Average

The measured emission levels were found to be compliant with the manufacturer's specifications and with all requirements of the FCC rules.

Test Equipment (see chapter 7.1):

10, 11, 12, 13, 14, 15, 16, 17, 19

## 7 Test Data and Screenshots

### 7.1 Part List of the Test Equipment


| No. | Equipment                                     | (Type)                             | Manufacturer                | ID. No. | (Specification)                                                                                  | Last Cal. | Next Cal. |
|-----|-----------------------------------------------|------------------------------------|-----------------------------|---------|--------------------------------------------------------------------------------------------------|-----------|-----------|
| 1   | EMI receiver                                  | ESPI-3                             | R&S                         | P1325   | 9 kHz - 3 GHz, with preselector                                                                  | 2013/03   | 2015/03   |
| 2   | EMI receiver, MZ4                             | ESCS30                             | R&S                         | P0320   | 9 kHz - 2.75 GHz                                                                                 | 2014/03   | 2016/03   |
| 3   | LISN (integrated pulse limiter P0489)         | ESH3-Z5                            | R&S                         | P0439   | 2 x 10 A; 50 Ohm                                                                                 | 2014/03   | 2016/03   |
| 4   | Frequency Converter                           | 2kVA 1-phase                       | HEIDEN power GmbH           | P1546   | 2,0 kVA 1-phase; AC-input-input: 230V 50/60Hz +/- 10% 1-phase; idle approx. 0,3 A;               | cnn       | cnn       |
| 5   | multimeter, digital (MZ04)                    | METRAHIT2+                         | GMC-I Gossen-Metrawatt GmbH | P1812   | 60 mV...600V, 60mA...10A, 600Ohm...40MOhm, 0.1Hz...1kHz, -50,0 °C ...+400,0°C                    | 2013/06   | 2014/06   |
| 6   | data logger temperature/humidity              | Hygrolog-D-Set                     | rotronic messgeräte GmbH    | P1318   | 0 - 100%rF, -40 - 85°C                                                                           | 2014/05   | 2015/05   |
| 7   | Notebook Labor EMV 02                         | Think Pad T440p                    | Lenovo                      | P1556   | sound card: 20Hz - 22kHz                                                                         | cnn       | cnn       |
| 8   | Notebook, Labor EMV 04                        | Think Pad T440p                    | Lenovo                      | P1627   | sound card: 20Hz - 22kHz                                                                         | cnn       | cnn       |
| 9   | test chamber 4                                |                                    | Siemens                     | P0339   | 4.1 • 3.5 • 3.0 m; without absorbers                                                             | 2014/01   | 2015/01   |
| 10  | EMI receiver                                  | ESU40                              | R&S                         | P1327   | 20Hz - 40GHz, FFT-Scan, Preamplifier 100kHz - 40GHz, 30dB                                        | 2012/02   | 2014/02   |
| 11  | Signal Analyzer                               | FSU26                              | R&S                         | 1523    | 20 Hz - 26,5 GHz                                                                                 | 2011/07   | 2014/07   |
| 12  | DC-Block (9kHz - 18 GHz)                      |                                    | Aeroflex/Weinschel          | P1544   | 9 kHz - 18 GHz; 0.9 dB max; +50 VDC / 20W max.                                                   | 2013/03   | 2014/03   |
| 13  | preamplifier and low freq. preamplifier (MZ2) | 8447F Opt. H64                     | HP -Agilent                 | P1572   | 1: 9 kHz - 50 MHz, 28dB; 2: Achtung geänderter Messbereich: Gain: 27 dB --> F-Bereich 1-1000 MHz | 2012/04   | 2014/04   |
| 14  | Mast                                          | MA 4000                            | innco GmbH                  | P1283   | 1 - 4m, hor./vert.                                                                               | cnn       | cnn       |
| 15  | Controller                                    | CO 2000                            | innco GmbH                  | P1284   | P1523                                                                                            | cnn       | cnn       |
| 16  | test chamber 2                                |                                    | Siemens                     | P0337   | 11.0 • 10.0 • 6.0 m; 0.5 m pyramid absorbers + ferrite tiles                                     | 2013/03   | 2014/03   |
| 17  | preamplifier (MZ2)                            | KU LNA BB 202 A, Freq. 0,1 - 20GHz | Kuhne electronic            | P1590   | 0.1 - 20GHz, gain ca. 28dB                                                                       | 2013/06   | 2014/06   |
| 18  | antenna                                       | CBL6111                            | Chase                       | P0018   | 30 - 1000 MHz E                                                                                  | 2011/03   | 2014/03   |
| 19  | antenna (MZ2)                                 | HL050                              | R&S                         | P1575   | 0.85 GHz - 26.5 GHz                                                                              | 2012/10   | 2014/10   |

cal = Calibration, car = Calibration restricted use, chk = Check, chr = Check restricted use, cpu = Check prior to use, calchk = Calibration and check, ind = for indication only, cnn = Calibration not necessary

**Table 7-1: Part List of the EMC Measurement Test Equipment**

## 7.2 Spectral Plots

### 7.2.1 Test No. 1: Conducted Emissions (§ 15.107)

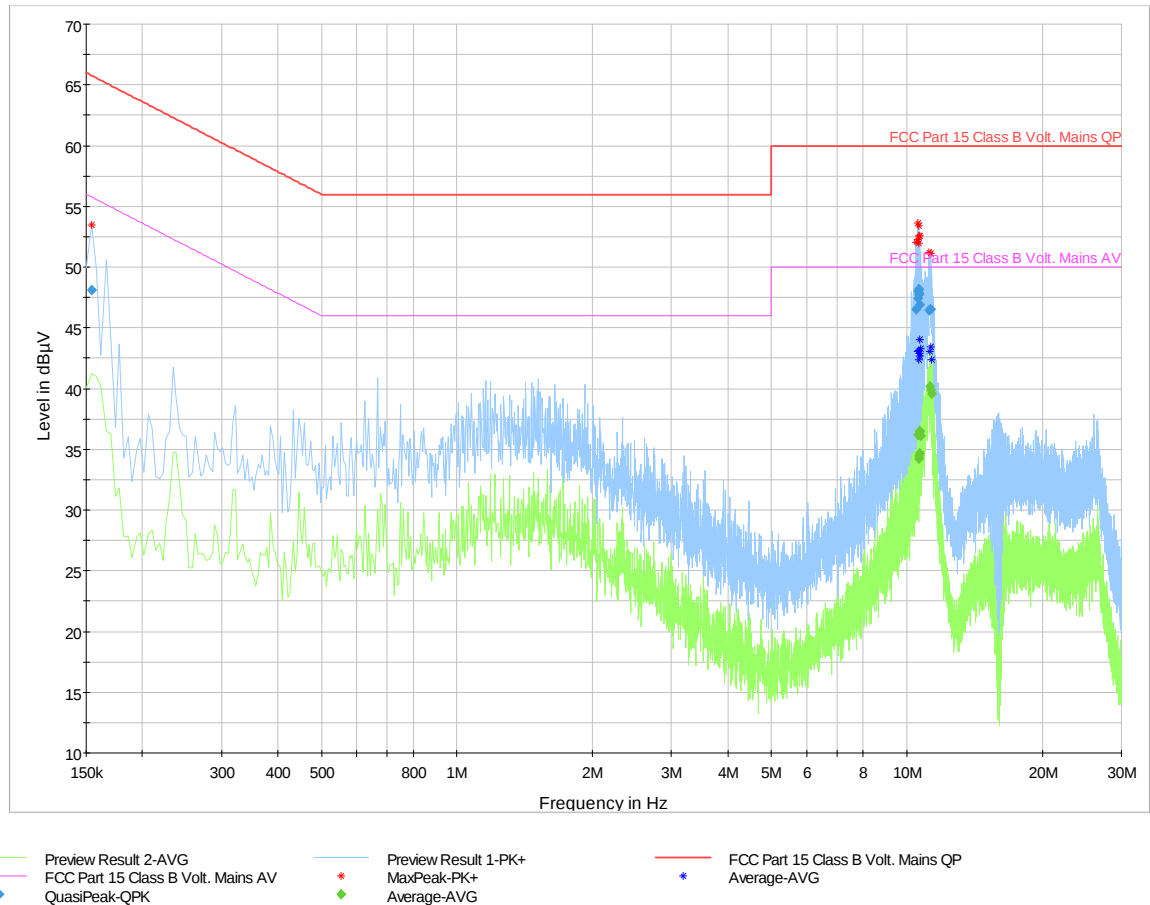

**Figure 7-1: Conducted Emissions (150 kHz – 30 MHz)**

The test report shall not be reproduced except in full without the written approval of the testing laboratory

## 7.2.2 Test No. 2: Radiated Emissions (§ 15.109a)

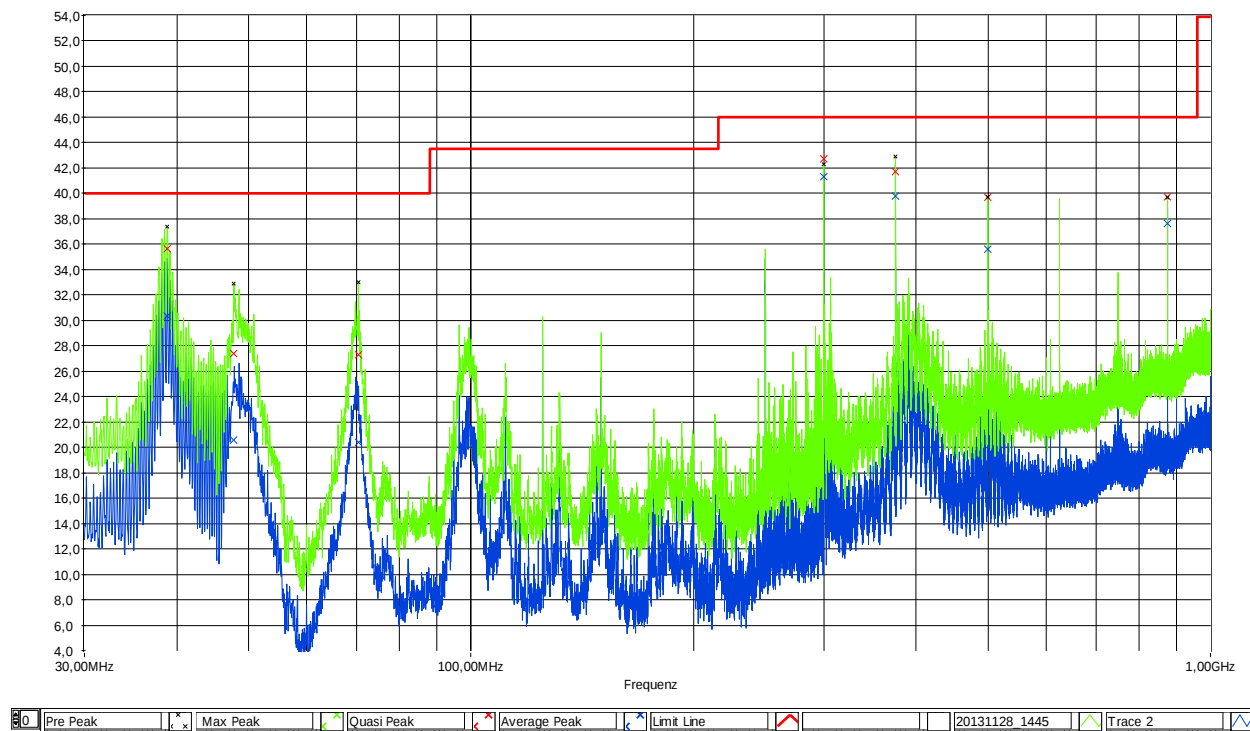


Figure 7-2: Radiated Emissions (30 MHz – 1 GHz) – Operation mode 1 with POE

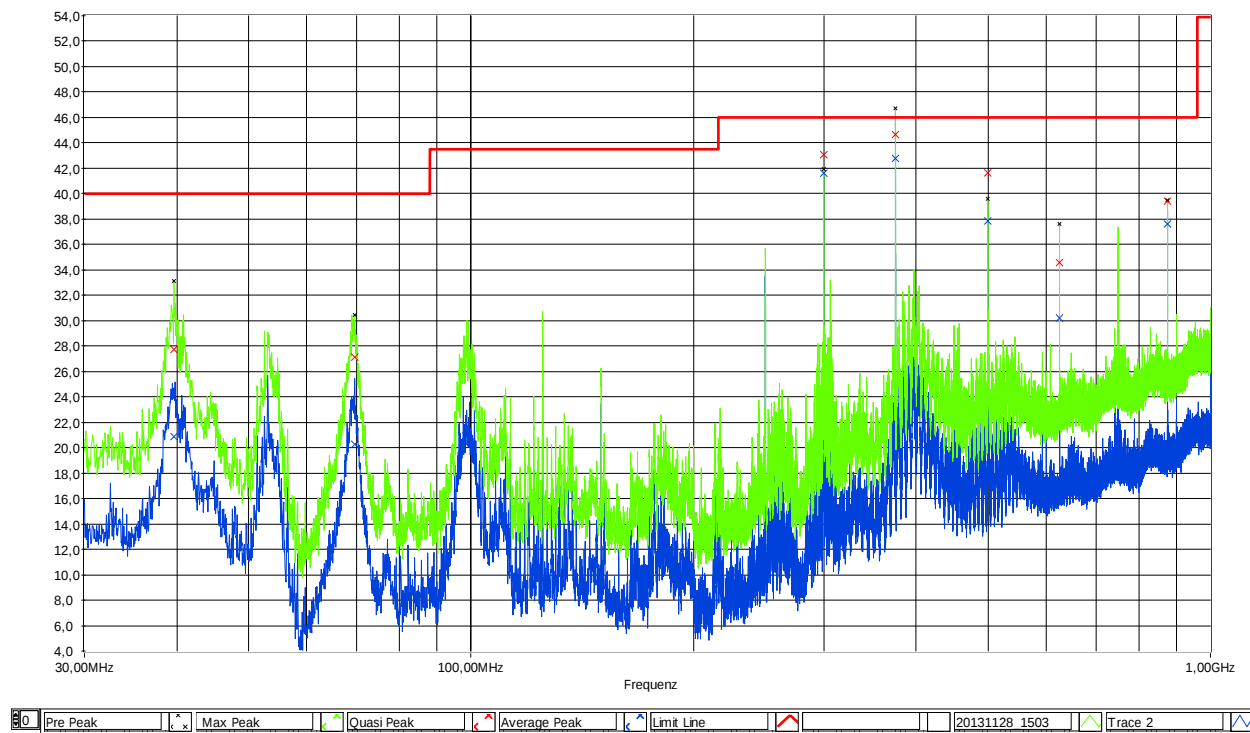


Figure 7-3: Radiated Emissions (30 MHz – 1 GHz) – Operation mode 2 with AC/DC Adapter

The test report shall not be reproduced except in full without the written approval of the testing laboratory

The test report shall not be reproduced except in full without the written approval of the testing laboratory


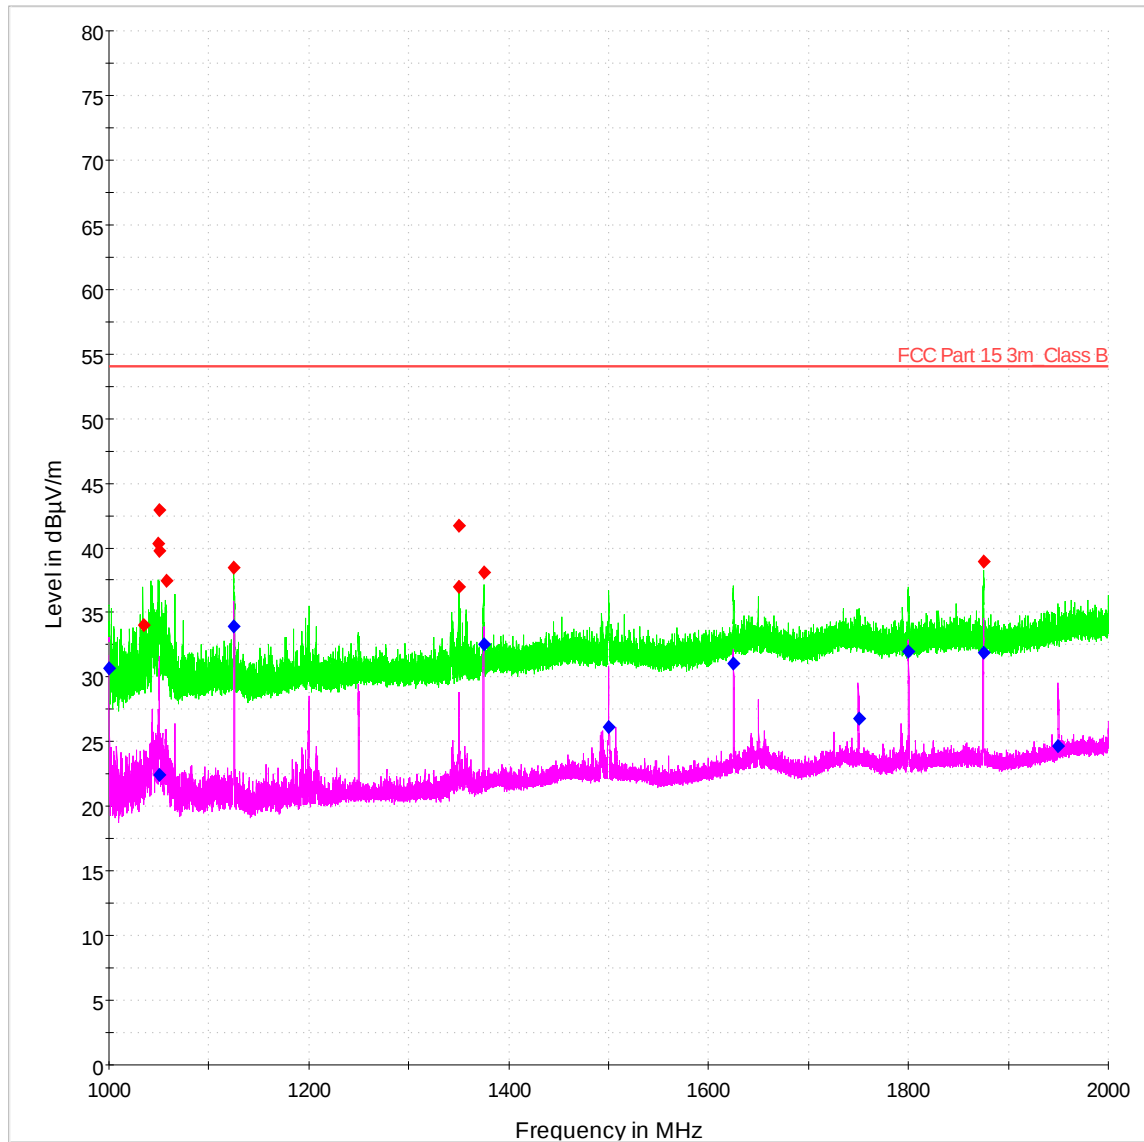


Figure 7-4: Radiated Emissions (1 GHz – 6 GHz) – Operation mode 1 with POE

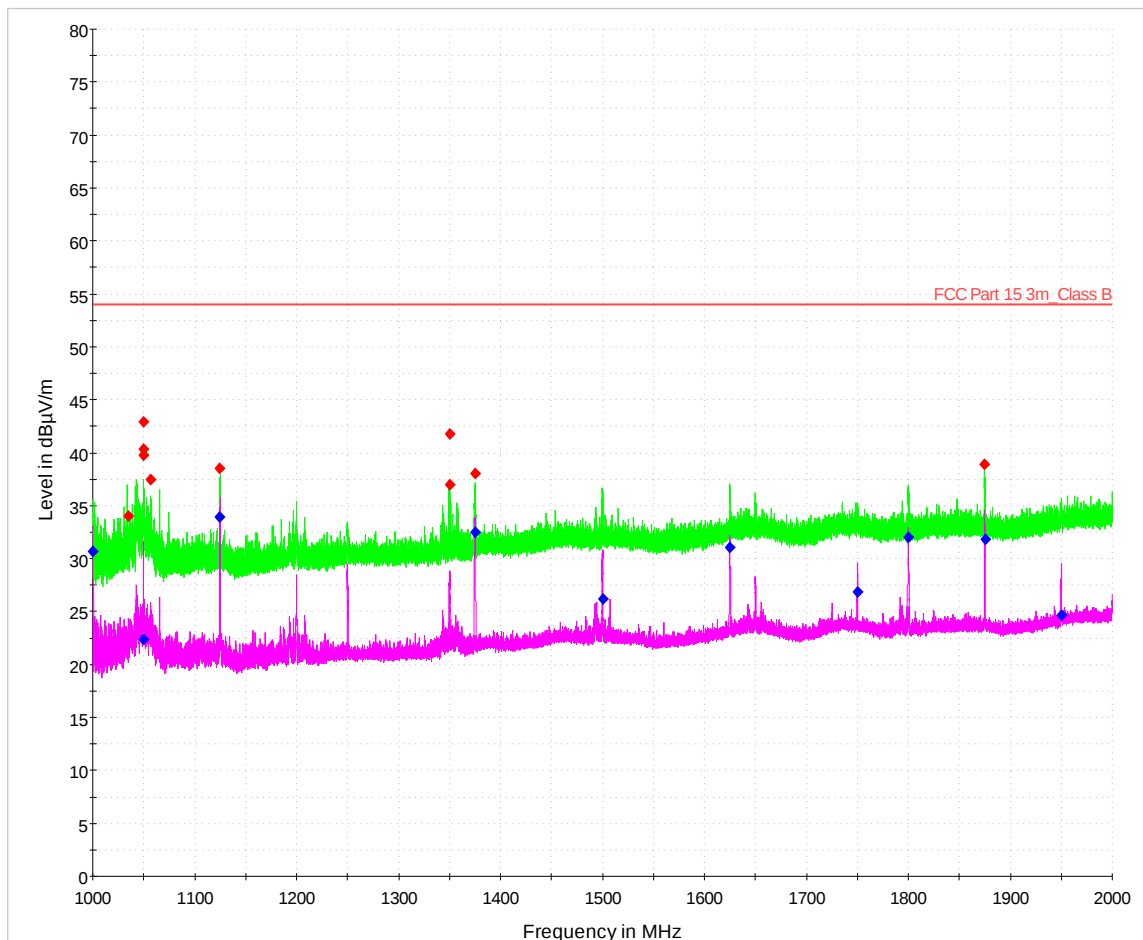

**Figure 7-5: Radiated Emissions (1 GHz – 6 GHz) – Operation mode 2 with AC/DC Adapter**

The test report shall not be reproduced except in full without the written approval of the testing laboratory

## 7.3 Test Setups

### 7.3.1 Test No. 1: Conducted Emissions (§ 15.107)



Figure 7-6: Test Setup Conducted Emissions (150 kHz – 30 MHz)

The test report shall not be reproduced except in full without the written approval of the testing laboratory

## 7.3.2 Test No. 2: Radiated Emissions (§ 15.109a)



Figure 7-7: Test Setup Radiated Emission (30 MHz – 1 GHz) – Operation mode 1 with POE

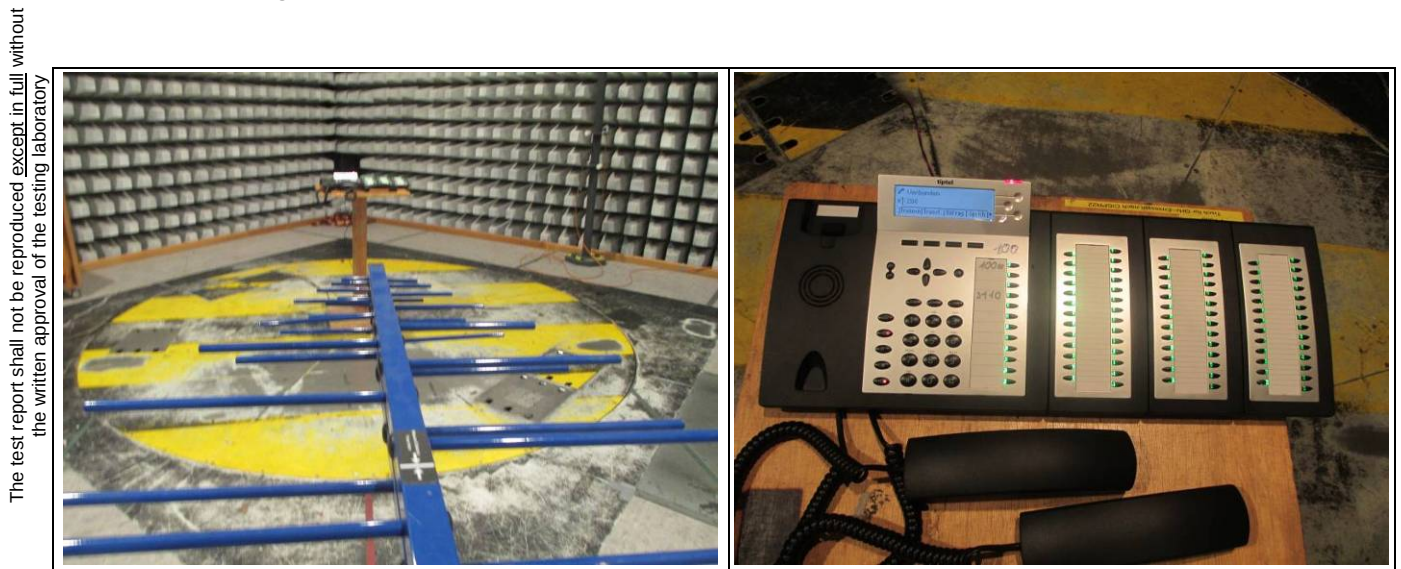



Figure 7-8: Test Setup Radiated Emission (30 MHz – 1 GHz) – Operation mode 2 with AC/DC Adapter

The test report shall not be reproduced except in full without the written approval of the testing laboratory



**Figure 7-9: Test Setup Radiated Emission (1 GHz – 2 GHz) – Operation mode 1 with POE**

The test report shall not be reproduced except in full without the written approval of the testing laboratory

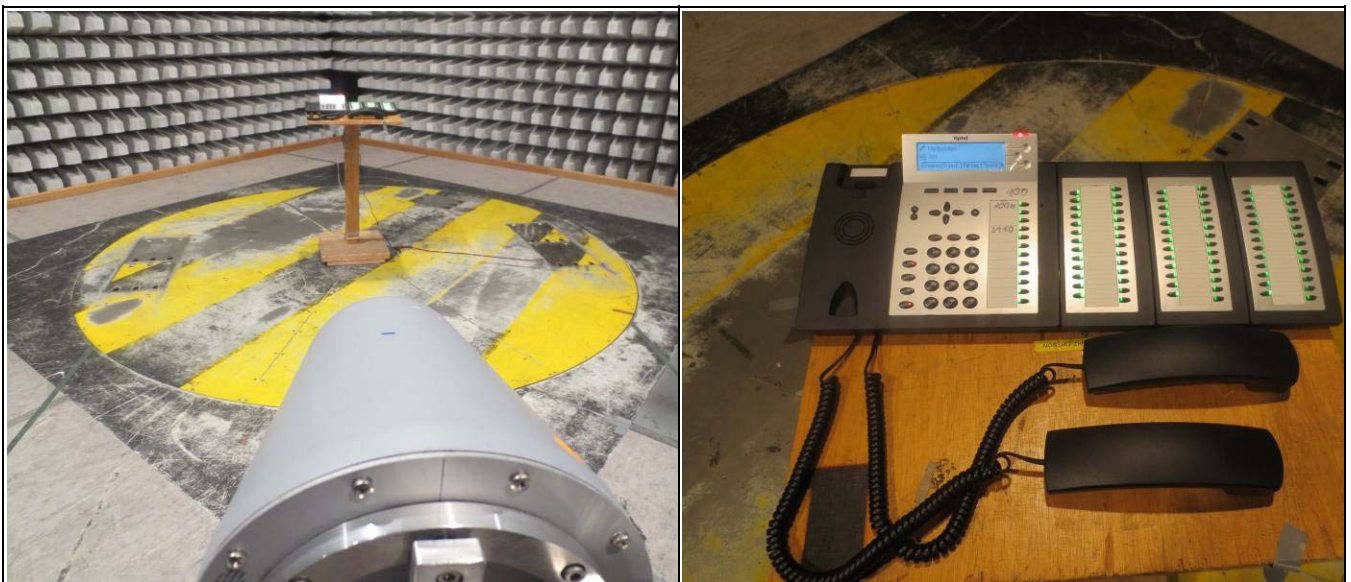

**Figure 7-10: Test Setup Radiated Emission (1 GHz – 2 GHz) – Operation mode 2 with AC/DC Adapter**

## 7.4 Photographs of EUT and accessories



Figure 7-11: Premium IP-Phones TIPTTEL 3110, S/N: 54831087958 (Test No.1)  
and S/N: 54831087959 (Test No. 2)

## 7.4.1 Auxiliary Equipment of the EUTs



Figure 7-12: Keypad extensions KM27, S/N: 001618; 001621; 001653 (All tests)  
(Tests were performed with maximum configuration of 3x KM 27)

The test report shall not be reproduced except in full without the written approval of the testing laboratory

The test report shall not be reproduced except in full without the written approval of the testing laboratory



Figure 7-13: Switching power supply, S/N: D24501396A

## 8 Disclaimer

This document is issued by the Company under its General Conditions of Service accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The test report shall not be reproduced except in full without the written approval of the testing laboratory