3838 TPMS Tool Quick Start Guide

1. Battery charge indicator and SD card in slot indicator.
2. Display.
3. Charging light (red = charging; green = charged).
4. Keyboard.
5. Power button, Press to power tool ON or OFF.
6. OBDII module (Bluetooth).
7. IR printer Window.
8. Antenna.
9. SD card slot
10. USB port
11. RS232 port
12. Power port.

Product content:

- 3838 TPMS Scan Tool x1
- USB cable x1
- OBDII Module x1
- RJ 45 cable x1
- 24v adapter
- Magnet
- Quick Start Guide
- CD – User Manual and USB Drivers
- Carrying case

Note

The 3838 battery may be partially discharged. Connect the 3838 to the AC Power Adapter and fully charge the battery before use.

Charge

Connect the tool to AC power and fully charge the battery.

When charging, the battery light is red and becomes green when the battery is fully charged.



To charge the tool, connect the AC Power Adapter into the provided jack on the tool and 110V end into an appropriate wall outlet. The LED "**CHARGE**" light will illuminate.

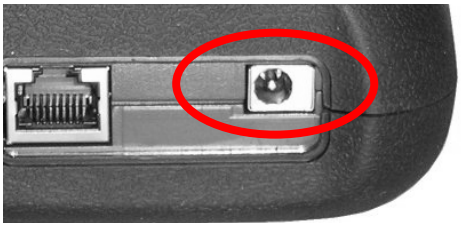

Function Keys

	Power ON /OFF switch		To Test /Activate sensor.
enter	Next, continue or confirm.		Back, previous step.
	Navigate to select "**up**".		Navigate to select "**down**".
	Navigate to select "**left**".		Navigate to select "**right**".

Power on and start

To start: Press to turn on the tool.

Use to select task.

Icons menu

Refer to the user guide for more detail information.

	Diagnostics: Access to registration procedures and TPMS codes.		**Recent Vehicles**: Quick access to recent TPM sensor test results.
	Sensor Activation: Used to activate/test Tire Pressure Monitoring (TPM) Sensors. Follow the on-screen instructions to complete the task.		**Keyfob Test**: Test signal strength of vehicle remote key.
	Universal Sensor Programming: Used for programming Non-OEM programmable sensors.		**Settings**: Change tool settings: language, units, buzzer and tool info.

Change language settings

LANGUAGE: select displayed language among English, Español.

	Enter Settings Menu SETTINGS	enter = Continue = Previous
	Enter Language Menu LANGUAGES	enter = Continue = Previous
Scroll up and down to select language.		enter = Continue = Previous

3838 TPMS Tool Quick Start Guide

Updates & software

Insert the CD supplied with your tool into a PC drive and click on the **3838TPM** icon to start the program. The software will prepare the setup. Follow the on screen instructions to update your tool or print reports.

Warning

This product emits electromagnetic and electronically generated waves that may interfere with the safe operation of **pacemakers**.
Individuals that have pacemakers should never use this product.

Triggering

***Warning**! For best sensor triggering, hold the tool against the tire sidewall right above the sensor.*

Recycling

Do not dispose of the rechargeable Lithium-Ion battery or the tool and/or it accessories to the dustbin.

These components must be collected and recycled.

For further information, please refer to the complete user guide.

OTC Technical Support: (800) 533-6127

Please record and retain this important information:

Part No: _____

Serial No: _____

Purchase Date: _____