

FCC BT LE REPORT

Certification

Applicant Name:
UCOMM TECHNOLOGY CO., LTD.

Date of Issue:
March 18, 2019

Address:
#2108-2112, Pyeongchon Smart Bay 21floor, 123,
Beolmal-ro, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Test Site/Location:
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1903-FC033

FCC ID: 2ABTKT6

APPLICANT: UCOMM TECHNOLOGY CO., LTD.

Model: T6
EUT Type: Voice Caddie Watch
RF Peak Output Power: -2.926 dBm (0.510 mW)
Frequency Range: 2402 MHz -2480 MHz
Modulation type: GFSK
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by : Jung Ki Lim
Engineer of Telecommunication testing center



Approved by : Kwon Jeong
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1903-FC033	March 18, 2019	- First Approval Report

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE.....	5
GENERAL TEST PROCEDURES.....	5
DESCRIPTION OF TEST MODES.....	5
3. INSTRUMENT CALIBRATION	6
4. FACILITIES AND ACCREDITATIONS.....	6
FACILITIES	6
EQUIPMENT.....	6
5. ANTENNA REQUIREMENTS.....	6
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS.....	8
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 DUTY CYCLE.....	25
9.2 6dB BANDWIDTH.....	28
9.3 OUTPUT POWER.....	37
9.4 POWER SPECTRAL DENSITY	45
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	50
9.6 RADIATED SPURIOUS EMISSIONS.....	67
9.7 RADIATED RESTRICTED BAND EDGES.....	74
9.8 POWERLINE CONDUCTED EMISSIONS	80
10. LIST OF TEST EQUIPMENT	84
11. ANNEX A_ TEST SETUP PHOTO.....	86

1. EUT DESCRIPTION

Model	T6	
EUT Type	Voice Caddie Watch	
Power Supply	DC 5.0 V	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak	1M Bit/s - 37 byte : -3.360 dBm (0.461 mW) - 255 byte : -3.192 dBm (0.480 mW) 2M Bit/s - 37 byte: -3.179 dBm (0.481 mW) - 255 byte : -2.926 dBm (0.510 mW)
	Average	1M Bit/s - 37 byte: -3.540 dBm (0.443 mW) - 255 byte: -3.480 dBm (0.449 mW) 2M Bit/s - 37 byte: -3.430 dBm (0.454 mW) - 255 bytes: -3.270 dBm (0.471 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Antenna type: Dielectric Chip Antenna Peak Gain : 1.80 dBi	
Date(s) of Tests	March 11, 2019 ~ March 14, 2019	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r01 dated February 11, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

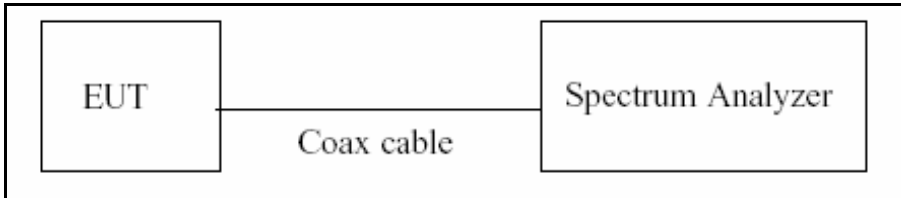

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r01.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r01, Procedure 11.8.1 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 8.3.1.1 in KDB 558074 v05r01, Procedure 11.9.1.1 in ANSI 63.10-2013)
 - 1) $RBW \geq DTS \text{ Bandwidth}$
 - 2) $VBW \geq 3 \times RBW$
 - 3) $SPAN \geq 3 \times RBW$
 - 4) Detector Mode = Peak
 - 5) Sweep = auto couple
 - 6) trace Mode = max hold
 - 7) Allow trace to fully stabilize.
 - 8) Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 8.3.2.2 in KDB 558074 v05r01, Procedure 11.9.2.2 in ANSI 63.10-2013)
 - 1) We use the spectrum analyzer's integrated band power measurement function.
 - 2) Measure the duty cycle
 - 3) Set span to at least 1.5 times the OBW
 - 4) RBW = 1-5 % of the OBW, not to exceed 1 MHz.
 - 5) VBW $\geq 3 \times$ RBW.
 - 6) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
 - 7) Sweep time = auto.
 - 8) Detector = RMS(i.e., power averaging)
 - 9) Do not use sweep triggering. Allow the sweep to "free run".
 - 10) Trace average at least 100 traces in power averaging(RMS) mode.
 - 11) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
 - 12) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r01, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r01, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times \text{Span} / \text{RBW}$
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53
26000	12.02

Note : 1. ‘*’ is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

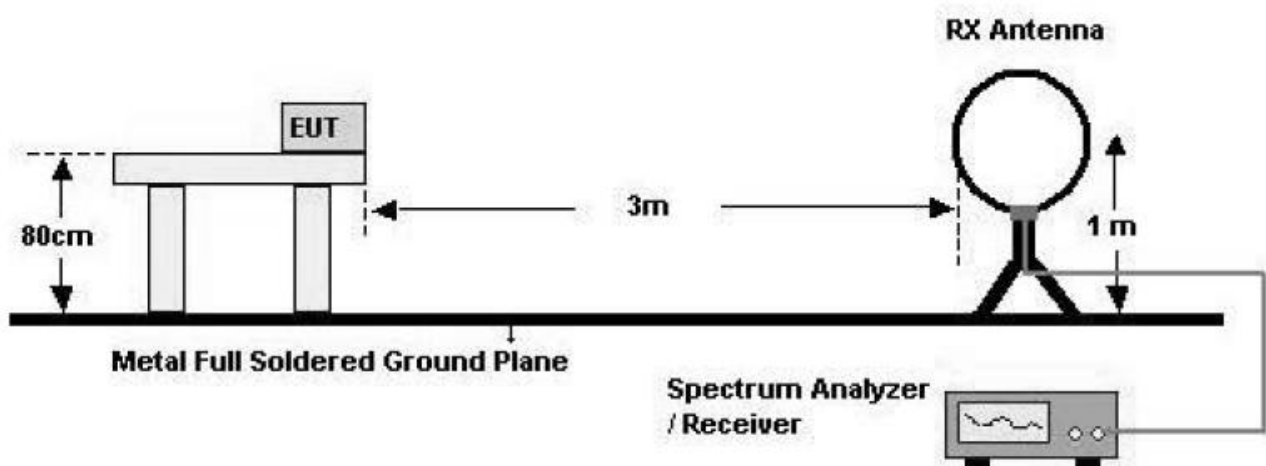

30 MHz - 1 GHz

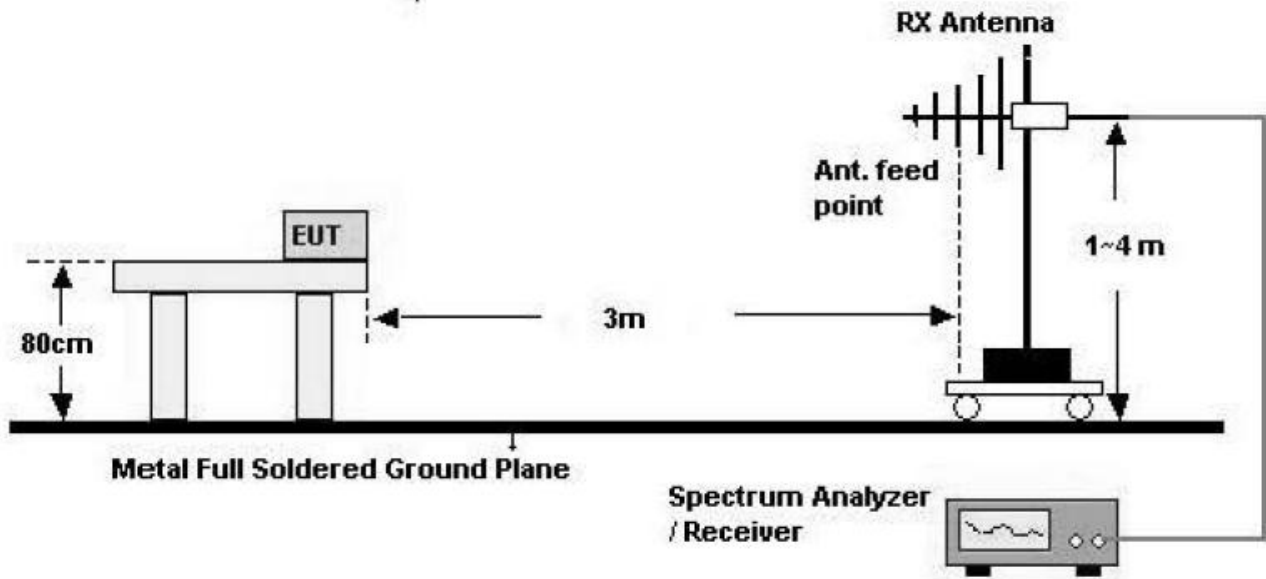

Above 1 GHz

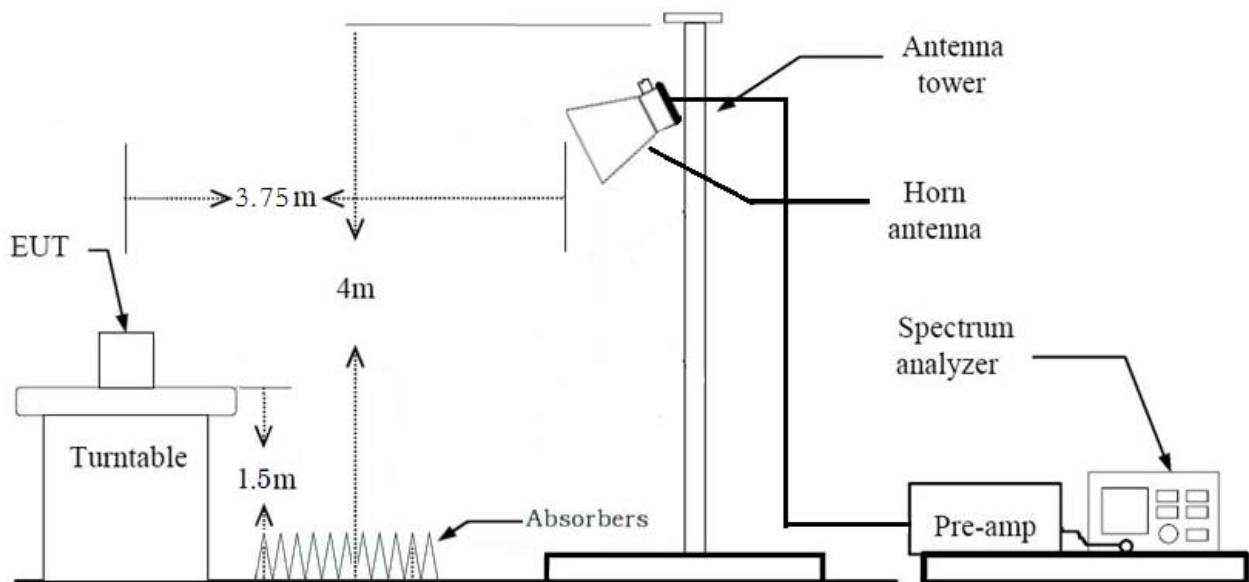

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.

The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r01, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
 - *Worst case :
 - LE 5.0(1M Bit/s) : 255 Byte
 - LE 5.0(2M Bit/s) : 255 Byte

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

Conducted test

The EUT was configured with packet length of highest power.

- * Packet length of highest power :
 - LE 5.0(1M Bit/s) : 255 Byte
 - LE 5.0(2M Bit/s) : 255 Byte

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.3621	0.4797	0.7549	1.22
	255	2.1050	2.2250	0.9461	0.24
2M	37	0.1879	0.3061	0.6139	2.12
	255	1.0589	1.1780	0.8989	0.46


1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

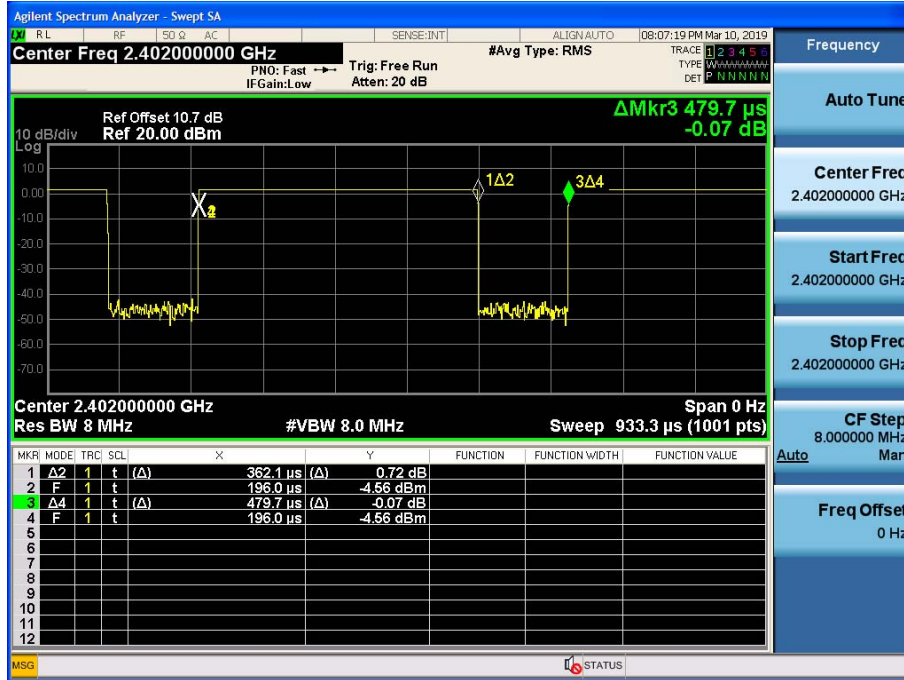


1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

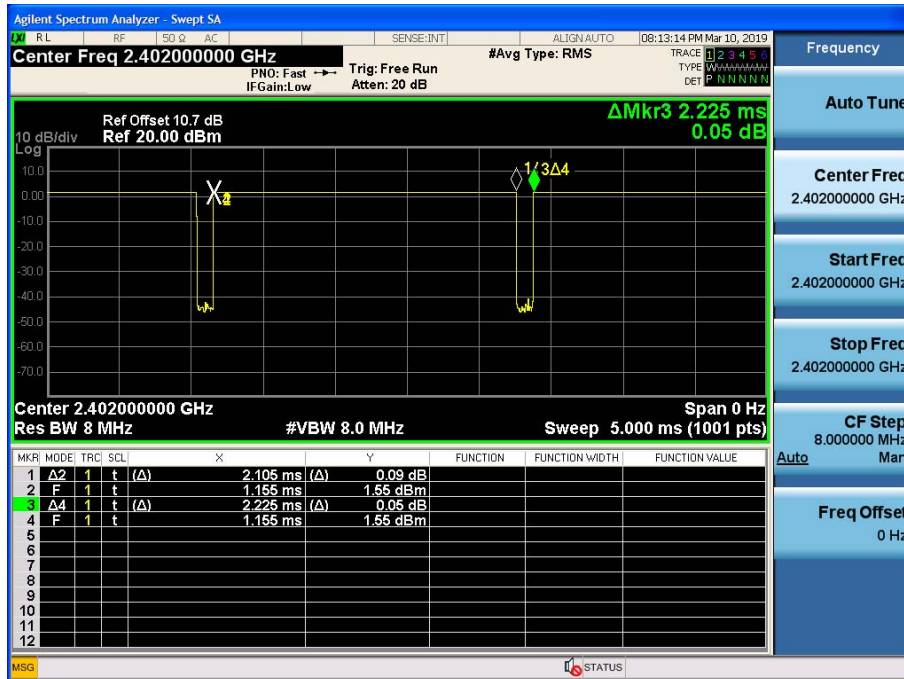


2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

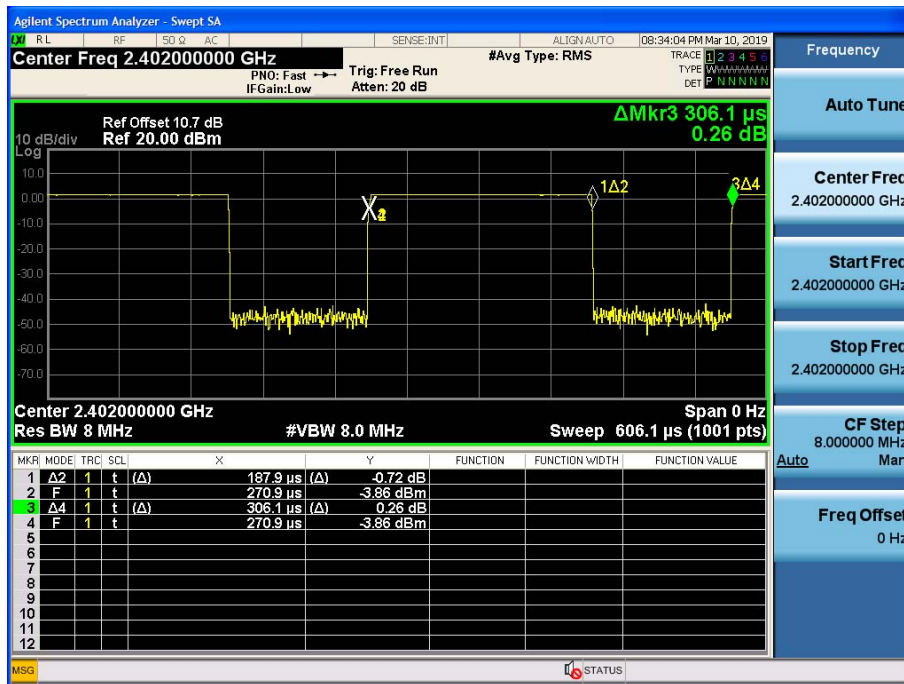

2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

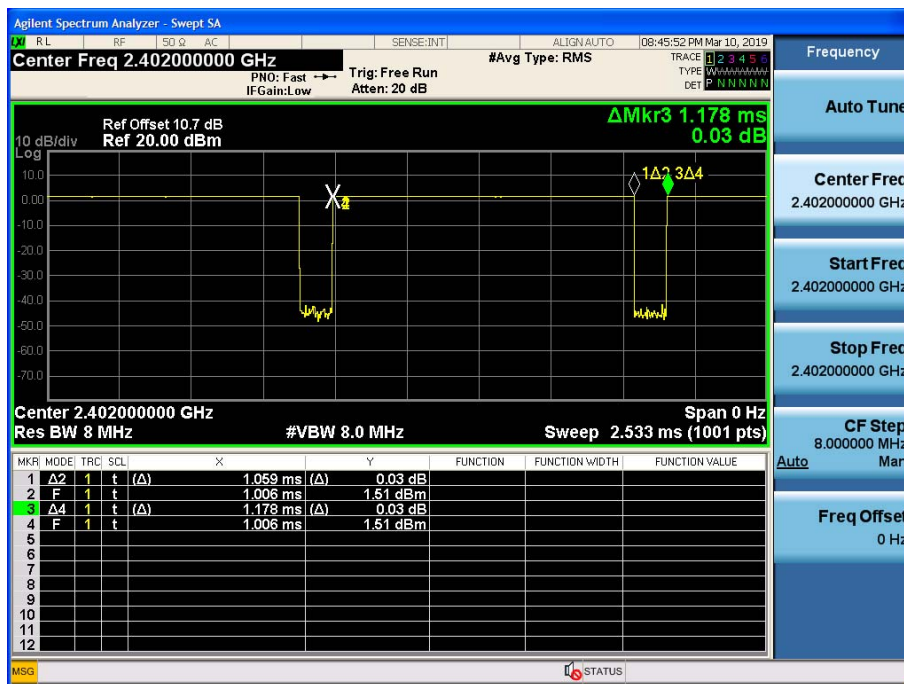


9.2 6dB BANDWIDTH


Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	517.8	> 500
	19	511.8	
	39	514.9	
1M 255 Byte	0	516.2	> 500
	19	514.4	
	39	515.3	
2M 37 Byte	0	827.7	> 500
	19	657.8	
	39	739.4	
2M 255 Byte	0	766.6	> 500
	19	901.8	
	39	848.3	

1M 37 Bit/s Test Plots


6 dB Bandwidth plot (Low-CH 0)

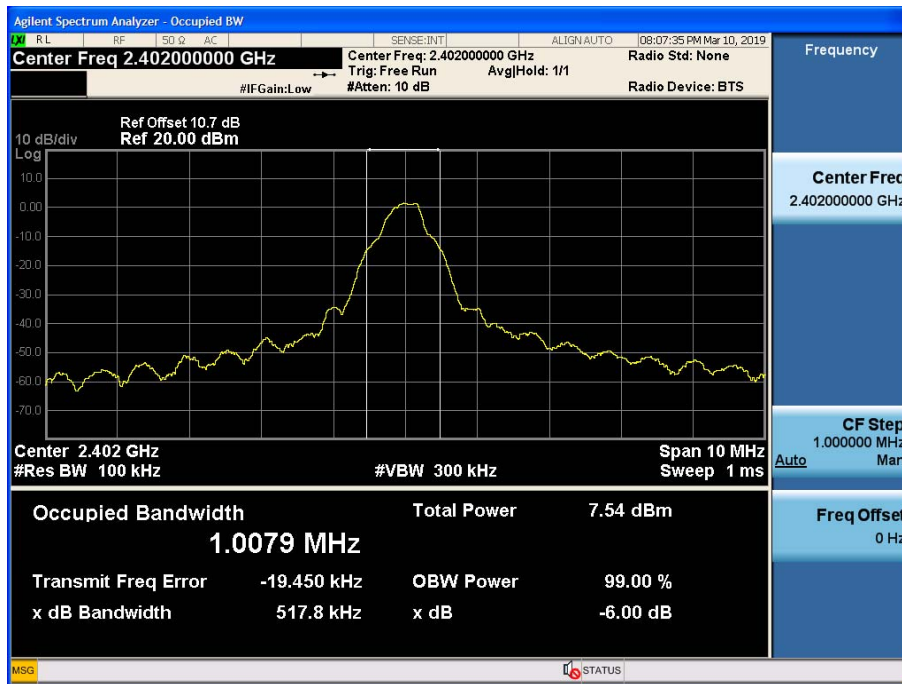

6 dB Bandwidth plot (Mid-CH 19)

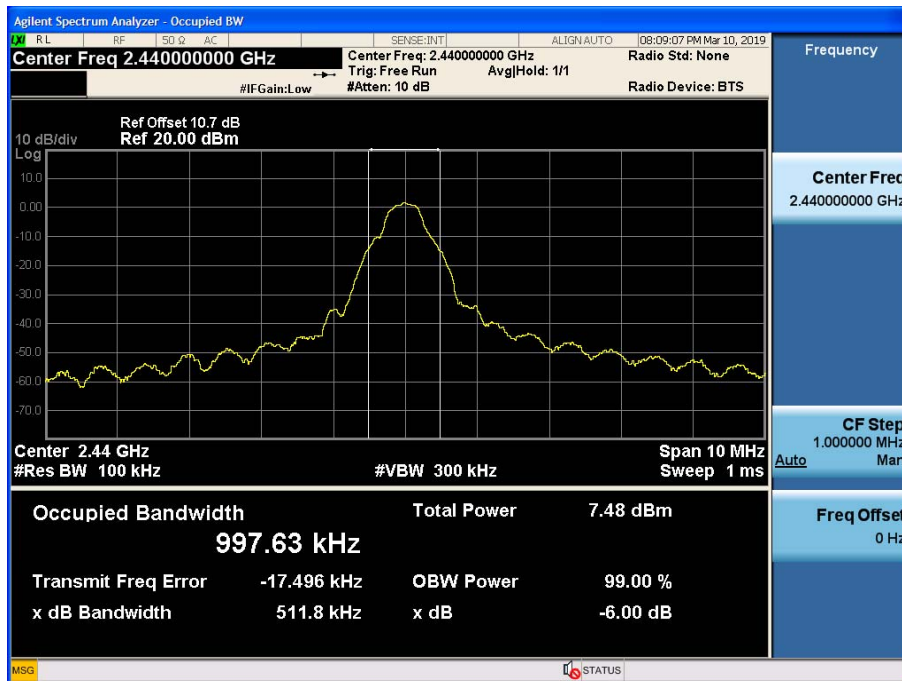


6 dB Bandwidth plot (High-CH 39)

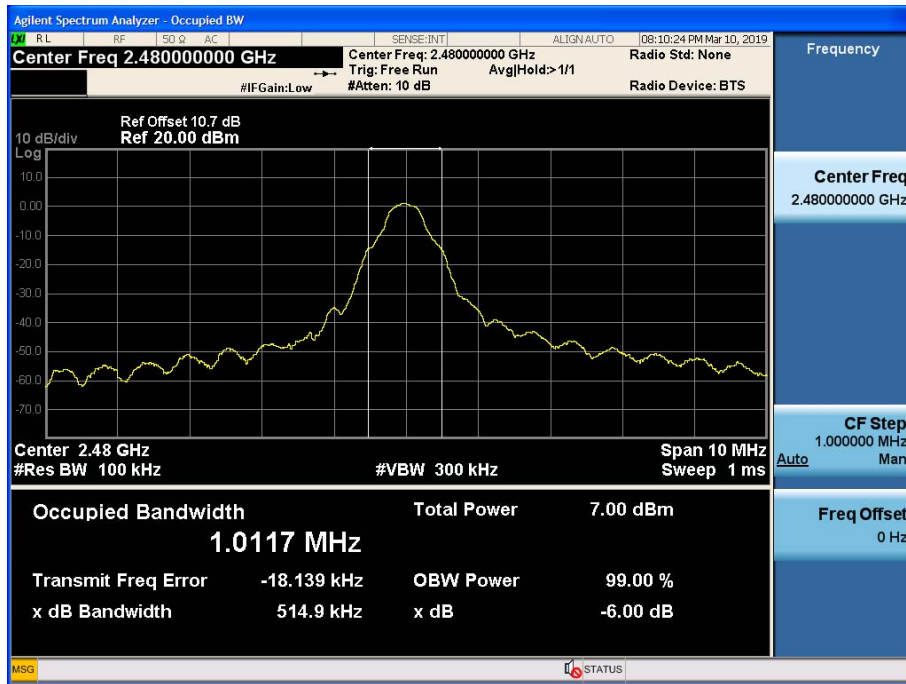


1M 255 Bit/s Test Plots


6 dB Bandwidth plot (Low-CH 0)

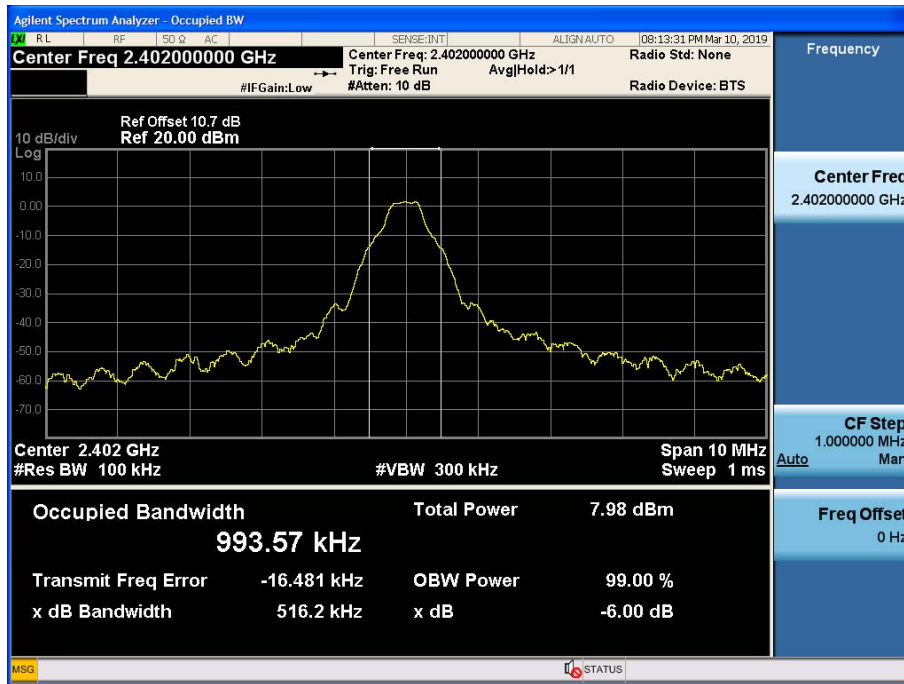

6 dB Bandwidth plot (Mid-CH 19)

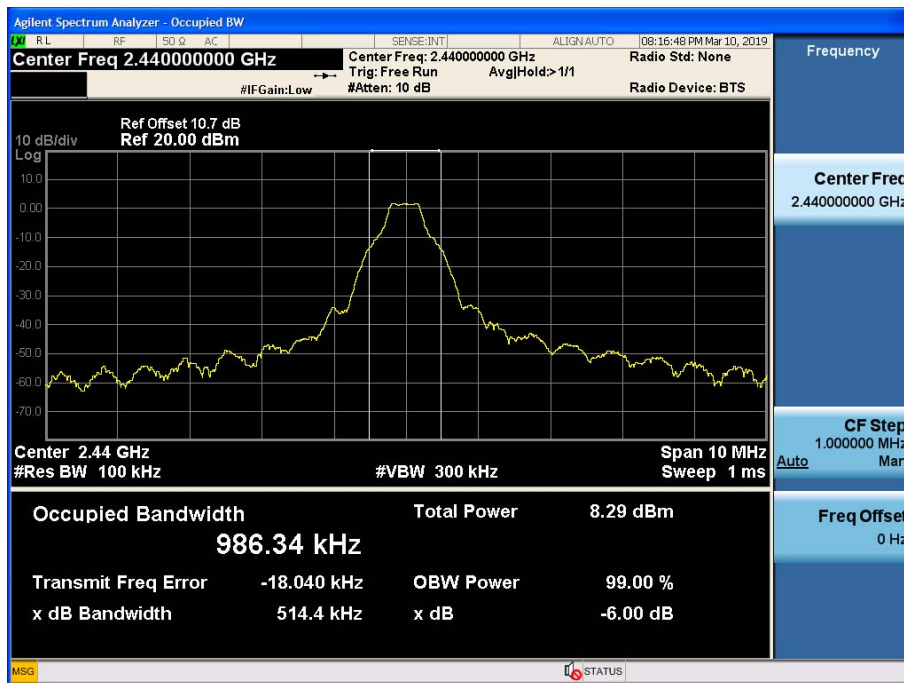


6 dB Bandwidth plot (High-CH 39)

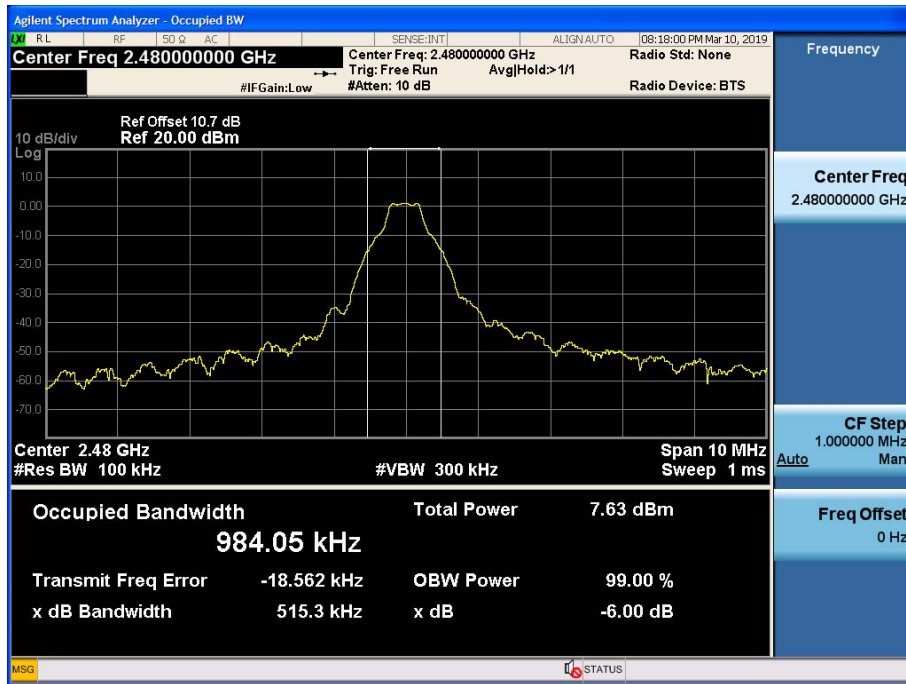


■ 2M 37 Bit/s Test Plots


6 dB Bandwidth plot (Low-CH 0)

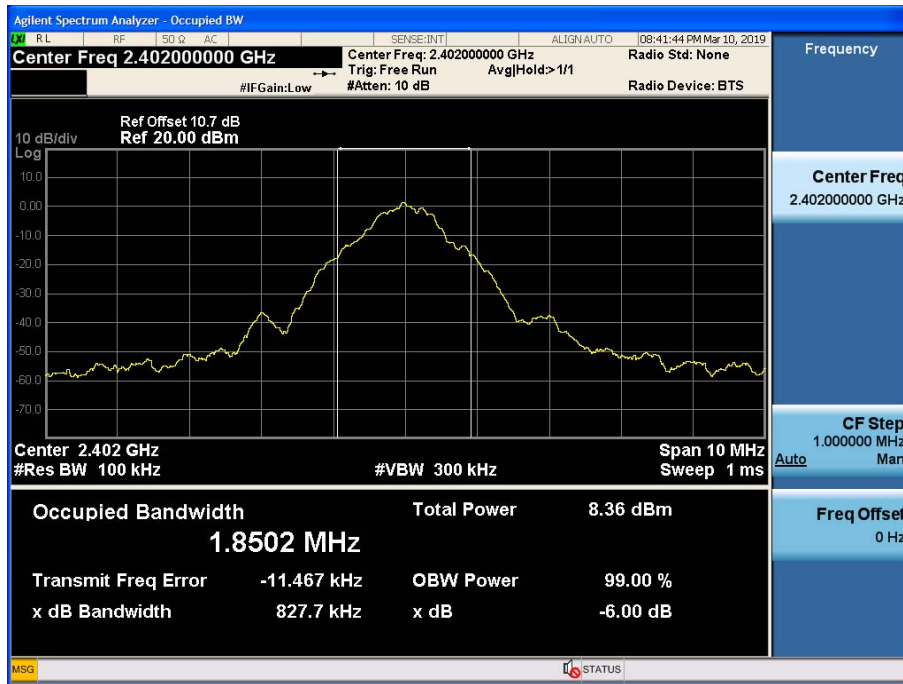

6 dB Bandwidth plot (Mid-CH 19)

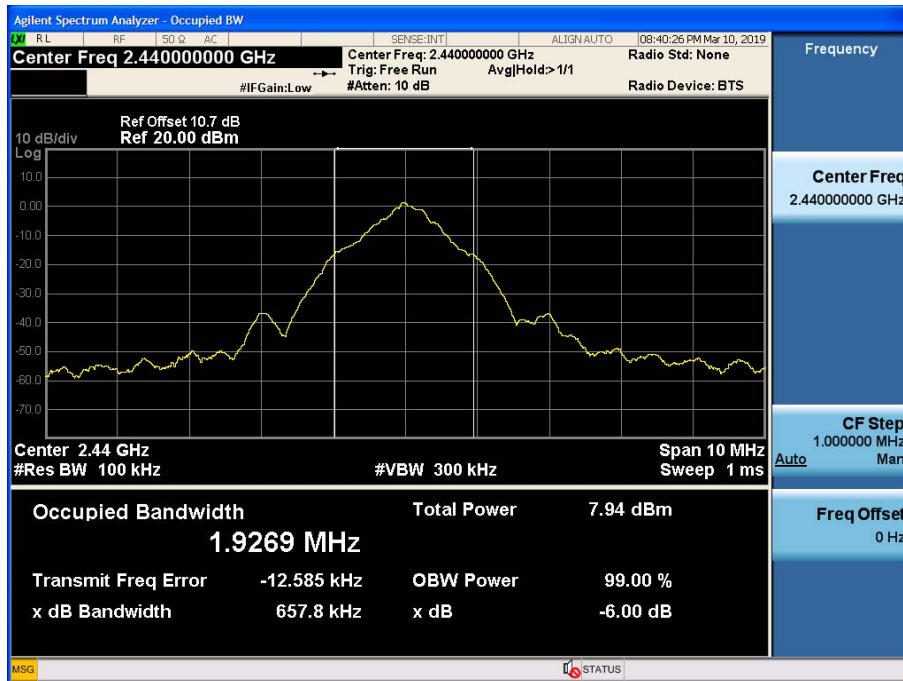


6 dB Bandwidth plot (High-CH 39)

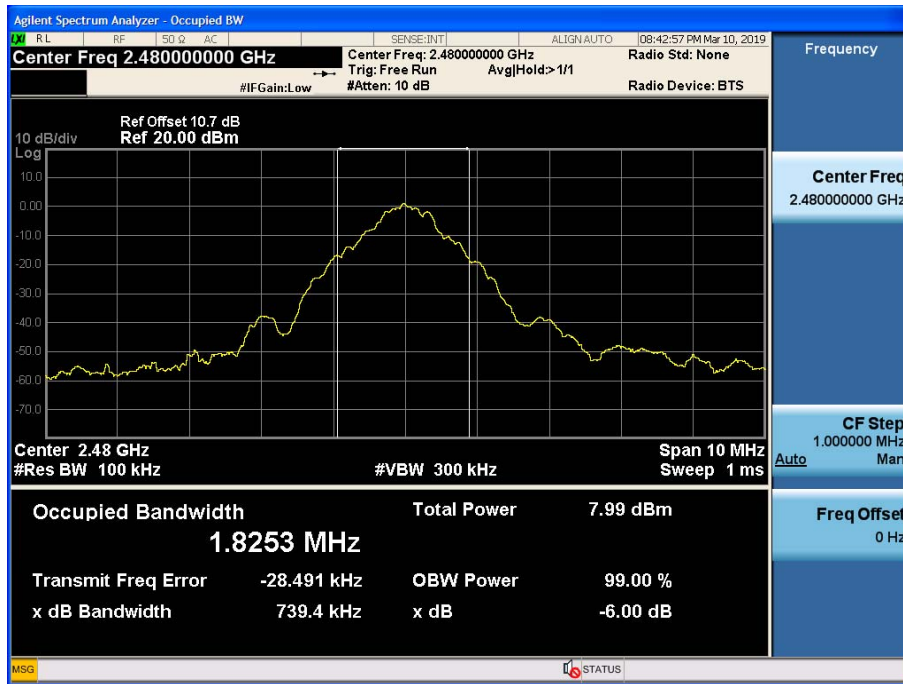


2M 255 Bit/s Test Plots


6 dB Bandwidth plot (Low-CH 0)

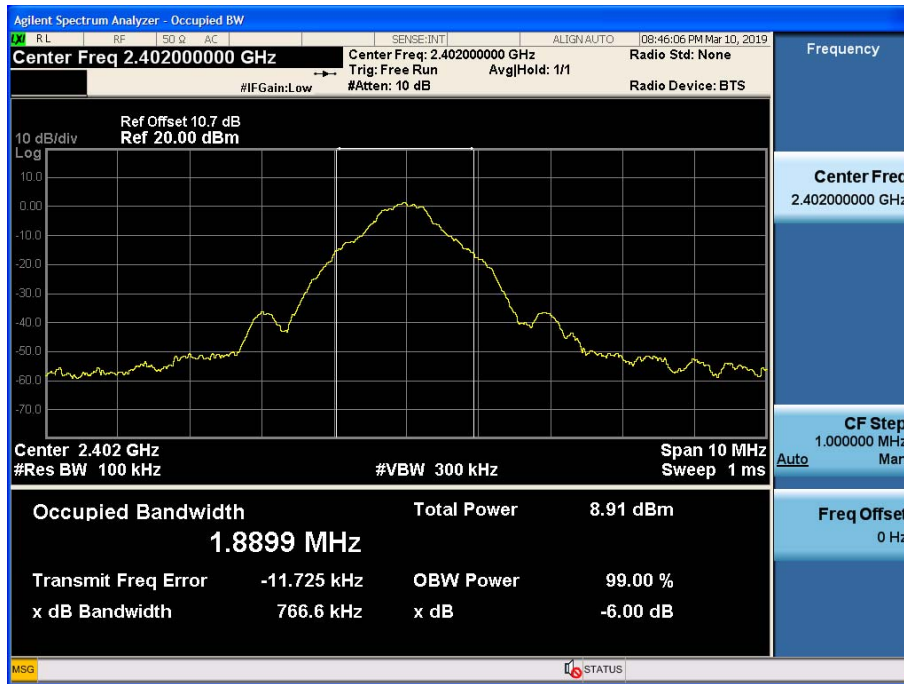

6 dB Bandwidth plot (Mid-CH 19)

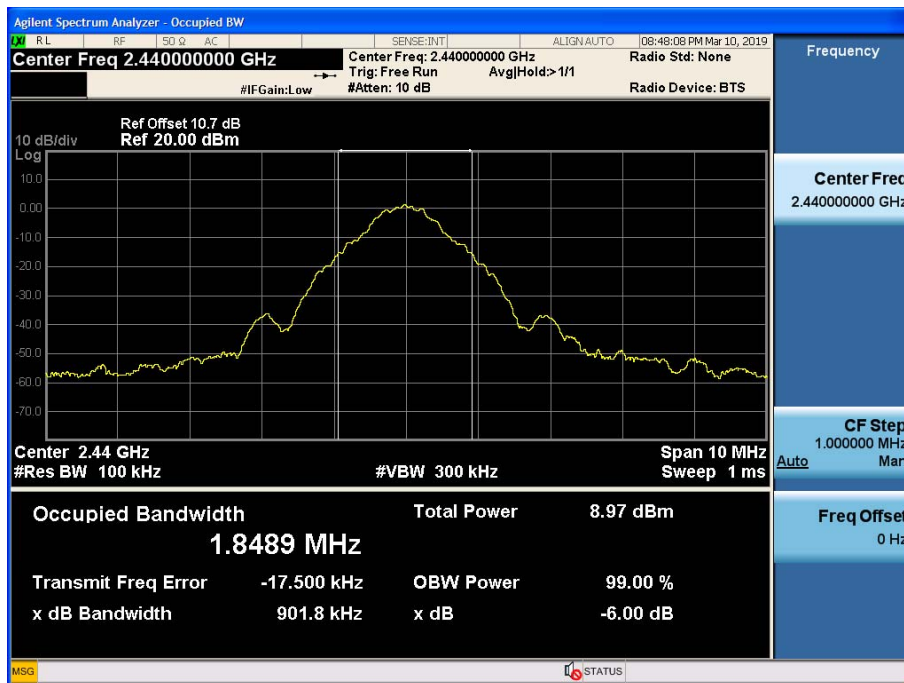

6 dB Bandwidth plot (High-CH 39)

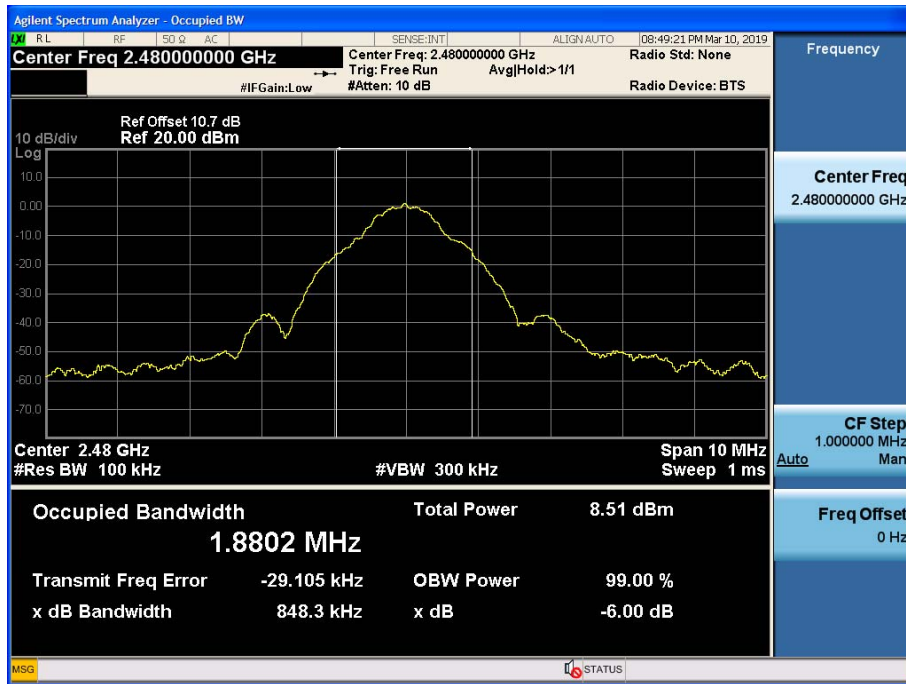

9.3 OUTPUT POWER

Peak Power

LE Mode		Data rate (Bit/s)	Packet length (Byte)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.				
2402	0	1M	37	-3.360	30
			255	-3.192	
		2M	37	-3.179	
			255	-2.926	
2440	19	1M	37	-3.595	
			255	-3.601	
		2M	37	-3.435	
			255	-3.455	
2480	39	1M	37	-3.944	
			255	-3.950	
		2M	37	-3.819	
			255	-3.843	

Average Power

LE Mode		Data rate	Packet length	Measured	Duty Cycle	Result	Limit
Frequency[MHz]	Channel No.	(Bit/s)	(Byte)	Power(dBm)	Factor (dB)	(dBm)	(dBm)
2402	0	1M	37	-4.76	1.22	-3.54	30
			255	-3.72	0.24	-3.48	
		2M	37	-5.55	2.12	-3.43	
			255	-3.73	0.46	-3.27	
2440	19	1M	37	-4.97	1.22	-3.75	
			255	-4.01	0.24	-3.77	
		2M	37	-5.72	2.12	-3.60	
			255	-4.11	0.46	-3.65	
2480	39	1M	37	-5.26	1.22	-4.04	
			255	-4.34	0.24	-4.10	
		2M	37	-6.17	2.12	-4.05	
			255	-4.41	0.46	-3.95	

Note :

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss


3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 10.7 dB is offset for 2.4 GHz Band.

1M Bit/s(255 Byte) Test Plots

Peak Power

Conducted Output Power (Low-CH 0)

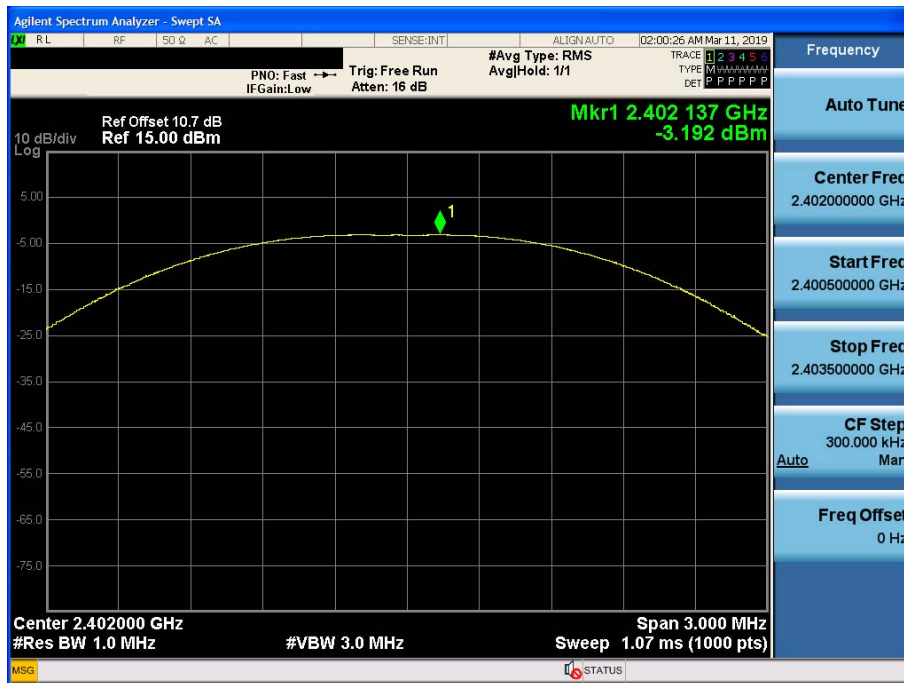

Conducted Output Power (Mid-CH 19)



Conducted Output Power (High-CH 39)



Average Power


Conducted Output Power (Low-CH 0)



Conducted Output Power (Mid-CH 19)



Conducted Output Power (High-CH 39)

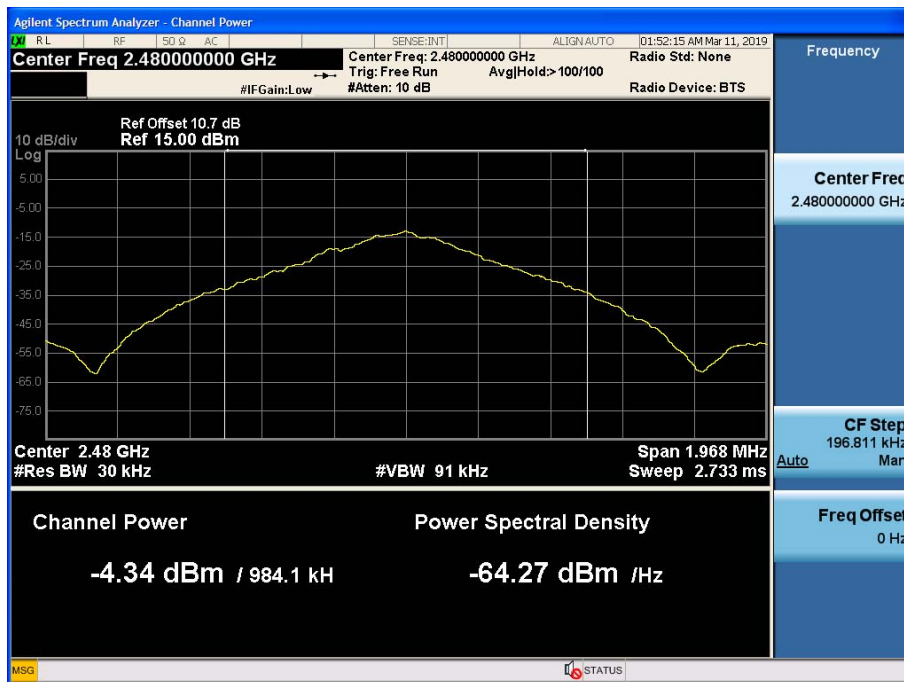

2M Bit/s(255 Byte) Test Plots

Peak Power

Conducted Output Power (Low-CH 0)



Conducted Output Power (Mid-CH 19)




Conducted Output Power (High-CH 39)




Average Power

Conducted Output Power (Low-CH 0)

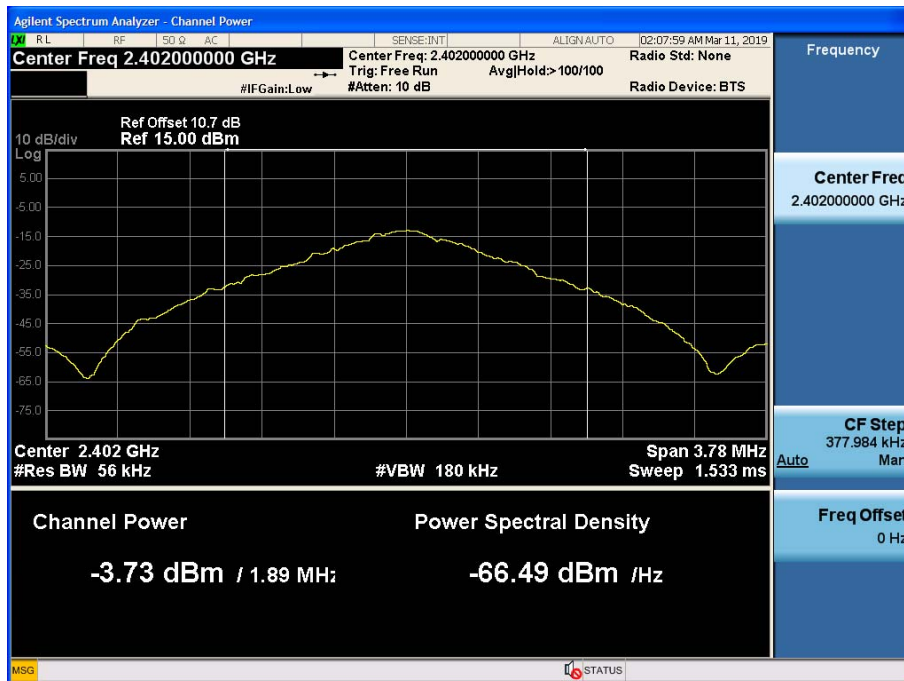

Conducted Output Power (Mid-CH 19)

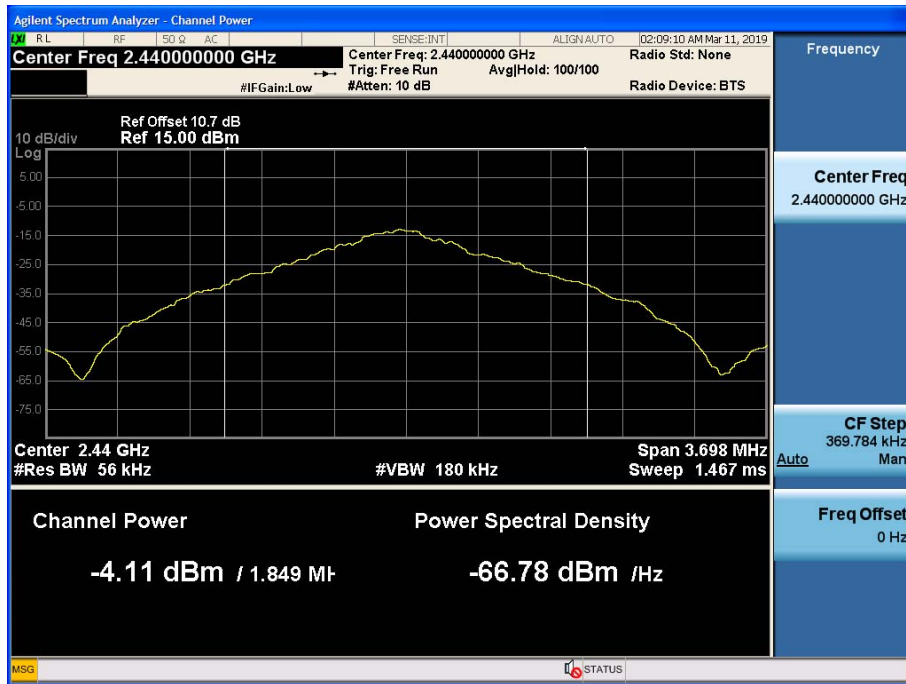

Conducted Output Power (High-CH 39)



Note :

In order to simplify the report, attached plots were only the worstcase.

9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode	Test Result	
			PSD (dBm)	Limit (dBm)
2402	0	1M Bit 255 Byte	-14.960	8.000
2440	19		-14.225	8.000
2480	39		-13.968	8.000
2402	0	2M Bit 255 Byte	-16.402	8.000
2440	19		-16.070	8.000
2480	39		-16.065	8.000

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 10.7 dB is offset for 2.4 GHz Band.

4. The EUT was configured with packet length of highest power.

Packet length of highest power :

- LE 5.0(1M Bit/s) : 255 Byte


- LE 5.0(2M Bit/s) : 255 Byte

1M Bit/s 255 byte_Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)

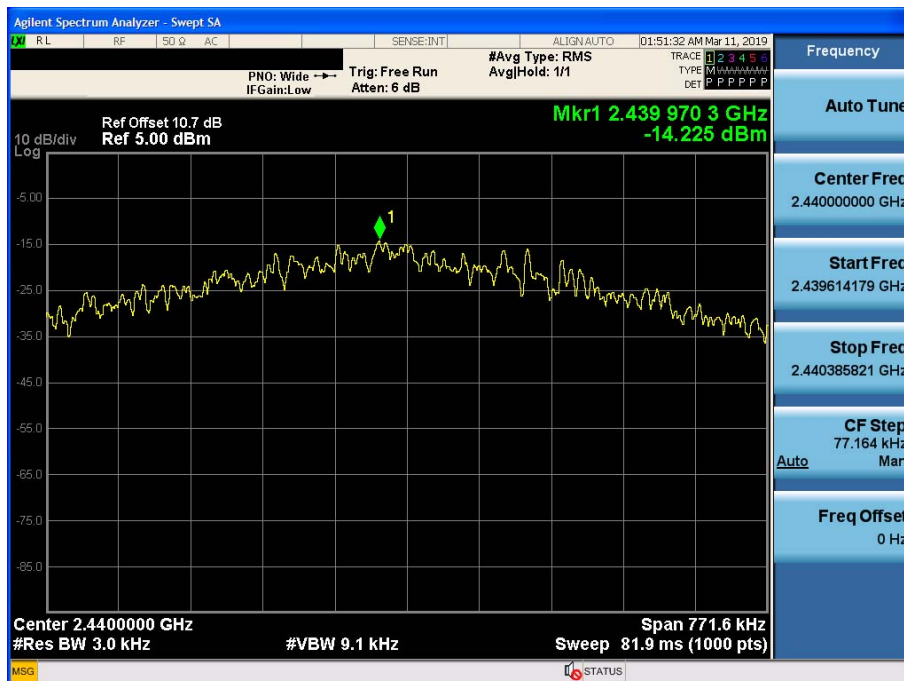


Power Spectral Density (High-CH 39)



2M Bit/s 255 byte _ Test Plots


Power Spectral Density (Low-CH 0)

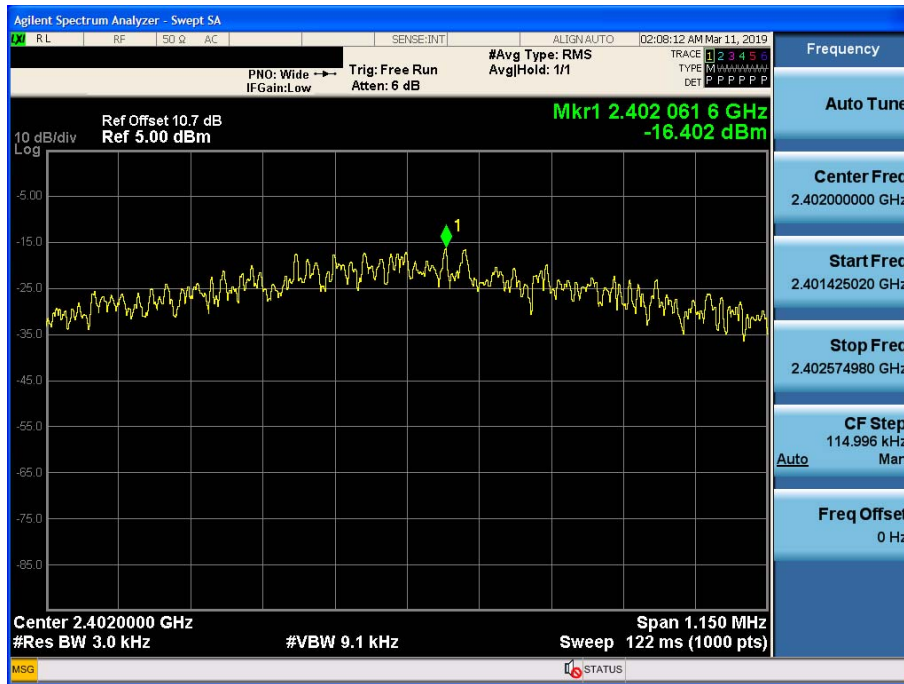

Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)

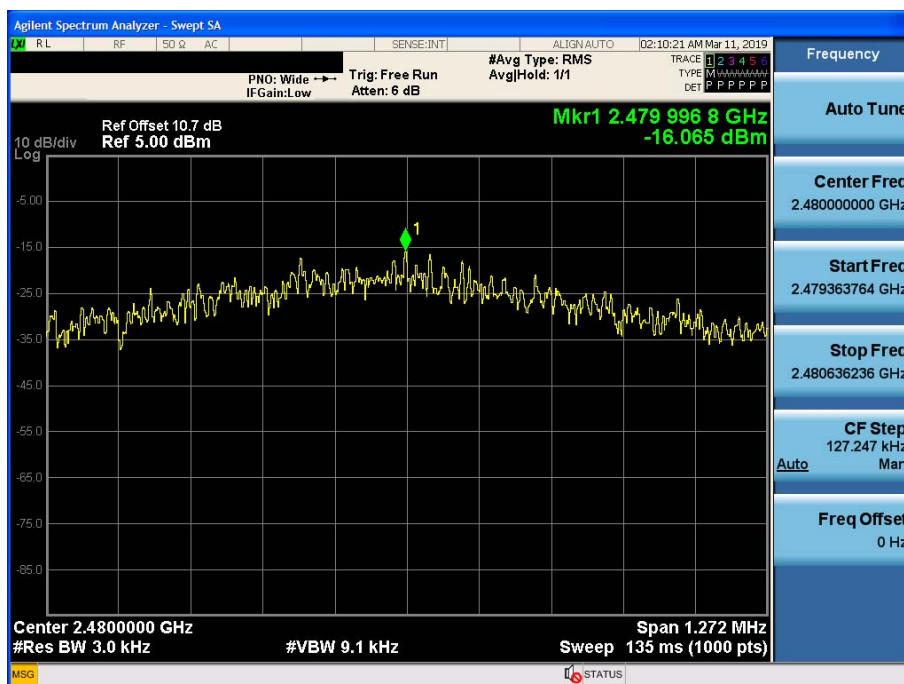

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

1M Bit/s 255 byte_Test Plots (BandEdge)

Low-CH 0




High-CH 39



1M Bit/s 255 byte _ Test Plots (Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

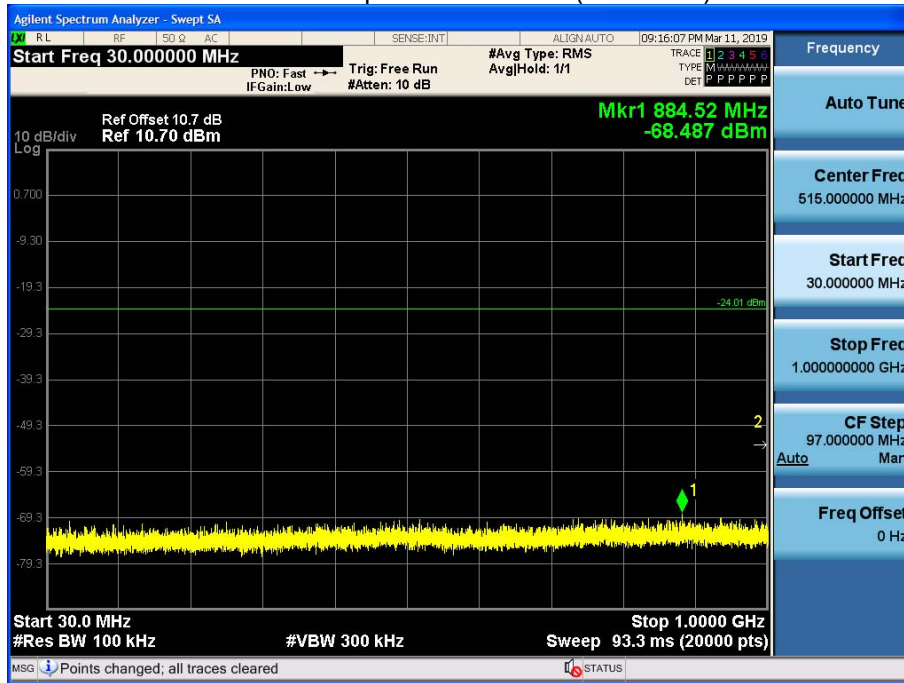


1 GHz ~ 3 GHz

Conducted Spurious Emission (Low-CH 0)

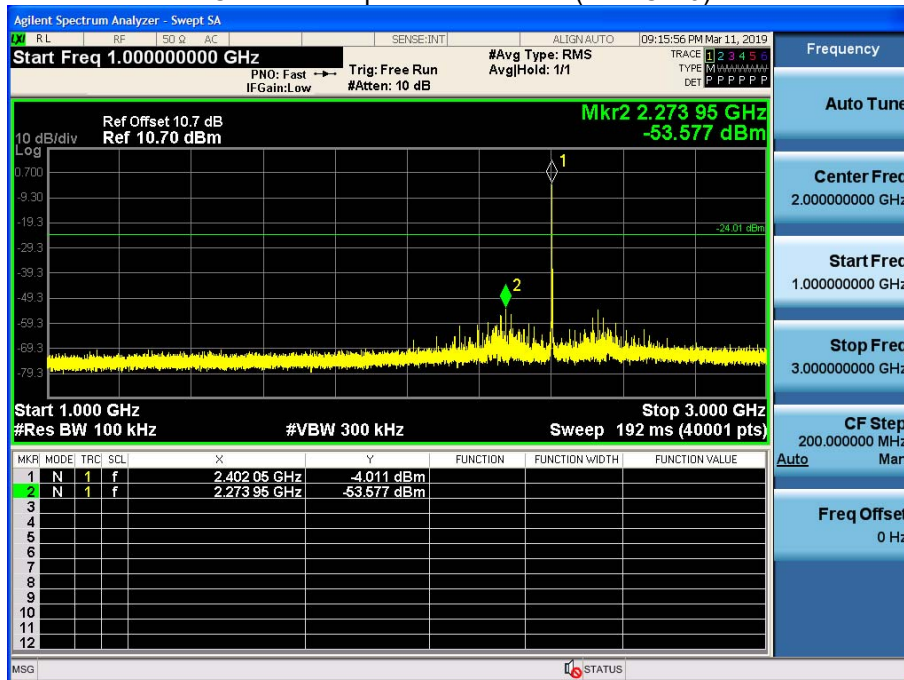

3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 0)

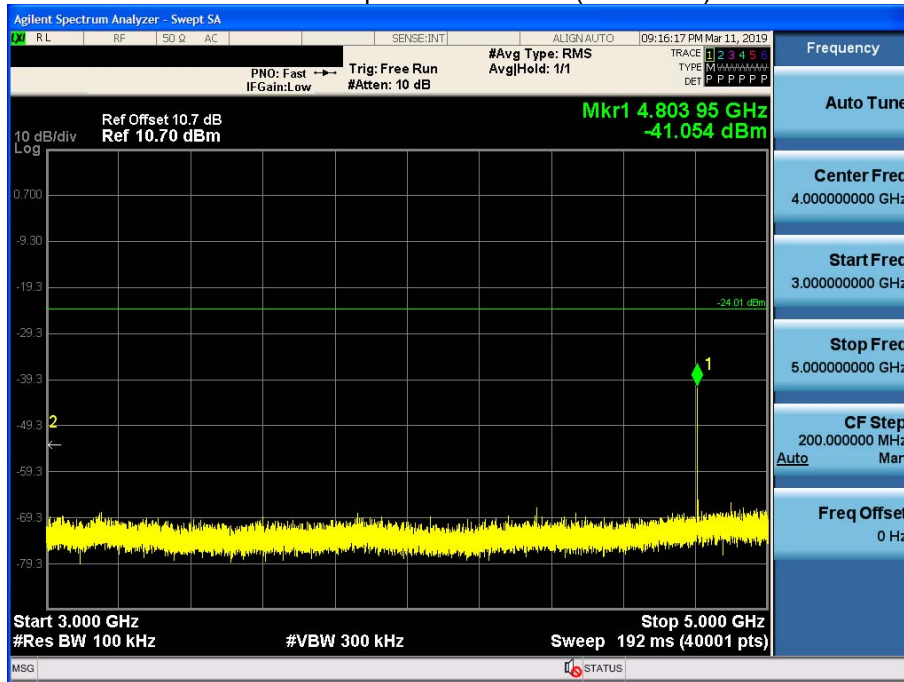

5 GHz ~ 7 GHz

Conducted Spurious Emission (Low-CH 0)

