

RF TEST REPORT

Applicant	Aava Mobile Oy
FCC ID	2ABVH-INARI10E2
Product	10" Tablet Computer
Brand	AAVA
Model	INARI-E-10-T5G-1
Report No.	EFTA25070216-IE-03-R2V1
Issue Date	March 27, 2026

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 / FCC CFR 47 Part 22H / FCC CFR 47 Part 24E/ FCC CFR 47 Part 25 / FCC CFR47 Part 27C / FCC CFR 47 Part 90R / FCC CFR 47 Part 90S**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1	Test Laboratory	10
1.1	Notes of the Test Report.....	10
1.2.	Test facility	10
1.3	Testing Location.....	10
2	General Description of Equipment under Test.....	11
2.1	Applicant and Manufacturer Information	11
2.2	General information	11
3	Applied Standards.....	14
4	Test Case	15
4.1	RF Power Output and Effective Isotropic Radiated Power	15
4.2	Radiated Spurious Emission	16
5	Test Results.....	19
5.1	RF Power Output and Effective (Isotropic) Radiated Power	19
6	Main Test Instruments	47
7	The EUT Appearance.....	48
8	Test Setup Photos	49

Version	Revision Description	Issue Date
Rev.0	Initial issue of report.	December 31, 2025
Rev.1	Delete Band48 information and data.	March 27, 2026
Note: This revised report (Report No.: EFTA25070216-IE-03-R2V1) supersedes and replaces the previously issued report (Report No.: EFTA25070216-IE-03-R2). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of Measurement Results

Test Case	Clause in FCC rules	Limits	Verdict
NR Band n5/n26 (824-849MHz)			
RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	$\leq 7 \text{ W (38.45 dBm)}$	PASS ^{Note 1}
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)		
Band Edge Compliance			
Peak-to-Average Power Ratio			
Frequency Stability			
Spurious Emissions at Antenna Terminals			
Radiated Spurious Emission	2.1053 22.917 (a)	$\leq -13 \text{ dBm}$	PASS
NR Band n2/n25			
RF Power Output and Effective Isotropic Radiated Power	2.1046 24.232(c)	$\leq 2 \text{ W (33 dBm)}$	PASS ^{Note 1}
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)		
Band Edge Compliance			
Peak-to-Average Power Ratio			
Frequency Stability			
Spurious Emissions at Antenna Terminals			
Radiated Spurious Emission	2.1053 24.238(a)	$\leq -13 \text{ dBm}$	PASS
NR Band n66/n70			
RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(d)(4)	$\leq 1 \text{ W (30 dBm)}$	PASS ^{Note 1}
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)		
Band Edge Compliance			
Peak-to-Average Power Ratio			
Frequency Stability			
Spurious Emissions at Antenna Terminals			
Radiated Spurious Emission	2.1053 27.53(h)	$\leq -13 \text{ dBm}$	PASS
NR Band n7/n38/n41			
RF Power Output and Effective	2.1046	$\leq 2 \text{ W (33 dBm)}$	PASS

Test Case	Clause in FCC rules	Limits	Verdict				
Isotropic Radiated Power	27.50(h)(2)						
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)						
Band Edge Compliance							
Peak-to-Average Power Ratio							
Frequency Stability							
Spurious Emissions at Antenna Terminals							
Radiated Spurious Emission	2.1053 27.53(m)	≤ -25 dBm	PASS				
NR Band n12/n71							
RF Power Output and Effective Radiated Power	2.1046 27.50(c)(10)	≤ 3 W (34.77 dBm)	PASS Note 1				
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)						
Band Edge Compliance							
Peak-to-Average Power Ratio							
Frequency Stability							
Spurious Emissions at Antenna Terminals							
Radiated Spurious Emission	2.1053 27.53(g)	≤ -13 dBm	PASS				
NR Band n13							
RF Power Output and Effective Radiated Power	2.1046 27.50(b)(10)	≤ 3 W (34.77 dBm)	PASS Note 1				
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)						
Band Edge Compliance							
Peak-to-Average Power Ratio							
Frequency Stability							
Spurious Emissions at Antenna Terminals							
Radiated Spurious Emission	2.1053 27.53(c) 27.53(f)	<table><tr><td>Limit out of the band 1559-1610 MHz</td><td>≤ -13 dBm</td></tr><tr><td>Limit in the band 1559-1610 MHz</td><td>≤ -40 dBm</td></tr></table>	Limit out of the band 1559-1610 MHz	≤ -13 dBm	Limit in the band 1559-1610 MHz	≤ -40 dBm	PASS
Limit out of the band 1559-1610 MHz	≤ -13 dBm						
Limit in the band 1559-1610 MHz	≤ -40 dBm						
NR Band n14							
RF power output and Effective Radiated Power	2.1046 90.542(a)(7)	≤ 3 W (34.77 dBm)	PASS Note 1				
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER;						
Emission Masks							

Test Case	Clause in FCC rules	Limits	Verdict
Peak-to-Average Power Ratio	FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)		
Frequency Stability			
Spurious Emissions at Antenna Terminals			
Radiated Spurious Emission	2.1053 90.543 (e)(f)	(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations. (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB. (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment. (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed. (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70	PASS

Test Case	Clause in FCC rules	Limits	Verdict
		dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.	
NR Band n26 (814-824MHz)			
RF Power Output and Effective Radiated Power	2.1046 90.635(b)	≤ 100 W (50 dBm)	PASS Note 1
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)		
Emission Masks			
Peak-to-Average Power Ratio			
Frequency Stability			
Spurious Emissions at Antenna Terminals			
Radiated Spurious Emission	2.1053 90.691	≤ -13 dBm	PASS
NR Band n30			
RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(a)(3)	≤ 50 mW / 1MHz (17 dBm / 1MHz) ≤ 250 mW / 5MHz (24 dBm / 5MHz)	PASS
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)		
Band Edge Compliance			
Peak-to-Average Power Ratio			
Frequency Stability			
Spurious Emissions at Antenna Terminals			

Test Case	Clause in FCC rules	Limits	Verdict																												
Radiated Spurious Emission	2.1053 27.53(a) (4)	<table><tr><td>Limit out of the band 2288-2360 MHz</td><td>-40 dBm</td></tr><tr><td>2288-2292 MHz</td><td>-37 dBm</td></tr><tr><td>2292-2296 MHz</td><td>-31 dBm</td></tr><tr><td>2296-2300 MHz</td><td>-25 dBm</td></tr><tr><td>2300-2305 MHz</td><td>-13 dBm</td></tr><tr><td>2305-2315 MHz</td><td>NA</td></tr><tr><td>2315-2320 MHz</td><td>-13 dBm</td></tr><tr><td>2320-2324 MHz</td><td>-25 dBm</td></tr><tr><td>2324-2328 MHz</td><td>-31 dBm</td></tr><tr><td>2328-2337 MHz</td><td>-37 dBm</td></tr><tr><td>2337-2341 MHz</td><td>-31 dBm</td></tr><tr><td>2341-2345 MHz</td><td>-25 dBm</td></tr><tr><td>2345-2350 MHz</td><td>-13 dBm</td></tr><tr><td>2350-2360 MHz</td><td>NA</td></tr></table>	Limit out of the band 2288-2360 MHz	-40 dBm	2288-2292 MHz	-37 dBm	2292-2296 MHz	-31 dBm	2296-2300 MHz	-25 dBm	2300-2305 MHz	-13 dBm	2305-2315 MHz	NA	2315-2320 MHz	-13 dBm	2320-2324 MHz	-25 dBm	2324-2328 MHz	-31 dBm	2328-2337 MHz	-37 dBm	2337-2341 MHz	-31 dBm	2341-2345 MHz	-25 dBm	2345-2350 MHz	-13 dBm	2350-2360 MHz	NA	PASS
		Limit out of the band 2288-2360 MHz	-40 dBm																												
		2288-2292 MHz	-37 dBm																												
		2292-2296 MHz	-31 dBm																												
		2296-2300 MHz	-25 dBm																												
		2300-2305 MHz	-13 dBm																												
		2305-2315 MHz	NA																												
		2315-2320 MHz	-13 dBm																												
		2320-2324 MHz	-25 dBm																												
		2324-2328 MHz	-31 dBm																												
		2328-2337 MHz	-37 dBm																												
		2337-2341 MHz	-31 dBm																												
		2341-2345 MHz	-25 dBm																												
		2345-2350 MHz	-13 dBm																												
		2350-2360 MHz	NA																												
NR Band n53																															
RF Power Output and Effective Isotropic Radiated Power	25.149 (4) (iii)	The maximum transmit power is no more than 1 W with a peak EIRP of no more than 6 dBW <table><tr><td>power Limit¹⁾</td><td>≤ 1 W (30 dBm)²⁾</td></tr><tr><td>peak EIRP Limit³⁾</td><td>≤ 6 dBW (36dBm)³⁾</td></tr></table>	power Limit ¹⁾	≤ 1 W (30 dBm) ²⁾	peak EIRP Limit ³⁾	≤ 6 dBW (36dBm) ³⁾	PASS ^{Note 1}																								
power Limit ¹⁾	≤ 1 W (30 dBm) ²⁾																														
peak EIRP Limit ³⁾	≤ 6 dBW (36dBm) ³⁾																														
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)																														
Band Edge Compliance																															
Peak-to-Average Power Ratio																															
Frequency Stability																															
Spurious Emissions at Antenna Terminals																															
Radiated Spurious Emission	25.149(c)(4)(v)(vi)	Emissions below 2483.5 MHz are attenuated below the transmitter power (P) measured in watts by a factor of at least 40 + 10 log (P) dB at the channel edge at 2483.5 MHz, 43 + 10 log (P) dB at 5 MHz from the channel edge, and 55 + 10 log (P) dB at X MHz from the channel edge where X is the greater of 6 MHz or the actual emission bandwidth. Emissions above 2495 MHz are attenuated below the transmitter power (P) measured in watts by a factor of at least 43 + 10 log (P) dB on all frequencies between the channel edge at 2495 MHz and X MHz from this channel edge and 55 + 10 log (P) dB on all frequencies more than X MHz from this channel edge, where X is the greater of 6 MHz or the actual emission bandwidth;	PASS																												
NR Band n77/ n78																															
RF Power Output and Effective Isotropic Radiated Power	2.1046 27.50(k) (3) 27.50(j) (3)	≤ 1 W (30 dBm)	PASS ^{Note 1}																												
Occupied Bandwidth	Refer to the Module report (Model: FN920C04-WW; Report No.: TERF2410003183ER; FCC ID: RI7FN920C04WW, Grant date: 04/28/2025)																														
Band Edge Compliance																															
Peak-to-Average Power Ratio																															
Frequency Stability																															
Spurious Emissions at Antenna Terminals																															
Radiated Spurious Emission	2.1053 27.53(n) (2) / 27.53(l) (2)	≤ -13 dBm	PASS																												
Date of Testing: July 16, 2025 ~ September 26, 2025																															

Test Case	Clause in FCC rules	Limits	Verdict
Date of Sample Received: July 16, 2025			
Note: 1. Because of the change of antenna gain, ERP/EIRP need to be re-evaluated. 2. PASS: The EUT complies with the essential requirements in the standard. 3. FAIL: The EUT does not comply with the essential requirements in the standard. 4. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company:	Eurofins TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Xu Kai
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	https://www.eurofins.com/electrical-and-electronics
E-mail:	Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Aava Mobile Oy
Applicant address	Nahkatehtaankatu 2, FI-90130 Oulu, Finland
Manufacturer	Aava Mobile Oy
Manufacturer address	Nahkatehtaankatu 2, FI-90130 Oulu, Finland

2.2 General information

EUT Description				
Model	INARI-E-10-T5G-1			
SN	XBBB2FC5100049			
Hardware Version	DV2			
Software Version	007			
Power Supply	Battery / AC adapter			
Antenna Type	Internal Antenna			
Rated Power Supply Voltage	3.85 VDC			
Operating Voltage	Minimum: 3.20V Maximum: 4.40V			
Operating Temperature	Lowest: -10°C Highest: +50°C			
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)	Gain (dBi)
	NR Band n2	1850 ~ 1910	1930 ~ 1990	1.1 dBi
	NR Band n5	824 ~ 849	869 ~ 894	0.3 dBi
	NR Band n7	2500 ~ 2570	2620 ~ 2690	1.1 dBi
	NR Band n12	699 ~ 716	729 ~ 746	0.4 dBi
	NR Band n13	777 ~ 787	746 ~ 756	1.4 dBi
	NR Band n14	788 ~ 798	758 ~ 768	0.4 dBi
	NR Band n25	1850 ~ 1915	1930 ~ 1995	1.1 dBi
	NR Band n26 (814 ~ 824)	814 ~ 824	859 ~ 869	0.3 dBi
	NR Band n26 (824 ~ 849)	824 ~ 849	869 ~ 894	0.3 dBi
	NR Band n30	2305 ~ 2315	2350 ~ 2360	1.0 dBi
	NR Band n38	2570 ~ 2620	2570 ~ 2620	1.1 dBi
	NR Band n41	2496 ~ 2690	2496 ~ 2690	1.1 dBi
	NR Band n53	2483.5 ~ 2495	2483.5 ~ 2495	1.1 dBi
	NR Band n66	1710 ~ 1780	2110 ~ 2180	-0.1 dBi
	NR Band n70	1695 ~ 1710	1995 ~ 2020	-0.1 dBi
	NR Band n71	663 ~ 698	617 ~ 652	-0.1 dBi

NR Test Report		Report No.: ET-17A26070210-12-00-REV.1		
	NR Band n77 Subset 1	3450 ~ 3550	3450 ~ 3550	2.5 dBi
	NR Band n77 Subset 2	3700 ~ 3980	3700 ~ 3980	2.5 dBi
	NR Band n78 Subset 1	3450 ~ 3550	3450 ~ 3550	2.5 dBi
	NR Band n78 Subset 2	3700 ~ 3800	3700 ~ 3800	2.5 dBi
Test Modulation	(NR) CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM; DFT-s OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM			
Power Class	NR: 3			
Maximum E.I.R.P./ E.R.P.	NR Band n2	25.12 dBm		
	NR Band n5	22.98 dBm		
	NR Band n7	25.07 dBm		
	NR Band n12	23.15 dBm		
	NR Band n13	22.44 dBm		
	NR Band n14	22.45 dBm		
	NR Band n25	26.6 dBm		
	NR Band n26 (814 ~ 824)	22.73 dBm		
	NR Band n26 (824 ~ 849)	22.89 dBm		
	NR Band n30	23.59 dBm		
	NR Band n38	25.16 dBm		
	NR Band n41	25.00 dBm		
	NR Band n53	24.45 dBm		
	NR Band n66	25.11 dBm		
	NR Band n70	24.10 dBm		
	NR Band n71	22.59 dBm		
	NR Band n77 Subset 1	24.70 dBm		
	NR Band n77 Subset 2	25.07 dBm		
EUT Accessory				
Battery	Manufacturer: Shenzhen Guangwei Electronic Technology Co., Ltd. Model: AMME5260			
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. Radio equipment in band n77 is only allowed to operate from 3450 MHz to 3550 MHz for Subset 1; 3700 MHz to 3980 MHz for Subset 2 for the transmitter and receiver. Radio equipment in band n78 is only allowed to operate from 3450 MHz to 3550 MHz for Subset 1;				

3700 MHz to 3800 MHz for Subset 2 for the transmitter and receiver.

3. The Power / Bandwidth / Channels of n78 is the same as n77, so the test items will be covered by n77.

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2025)

FCC CFR 47 Part 24E (2025)

FCC CFR 47 Part 25 (2025)

FCC CFR 47 Part 27C (2025)

FCC CFR 47 Part 90S (2025)

FCC CFR 47 Part 90R (2025)

Reference standard:

FCC CFR 47 Part 2 (2025)

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Case

4.1 RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Methods of Measurement


During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.

ERP can then be calculated as follows:

$EIRP \text{ (dBm)} = \text{Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

Test Setup

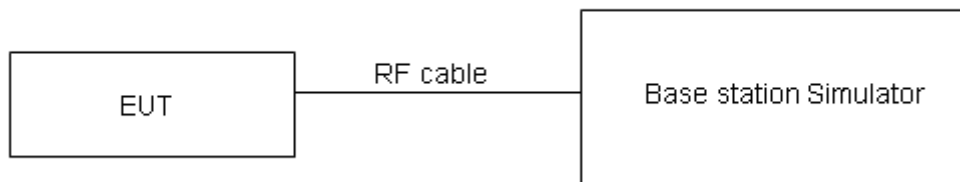

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB for RF power output, $k = 2$, $U= 1.19$ dB for ERP/EIRP.

Test Results

Refer to the section 5.1 of this report for test data.

4.2 Radiated Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26-2015.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dB}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz~ 30MHz

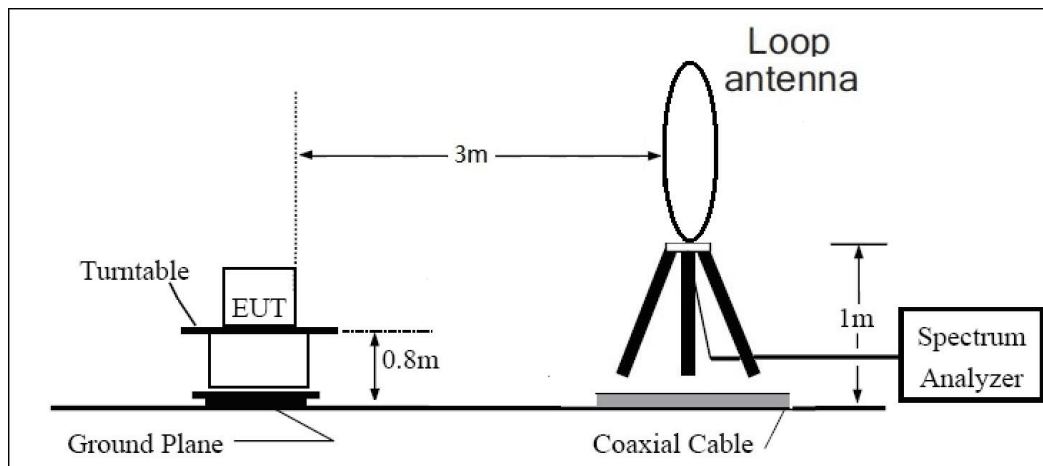

30MHz~ 1GHz

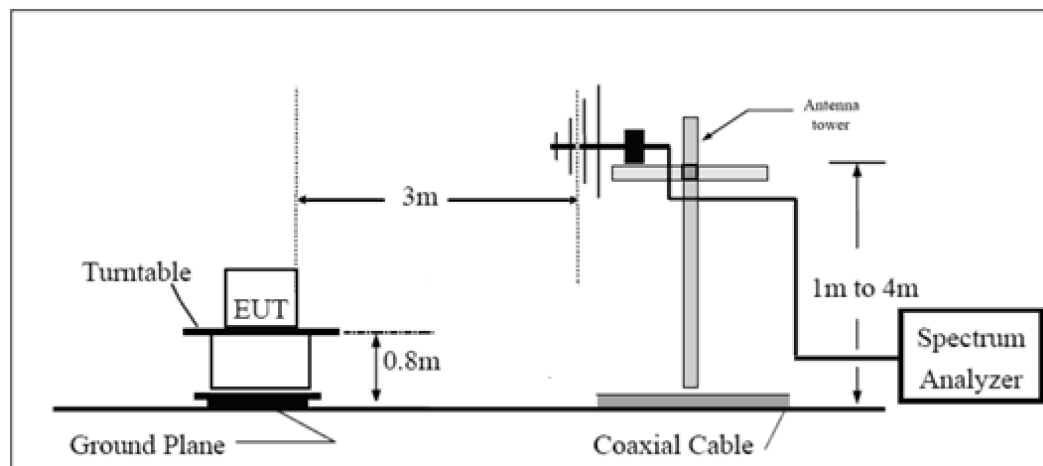

Above 1GHz

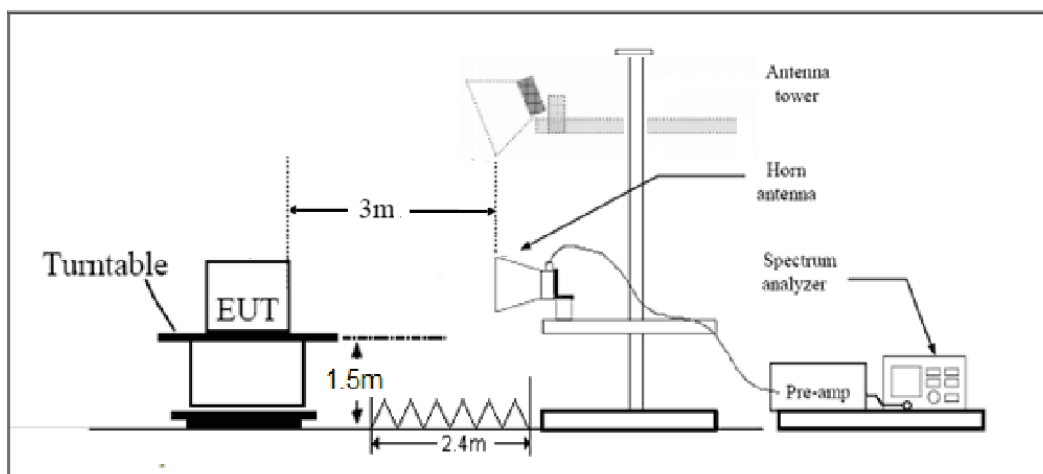

Note: Area side:2.4mX3.6m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Results

The detailed test data see EFTA25070216-IE-03-R2-ANNEX G Test Result.

5 Test Results

5.1 RF Power Output and Effective (Isotropic) Radiated Power

5G NR Band n2:1850 to 1910 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	370500	376000	381500	370500	376000	381500
					1852.5	1880	1907.5	1852.5	1880	1907.5
5	15	DFT-SPI/2BPSK	1	1	23.91	23.79	23.75	25.01	24.89	24.85
			1	23	23.85	23.80	23.48	24.95	24.90	24.58
			12	6	23.89	23.70	23.72	24.99	24.80	24.82
			25	0	23.35	23.23	23.18	24.45	24.33	24.28
		DFT-s QPSK	1	1	23.87	23.84	23.50	24.97	24.94	24.60
			1	23	23.73	23.87	23.44	24.83	24.97	24.54
			12	6	23.85	23.77	23.51	24.95	24.87	24.61
			25	0	22.86	22.72	22.72	23.96	23.82	23.82
		DFT-s 16QAM	1	1	22.73	22.84	22.61	23.83	23.94	23.71
		DFT-s 64QAM	1	1	21.43	21.95	21.59	22.53	23.05	22.69
		DFT-s 256QAM	1	1	19.52	19.82	18.55	20.62	20.92	19.65
		CP QPSK	1	1	22.77	22.85	22.15	23.87	23.95	23.25
		CP 16QAM	1	1	22.53	21.57	21.84	23.63	22.67	22.94
		CP 64QAM	1	1	20.44	20.32	19.99	21.54	21.42	21.09
		CP256QAM	1	1	17.61	17.69	17.30	18.71	18.79	18.40
5G NR Band n2:1850 to 1910 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	371000	376000	381000	371000	376000	381000
					1855	1880	1905	1855	1880	1905
10	15	DFT-s PI/2 BPSK	1	1	24.02	23.73	23.72	25.12	24.83	24.82
			1	50	23.89	23.63	23.45	24.99	24.73	24.55
			25	12	23.87	23.72	23.68	24.97	24.82	24.78
			50	0	23.39	23.30	23.26	24.49	24.40	24.36
		DFT-s QPSK	1	1	23.91	23.67	23.50	25.01	24.77	24.60
			1	50	23.89	23.54	23.45	24.99	24.64	24.55
			25	12	23.92	23.71	23.64	25.02	24.81	24.74
			50	0	22.88	22.79	22.79	23.98	23.89	23.89
		DFT-s 16QAM	1	1	23.15	22.54	22.70	24.25	23.64	23.80
		DFT-s 64QAM	1	1	21.53	21.74	21.63	22.63	22.84	22.73

		DFTs 256QAM	1	1	19.55	18.98	19.48	20.65	20.08	20.58
		CP QPSK	1	1	22.79	22.52	22.09	23.89	23.62	23.19
		CP 16QAM	1	1	22.25	21.99	21.94	23.35	23.09	23.04
		CP 64QAM	1	1	20.66	20.27	20.25	21.76	21.37	21.35
		CP256QAM	1	1	17.35	17.31	17.68	18.45	18.41	18.78
5G NR Band n2:1850 to 1910 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	371500	376000	380500	371500	376000	380500
					1857.5	1880	1902.5	1857.5	1880	19025
15	15	DFT-s PI/2 BPSK	1	1	23.96	23.93	23.88	25.06	25.03	24.98
			1	77	23.72	23.86	23.81	24.82	24.96	24.91
			36	18	23.89	23.87	23.75	24.99	24.97	24.85
			75	0	23.45	23.34	23.23	24.55	24.44	24.33
		DFT-s QPSK	1	1	23.90	23.81	23.87	25.00	24.91	24.97
			1	77	23.87	23.84	23.80	24.97	24.94	24.90
			36	18	23.92	23.84	23.85	25.02	24.94	24.95
			75	0	22.97	22.87	22.77	24.07	23.97	23.87
		DFT-s 16QAM	1	1	23.08	23.27	23.03	24.18	24.37	24.13
		DFT-s 64QAM	1	1	21.71	21.51	21.62	22.81	22.61	22.72
		DFTs 256QAM	1	1	19.31	19.73	19.51	20.41	20.83	20.61
		CP QPSK	1	1	21.75	22.02	22.10	22.85	23.12	23.20
		CP 16QAM	1	1	21.76	21.58	21.76	22.86	22.68	22.86
		CP 64QAM	1	1	20.12	20.25	20.40	21.22	21.35	21.50
		CP256QAM	1	1	16.61	17.35	17.27	17.71	18.45	18.37
5G NR Band n2:1850 to 1910 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	372000	376000	380000	372000	376000	380000
					1860	1880	1900	1860	1880	1900
20	15	DFT-s PI/2 BPSK	1	1	23.99	23.93	23.92	25.09	25.03	25.02
			1	104	23.74	23.80	23.71	24.84	24.90	24.81
			50	25	23.94	23.83	23.74	25.04	24.93	24.84
			100	0	23.30	23.30	23.22	24.40	24.40	24.32
		DFT-s QPSK	1	1	23.91	23.89	23.79	25.01	24.99	24.89
			1	104	23.95	23.74	23.88	25.05	24.84	24.98
			50	25	23.89	23.88	23.83	24.99	24.98	24.93
			100	0	22.91	22.83	22.72	24.01	23.93	23.82
		DFT-s 16QAM	1	1	22.85	23.22	23.14	23.95	24.32	24.24
		DFT-s 64QAM	1	1	21.64	21.27	21.69	22.74	22.37	22.79
		DFT-s 256QAM	1	1	19.63	19.31	19.29	20.73	20.41	20.39
		CP QPSK	1	1	22.56	22.46	22.59	23.66	23.56	23.69

		CP 16QAM	1	1	22.23	22.28	22.04	23.33	23.38	23.14
		CP 64QAM	1	1	20.94	20.40	20.54	22.04	21.50	21.64
		CP256QAM	1	1	17.81	17.35	17.78	18.91	18.45	18.88

5G NR Band n5: 824to 849 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			7		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	165300	167300	169300	165300	167300	169300
5	15	DFT-s PI/2 BPSK	1	1	23.96	23.99	23.98	22.91	22.94	22.93
			1	23	23.84	23.86	23.69	22.79	22.81	22.64
			12	6	23.78	23.92	23.87	22.73	22.87	22.82
			25	0	23.34	23.38	23.26	22.29	22.33	22.21
		DFT-s QPSK	1	1	23.88	23.76	23.77	22.83	22.71	22.72
			1	23	23.87	23.68	23.83	22.82	22.63	22.78
			12	6	23.81	23.91	23.89	22.76	22.86	22.84
			25	0	22.78	22.97	22.84	21.73	21.92	21.79
		DFT-s 16QAM	1	1	23.26	23.17	22.79	22.21	22.12	21.74
		DFT-s 64QAM	1	1	21.40	21.73	21.48	20.35	20.68	20.43
		DFTs 256QAM	1	1	20.12	19.88	19.57	19.07	18.83	18.52
		CP QPSK	1	1	22.43	22.50	22.64	21.38	21.45	21.59
		CP 16QAM	1	1	22.00	22.33	22.43	20.95	21.28	21.38
		CP 64QAM	1	1	20.34	20.57	20.37	19.29	19.52	19.32
		CP256QAM	1	1	17.54	18.38	17.40	16.49	17.33	16.35

5G NR Band n5:824 to 849 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			7		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	165800	167300	168800	165800	167300	168800
10	15	DFT-s PI/2 BPSK	1	1	23.93	23.95	23.98	22.88	22.90	22.93
			1	50	23.89	23.84	23.88	22.84	22.79	22.83
			25	12	23.91	23.91	23.89	22.86	22.86	22.84
			50	0	23.41	23.44	23.36	22.36	22.39	22.31
		DFT-s QPSK	1	1	23.91	23.95	23.96	22.86	22.90	22.91
			1	50	23.86	23.94	23.93	22.81	22.89	22.88
			25	12	23.91	23.96	23.85	22.86	22.91	22.80
			50	0	22.98	23.04	22.94	21.93	21.99	21.89
		DFT-s 16QAM	1	1	22.87	23.09	23.25	21.82	22.04	22.20
		DFT-s 64QAM	1	1	21.48	21.53	21.49	20.43	20.48	20.44
		DFT-s 256QAM	1	1	19.92	19.53	19.60	18.87	18.48	18.55
		CP QPSK	1	1	22.68	22.37	22.79	21.63	21.32	21.74
		CP 16QAM	1	1	22.17	21.61	22.20	21.12	20.56	21.15

			CP 64QAM	1	1	20.18	20.47	20.73	19.13	19.42	19.68
			CP256QAM	1	1	17.59	17.72	17.37	16.54	16.67	16.32
5G NR Band n5: 824to 849 MHz						Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)			0.3		Channel (ARFCH)/ Frequency(MHz)			Channel (ARFCH)/ Frequency (MHz)			
ERP Limit (W)			7		Low	Mid	High	Low	Mid	High	
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	166300	167300	168300	166300	167300	168300	
					831.5	836.5	841.5	831.5	836.5	841.5	
15	15	DFT-s PI/2 BPSK	1	1	23.96	23.92	24.03	22.91	22.87	22.98	
			1	77	23.91	23.84	23.78	22.86	22.79	22.73	
			36	18	23.94	23.96	23.95	22.89	22.91	22.90	
			75	0	23.46	23.46	23.52	22.41	22.41	22.47	
		DFT-s QPSK	1	1	23.60	23.92	23.87	22.55	22.87	22.82	
			1	77	23.67	23.90	23.88	22.62	22.85	22.83	
			36	18	23.92	23.89	23.95	22.87	22.84	22.90	
			75	0	23.01	23.01	23.01	21.96	21.96	21.96	
		DFT-s 16QAM	1	1	23.08	23.12	23.01	22.03	22.07	21.96	
		DFT-s 64QAM	1	1	21.46	21.81	21.62	20.41	20.76	20.57	
		DFT-s 256QAM	1	1	19.95	19.71	19.67	18.90	18.66	18.62	
		CP QPSK	1	1	22.61	22.62	22.06	21.56	21.57	21.01	
		CP 16QAM	1	1	21.90	21.70	22.15	20.85	20.65	21.10	
		CP 64QAM	1	1	20.29	20.51	20.87	19.24	19.46	19.82	
		CP256QAM	1	1	17.49	17.44	17.50	16.44	16.39	16.45	
5G NR Band n5: 824 to 849 MHz						Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency(MHz)			
ERP Umit (W)			7		Low	Mid	High	Low	Mid	High	
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	166800	167300	167800	166800	167300	167800	
					834	836.5	839	834	836.5	839	
20	15	DFT-s PI/2 BPSK	1	1	23.99	23.95	23.97	22.94	22.90	22.92	
			1	104	23.83	23.82	23.85	22.78	22.77	22.80	
			50	25	23.93	23.86	23.97	22.88	22.81	22.92	
			100	0	23.41	23.41	23.42	22.36	22.36	22.37	
		DFT-s QPSK	1	1	23.90	23.88	23.98	22.85	22.83	22.93	
			1	104	23.76	23.86	23.82	22.71	22.81	22.77	
			50	25	23.98	23.90	23.79	22.93	22.85	22.74	
			100	0	23.03	22.91	22.89	21.98	21.86	21.84	
		DFT-s 16QAM	1	1	23.06	22.99	22.76	22.01	21.94	21.71	
		DFT-s 64QAM	1	1	21.24	21.55	21.66	20.19	20.50	20.61	
		DFT-s 256QAM	1	1	19.86	19.73	19.83	18.81	18.68	18.78	
		CP QPSK	1	1	22.36	22.30	22.59	21.31	21.25	21.54	
		CP 16QAM	1	1	21.95	21.87	22.14	20.90	20.82	21.09	
		CP 64QAM	1	1	20.69	20.48	20.88	19.64	19.43	19.83	
		CP256QAM	1	1	17.71	17.39	18.03	16.66	16.34	16.98	

5G NR Band n7:2500 to 2570 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	Hgh	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	500500	507000	513500	500500	507000	513500
					2502.5	2535	2567.5	25025	2535	2567.5
5	15	DFPs PI/2 BPSK	1	1	23.76	23.76	23.86	24.86	24.86	24.96
			1	23	23.60	23.75	23.74	24.70	24.85	24.84
			12	6	23.68	23.74	23.83	24.78	24.84	24.93
			25	0	23.23	23.29	23.30	24.33	24.39	24.40
		DFT-s QPSK	1	1	23.44	23.77	23.60	24.54	24.87	24.70
			1	23	23.67	23.71	23.45	24.77	24.81	24.55
			12	6	23.53	23.83	23.77	24.63	24.93	24.87
			25	0	22.74	22.71	22.91	23.84	23.81	24.01
		DFT-s 16QAM	1	1	22.66	22.87	22.86	23.76	23.97	23.96
		DFT-s 64QAM	1	1	21.28	21.91	21.32	22.38	23.01	22.42
		DFT-s 256QAM	1	1	18.92	19.52	18.89	20.02	20.62	19.99
		CP QPSK	1	1	22.22	22.38	22.20	23.32	23.48	23.30
		CP 16QAM	1	1	21.75	21.88	22.05	22.85	22.98	23.15
		CP 64QAM	1	1	20.71	20.28	20.62	21.81	21.38	21.72
		CP256QAM	1	1	17.33	17.70	17.53	18.43	18.80	18.63
5G NR Band n7:2500 to 2570 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulaton	RB Allocation	RB Offset	501000	507000	513000	501000	507000	513000
					2505	2535	2565	2505	2535	2565
10	15	DFT-s PI/2 BPSK	1	1	23.97	23.78	23.73	25.07	24.88	24.83
			1	50	23.68	23.54	23.83	24.78	24.64	24.93
			25	12	23.70	23.53	23.78	24.80	24.63	24.88
			50	0	23.40	23.18	23.35	24.50	24.28	24.45
		DFT-s QPSK	1	1	23.11	23.47	23.62	24.21	24.57	24.72
			1	50	23.51	23.44	23.75	24.61	24.54	24.85
			25	12	23.80	23.73	23.81	24.90	24.83	24.91
			50	0	22.95	22.82	22.77	24.05	23.92	23.87
		DFT-s 16QAM	1	1	22.83	22.52	22.70	23.93	23.62	23.80
		DFT-s 64QAM	1	1	20.97	21.28	21.62	22.07	22.38	22.72
		DFT-5 256QAM	1	1	18.84	19.22	19.24	19.94	20.32	20.34
		CP QPSK	1	1	22.67	22.24	22.31	23.77	23.34	23.41
		CP 16QAM	1	1	22.14	21.83	22.04	23.24	22.93	23.14
		CP 64QAM	1	1	20.47	20.59	20.45	21.57	21.69	21.55
		CP256QAM	1	1	17.70	17.76	17.06	18.80	18.86	18.16
5G NR Band n7:2500 to 2570 MHz					Conducted Average (dBm)			EIRP (dBm)		

Antenna Gain (dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency(MHz)		
ERP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	501500	507000	512500	501500	507000	512500
					2507.5	2535	2562.5	2507.5	2535	2562.5
15	15	DFT-s PI/2 BPSK	1	1	23.85	23.89	23.90	24.95	24.99	25.00
			1	77	23.76	23.76	23.89	24.86	24.86	24.99
			36	18	23.78	23.75	23.82	24.88	24.85	24.92
			75	0	23.33	23.24	23.34	24.43	24.34	24.44
		DFT-s QPSK	1	1	23.63	23.81	23.65	24.73	24.91	24.75
			1	77	23.65	23.87	23.76	24.75	24.97	24.86
			36	18	23.79	23.77	23.85	24.89	24.87	24.95
			75	0	22.74	22.75	22.98	23.84	23.85	24.08
		DFT-s 16QAM	1	1	22.97	22.79	22.89	24.07	23.89	23.99
		DFT-s 64QAM	1	1	21.07	21.20	21.82	22.17	22.30	22.92
		DFT-s 256QAM	1	1	19.36	19.20	19.64	20.46	20.30	20.74
		CP QPSK	1	1	22.14	22.35	22.59	23.24	23.45	23.69
		CP 16QAM	1	1	21.87	21.97	21.85	22.97	23.07	22.95
		CP 64QAM	1	1	19.92	20.57	20.54	21.02	21.67	21.64
		CP256QAM	1	1	17.47	17.23	18.01	18.57	18.33	19.11
5G NR Band n7:2500 to 2570 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	502000	507000	512000	502000	507000	512000
					2510	2535	2560	2510	2535	2560
20	15	DFT-s PI/2 BPSK	1	1	23.91	23.72	23.85	25.01	24.82	24.95
			1	104	23.83	23.55	23.56	24.93	24.65	24.66
			50	25	23.78	23.68	23.77	24.88	24.78	24.87
			100	0	23.38	23.21	23.21	24.48	24.31	24.31
		DFT-s QPSK	1	1	23.77	23.69	23.82	24.87	24.79	24.92
			1	104	23.55	23.70	23.77	24.65	24.80	24.87
			50	25	23.74	23.71	23.72	24.84	24.81	24.82
			100	0	22.79	22.71	22.78	23.89	23.81	23.88
		DFT-s 16QAM		1	22.77	23.02	23.00	23.87	24.12	24.10
		DFT-s 64QAM	1	1	21.61	21.27	21.63	22.71	22.37	22.73
		DFT-s 256QAM	1	1	19.32	19.32	19.44	20.42	20.42	20.54
		CP QPSK	1	1	22.11	22.04	22.34	23.21	23.14	23.44
		CP 16QAM	1	1	21.80	21.52	22.02	22.90	22.62	23.12
		CP 64QAM	1	1	20.70	20.36	20.91	21.80	21.46	22.01
		CP256QAM	1	1	17.03	17.40	17.33	18.13	18.50	18.43
5G NR Band n12: 699 to 716 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.4		Channel (ARFCH)/			Channel (ARFCH)/		

					Frequency (MHz)			Frequency (MHz)				
ERP Limit (W)			3		Low	Mid	High	Low	Mid	High		
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	140300	141500	142700	140300	141500	142700		
					701.5	707.5	713.5	701.5	707.5	713.5		
5	15	DFT-s PI/2 BPSK	1	1	23.11	23.23	23.30	22.96	23.08	23.15		
			1	23	22.95	23.17	22.99	22.80	23.02	22.84		
			12	6	23.09	23.21	23.14	22.94	23.06	22.99		
			25	0	22.69	22.99	22.83	22.54	22.84	22.68		
		DFT-s QPSK	1	1	23.08	23.01	23.23	22.93	22.86	23.08		
			1	23	22.90	23.18	23.21	22.75	23.03	23.06		
			12	6	23.07	23.18	23.22	22.92	23.03	23.07		
			25	0	22.35	22.46	22.41	22.20	22.31	22.26		
		DFT-s 16QAM	1	1	22.60	22.30	22.48	22.45	22.15	22.33		
		DFT-s 64QAM	1	1	21.11	20.67	21.47	20.96	20.52	21.32		
		DFT-s 256QAM	1	1	19.37	19.03	19.14	19.22	18.88	18.99		
		CP QPSK	1	1	22.14	21.62	22.15	21.99	21.47	22.00		
		CP 16QAM	1	1	21.76	21.61	21.20	21.61	21.46	21.05		
		CP 64QAM	1	1	20.07	19.78	19.97	19.92	19.63	19.82		
		CP256QAM	1	1	17.42	17.01	17.31	17.27	16.86	17.16		
		5G NR Band n12: 699 to 716 MHz					Conducted Average (dBm)			ERP (dBm)		
		Antenna Gain (dBi)			0.4		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		Low	Mid	Hgh	Low	Mid	High		
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	140800	141500	142200	140800	141500	142200		
					704	707.5	711	704	707.5	711		
10	15	DR-s PI/2 BPSK	1	1	23.63	23.29	23.33	22.58	22.24	22.28		
			1	50	23.39	23.10	23.17	22.34	22.05	22.12		
			25	12	22.65	23.05	23.22	21.60	22.00	22.17		
			50	0	22.57	22.99	22.96	21.52	21.94	21.91		
		DFT-s QPSK	1	1	23.38	23.13	23.23	22.33	22.08	22.18		
			1	50	23.48	23.06	23.20	22.43	22.01	22.15		
			25	12	22.66	23.22	23.21	21.61	22.17	22.16		
			50	0	22.17	22.39	22.48	21.12	21.34	21.43		
		DFT-s 16QAM	1	1	22.51	21.78	22.67	21.46	20.73	21.62		
		DFT-s 64QAM	1	1	21.08	20.77	20.97	20.03	19.72	19.92		
		DFT-s 256QAM	1	1	19.49	18.92	19.00	18.44	17.87	17.95		
		CP QPSK	1	1	22.30	21.20	22.15	21.25	20.15	21.10		
		CP 16QAM	1	1	21.75	20.90	21.61	20.70	19.85	20.56		
		CP 64QAM	1	1	19.62	19.87	20.22	18.57	18.82	19.17		
		CP256QAM	1	1	16.93	17.08	16.82	15.88	16.03	15.77		
		5G NR Band n12: 699 to 716 MHz					Conducted Average (dBm)			ERP (dBm)		
		Antenna Gain (dBi)			0.4		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		Low	Mid	High	Low	Mid	High		

RF Test Report
Report No.: EFTA25070216-IE-03-R2V1

BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	141300	141500	141700	141300	141500	141700
					706.5	707.5	708.5	706.5	707.5	708.5
15	15	DFT-s PI/2 BPSK	1	1	23.28	23.20	23.26	22.23	22.15	22.21
			1	77	23.12	23.19	23.03	22.07	22.14	21.98
			36	18	23.11	23.15	23.05	22.06	22.10	22.00
			75	0	22.96	22.96	22.84	21.91	21.91	21.79
		DFT-s QPSK	1	1	23.14	23.10	23.18	22.09	22.05	22.13
			1	77	23.16	22.63	23.14	22.11	21.58	22.09
			36	18	23.25	23.17	23.15	22.20	22.12	22.10
			75	0	22.32	22.38	22.37	21.27	21.33	21.32
		DFT-s 16QAM	1	1	22.54	22.20	22.22	21.49	21.15	21.17
		DFT-s 64QAM	1	1	21.39	20.96	21.12	20.34	19.91	20.07
		DFT-s 256QAM	1	1	19.38	19.28	19.20	18.33	18.23	18.15
		CP QPSK	1	1	21.82	21.87	21.15	20.77	20.82	20.10
		CP 16QAM	1	1	21.05	21.29	20.90	20.00	20.24	19.85
		CP 64QAM	1	1	19.79	19.91	20.03	18.74	18.86	18.98
		CP256QAM	1	1	16.88	17.23	17.38	15.83	16.18	16.33

5G NR Band n13:777 to787 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			1.4		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Alocation	RB Offset	155900	156400	156900	155900	156400	156900
					779.5	782	784.5	779.5	782	784.5
5	15	DFT-s PI/2 BPSK	1	1	23.44	23.35	23.42	22.39	22.30	22.37
			1	23	23.08	23.05	23.12	22.03	22.00	22.07
			12	6	23.39	23.26	23.29	22.34	22.21	22.24
			25	0	23.01	23.04	22.95	21.96	21.99	21.90
		DFT-s QPSK	1	1	23.49	23.43	23.26	22.44	22.38	22.21
			1	23	23.25	23.28	23.06	22.20	22.23	22.01
			12	6	23.32	23.32	23.33	22.27	22.27	22.28
			25	0	22.48	22.56	22.47	21.43	21.51	21.42
		DFT-s 16QAM	1	1	22.15	22.51	22.57	21.10	21.46	22.55
		DFT-s 64QAM	1	1	20.55	20.31	20.87	19.50	19.26	19.82
		DFT-s 256QAM	1	1	18.07	19.38	19.58	17.02	18.33	18.53
		CP QPSK	1	1	21.59	22.18	21.85	20.54	21.13	20.80
		CP 16QAM	1	1	21.14	21.56	21.22	20.09	20.51	20.17
		CP 64QAM	1	1	19.43	20.69	19.66	18.38	19.64	18.61
		CP256QAM	1	1	16.65	17.20	17.39	15.60	16.15	16.34
5G NR Band n13: 777 to787 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			1.4		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		/	Mid	/	/	Mid	/
BW	SCS	Modulation	RB Alocation	RB	/	156400	/	/	156400	/

RF Test Report
Report No.: EFTA25070216-IE-03-R2V1

(MHz)	(kHz)			Offset	/	782	/	/	782	/
10	15	DFT-s PI/2 BPSK	1	1	/	23.29	/	/	22.24	/
			1	23	/	23.10	/	/	22.05	/
			12	6	/	23.37	/	/	22.32	/
			25	0	/	22.92	/	/	21.87	/
		DFT-s QPSK	1	1	/	22.98	/	/	21.93	/
			1	23	/	22.85	/	/	21.80	/
			12	6	/	23.26	/	/	22.21	/
			25	0	/	22.67	/	/	21.62	/
		DFT-s 16QAM	1	1	/	22.29	/	/	21.24	/
		DFT-s 64QAM	1	1	/	20.90	/	/	19.85	/
		DFT-s 256QAM	1	1	/	19.01	/	/	17.96	/
		CP QPSK	1	1	/	22.12	/	/	21.07	/
		CP 16QAM	1	1	/	21.43	/	/	20.38	/
		CP 64QAM	1	1	/	19.79	/	/	18.74	/
		CP256QAM	1	1	/	17.11	/	/	16.06	/

5G NR Band n14: 788 to 798 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.4		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	158100.00	158600.00	189100.00	158100	158600	189100
					790.50	793.00	795.50	790.5	793	795.5
5	15	DK-s PI/2 BPSK	1	1	23.32	23.30	23.35	22.27	22.25	22.30
			1	23	23.26	23.28	23.34	22.21	22.23	22.29
			12	6	23.21	23.22	23.06	22.16	22.17	22.01
			25	0	22.90	22.90	22.82	21.85	21.85	21.77
		DFT-s QPSK	1	1	22.99	23.02	23.08	21.94	21.97	22.03
			1	23	23.16	23.09	23.28	22.11	22.04	22.23
			12	6	23.27	23.28	23.01	22.22	22.23	21.96
			25	0	22.44	22.39	22.25	21.39	21.34	21.20
		DFT-s 16QAM	1	1	22.44	22.45	22.81	21.39	21.40	21.76
		DFT-s 64QAM	1	1	20.95	20.94	20.68	19.90	19.89	19.63
		DFT-s 256QAM	1	1	18.63	18.56	19.63	17.58	17.51	18.58
		CP QPSK	1	1	22.12	22.15	21.89	21.07	21.10	20.84
		CP 16QAM	1	1	21.60	-58.38	21.41	20.55	-59.43	20.36
		CP 64QAM	1	1	20.04	20.06	19.75	18.99	19.01	18.70
		CP256QAM	1	1	17.28	17.30	16.89	16.23	16.25	15.84
5G NR Band n14: 788 to 798 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)			0.4		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		/	Mid	/	/	Mid	/
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	/	158600	/	/	158600	/
					/	793	/	/	793	/

10	15	DFT-s PI/2 BPSK	1	1	/	23.45	/	/	22.40	/
			1	50	/	23.25	/	/	22.20	/
			25	12	/	23.19	/	/	22.14	/
			50	0	/	22.88	/	/	21.83	/
		DFT-s QPSK	1	1	/	23.50	/	/	22.45	/
			1	50	/	23.23	/	/	22.18	/
			25	12	/	23.25	/	/	22.20	/
			50	0	/	22.37	/	/	21.32	/
		DFT-s 16QAM	1	1	/	22.82	/	/	21.77	/
		DFT-s 64QAM	1	1	/	21.24	/	/	20.19	/
		DFT-s 256QAM	1	1	/	19.18	/	/	18.13	/
		CP QPSK	1	1	/	22.06	/	/	21.01	/
		CP 16QAM	1	1	/	21.43	/	/	20.38	/
		CP 64QAM	1	1	/	20.04	/	/	18.99	/
		CP256QAM	1	1	/	17.25	/	/	16.20	/

5G NR Band n25:1850 to 1915MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			2		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Ofcet	370500	376500	382500	370500	376500	382500
					18525	1882.5	19125	1852.5	1882.5	1912.5
5	15	DFT-s PI/2 BPSK	1	1	24.06	23.79	23.68	25.16	24.89	24.78
			1	23	23.96	23.76	23.63	25.06	24.86	26.42
			12	6	23.95	23.66	23.74	25.05	24.76	26.53
			25	0	23.48	23.15	23.26	24.58	24.25	26.05
		DFT-s QPSK	1	1	23.72	23.60	23.51	24.82	24.70	26.30
			1	23	23.74	23.59	23.51	24.84	24.69	26.30
			12	6	23.79	23.65	23.81	24.89	24.75	26.60
			25	0	23.03	22.65	22.74	24.13	23.75	25.53
		DFT-s 16QAM	1	1	22.96	23.04	22.88	24.06	24.14	25.67
		DFT-s 64QAM	1	1	21.51	21.13	21.40	22.61	22.23	24.19
		DFT-s 256QAM	1	1	19.48	18.70	19.37	20.58	19.80	22.16
		CP QPSK	1	1	22.15	22.24	22.41	23.25	23.34	25.20
		CP 16QAM	1	1	22.05	21.73	22.28	23.15	22.83	25.07
		CP 64QAM	1	1	20.48	20.07	20.43	21.58	21.17	23.22
		CP256QAM	1	1	17.52	17.34	17.46	18.62	18.44	20.25
5G NR Band n25:1850 to 1915 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allncafinn	RB Ofcet	371000	376500	382000	371000	376500	382000
					1855	1882.5	1910	1855	1882.5	1910
10	15	DFT-s PI/2	1	1	23.94	23.82	23.93	25.04	24.92	25.03

		BPSK	1	50	23.74	23.87	23.68	24.84	24.97	24.78
			25	12	23.91	23.69	23.72	25.01	24.79	24.82
			50	0	23.44	23.20	23.26	24.54	24.30	24.36
		DK-s QPSK	1	1	23.95	23.88	23.91	25.05	24.98	25.01
			1	50	23.90	23.89	23.73	25.00	24.99	24.83
			25	12	23.94	23.69	23.80	25.04	24.79	24.90
			50	0	23.02	22.70	22.79	24.12	23.80	23.89
		DFT-s 16QAM	1	1	22.98	22.76	22.98	24.08	23.86	24.08
		DFT-s 64QAM	1	1	21.79	21.28	21.41	22.89	22.38	22.51
		DFT-s 256QAM	1	1	19.61	19.72	19.33	20.71	20.82	20.43
		CP QPSK	1	1	22.50	22.32	22.35	23.60	23.42	23.45
		CP 16QAM	1	1	22.20	21.97	21.69	23.30	23.07	22.79
		CP 64QAM	1	1	20.69	19.88	20.44	21.79	20.98	21.54
		CP256QAM	1	1	17.27	17.35	17.47	18.37	18.45	18.57
5G NR Band n25:1850 to 1915 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Umit (W)			2		Low	Mid	Hgh	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulaion	RB Allocation	RB Offset	371500	376500	381500	371500	376500	381500
					1857.5	1882.5	1907.5	1857.5	1882.5	1907.5
15	15	DFT-s PI/2 BPSK	1	1	23.98	23.85	23.77	25.08	24.95	24.87
			1	77	23.76	23.75	23.78	24.86	24.85	24.88
			36	18	23.92	23.78	23.77	25.02	24.88	24.87
			75	0	23.38	23.19	23.25	24.48	24.29	24.35
		DFT-s QPSK	1	1	23.94	23.38	23.94	25.04	24.48	25.04
			1	77	23.78	23.25	23.89	24.88	24.35	24.99
			36	18	23.96	23.66	23.81	25.06	24.76	24.91
			75	0	22.90	22.70	22.77	24.00	23.80	23.87
		DFT-s 16QAM	1	1	23.15	22.86	22.99	24.25	23.96	24.09
		DFT-s 64QAM	1	1	22.00	21.37	21.60	23.10	22.47	22.70
		DFT-s 256QAM	1	1	20.06	19.63	19.52	21.16	20.73	20.62
		CP QPSK	1	1	22.48	22.62	22.42	23.58	23.72	23.52
		CP 16QAM	1	1	21.79	21.90	21.60	22.89	23.00	22.70
		CP 64QAM	1	1	20.45	20.28	20.41	21.55	21.38	21.51
CP256QAM	1	1	18.08	17.64	18.08	19.18	18.74	19.18		
5G NR Band n25:1850 to 1915 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	372000	376500	381000	372000	376500	381000
					1860	1882.5	1905	1860	1882.5	1905
20	15	DFT-s PI/2 BPSK	1	1	23.96	23.69	23.71	25.06	24.79	24.81
			1	104	23.69	23.58	23.76	24.79	24.68	24.86
			50	25	23.90	23.63	23.75	25.00	24.73	24.85

			100	0	23.38	23.10	23.24	24.48	24.20	24.34
		DFT-s QPSK	1	1	23.88	23.73	23.71	24.98	24.83	24.81
			1	104	23.74	23.68	23.79	24.84	24.78	24.89
			50	25	23.89	23.72	23.79	24.99	24.82	24.89
			100	0	22.84	22.69	22.82	23.94	23.79	23.92
		DFT-s 16QAM	1	t	23.12	22.91	22.83	24.22	24.01	23.93
		DFT-s 64QAM	1	1	21.77	21.16	21.44	22.87	22.26	22.54
		DFT-s 256QAM	1	1	19.56	19.45	19.26	20.66	20.55	20.36
		CP QPSK	1	1	22.67	22.26	22.20	23.77	23.36	23.30
		CP 16QAM	1	1	22.20	21.95	21.77	23.30	23.05	22.87
		CP 64QAM	1	1	20.80	20.58	20.39	21.90	21.68	21.49
		CP256QAM	1	1	17.68	17.39	17.02	18.78	18.49	18.12

5G NR Band n26: 814 to 824 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			100		Low	Mid	Hgh	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	163300	163800	164300	163300	163800	164300
					816.5	819	821.5	816.5	819	821.5
5	15	DH-s PI/2 BPSK	1	1	23.71	23.71	23.77	22.66	22.66	22.72
			1	23	23.48	23.59	23.76	22.43	22.54	22.71
			12	6	23.39	23.52	23.74	22.34	22.47	22.69
			25	0	23.20	23.14	23.22	22.15	22.09	22.17
		DH-s PI/2 BPSK	1	1	23.73	23.73	23.74	22.68	22.68	22.69
			1	23	23.70	23.66	23.60	22.65	22.61	22.55
			12	6	23.66	23.57	23.55	22.61	22.52	22.50
			25	0	22.60	22.75	22.67	21.55	21.70	21.62
		DFT-s 16QAM	1	1	22.60	22.56	22.82	21.55	21.51	21.77
		DFT-s 64QAM	1	1	20.90	21.05	20.80	19.85	20.00	19.75
		DFT-s 256QAM	1	1	18.47	18.63	19.55	17.42	17.58	18.50
		CP QPSK	1	1	21.55	22.22	22.37	20.50	21.17	21.32
		CP 16QAM	1	1	21.49	21.48	21.78	20.44	20.43	20.73
		CP 64QAM	1	1	19.88	20.68	20.15	18.83	19.63	19.10
		CP256QAM	1	1	17.00	17.09	17.65	15.95	16.04	16.60
5G NR Band n26: 814 to 824 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			100		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	/	163800	/	/	163800	/
					/	819	/	/	819	/
10	15	DFT-s PV2 BPSK	1	1	/	23.78	/	/	22.73	/
			1	50	/	23.52	/	/	22.47	/
			25	12	/	23.44	/	/	22.39	/
			50	0	/	23.18	/	/	22.13	/

		DFT-s QPSK	1	1	/	23.36	/	/	22.31	/
			1	50	/	23.49	/	/	22.44	/
			25	12	/	23.63	/	/	22.58	/
			50	0	/	22.69	/	/	21.64	/
		DFT-s 16QAM	1	1	/	22.34	/	/	21.29	/
		DFT-s 64QAM	1	1	/	20.74	/	/	19.69	/
		DFT-s 256QAM	1	1	/	19.09	/	/	18.04	/
		CP QPSK	1	1	/	22.03	/	/	20.98	/
		CP 16QAM	1	1	/	21.44	/	/	20.39	/
		CP 64QAM	1	1	/	19.86	/	/	18.81	/
		CP256QAM	1	1	/	17.70	/	/	16.65	/

5G NR Band n26: 824 to 849 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			7		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	165300 826.5	167300 836.5	169300 846.5	165300 826.5	167300 836.5	169300 846.5
5	15	DFT-s PI/2 BPSK	1	1	23.80	23.92	23.76	22.75	22.87	22.71
			1	23	23.41	23.70	23.73	22.36	22.65	22.68
			12	6	23.91	23.76	23.90	22.86	22.71	22.85
			25	0	23.30	23.30	23.28	22.25	22.25	22.23
		DFT-s QPSK	1	1	23.58	23.61	23.51	22.53	22.56	22.46
			1	23	23.52	23.52	23.52	22.47	22.47	22.47
			12	6	23.86	23.90	23.85	22.81	22.85	22.80
			25	0	22.80	22.77	22.79	21.75	21.72	21.74
		DFT-s 16QAM	1	1	22.81	22.86	22.90	21.76	21.81	21.85
		DFT-s 64QAM	1	1	21.40	21.39	21.39	20.35	20.34	20.34
		DFT-s 256QAM	1	1	19.74	19.63	19.73	18.69	18.58	18.68
		CP QPSK	1	1	22.37	22.62	22.37	21.32	21.57	21.32
		CP 16QAM	1	1	22.21	22.06	22.20	21.16	21.01	21.15
		CP 64QAM	1	1	20.37	20.38	20.39	19.32	19.33	19.34
		CP256QAM	1	1	18.28	18.27	18.28	17.23	17.22	17.23
5G NR Band n26: 824 to 849 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency(MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			7		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	165800 829	167300 836.5	168800 844	165800 829	167300 836.5	168800 844
10	15	DFT-s PI/2 BPSK	1	1	23.85	23.86	23.76	22.80	22.81	22.71
			1	50	23.78	23.75	23.75	22.73	22.70	22.70
			25	12	23.75	23.77	23.84	22.70	22.72	22.79
			50	0	23.39	23.33	23.24	22.34	22.28	22.19
		DFT-s QPSK	1	1	23.69	23.66	23.65	22.64	22.61	22.60

			1	50	23.64	23.60	23.60	22.59	22.55	22.55
			25	12	23.83	23.74	23.84	22.78	22.69	22.79
			50	0	22.80	22.82	22.91	21.75	21.77	21.86
		DFT-s 16QAM	1	1	22.61	22.62	22.64	21.56	21.57	21.59
		DFT-s 64QAM	1	1	21.79	21.79	21.79	20.74	20.74	20.74
		DFT-s 256QAM	1	1	19.06	19.05	19.15	18.01	18.00	18.10
		CP QPSK	1	1	22.63	22.60	22.58	21.58	21.55	21.53
		CP 16QAM	1	1	22.01	22.01	22.00	20.96	20.96	20.95
		CP 64QAM	1	1	20.42	20.45	20.55	19.37	19.40	19.50
		CP256QAM	1	1	17.37	17.35	17.39	16.32	16.30	16.34
5G NR Band n26: 824 to 849 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Umit (W)			7		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	166300	167300	168300	166300	167300	168300
15	15	DFT-s PI/2 BPSK	1	1	23.94	23.86	23.85	22.89	22.81	22.80
			1	77	23.90	23.86	23.90	22.85	22.81	22.85
			36	18	23.76	23.85	23.84	22.71	22.80	22.79
			75	0	23.33	23.34	23.33	22.28	22.29	22.28
		DR-s QPSK	1	1	23.86	23.82	23.73	22.81	22.77	22.68
			1	77	23.73	23.93	23.91	22.68	22.88	22.86
			36	18	23.91	23.88	23.88	22.86	22.83	22.83
			75	0	22.88	22.91	22.89	21.83	21.86	21.84
		DFT-s 16QAM	1	1	23.01	22.88	22.93	21.96	21.83	21.88
		DFT-s 64QAM	1	1	21.49	21.51	21.47	20.44	20.46	20.42
		DFT-s 256QAM	1	1	19.63	19.50	19.48	18.58	18.45	18.43
		CP QPSK	1	1	22.13	22.23	22.11	21.08	21.18	21.06
		CP 16QAM	1	1	21.64	21.68	21.70	20.59	20.63	20.65
		CP 64QAM	1	1	20.31	20.30	20.34	19.26	19.25	19.29
		CP256QAM	1	1	17.33	17.38	17.33	16.28	16.33	16.28
5G NR Band n26: 824 to 849 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)			0.3		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			7		Low	Mid	High	Low	Mid	High
BW(MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	166800	167300	167800	166800	167300	167800
20	15	DFT-s PI/2 BPSK	1	1	23.71	23.93	23.70	22.66	22.88	22.65
			1	104	23.77	23.81	23.77	22.72	22.76	22.72
			50	25	23.87	23.67	23.92	22.82	22.62	22.87
			100	0	23.36	23.37	23.41	22.31	22.32	22.36
		DFT-s QPSK	1	1	23.62	23.62	23.59	22.57	22.57	22.54
			1	104	23.68	23.76	23.65	22.63	22.71	22.60
			50	25	23.91	23.92	23.91	22.86	22.87	22.86
			50	25	23.91	23.92	23.91	22.86	22.87	22.86

			100	0	22.95	22.96	22.95	21.90	21.91	21.90
		DFT-s 16QAM	1	1	23.05	23.06	23.06	22.00	22.01	22.01
		DFT-s 64QAM	1	1	21.30	21.29	21.29	20.25	20.24	20.24
		DFT-s 256QAM	1	1	19.67	19.61	19.63	18.62	18.56	18.58
		CP QPSK	1	1	21.99	21.94	21.93	20.94	20.89	20.88
		CP 16QAM	1	1	21.58	21.63	21.62	20.53	20.58	20.57
		CP 64QAM	1	1	20.57	20.57	20.58	19.52	19.52	19.53
		CP256QAM	1	1	17.51	17.53	17.77	16.46	16.48	16.72

5G NR Band n30:2305 to 2315MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			0.25		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	461500	462000	462500	461500	462000	462500
					2307.5	2310	2312.5	2307.5	2310	2312.5
5	15	DFT-s PI/2 BPSK	I	1	22.12	22.48	22.21	23.22	23.58	23.31
			1	23	22.02	22.38	22.07	23.12	23.48	23.17
			12	6	22.22	22.37	22.21	23.32	23.47	23.31
			25	0	21.69	21.84	21.63	22.79	22.94	22.73
		DFT-s QPSK	1	1	22.14	22.36	22.20	23.24	23.46	23.30
			1	23	22.12	22.45	22.12	23.22	23.55	23.22
			12	6	22.16	22.40	22.22	23.26	23.50	23.32
			25	0	21.18	21.37	21.07	22.28	22.47	22.17
		DFT-s 16QAM	1	1	21.20	21.44	21.37	22.30	22.54	22.47
		DFT-s 64QAM	1	1	19.75	19.91	19.55	20.85	21.01	20.65
		DFT-s 256QAM	1	1	17.33	17.53	17.47	18.43	18.63	18.57
		CP QPSK	1	1	21.04	21.16	21.22	22.14	22.26	22.32
		CP 16CWM	1	1	20.22	20.47	20.52	21.32	21.57	21.62
		CP 64aAM	1	1	18.36	18.68	18.48	19.46	19.78	19.58
		CP256QAM	1	1	15.84	16.09	15.99	16.94	17.19	17.09
5G NR Band n30: 2305to 2315 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			0.25		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	/	462000	/	/	462000	/
					/	2310	/	/	2310	/
10	15	DFT-s PI/2 BPSK	1	1	/	22.49	/	/	23.59	/
			1	50	/	22.21	/	/	23.31	/
			25	12	/	22.41	/	/	23.51	/
			50	0	/	21.98	/	/	23.08	/
		DFT-s QPSK	1	1	/	22.24	/	/	23.34	/
			1	50	/	22.28	/	/	23.38	/
			25	12	/	22.38	/	/	23.48	/
			50	0	/	21.39	/	/	22.49	/

		DFT-s 16QAM	1	1	/	21.46	/	/	22.56	/
		DFT-s 64QAM	1	1	/	19.88	/	/	20.98	/
		DFT-s 256QAM	1	1	/	17.59	/	/	18.69	/
		CP QPSK	1	1	/	21.37	/	/	22.47	/
		CP 16QAM	1	1	/	20.42	/	/	21.52	/
		CP 64QAM	1	1	/	18.74	/	/	19.84	/
		CP256QAM	1	1	/	16.15	/	/	17.25	/

5G NR Band n38:2570 to 2620 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	515000	519000	523000	515000	519000	523000
					2575	2595	2615	2575	2595	2615
10	30	DFT-s PI/2 BPSK	1	1	23.99	24.06	23.83	25.09	25.16	24.93
			1	22	23.93	23.90	23.79	25.03	25.00	24.89
			12	6	23.76	23.84	23.68	24.86	24.94	24.78
			24	0	23.52	23.60	23.47	24.62	24.70	24.57
		DFT-s QPSK	1	1	23.59	23.84	23.38	24.69	24.94	24.48
			1	22	23.85	23.87	23.82	24.95	24.97	24.92
			12	6	23.74	23.85	23.74	24.84	24.95	24.84
			24	0	22.96	23.17	22.89	24.06	24.27	23.99
		DFT-s 16QAM	1	1	22.90	23.31	23.00	24.00	24.41	24.10
		DFT-s 64QAM	1	1	21.14	21.56	21.59	22.24	22.66	22.69
		DFT-s 256QAM	1	1	19.22	20.24	19.36	20.32	21.34	20.46
		CP QPSK	1	1	22.44	22.59	22.50	23.54	23.69	23.60
		CP 16QAM	1	1	21.99	22.20	22.20	23.09	23.30	23.30
		CP 64QAM	1	1	20.64	20.58	20.59	21.74	21.68	21.69
		CP256QAM	1	1	17.61	17.56	18.25	18.71	18.66	19.35
5G NR Band n38:2570 to 2620 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	515500	519000	522500	515500	519000	522500
					2577.5	2595	26125	2577.5	2595	2612.5
15	30	DFT-s PI/2 BPSK	1	1	23.92	23.91	24.05	25.02	25.01	25.15
			1	36	23.77	23.85	23.75	24.87	24.95	24.85
			18	9	23.82	23.75	23.99	24.92	24.85	25.09
			36	0	23.50	23.57	23.58	24.60	24.67	24.68
		DFT-s QPSK	1	1	23.85	23.67	23.83	24.95	24.77	24.93
			1	36	23.70	23.73	23.94	24.80	24.83	25.04
			18	9	23.78	23.86	23.88	24.88	24.96	24.98
			36	0	23.01	23.10	23.07	24.11	24.20	24.17
		DFT-s 16QAM	1	1	22.97	23.05	23.00	24.07	24.15	24.10

RF Test Report
Report No.: EFTA25070216-IE-03-R2V1

		DFT-s 64QAM	1	1	21.09	21.74	21.46	22.19	22.84	22.56
		DFT-s 256QAM	1	1	19.10	19.70	19.38	20.20	20.80	20.48
		CP QPSK	1	1	22.33	22.22	22.84	23.43	23.32	23.94
		CP 16QAM	1	1	21.76	21.91	22.32	22.86	23.01	23.42
		CP 64QAM	1	1	20.08	20.84	20.55	21.18	21.94	21.65
		CP256QAM	1	1	17.03	17.31	17.65	18.13	18.41	18.75
5G NR Band n38:2570to 2620 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			2		Low	Mid	High	Low	Mid	High
BW(MHz)	SCS(kHz)	Modulation	RB Allocation	RB Offset	516000	519000	522000	516000	519000	522000
					2580	2595	2610	2580	2595	2610
20	30	DFT-s PI/2 BPSK	1	1	23.95	23.92	23.83	25.05	25.02	24.93
			1	49	23.71	23.71	23.80	24.81	24.81	24.90
			25	12	23.83	23.78	23.82	24.93	24.88	24.92
			50	0	23.51	23.62	23.49	24.61	24.72	24.59
		DFT-s QPSK	1	1	23.80	23.84	23.71	24.90	24.94	24.81
			1	49	23.90	23.80	23.78	25.00	24.90	24.88
			25	12	23.78	23.87	23.71	24.88	24.97	24.81
			50	0	22.96	23.07	22.99	24.06	24.17	24.09
		DFT-s 16QAM	1	1	22.95	23.14	23.12	24.05	24.24	24.22
		DFT-s 64QAM	1	1	21.55	21.49	21.88	22.65	22.59	22.98
		DFT-s 256QAM	1	1	19.54	19.55	19.65	20.64	20.65	20.75
		CP QPSK	1	1	22.40	22.47	22.92	23.50	23.57	24.02
		CP 16QAM	1	1	21.89	22.39	22.26	22.99	23.49	23.36
		CP 64QAM	1	1	20.52	20.18	20.78	21.62	21.28	21.88
		CP256QAM	1	1	17.70	17.48	17.75	18.80	18.58	18.85

FCC 5G NR Band n41:2496 to 2690 MHz					Conducted Average (dBm)				EIRP (dBm)			
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency(MHz)				Channel (ARFCH)/ Frequency(MHz)			
EIRP Limit (W)			2		Low	Low	Mid	High	Low	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	500202	501000	518604	537000	500202	501000	518604	537000
					2501.01	2505	2593.02	2685	2501.01	2505	2593.02	2685
10	30	DFT-s PI/2 BPSK	1	1	23.86	23.85	23.81	23.80	24.96	24.95	24.91	24.90
			1	22	23.85	23.55	23.76	23.53	24.95	24.65	24.86	24.63
			12	6	23.72	23.60	23.54	23.46	24.82	24.70	24.64	24.56
			24	0	23.41	23.40	23.40	23.14	24.51	24.50	24.50	24.24
		DFT-s QPSK	1	1	23.74	23.82	23.63	23.37	24.84	24.92	24.73	24.47
			1	22	23.82	23.53	23.65	23.48	24.92	24.63	24.75	24.58
			12	6	23.71	23.63	23.71	23.44	24.81	24.73	24.81	24.54
			24	0	22.91	22.86	22.90	22.64	24.01	23.96	24.00	23.74
		DFT-s 16QAM	1	1	22.82	22.91	22.99	22.84	23.92	24.01	24.09	23.94
		DFT-s 64QAM	1	1	21.36	21.72	21.19	21.11	22.46	22.82	22.29	22.21

RF Test Report
Report No.: EFTA25070216-IE-03-R2V1

		DFT-s 256QAM	1	1	19.42	19.66	18.98	19.58	20.52	20.76	20.08	20.68
		CP QPSK	1	1	22.39	22.44	22.52	22.24	23.49	23.54	23.62	23.34
		CP 16QAM	1	1	21.90	21.61	22.00	21.76	23.00	22.71	23.10	22.86
		CP64QAM	1	1	20.60	20.35	20.57	20.25	21.70	21.45	21.67	21.35
		CP256QAM	1	1	17.48	17.98	17.37	16.91	18.58	19.08	18.47	18.01
FCC 5G NR Band n41:2496 to 2690 MHz					Conducted Average (dBm)				EIRP (dBm)			
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency(MHz)				Channel (ARFCH)/ Frequency(MHz)			
EIRP Limit (W)			2		Low	Low	Mid	High	Low	Low	Mid	High
BW (MHz)	SCS (kHz)	Modiation	RB Allocation	RB Offset	500700	501504	518604	536496	500700	501504	518604	536496
					2503.5	2507.52	2593.02	2682.48	2503.5	2507.52	2593.02	2682.48
15	30	DFT-s PI/2 BPSK	1	1	23.89	23.90	23.72	23.58	24.99	25.00	24.82	24.68
			1	36	23.64	23.85	23.46	23.54	24.74	24.95	24.56	24.64
			18	9	23.79	23.77	23.63	23.51	24.89	24.87	24.73	24.61
			36	0	23.43	23.44	23.40	23.17	24.53	24.54	24.50	24.27
		DFT-s QPSK	1	1	23.62	23.34	23.36	23.72	24.72	24.44	24.46	24.82
			1	36	23.83	23.80	23.44	23.34	24.93	24.90	24.54	24.44
			18	9	23.76	23.73	23.71	23.53	24.86	24.83	24.81	24.63
			36	0	24.08	24.06	23.98	23.83	24.08	24.06	23.98	23.83
		DFT-fi 16QAM	1	1	23.67	24.2	23.83	23.86	23.67	24.2	23.83	23.86
		DFT-s 64QAM	1	1	21.59	21.56	21.23	20.89	22.69	22.66	22.33	21.99
		DFT-s 256QAM	1	1	19.06	19.08	18.86	18.81	20.16	20.18	19.96	19.91
		CP QPSK	1	1	22.48	22.58	21.69	22.08	23.58	23.68	22.79	23.18
		CP 16QAM	1	1	21.73	21.85	21.69	21.66	22.83	22.95	22.79	22.76
		CP64QAM	1	1	20.15	19.82	20.45	19.94	21.25	20.92	21.55	21.04
		CP256QAM	1	1	17.36	16.96	17.03	16.89	18.46	18.06	18.13	17.99
FCC 5G NR Band n41:2496 to 2690 MHz					Conduced Average (dBm)				EIRP (dBm)			
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency(MHz)				Channel (ARFCH)/ Frequency(MHz)			
EIRP Limit (W)			2		Low	Low	Mid	High	Low	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	501204	502002	518604	535998	501204	502002	518604	535998
					2506.02	2510.01	2593.02	2679.99	2506.02	2510.01	2593.02	2679.99
20	30	DFT-s PI/2 BPSK	1	1	23.68	23.74	23.74	23.81	24.78	24.84	24.84	24.91
			1	49	23.66	23.64	23.72	23.40	24.76	24.74	24.82	24.50
			25	12	23.63	23.64	23.68	23.48	24.73	24.74	24.78	24.58
			50	0	23.37	23.35	23.32	23.22	24.47	24.45	24.42	24.32
		DFT-s QPSK	1	1	23.55	23.69	23.65	23.54	24.65	24.79	24.75	24.64
			1	49	23.64	23.40	23.50	23.54	24.74	24.50	24.60	24.64
			25	12	23.77	23.65	23.69	23.54	24.87	24.75	24.79	24.64
			50	0	22.95	22.88	22.88	22.72	24.05	23.98	23.98	23.82
		DFT-s 16QAM	1	1	22.95	22.85	23.00	22.60	24.05	23.95	24.10	23.70
		DFT-s 64QAM	1	1	21.74	21.20	21.13	21.42	22.84	22.30	22.23	22.52
		DFT-s 256QAM	1	1	19.46	18.95	19.45	19.36	20.56	20.05	20.55	20.46
		CP QPSK	1	1	23.52	23.58	23.31	23.12	23.52	23.58	23.31	23.12
		CP 16QAM	1	1	21.93	21.80	21.85	21.68	23.03	22.90	22.95	22.78

RF Test Report**Report No.: EFTA25070216-IE-03-R2V1**

	CP64QAM	1	1	20.57	20.21	20.62	20.33	21.67	21.31	21.72	21.43
	CP256QAM	1	1	17.52	16.79	17.58	17.14	18.62	17.89	18.68	18.24

5G NR Band n53:2483.5 to 2495 MHz					Conducted Average (dBm)			EIRP(dBm)		
Antenna Gain(dBi)			1.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	497700	497800	498000.00	497700	497800	493000
10	30	DH-s PI/2 BPSK	1	1	23.26	23.35	23.18	24.36	24.45	24.28
			1	22	23.03	23.25	22.88	24.13	24.35	23.98
			12	6	23.10	23.14	23.02	24.20	24.24	24.12
			24	0	22.90	22.88	22.85	24.00	23.98	23.95
		DFT-s QPSK	1	1	23.07	23.19	23.12	24.17	24.29	24.22
			1	22	22.94	23.11	23.14	24.04	24.21	24.24
			12	6	23.12	23.12	23.08	24.22	24.22	24.18
			24	0	22.32	22.37	22.32	23.42	23.47	23.42
		DFT-s 16QAM	1	1	22.37	22.48	22.31	23.47	23.58	23.41
		DFT-s 64QAM	1	1	21.04	21.41	21.04	22.14	22.51	22.14
		DFT-s 256QAM	1	1	19.28	19.28	19.00	20.38	20.38	20.10
		CP QPSK	1	1	22.12	22.03	21.80	23.22	23.13	22.90
		CP 16QAM	1	1	21.27	21.48	21.51	22.37	22.58	22.61
		CP 64QAM	1	1	19.69	20.25	19.86	20.79	21.35	20.96
		CP256QAM	1	1	17.88	17.52	17.71	18.98	18.62	18.81

5G NR Band n66:1710 to 1780 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	342500	349000	355500	342500	349000	355500
5	15	DH-s PI/2 BPSK	1	1	23.96	23.89	23.70	25.06	24.99	24.80
			1	23	23.89	23.87	23.70	24.99	24.97	24.80
			12	6	23.95	23.93	23.73	25.05	25.03	24.83
			25	0	23.42	23.34	23.15	24.52	24.44	24.25
		DFT-s QPSK	1	1	23.94	23.67	23.35	25.04	24.77	24.45
			1	23	23.39	23.73	23.43	24.49	24.83	24.53
			12	6	23.94	23.89	23.67	25.04	24.99	24.77
			25	0	22.99	22.90	22.64	24.09	24.00	23.74
		DFT-s 16QAM	1	1	22.87	22.90	22.63	23.97	24.00	23.73
		DFT-s 64QAM	1	1	21.20	21.91	21.10	22.30	23.01	22.20
		DFT-s 256QAM	1	1	18.91	19.58	18.71	20.01	20.68	19.81
		CP QPSK	1	1	22.01	22.62	22.39	23.11	23.72	23.49
		CP 16QAM	1	1	21.77	21.84	21.87	22.87	22.94	22.97
		CP 64QAM	1	1	20.73	20.24	20.33	21.83	21.34	21.43
		CP256QAM	1	1	17.41	17.79	17.45	18.51	18.89	18.55

5G NR Band n66:1710 to 1780 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain (dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	343000	349000	355000	343000	349000	355000
					1715	1745	1775	1715	1745	1775
10	15	DFT-s PI/2 BPSK	1	1	23.66	23.71	24.01	24.76	24.81	25.11
			1	50	23.72	23.65	23.85	24.82	24.75	24.95
			25	12	23.92	23.72	23.59	25.02	24.82	24.69
			50	0	23.36	23.26	23.10	24.46	24.36	24.20
		DK-s QPSK	1	1	23.59	23.79	23.79	24.69	24.89	24.89
			1	50	23.66	23.88	23.79	24.76	24.98	24.89
			25	12	23.91	23.77	23.58	25.01	24.87	24.68
			50	0	22.95	22.74	22.68	24.05	23.84	23.78
		DFT-s 16QAM	1	1	22.69	22.73	22.68	23.79	23.83	23.78
		DFT-s 64QAM	1	1	21.38	21.58	21.09	22.48	22.68	22.19
		DFT-s 256QAM	1	1	19.26	19.23	19.77	20.36	20.33	20.87
		CP QPSK	1	1	22.13	22.31	22.19	23.23	23.41	23.29
		CP 16QAM	1	1	21.79	21.97	21.96	22.89	23.07	23.06
		CP 64QAM	1	1	20.65	20.59	19.91	21.75	21.69	21.01
		CP256QAM	1	1	17.83	16.94	17.22	18.93	18.04	18.32
5G NR Band n66:1710 to 1780 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulaion	RB Allocation	RB Offset	343500	349000	354500	343500	349000	354500
					1717.5	1745	17725	1717.5	1745	17725
15	15	DFT-s PI/2 BPSK	1	1	23.96	23.86	23.81	25.06	24.96	24.91
			1	77	23.82	23.84	23.89	24.92	24.94	24.99
			36	18	23.89	23.74	23.79	24.99	24.84	24.89
			75	0	23.44	23.22	23.28	24.54	24.32	24.38
		DFT-s QPSK	1	1	23.91	23.75	23.89	25.01	24.85	24.99
			1	77	23.93	23.81	23.90	25.03	24.91	25.00
			36	18	23.88	23.78	23.85	24.98	24.88	24.95
			75	0	22.96	22.77	22.77	24.06	23.87	23.87
		DFT-s 16QAM	1	1	23.06	23.01	22.79	24.16	24.11	23.89
		DFT-s 64QAM	1	1	21.66	20.99	21.50	22.76	22.09	22.60
		DFT-s 256QAM	1	1	19.58	19.29	18.95	20.68	20.39	20.05
		CP QPSK	1	1	21.80	22.21	22.15	22.90	23.31	23.25
		CP 16QAM	1	1	21.63	21.56	21.75	22.73	22.66	22.85
		CP 64QAM	1	1	19.99	20.33	20.39	21.09	21.43	21.49
		CP256QAM	1	1	16.76	17.65	17.30	17.86	18.75	18.40
5G NR Band n66:1710 to 1780 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/			Channel (ARFCH)/		

EIRP Limit (W)			1		Frequency (MHz)			Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW(MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	344000	349000	354000	344000	349000	354000
					1720	1745	1770	1720	1745	1770
20	15	DFT-s PI/2 BPSK	1	1	23.88	23.70	23.62	24.98	24.80	24.72
			1	104	23.81	23.64	23.60	24.91	24.74	24.70
			50	25	23.80	23.73	23.78	24.90	24.83	24.88
			100	0	23.34	23.24	23.25	24.44	24.34	24.35
		DFT-s QPSK	1	1	23.78	23.79	23.70	24.88	24.89	24.80
			1	104	23.75	23.72	23.66	24.85	24.82	24.76
			50	25	23.87	23.72	23.82	24.97	24.82	24.92
			100	0	22.86	22.76	22.77	23.96	23.86	23.87
		DFT-s 16QAM	1	1	23.24	23.12	22.83	24.34	24.22	23.93
		DFT-s 64QAM	1	1	21.36	21.60	21.09	22.46	22.70	22.19
		DFT-s 256QAM	1	1	19.56	19.53	19.49	20.66	20.63	20.59
		CP QPSK	1	1	22.22	22.44	22.16	23.32	23.54	23.26
		CP 16QAM	1	1	21.79	22.12	21.84	22.89	23.22	22.94
		CP 64QAM	1	1	20.59	20.78	20.51	21.69	21.88	21.61
		CP256QAM	1	1	17.66	17.50	17.35	18.76	18.60	18.45

5G NR Band n70:1695 to 1710 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW(MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	339500	340500	341500	339500	340500	341500
					1697.5	1702.5	1707.5	1697.5	1702.5	1707.5
5	15	DFT-s PI/2 BPSK	1	1	23.00	22.72	22.90	24.10	23.82	24.00
			1	23	22.83	22.65	22.53	23.93	23.75	23.63
			12	6	22.79	22.70	22.72	23.89	23.80	23.82
			25	0	22.42	22.26	22.37	23.52	23.36	23.47
		DFT-s QPSK	1	1	22.71	22.38	22.76	23.81	23.48	23.86
			1	23	22.60	22.42	22.76	23.70	23.52	23.86
			12	6	22.76	22.60	22.82	23.86	23.70	23.92
			25	0	22.00	21.80	21.96	23.10	22.90	23.06
		DFT-s 16QAM	1	1	21.78	21.71	21.82	22.88	22.81	22.92
		DFT-s 64QAM	1	1	20.52	19.98	20.77	21.62	21.08	21.87
		DFT-s 256QAM	1	1	18.53	17.71	18.61	19.63	18.81	19.71
		CP QPSK	1	1	21.10	20.93	20.95	22.20	22.03	22.05
		CP 16QAM	1	1	20.85	20.62	20.70	21.95	21.72	21.80
		CP 64QAM	1	1	19.15	19.72	19.24	20.25	20.82	20.34
		CP 256QAM	1	1	16.26	15.96	16.64	17.36	17.06	17.74
5G NR Band n70:1695to 1710 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		

RF Test Report
Report No.: EFTA25070216-IE-03-R2V1

EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	340000	340500	341000	340000	340500	341000
					1700	1702.5	1705	1700	1702.5	1705
10	15	DFT-s PI/2 BPSK	1	1	22.86	22.71	22.79	23.96	23.81	23.89
			1	50	22.82	22.54	22.51	23.92	23.64	23.61
			25	12	22.64	22.58	22.78	23.74	23.68	23.88
			50	0	22.42	22.37	22.47	23.52	23.47	23.57
		DK-s QPSK	1	1	22.80	22.59	22.43	23.90	23.69	23.53
			1	50	22.85	22.70	22.71	23.95	23.80	23.81
			25	12	22.75	22.61	22.63	23.85	23.71	23.73
			50	0	21.99	21.89	21.98	23.09	22.99	23.08
		DFT-s 16QAM	1	1	22.11	21.46	21.93	23.21	22.56	23.03
		DFT-s 64QAM	1	1	20.33	20.73	20.55	21.43	21.83	21.65
		DFT-s 256QAM	1	1	18.45	18.16	18.61	19.55	19.26	19.71
		CP QPSK	1	1	21.25	21.31	21.76	22.35	22.41	22.86
		CP 16QAM	1	1	20.96	21.12	21.19	22.06	22.22	22.29
		CP 64QAM	1	1	19.37	19.29	19.33	20.47	20.39	20.43
		CP256QAM	1	1	16.16	16.15	16.65	17.26	17.25	17.75
5G NR Band n70:1695 to 1710 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	/	340500	/	/	340500	/
					/	1702.5	/	/	1702.5	/
15	15	DR-s PI/2 BPSK	1	1	/	22.91	/	/	24.01	/
			1	77	/	22.52	/	/	23.62	/
			36	18	/	22.69	/	/	23.79	/
			75	0	/	22.43	/	/	23.53	/
		DFT-s QPSK	1	1	/	22.30	/	/	23.40	/
			1	77	/	22.62	/	/	23.72	/
			36	18	/	22.66	/	/	23.76	/
			75	0	/	21.85	/	/	22.95	/
		DFT-s 16QAM	1	1	/	21.97	/	/	23.07	/
		DFT-s 64QAM	1	1	/	20.55	/	/	21.65	/
		DFT-s 256QAM	1	1	/	18.46	/	/	19.56	/
		CP QPSK	1	1	/	21.31	/	/	22.41	/
		CP 16QAM	1	1	/	20.75	/	/	21.85	/
		CP 64QAM	1	1	/	19.15	/	/	20.25	/
		CP256QAM	1	1	/	16.03	/	/	17.13	/

5G NR Band n71: 663 to 698 MHz				Conducted Average (dBm)			ERP (dBm)		
Antenna Gain (dBi)		-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)		3		Low	Mid	High	Low	Mid	High

BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	133100	136100	139100	133100	136100	139100
					665.5	680.5	695.5	665.5	680.5	695.5
5	15	DFT-s PI/2 BPSK	1	1	23.15	23.35	23.21	22.10	22.30	22.16
			1	23	23.24	23.11	23.15	22.19	22.06	22.10
			12	6	23.33	23.29	23.15	22.28	22.24	22.10
			25	0	22.99	22.97	22.88	21.94	21.92	21.83
		DFT-s QPSK	1	1	23.49	23.21	22.92	22.44	22.16	21.87
			1	23	23.08	23.29	23.06	22.03	22.24	22.01
			12	6	23.20	23.13	23.09	22.15	22.08	22.04
			25	0	22.51	22.52	22.36	21.46	21.47	21.31
		DFT-s 16QAM	1	1	22.20	22.40	22.24	21.15	21.35	21.19
		DFT-s 64QAM	1	1	20.97	21.54	21.17	19.92	20.49	20.12
		DFT-s 256QAM	1	1	18.87	19.34	18.20	17.82	18.29	17.15
		CP QPSK	1	1	22.74	22.43	22.51	21.69	21.38	21.46
		CP 16QAM	1	1	21.88	21.44	21.40	20.83	20.39	20.35
		CP 64QAM	1	1	19.69	19.80	19.72	18.64	18.75	18.67
		CP256QAM	1	1	16.94	17.12	16.66	15.89	16.07	15.61
5G NR Band n71: 663 to 698 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	133600	136100	138600	133600	136100	138600
10	15	DFT-s PI/2 BPSK	1	1	23.57	23.64	23.26	22.52	22.59	22.21
			1	50	23.02	23.44	23.07	21.97	22.39	22.02
			25	12	23.30	23.31	23.21	22.25	22.26	22.16
			50	0	23.07	23.03	22.94	22.02	21.98	21.89
		DFT-s QPSK	1	1	23.42	23.20	23.23	22.37	22.15	22.18
			1	50	23.44	23.25	23.05	22.39	22.20	22.00
			25	12	23.30	23.19	23.09	22.25	22.14	22.04
			50	0	22.59	22.56	22.51	21.54	21.51	21.46
		DFT-s 16QAM	1	1	22.68	22.19	22.56	21.63	21.14	21.51
		DFT-s 64QAM	1	1	20.87	21.32	21.14	19.82	20.27	20.09
		DFT-s 256QAM	1	1	19.25	18.89	19.26	18.20	17.84	18.21
		CP QPSK	1	1	21.83	22.39	22.34	20.78	21.34	21.29
		CP 16QAM	1	1	21.56	21.72	21.74	20.51	20.67	20.69
		CP 64QAM	1	1	20.18	20.00	19.90	19.13	18.95	18.85
		CP256QAM	1	1	16.89	17.17	17.24	15.84	16.12	16.19
5G NR Band n71: 663 to 698 MHz					Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)			-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)			3		Low	Mid	High	Low	Mid	High
BW(MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	134100	136100	138100	134100	136100	138100
					670.5	680.5	690.5	670.5	680.5	690.5

15	15		DFT-s PI/2 BPSK	1	1	23.30	23.36	23.49	22.25	22.31	22.44
				1	77	22.94	23.10	23.29	21.89	22.05	22.24
				36	18	23.26	23.30	23.15	22.21	22.25	22.10
				75	0	22.98	23.05	22.90	21.93	22.00	21.85
			DFT-s QPSK	1	1	23.15	23.21	23.18	22.10	22.16	22.13
				1	77	22.99	23.11	23.46	21.94	22.06	22.41
				36	18	23.28	23.32	23.17	22.23	22.27	22.12
				75	0	22.56	22.57	22.42	21.51	21.52	21.37
			DFT-s 16QAM	1	1	22.43	22.57	22.73	21.38	21.52	21.68
			DFT-s 64QAM	1	1	21.26	21.18	21.05	20.21	20.13	20.00
			DFT-s 256QAM	1	1	19.22	19.07	19.13	18.17	18.02	18.08
			CP QPSK	1	1	21.86	21.67	21.43	20.81	20.62	20.38
			CP 16QAM	1	1	21.20	21.53	20.81	20.15	20.48	19.76
			CP 64QAM	1	1	19.71	19.72	19.80	18.66	18.67	18.75
			CP 256QAM	1	1	17.56	16.51	16.87	16.51	15.46	15.82
5G NR Band n71: 663 to 698 MHz						Conducted Average (dBm)			ERP (dBm)		
Antenna Gain(dBi)				-0.1		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
ERP Limit (W)				3		Low	Mid	High	Low	Mid	High
BW(MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	134600	136100	137600	134600	136100	137600	
					673	680.5	688	673	680.5	688	
20	15		DFT-s PI/2 BPSK	1	1	23.38	23.38	23.42	22.33	22.33	22.37
				1	104	23.25	23.09	23.18	22.20	22.04	22.13
				50	25	23.20	23.28	23.16	22.15	22.23	22.11
				100	0	22.88	22.99	22.95	21.83	21.94	21.90
			DFT-s QPSK	1	1	23.29	23.30	23.12	22.24	22.25	22.07
				1	104	23.21	23.32	23.20	22.16	22.27	22.15
				50	25	23.18	23.21	23.19	22.13	22.16	22.14
				100	0	22.41	22.51	22.44	21.36	21.46	21.39
			DFT-s 16QAM	1	1	22.50	22.22	22.57	21.45	21.17	21.52
			DFT-s 64QAM	1	1	20.95	21.08	20.66	19.90	20.03	19.61
			DFT-s 256QAM	1	1	19.23	19.14	18.84	18.18	18.09	17.79
			CP QPSK	1	1	22.08	22.00	22.31	21.03	20.95	21.26
			CP 16QAM	1	1	21.56	21.51	21.71	20.51	20.46	20.66
			CP 64QAM	1	1	19.86	20.18	19.78	18.81	19.13	18.73
			CP 256QAM	1	1	16.90	17.17	17.14	15.85	16.12	16.09

5G NR Band n77: 3450 to 3550 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			2.5		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	630334	633334	636332	630334	633334	636332
					3455.01	3500.01	3544.98	3455.01	3500.01	3544.98

10	30	DFT-s PI/2 BPSK	1	1	23.56	23.29	23.16	24.66	24.39	24.26
			1	22	23.38	23.06	23.07	24.48	24.16	24.17
			12	6	23.50	23.05	23.10	24.60	24.15	24.20
			24	0	23.17	22.84	22.87	24.27	23.94	23.97
		DFT-s QPSK	1	1	23.50	23.14	23.10	24.60	24.24	24.20
			1	22	23.51	22.96	23.10	24.61	24.06	24.20
			12	6	23.47	23.11	23.15	24.57	24.21	24.25
			24	0	22.82	22.43	22.44	23.92	23.53	23.54
		DFT-s 16QAM	1	1	22.24	22.38	22.43	23.34	23.48	23.53
		DFT-s 64QAM	1	1	21.23	20.92	20.82	22.33	22.02	21.92
		DFT-s 256QAM	1	1	18.84	19.25	18.71	19.94	20.35	19.81
		CP QPSK	1	1	22.50	22.25	22.24	23.60	23.35	23.34
		CP 16QAM	1	1	21.80	21.27	21.39	22.90	22.37	22.49
		CP 64QAM	1	1	20.08	20.23	19.67	21.18	21.33	20.77
		CP256QAM	1	1	17.18	17.31	16.68	18.28	18.41	17.78
5G NR Band n77: 3450 to 3550 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			2.5		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	Hgh	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	630500	633334	636166	630500	633334	635166
					3457.5	3500.01	3542.49	3457.5	3500.01	3542.49
15	30	DFT-s PI/2 BPSK	1	1	23.55	23.27	23.24	24.65	24.37	24.34
			1	36	23.11	22.88	23.22	24.21	23.98	24.32
			18	9	23.34	23.04	23.15	24.44	24.14	24.25
			36	0	23.13	22.83	22.85	24.23	23.93	23.95
		DK-s QPSK	1	1	23.43	23.15	23.02	24.53	24.25	24.12
			1	36	23.33	23.12	23.06	24.43	24.22	24.16
			18	9	23.46	23.04	23.19	24.56	24.14	24.29
			36	0	22.71	22.25	22.39	23.81	23.35	23.49
		DFT-s 16QAM	1	1	22.59	21.93	22.21	23.69	23.03	23.31
		DFT-s 64QAM	1	1	21.23	20.71	20.64	22.33	21.81	21.74
		DFT-s 256QAM	1	1	19.15	18.76	18.80	20.25	19.86	19.90
		CP QPSK	1	1	22.03	21.31	21.69	23.13	22.41	22.79
		CP 16QAM	1	1	21.30	21.12	21.28	22.40	22.22	22.38
		CP 64QAM	1	1	19.93	19.82	19.41	21.03	20.92	20.51
		CP256QAM	1	1	16.77	16.90	16.37	17.87	18.00	17.47
5G NR Band n77: 3450 to 3550 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			2.5		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	Hgh
BW(MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	630668	633334	636000	630668	633334	636000
					3460.02	3500.01	3540	3460.02	3500.01	3540
20	30	DFT-s PI/2	1	1	23.60	23.29	23.24	24.70	24.39	24.34
		BPSK	1	49	23.49	22.97	23.22	24.59	24.07	24.32

			25	12	23.55	23.09	23.05	24.65	24.19	24.15
			50	0	23.31	22.85	22.81	24.41	23.95	23.91
		DFT-s QPSK	1	1	23.39	23.24	23.03	24.49	24.34	24.13
			1	49	23.27	23.02	23.14	24.37	24.12	24.24
			25	12	23.51	23.00	23.06	24.61	24.10	24.16
			50	0	22.62	22.29	22.31	23.72	23.39	23.41
		DFT-s 16QAM	1	1	22.99	22.15	22.33	24.09	23.25	23.43
		DFT-s 64QAM	1	1	21.34	20.94	20.60	22.44	22.04	21.70
		DFT-s 256QAM	1	1	19.26	18.72	19.11	20.36	19.82	20.21
		CP QPSK	1	1	21.74	21.67	21.45	22.84	22.77	22.55
		CP 16QAM	1	1	21.79	21.18	21.09	22.89	22.28	22.19
		CP 64QAM	1	1	20.36	19.91	19.80	21.46	21.01	20.90
		CP256QAM	1	1	16.94	16.78	16.70	18.04	17.88	17.80

5G NR Band n77: 3700 to 3980 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			2.5		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulaion	RB Allocation	RB Offset	647000 3705	656000 3840	665000 3975	647000 3705	656000 3840	665000 3975
10	30	DFT-s PI/2 BPSK	1	1	23.13	22.92	23.35	24.23	24.02	24.45
			1	22	22.85	22.41	22.47	23.95	23.51	23.57
			12	6	22.76	22.56	23.31	23.86	23.66	24.41
			24	0	22.46	22.38	23.09	23.56	23.48	24.19
		DK-s QPSK	1	1	22.79	22.78	23.20	23.89	23.88	24.30
			1	22	22.80	22.47	23.24	23.90	23.57	24.34
			12	6	22.73	22.57	23.32	23.83	23.67	24.42
			24	0	22.01	21.78	22.62	23.11	22.88	23.72
		DFT-s 16QAM	1	1	22.01	21.73	22.28	23.11	22.83	23.38
		DFT-s 64QAM	1	1	20.53	20.18	20.46	21.63	21.28	21.56
		DFT-s 256QAM	1	1	18.79	18.70	18.93	19.89	19.80	20.03
		CP QPSK	1	1	21.84	21.00	21.93	22.94	22.10	23.03
		CP 16QAM	1	1	21.12	20.68	21.64	22.22	21.78	22.74
		CP 64QAM	1	1	19.60	19.19	19.99	20.70	20.29	21.09
		CP256QAM		1	16.98	16.92	16.99	18.08	18.02	18.09
5G NR Band n77: 3700 to 3980 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			2.5		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	Hgh	Low	Mid	Hgh
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	647168 3707.52	656000 3840	664832 3972.48	647168 3707.52	656000 3840	664832 3972.48
15	30	DFT-s PI/2 BPSK	1	1	22.81	22.71	23.43	23.91	23.81	24.53
			1	36	22.68	22.70	23.42	23.78	23.80	24.52
			18	9	22.72	22.69	23.31	23.82	23.79	24.41

			36	0	22.38	22.32	23.07	23.48	23.42	24.17
		DFT-s QPSK	1	1	22.68	22.51	23.27	23.78	23.61	24.37
			1	36	22.58	22.57	23.30	23.68	25.07	24.4
			18	9	22.65	22.60	23.31	23.75	23.70	24.41
			36	0	21.86	21.78	22.49	22.96	22.88	23.59
		DFT-s 16QAM	1	1	22.01	21.74	22.60	23.11	22.84	23.70
		DFT-s 64QAM	1	1	20.39	20.16	20.88	21.49	21.26	21.98
		DFT-s 256QAM	1	1	18.57	18.25	19.11	19.67	19.35	20.21
		CP QPSK	1	1	21.72	21.43	22.35	22.82	22.53	23.45
		CP 16QAM	1	1	21.12	21.27	21.91	22.22	22.37	23.01
		CP 64QAM	1	1	20.09	19.39	20.11	21.19	20.49	21.21
		CP256QAM	1	1	16.43	16.70	17.15	17.53	17.80	18.25
5G NR Band n77: 3700 to 3980 MHz					Conducted Average (dBm)			EIRP (dBm)		
Antenna Gain(dBi)			2.5		Channel (ARFCH)/ Frequency (MHz)			Channel (ARFCH)/ Frequency (MHz)		
EIRP Limit (W)			1		Low	Mid	High	Low	Mid	High
BW (MHz)	SCS (kHz)	Modulation	RB Allocation	RB Offset	647334	656000	664666	647334	656000	664666
					3710.01	3840	3969.99	3710.01	3840	3969.99
20	30	DFT-s PI/2 BPSK	1	1	22.73	22.67	23.20	23.83	23.77	24.30
			1	49	22.65	22.49	23.05	23.75	23.59	24.15
			25	12	22.71	22.63	23.16	23.81	23.73	24.26
			50	0	22.38	22.33	22.78	23.48	23.43	23.88
		DFT-s QPSK	1	1	22.61	22.61	23.13	23.71	23.71	24.23
			1	49	22.72	22.66	23.04	23.82	23.76	24.14
			25	12	22.69	22.61	23.11	23.79	23.71	24.21
			50	0	21.84	21.79	22.32	22.94	22.89	23.42
		DFT-s 16QAM	1	1	21.48	21.72	22.38	22.58	22.82	23.48
		DFT-s 64QAM	1	1	20.45	20.10	20.89	21.55	21.20	21.99
		DFT-s 256QAM	1	1	18.56	18.28	18.80	19.66	19.38	19.90
		CP QPSK	1	1	21.35	20.92	21.35	22.45	22.02	22.45
		CP 16QAM	1	1	20.83	20.70	21.48	21.93	21.80	22.58
		CP 64QAM	1	1	19.46	18.92	19.93	20.56	20.02	21.03
		CP256QAM	1	1	16.01	16.29	16.45	17.11	17.39	17.55

6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2024-12-02	2025-12-01
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2022-09-29	2025-09-28
Horn Antenna	SCHWARZBECK	BBHA 9120D	1594	2023-12-05	2026-12-04
Software	R&S	EMC32	10.35.10	/	/

7 The EUT Appearance

Refer to *EUT Appearance*.

8 Test Setup Photos

Refer to *Part22_24_27_90 Test Setup*.

***** END OF REPORT *****