



DATE: 3 March 2014


I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Argo Medical Technologies
Ltd.


Equipment under test:

ReWalk P INF

30-30-0002

Written by: 
R. Pinchuck, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Argo Medical Technologies Ltd.

Equipment under test:

ReWalk P INF

30-30-0002

FCC ID: 2ABWK-30-30-0002

This report concerns: Original Grant: x
Class I change:
Class II change:

Equipment type: Digital Transmission System

Limits used: 47CFR15 Section 15.249 (a-b)

Measurement procedure used is KDB 558074 D01, April 1, 2013 and
ANSI C63.4-2003.

Application for Certification
prepared by:

R. Pinchuck
ITL (Product Testing) Ltd.
Kfar Bin Nun
D.N. Shimshon 99780
Israel
Tel: +972-8-918-6117
Fax: +972-8-915-3101
Email: Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")

Argo Medical Technologies Ltd.
6th Floor, Kochav Yokneam Building
P.O.B. 161
Yokneam Ilit, 206292
Israel
Tel: +972-4-959-0123
Fax: +972-4-959-0125
Email:

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	7
3.	CONDUCTED AND RADIATED MEASUREMENT TEST SET-UP PHOTO -----	8
5.	FIELD STRENGTH OF FUNDAMENTAL -----	17
5.1	Test Specification	17
5.2	Test Procedure	17
5.3	Measured Data	17
5.4	Test Instrumentation Used, Field Strength of Fundamental	22
6.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	23
6.1	Test Specification	23
6.2	Test Procedure	23
6.3	Measured Data	23
6.4	Test Instrumentation Used, Radiated Measurements	24
6.5	Field Strength Calculation	25
7.	SPURIOUS RADIATED EMISSION 30 MHZ - 25GHZ-----	26
7.1	Test Specification	26
7.2	Measured Data	27
7.3	Test Instrumentation Used	32
7.4	Field Strength Calculation	33
8.	ANTENNA GAIN/INFORMATION-----	34
9.	R.F EXPOSURE/SAFETY-----	35
10.	APPENDIX A - CORRECTION FACTORS -----	36
10.1	Correction factors for CABLE	36
10.2	Correction factors for CABLE	37
10.3	Correction factors for CABLE	38
8.4	Correction factors for LOG PERIODIC ANTENNA	39
10.5	Correction factors for LOG PERIODIC ANTENNA	40
10.6	Correction factors for BICONICAL ANTENNA	41
10.7	Correction factors for Double-Ridged Waveguide Horn	42
10.8	Correction factors for Horn Antenna	43
10.9	Correction factors for ACTIVE LOOP ANTENNA	44



1. General Information

1.1 Administrative Information

Manufacturer:	Argo Medical Technologies Ltd.
Manufacturer's Address:	6 th Floor, Kochav Yokneam Building, P.O.B. 161 Yokneam Ilit, 206292 Israel Tel: +972-4-959-0123 Fax: +972-4-959-0125
Manufacturer's Representative:	Shany Zohar
Equipment Under Test (E.U.T):	ReWalk P INF
Equipment Model No.:	30-30-0002
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	02.02.14
Start of Test:	02.02.14
End of Test:	04.02.14
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	FCC Part 15, Subpart C, Section 15.249



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Rewalk is a battery Powered Orthotic Ambulation Device orthotically fits to the lower limbs and part of the upper body and is intended to enable individuals with lower limb disabilities to perform routine ambulatory functions in an urban terrain (stand, walk on level surfaces and mild slopes) to increase their activity level. The device is not intended for sports or aggressive use.

There are two RF transmitters in the Rewalk system, one is a remote device worn on the wrist of the user. The second resides within the main computer. The RF communication provides information regarding the selection of the operation, warnings and power levels of the batteries.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in KDB 558074 D01, April 9, 2013 and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing September 3, 2009). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) 0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

2. System Test Configuration

2.1 *Justification*

The ReWalk suit and RC were separately tested by switching each of them to one of several test modes. In each test mode the onboard transceiver continuously transmitted pseudo random data at selected carrier frequencies (using the same TX parameters as the operational system like power and modulation).

2.2 *EUT Exercise Software*

No special exercise software was needed to achieve compliance.

2.3 *Special Accessories*

A wooden jig was used to hang the ReWalk suit on in order for it to walk properly.

2.4 *Equipment Modifications*

No equipment modifications were needed to achieve compliance.

2.5 *Configuration of Tested System*

The configuration of the tested system is described below.




Figure 1. Configuration of Tested System

3. Conducted and Radiated Measurement Test Set-up Photo



Figure 2. Conducted Emission Test



Figure 3. Radiated Emission Test



Figure 4. Radiated Emission Test

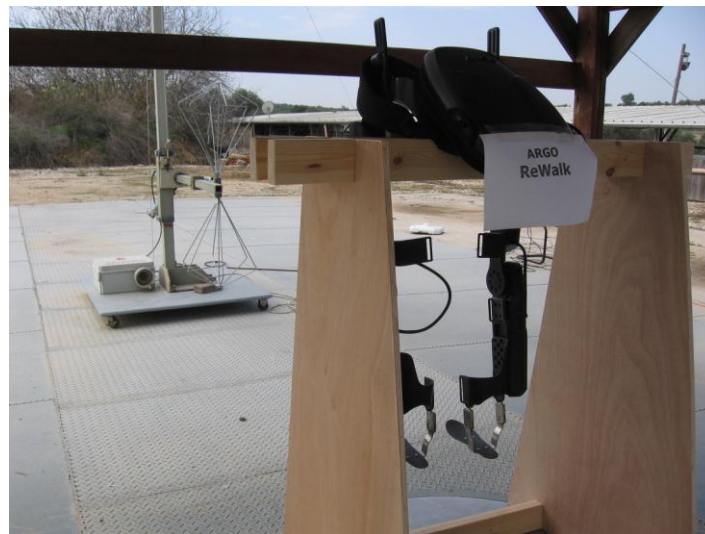


Figure 5. Radiated Emission Test



Figure 6. Radiated Emission Test

4. Conducted Emission

4.1 Test Specification

F.C.C., Part 15, Subpart C

4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC / 60 Hz via a 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Measured Data

JUDGEMENT: Passed by 4.7 dB

The margin between the emission levels and the specification limit is, in the worst case, 4.7 dB for the phase line at 0.319 MHz and 5.2 dB at 0.160 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 7* to *Figure 10*.

TEST PERSONNEL:

Tester Signature: 

Date: 11.04.14

Typed/Printed Name: A. Sharabi

Conducted Emission

E.U.T Description ReWalk P INF
Type 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.160786	66.1	62.4	-3.1	48.9	-6.6	0.0
2	0.319369	55.5	53.6	-6.2	45.0	-4.7	0.0
3	0.397565	52.8	48.1	-9.8	41.3	-6.6	0.0
4	3.842376	42.8	39.1	-16.9	26.8	-19.2	0.0
5	5.297489	42.1	36.5	-23.5	25.6	-24.4	0.0
6	26.319841	51.3	46.3	-13.7	37.1	-12.9	0.0

Figure 7. Detectors: Peak, Quasi-peak, AVERAGE .

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description ReWalk P INF
Type 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
Lead: Phase
Detectors: Peak, Quasi-peak, Average

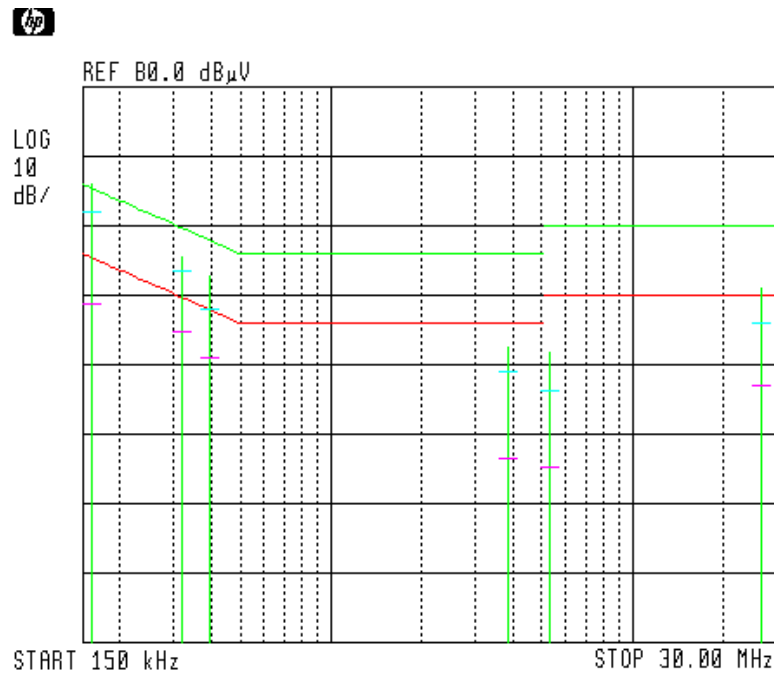


Figure 8. Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description ReWalk P INF
Type 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.160797	66.8	64.4	-1.1	50.2	-5.2	0.0
2	0.319365	55.1	53.1	-6.6	41.4	-8.4	0.0
3	0.397559	50.0	47.7	-10.2	37.9	-10.1	0.0
4	3.842376	45.4	41.7	-14.3	29.6	-16.4	0.0
5	5.297489	43.2	39.7	-20.3	28.6	-21.4	0.0
6	26.319841	51.8	46.9	-13.1	38.4	-11.6	0.0

Figure 9. Detectors: Peak, Quasi-peak, AVERAGE

Note: QP Delta/Av Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description ReWalk P INF
Type 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C
Lead: Neutral
Detectors: Peak, Quasi-peak, Average

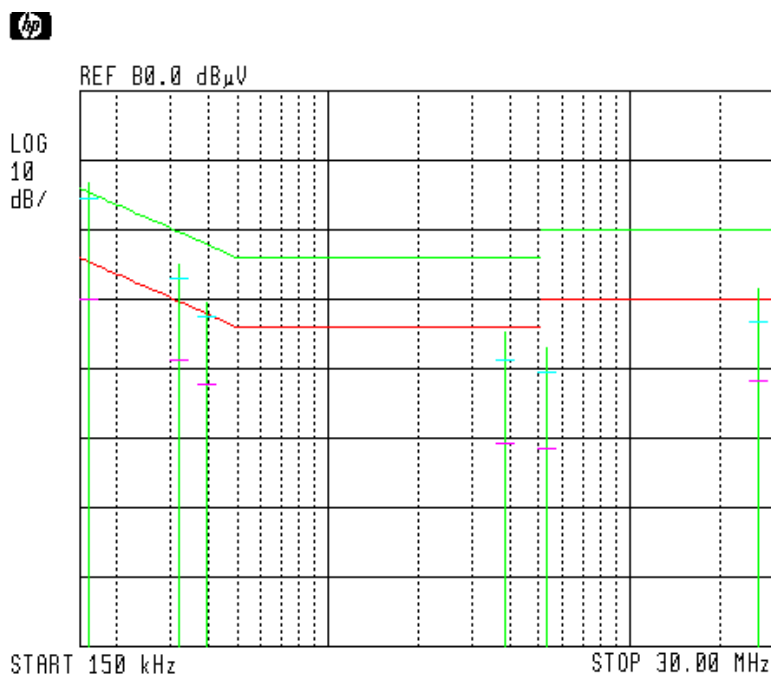


Figure 10 Conducted Emission: NEUTRAL
Detectors: Peak, Quasi-peak, Average



4.4 Test Instrumentation Used, Conducted Measurement

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	January 1, 2014	1 Year
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1Year
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A



5. Field Strength of Fundamental

5.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(a)

5.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (low, mid and high) and Peak Detection. The turntable and antenna mast were adjusted for maximum level reading on the EMI receiver. The measurement was performed for vertical and horizontal polarizations of the test antenna.

5.3 Measured Data

JUDGEMENT: Passed by 13.21 dB

The EUT met the FCC Part 15, Subpart C, Section 15.249(a) specification requirements.

The details of the highest emissions are given in *Figure 11*.

TEST PERSONNEL:

Tester Signature: _____

Date: 11.04.14

Typed/Printed Name: A. Sharabi



Field Strength of Fundamental

E.U.T Description ReWalk P INF
Model Number 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)

Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

Freq.	Pol.	Peak Reading	Specification	Avg. Factor	Avg. Result	Specification	Margin
(MHz)	V/H	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
2405.0	H	102.79	114.0	-22.0	80.79	94.0	-13.21
2405.0	V	95.53	114.0	-22.0	73.53	94.0	-20.47
2427.0	H	101.67	114.0	-22.0	79.67	94.0	-14.33
2427.0	V	93.43	114.0	-22.0	71.43	94.0	-22.57
2475.0	H	101.05	114.0	-22.0	79.05	94.0	-14.95
2475.0	V	93.93	114.0	-22.0	71.93	94.0	-22.07

Figure 11. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL/VERTICAL. Detector: Peak

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

* "Peak Amp." includes "Correction Factors.

"Correction Factors" = Antenna Correction Factor + Cable Loss.

Field Strength of Fundamental


E.U.T Description ReWalk P INF
Model Number 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)


Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

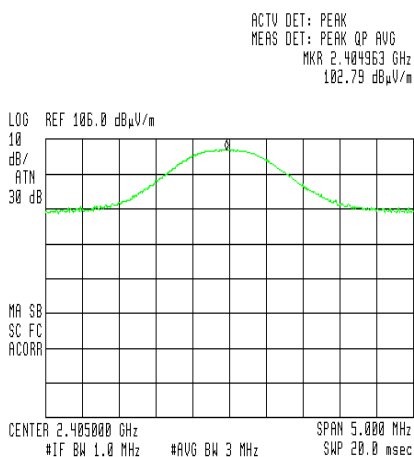

**Figure 12. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL
Channel: Low**

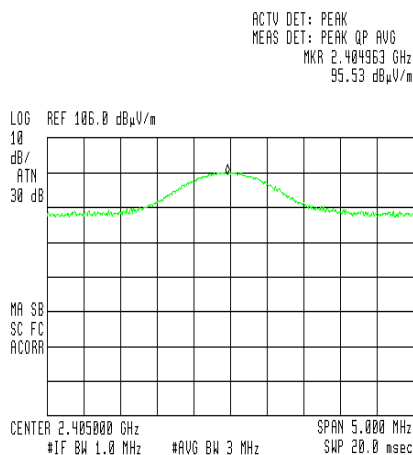

**Figure 13. Field Strength of Fundamental. Antenna Polarization: VERTICAL
Channel: Low**

Field Strength of Fundamental


E.U.T Description ReWalk P INF
Model Number 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)


Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

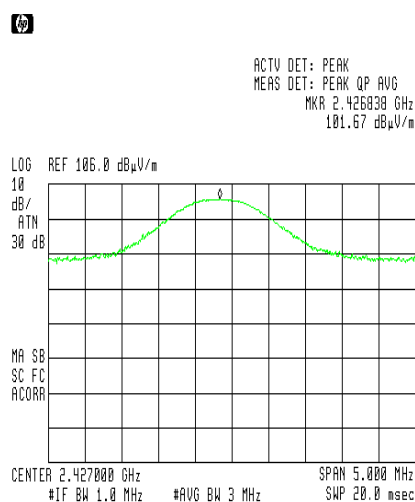

**Figure 14. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL
Channel: Mid**

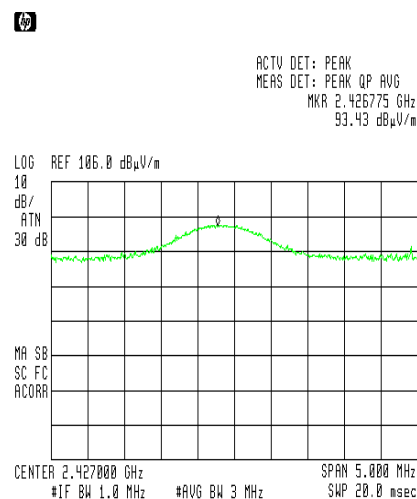

**Figure 15. Field Strength of Fundamental. Antenna Polarization: VERTICAL
Channel: Mid**

Field Strength of Fundamental


E.U.T Description ReWalk P INF
Model Number 30-30-0002
Serial Number: Not Designated

Specification: F.C.C., Part 15, Subpart C 15.249(a)


Antenna Polarization: Horizontal/Vertical

Test Distance: 3 meters

Detector: Peak

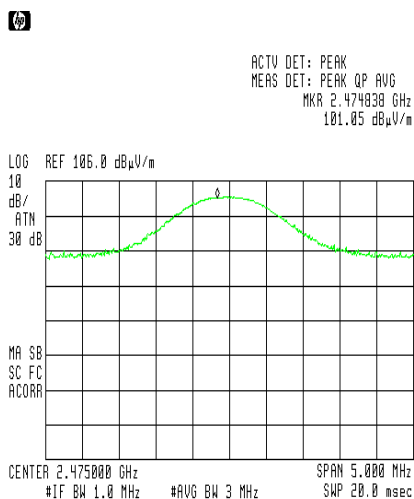

**Figure 16. Field Strength of Fundamental. Antenna Polarization: HORIZONTAL
Channel: High**

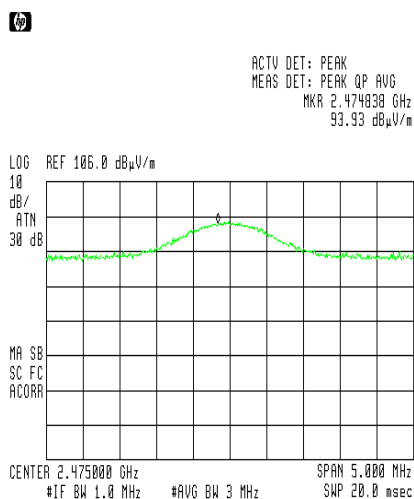

**Figure 17. Field Strength of Fundamental. Antenna Polarization: VERTICAL
Channel: High**



5.4 Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Horn Antenna	ETS	3115	6142	March 14, 2012	2 Years
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A



6. Radiated Emission, 9 kHz – 30 MHz

6.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 25 GHz. This frequency was measured using a peak detector.

6.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification. No results were detected in the range of 9kHz-30MHZ.

TEST PERSONNEL:

Tester Signature: _____

Date: 11.04.14

Typed/Printed Name: A. Sharabi



6.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 3, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS:	Field Strength [dB μ V/m]
RA:	Receiver Amplitude [dB μ V]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

7. Spurious Radiated Emission 30 MHz - 25GHz

7.1 Test Specification

F.C.C., Part 15, Subpart C, Section 15.249(b)

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 1*.

The frequency range 30 MHz-1000 MHz was scanned and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 30 MHz – 2.9 GHz, the emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 25 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)



7.2 **Measured Data**

JUDGEMENT: Passed

The margin between the emission level and the specification limit was 16.9 dB in the worst case at the frequency of 4854.0 MHz, horizontal polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 15.249 specification.

TEST PERSONNEL:

Tester Signature: 

Date: 11.04.14

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1.0 GHz

E.U.T Description ReWalk P INF
Type 30-30-0002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: Low/Mid/High

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
2390.0	H	42.0*	74.0	-32.0
2390.0	V	41.4*	74.0	-32.6
4810.0	H	54.0*	74.0	-20.0
4810.0	V	55.3*	74.0	-18.7
4854.0	H	57.1*	74.0	-16.9
4854.0	V	57.0*	74.0	-17.0
2483.5	H	43.0*	74.0	-31.0
2483.5	V	42.1*	74.0	-31.9
4950.0	H	55.9*	74.0	-18.1
4950.0	V	55.0*	74.0	-19.0

Figure 18. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission Above 1.0 GHz

E.U.T Description ReWalk P INF
Type 30-30-0002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: Low/Mid/High

Freq.	Polarity	Avg Factor	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
2390.0	H	-22.5	19.5*	54.0	-34.5
2390.0	V	-22.5	18.9*	54.0	-35.1
4810.0	H	-22.5	31.5*	54.0	-22.5
4810.0	V	-22.5	32.8*	54.0	-21.2
4854.0	H	-22.5	34.6*	54.0	-19.4
4854.0	V	-22.5	34.5*	54.0	-19.5
2483.5	H	-22.5	20.5*	54.0	-33.5
2483.5	V	-22.5	19.6*	54.0	-34.4
4950.0	H	-22.5	33.4*	54.0	-20.6
4950.0	V	-22.5	32.5*	54.0	-21.5

**Figure 19. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



****Avg. Factor calculation:**

1. Pulse period = 1 (worst scenario)*
2. Pulse duration = 1 (worst scenario)*
3. Burst duration = 2.5msec
4. Time between bursts = 32.3msec
5. Average Factor = $20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$

$$\text{Average Factor} = 20 \log \left[\frac{7.5}{100} \right] = -22.5\text{dB}$$

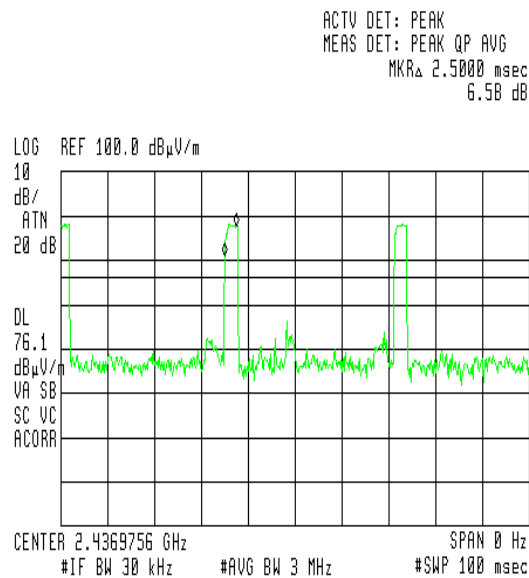


Figure 20. Transmission Burst Duration = 2.5 msec

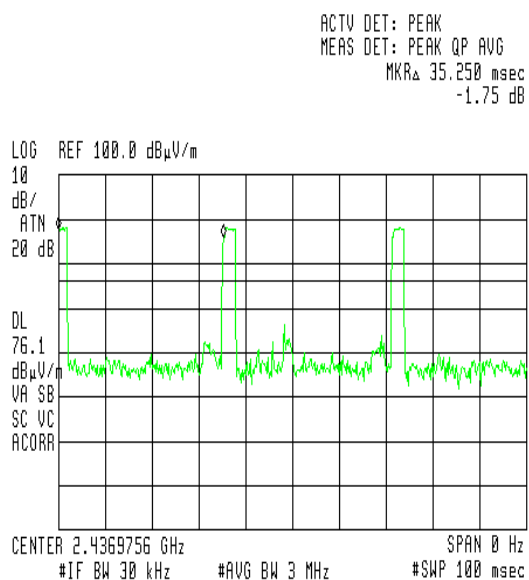


Figure 21. Time between Transmissions 32.3 msec



7.3 Test Instrumentation Used

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



7.4 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{V/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS:	Field Strength [dB μ V/m]
RA:	Receiver Amplitude [dB μ V]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

8. Antenna Gain/Information

The antenna gain is 4.1 dBi



Titanis 2.4 GHz Swivel SMA Antenna

Product Specification

1 Features

- Designed for 2.4 GHz applications [Bluetooth™, WiFi™ (802.11b/g), Zigbee™, WiMedia™ etc.]
- Also available as reversed thread (left) to meet FCC regulation part 15
- Intended for SMA mounting
- Supplied in bulk

2 Description

The Titanis antenna is intended for use with all 2.4 GHz applications. The antenna is fitted with an SMA male connector and a blade, made of a flexible material that can be rotated 360 degrees. No external matching net is required.

Titanis is available as standard SMA and reversed thread SMA.

9. R.F Exposure/Safety

Typical use of the E.U.T. is in a ReWalk P-INF.

The typical distance between the E.U.T. and the user in the worst case application, is 5 cm.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1310 Requirements

(a) FCC limits at 2437 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t - Transmitted Power 102.79 dBuV/m (Peak) = 5.74 mW

G_t - Antenna Gain, 4.1 dBi = 2.57 numeric

R - Distance from Transmitter using 5 cm worst case

(c) The peak power density is:

$$S_p = \frac{5.74 \times 2.57}{4\pi(5)^2} = 0.047 \frac{mW}{cm^2}$$

(e) This is below the FCC limit.

10. APPENDIX A - CORRECTION FACTORS

10.1 Correction factors for CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

10.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

10.3 Correction factors for CABLE
from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

8.4 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

10.5 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511 at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

10.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



10.7 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENNA	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	Gain	(GHz)	FACTOR	Gain
	(dB 1/m)	(dBi)		(dB 1/m)	(dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			



10.8 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

10.9 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2