



F2 Labs
16740 Peters Road
Middlefield, Ohio 44062
United States of America
www.f2labs.com

CERTIFICATION TEST REPORT

Manufacturing Address: Beijing Jia An Electronics Technology Co., Ltd.
No. 19 Gu Cheng West Street,
Shi Jing Shan District,
Beijing 100043, China

Applicant: BEA Incorporated
RIDC Park West,
100 Enterprise Drive
Pittsburgh, Pennsylvania 15275
United States of America

Product: RF 900 MHz Transceivers for Pedestrian
Automatic Door Industry

Models: 10TD900HH, 10TD900HH2, 10TD900HH3, 10TD900HH4

FCC ID: 2ABWS-10TD900HH4

Testing Commenced: April 1, 2014

Testing Ended: May 16, 2014

Summary of Test Results: Page 5

Standards:

- ❖ **FEDERAL REGISTER CFR 47, PART 15 – RADIO FREQUENCY DEVICES**
 - Part 15 Subpart C, Section 15.231 - Periodic operation in the band 40.66–40.70 MHz and above 70 MHz
 - Part 15 Subpart C, Section 15.209 - Radiated emissions limits; general requirements
 - Part 15 Subpart C, Section 15.35 - Measurement detector functions and bandwidths
- ❖ **ANSI C63.4 2009 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz**



Order Number: F2LQ5979B

Client: BEA Incorporated

Model: 10TD900HH4

Evaluation Conducted by:

Joe Knepper, EMC Proj. Eng.

Ken Littell, EMC Tech. Mgr.

Report Reviewed by:

Wendy Fuster, President

F2 Labs
26501 Ridge Road
Damascus, MD 20872
Ph 301.253.4500
Fax 301.253.5179

F2 Labs
16740 Peters Road
Middlefield, OH 44062
Ph 440.632.5541
Fax 440.632.5542

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



TABLE OF CONTENTS

Section	Title	Page
1	ADMINISTRATIVE INFORMATION	4
2	SUMMARY OF TEST RESULTS/MODIFICATIONS	5
3	ENGINEERING STATEMENT	6
4	EUT INFORMATION AND DATA	7
5	LIST OF MEASUREMENT INSTRUMENTATION	8
6	FCC Part 15.231(a)(1)	9
7	FCC Part 15.231(b)	16
8	FCC Part 15.231(b)(3)(c)	32
9	15.35(c) DUTY CYCLE	36
10	PHOTOGRAPHS	40



1 ADMINISTRATIVE INFORMATION

1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

1.2 Measurement Procedure:

All measurements were performed according to the 2009 version of ANSI C63.4 and recommended FCC procedure of measurement for Intermittent Transmitters and Receivers operating under Section 15.231. A list of the measurement equipment can be found in Section 6.

1.3 Uncertainty Budget:

Radiated Emission

- Combined Uncertainty (+ or -) 2.67 dB
- Expanded Uncertainty (+ or -) 5.35 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.4 Document History

Document Number	Description	Issue Date	Approved By
F2LQ5979A-01E	First Issue	May 16, 2014	W. Fuster

**2 SUMMARY OF TEST RESULTS**

Standard(s)	Results
CFR 47 Part 15.231(a)(1)	Complies
CFR 47 Part 15.231(b) / Part 15.209	Complies
CFR 47 Part 15.231(b)(3)(c)	Complies
CFR 47 Part 15.35	Complies
CFR 47 Part 15.31(e)	Complies*

*EUT was tested using new batteries and therefore complies with this rule part.

Modifications Made to the Equipment
Reduced power of EUT to -7.4dBm



3 ENGINEERING STATEMENT

This report has been prepared on behalf of BEA Incorporated, to provide documentation for the testing described herein. This equipment has been tested and found to comply with Part 15.231 of the FCC Rules, using ANSI C63.4 2009 standards, with the modifications noted in Section 2 of this Test report. The test results found in this test report relate only to the items tested.



4 EUT INFORMATION AND DATA

4.1 Equipment Under Test:

Product: RF 900 MHz Transceivers for Pedestrian Automatic Door Industry
Model: 10TD900HH4
Serial No.: None Spec.
FCC ID: 2ABWS-10TD900HH4

4.2 Trade Name: BEA Incorporated

4.3 Power Supply:

Battery Powered

4.4 Applicable Rules:

CFR 47, Part 15.231, subpart C

4.5 Equipment Category:

Intermittent Transceiver

4.6 Antenna:

0dBi Internal

4.7 Accessories:

N/A

4.8 Test Item Condition:

The equipment to be tested was received in good condition.

4.9 Testing Algorithm:

The EUT was configured to permit frequency changes from low-mid-upper transmission channel. For all tests, in a semi-anechoic chamber and on the OATS, the EUT was equipped with a 0dBi Omni antenna.

**5 LIST OF MEASUREMENT INSTRUMENTATION**

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shield Room	0175	Ray Proof	N/A	11645	Aug. 7, 2014
Temp/Hum. Recorder	CL119	Extech	RH520	H005869	Jan. 8, 2015
OATS-3m	CL017	Compliance Labs	N/A	001	Dec. 13, 2014
Spectrum Analyzer	CL147	Agilent	E7402A	MY45101241	Oct. 24, 2014
Spectrum Analyzer	CL138	Agilent Technologies	E4407B	US41192779	Oct. 29, 2014
Receiver	CL151	Rohde & Schwarz	ESU40	100319	Oct. 30, 2014
Antenna 1-Chamber	0142	ETS/EMCO	3142B	9811-1330	Verified
Antenna 2-OATS	0105	Sunol Sciences	JB1	A101101	May 7, 2015
Pre-Amplifier	CL153	Agilent	83006-69007	MY39500900	Jan. 9, 2015
Amplifier w/Monopole & 18" Loop	CL163	A.H. Systems, Inc.	EHA-52B	100	Apr. 24, 2015
Antenna, Horn	CL098	Emco	3115	9809-5580	Dec. 3, 2015
Cable: 0.3m Low Loss	CL116	A.H. Systems, Inc.	SAC-26G-0.3	206	Apr. 29, 2015
Cable: 0.3m Low Loss	CL117	A.H. Systems, Inc.	SAC-26G-3	207	Jan. 16, 2015
Cable, High Frequency	CL154	Pasternack	p/n PE350-240	N/A	Jan. 16, 2015



6 FCC PART 15.231(a)(1)

6.1 Requirements:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter with not more than 5 seconds of being released.




6.2 Test Data

Test Date:	May 1, 2014	Test Engineers:	J. Knepper; K. Littell
Standards:	CFR 47 Part 15.231(a)(1);	Air Temperature:	22.3°C
		Relative Humidity:	48%

High Channel


The following plot is of a single press and release of the manual push button, showing that the transmission ceased prior to 5 seconds of release.

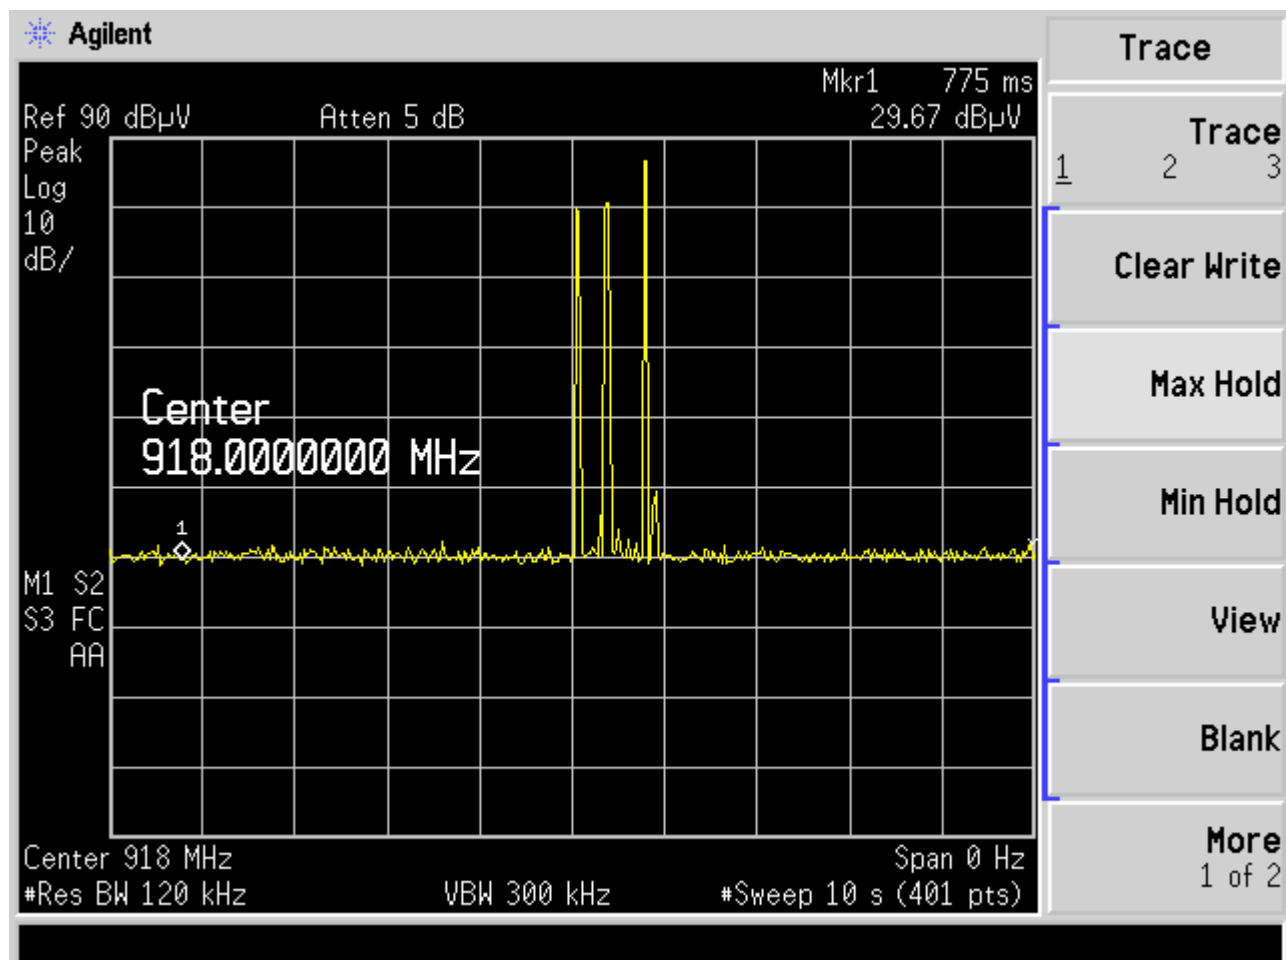



High Channel, cont'd


The following plot is of a press and hold for four seconds then release of the manual push button. This is to show that the transmission ceased in less than 5 seconds of release.

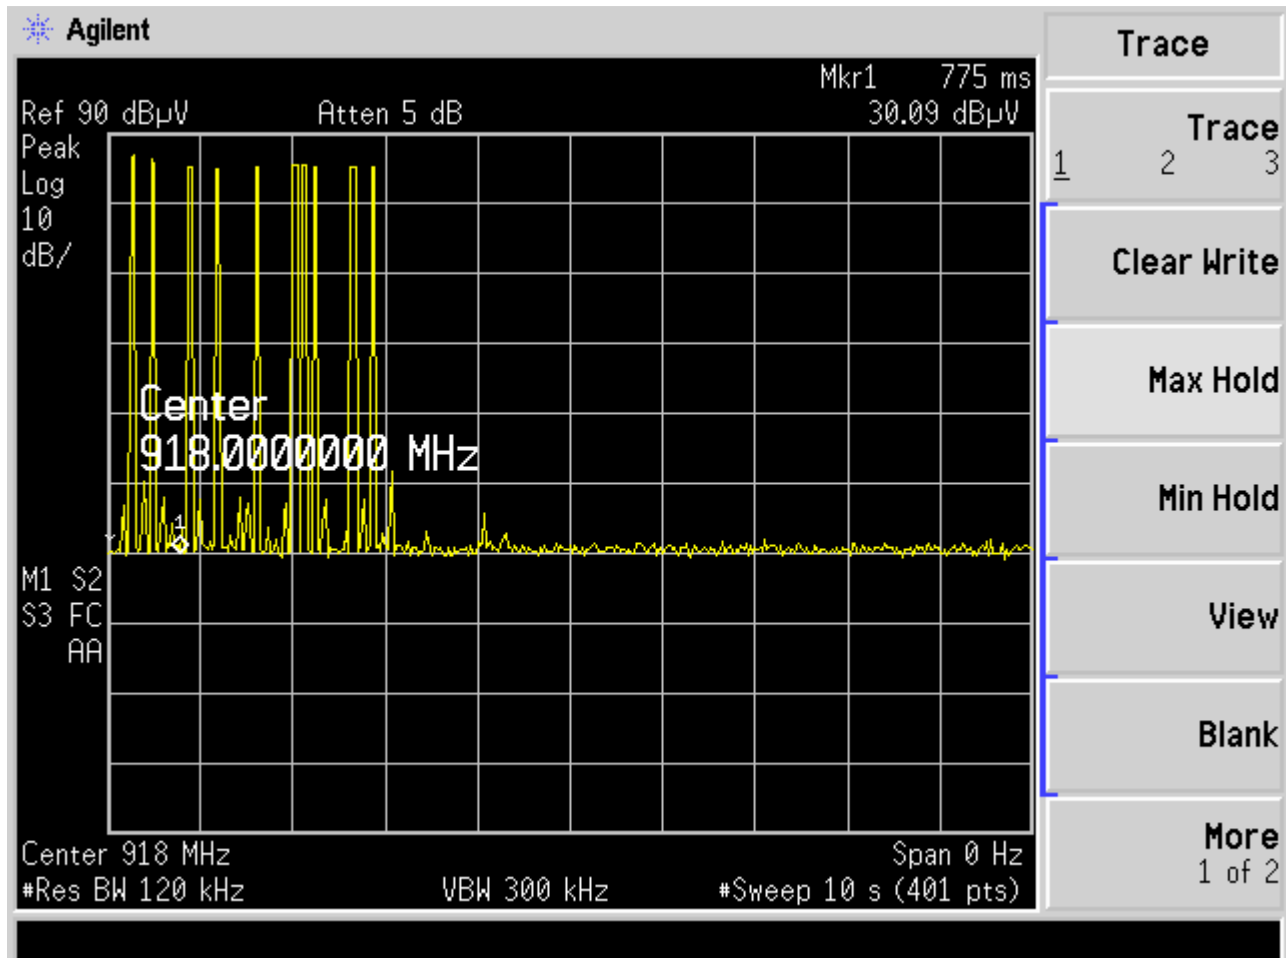



Mid Channel


The following plot is of a single press and release of the manual push button, showing that the transmission ceased prior to 5 seconds of release.

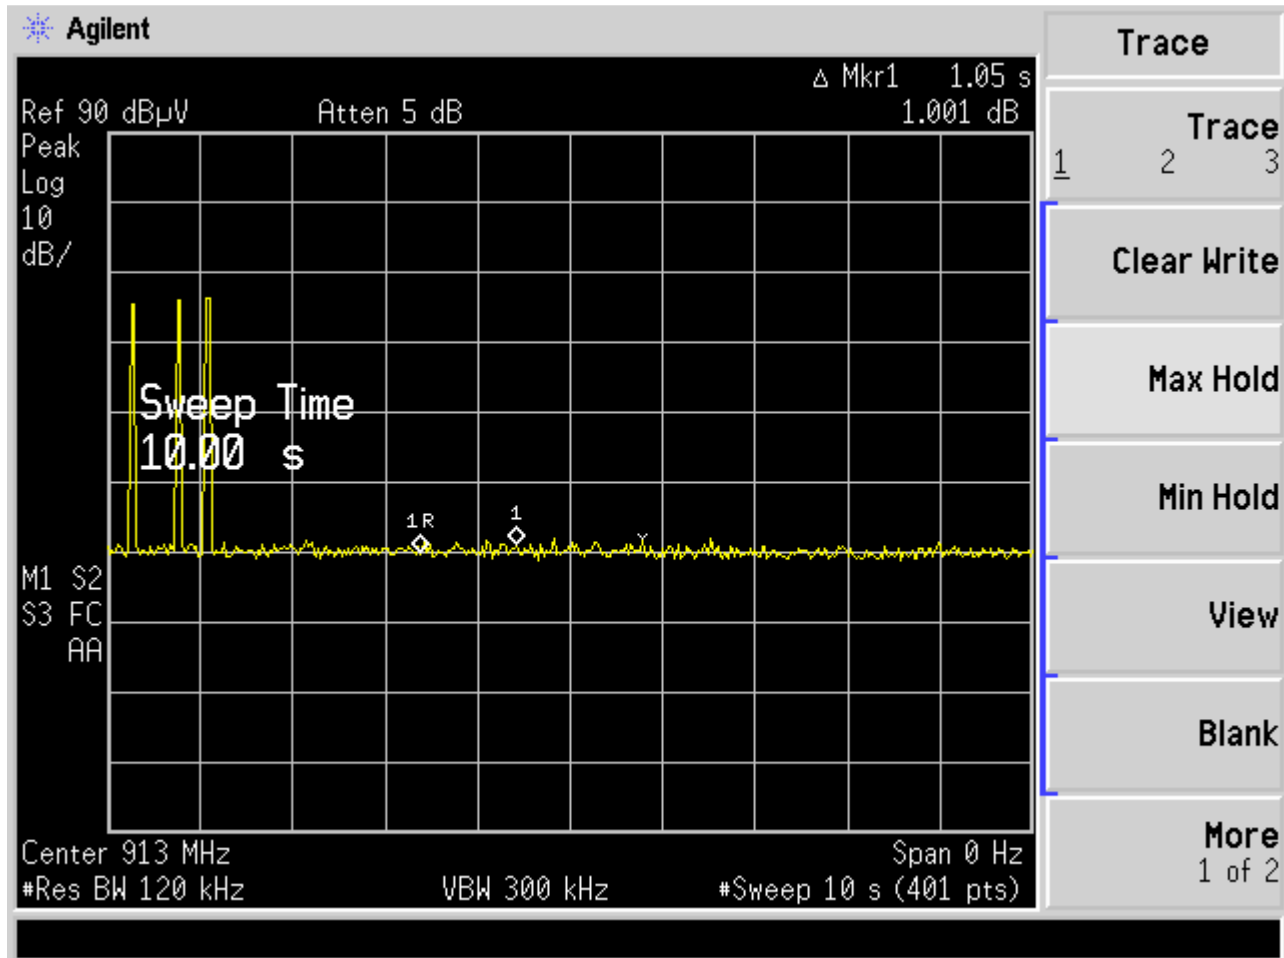



Mid Channel, cont'd


The following plot is of a press and hold for four seconds then release of the manual push button. This is to show that the transmission ceased in less than 5 seconds of release.

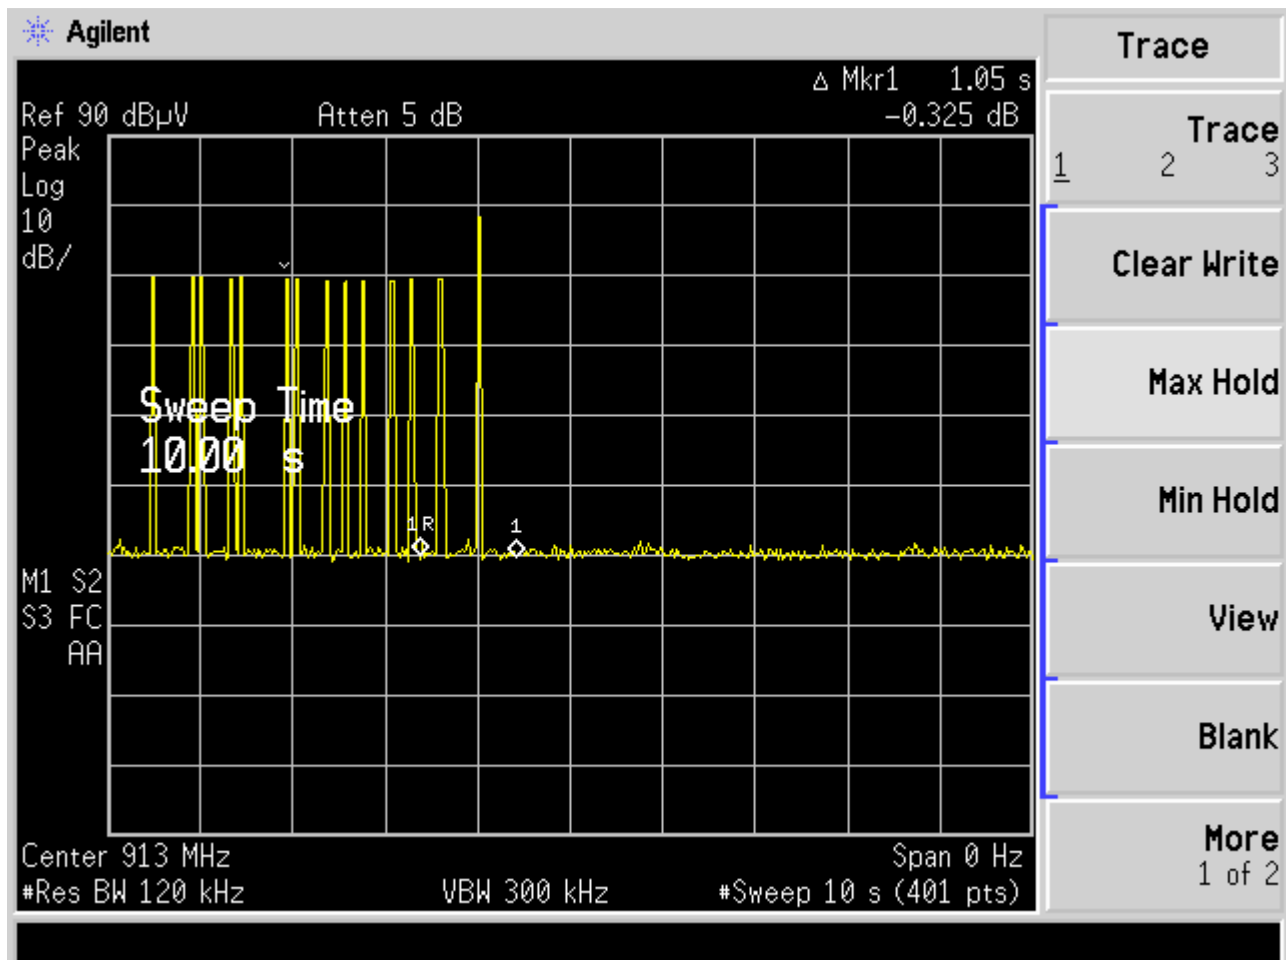



Low Channel


The following plot is of a single press and release of the manual push button, showing that the transmission ceased prior to 5 seconds of release.

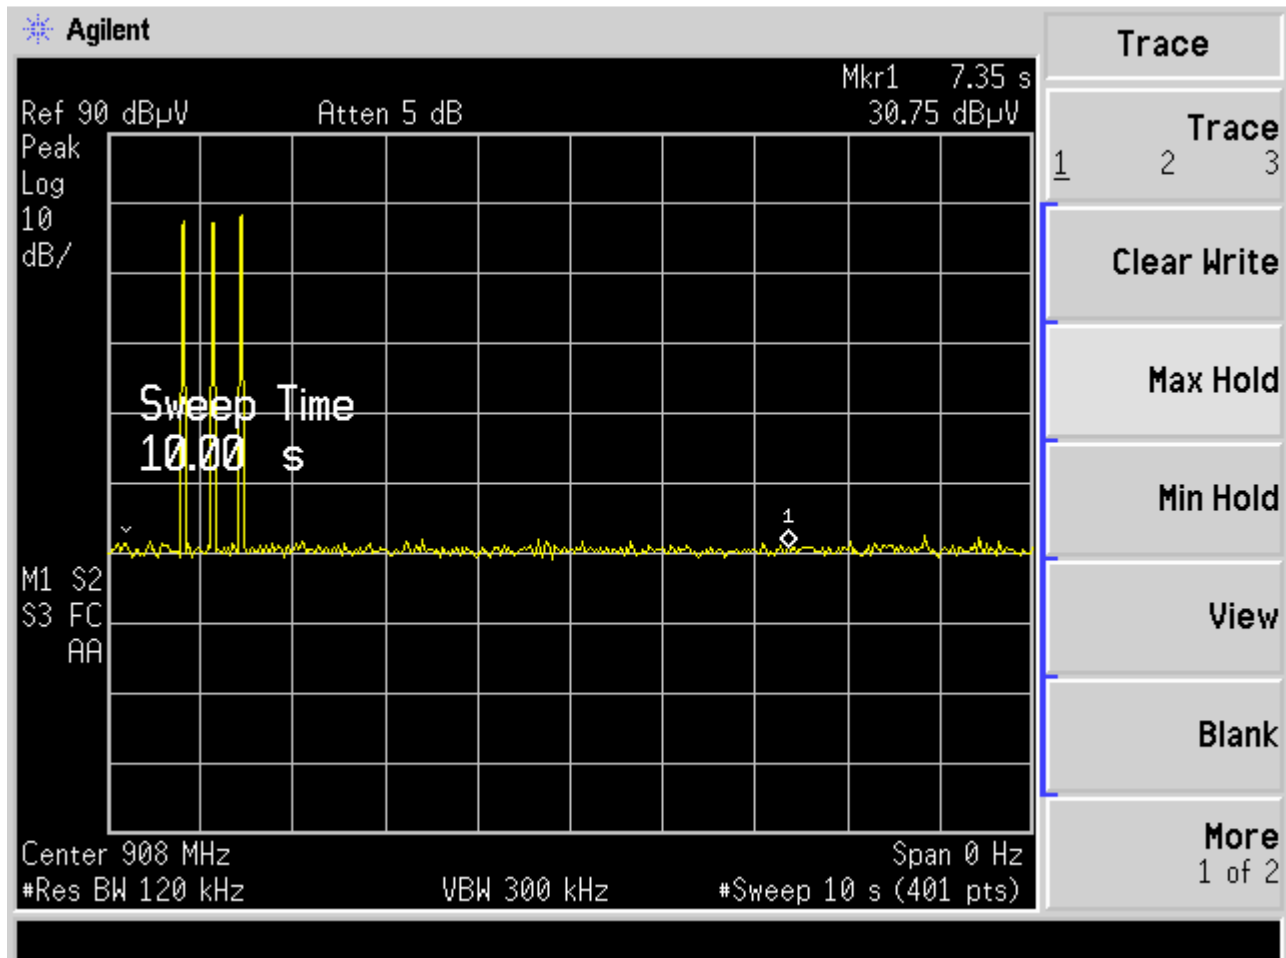



Low Channel, cont'd

The following plot is of a press and hold for four seconds then release of the manual push button. This is to show that the transmission ceased in less than 5 seconds of release.

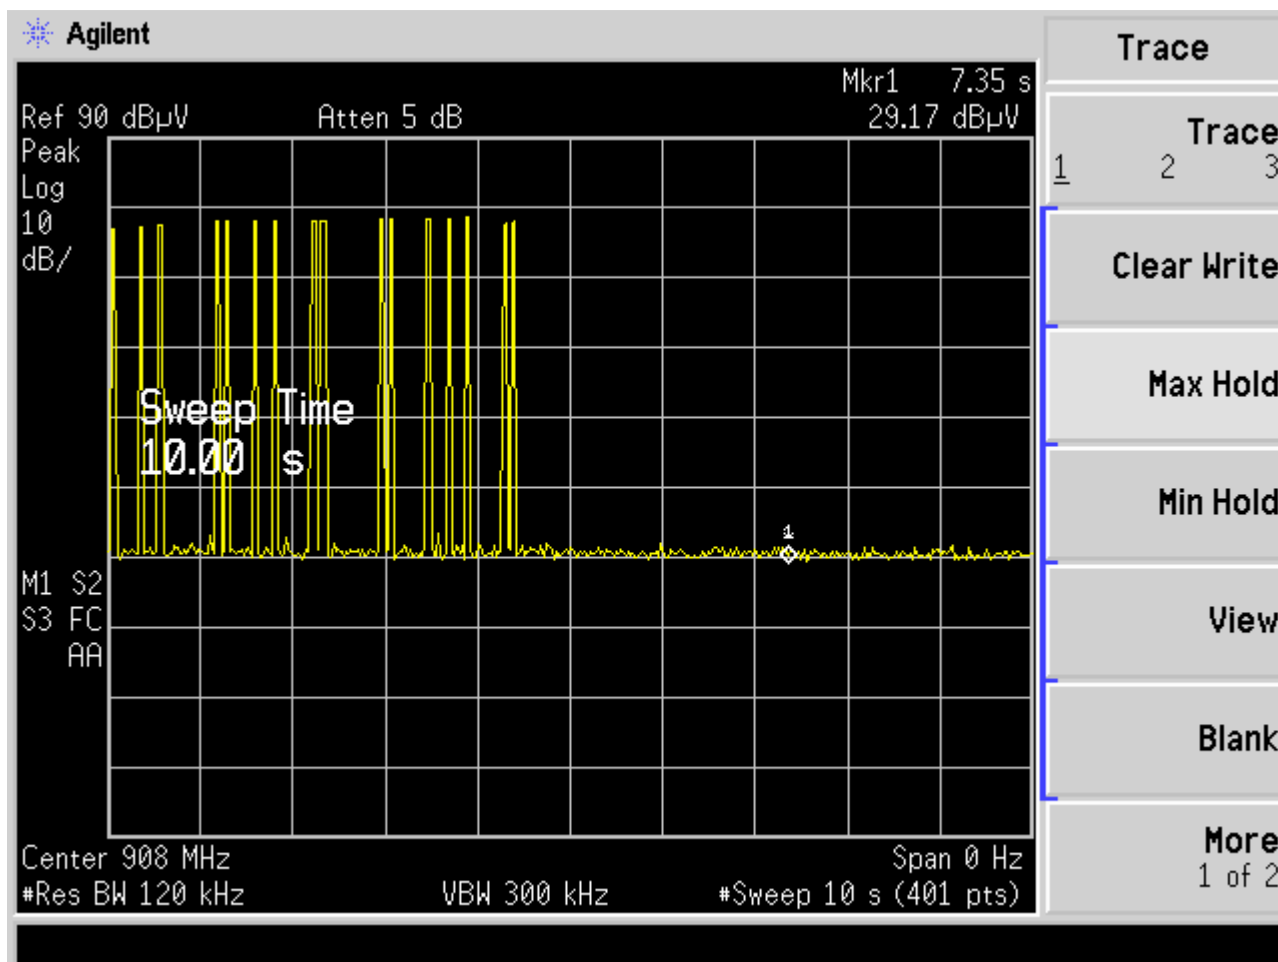



7 FCC PART 15.231(b)

7.1 Requirements:

Field strength of emissions, fundamental and spurious using average detector and a peak limit of 20dB was added above the average limit per 15.35(b).

Limit for fundamental frequency above 470 MHz is: 12,500 $\mu\text{V/m}$.

Limits for spurious emissions were those specified in 15.209.

The EUT was initially placed in a semi-anechoic chamber, and rotated in all three orthogonal positions to maximize the emissions. Characterization measurements were then performed to determine at which frequencies significant emissions occurred. These graphs are shown below.

The EUT was then positioned on the OATS and while the equipment was energized, the receiving antenna was scanned from 1.0 meter to 4.0 meters in both vertical and horizontal polarities while the turntable was adjusted 360 degrees to determine the maximum field strength. The tables of measured results can be found below.

The equipment was fully exercised with all cabling attached to the EUT and was positioned for maximum emissions. The EUT was positioned flat against the plastic tabletop and it was verified, by placing a foam support between the table and the antenna, that the table had no effect on the emissions at these frequency ranges.

Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit.


In the following plots, the black line indicates ambient noise and the red line indicates the measurement with the EUT on. Emissions to be found by the EUT were measured and listed in tables. In the frequency range of 9kHz-30MHz, the plots are for reference only and the limit lines are not actual limit lines but merely a guide. The plots are to show that there are no measureable emissions above the ambient signal.




7.2 Test Data

Test Date:	Apr. 1, 2014 to May 14, 2014	Test Engineers:	J. Knepper; K. Littell
Standards:	CFR 47 Part 15.231(b); 15.209; C63.4:2009, Section 13.7	Air Temperature:	18.8°C
		Relative Humidity:	47%

High Channel: 9 kHz to 150 kHz

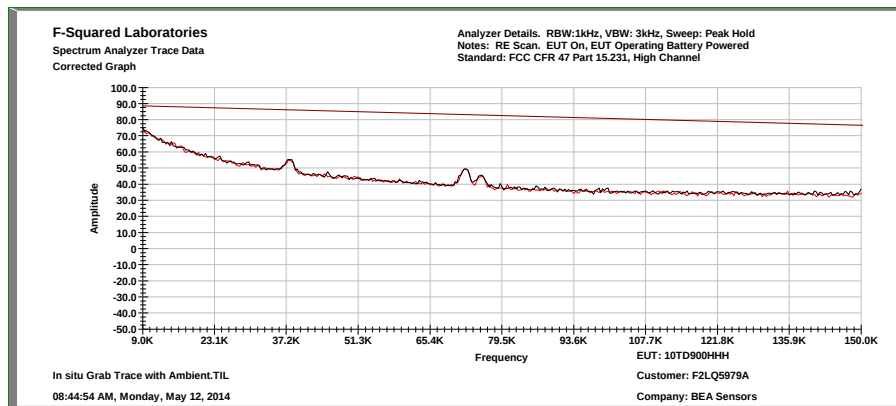


High Channel: 150 kHz to 30 MHz

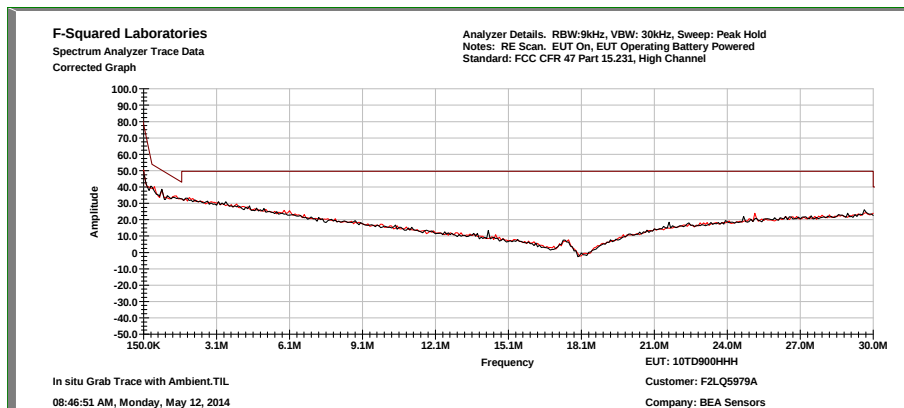




High Channel: 30 MHz to 880 MHz, Horizontal

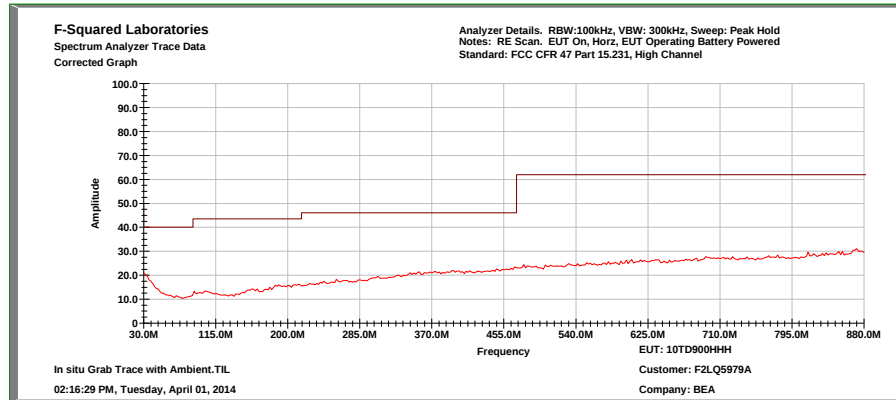


High Channel: 30 MHz to 900 MHz, Vertical

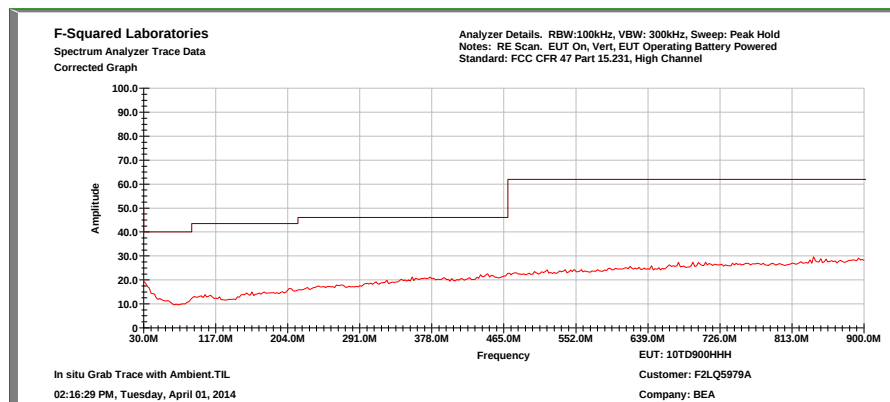




High Channel: 880 MHz to 1 GHz, Horizontal

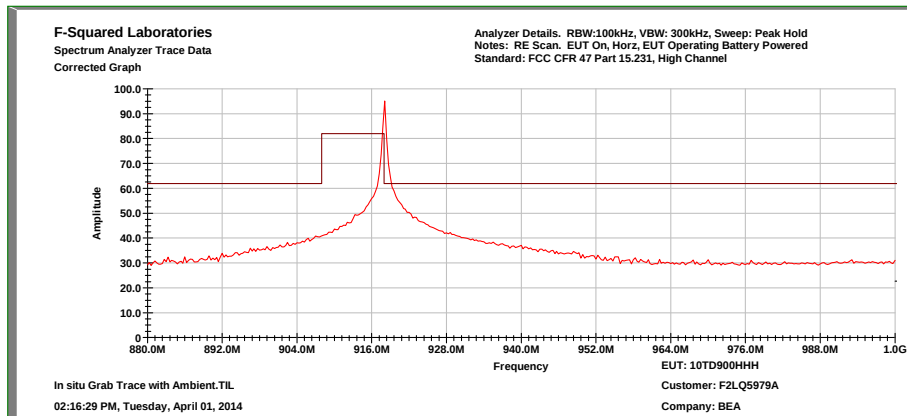


High Channel: 900 MHz to 1 GHz, Vertical

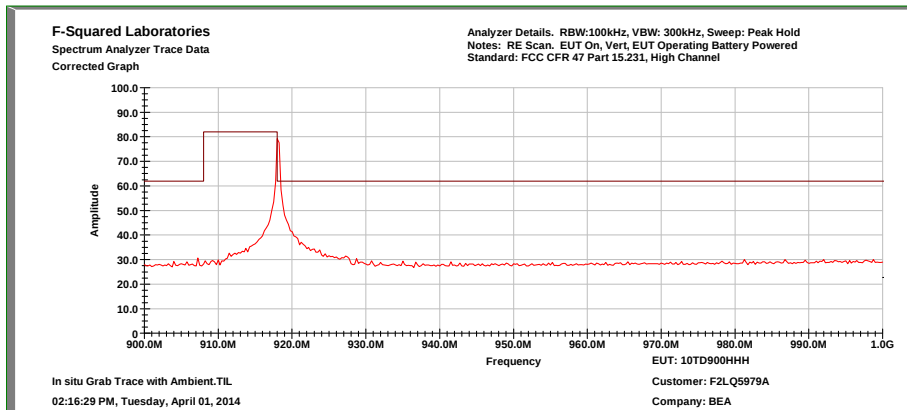




High Channel: 1 GHz to 10 GHz, Horizontal

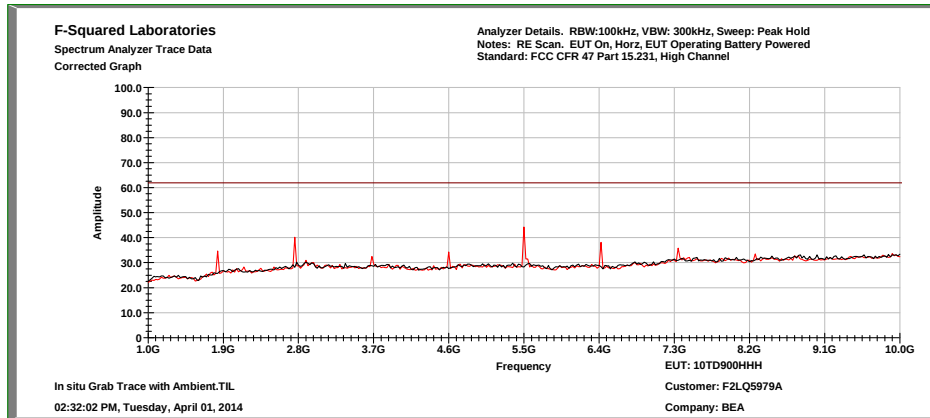

High Channel: 1 GHz to 10 GHz, Vertical

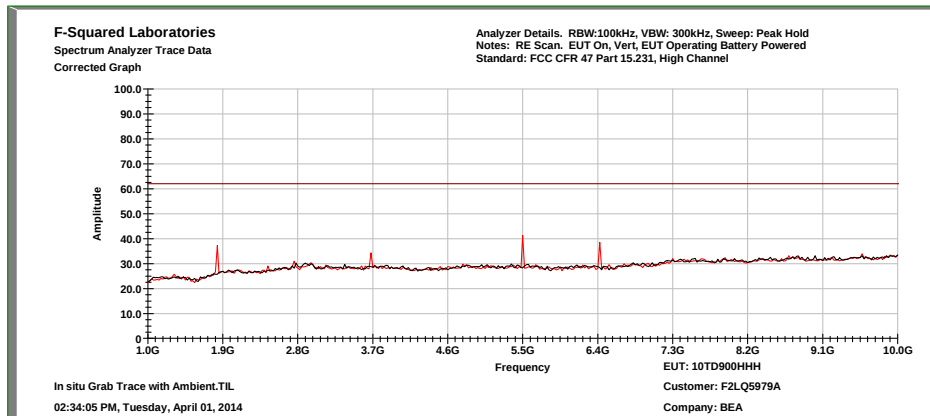




High Channel


Frequency (MHz)	Polarity	Corr. (dB)	MaxPeak (dB μ V/m)	MaxPeak (dB μ V/m) Limit	MaxPeak Margin	Average (dB μ V/m)	Average (dB μ V/m) w/DCCF	Average (dB μ V/m) Limit	Average Margin	Bandwidth (kHz)
902.000000	V	30.6	43.4	81.9	-38.5	31.9	21.45	61.9	-40.5	120.000
902.000000	H	31.0	45.1	81.9	-36.8	32.6	22.15	61.9	-39.8	120.000
908.000000	H	31.3	49.5	81.9	-32.4	32.8	22.35	61.9	-39.6	120.000
908.000000	V	30.8	44.7	81.9	-37.2	32.2	21.75	61.9	-40.2	120.000
918.020000	H	31.5	85.4	101.9	-16.5	80.6	70.15	81.9	-11.8	120.000
918.030000	V	30.9	78.9	101.9	-23.0	74.6	64.15	81.9	-17.8	120.000
928.000000	H	31.5	48.5	81.9	-33.4	33.3	22.85	61.9	-39.1	120.000
928.000000	V	31.1	43.6	81.9	-38.3	32.8	22.35	61.9	-39.6	120.000
5508.000000	V	38.1	41.6	81.9	-40.3	38.2	27.75	61.9	-34.2	1000.000
5508.000000	H	38.8	40.4	81.9	-41.5	39.3	28.85	61.9	-33.1	1000.000



Mid Channel: 9 kHz to 150 kHz

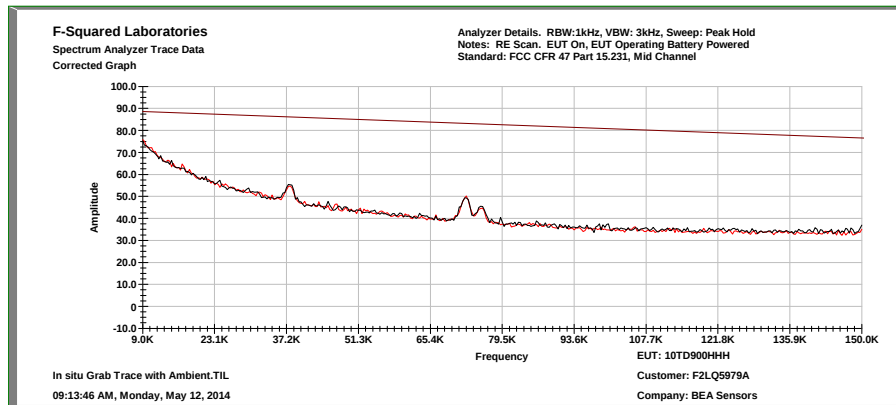


Mid Channel: 150 kHz to 30 MHz

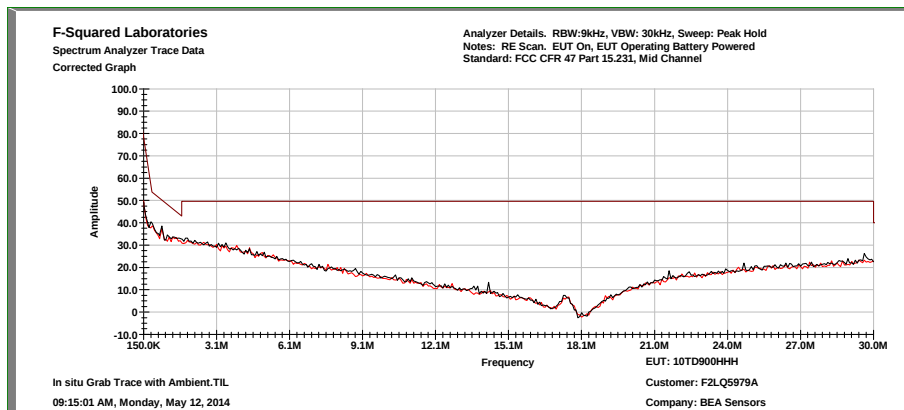




Mid Channel: 30 MHz to 880 MHz, Horizontal

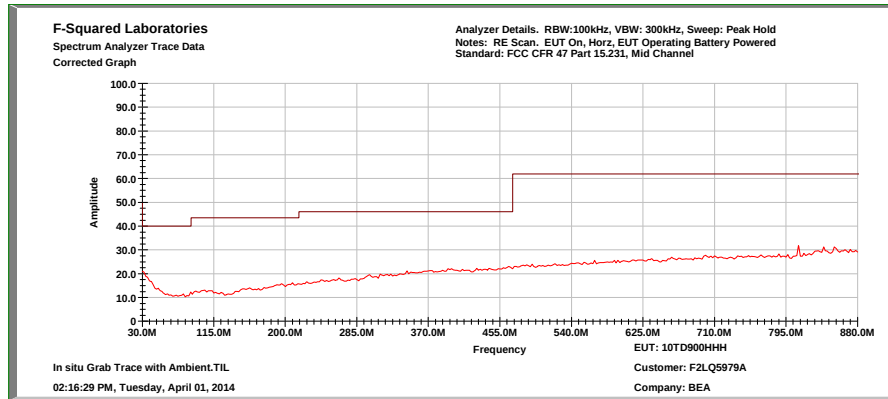


Mid Channel: 30 MHz to 900 MHz, Vertical

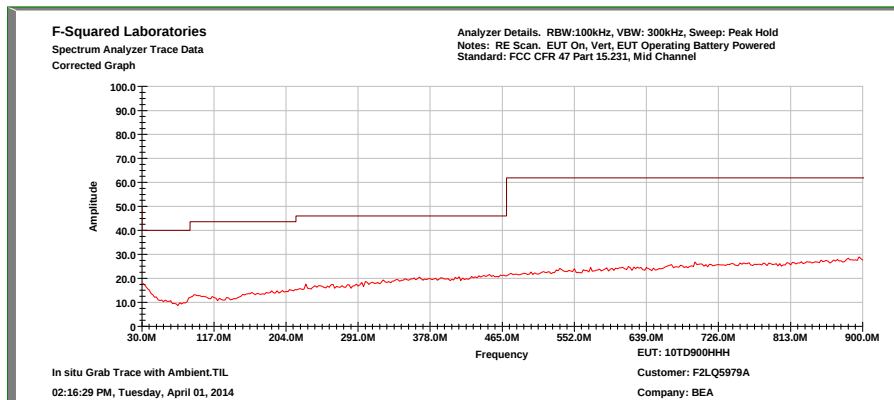




Mid Channel: 880 MHz to 1 GHz, Horizontal

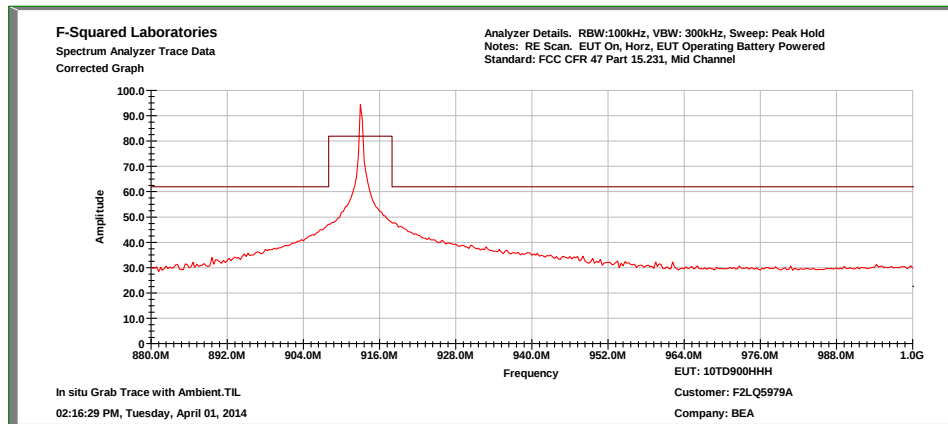


Mid Channel: 900 MHz to 1 GHz, Vertical

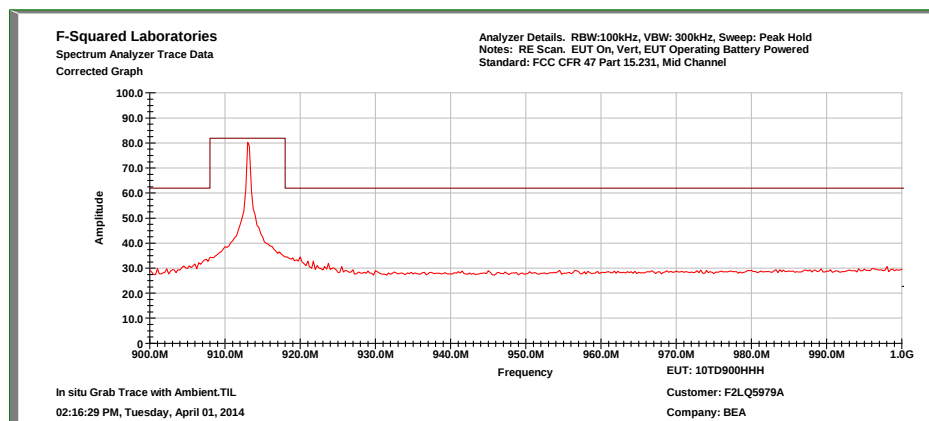




Mid Channel: 1 GHz to 10 GHz, Horizontal

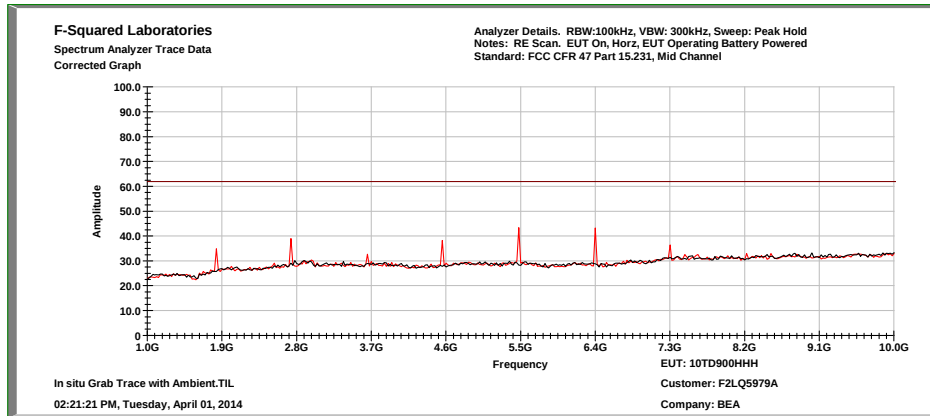

Mid Channel: 1 GHz to 10 GHz, Vertical

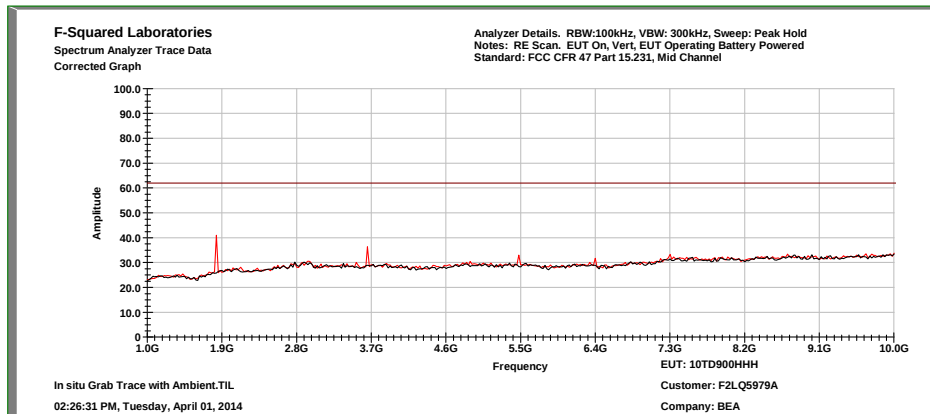




Mid Channel


Frequency (MHz)	Polarity	Corr. (dB)	MaxPeak (dB μ V/m)	MaxPeak (dB μ V/m) Limit	MaxPeak Margin	Average (dB μ V/m)	Average (dB μ V/m) w/DCCF	Average (dB μ V/m) Limit	Average Margin	Bandwidth (kHz)
902.000000	H	31.0	48.6	81.9	-33.3	32.8	22.35	61.9	-39.6	120.000
902.000000	V	30.6	44.1	81.9	-37.8	32.1	21.65	61.9	-40.3	120.000
908.000000	V	30.8	43.5	81.9	-38.4	32.3	21.85	61.9	-40.1	120.000
908.000000	H	31.3	54.6	81.9	-27.3	34.1	23.65	61.9	-38.3	120.000
913.020000	V	30.7	85.1	101.9	-16.8	81.1	70.65	81.9	-11.3	120.000
913.030000	H	31.2	96.9	101.9	-5.0	90.6	80.15	81.9	-1.8	120.000
918.000000	V	30.9	44.2	81.9	-37.7	32.5	22.05	61.9	-39.9	120.000
918.000000	H	31.5	54.6	81.9	-27.3	34.5	24.05	61.9	-37.9	120.000
928.000000	V	31.1	43.9	81.9	-38.0	32.7	22.25	61.9	-39.7	120.000
928.000000	H	31.5	47.3	81.9	-34.6	33.3	22.85	61.9	-39.1	120.000
5478.000000	V	38.3	43.6	81.9	-38.3	40.5	30.05	61.9	-31.85	1000.000
5478.000000	H	39.1	42.1	81.9	-39.8	41.8	31.35	61.9	-30.55	1000.000



Low Channel: 9 kHz to 150 kHz

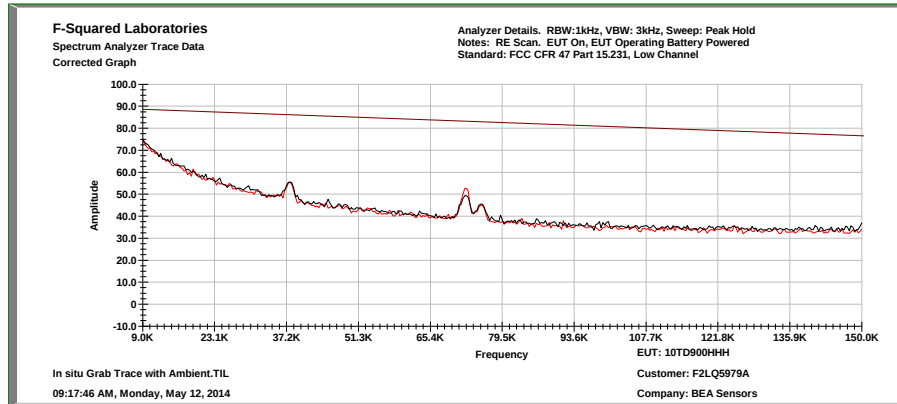


Low Channel: 150 kHz to 30 MHz

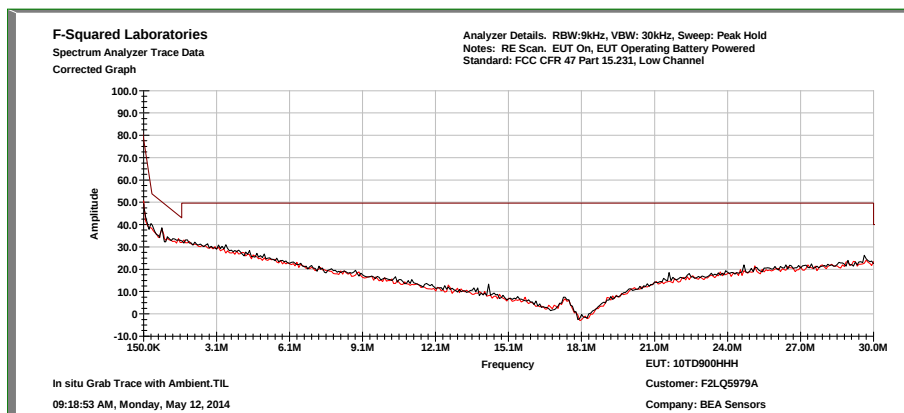




Low Channel: 30 MHz to 880 MHz, Horizontal

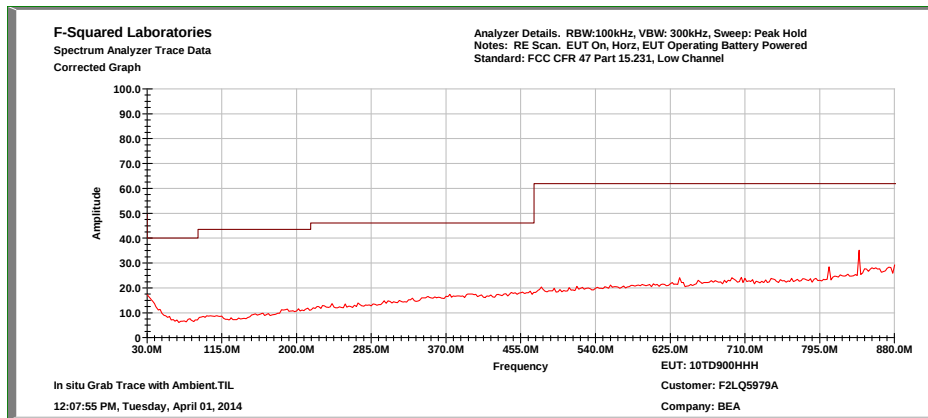


Low Channel: 30 MHz to 900 MHz, Vertical

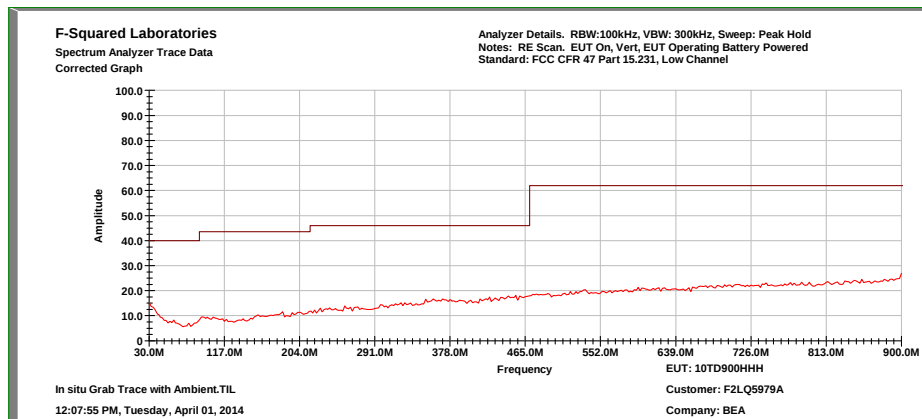




Low Channel: 880 MHz to 1 GHz, Horizontal

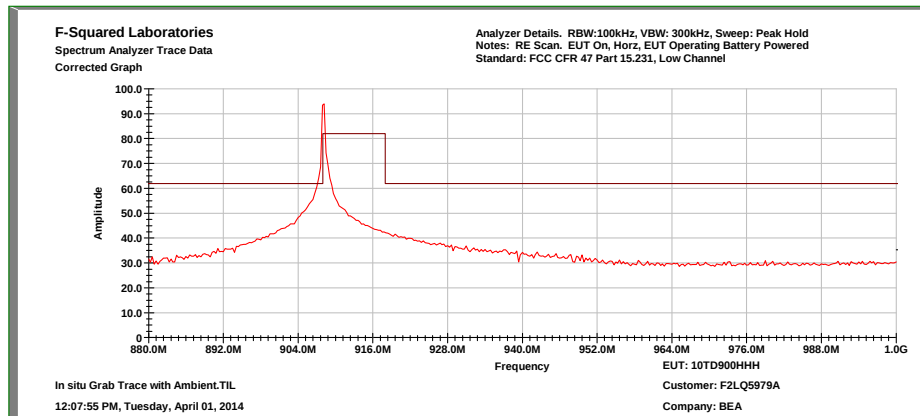


Low Channel: 900 MHz to 1 GHz, Vertical

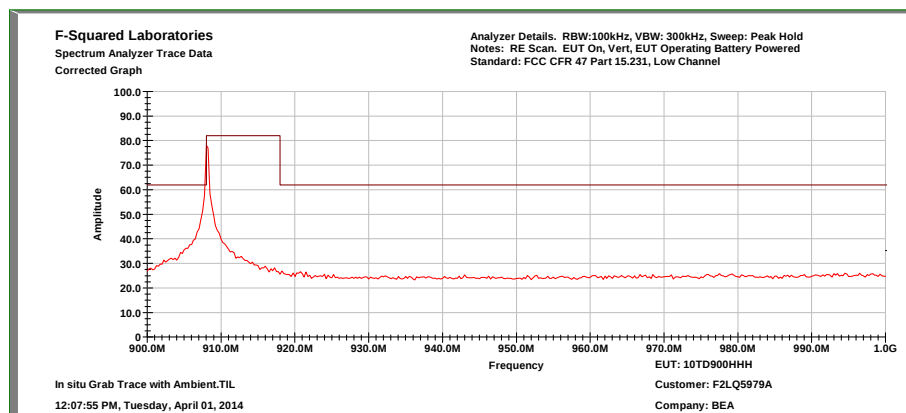




Low Channel: 1 GHz to 10 GHz, Horizontal

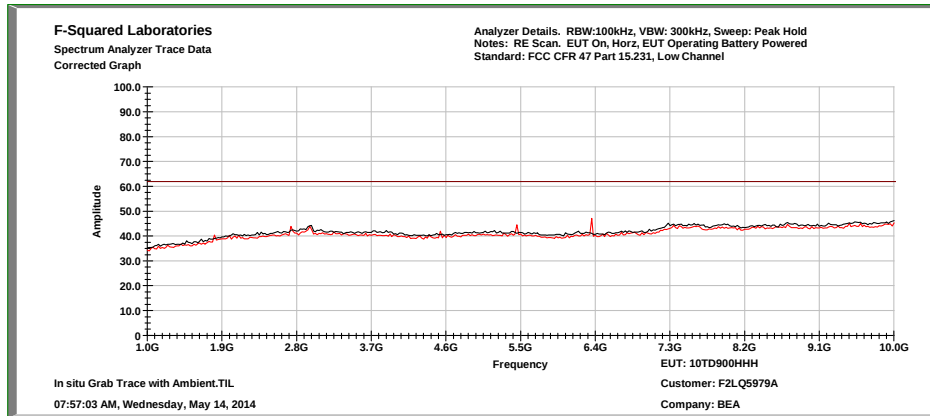

Low Channel: 1 GHz to 10 GHz, Vertical

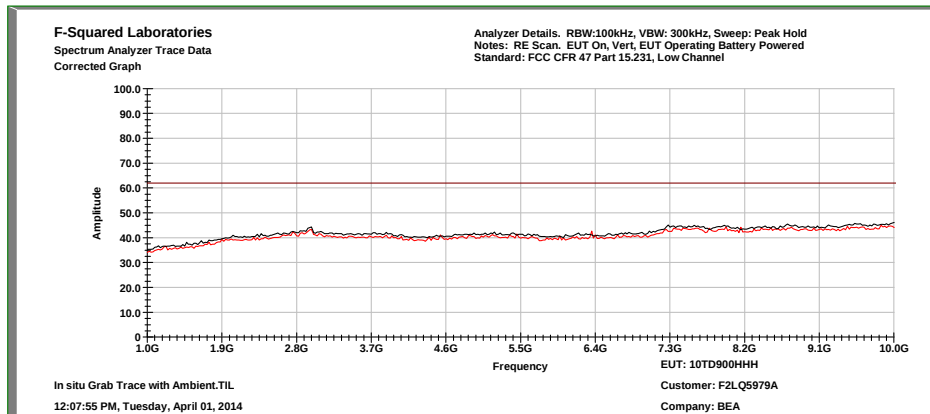



Low Channel

Frequency (MHz)	Polarity	Corr. (dB)	MaxPeak (dB μ V/m)	MaxPeak (dB μ V/m) Limit	MaxPeak Margin	Average (dB μ V/m)	Average (dB μ V/m) w/DCCF	Average (dB μ V/m) Limit	Average Margin	Bandwidth (kHz)
902.000000	V	30.6	44.2	81.9	-37.7	32.1	21.65	61.9	-40.3	120.000
902.000000	H	31.0	51.4	81.9	-30.5	33.1	22.65	61.9	-39.3	120.000
908.020000	H	31.3	94.7	101.9	-7.2	89.9	79.45	81.9	-2.5	120.000
908.020000	V	30.8	77.5	101.9	-24.4	73.1	62.65	81.9	-19.3	120.000
918.000000	V	30.9	44.7	81.9	-37.2	32.5	22.05	61.9	-39.9	120.000
928.000000	H	31.5	45.5	81.9	-36.4	33.2	22.75	61.9	-39.2	120.000
928.000000	V	31.1	44.9	81.9	-37.0	32.8	22.35	61.9	-39.6	120.000
5448.000000	V	38.9	42.3	81.9	-39.6	40.5	30.05	61.9	-31.85	1000.000
5448.000000	H	39.2	40.8	81.9	-41.1	41.8	31.35	61.9	-30.55	1000.000



8 FCC Part 15.231(b)(3)(c)

8.1 Requirements:

The bandwidth of the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier. 908 MHz bandwidth must be no wider than 4.54 MHz; 913 MHz no wider than 4.566 MHz, and 918 MHz no wider than 4.59 MHz.



8.2 Test Data – OCCUPIED BANDWIDTH


Test Date:	May 12, 2014	Test Engineers:	J. Knepper; K. Littell
Standards:	CFR 47 Part 15.231(b)(3)(c)	Air Temperature:	23.3°C
		Relative Humidity:	48%

Occupied Bandwidth, High Channel: 82.3 kHz

Occupied Bandwidth, Mid Channel: 81.3 kHz


Occupied Bandwidth, Low Channel: 84.1 kHz

High Channel

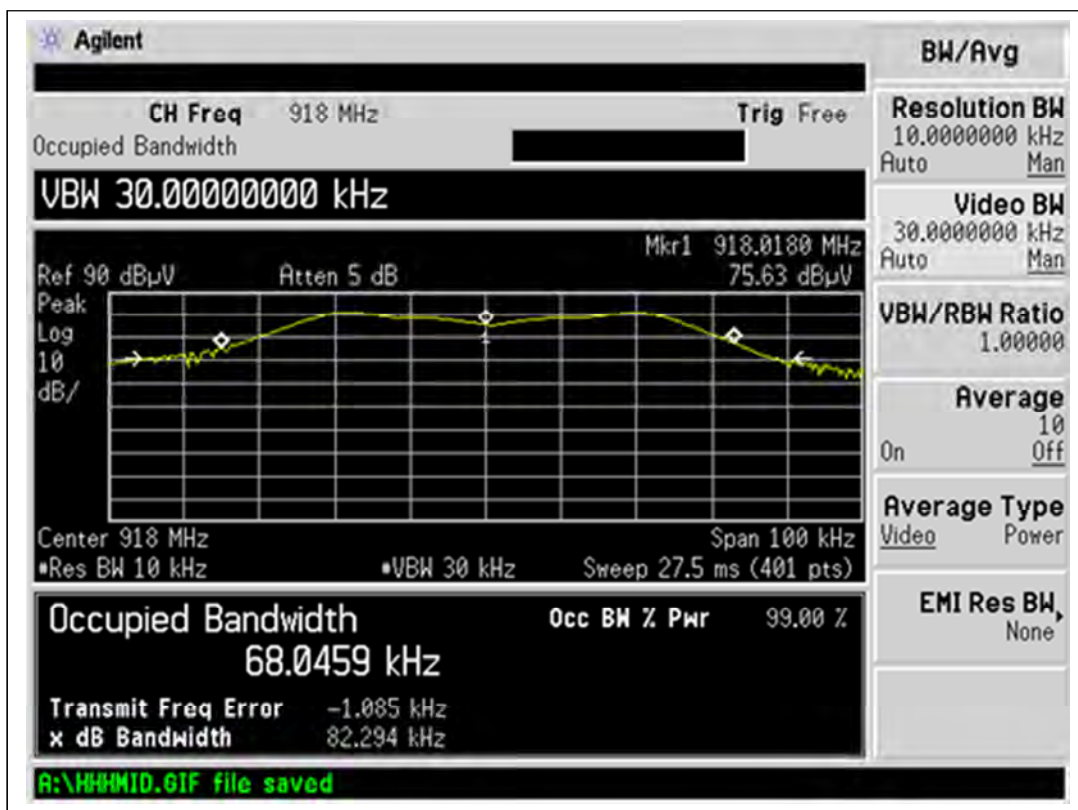




Mid Channel

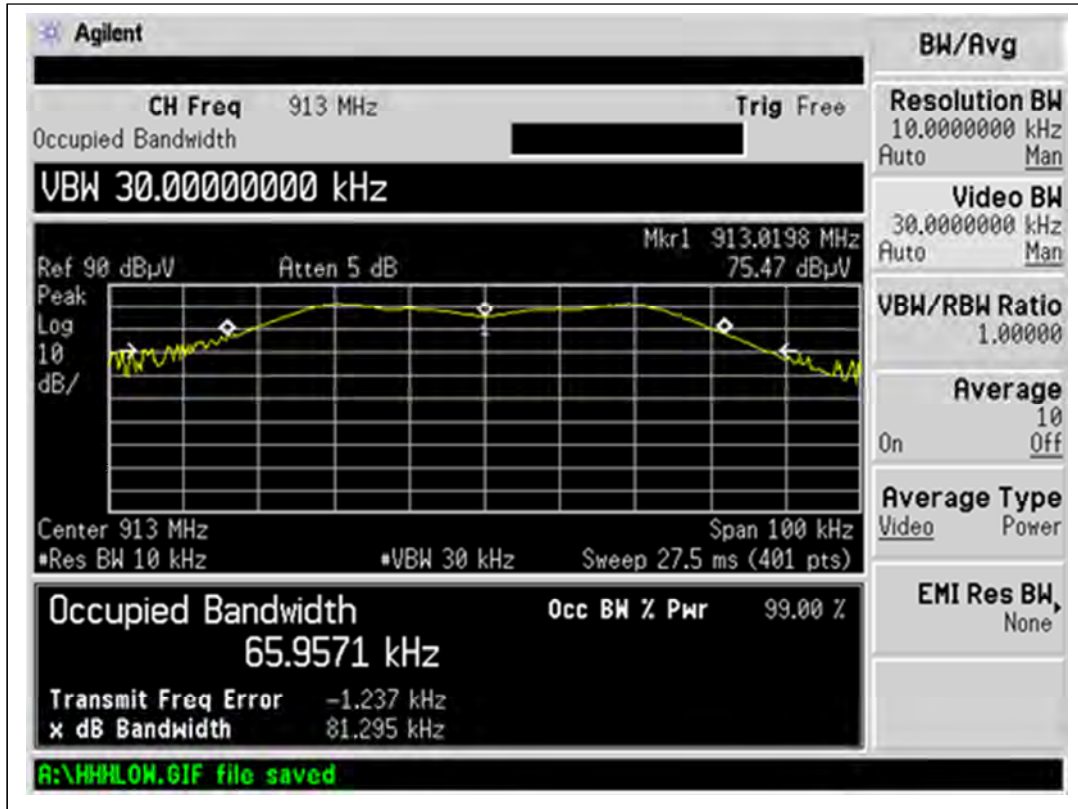



Low Channel

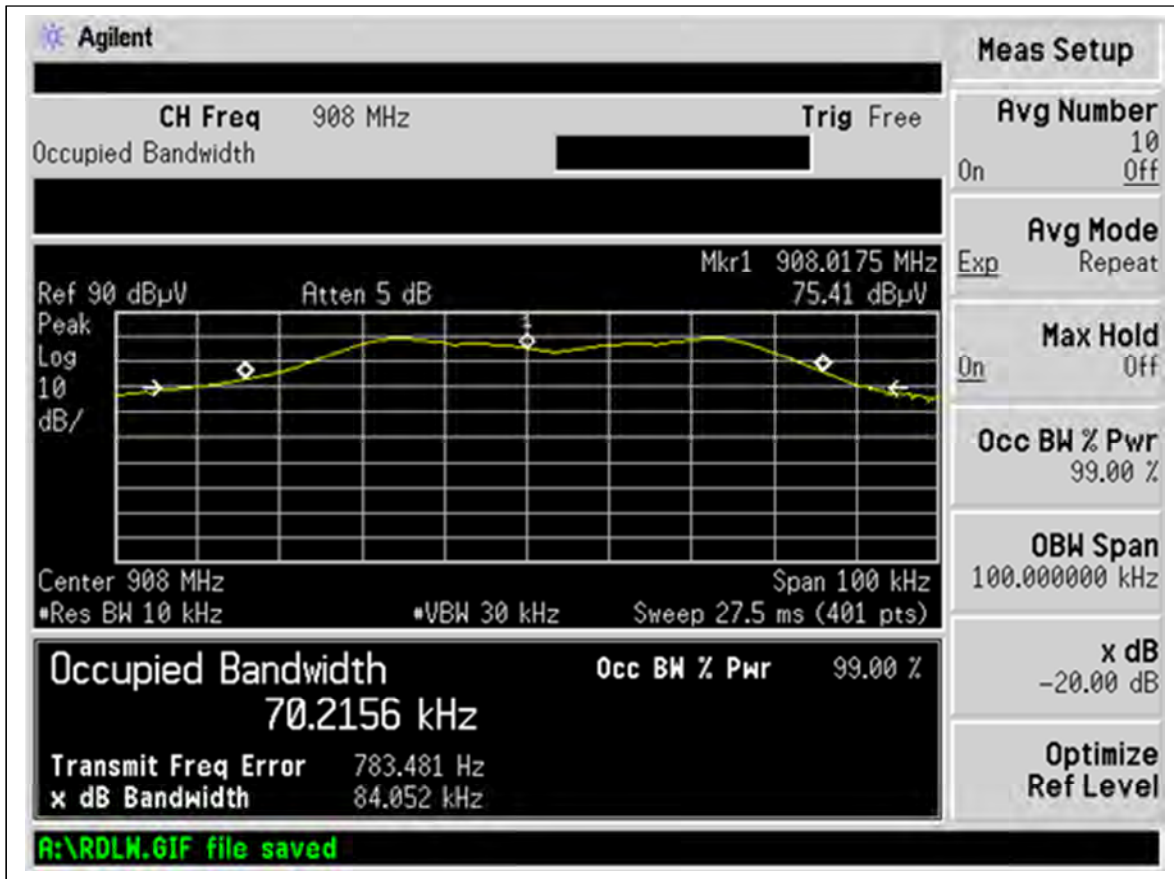



9 15.35(c) - DUTY CYCLE

A duty cycle correction of 10.45dB was added to the field strength measured because the EUT has a 30% duty cycle. One transmission was on for 30mS in a 100ms sweep.

The formula used was: $DCCF = 20 \log \left(\frac{30.0ms}{100ms} \right) = -10.45$




9.1 Test Data

Test Date(s):	May 16, 2014	Test Engineers:	J. Knepper; K. Littell
Standards:	CFR 47 Part 15.231	Air Temperature:	22.8°C
		Relative Humidity:	48%

High Channel


The following plot is of a single press and release of the manual push button one time, showing the Duty Cycle.

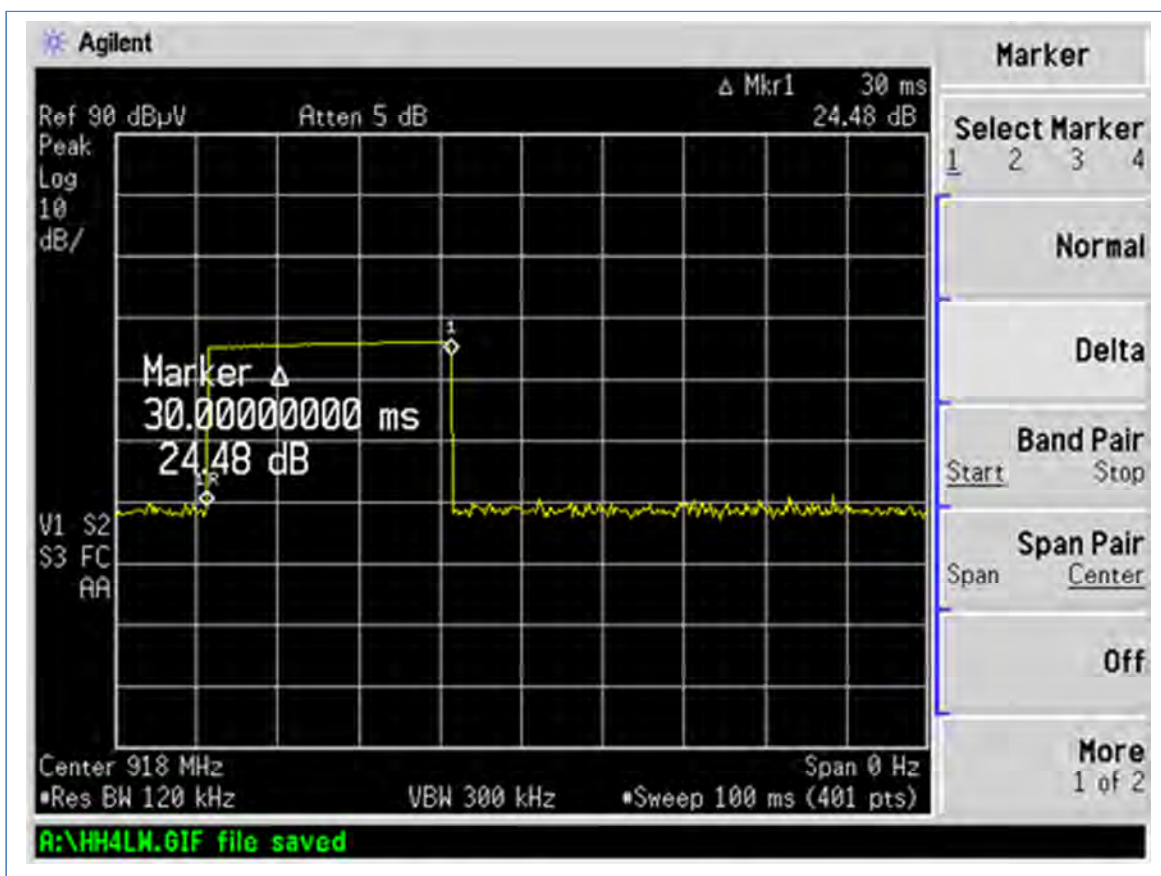



Mid Channel


The following plot is of a single press and release of the manual push button, showing the Duty Cycle.

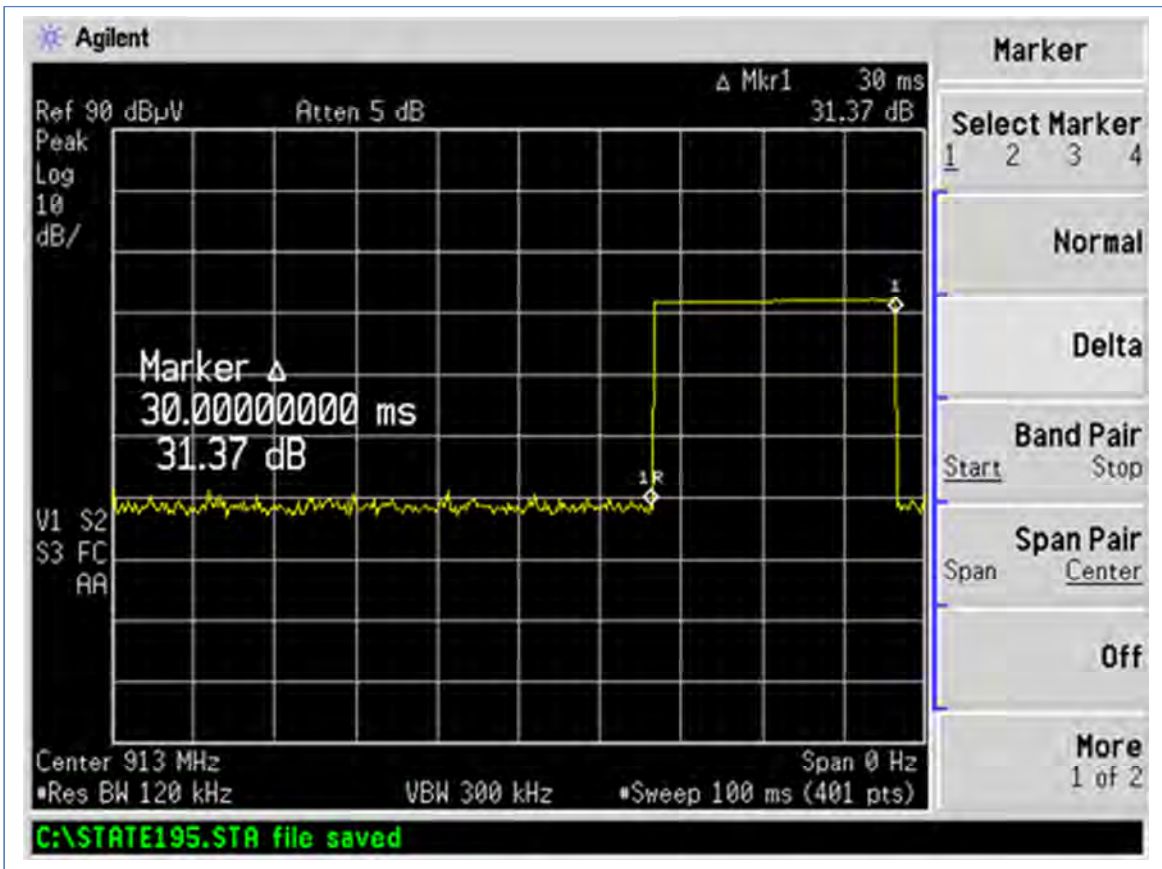



Low Channel


The following plot is of a single press and release of the manual push button three times, showing the Duty Cycle.

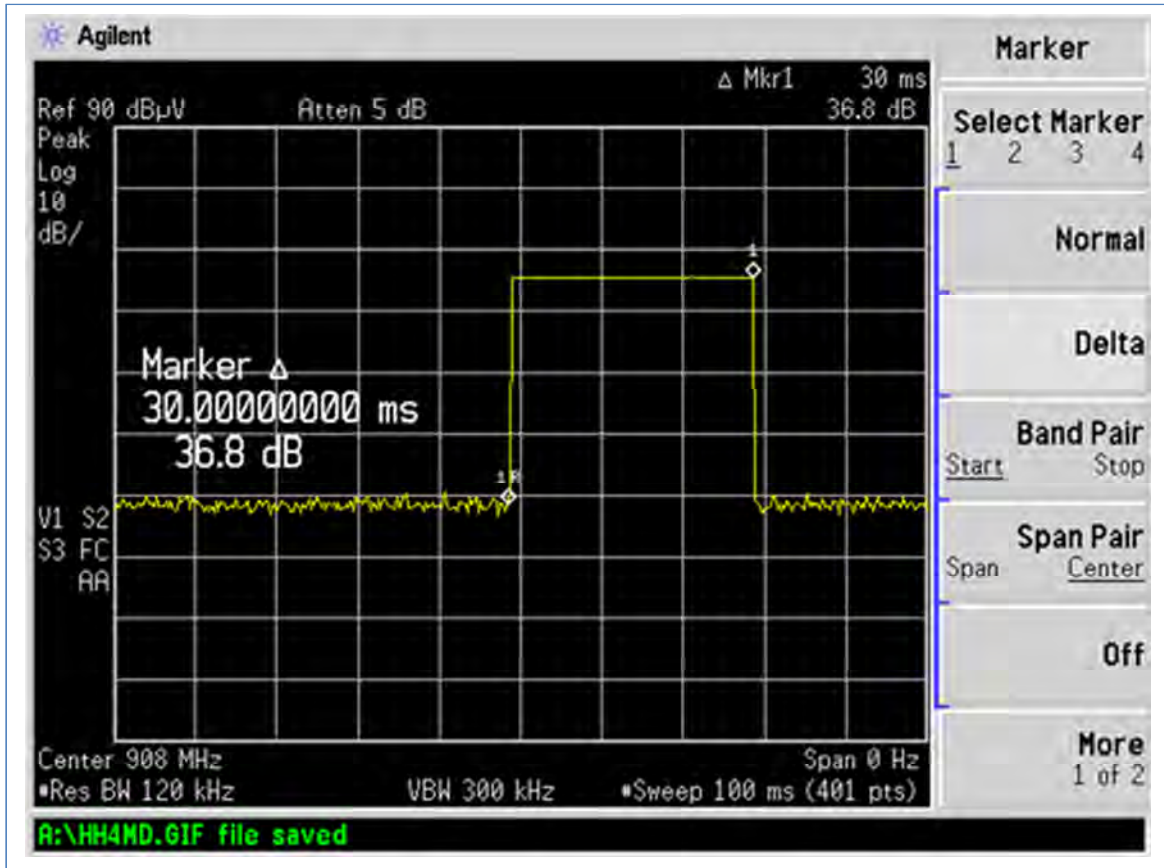



10 PHOTOGRAPHS

Radiated Spurious Emissions

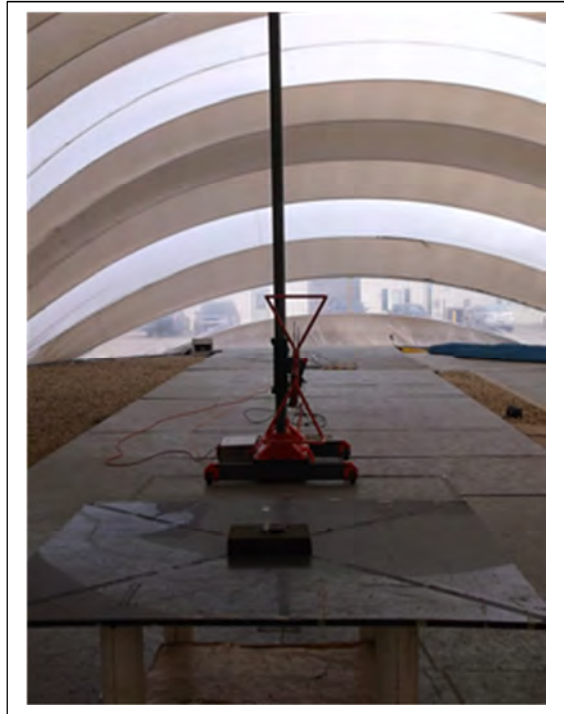

Occupied Bandwidth, Duty Cycle

